



FCC PART 15.407

TEST REPORT

For

Winner Wave Limited

4F-5, No.736, Jhongjheng Road, Jhonghe Dist., New Taipei City, Taiwan

FCC ID: 2ADFSTYWPB1

Report Type: Original Report	Product Type: Wireless Presentation System
Report Number: <u>RSZ200724002-00</u>	
Report Date:	<u>2020-09-18</u>
Reviewed By:	Jimmy Xiao  RF Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	11
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	12
SUMMARY OF TEST RESULTS.....	13
TEST EQUIPMENT LIST	14
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	16
APPLICABLE STANDARD	16
RESULT	16
FCC §15.203 – ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
TEST DATA	19
§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE	25
CORRECTED AMPLITUDE & MARGIN CALCULATION	26
TEST DATA	26
FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	42
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	66
APPLICABLE STANDARD	66
TEST PROCEDURE	66
TEST DATA	67

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	70
APPLICABLE STANDARD	70
TEST PROCEDURE	70
TEST DATA	71

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless Presentation System
Model	TY-WPB1
Frequency Range	5G Wi-Fi: 5150-5250 MHz; 5725-5850 MHz
Maximum Conducted Output Power	Wi-Fi: 5150-5250 MHz: 11.83dBm (802.11a), 11.76dBm(802.11n20), 11.31 dBm(802.11n40) 11.67dBm (802.11ac20), 11.51dBm(802.11 ac40), 7.99dBm(802.11 ac80) 5725-5850 MHz: 11.12dBm (802.11a), 12.64dBm(802.11n20), 10.67dBm(802.11n40) 12.78dBm (802.11ac20), 11.00dBm(802.11 ac40), 11.56dBm(802.11 ac80)
Modulation Technique	OFDM
Antenna Specification	1.52 dBi
Voltage Range	DC 5.0V from adapter
Date of Test	2020/07/09~2020/08/06
Sample serial number	RSZ200724002-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-07-24
Sample/EUT Status	Good condition

Objective

This type approval report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	±5%	
RF Output Power with Power meter	±0.73dB	
RF conducted test with spectrum	±1.6dB	
AC Power Lines Conducted Emissions	±1.95dB	
Emissions, Radiated	Below 1GHz Above 1GHz	±4.75dB ±4.88dB
Temperature	±1°C	
Humidity	±6%	
Supply voltages	±0.4%	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n20, 802.11ac20 channel 36, 40, 48 were tested; For 802.11n40, 802.11ac40 channel 38, 46 were tested; For 802.11ac80, channel 42 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n20, 802.11ac20 channel 149, 157, 165 were tested; For 802.11n40, 802.11ac40 channel 151, 159 were tested; For 802.11ac80, channel 155 was tested.

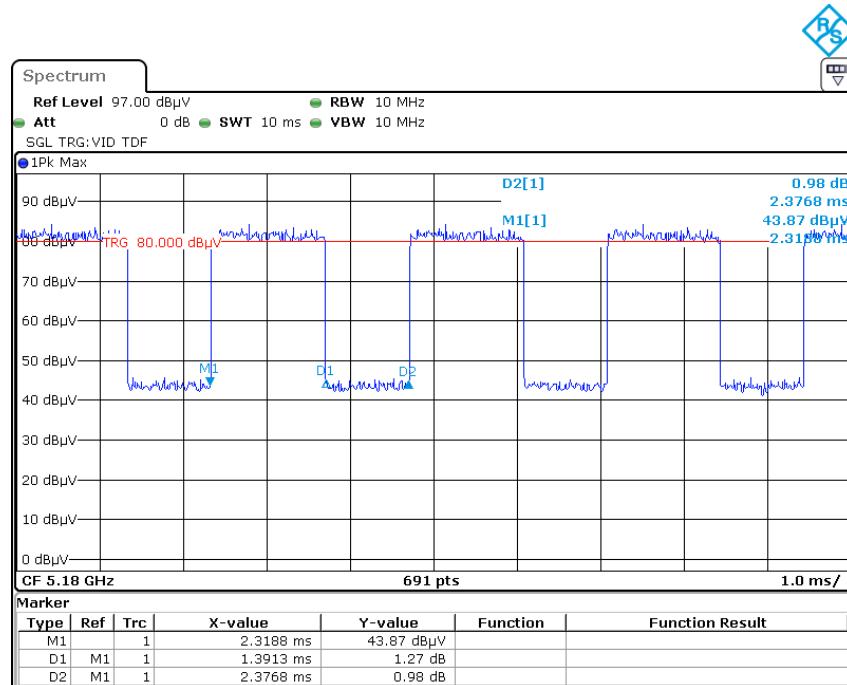
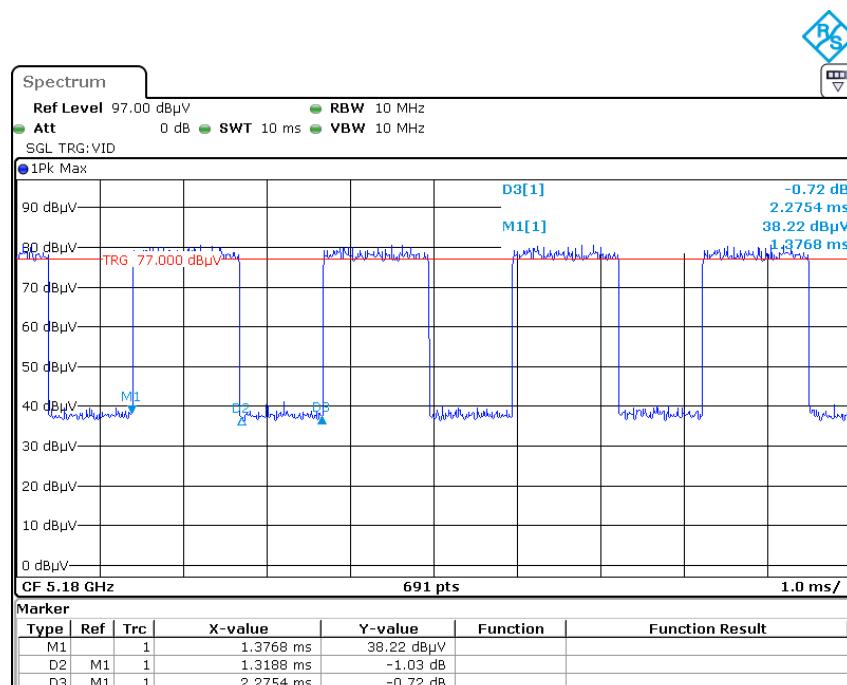
EUT Exercise Software

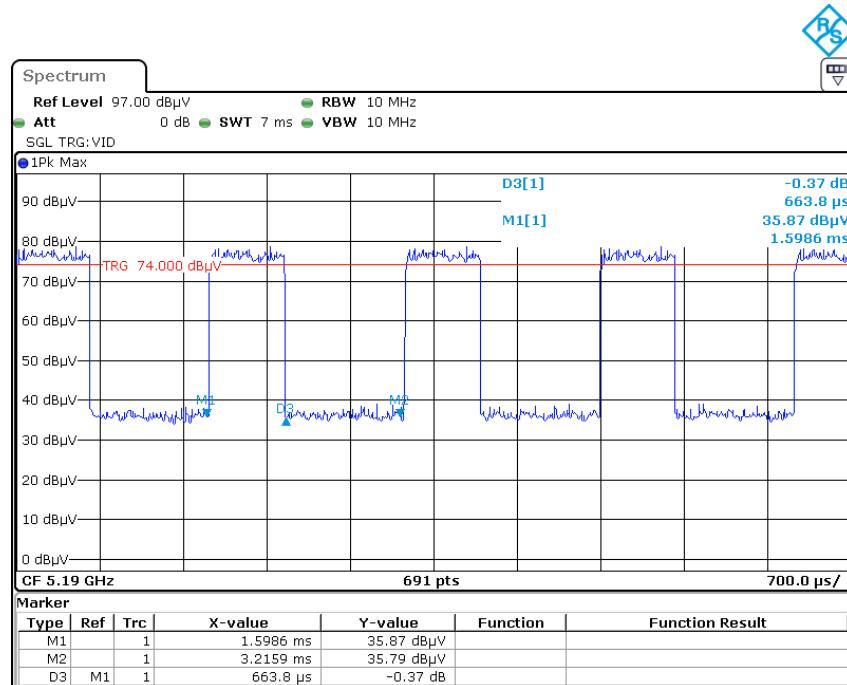
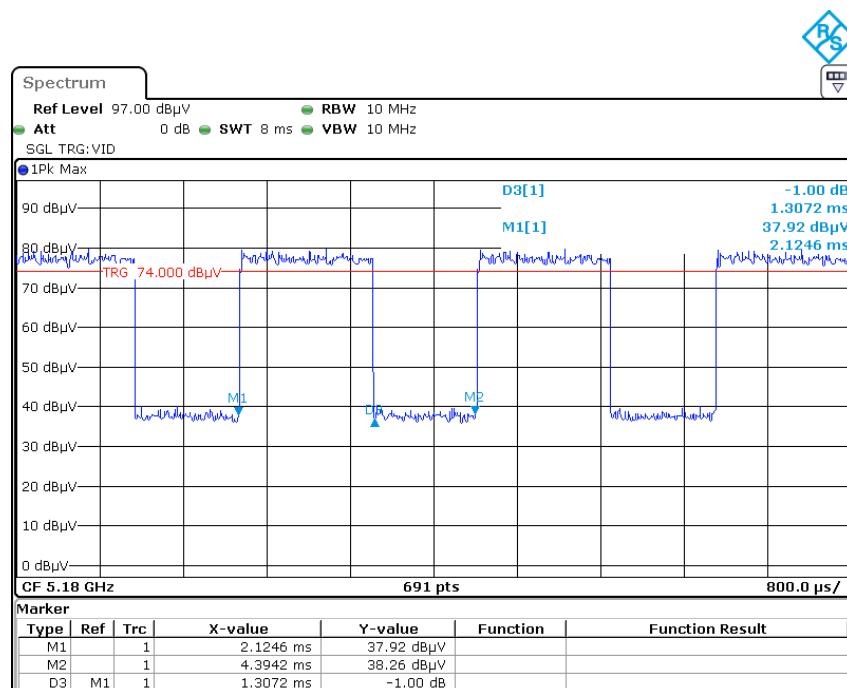
“Realtek 11ac 8821C USB WLAN MP Diagnostic Program” exercise software was used.

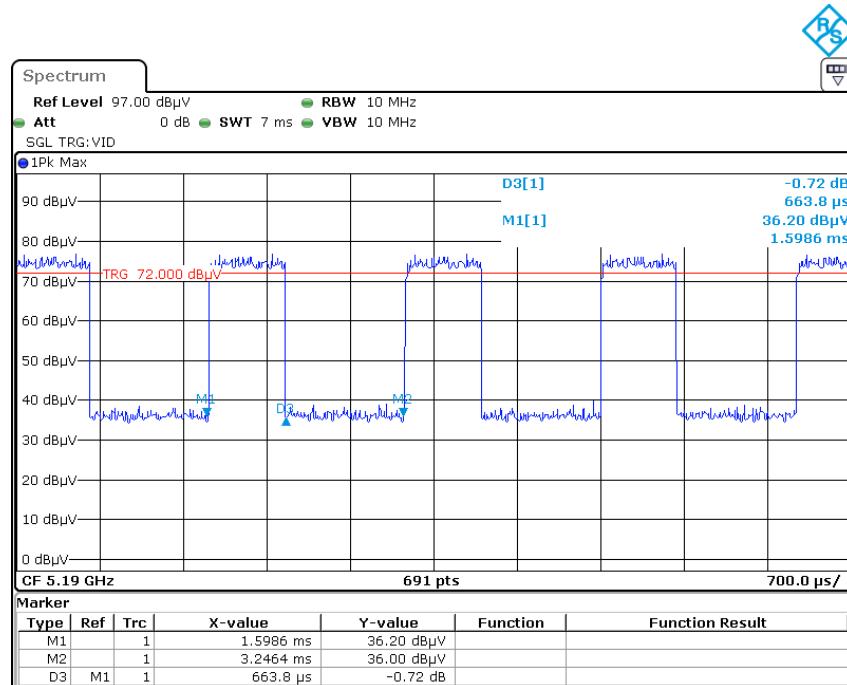
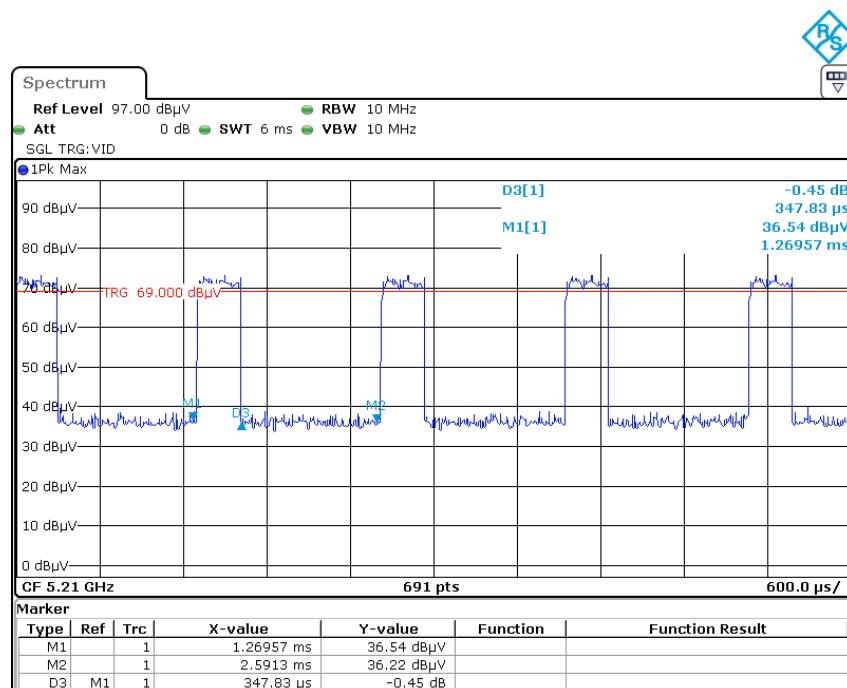
Test frequencies and power level were configured as below:

U-NII	Mode	Frequency (MHz)	Data Rate (Mbps)	Power Level
5150 – 5250MHz	802.11 a	5180	6	45
		5200	6	45
		5240	6	45
	802.11 n20	5180	MCS0	45
		5200	MCS0	45
		5240	MCS0	45
	802.11 n40	5190	MCS0	38
		5230	MCS0	38
	802.11 ac20	5180	MCS0	45
		5200	MCS0	45
		5240	MCS0	45
	802.11 ac40	5190	MCS0	38
		5230	MCS0	38
	802.11 ac8	5210	MCS0	33
5725 – 5850MHz	802.11 a	5745	6	45
		5785	6	45
		5825	6	45
	802.11 n20	5745	MCS0	45
		5785	MCS0	45
		5825	MCS0	45
	802.11 n40	5755	MCS0	38
		5795	MCS0	38
	802.11 ac20	5745	MCS0	45
		5785	MCS0	45
		5825	MCS0	45
	802.11 ac40	5755	MCS0	38
		5795	MCS0	38
	802.11 ac80	5775	MCS0	33

Note: the above data rate was the worst case.

Duty cycle**802.11a mode****802.11n20 mode**

802.11n40 mode**802.11ac20 Mode**

802.11ac40 Mode**802.11ac80 Mode**

Band	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	10log(1/duty cycle) (dB)
802.11a	1.391	2.377	58.52	2.33
802.11n20	1.319	2.275	57.98	2.37
802.11n40	0.664	1.617	41.06	3.87
802.11ac20	1.307	2.270	57.58	2.40
802.11ac40	0.664	1.648	40.29	3.95
802.11ac80	0.348	1.322	26.32	5.80

Equipment Modifications

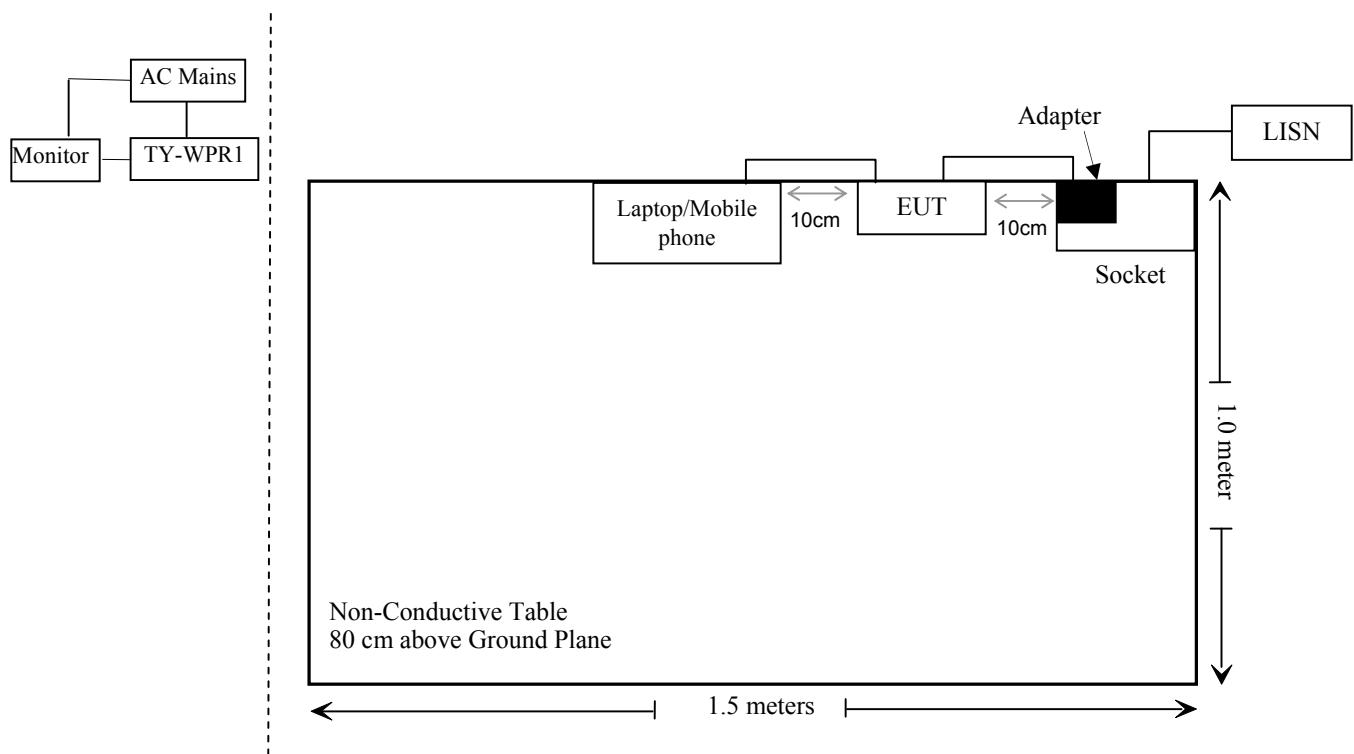
No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-212	A37209315081183
DELL	Monitor	ST2420Lb	CN-0X0K27-74261-2AF-090U
DELL	Laptop	Latitude E5430	JG3NLV1
iPhone	Mobile phone	6splus	6splus-1
Panasonic Corporation	Wireless Presentation System	TY-WPR1	TY-WPR1-25
ULLPOWER	Adapter	ICP12-050-2000B	ICP12-050-2000B

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Un-detachable AC Cable	1.0	Socket	LISN
Unshielded Un-detachable DC Cable	0.2	Adapter	EUT
Unshielded Detachable HDMI Cable	0.2	EUT	Laptop

Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	MaximuM Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1), (4),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1), (5),(e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019/08/04	2020/08/03
Rohde & Schwarz	LISN	ENV216	101613	2019/08/04	2020/08/03
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2019/08/04	2020/08/03
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2019/08/04	2020/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
Ducommun technologies	RF Cable	RG-214	1	2019/11/12	2020/11/12
Ducommun technologies	RF Cable	RG-214	2	2019/11/12	2020/11/12
Band Reject filter	BSF5150-5850MN-0899-004	5G filter	2020/04/20	2020/04/20	2021/4/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/6	2020/12/5
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-03	2017/12/6	2020/12/5

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB Wideband Power Sensor	U2021XA	MY54250003	2019/08/04	2020/08/03
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
WEINSCHEL	10dB Attenuator	5324	AU3842	2019/11/29	2020/11/28
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune Up Conducted Output Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
5150-5250	1.52	1.42	12	15.85	20	0.0045	1.0
5725-5850	1.52	1.42	13	19.95	20	0.0056	1.0

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.52 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

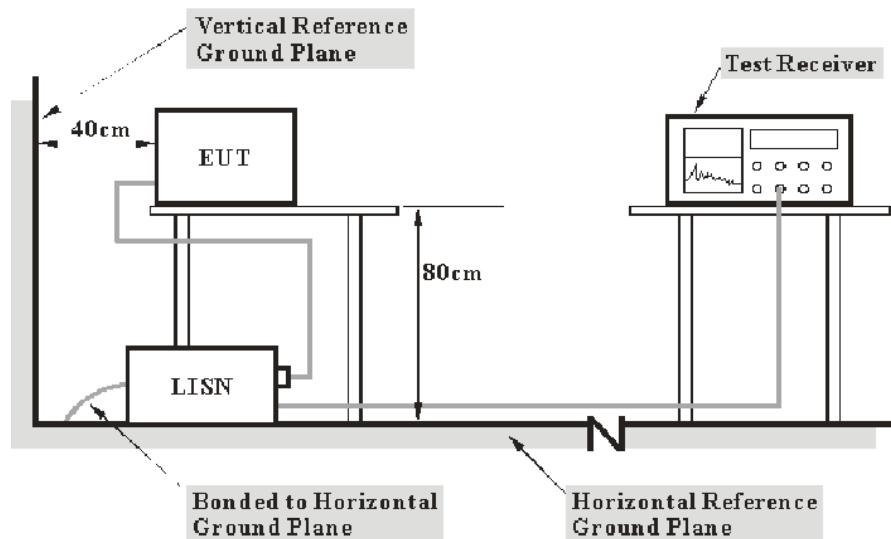
Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup



- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

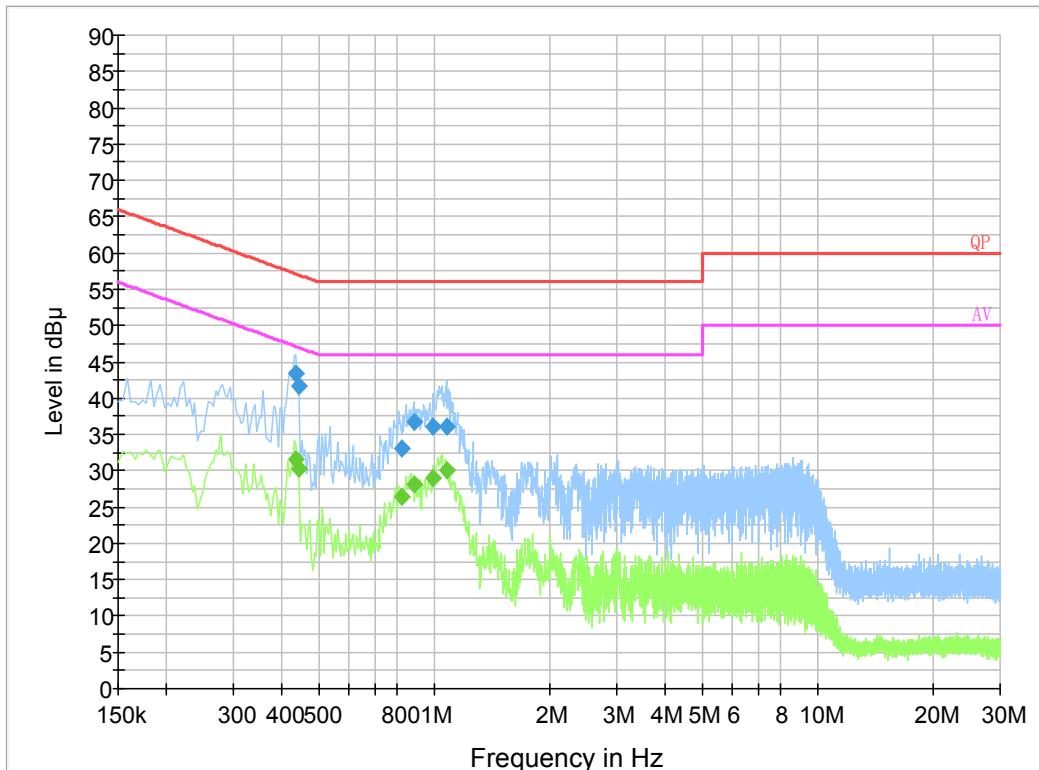
Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li from 2020-07-30 to 2020-08-03.

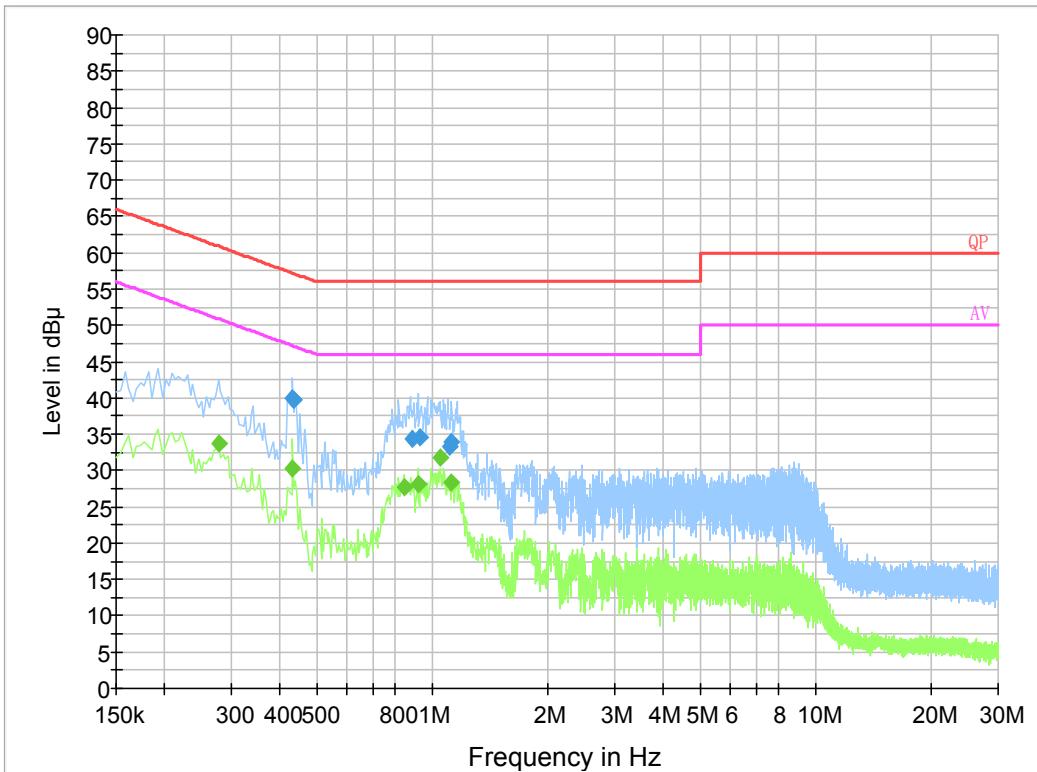
EUT operation mode: Transmitting

HDMI Input:**Line:****Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.436450	43.4	9.000	L1	19.8	13.7	57.1
0.443430	41.7	9.000	L1	19.8	15.3	57.0
0.822150	33.2	9.000	L1	19.8	22.8	56.0
0.884710	36.7	9.000	L1	19.8	19.3	56.0
0.995090	36.0	9.000	L1	19.9	20.0	56.0
1.077830	36.0	9.000	L1	19.9	20.0	56.0

Final Result 2

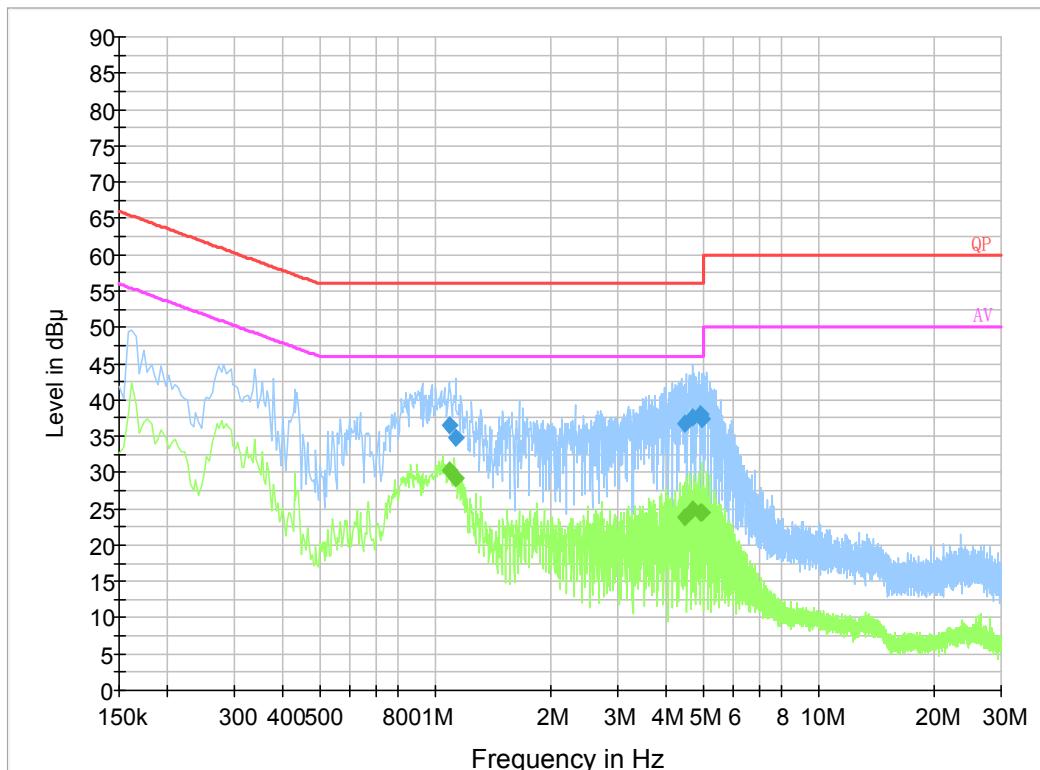
Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.436450	31.5	9.000	L1	19.8	15.6	47.1
0.443430	30.4	9.000	L1	19.8	16.6	47.0
0.822150	26.5	9.000	L1	19.8	19.5	46.0
0.884710	28.1	9.000	L1	19.8	17.9	46.0
0.995090	29.1	9.000	L1	19.9	16.9	46.0
1.077830	30.1	9.000	L1	19.9	15.9	46.0

Neutral:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.431490	40.0	9.000	N	19.8	17.2	57.2
0.435550	39.8	9.000	N	19.8	17.4	57.1
0.888830	34.4	9.000	N	19.7	21.6	56.0
0.932170	34.6	9.000	N	19.8	21.4	56.0
1.117110	33.3	9.000	N	19.8	22.7	56.0
1.118530	33.9	9.000	N	19.8	22.1	56.0

Final Result 2

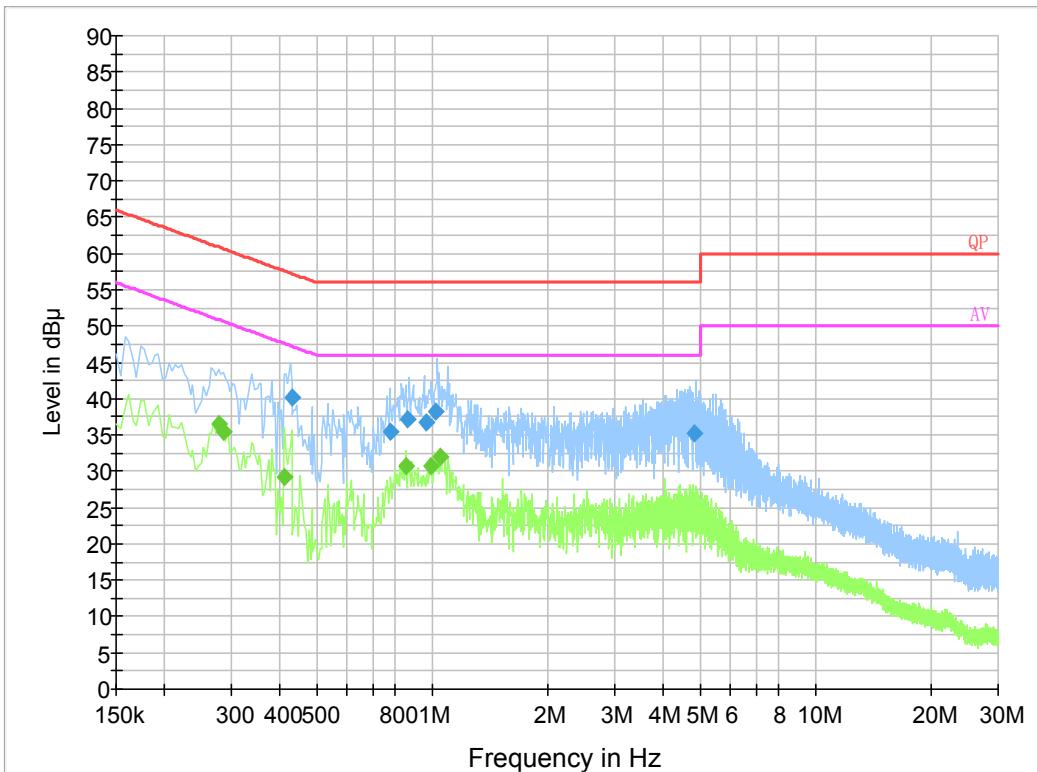
Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.278000	33.7	9.000	N	19.7	17.1	50.9
0.434000	30.2	9.000	N	19.8	17.0	47.2
0.846000	27.6	9.000	N	19.8	18.4	46.0
0.922000	28.2	9.000	N	19.8	17.8	46.0
1.050000	31.8	9.000	N	19.8	14.2	46.0
1.126000	28.3	9.000	N	19.8	17.7	46.0

USB Input:**Line:****Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.093650	36.5	9.000	L1	19.8	19.5	56.0
1.132990	34.8	9.000	L1	19.8	21.2	56.0
4.475790	36.7	9.000	L1	19.9	19.3	56.0
4.703410	37.5	9.000	L1	19.9	18.5	56.0
4.916650	38.1	9.000	L1	19.9	17.9	56.0
4.991510	37.3	9.000	L1	19.9	18.7	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.093650	30.3	9.000	L1	19.8	15.7	46.0
1.132990	29.3	9.000	L1	19.8	16.7	46.0
4.475790	23.9	9.000	L1	19.9	22.1	46.0
4.703410	24.9	9.000	L1	19.9	21.1	46.0
4.916650	24.5	9.000	L1	19.9	21.5	46.0
4.991510	24.4	9.000	L1	19.9	21.6	46.0

Neutral:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.432390	40.2	9.000	N	19.8	17.0	57.2
0.782330	35.4	9.000	N	19.8	20.6	56.0
0.864890	37.3	9.000	N	19.8	18.7	56.0
0.967690	36.7	9.000	N	19.8	19.3	56.0
1.026490	38.3	9.000	N	19.8	17.7	56.0
4.841070	35.2	9.000	N	19.9	20.8	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.278000	36.4	9.000	N	19.7	14.5	50.9
0.286000	35.4	9.000	N	19.7	15.2	50.6
0.414000	29.3	9.000	N	19.8	18.3	47.6
0.854000	30.7	9.000	N	19.8	15.3	46.0
0.998000	30.7	9.000	N	19.8	15.3	46.0
1.050000	31.9	9.000	N	19.8	14.1	46.0

§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION**Applicable Standard**

FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

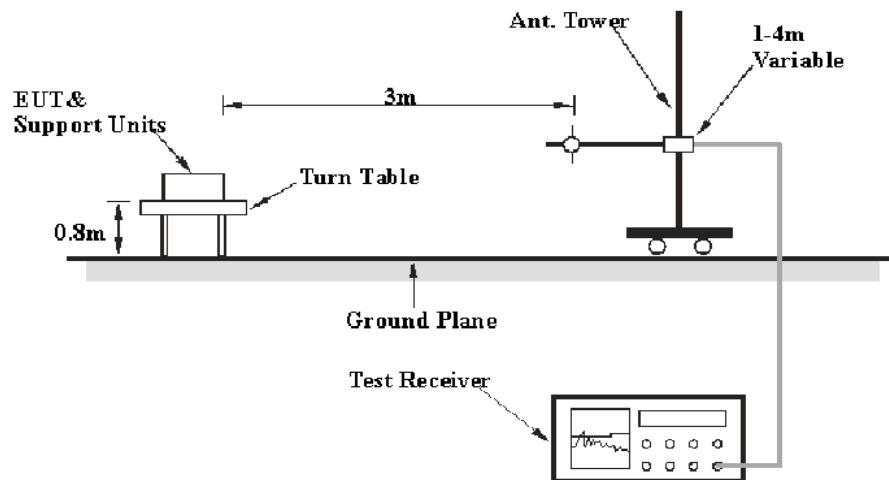
(4) For transmitters operating in the 5.725-5.85 GHz band:

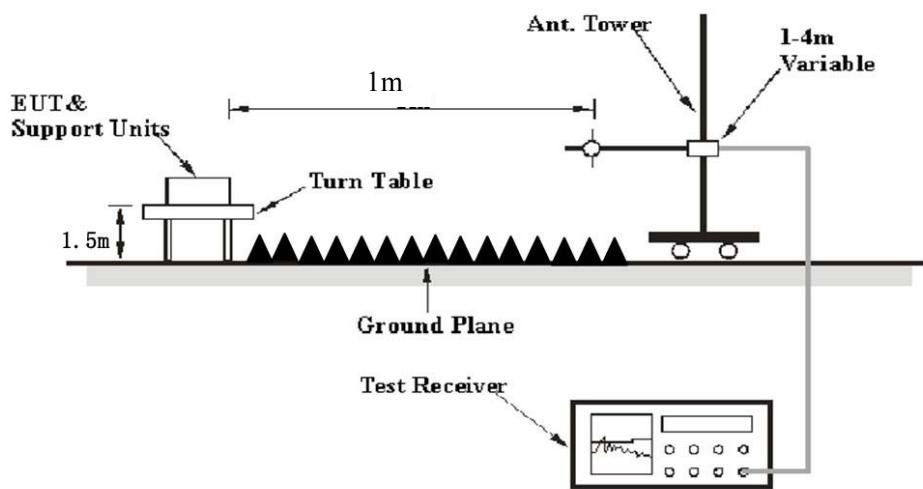
(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:



Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	>1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

- $E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dB μ V/m
- E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m
- d_{Meas} is the measurement distance, in m
- $d_{\text{SpecLimit}}$ is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 * \lg(1/3) = -9.5$ dB

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

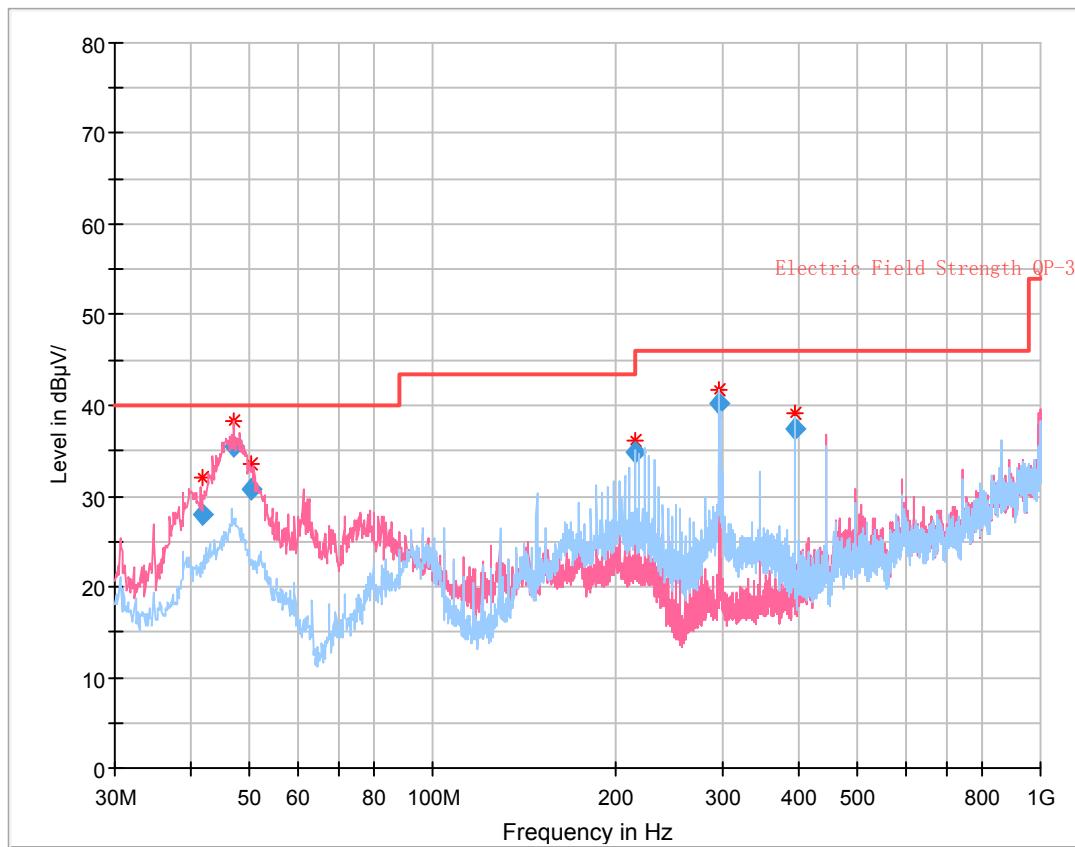
Test Data

Environmental Conditions

Temperature:	22~29 °C
Relative Humidity:	50~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Harris He from 2020-07-29 to 2020-08-04 for below 1GHz and by Leven Gan on 2020-08-06 for above 1GHz.

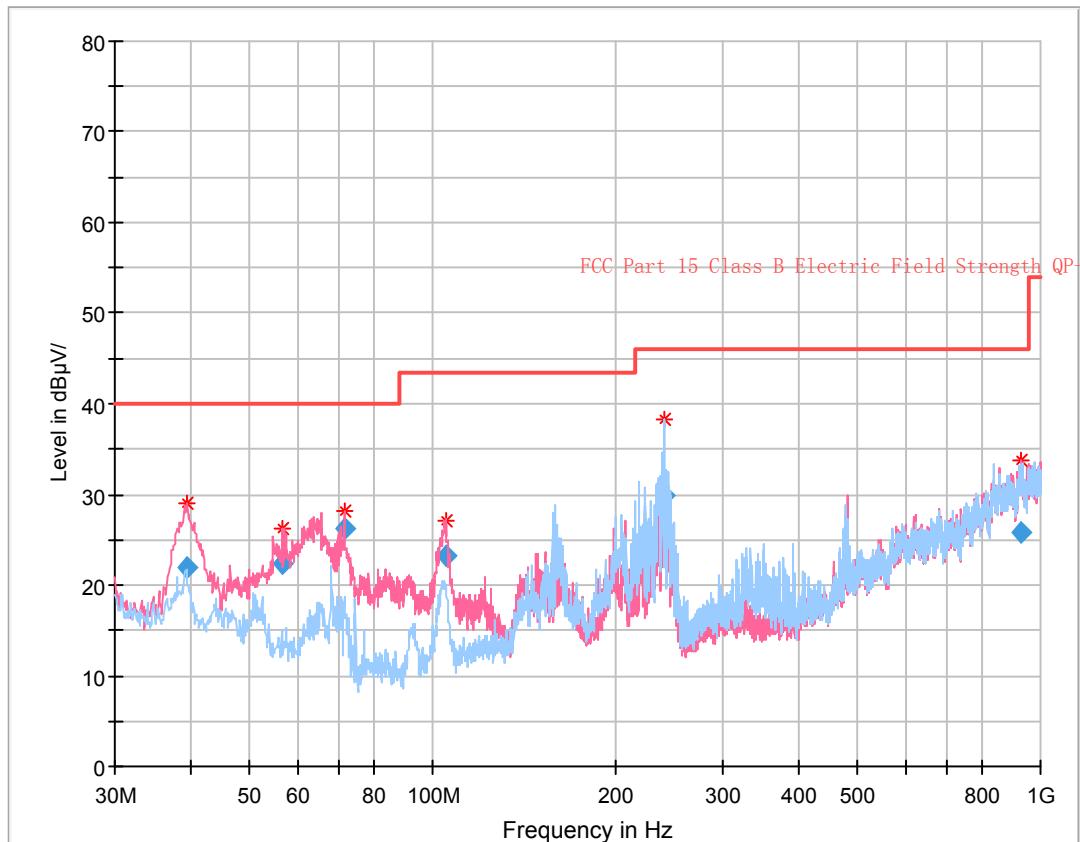
EUT operation mode: Transmitting

HDMI Input:**30 MHz~1 GHz: (the worst case is 5.8G Wi-Fi 802.11ac20 Mode, High Channel)****Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.846000	28.05	40.00	11.95	101.0	V	198.0	-15.1
47.099875	35.59	40.00	4.41	101.0	V	147.0	-18.3
50.401250	30.67	40.00	9.33	103.0	V	0.0	-19.7
215.046625	34.89	43.50	8.61	134.0	H	224.0	-13.9
296.716750	40.28	46.00	5.72	108.0	H	239.0	-10.8
395.627250	37.44	46.00	8.56	108.0	H	301.0	-10.4

USB Input:

30 MHz~1 GHz: (the worst case is 5.8G Wi-Fi 802.11ac20 Mode, High Channel)



Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
39.456250	21.83	40.00	18.17	101.0	V	230.0	-13.6
56.553875	22.31	40.00	17.69	108.0	V	256.0	-20.0
71.588000	26.32	40.00	13.68	108.0	V	309.0	-20.5
104.922750	23.33	43.50	20.17	116.0	V	318.0	-16.3
239.882625	29.84	46.00	17.16	126.0	H	194.0	-14.1
929.420500	25.90	46.00	20.10	246.0	V	158.0	4.7

1 ~ 40 GHz:

Note: The test distance is 1m, so the correct factor from 3m to 1m is $20\log(3/1)=9.5\text{dB}$ which was added into the final limit.

5150-5250 MHz:

Frequency (MHz)	Receiver		Turtable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209				
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)			
802.11a												
5180 MHz												
5071.45	32.18	PK	41	1.5	H	38.26	70.44	83.5	13.06			
5071.45	18.33	Ave.	41	1.5	H	38.26	56.59	63.5	6.91			
5456.26	32.08	PK	292	1.7	H	39.37	71.45	83.5	12.05			
5456.26	18.22	Ave.	292	1.7	H	39.37	57.59	63.5	5.91			
10360.00	44.84	PK	114	2.2	H	17.42	62.26	77.7	15.44			
5200 MHz												
10400.00	46.48	PK	201	2.4	H	17.52	64.00	77.7	13.70			
5240 MHz												
4560.70	31.00	PK	293	1.1	H	37.60	68.60	83.5	14.90			
4560.70	18.17	Ave.	293	1.1	H	37.60	55.77	63.5	7.73			
5447.66	31.03	PK	189	2.1	H	39.29	70.32	83.5	13.18			
5447.66	18.29	Ave.	189	2.1	H	39.29	57.58	63.5	5.92			
10480.00	47.67	PK	31	2.4	H	17.25	64.92	77.7	12.78			
802.11n20												
5180 MHz												
4781.73	30.08	PK	19	1.4	H	37.80	67.88	83.5	15.62			
4781.73	18.08	Ave.	19	1.4	H	37.80	55.88	63.5	7.62			
5457.21	30.92	PK	326	2.0	H	39.37	70.29	83.5	13.21			
5457.21	18.34	Ave.	326	2.0	H	39.37	57.71	63.5	5.79			
10360.00	44.06	PK	256	2.3	H	17.42	61.48	77.7	16.22			
5200 MHz												
10400.00	44.37	PK	198	2.3	H	17.52	61.89	77.7	15.81			
5240 MHz												
4817.47	29.96	PK	322	2.1	H	37.80	67.76	83.5	15.74			
4817.47	18.23	Ave.	322	2.1	H	37.80	56.03	63.5	7.47			
5363.29	31.99	PK	244	1.5	H	39.09	71.08	83.5	12.42			
5363.29	18.36	Ave.	244	1.5	H	39.09	57.45	63.5	6.05			
10480.00	45.81	PK	180	1.9	H	17.25	63.06	77.7	14.64			

Frequency (MHz)	Receiver		Turtable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209			
	Reading (dB μ V)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)		
802.11n40											
5190 MHz											
5053.58	30.94	PK	185	2.5	H	38.16	69.10	83.5	14.40		
5053.58	18.49	Ave.	185	2.5	H	38.16	56.65	63.5	6.85		
5350.56	31.54	PK	103	1.2	H	39.09	70.63	83.5	12.87		
5350.56	18.12	Ave.	103	1.2	H	39.09	57.21	63.5	6.29		
10380.00	43.09	PK	69	2.0	H	17.42	60.51	77.7	17.19		
5230 MHz											
5139.18	30.77	PK	173	2.2	H	38.36	69.13	83.5	14.37		
5139.18	17.99	Ave.	173	2.2	H	38.36	56.35	63.5	7.15		
5377.46	31.38	PK	193	1.3	H	39.09	70.47	83.5	13.03		
5377.46	18.16	Ave.	193	1.3	H	39.09	57.25	63.5	6.25		
10460.00	43.37	PK	30	1.9	H	17.15	60.52	77.7	17.18		
802.11ac20											
5180 MHz											
5078.04	30.01	PK	162	1.5	H	38.26	68.27	83.5	15.23		
5078.04	18.09	Ave.	162	1.5	H	38.26	56.35	63.5	7.15		
5359.31	31.49	PK	184	1.3	H	39.09	70.58	83.5	12.92		
5359.31	18.15	Ave.	184	1.3	H	39.09	57.24	63.5	6.26		
10360.00	44.10	PK	57	1.8	H	17.42	61.52	77.7	16.18		
5200 MHz											
10400.00	42.17	PK	246	1.8	H	17.52	59.69	77.7	18.01		
5240 MHz											
5103.44	30.23	PK	69	1.4	H	38.26	68.49	83.5	15.01		
5103.44	18.09	Ave.	69	1.4	H	38.26	56.35	63.5	7.15		
5454.19	31.94	PK	75	1.2	H	39.37	71.31	83.5	12.19		
5454.19	18.16	Ave.	75	1.2	H	39.37	57.53	63.5	5.97		
10480.00	46.05	PK	154	2.3	H	17.25	63.30	77.7	14.40		
802.11ac40											
5190 MHz											
5142.00	30.66	PK	302	2.4	H	38.36	69.02	83.5	14.48		
5142.00	18.45	Ave.	302	2.4	H	38.36	56.81	63.5	6.69		
5356.13	31.48	PK	160	1.9	H	39.09	70.57	83.5	12.93		
5356.13	18.50	Ave.	160	1.9	H	39.09	57.59	63.5	5.91		
10380.00	43.12	PK	123	1.6	H	17.42	60.54	77.7	17.16		
5230 MHz											
5026.30	30.31	PK	168	1.5	H	38.14	68.45	83.5	15.05		
5026.30	18.29	Ave.	168	1.5	H	38.14	56.43	63.5	7.07		
5373.16	32.00	PK	11	1.3	H	39.09	71.09	83.5	12.41		
5373.16	18.49	Ave.	11	1.3	H	39.09	57.58	63.5	5.92		
10460.00	42.47	PK	128	1.5	H	17.15	59.62	77.7	18.08		

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209				
	Reading (dB μ V)	PK/QP/Ave.		Degree	Height (m)			Limit (dB μ V/m)	Margin (dB)			
802.11ac80												
5210 MHz												
5078.98	30.12	PK	268	1.0	H	38.26	68.38	83.5	15.12			
5078.98	18.70	Ave.	268	1.0	H	38.26	56.96	63.5	6.54			
5351.03	31.67	PK	213	1.4	H	39.09	70.76	83.5	12.74			
5351.03	18.77	Ave.	213	1.4	H	39.09	57.86	63.5	5.64			
10420.00	42.17	PK	58	2.4	H	17.52	59.69	77.7	18.01			

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209				
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)			
802.11a												
5745 MHz												
5644.34	32.13	PK	94	1.9	H	39.46	71.59	77.7	6.11			
5698.55	33.03	PK	234	1.4	H	39.49	72.52	113.63	41.11			
5716.28	32.98	PK	282	1.6	H	39.49	72.47	119.26	46.79			
5723.67	37.52	PK	46	2.2	H	39.49	77.01	128.67	51.66			
11490.00	50.63	PK	229	1.2	H	17.47	68.10	83.5	15.40			
11490.00	35.51	Ave.	229	1.2	H	17.47	52.98	63.5	10.52			
5785 MHz												
11570.00	47.87	PK	279	2.0	H	17.51	65.38	83.5	18.12			
11570.00	34.19	Ave.	279	2.0	H	17.51	51.70	63.5	11.80			
5825 MHz												
5854.16	34.25	PK	98	2.0	H	39.87	74.12	122.22	48.10			
5872.03	33.61	PK	148	1.9	H	39.87	73.48	115.3	41.82			
5904.63	34.19	PK	223	1.1	H	39.87	74.06	92.77	18.71			
5971.78	33.78	PK	209	1.8	H	39.84	73.62	77.7	4.08			
11650.00	46.61	PK	152	1.3	H	16.18	62.79	83.5	20.71			
11650.00	32.60	Ave.	152	1.3	H	16.18	48.78	63.5	14.72			
802.11n20												
5745 MHz												
5628.18	32.31	PK	85	1.6	H	39.46	71.77	77.7	5.93			
5689.91	32.85	PK	147	1.5	H	39.49	72.34	107.23	34.89			
5719.29	33.47	PK	305	1.1	H	39.49	72.96	120.10	47.14			
5724.16	38.57	PK	70	1.1	H	39.49	78.06	129.76	51.70			
11490.00	48.13	PK	228	2.1	H	17.47	65.60	83.5	17.90			
11490.00	32.61	Ave.	228	2.1	H	17.47	50.08	63.5	13.42			
5785 MHz												
11570.00	45.64	PK	151	2.4	H	17.51	63.15	83.5	20.35			
11570.00	31.91	Ave.	151	2.4	H	17.51	49.42	63.5	14.08			
5825 MHz												
5852.41	34.16	PK	302	2.3	H	39.87	74.03	126.21	52.18			
5871.19	33.54	PK	259	2.5	H	39.87	73.41	115.77	42.36			
5897.69	33.94	PK	328	1.4	H	39.87	73.81	97.91	24.10			
5966.72	32.96	PK	245	1.1	H	39.84	72.80	77.7	4.90			
11650.00	45.35	PK	358	1.7	H	16.18	61.53	83.5	21.97			
11650.00	31.87	Ave.	358	1.7	H	16.18	48.05	63.5	15.45			

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209				
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)			
802.11n40												
5755 MHz												
5614.57	31.94	PK	73	1.1	H	39.46	71.40	77.7	6.30			
5684.19	32.35	PK	321	1.1	H	39.49	71.84	103.00	31.16			
5719.35	36.47	PK	297	1.7	H	39.49	75.96	120.12	44.16			
5724.99	39.27	PK	82	1.4	H	39.49	78.76	131.68	52.92			
11510.00	44.85	PK	167	1.6	H	17.47	62.32	83.5	21.18			
11510.00	31.30	Ave.	3167	1.6	H	17.47	48.77	63.5	14.73			
5795 MHz												
5853.13	33.77	PK	295	2.3	H	39.87	73.64	124.56	50.92			
5868.52	33.65	PK	102	2.3	H	39.87	73.52	116.51	42.99			
5897.01	33.25	PK	124	1.9	H	39.87	73.12	98.41	25.29			
5969.47	33.53	PK	335	1.6	H	39.84	73.37	77.7	4.33			
11590.00	44.18	PK	331	1.2	H	17.51	61.69	83.5	21.81			
11590.00	30.45	Ave.	331	1.2	H	17.51	47.96	63.5	15.54			
802.11ac20												
5745 MHz												
5600.69	33.15	PK	286	1.4	H	39.46	72.61	77.7	5.09			
5661.04	33.61	PK	91	1.6	H	39.49	73.10	85.85	12.75			
5718.31	33.24	PK	339	1.2	H	39.49	72.73	119.83	47.10			
5723.98	38.12	PK	158	1.2	H	39.49	77.61	129.37	51.76			
11490.00	47.21	PK	297	1.5	H	17.47	64.68	83.5	18.82			
11490.00	32.36	Ave.	297	1.5	H	17.47	49.83	63.5	13.67			
5785 MHz												
11570.00	46.78	PK	53	1.7	H	17.51	64.29	83.5	19.21			
11570.00	31.87	Ave.	53	1.7	H	17.51	49.38	63.5	14.12			
5825 MHz												
5854.88	33.63	PK	308	2.4	H	39.87	73.50	120.57	47.07			
5856.23	33.34	PK	272	1.2	H	39.87	73.21	119.96	46.75			
5924.39	34.42	PK	135	1.7	H	39.97	74.39	78.15	3.76			
5968.74	32.87	PK	157	2.0	H	39.84	72.71	77.7	4.99			
11650.00	46.27	PK	249	1.8	H	16.18	62.45	83.5	21.05			
11650.00	31.10	Ave.	249	1.8	H	16.18	47.28	63.5	16.22			

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.407/205/209				
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)			
802.11ac40												
5755 MHz												
5647.07	32.50	PK	205	1.2	H	39.46	71.96	77.7	5.74			
5695.56	31.62	PK	124	2.1	H	39.49	71.11	111.41	40.30			
5717.78	31.67	PK	172	1.7	H	39.49	71.18	119.68	48.50			
5723.61	38.88	PK	315	2.3	H	39.49	78.37	128.53	50.16			
11510.00	44.57	PK	225	2.1	H	17.47	62.04	83.5	21.46			
11510.00	31.30	Ave.	225	2.1	H	17.47	48.77	63.5	14.73			
5795 MHz												
5854.34	33.34	PK	225	1.0	H	39.87	73.21	121.80	48.59			
5864.83	32.89	PK	351	2.1	H	39.87	72.76	117.55	44.79			
5917.37	34.05	PK	221	2.0	H	39.97	74.02	83.35	9.33			
5951.58	33.03	PK	134	1.3	H	39.84	72.87	77.7	4.83			
11590.00	44.05	PK	196	1.8	H	17.51	61.56	83.5	21.94			
11590.00	30.94	Ave.	196	1.8	H	17.51	48.45	63.5	15.05			
802.11ac80												
5775 MHz												
5648.31	32.15	PK	199	2.0	H	39.46	71.61	77.7	6.09			
5674.21	33.11	PK	119	1.3	H	39.49	72.60	95.62	23.02			
5719.29	33.91	PK	126	1.7	H	39.49	73.40	120.1	46.70			
5724.15	35.60	PK	46	1.3	H	39.49	75.09	129.76	54.67			
5852.58	34.29	PK	294	2.4	H	39.87	74.16	125.82	51.66			
5865.49	33.01	PK	287	2.0	H	39.87	72.88	117.36	44.48			
5914.64	34.57	PK	267	2.3	H	39.87	74.44	85.37	10.93			
5944.79	32.94	PK	279	2.0	H	39.97	72.91	77.7	4.79			
11550.00	42.93	PK	296	2.5	H	17.51	60.44	83.5	23.06			
11550.00	29.24	Ave.	296	2.5	H	17.51	46.75	63.5	16.75			

Note:

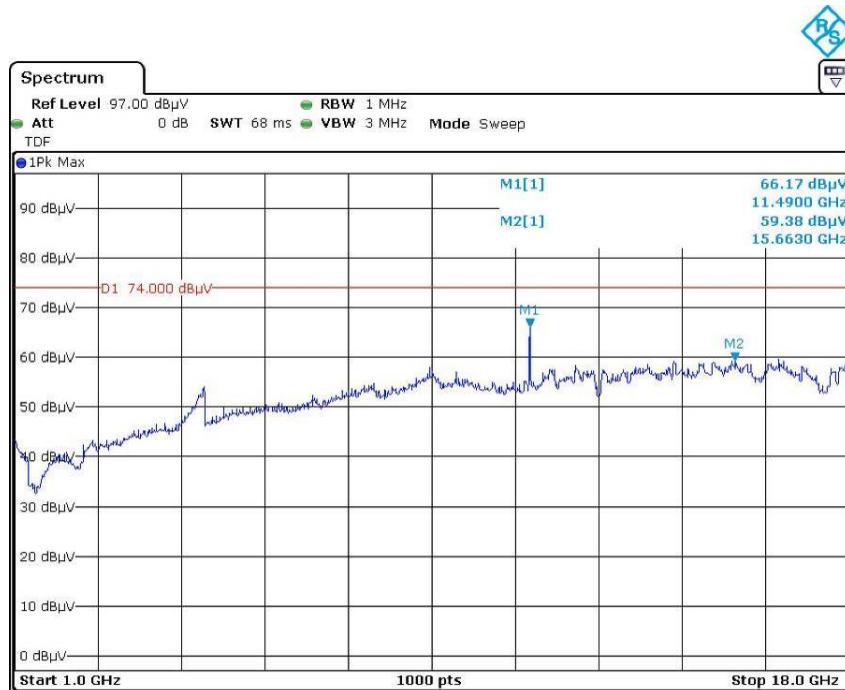
Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

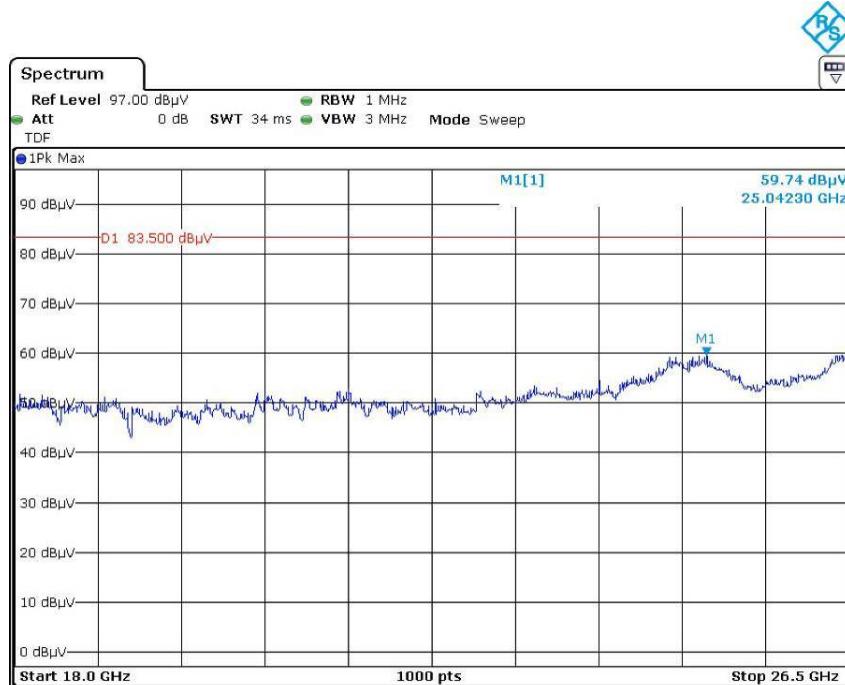
Margin = Limit- Corr. Amplitude

All other spurious emissions are 20 dB below the limit or are on the system noise floor level.

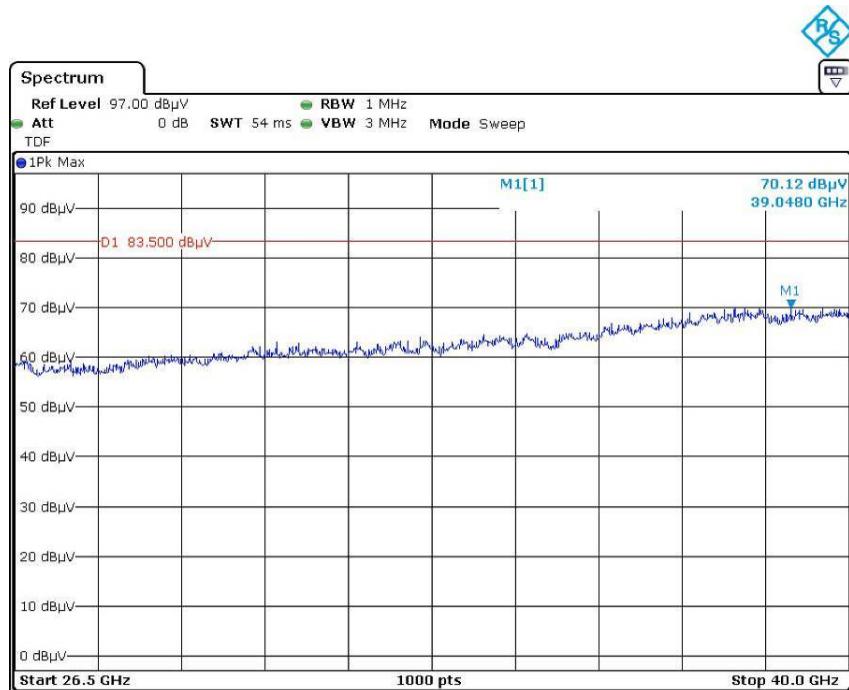
**Pre-scan with 802.11a 5745MHz
Peak
Horizontal**



Date: 6.AUG.2020 18:05:31

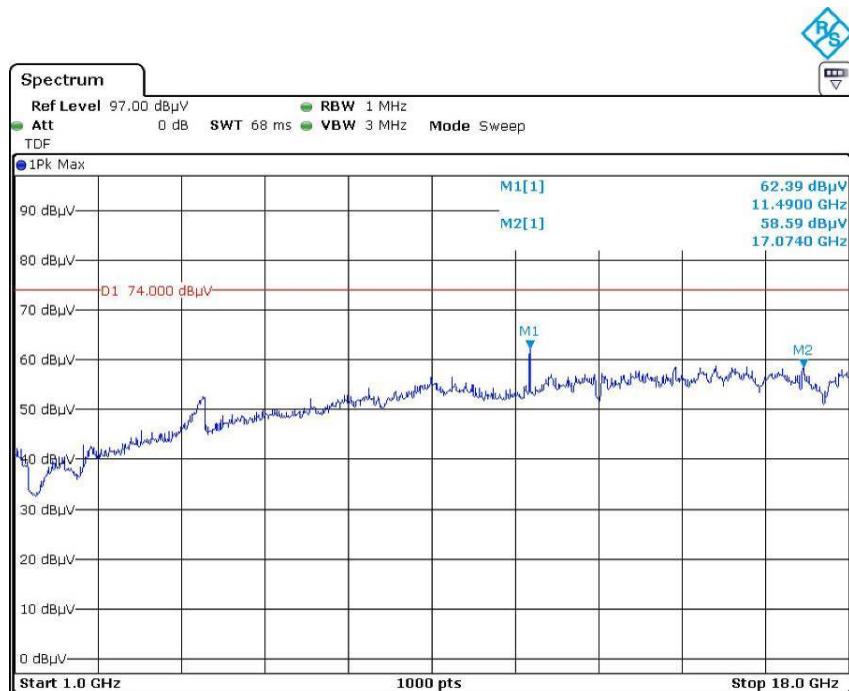


Date: 6.AUG.2020 18:56:17

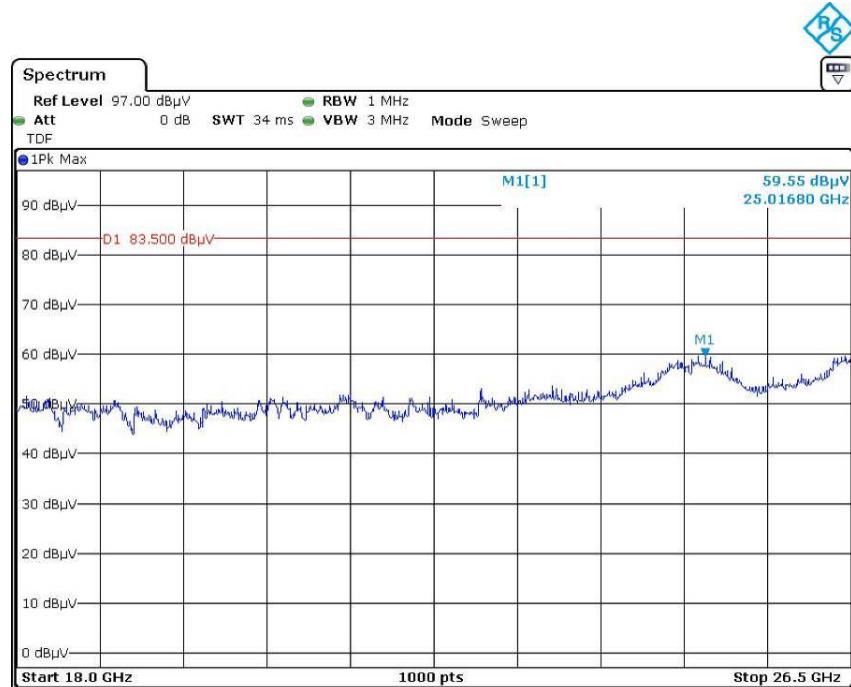


Date: 6.AUG.2020 19:38:05

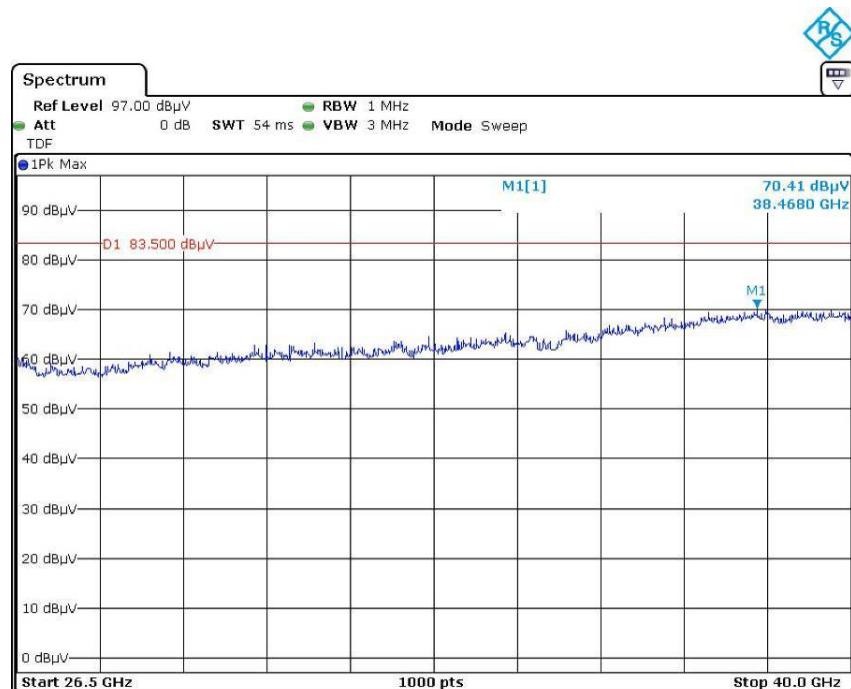
Vertical



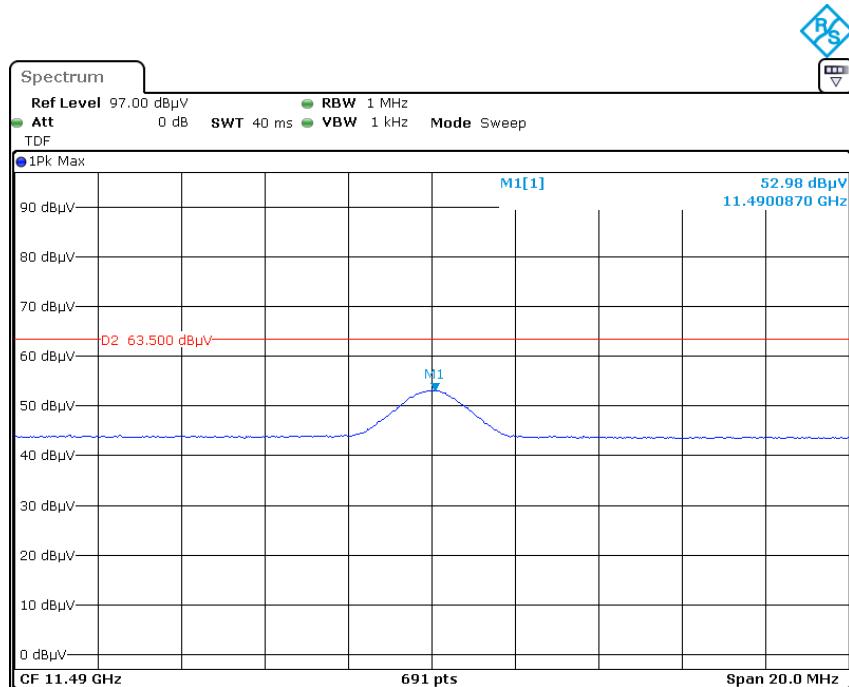
Date: 6.AUG.2020 18:16:13



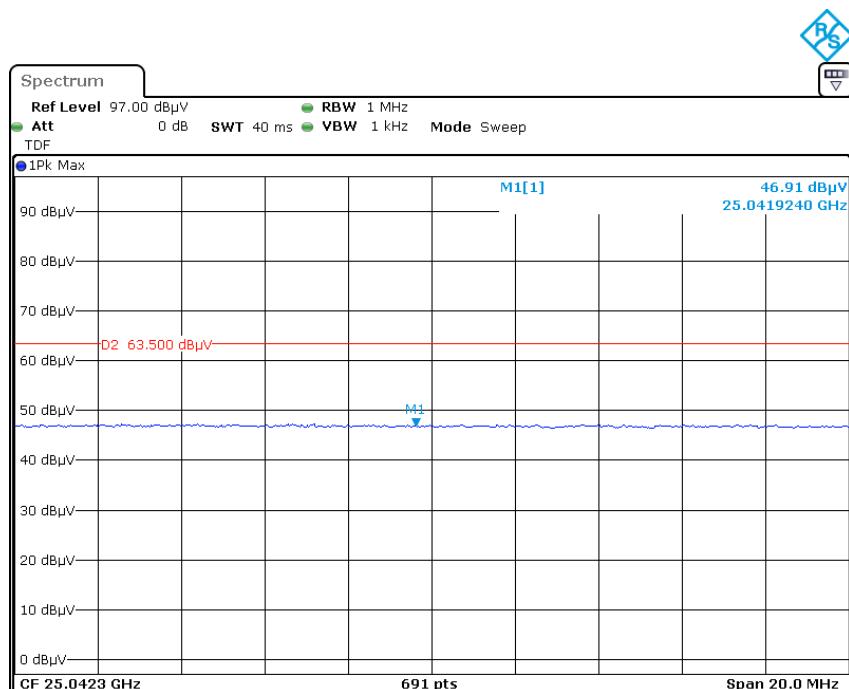
Date: 6.AUG.2020 19:03:03



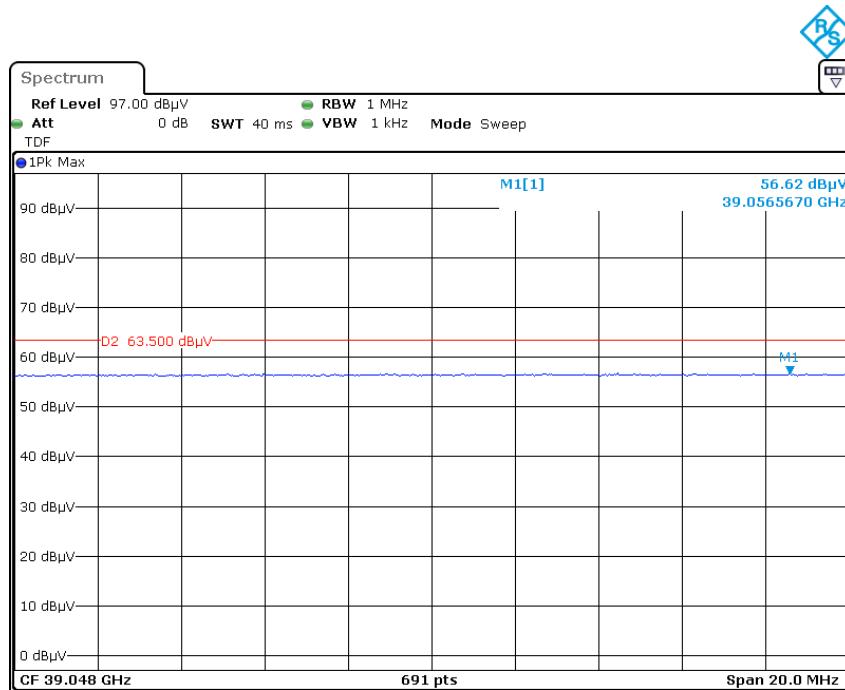
Date: 6.AUG.2020 19:45:06

**Average
Horizontal**

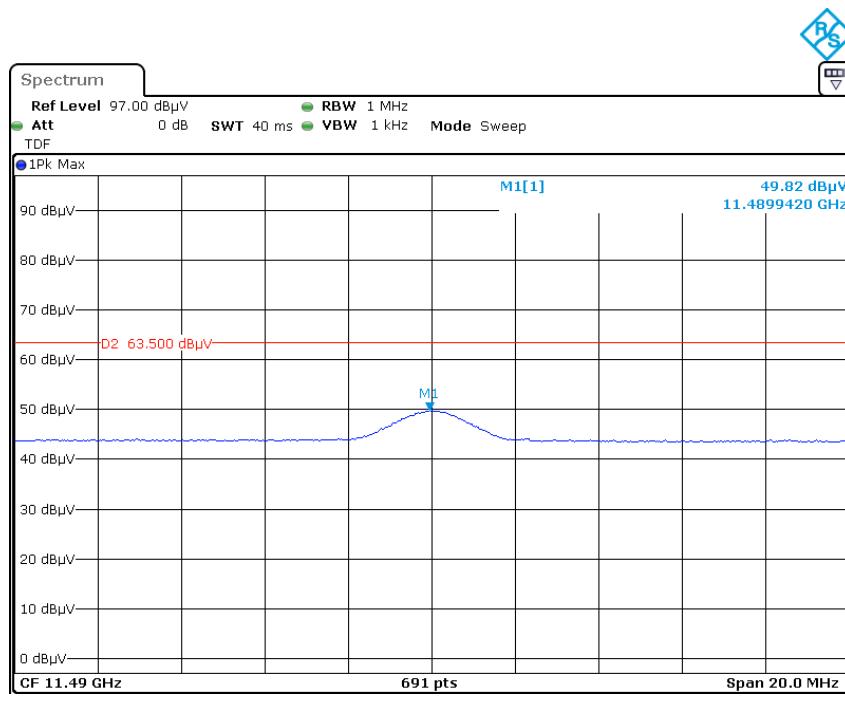
Date: 6.AUG.2020 18:11:29

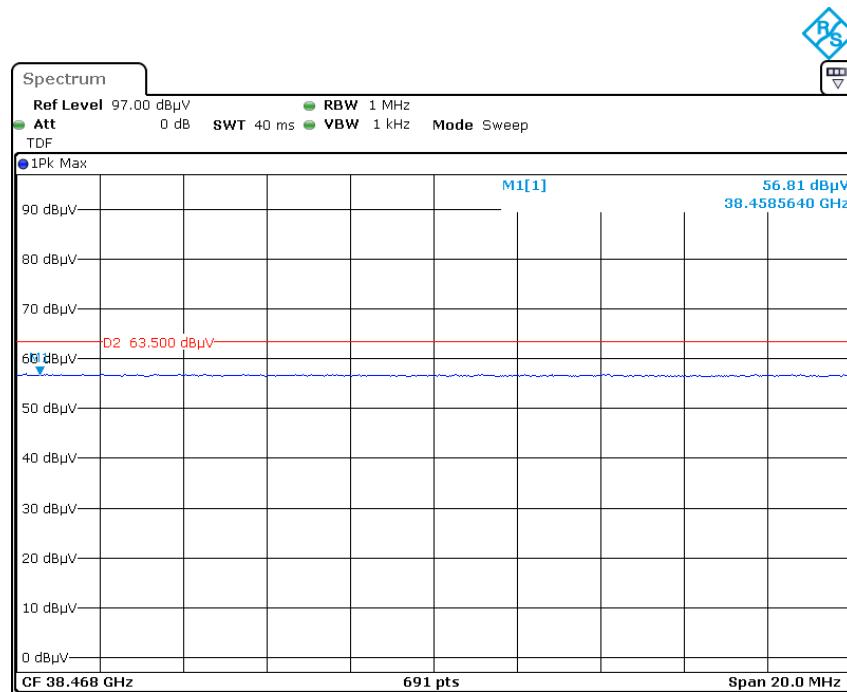
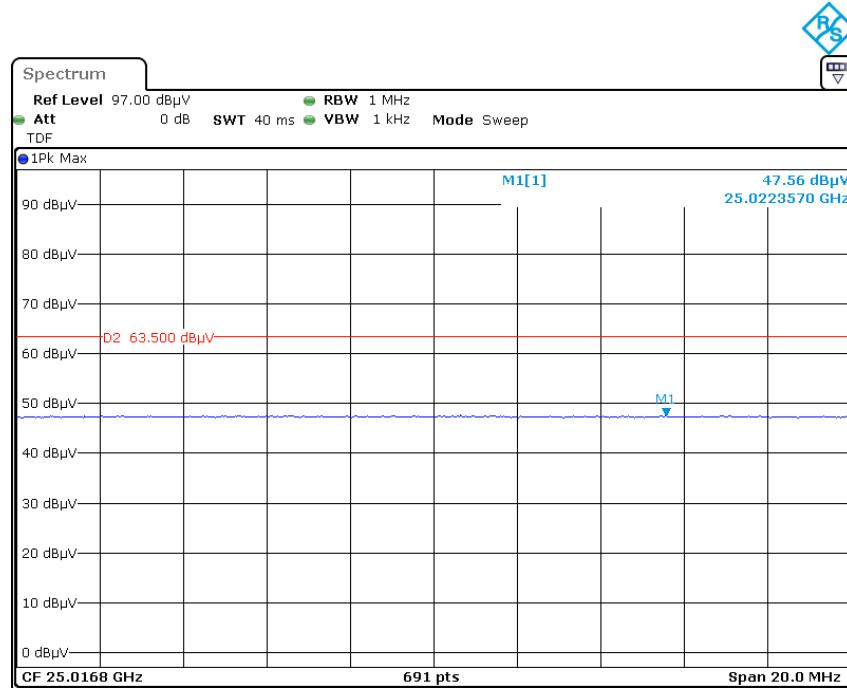


Date: 6.AUG.2020 18:59:29



Vertical





FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Blank Chen on 2020-07-28.

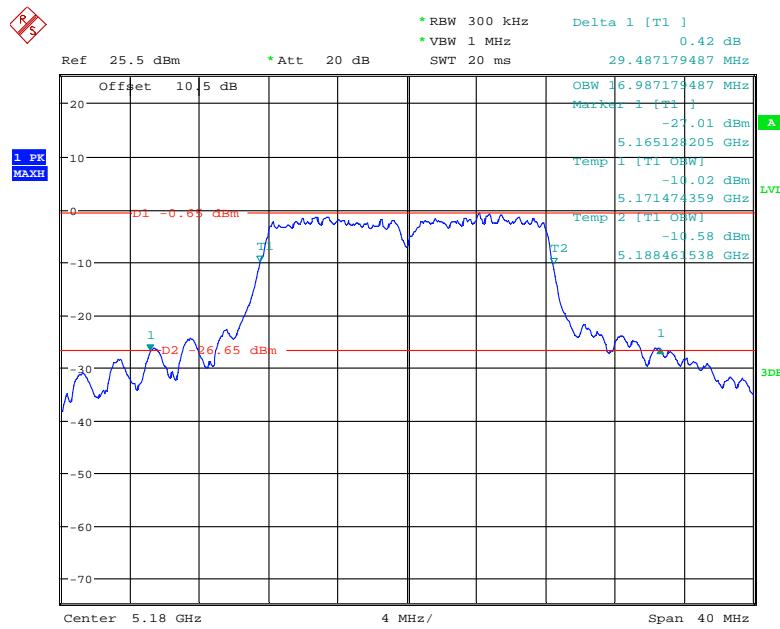
EUT operation mode: Transmitting

Test Result: Pass; please refer to the following tables and plots.

5150 MHz - 5250 MHz:

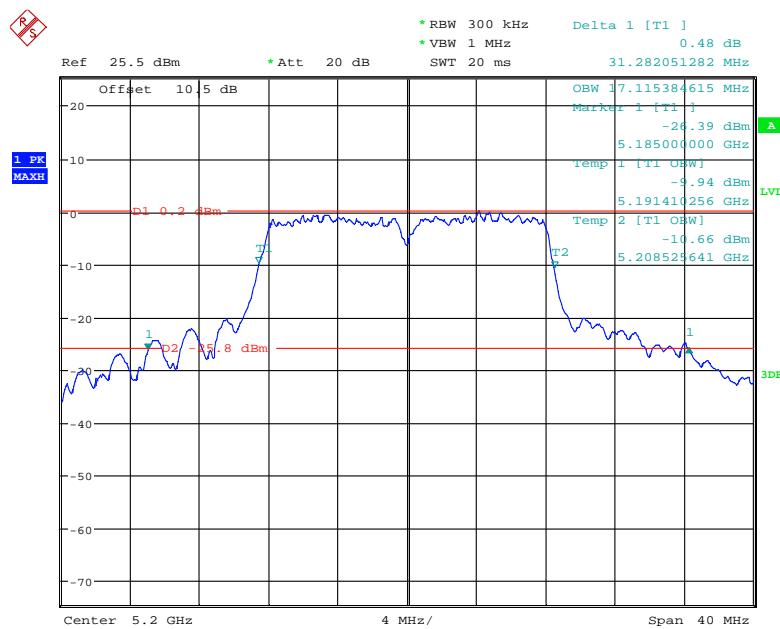
Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Remark
802.11a			
5180	29.49	16.99	
5200	31.28	17.12	
5240	29.36	17.05	
802.11n20			
5180	21.35	17.76	
5200	27.31	17.88	
5240	21.15	17.76	
802.11n40			
5190	41.92	36.15	
5230	41.79	36.28	
802.11ac20			
5180	21.47	17.82	
5200	26.92	17.95	
5240	21.28	17.76	
802.11ac40			
5190	41.79	36.28	
5230	41.79	36.28	
802.11ac80			
5210	81.79	75.38	No transmitted signal in the 99% bandwidth extends into the U-NII-2A band

802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

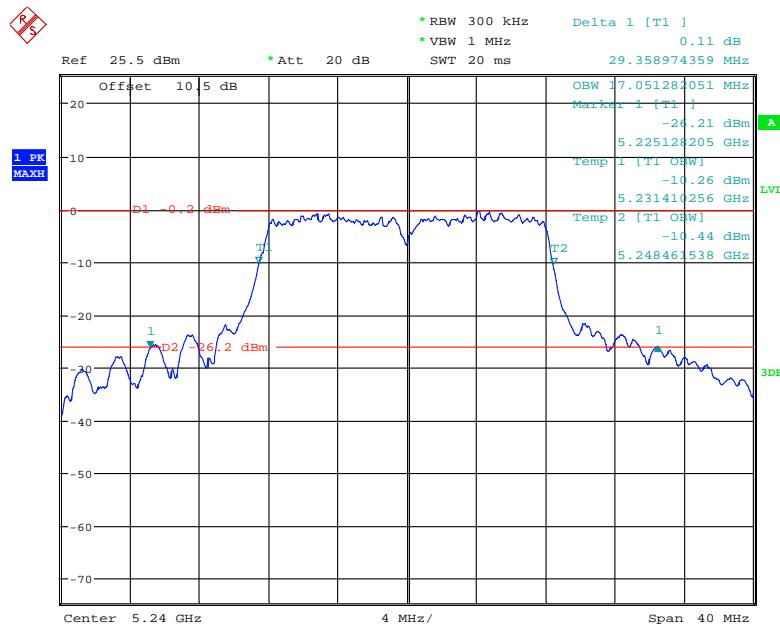


Date: 28.JUL.2020 23:57:02

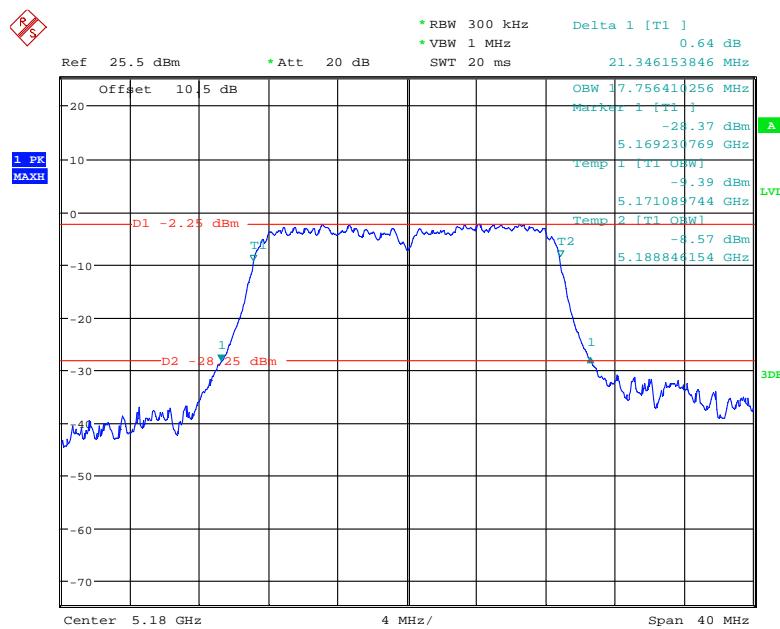
802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz



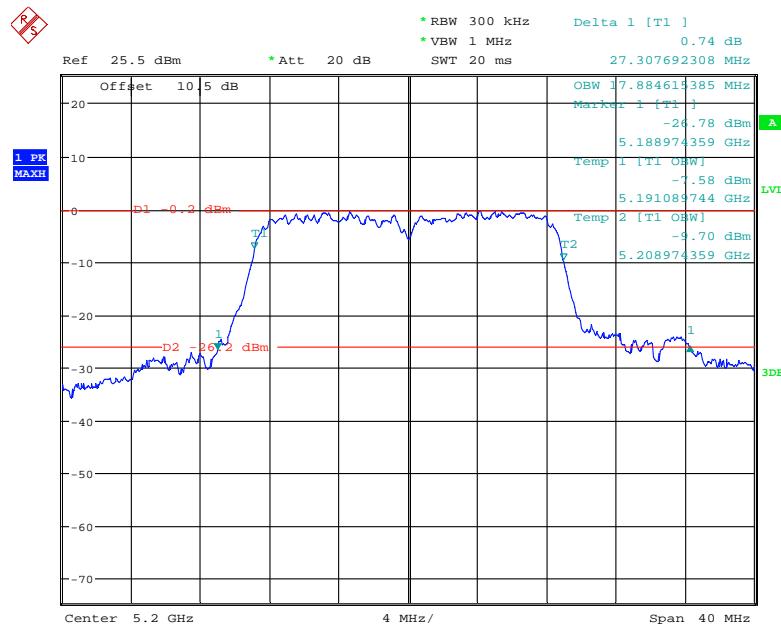
Date: 28.JUL.2020 23:59:48

802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

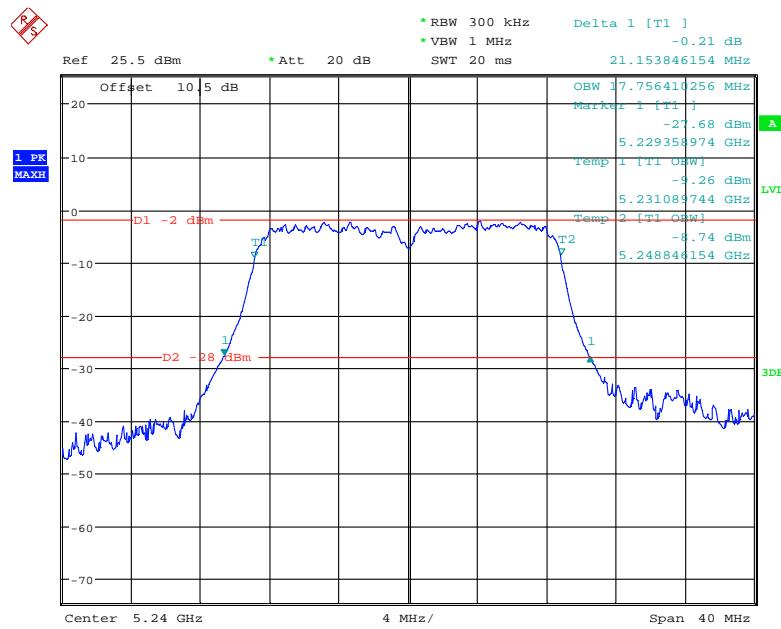
Date: 29.JUL.2020 00:00:55

802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

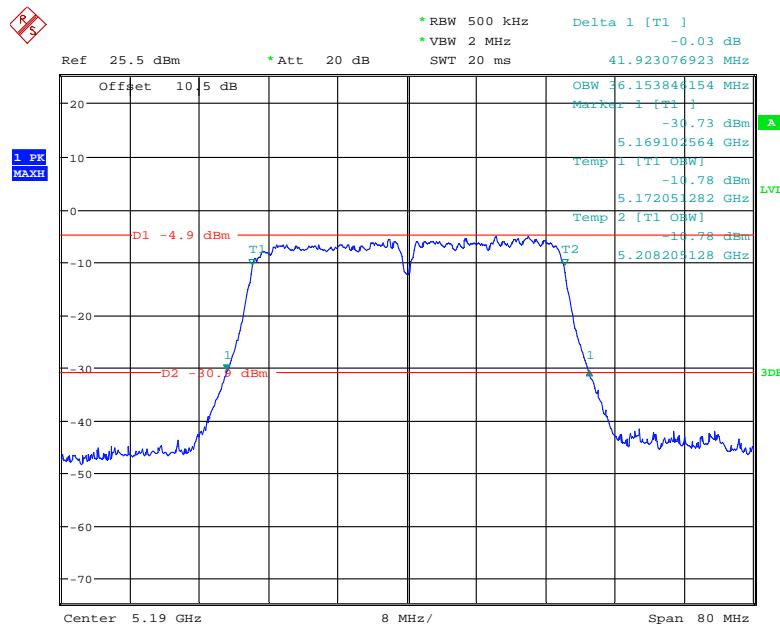
Date: 29.JUL.2020 00:08:09

802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz

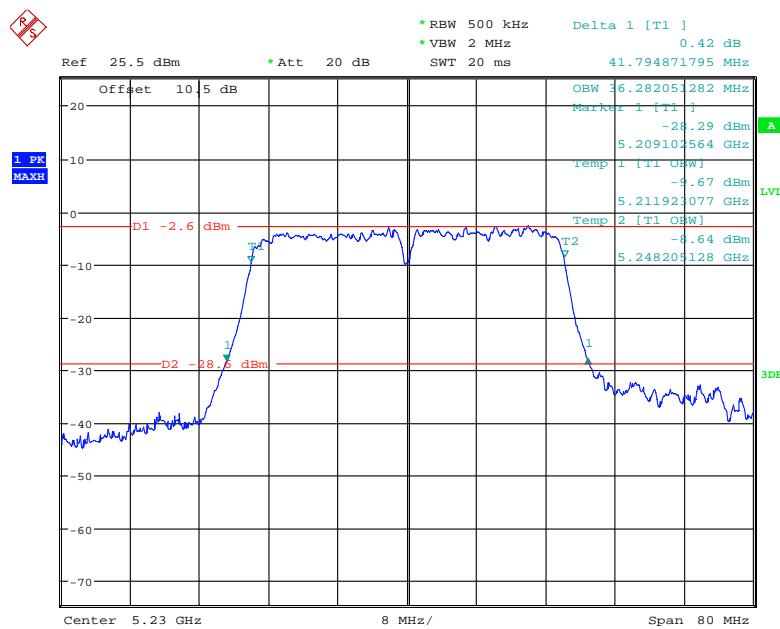
Date: 29.JUL.2020 00:07:22

802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

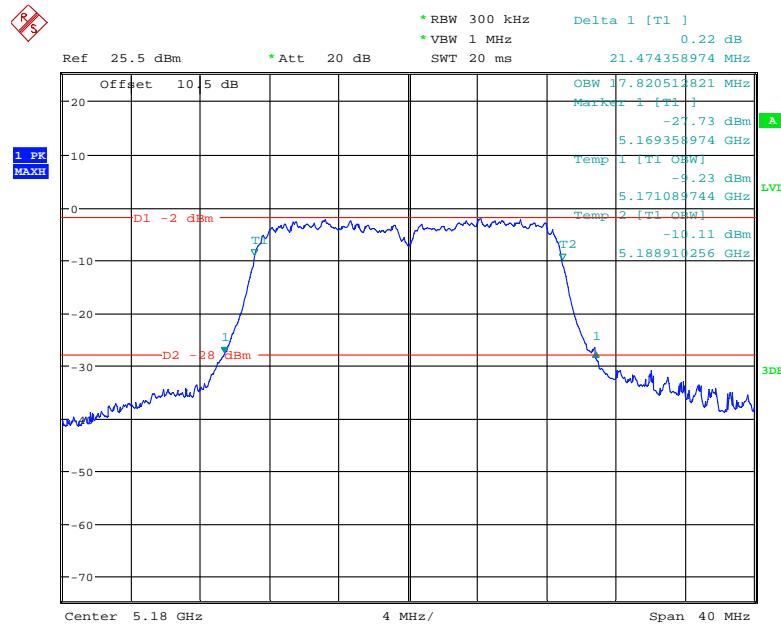
Date: 29.JUL.2020 00:06:36

802.11n40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5190 MHz

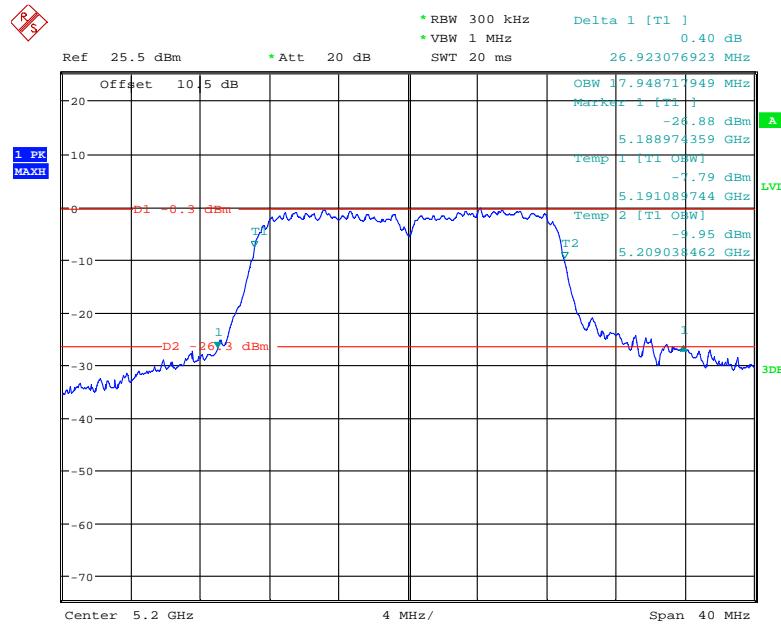
Date: 29.JUL.2020 00:11:12

802.11n40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5230 MHz

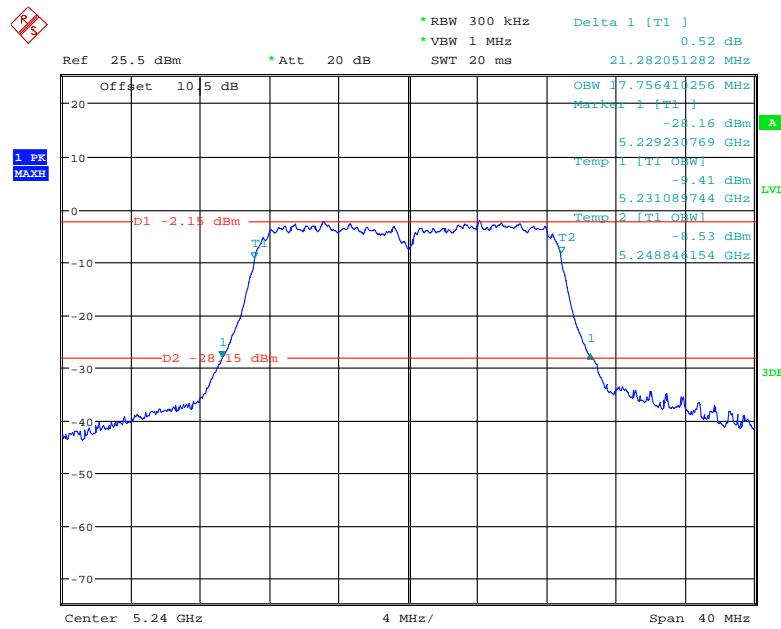
Date: 29.JUL.2020 00:11:55

802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

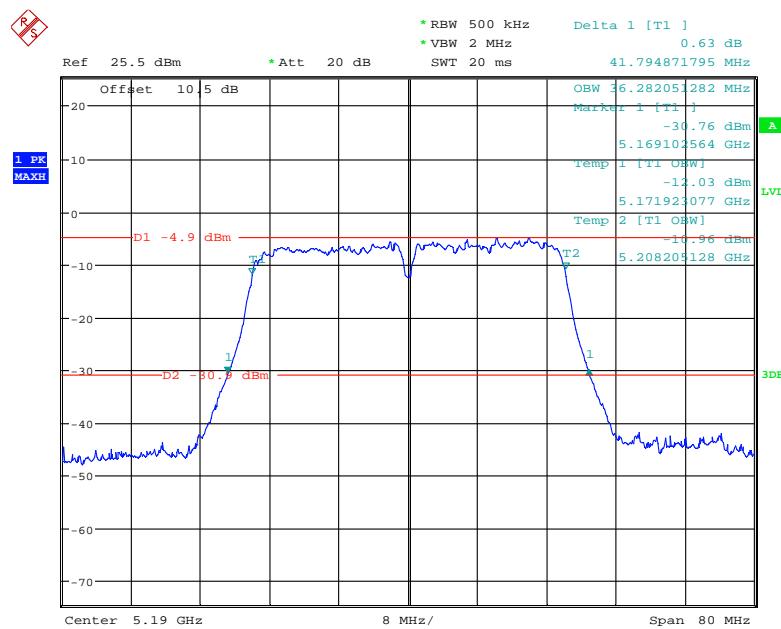
Date: 29.JUL.2020 00:08:39

802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz

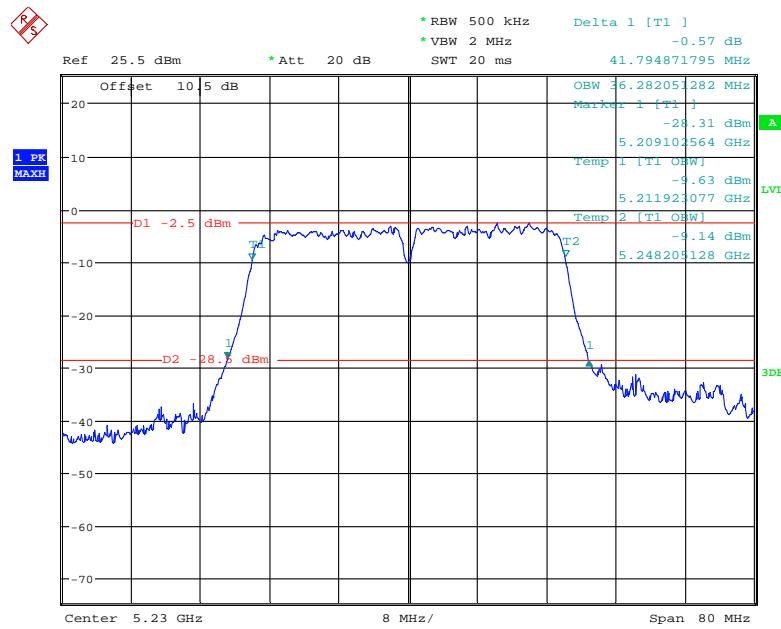
Date: 29.JUL.2020 00:09:35

802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

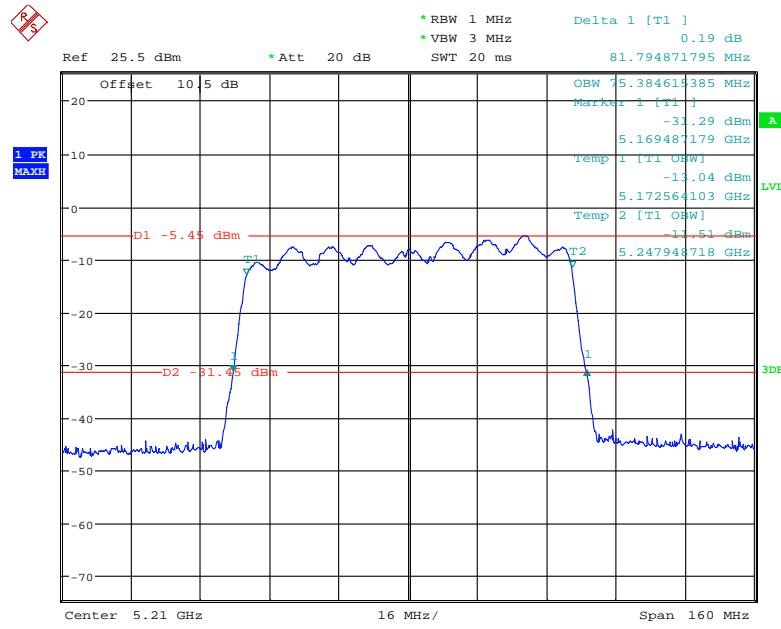
Date: 29.JUL.2020 00:10:24

802.11ac40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5190 MHz

Date: 29.JUL.2020 00:13:24

802.11ac40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5230 MHz

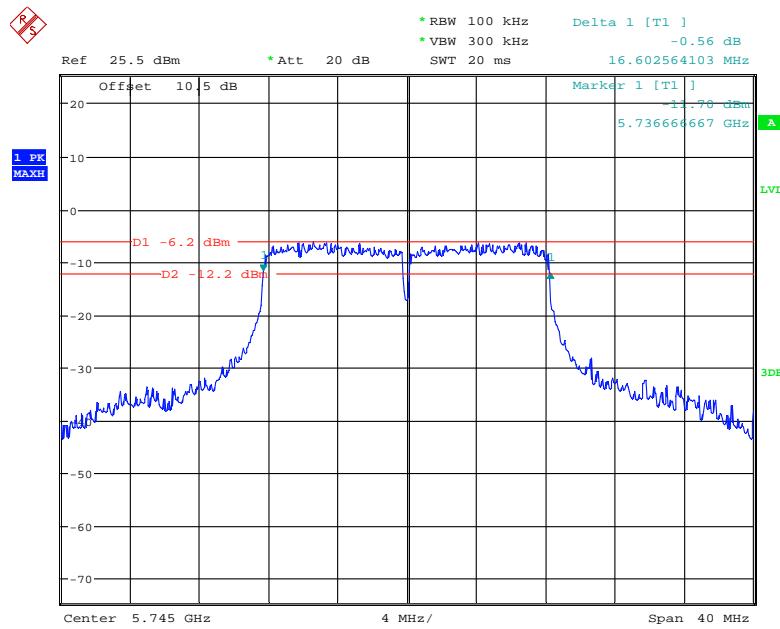
Date: 29.JUL.2020 00:12:32

802.11ac80 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5210 MHz

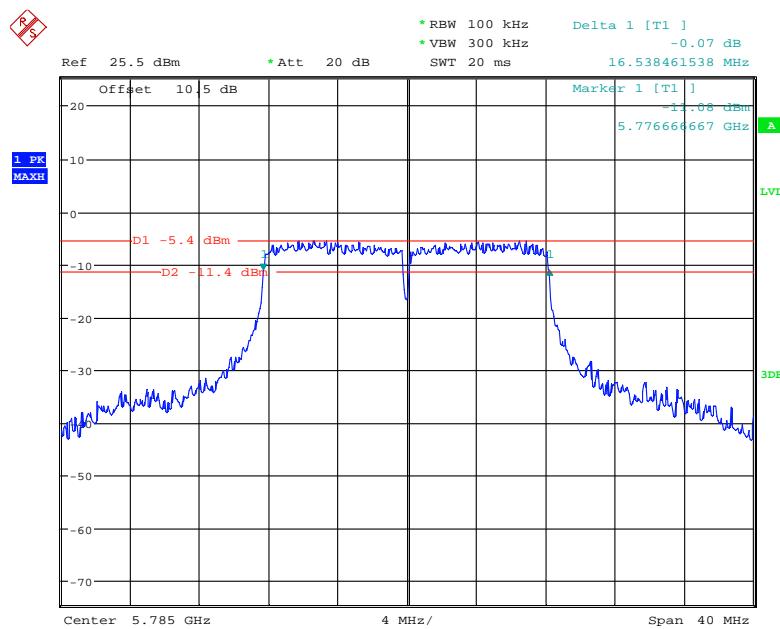
Date: 28.JUL.2020 23:55:46

5725 MHz – 5850 MHz:

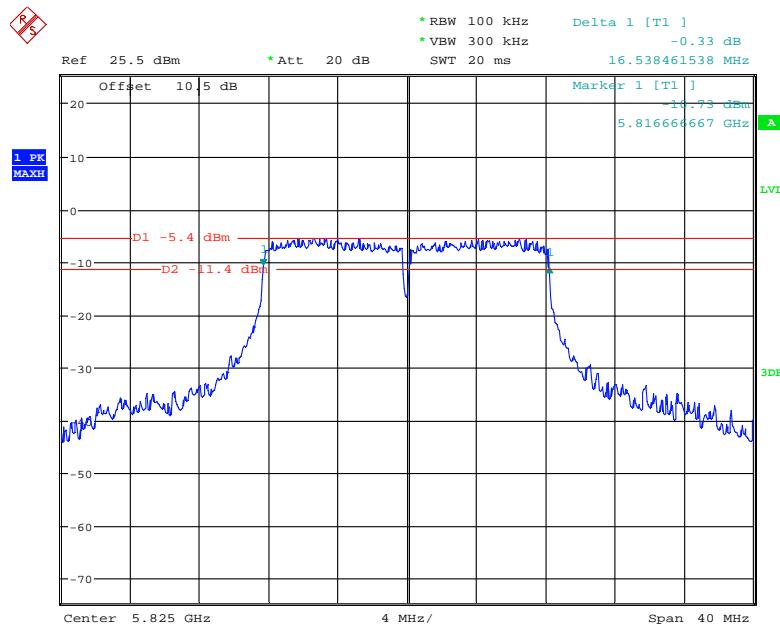
Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark
802.11a				
5745	16.60	16.99	0.5	
5785	16.54	16.99	0.5	
5825	16.54	16.92	0.5	
802.11n20				
5745	17.82	18.21	0.5	
5785	17.69	18.14	0.5	
5825	17.69	18.08	0.5	
802.11n40				
5755	36.67	36.41	0.5	
5795	36.54	36.41	0.5	
802.11ac20				
5745	17.69	18.27	0.5	
5785	17.69	18.14	0.5	
5825	17.69	18.08	0.5	
802.11ac40				
5755	36.54	36.41	0.5	
5795	36.54	36.41	0.5	
802.11ac80				
5775	76.41	75.90	0.5	No transmitted signal in the 99% bandwidth extends into the U-NII-2C band

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

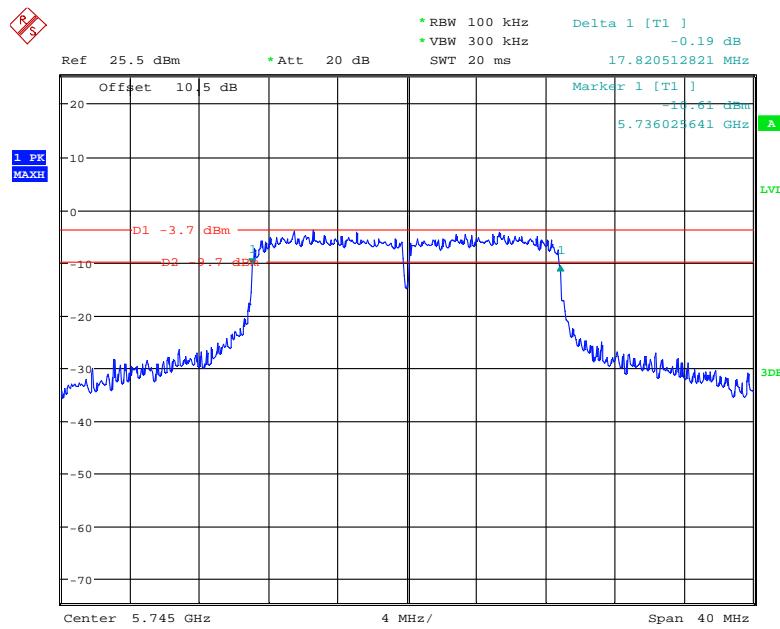
Date: 29.JUL.2020 22:58:13

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

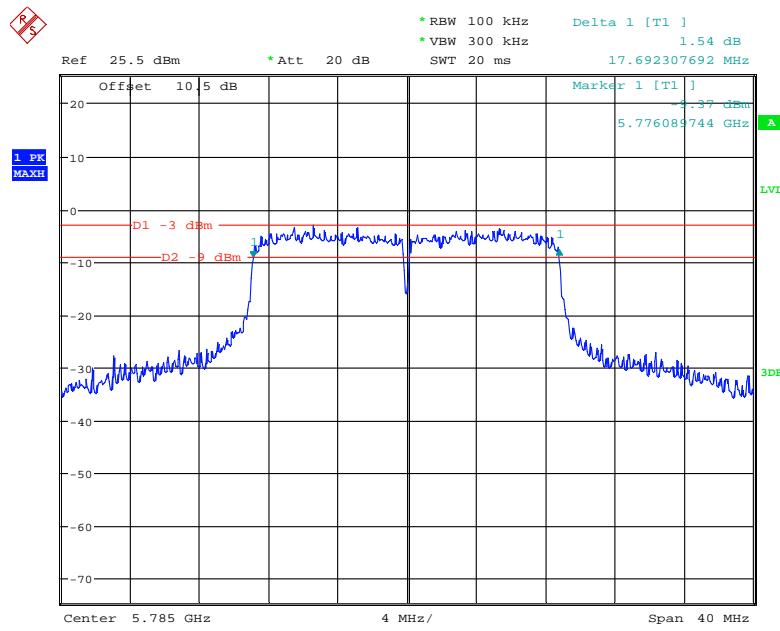
Date: 29.JUL.2020 22:57:35

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

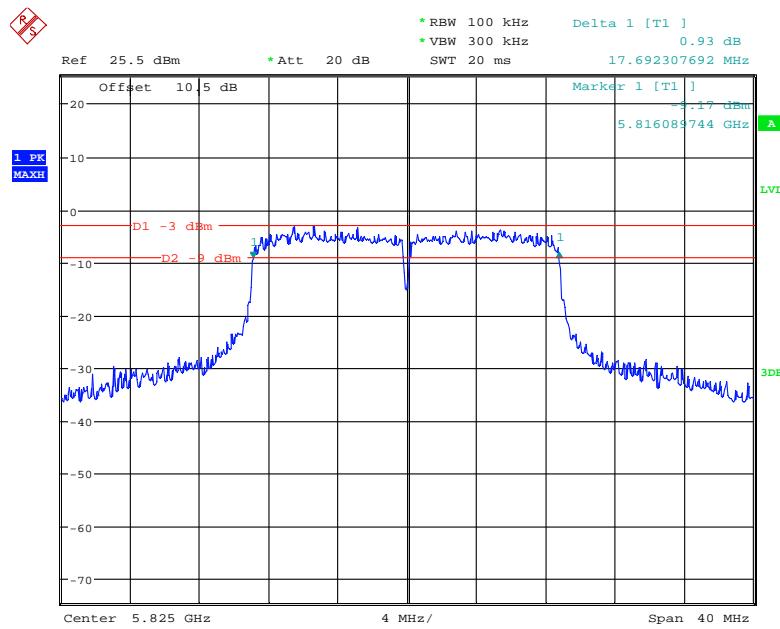
Date: 29.JUL.2020 22:57:04

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

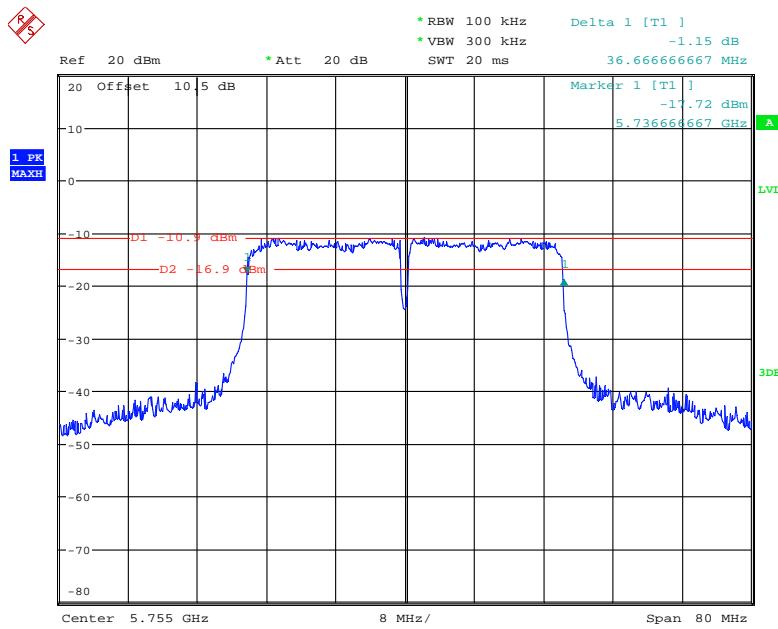
Date: 29.JUL.2020 22:54:37

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

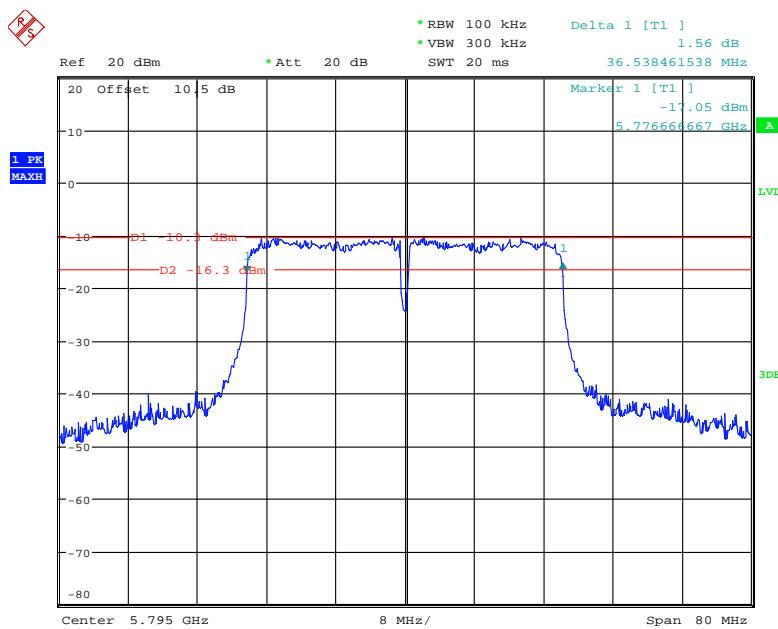
Date: 29.JUL.2020 22:55:28

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

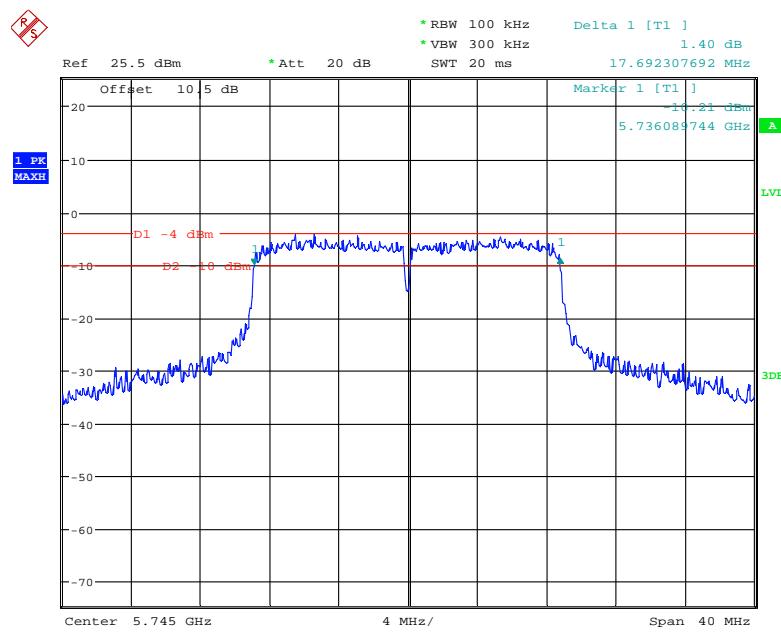
Date: 29.JUL.2020 22:55:57

802.11n40 mode, 6dB Emission Bandwidth, 5755 MHz

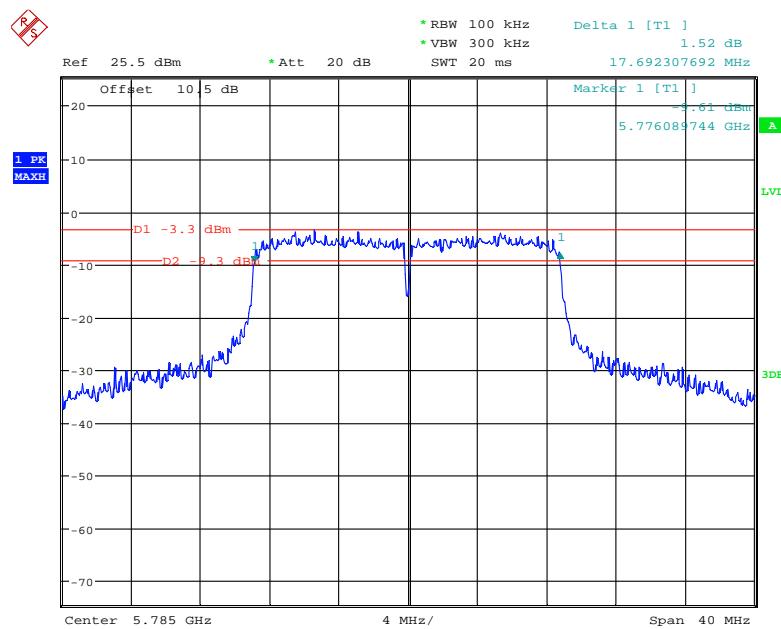
Date: 29.JUL.2020 23:03:15

802.11n40 mode, 6dB Emission Bandwidth, 5795 MHz

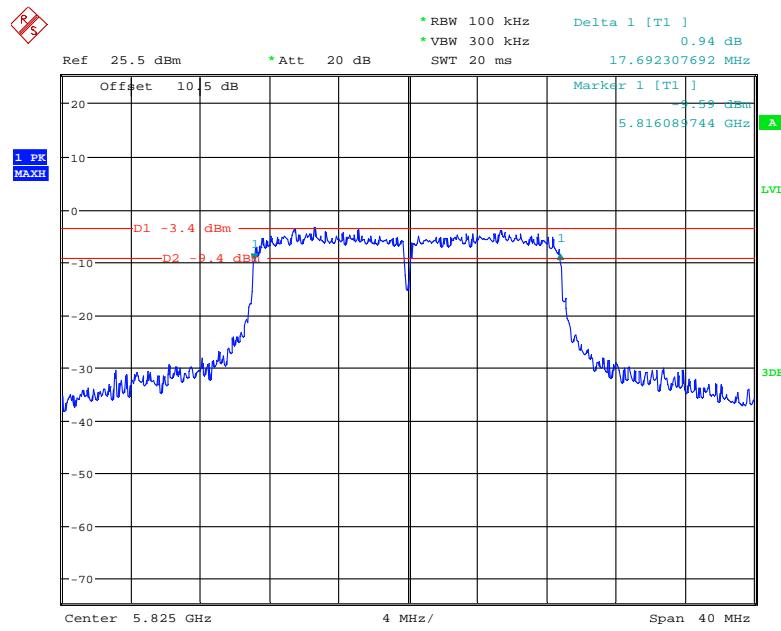
Date: 29.JUL.2020 23:04:04

802.11ac20 mode, 6dB Emission Bandwidth, 5745 MHz

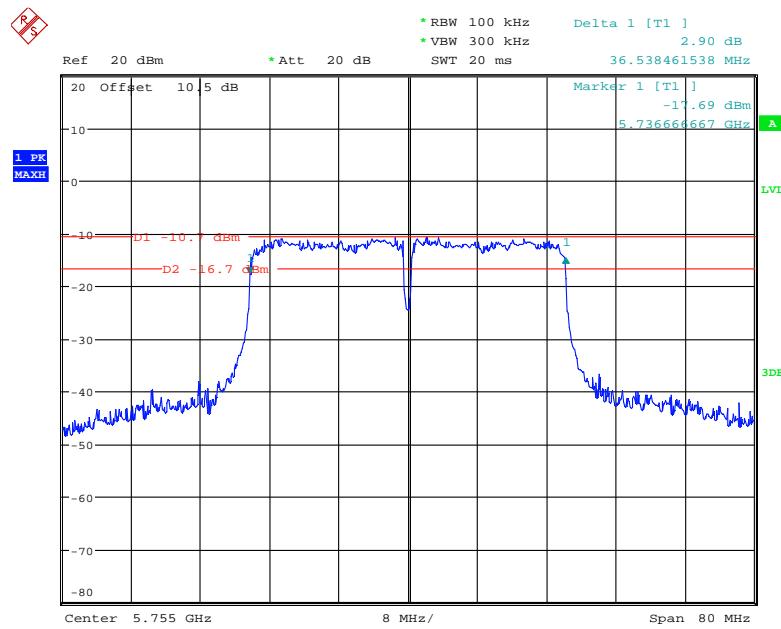
Date: 29.JUL.2020 22:59:45

802.11ac20 mode, 6dB Emission Bandwidth, 5785 MHz

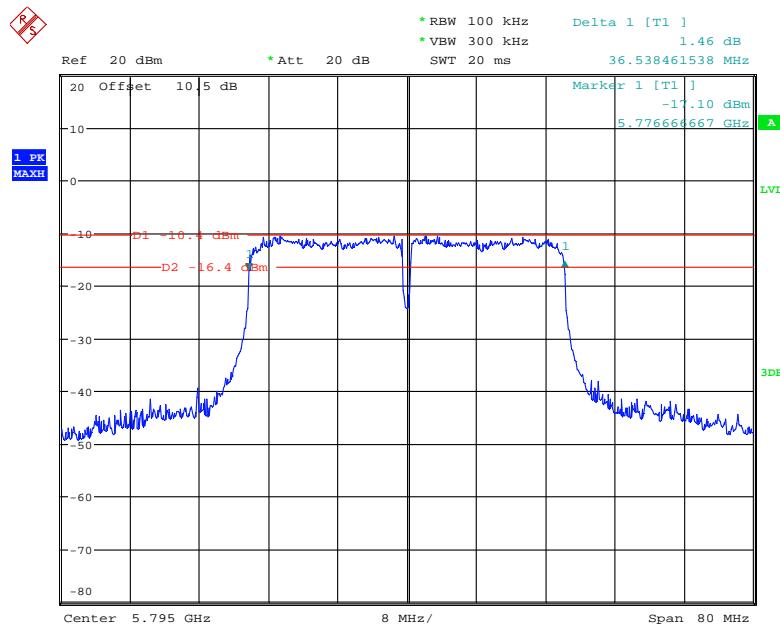
Date: 29.JUL.2020 23:01:23

802.11ac20 mode, 6dB Emission Bandwidth, 5825 MHz

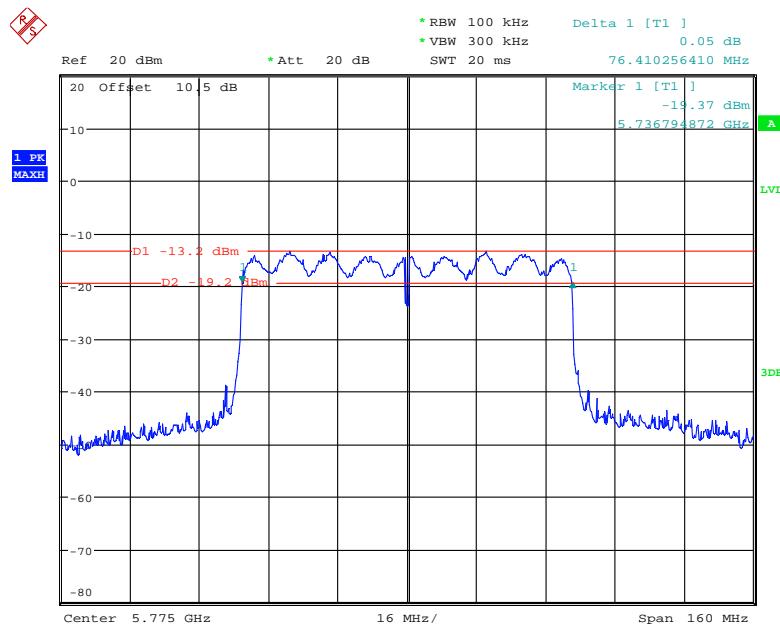
Date: 29.JUL.2020 23:02:15

802.11ac40 mode, 6dB Emission Bandwidth, 5755 MHz

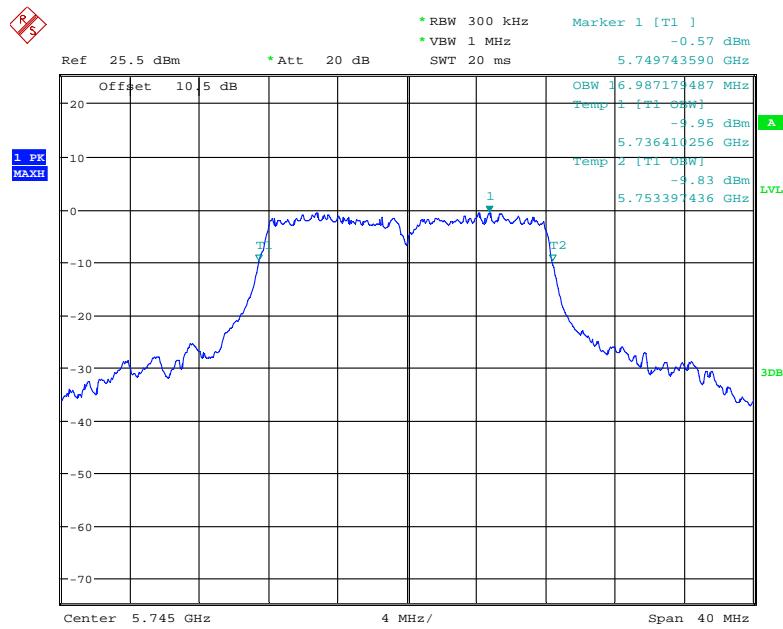
Date: 29.JUL.2020 23:06:32

802.11ac40 mode, 6dB Emission Bandwidth, 5795 MHz

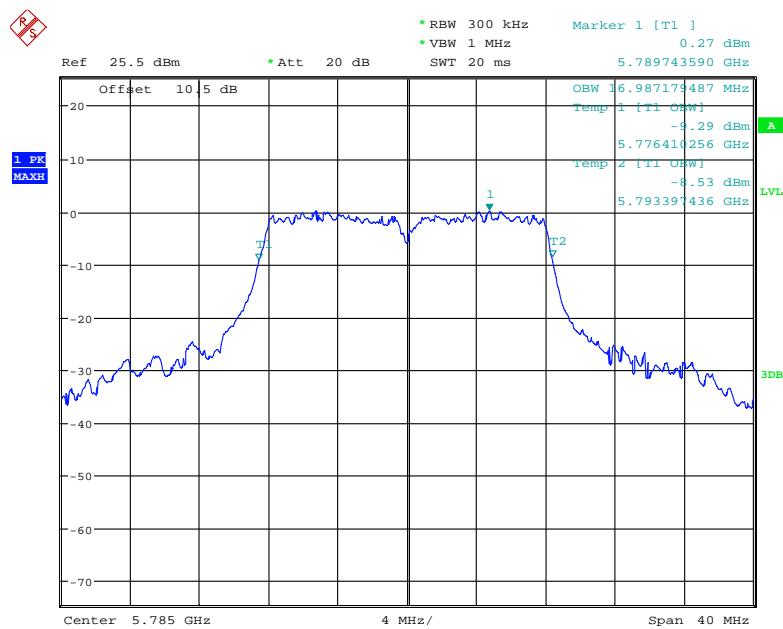
Date: 29.JUL.2020 23:05:37

802.11ac80 mode, 6dB Emission Bandwidth, 5775 MHz

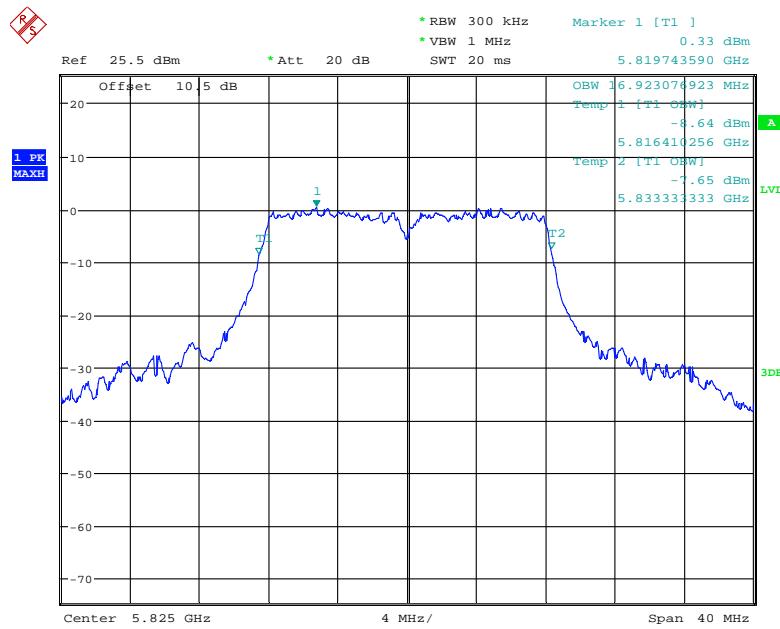
Date: 29.JUL.2020 23:07:31

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

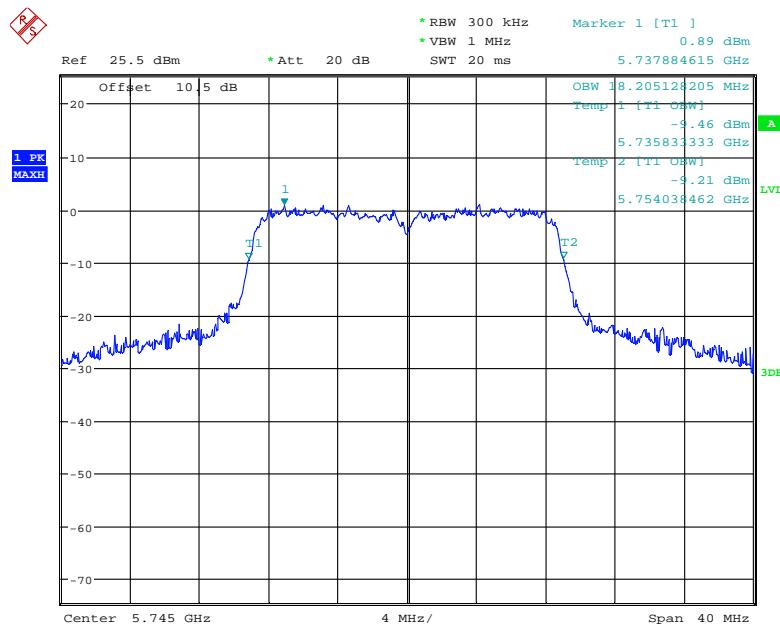
Date: 29.JUL.2020 23:08:47

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

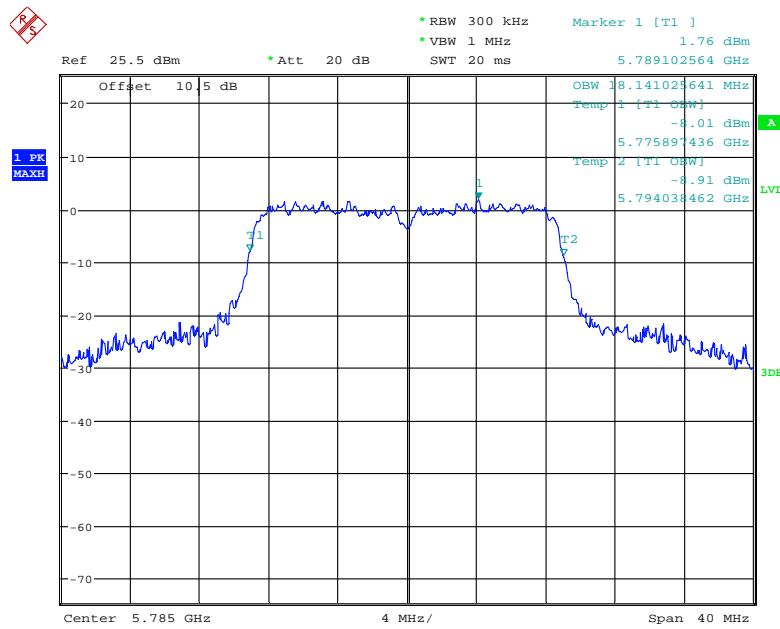
Date: 29.JUL.2020 23:09:05

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

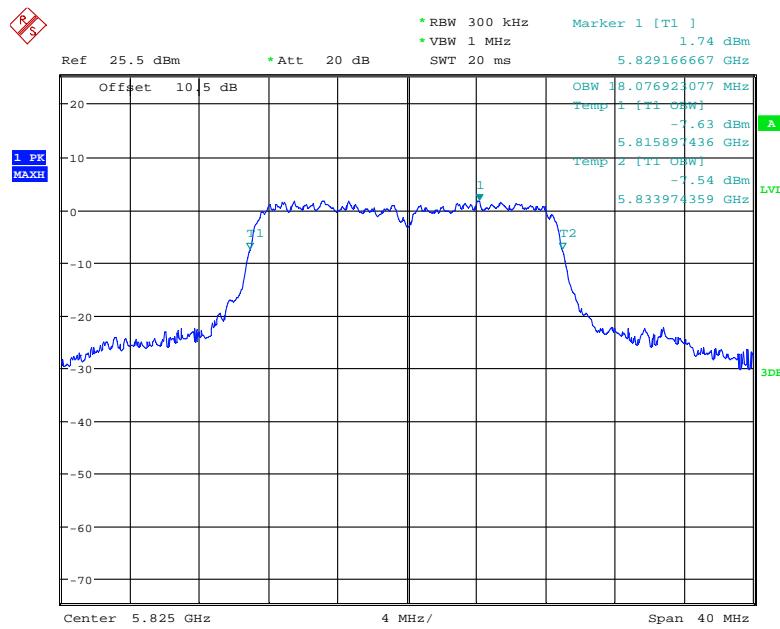
Date: 29.JUL.2020 23:09:24

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

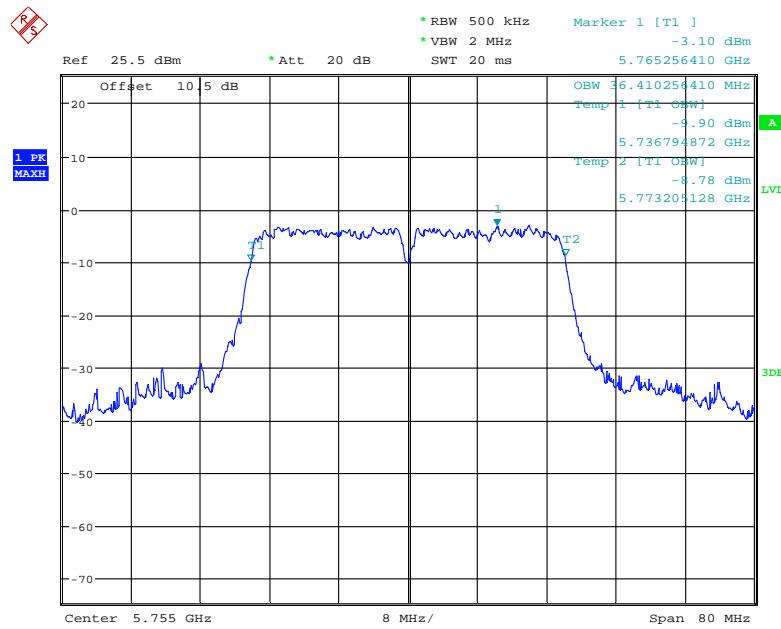
Date: 29.JUL.2020 23:10:16

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

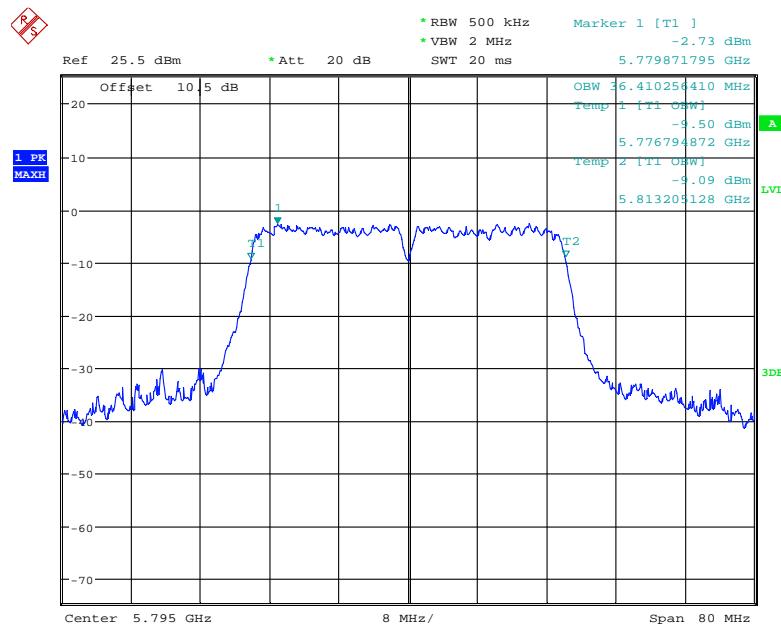
Date: 29.JUL.2020 23:10:00

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

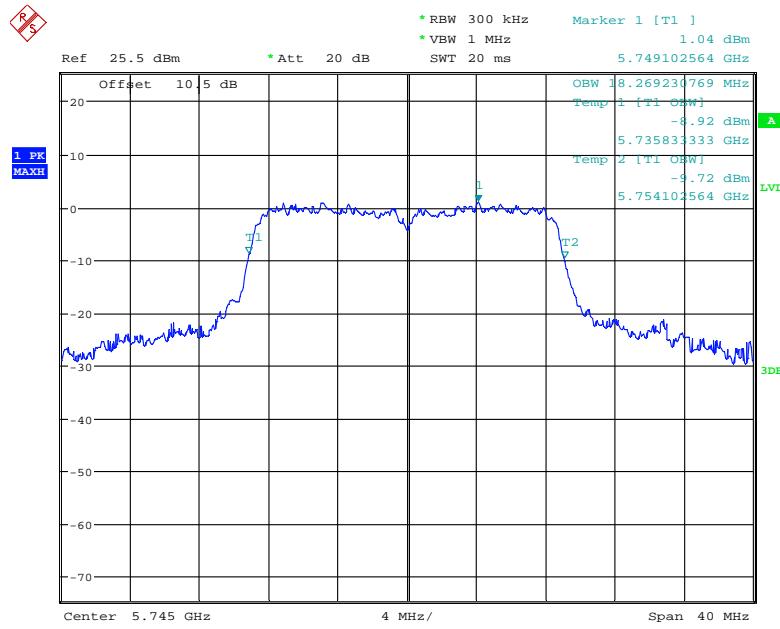
Date: 29.JUL.2020 23:09:41

802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz

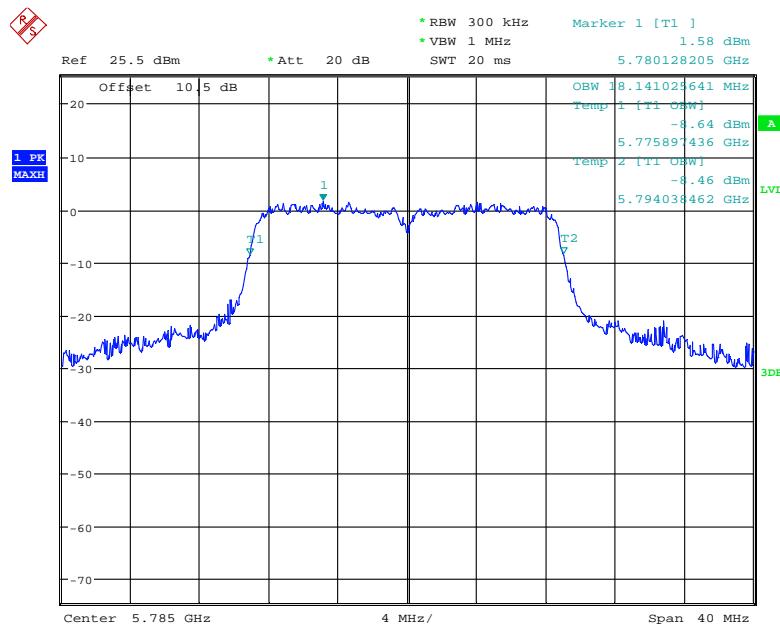
Date: 29.JUL.2020 23:11:38

802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz

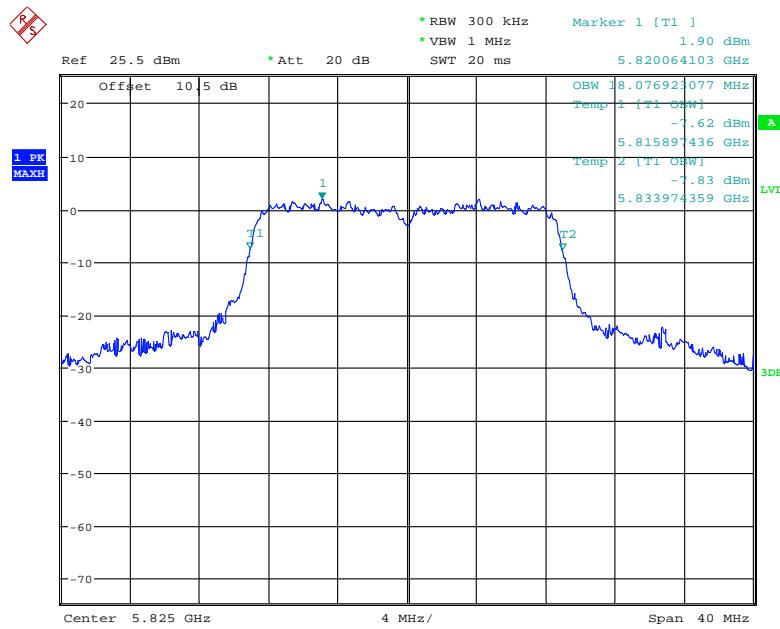
Date: 29.JUL.2020 23:12:05

802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz

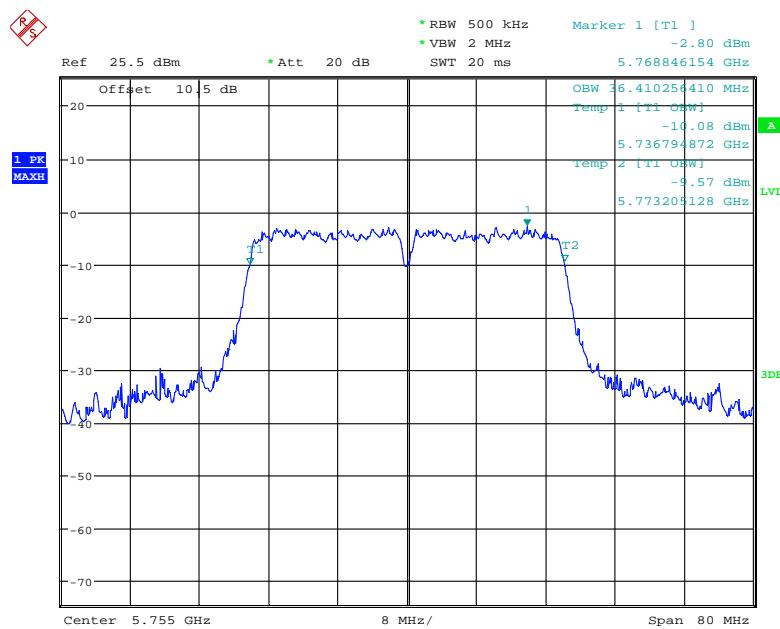
Date: 29.JUL.2020 23:10:32

802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz

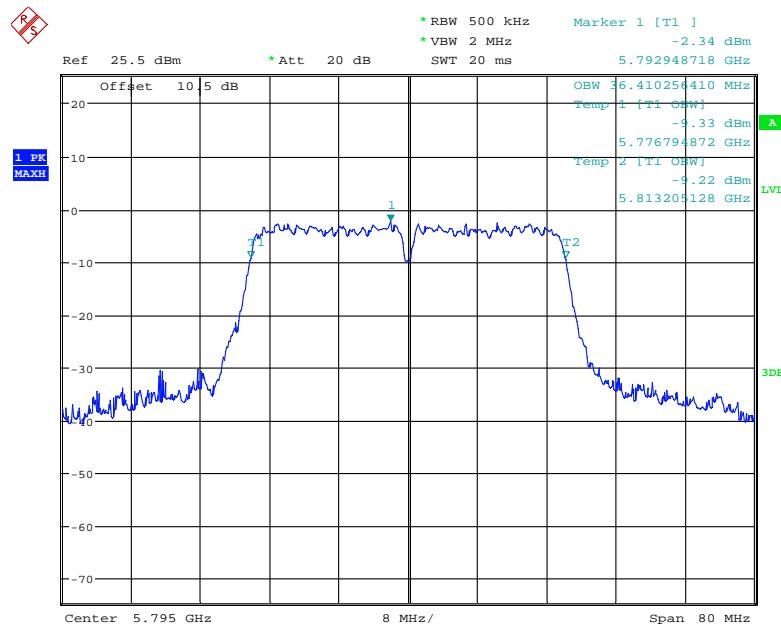
Date: 29.JUL.2020 23:10:50

802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz

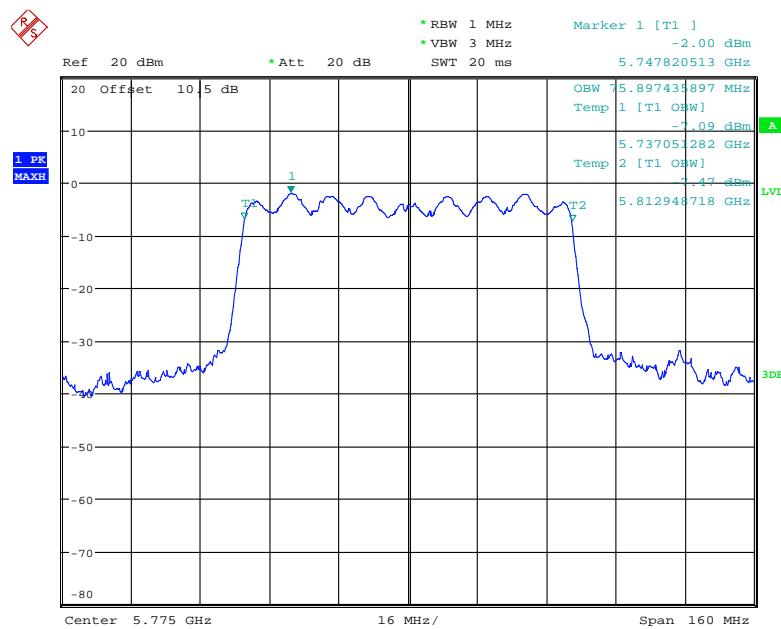
Date: 29.JUL.2020 23:11:07

802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz

Date: 29.JUL.2020 23:12:37

802.11ac40 mode, 99% Occupied Bandwidth, 5795 MHz

Date: 29.JUL.2020 23:12:20

802.11ac80 mode, 99% Occupied Bandwidth, 5775 MHz

Date: 29.JUL.2020 23:07:59


FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Blank Chen on 2020-07-28.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

5150 MHz – 5250 MHz

Frequency (MHz)	Conducted Output Power (dBm)	Duty Cycle Factor (dB)	Corrected Conducted Output Power (dBm)	Limit (dBm)
802.11a				
5180	8.61	2.33	10.94	24
5200	9.50	2.33	11.83	
5240	9.12	2.33	11.45	
802.11n20				
5180	7.43	2.37	9.80	24
5200	9.39	2.37	11.76	
5240	7.74	2.37	10.11	
802.11n40				
5190	5.04	3.87	8.91	24
5230	7.44	3.87	11.31	
802.11ac20				
5180	7.44	2.40	9.84	24
5200	9.27	2.40	11.67	
5240	7.50	2.40	9.9	
802.11ac40				
5190	5.00	3.95	8.95	24
5230	7.56	3.95	11.51	
802.11ac80				
5210	2.19	5.80	7.99	24

5725 MHz – 5825 MHz:

Frequency (MHz)	Conducted Output Power (dBm)	Duty Cycle Factor (dB)	Corrected Conducted Output Power (dBm)	Limit (dBm)
802.11a				
5745	7.72	2.33	10.05	30
5785	8.42	2.33	10.75	
5825	8.79	2.33	11.12	
802.11n20				
5745	9.25	2.37	11.62	30
5785	10.10	2.37	12.47	
5825	10.27	2.37	12.64	
802.11n40				
5755	6.55	3.87	10.42	30
5795	6.80	3.87	10.67	
802.11ac20				
5745	9.38	2.40	11.78	30
5785	10.09	2.40	12.49	
5825	10.38	2.40	12.78	
802.11ac40				
5755	6.56	3.95	10.51	30
5795	7.05	3.95	11.00	
802.11ac80				
5775	5.76	5.80	11.56	30

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geqslant 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geqslant 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Blank Chen from 2020-07-28 to 2020-08-26.

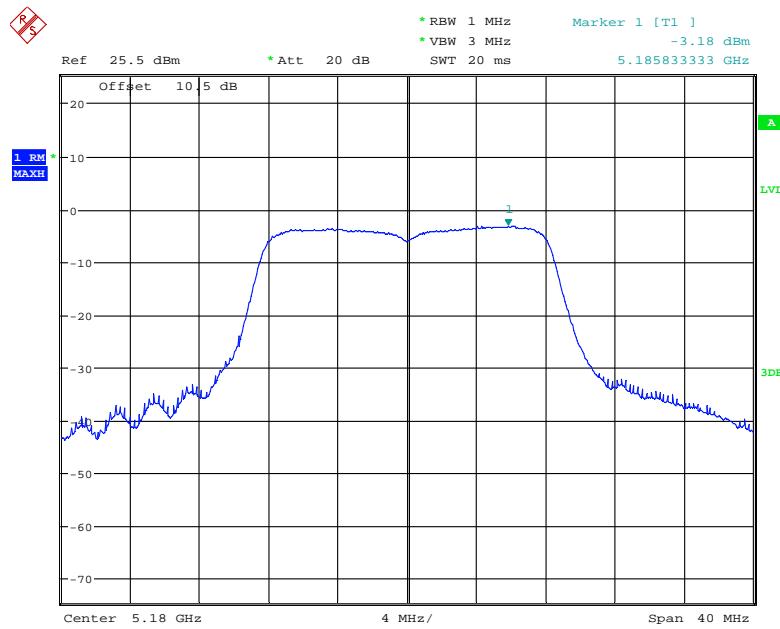
EUT operation mode: Transmitting

Test Result: Pass

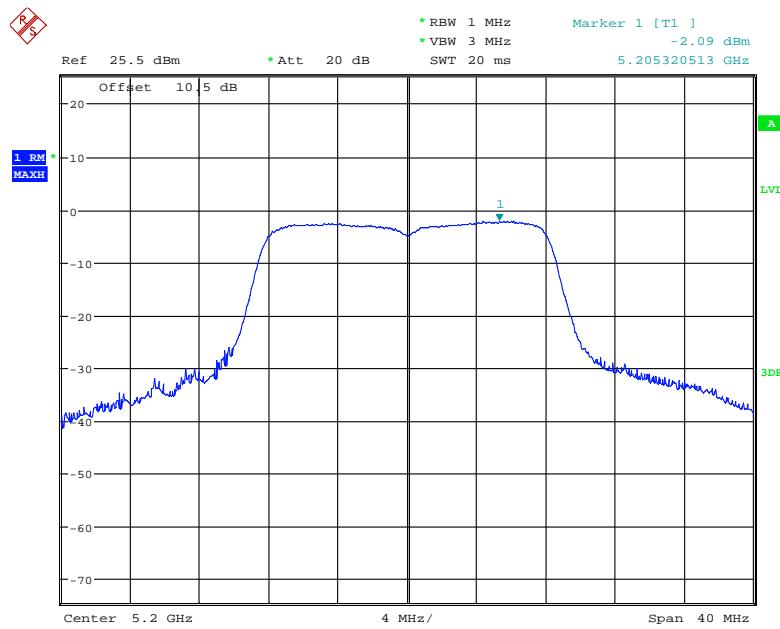
Please refer to the following tables and plots.

5150 – 5250 MHz

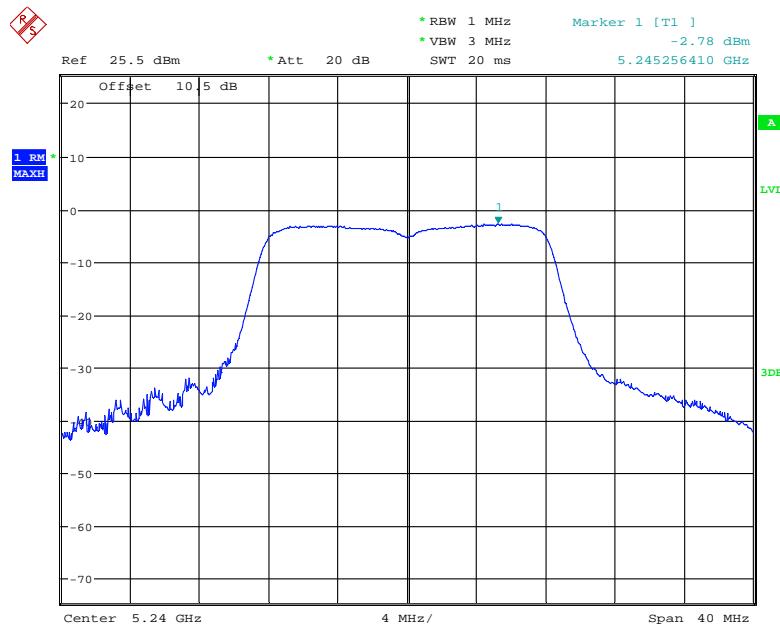
Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Cycle Factor (dB)	Corrected Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a				
5180	-3.18	2.33	-0.85	11
5200	-2.09	2.33	0.24	
5240	-2.78	2.33	-0.45	
802.11n20				
5180	-4.24	2.37	-1.87	11
5200	-2.22	2.37	0.15	
5240	-4.28	2.37	-1.91	
802.11n40				
5190	-9.27	3.87	-5.4	11
5230	-6.89	3.87	-3.02	
802.11ac20				
5180	-3.86	2.40	-1.46	11
5200	-2.20	2.40	0.2	
5240	-4.05	2.40	-1.65	
802.11ac40				
5190	-9.18	3.95	-5.23	11
5230	-6.72	3.95	-2.77	
802.11ac80				
5210	-13.50	5.80	-7.7	11

802.11a mode, Power Spectral Density, 5180 MHz

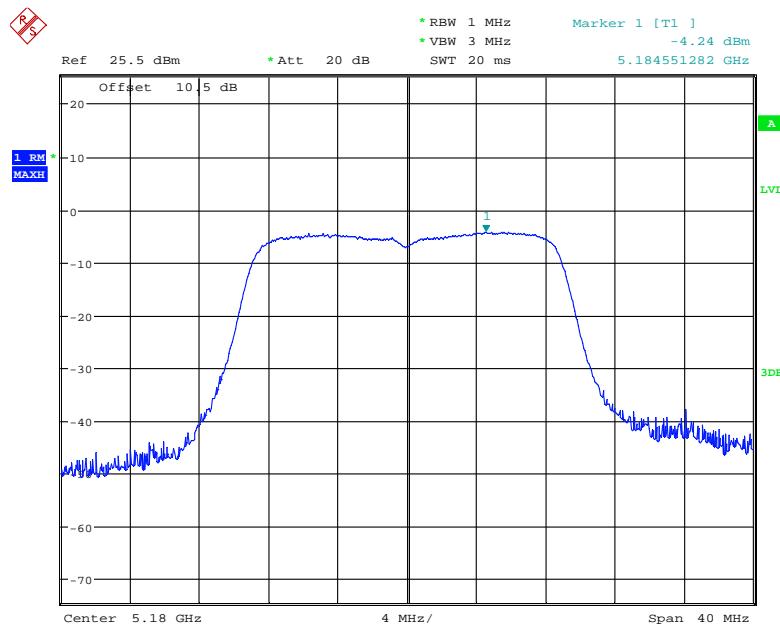
Date: 28.JUL.2020 23:50:10

802.11a mode, Power Spectral Density, 5200 MHz

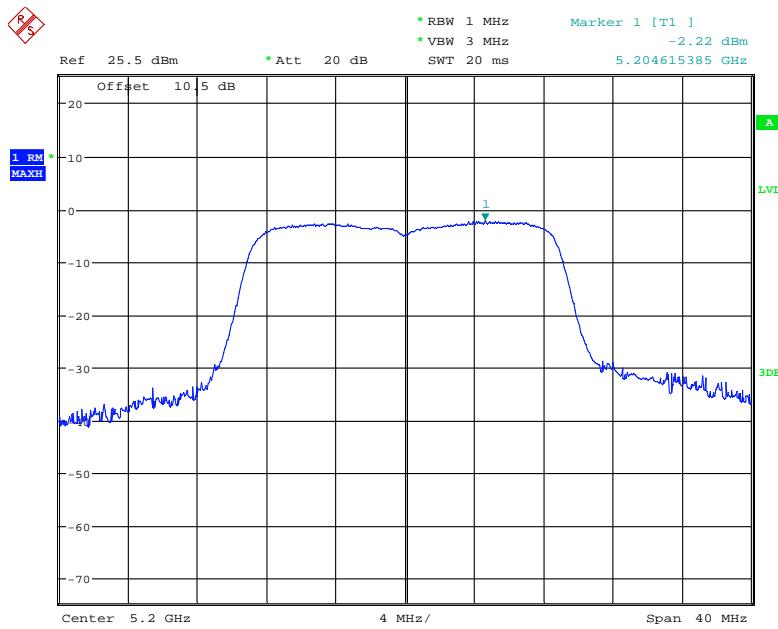
Date: 28.JUL.2020 23:50:31

802.11a mode, Power Spectral Density, 5240 MHz

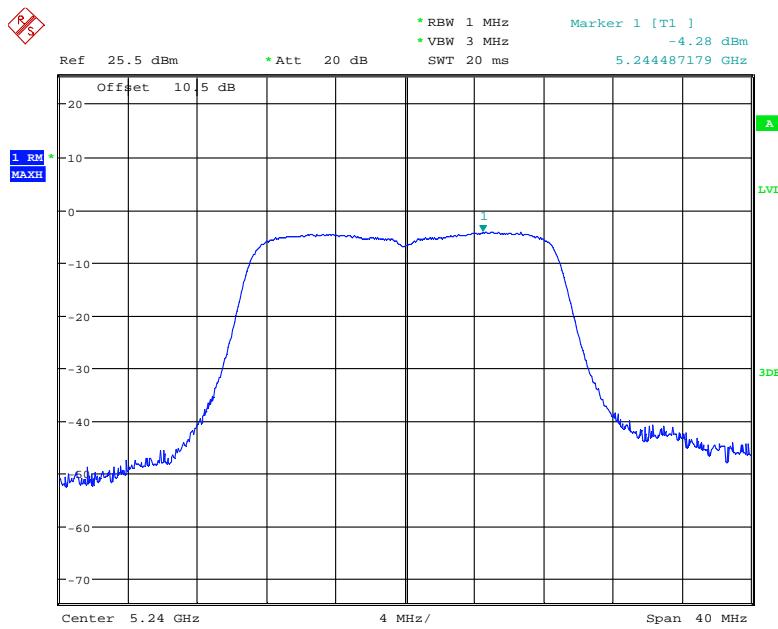
Date: 28.JUL.2020 23:50:49

802.11n20 mode, Power Spectral Density, 5180 MHz

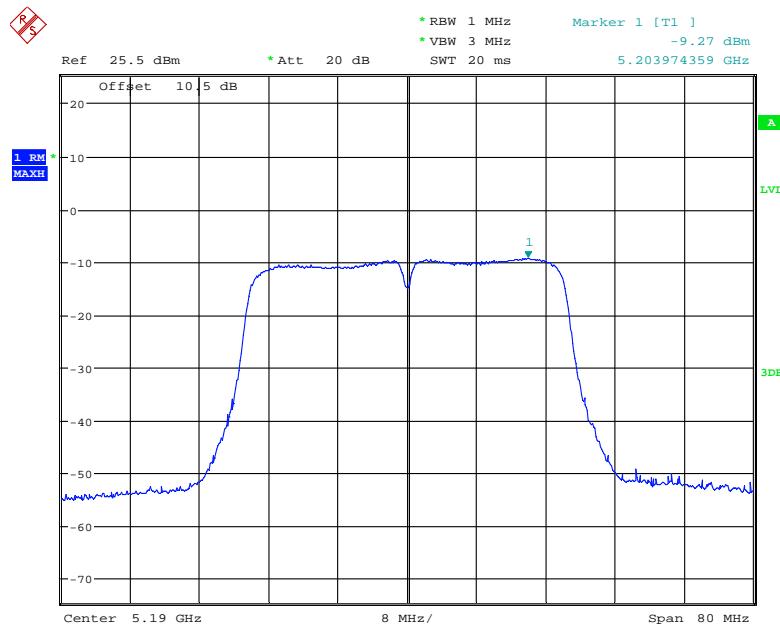
Date: 28.JUL.2020 23:51:34

802.11n20 mode, Power Spectral Density, 5200 MHz

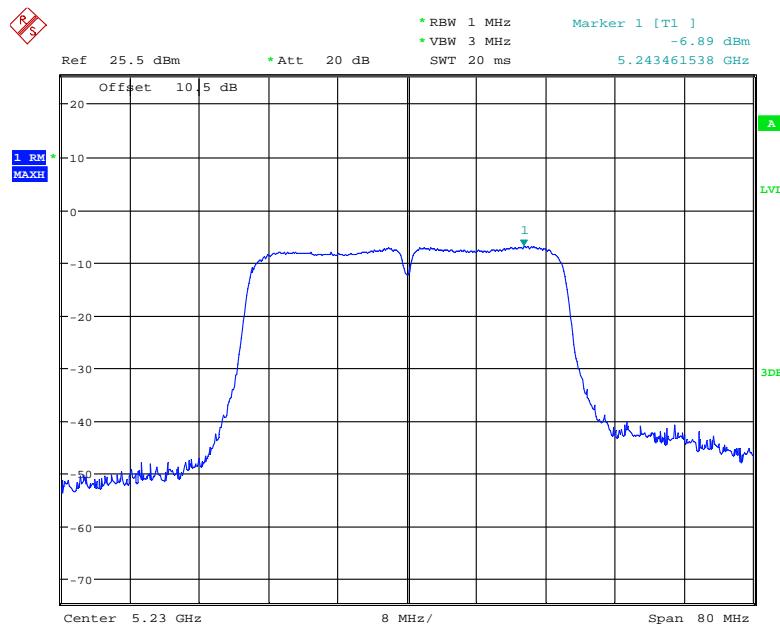
Date: 28.JUL.2020 23:51:21

802.11n20 mode, Power Spectral Density, 5240 MHz

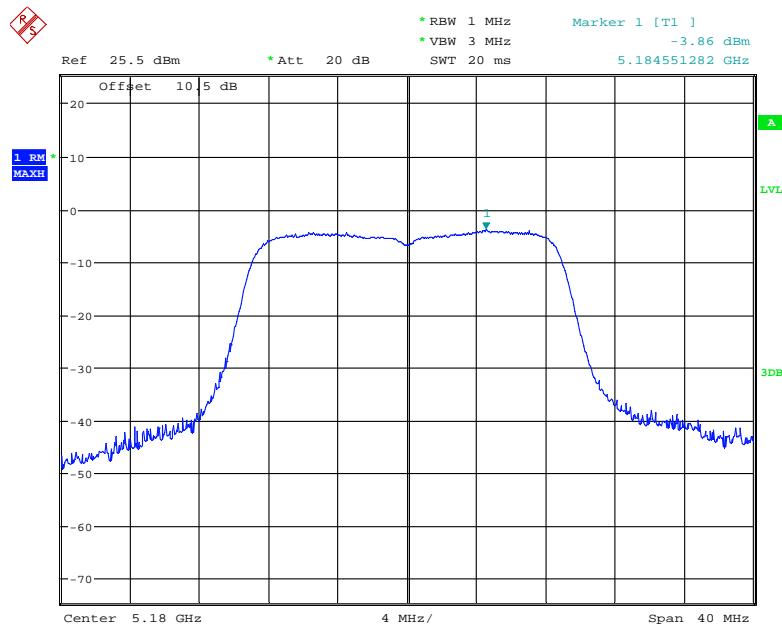
Date: 28.JUL.2020 23:51:04

802.11n40 mode, Power Spectral Density, 5190 MHz

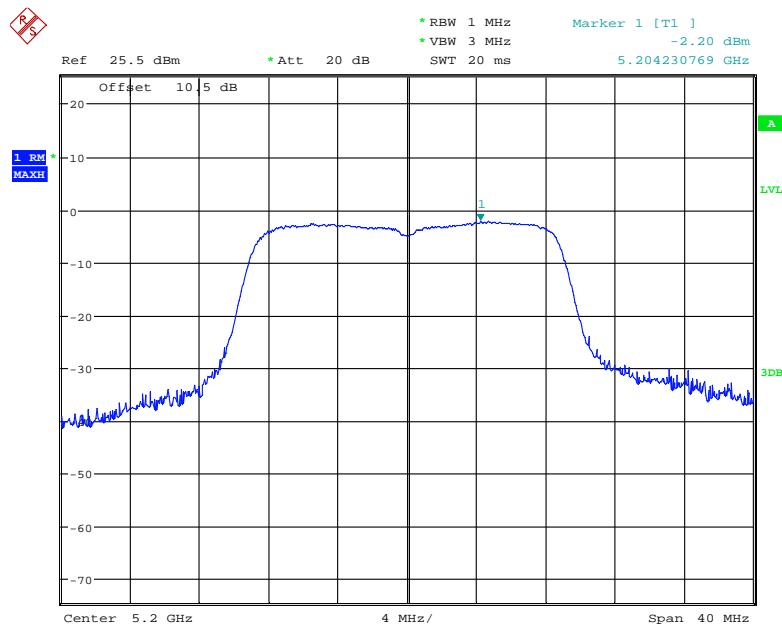
Date: 28.JUL.2020 23:52:32

802.11n40 mode, Power Spectral Density, 5230 MHz

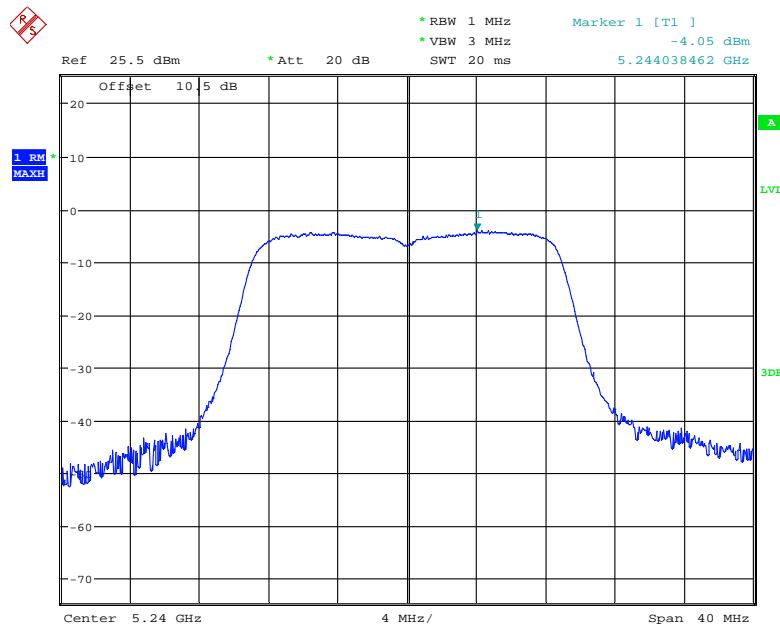
Date: 28.JUL.2020 23:52:48

802.11ac20 mode, Power Spectral Density, 5180 MHz

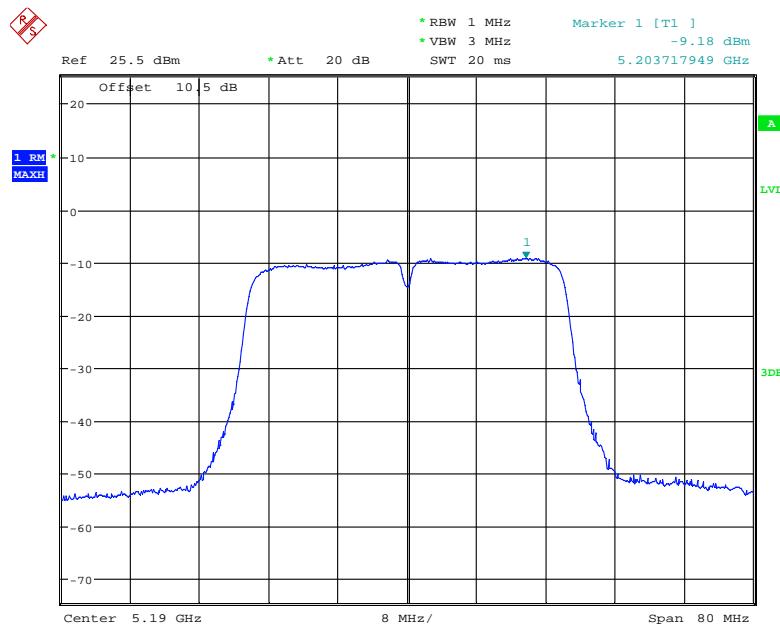
Date: 28.JUL.2020 23:51:48

802.11ac20 mode, Power Spectral Density, 5200 MHz

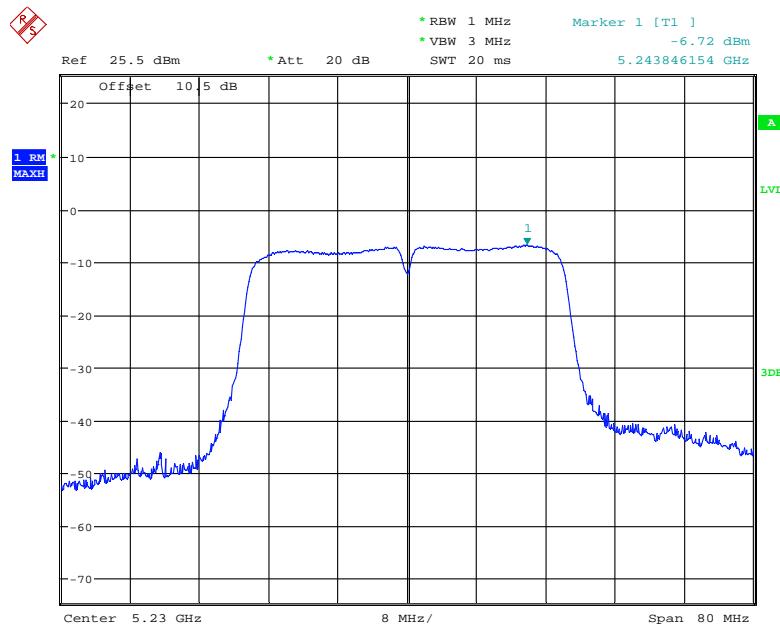
Date: 28.JUL.2020 23:52:00

802.11ac20 mode, Power Spectral Density, 5240 MHz

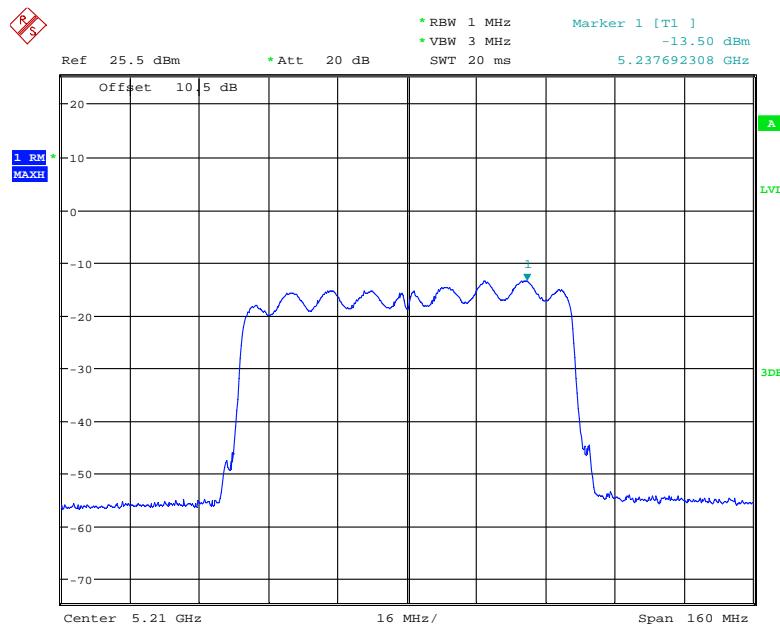
Date: 28.JUL.2020 23:52:13

802.11ac40 mode, Power Spectral Density, 5190 MHz

Date: 28.JUL.2020 23:53:18

802.11ac40 mode, Power Spectral Density, 5230 MHz

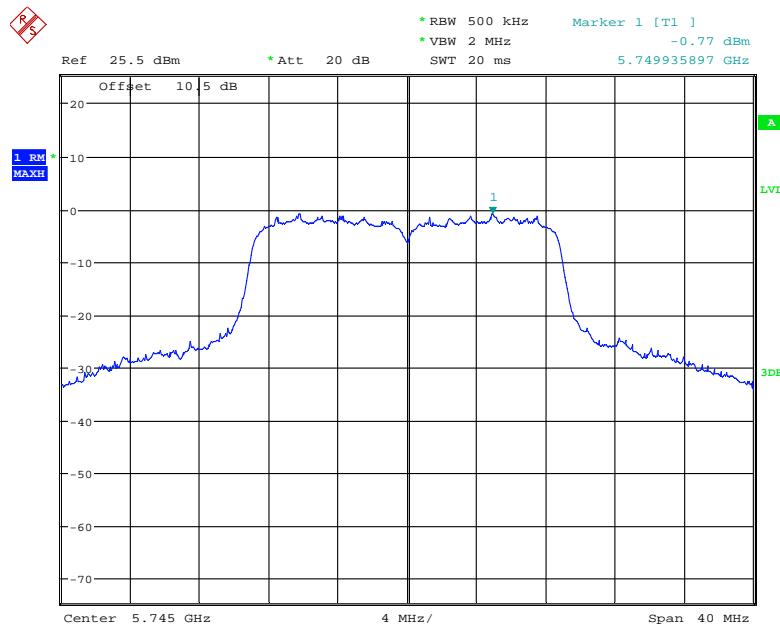
Date: 28.JUL.2020 23:53:05

802.11ac80 mode, Power Spectral Density, 5210 MHz

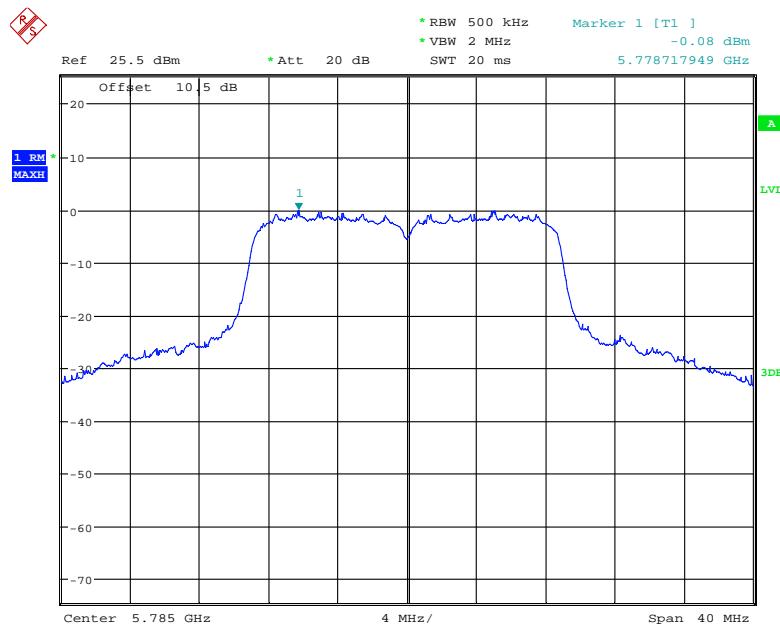
Date: 28.JUL.2020 23:53:37

5745– 5825 MHz:

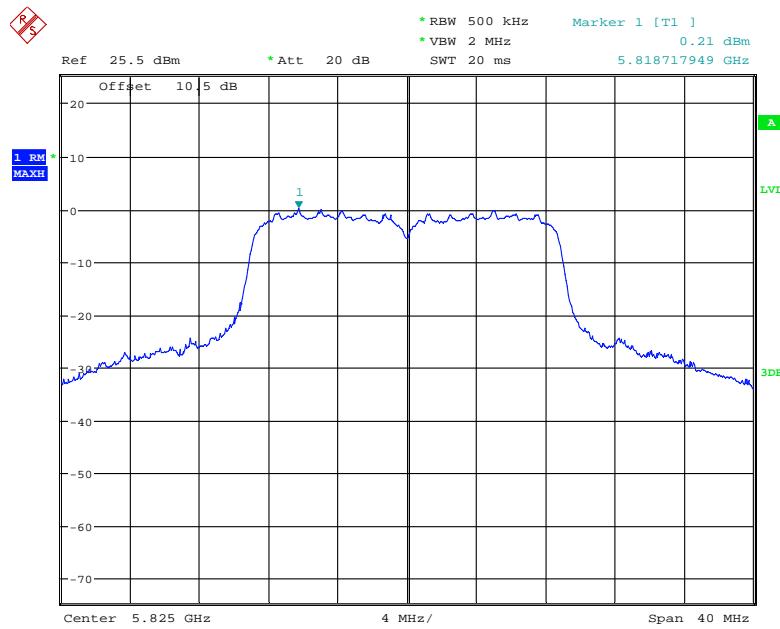
Frequency (MHz)	Power Spectral Density (dBm/500kHz)	Duty Cycle Factor (dB)	Corrected Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a				
5745	-0.77	2.33	1.56	30
5785	-0.08	2.33	2.25	
5825	0.21	2.33	2.54	
802.11n20				
5745	-2.14	2.37	0.23	30
5785	-1.20	2.37	1.17	
5825	-1.58	2.37	0.79	
802.11n40				
5755	-5.71	3.87	-3.34	30
5795	-5.82	3.87	-3.45	
802.11ac20				
5745	-0.88	2.40	1.49	30
5785	0.21	2.40	2.58	
5825	0.09	2.40	2.46	
802.11ac40				
5755	-6.20	3.95	-3.83	30
5795	-6.10	3.95	-3.73	
802.11ac80				
5775	-7.94	5.80	-2.14	30

802.11a mode, Power Spectral Density, 5745 MHz

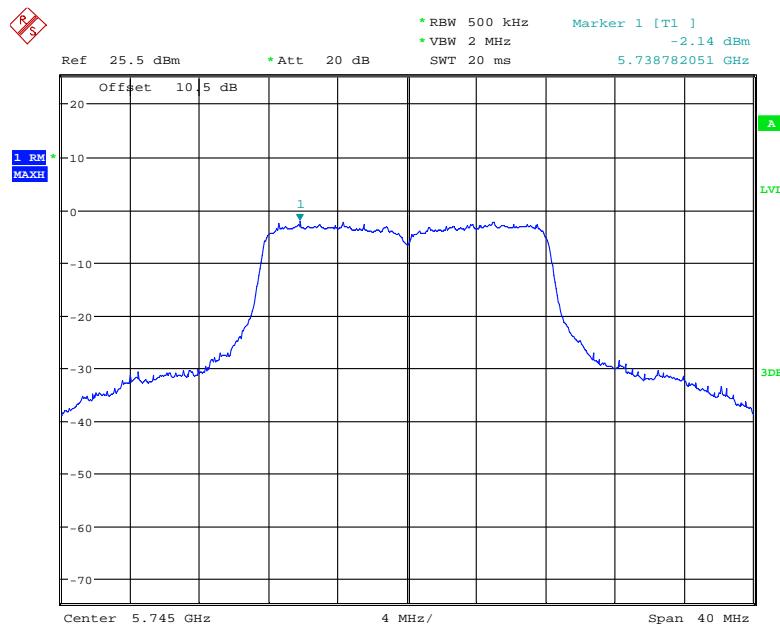
Date: 26.AUG.2020 00:35:45

802.11a mode, Power Spectral Density, 5785 MHz

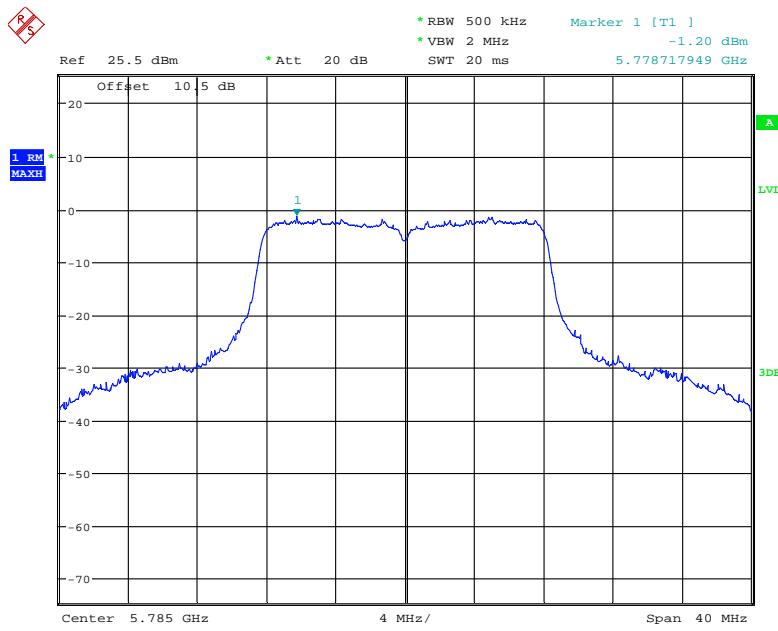
Date: 26.AUG.2020 00:38:30

802.11a mode, Power Spectral Density, 5825 MHz

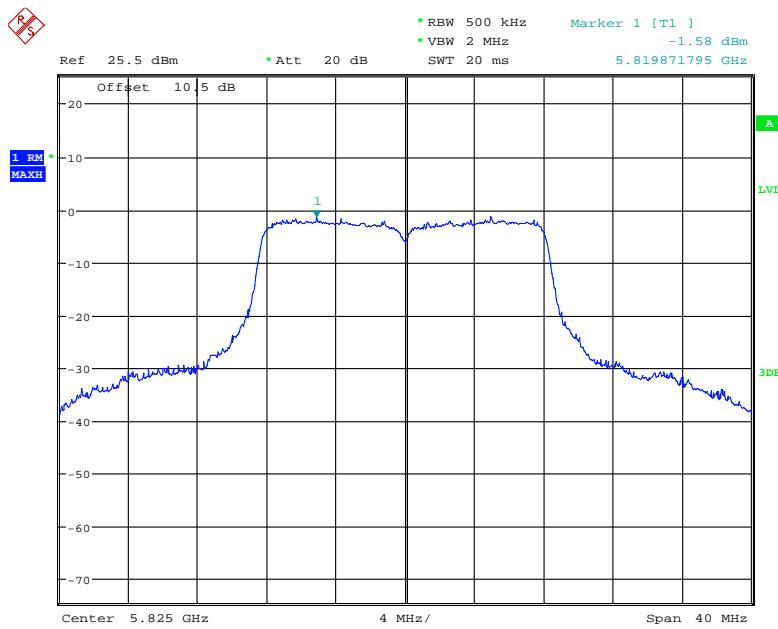
Date: 26.AUG.2020 00:33:38

802.11n20 mode, Power Spectral Density, 5745 MHz

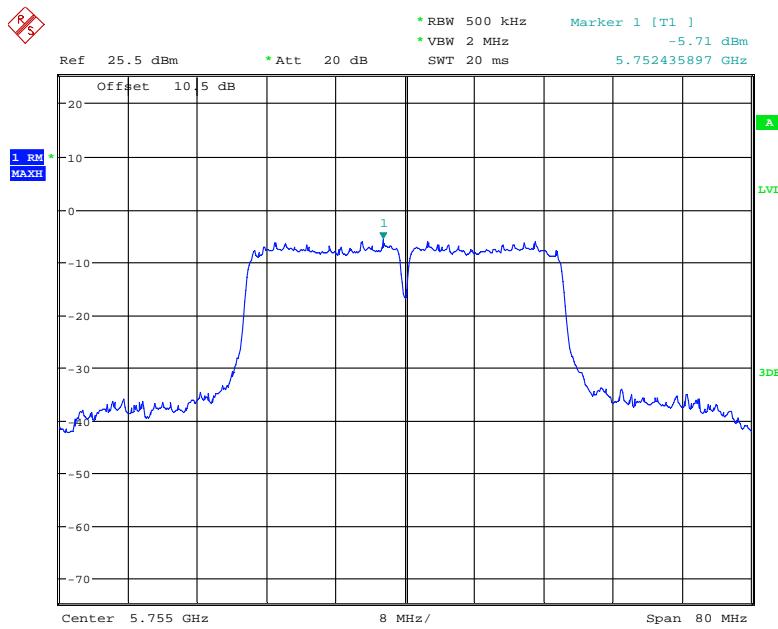
Date: 26.AUG.2020 00:55:06

802.11n20 mode, Power Spectral Density, 5785 MHz

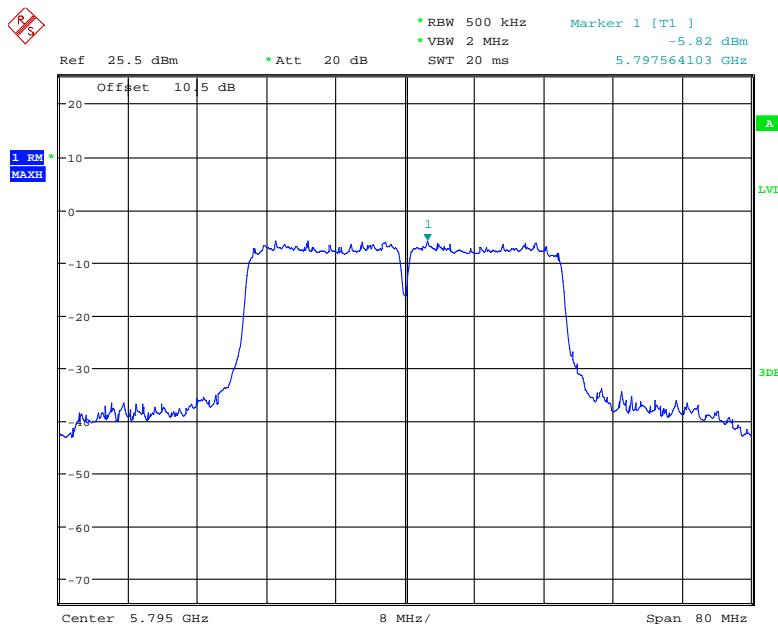
Date: 26.AUG.2020 00:53:09

802.11n20 mode, Power Spectral Density, 5825 MHz

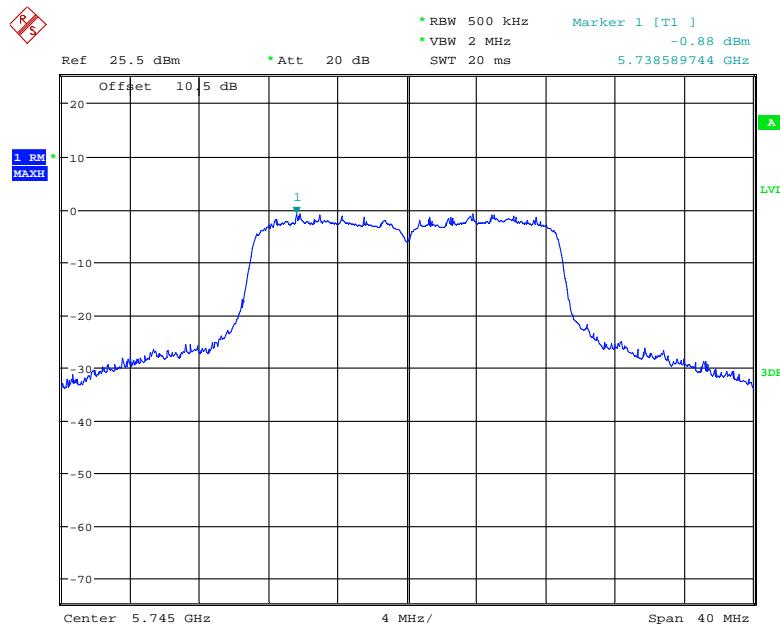
Date: 26.AUG.2020 00:52:13

802.11n40 mode, Power Spectral Density, 5755 MHz

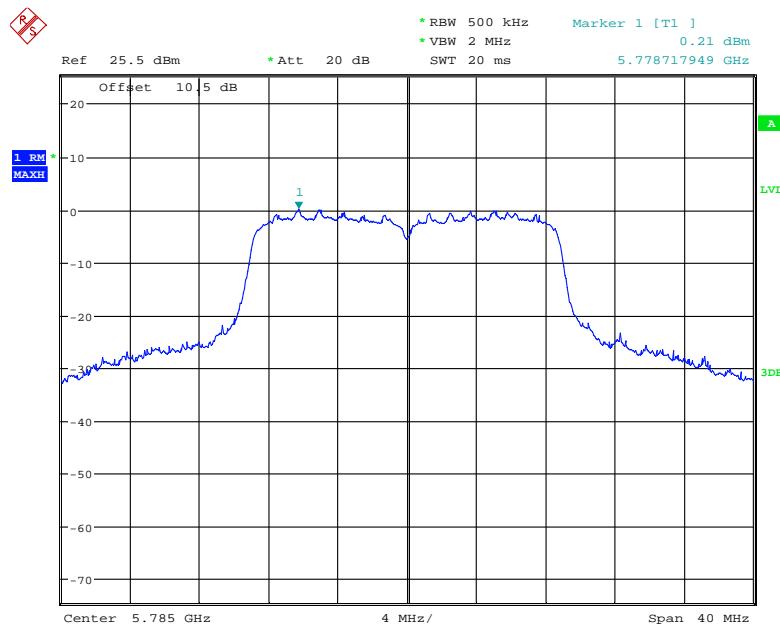
Date: 26.AUG.2020 00:57:18

802.11n40 mode, Power Spectral Density, 5795 MHz

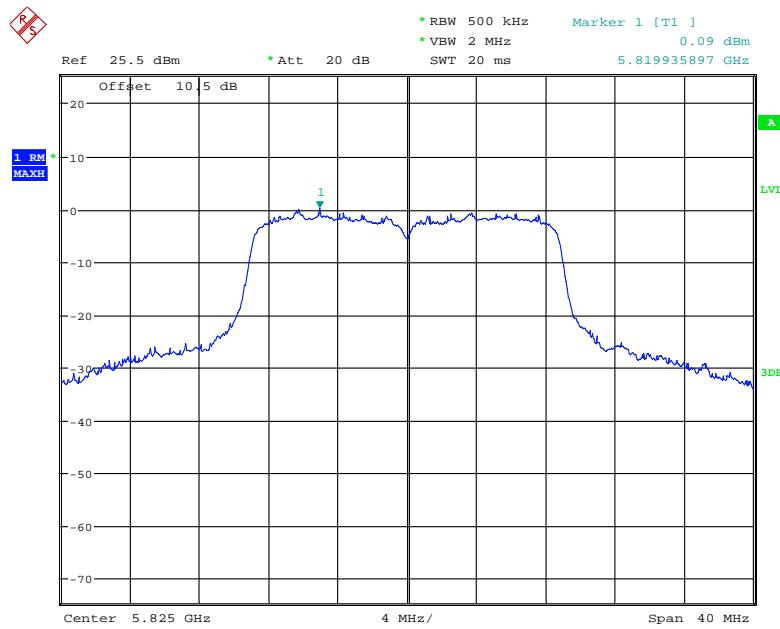
Date: 26.AUG.2020 00:56:24

802.11ac20 mode, Power Spectral Density, 5745 MHz

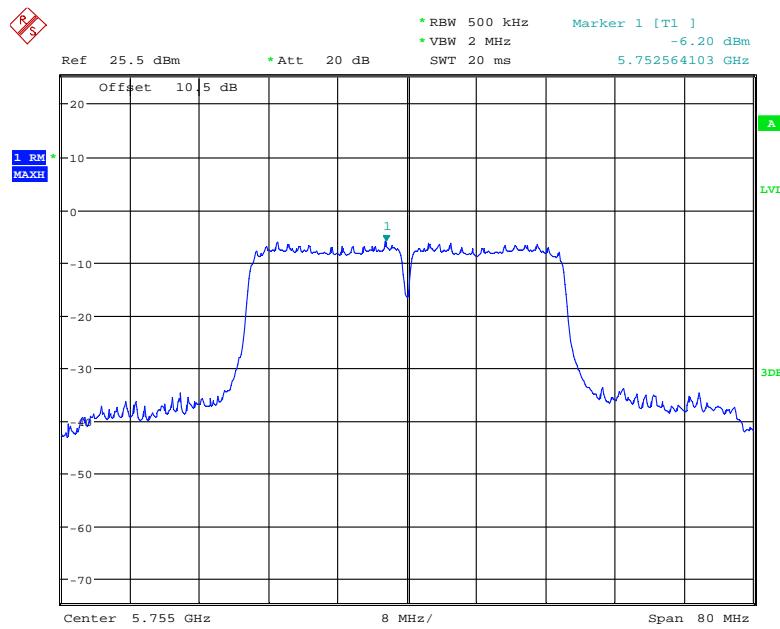
Date: 26.AUG.2020 00:42:02

802.11ac20 mode, Power Spectral Density, 5785 MHz

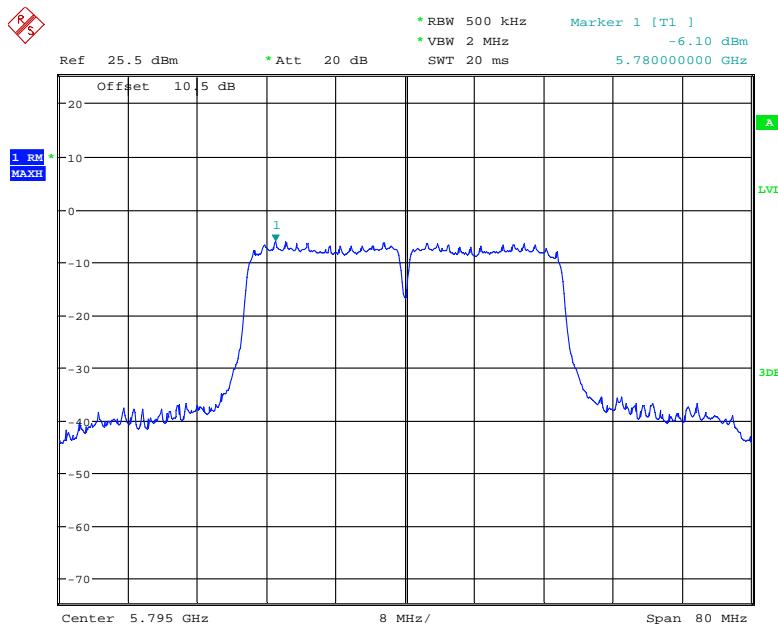
Date: 26.AUG.2020 00:43:15

802.11ac20 mode, Power Spectral Density, 5825 MHz

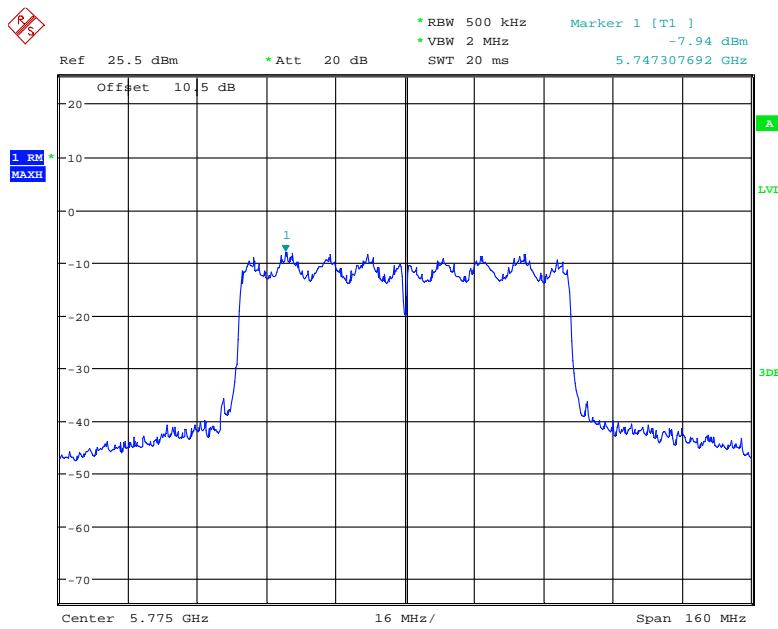
Date: 26.AUG.2020 00:41:17

802.11ac40 mode, Power Spectral Density, 5755 MHz

Date: 26.AUG.2020 00:48:24

802.11ac40 mode, Power Spectral Density, 5795 MHz

Date: 26.AUG.2020 00:46:27

802.11ac80 mode, Power Spectral Density, 5775 MHz

Date: 26.AUG.2020 00:50:02

******* END OF REPORT *******