

TEST REPORT

Report Number: 101786460DAL-001
Project Number: G101786460

Report Issue Date: October 22, 2014

Product Designation: RKE System Key Fob
FCC: 2ADG6- 32476
IC: 12459A- 32476

Standards: 47 CFR Part 15, Subpart C (15.231 - Periodic operation in the band 40.66-40.70 MHz and above 70 MHz)
RSS-210, Issue:2010/12/01 Issue:8 Low Power License-Exempt Radio communication Devices (All Frequency Bands) - Category I Equipment

Tested by:
Intertek Testing Services NA, Inc.
1809 10th St. Suite 400
Plano, TX 75074 - USA

Client:
Stoneridge Electronics, Inc
7- A Zane Grey St
El Paso, TX 79906

Report prepared by

Shawn K McGuinness
Senior EMC Assoc. Engineer

Report reviewed by

Bryan Taylor
Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS (OPTIONAL)

1	<i>Introduction and Conclusion</i>	3
2	<i>Test Summary</i>	3
3	<i>Description of Equipment Under Test</i>	4
4	<i>System setup including cable interconnection details, support equipment and simplified block diagram</i>	5
5	<i>Duty Cycle Determination (FCC 15A - 15.35(c))</i>	7
6	<i>Radiated emissions (E-field) for low power intentional radiators</i>	12
7	<i>Bandwidth Requirements (FCC 15C - 15.231(c))1</i>	18
8	<i>Conducted emissions on AC power line</i>	20
9	<i>Restrictions (FCC 15C - 15.231(a))</i>	20
10	<i>Revision History</i>	23

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2 Test Summary

Section	Test full name	Test date	Result
3	Description of Equipment Under Test		
4	System setup including cable interconnection details, support equipment and simplified block diagram		
5	Duty Cycle Determination (FCC 15A - 15.35(c))	10/16/14	Pass
6	Radiated emissions (E-field) for low power intentional radiators	10/17/14	Pass
7	Bandwidth Requirements (FCC 15C - 15.231(c))	10/20/14	Pass
8	Conducted emissions on AC power lines	N/A	N/A
9	Restrictions (FCC 15C - 15.231(a))	10/17/14	Pass

3 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Remote Key Fob	Stoneridge Electronics, Inc.	RKE Key Fob	#1

Receive Date:	10-10-2014
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The EUT is a key fob remote control device that operates at 314.956MHz and is used to operate Remote Vehicle Lock systems.

EUT employs:

- ASK Modulation
- Encryption standard AES (Advanced Encryption Standard) 128 bits.
- Range Performance Requirements of 20 meters measured line-of-sight not installed in vehicle.

Transmitter Overview:

FCC Identifier	2ADG6- 32476
IC Identifier	12459A- 32476
Frequency Range	314.956MHz
Modulation	ASK Modulation
Antenna type (15.203)	Integral

Equipment Under Test Power Configuration

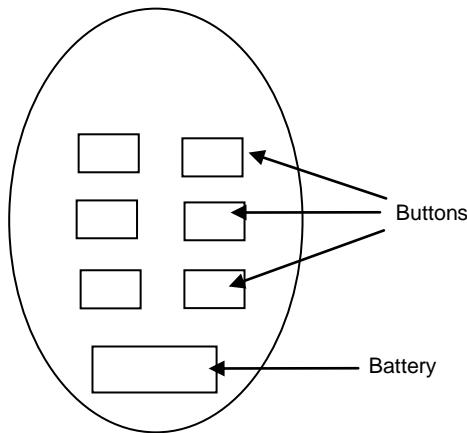
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
3.0 VDC Battery	NA	NA	NA

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	For radiated testing, EUT was programmed to operate at a steady repeat in its normal modulation scheme. When button was depressed EUT continuously transmitted.
2	For Duty Cycle and BW testing, EUT was programmed to operate in its normal mode and modulation scheme. When button was depressed EUT transmitted one pulse.

4 System setup including cable interconnection details, support equipment and simplified block diagram**4.1 Method:**

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

4.2 EUT Block Diagram:

4.3 Data:

ID	Description	Length	Shielding	Ferrites
	None			

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None			

5 Duty Cycle Determination (FCC 15A - 15.35(c))**5.1 Method:**

From 47 CFR Part 15, Subpart A (15.35(c)) and RSS-GEN Section 4.5

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Determine the period of the pulse train, T, in mSec and record the results. T is defined as the time from the beginning of one pulse train to the beginning of the next pulse train.

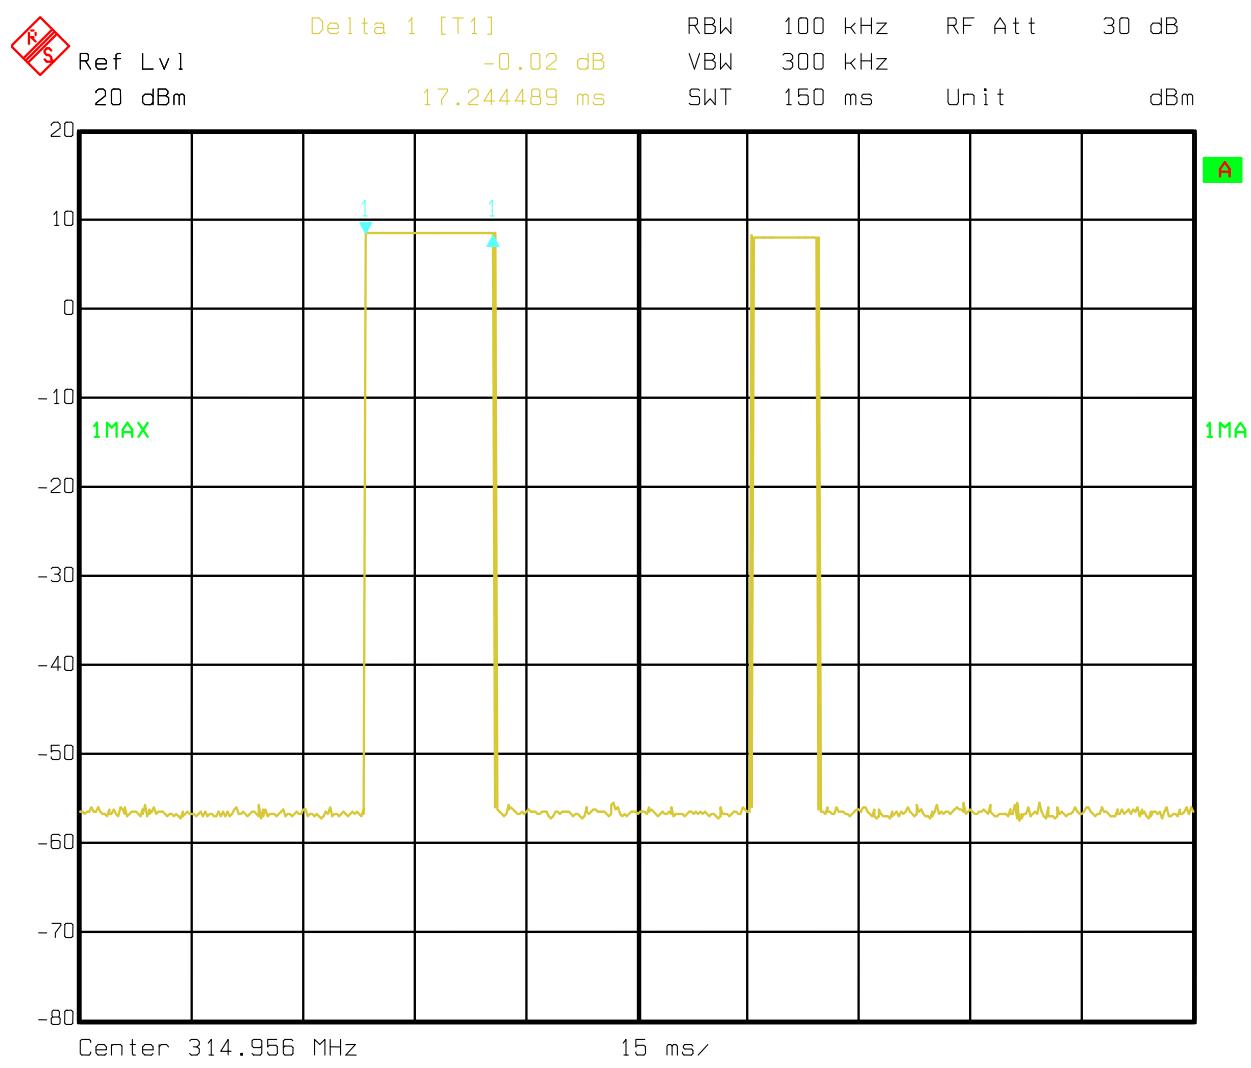
Count the number of different types of pulses, N and record the results.

For each of the different types of pulses, count the number of occurrences within one pulse train.

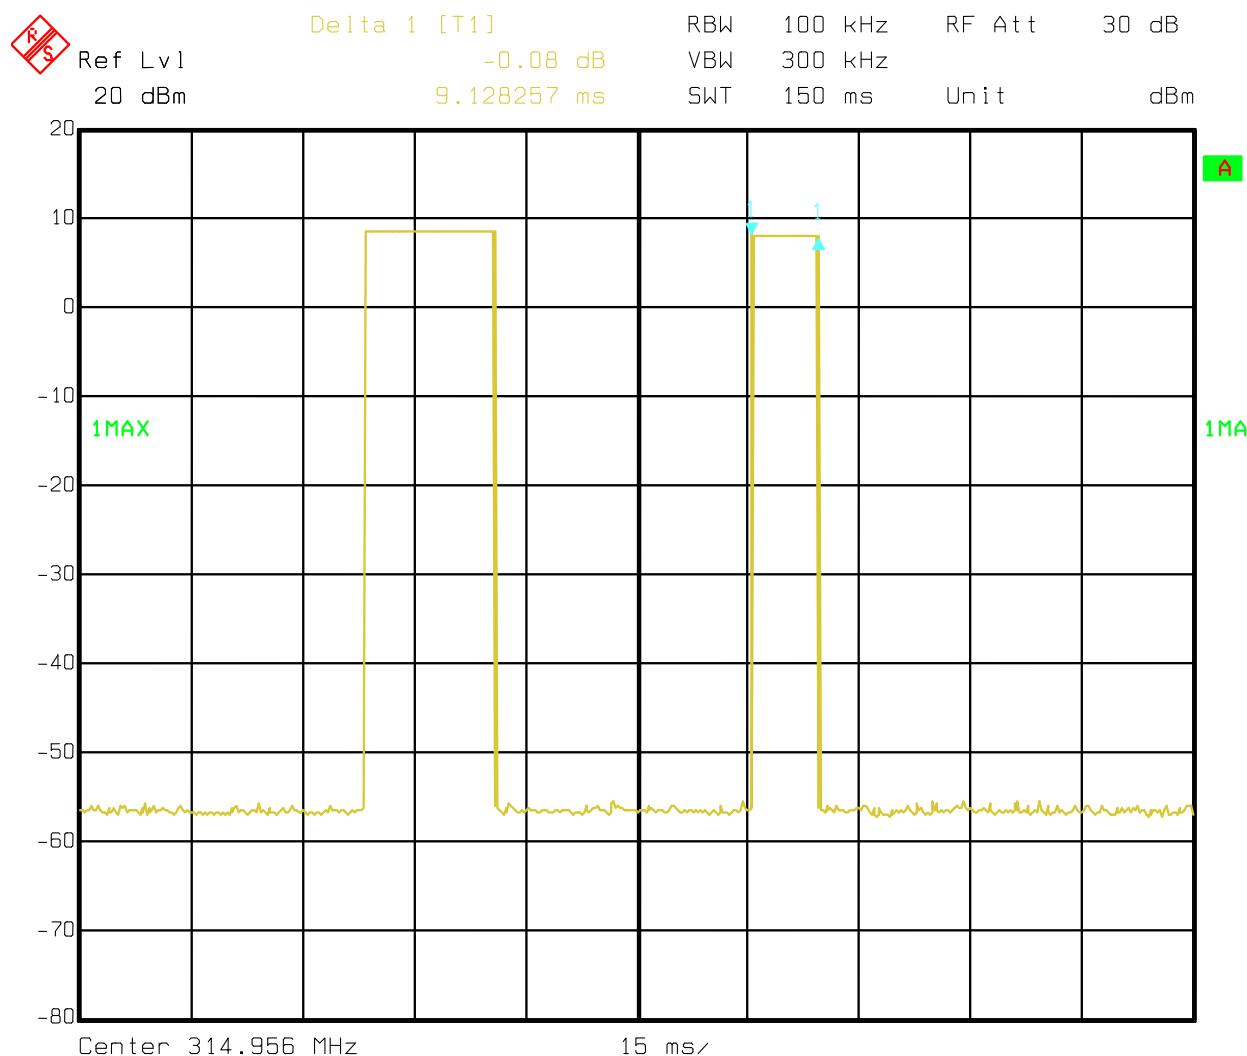
Use the Duty Cycle Correction Factor, DCCF, from the results table and use it to adjust the field strength measurements recorded for radiated emissions.

5.2 Test Equipment Used:

Asset ID	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due
77	EMI Receiver rated: 10KHz-7GHz	R & S	ESI 7	100044	04/22/2014	04/22/2015
803	SMA RF CABLE	Insulated Wire Inc.	SPS- 2301- 180-SPS	803	08/08/2014	08/08/2015

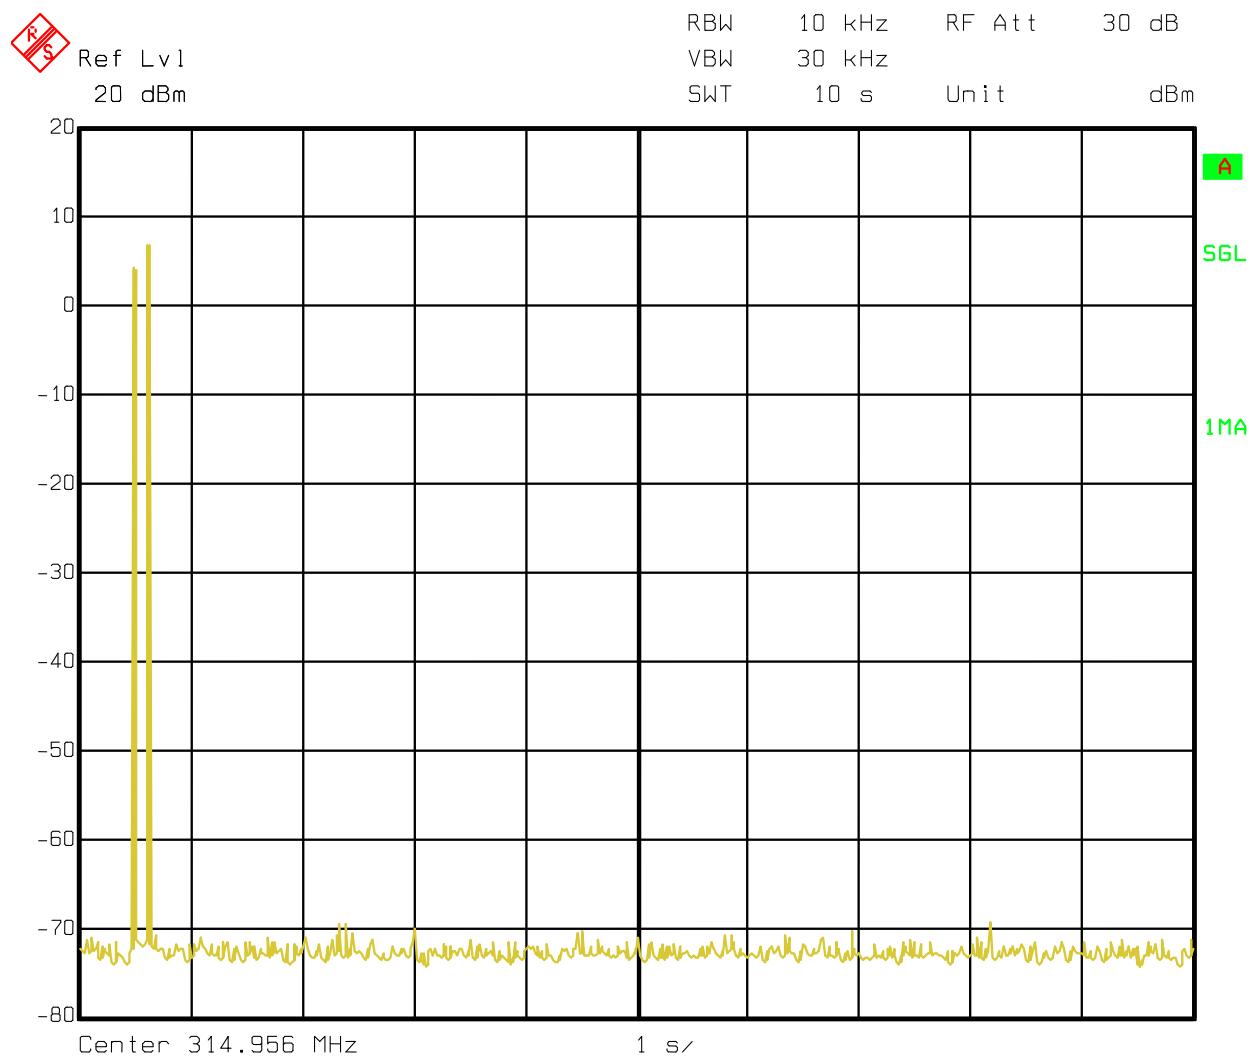
5.3 Plots:

Pulse #1 17.244 mSec



Date: 16.OCT.2014 16:55:36

Pulse #2 9.128 mSec



Date: 20.OCT.2014 19:04:17

Pulse Deactivation.

5.4 Data:

Duration of Pulse Train, T (mSec): 150
 Averaging Interval, A_l (mSec): 100
 Number of different Pulses, N: 2

Note: Count only the pulses within the first 100 mSec

	Number (#P _x)	Pulse Width, mSec (PW _x)	Product (#P _x)*(PW _x)
Pulse Width 1	1	17.244	17.244
Pulse Width 2	1	9.128	9.128
Pulse Width 3			
Pulse Width 4			
Pulse Width 5			
Pulse Width 6			
Pulse Width 7			
Pulse Width 8			
Pulse Width 9			
Pulse Width 10			

Duty Cycle: 0.26372
 Duty Cycle Correction Factor, dB: -11.6

$$T_{on} = PW_1 * \#P_1 + PW_2 * \#P_2 + \dots + PW_n * \#P_n$$

$$DutyCycle = T_{on} \div A_l$$

$$DCCF = 20 * \log_{10}(DutyCycle)$$

6 Radiated emissions (E-field) for low power intentional radiators

6.1 Method

The test method and equipment setup for radiated emissions tests shall follow the guidelines of ANSI C63.4:2003.

Measurements below 1 GHz shall be performed with a quasi-peak detector instrument that meets the requirements of Section One of CISPR 16.

Bandwidths:

30 MHz to 1000 MHz: 120 kHz RBW and 1 MHz VBW

Above 1000 MHz: 1 MHz RBW and 3 MHz VBW

Detectors:

Equal to or less than 1000 MHz: CISPR quasi-peak detector (alternative: peak detector)

Above 1000 MHz: Average detector (applies to average limit)

Above 1000 MHz: Peak detector (applies to peak limit)

Limits:

Equal to or less than 1000 MHz, the limits are specified as quasi-peak. If a peak detector is used, the limit does not change. Above 1000 MHz, the limits are specified as average. The peak limit is 20 dB above the average limit. Both peak and average measurements are required to be reported.

Limits from 15.249 / RSS-210 Annex A2.9 specified at 3 meters

Fundamental Frequency	Field Strength of fundamental (millivolts / meter)	Field Strength of harmonics (microvolts/meter)
902 to 928 MHz	50	500
2400 to 2483.5 MHz	50	500
5725 to 5875 MHz	50	500
24.0 to 24.25 MHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequency range of radiated measurements

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

Measurement antenna requirements:

Below 30 MHz - Loop antenna

30 to 1000 MHz - Biconical, Log Periodic, or equivalent

Above 1000 MHz - Horn or equivalent

Measurements of the radiated field are made with the antenna located at a distance of 3 or 10 meters from the EUT. The limit applied to the measurement shall be appropriate for the test distance. The test distance shall be indicated in the results section.

The EUT shall be arranged and connected with cables terminated in accordance with the product specification.

Exploratory tests should be carried out while varying the cable positions to determine the maximum or near-maximum emission levels. During manipulation, cables shall not be placed under or on top of the system test components unless such placement is required by the inherent equipment design.

The antenna shall be adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency. The antenna-to-EUT azimuth shall be varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) shall be varied during the measurements to find the maximum field-strength readings.

If the EUT is handheld, it shall be oriented in each of its orthogonal axes.

If the EUT is intended for tabletop use, it shall be placed on a table whose top is 0.8m above the ground plane. The table shall be constructed of nonconductive materials. Its dimensions are at least 1m by 1.5m, but may be extended for larger EUT.

If EUT is floor standing, the EUT was placed on a horizontal metal ground plane and isolated from the ground plane by up to 12 mm of insulating material.

TEST SITE

The test site for radiated emissions consists of a 3 meter semi-anechoic chamber and is located at Intertek Testing Services NA, Inc. 1809 10th St. Suite 400 Plano, TX 75074 - USA

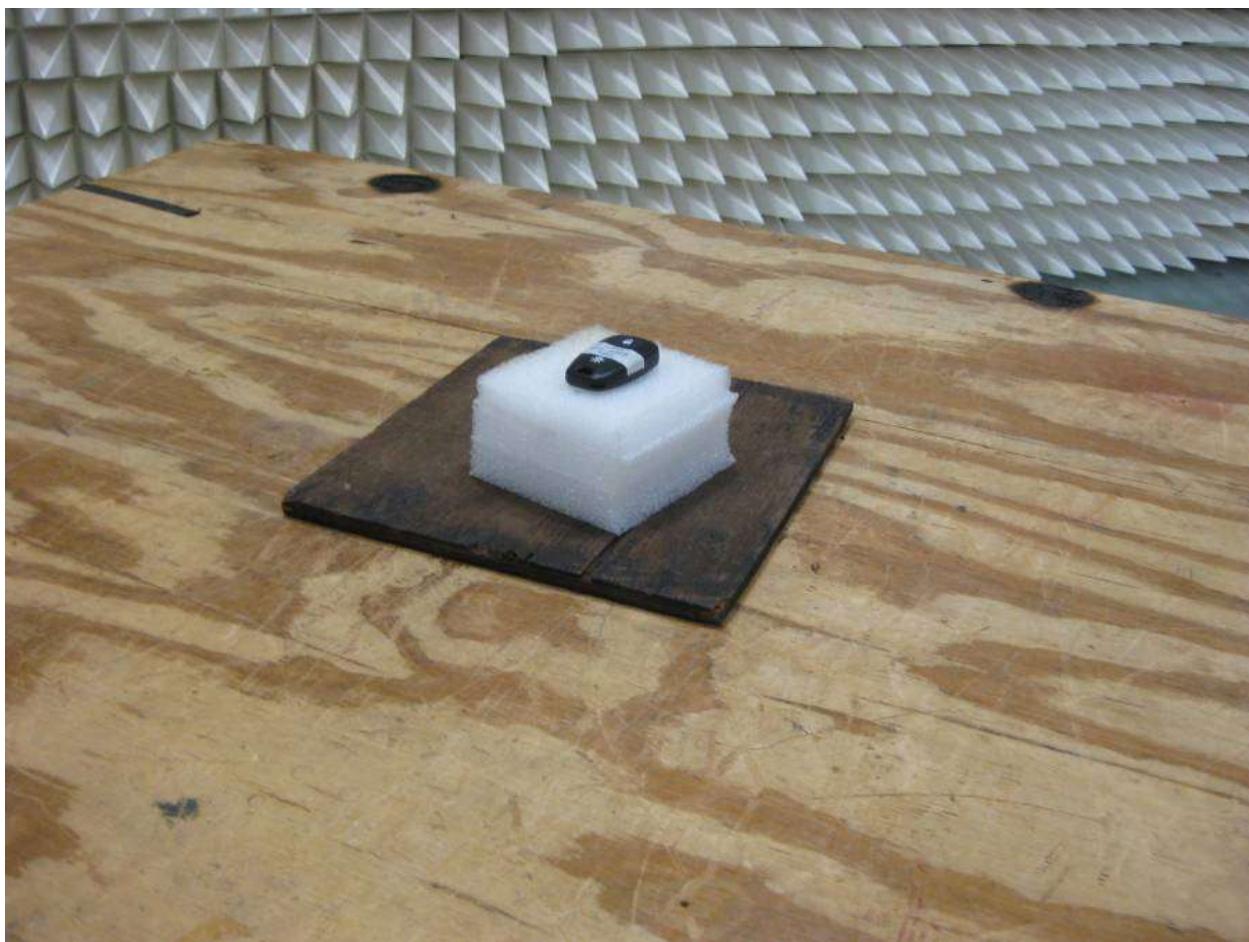
6.2 Test Equipment Used:

Asset #	Description	Manufacturer	Model	Serial Number	Cal Date	Cal Due
77	EMI Receiver rated: 10KHz-7GHz	R & S	ESI 7	100044	04/22/2014	04/22/2015
804	SMA RF CABLE	Insulated Wire Inc.	SPS-2303-720-SPS	804	08/08/2014	08/08/2015
805	SMA RF CABLE	Insulated Wire Inc.	SPS-2303-4250-SPS	804	08/08/2014	08/08/2015
803	SMA RF CABLE	Insulated Wire Inc.	SPS-2301-180-SPS	803	08/08/2014	08/08/2015
238	cable	SemFlex	RF coax cable	none	07/21/2014	07/21/2015
1001	LNA 500 MHz to 18 GHz	Miteq, Inc.	AMF-5D-00501800-28-1	1469795	07/18/2014	07/18/2015
1179	Preamplifier 1-1000MHz 33dB Typical Gain	Com Power	PAM-103	441028	08/05/2014	08/05/2015
1324	Antenna - 20 MHz to 6 GHz	Sunol Sciences	JB6	A101612	03/04/2014	03/04/2015

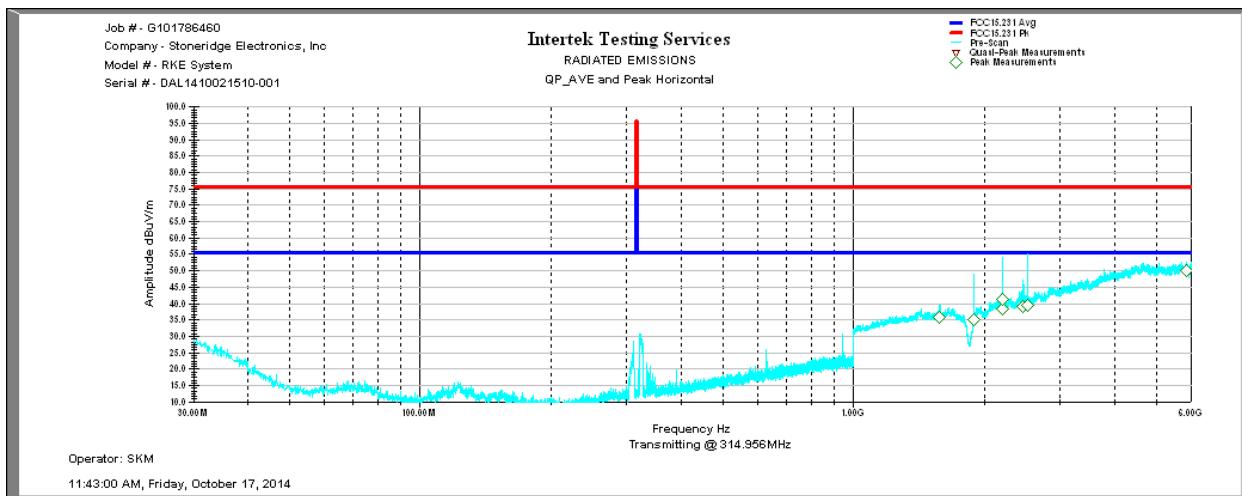
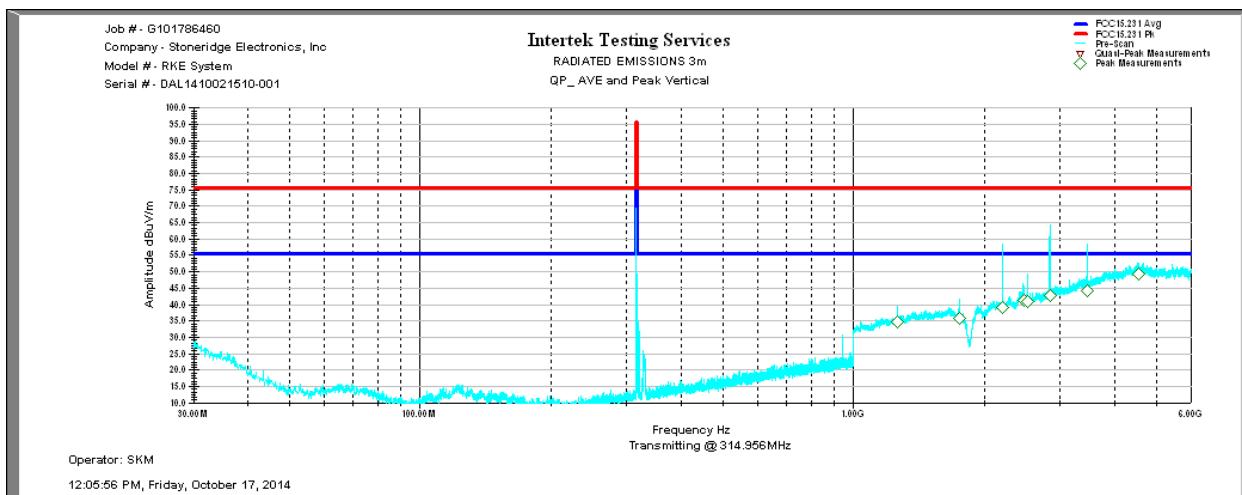
6.3 Results:

The sample tested was found to Comply.

6.4 Setup Photographs:



Test setup

6.5 Plots:**Horizontal emissions plot: 30 to 6000 MHz****Vertical emissions plot: 30 to 6000 MHz**

6.6 Test Data:

Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre- Amp Factors	Cable Factors	Final	Avg LIMIT	Margin
315.51	184	121	52.3	14.3	35.4	1.8	33	75.6	-42.6
315.01	166	57	77.9	14.1	35.4	1.8	58.4	75.6	-17.2

Fundamental EIRP Data: FCC15.231 Limits (Uncorrected by Duty Cycle)

Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre- Amp Factors	Cable Factors	Final	Avg LIMIT	Margin
30.04	282	258	37.6	22.4	34.9	0.6	25.7	55.6	-29.9
122.58	234	195	32.8	13.8	35.6	1.2	12.1	55.6	-43.5
307.89	162	215	33.7	14.2	35.4	1.8	14.3	55.6	-41.3
311.21	169	76	35.6	14.2	35.4	1.8	16.1	55.6	-39.5
315.51	184	121	52.3	14.3	35.4	1.8	33	75.6	-42.6
329.05	118	259	39	14.6	35.4	1.8	20	55.6	-35.6
336.64	282	54	32.3	14.6	35.4	1.8	13.3	55.6	-4203
594.49	161	306	27.8	19.2	34.7	2.4	14.7	55.6	-40.9
878.68	293	304	26.6	22.3	33.8	2.9	18.1	55.6	-37.5
944.87	332	9	53.5	23.1	33.6	3.1	46.1	55.6	-9.5

Horizontal 30 to 1000MHZ Data: FCC15.231 Limits

Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre- Amp Factors	Cable Factors	Final	Avg LIMIT	Margin
30.02	171	171	34.4	21.2	34.9	0.6	21.3	55.6	-34.3
41.36	173	164	33.9	12.8	35.2	0.7	12.2	55.6	-43.4
315.01	166	57	77.9	14.1	35.4	1.8	58.4	75.6	-17.2
808.56	290	25	27.1	21.9	34	2.8	17.9	55.6	-37.7
843.18	318	126	27	21.9	33.9	2.8	17.8	55.6	-37.8
919.7	186	321	26.7	23	33.7	2.9	18.9	55.6	-36.7
922.36	166	153	26.6	23	33.7	2.9	18.9	55.6	-36.7
944.87	288	216	44.5	23.3	33.6	3.1	37.2	55.6	-18.4
952.32	152	24	26.4	23.2	33.6	3	18.9	55.6	-36.7
954.21	216	57	26.4	23.1	33.6	3	18.9	55.6	-36.7

Vertical 30 to 1000MHZ Data: FCC15.231 Limits

Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre- Amp Factors	Cable Factors	Final	Avg LIMIT	Margin
1580.25	294	251	32.8	27	3.9	38.1	25.3	55.6	-30.3
1890.75	219	211	28.9	28.4	4.3	38.1	23.3	55.6	-32.3
2199.75	214	241	32.3	29.9	4.9	38.1	28.7	55.6	-26.9
2204.25	102	25	32.2	30	4.8	38.1	28.7	55.6	-26.9
2463.75	102	331	31.6	30.8	4.9	38	29	55.6	-26.6
2519.75	299	26	31.9	31	5	38	29.7	55.6	-25.9
5855.08	103	276	31.7	39.8	8.7	39.4	40.2	55.6	-15.4

Horizontal 1000 to 6000MHZ Data: FCC15.231 Limits

Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre- Amp Factors	Cable Factors	Final	Avg LIMIT	Margin
1259.75	280	66	33.4	25.7	3.5	38.4	23.9	55.6	-31.7
1750.25	107	285	31.2	27.9	4.1	38.1	24.9	55.6	-30.7
2204.75	109	64	32.1	29.9	4.8	38.1	28.5	55.6	-27.1
2464.75	280	40	44.5	31.6	4.9	38	42.7	55.6	-12.9
2520.25	195	166	31.5	31.6	5	38	29.8	55.6	-25.8
2834.42	127	117	32.3	32.7	5.3	38	32.1	55.6	-23.5
3464.92	107	247	31.6	35.1	6.5	38	34.8	55.6	-20.8
4538.08	243	255	31.3	38.1	7.4	37.2	39.1	55.6	-16.5

Vertical 1000 to 6000MHZ Data: FCC15.231 Limits

Notes: (a) EUT was rotated through x, y, and z axis to determine maximum emissions and tested at maximum orientation.

Deviations, Additions, or Exclusions: None

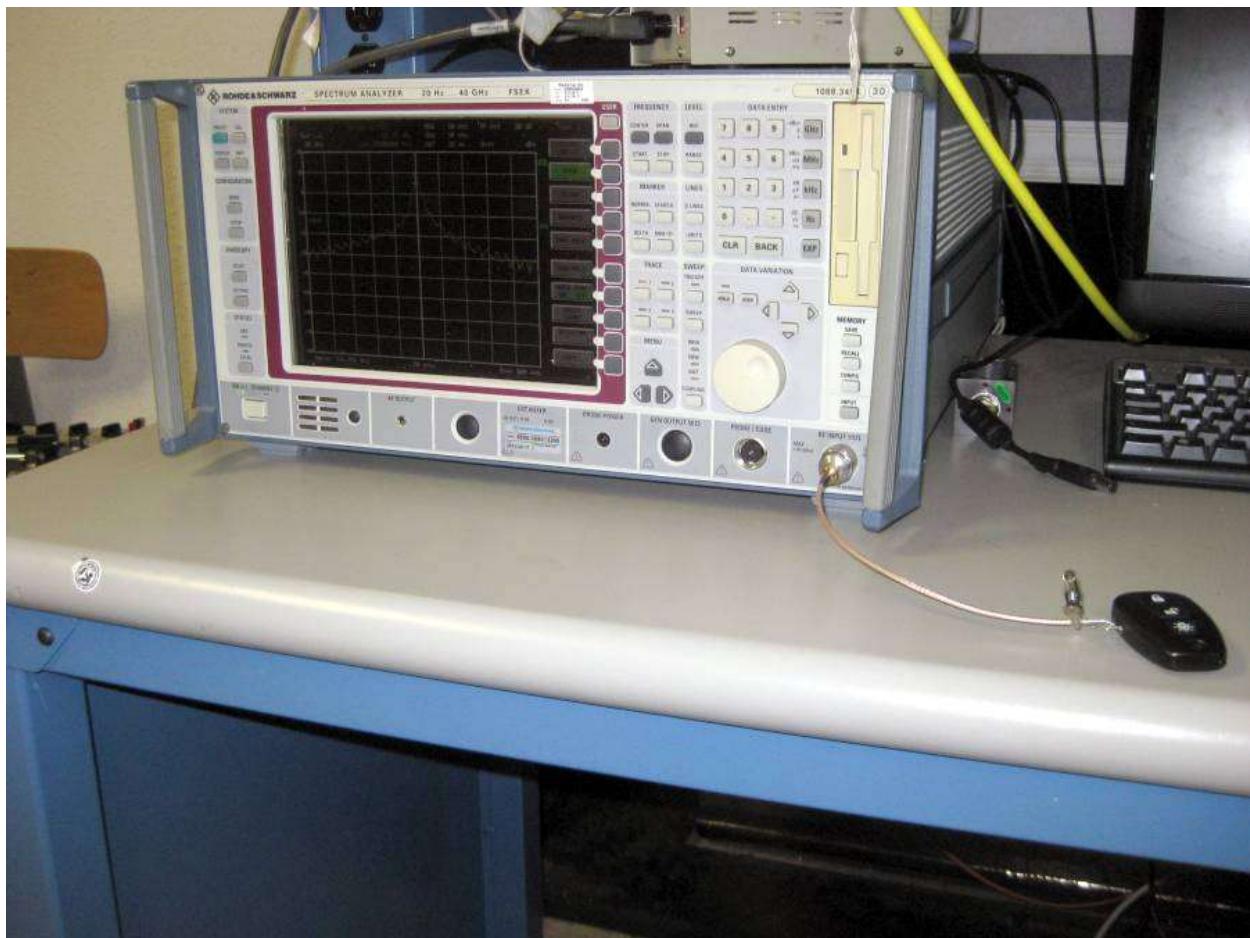
7 Bandwidth Requirements (FCC 15C - 15.231(c))**7.1 Method**

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

- Center Frequency is set to the fundamental of transmitter.
- Resolution Bandwidth is set to approximately 1% of the emission bandwidth.
- Video Bandwidth is set greater than or equal to the Resolution Bandwidth.

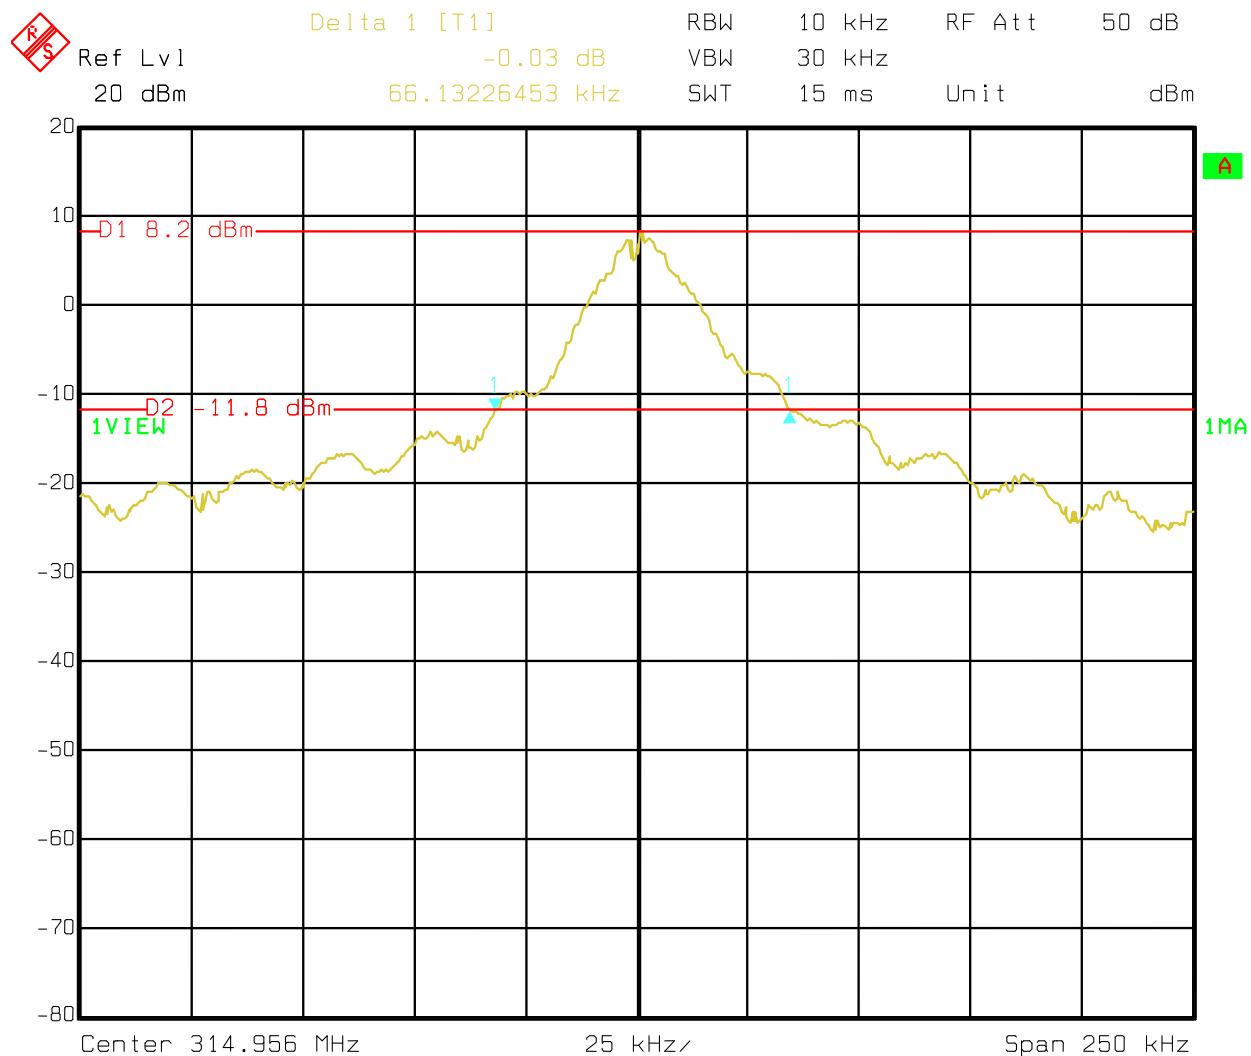
7.2 Test Equipment Used:

Asset #	Description	Manufacturer	Model	Serial Number	Cal Date	Cal Due
77	EMI Receiver rated: 10KHz- 7GHz	R & S	ESI 7	100044	04/22/2014	04/22/2015
803	SMA RF CABLE	Insulated Wire Inc.	SPS-2301- 180-SPS	803	08/08/2014	08/08/2015

7.3 Setup Photographs:

7.4 Plots:

Fundamental Freq	25% Fund BW	Measure 20dB BW	Result
314.956MHz	78.739	66.132	Pass



Date: 15.OCT.2014 21:23:36

20dB BW

7.5 Results:

The sample tested was found to Comply.

Deviations, Additions, or Exclusions: None

8 Conducted emissions on AC power lines

Not Applicable: EUT is Battery-powered.

9 Restrictions (FCC 15C - 15.231(a))

9.1 Method:

15.231(a) The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with

a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more

than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

9.2 Test Equipment Used:

Asset #	Description	Manufacturer	Model	Serial Number	Cal Date	Cal Due
77	EMI Receiver rated: 10KHz-7GHz	R & S	ESI 7	100044	04/22/2014	04/22/2015
804	SMA RF CABLE	Insulated Wire Inc.	SPS-2303-720-SPS	804	08/08/2014	08/08/2015
805	SMA RF CABLE	Insulated Wire Inc.	SPS-2303-4250-SPS	804	08/08/2014	08/08/2015
803	SMA RF CABLE	Insulated Wire Inc.	SPS-2301-180-SPS	803	08/08/2014	08/08/2015
238	cable	SemFlex	RF coax cable	none	07/21/2014	07/21/2015
1001	LNA 500 MHz to 18 GHz	Miteq, Inc.	AMF-5D-00501800-28-1	1469795	07/18/2014	07/18/2015
1179	Preamplifier 1-1000MHz 33dB Typical Gain	Com Power	PAM-103	441028	08/05/2014	08/05/2015
1324	Antenna - 20 MHz to 6 GHz	Sunol Sciences	JB6	A101612	03/04/2014	03/04/2015

9.3 Restricted Band Data

Antenna Orient	Freq MHz	Antenna Height	Azimuth degrees	Reading (dBuV/m)	Antenna Factors	Pre-Amp Factors	Cable Factors	Avg Final	R/Band LIMIT	R/Band Margin
H	329.05	118	259	39	14.6	35.4	1.8	20	46	-26
H	1580.25	294	251	32.8	27	38.1	3.9	25.3	54	-28.1
H	2204.25	102	25	32.2	30	38.1	4.8	28.7	54	-25.3
V	2204.75	109	64	32.1	29.9	38.1	4.8	28.5	54	-25.5
V	4538.08	243	255	31.3	38.1	37.2	7.4	39.1	54	-14.9

15.231(a)

	Response	Requirement
Frequency Range (Mhz, max)	314.956 MHz	40.66-40.70 MHz and > 70MHz
Frequency Range (MHz, min)	314.956 MHz	40.66-40.70 MHz and > 70MHz
Transmit only control signal?	Yes	Only control signal allowed
Continuous transmission?	No	No
Voice transmission?	No	No
Video transmission?	No	No
Radio control of toy?	No	No

15.231(a)(1)

Manually operated?	Yes	
Deactivates within 5 seconds?	Yes	Yes
Show plot (10 second sweep)	Yes (See Pg. 10)	Yes

15.231(a)(2)

Automatically operated?	No	
Deactivates within 5 seconds?	NA	Yes

15.231(a)(3)

Periodically transmits at predetermined intervals?	No	Allowed, with restrictions
Polling signals?	No	Allowed, with restrictions
Polling rate and timing	NA	< 2 seconds per hour

15.231(a)(4)

For Emergency Use?	No	Allowed
--------------------	----	---------

15.231(a)(5)

Exceed 15.231(a)(1) or (a)(2) requirements?	No	Allowed for professional install
---	----	----------------------------------

10 Revision History

Revision Level	Date	Report Number	Notes
0	Oct. 22, 2014	101786460DAL-004	Original Issue