

**FCC PART 15 SUBPART C SECTION 15.247
TEST REPORT***for***WIRELESS MODULE****Model: SAMW25H18-MR210P**

Prepared for

ATMEL CORPORATION
1 SPECTRUM POINTE DR., SUITE 225
LAKE FOREST, CA 92630

Prepared by: _____

TOREY OLIVER

Approved by: _____

MATT HARRISON**COMPATIBLE ELECTRONICS INC.**
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: SEPTEMBER 1, 2015

| | REPORT BODY | APPENDICES | | | | | TOTAL |
|-------|----------------|------------|---|---|----|-----|------------|
| | | A | B | C | D | E | |
| PAGES | 19 | 2 | 2 | 2 | 16 | 119 | 160 |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

**Brea Division**
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**Agoura Division**
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**Silverado Division**
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**Lake Forest Division**
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

| Section / Title | PAGE |
|---|-------------|
| GENERAL REPORT SUMMARY | 4 |
| SUMMARY OF TEST RESULTS | 5 |
| 1. PURPOSE | 6 |
| 2. ADMINISTRATIVE DATA | 7 |
| 2.1 Location of Testing | 7 |
| 2.2 Traceability Statement | 7 |
| 2.3 Cognizant Personnel | 7 |
| 2.4 Date Test Sample was Received | 7 |
| 2.5 Disposition of the Test Sample | 7 |
| 2.6 Abbreviations and Acronyms | 7 |
| 3. APPLICABLE DOCUMENTS | 8 |
| 4. DESCRIPTION OF TEST CONFIGURATION | 9 |
| 4.1 Description of Test Configuration | 9 |
| 4.1.1 Photograph Test Configuration | 9 |
| 4.1.2 Cable Construction and Termination | 10 |
| 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT | 11 |
| 5.1 EUT and Accessory List | 11 |
| 5.2 EMI Test Equipment | 12 |
| 6. TEST SITE DESCRIPTION | 13 |
| 6.1 Test Facility Description | 13 |
| 6.2 EUT Mounting, Bonding and Grounding | 13 |
| 6.3 Facility Environmental Characteristics | 13 |
| 7. CHARACTERISTICS OF THE TRANSMITTER | 14 |
| 7.1 Channel Number and Frequencies | 14 |
| 7.2 Antenna | 14 |
| 8. TEST PROCEDURES | 15 |
| 8.1 RF Emissions | 15 |
| 8.1.1 Conducted Emissions Test | 15 |
| 8.1.2 Radiated Emissions (Spurious and Harmonics) Test | 16 |
| 8.1.3 DTS Bandwidth | 17 |
| 8.1.4 Maximum Peak Conducted Output Power | 17 |
| 8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission | 17 |
| 8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) | 18 |
| 8.1.7 Emissions in the Restricted Bands (Radiated) | 18 |
| 8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band | 18 |
| 9. TEST PROCEDURE DEVIATIONS | 19 |
| 10. CONCLUSIONS | 19 |



LIST OF APPENDICES

| APPENDIX | TITLE |
|----------|---|
| A | Laboratory Accreditations and Recognitions |
| B | Modifications to the EUT |
| C | Additional Models Covered Under This Report |
| D | Diagrams, Factors, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Antenna and Amplifier Factors• Radiated and Conducted Emissions Photos |
| E | Radiated and Conducted Emissions Data Sheets |

**LIST OF FIGURES**

| FIGURE | TITLE |
|--------|---|
| 1 | Plot Map And Layout of Test Site Below 1GHz |
| 2 | Plot Map And Layout of Test Site Above 1GHz |
| 3 | Conducted Emissions Test Setup |



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Wireless Module
Model: SAMW25H18-MR210P
S/N: None

Product Description: The EUT is an 802.11b, g, and n Wireless Shielded Module.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Atmel Corporation
1 Spectrum Pointe Dr., Suite 225
Lake Forest, CA 92630

Test Dates: June 29, 30, and July 7, 15, 2015

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209, & 15.247.

Test Procedure: ANSI C63.10, and KDB 558074 D01 v03r03.



SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION | RESULTS |
|------|--|--|
| 1 | Conducted RF Emissions, 150 kHz - 30 MHz | Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.207 |
| 2 | Radiated RF Emissions & Harmonics, 9 kHz – 25,000 MHz | Complies with the limits of CFR Title 47 Part 15 Subpart C Sections 15.205, 15.209 |
| 3 | DTS Bandwidth | Complies with CFR Title 47 Part 15 Subpart C Section 15.247 |
| 4 | Maximum Peak Conducted Output Power | Complies with CFR Title 47 Part 15 Subpart C Section 15.247 |
| 5 | Maximum Peak Power Spectral Density Level In The Fundamental Emission | Complies with CFR Title 47 Part 15 Subpart C Section 15.247 |
| 6 | Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) | Complies with CFR Title 47 Part 15 Subpart C Section 15.247 |
| 7 | Emissions in the Restricted Bands | Complies with CFR Title 47 Part 15 Subpart C Section 15.205 |



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Wireless Module Model: SAMW25H18-MR210P. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.207, 15.205, 15.209 and 15.247.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Atmel Corporation

Igor Radutnuy Staff Applications Engineer

Compatible Electronics Inc.

Matt Harrison Test Engineer
Jeff Klinger Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on April 14, 2015.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

| | |
|-------|---|
| RF | Radio Frequency |
| EMI | Electromagnetic Interference |
| EUT | Equipment Under Test |
| P/N | Part Number |
| S/N | Serial Number |
| HP | Hewlett Packard |
| ITE | Information Technology Equipment |
| CML | Corrected Meter Limit |
| LISN | Line Impedance Stabilization Network |
| NVLAP | National Voluntary Laboratory Accreditation Program |
| CFR | Code of Federal Regulations |
| PCB | Printed Circuit Board |
| TX | Transmit |
| RX | Receive |



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

| SPEC | TITLE |
|--------------------------|---|
| CFR Title 47, Part 15 | FCC Rules – Radio frequency devices (including digital devices) |
| ANSI C63.10: 2009 | American National Standard for Testing Unlicensed Wireless Devices |
| KDB 558074 D01 v03r03 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The Wireless Module Model: SAMW25H18-MR210P (EUT) was setup in a tabletop configuration. The EUT was powered by a DC Supply (for Conducted Emissions the EUT was connected to a USB Power Adapter). The EUT was continuously transmitting a data stream. The EUT was checked in all axes and the X-Axis was found to be the worst case.

The voltage was varied $\pm 15\%$ and the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration



4.1.2 Cable Construction and Termination

Cable 1

This is a 2 meter, un-shielded, round cable that connects the EUT to the DC Power Supply. The cable is hardwired into the EUT and has a banana connector at the DC Supply end. The cable was not bundle.

Cable 2

This is a 10 centimeter, un-shielded, round cables that connect the EUT to the EUT Control Board. The cable is hardwired into both ends of the cable. The cable was not bundle.

Cable 3

This is a 1 meter, foil shielded, USB cable that connect the EUT to the USB Power Adapter. The cable is hardwired into both ends of the cable. The cable was not bundled. The shield of the cable was terminated at the connectors.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

| # | EQUIPMENT TYPE | MANU-FACTURER | MODEL | SERIAL NUMBER |
|---|---|-------------------|------------------|---------------|
| 1 | WIRELESS MODULE(EUT) | ATMEL CORPORATION | SAMW25H18-MR210P | N/A |
| 2 | DC SUPPLY | MPJA | 0-30V / 0-5A | 017687 |
| 3 | EUT CONTROL BOARD | ATMEL CORPORATION | NONE | NONE |
| 4 | USB POWER ADAPTER (CONDUCTED EMISSIONS) | BELKIN | F8J052 | NONE |



5.2 EMI Test Equipment

| EQUIPMENT TYPE | MANUFACTURER | MODEL NUMBER | SERIAL NUMBER | CAL. DATE | CAL. DUE DATE |
|-------------------------------|---------------------------|--------------|---------------|------------|---------------|
| Computer | Compatible Electronics | NONE | NONE | N/A | N/A |
| EMI Receiver | Rohde & Schwarz | ESIB40 | 100172 | 9/5/2014 | 9/5/2015 |
| Antenna, Loop | Com Power | AL-130 | 121049 | 12/06/2013 | 12/06/2015 |
| Antenna, CombiLog | Com Power | AC-220 | 25857 | 5/21/2014 | 5/21/2016 |
| Antenna, Horn 1-18GHz | Com Power | AH-118 | 071250 | 7/1/2014 | 7/1/2016 |
| Antenna, Horn 18-26 GHz | Com Power | AH-826 | 081033 | NCR | NCR |
| Pre-Amp, 1-18GHz | Com Power | PAM-118 | 443013 | 4/24/2014 | 4/24/2016 |
| Pre-Amp, 1-18GHz | Com Power | PAM-118 | 443011 | 4/24/2014 | 4/24/2016 |
| Pre-Amp, 18-40GHz | Com Power | PA-840 | 181289 | 6/16/2014 | 6/16/2016 |
| LISN | Com Power | LI-215 | 191937 | 4/16/2015 | 4/16/2016 |
| RF Peak Power Meter/Analyzer | Boonton | 4500A | 1282 | 12/2/2014 | 12/2/2015 |
| Peak Power Sensor | Boonton | 57318 | 3723 | 12/2/2014 | 12/2/2015 |
| High Pass Filter | AMTI Microwave Circuits | H3G020G4 | 481230 | 6/4/2014 | 6/4/2016 |
| Mast, Antenna Positioner | Sunol Science Corporation | TWR 95-4 | 020808-3 | N/A | N/A |
| Antenna Mast | Sunol Science Corporation | TWR 95-4 | 020808-3 | N/A | N/A |
| Turntable | Sunol Science Corporation | FM 2001 | N/A | N/A | N/A |
| Mast and Turntable Controller | Sunol Science Corporation | SC104V | 020808-1 | N/A | N/A |



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There are a total of 11 channels. The low channel is at 2412.0 MHz and the high channel is at 2462.0 MHz. There is approximately 5 MHz separation between channels and the EUT uses DSSS modulation. The EUT has two modes of operation; Normal Current and Low Current. Below are the channels and power settings:

| Normal Current | b Mode | g Mode | n Mode |
|-------------------------|---------|--------|-------------|
| 1 == 2412 MHz DigGain= | Default | DG= -9 | DG= -10 |
| 2 == 2417 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 3 == 2422 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 4 == 2427 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 5 == 2432 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 6 == 2437 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 7 == 2442 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 8 == 2447 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 9 == 2452 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 10 == 2457 MHz DigGain= | -8 | DG= -6 | DG= Default |
| 11 == 2462 MHz DigGain= | -7 | DG= -9 | DG= Default |

| Low Current | b Mode | g Mode | n Mode |
|-------------------------|---------|--------|-------------|
| 1 == 2412 MHz DigGain= | Default | DG= -5 | DG= -5 |
| 2 == 2417 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 3 == 2422 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 4 == 2427 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 5 == 2432 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 6 == 2437 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 7 == 2442 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 8 == 2447 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 9 == 2452 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 10 == 2457 MHz DigGain= | -9 | DG= -3 | DG= -5 |
| 11 == 2462 MHz DigGain= | -10 | DG= -5 | DG= Default |

7.2 Antenna

The antenna is made up of a PCB Trace located on the antenna board.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test


The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C section 15.207.

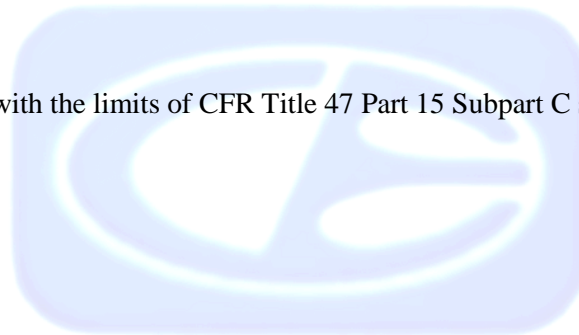

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The R&S receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There were two Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the radiated Harmonic emissions and Band Edges a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

| FREQUENCY RANGE (MHz) | TRANSDUCER | EFFECTIVE MEASUREMENT BANDWIDTH |
|-----------------------|---------------------|---------------------------------|
| .009 to .150 | Active Loop Antenna | 200 Hz |
| .150 to 30 | Active Loop Antenna | 9 kHz |
| 30 to 1000 | Combilog Antenna | 100 kHz |
| 1000 to 25000 | Horn Antenna | 1 MHz |

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209 and 15.247.



8.1.3 DTS Bandwidth

The DTS Bandwidth was measured directly connected to the EMI Receiver using a RBW of 100 kHz and a VBW of 300 kHz. A peak detector and a max hold trace were used with auto sweep time. The trace was allowed to fully maximize. We measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. The automatic bandwidth measurement capability of the EMI Receiver was employed using the n dB bandwidth mode with n set to 6 dB. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247.

8.1.4 Maximum Peak Conducted Output Power

The maximum peak conducted output power was measured using a Peak Power Meter. The Peak Power Meter used a resolution bandwidth that is greater than the DTS bandwidth and a video bandwidth greater than 3 x RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.247.

8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission

The Maximum Peak Power Spectral Density Level in the Fundamental Emission was measured directly connected to the EMI Receiver. Tuned to the center frequency of the DTS channel and set the span to 1.5 times the DTS bandwidth. RBW was set to 3 kHz > 100kHz and VBW 3 * RBW. A peak detector was used with the sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level within the RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247.



8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)

The Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) measurements were performed using the EMI Receiver directly connected to the EUT. A reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was 100 kHz and VBW 300 kHz. A peak detector was used with a sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20dB below that was the reference level. For Emission Level Measurement the center frequency and span were set to encompass the frequency range to be measured. RBW was set to 100 kHz and VBW to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247.

8.1.7 Emissions in the Restricted Bands (Radiated)

The Emissions in the Restricted Bands measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205.

8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The low and high channels were tuned to during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.247.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Wireless Module Model: SAMW25H18-MR210P meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209 and 15.247.



APPENDIX A

***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](#)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](#) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](#) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications made during testing.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Wireless Module
Model: SAMW25H18-MR210P
S/N: None

No additional models were tested.



APPENDIX D

DIAGRAMS, FACTORS, CHARTS, AND PHOTOS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE
BELOW 1GHZ**

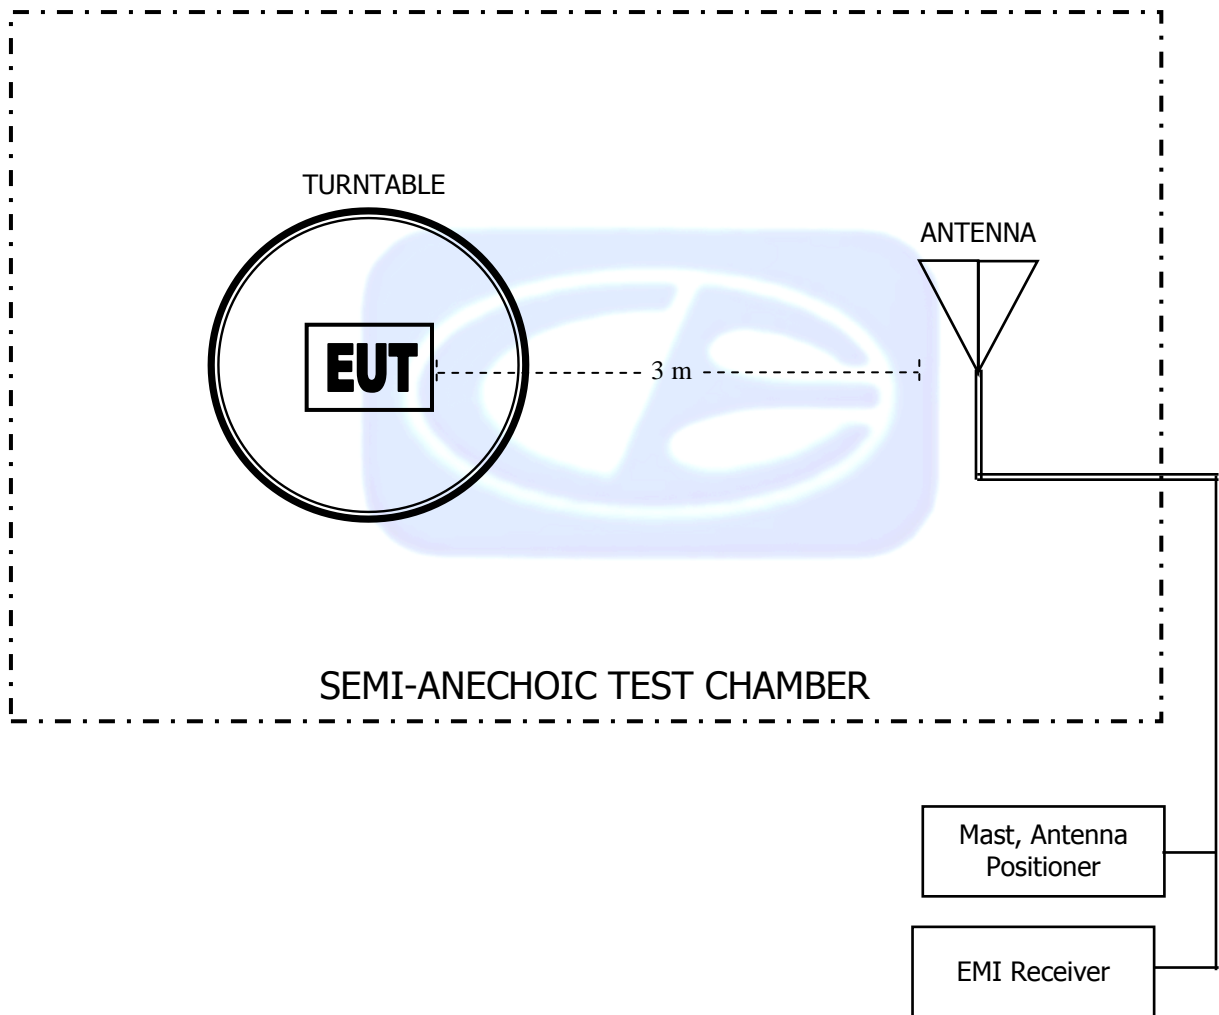


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


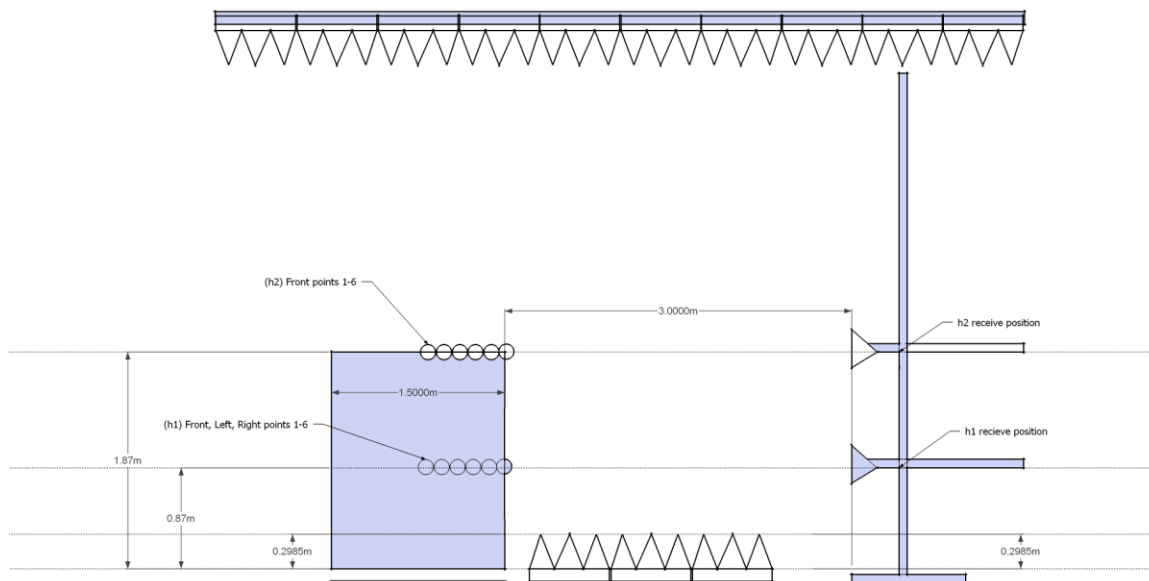


FIGURE 3: CONDUCTED EMISSIONS TEST SETUP

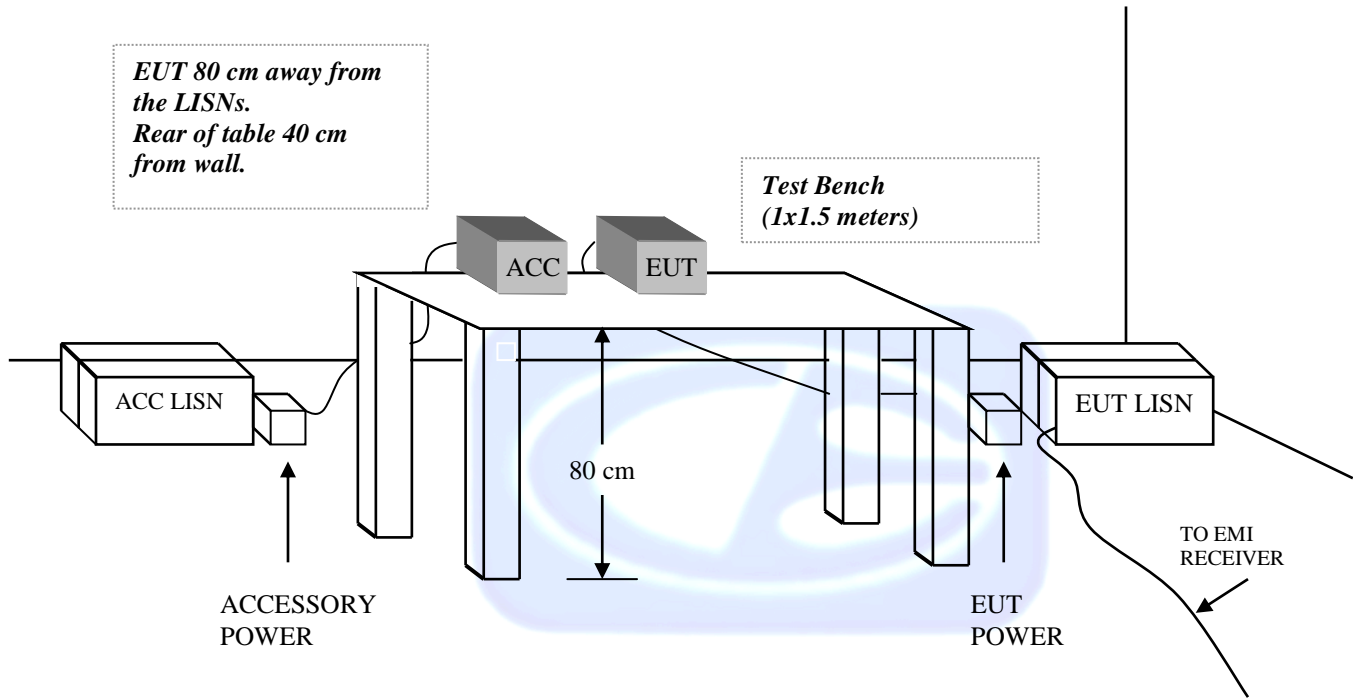

COM-POWER AL-130**LOOP ANTENNA**

S/N: 121049

CALIBRATION DUE: DECEMBER 6, 2015

| FREQUENCY (MHz) | MAGNETIC (dB/m) | ELECTRIC (dB/m) | FREQUENCY (MHz) | MAGNETIC (dB/m) | ELECTRIC (dB/m) |
|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 0.009 | -34.64 | 16.86 | 0.8 | -36.32 | 15.18 |
| 0.01 | -34.78 | 16.72 | 0.9 | -36.22 | 15.28 |
| 0.02 | -35.91 | 15.59 | 1.0 | -36.22 | 15.28 |
| 0.03 | -35.48 | 16.02 | 2.0 | -35.91 | 15.59 |
| 0.04 | -35.82 | 15.68 | 3.0 | -35.91 | 15.59 |
| 0.05 | -36.49 | 15.01 | 4.0 | -36.01 | 15.49 |
| 0.06 | -36.30 | 15.20 | 5.0 | -35.80 | 15.70 |
| 0.07 | -36.43 | 15.07 | 6.0 | -36.00 | 15.50 |
| 0.08 | -36.30 | 15.20 | 7.0 | -35.90 | 15.60 |
| 0.09 | -36.39 | 15.11 | 8.0 | -35.70 | 15.80 |
| 0.1 | -36.41 | 15.09 | 9.0 | -35.70 | 15.80 |
| 0.2 | -36.61 | 14.89 | 10.0 | -35.60 | 15.90 |
| 0.3 | -36.63 | 14.87 | 15.0 | -36.52 | 14.98 |
| 0.4 | -36.52 | 14.99 | 20.0 | -35.75 | 15.75 |
| 0.5 | -36.63 | 14.87 | 25.0 | -37.78 | 13.72 |
| 0.6 | -36.62 | 14.88 | 30.0 | -38.62 | 12.88 |
| 0.7 | -36.53 | 14.97 | | | |



COM-POWER AC-220**LAB R - COMBILOG ANTENNA**

S/N: 25857

CALIBRATION DUE: MAY 21, 2016

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (MHz) | FACTOR (dB) |
|------------------------|--------------------|------------------------|--------------------|
| 30 | 22.5 | 160 | 13.3 |
| 35 | 22.5 | 180 | 15.0 |
| 40 | 23.0 | 200 | 14.6 |
| 45 | 21.5 | 250 | 16.5 |
| 50 | 21.3 | 300 | 18.1 |
| 60 | 18.2 | 400 | 19.4 |
| 70 | 13.2 | 500 | 21.4 |
| 80 | 11.6 | 600 | 21.6 |
| 90 | 11.9 | 700 | 23.7 |
| 100 | 12.6 | 800 | 26.0 |
| 120 | 15.1 | 900 | 26.6 |
| 140 | 13.6 | 1000 | 28.5 |



COM-POWER AH-118**HORN ANTENNA**

S/N: 071250

CALIBRATION DUE: JULY 1, 2016

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (MHz) | FACTOR (dB) |
|------------------------|--------------------|------------------------|--------------------|
| 1000 | 30.1 | 9500 | 44.2 |
| 1500 | 29.2 | 10000 | 43.4 |
| 2000 | 31.6 | 10500 | 44.6 |
| 2500 | 35.5 | 11000 | 45.1 |
| 3000 | 33.7 | 11500 | 45.7 |
| 3500 | 36.0 | 12000 | 46.2 |
| 4000 | 35.4 | 12500 | 45.4 |
| 4500 | 35.5 | 13000 | 44.8 |
| 5000 | 40.1 | 13500 | 46.7 |
| 5500 | 37.8 | 14000 | 47.8 |
| 6000 | 39.0 | 14500 | 46.4 |
| 6500 | 39.9 | 15000 | 47.2 |
| 7000 | 40.4 | 15500 | 45.5 |
| 7500 | 44.4 | 16000 | 45.0 |
| 8000 | 44.1 | 16500 | 44.5 |
| 8500 | 43.1 | 17000 | 47.0 |
| 9000 | 43.0 | 17500 | 47.8 |
| | | 18000 | 44.2 |



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER**

S/N: 443013

CALIBRATION DUE: APRIL 24, 2016

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (MHz) | FACTOR (dB) |
|----------------------------|------------------------|----------------------------|------------------------|
| 500 | 26.2 | 5500 | 25.3 |
| 1000 | 25.6 | 6000 | 25.0 |
| 1100 | 25.9 | 6500 | 24.7 |
| 1200 | 25.9 | 7000 | 23.6 |
| 1300 | 26.3 | 7500 | 23.3 |
| 1400 | 26.5 | 8000 | 23.7 |
| 1500 | 26.3 | 8500 | 24.0 |
| 1600 | 26.1 | 9000 | 24.3 |
| 1700 | 26.2 | 9500 | 24.1 |
| 1800 | 26.3 | 10000 | 23.7 |
| 1900 | 25.8 | 11000 | 24.2 |
| 2000 | 26.0 | 12000 | 23.2 |
| 2500 | 26.0 | 13000 | 22.8 |
| 3000 | 25.8 | 14000 | 22.6 |
| 3500 | 25.9 | 15000 | 22.9 |
| 4000 | 26.4 | 16000 | 22.3 |
| 4500 | 26.0 | 17000 | 22.6 |
| 5000 | 25.6 | 18000 | 23.9 |



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER**

S/N: 443011

CALIBRATION DUE: April 24, 2016

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (GHz) | FACTOR (dB) |
|----------------------------|------------------------|----------------------------|------------------------|
| 0.500 | 27.2 | 7.000 | 23.8 |
| 1.000 | 26.6 | 7.500 | 23.9 |
| 1.500 | 27.0 | 8.000 | 24.4 |
| 2.000 | 27.0 | 8.500 | 25.2 |
| 2.500 | 27.4 | 9.500 | 26.2 |
| 3.000 | 27.6 | 10.000 | 25.8 |
| 3.500 | 27.5 | 11.000 | 25.5 |
| 4.000 | 27.3 | 12.000 | 25.4 |
| 4.500 | 27.3 | 13.000 | 25.1 |
| 5.000 | 27.5 | 14.000 | 24.6 |
| 5.500 | 26.3 | 15.000 | 24.1 |
| 6.000 | 26.1 | 16.000 | 25.1 |
| 6.500 | 25.4 | 17.000 | 25.2 |
| | | 18.000 | 24.4 |



COM-POWER PA-840**18-40 GHz PREAMPLIFIER**

S/N: 181289

CALIBRATION DUE: JUNE 16, 2016

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (MHz) | FACTOR (dB) |
|------------------------|--------------------|------------------------|--------------------|
| 18000 | 29.4 | 31500 | 28.2 |
| 19000 | 28.8 | 32000 | 28.6 |
| 20000 | 30.5 | 32500 | 28.8 |
| 21000 | 31.4 | 33000 | 28.2 |
| 22000 | 31.2 | 33500 | 27.7 |
| 23000 | 30.1 | 34000 | 27.2 |
| 24000 | 30.3 | 34500 | 28.2 |
| 25000 | 29.8 | 35000 | 27.3 |
| 26000 | 30.5 | 35500 | 27.2 |
| 26500 | 30.7 | 36000 | 27.2 |
| 27000 | 30.8 | 36500 | 27.5 |
| 27500 | 30.2 | 37000 | 27.0 |
| 28000 | 30.1 | 37500 | 26.7 |
| 28500 | 30.2 | 38000 | 26.2 |
| 29000 | 30.1 | 38500 | 26.5 |
| 29500 | 29.8 | 39000 | 26.3 |
| 30000 | 29.2 | 39500 | 26.9 |
| 30500 | 28.4 | 40000 | 27.6 |
| 31000 | 29.8 | | |





FRONT VIEW


ATMEL CORPORATION
WIRELESS MODULE

Model: SAMW25H18-MR210P

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



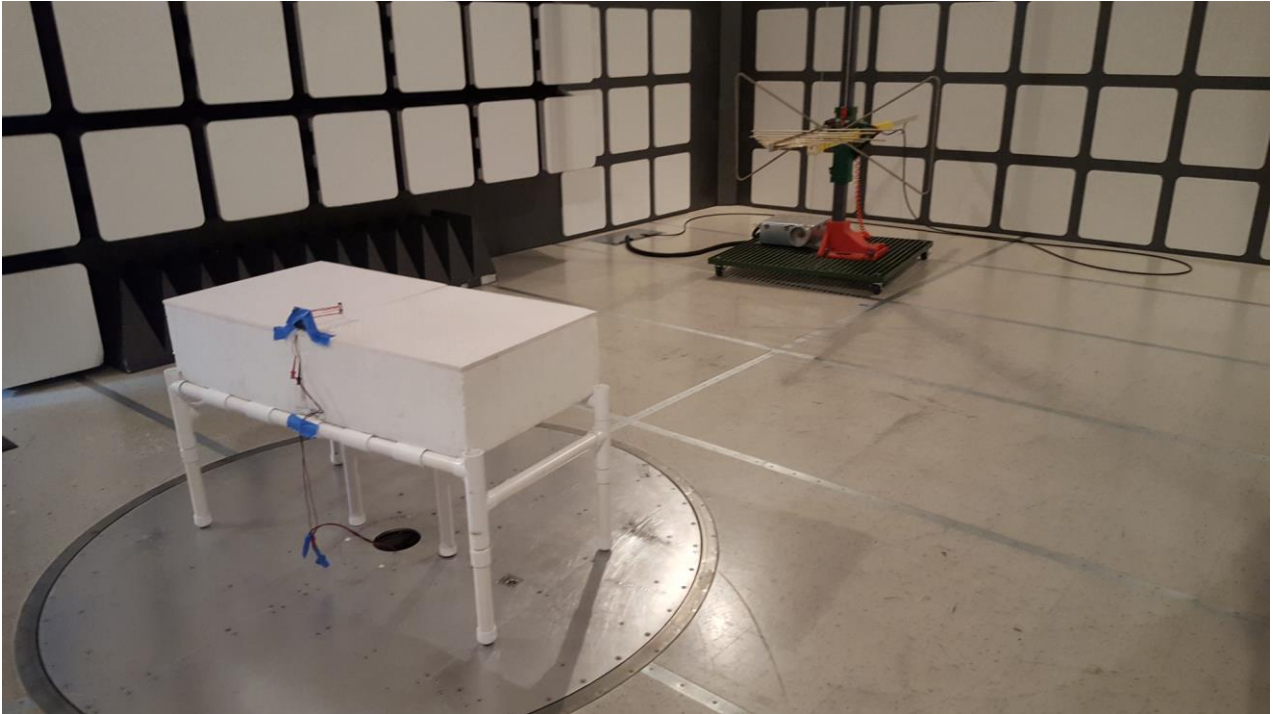

REAR VIEW

ATMEL CORPORATION
WIRELESS MODULE
Model: SAMW25H18-MR210P
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





FRONT VIEW

ATMEL CORPORATION
WIRELESS MODULE
Model: SAMW25H18-MR210P
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

ATMEL CORPORATION
WIRELESS MODULE
Model: SAMW25H18-MR210P
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**






FRONT VIEW

ATMEL CORPORATION
WIRELESS MODULE
Model: SAMW25H18-MR210P
FCC SUBPART C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



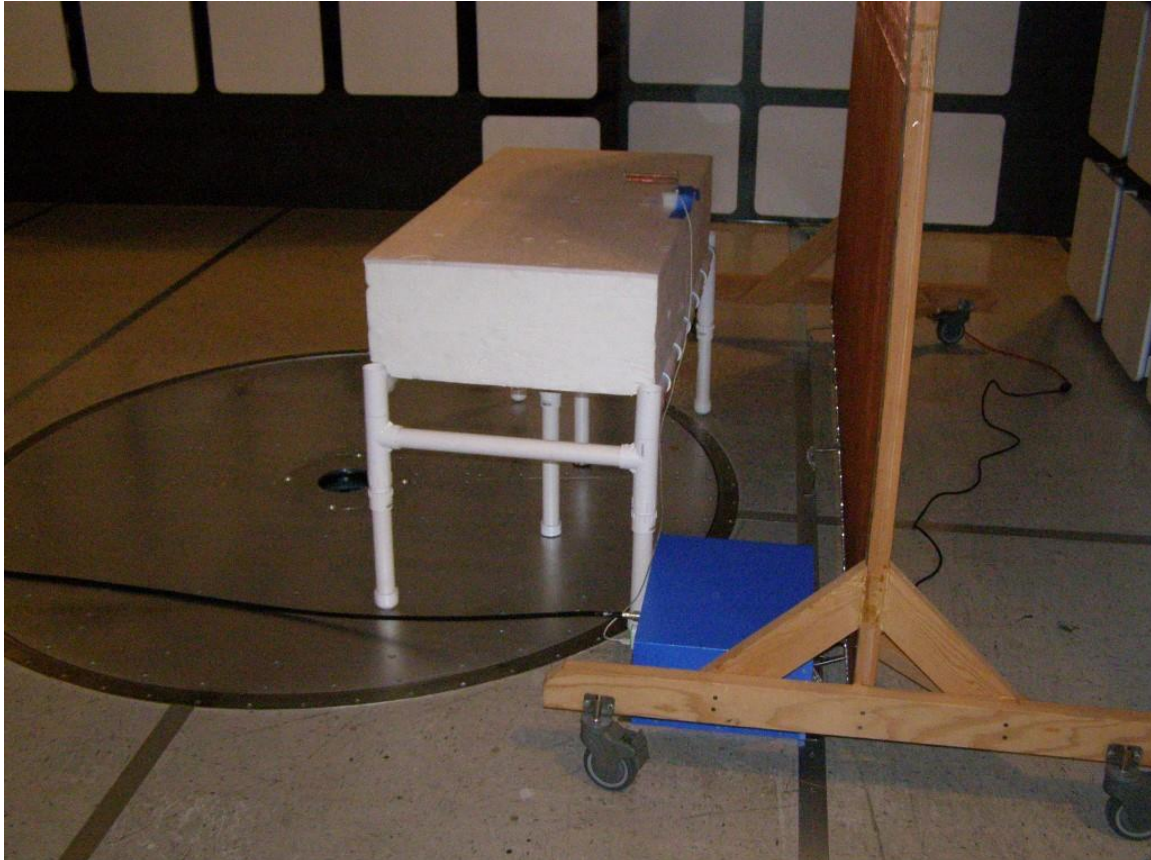

REAR VIEW

ATMEL CORPORATION
WIRELESS MODULE
Model: SAMW25H18-MR210P
FCC SUBPART C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

RADIATED EMISSIONS DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
 File: Radiated Pre-Scan 30-1000Mhz_B.set
 Operator: Matt Harrison
 EUT Type: Wireless Module: SAMW25-MP210P.
 EUT Condition: Transmitting 802.11b, 2412MHz, DigGain= Default.
 Comments: Connected to DC Supply.
 Temp: 74f
 Hum: 45%
 5VDC

7/7/2015 2:54:39 PM
 Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab R)

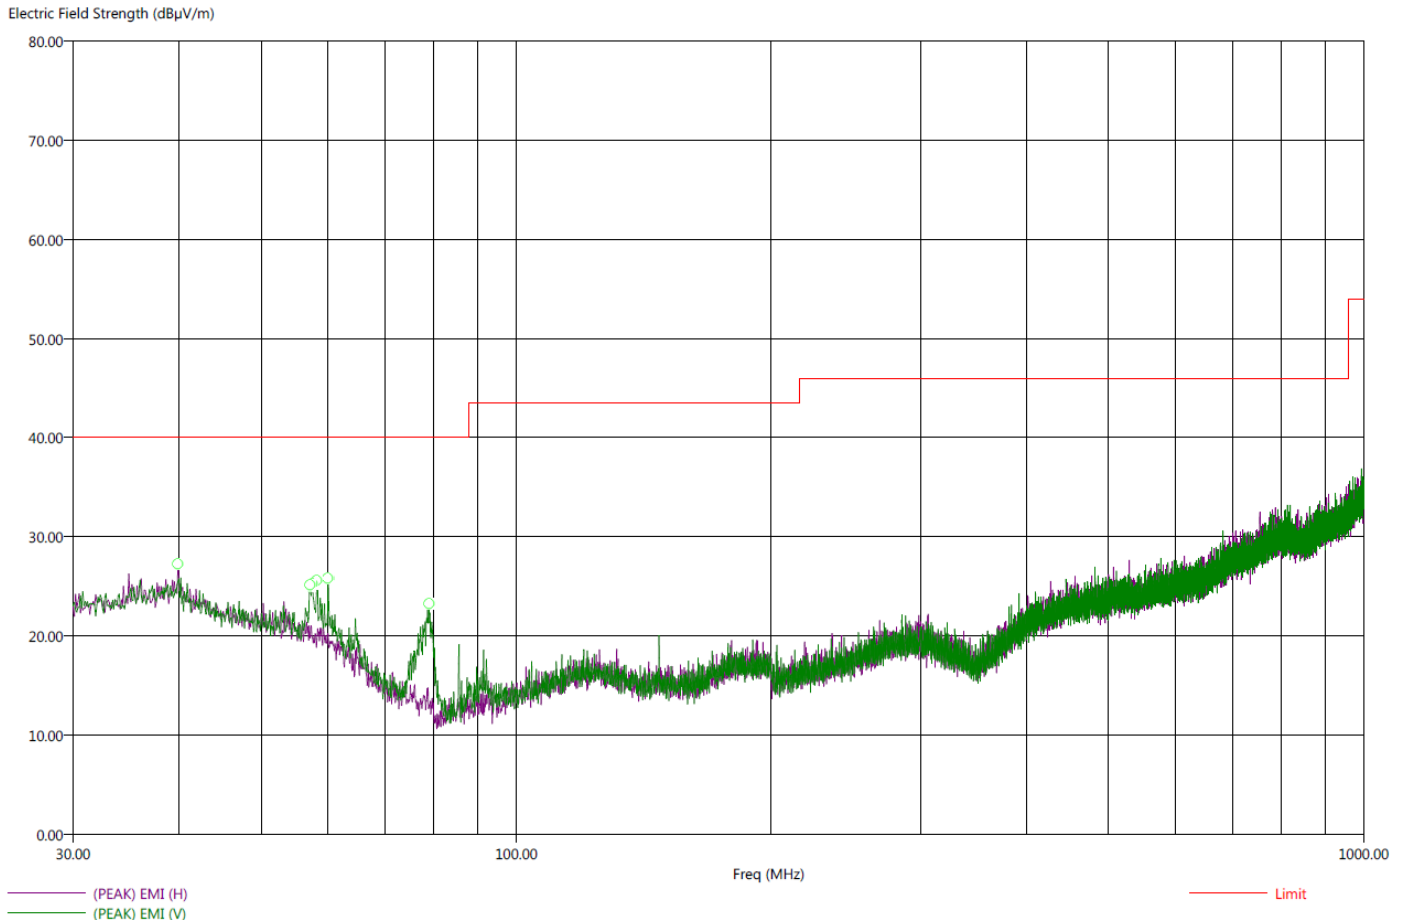

This was worst case for all modes and channels
There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Title: FCC 15.209
File: Radiated Final 30-1000Mhz_B.set
Operator: Matt Harrison
EUT Type: Wireless Module: SAMW25-MP210P.
EUT Condition: Transmitting 802.11b, 2412MHz, DigGain= Default.
Comments: Connected to DC Supply.
Temp: 74f
Hum: 45%
5VDC

7/7/2015 3:07:42 PM

Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq (MHz) | (QP) Margin (dB) | (QP) EMI (dB μ V/m) | (PEAK) EMI (dB μ V/m) | Limit (dB μ V/m) | Pol | Ttbl Agl (deg) | Twr Ht (cm) | Transducer (dB) | Cable(dB) |
|------------|------------------|-------------------------|---------------------------|----------------------|-----|----------------|-------------|-----------------|-----------|
| 39.90 | -19.61 | 20.39 | 25.19 | 40.00 | H | 121.00 | 255.02 | 23.00 | 1.30 |
| 57.10 | -19.74 | 20.26 | 25.66 | 40.00 | V | 47.25 | 118.97 | 19.05 | 0.75 |
| 57.50 | -19.26 | 20.74 | 26.80 | 40.00 | V | 22.50 | 124.82 | 18.95 | 0.78 |
| 58.20 | -20.73 | 19.27 | 25.18 | 40.00 | V | 145.25 | 101.41 | 18.74 | 0.84 |
| 60.00 | -17.73 | 22.27 | 27.17 | 40.00 | V | 22.25 | 109.23 | 18.20 | 1.00 |
| 78.90 | -21.93 | 18.07 | 25.02 | 40.00 | V | 219.50 | 108.40 | 11.77 | 0.43 |

This was worst case for all modes and channels

There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E

CONDUCTED EMISSIONS DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
 File: Conducted Pre-Line_n.set
 Operator: Matt Harrison
 EUT Type: Wireless Module: SAMW25-MP210P.
 EUT Condition: Transmitting 802.11n, 2437MHz, DigGain= Default.
 Comments: Connected to USB Adapter.
 Temp: 74f
 Hum: 48%
 USB Adapter: 120V 60Hz

7/15/2015 10:43:49 AM
 Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (LAB R)

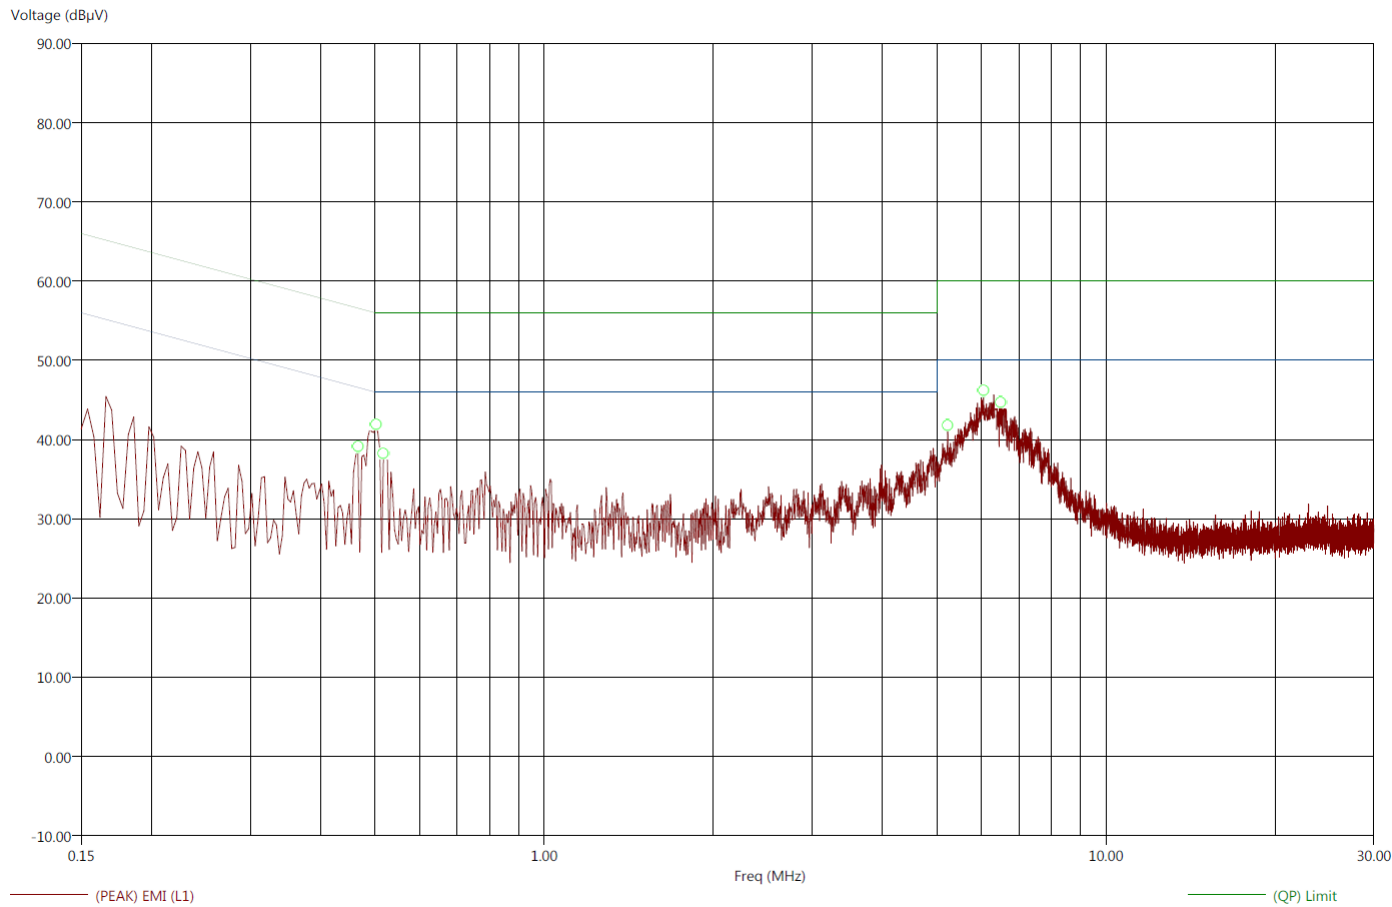

This was worst case for all modes and channels



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Title: FCC 15.207 7/15/2015 10:46:15 AM
 File: Conducted Final-Line_n.set Sequence: Final Measurements
 Operator: Matt Harrison
 EUT Type: Wireless Module: SAMW25-MP210P.
 EUT Condition: Transmitting 802.11n, 2437MHz, DigGain= Default.
 Comments: Connected to USB Adapter.
 Temp: 74f
 Hum: 48%
 USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

| Freq (MHz) | (AVG) Margin AVL (dB) | (QP) Margin QPL (dB) | (AVG) EMI (dBμV) | (QP) EMI (dBμV) | (PEAK) EMI (dBμV) | (AVG) Limit (dBμV) | (QP) Limit (dBμV) | Transducer (dB) | Cable (dB) |
|------------|-----------------------|----------------------|------------------|-----------------|-------------------|--------------------|-------------------|-----------------|------------|
| 0.47 | -22.22 | -22.16 | 24.36 | 34.43 | 39.37 | 46.58 | 56.58 | 0.05 | 0.02 |
| 0.50 | -17.21 | -16.98 | 28.79 | 39.02 | 43.12 | 46.00 | 56.00 | 0.07 | 0.00 |
| 0.52 | -20.29 | -20.50 | 25.71 | 35.50 | 40.04 | 46.00 | 56.00 | 0.07 | 0.00 |
| 5.23 | -24.27 | -24.25 | 25.73 | 35.75 | 40.15 | 50.00 | 60.00 | 0.07 | 0.23 |
| 6.05 | -19.18 | -18.48 | 30.82 | 41.52 | 45.76 | 50.00 | 60.00 | 0.06 | 0.34 |
| 6.51 | -19.88 | -18.57 | 30.12 | 41.43 | 44.45 | 50.00 | 60.00 | 0.05 | 0.39 |


This was worst case for all modes and channels



Title: FCC 15.207
File: Conducted Pre-Neutral_n.set
Operator: Matt Harrison
EUT Type: Wireless Module: SAMW25-MP210P.
EUT Condition: Transmitting @ 802.11b, 2437 MHz, DigGain= Default.
Comments: Connected to USB Adapter.
Temp: 74f
Hum: 48%
USB Adapter: 120V 60Hz

7/15/2015 10:48:48 AM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (LAB R)

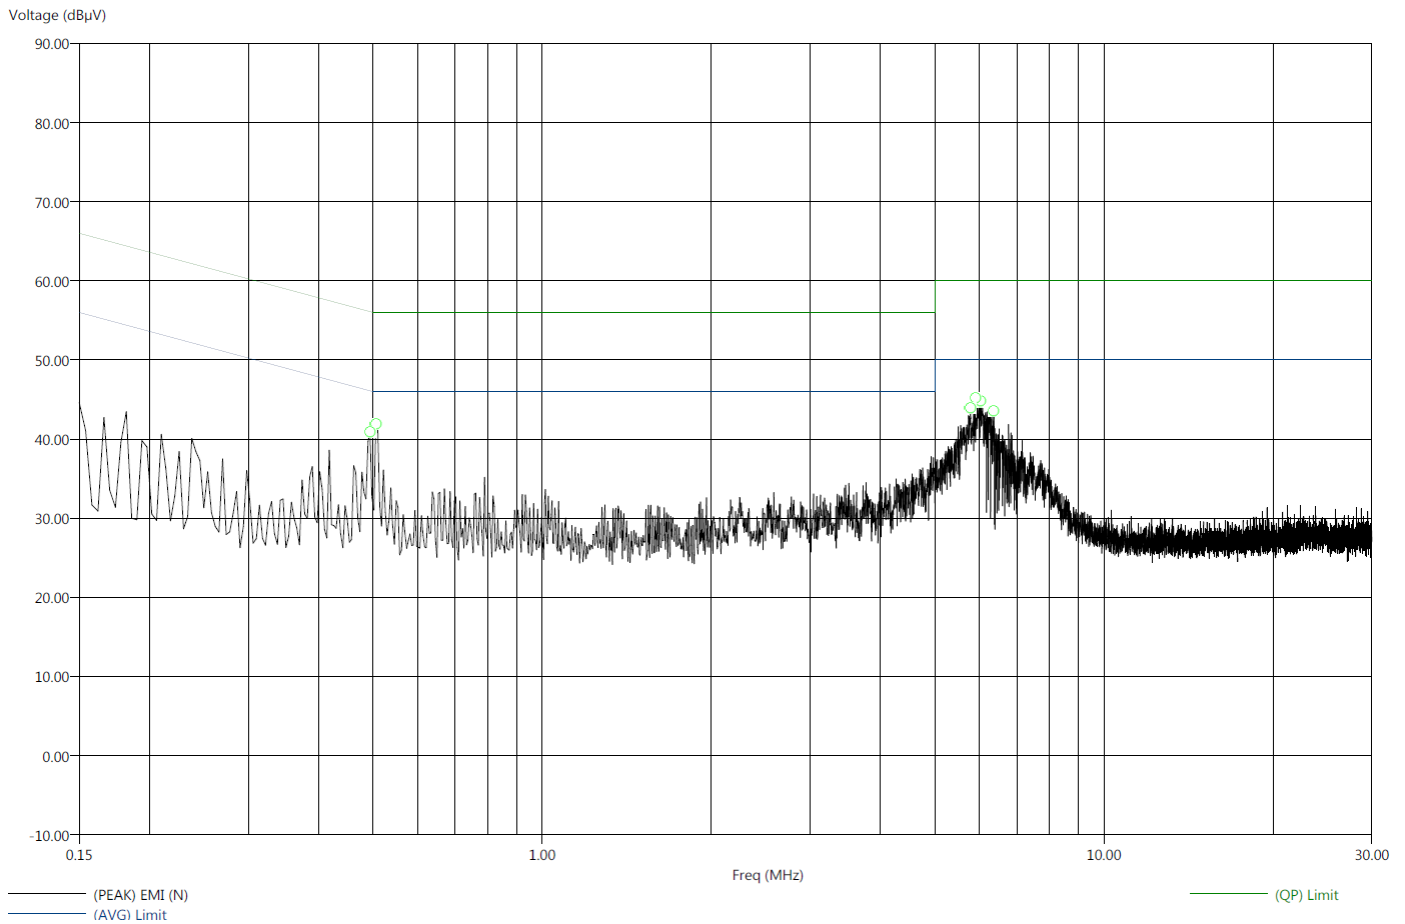

This was worst case for all modes and channels



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 7/15/2015 10:51:10 AM
 File: Conducted Final-Neutral_n.set Sequence: Final Measurements
 Operator: Matt Harrison
 EUT Type: Wireless Module: SAMW25-MP210P.
 EUT Condition: Transmitting @ 802.11n, 2437 MHz, DigGain= Default.
 Comments: Connected to USB Adapter.
 Temp: 74f
 Hum: 48%
 USB Adapter: 120V 60Hz

Compatible Electronics, Inc. FAC-3 (LAB R)

| Freq (MHz) | (AVG) Margin AVL (dB) | (QP) Margin QPL (dB) | (AVG) EMI (dBμV) | (QP) EMI (dBμV) | (PEAK) EMI (dBμV) | (AVG) Limit (dBμV) | (QP) Limit (dBμV) | Transducer (dB) | Cable (dB) |
|------------|-----------------------|----------------------|------------------|-----------------|-------------------|--------------------|-------------------|-----------------|------------|
| 0.49 | -19.54 | -18.60 | 26.56 | 37.50 | 42.04 | 46.10 | 56.10 | 0.06 | 0.00 |
| 0.51 | -19.49 | -17.94 | 26.51 | 38.06 | 42.56 | 46.00 | 56.00 | 0.06 | 0.00 |
| 5.79 | -28.36 | -22.18 | 21.64 | 37.82 | 42.94 | 50.00 | 60.00 | 0.08 | 0.31 |
| 5.91 | -27.63 | -20.44 | 22.37 | 39.56 | 45.89 | 50.00 | 60.00 | 0.08 | 0.32 |
| 6.04 | -27.51 | -20.41 | 22.49 | 39.59 | 44.56 | 50.00 | 60.00 | 0.07 | 0.34 |
| 6.37 | -27.17 | -22.99 | 22.83 | 37.01 | 43.10 | 50.00 | 60.00 | 0.07 | 0.37 |

This was worst case for all modes and channels



DTS BANDWIDTH



802.11b MODE

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 12144.29 | 500.00 | 11644.29 | Peak | |
| 2437 | 11843.69 | 500.00 | 11343.69 | Peak | |
| 2462 | 11783.57 | 500.00 | 11283.57 | Peak | |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11b


Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 12444.89 | 500.00 | 11944.89 | Peak | |
| 2437 | 12144.29 | 500.00 | 11644.29 | Peak | |
| 2462 | 12144.29 | 500.00 | 11644.29 | Peak | |



| | | | | | | |
|--|-------------|-----------------|-----|---------|--------|-------|
| | Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dBμV | -0.49 dB | VBW | 300 kHz | | |
| | 127 dBμV | 12.14428858 MHz | SWT | 7.5 ms | Unit | dBμV |

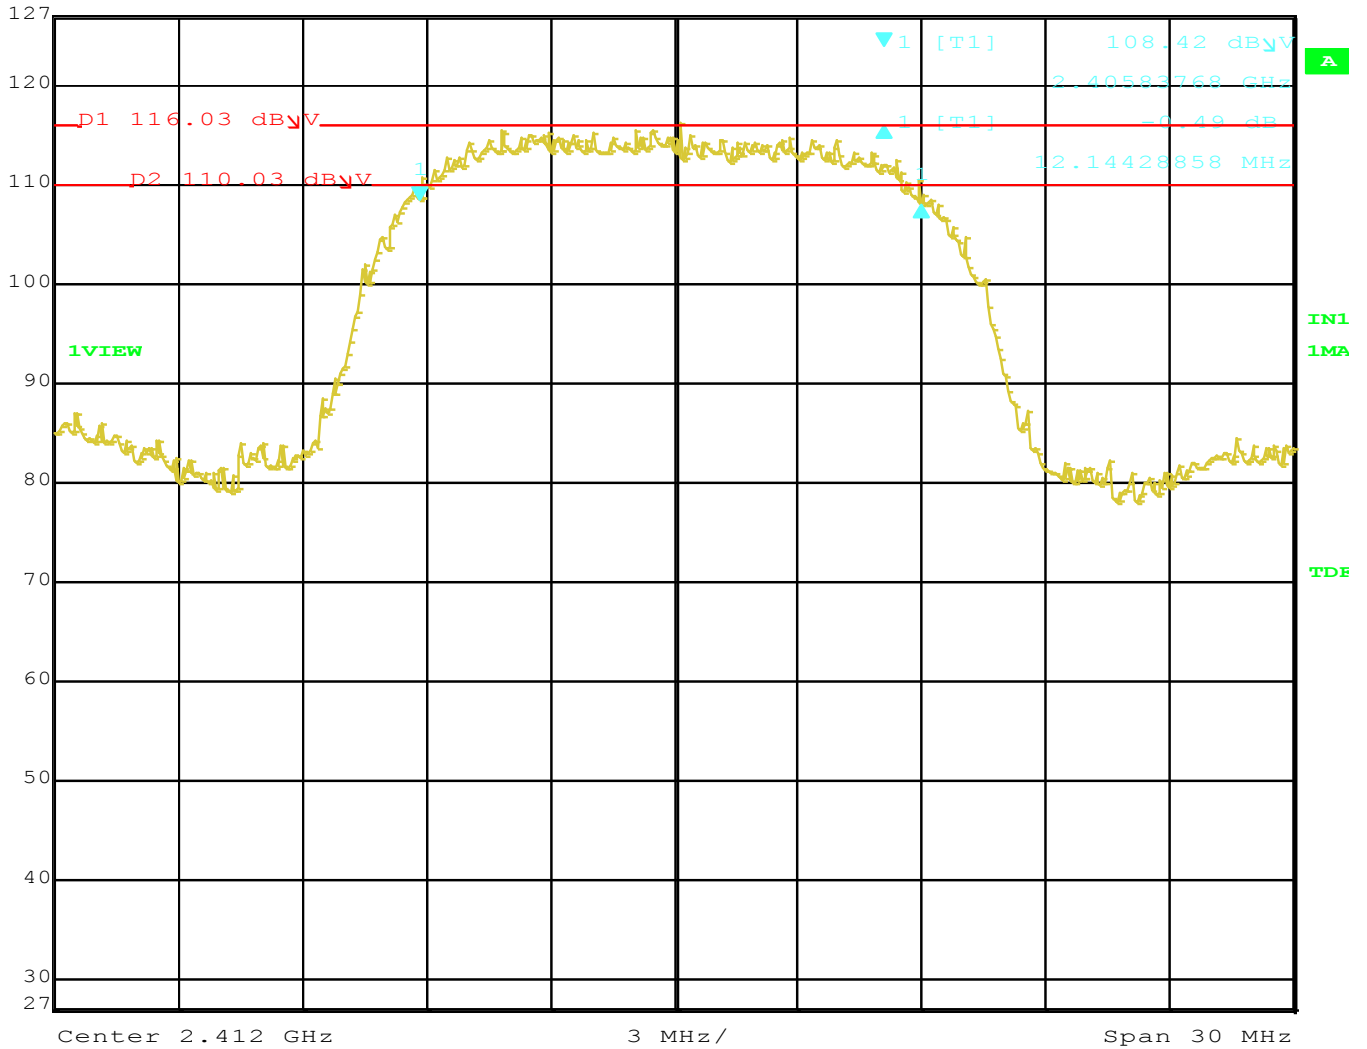


Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, 2412MHz.
 Date: 15.JUL.2015 13:23:30





| | | | | | |
|----------------|-----------------|-----|---------|--------|------------|
| Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | -0.24 dB | VBW | 300 kHz | | |
| 127 dB μ V | 11.84368737 MHz | SWT | 7.5 ms | Unit | dB μ V |

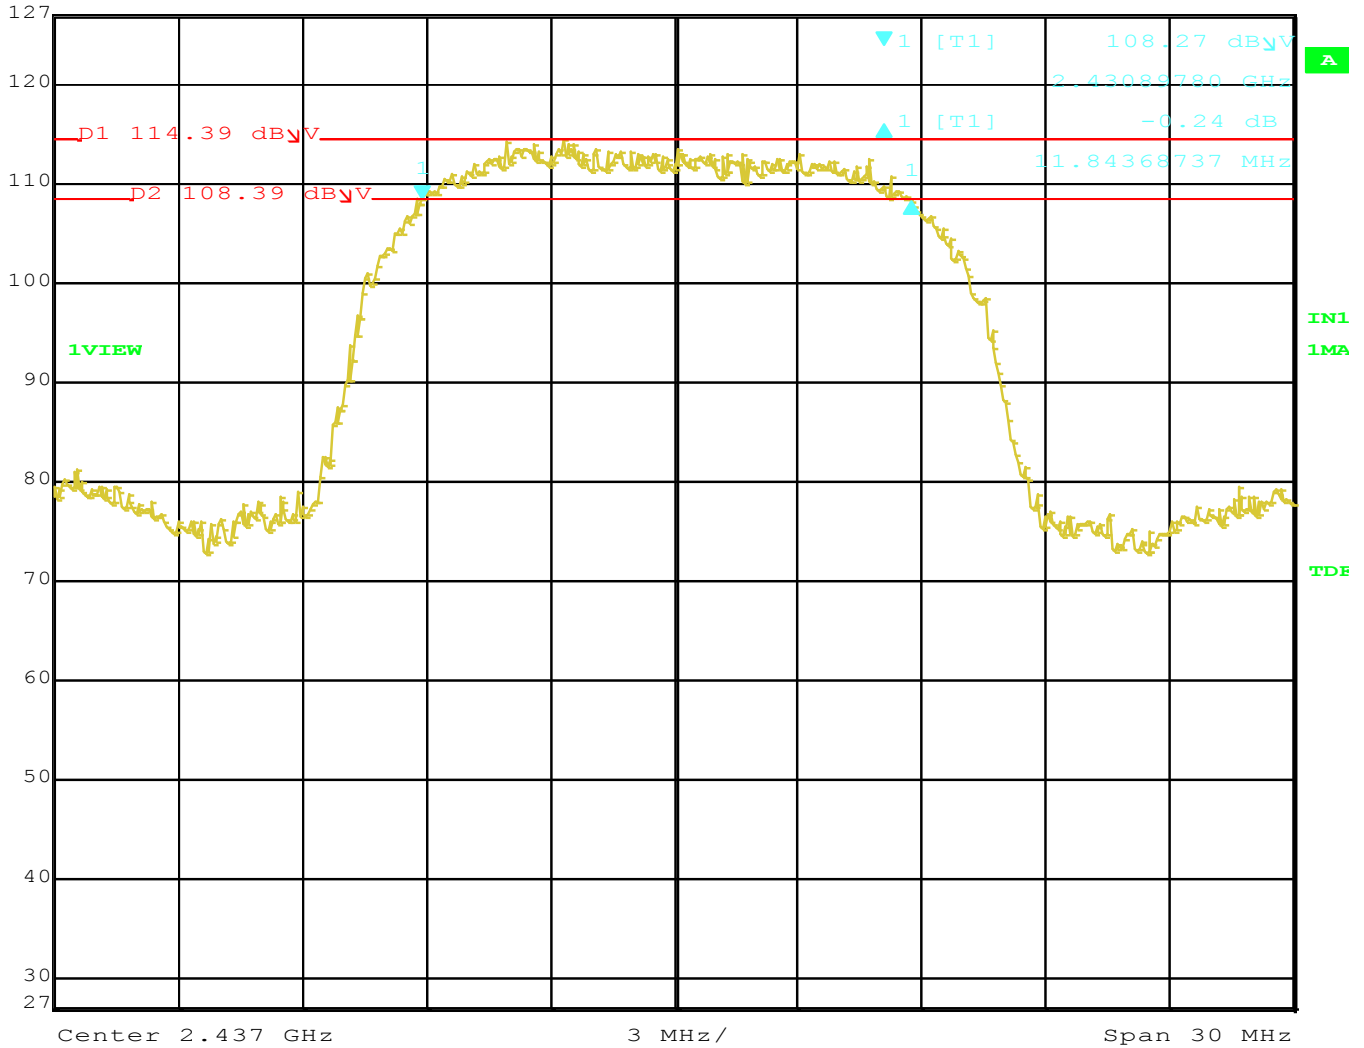

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, 2437MHz.
 Date: 15.JUL.2015 13:27:06




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|---|----------------|-----------------|-----|---------|--------|------------|
|  | Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | -1.37 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 11.78356713 MHz | SWT | 7.5 ms | Unit | dB μ V |

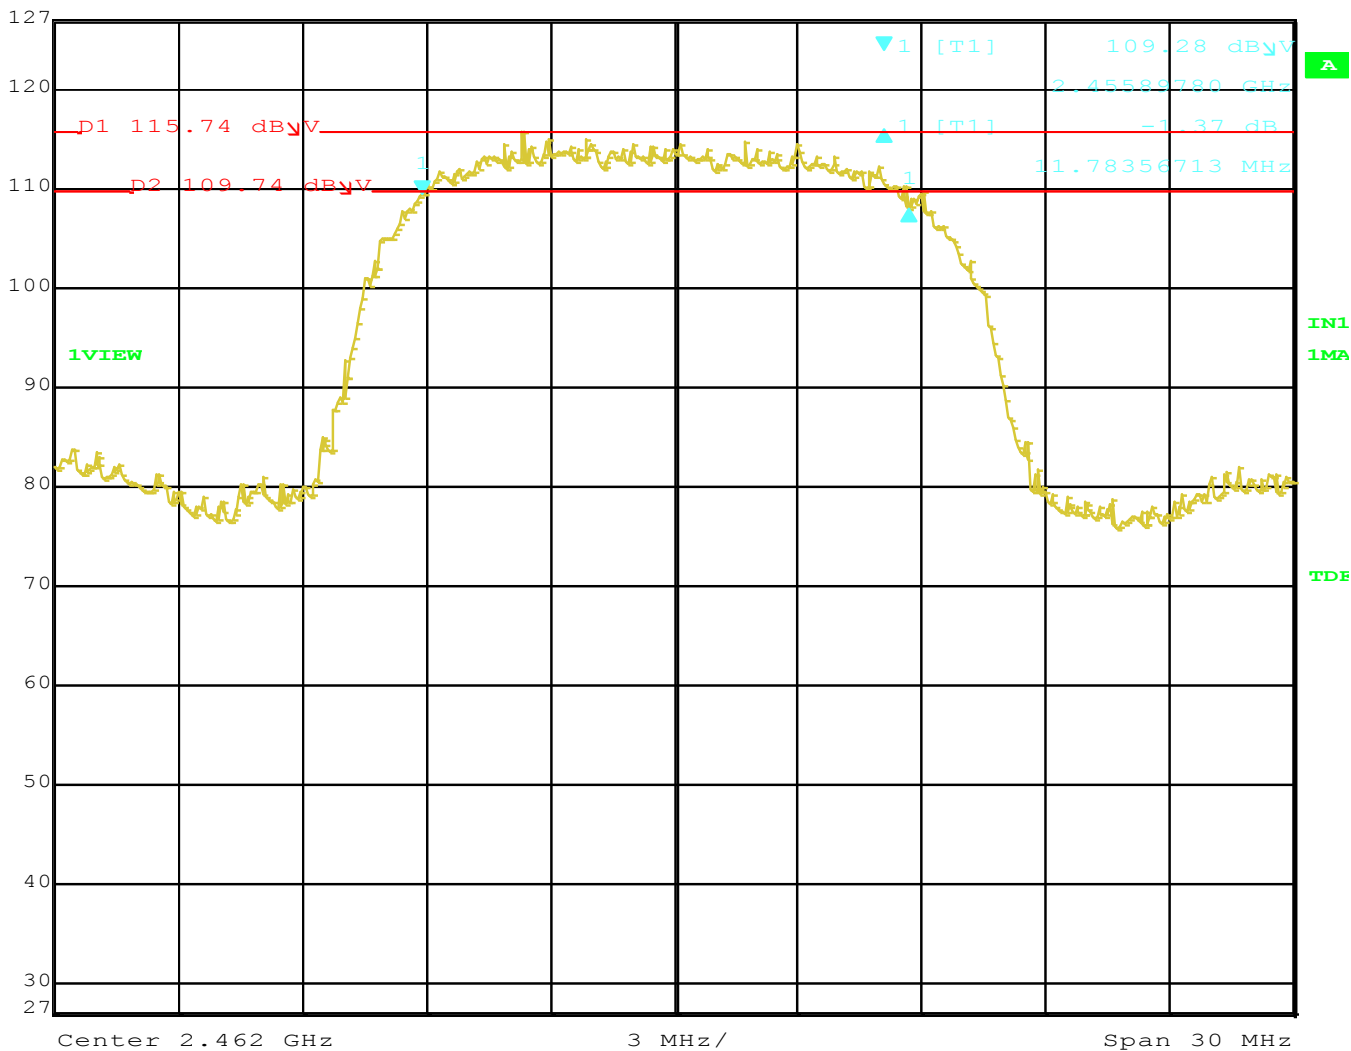

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, 2462MHz.
 Date: 15.JUL.2015 13:28:32



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-----------------|-----|---------|--------|------------|
| Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 0.51 dB | VBW | 300 kHz | | |
| 127 dB μ V | 12.44488978 MHz | SWT | 7.5 ms | Unit | dB μ V |

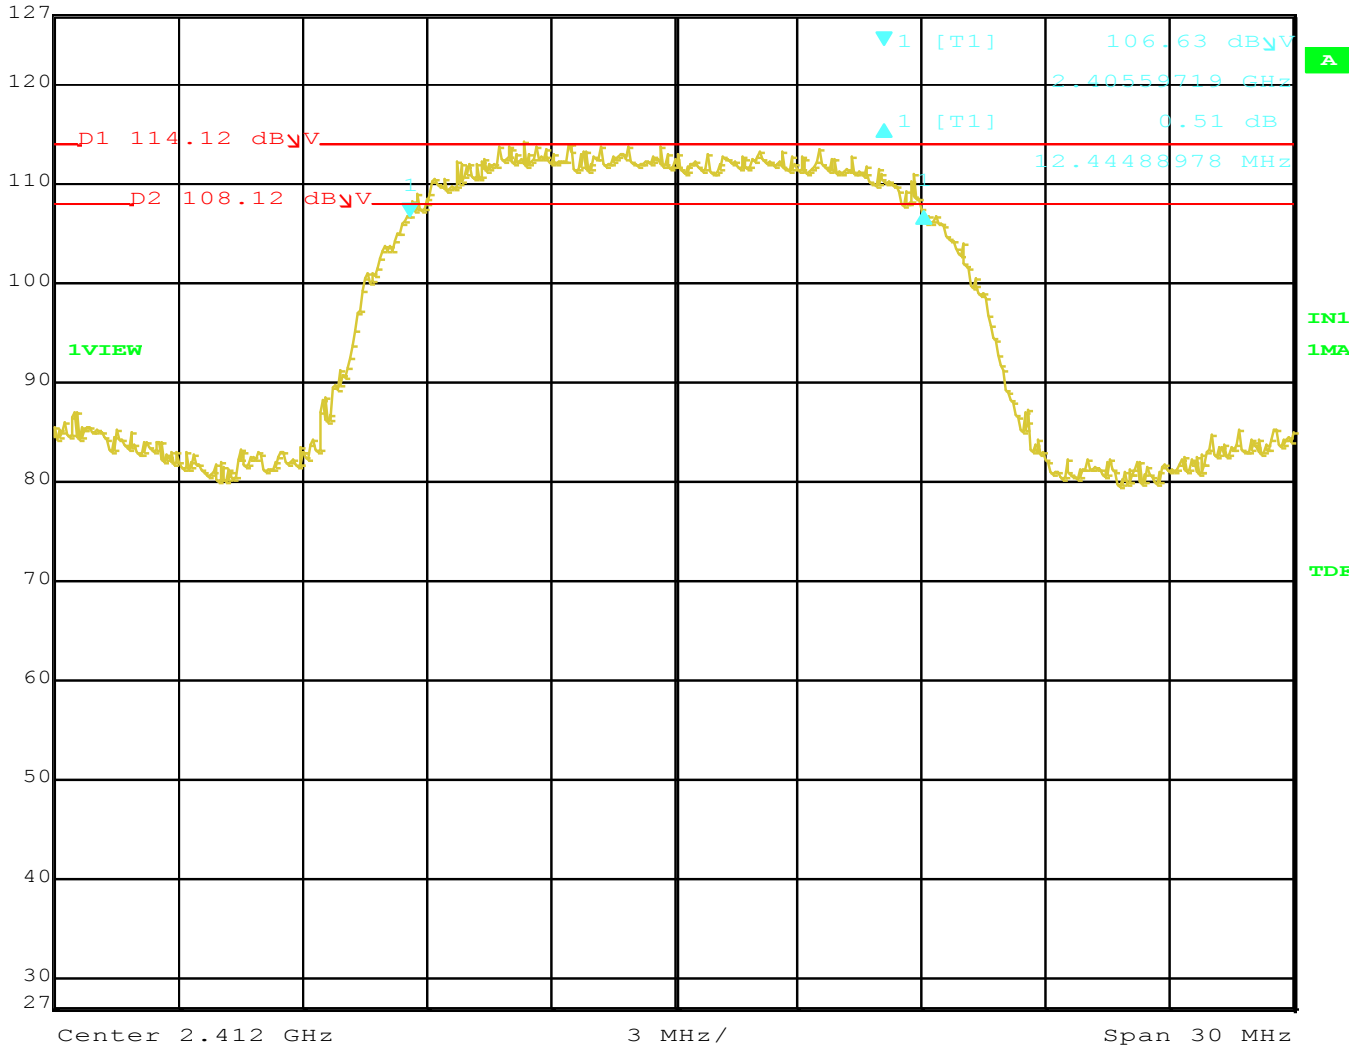

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, Low Current, 2412MHz.
 Date: 15.JUL.2015 13:21:23




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 0.31 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 12.14428858 MHz | SWT | 7.5 ms | Unit | dB μ V |

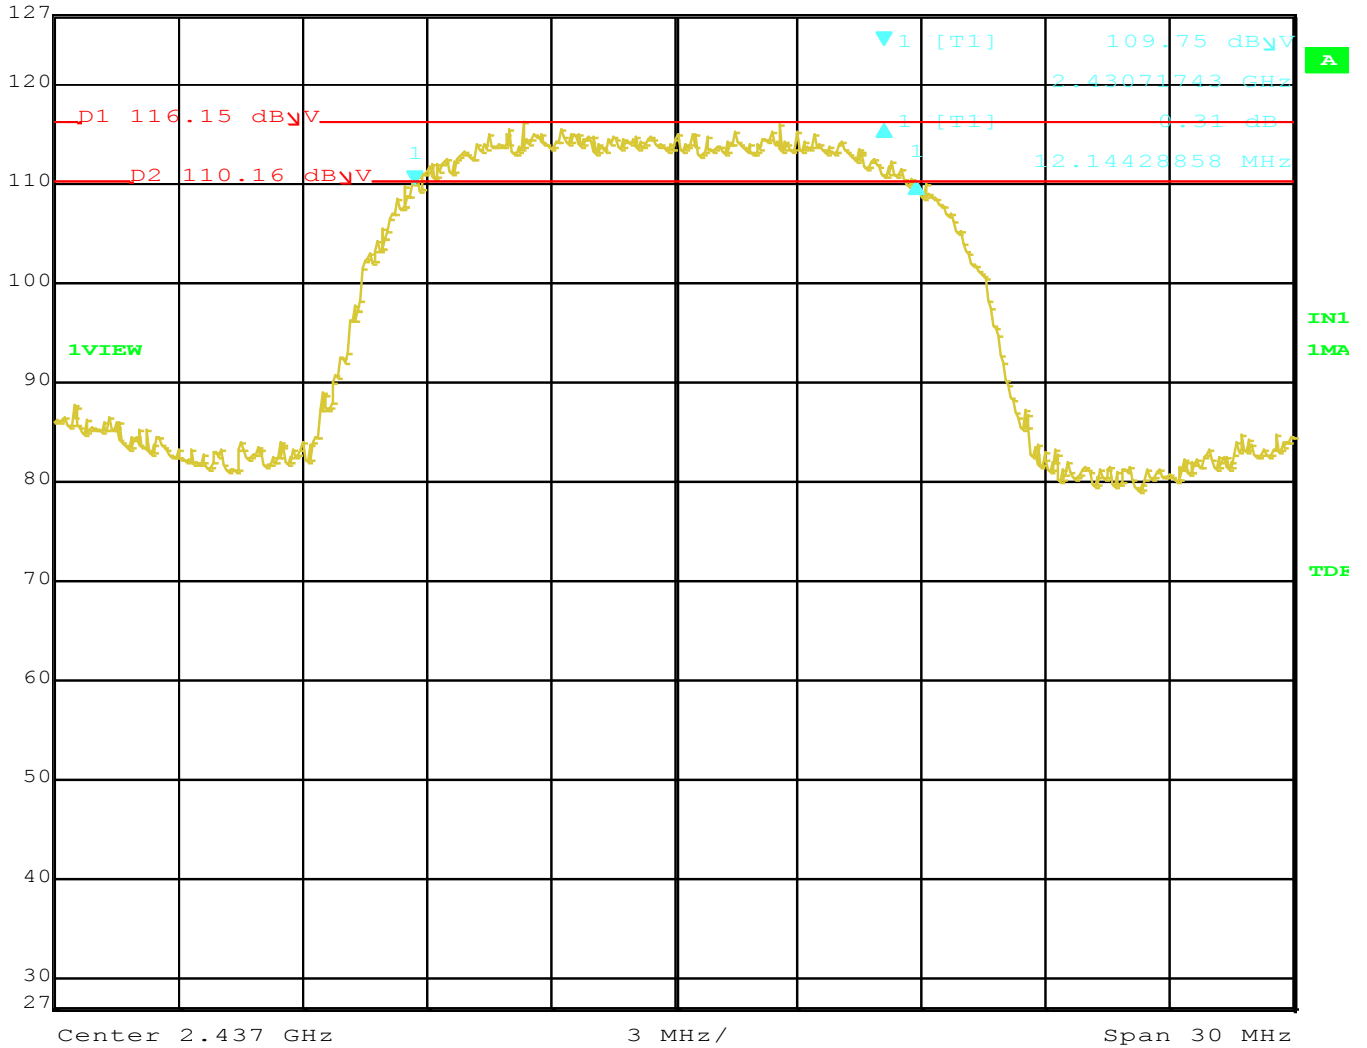

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, Low Current, 2437MHz.
 Date: 15.JUL.2015 13:19:48




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 0.49 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 12.14428858 MHz | SWT | 7.5 ms | Unit | dB μ V |

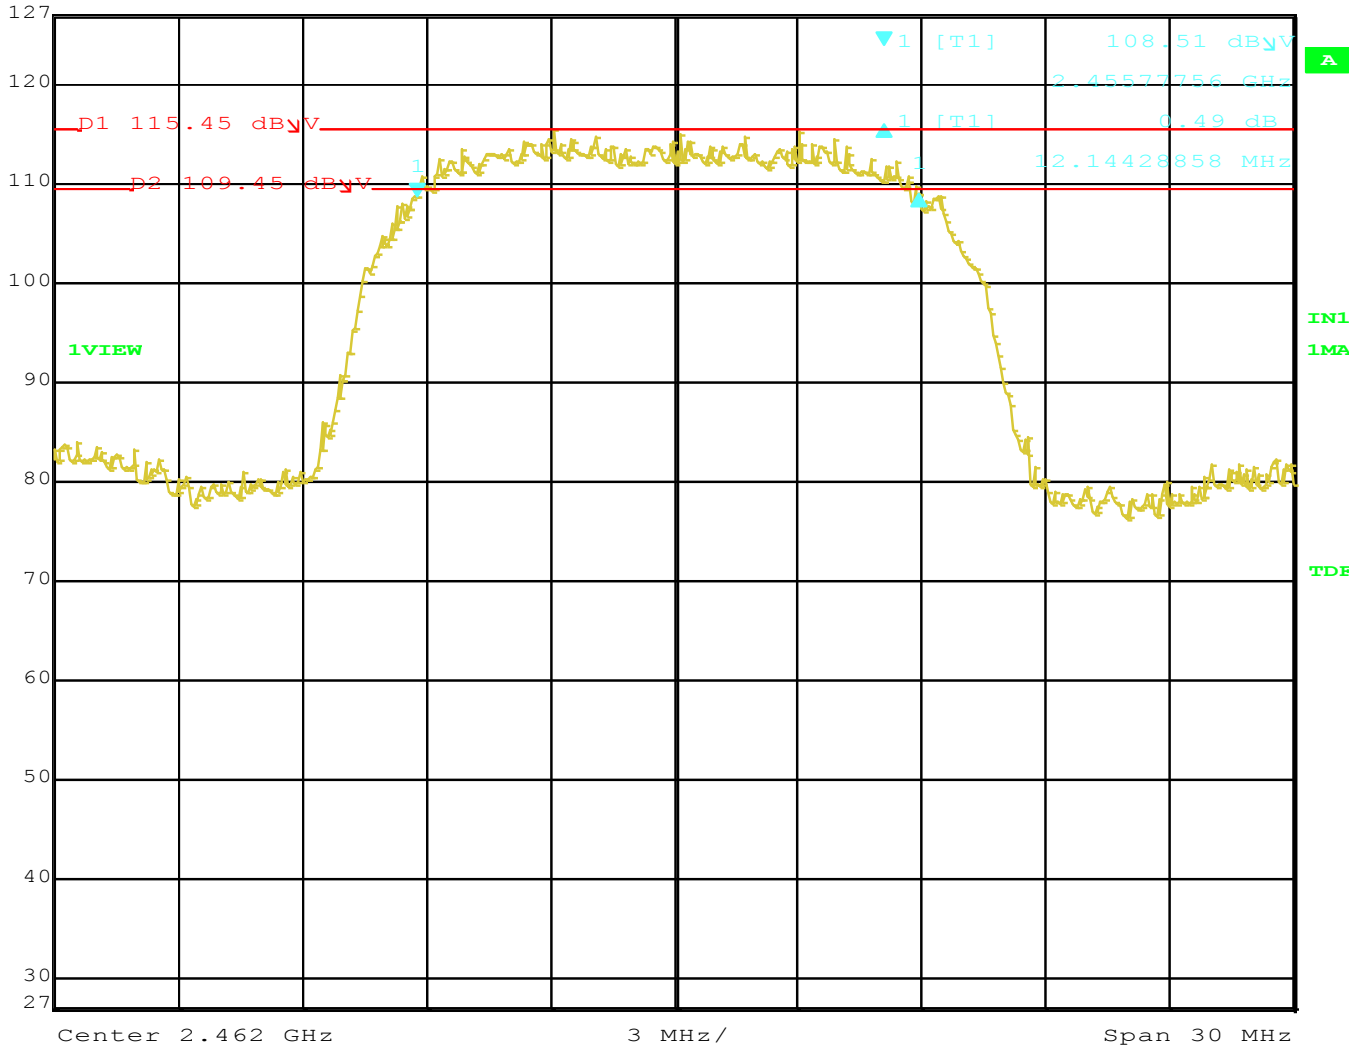

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11b, Low Current, 2462MHz.
 Date: 15.JUL.2015 13:16:02



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

802.11g MODE

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Normal Current.

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 16052.10 | 500.00 | 15552.10 | Peak | |
| 2437 | 16472.95 | 500.00 | 15972.95 | Peak | |
| 2462 | 16232.46 | 500.00 | 15732.46 | Peak | |

FCC 15.247


Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Low Current.


Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 16472.95 | 500.00 | 15972.95 | Peak | |
| 2437 | 16472.95 | 500.00 | 15972.95 | Peak | |
| 2462 | 16472.95 | 500.00 | 15972.95 | Peak | |





 Max/Ref Lvl Delta 1 [T2] RBW 100 kHz RF Att 30 dB
 127 dB μ V 0.86 dB VBW 300 kHz
 127 dB μ V 16.05210421 MHz SWT 7.5 ms Unit dB μ V

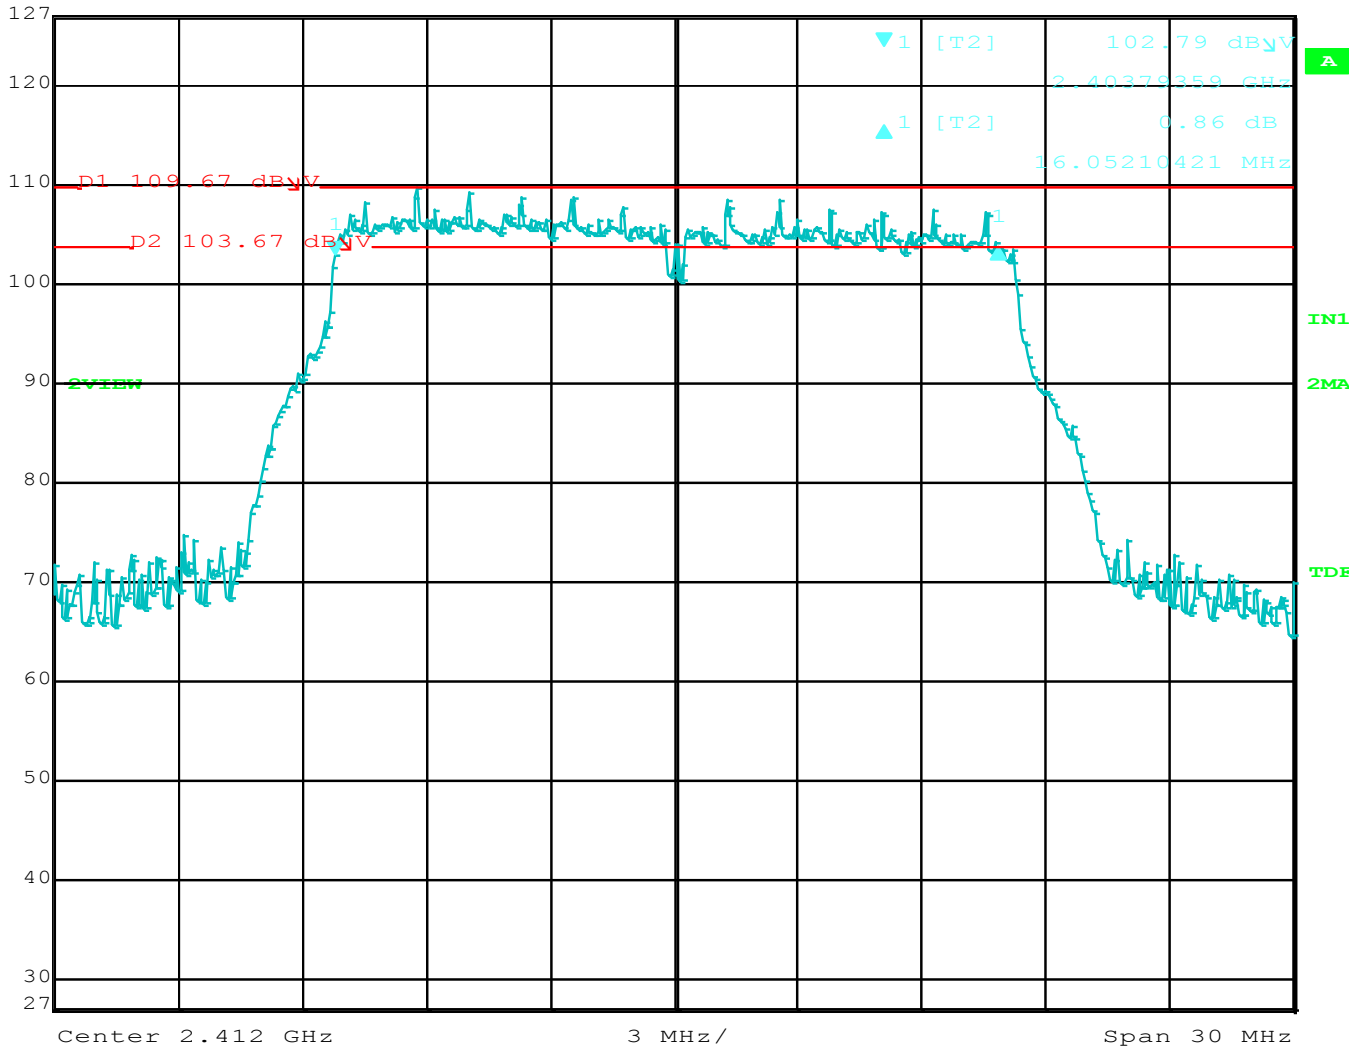

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, 2412MHz.
 Date: 15.JUL.2015 13:33:24



| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | -0.73 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 16.47294589 MHz | SWT | 7.5 ms | Unit | dB μ V |

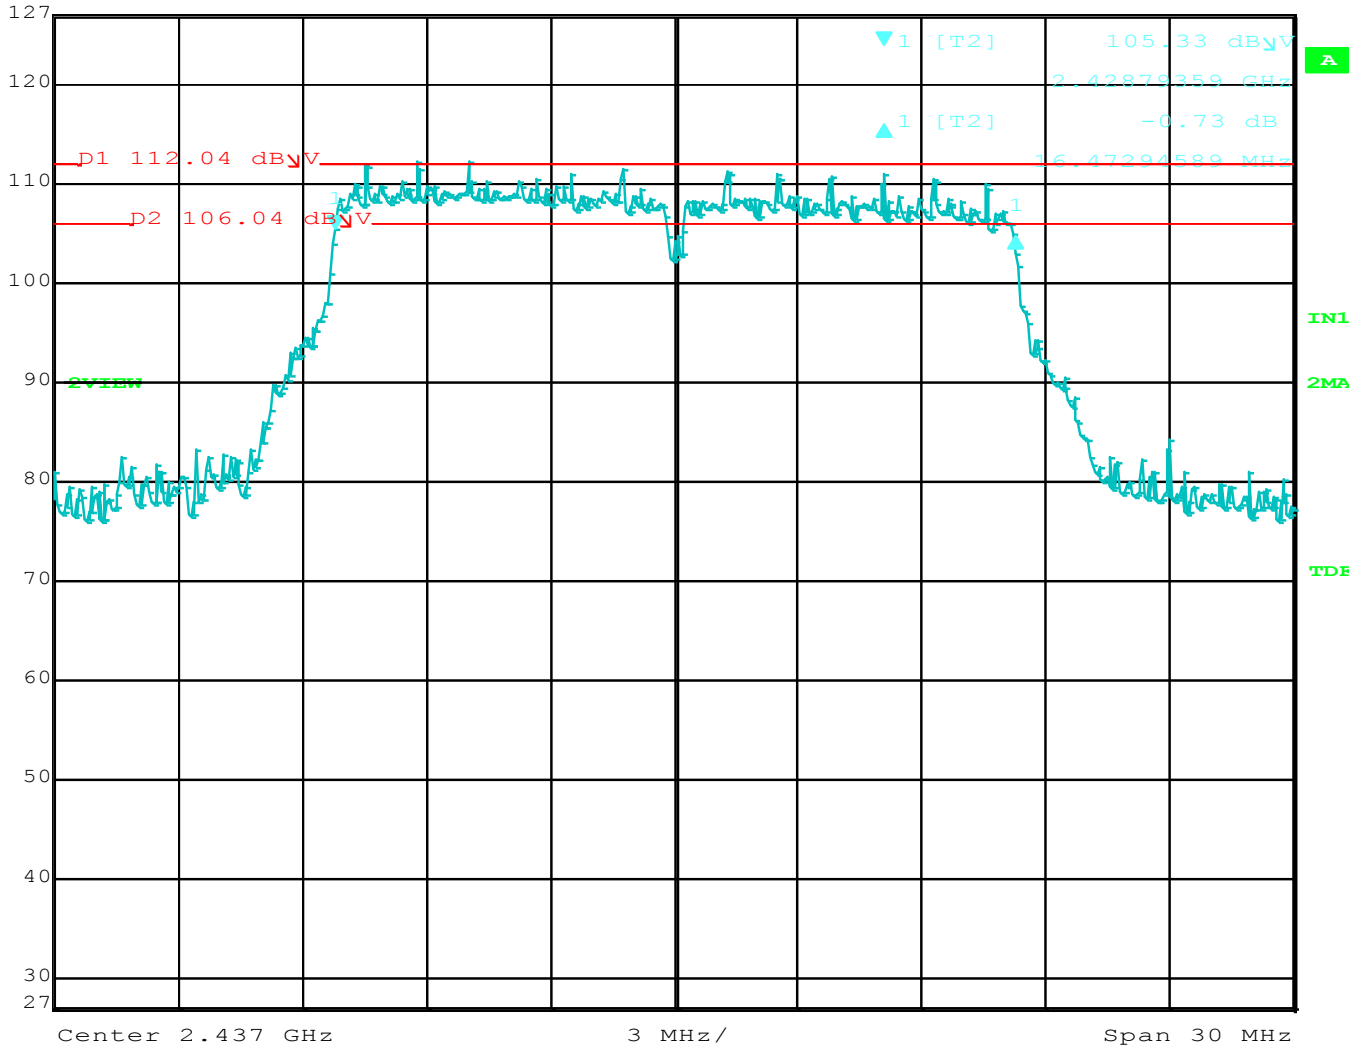

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, 2437MHz.
 Date: 15.JUL.2015 13:32:01




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 0.06 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 16.23246493 MHz | SWT | 7.5 ms | Unit | dB μ V |

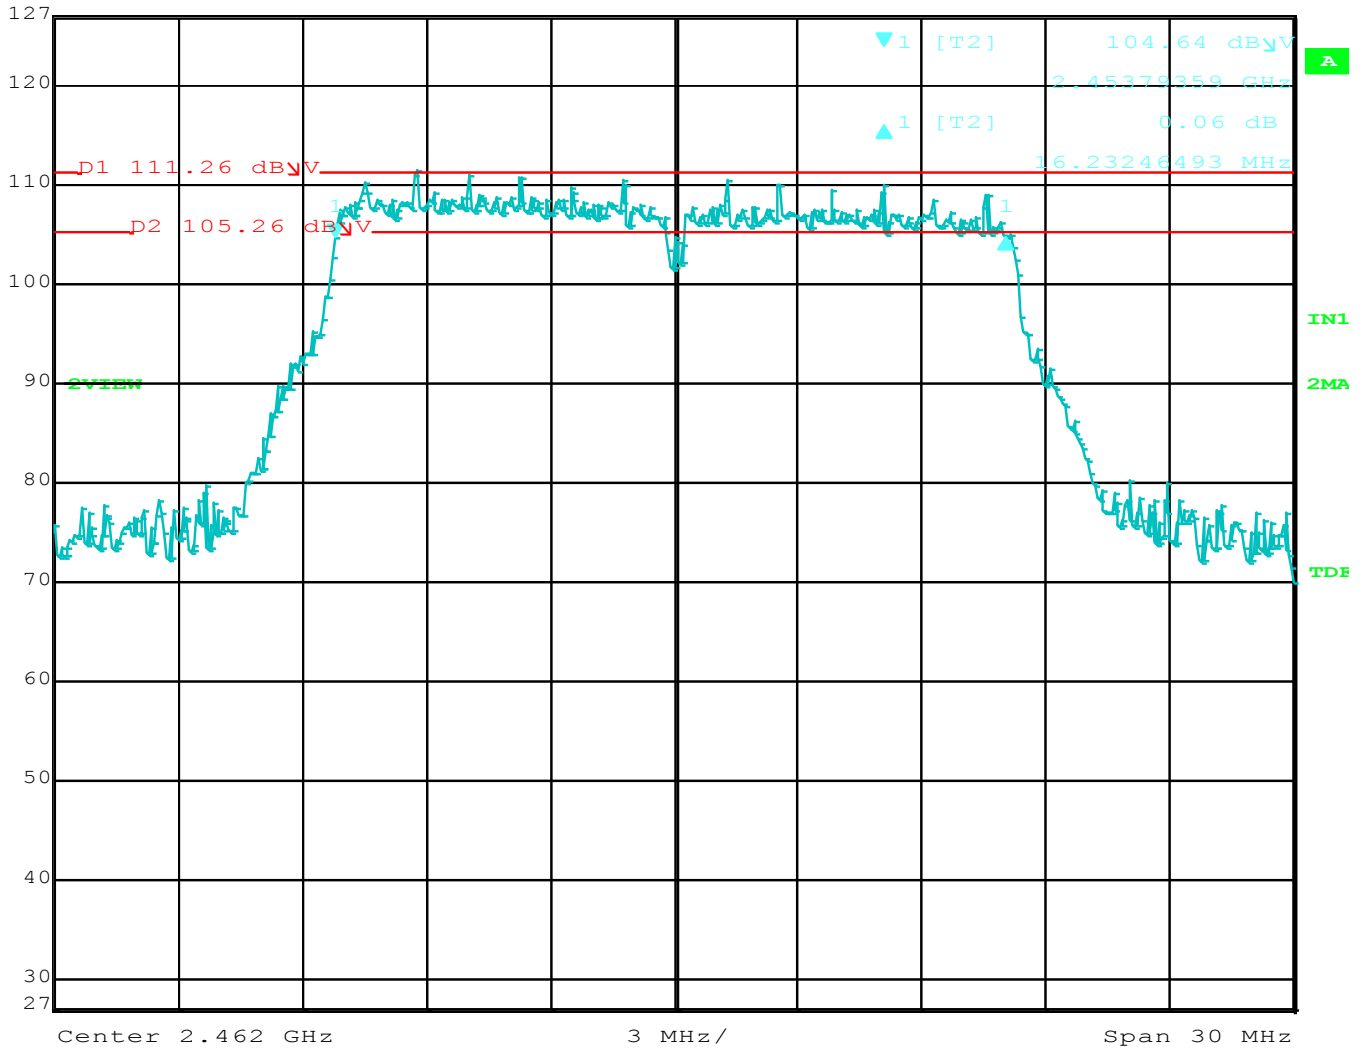

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, 2462MHz.
 Date: 15.JUL.2015 13:30:31




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | -0.19 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 16.47294589 MHz | SWT | 7.5 ms | Unit | dB μ V |

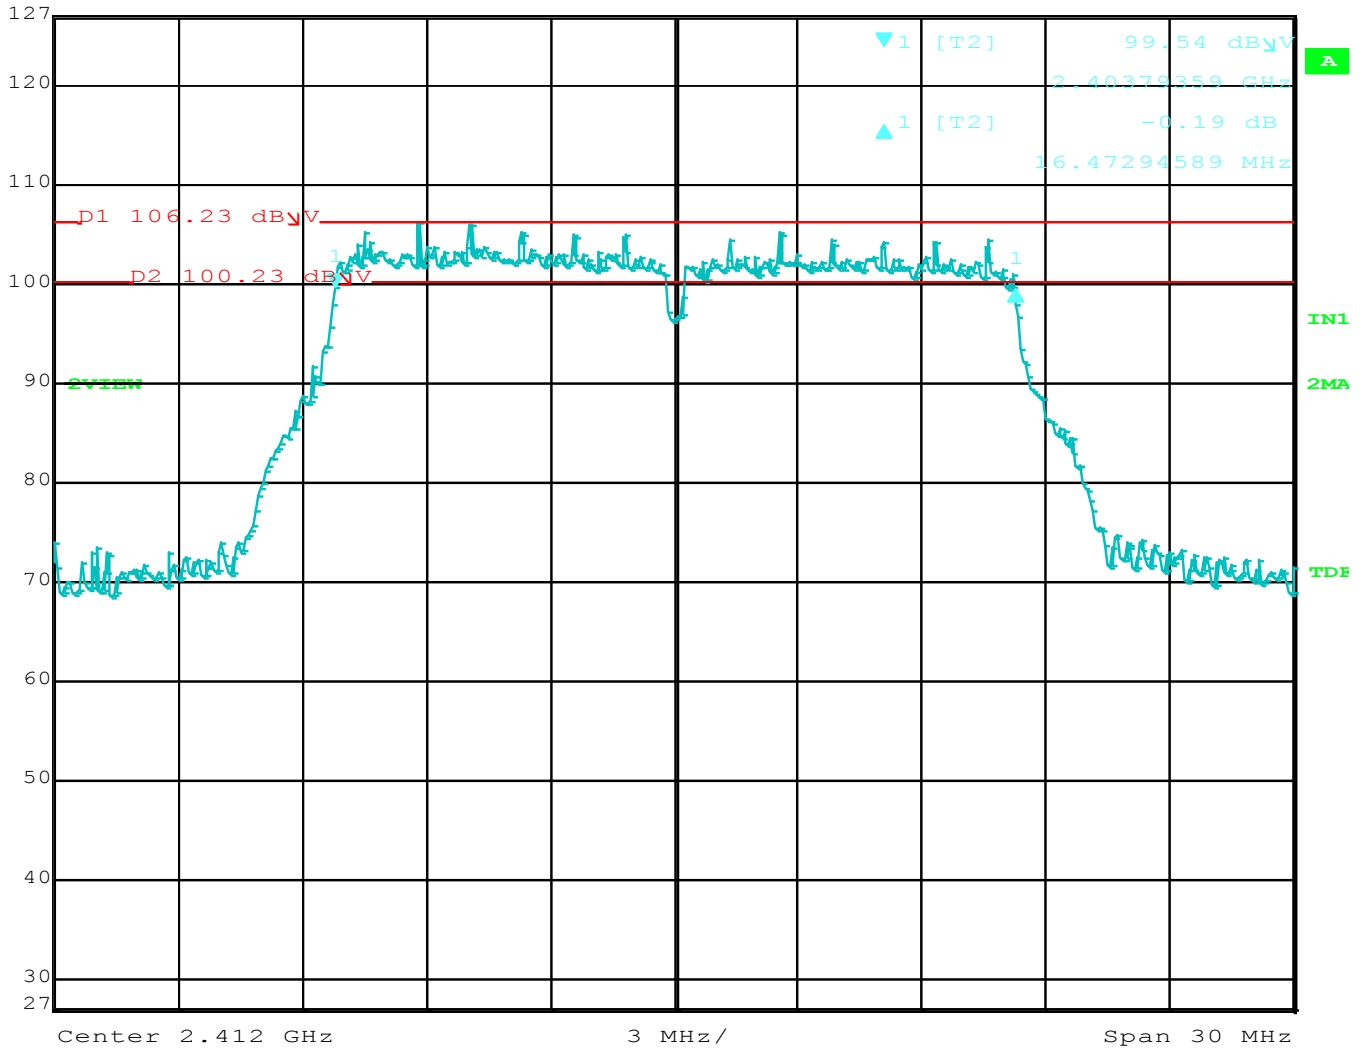


Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, Low Current, 2412MHz.
 Date: 15.JUL.2015 13:11:22





| | | | | | |
|----------------|-----------------|-----|---------|--------|------------|
| Max/Ref Lvl | Delta 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | -0.78 dB | VBW | 300 kHz | | |
| 127 dB μ V | 16.47294589 MHz | SWT | 7.5 ms | Unit | dB μ V |

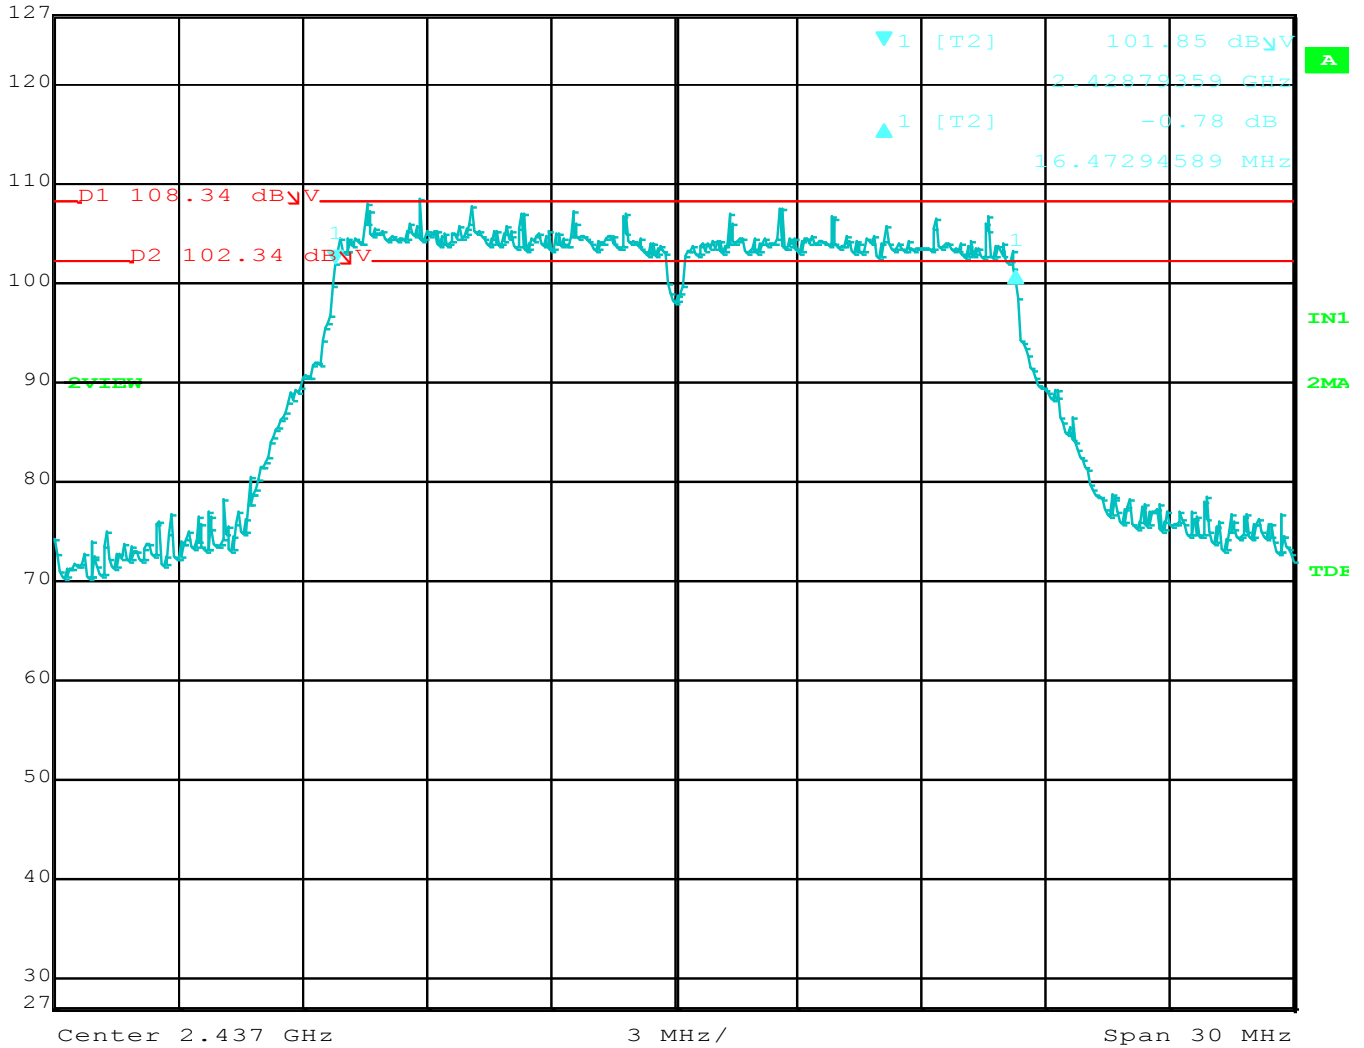

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, Low Current, 2437MHz.
 Date: 15.JUL.2015 13:12:46




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 0.14 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 16.47294589 MHz | SWT | 7.5 ms | Unit | dB μ V |

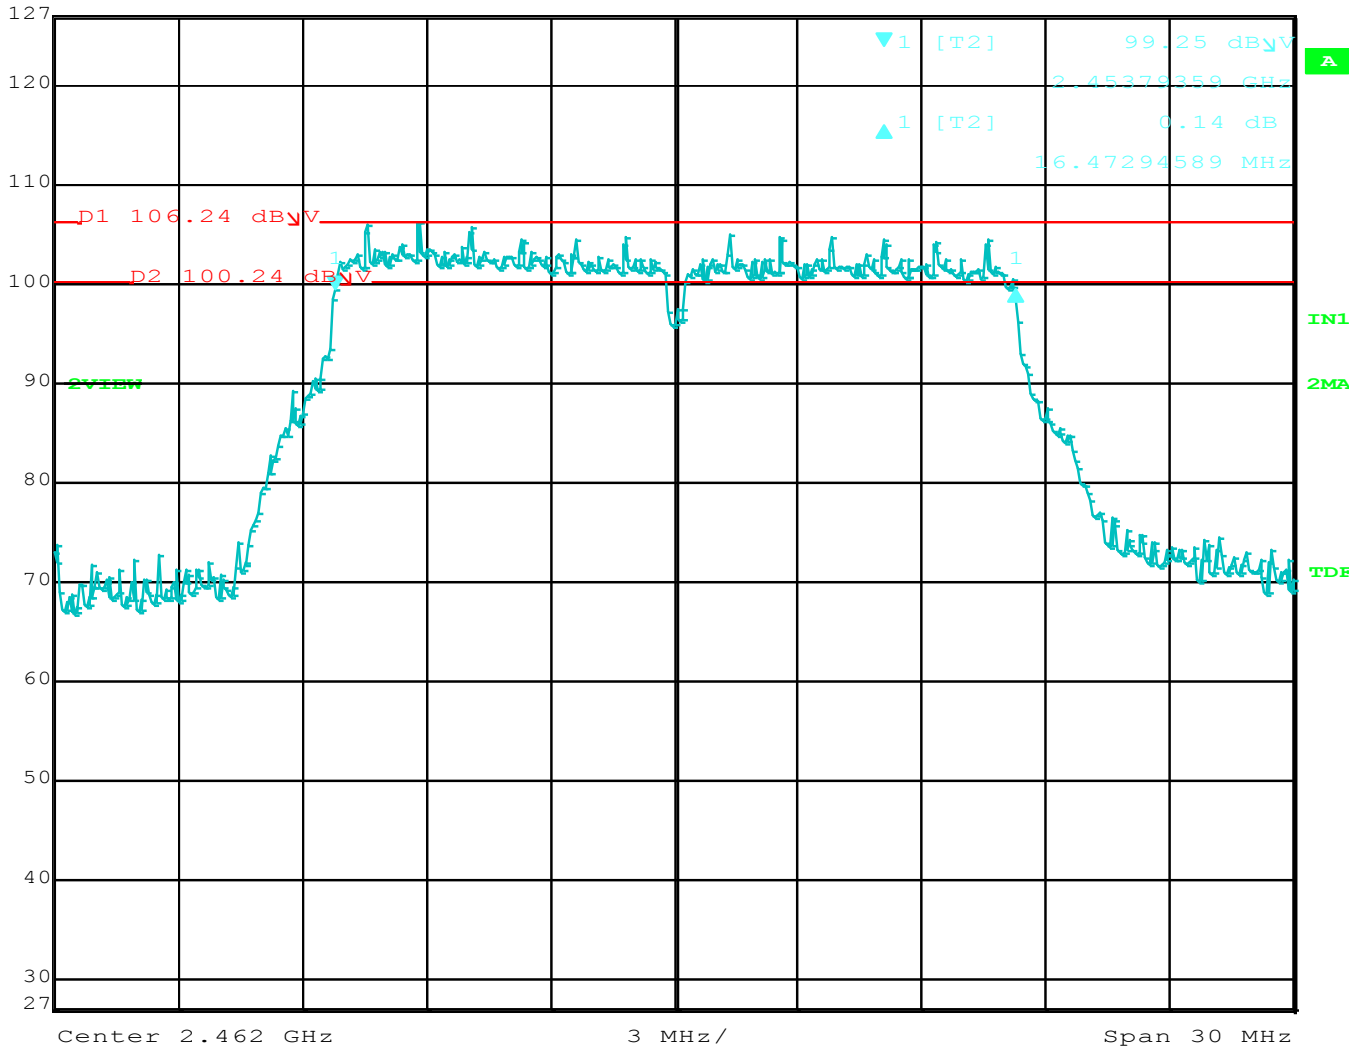

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11g, Low Current, 2462MHz.
 Date: 15.JUL.2015 13:14:06



802.11n MODE

FCC 15.247

Company: Atmel Corporation Date: 7/10/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Normal Current

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 17434.87 | 500.00 | 16934.87 | Peak | |
| 2437 | 17194.39 | 500.00 | 16694.39 | Peak | |
| 2462 | 17434.87 | 500.00 | 16934.87 | Peak | |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Low Current


Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

| Freq. (MHz) | Measured BW (kHz) | Limit (Min) (kHz) | Margin (kHz) | Peak / QP / Avg | Comments |
|-------------|-------------------|-------------------|--------------|-----------------|----------|
| 2412 | 17494.99 | 500.00 | 16994.99 | Peak | |
| 2437 | 17494.99 | 500.00 | 16994.99 | Peak | |
| 2462 | 17735.47 | 500.00 | 17235.47 | Peak | |




 Max/Ref Lvl Delta 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dB μ V 0.14 dB VBW 300 kHz
 127 dB μ V 17.43486974 MHz SWT 7.5 ms Unit dB μ V

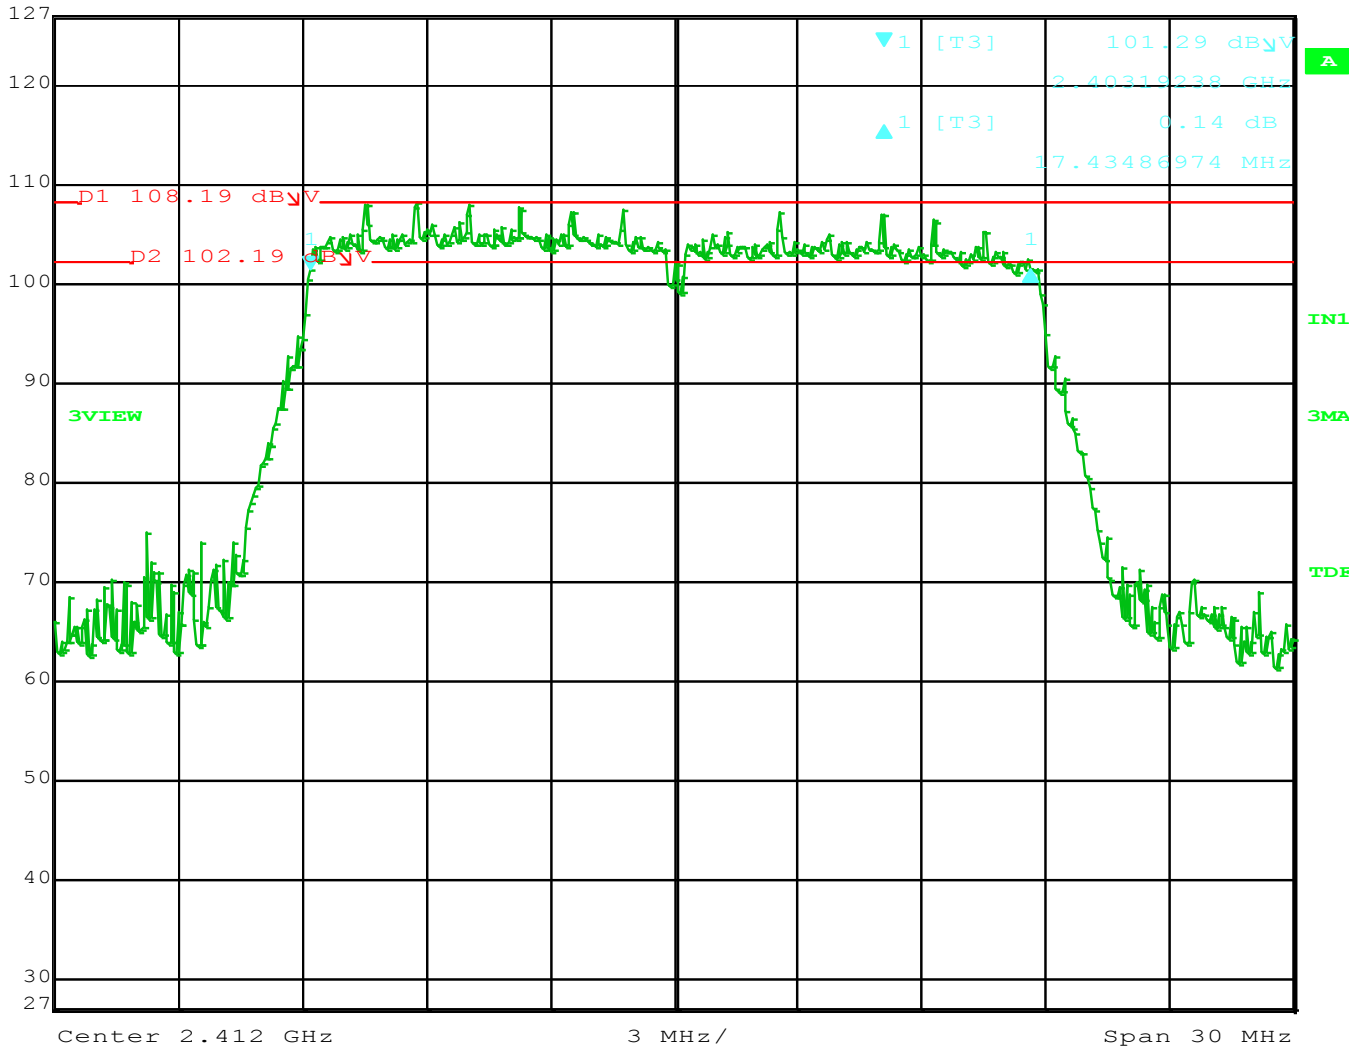

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, 2412MHz.
 Date: 15.JUL.2015 13:35:51




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 0.42 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 17.19438878 MHz | SWT | 7.5 ms | Unit | dB μ V |

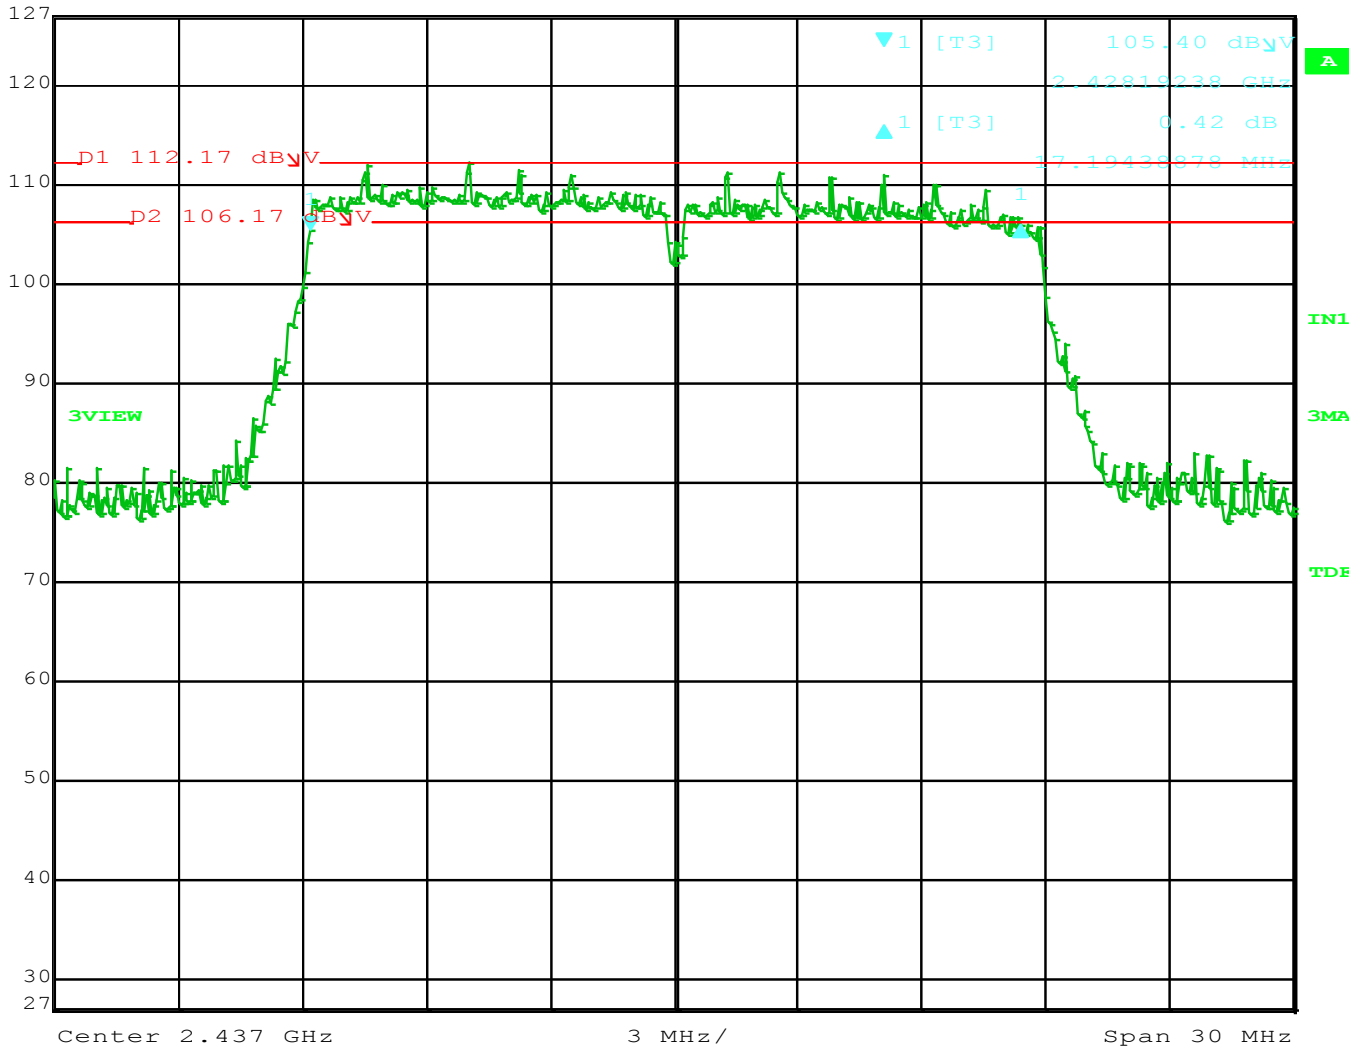

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, 2437MHz.
 Date: 15.JUL.2015 13:37:50




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Max/Ref Lvl Delta 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dBμV -0.45 dB VBW 300 kHz
 127 dBμV 17.43486974 MHz SWT 7.5 ms Unit dBμV

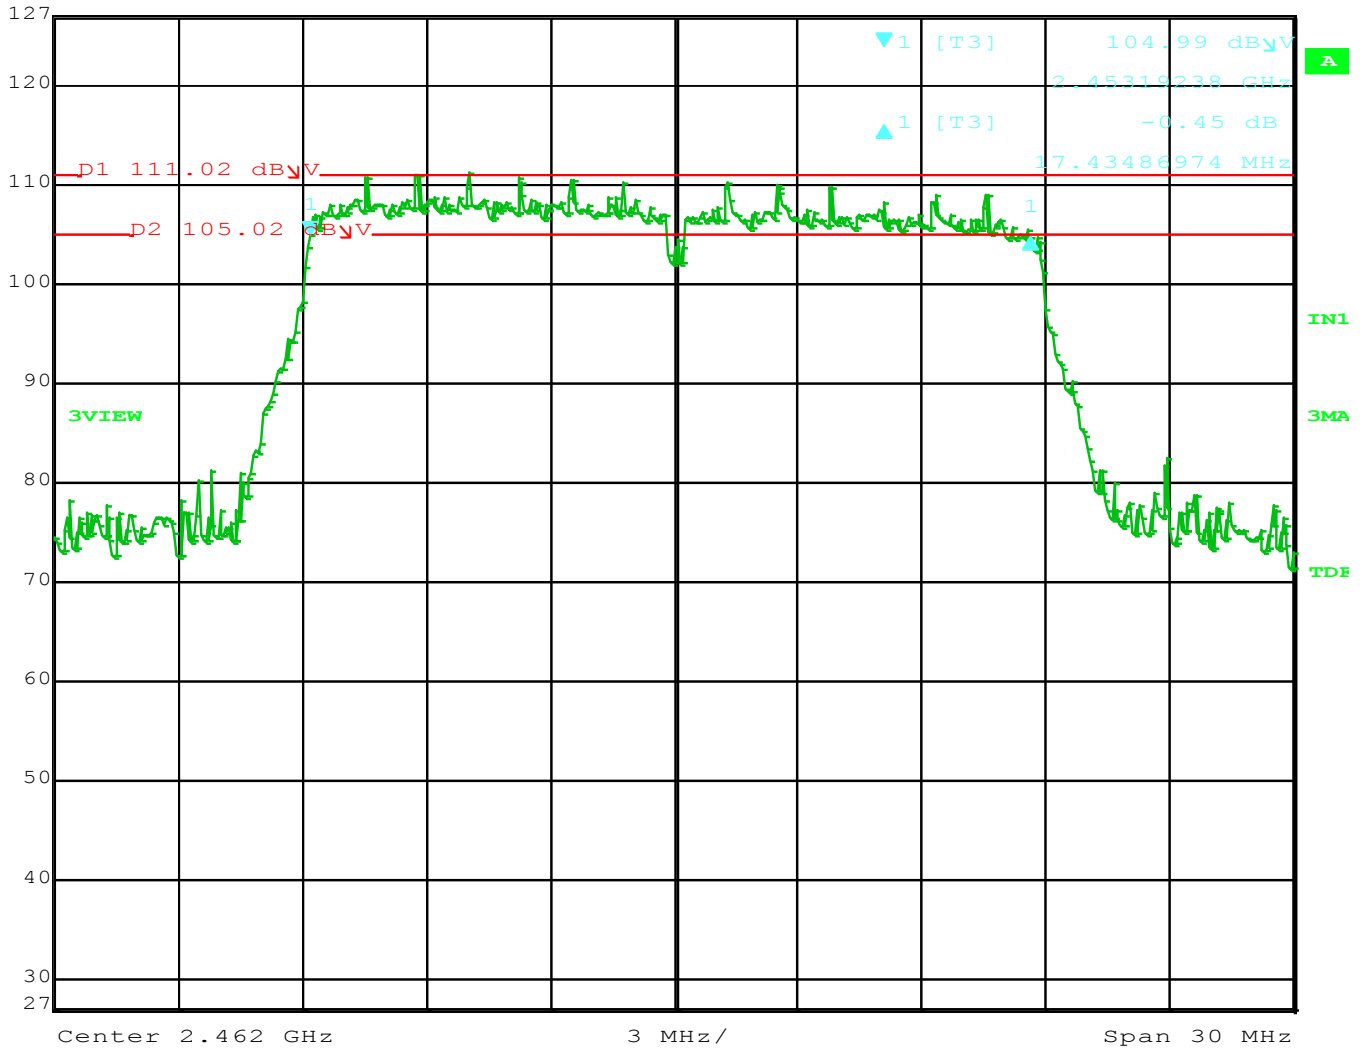

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, 2462MHz.
 Date: 15.JUL.2015 13:39:14




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400


| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | -0.26 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 17.49498998 MHz | SWT | 7.5 ms | Unit | dB μ V |

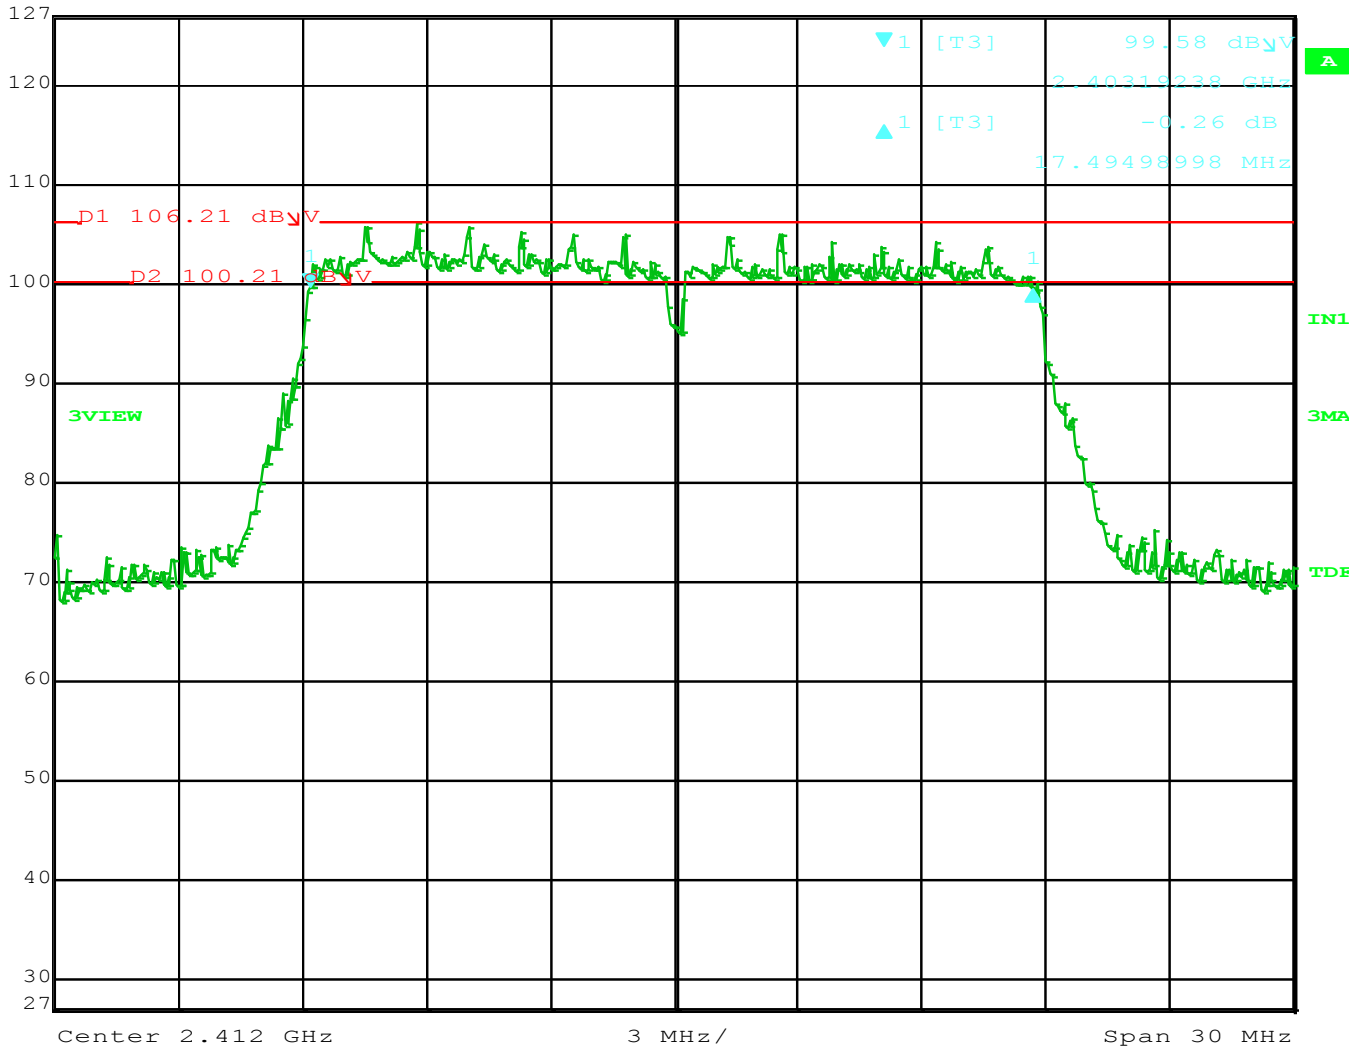

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, Low Current, 2412MHz.
 Date: 15.JUL.2015 13:08:49



Max/Ref Lvl Delta 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dB μ V -0.34 dB VBW 300 kHz
 127 dB μ V 17.49498998 MHz SWT 7.5 ms Unit dB μ V

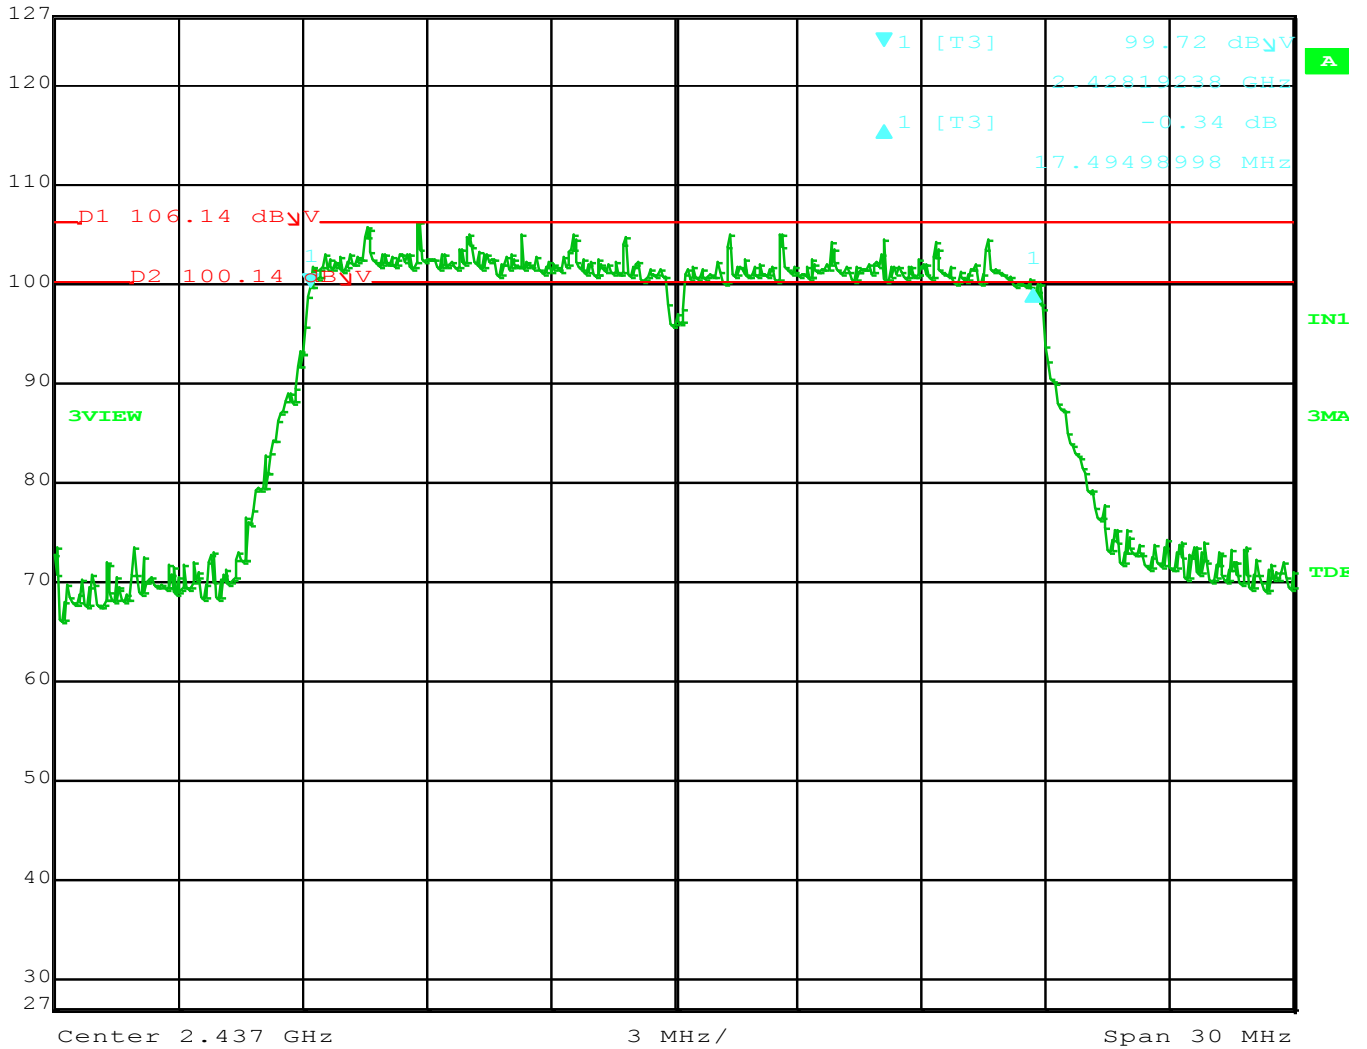

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, Low Current, 2437MHz.
 Date: 15.JUL.2015 13:07:09




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-----------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Delta 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | -2.50 dB | VBW | 300 kHz | | |
| | 127 dB μ V | 17.73547094 MHz | SWT | 7.5 ms | Unit | dB μ V |

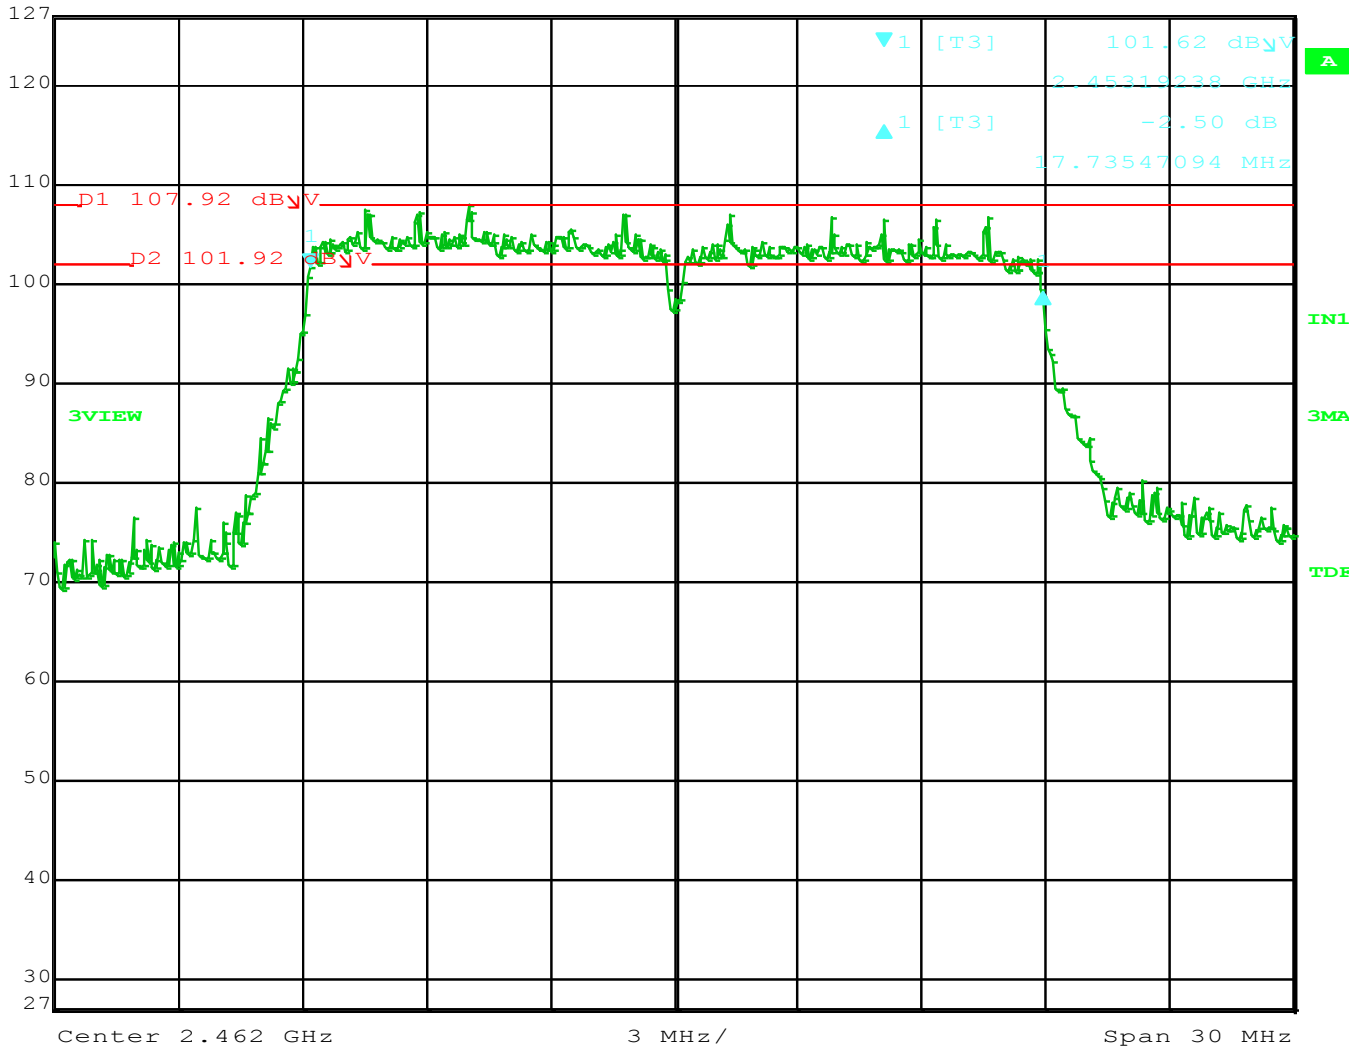

Title: SAMW25-MR210P.
 Comment A: DTS BW, 802.11n, Low Current, 2462MHz.
 Date: 15.JUL.2015 13:05:24



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

MAXIMUM PEAK CONDUCTED OUTPUT POWER


DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MAXIMUM PEAK CONDUCTED OUTPUT POWER**802.11b Mode****FCC 15.247**

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11b, Normal Current

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|------------------|
| 2412 | 21.48 | 30.00 | -8.52 | Peak | DigGain= Default |
| 2437 | 20.46 | 30.00 | -9.54 | Peak | DigGain= -8 |
| 2462 | 21.10 | 30.00 | -8.90 | Peak | DigGain= -7 |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11b, Low Current

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|------------------|
| 2412 | 19.64 | 30.00 | -10.36 | Peak | DigGain= Default |
| 2437 | 21.68 | 30.00 | -8.32 | Peak | DigGain= -9 |
| 2462 | 21.57 | 30.00 | -8.43 | Peak | DigGain= -10 |



MAXIMUM PEAK CONDUCTED OUTPUT POWER**802.11g Mode****FCC 15.247**

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Normal Current.

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|-------------|
| 2412 | 22.54 | 30.00 | -7.46 | Peak | DigGain= -9 |
| 2437 | 23.33 | 30.00 | -6.67 | Peak | DigGain= -6 |
| 2462 | 22.56 | 30.00 | -7.44 | Peak | DigGain= -9 |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Low Current.

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|-------------|
| 2412 | 20.00 | 30.00 | -10.00 | Peak | DigGain= -5 |
| 2437 | 21.31 | 30.00 | -8.69 | Peak | DigGain= -3 |
| 2462 | 20.48 | 30.00 | -9.52 | Peak | DigGain= -5 |



MAXIMUM PEAK CONDUCTED OUTPUT POWER**802.11n Mode****FCC 15.247**

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Normal Current

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|------------------|
| 2412 | 22.07 | 30.00 | -7.93 | Peak | DigGain= -10 |
| 2437 | 23.39 | 30.00 | -6.61 | Peak | DigGain= Default |
| 2462 | 23.29 | 30.00 | -6.71 | Peak | DigGain= Default |

FCC 15.247

Company: Atmel Corporation Date:
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Low Current

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|-------------|-------------|-----------------|------------------|
| 2412 | 20.05 | 30.00 | -9.95 | Peak | DigGain= -5 |
| 2437 | 20.07 | 30.00 | -9.93 | Peak | DigGain= -5 |
| 2462 | 21.31 | 30.00 | -8.69 | Peak | DigGain= Default |



***MAXIMUM PEAK POWER SPECTRAL DENSITY LEVEL IN THE
FUNDAMENTAL EMISSION***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11b Mode

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11b

Compatible Electronics, Inc. FAC-3 (Lab R)

PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|------------------|
| 2412 | 113.04 | 115.00 | -1.96 | Peak | DigGain= Default |
| 2437 | 111.94 | 115.00 | -3.06 | Peak | DigGain= -8 |
| 2462 | 113.39 | 115.00 | -1.61 | Peak | DigGain= -7 |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
802.11b, Low
Mode: Current


Compatible Electronics, Inc. FAC-3 (Lab R)

PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|------------------|
| 2412 | 111.78 | 115.00 | -3.22 | Peak | DigGain= Default |
| 2437 | 112.88 | 115.00 | -2.12 | Peak | DigGain= -9 |
| 2462 | 113.10 | 115.00 | -1.90 | Peak | DigGain= -10 |



| | | | | | | |
|--|----------------|-------------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| | 127 dB μ V | 113.04 dB μ V | VBW | 200 kHz | | |
| | 127 dB μ V | 2.40887875 GHz | SWT | 18.5 ms | Unit | dB μ V |

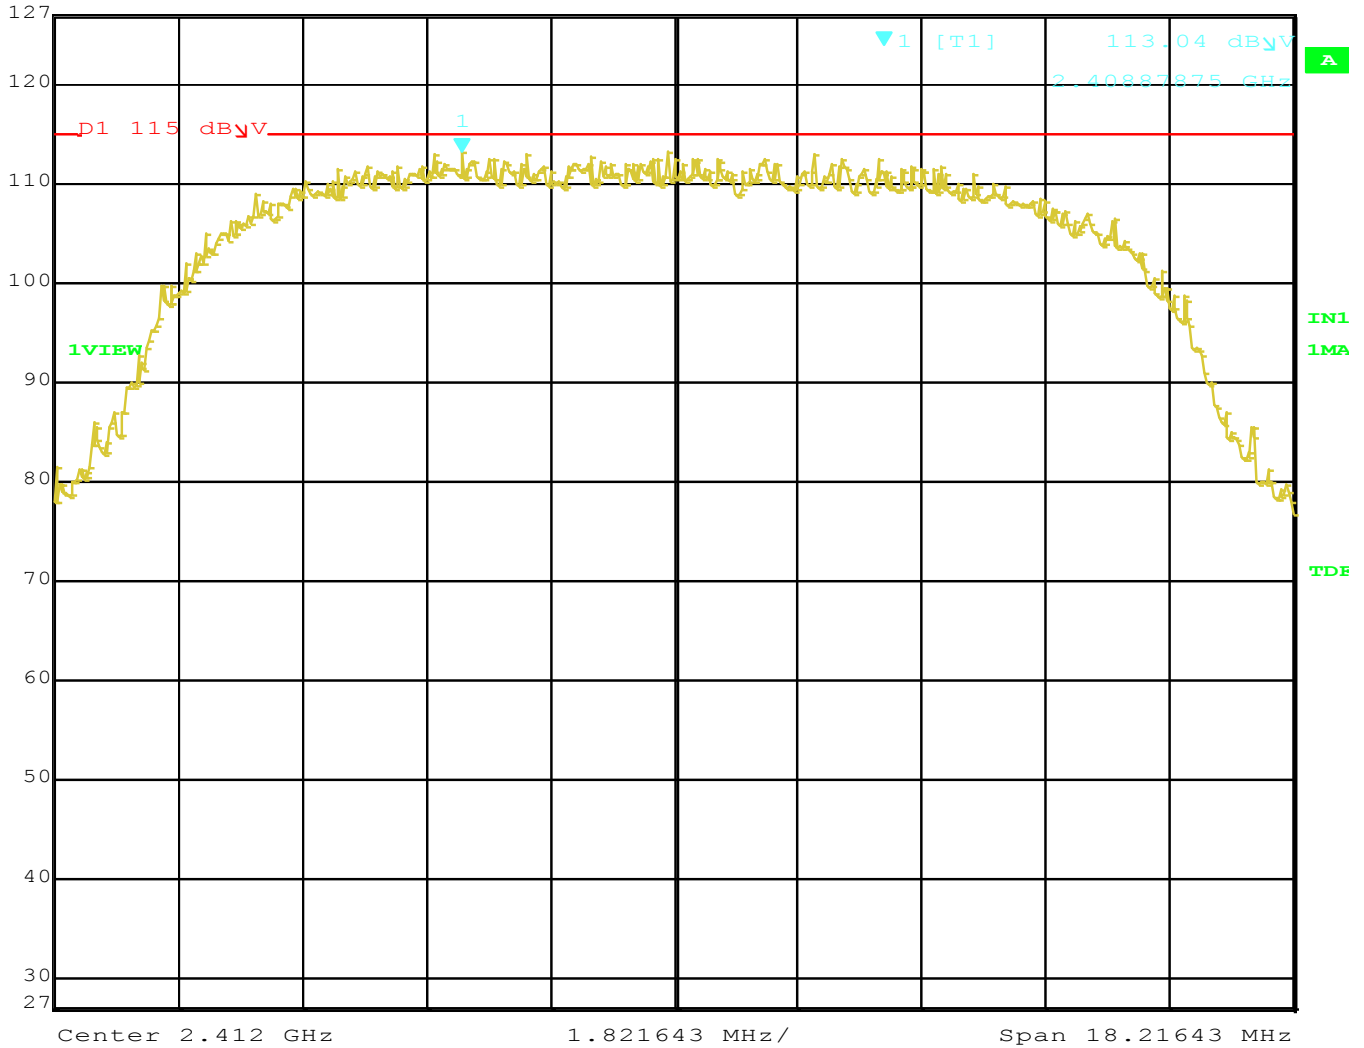

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, 2412MHz.
 Date: 15.JUL.2015 14:12:38




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|---|----------------|-------------------|-----|---------|--------|------------|
|  | Max/Ref Lvl | Marker 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| | 127 dB μ V | 111.94 dB μ V | VBW | 200 kHz | | |
| | 127 dB μ V | 2.43559373 GHz | SWT | 18 ms | Unit | dB μ V |

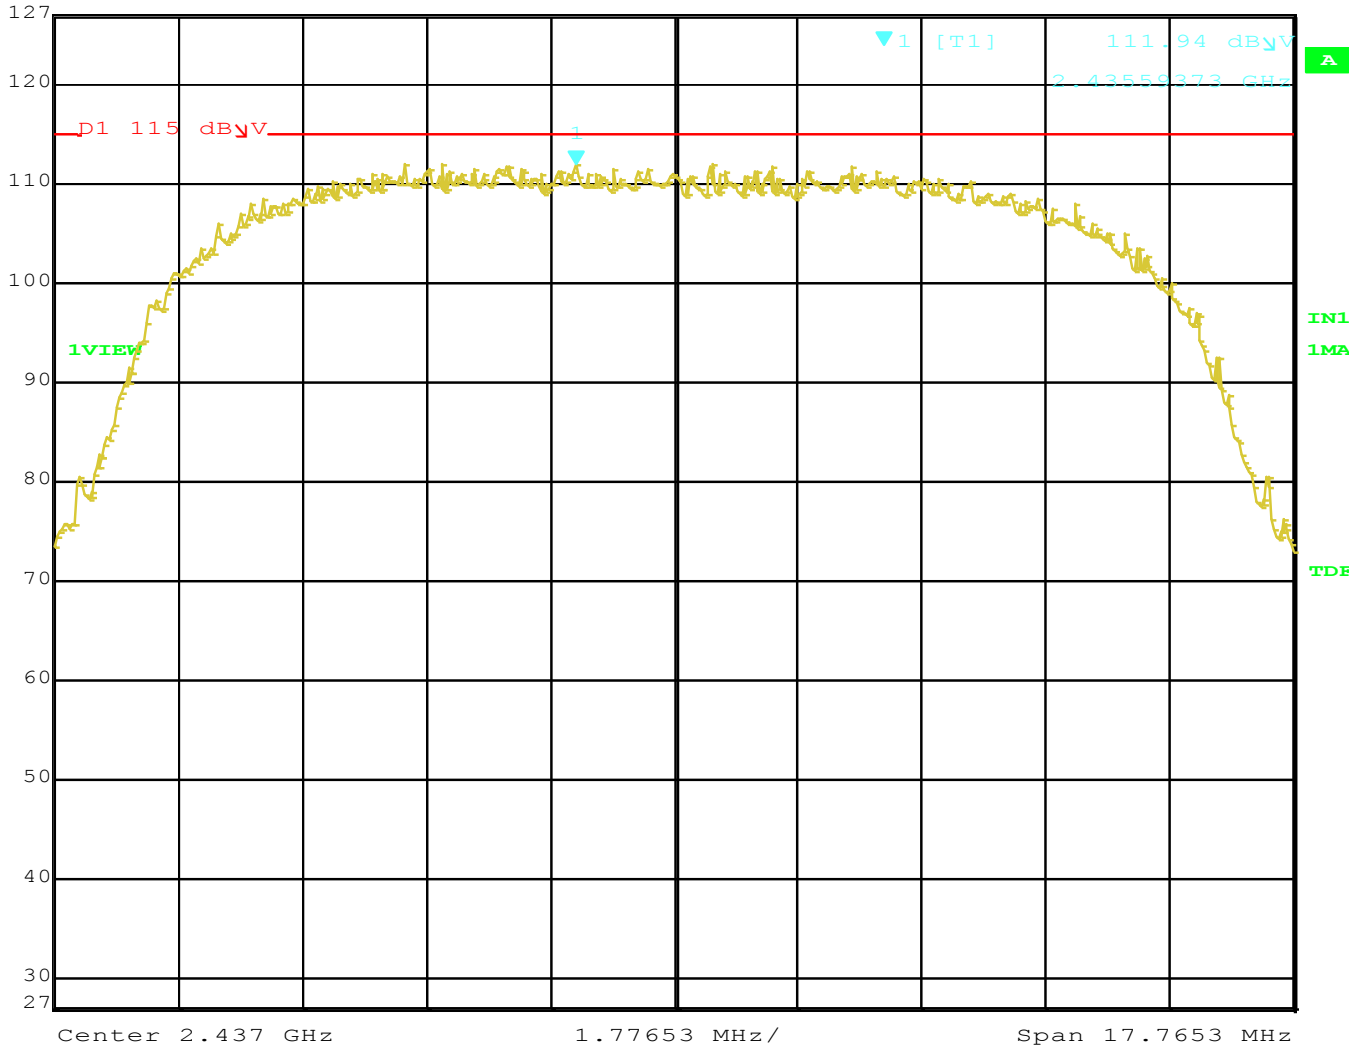

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, 2437MHz.
 Date: 15.JUL.2015 14:11:44




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Max/Ref Lvl Marker 1 [T1] RBW 50 kHz RF Att 30 dB
 127 dB μ V 113.39 dB μ V VBW 200 kHz
 127 dB μ V 2.45815676 GHz SWT 18 ms Unit dB μ V

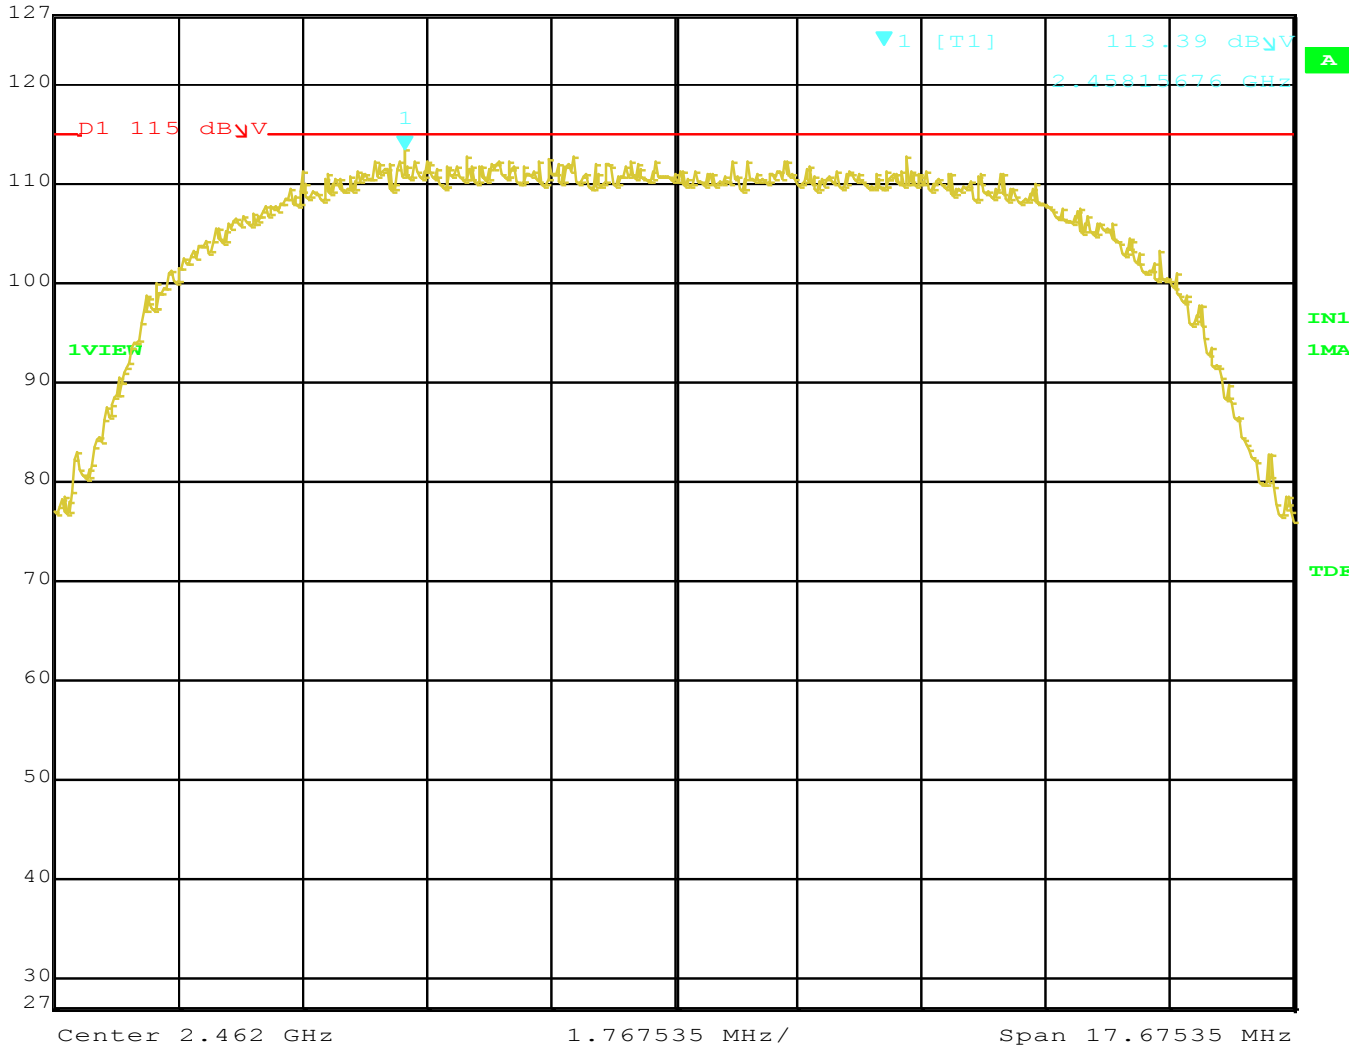

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, 2462MHz.
 Date: 15.JUL.2015 14:10:49




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|---|----------------|-------------------|-----|---------|--------|------------|
|  | Max/Ref Lvl | Marker 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| | 127 dB μ V | 111.78 dB μ V | VBW | 200 kHz | | |
| | 127 dB μ V | 2.41254244 GHz | SWT | 19 ms | Unit | dB μ V |

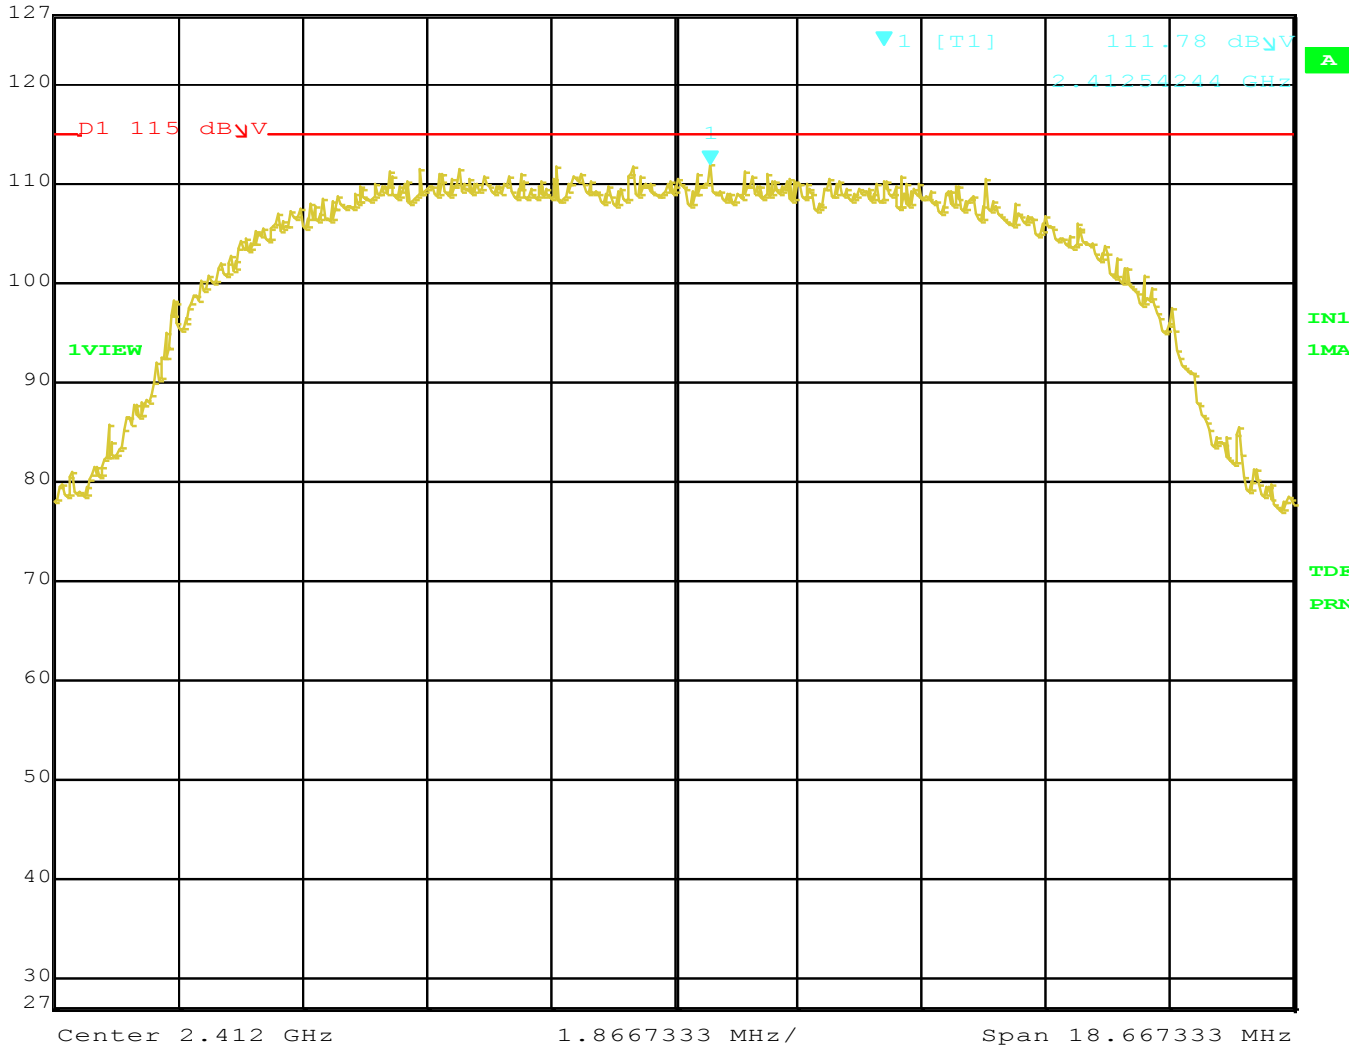

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, Low Current, 2412MHz.
 Date: 15.JUL.2015 14:18:06




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|---|----------------|-------------------|-----|---------|--------|------------|
|  | Max/Ref Lvl | Marker 1 [T1] | RBW | 50 kHz | RF Att | 30 dB |
| | 127 dB μ V | 112.88 dB μ V | VBW | 200 kHz | | |
| | 127 dB μ V | 2.43380574 GHz | SWT | 18.5 ms | Unit | dB μ V |

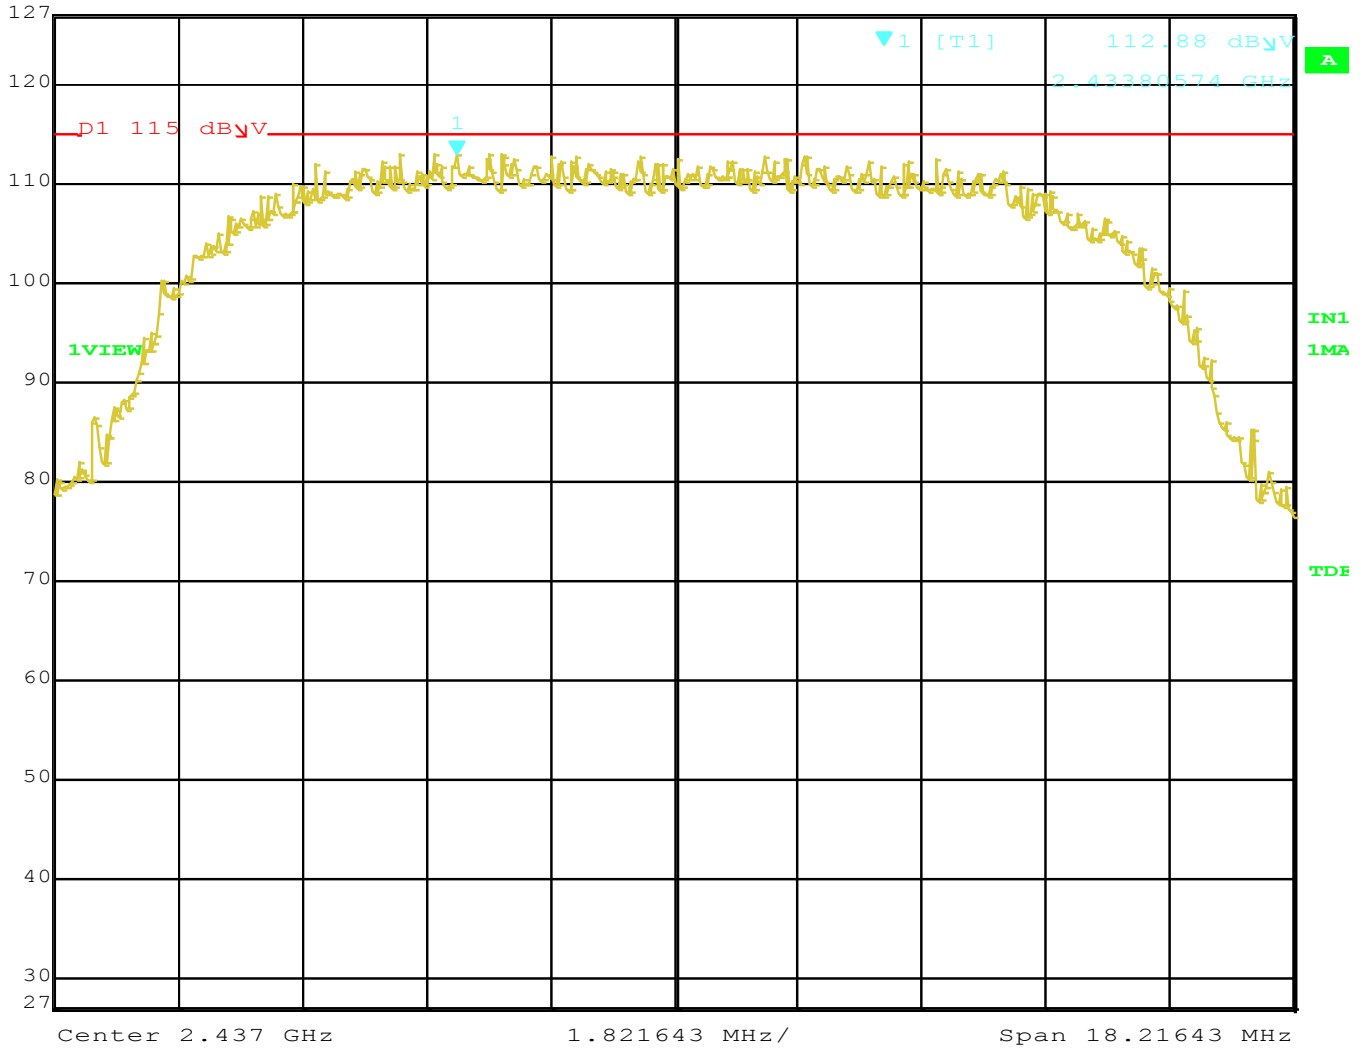

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, Low Current, 2437MHz.
 Date: 15.JUL.2015 14:19:47




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400


 Max/Ref Lvl Marker 1 [T1] RBW 50 kHz RF Att 30 dB
 127 dBμV 113.10 dBμV VBW 200 kHz
 127 dBμV 2.45895176 GHz SWT 18.5 ms Unit dBμV

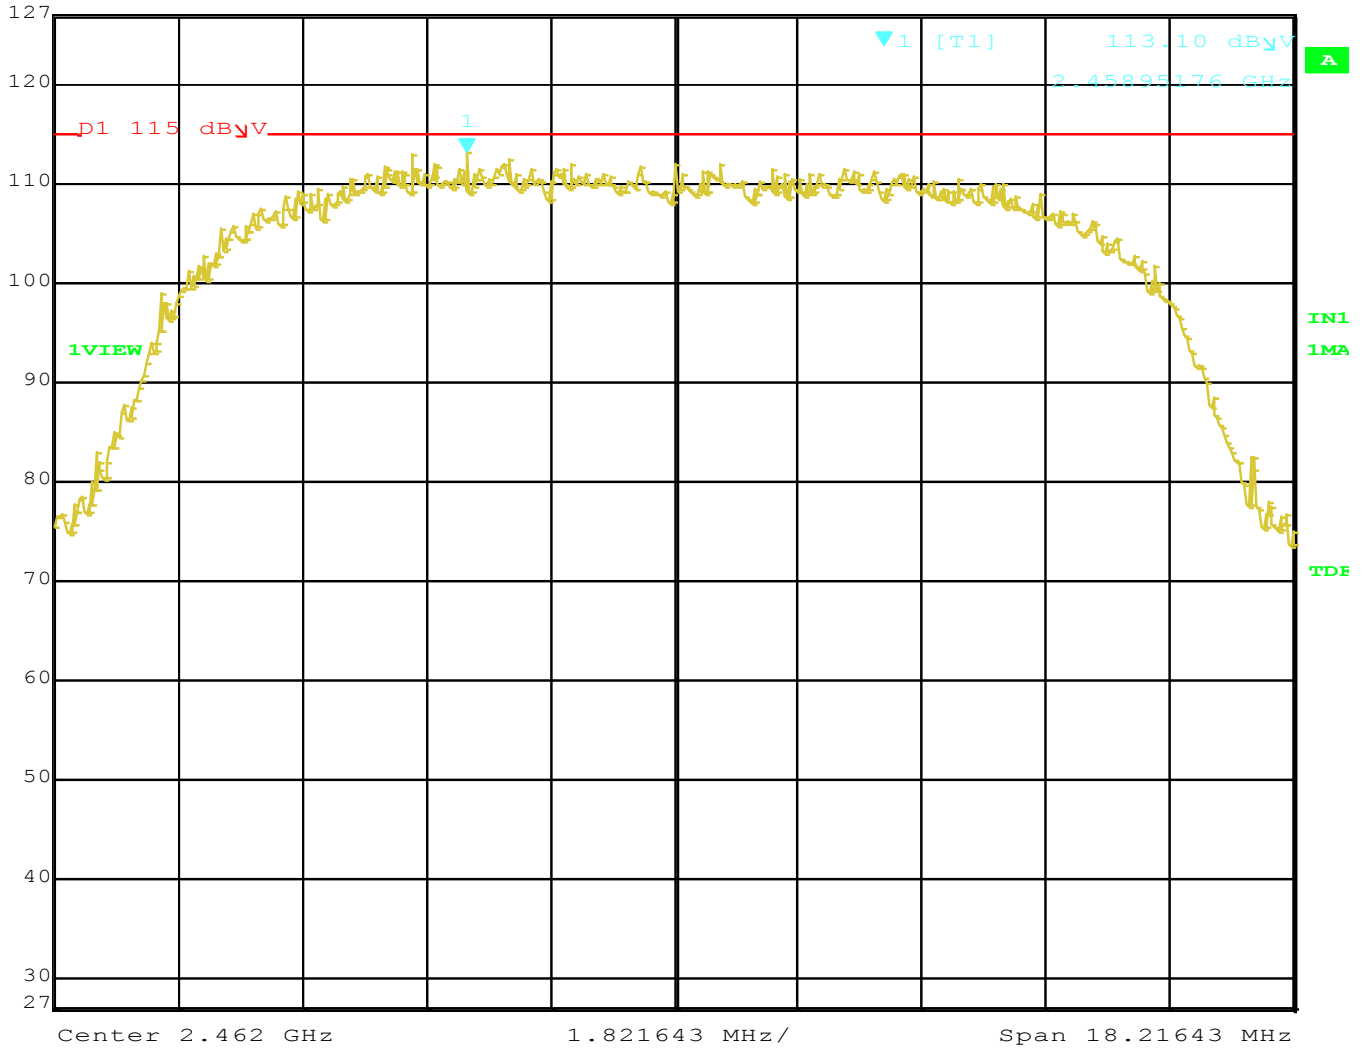

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11b, Low Current, 2462MHz.
 Date: 15.JUL.2015 14:20:57



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11g Mode

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Normal Current.

Compatible Electronics, Inc. FAC-3 (Lab R)

PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|-------------|
| 2412 | 109.65 | 115.00 | -5.35 | Peak | DigGain= -9 |
| 2437 | 112.62 | 115.00 | -2.38 | Peak | DigGain= -6 |
| 2462 | 111.31 | 115.00 | -3.69 | Peak | DigGain= -9 |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11g, Low Current.

Compatible Electronics, Inc. FAC-3 (Lab R)


PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|-------------|
| 2412 | 106.25 | 115.00 | -8.75 | Peak | DigGain= -5 |
| 2437 | 108.26 | 115.00 | -6.74 | Peak | DigGain= -3 |
| 2462 | 106.30 | 115.00 | -8.70 | Peak | DigGain= -5 |





| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 109.65 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.40575126 GHz | SWT | 6.5 ms | Unit | dB μ V |

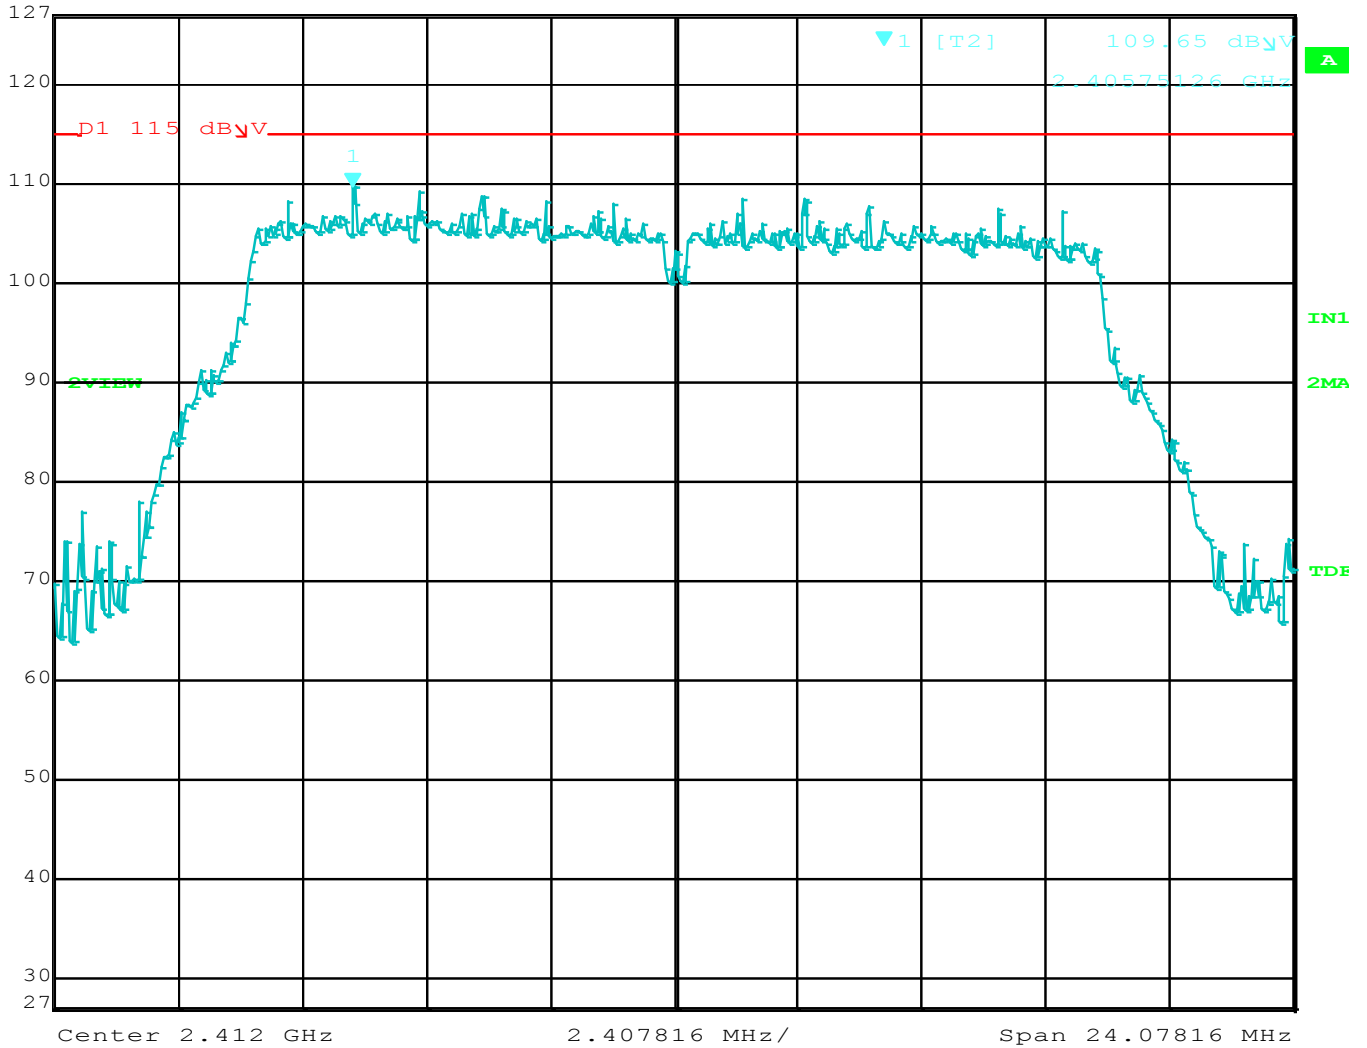

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11g, 2412MHz.
 Date: 15.JUL.2015 14:13:38



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 112.63 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.43078551 GHz | SWT | 6.5 ms | Unit | dB μ V |

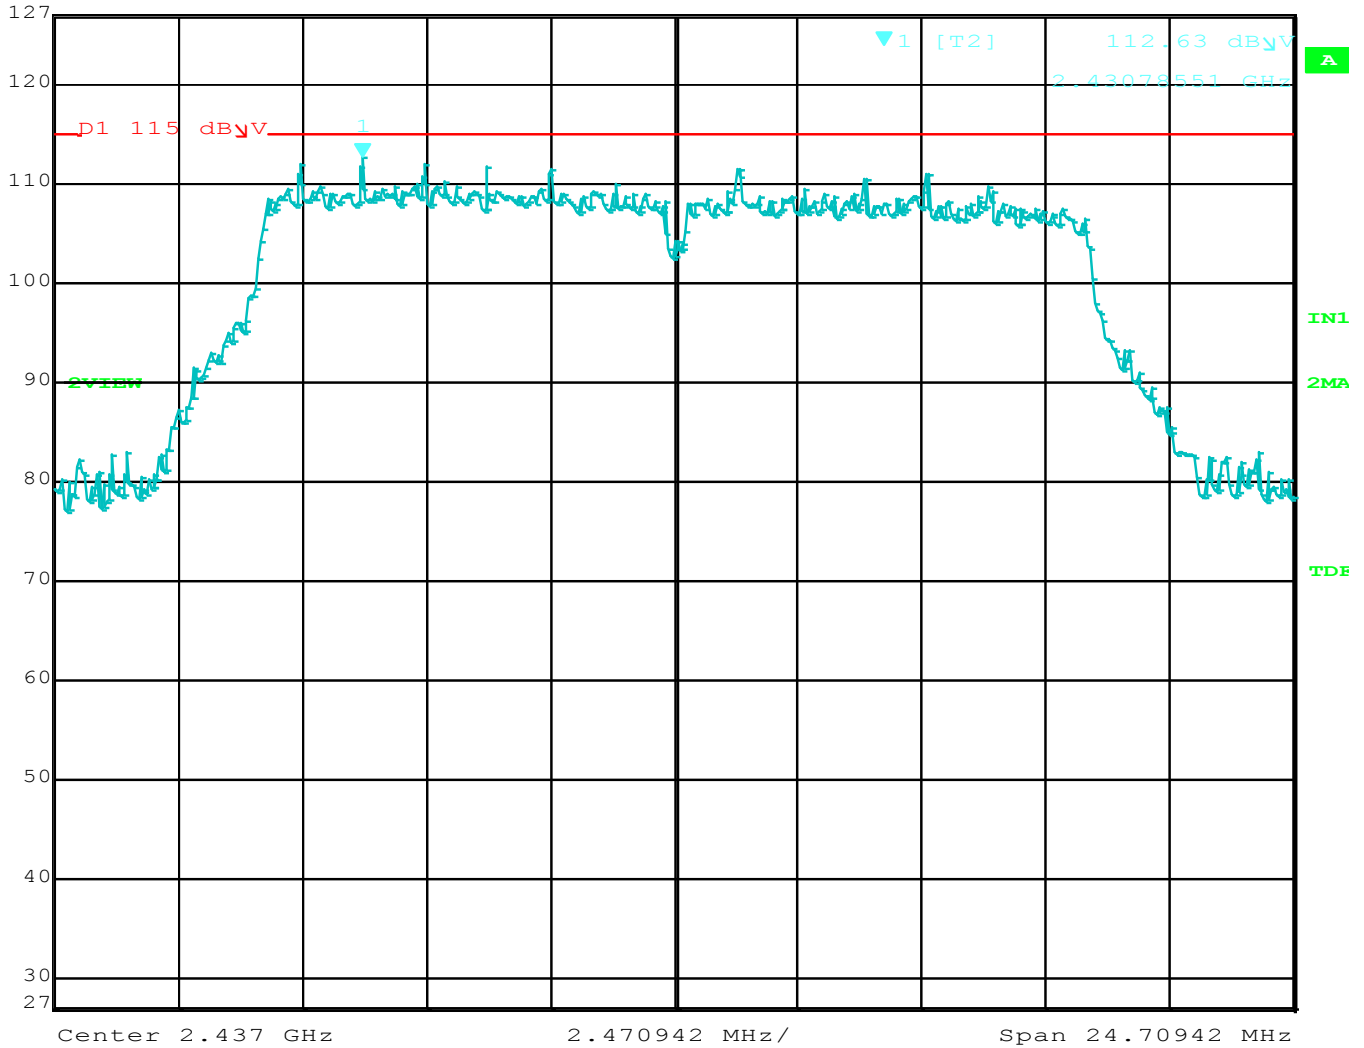

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11g, 2437MHz.
 Date: 15.JUL.2015 14:14:19



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 111.31 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.45572984 GHz | SWT | 6.5 ms | Unit | dB μ V |

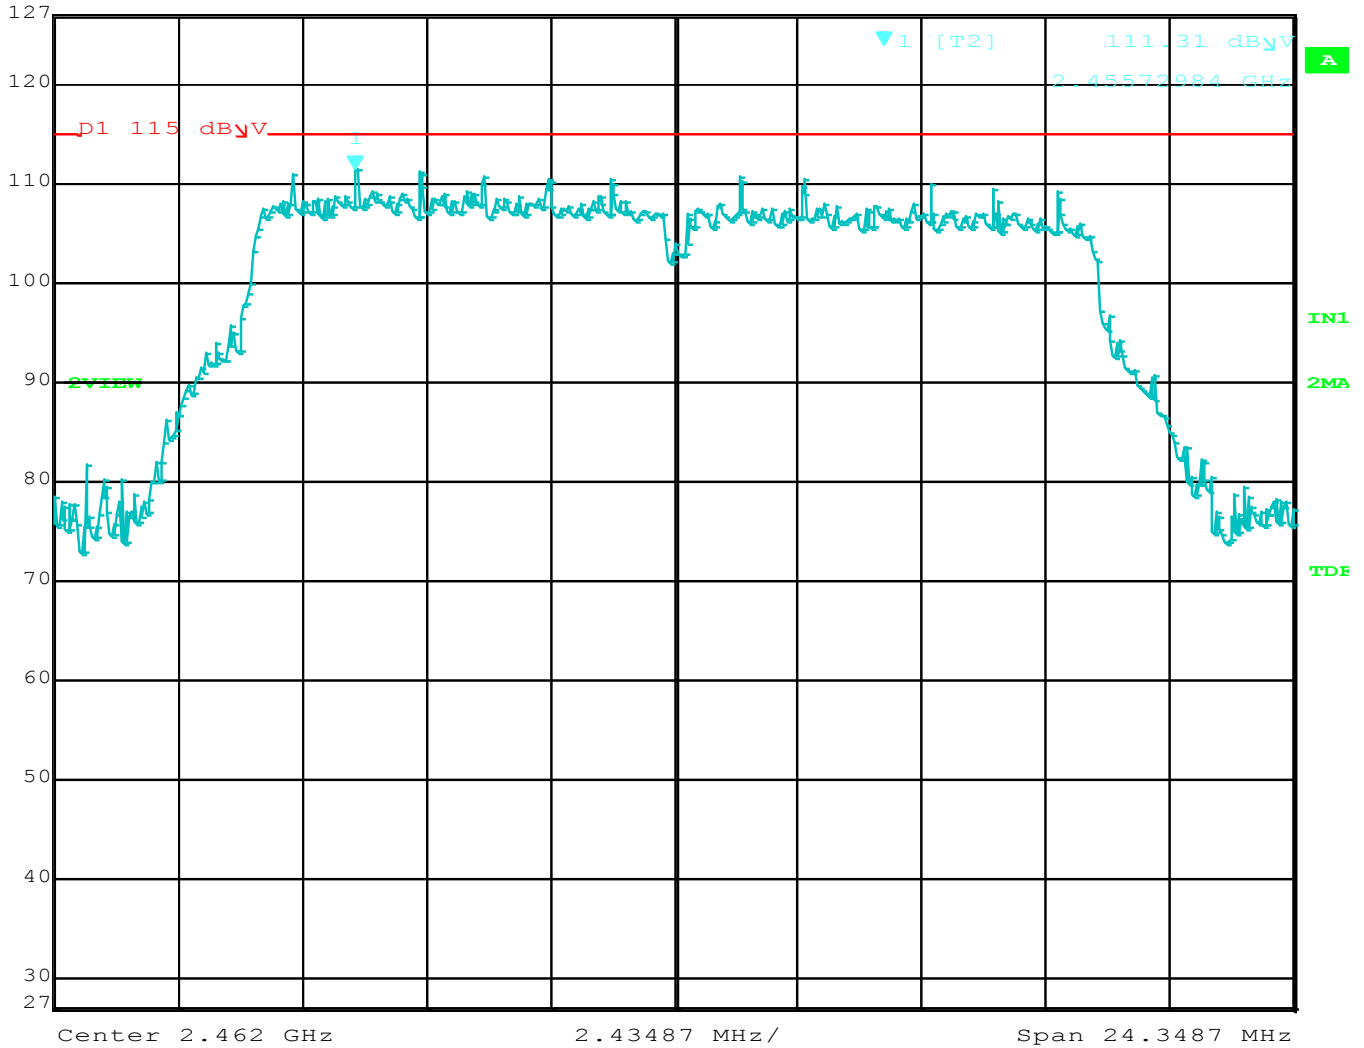

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11g, 2462MHz.
 Date: 15.JUL.2015 14:36:49



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 106.25 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.40578551 GHz | SWT | 6.5 ms | Unit | dB μ V |

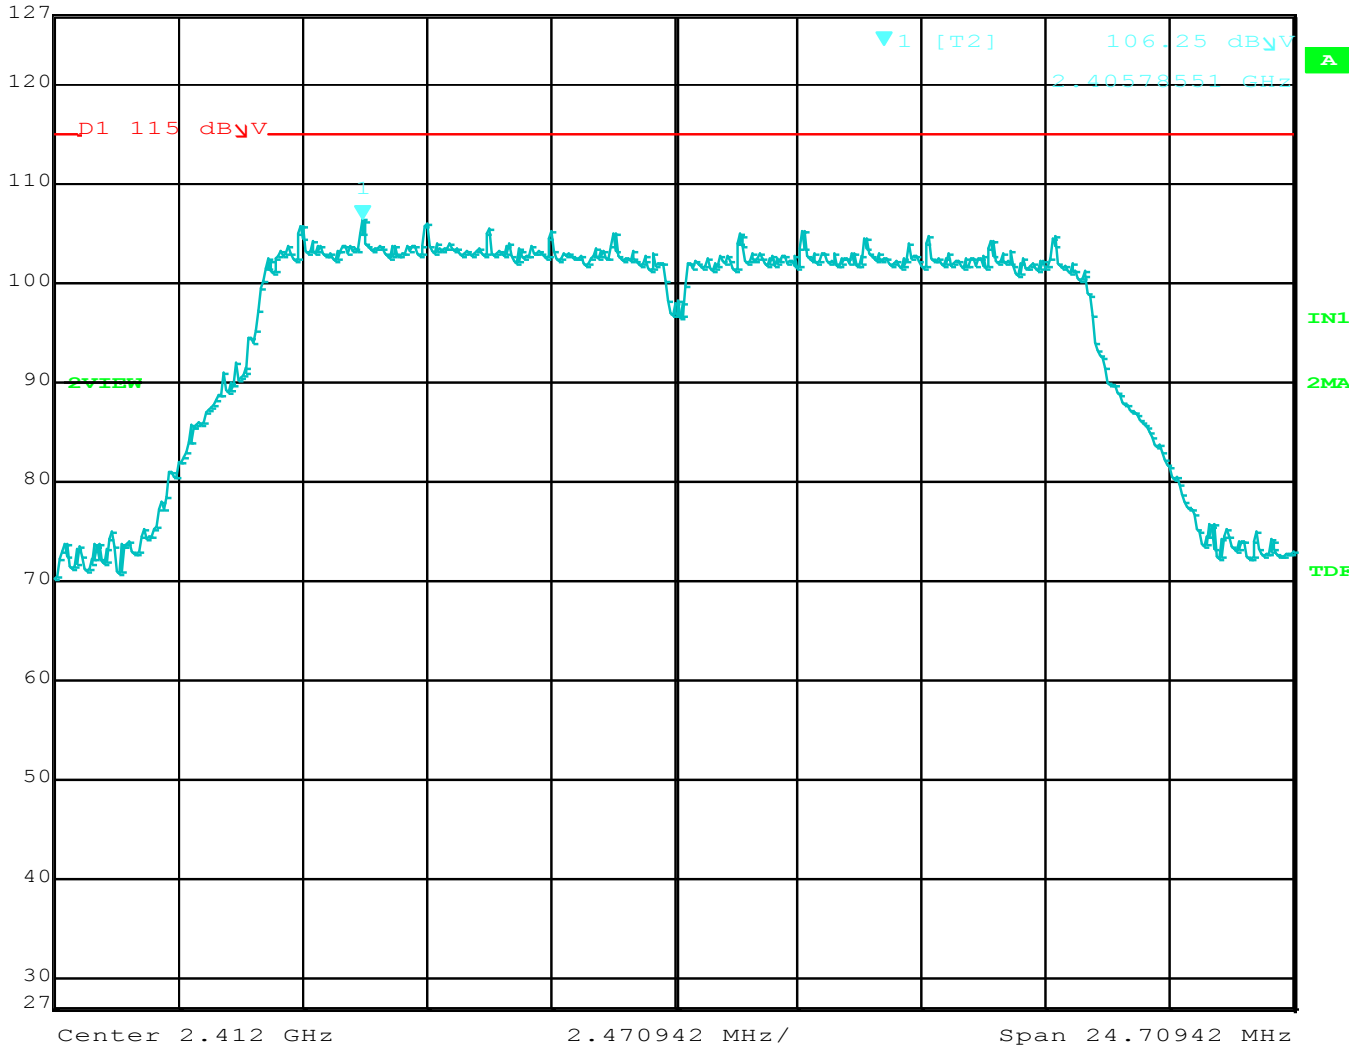

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11g, Low Current, 2412MHz.
 Date: 15.JUL.2015 14:31:00



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T2] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 108.26 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.43078551 GHz | SWT | 6.5 ms | Unit | dB μ V |

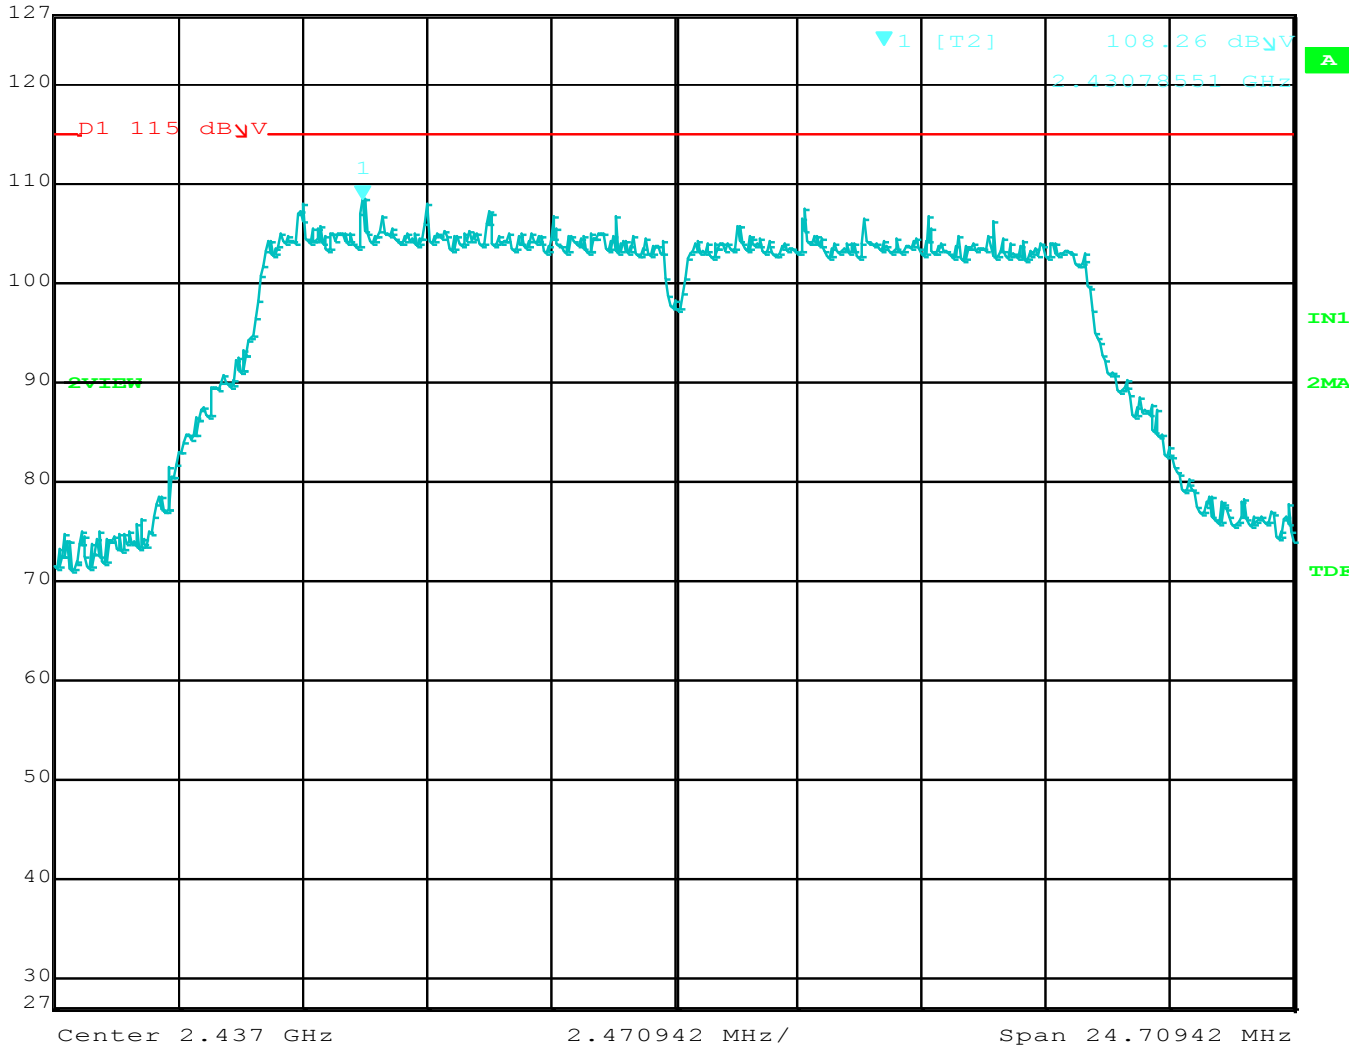

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11g, Low Current, 2437MHz.
 Date: 15.JUL.2015 14:39:26



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11n Mode

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Normal Current

Compatible Electronics, Inc. FAC-3 (Lab R)

PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|------------------|
| 2412 | 108.41 | 115.00 | -6.59 | Peak | DigGain= -10 |
| 2437 | 112.15 | 115.00 | -2.85 | Peak | DigGain= Default |
| 2462 | 111.50 | 115.00 | -3.50 | Peak | DigGain= Default |

FCC 15.247

Company: Atmel Corporation Date: 7/15/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25-MR210P Test ENG: M. Harrison
Mode: 802.11n, Low Current

Compatible Electronics, Inc. FAC-3 (Lab R)


PSD

| Freq. (MHz) | Peak (dBuV) | Limit (dBuV) | Margin (dB) | Peak / QP / Avg | Comments |
|-------------|-------------|--------------|-------------|-----------------|------------------|
| 2412 | 105.67 | 115.00 | -9.33 | Peak | DigGain= -5 |
| 2437 | 106.20 | 115.00 | -8.80 | Peak | DigGain= -5 |
| 2462 | 108.20 | 115.00 | -6.80 | Peak | DigGain= Default |





| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 108.41 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.40578948 GHz | SWT | 7 ms | Unit | dB μ V |

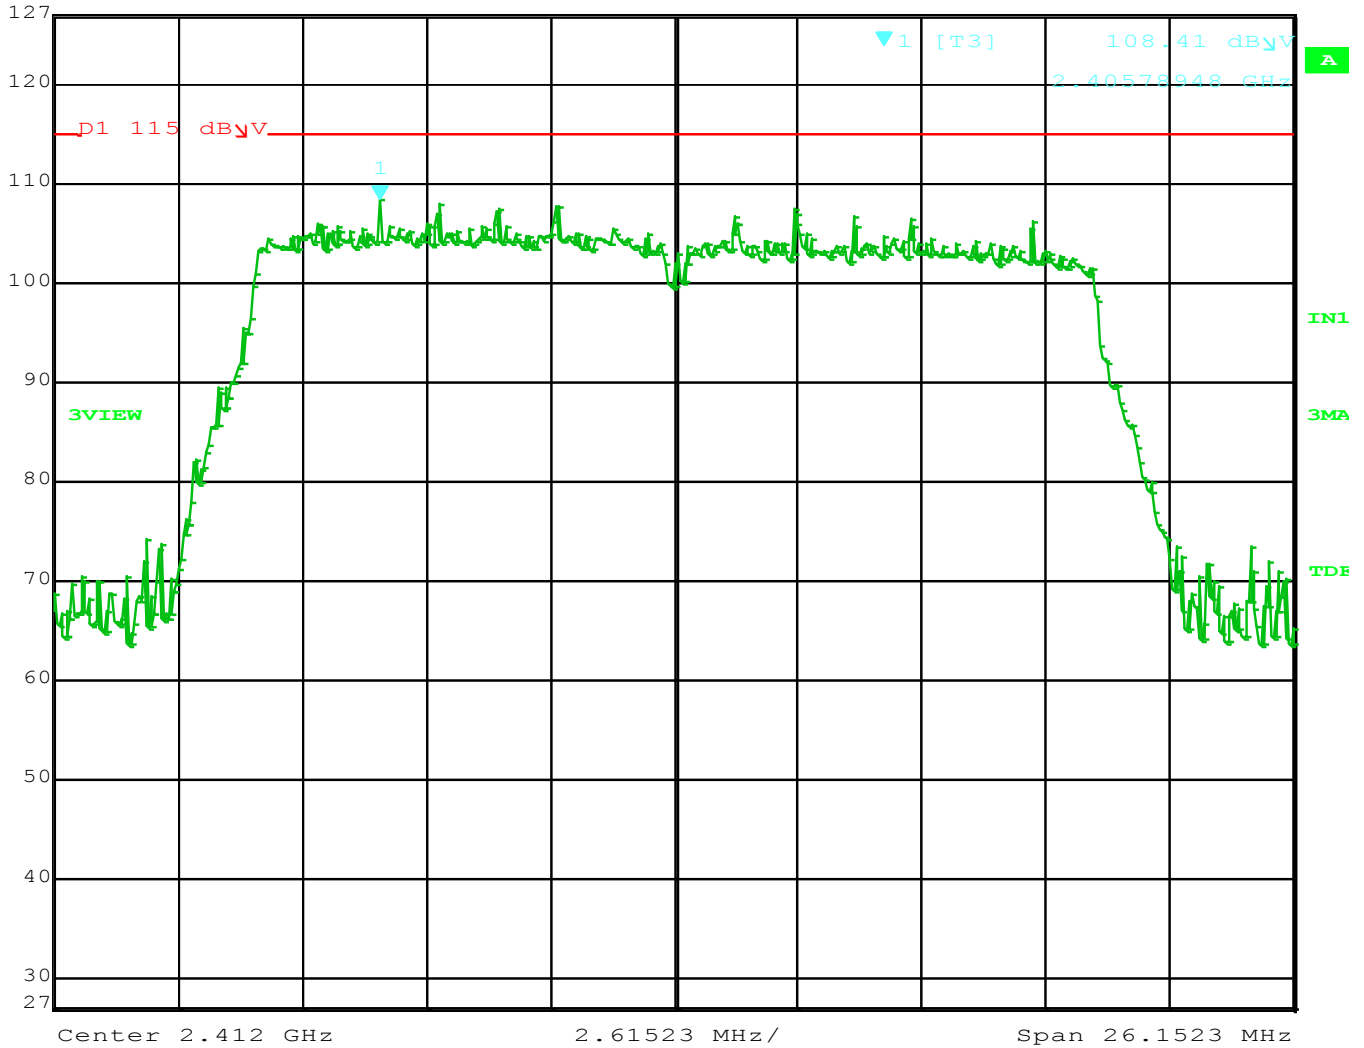

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, 2412MHz.
 Date: 15.JUL.2015 14:04:13




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

| | | | | | | |
|--|----------------|-------------------|-----|---------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| | 127 dB μ V | 112.15 dB μ V | VBW | 300 kHz | | |
| | 127 dB μ V | 2.43206394 GHz | SWT | 6.5 ms | Unit | dB μ V |

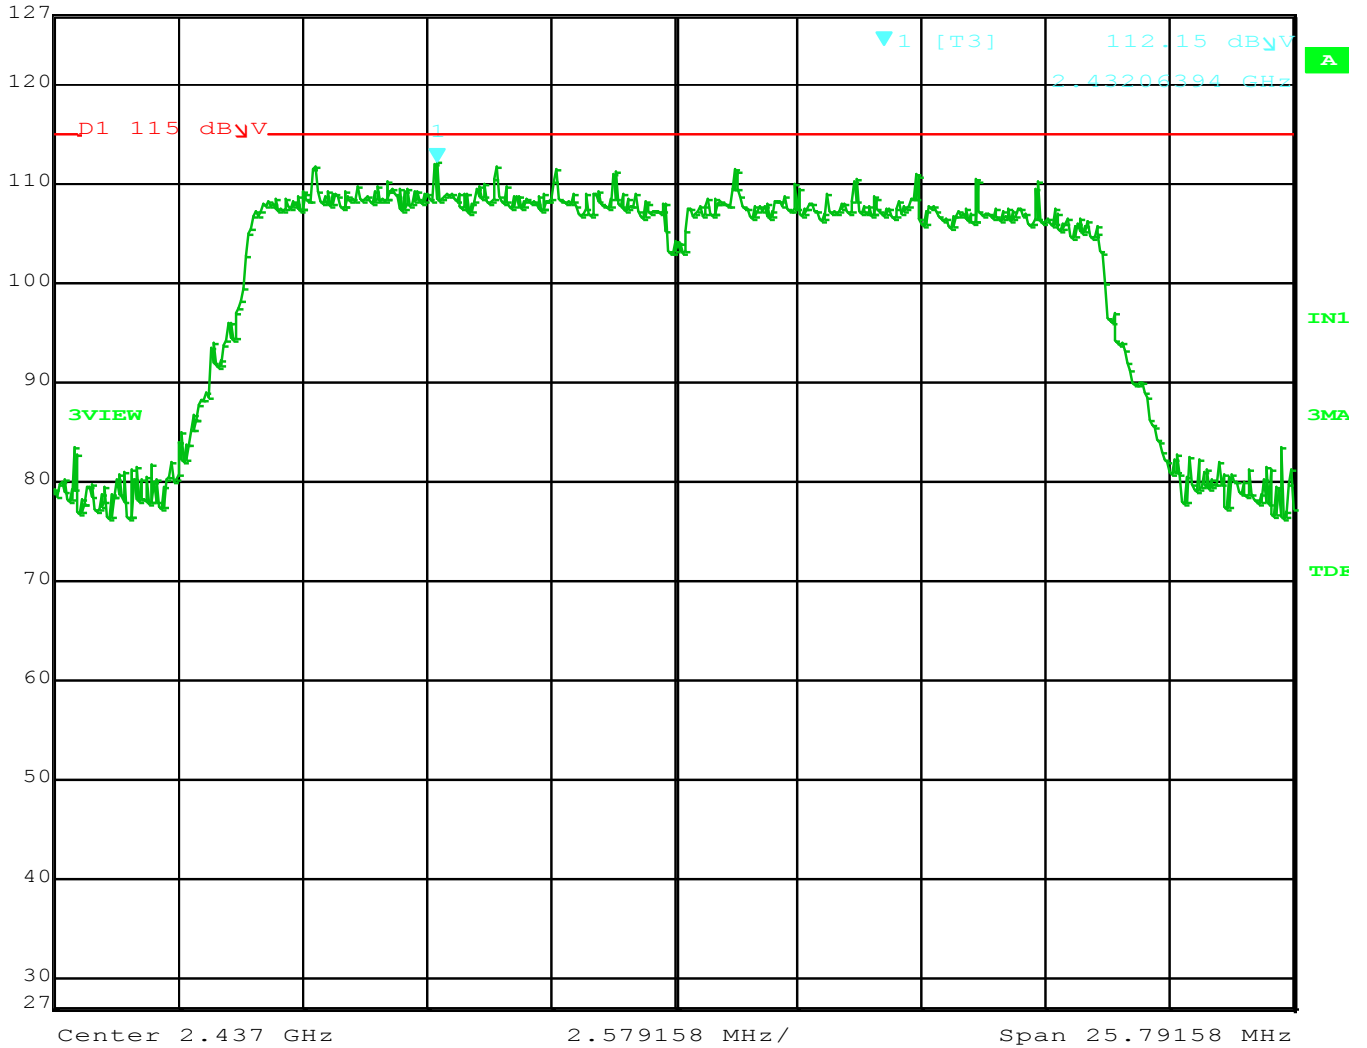

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, 2437MHz.
 Date: 15.JUL.2015 14:02:14




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Max/Ref Lvl Marker 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dBμV 111.50 dBμV VBW 300 kHz
 127 dBμV 2.45573707 GHz SWT 7 ms Unit dBμV

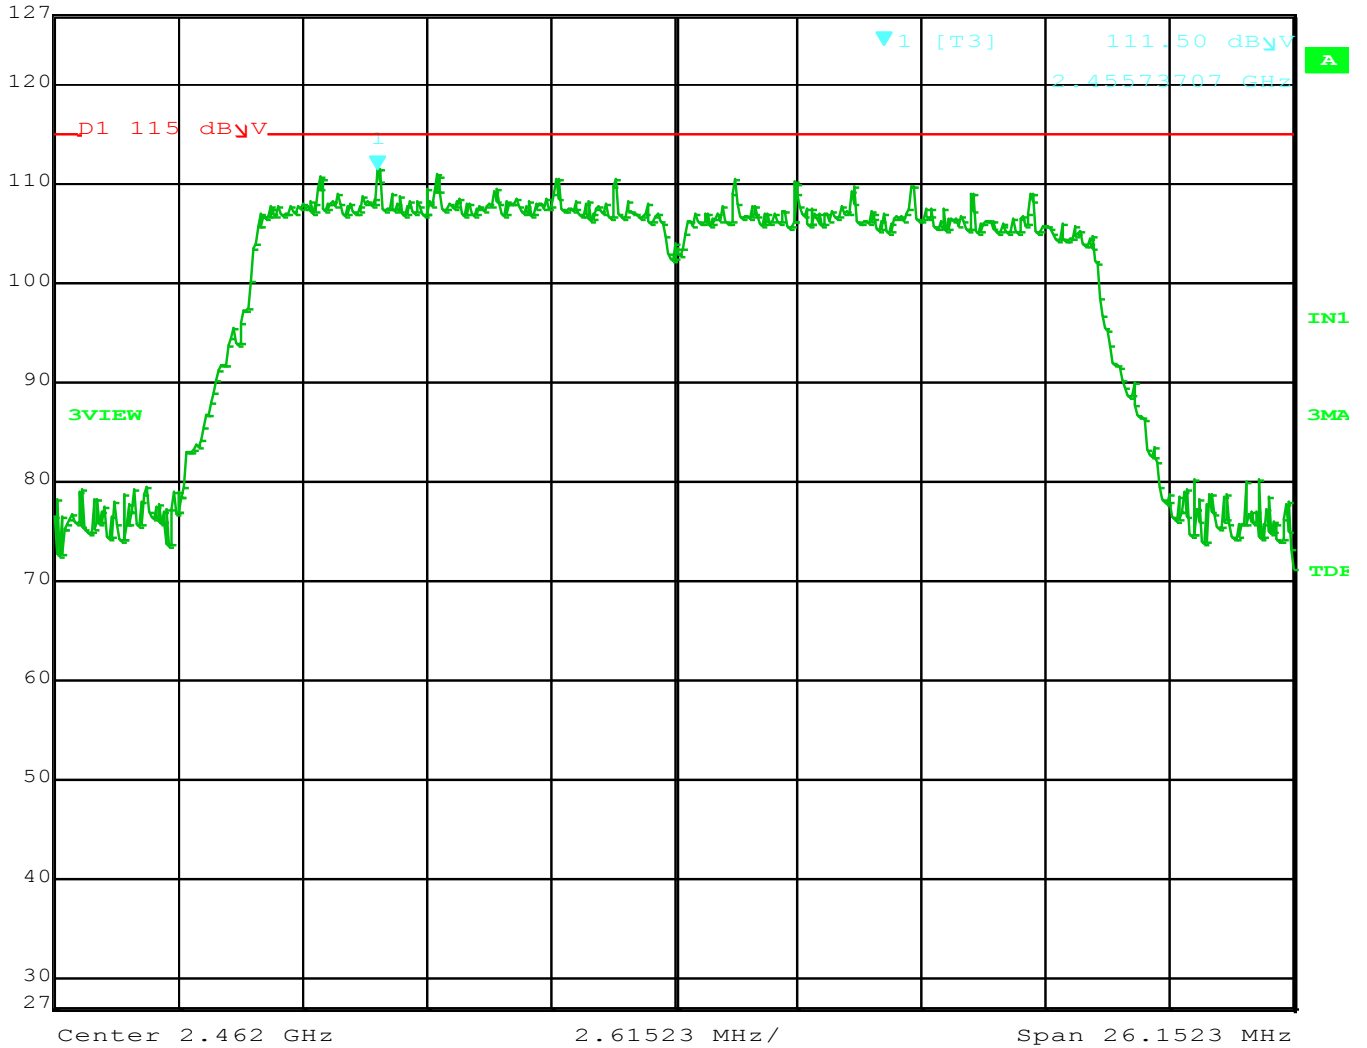

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, 2462MHz.
 Date: 15.JUL.2015 14:01:11




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

 Max/Ref Lvl Marker 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dBμV 105.67 dBμV VBW 300 kHz
 127 dBμV 2.40708282 GHz SWT 7 ms Unit dBμV

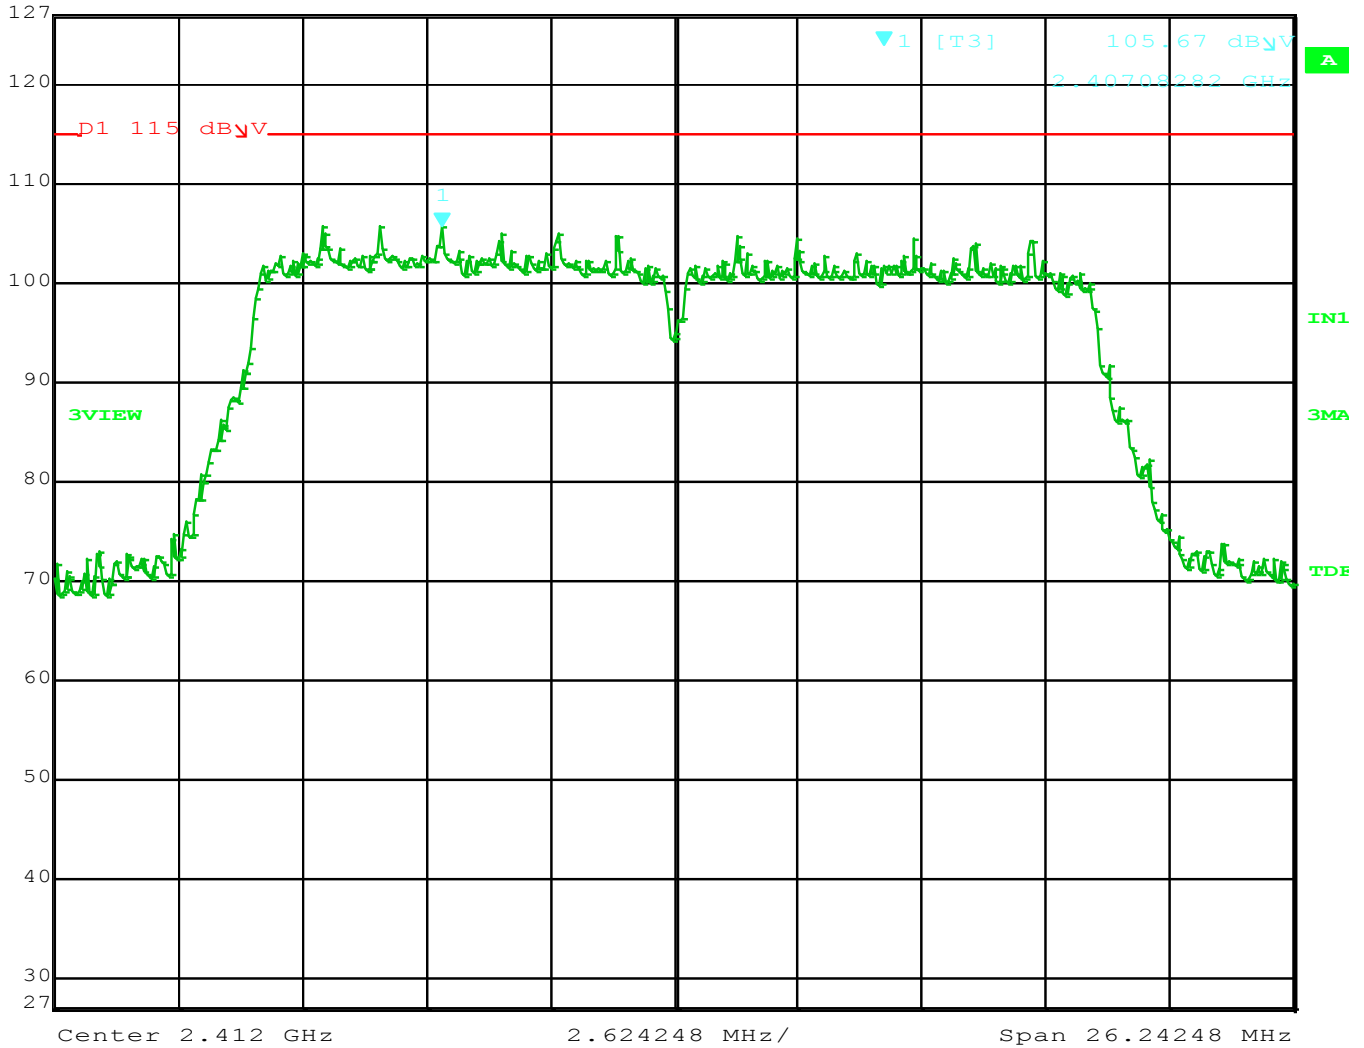

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, Low Current, 2412MHz.
 Date: 15.JUL.2015 14:23:41




Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Max/Ref Lvl Marker 1 [T3] RBW 100 kHz RF Att 30 dB
 127 dBμV 106.20 dBμV VBW 300 kHz
 127 dBμV 2.43082066 GHz SWT 7 ms Unit dBμV

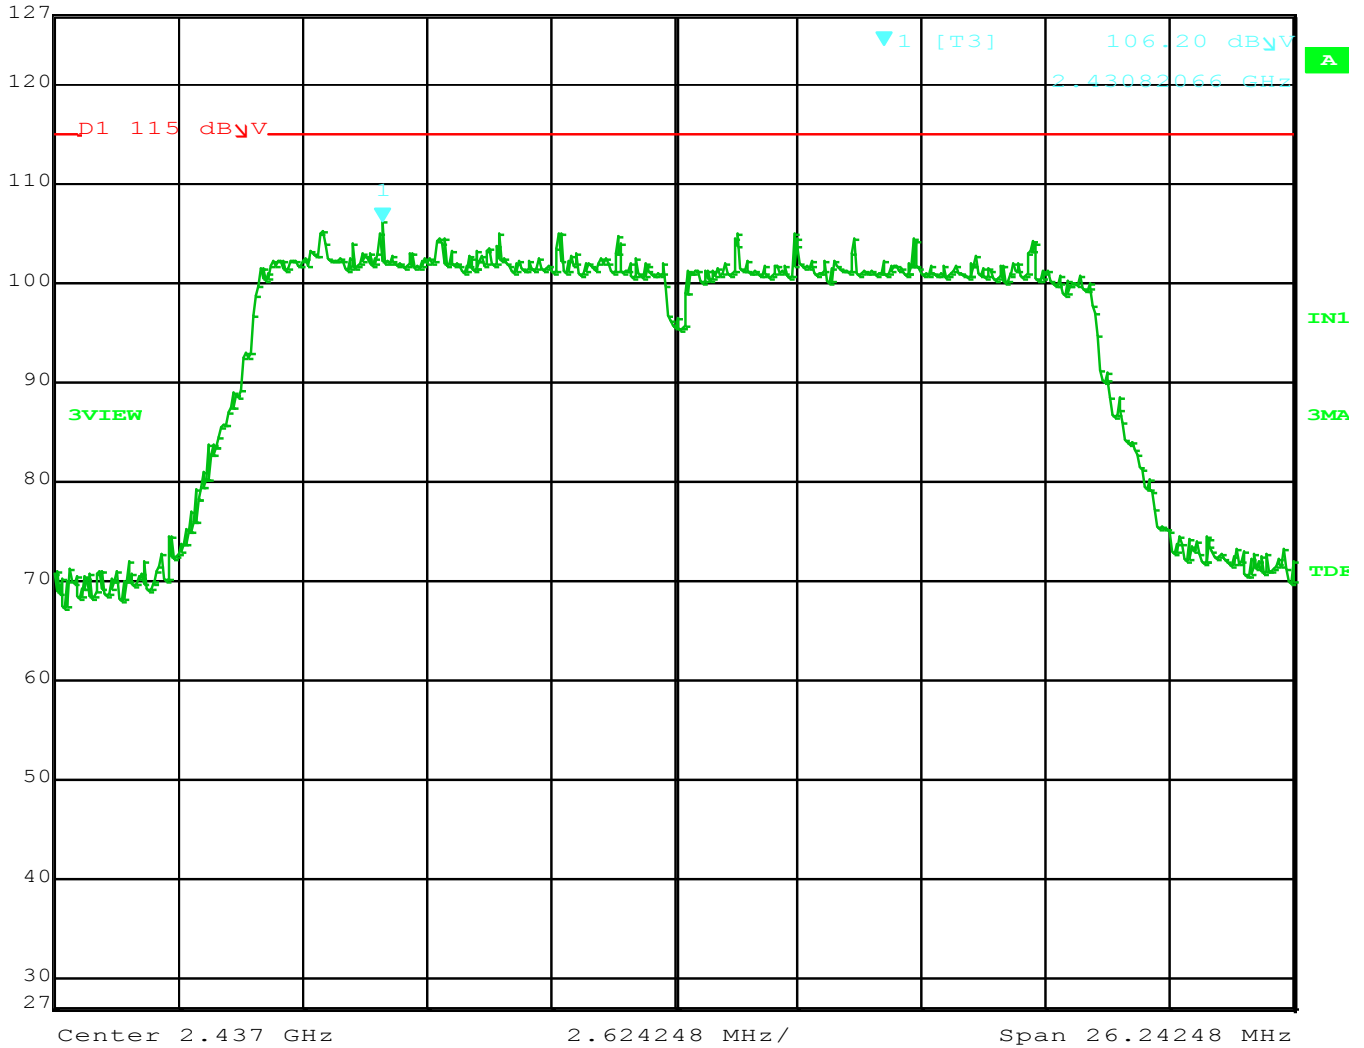

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, Low Current, 2437MHz.
 Date: 15.JUL.2015 14:24:23



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



| | | | | | |
|----------------|-------------------|-----|---------|--------|------------|
| Max/Ref Lvl | Marker 1 [T3] | RBW | 100 kHz | RF Att | 30 dB |
| 127 dB μ V | 108.20 dB μ V | VBW | 300 kHz | | |
| 127 dB μ V | 2.45584234 GHz | SWT | 7 ms | Unit | dB μ V |

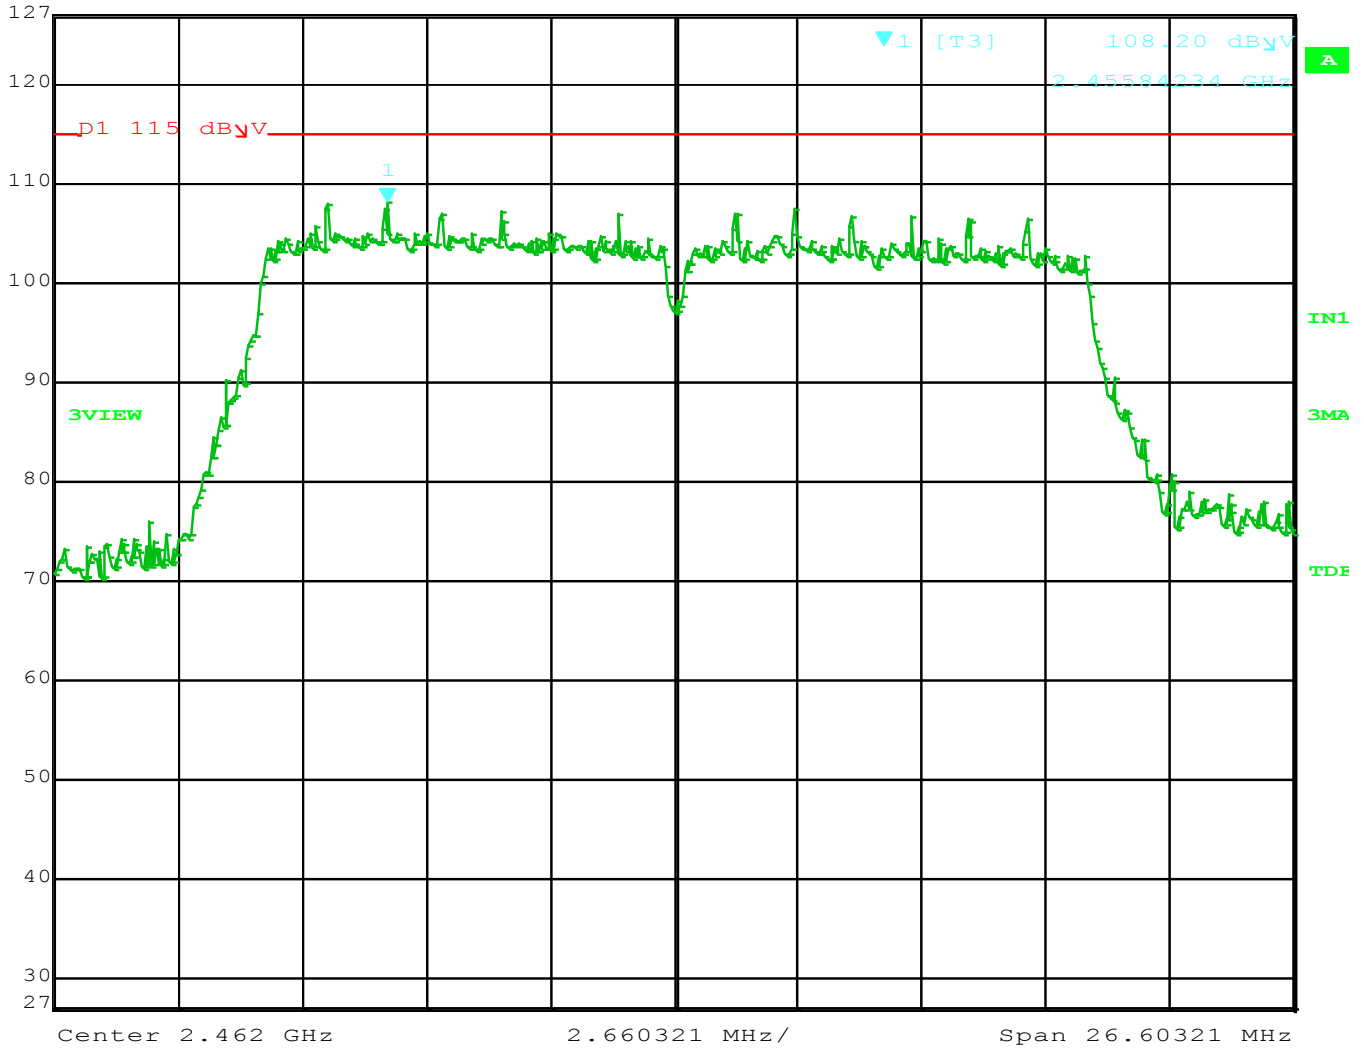

Title: SAMW25-MR210P.
 Comment A: PSD, 802.11n, Low Current, 2462MHz.
 Date: 15.JUL.2015 14:25:08



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

***HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY
BANDS (IN 100KHZ BANDWIDTH) / CONDUCTED***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11b Mode

FCC 15.247

Company: Atmel Corporation Date: 6/30/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25H18-MR210P Test ENG: M. Harrison


| Freq. (MHz) | Level (dBuV) | Limit | Margin | Peak / QP / Avg | Comments |
|-------------|--------------|-------|--------|-----------------|------------------------------|
| 9648.00 | 70.87 | 95.36 | -24.49 | Peak | Channel 1, Dig Gain= Default |
| 9848.00 | 67.81 | 94.08 | -26.27 | Peak | Channel 11, Dig Gain= -7 |
| 9748.00 | 67.79 | 94.14 | -26.35 | Peak | Channel 6, Dig Gain = -8 |

Worst case for all b mode measurements




802.11b Mode


Reference Level Measurements

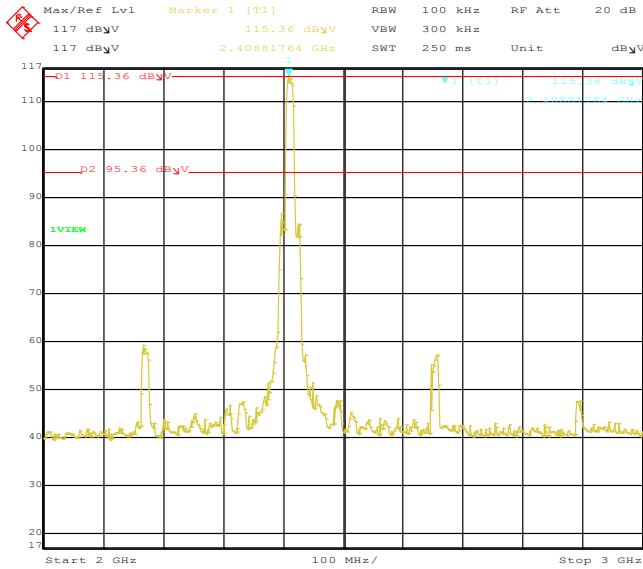

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11b, 2412MHz.
 Date: 15.JUL.2015 15:41:39

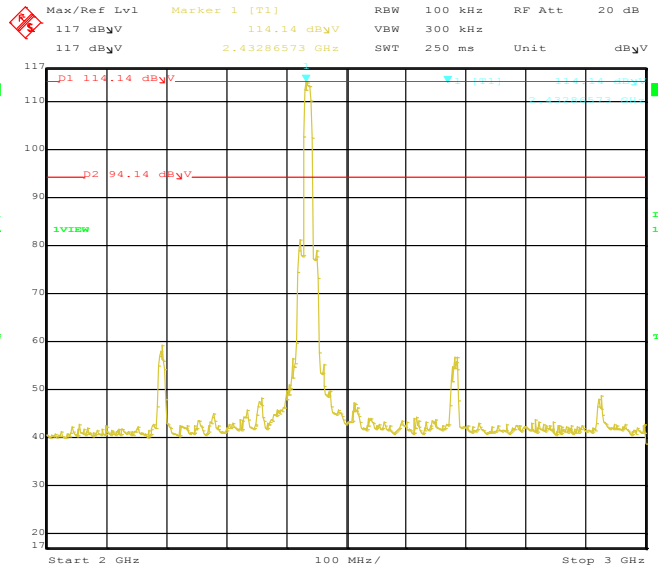

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11b, 2437MHz.
 Date: 15.JUL.2015 15:45:29

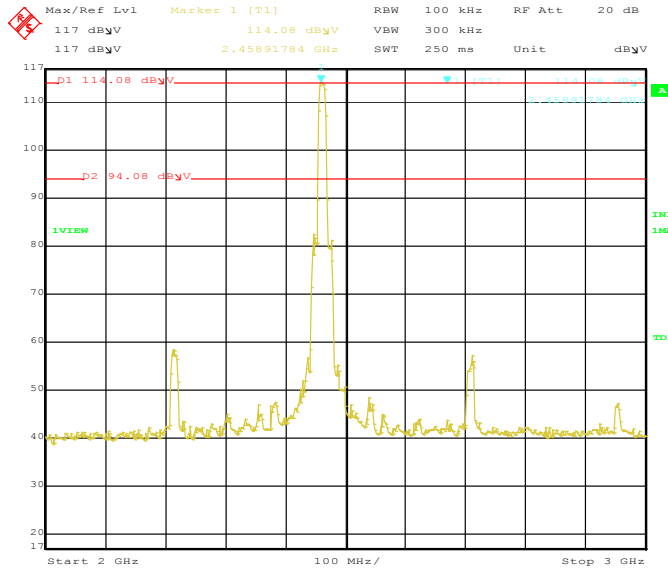

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11b, 2462MHz.
 Date: 15.JUL.2015 15:48:15



HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11g Mode

FCC 15.247

Company: Atmel Corporation Date: 7/7/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25H18-MR210P Test ENG: M. Harrison


| Freq. (MHz) | Level (dBuV) | Limit | Margin | Peak / QP / Avg | Comments |
|-------------|--------------|-------|--------|-----------------|-----------------------------|
| 9648.00 | 68.99 | 89.24 | -20.25 | Peak | Channel 1, Dig Gain= -9 |
| 9648.00 | 64.83 | 85.60 | -20.77 | Peak | Channel 1(LC), Dig Gain= -5 |
| 9748.00 | 66.24 | 87.54 | -21.30 | Peak | Channel 6(LC), Dig Gain= -3 |

Worst case for all g mode measurements




802.11g Mode

Reference Level Measurements

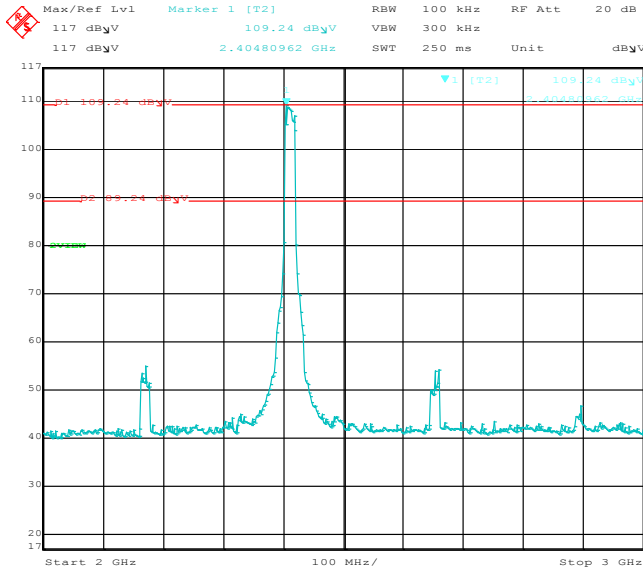


Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11g, 2412MHz.
 Date: 15.JUL.2015 15:54:30

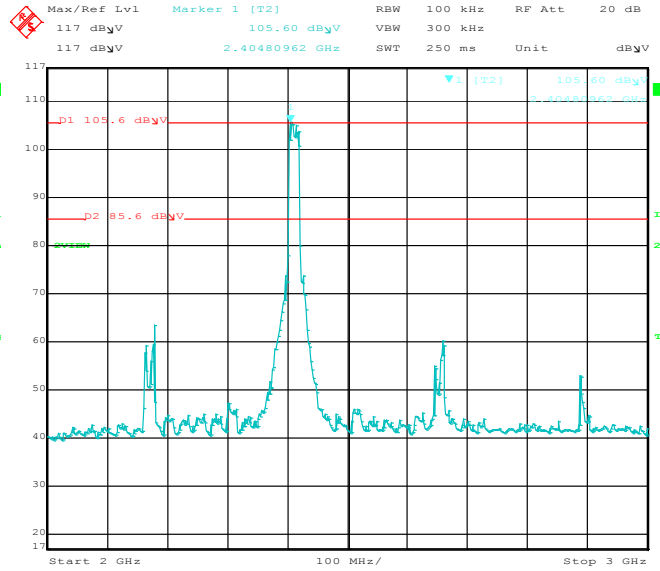

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11g, Low Current, 2412M Hz.

Date: 15.JUL.2015 15:08:53

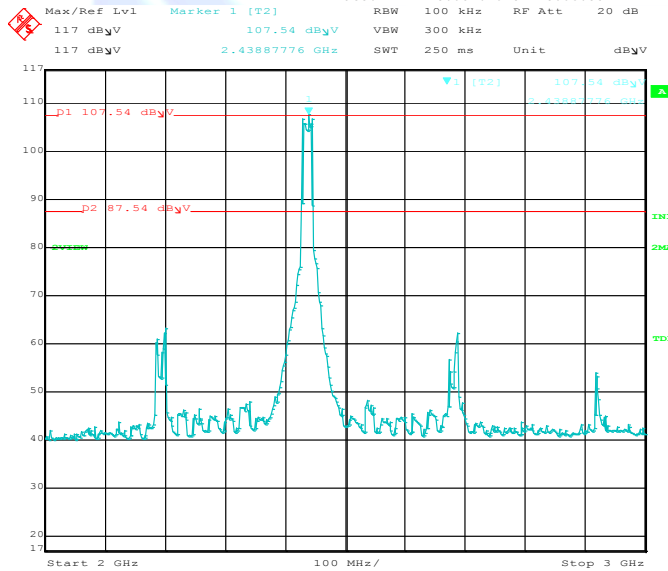

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11g, Low Current, 2437M Hz.
 Date: 15.JUL.2015 15:12:33



HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11n Mode

FCC 15.247

Company: Atmel Corporation Date: 7/7/2015
EUT: Modular Transmitter Lab: R
Model: SAMW25H18-MR210P Test ENG: M. Harrison


| Freq. (MHz) | Level (dBuV) | Limit | Margin | Peak / QP / Avg | Comments |
|-------------|--------------|-------|--------|-----------------|-----------------------------|
| 9648.00 | 68.86 | 88.57 | -19.71 | Peak | Channel 1, Dig Gain= -10 |
| 9748.00 | 64.01 | 85.52 | -21.51 | Peak | Channel 6(LC), Dig Gain= -5 |
| 9648.00 | 64.29 | 85.83 | -21.54 | Peak | Channel 1(LC), Dig Gain= -5 |



802.11n Mode


Reference Level Measurements

Max/Ref Lvl 117 dBµV
 Marker 1 [T3] 108.57 dBµV
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 117 dBµV 2.40480962 GHz
 SWT 250 ms Unit dBµV

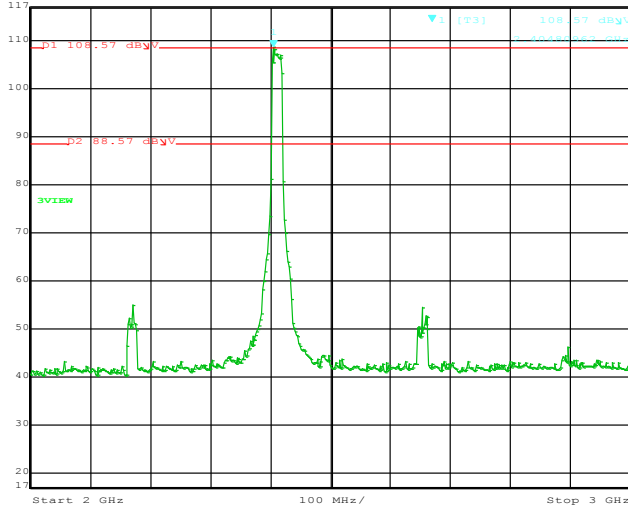


Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11n, 2412MHz.
 Date: 15.JUL.2015 16:04:55

Max/Ref Lvl 117 dBµV
 Marker 1 [T3] 105.52 dBµV
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 117 dBµV 2.42885772 GHz
 SWT 250 ms Unit dBµV

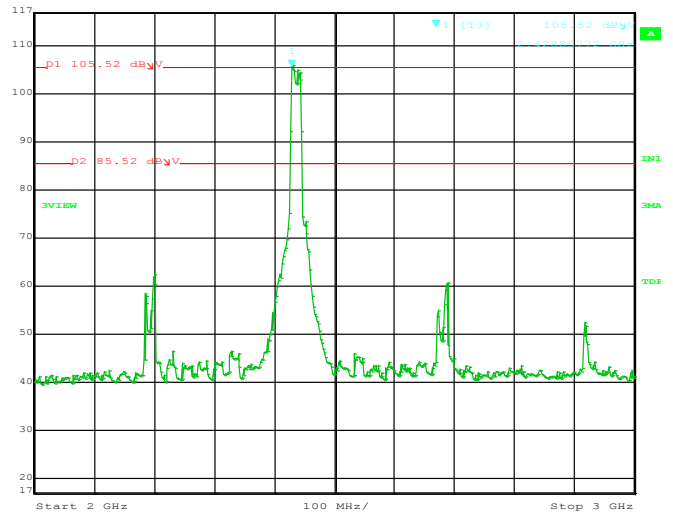

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11n, Low Current, 2437M Hz.
 Date: 15.JUL.2015 14:56:09

Max/Ref Lvl 117 dBµV
 Marker 1 [T3] 105.83 dBµV
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 117 dBµV 2.40681363 GHz
 SWT 250 ms Unit dBµV

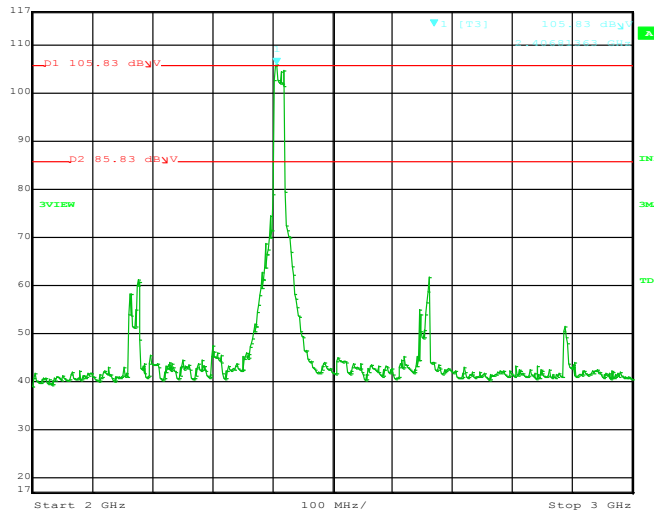

Title: SAMW25-MR210P.
 Comment A: Emissions in Non Restricted Band 802.11n, Low Current, 2412M Hz.
 Date: 15.JUL.2015 15:00:29



***EMISSIONS IN RESTRICTED FREQUENCY BANDS (RADIATED
FIELD STRENGTH)***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= Default

Date: 6/30/2015
 Lab: R
 Test ENG: M.Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 59.82 | H | 73.98 | -14.16 | Peak | 1.10 | 220 | In Restricted Band |
| 4824.00 | 46.23 | H | 53.98 | -7.75 | Avg | 1.10 | 220 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 56.37 | V | 73.98 | -17.61 | Peak | 1.60 | 281 | In Restricted Band |
| 4824.00 | 41.98 | V | 53.98 | -12.00 | Avg | 1.60 | 281 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= -8

Date: 6/30/2015
 Lab: R
 Test ENG: M.Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 58.65 | H | 73.98 | -15.33 | Peak | 1.29 | 157 | |
| 4874.00 | 45.82 | H | 53.98 | -8.16 | Avg | 1.29 | 157 | In Restricted Band |
| 7311.00 | 63.85 | H | 73.98 | -10.13 | Peak | 1.28 | 148 | |
| 7311.00 | 52.77 | H | 53.98 | -1.21 | Avg | 1.28 | 148 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 55.20 | V | 73.98 | -18.78 | Peak | 1.11 | 112 | |
| 4874.00 | 42.53 | V | 53.98 | -11.45 | Avg | 1.11 | 112 | In Restricted Band |
| 7311.00 | 59.14 | V | 73.98 | -14.84 | Peak | 1.21 | 143 | |
| 7311.00 | 46.59 | V | 53.98 | -7.39 | Avg | 1.21 | 143 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, High Channel, Horizontal & Vertical

FCC 15.247


Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= -7

Date: 6/29/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 61.84 | H | 73.98 | -12.14 | Peak | 1.44 | 149 | In Restricted Band |
| 4924.00 | 48.66 | H | 53.98 | -5.32 | Avg | 1.44 | 149 | |
| 7386.00 | 64.55 | H | 73.98 | -9.43 | Peak | 1.29 | 165 | In Restricted Band |
| 7386.00 | 53.61 | H | 53.98 | -0.37 | Avg | 1.29 | 165 | |
| 12310.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 52.52 | V | 73.98 | -21.46 | Peak | 1.18 | 84 | In Restricted Band |
| 4924.00 | 39.92 | V | 53.98 | -14.06 | Avg | 1.18 | 84 | |
| 7386.00 | 62.13 | V | 73.98 | -11.85 | Peak | 1.44 | 276 | In Restricted Band |
| 7386.00 | 51.14 | V | 53.98 | -2.84 | Avg | 1.44 | 276 | |
| 12310.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Low Current, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= Default, Low Current

Date: 6/29/2015
 Lab: R
 Test ENG: M.Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 62.21 | H | 73.98 | -11.77 | Peak | 1.58 | 216 | In Restricted Band |
| 4824.00 | 48.52 | H | 53.98 | -5.46 | Avg | 1.58 | 216 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 61.33 | V | 73.98 | -12.65 | Peak | 1.34 | 247 | In Restricted Band |
| 4824.00 | 47.63 | V | 53.98 | -6.35 | Avg | 1.34 | 247 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Low Current, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= -9, Low Current

Date: 6/29/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 61.46 | H | 73.98 | -12.52 | Peak | 1.4 | 50 | |
| 4874.00 | 48.06 | H | 53.98 | -5.92 | Avg | 1.4 | 50 | In Restricted Band |
| 7311.00 | 63.35 | H | 73.98 | -10.63 | Peak | 1.40 | 0 | |
| 7311.00 | 51.91 | H | 53.98 | -2.07 | Avg | 1.40 | 0 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 55.43 | V | 73.98 | -18.55 | Peak | 1.5 | 108 | |
| 4874.00 | 43.15 | V | 53.98 | -10.83 | Avg | 1.5 | 108 | In Restricted Band |
| 7311.00 | 64.53 | V | 73.98 | -9.45 | Peak | 1.81 | 30 | |
| 7311.00 | 53.28 | V | 53.98 | -0.70 | Avg | 1.81 | 30 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Low Current, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, DigGain= -10, Low Current Mode

Date: 6/29/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 62.17 | H | 73.98 | -11.81 | Peak | 1.32 | 336 | In Restricted Band |
| 4924.00 | 49.86 | H | 53.98 | -4.12 | Avg | 1.32 | 336 | |
| 7386.00 | 62.99 | H | 73.98 | -10.99 | Peak | 1.38 | 147 | In Restricted Band |
| 7386.00 | 52.34 | H | 53.98 | -1.64 | Avg | 1.38 | 147 | |
| 12310.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 58.16 | V | 73.98 | -15.82 | Peak | 1.17 | 139 | In Restricted Band |
| 4924.00 | 43.76 | V | 53.98 | -10.22 | Avg | 1.17 | 139 | |
| 7386.00 | 61.75 | V | 73.98 | -12.23 | Peak | 1.54 | 274 | In Restricted Band |
| 7386.00 | 50.79 | V | 53.98 | -3.19 | Avg | 1.54 | 274 | |
| 12310.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain=-9

Date: 6/30/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 52.25 | H | 73.98 | -21.73 | Peak | 1.22 | 247 | In Restricted Band |
| 4824.00 | 37.18 | H | 53.98 | -16.80 | Avg | 1.22 | 247 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 56.37 | V | 73.98 | -17.61 | Peak | 1.14 | 217 | In Restricted Band |
| 4824.00 | 41.08 | V | 53.98 | -12.90 | Avg | 1.14 | 217 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11g Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain= -6

Date: 6/30/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 60.29 | H | 73.98 | -13.69 | Peak | 1.05 | 143 | |
| 4874.00 | 44.64 | H | 53.98 | -9.34 | Avg | 1.05 | 143 | In Restricted Band |
| 7311.00 | 67.77 | H | 73.98 | -6.21 | Peak | 1.33 | 146 | |
| 7311.00 | 51.83 | H | 53.98 | -2.15 | Avg | 1.33 | 146 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 57.33 | V | 73.98 | -16.65 | Peak | 1.46 | 310 | |
| 4874.00 | 41.59 | V | 53.98 | -12.39 | Avg | 1.46 | 310 | In Restricted Band |
| 7311.00 | 62.16 | V | 73.98 | -11.82 | Peak | 1.65 | 236 | |
| 7311.00 | 46.62 | V | 53.98 | -7.36 | Avg | 1.65 | 236 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emission Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11g Mode, High Channel, Horizontal & Vertical

FCC 15.247


Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain=-9

Date: 6/30/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 60.60 | H | 73.98 | -13.38 | Peak | 1.01 | 150 | In Restricted Band |
| 4924.00 | 43.96 | H | 53.98 | -10.02 | Avg | 1.01 | 150 | |
| 7386.00 | 63.98 | H | 73.98 | -10.00 | Peak | 1.40 | 160 | In Restricted Band |
| 7386.00 | 47.82 | H | 53.98 | -6.16 | Avg | 1.40 | 160 | |
| 12310.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 54.14 | V | 73.98 | -19.84 | Peak | 1.06 | 146 | In Restricted Band |
| 4924.00 | 39.31 | V | 53.98 | -14.67 | Avg | 1.06 | 146 | |
| 7386.00 | 54.73 | V | 73.98 | -19.25 | Peak | 2.04 | 31 | In Restricted Band |
| 7386.00 | 41.80 | V | 53.98 | -12.18 | Avg | 2.04 | 31 | |
| 12310.00 | 58.84 | V | 73.98 | -15.14 | Peak | 1.36 | 343 | In Restricted Band |
| 12310.00 | 50.41 | V | 53.98 | -3.57 | Avg | 1.36 | 343 | |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11g Mode, Low Current, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain= -5, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 63.91 | H | 73.98 | -10.07 | Peak | 1.14 | 170 | In Restricted Band |
| 4824.00 | 48.85 | H | 53.98 | -5.13 | Avg | 1.14 | 170 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 63.82 | V | 73.98 | -10.16 | Peak | 2.93 | 110 | In Restricted Band |
| 4824.00 | 48.89 | V | 53.98 | -5.09 | Avg | 2.93 | 110 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11g Mode, Low Current, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain= -3, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 67.15 | H | 73.98 | -6.83 | Peak | 1.55 | 184 | |
| 4874.00 | 52.60 | H | 53.98 | -1.38 | Avg | 1.55 | 184 | In Restricted Band |
| 7311.00 | 58.60 | H | 73.98 | -15.38 | Peak | 1.44 | 169 | |
| 7311.00 | 45.41 | H | 53.98 | -8.57 | Avg | 1.44 | 169 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 64.50 | V | 73.98 | -9.48 | Peak | 1.54 | 252 | |
| 4874.00 | 49.88 | V | 53.98 | -4.10 | Avg | 1.54 | 252 | In Restricted Band |
| 7311.00 | 55.48 | V | 73.98 | -18.50 | Peak | 1.53 | 28 | |
| 7311.00 | 42.58 | V | 53.98 | -11.40 | Avg | 1.53 | 28 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emission Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11g Mode, Low Current, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, DigGain= -5, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: M. Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 67.10 | H | 73.98 | -6.88 | Peak | 1.49 | 177 | In Restricted Band |
| 4924.00 | 52.45 | H | 53.98 | -1.53 | Avg | 1.49 | 177 | |
| 7386.00 | 56.69 | H | 73.98 | -17.29 | Peak | 1.38 | 161 | In Restricted Band |
| 7386.00 | 43.93 | H | 53.98 | -10.05 | Avg | 1.38 | 161 | |
| 12310.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 54.14 | V | 73.98 | -19.84 | Peak | 1.06 | 146 | In Restricted Band |
| 4924.00 | 39.31 | V | 53.98 | -14.67 | Avg | 1.06 | 146 | |
| 7386.00 | 54.73 | V | 73.98 | -19.25 | Peak | 2.04 | 31 | In Restricted Band |
| 7386.00 | 41.80 | V | 53.98 | -12.18 | Avg | 2.04 | 31 | |
| 12310.00 | 58.84 | V | 73.98 | -15.14 | Peak | 1.36 | 343 | In Restricted Band |
| 12310.00 | 50.41 | V | 53.98 | -3.57 | Avg | 1.36 | 343 | |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= -10

Date: 7/7/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 50.16 | H | 73.98 | -23.82 | Peak | 2.00 | 174 | In Restricted Band |
| 4824.00 | 38.06 | H | 53.98 | -15.92 | Avg | 2.00 | 174 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 47.21 | V | 73.98 | -26.77 | Peak | 1.77 | 259 | In Restricted Band |
| 4824.00 | 33.82 | V | 53.98 | -20.16 | Avg | 1.77 | 259 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= Default

Date: 7/7/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 60.53 | H | 73.98 | -13.45 | Peak | 1.02 | 148 | |
| 4874.00 | 45.55 | H | 53.98 | -8.43 | Avg | 1.02 | 148 | In Restricted Band |
| 7311.00 | 68.60 | H | 73.98 | -5.38 | Peak | 1.40 | 156 | |
| 7311.00 | 52.34 | H | 53.98 | -1.64 | Avg | 1.40 | 156 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 59.35 | V | 73.98 | -14.63 | Peak | 1.36 | 117 | |
| 4874.00 | 43.91 | V | 53.98 | -10.07 | Avg | 1.36 | 117 | In Restricted Band |
| 7311.00 | 65.11 | V | 73.98 | -8.87 | Peak | 1.66 | 61 | |
| 7311.00 | 49.54 | V | 53.98 | -4.44 | Avg | 1.66 | 61 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= Default

Date: 6/30/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 60.32 | H | 73.98 | -13.66 | Peak | 1.00 | 161 | In Restricted Band |
| 4924.00 | 45.00 | H | 53.98 | -8.98 | Avg | 1.00 | 161 | |
| 7386.00 | 64.63 | H | 73.98 | -9.35 | Peak | 1.36 | 162 | In Restricted Band |
| 7386.00 | 48.96 | H | 53.98 | -5.02 | Avg | 1.36 | 162 | |
| 12310.00 | 55.35 | H | 73.98 | -18.63 | Peak | 1.84 | 247 | In Restricted Band |
| 12310.00 | 42.37 | H | 53.98 | -11.61 | Avg | 1.84 | 247 | |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 57.79 | V | 73.98 | -16.19 | Peak | 1.27 | 42 | In Restricted Band |
| 4924.00 | 42.83 | V | 53.98 | -11.15 | Avg | 1.27 | 42 | |
| 7386.00 | 61.44 | V | 73.98 | -12.54 | Peak | 1.69 | 273 | In Restricted Band |
| 7386.00 | 46.32 | V | 53.98 | -7.66 | Avg | 1.69 | 273 | |
| 12310.00 | 59.11 | V | 73.98 | -14.87 | Peak | 1.22 | 19 | In Restricted Band |
| 12310.00 | 49.65 | V | 53.98 | -4.33 | Avg | 1.22 | 19 | |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, Low Current, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= -5, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4824.00 | 64.31 | H | 73.98 | -9.67 | Peak | 1.17 | 176 | In Restricted Band |
| 4824.00 | 50.06 | H | 53.98 | -3.92 | Avg | 1.17 | 176 | |
| 12060.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4824.00 | 64.70 | V | 73.98 | -9.28 | Peak | 1.43 | 261 | In Restricted Band |
| 4824.00 | 50.06 | V | 53.98 | -3.92 | Avg | 1.43 | 261 | |
| 12060.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12060.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 14472.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 14472.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19296.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19296.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, Low Current, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= -5, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4874.00 | 67.08 | H | 73.98 | -6.90 | Peak | 1.16 | 178 | |
| 4874.00 | 52.62 | H | 53.98 | -1.36 | Avg | 1.16 | 178 | In Restricted Band |
| 7311.00 | 57.39 | H | 73.98 | -16.59 | Peak | 1.38 | 164 | |
| 7311.00 | 44.80 | H | 53.98 | -9.18 | Avg | 1.38 | 164 | In Restricted Band |
| 12185.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | H | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | H | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 4874.00 | 67.53 | V | 73.98 | -6.45 | Peak | 1.65 | 307 | |
| 4874.00 | 52.01 | V | 53.98 | -1.97 | Avg | 1.65 | 307 | In Restricted Band |
| 7311.00 | 54.47 | V | 73.98 | -19.51 | Peak | 2.61 | 133 | |
| 7311.00 | 41.39 | V | 53.98 | -12.59 | Avg | 2.61 | 133 | In Restricted Band |
| 12185.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 12185.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |
| 19496.00 | -- | V | 73.98 | -- | Peak | -- | -- | No Emissions Found |
| 19496.00 | -- | V | 53.98 | -- | Avg | -- | -- | In Restricted Band |

Test distance
 3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, Low Current, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, DigGain= Default, Low Current

Date: 7/7/2015
 Lab: R
 Test ENG: MH

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBuV) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----------|-------|--------|-----------------|-----------------|-------------------|--------------------|
| 4924.00 | 66.66 | H | 73.98 | -7.32 | Peak | 1.41 | 360 | In Restricted Band |
| 4924.00 | 51.51 | H | 53.98 | -2.47 | Avg | 1.41 | 360 | |
| 7386.00 | 57.62 | H | 73.98 | -16.36 | Peak | 1.12 | 157 | In Restricted Band |
| 7386.00 | 44.74 | H | 53.98 | -9.24 | Avg | 1.12 | 157 | |
| 12310.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | H | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | H | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 4924.00 | 68.39 | V | 73.98 | -5.59 | Peak | 1.52 | 117 | In Restricted Band |
| 4924.00 | 52.38 | V | 53.98 | -1.60 | Avg | 1.52 | 117 | |
| 7386.00 | 55.50 | V | 73.98 | -18.48 | Peak | 1.15 | 243 | In Restricted Band |
| 7386.00 | 42.71 | V | 53.98 | -11.27 | Avg | 1.15 | 243 | |
| 12310.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 12310.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 19696.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 19696.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |
| 22158.00 | -- | V | 73.98 | -- | Peak | -- | -- | In Restricted Band |
| 22158.00 | -- | V | 53.98 | -- | Avg | -- | -- | No Emissions Found |

Test distance
 3 meter



***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND AT BAND EDGES***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11b Mode

BAND EDGES- VERTICAL

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, Normal Current

 Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|----------------------------------|
| 2412.00 | 115.41 | V | -- | -- | Peak | 1.1 | 220 | Fundamental of High Channel |
| | | | | | | | | X-Axis, Default, 11Mbps |
| 2396.15 | 89.52 | V | 95.41 | -5.89 | Delta | 1.1 | 220 | From Peak |
| 2385.03 | 63.75 | V | 73.98 | -10.23 | Peak | 1.1 | 220 | No Marker Delta Method |
| 2385.03 | 46.28 | V | 53.98 | -7.70 | Avg | 1.1 | 220 | X-Axis, Default, 11Mbps |
| 2462.00 | 113.44 | V | -- | -- | Peak | 1 | 210 | Fundamental of High Channel |
| 2484.20 | 55.80 | V | 73.98 | -18.18 | Peak | 1 | 210 | No Marker Delta Method |
| 2484.20 | 41.17 | V | 53.98 | -12.81 | Avg | 1 | 210 | X-Axis, DigGain-7, 11Mbps |

 Test distance
 3 meter


BAND EDGES- HORIZONTAL

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, Normal Current

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)


| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|---|
| 2412.00 | 110.82 | H | -- | -- | Peak | 1.25 | 150 | Fundamental of High Channel X-Axis, Default, 11Mbps |
| 2397.05 | 83.53 | H | 90.82 | -7.29 | Delta | 1.25 | 150 | From Peak |
| 2385.03 | 58.41 | H | 73.98 | -15.57 | Peak | 1.25 | 150 | No Marker Delta Method |
| 2385.03 | 41.28 | H | 53.98 | -12.70 | Avg | 1.25 | 150 | X-Axis, Default, 11Mbps |
| 2462.00 | 109.75 | H | -- | -- | Peak | 1 | 210 | Fundamental of High Channel |
| 2488.71 | 56.13 | H | 73.98 | -17.85 | Peak | 1 | 210 | No Marker Delta Method |
| 2488.71 | 39.82 | H | 53.98 | -14.16 | Avg | 1 | 210 | X-Axis, DigGain-7, 11Mbps |

Test distance
 3 meter



LOWER BAND EDGE (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 110.82 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.41208918 GHz | SWT | 5 ms | Unit | dB μ V |

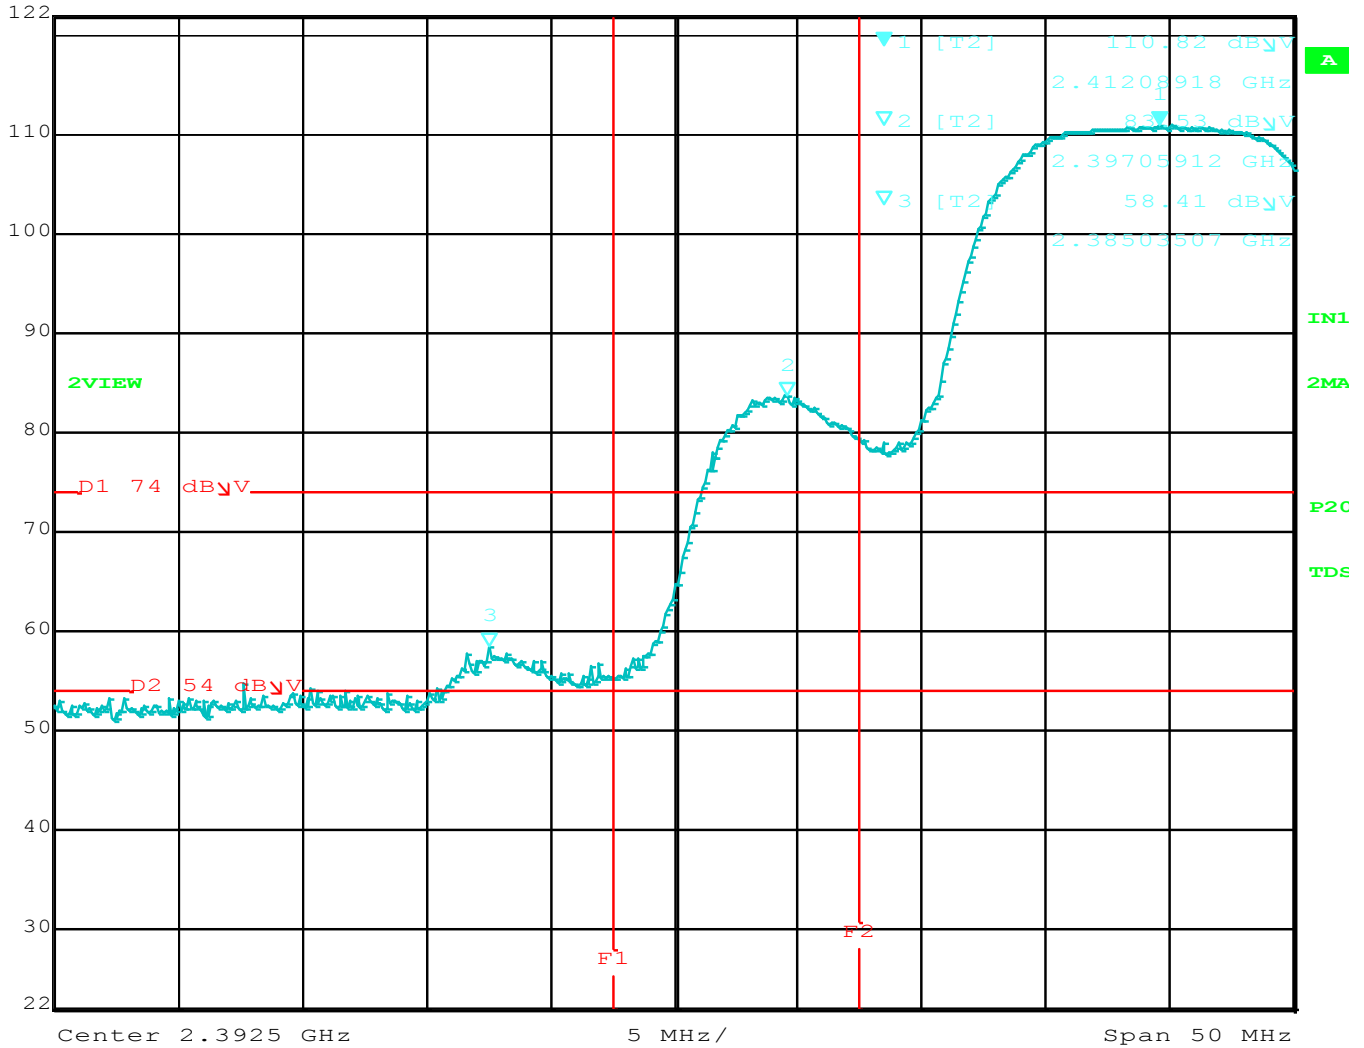


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11b, Default Power, Horizontal.
 Date: 29.JUN.2015 08:56:59



LOWER BAND EDGE (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 115.41 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.41068637 GHz | SWT | 5 ms | Unit | dB μ V |

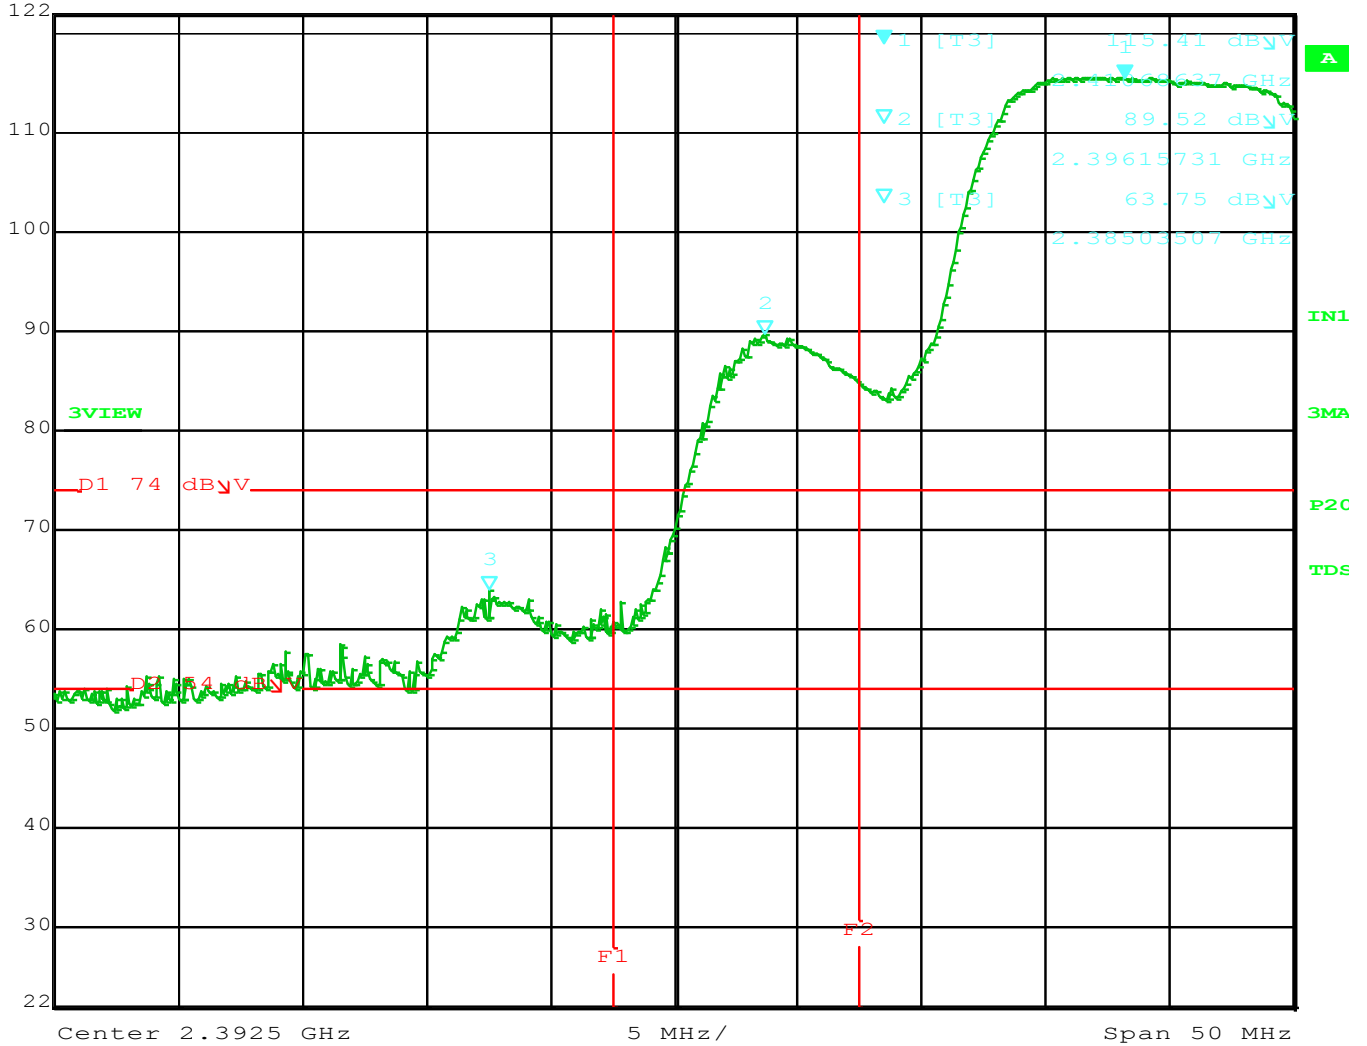


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11b, Default Power, Vertical.
 Date: 29.JUN.2015 09:02:00



**UPPER BAND EDGE
 (Horizontal)**

| | | | | | | |
|--|-------------|----------------|-----|-------|--------|------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dBV | 109.75 dBV | VBW | 3 MHz | | |
| | 72 dBV | 2.45981263 GHz | SWT | 5 ms | Unit | dBV |

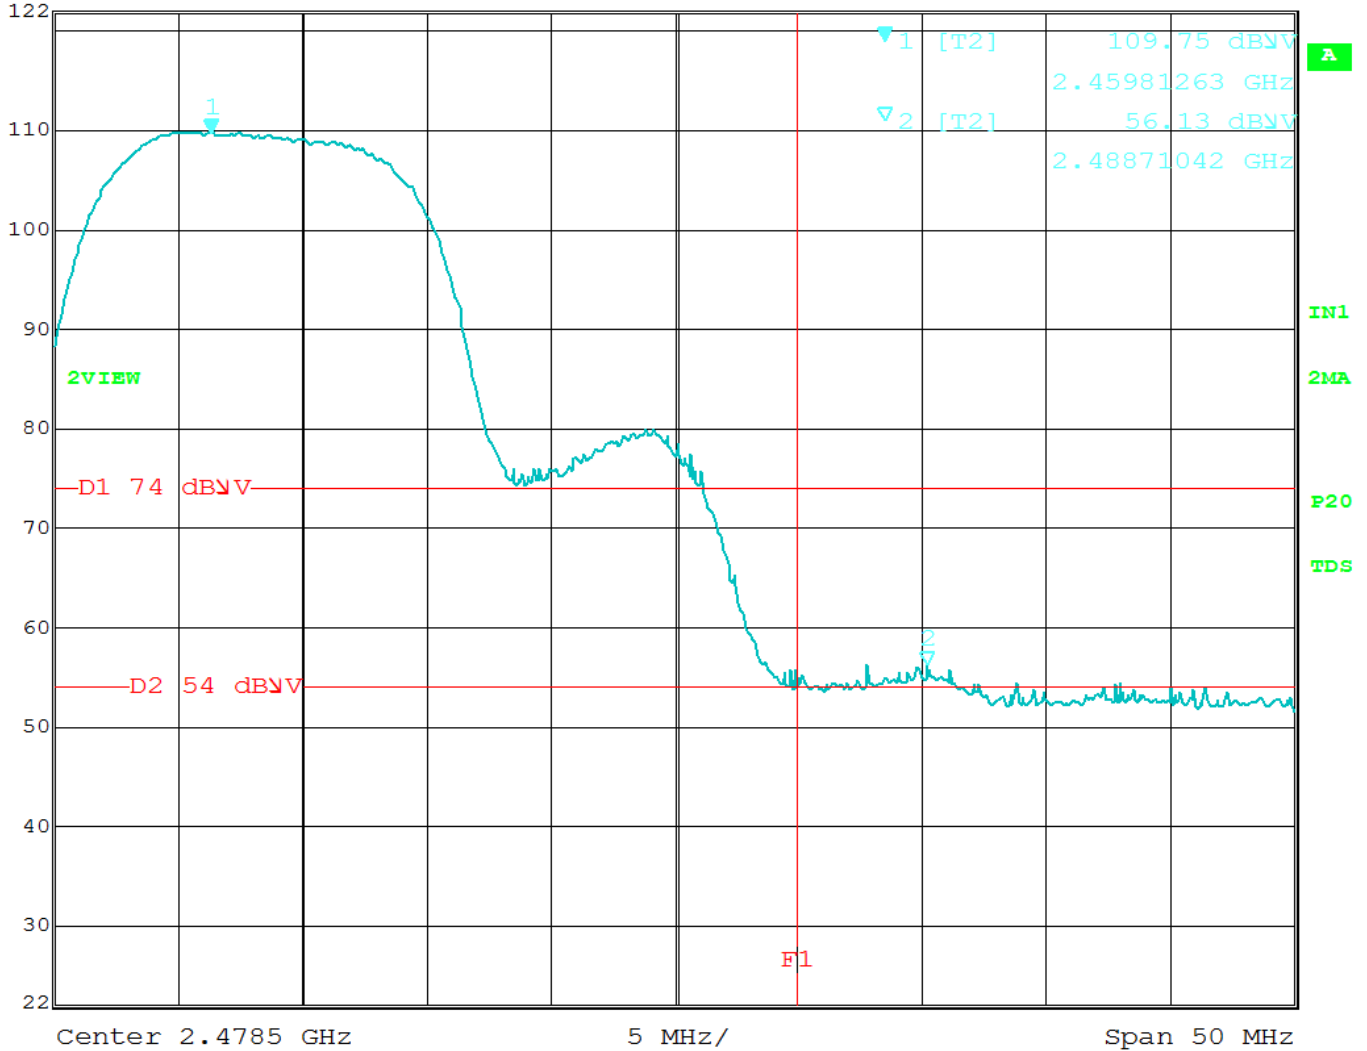


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11b, Horizontal.
 Date: 29.JUN.2015 09:59:45



UPPER BAND EDGE
(Vertical)

| | | | | | | |
|--|-------------|----------------|-----|-------|--------|------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dBV | 113.44 dBV | VBW | 3 MHz | | |
| | 72 dBV | 2.45901102 GHz | SWT | 5 ms | Unit | dBV |

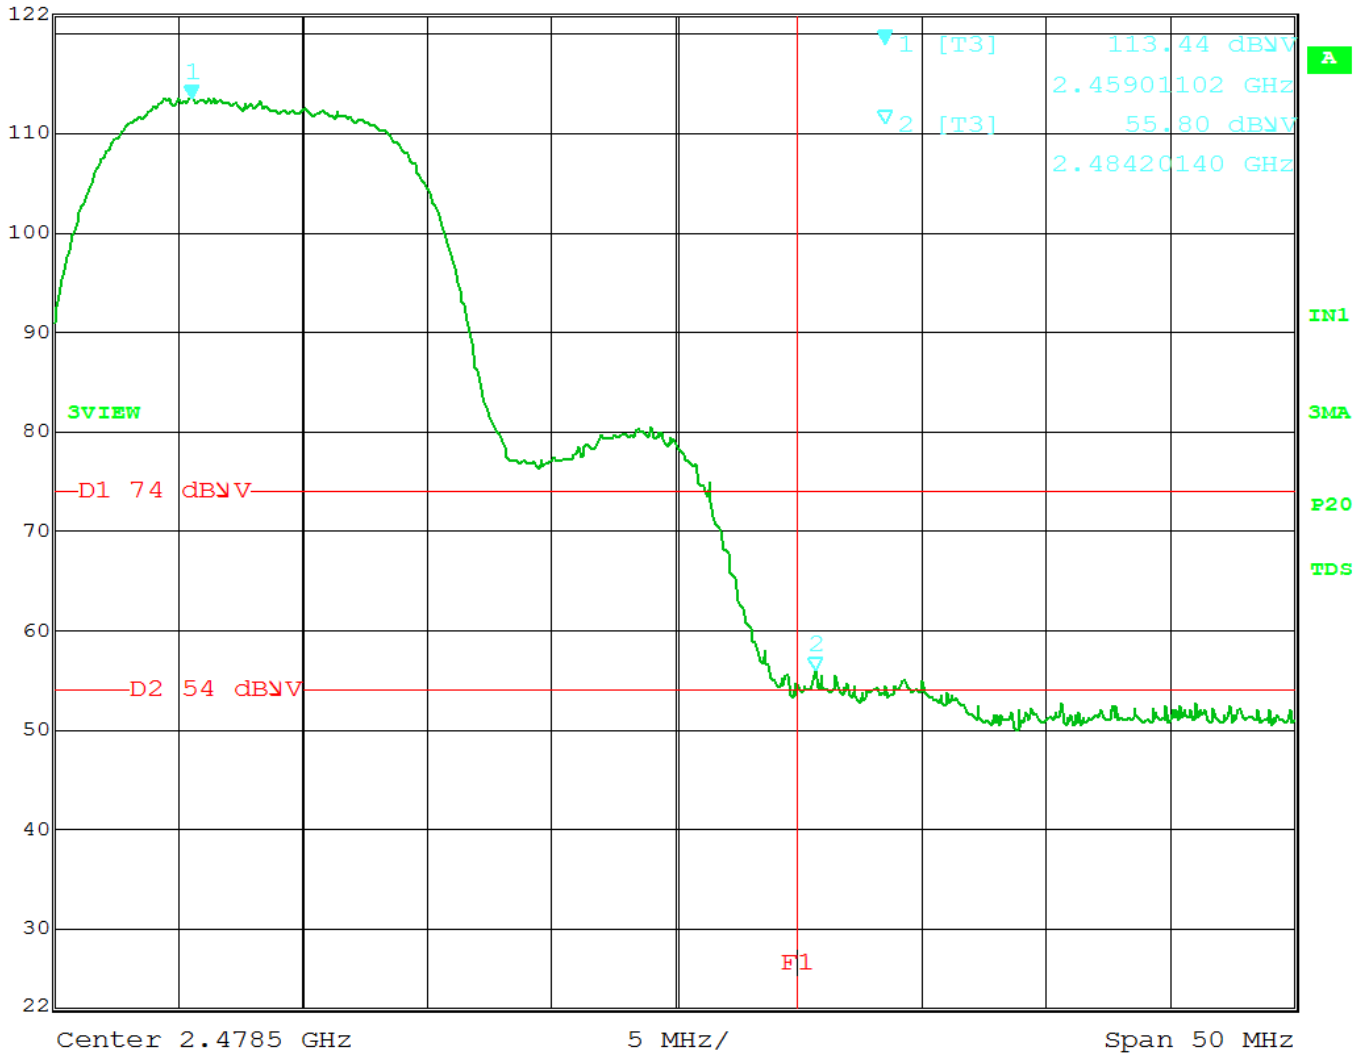

Title: SAMW25-MR210P.
 Comment A: LBE, 802.11b, Vertical.
 Date: 29.JUN.2015 09:54:32



802.11b Mode

BAND EDGES- VERTICAL LOW CURRENT

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, Low Current

 Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|---|
| 2412.00 | 114.16 | V | -- | -- | Peak | 1 | 216 | Fundamental of High Channel X-Axis, Default, 11Mbps |
| 2396.35 | 89.48 | V | 94.16 | -4.68 | Delta | 1 | 216 | From Peak |
| 2384.93 | 68.39 | V | 73.98 | -5.59 | Peak | 1 | 216 | No Marker Delta Method |
| 2384.93 | 49.16 | V | 53.98 | -4.82 | Avg | 1 | 216 | X-Axis, Default, 11Mbps |
| 2462.00 | 111.36 | V | -- | -- | Peak | 1 | 216 | Fundamental of High Channel |
| 2488.97 | 62.46 | V | 73.98 | -11.52 | Peak | 1 | 216 | No Marker Delta Method |
| 2488.97 | 42.56 | V | 53.98 | -11.42 | Avg | 1 | 216 | X-Axis, DG= -10, 11Mbps |

 Test distance
 3 meter


BAND EDGES- HORIZONTAL LOW CURRENT

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11b, Low Current

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)


| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|--------------------------------|
| 2412.00 | 107.00 | H | -- | -- | Peak | 1.04 | 50 | Fundamental of High Channel |
| | | | | | | | | X-Axis, Default, 11Mbps |
| 2396.85 | 76.77 | H | 87.00 | -10.23 | Delta | 1.04 | 50 | From Peak |
| 2384.63 | 56.80 | H | 73.98 | -17.18 | Peak | 1.04 | 50 | No Marker Delta Method |
| 2384.63 | 40.05 | H | 53.98 | -13.93 | Avg | 1.04 | 50 | X-Axis, Default, 11Mbps |
| 2462.00 | 109.47 | H | -- | -- | Peak | 1.04 | 50 | Fundamental of High Channel |
| 2489.87 | 61.17 | H | 73.98 | -12.81 | Peak | 1.04 | 50 | No Marker Delta Method |
| 2489.87 | 42.11 | H | 53.98 | -11.87 | Avg | 1.04 | 50 | X-Axis, DG= -10, 11Mbps |

Test distance
 3 meter



LOWER BAND EDGE LOW CURRENT (Vertical)

| | | | | | | |
|--|-------------|----------------|-----|-------|--------|------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dBμV | 114.16 dBμV | VBW | 3 MHz | | |
| | 72 dBμV | 2.40848096 GHz | SWT | 5 ms | Unit | dBμV |

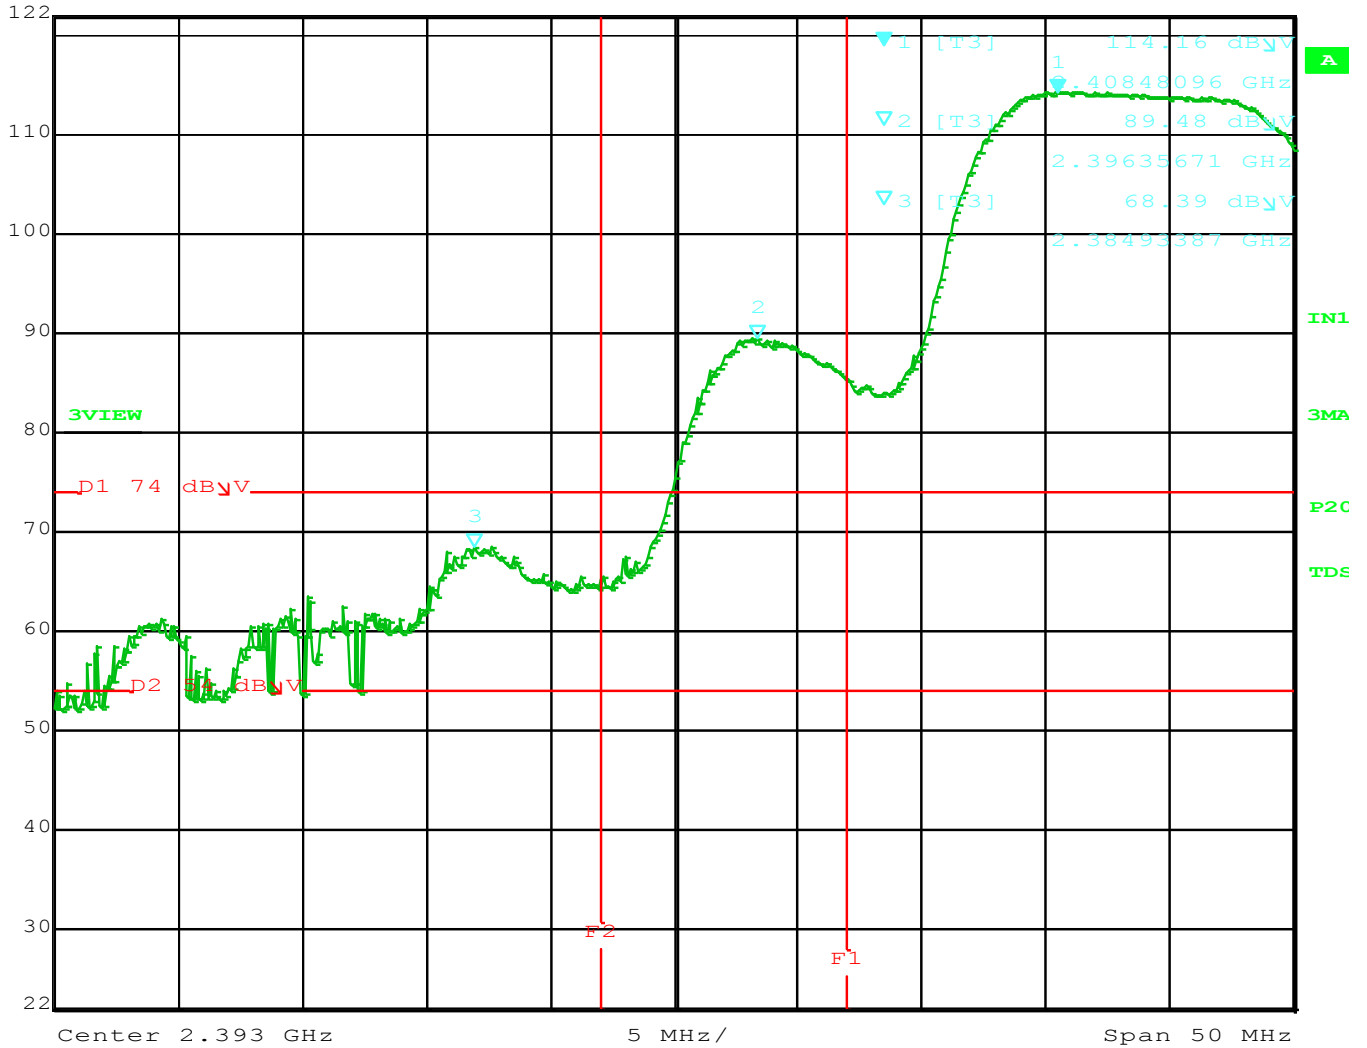


Title: SAMW25-MR210P, Low Current.
 Comment A: LBE, 802.11b, DG= Default, Vertical.
 Date: 29.JUN.2015 11:12:00



UPPER BAND EDGE LOW CURRENT (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 109.47 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.46011323 GHz | SWT | 5 ms | Unit | dB μ V |

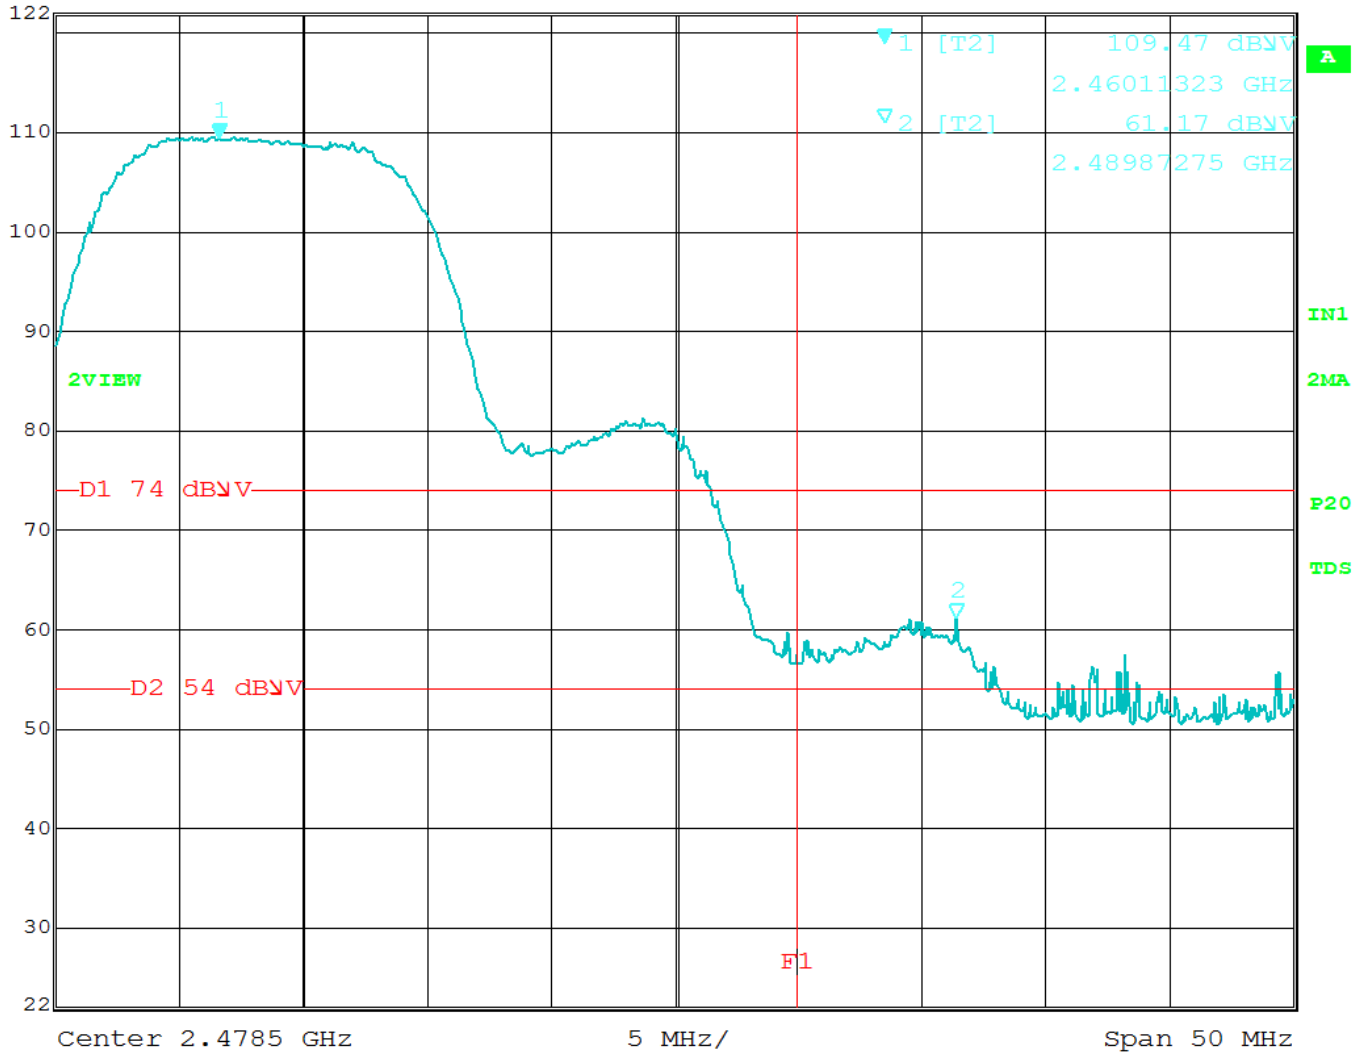


Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11b, Horizontal.
 Date: 29.JUN.2015 10:45:20



UPPER BAND EDGE LOW CURRENT (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 111.36 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45911122 GHz | SWT | 5 ms | Unit | dB μ V |

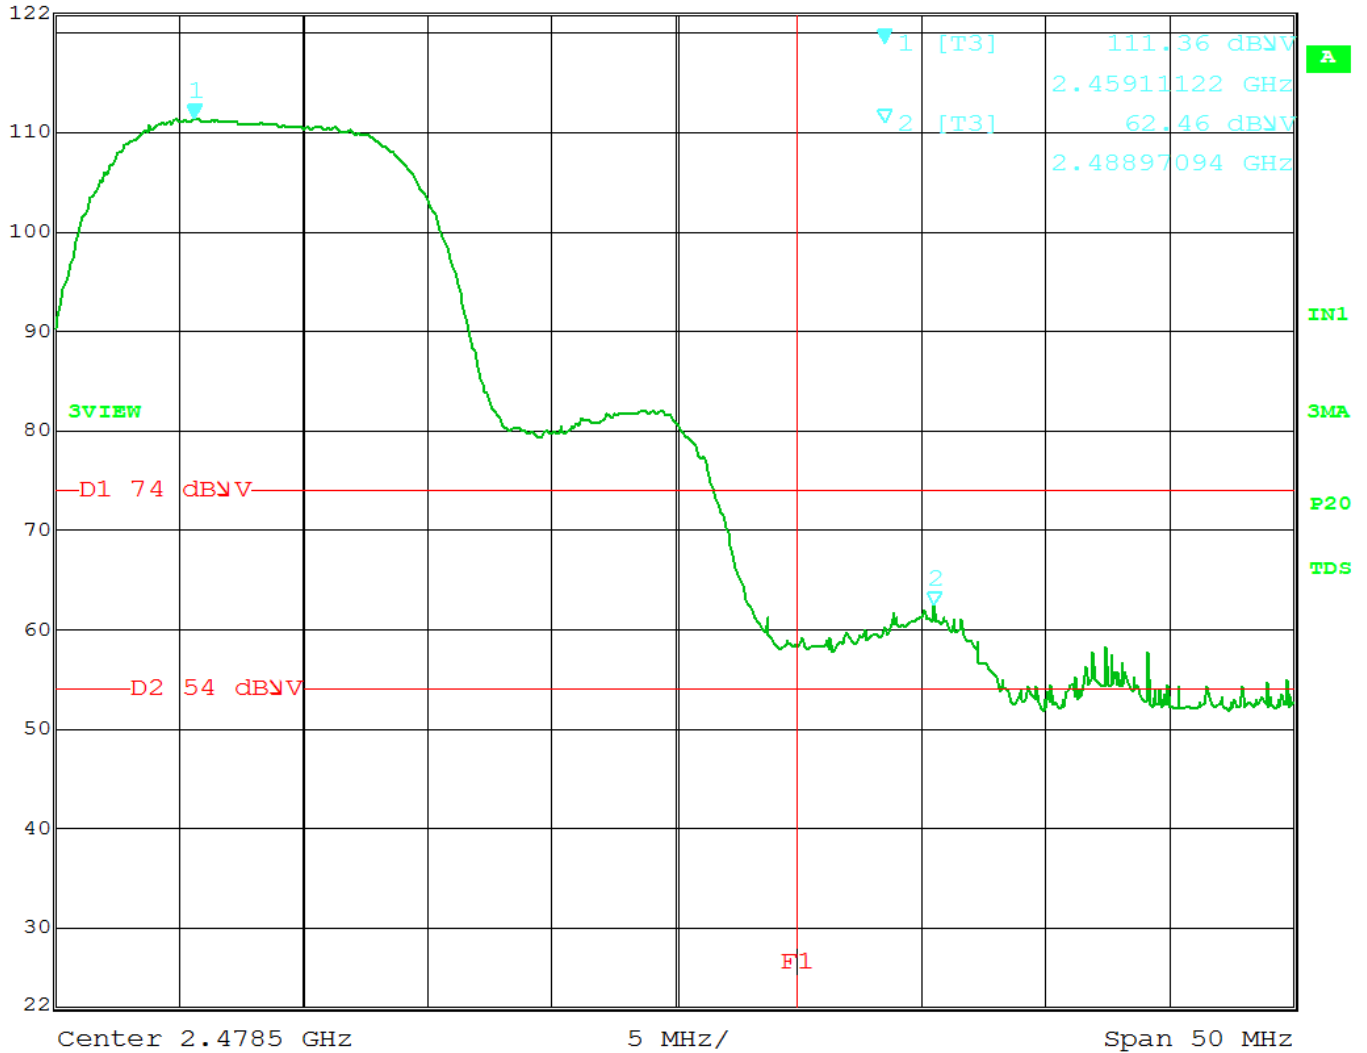

Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11b, Vertical.
 Date: 29.JUN.2015 10:41:08



802.11g Mode

BAND EDGES- VERTICAL

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, Normal Current.

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|-----------------------------------|
| 2412.00 | 113.40 | V | -- | -- | Peak | 1.1 | 220 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain= -9, 6Mbps |
| 2399.06 | 84.91 | V | 93.40 | -8.49 | Delta | 1.1 | 220 | From Peak |
| 2389.85 | 71.96 | V | 73.98 | -2.02 | Peak | 1.1 | 220 | No Marker Delta Method |
| 2389.85 | 48.80 | V | 53.98 | -5.18 | Avg | 1.1 | 220 | X-Axis, DigGain= -9, 6Mbps |
| 2462.00 | 110.63 | V | -- | -- | Peak | 1 | 210 | Fundamental of High Channel |
| 2483.50 | 72.29 | V | 73.98 | -1.69 | Peak | 1 | 210 | No Marker Delta Method |
| 2483.50 | 48.61 | V | 53.98 | -5.37 | Avg | 1 | 210 | X-Axis, DigGain= -9, 6Mbps |

Test distance
3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, Normal Current.

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)


| Freq. (MHz) | Level (dBμV) | Poi | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|-----------------------------------|
| 2412.00 | 104.81 | H | -- | -- | Peak | 1.3 | 220 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain= -9, 6Mbps |
| 2399.16 | 75.77 | H | 84.81 | -9.04 | Delta | 1.3 | 220 | From Peak |
| 2389.94 | 65.40 | H | 73.98 | -8.58 | Peak | 1.3 | 220 | No Marker Delta Method |
| 2389.94 | 43.17 | H | 53.98 | -10.81 | Avg | 1.3 | 220 | X-Axis, DigGain= -9, 6Mbps |
| 2462.00 | 106.33 | H | -- | -- | Peak | 1.02 | 215 | Fundamental of High Channel |
| 2484.10 | 70.10 | H | 73.98 | -3.88 | Peak | 1.02 | 215 | No Marker Delta Method |
| 2484.10 | 46.12 | H | 53.98 | -7.86 | Avg | 1.02 | 215 | X-Axis, DigGain= -9, 6Mbps |

Test distance
 3 meter



LOWER BAND EDGE (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 104.81 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40828156 GHz | SWT | 5 ms | Unit | dB μ V |

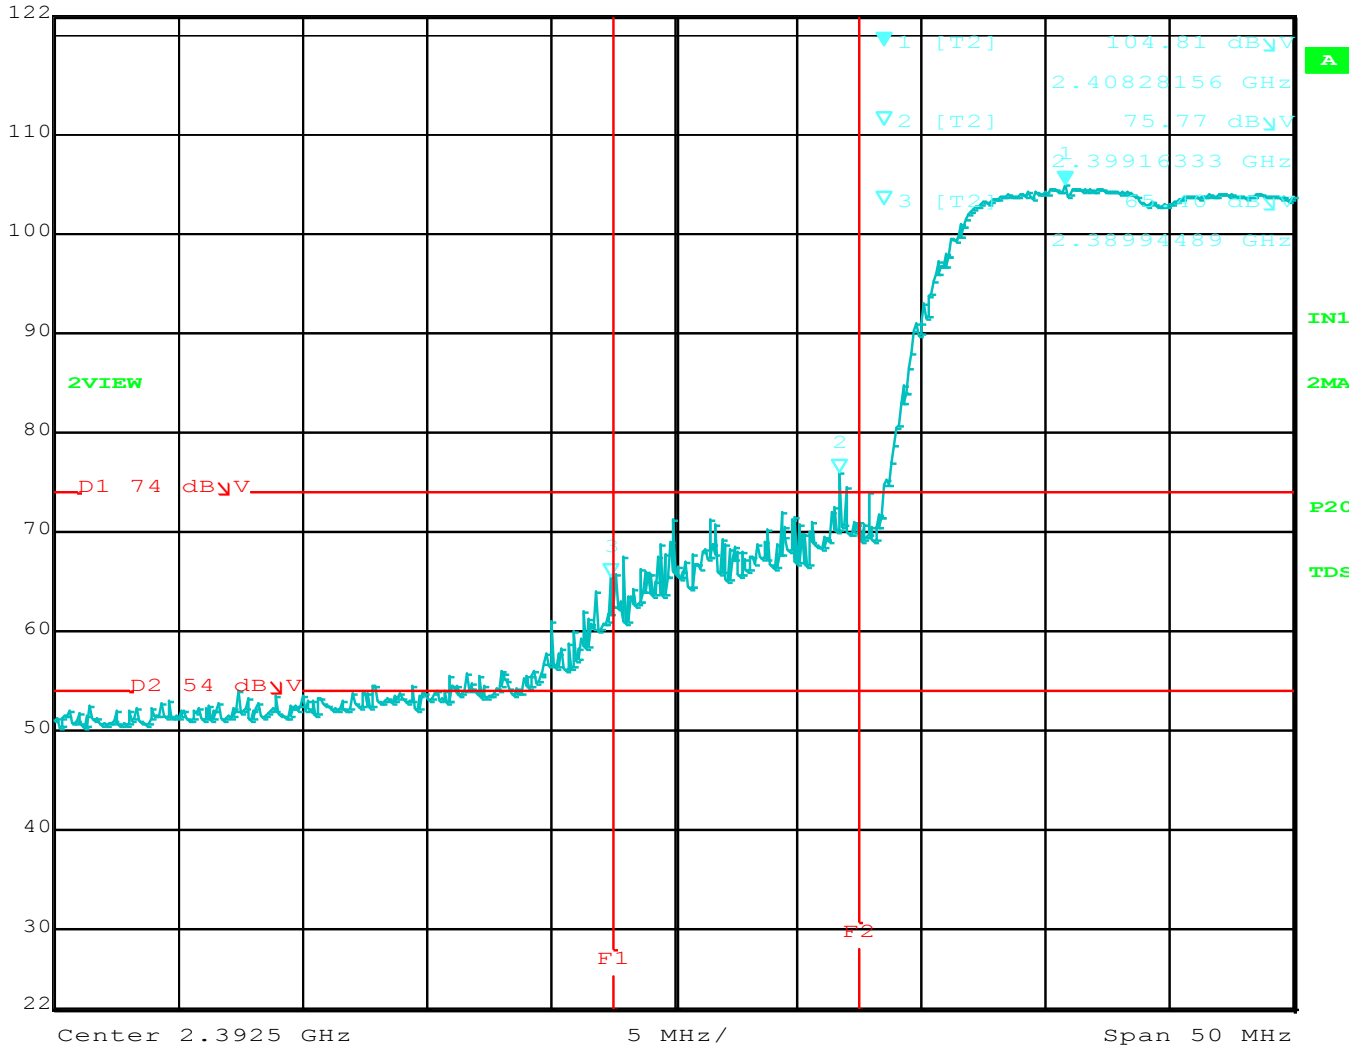


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11g, DG= -9, Horizontal.
 Date: 29.JUN.2015 09:22:14



LOWER BAND EDGE (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 113.40 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40948397 GHz | SWT | 5 ms | Unit | dB μ V |

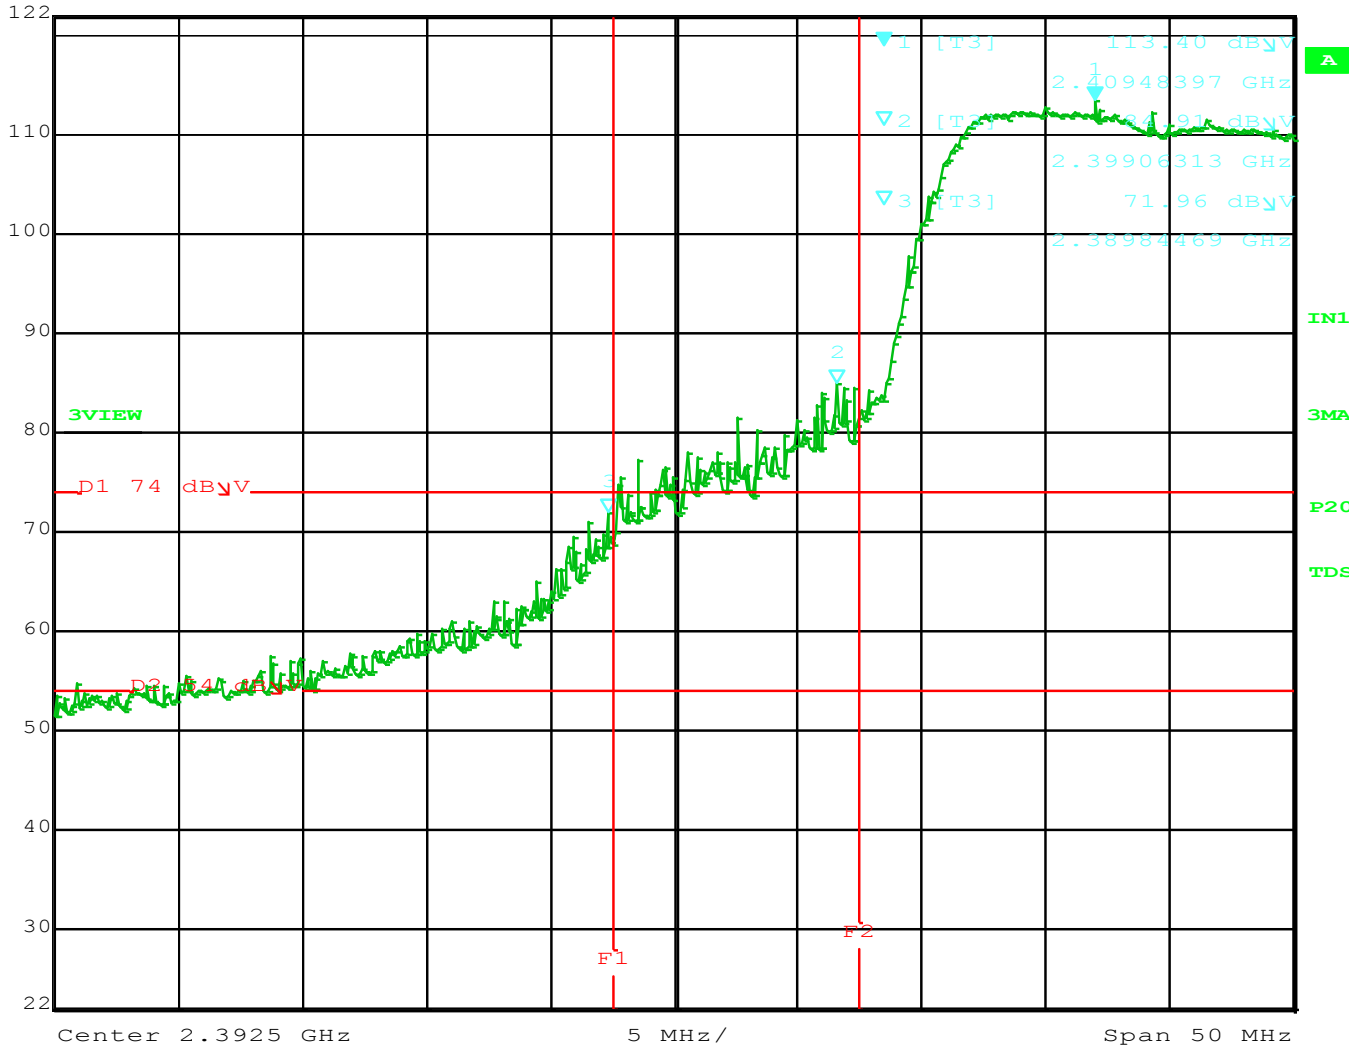


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11g, DG= -9, Vertical.
 Date: 29.JUN.2015 09:17:47



**UPPER BAND EDGE
(Horizontal)**

| | | | | | | |
|--|-------------|----------------|-----|-------|--------|------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dBμV | 106.33 dBμV | VBW | 3 MHz | | |
| | 72 dBμV | 2.46662625 GHz | SWT | 5 ms | Unit | dBμV |

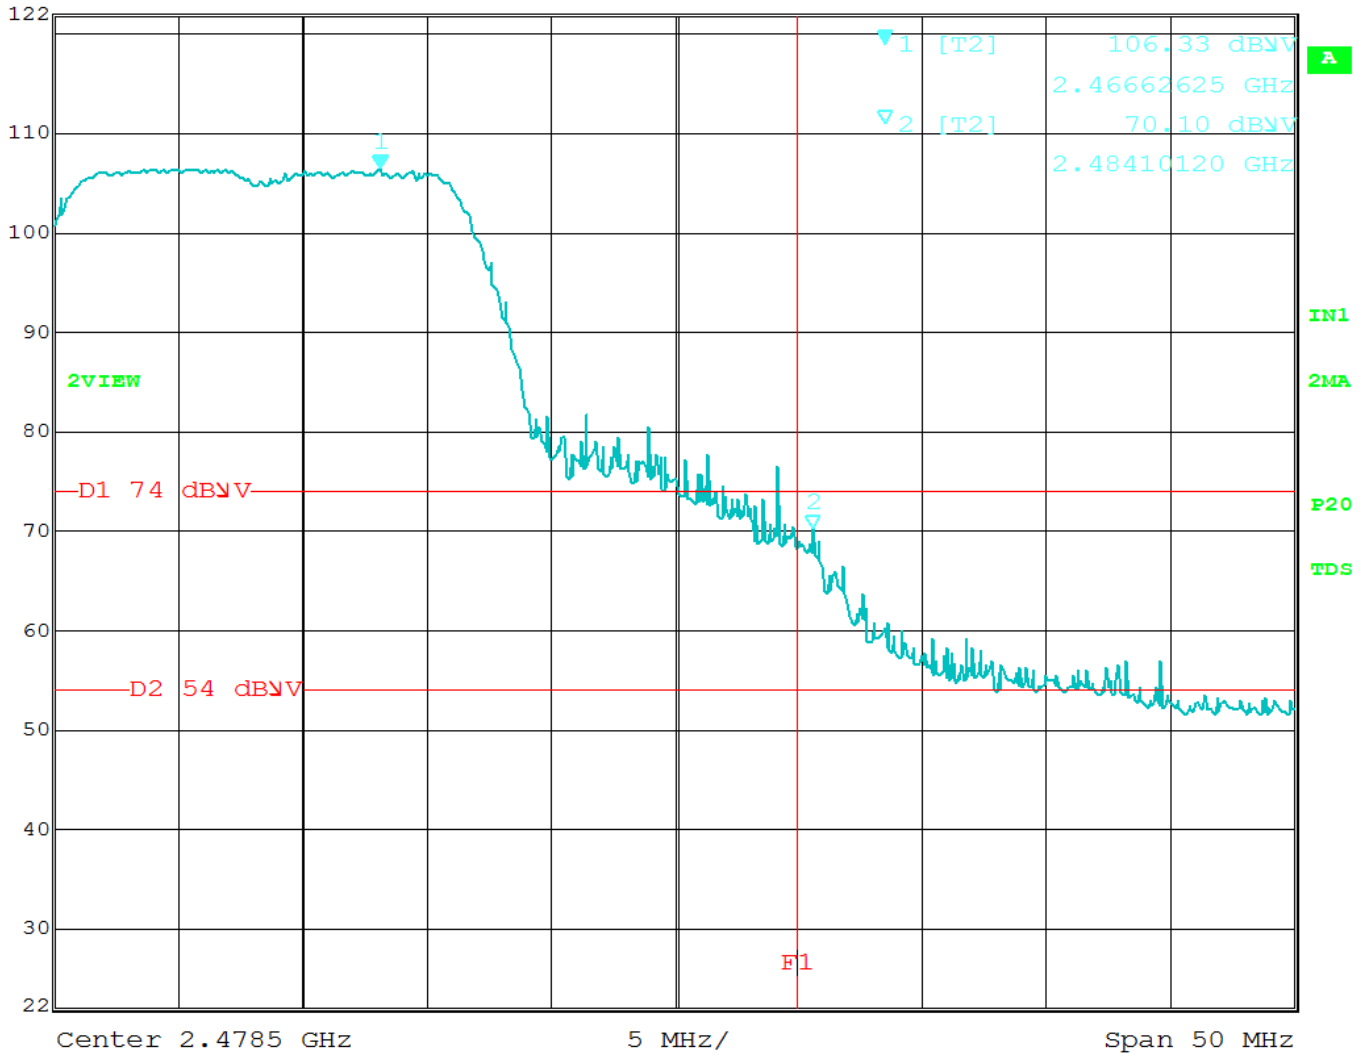


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11g, Horizontal.
 Date: 29.JUN.2015 10:12:17



UPPER BAND EDGE (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 110.63 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45490281 GHz | SWT | 5 ms | Unit | dB μ V |

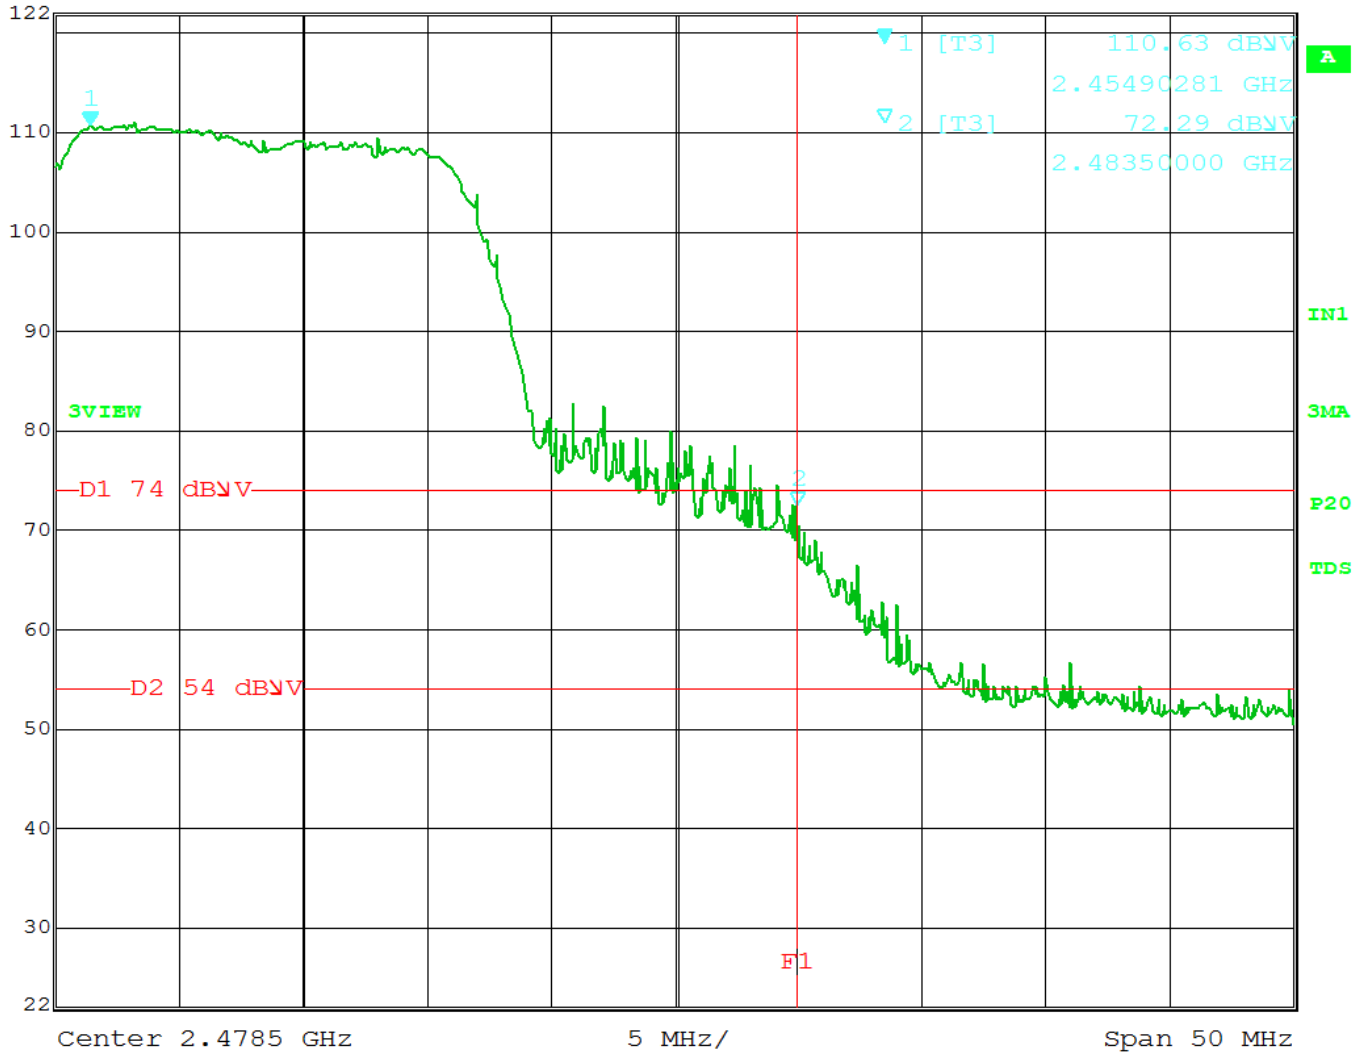

Title: SAMW25-MR210P.
 Comment A: LBE, 802.11g, Vertical.
 Date: 29.JUN.2015 10:08:39



802.11g Mode

BAND EDGES- VERTICAL LOW CURRENT

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, Low Current.

 Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|------------------------------------|
| 2412.00 | 110.19 | V | -- | -- | Peak | 1.04 | 220 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain= -5, 6Mbps |
| 2398.06 | 82.62 | V | 90.19 | -7.57 | Delta | 1.04 | 220 | From Peak |
| | | | | | | | | No Marker Delta Method Used |
| 2387.73 | 72.34 | V | 73.98 | -1.64 | Peak | 1.04 | 220 | |
| 2387.73 | 50.12 | V | 53.98 | -3.86 | Avg | 1.04 | 220 | X-Axis, DigGain= -5, 6Mbps |
| | | | | | | | | |
| 2462.00 | 109.79 | V | -- | -- | Peak | 1 | 209 | Fundamental of High Channel |
| | | | | | | | | No Marker Delta Method Used |
| 2483.50 | 71.80 | V | 73.98 | -2.18 | Peak | 1 | 209 | |
| 2483.50 | 50.99 | V | 53.98 | -2.99 | Avg | 1 | 209 | X-Axis, DigGain= -5, 6Mbps |
| | | | | | | | | |

 Test distance
 3 meter


BAND EDGES- HORIZONTAL LOW CURRENT

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11g, Low Current.

 Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison


Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|------------------------------------|
| 2412.00 | 102.66 | H | -- | -- | Peak | 1.05 | 50 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain= -5, 6Mbps |
| 2399.86 | 72.84 | H | 82.66 | -9.82 | Delta | 1.05 | 50 | From Peak |
| | | | | | | | | No Marker Delta Method Used |
| 2390.00 | 61.77 | H | 73.98 | -12.21 | Peak | 1.05 | 50 | |
| 2390.00 | 41.76 | H | 53.98 | -12.22 | Avg | 1.05 | 50 | X-Axis, DigGain= -5, 6Mbps |
| | | | | | | | | |
| 2462.00 | 106.87 | H | -- | -- | Peak | 1.3 | 215 | Fundamental of High Channel |
| | | | | | | | | No Marker Delta Method Used |
| 2484.20 | 71.09 | H | 73.98 | -2.89 | Peak | 1.3 | 215 | |
| 2484.20 | 48.08 | H | 53.98 | -5.90 | Avg | 1.3 | 215 | X-Axis, DigGain= -5, 6Mbps |
| | | | | | | | | |

 Test distance
 3 meter


LOWER BAND EDGE LOW CURRENT (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 102.66 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40878156 GHz | SWT | 5 ms | Unit | dB μ V |

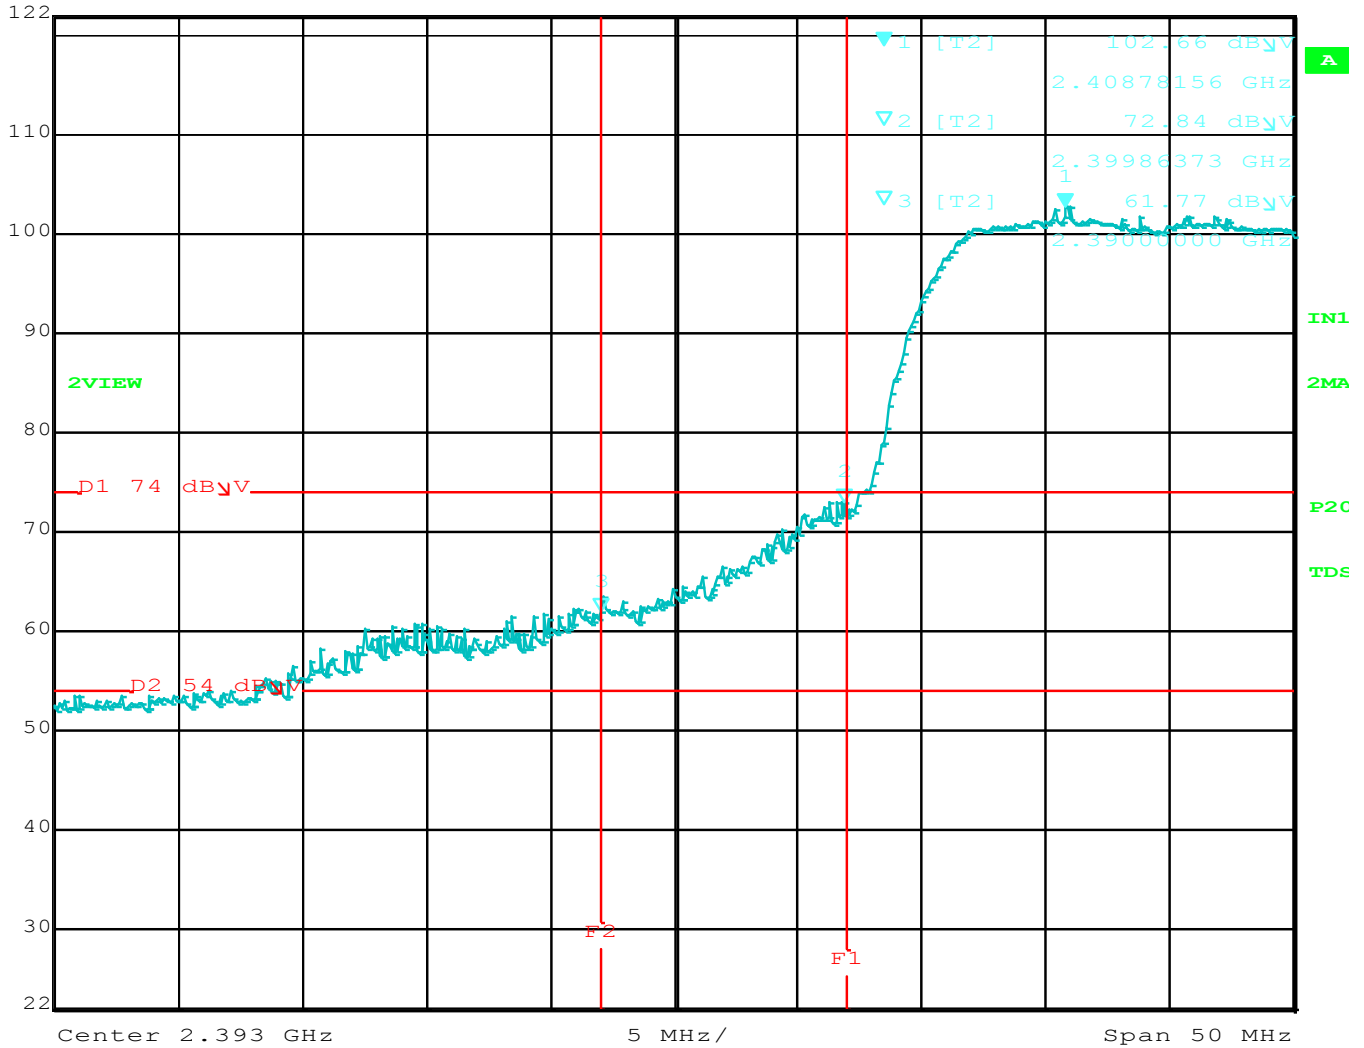


Title: SAMW25-MR210P, Low Current.
 Comment A: LBE, 802.11g, DG= -5, Horizontal.
 Date: 29.JUN.2015 12:46:21



LOWER BAND EDGE LOW CURRENT (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 110.19 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40687776 GHz | SWT | 5 ms | Unit | dB μ V |

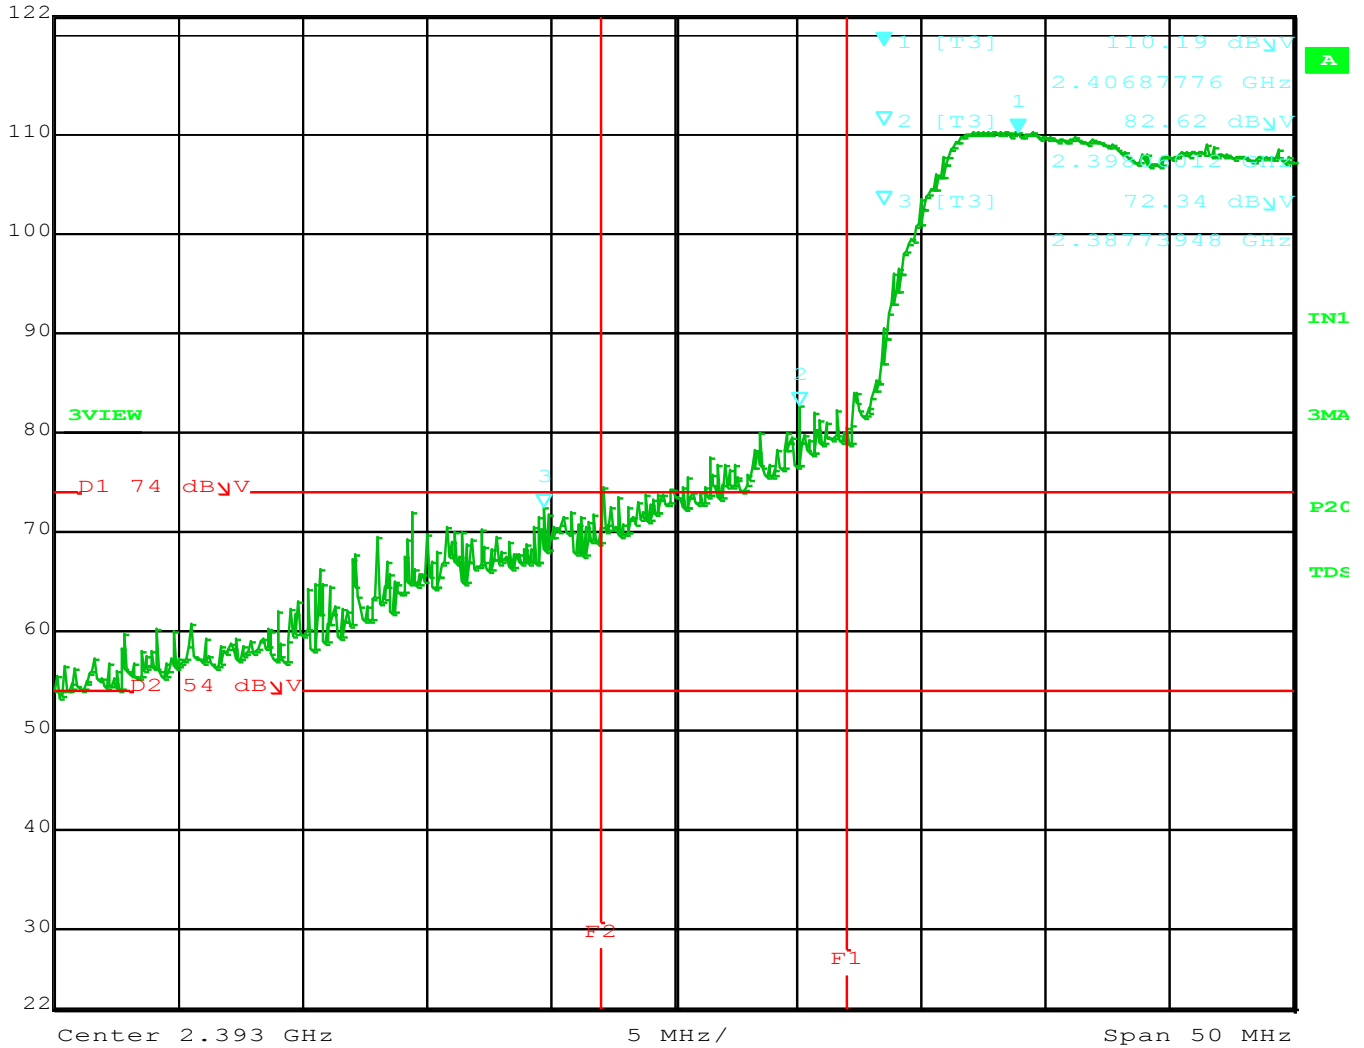


Title: SAMW25-MR210P, Low Current.
 Comment A: LBE, 802.11g, DG= -5, Vertical.
 Date: 29.JUN.2015 12:38:03



UPPER BAND EDGE LOW CURRENT (Horizontal)

| | | | | | | |
|--|-------------|----------------|-----|-------|--------|------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dBμV | 106.87 dBμV | VBW | 3 MHz | | |
| | 72 dBμV | 2.45650601 GHz | SWT | 5 ms | Unit | dBμV |

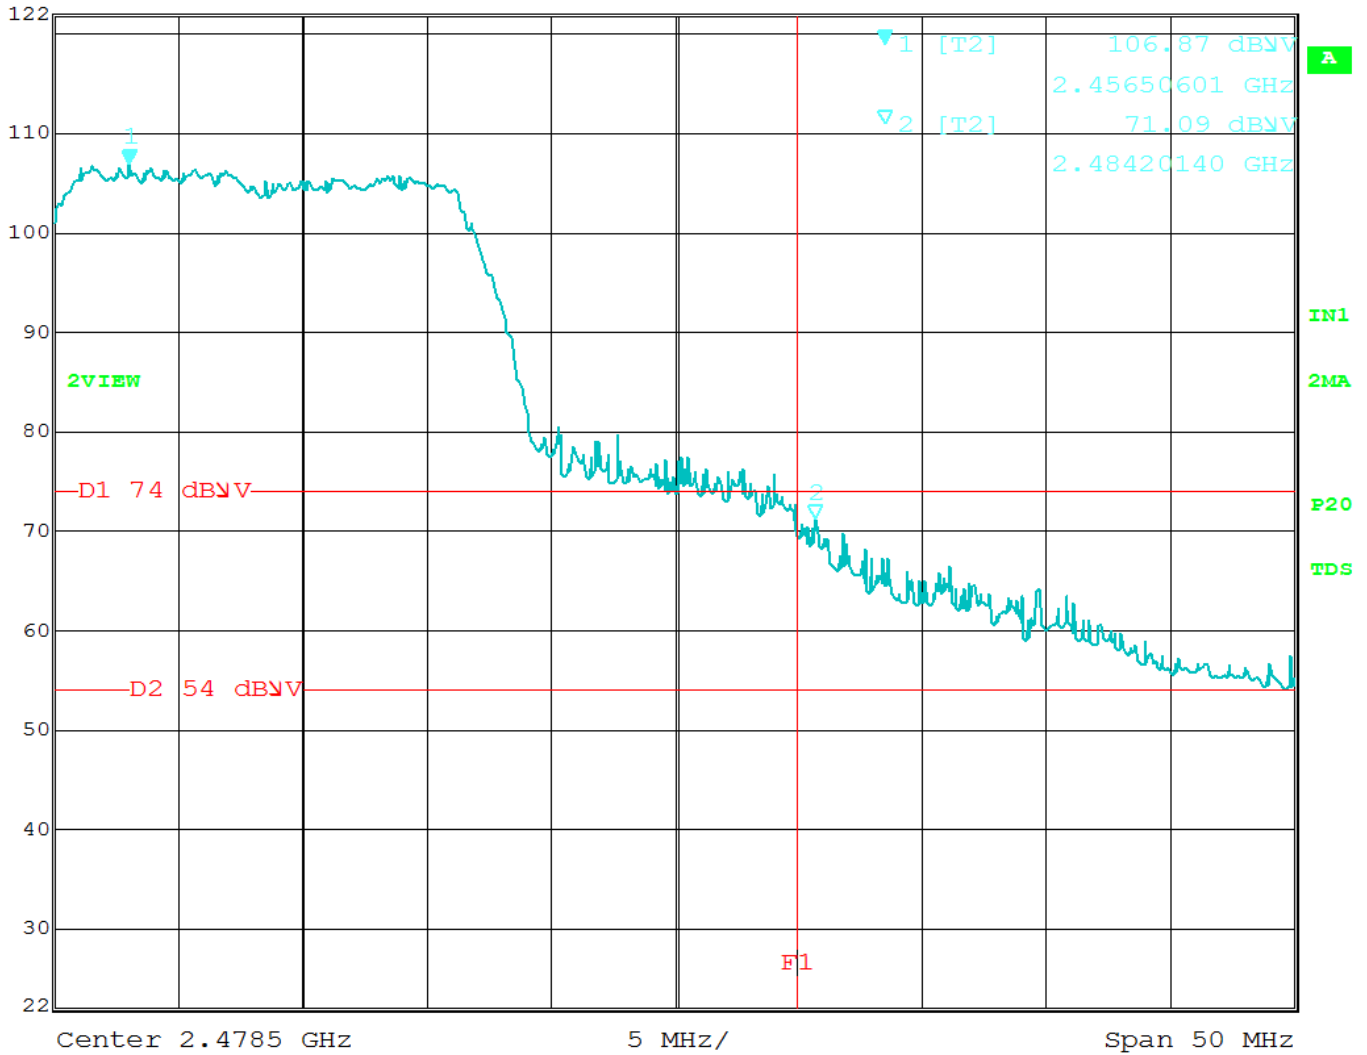


Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11g, Horizontal.
 Date: 29.JUN.2015 10:53:46



UPPER BAND EDGE LOW CURRENT (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 109.79 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45871042 GHz | SWT | 5 ms | Unit | dB μ V |

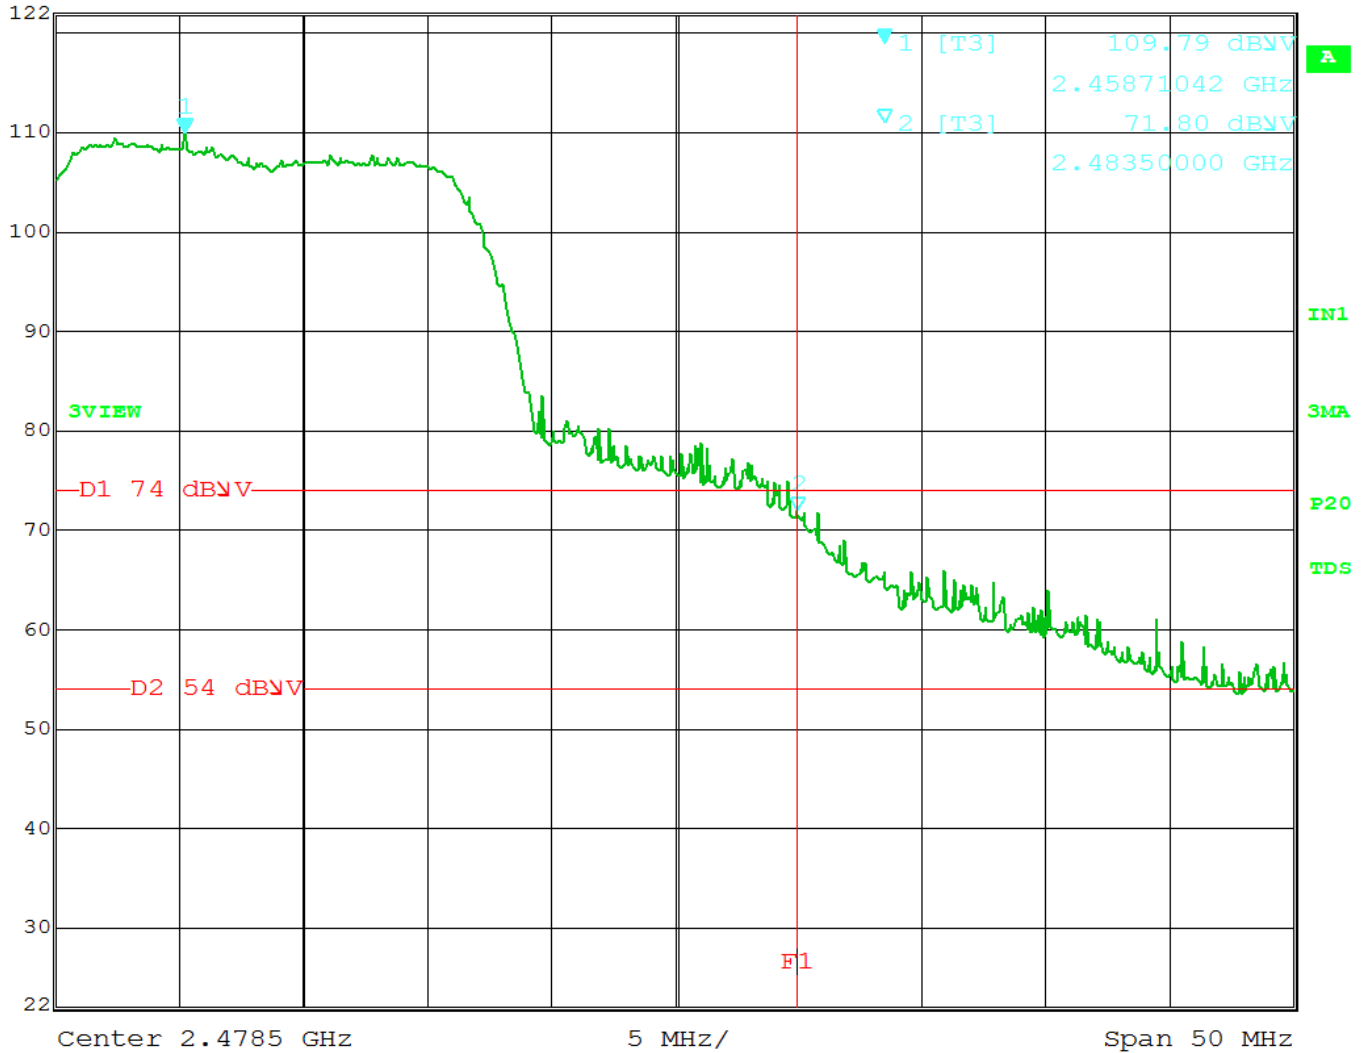

Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11g, Vertical.
 Date: 29.JUN.2015 10:51:58



802.11n Mode

BAND EDGES- VERTICAL

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, Normal Current

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|---|
| 2412.00 | 111.42 | V | -- | -- | Peak | 1.1 | 215 | Fundamental of High Channel X-Axis, DigGain=-10, MCS0 |
| 2398.46 | 84.07 | V | 91.42 | -7.35 | Delta | 1.1 | 215 | From Peak |
| 2389.64 | 71.78 | V | 73.98 | -2.20 | Peak | 1.1 | 215 | No Marker Delta Method Used |
| 2389.64 | 48.85 | V | 53.98 | -5.13 | Avg | 1.1 | 215 | X-Axis, DigGain=-10, MCS0 |
| 2462.00 | 111.45 | V | -- | -- | Peak | 1 | 210 | Fundamental of High Channel |
| 2484.90 | 72.90 | V | 73.98 | -1.08 | Peak | 1 | 210 | No Marker Delta Method Used |
| 2484.90 | 48.57 | V | 53.98 | -5.41 | Avg | 1 | 210 | X-Axis, Default, MCS0 |

Test distance
 3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter

Date: 6/29/2015

Lab: R

Test

 Model: SAMW25-MR210P
 Mode: 802.11n, Low Current

ENG: Matt Harrison


Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dB μ V) | Pol | Limit (dB μ V) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------------|-----|--------------------|-------------|-----------------|-----------------|-------------------|------------------------------------|
| 2412.00 | 102.54 | H | -- | -- | Peak | 1 | 210 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain=-10, MCS0 |
| 2399.66 | 74.32 | H | 82.54 | -8.22 | Delta | 1 | 210 | From Peak |
| 2389.94 | 59.84 | H | 73.98 | -14.14 | Peak | 1 | 210 | No Marker Delta Method Used |
| 2389.94 | 40.61 | H | 53.98 | -13.37 | Avg | 1 | 210 | X-Axis, DigGain=-10, MCS0 |
| 2462.00 | 106.89 | H | -- | -- | Peak | 1.2 | 215 | Fundamental of High Channel |
| 2484.26 | 73.07 | H | 73.98 | -0.91 | Peak | 1.2 | 215 | No Marker Delta Method Used |
| 2484.26 | 48.04 | H | 53.98 | -5.94 | Avg | 1.2 | 215 | X-Axis, Default, MCS0 |

 Test distance
 3 meter


LOWER BAND EDGE (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 102.54 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40597695 GHz | SWT | 5 ms | Unit | dB μ V |

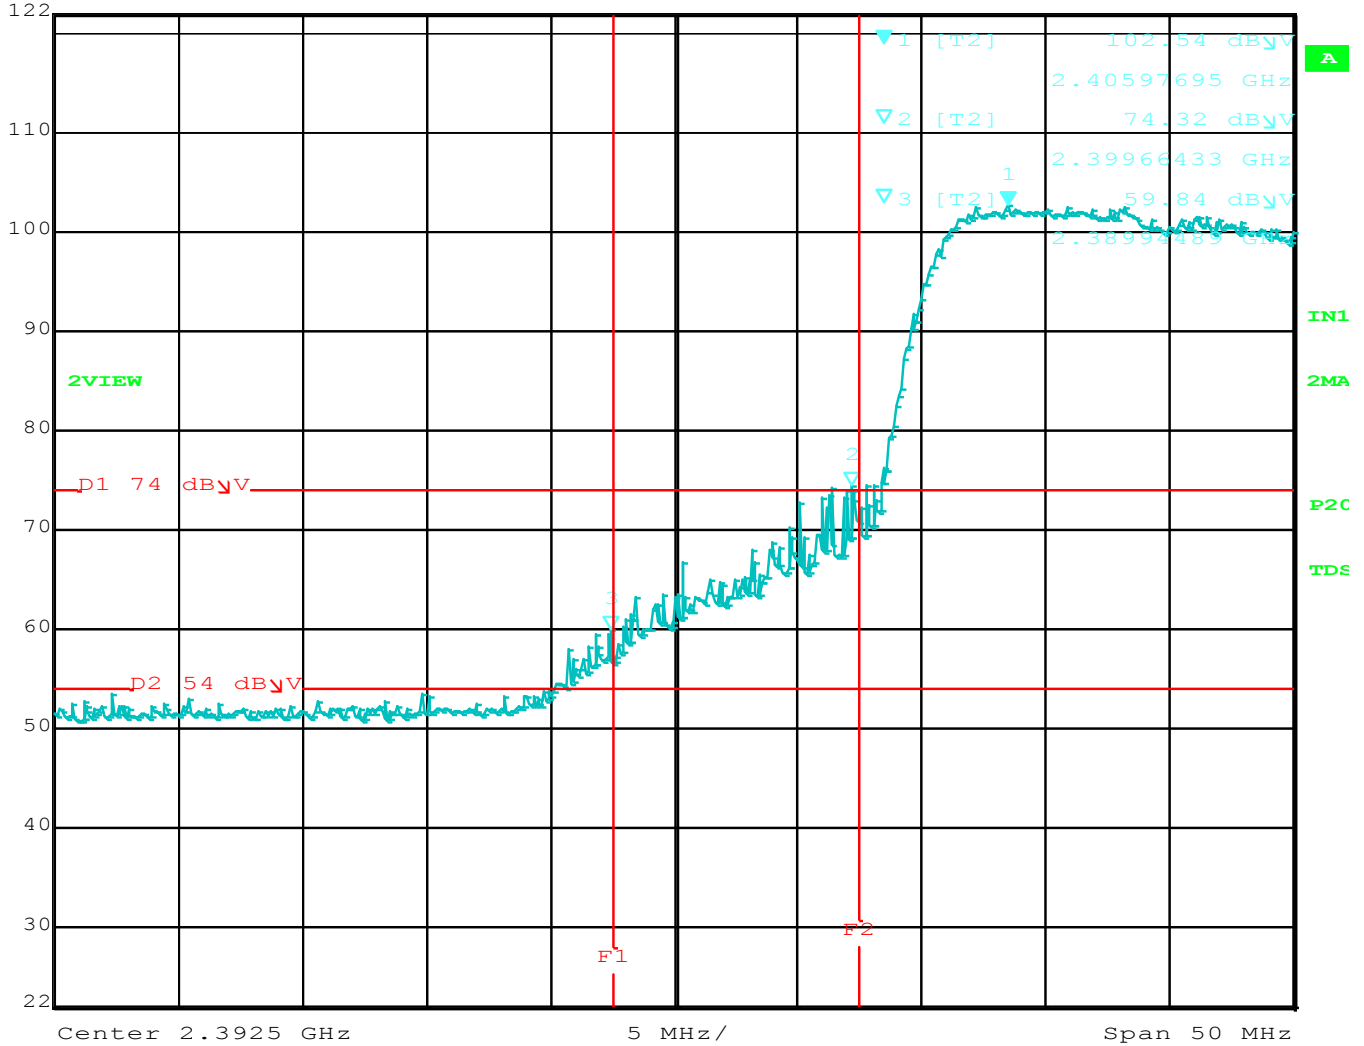


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11n, DG= -10, Horizontal.
 Date: 29.JUN.2015 09:45:30



LOWER BAND EDGE (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 111.42 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40447395 GHz | SWT | 5 ms | Unit | dB μ V |

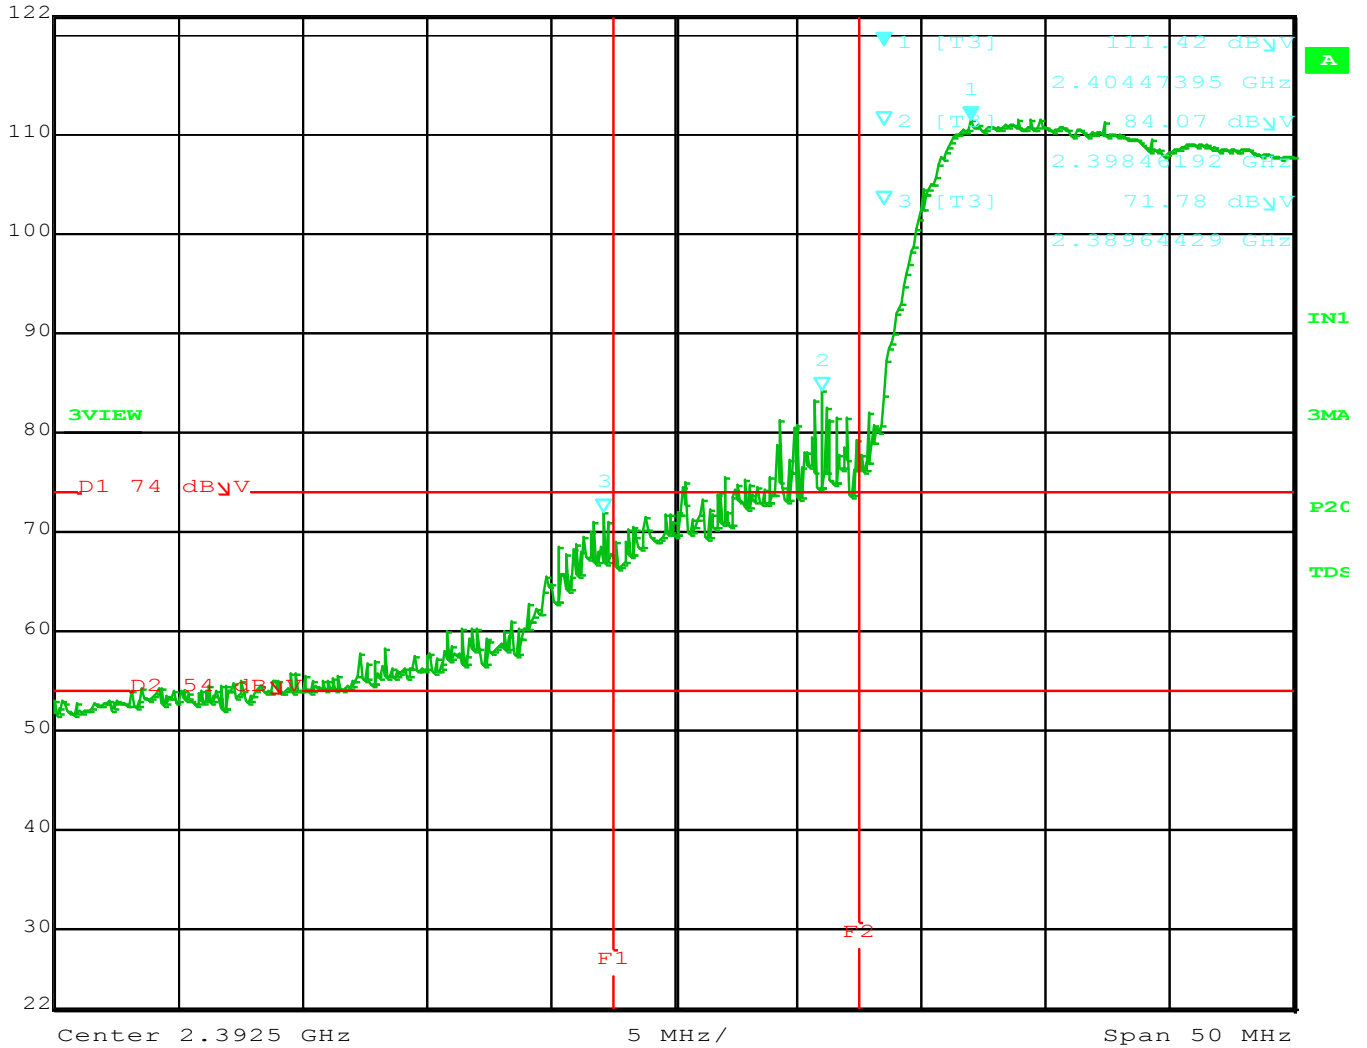


Title: SAMW25-MR210P.
 Comment A: LBE, 802.11n, DG= -10, Vertical.
 Date: 29.JUN.2015 09:40:11



UPPER BAND EDGE (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 106.89 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45450200 GHz | SWT | 5 ms | Unit | dB μ V |

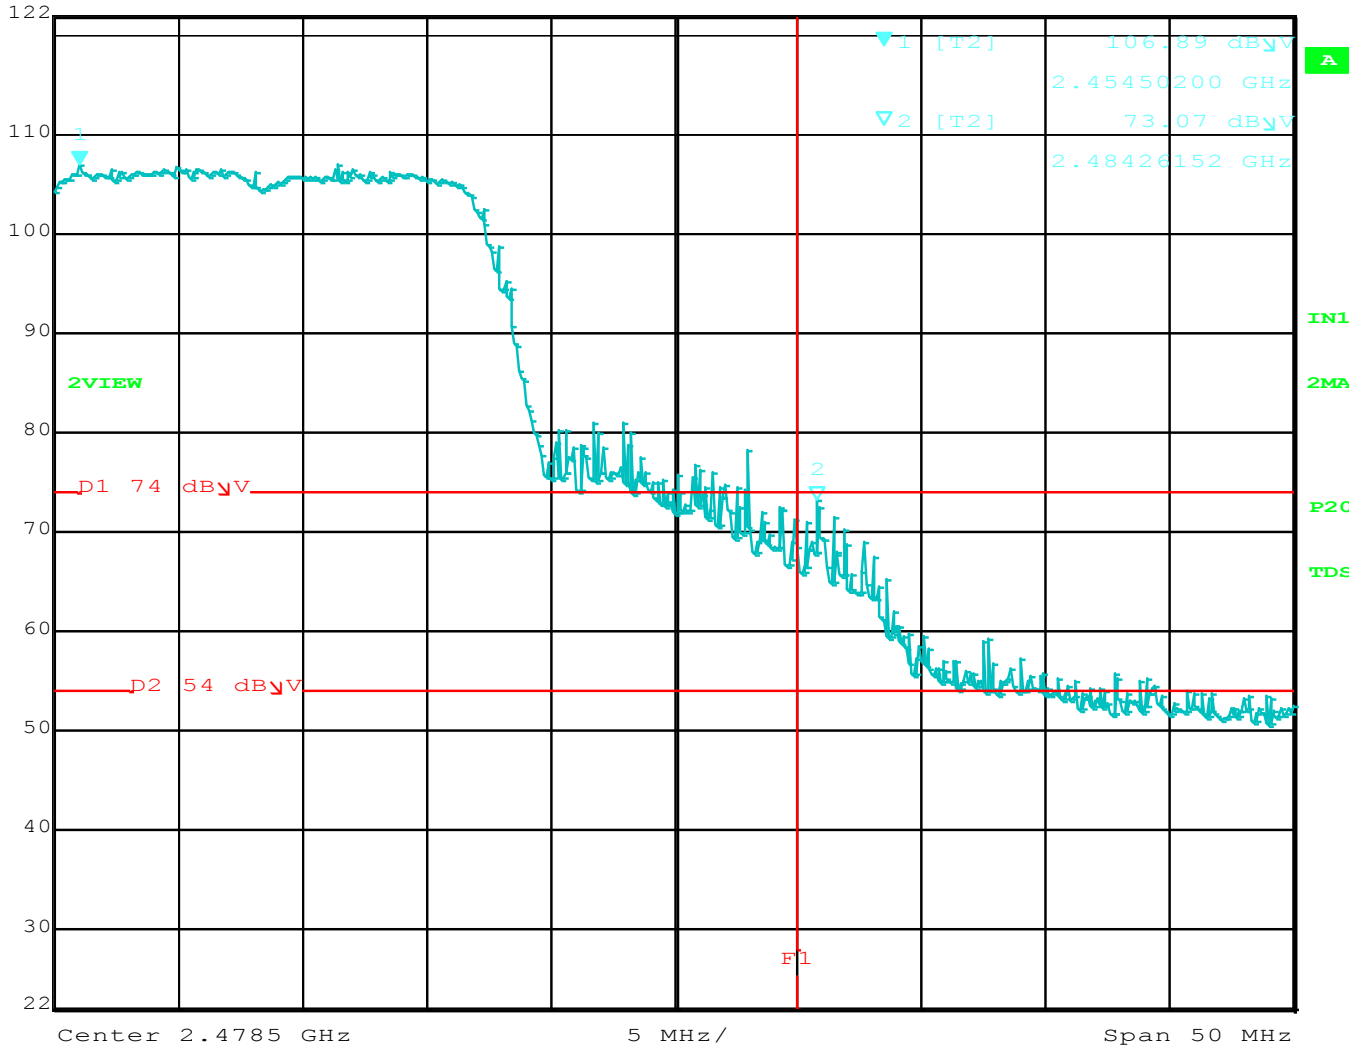


Title: SAMW25-MR210P.
 Comment A: UBE, 802.11n, DG= Default, Horizontal.
 Date: 29.JUN.2015 10:31:52



UPPER BAND EDGE (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 111.45 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45981263 GHz | SWT | 5 ms | Unit | dB μ V |

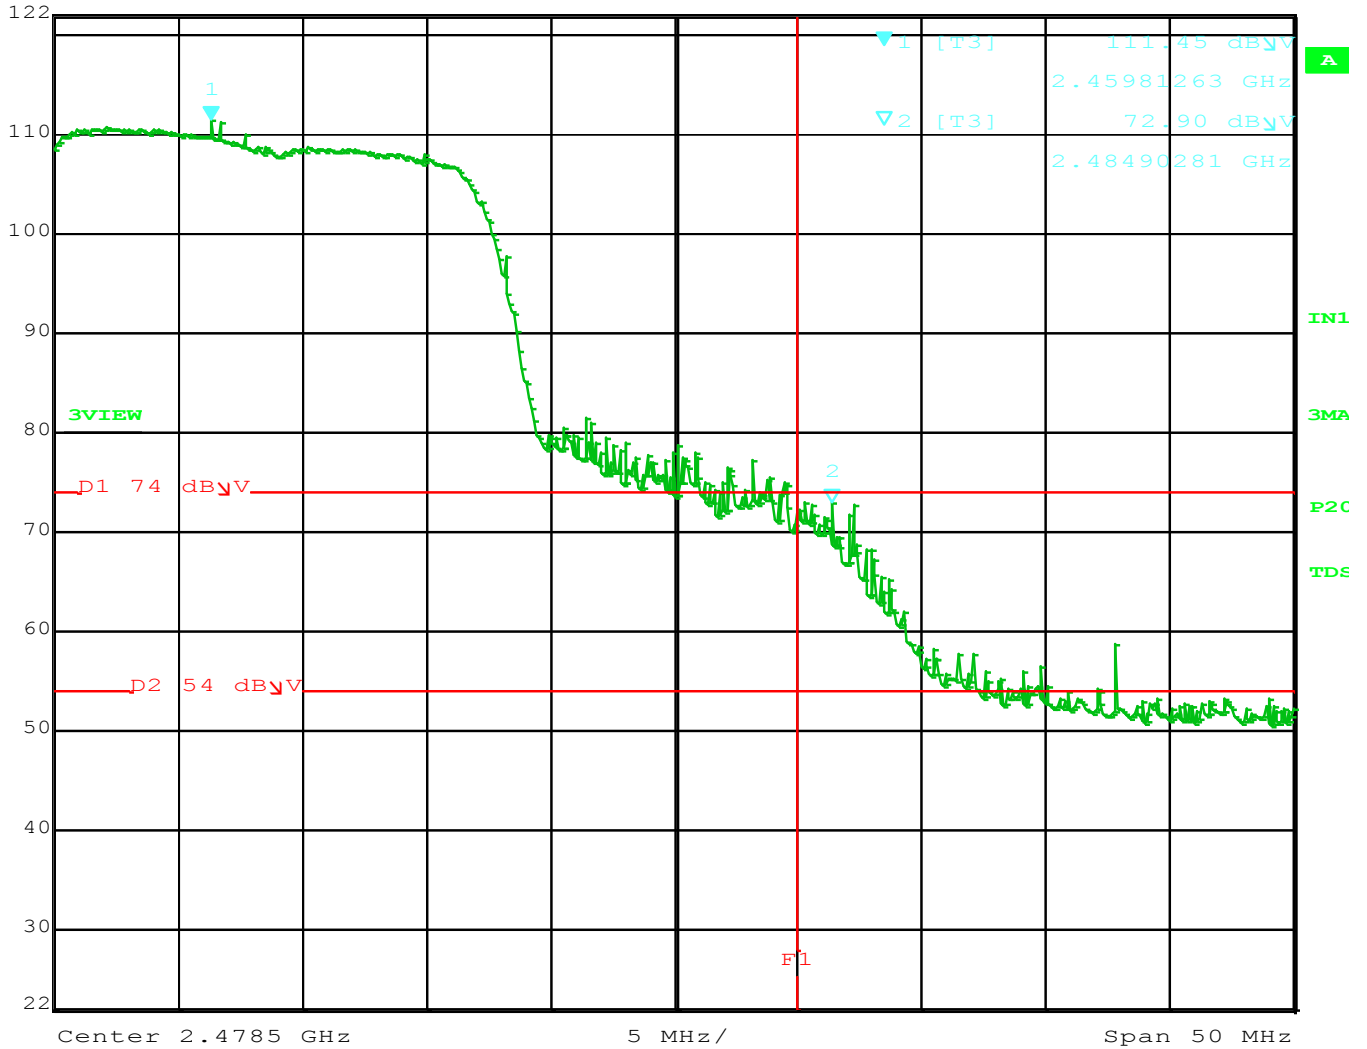

Title: SAMW25-MR210P.
 Comment A: UBE, 802.11n, DG= Default, Vertical.
 Date: 29.JUN.2015 10:24:47



802.11n Mode BAND EDGES- VERTICAL

FCC 15.247

Company: Atmel Corporation
 EUT: Modular Transmitter
 Model: SAMW25-MR210P
 Mode: 802.11n, Low Current

Date: 6/29/2015
 Lab: R
 Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dBμV) | Pol | Limit (dBμV) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------|-----|--------------|-------------|-----------------|-----------------|-------------------|---------------------------------|
| 2412.00 | 109.50 | V | -- | -- | Peak | 1 | 220 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain=-5, MCS0 |
| 2398.96 | 82.95 | V | 89.50 | -6.55 | Delta | 1 | 220 | From Peak |
| 2389.59 | 72.53 | V | 73.98 | -1.45 | Peak | 1 | 220 | No Marker Delta Method Used |
| 2389.59 | 53.15 | V | 53.98 | -0.83 | Avg | 1 | 220 | X-Axis, DigGain=-5, MCS0 |
| 2462.00 | 108.28 | V | -- | -- | Peak | 1.04 | 214 | Fundamental of High Channel |
| 2483.66 | 71.12 | V | 73.98 | -2.86 | Peak | 1.04 | 214 | No Marker Delta Method Used |
| 2483.66 | 49.36 | V | 53.98 | -4.62 | Avg | 1.04 | 214 | X-Axis, Default, MCS0 |

Test distance
 3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

 Company: Atmel Corporation
 EUT: Modular Transmitter

Date: 6/29/2015

Lab: R

Test

 Model: SAMW25-MR210P
 Mode: 802.11n, Low Current

ENG: Matt Harrison


Compatible Electronics, Inc. FAC-3 (Lab R)

| Freq. (MHz) | Level (dB μ V) | Pol | Limit (dB μ V) | Margin (dB) | Peak / QP / Avg | Ant. Height (m) | Table Angle (deg) | Comments |
|-------------|--------------------|-----|--------------------|-------------|-----------------|-----------------|-------------------|------------------------------------|
| 2412.00 | 99.90 | H | -- | -- | Peak | 1 | 50 | Fundamental of High Channel |
| | | | | | | | | X-Axis, DigGain=-5, MCS0 |
| 2398.96 | 72.99 | H | 79.90 | -6.91 | Delta | 1 | 50 | From Peak |
| 2389.59 | 59.26 | H | 73.98 | -14.72 | Peak | 1 | 50 | No Marker Delta Method Used |
| 2389.59 | 41.52 | H | 53.98 | -12.46 | Avg | 1 | 50 | X-Axis, DigGain=-5, MCS0 |
| 2462.00 | 104.43 | H | -- | -- | Peak | 1.2 | 210 | Fundamental of High Channel |
| 2483.70 | 70.24 | H | 73.98 | -3.74 | Peak | 1.2 | 210 | No Marker Delta Method Used |
| 2483.70 | 48.63 | H | 53.98 | -5.35 | Avg | 1.2 | 210 | X-Axis, Default, MCS0 |

 Test distance
 3 meter


LOWER BAND EDGE LOW CURRENT (Horizontal)

| | | | | | | |
|--|----------------|------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 99.90 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40928257 GHz | SWT | 5 ms | Unit | dB μ V |

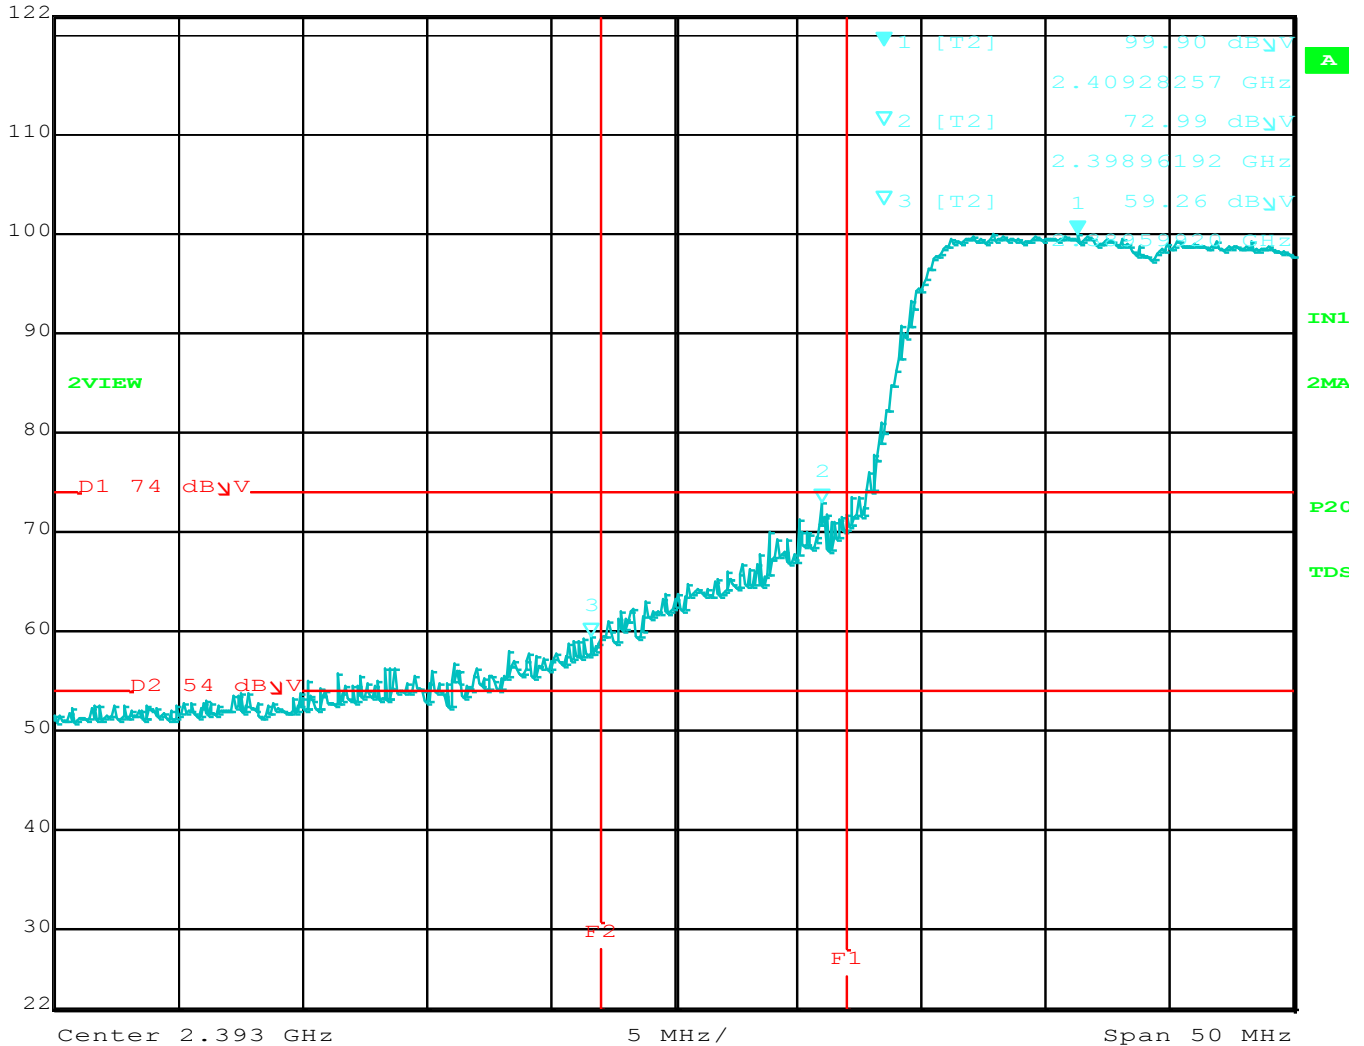


Title: SAMW25-MR210P, Low Current.
 Comment A: LBE, 802.11n, DG= -5, Horizontal.
 Date: 29.JUN.2015 12:58:01



LOWER BAND EDGE LOW CURRENT (Vertical)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 109.50 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.40657715 GHz | SWT | 5 ms | Unit | dB μ V |

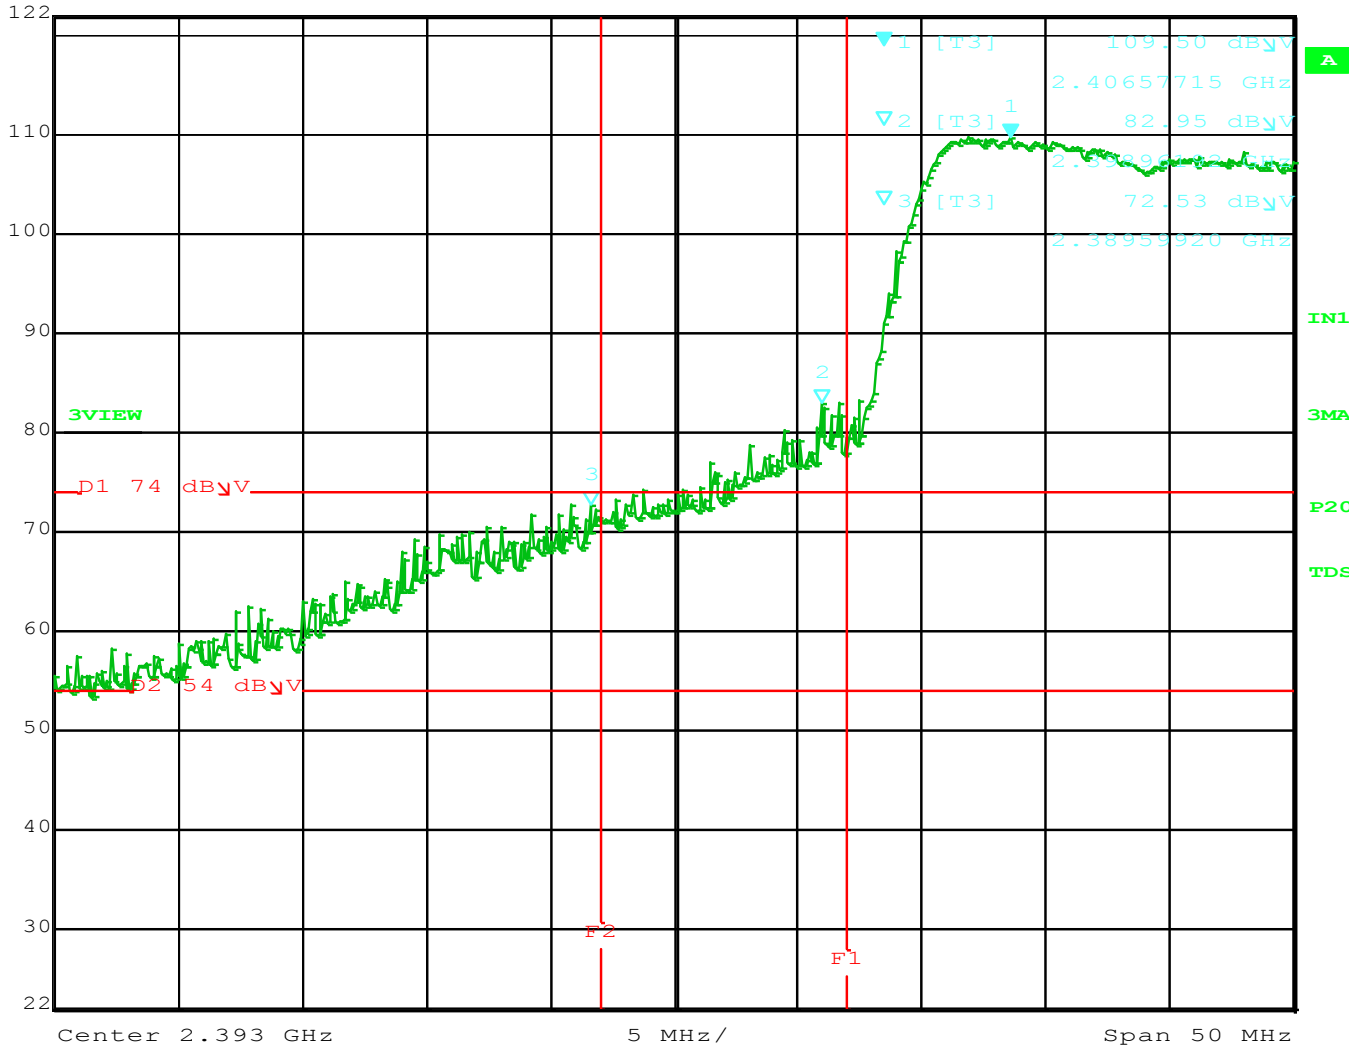


Title: SAMW25-MR210P, Low Current.
 Comment A: LBE, 802.11n, DG= -5, Vertical.
 Date: 29.JUN.2015 12:54:14



UPPER BAND EDGE LOW CURRENT (Horizontal)

| | | | | | | |
|--|----------------|-------------------|-----|-------|--------|------------|
| | Max/Ref Lvl | Marker 1 [T2] | RBW | 1 MHz | RF Att | 0 dB |
| | 122 dB μ V | 104.43 dB μ V | VBW | 3 MHz | | |
| | 72 dB μ V | 2.45981263 GHz | SWT | 5 ms | Unit | dB μ V |

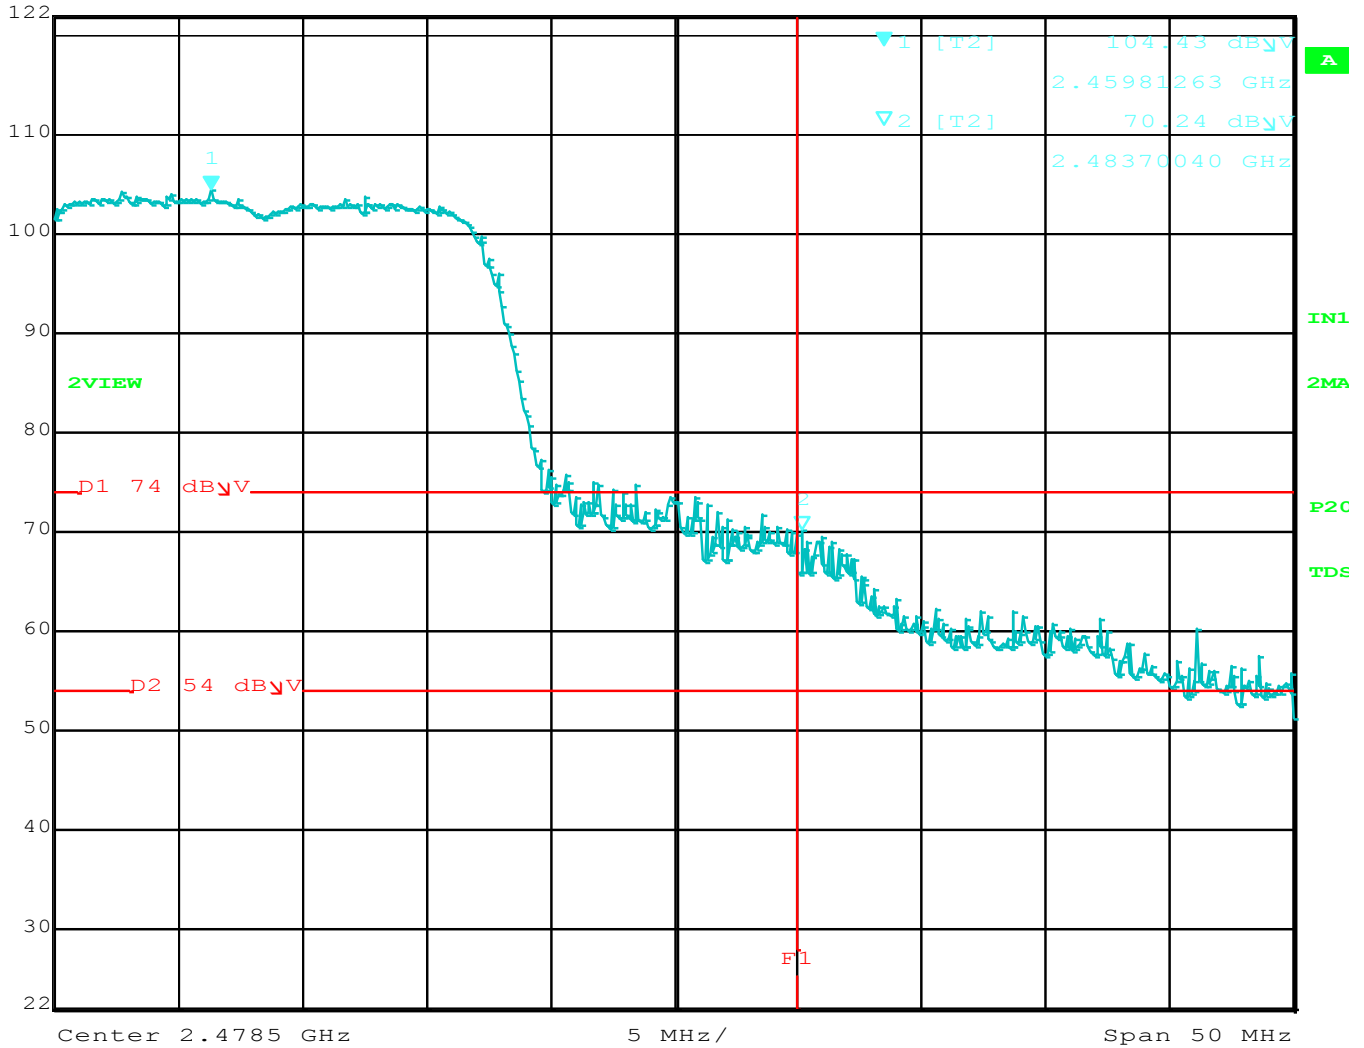


Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11n, DG= Default, Horizontal.
 Date: 29.JUN.2015 11:06:16



UPPER BAND EDGE LOW CURRENT (Vertical)



| | | | | | |
|----------------|-------------------|-----|-------|--------|------------|
| Max/Ref Lvl | Marker 1 [T3] | RBW | 1 MHz | RF Att | 0 dB |
| 122 dB μ V | 108.28 dB μ V | VBW | 3 MHz | | |
| 72 dB μ V | 2.45660621 GHz | SWT | 5 ms | Unit | dB μ V |

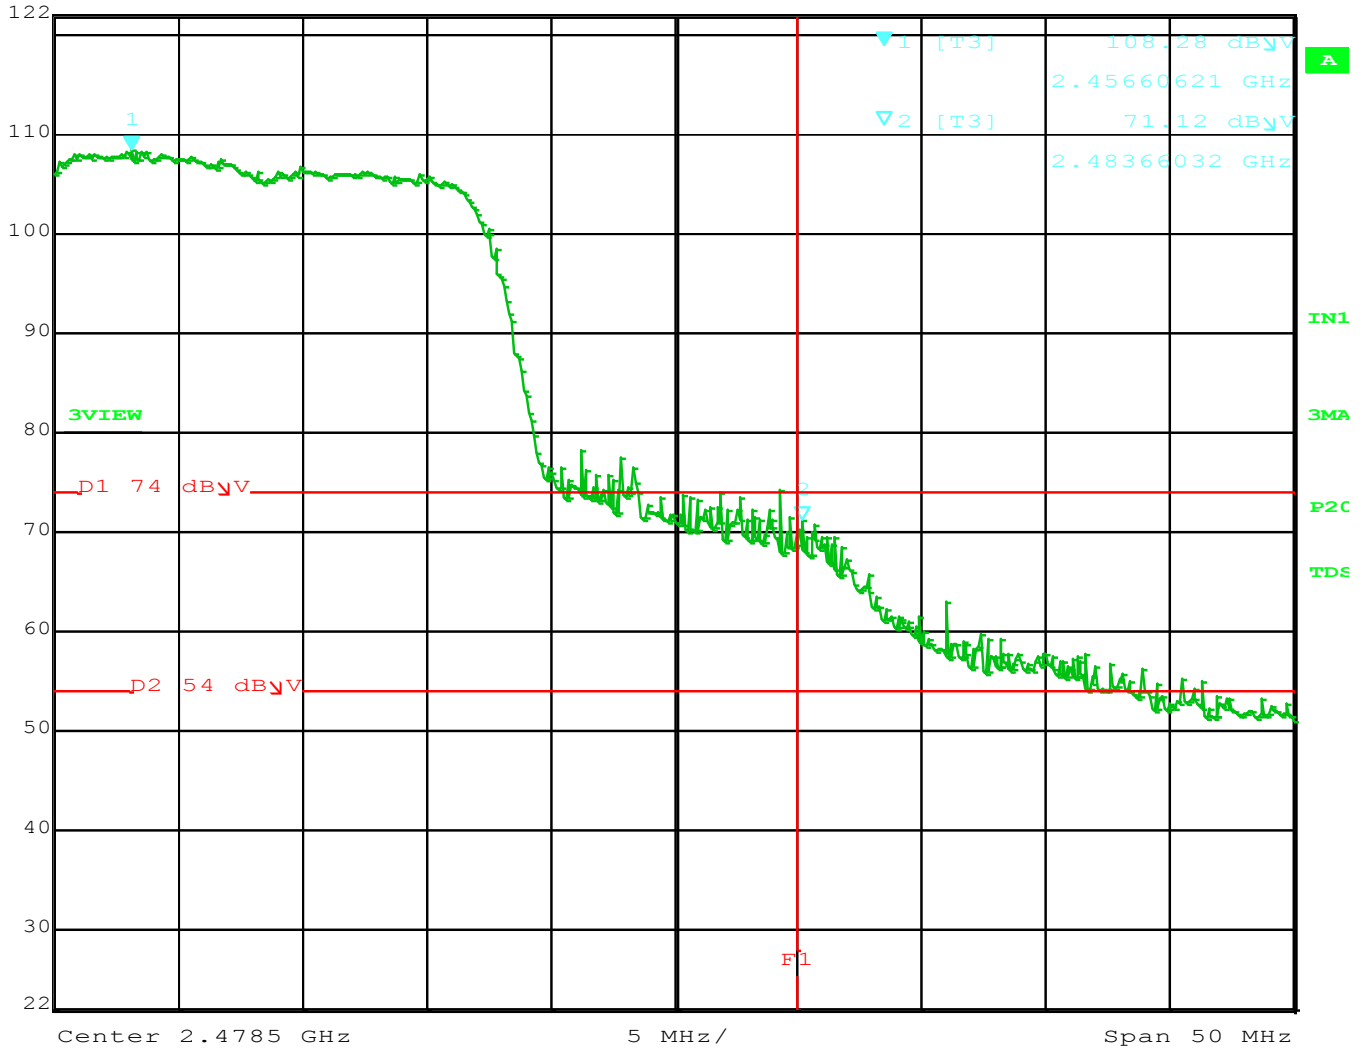

Title: SAMW25-MR210P, Low Current.
 Comment A: UBE, 802.11n, DG= Default, Vertical.
 Date: 29.JUN.2015 10:59:48

