



Nemko Test Report: 2014 267247 FCC15247

Applicant: Doremi Labs
1020 Chestnut Street
Burbank CA 91506
United States

**Equipment Under Test:
(E.U.T.)** CaptiView Transmitter

FCC Identifier: 2ADHX-CAPTIVIEWT

Industry Canada Identifier: 12467A- CAPTIVIEWTX

In Accordance With: **FCC Part 15, Subpart C, 15.247 and
Industry Canada RSS-210, Issue 8**
Digital Transmission System Transmitter

Tested By: Nemko USA, Inc.
2210 Faraday Ave, Suite 150
Carlsbad, CA 92008

TESTED BY:

A handwritten signature in black ink, appearing to read 'David Light'.

David Light, Wireless Engineer

DATE: 14 November 2014

APPROVED BY:

A handwritten signature in black ink, appearing to read 'Tom Tidwell'.

Tom Tidwell, Reviewer

DATE: 18 November, 2014

Number of Pages: 41

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	EQUIPMENT UNDER TEST (E.U.T.)	5
SECTION 3.	OCCUPIED BANDWIDTH	7
SECTION 4.	MAXIMUM PEAK OUTPUT POWER	12
SECTION 5	SPURIOUS EMISSIONS (CONDUCTED)	16
SECTION 6.	RADIATED EMISSIONS	21
SECTION 7.	PEAK POWER SPECTRAL DENSITY	24
SECTION 8.	POWERLINE CONDUCTED EMISSIONS	28
SECTION 9.	TEST EQUIPMENT LIST	31
ANNEX A -	TEST DETAILS	32
ANNEX B -	TEST DIAGRAMS	40

Section 1. Summary of Test Results

Manufacturer: Doremi Labs

Model No.: CaptiView Transmitter

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 and Industry Canada RSS-210, Issue 8 for Digital Transmission Systems. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC and Industry Canada.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE
TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP Lab Code 200116-0

Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety, for use by the company's employees only.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a) / RSS-General 7.2.4	Complies
Minimum 6 dB Bandwidth	15.247(a)(2) / RSS-210 A8.2(a)	Complies
Maximum Peak Power Output	15.247(b)(3) / RSS-210 A8.4(4)	Complies
Spurious Emissions (Antenna Conducted)	15.247(d) / RSS-210 A8.5	Complies
Spurious Emissions (Restricted Bands)	15.247(d)/15.209(a) / RSS-General 7.2.2	Complies
Peak Power Spectral Density	15.247(e) / RSS-210 A8.2(b)	Complies

Footnotes:

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band (MHz):

902-928

2400-2483.5

5725-5850

☐☒☐


Operating Frequency of Test Sample: 2405 to 2480 MHz

User Frequency Adjustment:

Software controlled

Description of EUT

The CaptiView is a Closed Caption Viewing System for hearing impaired movie audiences. The CaptiView system transmits and receives AES-128 encrypted closed captions on a wireless band frequency with an 80 meter signal range

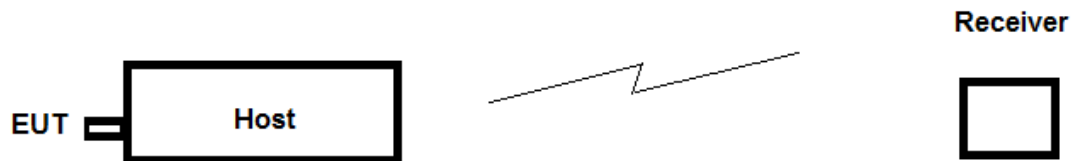System Diagram

Section 3. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth

PARA. NO.: FCC 15.247(a)(2)

RSS-210 A8.2(a)

TESTED BY: David Light

DATE: 28 October 2014

Test Results:

Complies.

Measurement Data:

See 6 dB BW plot

Measured 6 dB bandwidth: 1.65 MHz

Test Conditions:

35

%RH

22


°C

Measurement Uncertainty: $\pm 1 \times 10^{-7}$ ppm**Test Equipment Used:** 1036

Test Data – Occupied Bandwidth

EBW

Low Channel

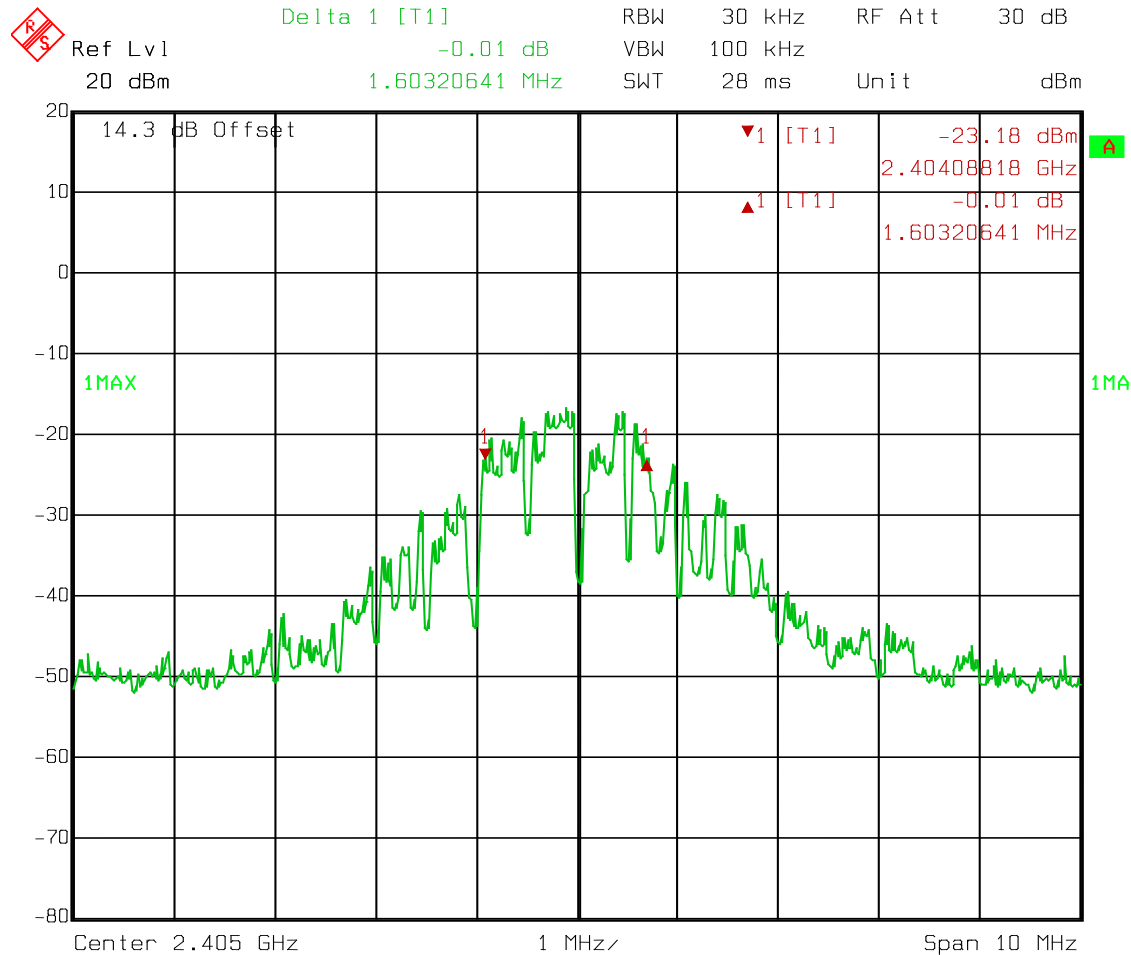


Date: 28.OCT.2014 11:35:47

Test Data – Occupied Bandwidth

EBW

Center Channel

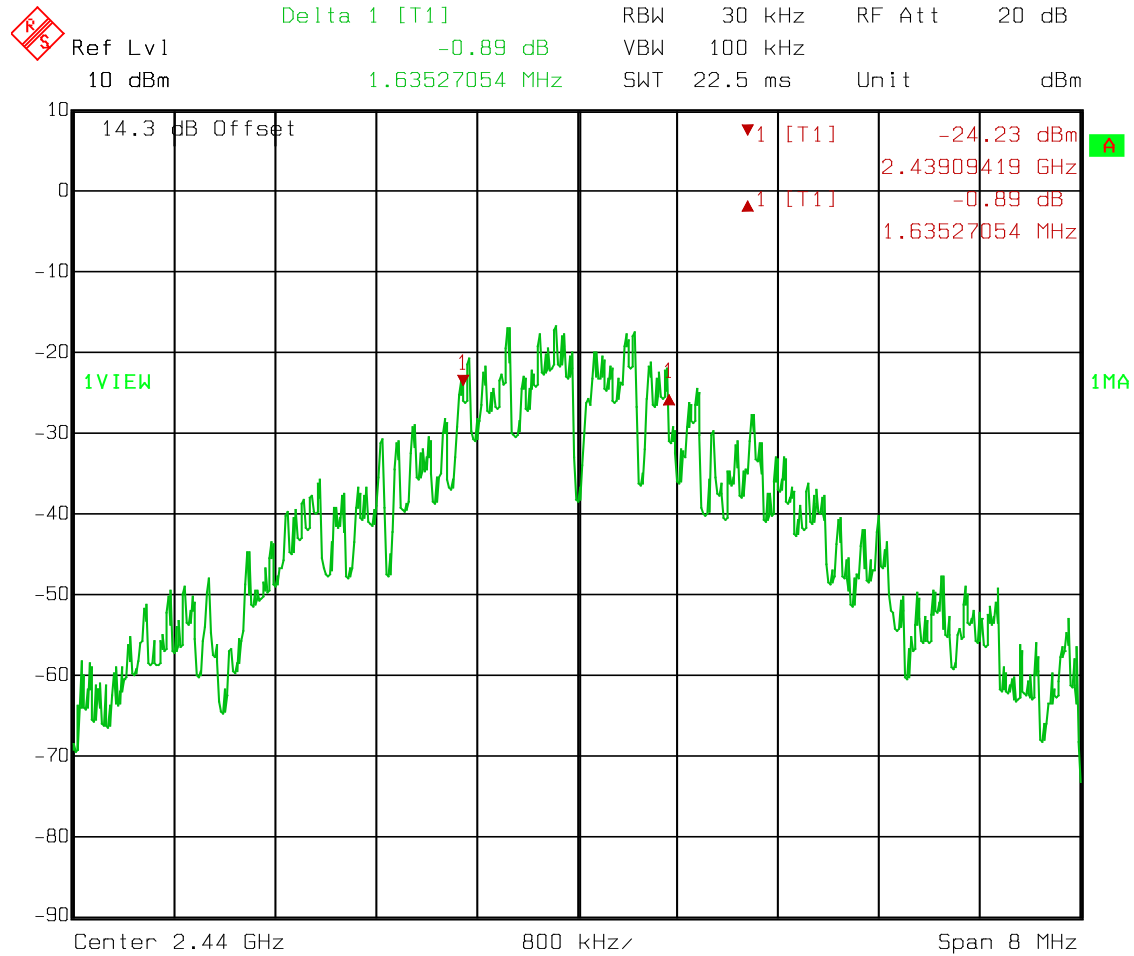


Date: 28.OCT.2014 11:48:29

Test Data – Occupied Bandwidth


EBW

Upper Channel

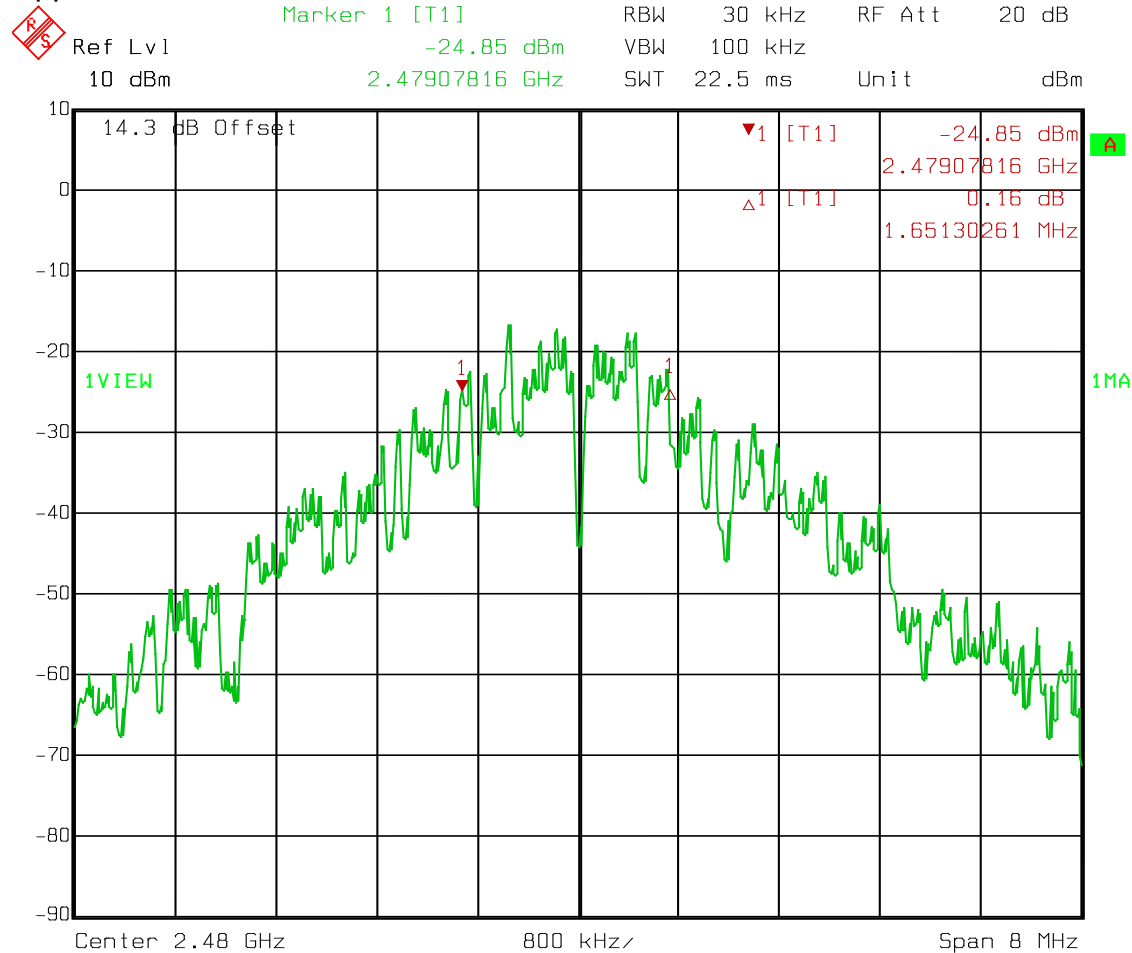

Date: 28.OCT.2014 11:50:14

99% Bandwidth

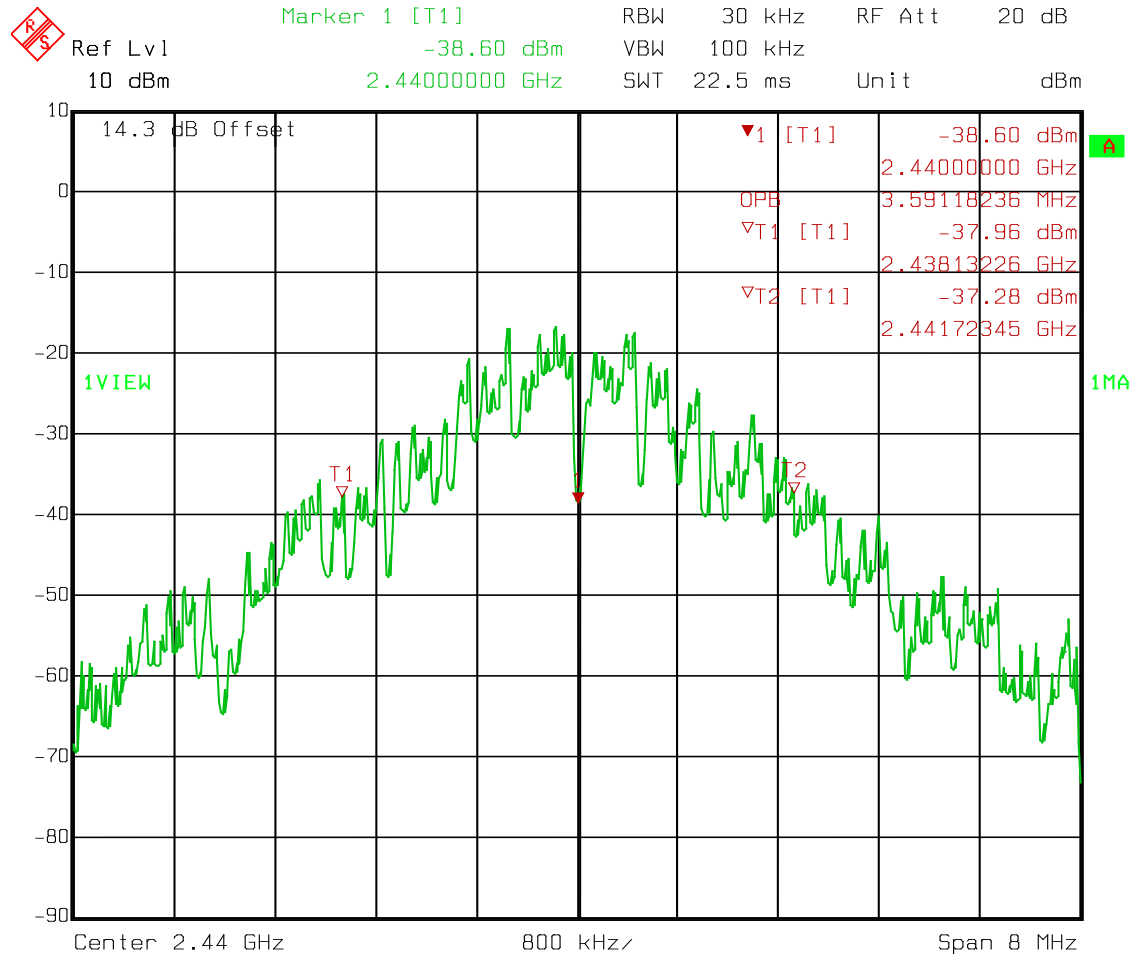

Date: 28.OCT.2014 11:48:53

Section 4. Maximum Peak Output Power

NAME OF TEST: Maximum Peak Output power	PARA. NO.: FCC 15.247(b)(3) RSS-210 A8.4(4)
TESTED BY: David Light	DATE: 28 October 2014

Test Results: Complies.

Measurement Data: Refer to attached data

Test Conditions: 35 %RH
22 °C


Measurement Uncertainty: +/-1.7 dB

Test Equipment Used: 1036

- ☒ This device was tested at +/- 15% input power per 15.31(e), with no variation in output power.
- ☐ For battery powered equipment, the device was tested with a fresh battery per 15.31(e).
- ☒ The device was tested on three channels per 15.31(l).
- ☐ This test was performed radiated.

Test Data – Peak Power


Low Channel

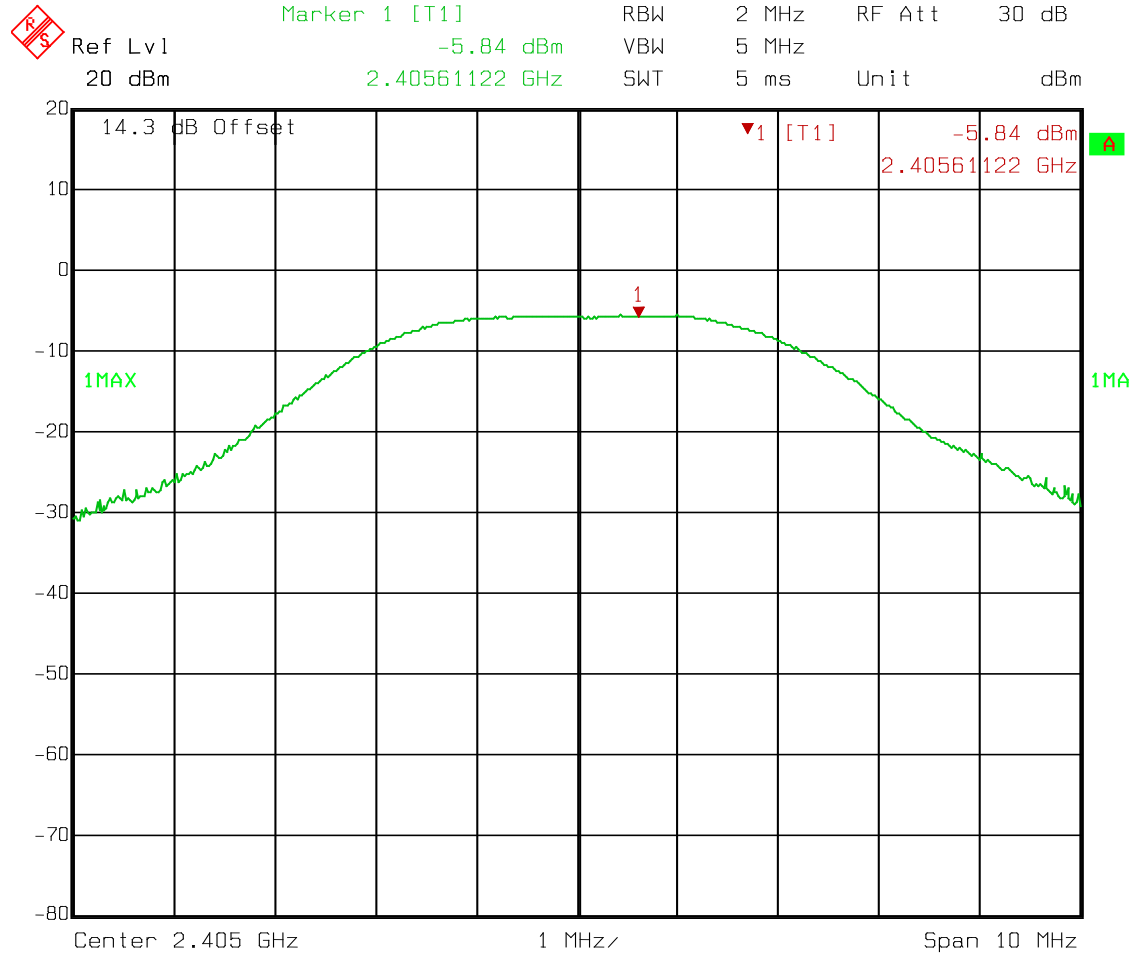

Date: 28.OCT.2014 11:39:36

Test Data – Peak Power


Mid Channel

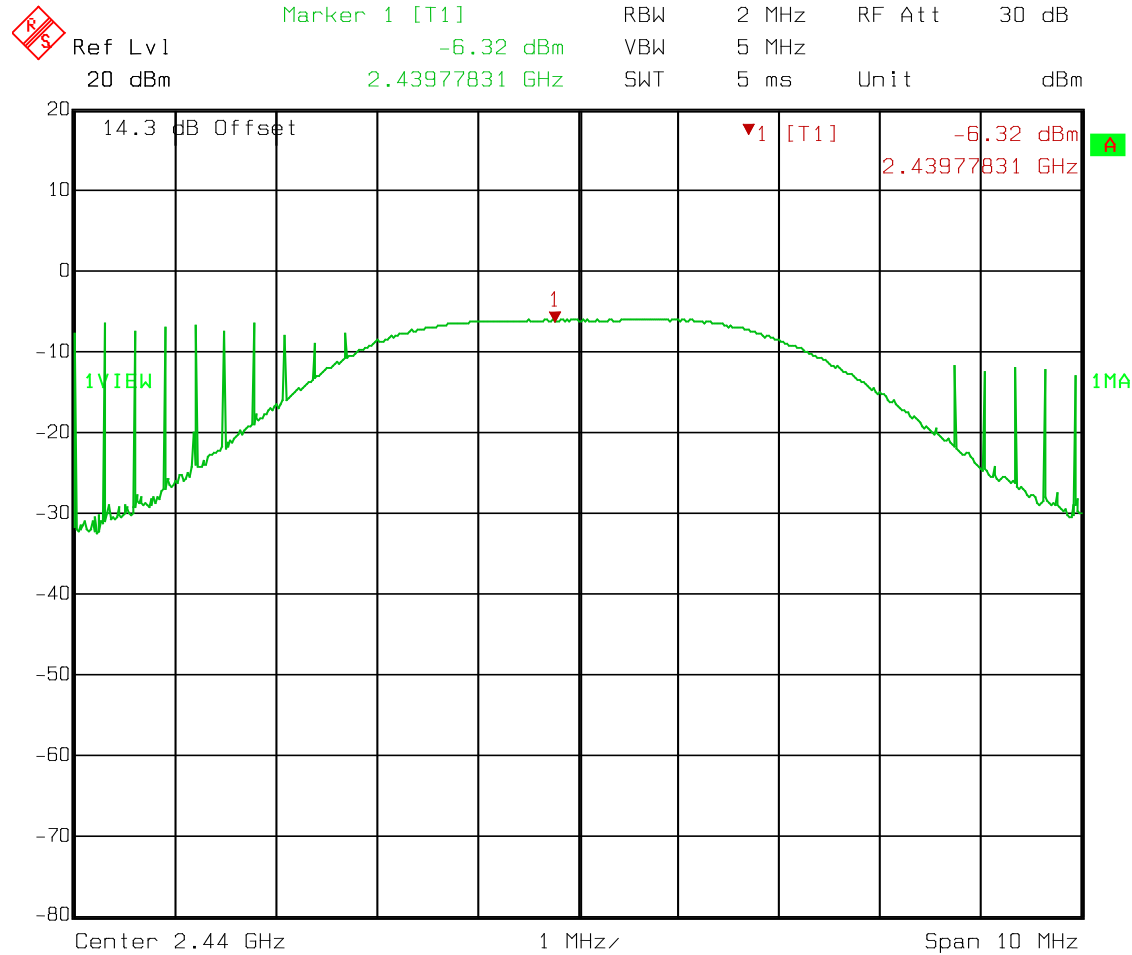

Date: 28.OCT.2014 11:45:52

Test Data – Peak Power

Upper Channel

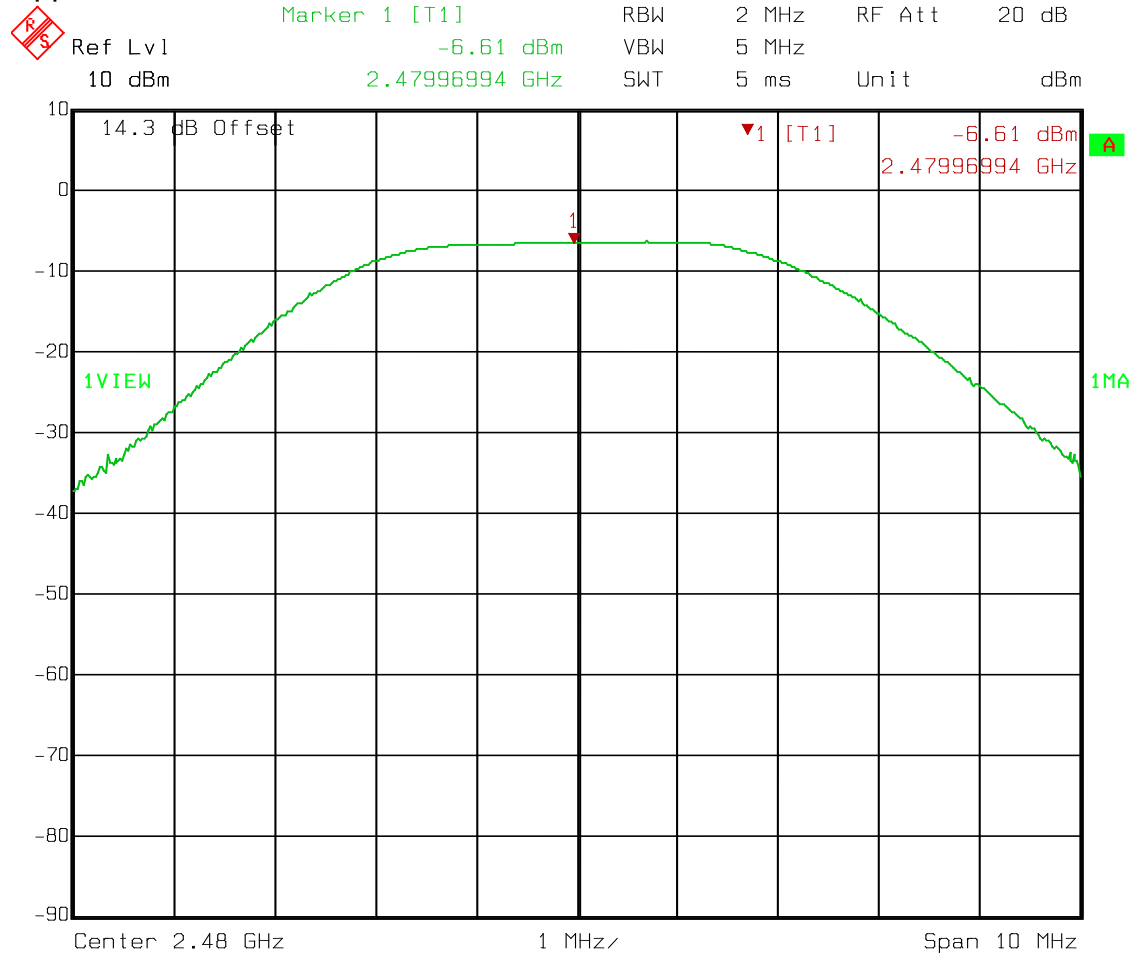

Date: 28.OCT.2014 11:51:33

Section 5 Spurious Emissions (Conducted)

NAME OF TEST: Spurious Emissions (Conducted)	PARA. NO.: FCC 15.247 (d) RSS-210 A8.5
TESTED BY: David Light	DATE: 28 October 2014

Test Results: Complies.

Measurement Data: See attached plots.


Test Conditions: 35 %RH
 22 °C

Measurement Uncertainty: +/-1.7 dB

Test Equipment Used: 1036

Test Data – Spurious Emissions at Antenna Terminals

Lower Band Edge

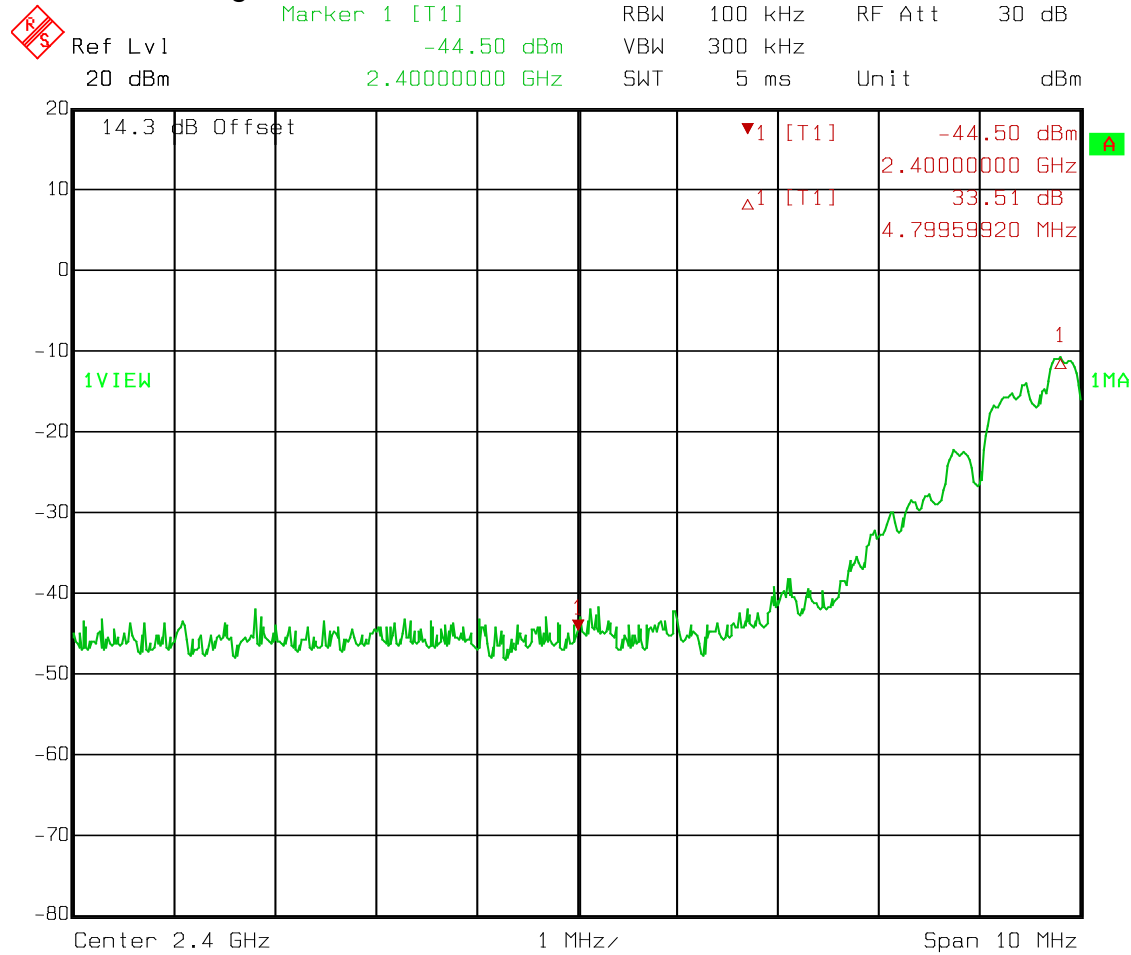


Date: 28.OCT.2014 11:32:54

Test Data – Spurious Emissions at Antenna Terminals

Spurious Emissions

Low Channel

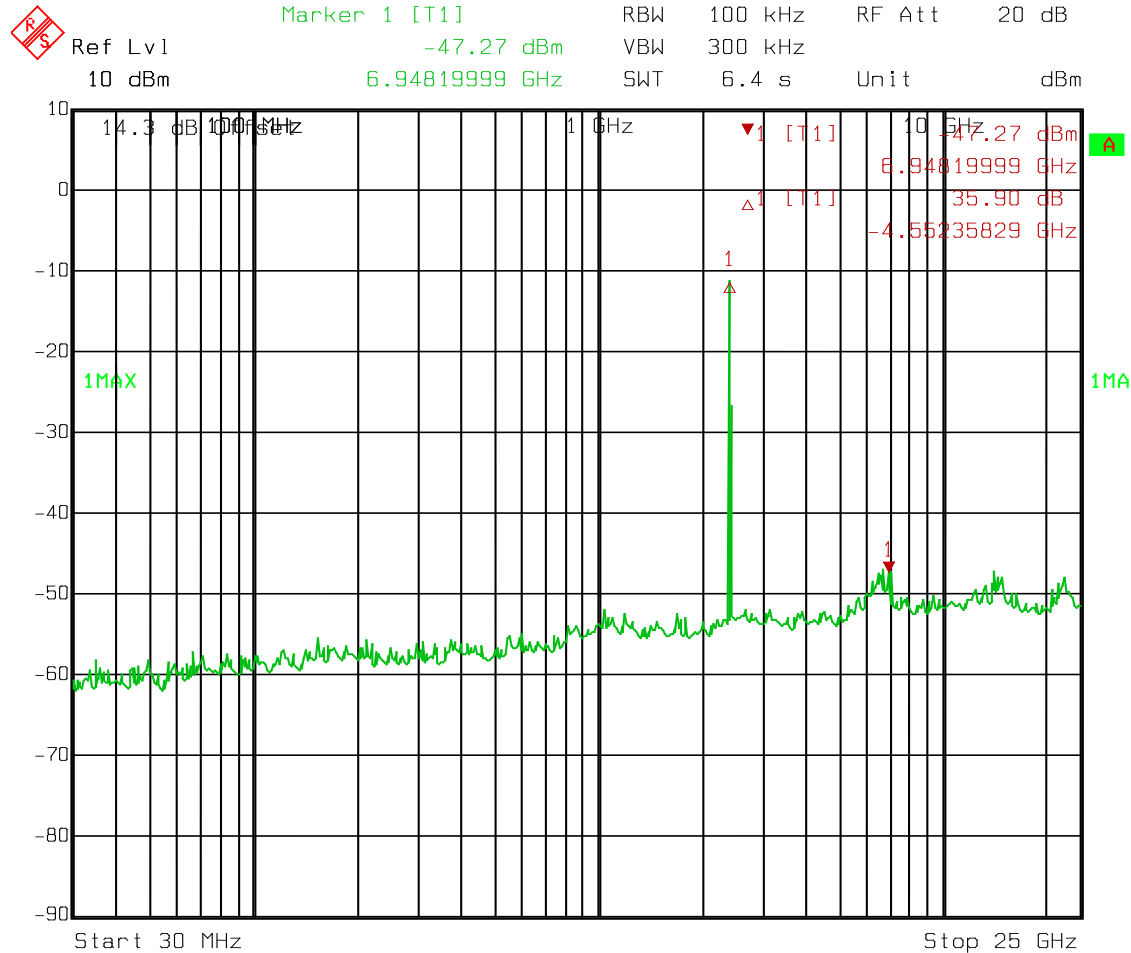


Date: 28.OCT.2014 11:38:12

Test Data – Spurious Emissions at Antenna Terminals

Spurious Emissions

Mid Channel

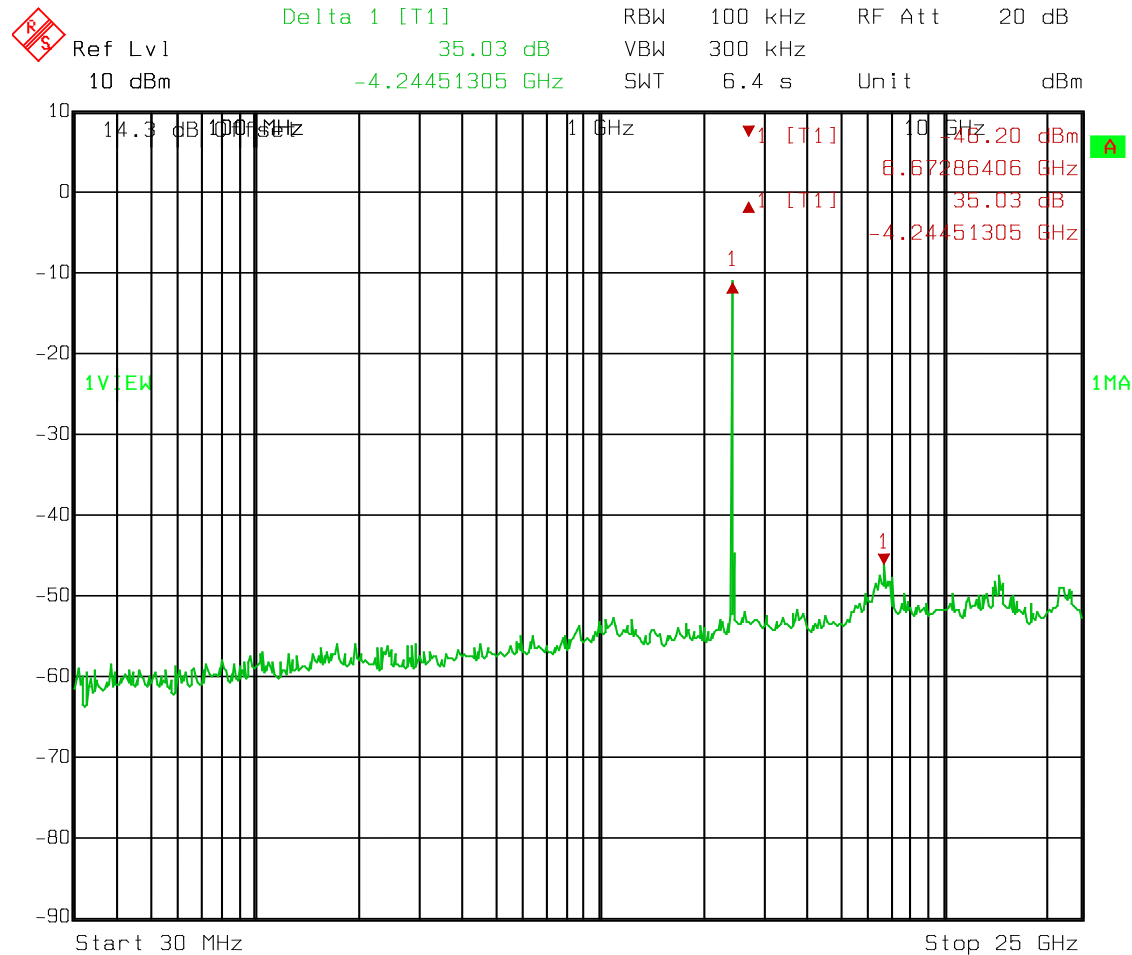


Date: 28.OCT.2014 11:46:58

Test Data – Spurious Emissions at Antenna Terminals

Spurious Emissions

Upper Channel

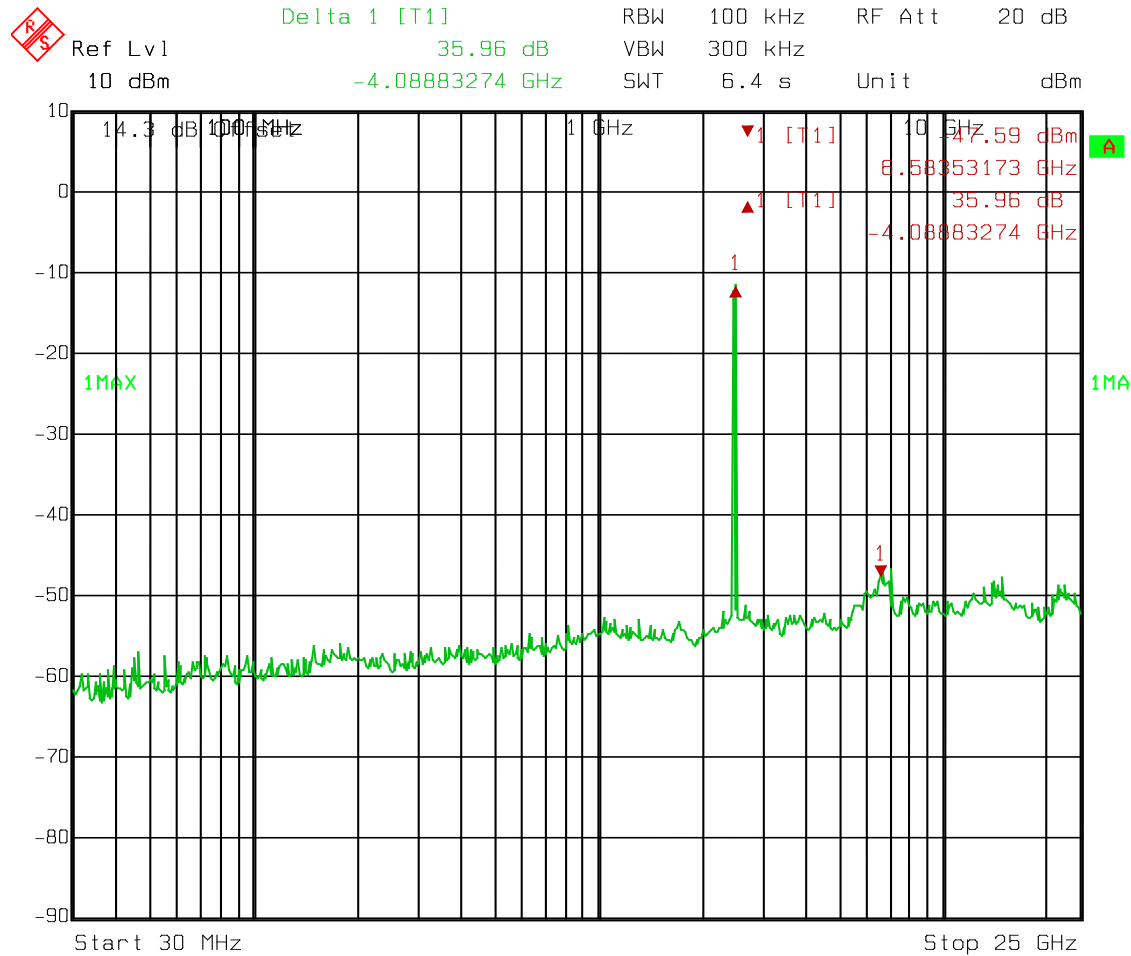

Date: 28.OCT.2014 11:51:00

Section 6. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.247 (d)
TESTED BY: David Light	DATE: 29 October 2014

Test Results: Complies.

Measurement Data: See attached table.

Test Conditions: 30 %RH
23 °C

Measurement Uncertainty: +/-1.7 dB

Test Equipment Used: 1036 – 752 – E1029 - 1480

Notes:

- ☒ For handheld devices, the EUT was tested on three orthogonal axis'
- ☒ The device was tested from 30 MHz to the tenth harmonic of the highest fundamental frequency per 15.33
- ☒ The device was tested on three channels per 15.31(l).
- ☒ No emissions were detected within 20 dB of the specification limit therefore none are reported per 15.31(o). Band edge data is presented below.

RBW=VBW=100 kHz below 1000 MHz
RBW=VBW=3 MHz above 1000 MHz (Peak)
RBW= 1 MHz VBW=3 MHz (Average)

Radiated Emissions

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Duty Cycle (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Pass.	Comment
2483.5	V	0.0	75.8	28.6	8.8	45.4	67.8	74.0	-6.2	Pass	
2483.5	V	-20.0	75.8	28.6	8.8	45.4	47.8	54.0	-6.2	Pass	
2483.5	H	0.0	77.3	28.6	8.8	45.4	69.3	74.0	-4.7	Pass	
2483.5	H	-20.0	77.3	28.6	8.8	45.4	49.3	54.0	-4.7	Pass	

Duty Cycle



Delta 1 [T1]

RBW 100 kHz RF Att 30 dB

Ref Lvl -38.54 dB


VBW 100 kHz

20 dBm

2.000000 ms

SWT 100 ms


Unit dBm

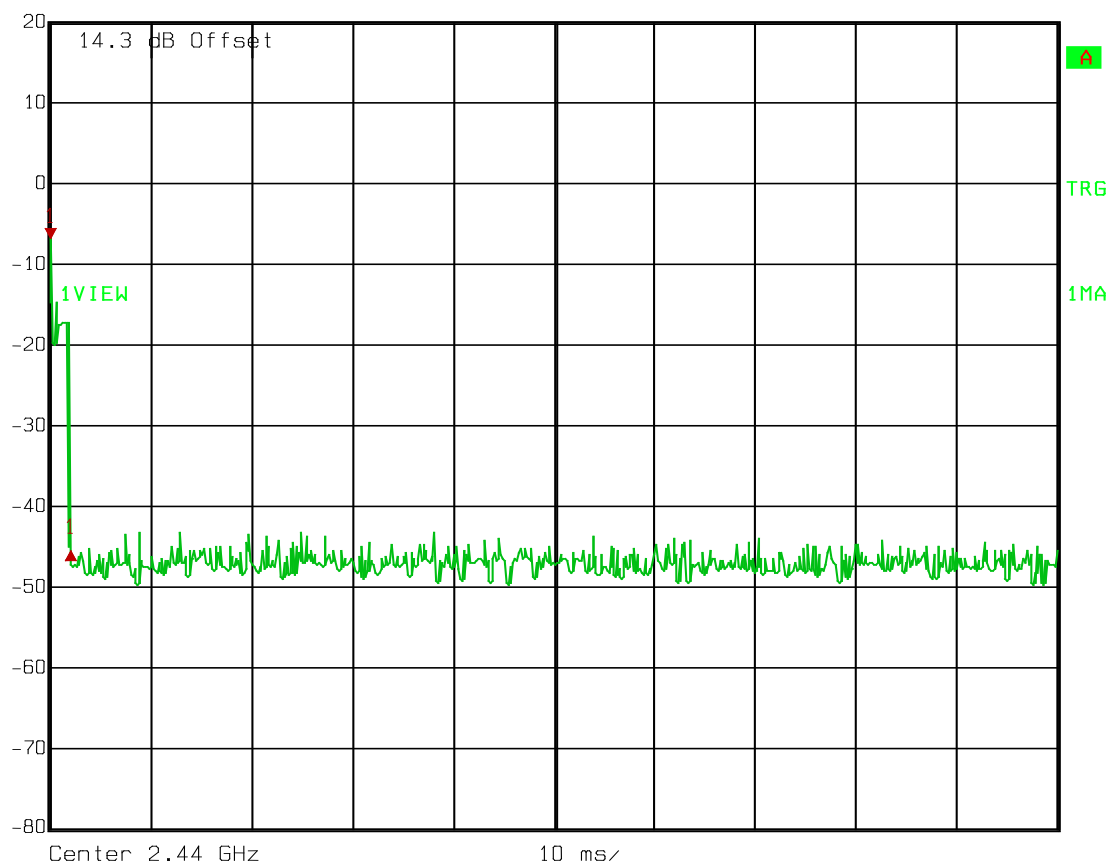

Date: 29.OCT.2014 07:59:32

Duty cycle = $20 \log (2\text{ms}/100\text{ms}) = -34 \text{ dB}$

Duty Cycle (continued)

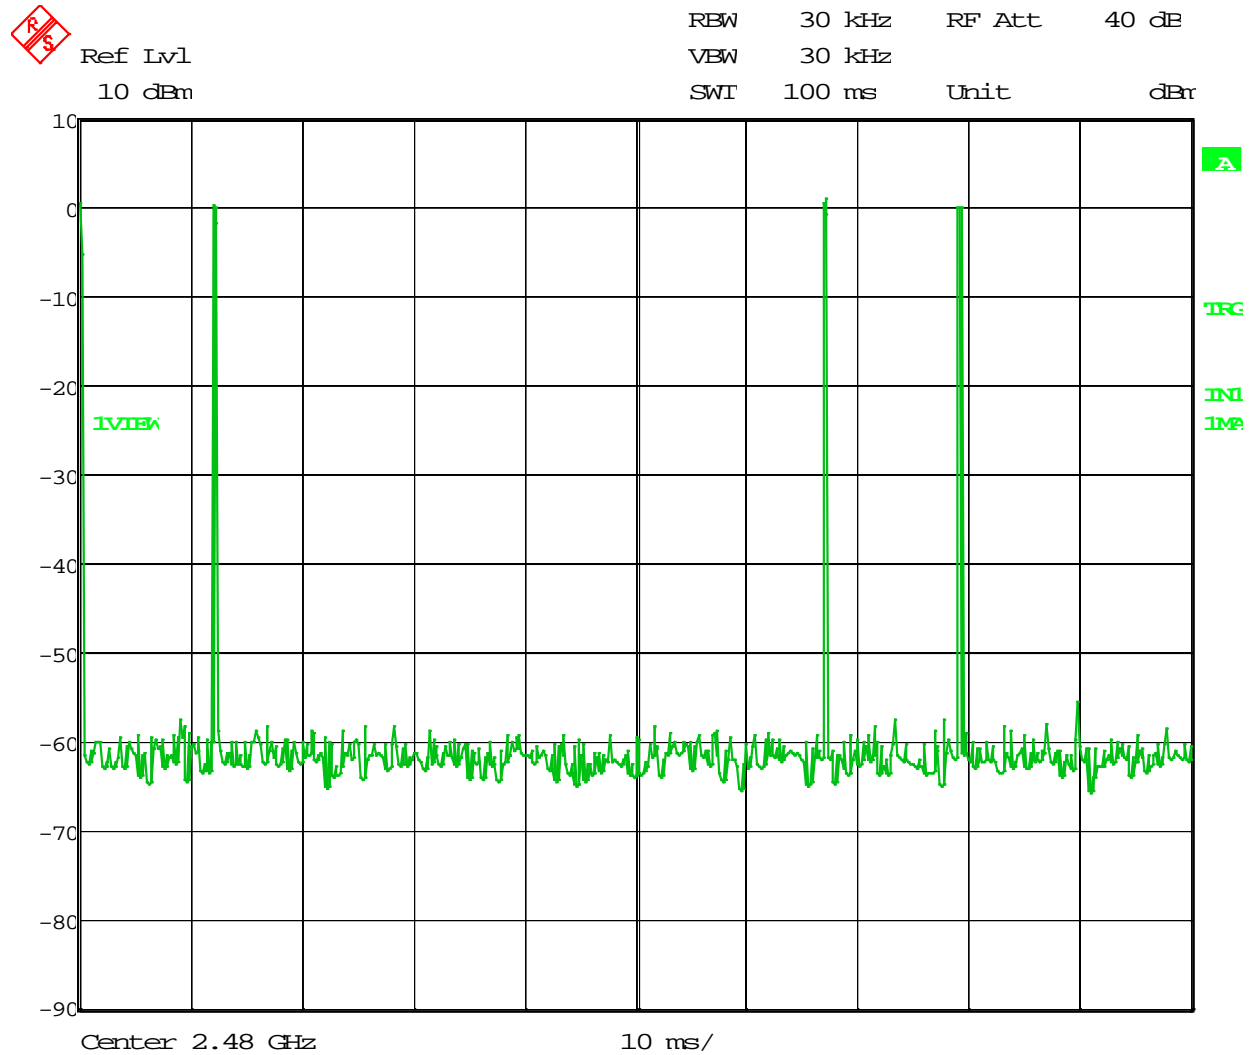

$$20 \log (1.8/100) = -34.8 \text{ dB}$$

Section 7. Peak Power Spectral Density

NAME OF TEST: Peak Power Spectral Density

PARA. NO.: FCC 15.247(e)

RSS-210 A8.2(b)


TESTED BY: David Light

DATE: 28 October 2014

Test Results: Complies.**Measurement Data:** See attached data..**Test Conditions:** 35 %RH
22 °C**Measurement Uncertainty:** +/-1.7 dB**Test Equipment Used:** 1036


Peak Power Spectral Density

Low Channel

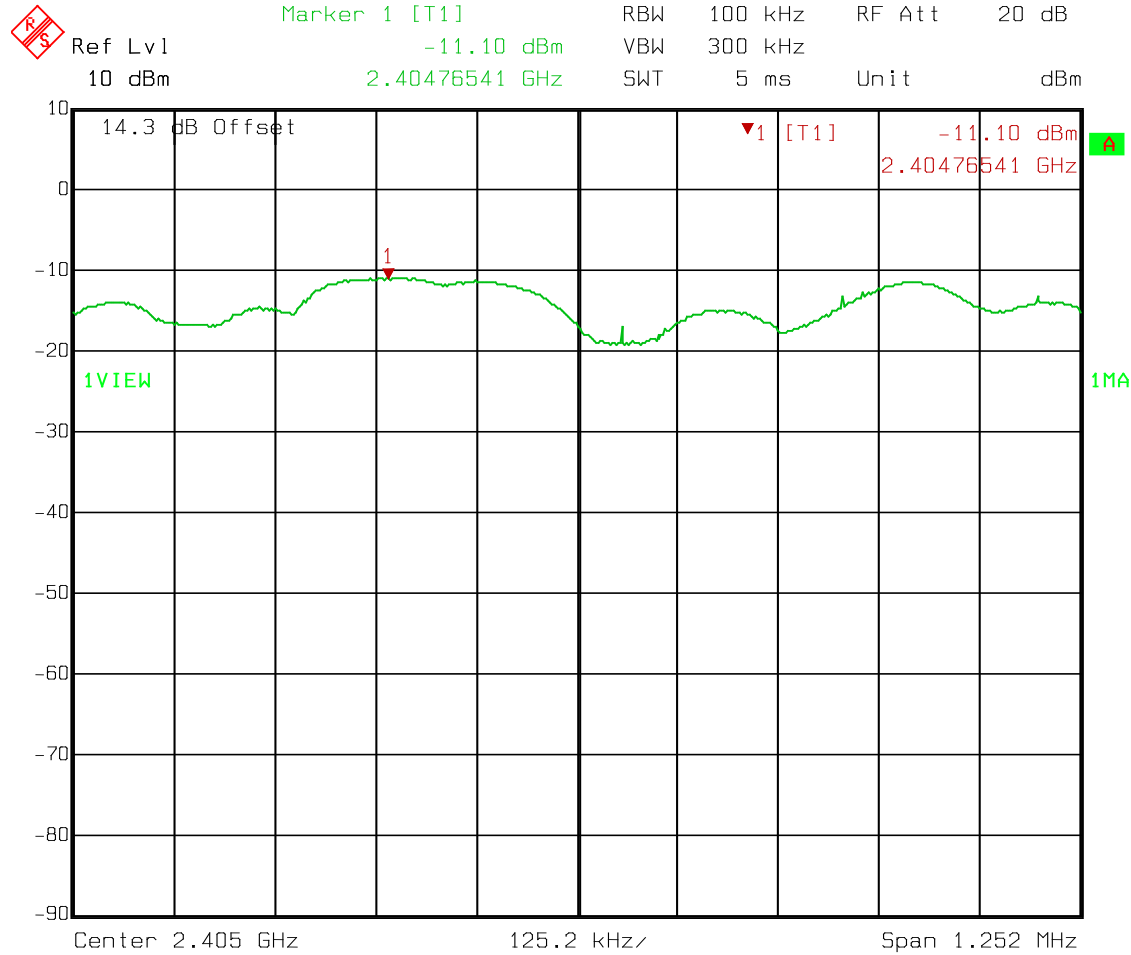

Date: 28.OCT.2014 11:53:00


$$\text{Density} = -11.1 \text{ dBm} - 15.2 \text{ dB} = -26.3 \text{ dBm}$$

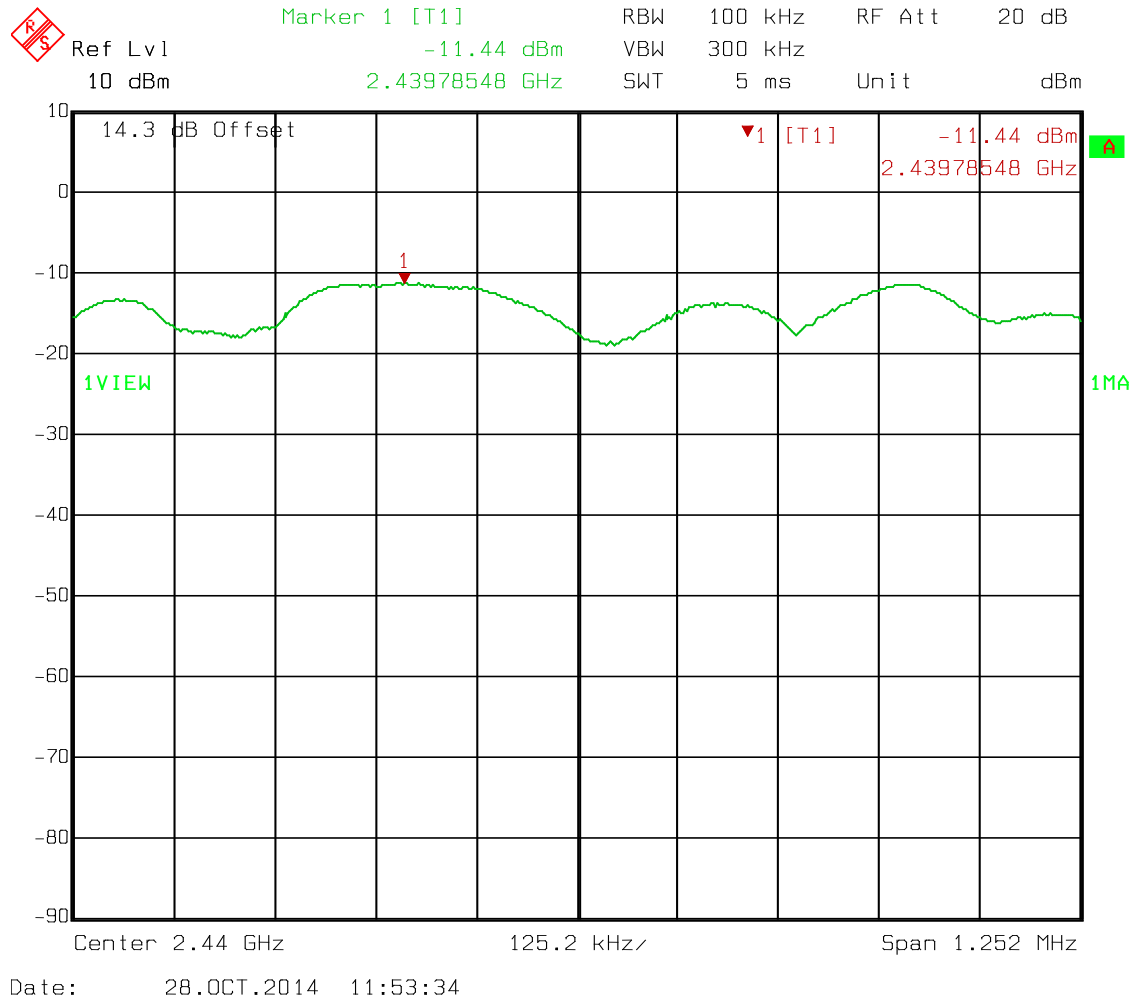Peak Power Spectral Density**Mid Channel**

$$\text{Density} = -11.4 \text{ dBm} - 15.2 \text{ dB} = -26.6 \text{ dBm}$$

Peak Power Spectral Density

Upper Channel

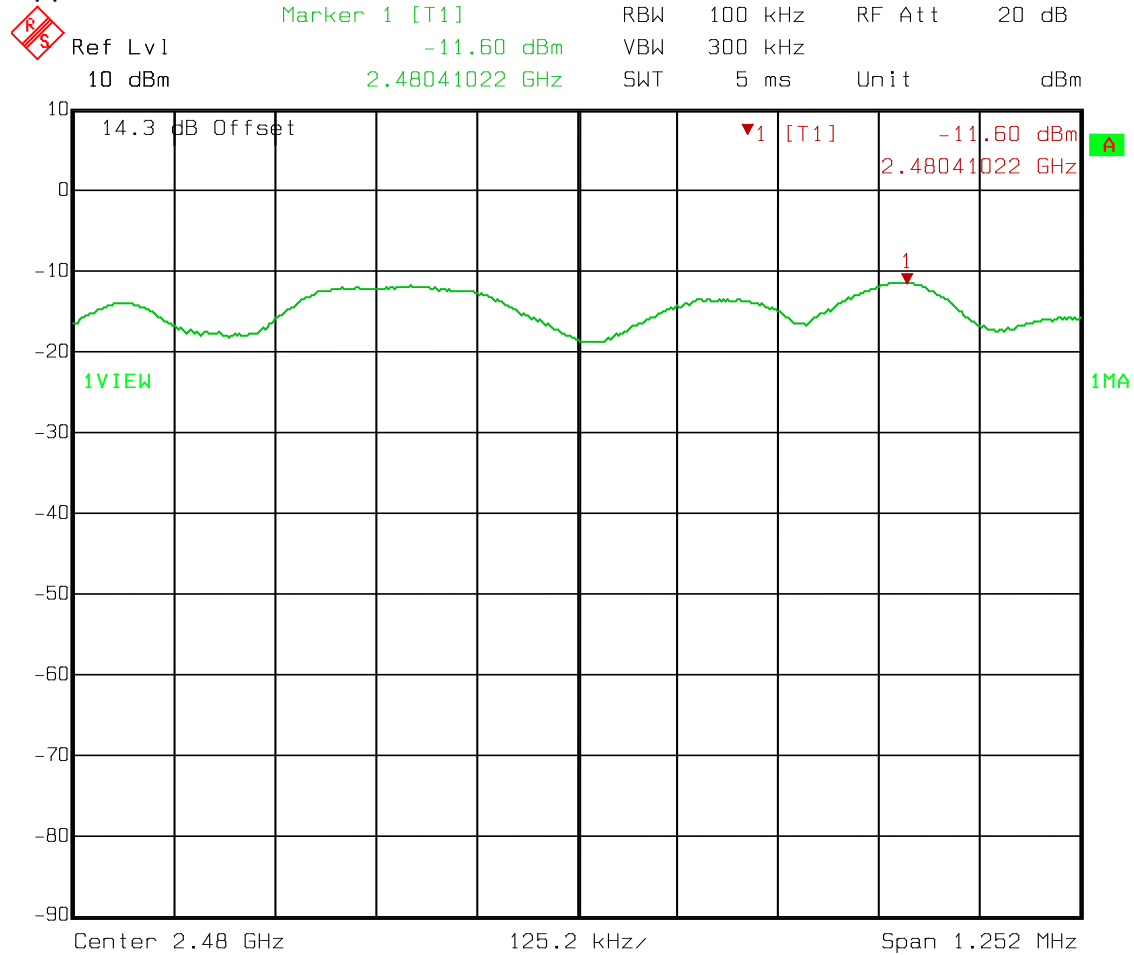

Date: 28.OCT.2014 11:52:12

$$\text{Density} = -11.6 \text{ dBm} - 15.2 \text{ dB} = -26.8 \text{ dBm}$$

Section 8. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
TESTED BY: Joel Rivera	DATE: 03 October 2014

Test Results:

Complies.


Measurement Data: See attached plots.

Measurement Uncertainty: +/- 1.7 dB

Test Equipment Used: E1026 - E1019

Test Data – Powerline Conducted Emissions – L1

Client	Doremi Labs			
NEx #	267247	Temperature	25	°C
EUT Name	CaptiView Transmitter	Humidity	45	%
EUT Model	CaptiView Transmitter	Pressure	100.4	kPa
Governing Doc	FCC Part 15 B, CAN CSA/CISPR 22	Test Location	Ground Plane 3	
Basic Standard	ANSI C63.4, CISPR 22	Test Engineer	Joel Rivera	
Test Voltage	120V/60Hz	Date	10/3/2014	

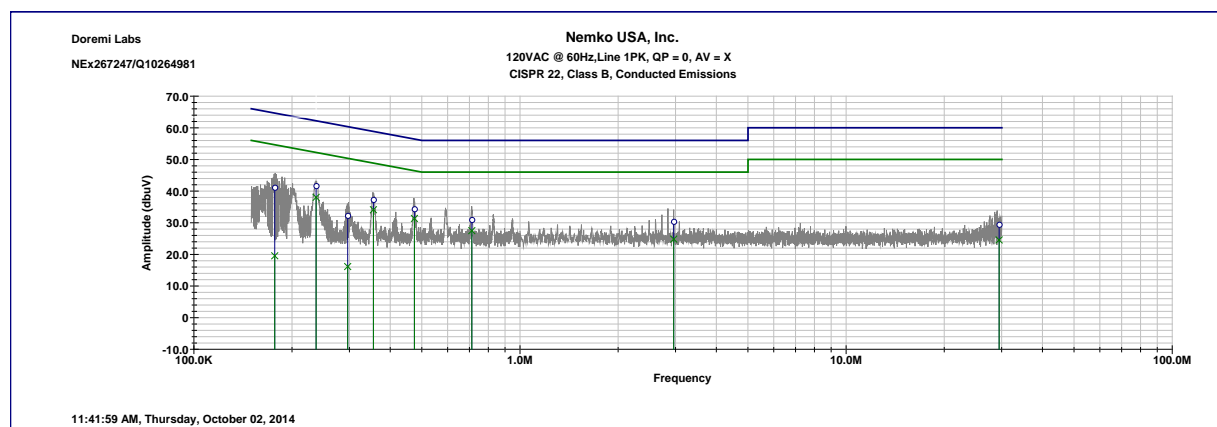


Frequency (kHz)	Measured (dBμV)		Limit (dBμV)		Margin (dB)		Result
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
29431.8	29.5	24.5	60	50	-30.5	-25.5	Pass
2959.47	30.4	24.8	56	46	-25.6	-21.2	Pass
711.454	31	27.5	56	46	-25	-18.5	Pass
474.307	34.4	31.3	56.7	46.4	-22.3	-15.1	Pass
355.354	37.3	34.1	60.1	48.8	-22.8	-14.7	Pass
296.264	32.3	16.1	61.8	50.3	-29.5	-34.2	Pass
237.074	41.7	38	63.5	52.2	-21.8	-14.2	Pass
176.959	41.2	19.5	65.2	54.6	-24	-35.1	Pass

Compliance			
Compliant?	Yes	Additional Comments	

Test Data – Powerline Conducted Emissions - Neutral

Client	Doremi Labs			
NEx #	267247	Temperature	25	°C
EUT Name	CaptiView Transmitter	Humidity	45	%
EUT Model	CaptiView Transmitter	Pressure	100.4	kPa
Governing Doc	FCC Part 15 B, CAN CSA/CISPR 22	Test Location	Ground Plane 3	
Basic Standard	ANSI C63.4, CISPR 22	Test Engineer	Joel Rivera	
Test Voltage	120V/60Hz	Date	10/3/2014	

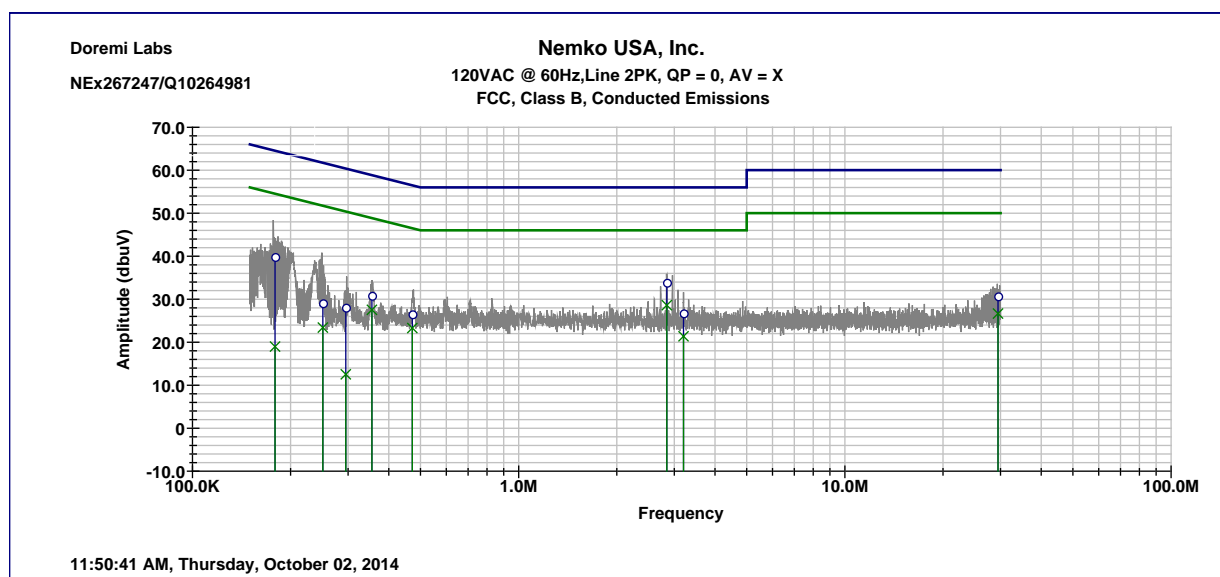

Frequency (kHz)	Measured (dBμV)		Limit (dBμV)		Margin (dB)		Result
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	
29461.7	30.7	26.6	60	50	-29.3	-23.4	Pass
3201.62	26.7	21.4	56	46	-29.3	-24.6	Pass
2845.47	33.9	28.6	56	46	-22.1	-17.4	Pass
472.078	26.5	23.3	56.8	46.5	-30.3	-23.2	Pass
354.835	30.8	27.5	60.1	48.8	-29.3	-21.3	Pass
295.212	28.1	12.5	61.9	50.4	-33.8	-37.9	Pass
251.015	29.1	23.4	63.1	51.7	-34	-28.3	Pass
179.151	39.8	19	65.2	54.5	-25.4	-35.5	Pass

Compliance			
Compliant?	Yes	Additional Comments	

Section 9. Test Equipment List

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
752	Antenna, DRWG	EMCO	3115	4943	19-Feb-2014	19-Feb-2015
E1029	Preamplifier (20MHz to 18GHz)	A.H. Systems, Inc.	PAM-0118	343	12-Aug-2014	12-Aug-2015
1036	Spectrum Analyzer	Rohde & Schwartz	FSEK30	830844/006	15-Jul-2013	15-Jul-2015
1480	Antenna, Bilog	Schaffner- Chase	CBL6111C	2572	02-Apr-2014	02-Apr-2015
E1019	Two Line V- Network	Rohde & Schwarz	ENV216	101045	07-May-2014	07-May-2015
E1026	EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESCI 7	100800	14-Aug-2014	14-Aug-2015

ANNEX A - TEST DETAILS

NAME OF TEST: Maximum Peak Output Power

PARA. NO.: FCC 15.247(b)(3)
RSS-210 A8.2(4)**Minimum Standard:** The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Measurement Method

5.2.1 Maximum Peak Conducted Output Power Level

§15.247(b)(3) specifies that the maximum peak conducted output power for DTS transmitters in any of the three authorized frequency bands is 1 watt (30 dBm). The following procedures can be used to determine the maximum peak conducted output power from a DTS EUT using a spectrum analyzer.

5.2.1.1 Measurement Procedure PK1:

1. This procedure requires availability of a spectrum analyzer resolution bandwidth that is \geq EBW.
2. Set the RBW \geq EBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set span = zero.
5. Sweep time = auto couple.
6. Detector = peak.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use peak marker function to determine the peak amplitude level within the fundamental emission.

5.2.1.2 Measurement Procedure PK2:

1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.

5.2.2 Maximum Conducted (Average) Output Power Level

§15.247(b)(3) permits the maximum conducted output power to be measured as an alternative to a peak power measurement to demonstrate compliance to the one watt (30 dBm) output power limit. The maximum conducted output power is the highest total transmit power occurring in any mode when averaged over the EUT EBW. This measurement requires that the EUT be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. Time intervals during which the transmitter is off or transmitting at reduced power levels shall not be included.

The spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins (the use of a greater number of measurement points than the minimum requirement is recommended).

The following procedures are acceptable for determining the maximum conducted output power with a spectrum analyzer.

5.2.2.1 Measurement Procedure AVG1 (power averaging over the EBW with slow sweep speed):

1. Set the analyzer span to 5-30% greater than the EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW \geq 3 MHz.
4. Detector = power average (RMS).
5. Ensure that the number of measurement points in the sweep $\geq 2 \times (\text{span}/\text{RBW})$.
6. Manually set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period})$.
7. Perform the measurement over a single sweep.
8. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges to determine the maximum conducted output power of the EUT over the EBW.

Note: If the analyzer does not have a band power function, sum the spectral levels (in linear power units) at 1 MHz intervals extending across the entire EBW.

5.2.2.2 Measurement Procedure AVG2 (trace averaging over the EBW):

1. Set the analyzer span to 5-30% greater than the EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW \geq 3 MHz.
4. Ensure that the number of measurement points in the sweep $\geq 2 \times$ (span/RBW).
5. Sweep time = auto couple.
6. Detector = power averaging (RMS) or sample.
7. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
8. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges to determine the maximum conducted output power of the EUT over the EBW. If the analyzer does not have a band power function, sum the spectral levels (in linear power units) at 1 MHz intervals extending across the entire EBW.

NAME OF TEST: Occupied Bandwidth

PARA. NO.: FCC 15.247(a)(2)
RSS-210 A8.2(a)**Minimum Standard:**

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Method Of Measurement:**5.1.1 EBW Measurement Procedure:**

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

5.1.2 Alternate EBW Measurement Procedure:

The automatic bandwidth measurement capability of a spectrum analyzer may be employed if it implements the functionality described above (e.g., RBW = 1-5% of EBW, VBW $\geq 3 \times$ RBW, peak detector with maximum hold). When using this capability, care should be taken to ensure that the bandwidth measurement is not influenced by any nulls in the fundamental emission.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Spurious Emissions(conducted)

PARA. NO.: FCC 15.247(d)
RSS-210 A8.5**Minimum Standard:**

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

5.4.1.1 Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

5.4.1.2 Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	Middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: FCC 15.247(c)

RSS-General 7.2.2

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Transmitter Power Density

PARA. NO.: FCC 15.247(d)
RSS-210 A8.2(b)

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement:**5.3.1 Measurement Procedure PKPSD:**


1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW \geq 300 kHz.
4. Set the span to 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz} = -15.2\text{ dB})$.
11. The resulting peak PSD level must be $\leq 8\text{ dBm}$.

5.3.2 Measurement Procedure AVGPSD:

1. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
2. Set the analyzer span to 5-30% greater than the EBW.
3. Set the RBW = 100 kHz.
4. Set the VBW \geq 300 kHz.
5. Detector = power average (RMS).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
7. Manually set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period})$.
8. Perform the measurement over a single sweep.
9. Use the peak marker function to determine the maximum level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent level in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz} = -15.2\text{ dB})$.
11. The resulting PSD level must be $\leq 8\text{ dBm}$

ANNEX B - TEST DIAGRAMS

Test Site for Radiated Emissions

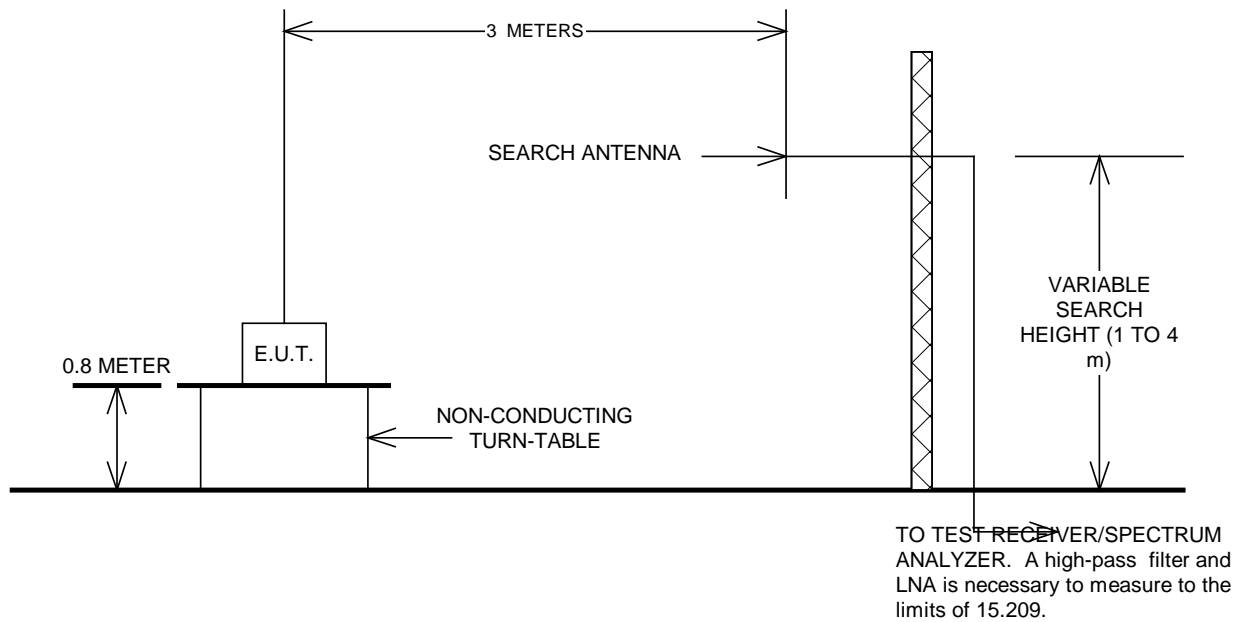

Peak Power at Antenna Terminals

Minimum 6 dB Bandwidth

Peak Power Spectral Density

Spurious Emissions (conducted)

