



PRODUCT SPECIFICATION

Version 1.0

WPC0GR2231R

WPC0GR2231R Specification

IEEE 802.11a/b/g/n/ ac 2T2R Wi-Fi router Module
(Realtek RTL8198CD+ RTL8192ER+ RTL8812AR)

Custom Approval Section		
Custom Name	Xiamen Prima Technology Inc	
Department		
Approval		Date:

DESIGN	CHECK	APPROVAL
Jason yu	Guan hui	York Chen
2017.05.18	2017.05.18	2017.05.18



1 General Description

WPC0G2231R is to specify the product requirements for **802.11 a/b/g/n/ ac Wi-Fi Router Module**. This Module is based on Realtek RTL8198CD+RTL8192ER+RTL8812AR chipset .that complied with IEEE 802.11n 、 IEEE 802.11ac,and it is also backward complied with IEEE 802.11b/g standard from 2.4~2.5GHz.It can be used to provide up to 54Mbps for IEEE 802.11a, 11Mbps for IEEE 802.11b, 54Mbps for IEEE 802.11g, 300Mbps for IEEE 802.11n and 866.7Mbps for IEEE 802.11ac to connect your wireless LAN.

2 Features

- I Compatible with IEEE 802.11a standard to provide wireless 54Mbps data rate.
- I Compatible with IEEE 802.11g standard to provide wireless 54Mbps data rate.
- I Compatible with IEEE 802.11b standard to provide wireless 11Mbps data rate.
- I Compatible with IEEE 802.11n standard to provide wireless 300Mbps data rate.
- I Compatible with IEEE 802.11ac standard to provide wireless 866.7Mbps data rate.
- I Operation at 2.4~2.5GHz and 5.15~5.825GHz frequency band to meet worldwide regulations
- I Provides simple legacy and 20MHz/40MHz/80MHz co-existence mechanisms to ensure backward and network compatibility.
- I Supports infrastructure networks via Access Point and ad-hoc network via peer-to-peer communication
- I Supports IEEE 802.11i (WPA and WPA2), WAPI, enhanced security
- I Friendly user configuration and diagnostic utilities
- I 62 AP Access points
- I ROHS compliant

3. Application Diagrams

3.1 Functional Block Diagram

RTL8198CD+RTL8192ER+RTL8812AR

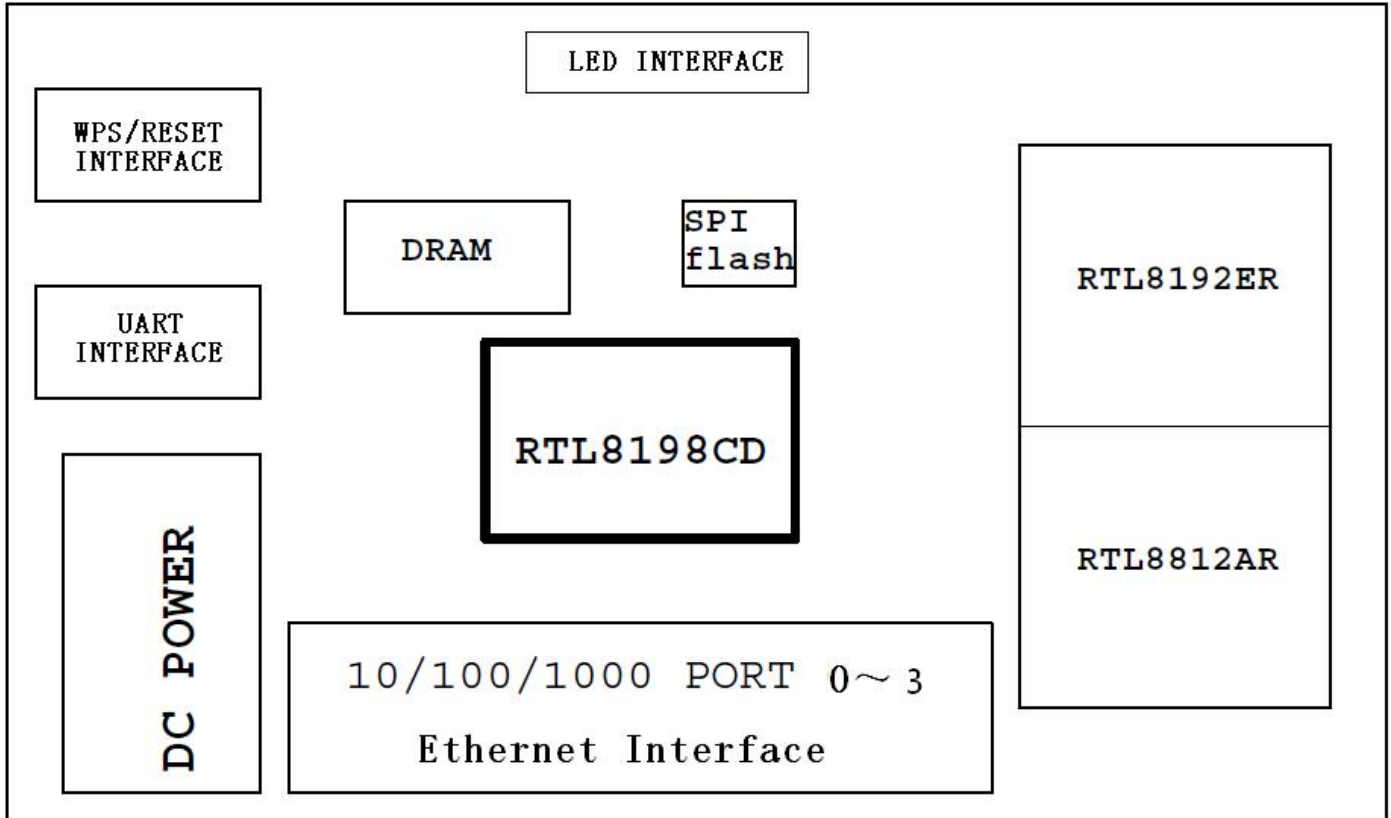


Figure 1

3.2 General Requirements

3.2.1 IEEE 802.11b Section

	Feature	Detailed Description
3.2.1.1	Standard	<ul style="list-style-type: none"> IEEE 802.11b
3.2.1.2	Radio and Modulation Schemes	<ul style="list-style-type: none"> DQPSK , DBPSK , DSSS , and CCK
3.2.1.3	Operating Frequency	<ul style="list-style-type: none"> 2412 ~ 2462MHz ISM band
3.2.1.4	Channel Numbers	<ul style="list-style-type: none"> 11 channels for United States 13 channels for Europe Countries 14 channels for Japan
3.2.1.5	Data Rate	<ul style="list-style-type: none"> 11,5.5,2,and 1Mbps
3.2.1.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK
3.2.1.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power at each RF chain, Data Rate and at room Temp. 25 degree C 18dBm(±2dB) at 1,2,5.5,11Mbps

3.2.2 IEEE 802.11g Section

	Feature	Detailed Description
3.2.2.1	Standard	<ul style="list-style-type: none"> IEEE 802.11g
3.2.2.2	Radio and Modulation Type	<ul style="list-style-type: none"> QPSK , BPSK , 16QAM ,64QAM with OFDM
3.2.2.3	Operating Frequency	<ul style="list-style-type: none"> 2412 ~ 2462MHz ISM band
3.2.2.4	Channel Numbers	<ul style="list-style-type: none"> 11 channels for United States 13 channels for Europe Countries 13 channels for Japan
3.2.2.5	Data Rate	<ul style="list-style-type: none"> 6,9,12,18,24,36,48,54Mbps
3.2.2.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK
3.2.2.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance\pm2dB) at each RF chain, Data Rate and at room Temp. 25degree C +17 dBm at 6,9Mbps +16 dBm at 12,18Mbps +15 dBm at 24,36Mbps +14 dBm at 48,54Mbps
3.2.2.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25 degree C -82 dBm at 6Mbps -81 dBm at 9Mbps -79 dBm at 12Mbps -77 dBm at 18Mbps -74 dBm at 24Mbps -70 dBm at 36Mbps -66 dBm at 48Mbps -65 dBm at 54Mbps

3.2.3 IEEE 802.11a Section

	Feature	Detailed Description
3.2.3.1	Standard	<ul style="list-style-type: none"> IEEE 802.11a
3.2.3.2	Radio and Modulation Type	<ul style="list-style-type: none"> QPSK , BPSK , 16QAM ,64QAM with OFDM
3.2.3.3	Operating Frequency	<ul style="list-style-type: none"> 5.15~5.25GHz and 5.725~5.825GHz for US and Canada 5.15~5.25GHz for Japan 5.15~5.25GHz for Europe 5.725~5.825GHz for China
3.2.3.4	Channel Numbers	<ul style="list-style-type: none"> 12 non-overlapping channels for US and Canada 8 non-overlapping channels for Japan 19 non-overlapping channels for Europe 4 non-overlapping channels for China
3.2.3.5	Data Rate	<ul style="list-style-type: none"> 6,9,12,18,24,36,48,54Mbps
3.2.3.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK
3.2.3.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance\pm 2dB) at each RF chain, Data Rate and at room Temp. 25degree C +14 dBm at 6,9Mbps +13 dBm at 12,18Mbps



PRODUCTS SPECIFICATION

WPC0GR2231

		<ul style="list-style-type: none"> +12 dBm at 24,36Mbps +11 dBm at 48,54Mbps
3.2.3.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25 degree C -82 dBm at 6Mbps -81 dBm at 9Mbps -79 dBm at 12Mbps -77 dBm at 18Mbps -74 dBm at 24Mbps -70 dBm at 36Mbps -66 dBm at 48Mbps -65 dBm at 54Mbps

3.2.4 IEEE 802.11n Section

	Feature	Detailed Description																																																	
3.2.4.1	Standard	<ul style="list-style-type: none"> IEEE 802.11n 																																																	
3.2.4.2	Radio and Modulation Type	<ul style="list-style-type: none"> BPSK , QPSK , 16QAM ,64QAM with OFDM 																																																	
3.2.4.3	Operating Frequency	<ul style="list-style-type: none"> 2.4GHz band:2412 ~ 2462MHz 5GHz and:5150 ~ 5250MHZ and 5725 ~ 5825MHZ 																																																	
3.2.4.4	Data Rate	<table border="1"> <thead> <tr> <th rowspan="2">MCS</th> <th colspan="2">GI=800ns</th> <th colspan="2">GI=400ns</th> </tr> <tr> <th>20MHz</th> <th>40MH</th> <th>20MHz</th> <th>40MHz</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>6.5</td> <td>13.5</td> <td>7.2</td> <td>15</td> </tr> <tr> <td>1</td> <td>13</td> <td>27</td> <td>14.4</td> <td>30</td> </tr> <tr> <td>2</td> <td>19.5</td> <td>40.5</td> <td>21.7</td> <td>45</td> </tr> <tr> <td>3</td> <td>26</td> <td>54</td> <td>28.9</td> <td>60</td> </tr> <tr> <td>4</td> <td>39</td> <td>81</td> <td>43.3</td> <td>90</td> </tr> <tr> <td>5</td> <td>52</td> <td>108</td> <td>57.8</td> <td>120</td> </tr> <tr> <td>6</td> <td>58.5</td> <td>121.5</td> <td>65.0</td> <td>135</td> </tr> <tr> <td>7</td> <td>65</td> <td>135</td> <td>72.2</td> <td>150</td> </tr> </tbody> </table>	MCS	GI=800ns		GI=400ns		20MHz	40MH	20MHz	40MHz	0	6.5	13.5	7.2	15	1	13	27	14.4	30	2	19.5	40.5	21.7	45	3	26	54	28.9	60	4	39	81	43.3	90	5	52	108	57.8	120	6	58.5	121.5	65.0	135	7	65	135	72.2	150
MCS	GI=800ns			GI=400ns																																															
	20MHz	40MH	20MHz	40MHz																																															
0	6.5	13.5	7.2	15																																															
1	13	27	14.4	30																																															
2	19.5	40.5	21.7	45																																															
3	26	54	28.9	60																																															
4	39	81	43.3	90																																															
5	52	108	57.8	120																																															
6	58.5	121.5	65.0	135																																															
7	65	135	72.2	150																																															
3.2.4.5	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK 																																																	
3.2.4.6	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power (tolerance±2dB) at each RF chain, Data Rate and at room Temp. 25 degree C 2.4GHz Band/HT20 +14dBm at MCS0~7 2.4GHz Band/HT40 +14dBm at MCS0~7 5GHz Band/HT20 +11dBm at MCS0~7 5GHz Band/HT40 +11dBm at MCS0~7 																																																	
3.2.4.7	Receiver Sensitivity at Antenna Connector	<p>Typical Sensitivity at each RF chain at Which Frame(1000-byte PDUs)Error Rate=10% and at room Temp.25 degree C</p> <table border="1"> <thead> <tr> <th>2.4GHz Band/HT20</th> <th>2.4GHz Band/HT40</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 </td> <td> <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 </td> </tr> </tbody> </table>	2.4GHz Band/HT20	2.4GHz Band/HT40	<ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	<ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																													
2.4GHz Band/HT20	2.4GHz Band/HT40																																																		
<ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	<ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																																		



PRODUCTS SPECIFICATION

WPC0GR2231

		5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7
--	--	---	---

3.2.5 IEEE 802.11ac Section

	Feature	Detailed Description		
3.2.5.1	Standard	<ul style="list-style-type: none"> IEEE 802.11ac 		
3.2.5.2	Radio and Modulation Type	<ul style="list-style-type: none"> QPSK , BPSK , 16QAM ,64QAM,256QAM with OFDM 		
3.2.5.3	Operating Frequency	<ul style="list-style-type: none"> 5.15~5.25GHz and 5.725~5.825GHz for US and Canada 5.15~5.25GHz for Japan 5.15~5.25GHz for Europe 5.725~5.825GHz for China 		
3.2.5.4	Channel Numbers	<ul style="list-style-type: none"> 12 non-overlapping channels for US and Canada 8 non-overlapping channels for Japan 19 non-overlapping channels for Europe 4 non-overlapping channels for China 		
3.2.5.5	Data Rate	<ul style="list-style-type: none"> at most 433.3 Mbps 		
3.2.5.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK 		
3.2.5.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance ± 2dB) at each RF chain, Data Rate and at room Temp. 25degree C +11 dBm at HT20 / HT40 		
3.2.5.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25 degree C <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> 5GHz Band / HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 </td> <td style="width: 50%; vertical-align: top;"> 5GHz Band / HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9 </td> </tr> </table>	5GHz Band / HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 	5GHz Band / HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9
5GHz Band / HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 	5GHz Band / HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9 			

		5GHz Band / HT80 not enabled <ul style="list-style-type: none"> • -76dBm at MCS0 • -73dBm at MCS1 • -71dBm at MCS2 • -68dBm at MCS3 • -64dBm at MCS4 • -60dBm at MCS5 • -59dBm at MCS6 • -58dBm at MCS7 • -55dBm at MCS8 • -51dBm at MCS9 		
--	--	---	--	--

4. Electrical and Thermal Characteristics

4.1 General Section

	Feature	Detailed Description
4.1.1	Antenna Type	<ul style="list-style-type: none"> • External antenna
4.1.2	Operating Voltage	<ul style="list-style-type: none"> • 12V±10%
4.1.3	Current Consumption	<ul style="list-style-type: none"> • 1000mA at continuous transmit mode • 500mA at receive mode w/o receiving packet

4.2 Software Requirements

The Configuration Software supports Microsoft Windows 2000, xp32/64-bit and Vista 32/64-bit. This configuration software includes the following functions:

- Information
Information allows you to monitor network status.
- Configuration
Configuration allows you to configure parameters for wireless networking.
- Encryption
Encryption provides WEP, WPA, WPA2, and 802.1X security control.
- Diagnosis
Diagnosis allows you to display all channel status and search neighboring access points


4.3 Environmental Requirements

	Feature	Detailed Description
4.3.1	Operating Temperature Conditions	<ul style="list-style-type: none"> • 0°C ~ +60°C.
4.3.2	Non-Operating Temperature Conditions	<ul style="list-style-type: none"> • -40°C ~ +80°C.
4.3.3	Operating Humidity conditions	<ul style="list-style-type: none"> • 10% ~ 90%
4.3.4	Non-Operating Humidity Conditions	<ul style="list-style-type: none"> • 5% ~ 95%

4.4 Mechanical Requirements

	Feature	Detailed Description
4.4.1	Length	<ul style="list-style-type: none"> 120mm
4.4.2	Width	<ul style="list-style-type: none"> 100mm
4.4.3	Height	<ul style="list-style-type: none"> 23mm

4.5 Mechanical Dimensions

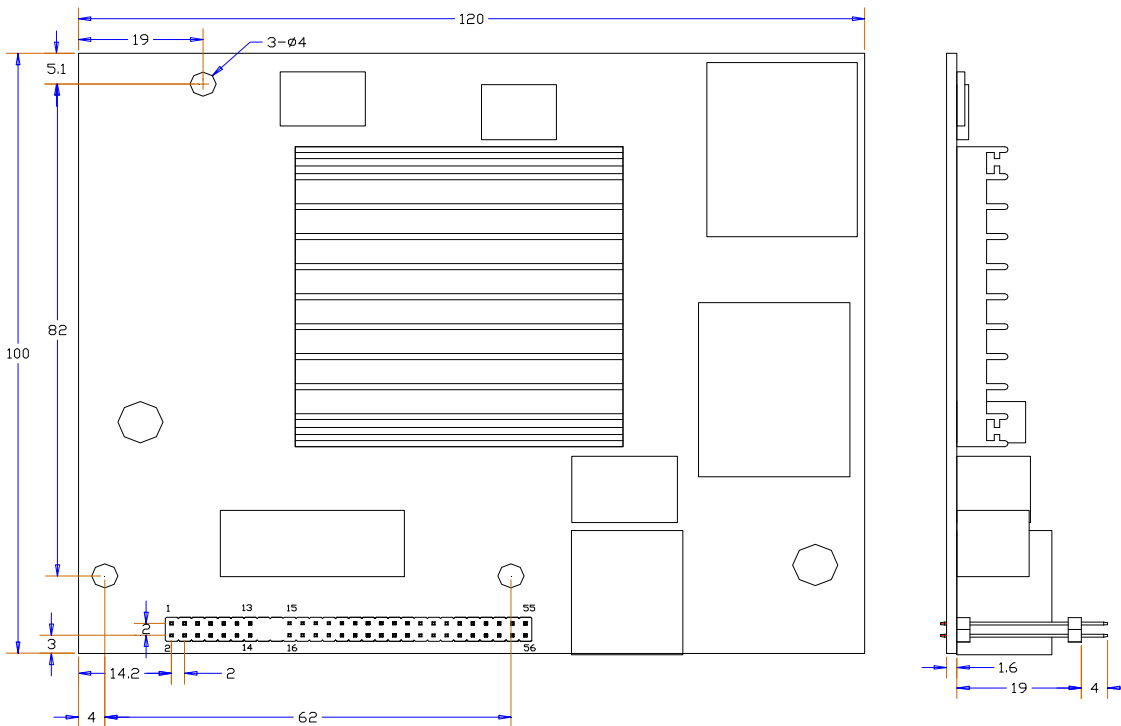

* TOLERANCES ARE +/-0.5mm UNLESS OTHERWISE SPECIFIED

* UNITE :mm

4.6 Connector Pin Definitions

5-Pin 1.25mm connector (Horizontal Type)

PIN	1	2	3	4	5	6
Definition	12V	12V	12V	12V	GND	GND
PIN	7	8	9	10	11	12
Definition	GND	GND	Gb WAN B-	Gb WAN D-	Gb WAN B+	Gb WAN D+



PRODUCTS SPECIFICATION

WPC0GR2231R

			(WAN□PIN6)	(WAN□PIN8)	(WAN□PIN3)	(WAN□PIN7)
PIN	13	14	15	16	17	18
Definition	GND	GND	Gb WAN A- (WAN□PIN2)	Gb WAN C- (WAN□PIN5)	Gb WAN A+ (WAN□PIN1)	Gb WAN C+ (WAN□PIN4)
PIN	19	20	21	22	23	24
Definition	Gb LAN B- (LAN□PIN6)	Gb LAN C+ (LAN□PIN4)	Gb LAN B+ (LAN□PIN3)	Gb LAN C+ (LAN□PIN5)	GND	GND
PIN	25	26	27	28	29	30
Definition	Gb LAN A- (LAN□PIN2)	Gb LAN D- (LAN□PIN7)	Gb LAN A+ (LAN□PIN1)	Gb LAN D+ (LAN□PIN8)	GND	GND
PIN	31	32	33	34	35	36
Definition	Mb LAN RX*N	GND	Mb LAN RX*P	GND	Mb LAN TX*N	GND
PIN	37	38	39	40	41	42
Definition	Mb LAN TX*P	GND	GND	GND	LAN1 LED	LAN2 LED
PIN	43	44	45	46	47	48
Definition	WAN LED (Y)	5G LED	WAN LED (G)	GND	RST	GND
PIN	49	50	51	52	53	54
Definition	WPS	GND	GND	AWAKE	UART RX	GND
PIN	55	56				
Definition	UART TX	GND				

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

FCC Statement:

This equipment complies with FCC radiation limits set forth for an uncontrolled environment. This equipment must not be co-located or operating with any other antenna or transmitter.

This module is designed to comply with FCC statement FCC ID is: 2ADID-WPC0GR2231R

The host system using this module should have label in a visible area indicated the following texts "Contains FCC ID: 2ADID-WPC0GR2231R".

2.4G and 5G can transmit simultaneously when sharing antennas.

Operations in the 5.15-5.25 GHz band are restricted to indoor usage only.

FCC Radiation Exposure Statement:


This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, Human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation.

When OEG purchase the module, they can only buy this antenna to match the modules
The max antenna gain of antenna is 5dBi. The following is an example of the module and antenna:



Precautions in hardware installation

Find the client mainboard's router interface: as shown in the following picture:

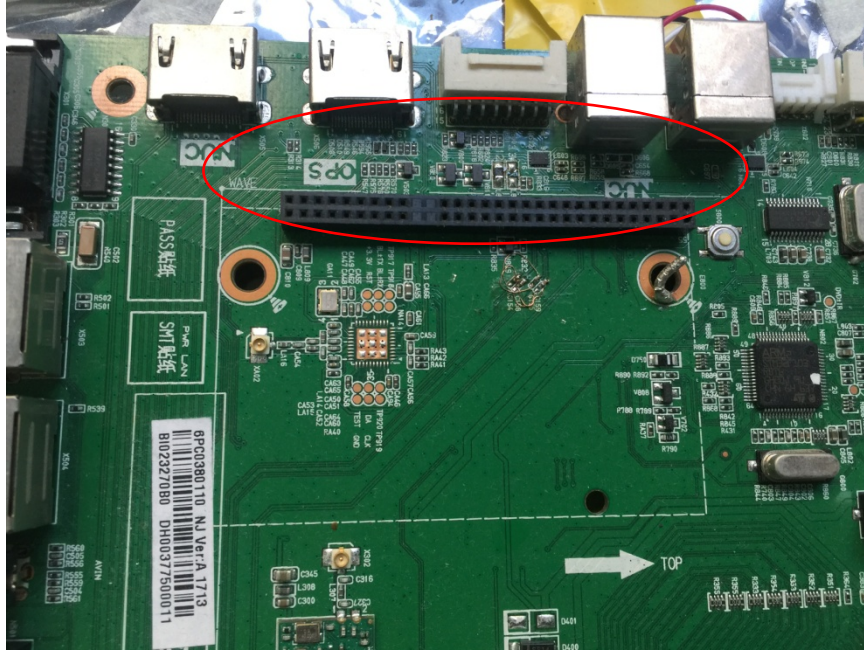

The router module insert the mainboard according to the requirements of customers, pay attention to the position, the user inserts the needle should be vertical and gently, otherwise it may cause deformation of pin module.



Fix the locating column and lock the fixed screw at the same time.

