

# SAR TEST REPORT

FCC ID: 2ADINN5001TL

Product: LTE mobile phone

Model No.: N5001L

Additional Model: N5001TL, A4L, A3L

Trade Mark: NUU

Report No.: TCT171020E002

Issued Date: Oct. 23, 2017

Issued for:

**Sun Cupid Technology (HK) Ltd.**

16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon

Issued By:

**Shenzhen Tongce Testing Lab.**

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,  
Shenzhen, Guangdong, China

TEL: +86-755-27673339

FAX: +86-755-27673332

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab..

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**TABLE OF CONTENTS**

1. Test Certification .....	4
2. Facilities and Accreditations .....	5
2.1.FACILITIES.....	5
2.2.LOCATION .....	5
2.3.ENVIRONMENT CONDITION .....	5
3. Test Result Summary .....	6
4. EUT Description.....	7
5. RF Exposure Limit .....	9
6. SAR Measurement System Configuration .....	10
6.1.SAR MEASUREMENT SET-UP.....	10
6.2.E-FIELD PROBE .....	11
6.3.PHANTOM.....	11
6.4.DEVICE HOLDER .....	12
6.5.DATA STORAGE AND EVALUATION.....	13
6.6.POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....	14
6.7.TISSUE DIELECTRIC PARAMETERS .....	17
6.8.TISSUE-EQUIVALENT LIQUID PROPERTIES.....	18
6.9.SYSTEM CHECK.....	20
7. Measurement Procedure .....	22
8. Conducted Output Power.....	25
9. Tune-up power olerance .....	42
10. Exposure Position Consideration .....	43
10.1. EUT ANTENNA LOCATION .....	43
11. SAR Test Results Summary.....	44
11.1. RESULTS OVERVIEW OF GSM850 .....	44
11.2. RESULTS OVERVIEW OF GSM1900 .....	45
11.3. RESULTS OVERVIEW OF UMTS BAND II .....	46
11.4. RESULTS OVERVIEW OF UMTS BAND IV.....	47
11.5. RESULTS OVERVIEW OF UMTS BAND V .....	48
11.6. RESULTS OVERVIEW OF LTE BAND II .....	49

11.7.	RESULTS OVERVIEW OF LTE BAND IV .....	50
11.8.	RESULTS OVERVIEW OF LTE BAND V .....	51
11.9.	RESULTS OVERVIEW OF LTE BAND VII .....	52
11.10.	RESULTS OVERVIEW OF LTE BAND XII .....	53
11.11.	RESULTS OVERVIEW OF LTE BAND IV .....	54
11.12.	RESULTS OVERVIEW OF WIFI 2.4G .....	56
11.13.	STAND-ALONE SAR TEST EXCLUSION .....	57
11.14.	SIMULTANEOUS TRANSMISSION POSSIBILITIES .....	58
11.15.	SAR SUMMATION SCENARIO .....	59
11.16.	MEASUREMENT UNCERTAINTY (450MHZ-3GHZ).....	65
11.17.	TEST EQUIPMENT LIST .....	67
Annex A:	System Check.....	68
Annex B:	Measurement results.....	68
Annex C:	Calibration reports .....	68
Annex D:	SAR SYSTEM VALIDATION .....	68
Annex E:	The Check Data of Impedance and Return Loss.....	68
Annex F:	Photo documentation.....	69

## 1. Test Certification

<b>Product:</b>	LTE mobile phone
<b>Model No.:</b>	N5001L,
<b>Additional Model No.</b>	N5001TL, A4L, A3L
<b>Applicant:</b>	Sun Cupid Technology (HK) Ltd.
<b>Address:</b>	16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon
<b>Manufacturer:</b>	Sun Cupid Technology (HK) Ltd.
<b>Address:</b>	16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon
<b>Date of Test:</b>	May 24 – Sep. 19, 2017
<b>Applicable Standards:</b>	FCC 47 CFR §2.1093 ANSI Std C95.1-2005: Safety Level with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz. IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques RSS-102: Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) (Issue 5 March 2015) KDB447498 D01: General RF Exposure Guidance v06 KDB865664 D01: SAR measurement 100MHz to 6GHz v01r04 KDB865664 D02: RF Exposure Reporting v01r02. KDB648474D04: Head set SAR v01r03 KDB941225 D01: 3G SAR Procedures v03r01 KDB248227 D01: 802.11 wi-fi SAR v02r02 KDB941225 D05: SAR for LTE devices v02r05 KDB941225 D06: Hotspot Mode v02r01 KDB941225 D05: SAR for LTE Devices v02r05

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Tested By:** Aero Liu

Aero Liu

**Date:** Sep. 19, 2017

**Reviewed By:** Joe Zhou

Joe Zhou

**Date:** Oct. 23, 2017

**Approved By:** Tomsin

Tomsin

**Date:** Oct. 23, 2017

## 2. Facilities and Accreditations

### 2.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen Tongce Testing Lab.. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

### 2.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China Environment Condition:

### 2.3. Environment Condition:

Temperature:	18°C ~25°C
Humidity:	35%~75% RH
Atmospheric Pressure:	1011 mbar

### 3. Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:  
<Highest Reported standalone SAR Summary>

Band	Position	MAX Reported SAR <sub>1g</sub> (W/kg)
GSM850	Head	0.753
	Body&Hotspot 10mm	0.783
GSM1900	Head	0.673
	Body&Hotspot 10mm	0.500
UMTS Band II	Head	0.709
	Body&Hotspot 10mm	0.697
UMTS Band IV	Head	0.465
	Body&Hotspot 10mm	0.524
UMTS Band V	Head	0.710
	Body&Hotspot 10mm	0.477
LTE Band II	Head	0.469
	Body&Hotspot 10mm	<b>0.797</b>
LTE Band IV	Head	0.726
	Body&Hotspot 10mm	0.722
LTE Band V	Head	0.540
	Body&Hotspot 10mm	0.297
LTE Band VII	Head	0.649
	Body&Hotspot 10mm	0.414
LTE Band XII	Head	0.674
	Body&Hotspot 10mm	0.658
LTE Band XVII	Head	0.541
	Body&Hotspot 10mm	0.510
Wi-Fi2.4G	Head	<b>0.771</b>
	Body&Hotspot 10mm	0.528
The highest simultaneous SAR is 1.481W/kg per KDB690783 D01		

**Note:**

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
3. This EUT owns two SIM cards, after we perform the pretest for these two SIM card; we found the SIM 1 is the worst case, so its result is recorded in this report.

#### 4. EUT Description

<b>Product Name:</b>	LTE mobile phone		
<b>Model :</b>	N5001L,		
<b>Additional Model:</b>	N5001TL, A4L, A3L		
<b>Hardware version:</b>	110SFM788P0A2V0		
<b>Software version :</b>	N5001L-AM-01		
<b>Trade Mark:</b>	<b>NUU</b>		
<b>Power Supply:</b>	3.8 VDC/2000mAh Rechargeable Battery		
<b>Device Operating Configurations:</b>			
<b>Supporting Mode(s) :</b>	GSM850,PCS1900, UMTS Band II,UMTS Band IV ,UMTS Band V,LTE Band II, LTE Band IV,LTE Band V ,LTE Band VII,,LTE Band XII,LTE Band XVII Wi-Fi , BT		
<b>Modulation:</b>	GSM(GMSK),UMTS(QPSK/16QAM),LTE(QPSK/16QAM), WiFi(OFDM/CCK),BT(GFSK/π/4-DQPSK/ 8-DPSK)		
<b>Device Class :</b>	Class B, No DTM Mode		
<b>Operating Frequency Range(s)</b>	Band	TX(MHz)	RX(MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	UMTS Band II	1850~1910	1930~1990
	UMTS Band IV	1710~1755	2110~2155
	UMTS Band V	824~849	869~894
	LTE Band II	1850~1910	1930~1990
	LTE Band IV	1710~1755	2110~2155
	LTE Band V	824~849	869~894
	LTE Band VII	2502~2568	2622~2688
	LTE Band XII	698~716	728~746
	LTE Band XVII	704~716	734~746
	Wi-Fi (2.4G)	2412-2462	
	BT	2402~2480	
<b>GPRS class level:</b>	GPRS class 12		
<b>Test Channels (low-mid-high):</b>	128-190-251(GSM850)		
	512-661-810(GSM1900)		
	9262-9400-9538(UMTS Band II)		
	1312-1413-1513(UMTS Band IV)		
	4132-4182-4233(UMTS Band V)		
	18700-18900-19100(LTE Band II)		
	20050-20175-20300(LTE Band IV)		

	20450-20525-20600(LTE Band V)
	20850-21100-21350(LTE Band VII)
	23060-23095-23130(LTE Band XII)
	23780-23790-23800(LTE Band XVII)
	1-6-11(Wi-Fi 2.4G)
	0-39-78(BT)
	0-19-39(BLE)
<b>Power Source:</b>	3.8 VDC/2000mAh Rechargeable Battery

**Models difference:**

N5001L, N5001TL, A4L, A3L Only the model name and color are different, the others are the same, so the test data is executed at N5001L

Note: The report LTE band2/4/5/7 data is used in 2ADINN5001L reported test data.



## 5. RF Exposure Limit

Type Exposure	SAR (W/kg)
	Uncontrolled Exposure Limit
Spatial Peak SAR (averaged over any 1 g of tissue)	1.60
Spatial Peak SAR (hands/wrists/feet/ankles averaged over 10g)	4.00
Spatial Peak SAR (averaged over the whole body)	0.08

**Note:**

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

## 6. SAR Measurement System Configuration

### 6.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System (VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch; it sends an "Emergency signal" to the robot controller that to stop robot's moves A computer operating Windows XP.


OPENSAR software Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles to validate the proper functioning of the system.

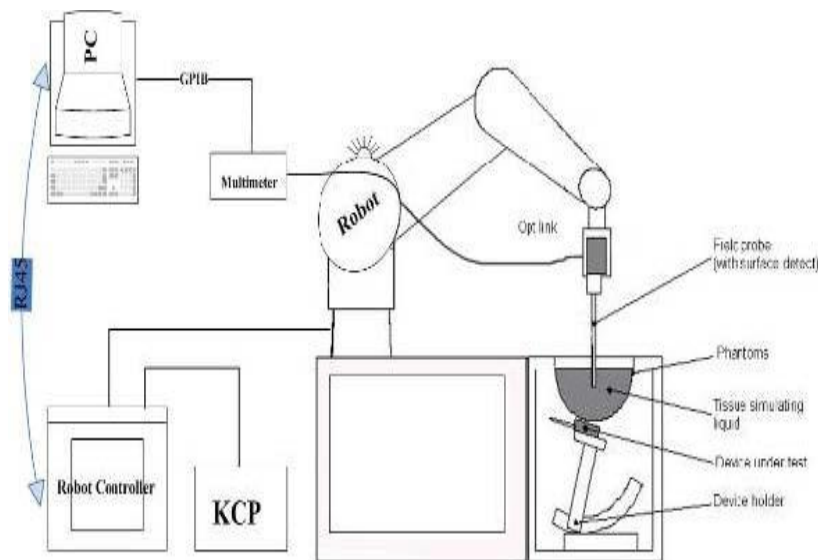

**KUKA SAR Test System Configuration**

## 6.2. E-field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### Probe Specification

Construction Symmetrical design with triangular core  
Interleaved sensors  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)  
Calibration ISO/IEC 17025 calibration service available.

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE5
Serial Number	SN 07/15 EP248
Frequency Range of Probe	0.45 GHz-3GHz
Resistance of Three Dipoles at Connector	Dipole 1:R1=0.218MΩ Dipole 2:R3=0.217MΩ Dipole 3:R3=0.215MΩ



Photo of E-Field Probe

## 6.3. Phantom

The SAM Phantom SAM120 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC IEC 62209-1, IEC 62209-2:2010.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections.

Body SAR testing also used the flat section between the head profiles.

Name: COMOSAR IEEE SAM PHANTOM

S/N: SN 19/15 SAM 120


Manufacture: MVG



SAM Twin Phantom

#### 6.4. Device Holder

In combination with the Generic Twin Phantom SAM120, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

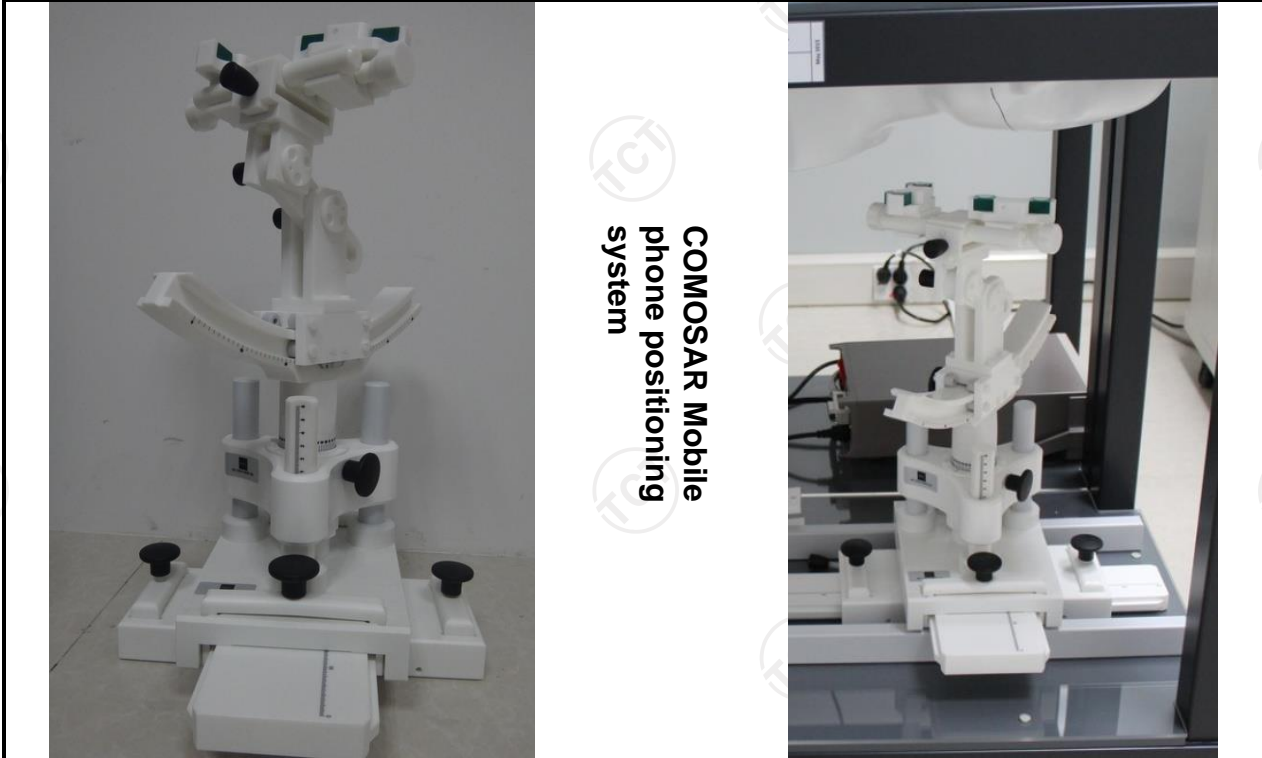

COMOSAR Mobile  
phone positioning  
system

## 6.5. Data Storage and Evaluation

### Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the millimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With	$V_i$	= compensated signal of channel i	(i = x, y, z)
	$U_i$	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(MVG parameter)
	dcpi	= diode compression point	(MVG parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Normi} \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With	$V_i$	= compensated signal of channel i	(i = x, y, z)
	Normi	= sensor sensitivity of channel i	(i = x, y, z)
	ConvF	= sensitivity enhancement in solution	[mV/(V/m) <sup>2</sup> ] for E-field Probes
	a <sub>ij</sub>	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	$E_i$	= electric field strength of channel i in V/m	
	$H_i$	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g
- E<sub>tot</sub> = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm<sup>3</sup>


Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

### 6.6. Position of the wireless device in relation to the phantom

#### Handset Reference Points

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

- With P<sub>pwe</sub> = equivalent power density of a plane wave in mW/cm<sup>2</sup>
- E<sub>tot</sub> = total electric field strength in V/m
- H<sub>tot</sub> = total magnetic field strength in A/m

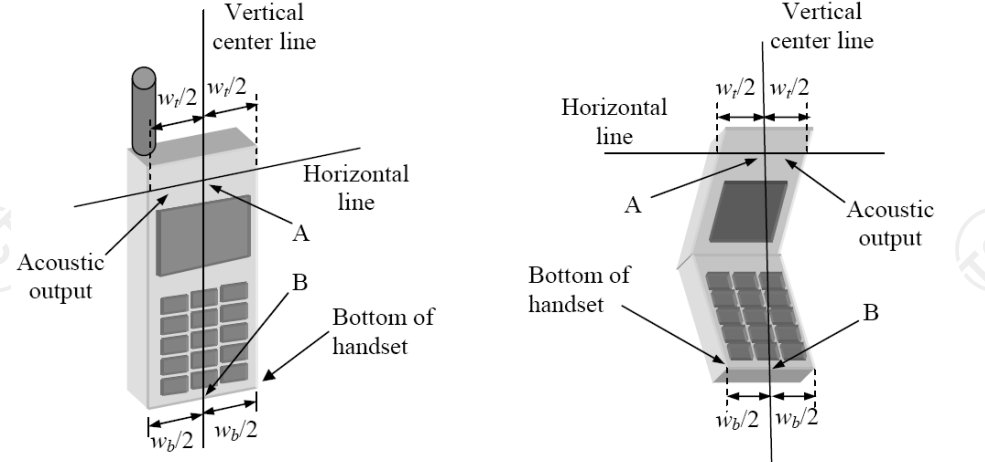


- W<sub>t</sub> Width of the handset at the level of the acoustic
- W<sub>b</sub> Width of the bottom of the handset
- A Midpoint of the width w<sub>t</sub> of the handset at the level of the acoustic output
- B Midpoint of the width w<sub>b</sub> of the bottom of the handset

#### Positioning for Cheek / Touch



**Positioning for Ear / 15° Tilt**

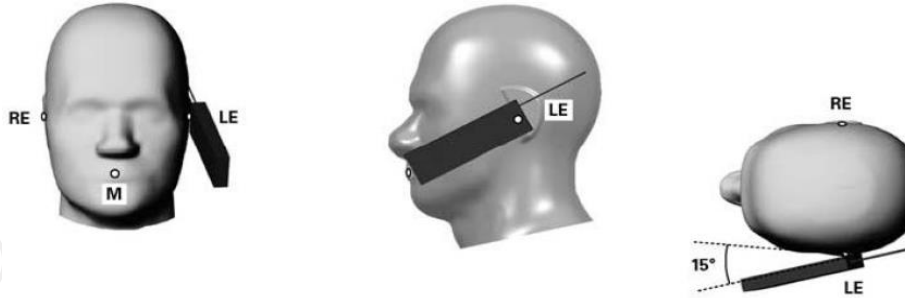


**Body Worn Accessory Configurations**

To position the device parallel to the phantom surface with either keypad up or down.

To adjust the device parallel to the flat phantom.

To adjust the distance between the device surface and the flat phantom to 15mm or holster surface and the flat phantom to 0 mm.

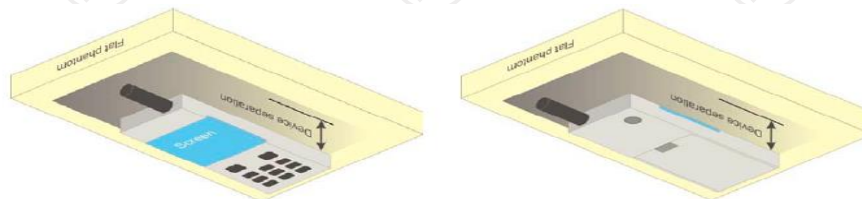


**Illustration for Body Worn Position**

**Wireless Router (Hotspot) Configurations**

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥

9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

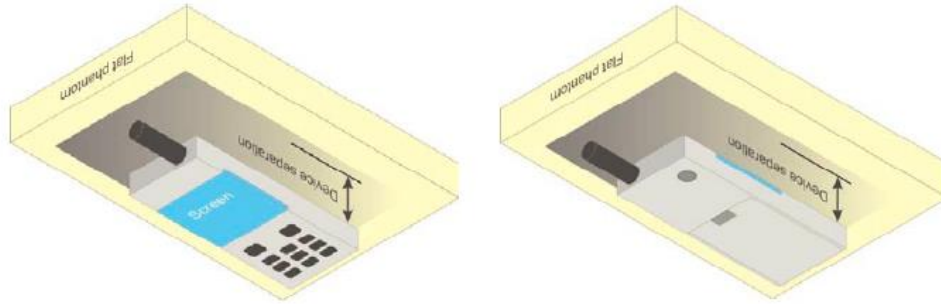


**Illustration for Hotspot Position**

**Limb-worn device**

A limb-worn device is a unit whose intended use includes being strapped to the arm or leg of the user while transmitting (except in idle mode). It is similar to a body-worn device. Therefore, the test positions of 6.1.4.4 also apply. The strap shall be opened so that it is divided into two parts as shown in Figure 9. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom.

If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.

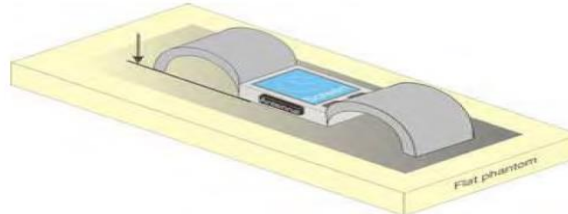

**Test position for limb-worn devices**



## 6.7. Tissue Dielectric Parameters

The liquid used for the frequency range of 100MHz-6G consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The following Table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values. The following materials are used for producing the tissue-equivalent materials

Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Liquid Type ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
300	Head	0.87	0.83~0.91	45.3	43.04~47.57
450	Head	0.87	0.83~0.91	43.5	41.33~45.68
835	Head	0.90	0.86~0.95	41.5	39.43~43.58
900	Head	0.97	0.92~1.02	41.5	39.43~43.58
1800-2000	Head	1.40	1.33~1.47	40.0	38.00~42.00
2450	Head	1.80	1.71~1.89	39.2	37.24~41.16
3000	Head	2.40	2.28~2.52	38.5	36.58~40.43
5800	Head	5.27	5.01~5.53	35.3	33.54~37.07
300	Body	0.92	0.87~0.97	58.2	55.29~61.11
450	Body	0.94	0.89~0.99	56.7	53.87~59.54
835	Body	0.97	0.92~1.02	55.2	52.44~57.96
900	Body	1.05	1.00~1.10	55.0	52.25~57.75
1800-2000	Body	1.52	1.44~1.60	53.3	50.64~55.97
2450	Body	1.95	1.85~2.05	52.7	50.07~55.34
3000	Body	2.73	2.60~2.87	52.0	49.40~54.60
5800	Body	6.00	5.70~6.30	48.2	45.79~50.61

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

### 6.8. Tissue-equivalent Liquid Properties

Test Date yy/mm/dd	Temp °C	Tissue Type	Measured Frequency ( MHz )	$\epsilon_r$	$\sigma$ (s/m)	Range of $\epsilon_r \pm$ 5%	Range of $\sigma \pm 5\%$
2017-09-19	21.6°C	750H	725	41.59	0.86	39.81~44.00	0.85~0.93
			735	41.57	0.87	39.81~44.00	0.85~0.93
			750	41.35	0.89	39.81~44.00	0.85~0.93
2017-09-19	21.6°C	750B	725	53.89	1.00	52.73~58.28	0.91~1.01
			735	53.70	1.00	52.73~58.28	0.91~1.01
			750	53.52	1.00	52.73~58.28	0.91~1.01
2017-06-10	21.6°C	835H	825	40.34	0.91	39.52~43.68	0.86~0.95
			835	40.33	0.92	39.43~43.58	0.86~0.95
			850	40.11	0.94	39.43~43.58	0.87~0.97
2017-06-10	21.6°C	835B	825	54.04	0.98	52.44~57.96	0.92~1.02
			835	53.93	0.99	52.44~57.96	0.92~1.02
			850	53.69	1.01	52.44~57.96	0.94~1.04
2017-06-15	21.6°C	1800H	1710	39.95	1.34	38.10~42.10	1.28~1.42
			1730	39.87	1.36	38.10~42.10	1.29~1.43
			1750	39.69	1.39	38.10~42.10	1.30~1.44
			1800	39.48	1.44	38.00~42.00	1.33~1.47
2017-06-15	21.6°C	1800B	1710	53.24	1.45	50.83~56.18	1.39~1.53
			1730	53.39	1.47	50.83~56.18	1.41~1.55
			1750	53.19	1.49	50.73~56.07	1.42~1.56
			1800	52.97	1.54	50.64~55.97	1.44~1.60
2017-05-24	21.6°C	1900H	1850	39.93	1.37	38.00~42.00	1.33~1.47
			1880	39.91	1.40	38.00~42.00	1.33~1.47
			1900	39.98	1.41	38.00~42.00	1.33~1.47
			1910	39.97	1.42	38.00~42.00	1.33~1.47
2017-05-24	21.6°C	1900B	1850	53.23	1.49	50.64~55.97	1.44~1.60
			1880	53.36	1.53	50.64~55.97	1.44~1.60
			1900	53.37	1.56	50.64~55.97	1.44~1.60
			1910	53.37	1.57	50.64~55.97	1.44~1.60
2017-06-17	21.6°C	2450H	2410	39.22	1.78	37.34~41.26	1.67~1.85
			2435	39.25	1.77	37.24~41.16	1.70~1.88
			2450	39.24	1.76	37.24~41.16	1.71~1.89
			2460	39.20	1.76	37.24~41.16	1.72~1.90
2017-06-17	21.6°C	2450B	2410	52.72	1.92	50.16~55.44	1.81~2.00
			2435	52.75	1.92	50.07~55.34	1.84~2.04
			2450	52.74	1.91	50.07~55.34	1.85~2.05
			2460	52.70	1.91	50.07~55.34	1.86~2.06
2017-06-08	21.6°C	2600H	2510	38.87	1.93	37.05~40.95	1.86~2.06
			2535	38.58	1.93	37.05~40.95	1.86~2.06
			2560	38.98	2.02	37.05~40.95	1.86~2.06
			2600	38.87	1.93	37.05~40.95	1.86~2.06


2017-06-08	21.6°C	2600B	2510	52.21	2.05	49.90~55.11	2.05~2.27
			2535	51.92	2.06	49.90~55.11	2.05~2.27
			2560	52.01	2.09	49.90~55.11	2.05~2.27
			2600	52.50	2.02	49.90~55.11	2.05~2.27

### 6.9. System Check

The SAR system must be validated against its performance specifications before it is deployed. When SAR probe and system component or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissue-equivalent media for system validation.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the OPENSAR system.

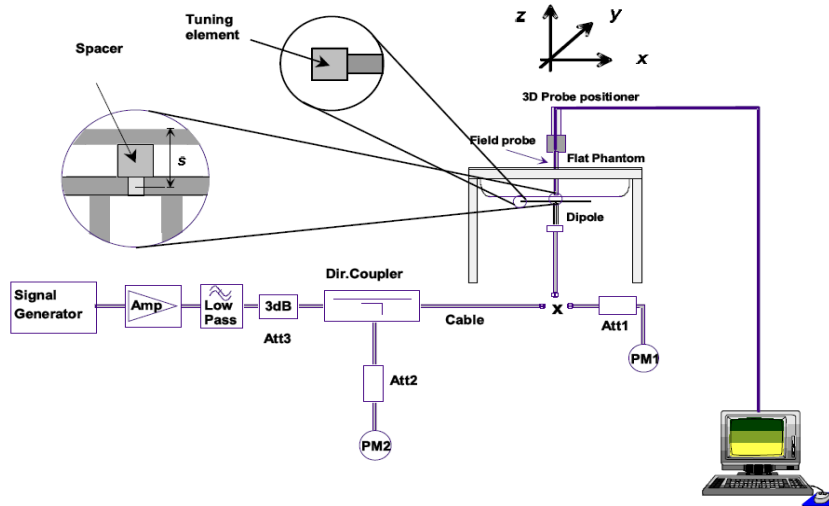

**System Check Set-up**  
Verification Results

System Check	Target SAR (1W) (+/-10%)				Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	Range of $\pm 10\%$ 1-g (mW/g)	10-g (mW/g)	Range of $\pm 10\%$ 10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
750H	8.52	7.67~9.37	5.67	5.10~6.24	7.840	5.370	21.6°C	2017/09/19
835H	9.82	8.84~10.80	6.35	5.72~6.99	9.700	6.150	21.6°C	2017/09/19
1800H	37.09	33.38~40.80	19.77	17.93~21.75	39.980	20.600	21.6°C	2017/06/15
1900H	38.93	35.04~42.82	20.27	18.45~22.55	39.980	21.070	21.6°C	2017/05/24
2450H	53.41	48.07~58.75	23.95	21.56~26.35	53.930	24.530	21.6°C	2017/06/17
2600H	56.88	51.20~62.56	24.92	22.43~27.41	53.180	23.430	21.6°C	2017/06/08
750B	8.52	7.67~9.37	5.74	5.17~6.31	9.054	6.097	21.6°C	2017/06/18
835B	9.41	8.47~10.35	6.22	5.99~6.84	10.150	6.450	21.6°C	2017/06/10
1800B	38.03	34.23~41.83	20.69	18.62~22.76	41.560	21.720	21.6°C	2017/06/15

1900B	38.73	34.86~42.60	20.48	18.43~22.53	39.330	20.940	21.6°C	2017/05/24
2450B	51.39	46.25~56.53	23.63	21.27~25.99	54.330	23.330	21.6°C	2017/06/17
2600B	54.54	49.09~59.99	24.37	21.94~26.80	57.860	25.600	21.6°C	2017/06/08
Note: All SAR values are normalized to 1W forward power.								

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Section 10 of this report.

## 7. Measurement Procedure

### Conducted power measurement

For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Read the WWAN RF power level from the base station simulator.

For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.

Connect EUT RF port through RF cable to the power meter or spectrum analyser, and measure WLAN/BT output power.

### Conducted power measurement

Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.

Place the EUT in positions as Appendix B demonstrates.

Set scan area, grid size and other setting on the MVG software.

Measure SAR results for the highest power channel on each testing position.

Find out the largest SAR result on these testing positions of each band.

Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

Power reference measurement

Area scan

Zoom scan

Power drift measurement

### Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The MVG software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

Extraction of the measured data (grid and values) from the Zoom Scan.

Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).

Generation of a high-resolution mesh within the measured volume.

Interpolation of all measured values from the measurement grid to the high-resolution grid

Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface

Calculation of the averaged SAR within masses of 1g and 10g.

### Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties

### Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

		$\leq 3$ GHz	$> 3$ GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD post-processor scan combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **SAR Averaged Methods**

In MVG, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

### **Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In MVG measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

### **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for

### **Measurement Uncertainty**

Per KDB 865664 D01 SAR Measurement 100KHz to 6GHz ,when the highest measurement 1-g SAR within a frequency band is  $<1.5\text{W/kg}$ , the extensive SAR measurement uncertainty analysis described IEEE Std 1528-2013 is not required in SAR report submitted for equipment approval.



## 8. Conducted Output Power

GSM 850 (SIM1)	Burst-Averaged output Power (dBm)			Calculation (dB)	Source Based time Average Power(dBm)		
	Channel	128	190		251	128	190
Frequency	824.2	836.6	848.8		824.2	836.6	848.8
GSM (GMSK, Voice)	32.92	32.88	32.86	-9.03	23.89	23.85	23.83
GPRS (GMSK, 1-slot)	32.21	32.13	32.15	-9.03	23.18	23.10	23.12
GPRS (GMSK, 2-slot)	31.57	31.59	31.58	-6.02	25.55	25.57	25.56
GPRS (GMSK, 3-slot)	30.38	30.36	30.35	-4.26	26.12	26.10	26.09
GPRS (GMSK, 4-slot)	29.89	29.86	29.88	-3.01	<b>26.88</b>	<b>26.85</b>	<b>26.87</b>
EGPRS (GMSK, 1-slot)	29.05	29.02	29.03	-9.03	20.02	19.99	20.00
EGPRS (GMSK, 2-slot)	28.33	28.36	28.31	-6.02	22.31	22.34	22.29
EGPRS (GMSK, 3-slot)	27.26	27.22	27.23	-4.26	23.00	22.96	22.97
EGPRS (GMSK, 4-slot)	26.68	26.53	26.55	-3.01	23.67	23.52	23.54

GSM 850 (SIM2)	Burst-Averaged output Power (dBm)			Calculation (dB)	Source Based time Average Power(dBm)		
	Channel	128	190		251	128	190
Frequency	824.2	836.6	848.8		824.2	836.6	848.8
GSM (GMSK, Voice)	32.92	32.88	32.86	-9.03	23.89	23.85	23.83
GPRS (GMSK, 1-slot)	32.21	32.13	32.15	-9.03	23.18	23.10	23.12
GPRS (GMSK, 2-slot)	31.57	31.59	31.58	-6.02	25.55	25.57	25.56
GPRS (GMSK, 3-slot)	30.38	30.36	30.35	-4.26	26.12	26.10	26.09
GPRS (GMSK, 4-slot)	29.89	29.86	29.88	-3.01	<b>26.88</b>	<b>26.85</b>	<b>26.87</b>
EGPRS (GMSK, 1-slot)	29.05	29.02	29.03	-9.03	20.02	19.99	20.00
EGPRS (GMSK, 2-slot)	28.33	28.36	28.31	-6.02	22.31	22.34	22.29
EGPRS (GMSK, 3-slot)	27.26	27.22	27.23	-4.26	23.00	22.96	22.97
EGPRS (GMSK, 4-slot)	26.68	26.53	26.55	-3.01	23.67	23.52	23.54

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according to the highest Source Based time Average Power table.

GSM 1900 (SIM1)	Burst-Averaged output Power (dBm)			Calculation (dB)	Source Based time Average Power(dBm)		
	Channel	512	661		810	512	661
Frequency	1850.2	1880.0	1909.8		1850.2	1880.0	1909.8
GSM (GMSK, Voice)	30.15	30.21	30.13	-9.03	21.12	21.18	21.10
GPRS (GMSK, 1-slot)	29.65	29.62	29.66	-9.03	20.62	20.59	20.63
GPRS (GMSK, 2-slot)	28.86	28.92	28.88	-6.02	22.84	22.90	22.86
GPRS (GMSK, 3-slot)	27.28	27.36	27.32	-4.26	23.02	23.10	23.06
GPRS (GMSK, 4-slot)	26.88	26.96	26.93	-3.01	<b>23.87</b>	<b>23.95</b>	<b>23.92</b>
EGPRS (GMSK, 1-slot)	27.95	27.98	27.96	-9.03	18.92	18.95	18.93
EGPRS (GMSK, 2-slot)	27.05	27.08	27.07	-6.02	21.03	21.06	21.05
EGPRS (GMSK, 3-slot)	26.10	26.12	26.11	-4.26	21.84	21.86	21.85
EGPRS (GMSK, 4-slot)	25.35	25.32	25.33	-3.01	22.34	22.31	22.32

GSM1900 (SIM2)	Burst-Averaged output Power (dBm)			Calculation (dB)	Source Based time Average Power(dBm)		
	Channel	128	190		251	128	190
Frequency	1850.2	1880.0	1909.8		1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.83	29.98	29.97	-9.03	20.80	20.95	20.94
GPRS (GMSK, 1-slot)	29.25	29.33	29.38	-9.03	20.22	20.30	20.35
GPRS (GMSK, 2-slot)	28.66	28.62	28.68	-6.02	22.64	22.60	22.66
GPRS (GMSK, 3-slot)	27.23	27.28	27.22	-4.26	22.97	23.02	22.96
GPRS (GMSK, 4-slot)	26.62	26.73	26.52	-3.01	<b>23.61</b>	<b>23.72</b>	<b>23.51</b>
EGPRS (GMSK, 1-slot)	27.35	27.37	27.39	-9.03	18.32	18.34	18.36
EGPRS (GMSK, 2-slot)	26.85	26.88	26.87	-6.02	20.83	20.86	20.85
EGPRS (GMSK, 3-slot)	26.02	26.03	26.09	-4.26	21.76	21.77	21.83
EGPRS (GMSK, 4-slot)	25.23	25.28	25.25	-3.01	22.22	22.27	22.24

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according to the highest Source Based time Average Power table.

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency	1852.4	1880.0	1907.6	826.4	836.4	846.6
RMC 12.2Kbps	21.58	21.52	21.56	22.40	22.42	22.35
HSDPA Subtest-1	21.21	21.41	21.30	22.12	22.23	22.28
HSDPA Subtest-2	21.19	20.52	20.62	21.52	21.51	21.32
HSDPA Subtest-3	21.10	20.25	20.11	21.32	21.35	21.48
HSDPA Subtest-4	21.02	20.02	20.32	20.54	20.55	20.62
HSUPA Subtest-1	21.32	20.75	20.42	20.72	20.60	20.83
HSUPA Subtest-2	21.02	20.45	20.10	21.58	21.82	21.32
HSUPA Subtest-3	21.15	20.23	20.20	21.31	21.33	21.22
HSUPA Subtest-4	20.52	20.15	20.11	21.53	21.26	21.82
HSUPA Subtest-5	20.95	20.15	20.11	21.28	21.16	21.28

Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2Kbps	22.02	22.12	22.16
HSDPA Subtest-1	21.51	21.52	21.55
HSDPA Subtest-2	21.82	21.71	21.43
HSDPA Subtest-3	21.72	21.51	21.43
HSDPA Subtest-4	21.61	21.72	21.58
HSUPA Subtest-1	21.46	21.38	21.31
HSUPA Subtest-2	21.51	21.61	21.42
HSUPA Subtest-3	21.48	21.32	21.33
HSUPA Subtest-4	21.32	21.44	22.38
HSUPA Subtest-5	21.36	21.43	21.31

WLAN 2.4G						
Mode	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency	2412	2437	2462	2412	2437	2462
Average Power (dBm)	14.22	<b>14.33</b>	14.31	13.34	13.64	13.92
Mode	802.11n(HT20)			802.11n(HT40)		
Channel	1	6	11	3	6	9
Frequency	2412	2437	2462	2422	2437	2452
Average Power (dBm)	13.43	13.52	13.64	12.08	12.05	12.34

Bluetooth						
Mode	1Mbps			2Mbps		
Channel	0	39	78	0	39	78
Frequency	2402	2441	2480	2402	2441	2480
Average Power (dBm)	<b>3.50</b>	3.39	2.88	2.33	2.16	1.76
Mode	3Mbps			BLE		
Channel	0	39	78	0	20	39
Frequency	2402	2441	2480	2402	2440	2480
Average Power (dBm)	2.34	2.16	1.75	/	/	/

**LTE Band 2 part**

Conducted Power of LTE Band II								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				18607	18900	19193		
1.4MHz	QPSK	1	0	20.67	21.40	21.09		
			3	20.94	20.81	20.68		
			5	20.86	21.56	21.60		
		3	0	21.20	21.47	21.34		
			2	20.99	21.28	20.73		
			3	21.29	20.94	21.38		
		6	0	21.19	21.28	21.30		
		16QAM	1	0	21.57	21.17	21.08	
				3	21.07	21.29	21.41	
	5			21.18	20.74	21.55		
	3		0	21.38	20.73	20.77		
			2	20.61	21.32	21.10		
			3	20.99	20.79	21.47		
	6		0	21.30	21.14	21.25		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						18615	18900	19185
	3MHz	QPSK	1	0	20.84	21.08	21.45	
				7	21.44	21.54	20.73	
14				21.45	21.09	21.00		
8			0	21.12	20.89	21.49		
			4	20.77	21.34	21.20		
			7	20.79	21.19	20.86		
15			0	21.16	20.75	20.87		
16QAM			1	0	21.41	21.30	21.58	
				7	21.47	21.53	20.62	
		14		21.47	21.17	20.93		
		8	0	21.38	20.76	21.26		
			4	21.45	20.62	21.33		
			7	20.86	21.28	21.26		
		15	0	21.10	21.39	21.02		

**Conducted Power of LTE Band II**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				18625	18900	19175		
5MHz	QPSK	1	0	20.85	21.18	20.61		
			13	21.00	20.72	21.49		
			24	21.25	20.88	20.64		
		12	0	20.99	20.92	21.42		
			6	21.28	21.17	21.57		
			13	20.76	21.58	20.81		
	25	0	20.91	20.99	21.55			
	16QAM	1	0	21.32	21.17	20.68		
			13	20.84	21.18	21.48		
			24	21.31	20.68	21.50		
		12	0	21.42	21.02	20.94		
			6	21.55	21.43	21.09		
			13	20.68	21.45	20.73		
		25	0	21.24	20.70	21.21		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
		10MHz	QPSK	1	0	20.79	20.70	20.87
					25	21.44	20.65	21.10
					49	21.24	21.26	21.04
25				0	20.75	20.86	21.48	
	13			20.99	20.73	20.75		
	25			20.74	21.35	21.35		
50	0		20.93	20.84	20.75			
16QAM	1		0	21.24	21.03	21.58		
			25	21.17	20.83	21.06		
			49	21.09	21.36	20.73		
	25		0	20.68	21.56	21.41		
			13	20.87	21.58	20.84		
			25	20.74	20.72	21.06		
	50		0	21.14	20.68	21.12		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
	10MHz		QPSK	1	0	20.79	20.70	20.87
					25	21.44	20.65	21.10
					49	21.24	21.26	21.04
		25		0	20.75	20.86	21.48	
13				20.99	20.73	20.75		
25				20.74	21.35	21.35		
50		0	20.93	20.84	20.75			
16QAM		1	0	21.24	21.03	21.58		
			25	21.17	20.83	21.06		
			49	21.09	21.36	20.73		
		25	0	20.68	21.56	21.41		
			13	20.87	21.58	20.84		
			25	20.74	20.72	21.06		
		50	0	21.14	20.68	21.12		

**Conducted Power of LTE Band II**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	20.82	21.29	20.81
			38	20.82	21.52	21.55
			74	20.72	20.88	21.37
		36	0	20.87	21.17	20.74
			18	21.27	20.62	21.13
			39	21.12	21.11	21.34
	75	0	20.92	20.94	21.53	
	16QAM	1	0	21.31	20.64	21.29
			38	20.91	21.36	20.69
			74	20.83	20.98	21.57
		36	0	21.01	20.75	21.24
			18	21.54	21.31	21.53
			39	21.24	20.66	21.28
	75	0	20.89	20.66	20.90	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	21.29	21.57	20.85
			50	20.84	20.86	21.19
			99	21.05	<b>21.58</b>	21.16
		50	0	21.35	20.61	20.76
			25	<b>21.51</b>	<b>21.56</b>	<b>21.53</b>
			50	20.94	21.31	20.82
	100	0	21.07	<b>21.08</b>	20.72	
	16QAM	1	0	20.70	21.26	21.23
			50	21.18	21.36	20.82
			99	21.43	20.73	21.13
		50	0	21.05	20.95	20.66
			25	21.02	21.04	21.53
			50	20.66	21.00	21.04
	100	0	21.46	21.50	20.97	

**LTE Band 4 part**

Conducted Power of LTE Band IV								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				19957	20393	20175		
1.4MHz	QPSK	1	0	20.66	20.76	20.80		
			3	20.95	21.23	21.03		
			5	20.47	21.12	20.55		
		3	0	20.66	20.56	21.13		
			2	20.80	21.12	20.82		
			3	21.19	20.94	20.66		
		6	0	20.52	20.65	20.80		
			16QAM	1	0	20.42	21.15	20.65
					3	20.38	20.85	20.66
	5	20.82			20.44	20.62		
	3	0		20.47	20.68	21.25		
		2		20.47	20.98	21.21		
		3		20.42	21.07	20.51		
	6	0	20.84	21.26	21.14			
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
					19965	20175	20385	
	3MHz	QPSK	1	0	20.35	21.24	21.12	
				7	20.65	20.69	20.35	
14				20.95	20.34	20.66		
8			0	21.18	20.80	20.30		
			4	21.21	20.94	20.83		
			7	20.30	20.45	20.83		
15			0	20.85	20.83	21.26		
16QAM			1	0	21.19	21.25	20.44	
				7	20.95	21.07	21.15	
		14		20.45	21.25	20.69		
		8	0	20.79	21.16	20.79		
			4	21.16	20.33	20.46		
			7	20.54	20.67	20.31		
		15	0	20.49	20.83	20.81		



**Conducted Power of LTE Band IV**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				19975	20175	20375	
5MHz	QPSK	1	0	21.08	20.48	20.92	
			13	21.10	20.70	20.58	
			24	21.16	20.89	20.58	
		12	0	20.50	20.50	21.02	
			6	21.20	21.23	20.55	
			13	20.36	21.19	20.79	
	25	0	21.13	21.19	20.55		
	16QAM	1	0	21.08	20.59	21.07	
			13	20.89	20.58	20.83	
			24	20.80	20.60	20.89	
		12	0	20.36	20.46	20.46	
			6	20.44	20.36	21.08	
			13	20.35	21.17	20.64	
		25	0	20.58	20.67	21.15	
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel
					20000	20175	20350
10MHz	QPSK	1	0	20.31	20.32	21.27	
			25	20.45	20.92	20.33	
			49	21.11	20.33	20.99	
		25	0	20.59	21.03	20.41	
			13	20.34	21.08	20.45	
			25	21.26	20.91	20.56	
	50	0	20.52	21.09	20.32		
	16QAM	1	0	20.87	21.18	20.32	
			25	20.74	20.96	21.05	
			49	21.16	21.19	21.14	
		25	0	20.70	20.89	21.24	
			13	20.70	20.60	20.38	
			25	21.03	20.58	20.51	
		50	0	20.69	20.60	20.36	

**Conducted Power of LTE Band IV**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				20025	20175	20325		
15MHz	QPSK	1	0	20.93	20.82	20.30		
			38	20.84	20.61	20.32		
			74	21.17	21.24	21.12		
		36	0	21.13	21.14	20.58		
			18	21.14	20.50	21.07		
			39	21.10	20.43	20.89		
		75	0	20.46	20.43	21.13		
		16QAM	1	0	20.87	21.13	20.55	
				38	20.31	20.58	20.38	
	74			20.37	21.23	21.19		
	36		0	21.11	21.05	20.87		
			18	20.63	20.44	20.73		
			39	20.83	20.78	21.20		
	75		0	20.74	20.63	21.05		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
	20MHz		QPSK	1	0	20.83	21.22	21.20
		50			20.82	20.90	21.22	
		99			21.34	<b>21.37</b>	21.35	
50		0		21.23	20.31	20.80		
		25		21.25	<b>21.26</b>	21.17		
		50		21.22	20.72	20.93		
100		0		20.52	<b>20.92</b>	20.51		
16QAM		1		0	21.17	20.66	20.81	
				50	20.38	20.45	20.35	
			99	20.42	20.41	20.83		
		50	0	20.60	21.15	20.96		
			25	21.02	20.42	21.27		
			50	21.23	21.10	20.43		
		100	0	20.75	20.88	20.54		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
		20MHz	QPSK	1	0	20.83	21.22	21.20
50					20.82	20.90	21.22	
99					21.34	<b>21.37</b>	21.35	
50	0			21.23	20.31	20.80		
	25			21.25	<b>21.26</b>	21.17		
	50			21.22	20.72	20.93		
100	0			20.52	<b>20.92</b>	20.51		
16QAM	1			0	21.17	20.66	20.81	
				50	20.38	20.45	20.35	
			99	20.42	20.41	20.83		
	50		0	20.60	21.15	20.96		
			25	21.02	20.42	21.27		
			50	21.23	21.10	20.43		
	100		0	20.75	20.88	20.54		

LTE Band 5 part

Conducted Power of LTE Band V								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				20470	20525	20643		
1.4MHz	QPSK	1	0	20.85	21.32	21.31		
			3	21.65	21.59	21.51		
			5	21.53	20.92	21.43		
		3	0	21.62	21.37	21.35		
			2	21.46	21.54	21.77		
			3	21.77	21.54	21.59		
		6	0	21.43	20.81	21.17		
		16QAM	1	0	20.85	21.38	20.93	
				3	21.55	21.71	21.17	
	5			20.92	21.56	20.99		
	3		0	21.63	21.28	20.86		
			2	20.84	21.52	21.68		
			3	20.94	21.78	21.38		
	6		0	21.22	21.09	21.03		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						20415	20525	20635
	3MHz	QPSK	1	0	21.29	21.42	21.77	
				7	20.93	21.65	21.69	
14				21.08	21.09	21.32		
8			0	21.46	21.78	21.26		
			4	21.63	21.50	20.91		
			7	20.94	21.64	21.03		
15			0	20.84	21.33	20.87		
16QAM			1	0	21.14	21.74	21.27	
				7	21.52	21.51	21.56	
		14		21.20	21.17	21.75		
		8	0	21.44	20.96	21.36		
			4	21.34	21.19	21.74		
			7	20.84	21.69	20.95		
		15	0	20.97	21.05	21.40		

**Conducted Power of LTE Band V**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	21.74	21.23	21.36
			13	21.12	21.75	21.02
			24	20.95	21.16	21.78
		12	0	21.49	21.71	21.02
			6	21.27	21.32	21.56
			13	20.81	21.00	21.25
	25	0	21.31	20.90	20.95	
	16QAM	1	0	21.05	21.32	21.28
			13	20.81	21.04	20.97
			24	20.96	21.27	21.36
		12	0	20.90	21.35	20.98
			6	21.48	21.53	21.18
			13	21.41	21.31	21.51
		25	0	21.05	21.48	21.71

**Conducted Power of LTE Band V**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	21.08	20.98	21.56
			25	21.43	<b>21.58</b>	20.84
			49	21.06	21.41	20.87
		25	0	21.03	21.56	21.29
			13	21.36	20.82	21.23
			25	21.59	<b>21.66</b>	21.56
	50	0	20.90	<b>21.65</b>	20.94	
	16QAM	1	0	20.88	21.68	21.66
			25	21.38	20.90	21.09
			49	21.61	21.78	21.42
		25	0	21.56	21.01	21.61
			13	21.78	21.64	20.87
			25	21.02	21.80	21.35
		50	0	20.85	21.63	21.67

LTE Band 7 part

Conducted Power of LTE Band VII						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	21.36	20.97	21.00
			13	21.43	20.92	21.03
			24	21.25	20.93	21.33
		12	0	21.32	20.68	21.06
			6	21.38	20.57	20.90
			13	20.79	20.87	20.62
	25	0	20.77	21.40	21.02	
	16QAM	1	0	21.48	21.48	21.48
			13	21.09	21.09	21.09
			24	20.73	20.73	20.73
		12	0	20.87	20.87	20.87
			6	20.93	20.93	20.93
			13	21.10	21.10	21.10
	25	0	21.02	21.02	21.02	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	21.41	21.42	21.24
			25	20.79	20.81	20.72
			49	20.69	21.42	20.92
		25	0	21.35	21.18	20.93
			13	21.50	20.56	21.11
			25	21.40	20.74	20.85
	50	0	20.65	21.37	20.99	
	16QAM	1	0	20.77	20.62	21.14
			25	20.95	21.19	21.46
			49	20.92	20.94	21.25
		25	0	21.35	20.92	20.56
			13	20.57	20.57	21.17
			25	21.50	20.73	21.22
	50	0	20.79	20.96	21.10	

**Conducted Power of LTE Band VII**

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel				
				20825	21100	21375				
15MHz	QPSK	1	0	21.43	20.57	20.60				
			38	21.02	21.34	21.04				
			74	20.69	20.97	20.80				
		36	0	21.15	21.48	21.09				
			18	21.09	21.28	21.31				
			39	20.67	21.42	21.25				
			75	0	20.90	20.98	21.41			
				16QAM	1	0	21.01	20.99	20.75	
						38	20.97	20.71	20.83	
	74	20.93	21.50			20.84				
	36	0	20.57		20.70	21.39				
		18	20.57		20.80	20.92				
		39	20.58		21.06	20.93				
		75	0		20.92	21.39	21.22			
			20MHz		QPSK	1	0	21.36	21.08	20.94
							50	21.41	20.78	21.42
	99	21.15		<b>21.49</b>			21.10			
	50	0		20.78		20.65	21.22			
25		20.85		<b>21.29</b>		20.81				
50		20.92		<b>20.91</b>		20.89				
100		0		20.80		21.02	21.22			
16QAM		1		0		20.98	21.52	21.14		
				50		20.59	20.63	20.78		
	99			21.39	20.78	21.26				
	50	0		20.91	20.72	20.65				
		25		21.25	20.64	20.86				
		50	20.93	20.56	20.68					
		100	0	21.05	20.57	21.03				

LTE Band 12 part

Conducted Power of LTE Band XII								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				23017	23095	23173		
1.4MHz	QPSK	1	0	21.97	21.81	21.81		
			3	21.09	21.63	21.86		
			5	21.73	21.53	21.62		
		3	0	21.11	21.56	21.70		
			2	21.10	21.81	21.77		
			3	21.08	21.55	21.23		
		6	0	21.29	21.89	21.85		
			16QAM	1	0	21.51	21.86	21.58
					3	21.73	21.93	21.50
	5	21.96			21.97	21.30		
	3	0		20.99	21.50	20.61		
		2		21.20	21.41	20.76		
		3		21.34	21.40	21.60		
	6	0	21.95	21.93	21.91			
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
						23025	23095	23165
	3MHz	QPSK	1	0	21.65	21.71	21.87	
				7	21.83	21.59	21.94	
14				21.94	21.86	21.61		
8			0	21.57	20.84	21.01		
			4	21.64	21.00	21.63		
			7	21.43	21.32	21.82		
15			0	21.61	21.45	21.89		
			16QAM	1	0	21.85	21.29	21.96
					7	21.67	21.58	21.85
14		21.59			21.61	21.77		
8		0		21.52	21.84	21.50		
		4		21.71	21.59	21.14		
		7		21.67	21.86	21.17		
15		0	21.80	21.67	21.66			

Conducted Power of LTE Band XII						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	21.09	21.58	21.13
			13	21.96	21.31	21.01
			24	21.84	21.02	21.52
		12	0	21.28	20.73	21.60
			6	21.45	20.51	21.15
			13	20.92	21.10	20.84
	25	0	21.22	21.31	21.24	
	16QAM	1	0	21.40	21.80	21.58
			13	21.35	21.75	21.71
			24	21.52	22.00	21.25
		12	0	21.56	21.12	20.68
			6	21.44	21.04	20.75
			13	20.75	21.59	21.17
		25	0	21.60	21.79	21.08

Conducted Power of LTE Band XII						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	21.76	21.66	21.74
			25	21.63	21.69	21.71
			49	21.75	<b>21.81</b>	21.61
		25	0	21.22	20.98	21.15
			13	21.14	20.64	20.99
			25	21.10	<b>21.57</b>	21.03
	50	0	21.28	<b>21.68</b>	21.34	
	16QAM	1	0	21.42	21.29	21.09
			25	21.13	21.32	21.34
			49	21.81	21.15	21.64
		25	0	21.64	21.63	21.34
			13	21.39	21.55	21.52
			25	21.01	21.28	20.67
		50	0	21.26	21.98	21.75



LTE Band 17 part

Conducted Power of LTE Band XVII						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	21.23	21.99	21.73
			13	21.10	21.72	21.61
			24	21.23	21.19	21.03
		12	0	20.62	21.14	21.20
			6	20.59	20.92	21.75
			13	20.81	21.27	21.35
	25	0	21.07	21.09	20.99	
	16QAM	1	0	20.45	21.05	20.70
			13	20.80	21.00	20.83
			24	20.64	21.29	21.04
		12	0	20.61	21.37	20.92
			6	20.59	21.29	21.27
			13	20.67	20.74	21.09
		25	0	21.00	21.05	21.21


Conducted Power of LTE Band XVII						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0	21.41	21.68	21.36
			25	21.35	21.25	21.12
			49	20.70	<b>21.96</b>	21.40
		25	0	20.62	20.73	21.24
			13	21.60	<b>21.68</b>	21.58
			25	20.92	<b>21.71</b>	20.81
	50	0	20.28	21.06	20.93	
	16QAM	1	0	20.99	21.09	21.18
			25	20.85	21.58	20.36
			49	20.70	20.60	20.88
		25	0	20.62	20.82	20.66
			13	20.70	20.71	20.53
			25	20.90	20.03	20.28
		50	0	21.16	21.31	21.74

## 9. Tune-up power Tolerance

Band	Tune-up power tolerance(dBm)		
GSM850	GSM/GPRS (GMSK)	GSM	Max output power =32.5dBm±0.5dBm
		1TXslots	Max output power =32.0dBm±0.5dBm
		2TXslots	Max output power =31.5dBm±0.5dBm
		3TXslots	Max output power =30.0dBm±0.5dBm
		4TXslots	Max output power =29.5dBm±0.5dBm
GSM850	EGPRS (8-PSK)	1TXslots	Max output power =29.0dBm±0.5dBm
		2TXslots	Max output power =28.0dBm±0.5dBm
		3TXslots	Max output power =27.0dBm±0.5dBm
		4TXslots	Max output power =26.5dBm±0.5dBm
GSM1900	GSM/GPRS (GMSK)	GSM	Max output power =30.0dBm±0.5dBm
		1TXslots	Max output power =29.5dBm±0.5dBm
		2TXslots	Max output power =28.5dBm±0.5dBm
		3TXslots	Max output power =27.0dBm±0.5dBm
		4TXslots	Max output power =26.5dBm±0.5dBm
GSM1900	EGPRS (8-PSK)	1TXslots	Max output power =27.5dBm±0.5dBm
		2TXslots	Max output power =27.0dBm±0.5dBm
		3TXslots	Max output power =26.0dBm±0.5dBm
		4TXslots	Max output power =25.0dBm±0.5dBm
WCDMA 2	Max output power =21.0dbm±1.0dbm		
WCDMA 4	Max output power =21.5dbm±1.0dbm		
WCDMA 5	Max output power =21.5dbm±1.0dbm		
LTE B2	Max output power =21.0dbm±1.0dbm		
LTE B4	Max output power =21.0dbm±1.0dbm		
LTE B7	Max output power =20.5dbm±1.0dbm		
LTE B12	Max output power =21.0dbm±1.0dbm		
LTE B17	Max output power =21.0dbm±1.0dbm		
2.4G Wi-Fi	802.11b	Max output power =13.5±1dbm	
	802.11g	Max output power =13.0±1dbm	
	802.11n (HT20)	Max output power =13.0±1dbm	
	802.11n (HT40)	Max output power =11.5±1dbm	
BT	1Mbps Power	Max output power =3.0dBm±0.5dbm	
	2Mbps Power	Max output power =2.0dBm±0.5dbm	
	3Mbps Power	Max output power =2.0dBm±0.5dbm	

## 10. Exposure Position Consideration

### 10.1. EUT Antenna Location

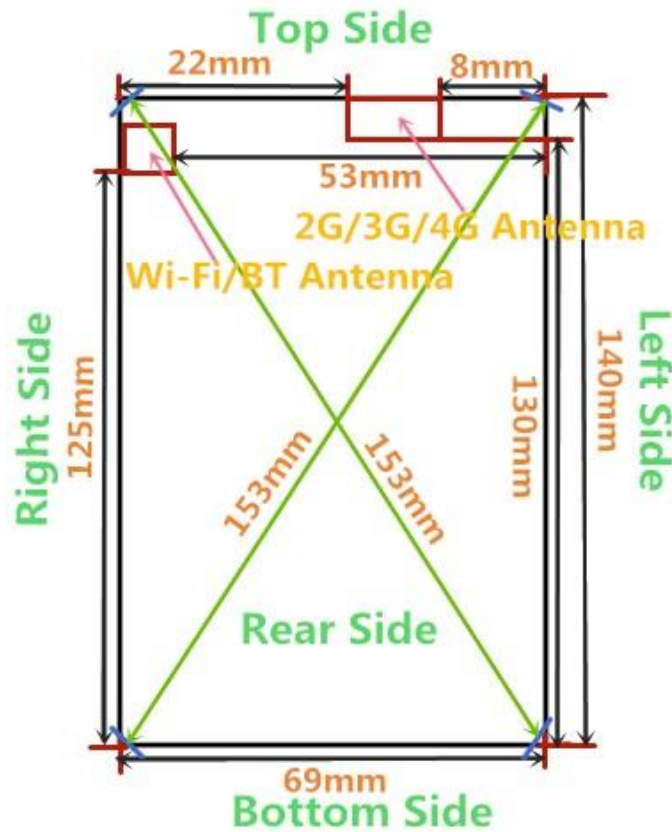

< Rear Side >

Mode	Front side	Rear side	Left side	Right side	Top side	Bottom side
2G/3G/4G Antenna	Yes	Yes	Yes	Yes	Yes	No
Wi-Fi/BT Antenna	Yes	Yes	No	Yes	Yes	No

1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

## 11. SAR Test Results Summary

### 11.1. Results overview of GSM850

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	128/824.2	GPRS 4TS	0.660	0.344	-0.040	29.890	30.000	0.677	1.026
Left Head Tilted 15°	128/824.2	GPRS 4TS	0.618	0.328	1.480	29.890	30.000	0.634	1.026
Right Head Touched	128/824.2	GPRS 4TS	0.734	0.429	4.610	29.890	30.000	<b>0.753</b>	1.026
Right Head Tilted 15°	128/824.2	GPRS 4TS	0.392	0.241	-1.530	29.890	30.000	0.402	1.026
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	128/824.2	GPRS 4TS	0.717	0.407	1.040	29.890	30.000	0.735	1.026
Rear side	128/824.2	GPRS 4TS	0.763	0.433	2.350	29.890	30.000	<b>0.783</b>	1.026
Top side	128/824.2	GPRS 4TS	0.436	0.268	1.920	29.890	30.000	0.447	1.026
Left side	128/824.2	GPRS 4TS	0.440	0.299	-2.700	29.890	30.000	0.451	1.026
Right side	128/824.2	GPRS 4TS	0.140	0.099	-0.320	29.890	30.000	0.144	1.026

**11.2. Results overview of GSM1900**

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	661/1880	GPRS 4TS	0.522	0.438	0.880	26.960	27.000	0.527	1.009
Left Head Tilted 15°	661/1880	GPRS 4TS	0.425	0.293	4.950	26.960	27.000	0.429	1.009
Right Head Touched	661/1880	GPRS 4TS	0.667	0.585	0.290	26.960	27.000	<b>0.673</b>	1.009
Right Head Tilted 15°	661/1880	GPRS 4TS	0.365	0.248	2.290	26.960	27.000	0.368	1.009
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

**SAR Results for Hotspot Exposure Condition**

Front side	661/1880	GPRS 4TS	0.431	0.328	1.120	26.960	27.000	0.435	1.009
Rear side	661/1880	GPRS 4TS	0.495	0.379	3.280	26.960	27.000	<b>0.500</b>	1.009
Top side	661/1880	GPRS 4TS	0.202	0.138	0.360	26.960	27.000	0.204	1.009
Left side	661/1880	GPRS 4TS	0.128	0.092	1.300	26.960	27.000	0.129	1.009
Right side	661/1880	GPRS 4TS	0.088	0.042	0.200	26.960	27.000	0.089	1.009

### 11.3. Results overview of UMTS Band II

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	9262/1852.4	RMC	0.569	0.328	1.290	21.580	22.000	0.627	1.102
Left Head Tilted 15°	9262/1852.4	RMC	0.526	0.307	-0.070	21.580	22.000	0.579	1.102
Right Head Touched	9262/1852.4	RMC	0.382	0.219	-0.400	21.580	22.000	0.421	1.102
Right Head Tilted 15°	9262/1852.4	RMC	0.644	0.404	3.910	21.580	22.000	<b>0.709</b>	1.102
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	9262/1852.4	RMC	0.483	0.170	3.230	21.580	22.000	0.601	1.102
Rear side	9262/1852.4	RMC	0.546	0.264	1.340	21.580	22.000	0.601	1.102
Top side	9262/1852.4	RMC	0.633	0.308	0.170	21.580	22.000	<b>0.697</b>	1.102
Left side	9262/1852.4	RMC	0.483	0.170	3.230	21.580	22.000	0.601	1.102
Right side	9262/1852.4	RMC	0.131	0.089	1.310	21.580	22.000	0.144	1.102

### 11.4. Results overview of UMTS Band IV

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	1513/1752.6	RMC	0.430	0.298	1.300	22.160	22.500	<b>0.465</b>	1.081
Left Head Tilted 15°	1513/1752.6	RMC	0.198	0.116	1.500	22.160	22.500	0.214	1.081
Right Head Touched	1513/1752.6	RMC	0.276	0.156	-0.440	22.160	22.500	0.298	1.081
Right Head Tilted 15°	1513/1752.6	RMC	0.196	0.105	-1.250	22.160	22.500	0.212	1.081
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition with 10mm

Front side	1513/1752.6	RMC	0.466	0.321	0.250	22.160	22.500	0.504	1.081
Rear side	1513/1752.6	RMC	0.485	0.337	-0.630	22.160	22.500	<b>0.524</b>	1.081
Top side	1513/1752.6	RMC	0.275	0.167	-0.280	22.160	22.500	0.297	1.081
Left side	1513/1752.6	RMC	0.275	0.177	-1.480	22.160	22.500	0.297	1.081
Right side	1513/1752.6	RMC	0.125	0.077	-0.180	22.160	22.500	0.135	1.081

### 11.5. Results overview of UMTS Band V

TestPosition of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	4182/836.4	RMC	0.697	0.447	0.860	22.420	22.500	<b>0.710</b>	1.019
Left Head Tilted 15°	4182/836.4	RMC	0.631	0.387	1.240	22.420	22.500	0.643	1.019
Right Head Touched	4182/836.4	RMC	0.650	0.442	0.100	22.420	22.500	0.662	1.019
Right Head Tilted 15°	4182/836.4	RMC	0.315	0.215	-2.180	22.420	22.500	0.321	1.019
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	4182/836.4	RMC	0.444	0.321	1.020	22.420	22.500	0.452	1.019
Rear side	4182/836.4	RMC	0.468	0.337	2.400	22.420	22.500	<b>0.477</b>	1.019
Top side	4182/836.4	RMC	0.270	0.167	-0.280	22.420	22.500	0.275	1.019
Left side	4182/836.4	RMC	0.260	0.177	-3.480	22.420	22.500	0.265	1.019
Right side	4182/836.4	RMC	0.152	0.107	-0.180	22.420	22.500	0.155	1.019



**11.6. Results overview of LTE Band II**

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	19100/1900	20M QPSK 1RB#99	0.355	0.206	-0.520	21.580	22.000	0.391	1.102
Left Head Tilted 15°	19100/1900	20M QPSK 1RB#99	0.277	0.163	-1.880	21.580	22.000	0.305	1.102
Right Head Touched	19100/1900	20M QPSK 1RB#99	0.426	0.223	-0.430	21.580	22.000	<b>0.469</b>	1.102
Right Head Tilted 15°	19100/1900	20M QPSK 1RB#99	0.203	0.121	-1.660	21.580	22.000	0.224	1.102
Left Head Touched	19100/1900	20M QPSK 50RB#25	0.390	0.226	0.850	21.560	22.000	0.432	1.107
Left Head Tilted 15°	19100/1900	20M QPSK 50RB#25	0.311	0.183	0.230	21.560	22.000	0.344	1.107
Right Head Touched	19100/1900	20M QPSK 50RB#25	0.370	0.210	-1.150	21.560	22.000	0.409	1.107
Right Head Tilted 15°	19100/1900	20M QPSK 50RB#25	0.228	0.136	0.520	21.560	22.000	0.252	1.107
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	19100/1900	20M QPSK 1RB#99	0.536	0.378	-1.940	21.580	22.000	0.590	1.102
Rear side	19100/1900	20M QPSK 1RB#99	0.699	0.414	-1.840	21.580	22.000	0.770	1.102
Top side	19100/1900	20M QPSK 1RB#99	0.687	0.421	-0.680	21.580	22.000	0.757	1.102
Left side	19100/1900	20M QPSK 1RB#99	0.120	0.068	-1.720	21.580	22.000	0.132	1.102
Right side	19100/1900	20M QPSK 1RB#99	0.082	0.048	-0.210	21.580	22.000	0.090	1.102
Front side	19100/1900	20M QPSK 50RB#25	0.450	0.348	0.430	21.560	22.000	0.498	1.107
Rear side	19100/1900	20M QPSK 50RB#25	0.720	0.638	0.240	21.560	22.000	<b>0.797</b>	1.107
Top side	19100/1900	20M QPSK	0.546	0.453	2.760	21.560	22.000	0.604	1.107

		50RB#25							
Left side	19100/190 0	20M QPSK 50RB#25	0.135	0.081	-2.340	21.560	22.000	0.149	1.107
Right side	19100/190 0	20M QPSK 50RB#25	0.085	0.050	-1.220	21.560	22.000	0.094	1.107

### 11.7. Results overview of LTE Band IV

TestPosition of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20300/174 5	20M QPSK 1RB#99	0.532	0.308	-0.210	21.370	21.500	0.548	1.030
Left Head Tilted 15°	20300/174 5	20M QPSK 1RB#99	0.590	0.347	1.770	21.370	21.500	0.608	1.030
Right Head Touched	20300/174 5	20M QPSK 1RB#99	0.705	0.470	0.360	21.370	21.500	<b>0.726</b>	1.030
Right Head Tilted 15°	20300/174 5	20M QPSK 1RB#99	0.608	0.344	1.010	21.370	21.500	0.626	1.030
Left Head Touched	20300/174 5	20M QPSK 50RB#25	0.573	0.332	-0.850	21.260	21.500	0.606	1.057
Left Head Tilted 15°	20300/174 5	20M QPSK 50RB#25	0.303	0.178	2.230	21.260	21.500	0.320	1.057
Right Head Touched	20300/174 5	20M QPSK 50RB#25	0.280	0.167	-1.070	21.260	21.500	0.296	1.057
Right Head Tilted 15°	20300/174 5	20M QPSK 50RB#25	0.521	0.296	0.160	21.260	21.500	0.551	1.057
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

#### SAR Results for Hotspot Exposure Condition

Front side	20300/174 5	20M QPSK 1RB#99	0.686	0.107	-1.480	21.370	21.500	0.707	1.030
Rear side	20300/174 5	20M QPSK 1RB#99	0.701	0.523	-1.770	21.370	21.500	<b>0.722</b>	1.030
Top side	20300/174 5	20M QPSK 1RB#99	0.098	0.052	-0.840	21.370	21.500	0.101	1.030
Left side	20300/174 5	20M QPSK 1RB#99	0.149	0.088	4.830	21.370	21.500	0.154	1.030
Right side	20300/174 5	20M QPSK 1RB#99	0.089	0.068	1.800	21.370	21.500	0.092	1.030

Front side	20300/174 5	20M QPSK 50RB#25	0.182	0.106	-1.050	21.260	21.500	0.192	1.057
Rear side	20300/174 5	20M QPSK 50RB#25	0.680	0.515	1.800	21.260	21.500	0.719	1.057
Top side	20300/174 5	20M QPSK 50RB#25	0.109	0.059	-1.590	21.260	21.500	0.115	1.057
Left side	20300/174 5	20M QPSK 50RB#25	0.250	0.145	2.870	21.260	21.500	0.264	1.057
Right side	20300/174 5	20M QPSK 50RB#25	0.150	0.105	2.100	21.260	21.500	0.159	1.057

## 11.8. Results overview of LTE Band V

Test Position of Head	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20600/84 4	10M QPSK 1RB#25	0.393	0.258	1.590	21.580	22.000	0.433	1.102
Left Head Tilted 15°	20600/84 4	10M QPSK 1RB#25	0.382	0.283	-0.060	21.580	22.000	0.421	1.102
Right Head Touched	20600/84 4	10M QPSK 1RB#25	0.437	0.283	0.930	21.580	22.000	0.481	1.102
Right Head Tilted 15°	20600/84 4	10M QPSK 1RB#25	0.342	0.204	-0.290	21.580	22.000	0.377	1.102
Left Head Touched	20600/84 4	10M QPSK 25RB#25	0.499	0.317	-0.910	21.660	22.000	<b>0.540</b>	1.081
Left Head Tilted 15°	20600/84 4	10M QPSK 25RB#25	0.338	0.174	-1.050	21.660	22.000	0.366	1.081
Right Head Touched	20600/84 4	10M QPSK 25RB#25	0.444	0.288	0.300	21.660	22.000	0.480	1.081
Right Head Tilted 15°	20600/84 4	10M QPSK 25RB#25	0.345	0.206	2.330	21.660	22.000	0.373	1.081
Test Position of Body with 10mm	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	20600/84 4	10M QPSK 1RB#25	0.145	0.104	-0.740	21.580	22.000	0.160	1.102
Rear side	20600/84 4	10M QPSK 1RB#25	0.256	0.192	-1.090	21.580	22.000	0.282	1.102

Top side	20600/84 4	10M QPSK 1RB#25	0.051	0.031	-2.560	21.580	22.000	0.056	1.102
Left side	20600/84 4	10M QPSK 1RB#25	0.034	0.023	-1.350	21.580	22.000	0.037	1.102
Right side	20600/84 4	10M QPSK 1RB#25	0.014	0.008	-0.320	21.580	22.000	0.015	1.102
Front side	20600/84 4	10M QPSK 25RB#25	0.143	0.105	-1.200	21.660	22.000	0.155	1.081
Rear side	20600/84 4	10M QPSK 25RB#25	0.275	0.192	-1.490	21.660	22.000	<b>0.297</b>	1.081
Top side	20600/84 4	10M QPSK 25RB#25	0.021	0.011	2.250	21.660	22.000	0.023	1.081
Left side	20600/84 4	10M QPSK 25RB#25	0.033	0.022	-0.850	21.660	22.000	0.036	1.081
Right side	20600/84 4	10M QPSK 25RB#25	0.013	0.072	-0.620	21.660	22.000	0.014	1.081

## 11.9. Results overview of LTE Band VII

TestPosition of Head	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	20850/25 10	20M QPSK 1RB#99	0.648	0.405	-0.510	21.490	21.500	<b>0.649</b>	1.002
Left Head Tilted 15°	20850/25 10	20M QPSK 1RB#99	0.499	0.269	0.120	21.490	21.500	0.500	1.002
Right Head Touched	20850/25 10	20M QPSK 1RB#99	0.599	0.382	3.810	21.490	21.500	0.600	1.002
Right Head Tilted 15°	20850/25 10	20M QPSK 1RB#99	0.492	0.338	1.780	21.490	21.500	0.493	1.002
Left Head Touched	20850/25 10	20M QPSK 50RB#25	0.447	0.321	1.050	21.290	21.500	0.469	1.050
Left Head Tilted 15°	20850/25 10	20M QPSK 50RB#25	0.469	0.211	0.100	21.290	21.500	0.492	1.050
Right Head Touched	20850/25 10	20M QPSK 50RB#25	0.401	0.297	-0.400	21.290	21.500	0.421	1.050
Right Head Tilted 15°	20850/25 10	20M QPSK 50RB#25	0.610	0.269	1.390	21.290	21.500	0.640	1.050
Test Position of Body with 10mm	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					

**SAR Results for Hotspot Exposure Condition**

Front side	20850/25 10	20M QPSK 1RB#99	0.400	0.148	3.310	21.490	21.500	0.401	1.002
Rear side	20850/25 10	20M QPSK 1RB#99	0.405	0.043	-4.230	21.490	21.500	0.406	1.002
Top side	20850/25 10	20M QPSK 1RB#99	0.413	0.186	-1.530	21.490	21.500	<b>0.414</b>	1.002
Left side	20850/25 10	20M QPSK 1RB#99	0.172	0.087	-0.340	21.490	21.500	0.172	1.002
Right side	20850/25 10	20M QPSK 1RB#99	0.072	0.037	-0.210	21.490	21.500	0.072	1.002
Front side	20850/25 10	20M QPSK 50RB#25	0.339	0.113	-1.550	21.290	21.500	0.356	1.050
Rear side	20850/25 10	20M QPSK 50RB#25	0.350	0.111	2.310	21.290	21.500	0.367	1.050
Top side	20850/25 10	20M QPSK 50RB#25	0.290	0.140	-1.840	21.290	21.500	0.304	1.050
Left side	20850/25 10	20M QPSK 50RB#25	0.132	0.067	0.270	21.290	21.500	0.139	1.050
Right side	20850/25 10	20M QPSK 50RB#25	0.092	0.037	0.270	21.290	21.500	0.097	1.050

**11.10. Results overview of LTE Band XII**

Test Position of Head	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	23095/70 7.5	10M QPSK 1RB#49	0.645	0.449	0.180	21.810	22.000	<b>0.674</b>	1.045
Left Head Tilted 15°	23095/70 7.5	10M QPSK 1RB#49	0.335	0.237	-0.310	21.810	22.000	0.350	1.045
Right Head Touched	23095/70 7.5	10M QPSK 1RB#49	0.558	0.369	0.070	21.810	22.000	0.583	1.045
Right Head Tilted 15°	23095/70 7.5	10M QPSK 1RB#49	0.281	0.200	1.290	21.810	22.000	0.294	1.045
Left Head Touched	23095/70 7.5	10M QPSK 25RB#25	0.563	0.403	0.280	21.570	22.000	0.622	1.104
Left Head Tilted 15°	23095/70 7.5	10M QPSK 25RB#25	0.266	0.182	2.310	21.570	22.000	0.294	1.104
Right Head Touched	23095/70 7.5	10M QPSK	0.565	0.362	2.570	21.570	22.000	0.624	1.104

Test Position of Body with 10mm	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Right Head Tilted 15°	23095/70 7.5	10M QPSK 25RB#25	0.312	0.252	0.320	21.570	22.000	0.344	1.104
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	23095/70 7.5	10M QPSK 1RB#49	0.513	0.331	0.520	21.810	22.000	0.536	1.045
Rear side	23095/70 7.5	10M QPSK 1RB#49	0.630	0.461	-0.630	21.810	22.000	<b>0.658</b>	1.045
Top side	23095/70 7.5	10M QPSK 1RB#49	0.438	0.307	-1.490	21.810	22.000	0.458	1.045
Left side	23095/70 7.5	10M QPSK 1RB#49	0.342	0.281	-1.790	21.810	22.000	0.357	1.045
Right side	23095/70 7.5	10M QPSK 1RB#49	0.286	0.196	2.350	21.810	22.000	0.299	1.045
Front side	23095/70 7.5	10M QPSK 25RB#25	0.503	0.354	1.440	21.570	22.000	0.555	1.104
Rear side	23095/70 7.5	10M QPSK 25RB#25	0.551	0.368	-0.640	21.570	22.000	0.608	1.104
Top side	23095/70 7.5	10M QPSK 25RB#25	0.426	0.293	-0.350	21.570	22.000	0.470	1.104
Left side	23095/70 7.5	10M QPSK 25RB#25	0.350	0.289	1.250	21.570	22.000	0.386	1.104
Right side	23095/70 7.5	10M QPSK 25RB#25	0.282	0.189	-0.250	21.570	22.000	0.311	1.104

## 11.11. Results overview of LTE Band IV

TestPosition of Head	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
Left Head Touched	23790/71 0	10M QPSK 1RB#49	0.482	0.332	3.090	21.960	22.000	0.486	1.009
Left Head Tilted 15°	23790/71 0	10M QPSK 1RB#49	0.235	0.207	1.920	21.960	22.000	0.237	1.009
Right Head Touched	23790/71 0	10M QPSK 1RB#49	0.458	0.319	-0.500	21.960	22.000	0.462	1.009
Right Head Tilted 15°	23790/71 0	10M QPSK 1RB#49	0.281	0.196	-0.990	21.960	22.000	0.284	1.009

Left Head Touched	23790/71 0	10M QPSK 25RB#25	0.503	0.355	-0.480	21.680	22.000	<b>0.541</b>	1.076
Left Head Tilted 15°	23790/71 0	10M QPSK 25RB#25	0.233	0.132	1.810	21.680	22.000	0.251	1.076
Right Head Touched	23790/71 0	10M QPSK 25RB#25	0.441	0.292	-2.700	21.680	22.000	0.475	1.076
Right Head Tilted 15°	23790/71 0	10M QPSK 25RB#25	0.296	0.138	-1.880	21.680	22.000	0.319	1.076
Test Position of Body with 10mm	Test channel /Freq.(M Hz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(d Bm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scalig Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	23790/71 0	10M QPSK 1RB#49	0.337	0.257	2.060	21.960	22.000	0.340	1.009
Rear side	23790/71 0	10M QPSK 1RB#49	0.395	0.286	-1.260	21.960	22.000	0.399	1.009
Top side	23790/71 0	10M QPSK 1RB#49	0.353	0.262	0.680	21.960	22.000	0.356	1.009
Left side	23790/71 0	10M QPSK 1RB#49	0.242	0.156	1.610	21.960	22.000	0.244	1.009
Right side	23790/71 0	10M QPSK 1RB#49	0.196	0.123	0.520	21.960	22.000	0.198	1.009
Front side	23790/71 0	10M QPSK 25RB#25	0.352	0.262	-0.250	21.680	22.000	0.379	1.076
Rear side	23790/71 0	10M QPSK 25RB#25	0.474	0.351	-1.590	21.680	22.000	<b>0.510</b>	1.076
Top side	23790/71 0	10M QPSK 25RB#25	0.386	0.282	0.250	21.680	22.000	0.416	1.076
Left side	23790/71 0	10M QPSK 25RB#25	0.325	0.269	-0.340	21.680	22.000	0.350	1.076
Right side	23790/71 0	10M QPSK 25RB#25	0.185	0.112	0.590	21.680	22.000	0.199	1.076

**11.12. Results overview of WIFI 2.4G**

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
Left Head Touched	6/2437	802.11b	0.741	0.542	0.250	14.330	14.500	<b>0.771</b>	1.040
Left Head Tilted 15°	6/2437	802.11b	0.538	0.502	0.830	14.330	14.500	0.559	1.040
Right Head Touched	6/2437	802.11b	0.559	0.444	-0.620	14.330	14.500	0.581	1.040
Right Head Tilted 15°	6/2437	802.11b	0.542	0.302	-0.420	14.330	14.500	0.564	1.040
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit(dBm)	Scaled SAR <sub>1-g</sub> (W/kg)	Scaling Factor
			1-g	10-g					
<b>SAR Results for Hotspot Exposure Condition</b>									
Front side	6/2437	802.11b	0.270	0.151	1.020	14.330	14.500	0.281	1.040
Rear side	6/2437	802.11b	0.508	0.306	1.830	14.330	14.500	<b>0.528</b>	1.040
Top side	6/2437	802.11b	0.456	0.254	-0.400	14.330	14.500	0.474	1.040
Right side	6/2437	802.11b	0.183	0.097	3.160	14.330	14.500	0.190	1.040



### 11.13. Stand-alone SAR test exclusion

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	3.5	2.24	5.00	2.45	0.70	3.00	Yes

Body-Worn position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	3.5	2.24	10.00	2.45	0.35	3.00	Yes

When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50$  mm, where  $x = 7.5$  for 1-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Head	3.5	2.24	5.00	2.45	7.50	0.093
BT	Body	3.5	2.24	10.00	2.45	7.50	0.047

### 11.14. Simultaneous transmission possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS/LTE +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS/LTE +BT	YES	NO	NO

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.

**11.15. SAR summation scenario**

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		GSM850	Wi-Fi (2.4G)				
Head	Left Head Touched	0.677	0.771	<b>1.448</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.634	0.559	1.193	N/A	N/A	NA
	Right Head Touched	0.753	0.581	1.334	N/A	N/A	NA
	Right Head Tilted 15°	0.402	0.564	0.966	N/A	N/A	NA
Hotspot	Front side	0.735	0.281	1.016	N/A	N/A	NA
	Rear side	0.783	0.528	1.311	N/A	N/A	NA
	Top side	0.447	0.474	0.921	N/A	N/A	NA
	Left side	0.451	0.000	0.451	N/A	N/A	NA
	Right side	0.144	0.190	0.334	N/A	N/A	NA

Note: Simultaneous Tx Combination of GSM850 and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		GSM1900	Wi-Fi (2.4G)				
Head	Left Head Touched	0.527	0.771	<b>1.298</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.429	0.559	0.988	N/A	N/A	NA
	Right Head Touched	0.673	0.581	1.254	N/A	N/A	NA
	Right Head Tilted 15°	0.368	0.564	0.932	N/A	N/A	NA
Hotspot	Front side	0.435	0.281	0.716	N/A	N/A	NA
	Rear side	0.500	0.528	1.028	N/A	N/A	NA
	Top side	0.204	0.474	0.678	N/A	N/A	NA
	Left side	0.129	0.000	0.129	N/A	N/A	NA
	Right side	0.089	0.190	0.279	N/A	N/A	NA

Note: Simultaneous Tx Combination of GSM1900 and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		UMTS Band II	Wi-Fi (2.4G)				
Head	Left Head Touched	0.627	0.771	<b>1.398</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.579	0.559	1.138	N/A	N/A	NA
	Right Head Touched	0.421	0.581	1.002	N/A	N/A	NA
	Right Head Tilted 15°	0.709	0.564	1.273	N/A	N/A	NA
Hotspot	Front side	0.601	0.281	0.882	N/A	N/A	NA
	Rear side	0.601	0.528	1.129	N/A	N/A	NA
	Top side	0.697	0.474	1.171	N/A	N/A	NA
	Left side	0.601	0.000	0.601	N/A	N/A	NA
	Right side	0.144	0.190	0.334	N/A	N/A	NA

Note: Simultaneous Tx Combination of UMTS Band II and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	Wi-Fi (5G)	$\Sigma_{1-g}$ SAR	SPLSP
		UMTS Band IV	Wi-Fi (2.4G)				
Head	Left Head Touched	0.465	0.771	<b>1.236</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.214	0.559	0.773	N/A	N/A	NA
	Right Head Touched	0.298	0.581	0.879	N/A	N/A	NA
	Right Head Tilted 15°	0.212	0.564	0.776	N/A	N/A	NA
Hotspot	Front side	0.504	0.281	0.785	N/A	N/A	NA
	Rear side	0.524	0.528	1.052	N/A	N/A	NA
	Top side	0.297	0.474	0.771	N/A	N/A	NA
	Left side	0.297	0.000	0.297	N/A	N/A	NA
	Right side	0.135	0.190	0.325	N/A	N/A	NA

Note: Simultaneous Tx Combination of UMTS Band II and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	Wi-Fi (5G)	$\Sigma_{1-g}$ SAR	SPLSP
		UMTS Band V	Wi-Fi (2.4G)				
Head	Left Head Touched	0.710	0.771	<b>1.481</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.643	0.559	1.202	N/A	N/A	NA
	Right Head Touched	0.662	0.581	1.243	N/A	N/A	NA
	Right Head Tilted 15°	0.321	0.564	0.885	N/A	N/A	NA
Hotspot	Front side	0.452	0.281	0.733	N/A	N/A	NA
	Rear side	0.477	0.528	1.005	N/A	N/A	NA
	Top side	0.275	0.474	0.749	N/A	N/A	NA
	Left side	0.265	0.000	0.265	N/A	N/A	NA
	Right side	0.155	0.190	0.345	N/A	N/A	NA

Note: Simultaneous Tx Combination of UMTS Band V and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	Wi-Fi (5G)	$\Sigma_{1-g}$ SAR	SPLSP
		LTE Band II	Wi-Fi (2.4G)				
Head	Left Head Touched	0.432	0.771	1.203	N/A	N/A	NA
	Left Head Tilted 15°	0.344	0.559	0.903	N/A	N/A	NA
	Right Head Touched	0.469	0.581	1.050	N/A	N/A	NA
	Right Head Tilted 15°	0.252	0.564	0.816	N/A	N/A	NA
Hotspot	Front side	0.590	0.281	0.871	N/A	N/A	NA
	Rear side	0.797	0.528	<b>1.325</b>	N/A	N/A	NA
	Top side	0.757	0.474	1.231	N/A	N/A	NA
	Left side	0.149	0.000	0.149	N/A	N/A	NA
	Right side	0.094	0.190	0.284	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band II and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		LTE Band IV	Wi-Fi (2.4G)				
Head	Left Head Touched	0.606	0.771	<b>1.377</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.608	0.559	1.167	N/A	N/A	NA
	Right Head Touched	0.726	0.581	1.307	N/A	N/A	NA
	Right Head Tilted 15°	0.626	0.564	1.190	N/A	N/A	NA
Hotspot	Front side	0.707	0.281	0.988	N/A	N/A	NA
	Rear side	0.722	0.528	1.250	N/A	N/A	NA
	Top side	0.115	0.474	0.589	N/A	N/A	NA
	Left side	0.264	0.000	0.264	N/A	N/A	NA
	Right side	0.106	0.190	0.296	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band IV and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		LTE Band V	Wi-Fi (2.4G)				
Head	Left Head Touched	0.540	0.771	<b>1.311</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.421	0.559	0.980	N/A	N/A	NA
	Right Head Touched	0.481	0.581	1.062	N/A	N/A	NA
	Right Head Tilted 15°	0.377	0.564	0.941	N/A	N/A	NA
Hotspot	Front side	0.16	0.281	0.441	N/A	N/A	NA
	Rear side	0.297	0.528	0.825	N/A	N/A	NA
	Top side	0.056	0.474	0.530	N/A	N/A	NA
	Left side	0.037	0.000	0.037	N/A	N/A	NA
	Right side	0.015	0.190	0.205	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band V and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		LTE Band VII	Wi-Fi (2.4G)				
Head	Left Head Touched	0.649	0.771	<b>1.420</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.500	0.559	1.059	N/A	N/A	NA
	Right Head Touched	0.600	0.581	1.181	N/A	N/A	NA
	Right Head Tilted 15°	0.640	0.564	1.204	N/A	N/A	NA
Hotspot	Front side	0.401	0.281	0.682	N/A	N/A	NA
	Rear side	0.406	0.528	0.934	N/A	N/A	NA
	Top side	0.414	0.474	0.888	N/A	N/A	NA
	Left side	0.172	0.000	0.172	N/A	N/A	NA
	Right side	0.097	0.190	0.287	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band VII and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		LTE Band XII	Wi-Fi (2.4G)				
Head	Left Head Touched	0.674	0.771	<b>1.445</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.350	0.559	0.909	N/A	N/A	NA
	Right Head Touched	0.624	0.581	1.205	N/A	N/A	NA
	Right Head Tilted 15°	0.344	0.564	0.908	N/A	N/A	NA
Hotspot	Front side	0.555	0.281	0.836	N/A	N/A	NA
	Rear side	0.658	0.528	1.186	N/A	N/A	NA
	Top side	0.470	0.474	0.944	N/A	N/A	NA
	Left side	0.386	0.000	0.386	N/A	N/A	NA
	Right side	0.311	0.190	0.501	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band XII and Wi-Fi

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	Wi-Fi (5G)	$\sum_{1-g}$ SAR	SPLSP
		LTE Band XVII	Wi-Fi (2.4G)				
Head	Left Head Touched	0.541	0.771	<b>1.312</b>	N/A	N/A	NA
	Left Head Tilted 15°	0.251	0.559	0.810	N/A	N/A	NA
	Right Head Touched	0.475	0.581	1.056	N/A	N/A	NA
	Right Head Tilted 15°	0.319	0.564	0.883	N/A	N/A	NA
Hotspot	Front side	0.379	0.281	0.660	N/A	N/A	NA
	Rear side	0.510	0.528	1.038	N/A	N/A	NA
	Top side	0.416	0.474	0.890	N/A	N/A	NA
	Left side	0.350	0.000	0.350	N/A	N/A	NA
	Right side	0.199	0.190	0.389	N/A	N/A	NA

Note: Simultaneous Tx Combination of LTE Band XVII and Wi-Fi

MAX. $\sum_{1-g}$ SAR<sub>1g</sub> = 1.481W/kg < 1.6 W/kg, so the Simultaneous SAR is not required for Wi-Fi and GSM & UMTS & LTE antenna.

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		GSM850	BT		
Head	Left Head Touched	0.677	0.093	0.770	NA
	Left Head Tilted 15°	0.634	0.093	0.727	NA
	Right Head Touched	0.753	0.093	<b>0.846</b>	NA
	Right Head Tilted 15°	0.402	0.093	0.495	NA

Note: Simultaneous Tx Combination of GSM850 and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		GSM1900	BT		
Head	Left Head Touched	0.527	0.093	0.620	NA
	Left Head Tilted 15°	0.429	0.093	0.522	NA
	Right Head Touched	0.673	0.093	<b>0.766</b>	NA
	Right Head Tilted 15°	0.368	0.093	0.461	NA

Note: Simultaneous Tx Combination of GSM1900 and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		UMTS Band II	BT		
Head	Left Head Touched	0.627	0.093	0.720	NA
	Left Head Tilted 15°	0.579	0.093	0.672	NA
	Right Head Touched	0.421	0.093	0.514	NA
	Right Head Tilted 15°	0.709	0.093	<b>0.802</b>	NA

Note: Simultaneous Tx Combination of UMTS Band II and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		UMTS Band IV	BT		
Head	Left Head Touched	0.465	0.093	0.558	NA
	Left Head Tilted 15°	0.214	0.093	0.307	NA
	Right Head Touched	0.298	0.093	0.391	NA
	Right Head Tilted 15°	0.212	0.093	0.305	NA

Note: Simultaneous Tx Combination of UMTS Band V and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		UMTS Band V	BT		
Head	Left Head Touched	0.710	0.093	<b>0.803</b>	NA
	Left Head Tilted 15°	0.643	0.093	0.736	NA
	Right Head Touched	0.662	0.093	0.755	NA
	Right Head Tilted 15°	0.321	0.093	0.414	NA

Note: Simultaneous Tx Combination of UMTS Band V and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		LTE Band II	BT		
Head	Left Head Touched	0.432	0.093	0.525	NA
	Left Head Tilted 15°	0.344	0.093	0.437	NA
	Right Head Touched	0.469	0.093	0.562	NA
	Right Head Tilted 15°	0.252	0.093	0.345	NA

Note: Simultaneous Tx Combination of LTE Band II and BT

Test Position		ScaledSAR <sub>Max</sub>		$\sum_{1-g}$ SAR	SPLSP
		LTE Band IV	BT		
Head	Left Head Touched	0.606	0.093	0.699	NA
	Left Head Tilted 15°	0.608	0.093	0.701	NA
	Right Head Touched	0.726	0.093	<b>0.819</b>	NA
	Right Head Tilted 15°	0.626	0.093	0.719	NA

Note: Simultaneous Tx Combination of LTE Band IV and BT

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	SPLSP
		LTE Band V	BT		
Head	Left Head Touched	0.540	0.093	<b>0.633</b>	NA
	Left Head Tilted 15°	0.421	0.093	0.514	NA
	Right Head Touched	0.481	0.093	0.574	NA
	Right Head Tilted 15°	0.377	0.093	0.470	NA

Note: Simultaneous Tx Combination of LTE Band V and BT

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	SPLSP
		LTE Band VII	BT		
Head	Left Head Touched	0.649	0.093	<b>0.742</b>	NA
	Left Head Tilted 15°	0.500	0.093	0.593	NA
	Right Head Touched	0.600	0.093	0.693	NA
	Right Head Tilted 15°	0.640	0.093	0.733	NA

Note: Simultaneous Tx Combination of LTE Band VII and BT

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	SPLSP
		LTE Band XII	BT		
Head	Left Head Touched	0.674	0.093	<b>0.767</b>	NA
	Left Head Tilted 15°	0.350	0.093	0.443	NA
	Right Head Touched	0.624	0.093	0.717	NA
	Right Head Tilted 15°	0.344	0.093	0.437	NA

Note: Simultaneous Tx Combination of LTE Band XII and BT

Test Position		ScaledSAR <sub>Max</sub>		$\Sigma_{1-g}$ SAR	SPLSP
		LTE Band XVII	BT		
Head	Left Head Touched	0.541	0.093	<b>0.634</b>	NA
	Left Head Tilted 15°	0.251	0.093	0.344	NA
	Right Head Touched	0.475	0.093	0.568	NA
	Right Head Tilted 15°	0.319	0.093	0.412	NA

Note: Simultaneous Tx Combination of LTE Band XVII and BT

MAX.  $\Sigma SAR_{1g} = 0.846 W/kg < 1.6 W/kg$ , so the Simultaneous SAR is not required for BT and GSM & UMTS & LTE antenna.



**11.16. Measurement Uncertainty (450MHz-3GHz)**

**UNCERTAINTY EVALUATION FOR HEADSET SAR**

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
<b>Measurement system</b>									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
<b>Test sample related</b>									
Test sample positioning	7.2.2.4.4	2.6	N	1	1	1	2.60	2.60	∞
Device holder uncertainty	7.2.2.4.2 7.2.2.4.3	3	N	1	1	1	3.00	3.00	∞
output power variation-SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	7.2.5	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
<b>Phantom and tissue parameters</b>									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.83	10.54	
Expanded uncertainty (95%CONFIDENCEINTERVAL)			k				21.26	21.08	

**UNCERTAINTY FOR PERFORMANCE CHECK**

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
<b>Measurement system</b>									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	0.00	0.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
<b>Dipole</b>									
Deviation of experimental source from numerical source		4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance		2	R	$\sqrt{3}$	1	1			∞
<b>Phantom and tissue parameters</b>									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.15	10.05	
Expanded uncertainty (95%CONFIDENCEINTERVAL)			k				20.29	20.10	

### 11.17. Test Equipment List

Test Equipment	Manufacturer	Model	Serial Number	Calibration	
				Calibration Date (D.M.Y)	Calibration Due (D.M.Y)
PC	Lenovo	H3050	N/A	N/A	N/A
Signal Generator	Agilent	N5182A	MY47070282	Sep. 28, 2017	Sep. 27, 2018
Multimeter	Keithley	Multimeter 2000	4078275	Sep. 28, 2017	Sep. 27, 2018
Network Analyzer	Agilent	8753E	US38432457	Sep. 28, 2017	Sep. 27, 2018
Wireless Communication Test Set	R & S	CMU200	111382	Sep. 28, 2017	Sep. 27, 2018
Wideband Radio Communication Tester	R&S	CMW500	114220	Sep. 28, 2017	Sep. 27, 2018
Power Meter	Agilent	E4418B	GB43312526	Sep. 28, 2017	Sep. 27, 2018
Power Meter	Agilent	E4416A	MY45101555	Sep. 28, 2017	Sep. 27, 2018
Power Meter	Agilent	N1912A	MY50001018	Sep. 28, 2017	Sep. 27, 2018
Power Sensor	Agilent	E9301A	MY41497725	Sep. 28, 2017	Sep. 27, 2018
Power Sensor	Agilent	E9327A	MY44421198	Sep. 28, 2017	Sep. 27, 2018
Power Sensor	Agilent	E9323A	MY53070005	Sep. 28, 2017	Sep. 27, 2018
Power Amplifier	PE	PE15A4019	112342	N/A	N/A
Directional Coupler	Agilent	722D	MY52180104	N/A	N/A
Attenuator	Chensheng	FF779	134251	N/A	N/A
E-Field PROBE	MVG	SSE5	SN 07/15 EP248	Apr. 27, 2016	Apr. 26, 2017
DIPOLE 835	MVG	SID835	SN 16/15 DIP 0G835-369	May. 06, 2015	May. 05, 2018
DIPOLE 1800	MVG	SID 1800	SN 16/15 DIP 1G800-371	May. 06, 2015	May. 05, 2018
DIPOLE 1900	MVG	SID1900	SN 16/15 DIP 1G900-372	May. 06, 2015	May. 05, 2018
DIPOLE 2450	MVG	SID 2450	SN 16/15 DIP 2G450-374	May. 06, 2015	May. 05, 2018
Limesar Dielectric Probe	MVG	SCLMP	SN 19/15 OCPG71	May. 06, 2015	May. 05, 2018
Communication Antenna	MVG	ANTA59	SN 39/14 ANTA59	N/A	N/A
Mobile Phone Position Device	MVG	MSH101	SN 19/15 MSH101	N/A	N/A
Dummy Probe	MVG	DP66	SN 13/15 DP66	N/A	N/A
SAM PHANTOM	MVG	SAM120	SN 19/15 SAM120	N/A	N/A
PHANTOM TABLE	MVG	TABP101	SN 19/15 TABP101	N/A	N/A
Robot TABLE	MVG	TABP61	SN 19/15 TABP61	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501822	N/A	N/A

**Note:** 1.N/A means this equipment no need to calibrate  
 2.Each Time means this device need to calibrate every use time  
 3. The dipole was not damaged properly repaired.  
 4. The measured SAR deviates from the calibrated SAR value by less than 10%  
 5. The most recent return-loss result meets the required 20 dB minimum return-loss requirement  
 6. The most recent measurement of the real or imaginary parts of the impedance deviates by less than 5 Ω from the previous measurement.

**Annex A: System Check**

**(Please See the SAR Measurement Plots of annex A.)**

**Annex B: Measurement results**

**(Please See the SAR Measurement Plots of annex B.)**

**Annex C: Calibration reports**

**Annex D: SAR SYSTEM VALIDATION**

**Annex E: The Check Data of Impedance and Return Loss**

**(Please See the Calibration reports of Annex C and Annex D)**

**Annex F: Photo documentation**

Photo 1: Measurement System OPENSAR



Photo 2: Front view



Photo 3: Rear View



Photo 4: Left Head Touched

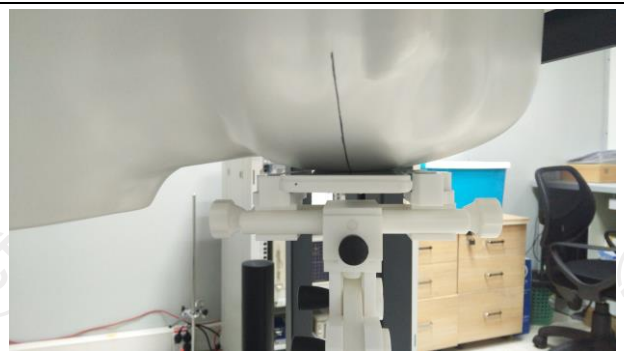


Photo 5: Left Head Tilted 15°



Photo 6: Right Head Touched

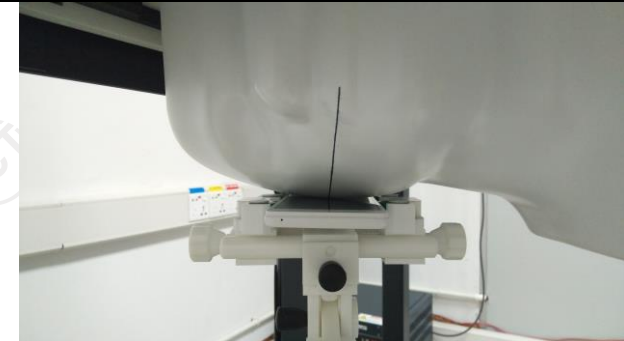


Photo 7: Right Head Tilted 15°

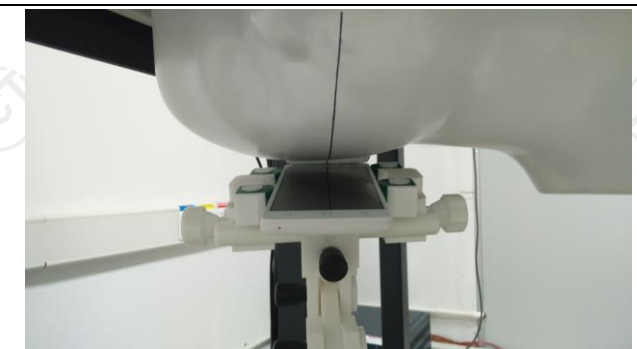


Photo 8: Towards Phantom 10mm

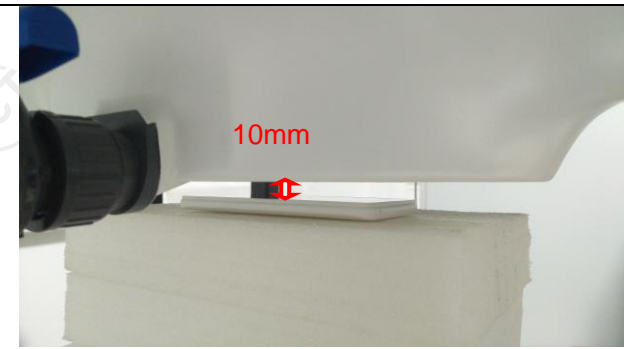


Photo 9: Towards Ground 10mm

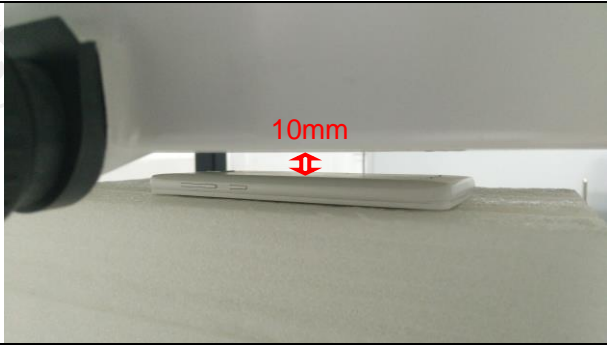


Photo 10: Right Side 10mm

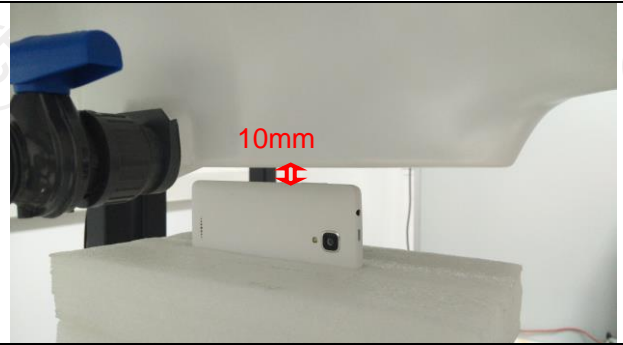


Photo 11: Left Side 10mm

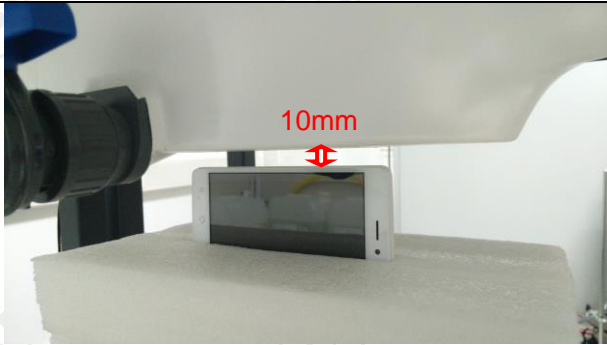


Photo 12: Top Side 10mm

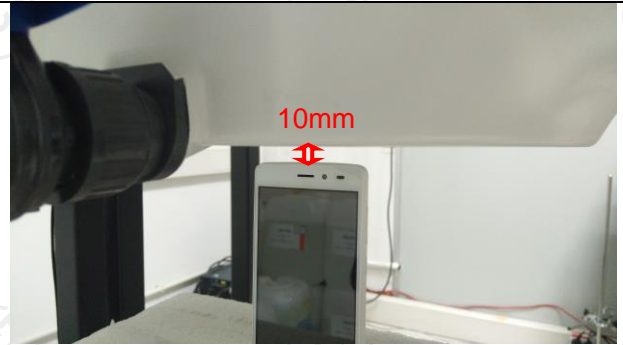


Photo 13: Bottom Side 10mm

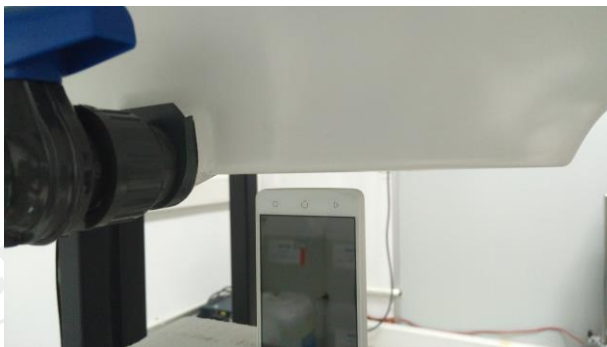


Photo 14: 850MHz Liquid Depth  $\geq 15.0\text{cm}$

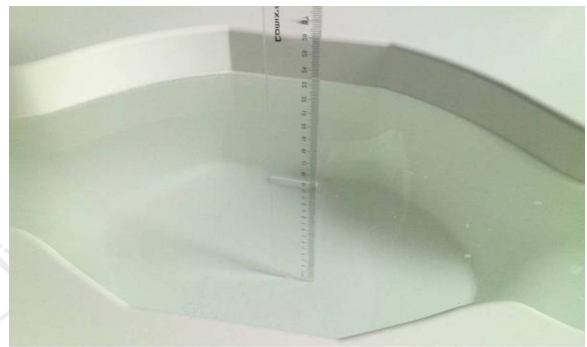


Photo 15: 1800~1900MHz Liquid Depth  $\geq 15.0\text{cm}$



Photo 16: 2450MHz Liquid Depth  $\geq 15.0\text{cm}$



\*\*\*\*\*END OF REPORT\*\*\*\*\*