

GSM850 Head

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0370 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.9390 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.00957 W/kg

Maximum value of SAR (measured) = 0.0238 W/kg

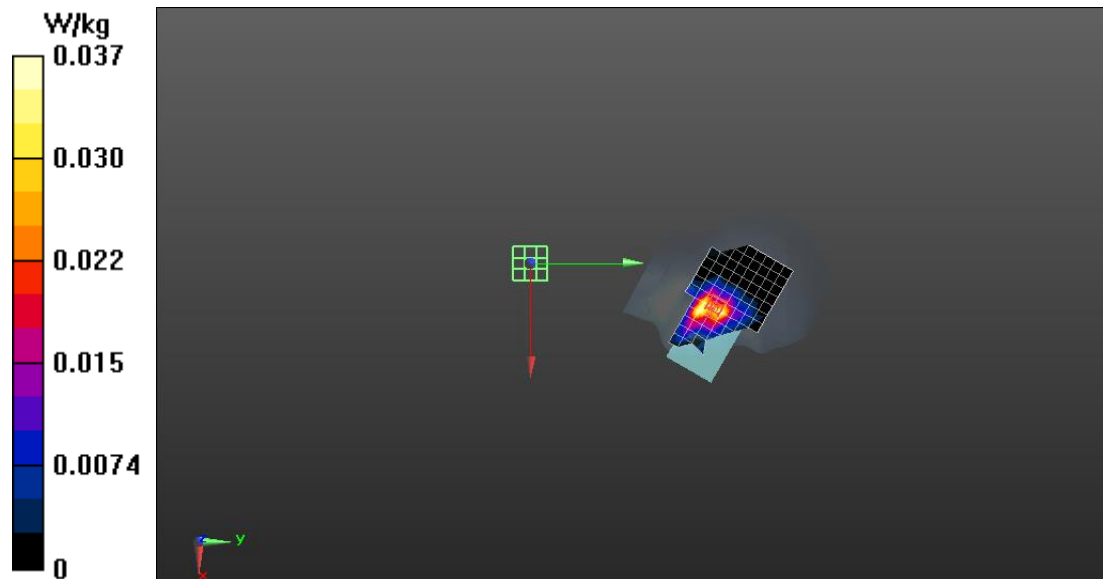

GSM850 Body

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0805 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.367 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0824 W/kg

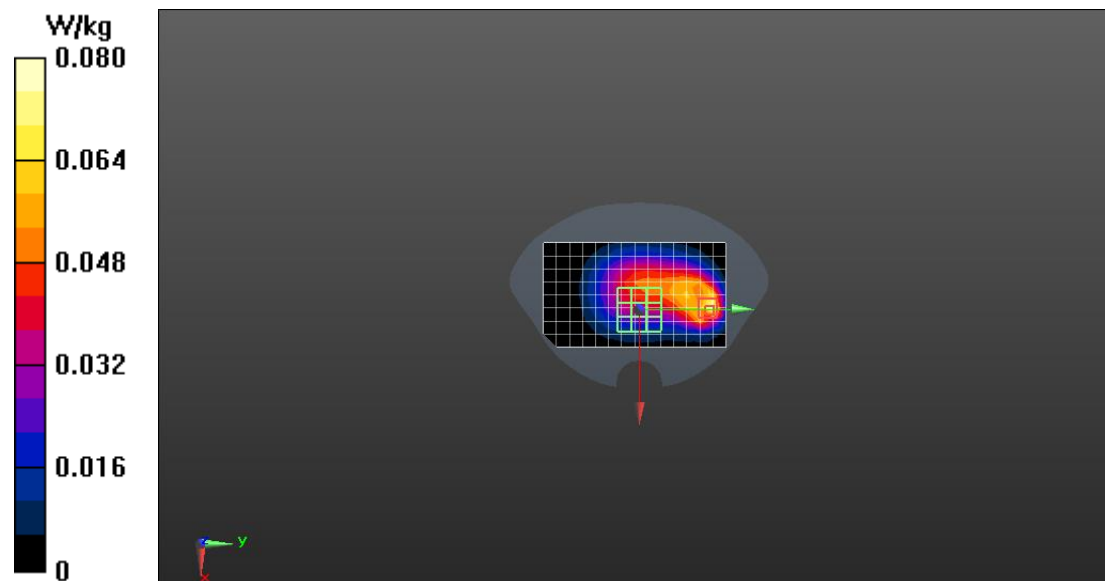

GSM1900 Head

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.237 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.493 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

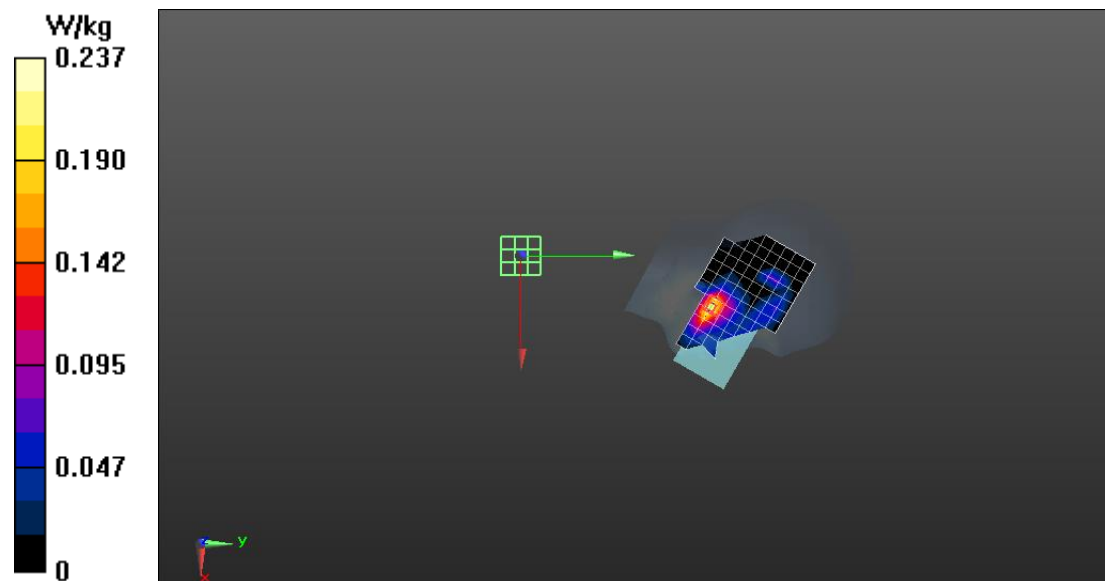

GSM1900 Body

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.888 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.06 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.993 W/kg

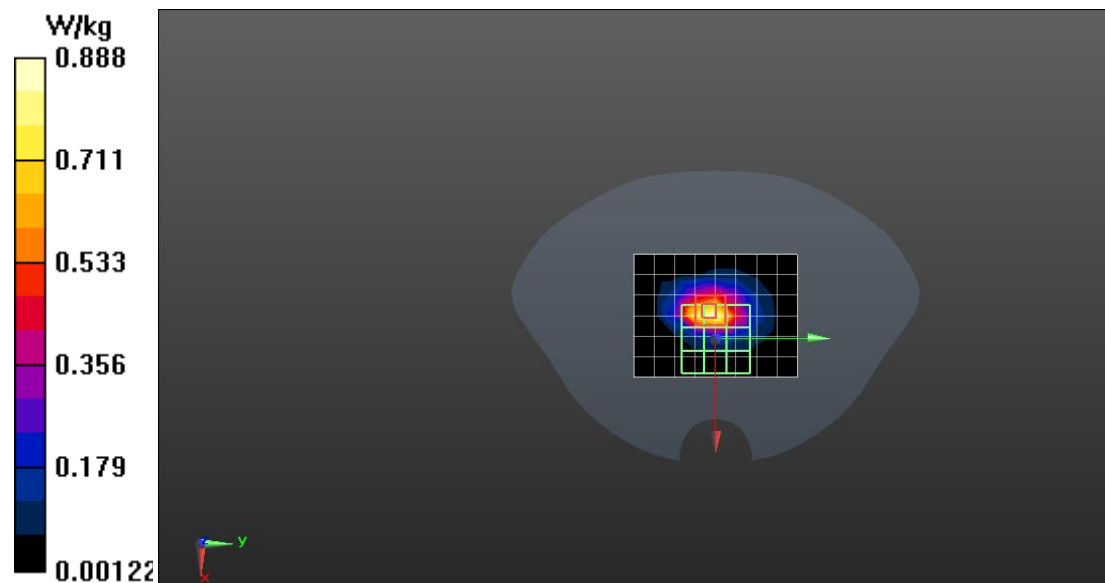

WCDMA B2 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.213 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

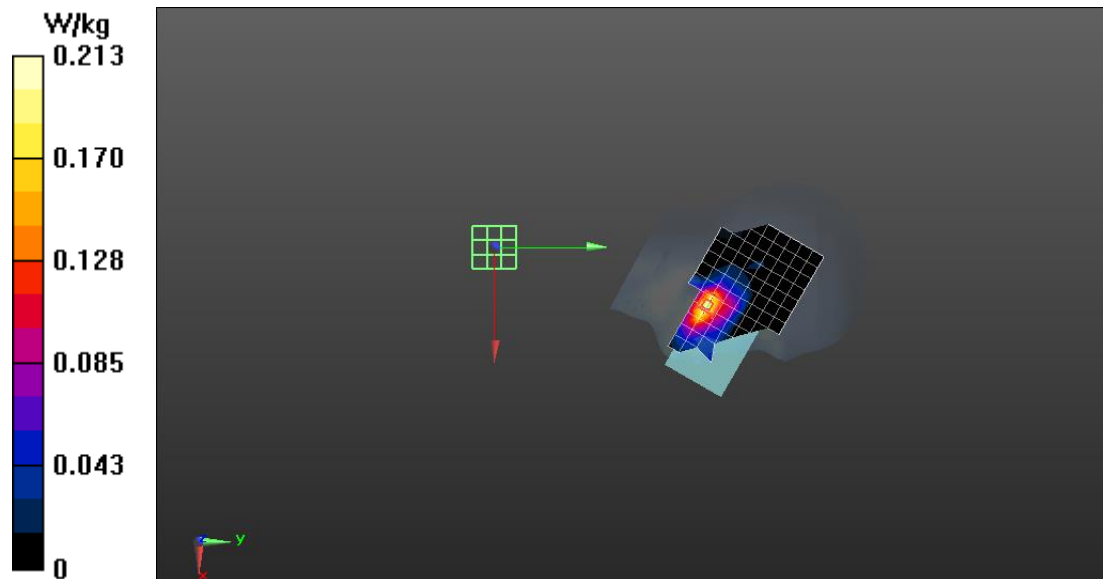

WCDMA B2 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1852.4 MHz;

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.938$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.894 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.80 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

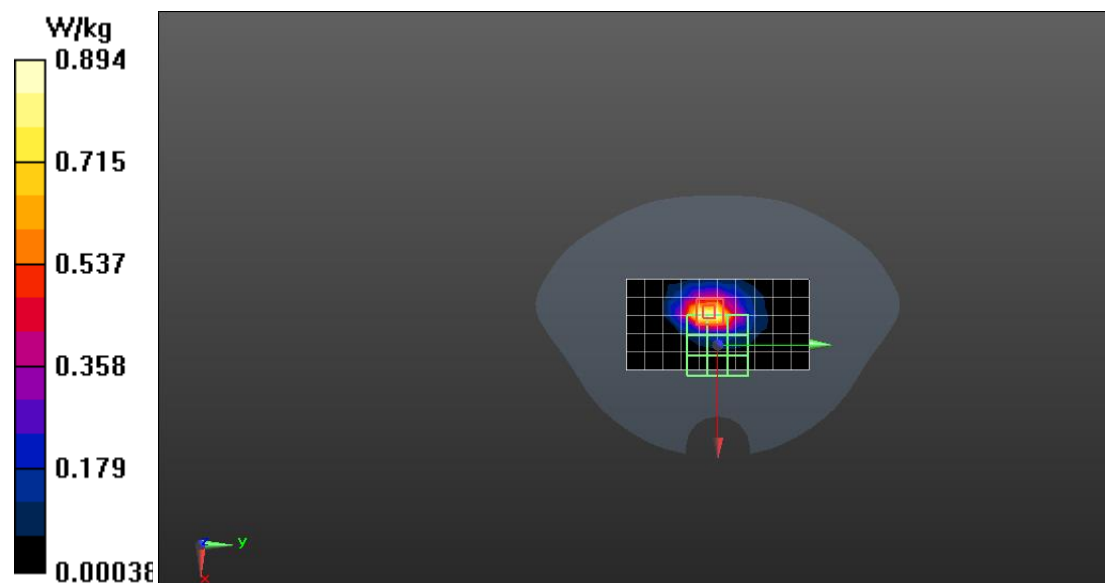

WCDMA B4 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1732.6 MHz;

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.292$ S/m; $\epsilon_r = 40.606$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0589 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.218 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0497 W/kg

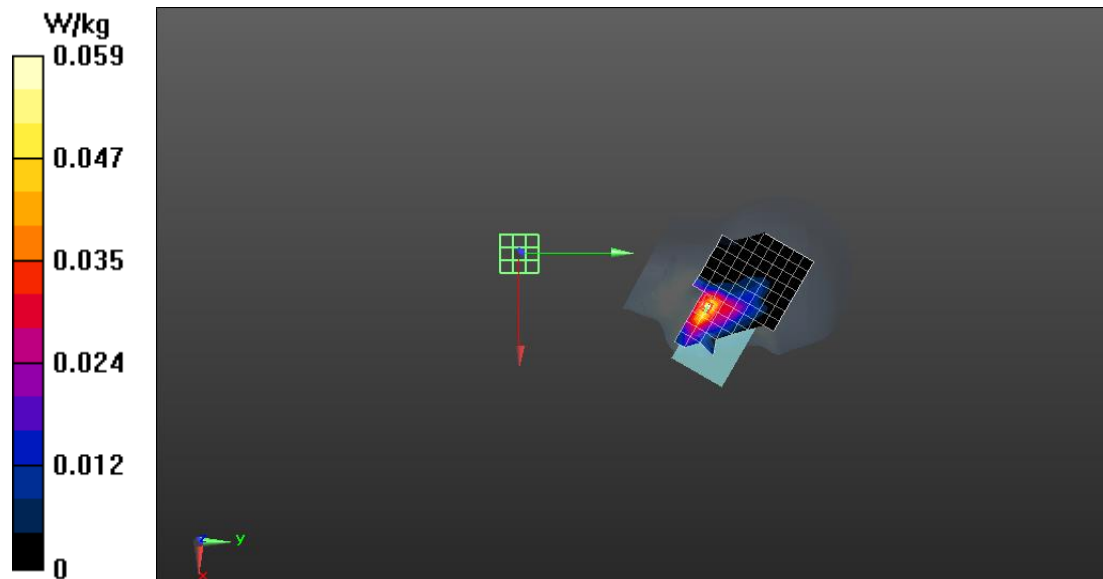

WCDMA B4 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1752.6 MHz;

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 40.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.926 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.212 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.341 W/kg

Maximum value of SAR (measured) = 0.947 W/kg

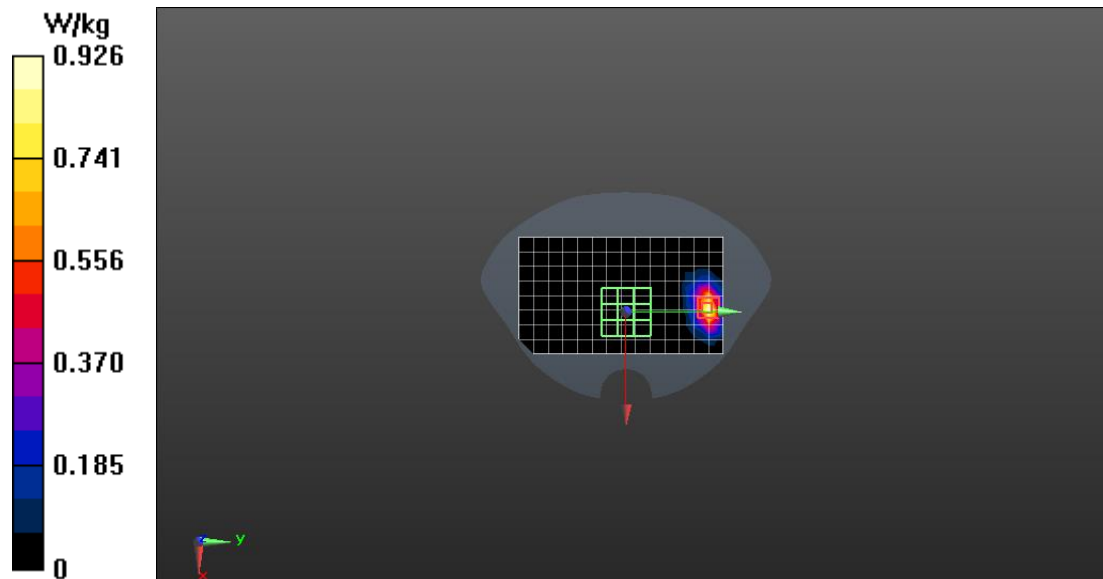

WCDMA B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.4 MHz;

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.28$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0400 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0203 W/kg

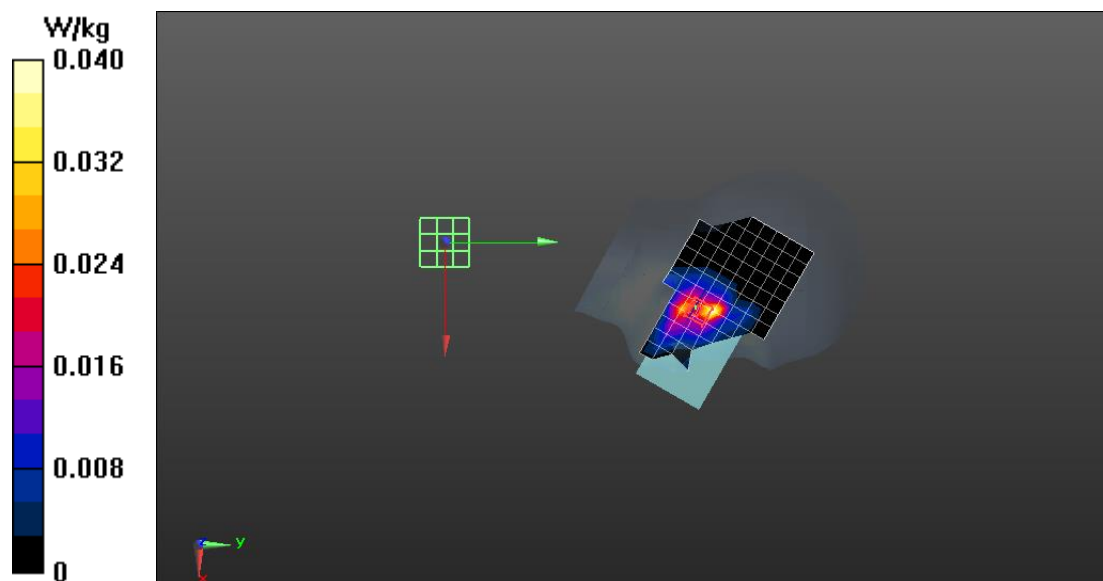

WCDMA B5 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.4 MHz;

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0304 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.121 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0343 W/kg

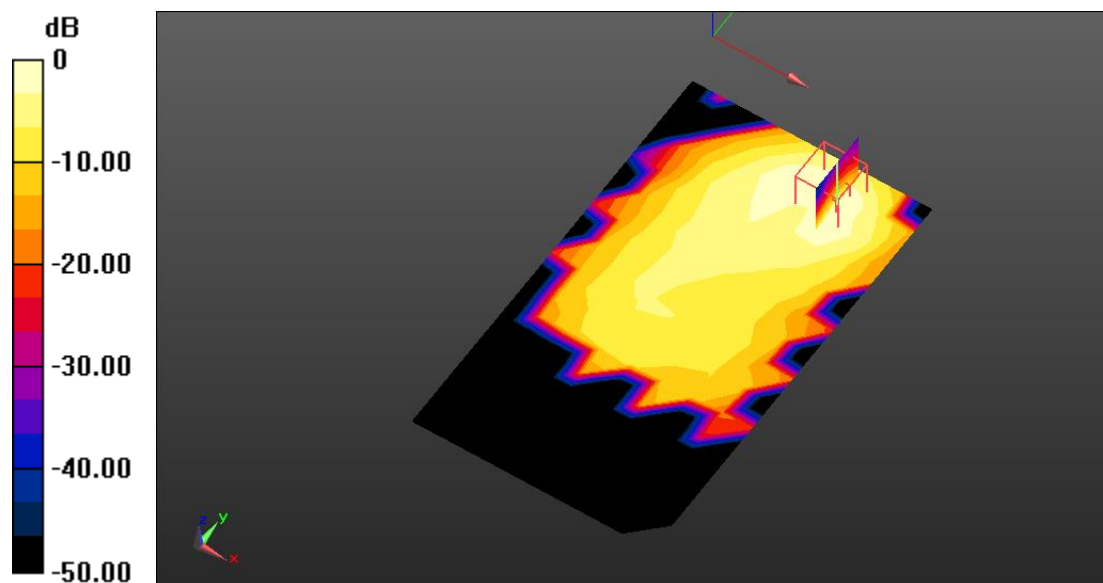

0 dB = 0.0304 W/kg = -15.17 dBW/kg

LTE B2 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.172 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.407 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

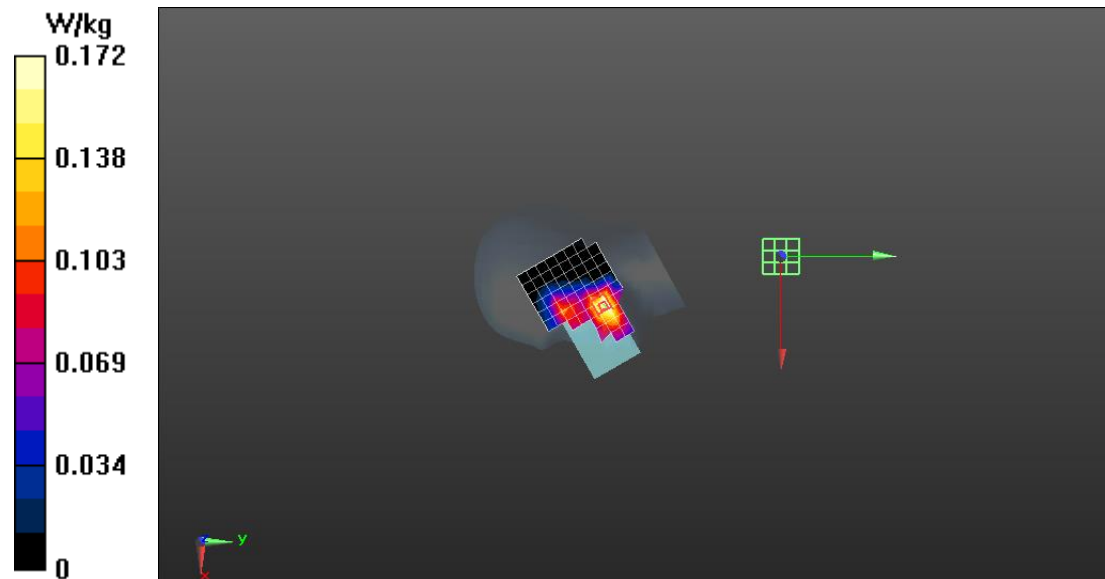

LTE B2 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1860 MHz;

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 39.912$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.490 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.21 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

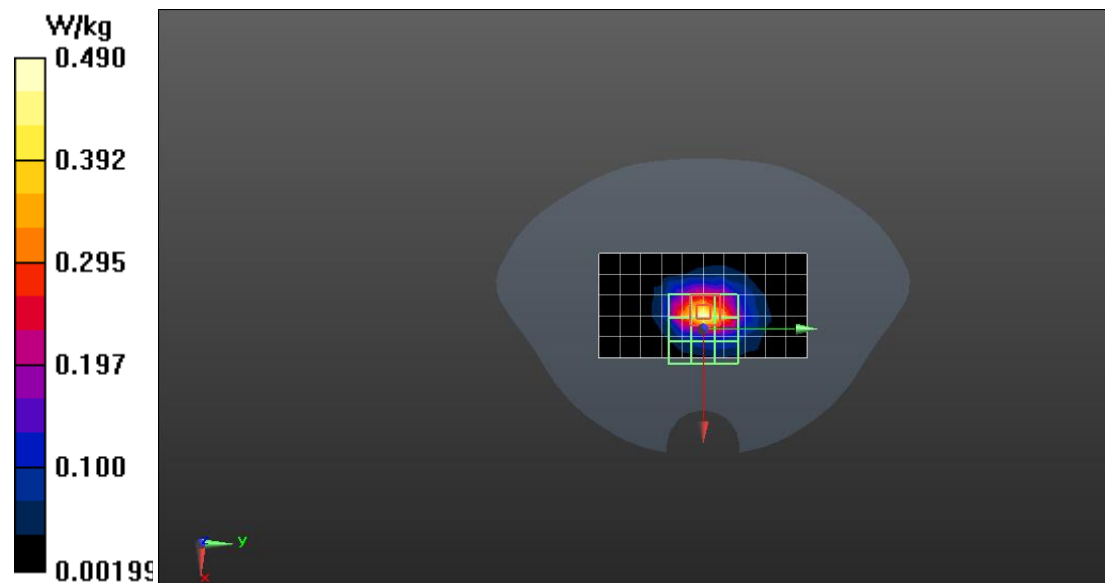

LTE B5 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 829 MHz;

Medium parameters used: $f = 829$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.333$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0390 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.9480 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0389 W/kg

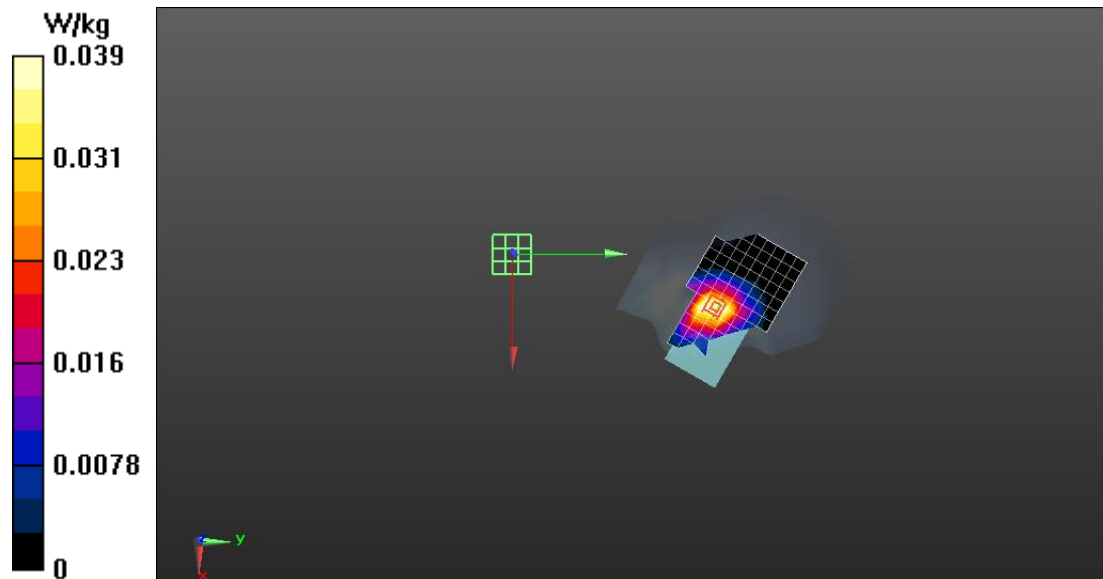

LTE B5 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 829 MHz;

Medium parameters used: $f = 829$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.333$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0944 W/kg


Configuration/Body/Zoom Scan (6x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.684 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

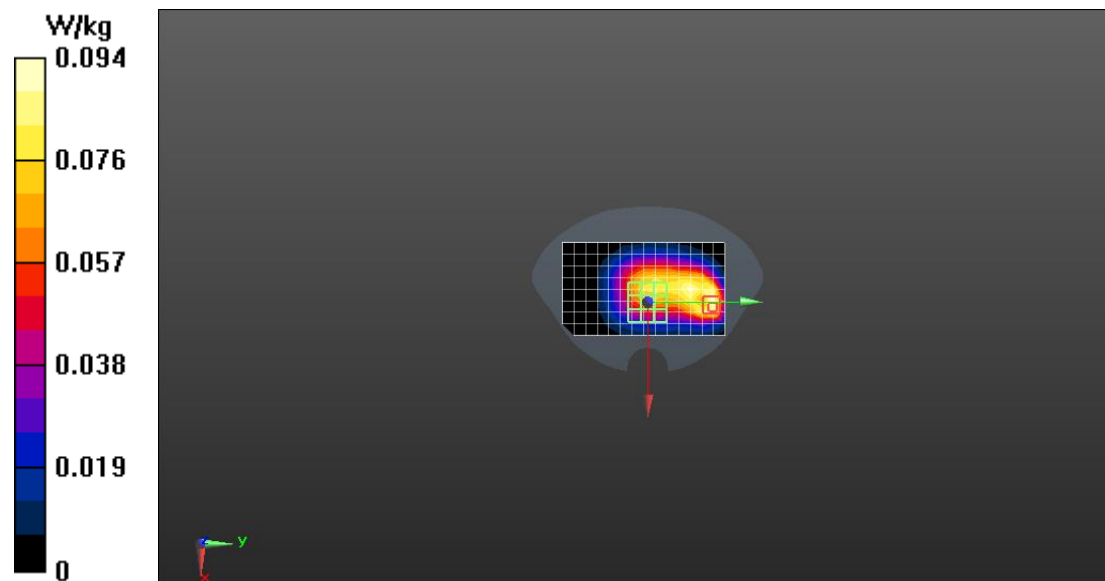

LTE B7 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 37.963$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0701 W/kg


Configuration/Head/Zoom Scan (7x11x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0736 W/kg

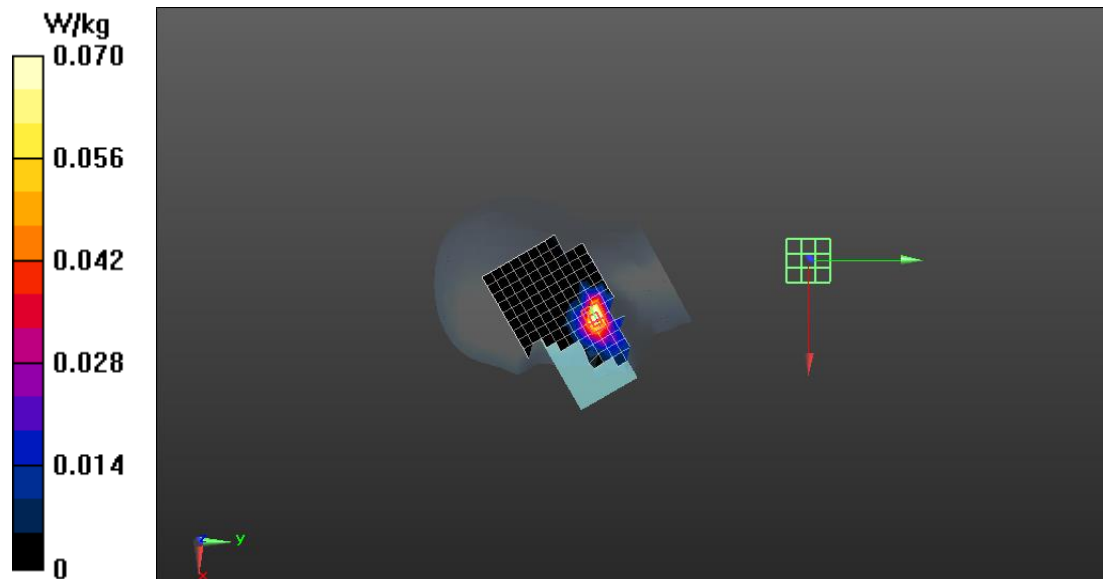

LTE B7 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 37.963$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.218 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.106 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

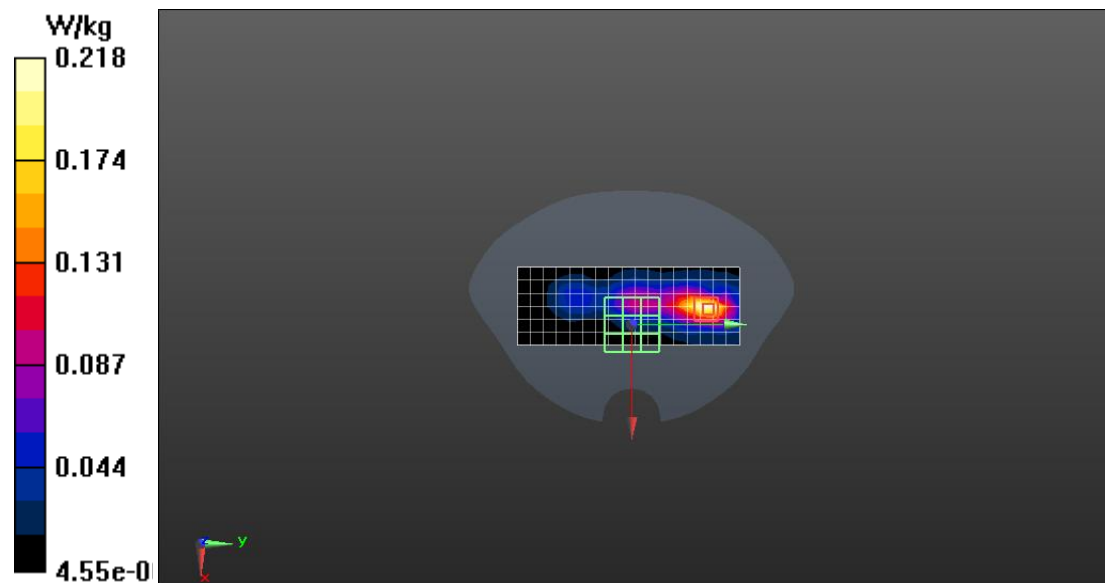

LTE B12 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used: $f = 711$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 42.466$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.210 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.943 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

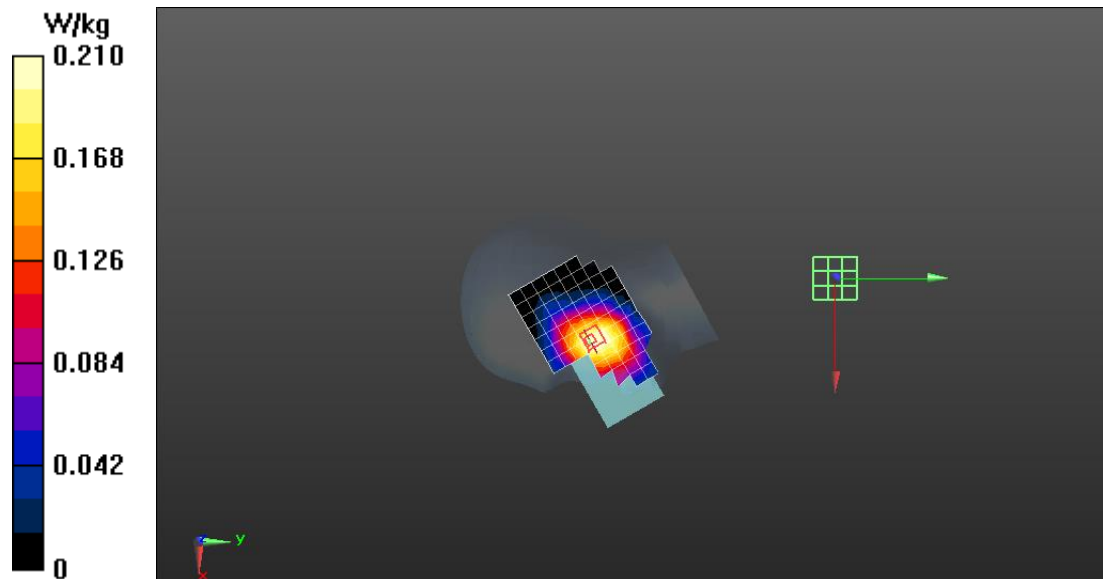

LTE B12 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used: $f = 711$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 42.466$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.453 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.78 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

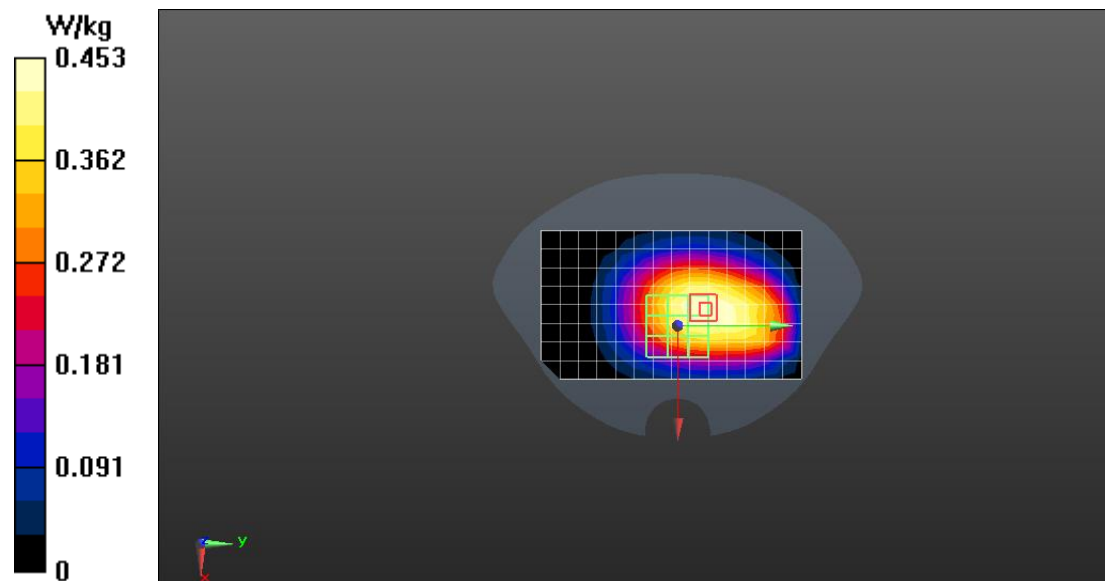

LTE B25 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1882.5 MHz;

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 39.761$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.184 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.572 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

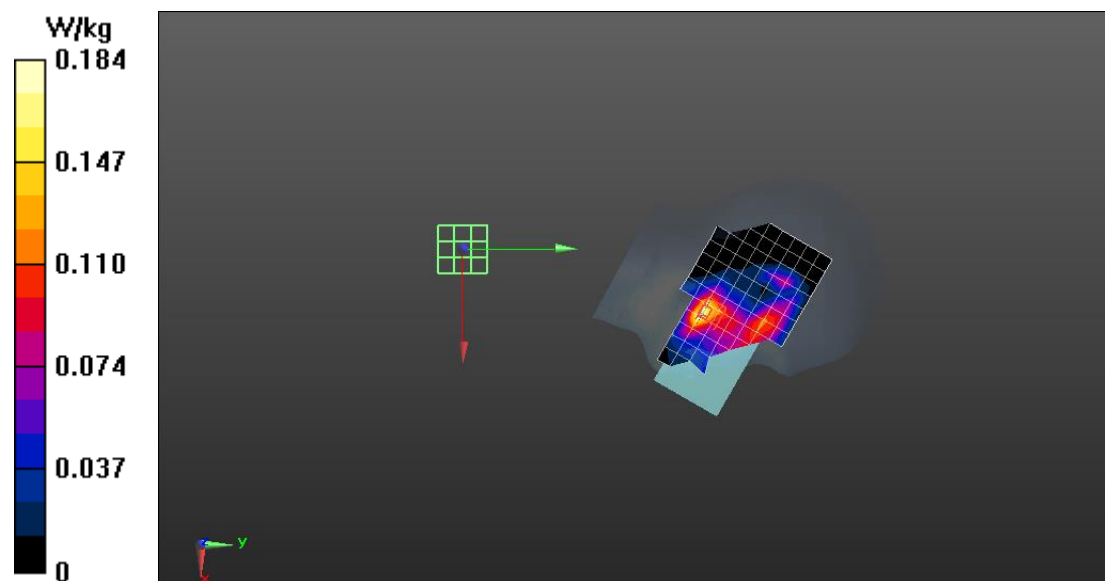

LTE B25 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1882.5 MHz;

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 39.761$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.760 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.29 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.936 W/kg

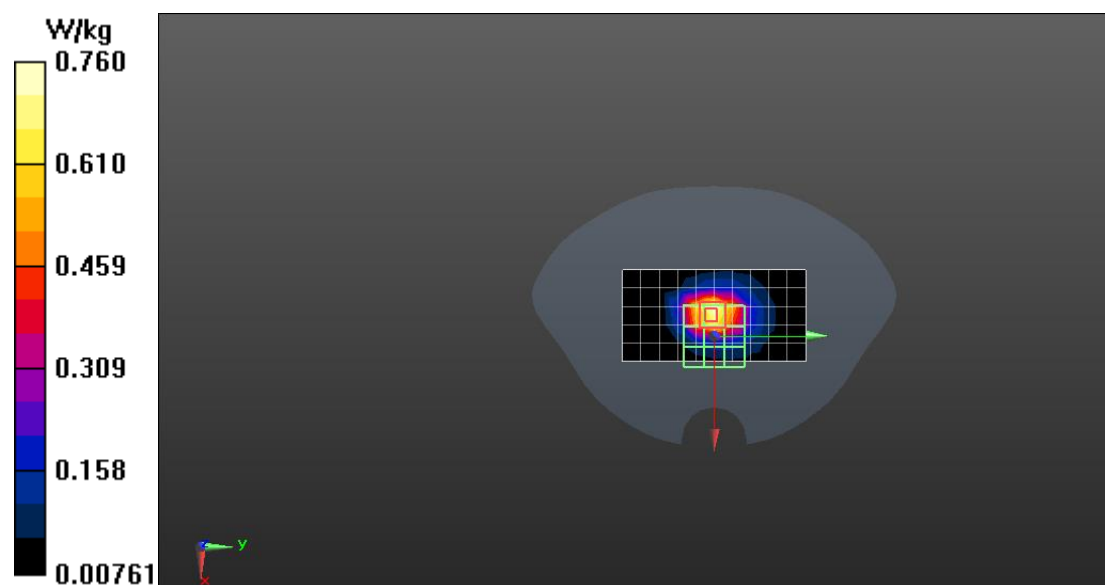

LTE B26 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 841.5 MHz;

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.338$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.403 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.679 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

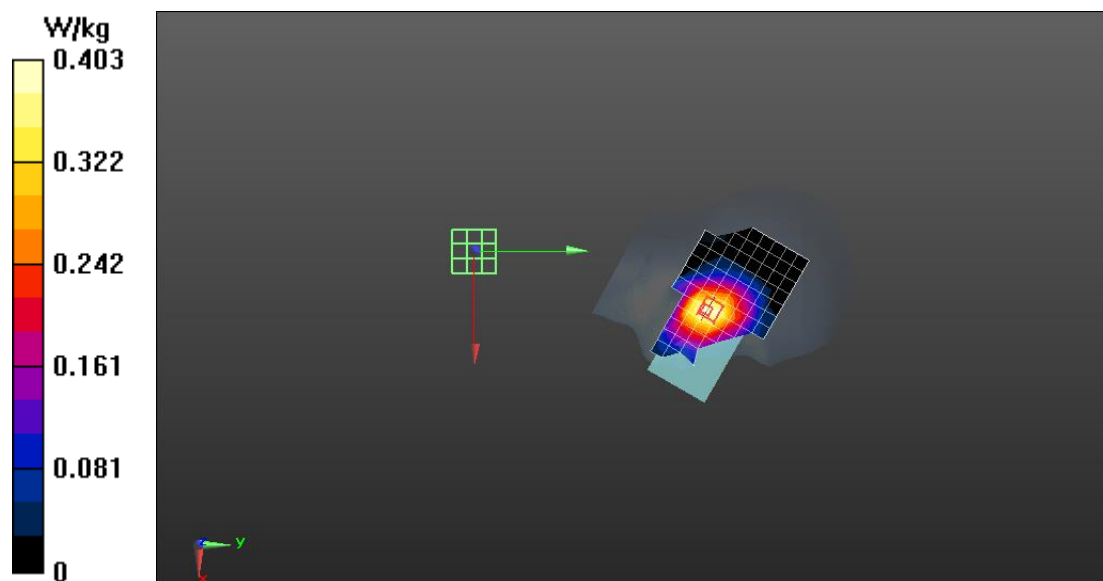

Date: 2024/7/23

LTE B26 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 841.5 MHz;

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.338$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.511 W/kg

Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.14 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.297 W/kg

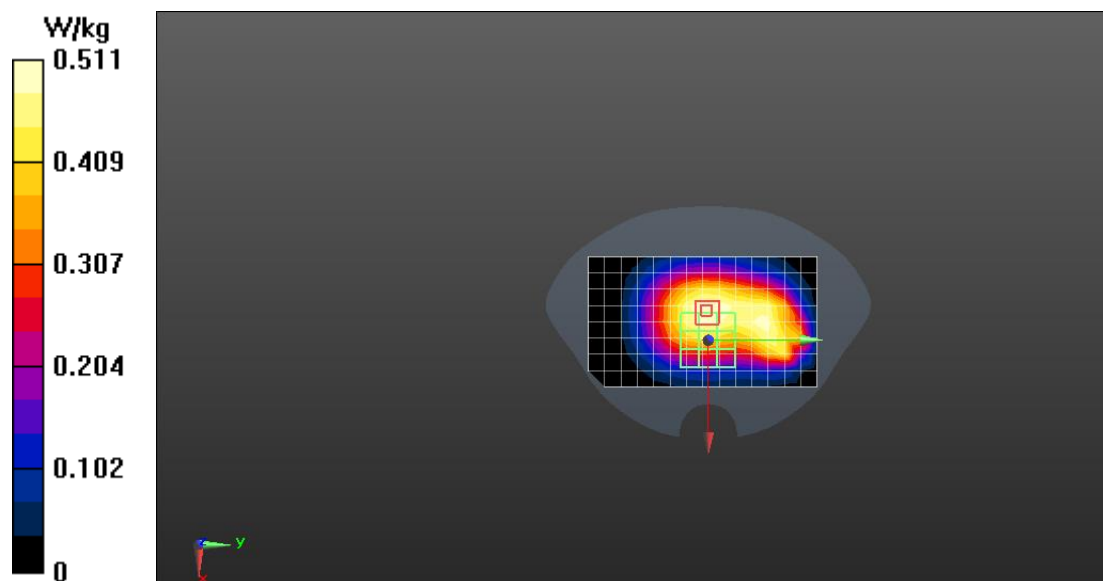

Date: 2024/7/23

LTE B41 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2645 MHz;

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.055$ S/m; $\epsilon_r = 37.654$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.654 W/kg


Configuration/Body/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

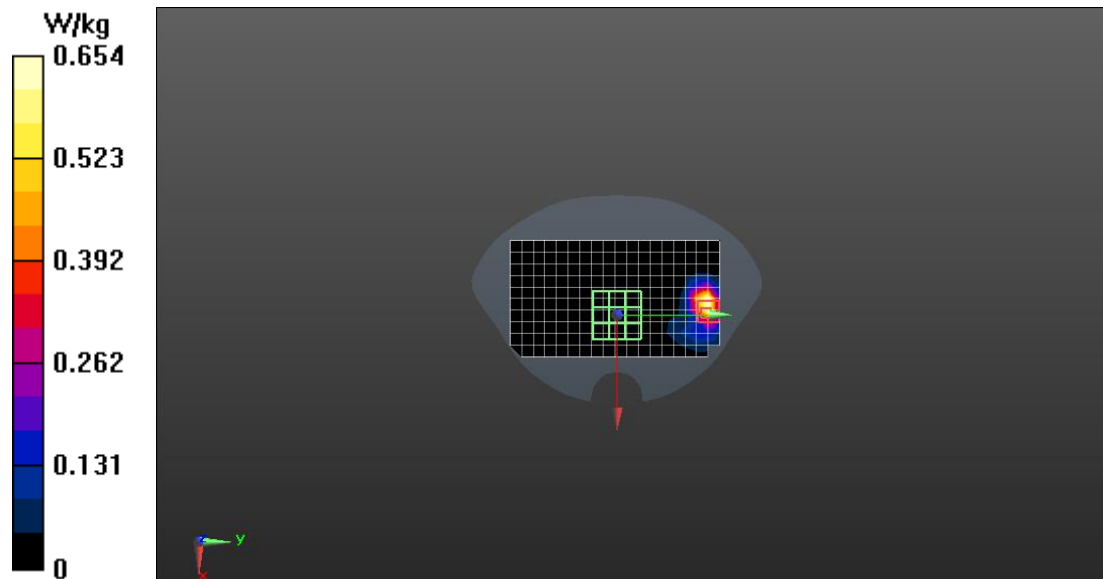

LTE B66 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 40.682$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0440 W/kg


Configuration/Head/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0396 W/kg

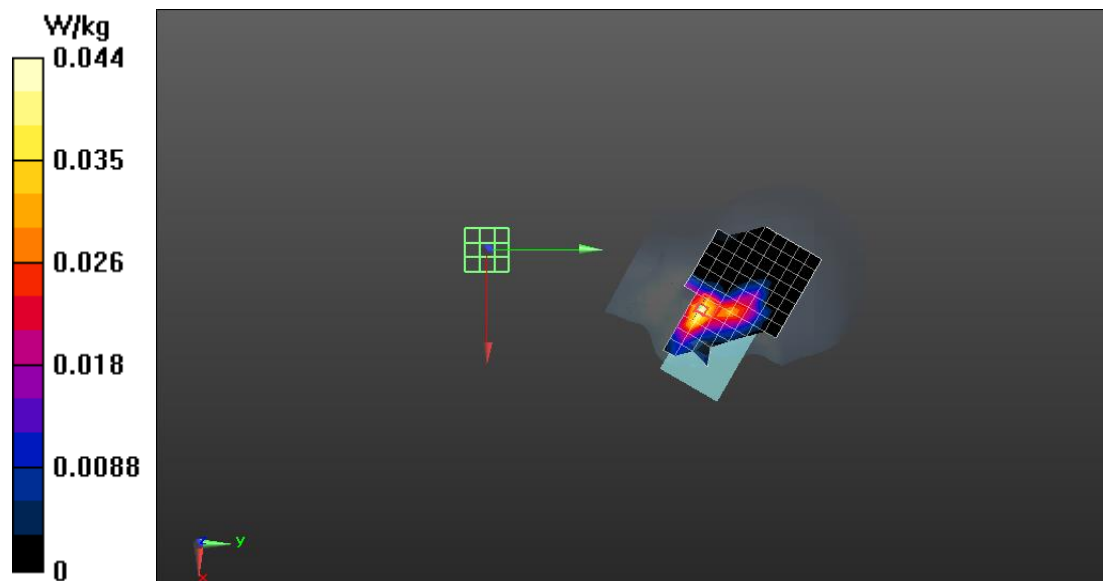

LTE B66 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1745 MHz;

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.603 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

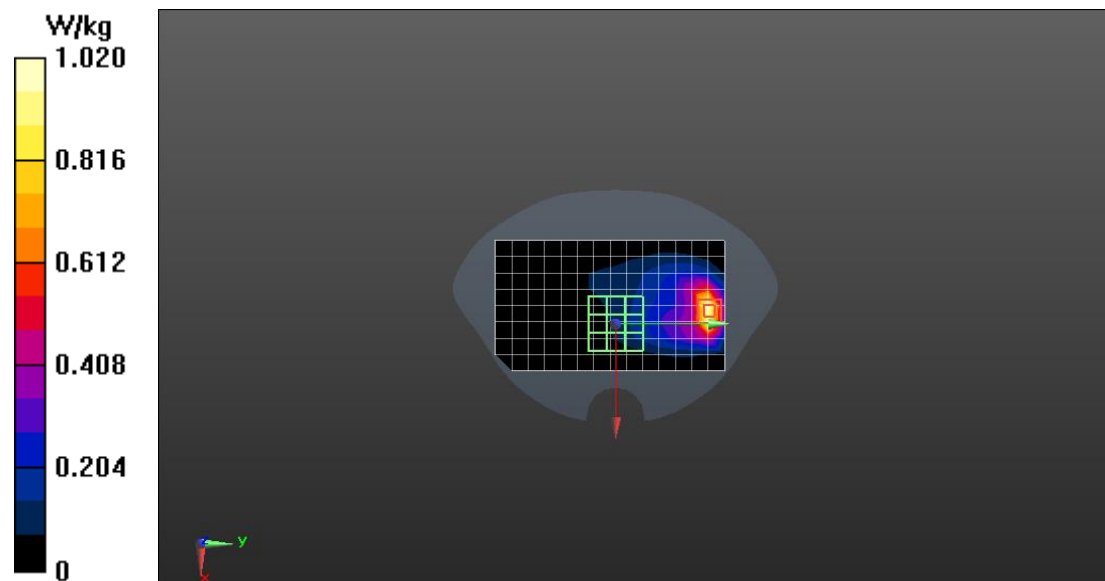

LTE B71 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 673 MHz;

Medium parameters used: $f = 673$ MHz; $\sigma = 0.824$ S/m; $\epsilon_r = 43.018$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.235 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.908 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

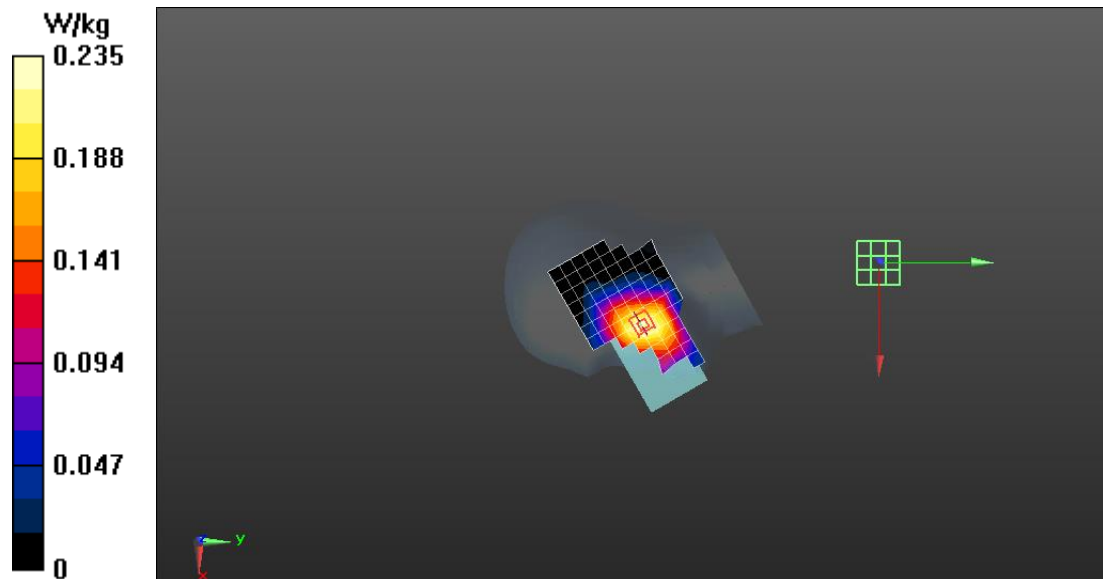

Date: 2024/7/23

LTE B71 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 673 MHz;

Medium parameters used: $f = 673$ MHz; $\sigma = 0.824$ S/m; $\epsilon_r = 43.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.430 W/kg


Configuration/Body/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.40 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

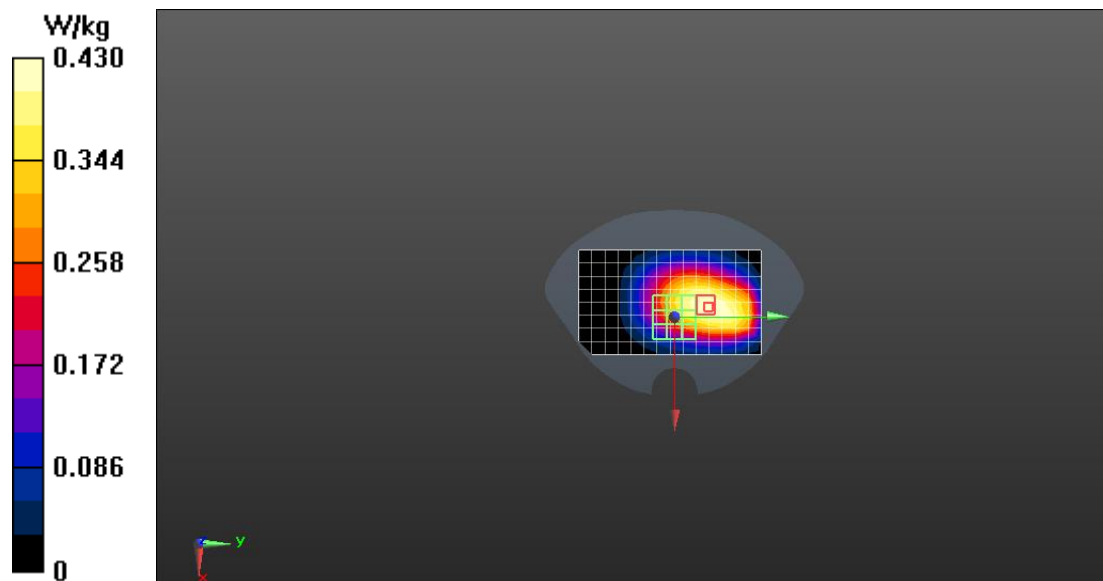

2.4G WIFI Head


Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2412 MHz;
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.829$ S/m; $\epsilon_r = 39.815$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.696 W/kg

Configuration/Head/Zoom Scan (9x12x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.97 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.942 W/kg
SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.264 W/kg
Maximum value of SAR (measured) = 0.764 W/kg

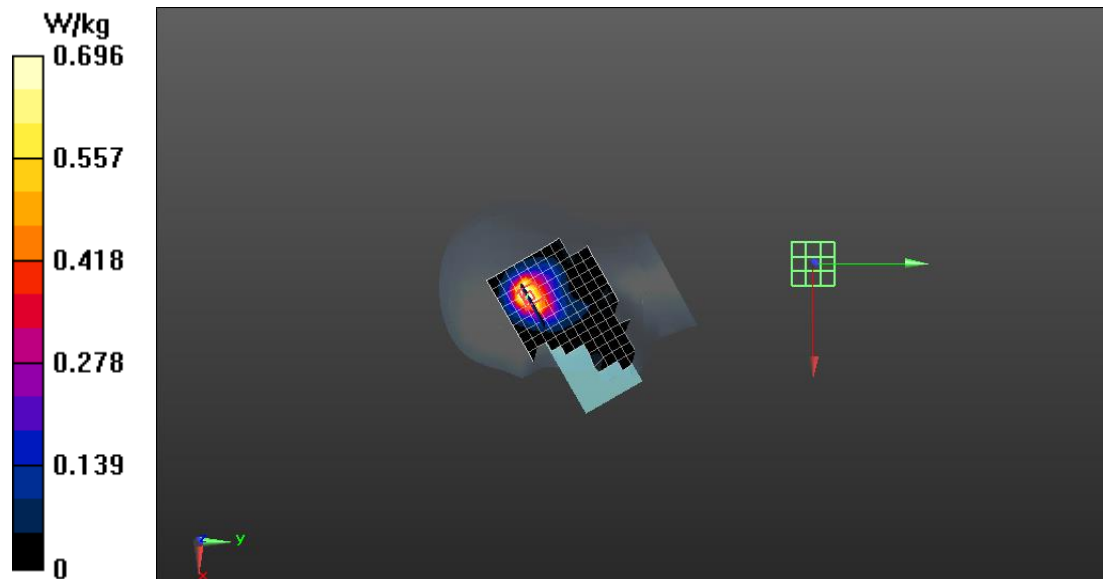

2.4G WIFI Body

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2412 MHz;

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.829$ S/m; $\epsilon_r = 39.815$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.246 W/kg


Configuration/Body/Zoom Scan (8x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.629 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

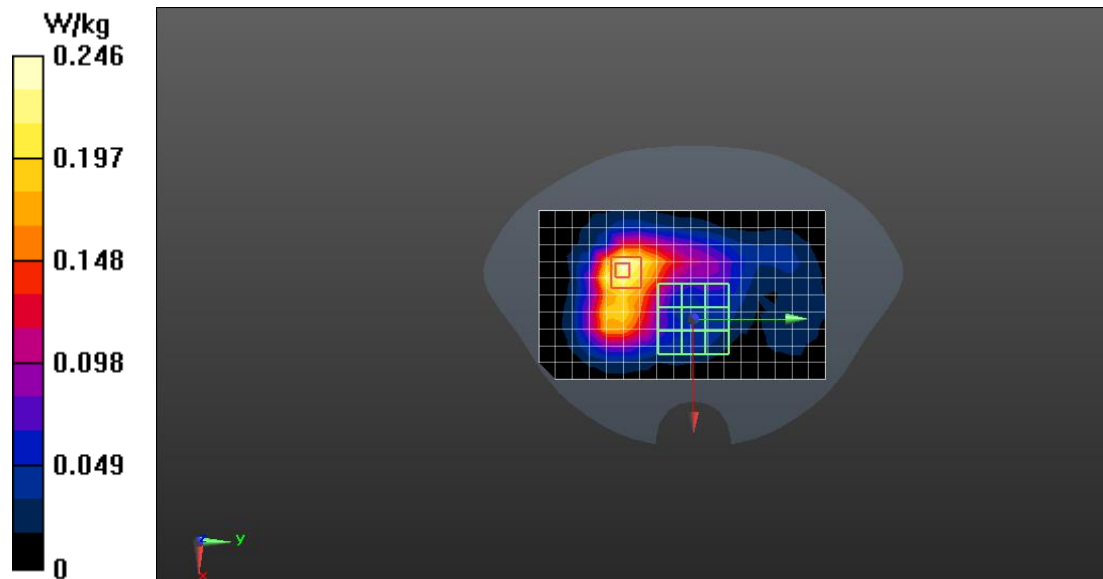

BT Head

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 39.758$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0567 W/kg


Configuration/Head/Zoom Scan (8x11x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.426 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0669 W/kg

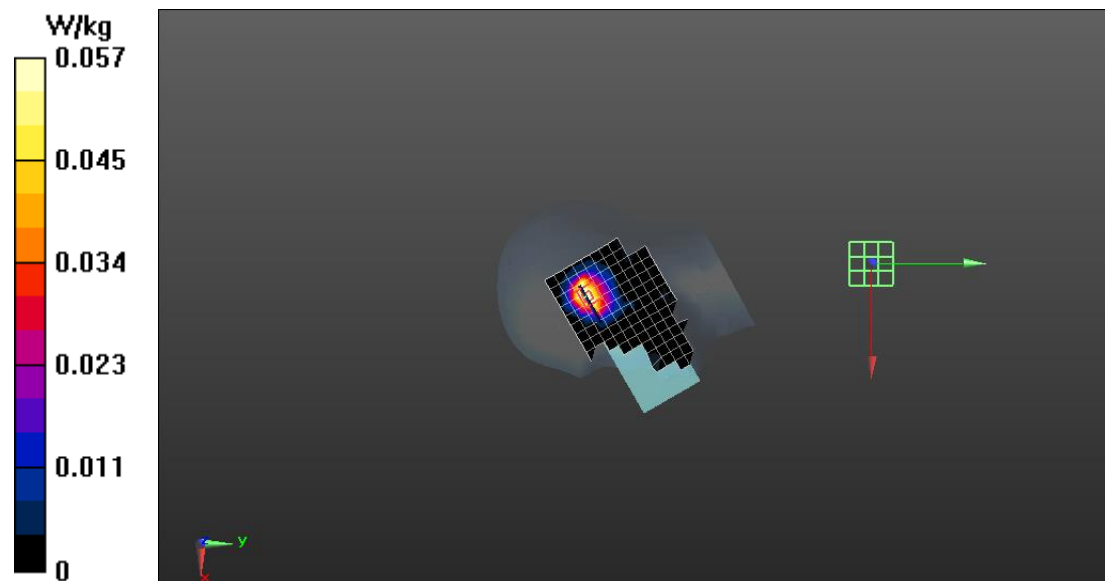

Date: 2024/7/29

BT Body

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 39.758$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0235 W/kg

Configuration/Body/Zoom Scan (8x9x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.684 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00869 W/kg

Maximum value of SAR (measured) = 0.0248 W/kg

