



Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

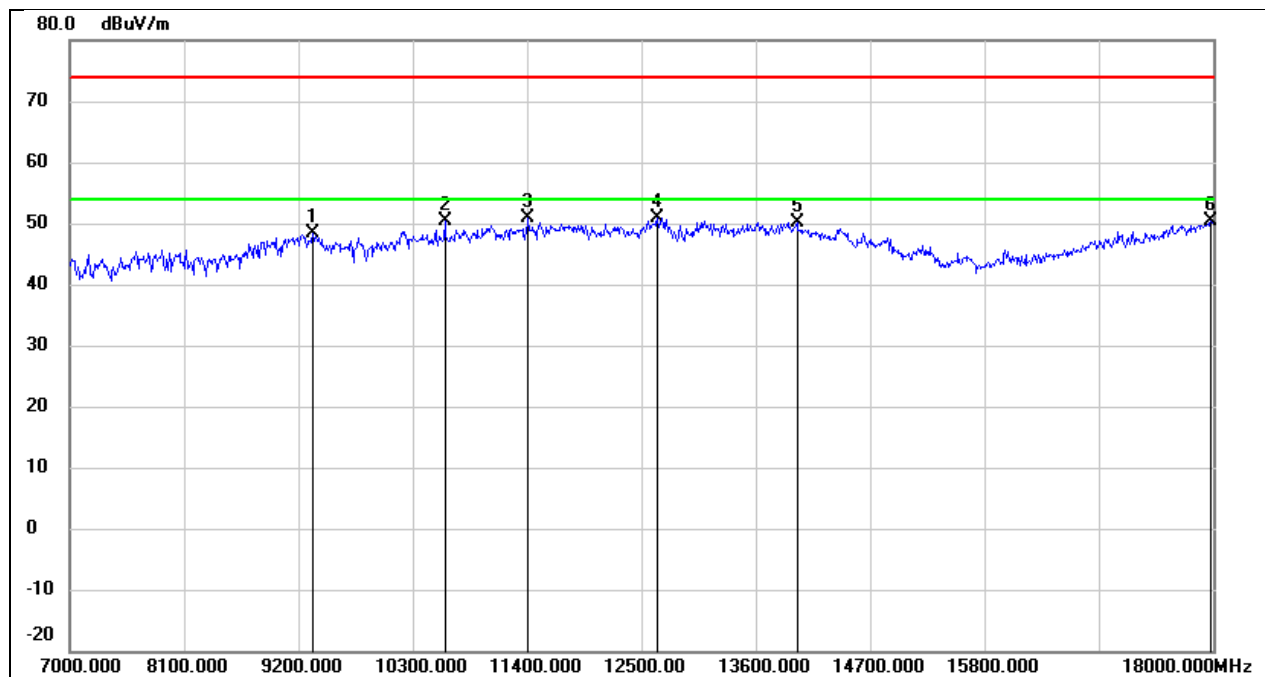


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.77	10.54	48.31	74.00	-25.69	peak
2	10608.000	37.20	13.23	50.43	74.00	-23.57	peak
3	11411.000	34.51	16.41	50.92	74.00	-23.08	peak
4	12654.000	32.89	18.01	50.90	74.00	-23.10	peak
5	13996.000	28.30	21.87	50.17	74.00	-23.83	peak
6	17978.000	24.31	25.97	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.87 V

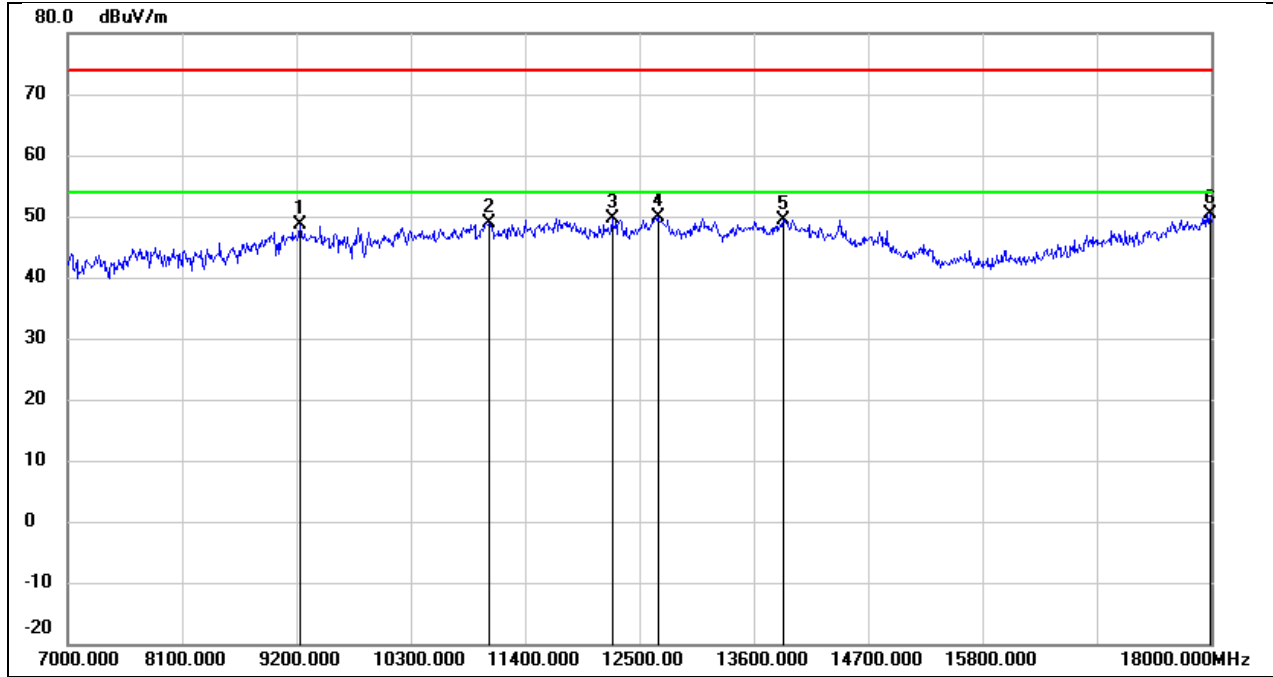


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.15	10.48	48.63	74.00	-25.37	peak
2	11048.000	34.07	14.91	48.98	74.00	-25.02	peak
3	12236.000	31.96	17.76	49.72	74.00	-24.28	peak
4	12676.000	31.85	18.05	49.90	74.00	-24.10	peak
5	13886.000	27.82	21.60	49.42	74.00	-24.58	peak
6	17989.000	24.39	26.04	50.43	74.00	-23.57	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

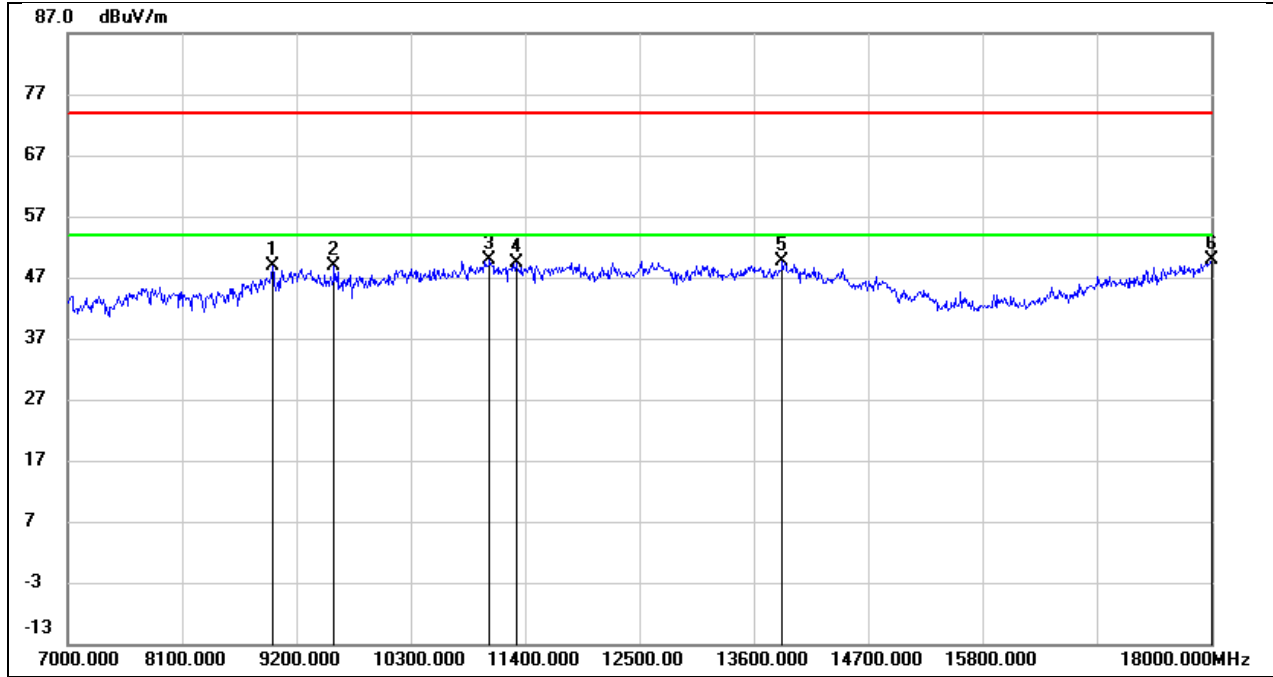


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8969.000	38.71	10.13	48.84	74.00	-25.16	peak
2	9563.000	37.97	10.79	48.76	74.00	-25.24	peak
3	11059.000	34.80	14.96	49.76	74.00	-24.24	peak
4	11312.000	33.48	16.00	49.48	74.00	-24.52	peak
5	13875.000	28.03	21.57	49.60	74.00	-24.40	peak
6	18000.000	23.76	26.12	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.87 V

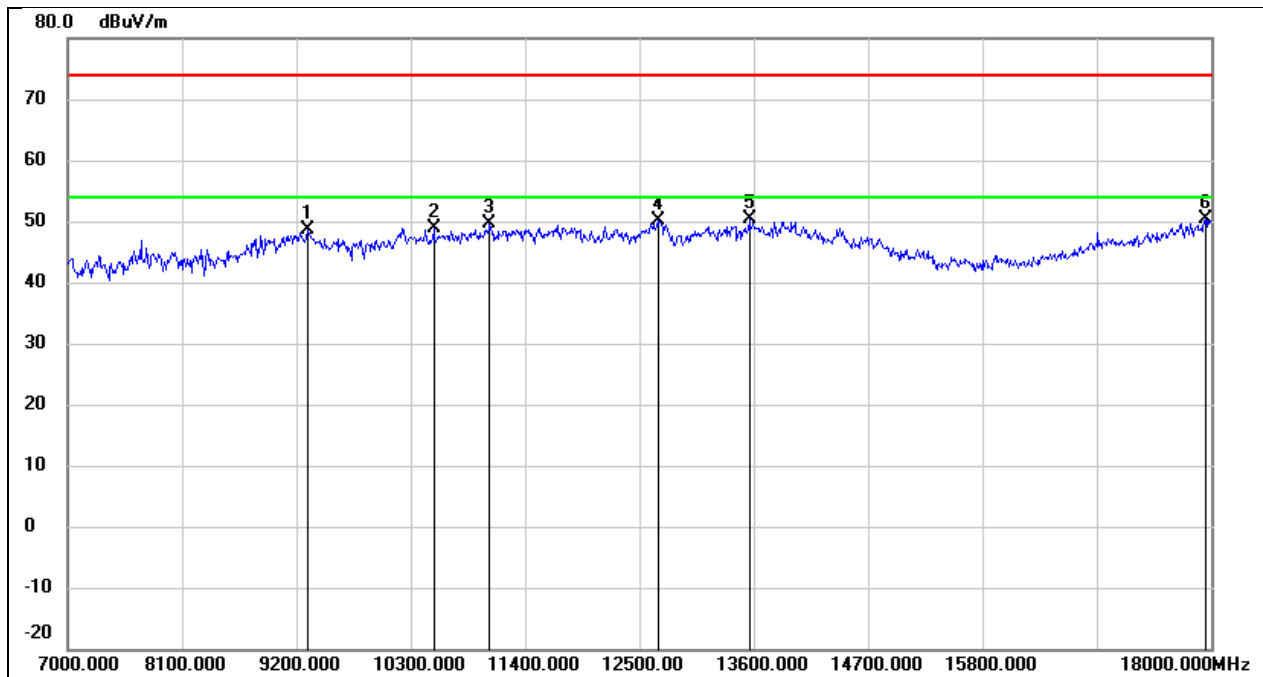


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	38.01	10.54	48.55	74.00	-25.45	peak
2	10520.000	36.09	12.90	48.99	74.00	-25.01	peak
3	11059.000	34.79	14.96	49.75	74.00	-24.25	peak
4	12676.000	31.97	18.05	50.02	74.00	-23.98	peak
5	13556.000	29.68	20.78	50.46	74.00	-23.54	peak
6	17945.000	24.68	25.75	50.43	74.00	-23.57	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

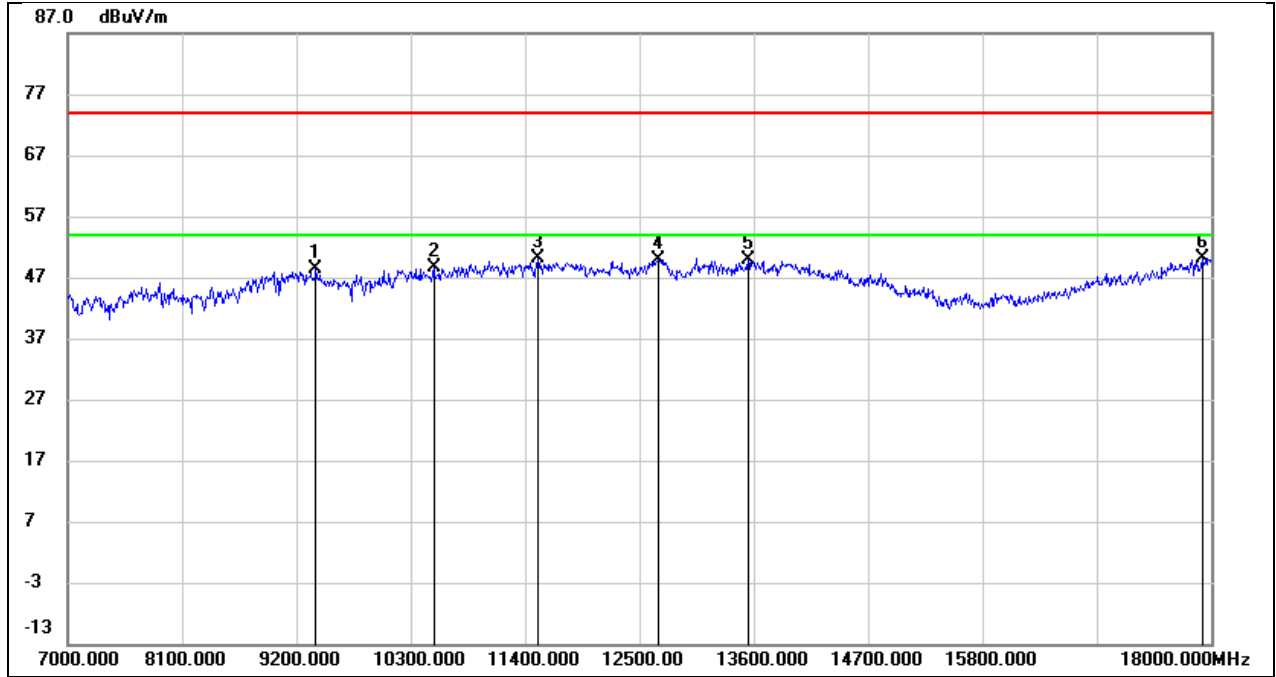


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	37.69	10.58	48.27	74.00	-25.73	peak
2	10520.000	35.64	12.90	48.54	74.00	-25.46	peak
3	11521.000	33.31	16.82	50.13	74.00	-23.87	peak
4	12687.000	31.87	18.05	49.92	74.00	-24.08	peak
5	13545.000	29.07	20.75	49.82	74.00	-24.18	peak
6	17912.000	24.59	25.52	50.11	74.00	-23.89	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.87 V

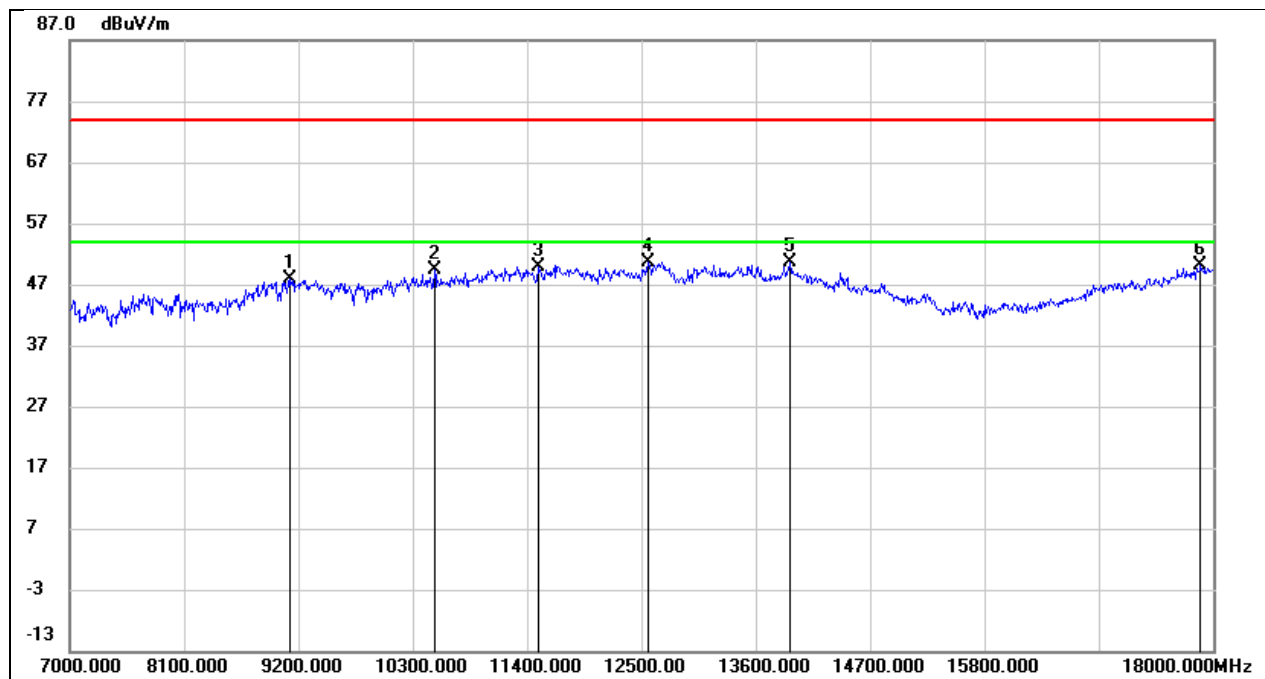


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.40	10.41	47.81	74.00	-26.19	peak
2	10509.000	36.46	12.85	49.31	74.00	-24.69	peak
3	11510.000	33.19	16.79	49.98	74.00	-24.02	peak
4	12566.000	32.84	17.91	50.75	74.00	-23.25	peak
5	13930.000	28.86	21.71	50.57	74.00	-23.43	peak
6	17879.000	24.92	25.29	50.21	74.00	-23.79	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

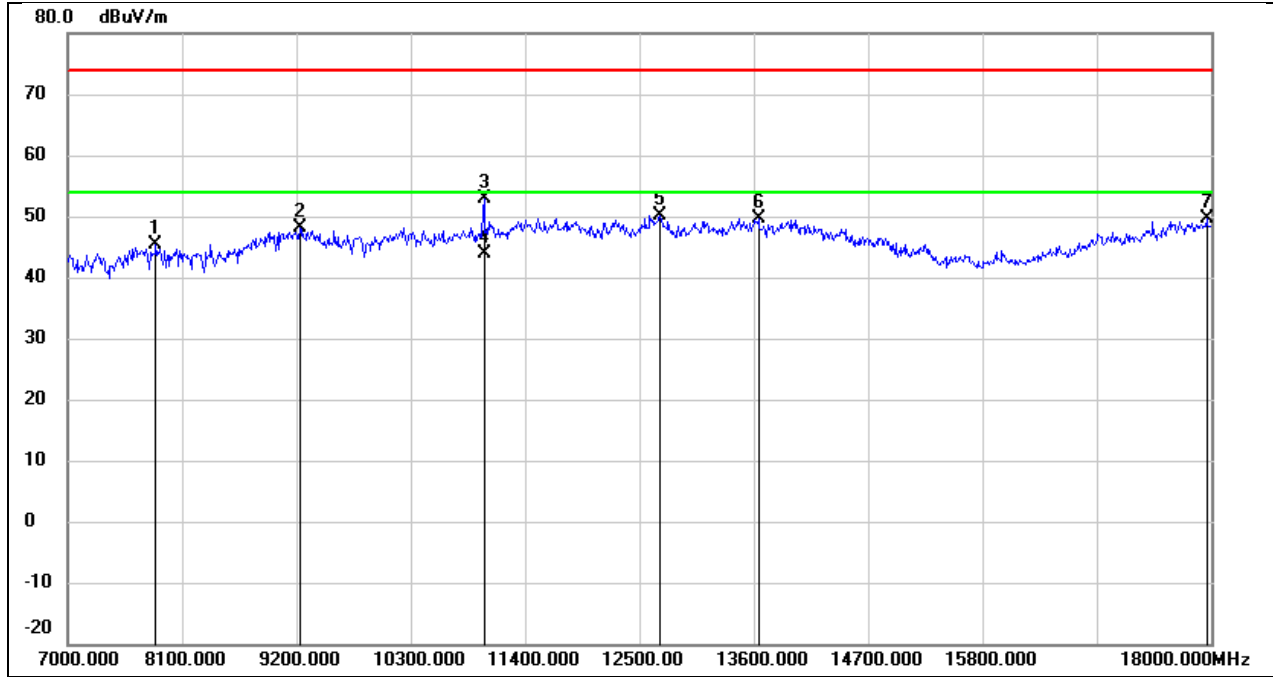


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	38.87	6.57	45.44	74.00	-28.56	peak
2	9233.000	37.61	10.48	48.09	74.00	-25.91	peak
3	11004.000	38.03	14.74	52.77	74.00	-21.23	peak
4	11004.000	29.12	14.74	43.86	54.00	-10.14	AVG
5	12698.000	32.07	18.08	50.15	74.00	-23.85	peak
6	13644.000	28.56	20.99	49.55	74.00	-24.45	peak
7	17956.000	23.83	25.82	49.65	74.00	-24.35	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.87 V

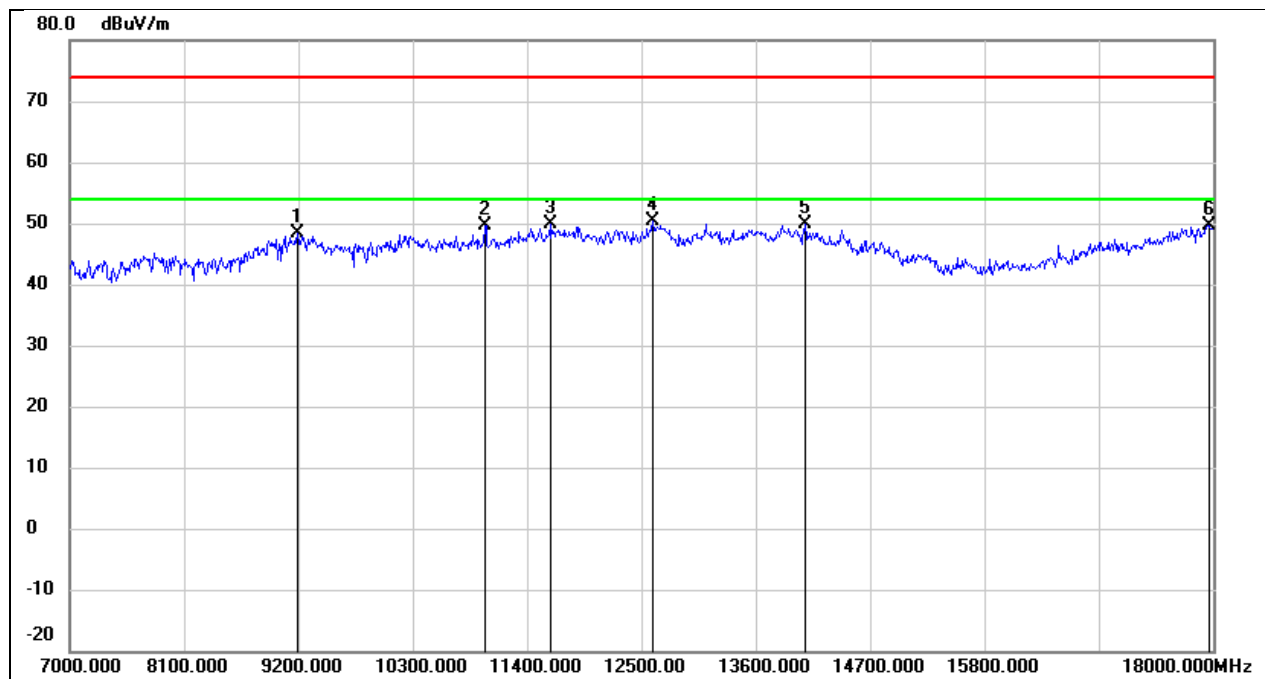


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.99	10.46	48.45	74.00	-25.55	peak
2	10993.000	34.83	14.70	49.53	74.00	-24.47	peak
3	11620.000	32.98	16.99	49.97	74.00	-24.03	peak
4	12610.000	32.44	17.97	50.41	74.00	-23.59	peak
5	14073.000	28.36	21.57	49.93	74.00	-24.07	peak
6	17956.000	23.89	25.82	49.71	74.00	-24.29	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

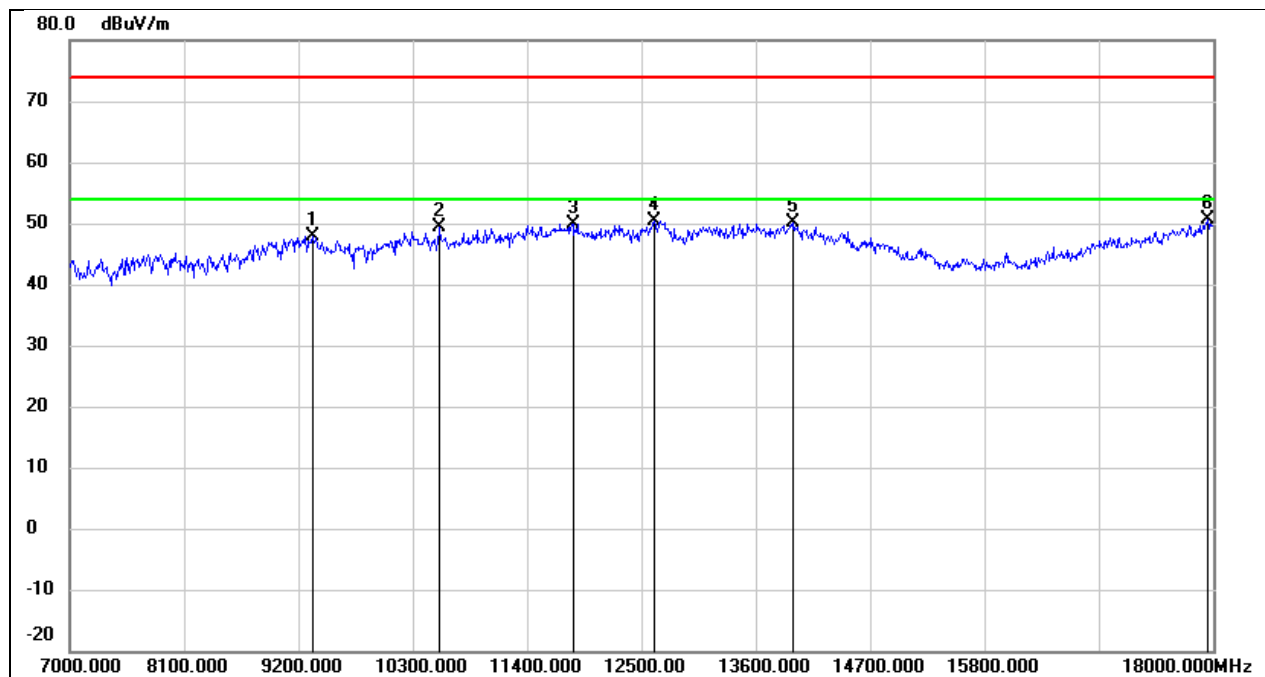


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.37	10.54	47.91	74.00	-26.09	peak
2	10553.000	36.28	13.02	49.30	74.00	-24.70	peak
3	11840.000	32.50	17.40	49.90	74.00	-24.10	peak
4	12621.000	32.41	17.98	50.39	74.00	-23.61	peak
5	13963.000	28.28	21.78	50.06	74.00	-23.94	peak
6	17945.000	24.95	25.75	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.87 V

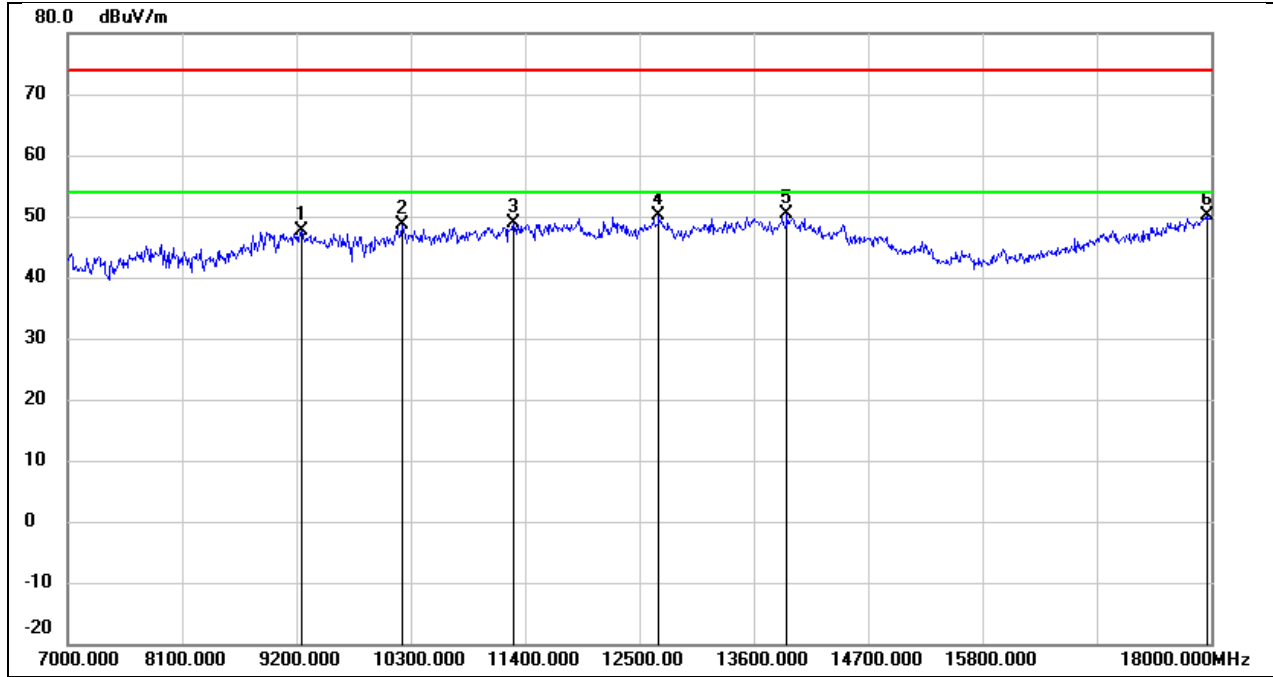


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.23	10.51	47.74	74.00	-26.26	peak
2	10223.000	36.47	12.24	48.71	74.00	-25.29	peak
3	11290.000	32.90	15.90	48.80	74.00	-25.20	peak
4	12687.000	32.12	18.05	50.17	74.00	-23.83	peak
5	13919.000	28.80	21.68	50.48	74.00	-23.52	peak
6	17967.000	24.14	25.89	50.03	74.00	-23.97	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

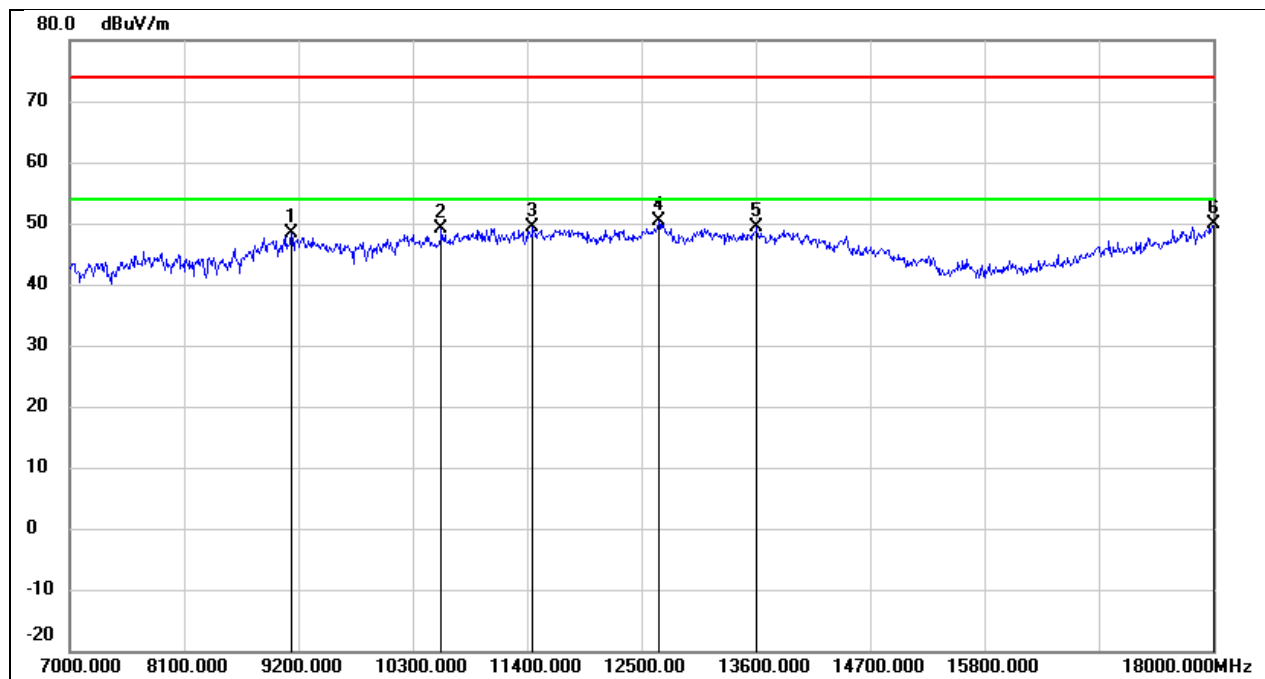


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.97	10.41	48.38	74.00	-25.62	peak
2	10575.000	36.02	13.10	49.12	74.00	-24.88	peak
3	11455.000	32.80	16.58	49.38	74.00	-24.62	peak
4	12665.000	32.40	18.04	50.44	74.00	-23.56	peak
5	13611.000	28.45	20.92	49.37	74.00	-24.63	peak
6	18000.000	23.67	26.12	49.79	74.00	-24.21	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.87 V

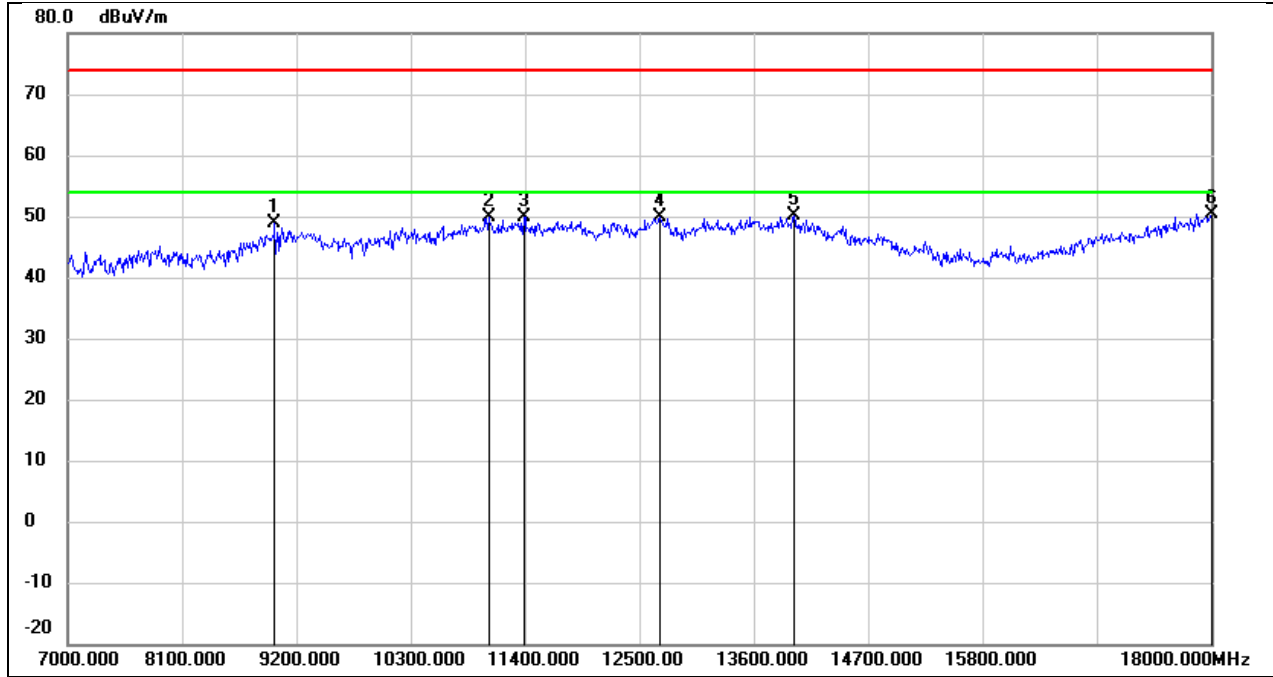


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	38.69	10.28	48.97	74.00	-25.03	peak
2	11048.000	34.86	14.91	49.77	74.00	-24.23	peak
3	11389.000	33.69	16.31	50.00	74.00	-24.00	peak
4	12698.000	31.80	18.08	49.88	74.00	-24.12	peak
5	13985.000	28.36	21.85	50.21	74.00	-23.79	peak
6	18000.000	24.37	26.12	50.49	74.00	-23.51	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

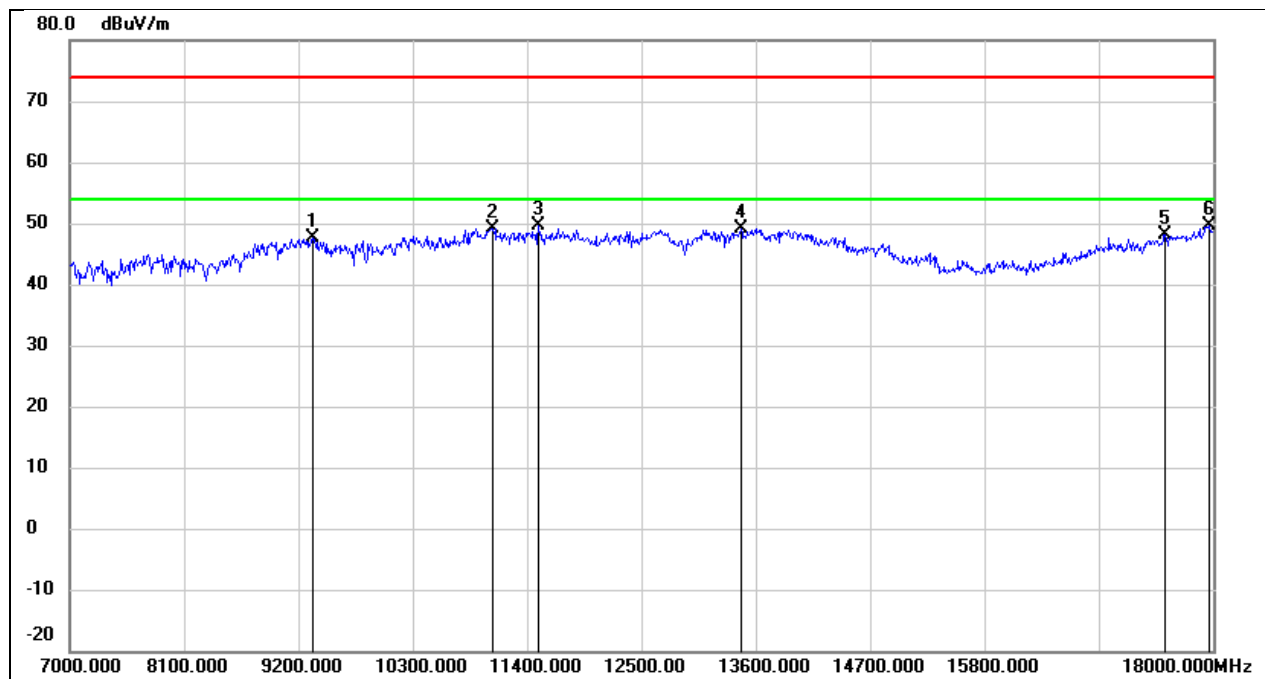


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.01	10.54	47.55	74.00	-26.45	peak
2	11070.000	34.23	15.01	49.24	74.00	-24.76	peak
3	11510.000	32.92	16.79	49.71	74.00	-24.29	peak
4	13457.000	28.65	20.46	49.11	74.00	-24.89	peak
5	17538.000	25.24	22.97	48.21	74.00	-25.79	peak
6	17956.000	23.74	25.82	49.56	74.00	-24.44	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.87 V

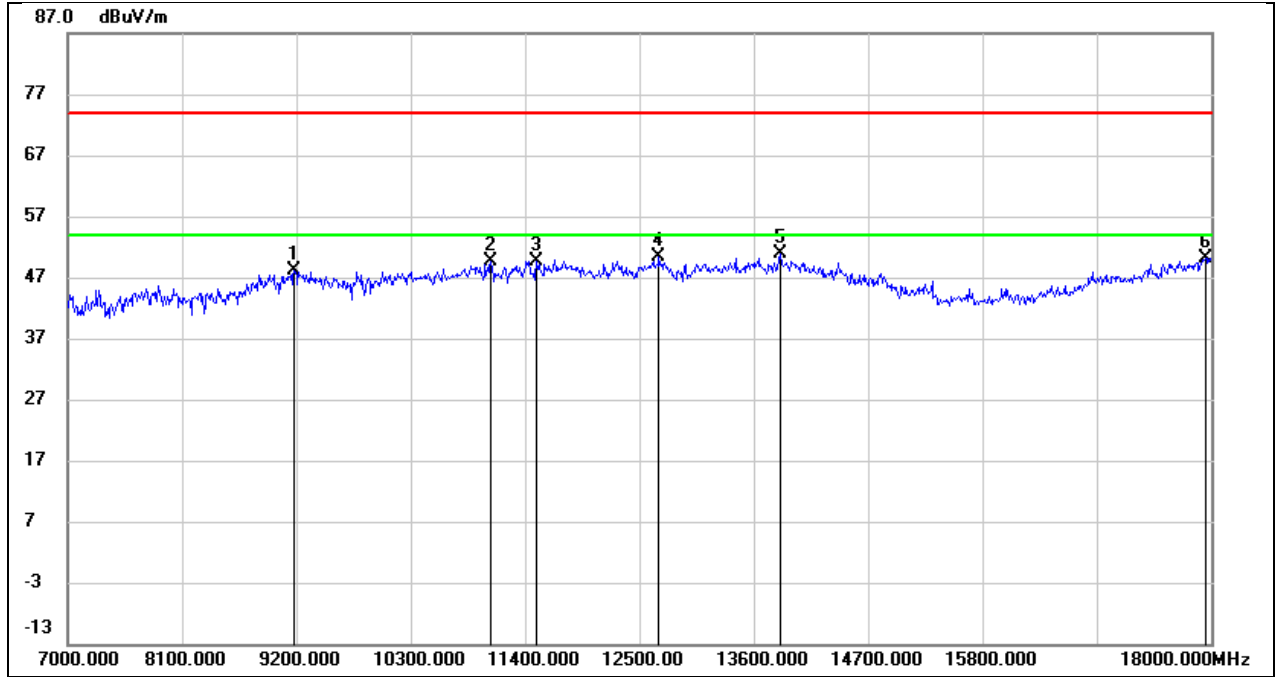


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.70	10.45	48.15	74.00	-25.85	peak
2	11070.000	34.52	15.01	49.53	74.00	-24.47	peak
3	11510.000	32.87	16.79	49.66	74.00	-24.34	peak
4	12687.000	32.40	18.05	50.45	74.00	-23.55	peak
5	13853.000	29.26	21.52	50.78	74.00	-23.22	peak
6	17945.000	24.48	25.75	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

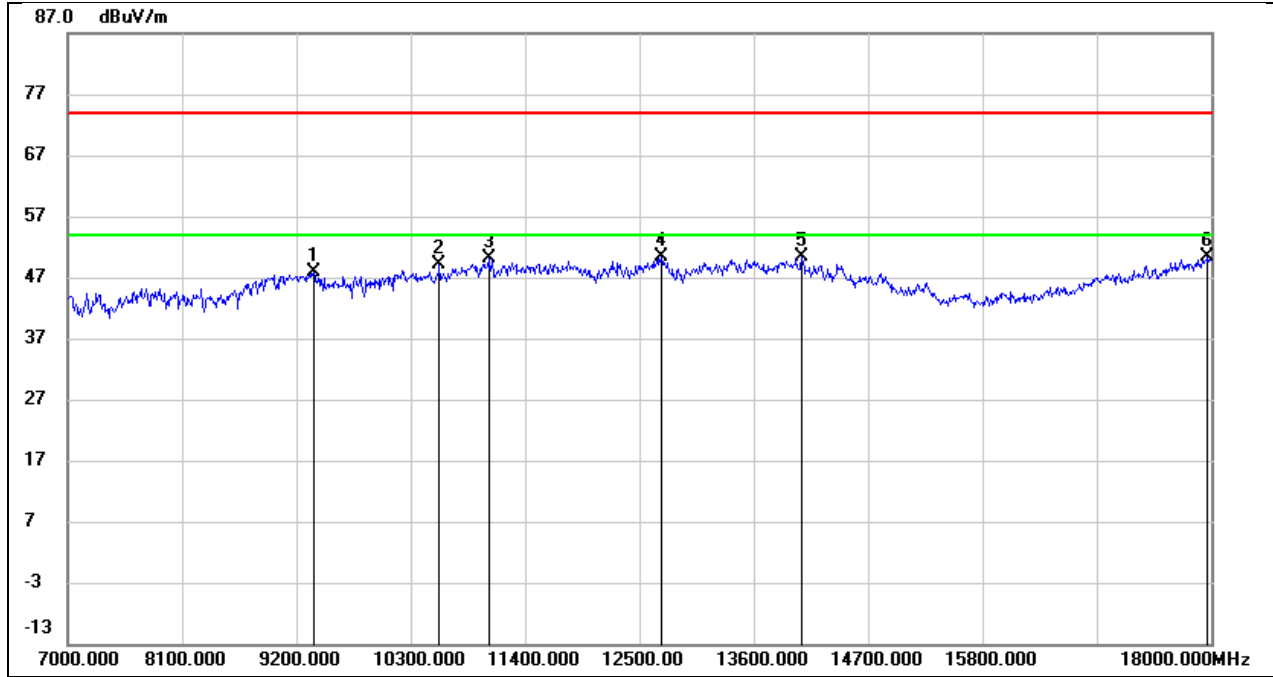


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	37.42	10.57	47.99	74.00	-26.01	peak
2	10575.000	35.98	13.10	49.08	74.00	-24.92	peak
3	11048.000	35.23	14.91	50.14	74.00	-23.86	peak
4	12709.000	32.21	18.09	50.30	74.00	-23.70	peak
5	14062.000	28.65	21.62	50.27	74.00	-23.73	peak
6	17967.000	24.57	25.89	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.87 V

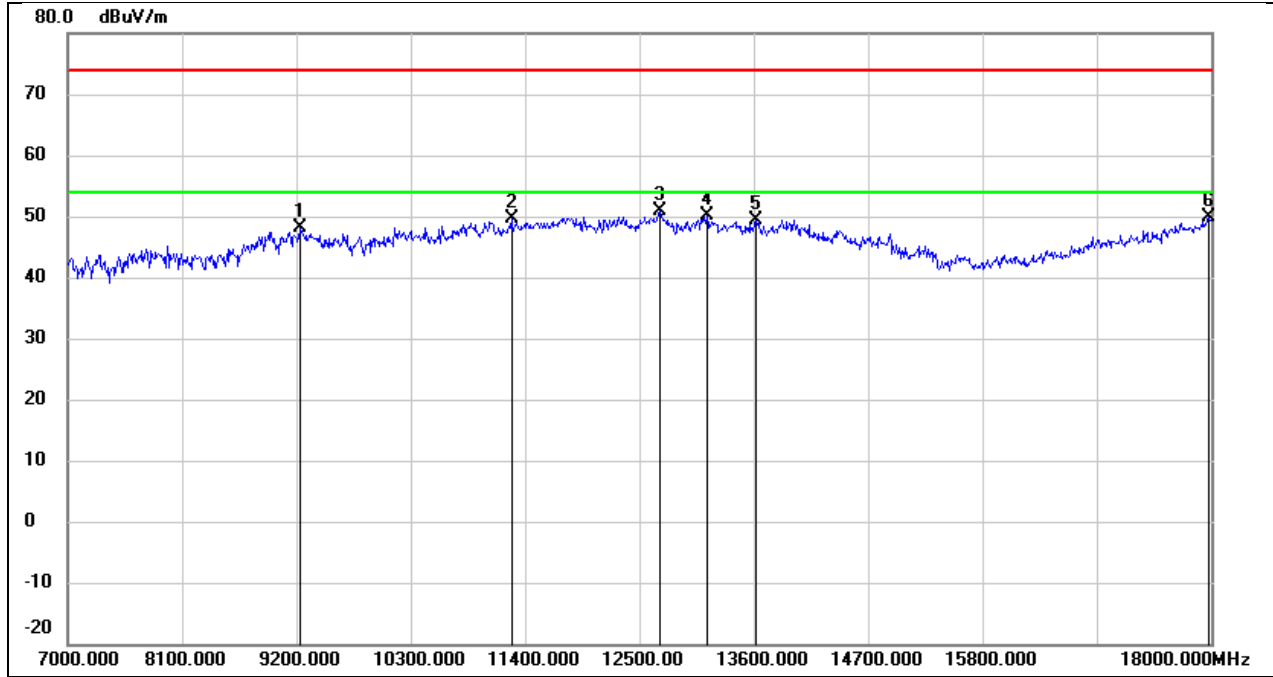


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.57	10.48	48.05	74.00	-25.95	peak
2	11268.000	33.73	15.83	49.56	74.00	-24.44	peak
3	12698.000	32.84	18.08	50.92	74.00	-23.08	peak
4	13149.000	31.12	19.10	50.22	74.00	-23.78	peak
5	13622.000	28.41	20.95	49.36	74.00	-24.64	peak
6	17978.000	23.92	25.97	49.89	74.00	-24.11	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

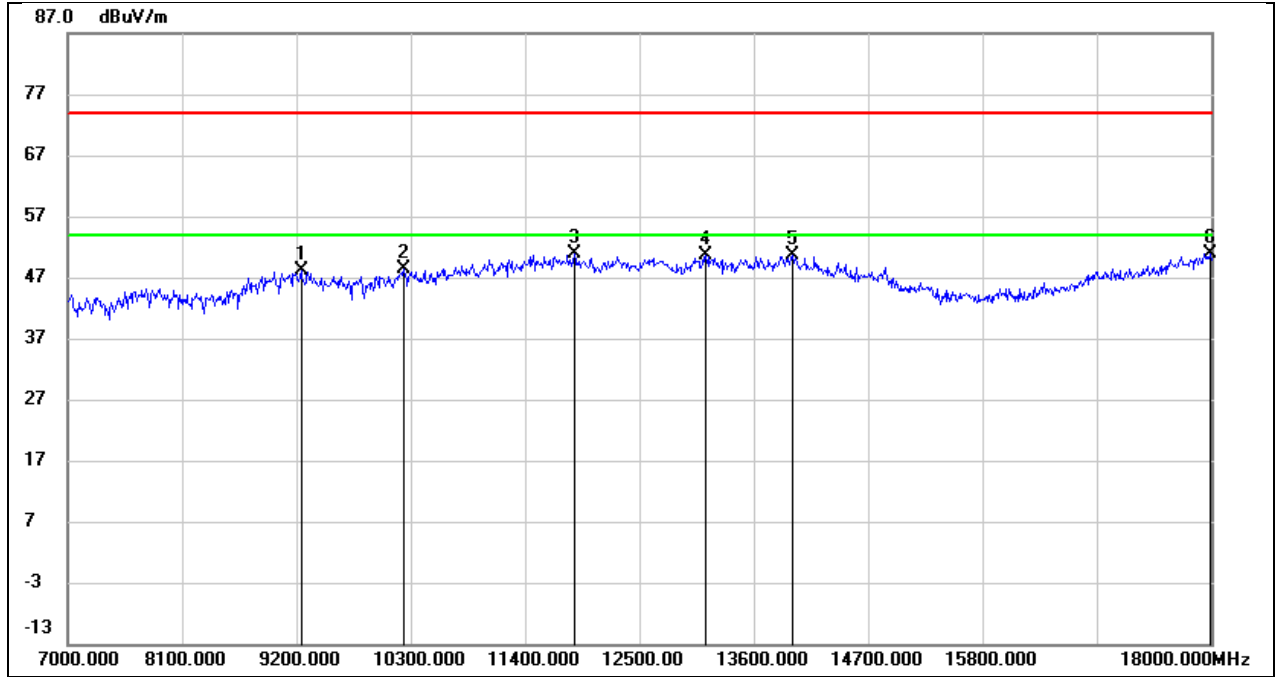


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.67	10.49	48.16	74.00	-25.84	peak
2	10234.000	36.05	12.26	48.31	74.00	-25.69	peak
3	11873.000	33.41	17.46	50.87	74.00	-23.13	peak
4	13138.000	31.47	19.05	50.52	74.00	-23.48	peak
5	13974.000	28.89	21.82	50.71	74.00	-23.29	peak
6	17989.000	24.92	26.04	50.96	74.00	-23.04	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.87 V

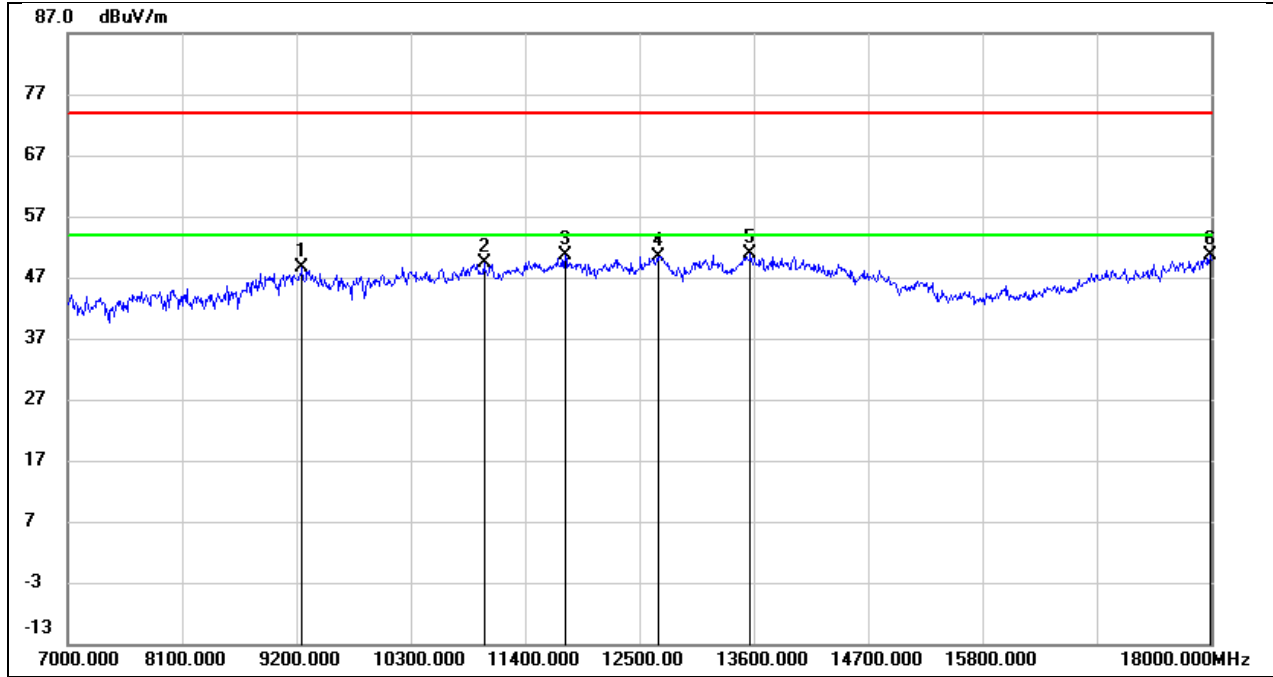


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.01	10.51	48.52	74.00	-25.48	peak
2	11004.000	34.59	14.74	49.33	74.00	-24.67	peak
3	11785.000	33.44	17.30	50.74	74.00	-23.26	peak
4	12676.000	32.37	18.05	50.42	74.00	-23.58	peak
5	13567.000	30.02	20.80	50.82	74.00	-23.18	peak
6	17989.000	24.71	26.04	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

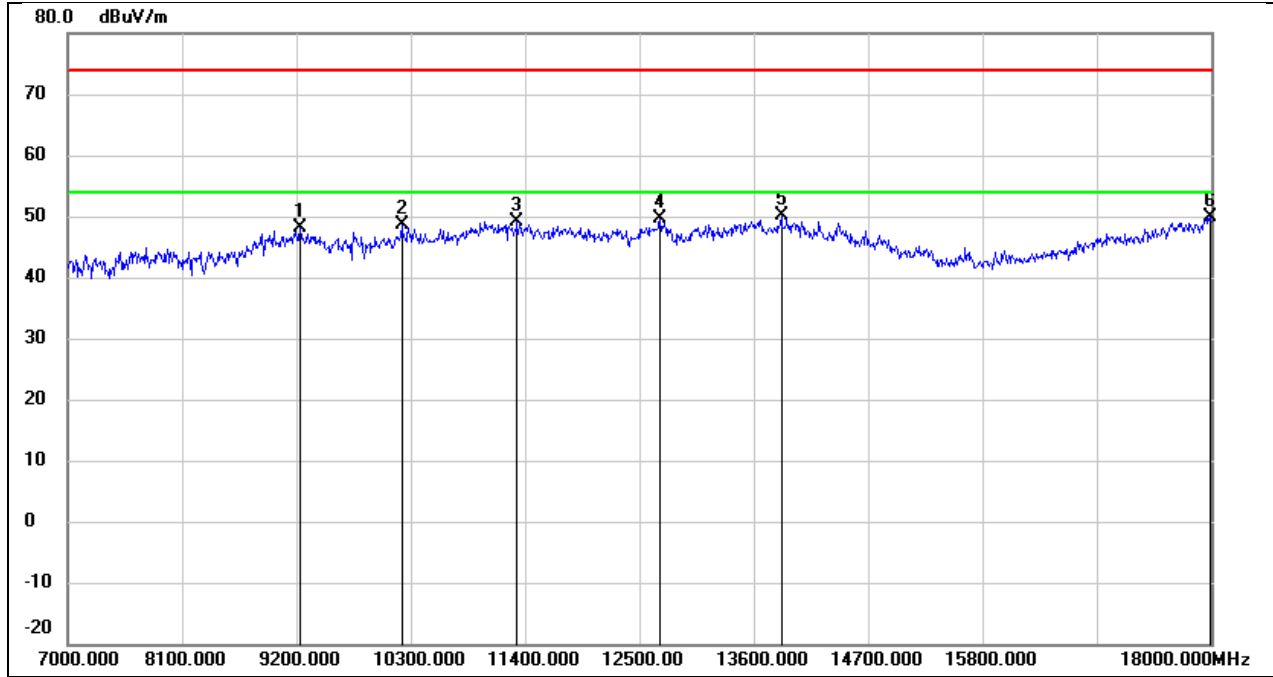


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.75	10.48	48.23	74.00	-25.77	peak
2	10212.000	36.40	12.21	48.61	74.00	-25.39	peak
3	11323.000	33.20	16.05	49.25	74.00	-24.75	peak
4	12698.000	31.55	18.08	49.63	74.00	-24.37	peak
5	13864.000	28.52	21.53	50.05	74.00	-23.95	peak
6	17989.000	23.95	26.04	49.99	74.00	-24.01	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.87 V

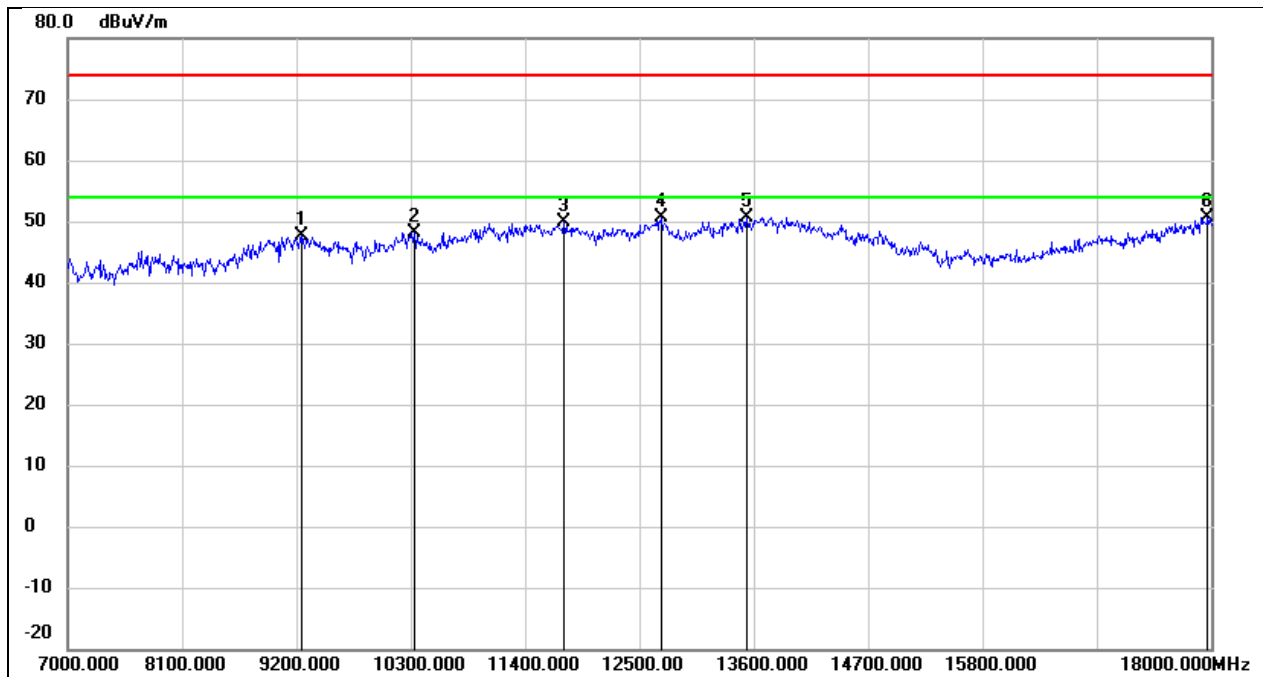


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.01	10.51	47.52	74.00	-26.48	peak
2	10333.000	35.71	12.47	48.18	74.00	-25.82	peak
3	11774.000	32.52	17.28	49.80	74.00	-24.20	peak
4	12709.000	32.46	18.09	50.55	74.00	-23.45	peak
5	13534.000	29.87	20.73	50.60	74.00	-23.40	peak
6	17967.000	24.84	25.89	50.73	74.00	-23.27	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

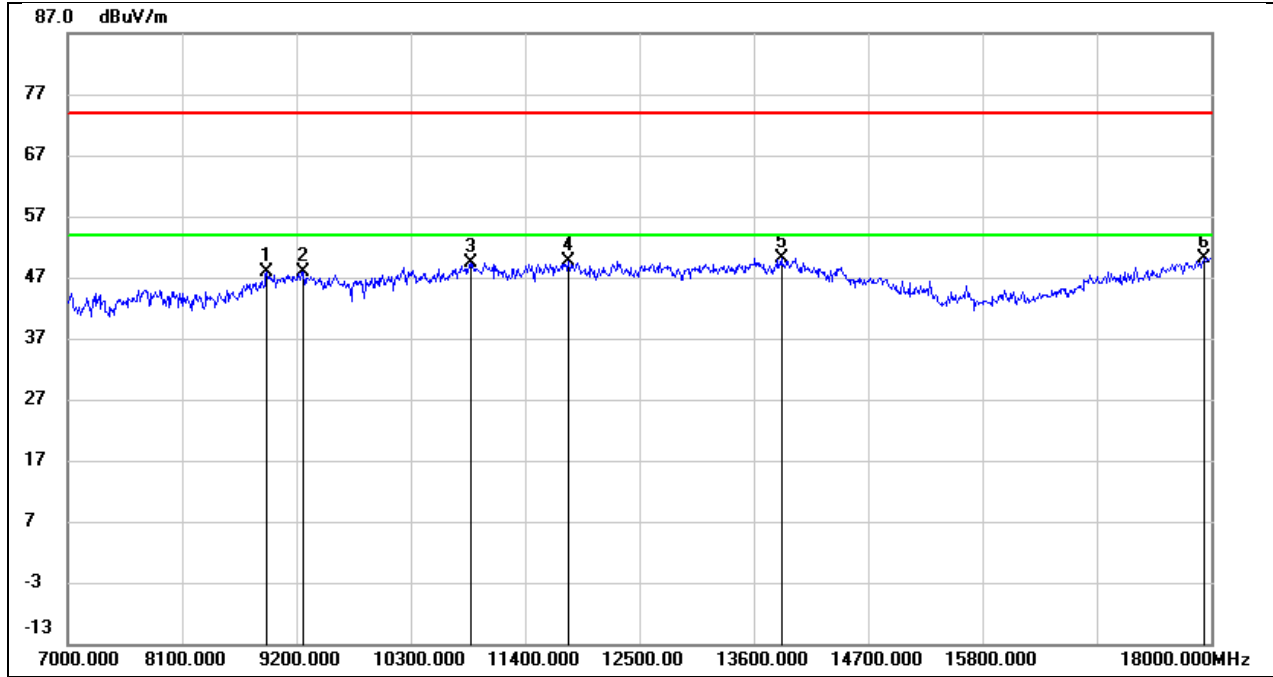


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8914.000	38.25	9.75	48.00	74.00	-26.00	peak
2	9266.000	37.33	10.51	47.84	74.00	-26.16	peak
3	10872.000	35.17	14.23	49.40	74.00	-24.60	peak
4	11818.000	32.34	17.36	49.70	74.00	-24.30	peak
5	13864.000	28.71	21.53	50.24	74.00	-23.76	peak
6	17934.000	24.54	25.67	50.21	74.00	-23.79	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.87 V

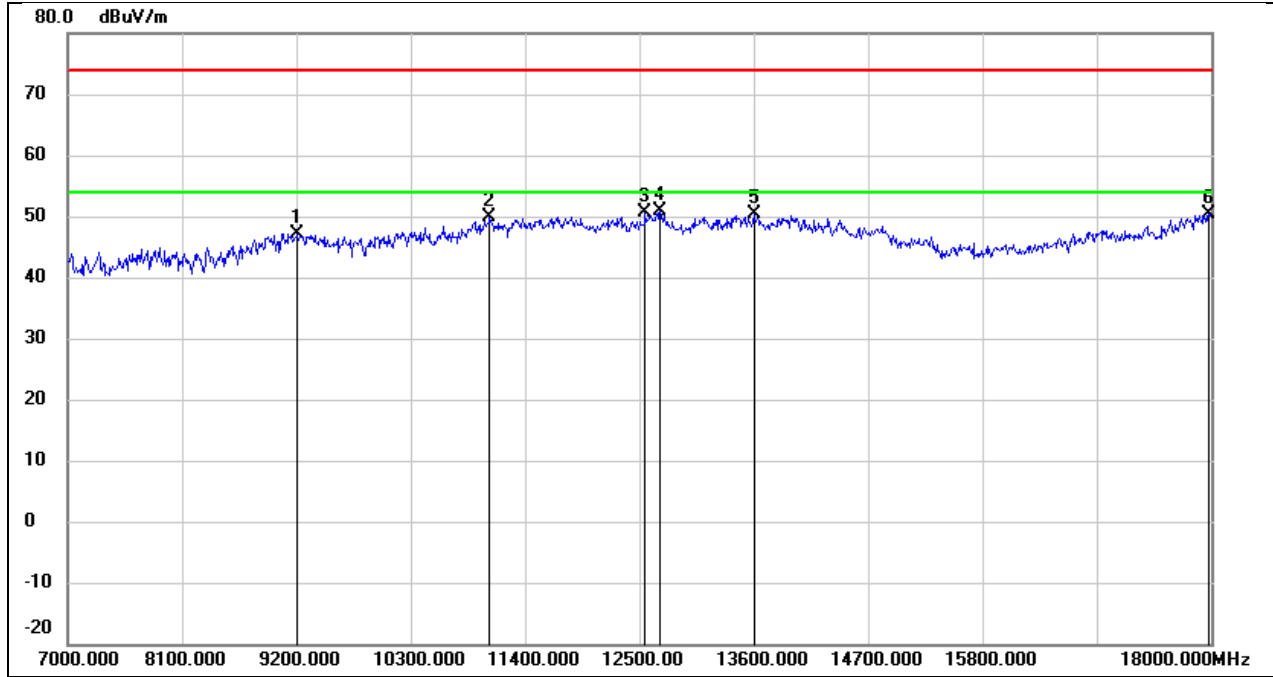


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	36.78	10.47	47.25	74.00	-26.75	peak
2	11059.000	34.87	14.96	49.83	74.00	-24.17	peak
3	12555.000	32.66	17.90	50.56	74.00	-23.44	peak
4	12698.000	32.68	18.08	50.76	74.00	-23.24	peak
5	13600.000	29.52	20.89	50.41	74.00	-23.59	peak
6	17978.000	24.38	25.97	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

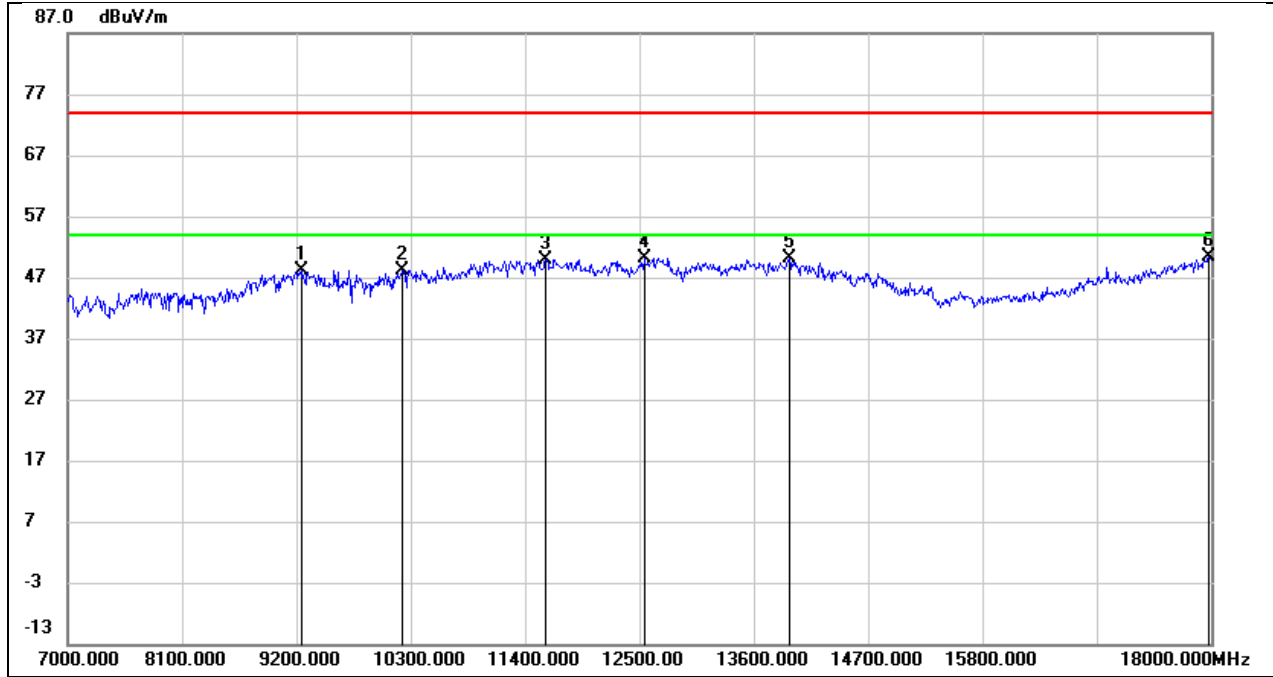


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.63	10.51	48.14	74.00	-25.86	peak
2	10212.000	35.93	12.21	48.14	74.00	-25.86	peak
3	11598.000	32.95	16.96	49.91	74.00	-24.09	peak
4	12544.000	32.29	17.88	50.17	74.00	-23.83	peak
5	13941.000	28.47	21.73	50.20	74.00	-23.80	peak
6	17978.000	24.42	25.97	50.39	74.00	-23.61	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.87 V

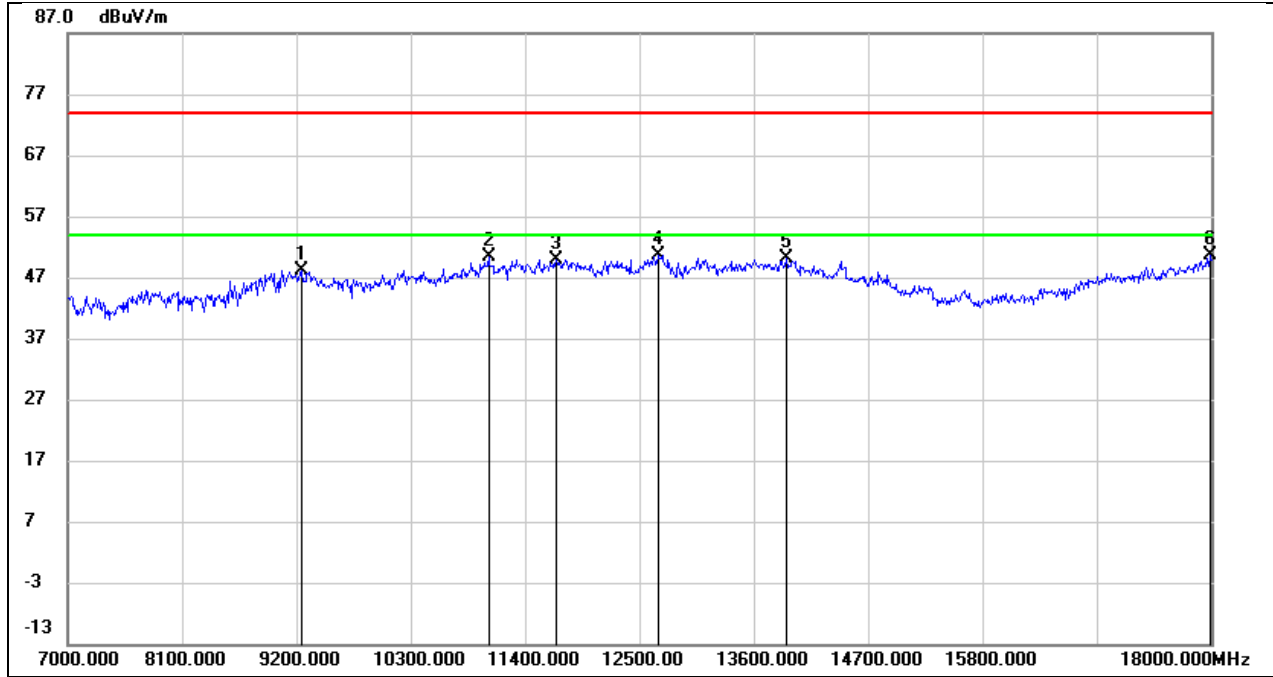


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.67	10.49	48.16	74.00	-25.84	peak
2	11048.000	35.35	14.91	50.26	74.00	-23.74	peak
3	11697.000	32.84	17.13	49.97	74.00	-24.03	peak
4	12687.000	32.70	18.05	50.75	74.00	-23.25	peak
5	13908.000	28.55	21.66	50.21	74.00	-23.79	peak
6	17989.000	24.52	26.04	50.56	74.00	-23.44	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

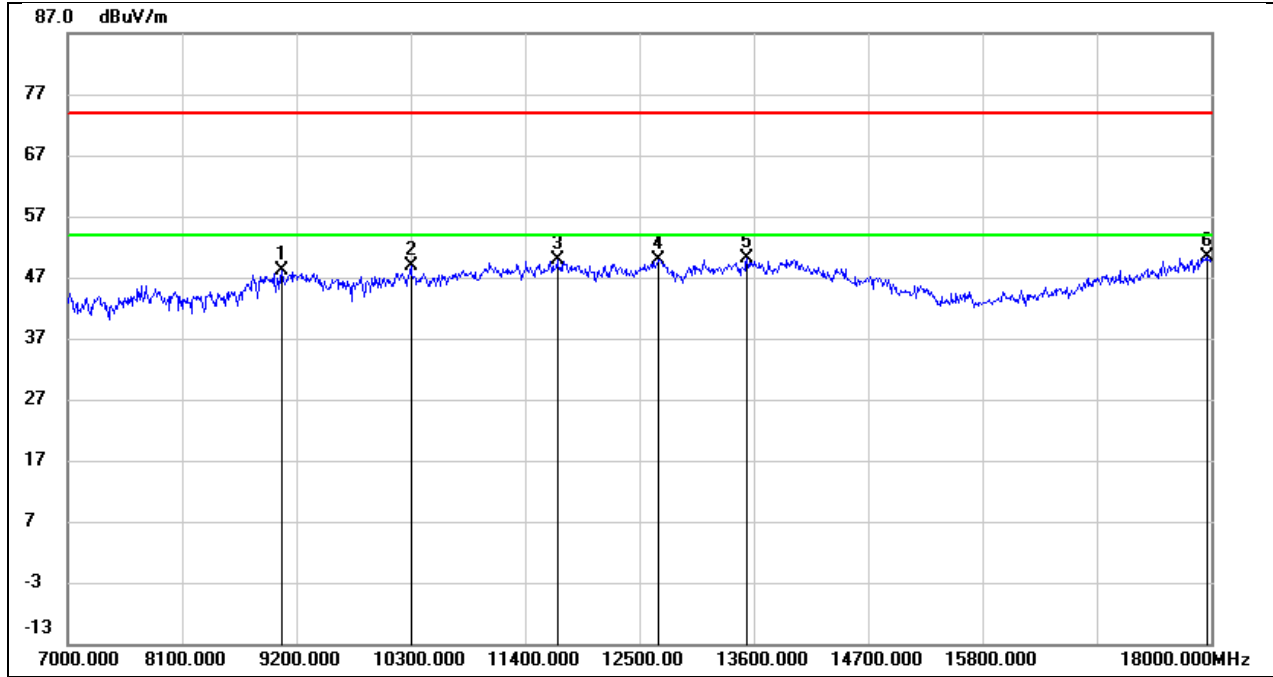


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.77	10.38	48.15	74.00	-25.85	peak
2	10300.000	36.44	12.40	48.84	74.00	-25.16	peak
3	11708.000	32.81	17.16	49.97	74.00	-24.03	peak
4	12676.000	31.90	18.05	49.95	74.00	-24.05	peak
5	13534.000	29.50	20.73	50.23	74.00	-23.77	peak
6	17956.000	24.44	25.82	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.87 V

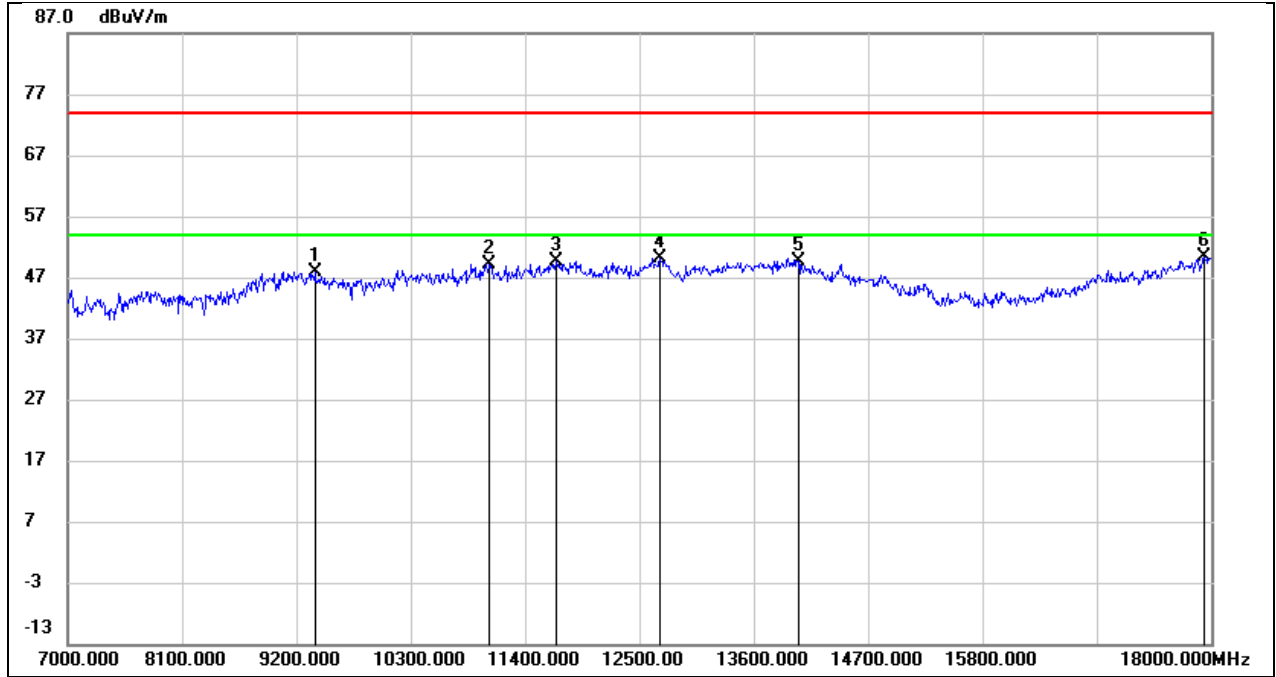


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	37.26	10.58	47.84	74.00	-26.16	peak
2	11048.000	34.30	14.91	49.21	74.00	-24.79	peak
3	11697.000	32.49	17.13	49.62	74.00	-24.38	peak
4	12698.000	32.08	18.08	50.16	74.00	-23.84	peak
5	14029.000	27.93	21.76	49.69	74.00	-24.31	peak
6	17934.000	24.71	25.67	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

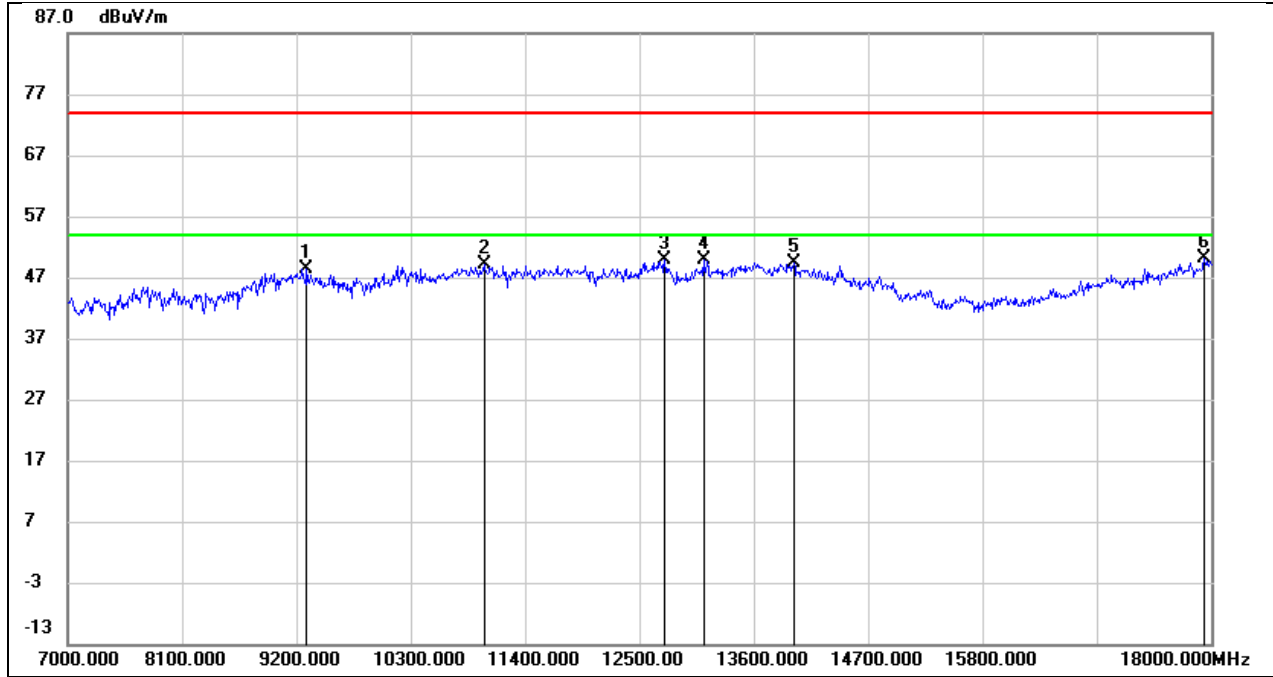


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.91	10.53	48.44	74.00	-25.56	peak
2	11004.000	34.32	14.74	49.06	74.00	-24.94	peak
3	12742.000	31.81	18.13	49.94	74.00	-24.06	peak
4	13116.000	30.82	18.96	49.78	74.00	-24.22	peak
5	13985.000	27.64	21.85	49.49	74.00	-24.51	peak
6	17934.000	24.48	25.67	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.87 V

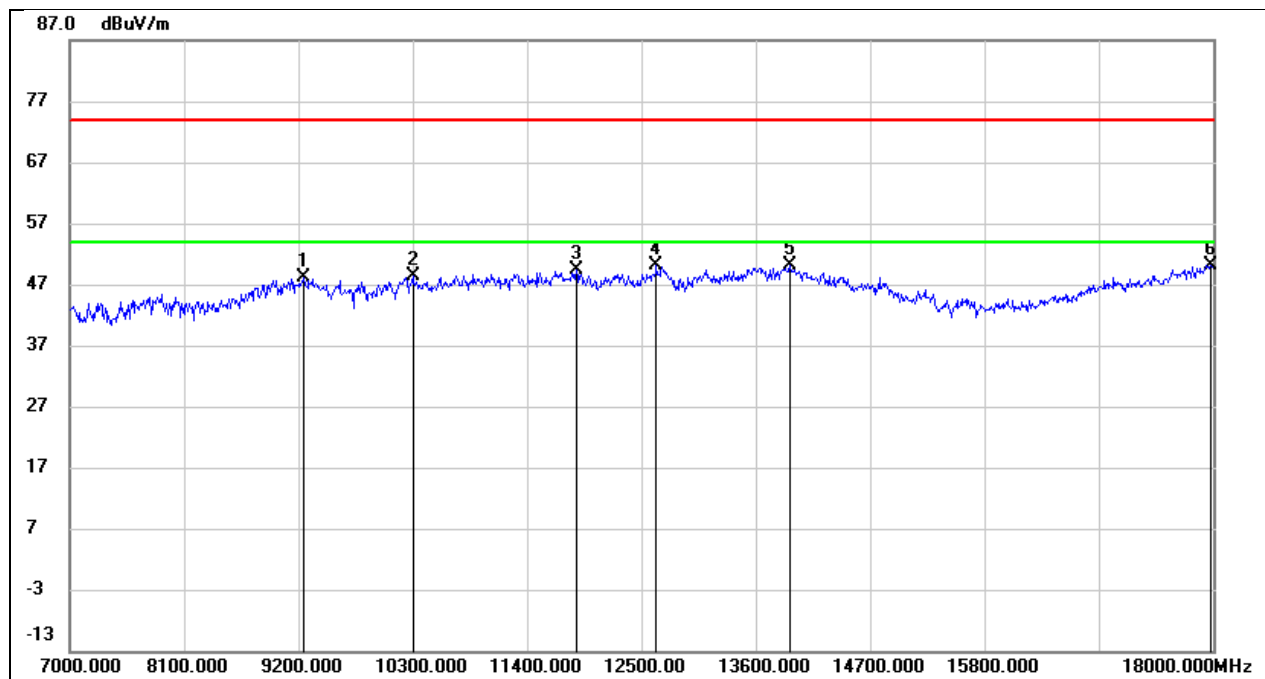


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.57	10.51	48.08	74.00	-25.92	peak
2	10300.000	36.00	12.40	48.40	74.00	-25.60	peak
3	11873.000	31.97	17.46	49.43	74.00	-24.57	peak
4	12643.000	32.05	18.01	50.06	74.00	-23.94	peak
5	13930.000	28.39	21.71	50.10	74.00	-23.90	peak
6	17978.000	24.22	25.97	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

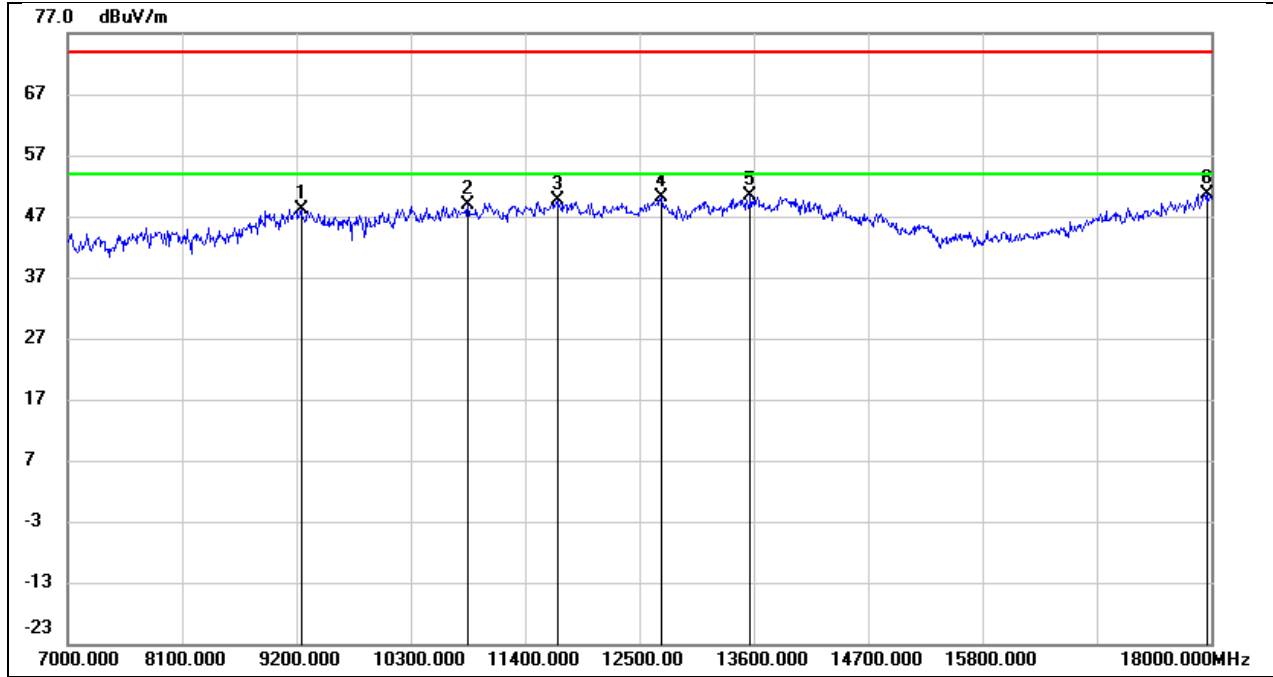


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.64	10.49	48.13	74.00	-25.87	peak
2	10850.000	34.75	14.15	48.90	74.00	-25.10	peak
3	11708.000	32.42	17.16	49.58	74.00	-24.42	peak
4	12709.000	31.93	18.09	50.02	74.00	-23.98	peak
5	13567.000	29.55	20.80	50.35	74.00	-23.65	peak
6	17967.000	24.71	25.89	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.87 V

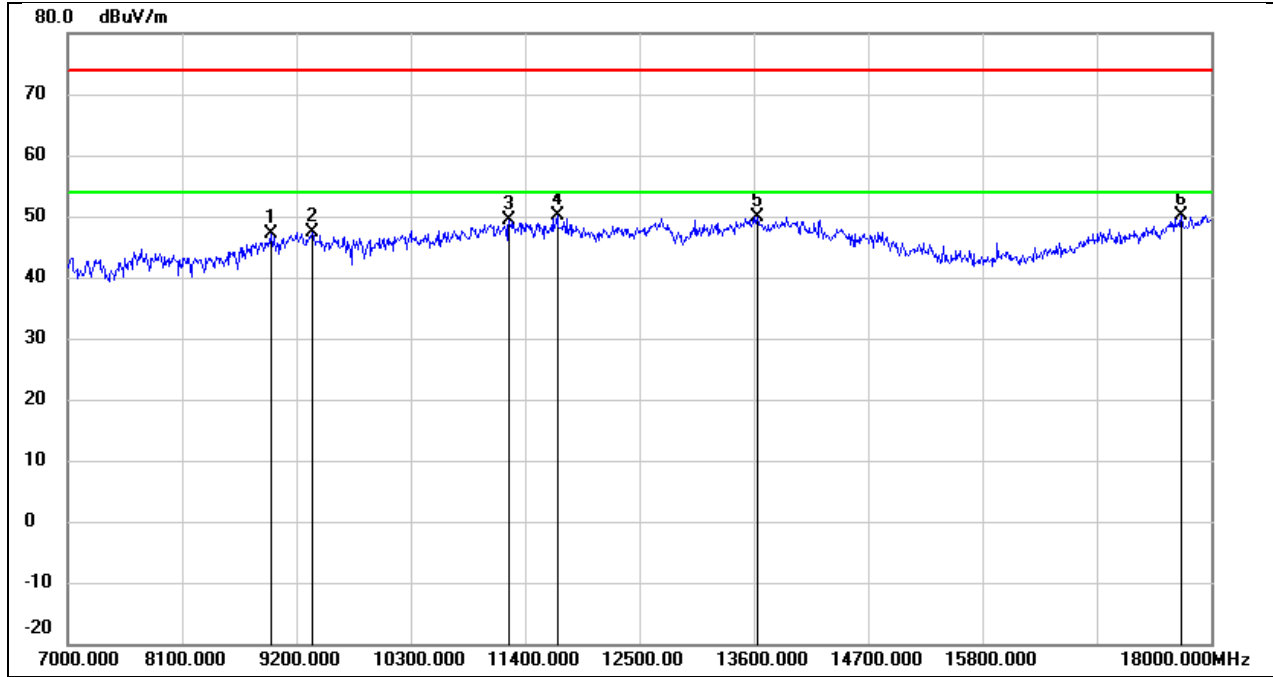


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	36.96	10.05	47.01	74.00	-26.99	peak
2	9354.000	36.83	10.56	47.39	74.00	-26.61	peak
3	11246.000	33.59	15.73	49.32	74.00	-24.68	peak
4	11708.000	32.99	17.16	50.15	74.00	-23.85	peak
5	13633.000	28.99	20.97	49.96	74.00	-24.04	peak
6	17714.000	25.96	24.16	50.12	74.00	-23.88	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

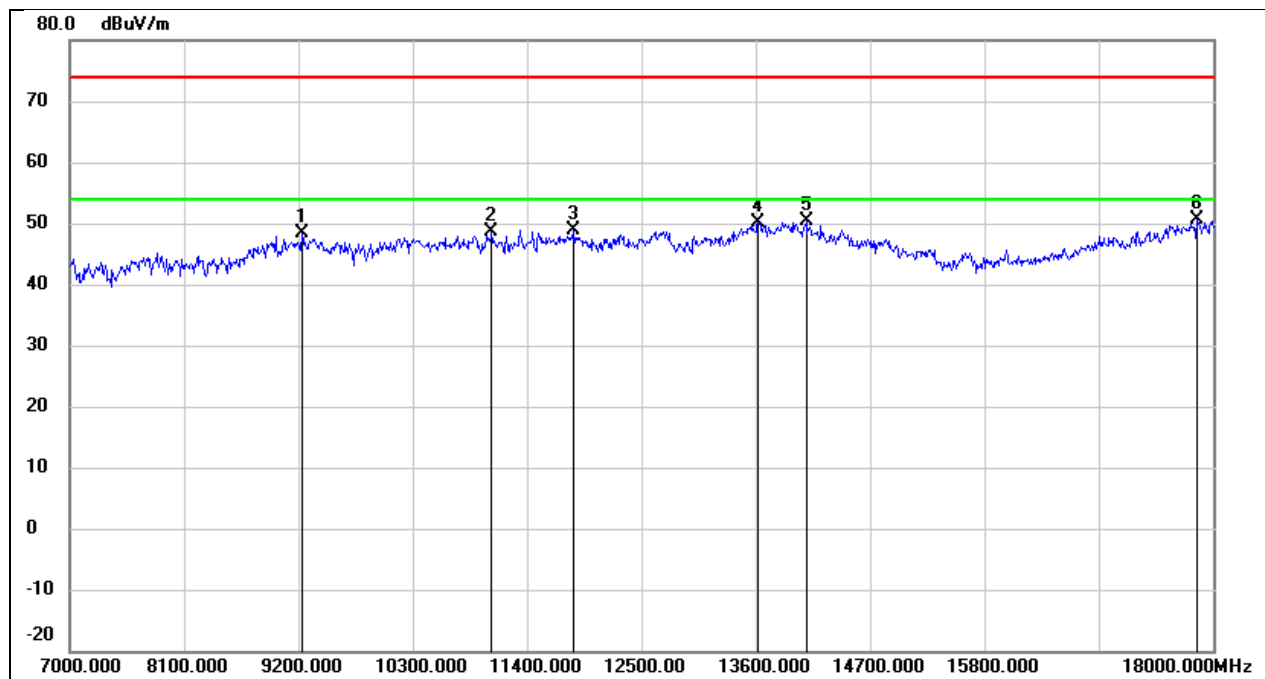


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.96	10.48	48.44	74.00	-25.56	peak
2	11059.000	33.62	14.96	48.58	74.00	-25.42	peak
3	11851.000	31.49	17.43	48.92	74.00	-25.08	peak
4	13622.000	29.13	20.95	50.08	74.00	-23.92	peak
5	14084.000	28.76	21.52	50.28	74.00	-23.72	peak
6	17846.000	25.45	25.08	50.53	74.00	-23.47	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.87 V

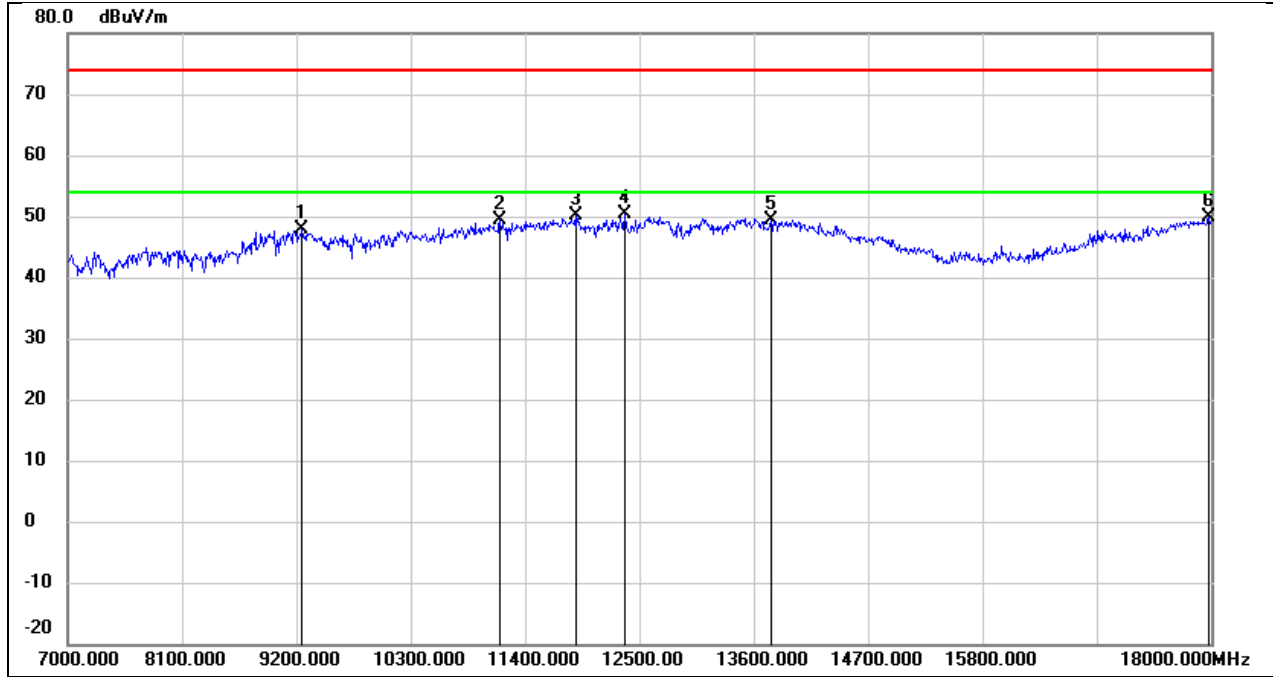


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.32	10.51	47.83	74.00	-26.17	peak
2	11158.000	34.07	15.37	49.44	74.00	-24.56	peak
3	11884.000	32.75	17.48	50.23	74.00	-23.77	peak
4	12357.000	32.67	17.79	50.46	74.00	-23.54	peak
5	13765.000	28.05	21.30	49.35	74.00	-24.65	peak
6	17978.000	23.79	25.97	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

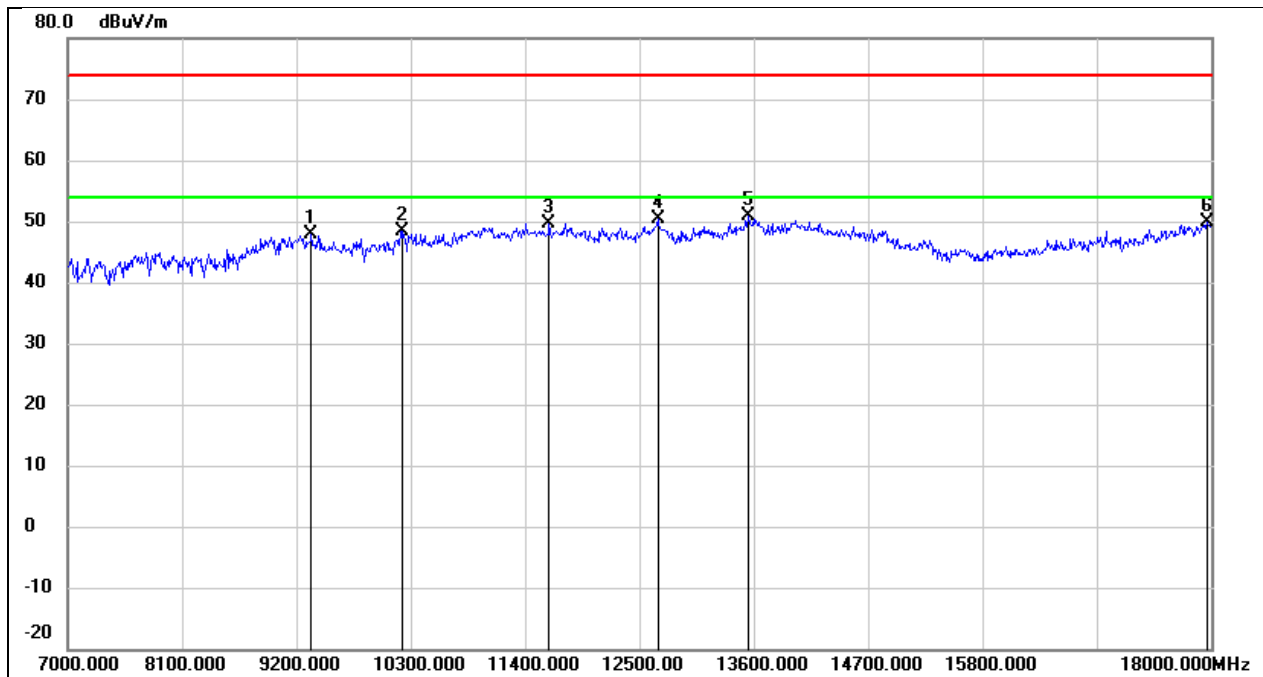


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.30	10.55	47.85	74.00	-26.15	peak
2	10223.000	36.14	12.24	48.38	74.00	-25.62	peak
3	11631.000	32.69	17.01	49.70	74.00	-24.30	peak
4	12676.000	32.30	18.05	50.35	74.00	-23.65	peak
5	13545.000	30.20	20.75	50.95	74.00	-23.05	peak
6	17956.000	24.06	25.82	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.87 V

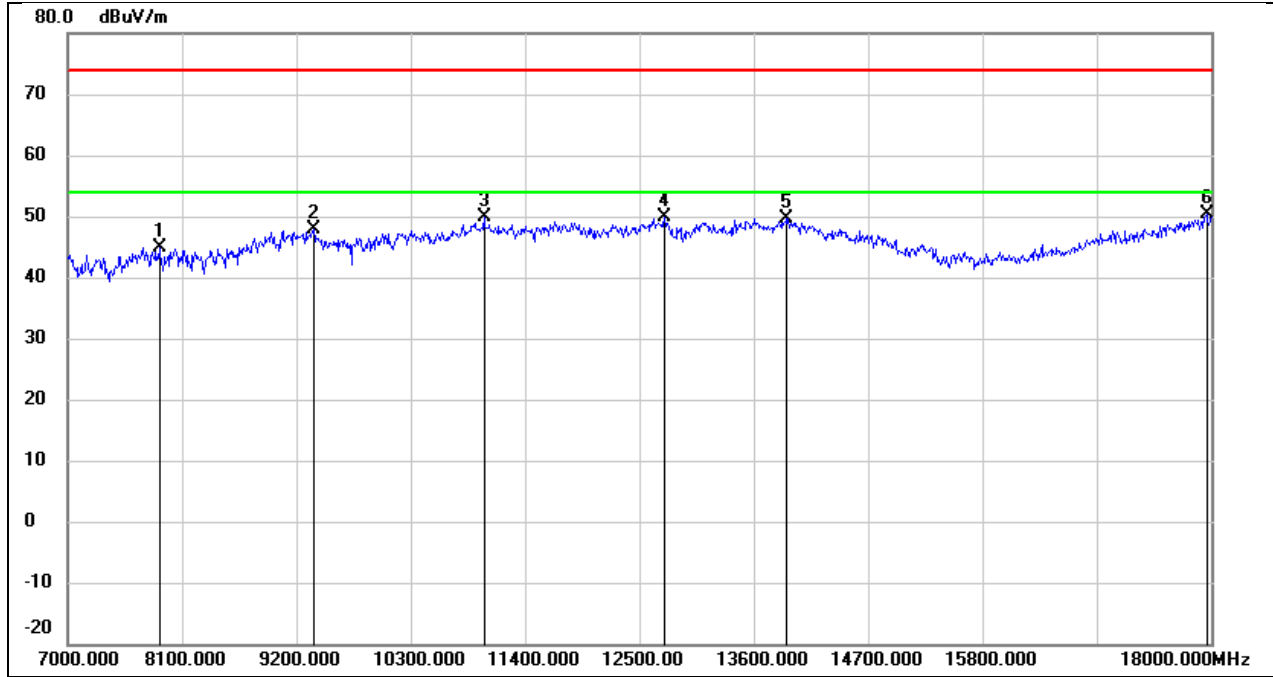


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.28	6.54	44.82	74.00	-29.18	peak
2	9365.000	37.21	10.57	47.78	74.00	-26.22	peak
3	11004.000	35.04	14.74	49.78	74.00	-24.22	peak
4	12742.000	31.63	18.13	49.76	74.00	-24.24	peak
5	13919.000	28.07	21.68	49.75	74.00	-24.25	peak
6	17956.000	24.65	25.82	50.47	74.00	-23.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

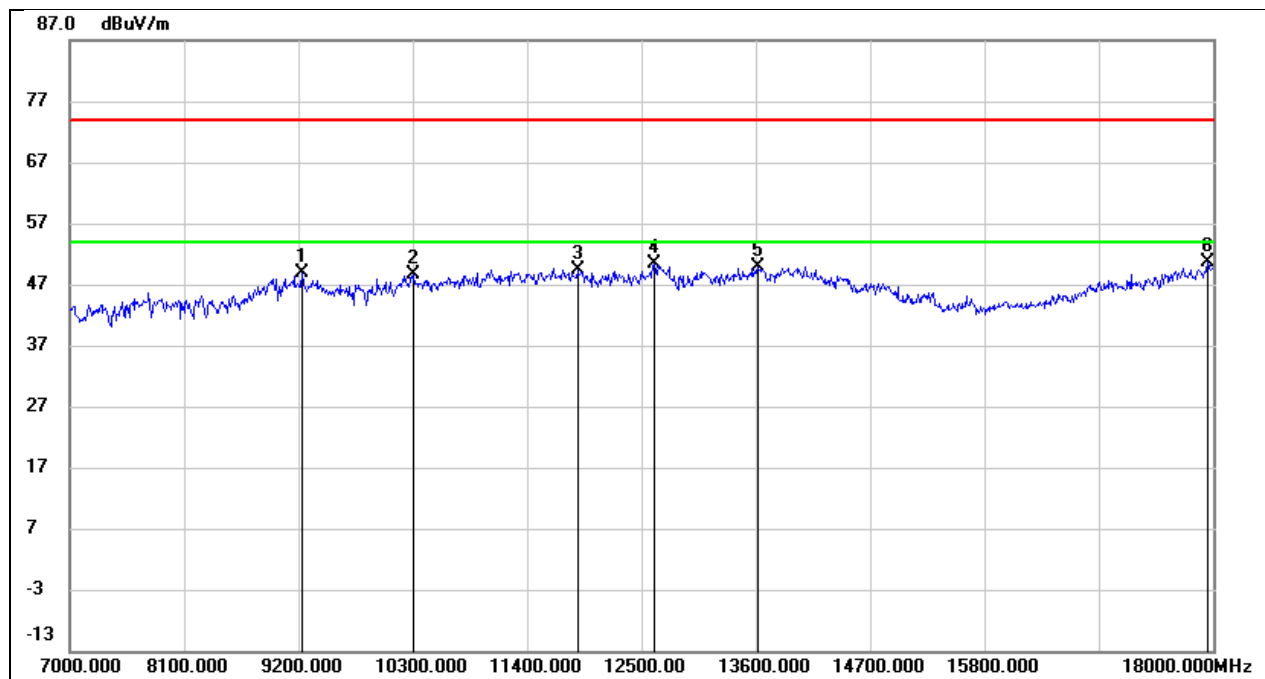


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.51	10.48	48.99	74.00	-25.01	peak
2	10311.000	36.19	12.42	48.61	74.00	-25.39	peak
3	11884.000	31.94	17.48	49.42	74.00	-24.58	peak
4	12621.000	32.48	17.98	50.46	74.00	-23.54	peak
5	13622.000	28.88	20.95	49.83	74.00	-24.17	peak
6	17945.000	24.77	25.75	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.87 V

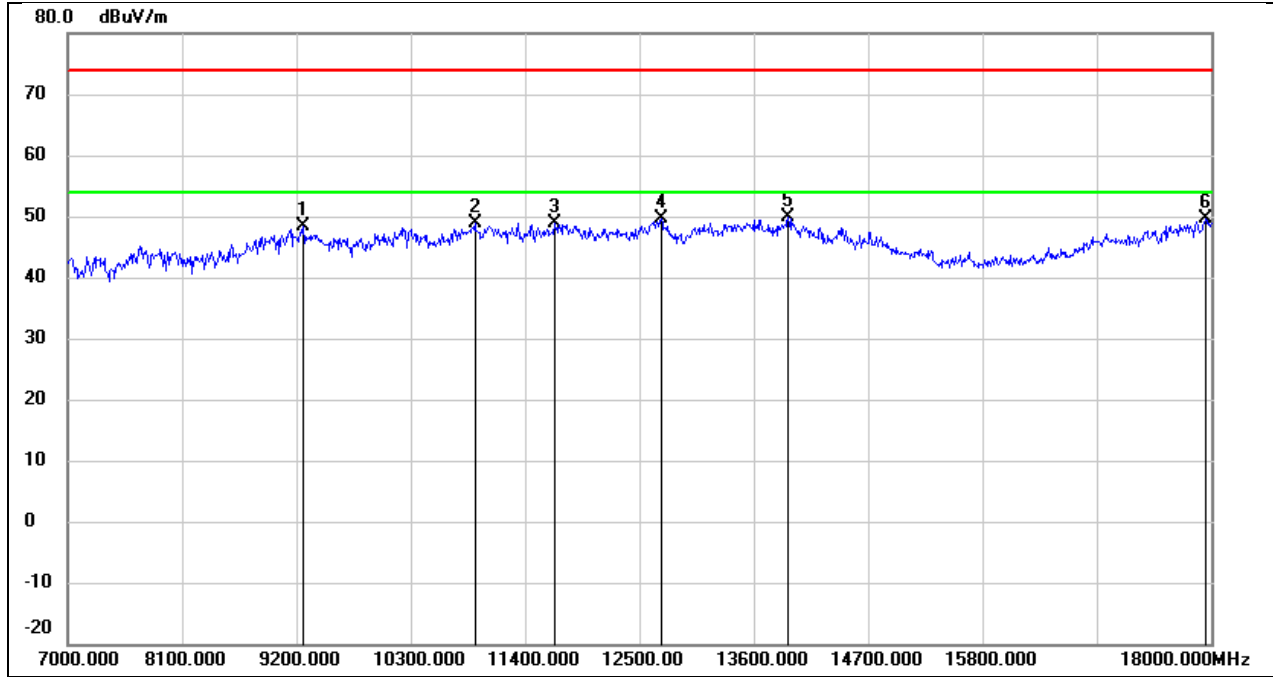


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.83	10.51	48.34	74.00	-25.66	peak
2	10916.000	34.37	14.39	48.76	74.00	-25.24	peak
3	11686.000	31.78	17.12	48.90	74.00	-25.10	peak
4	12709.000	31.53	18.09	49.62	74.00	-24.38	peak
5	13930.000	28.05	21.71	49.76	74.00	-24.24	peak
6	17945.000	23.85	25.75	49.60	74.00	-24.40	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

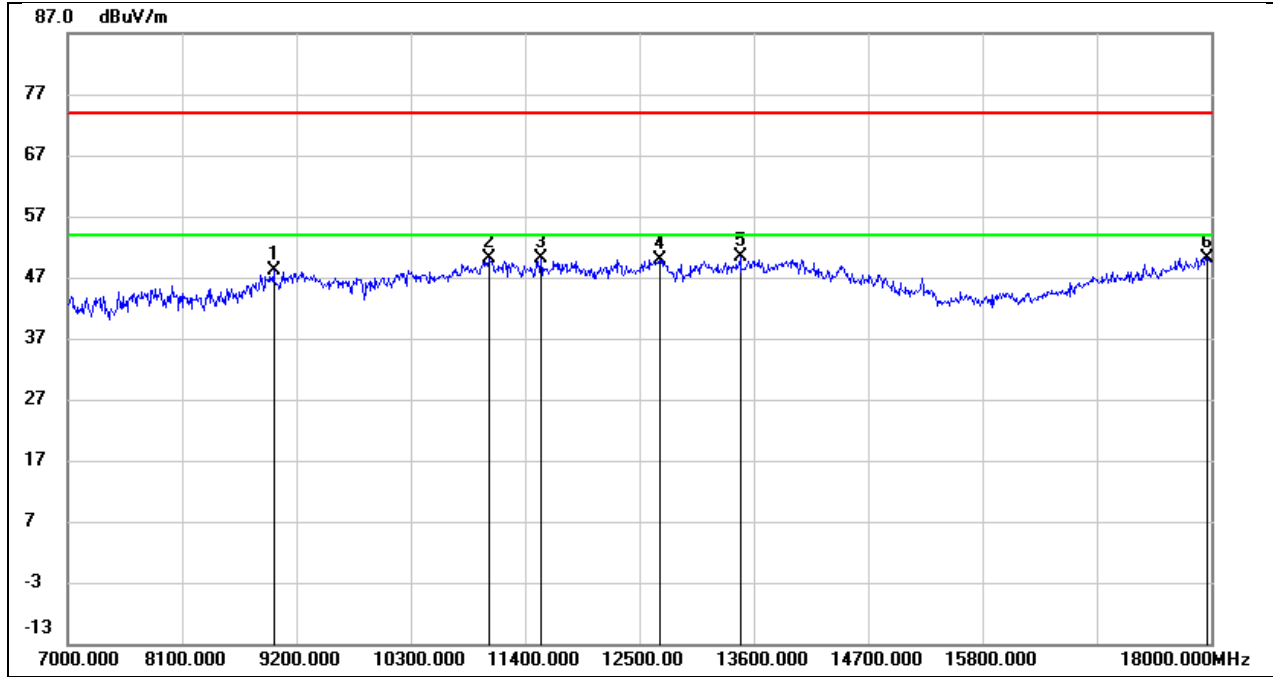


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.80	10.21	48.01	74.00	-25.99	peak
2	11048.000	35.33	14.91	50.24	74.00	-23.76	peak
3	11554.000	33.29	16.87	50.16	74.00	-23.84	peak
4	12698.000	31.89	18.08	49.97	74.00	-24.03	peak
5	13468.000	29.83	20.50	50.33	74.00	-23.67	peak
6	17967.000	24.30	25.89	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.87 V

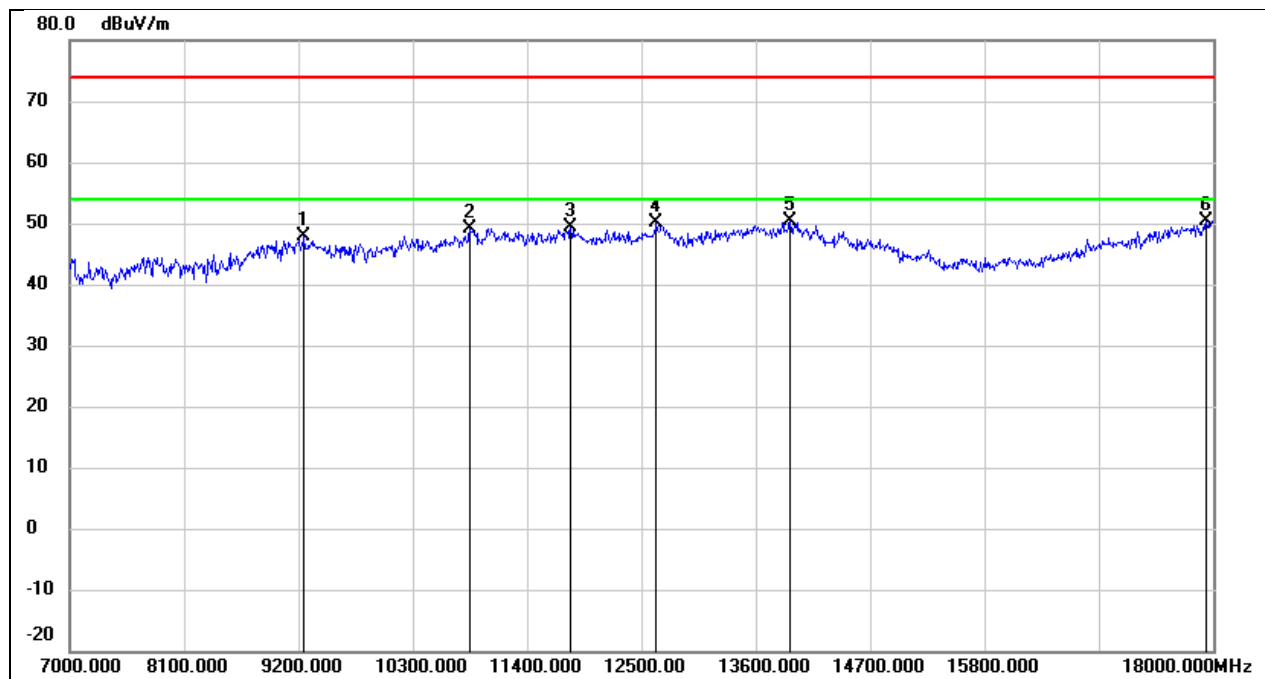


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.33	10.51	47.84	74.00	-26.16	peak
2	10850.000	34.95	14.15	49.10	74.00	-24.90	peak
3	11818.000	32.00	17.36	49.36	74.00	-24.64	peak
4	12643.000	32.05	18.01	50.06	74.00	-23.94	peak
5	13930.000	28.59	21.71	50.30	74.00	-23.70	peak
6	17934.000	24.80	25.67	50.47	74.00	-23.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

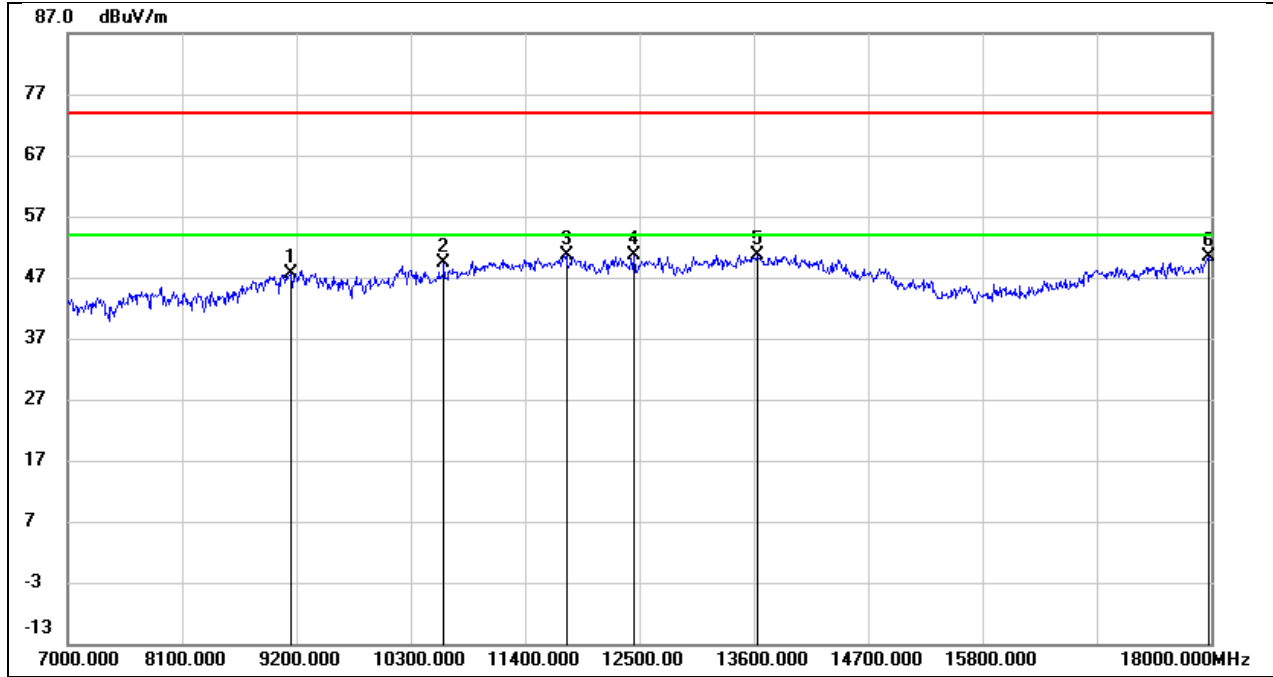


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.23	10.43	47.66	74.00	-26.34	peak
2	10619.000	36.21	13.28	49.49	74.00	-24.51	peak
3	11796.000	33.33	17.32	50.65	74.00	-23.35	peak
4	12445.000	32.71	17.82	50.53	74.00	-23.47	peak
5	13633.000	29.69	20.97	50.66	74.00	-23.34	peak
6	17978.000	24.33	25.97	50.30	74.00	-23.70	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.87 V

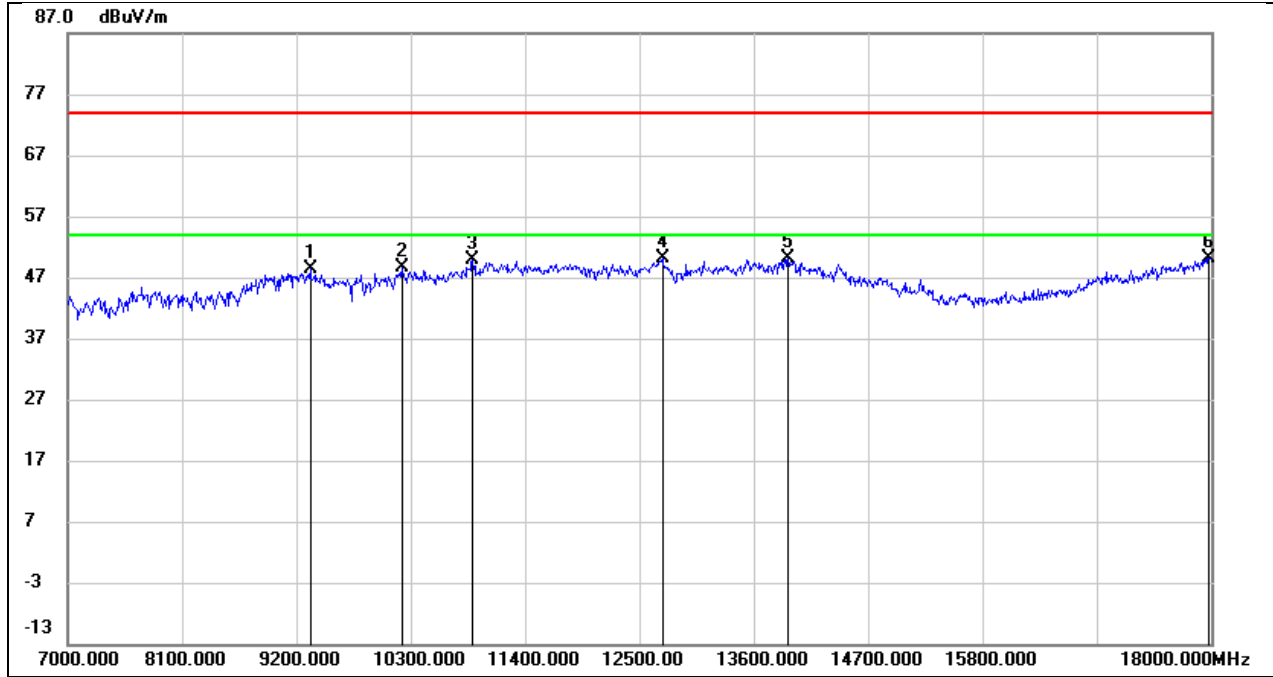


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.79	10.54	48.33	74.00	-25.67	peak
2	10212.000	36.37	12.21	48.58	74.00	-25.42	peak
3	10894.000	35.46	14.32	49.78	74.00	-24.22	peak
4	12720.000	32.04	18.09	50.13	74.00	-23.87	peak
5	13930.000	28.54	21.71	50.25	74.00	-23.75	peak
6	17978.000	24.25	25.97	50.22	74.00	-23.78	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

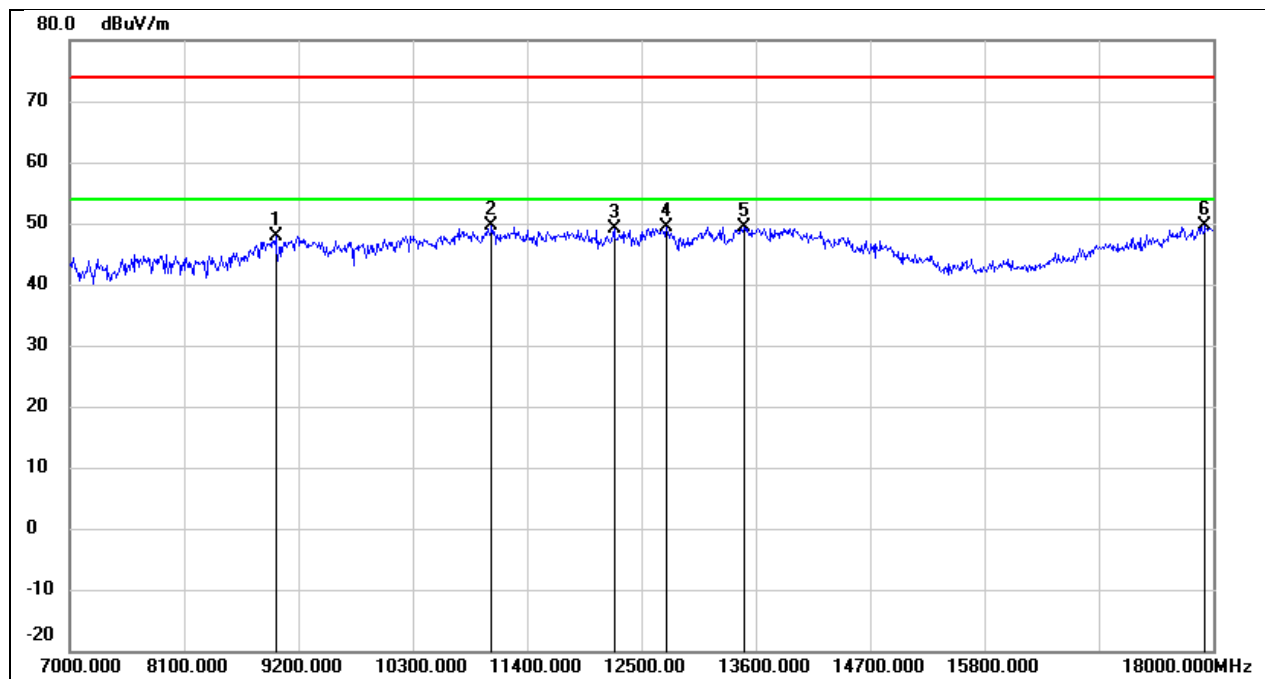


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.73	10.21	47.94	74.00	-26.06	peak
2	11059.000	34.57	14.96	49.53	74.00	-24.47	peak
3	12236.000	31.37	17.76	49.13	74.00	-24.87	peak
4	12742.000	31.21	18.13	49.34	74.00	-24.66	peak
5	13490.000	28.77	20.60	49.37	74.00	-24.63	peak
6	17923.000	24.12	25.60	49.72	74.00	-24.28	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.87 V

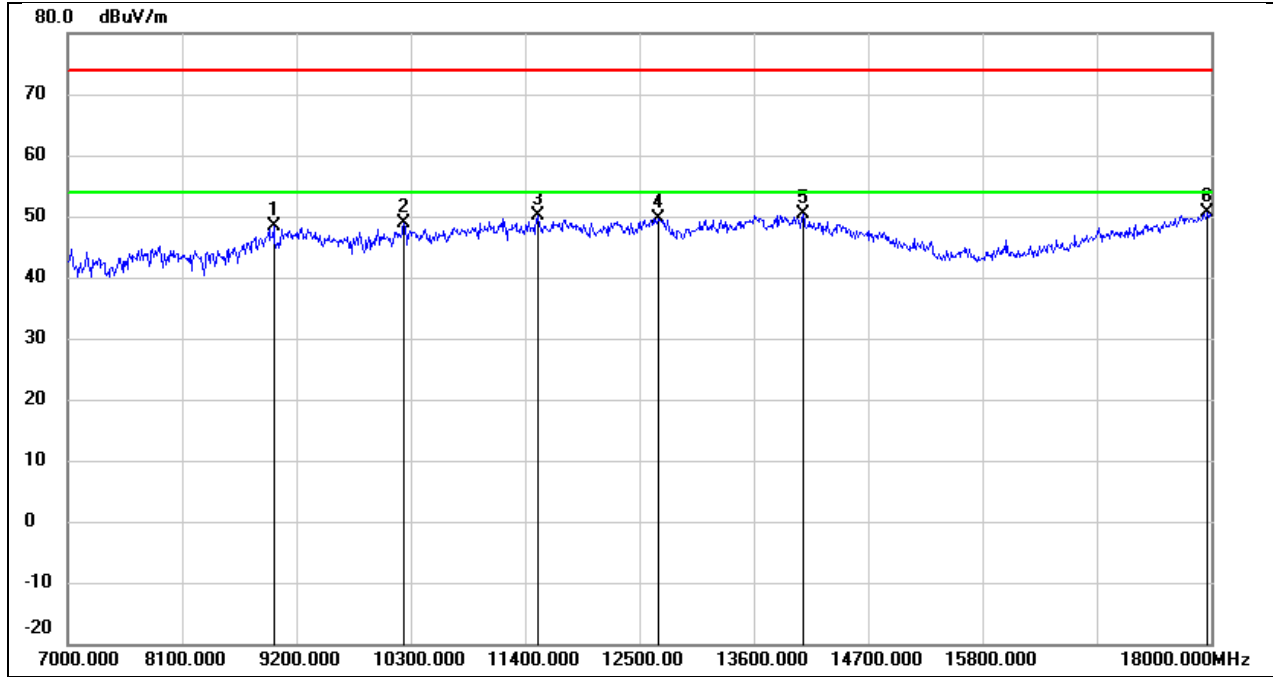


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.08	10.21	48.29	74.00	-25.71	peak
2	10234.000	36.56	12.26	48.82	74.00	-25.18	peak
3	11521.000	33.38	16.82	50.20	74.00	-23.80	peak
4	12687.000	31.56	18.05	49.61	74.00	-24.39	peak
5	14073.000	28.80	21.57	50.37	74.00	-23.63	peak
6	17967.000	24.73	25.89	50.62	74.00	-23.38	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

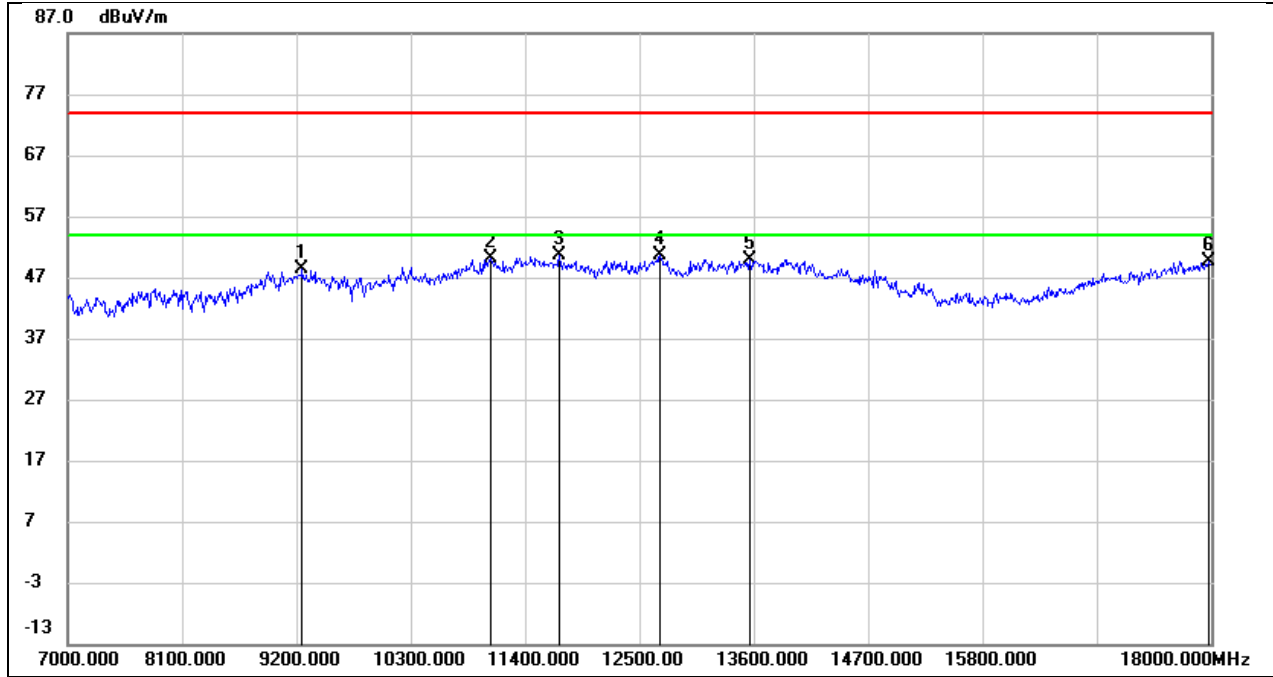


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.87	10.51	48.38	74.00	-25.62	peak
2	11070.000	35.17	15.01	50.18	74.00	-23.82	peak
3	11730.000	33.33	17.19	50.52	74.00	-23.48	peak
4	12698.000	32.58	18.08	50.66	74.00	-23.34	peak
5	13556.000	29.21	20.78	49.99	74.00	-24.01	peak
6	17978.000	23.68	25.97	49.65	74.00	-24.35	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.87 V

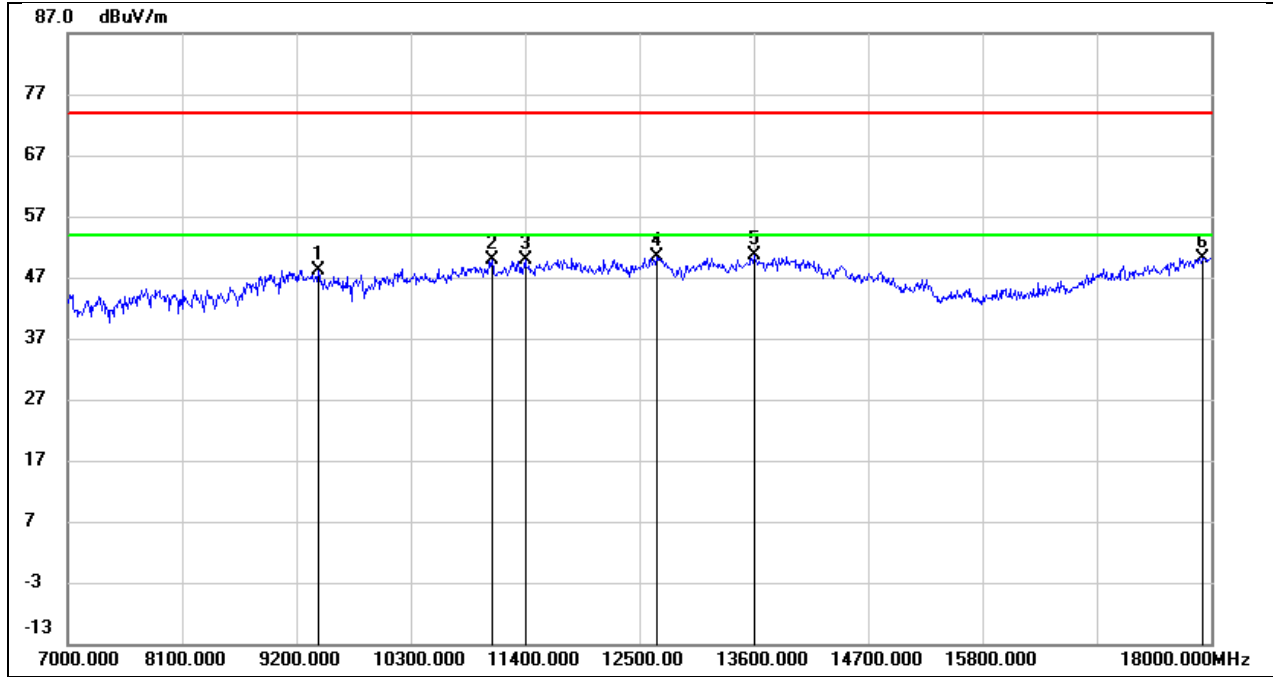


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9409.000	37.63	10.59	48.22	74.00	-25.78	peak
2	11081.000	34.81	15.05	49.86	74.00	-24.14	peak
3	11400.000	33.52	16.36	49.88	74.00	-24.12	peak
4	12665.000	32.44	18.04	50.48	74.00	-23.52	peak
5	13600.000	29.72	20.89	50.61	74.00	-23.39	peak
6	17923.000	24.65	25.60	50.25	74.00	-23.75	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

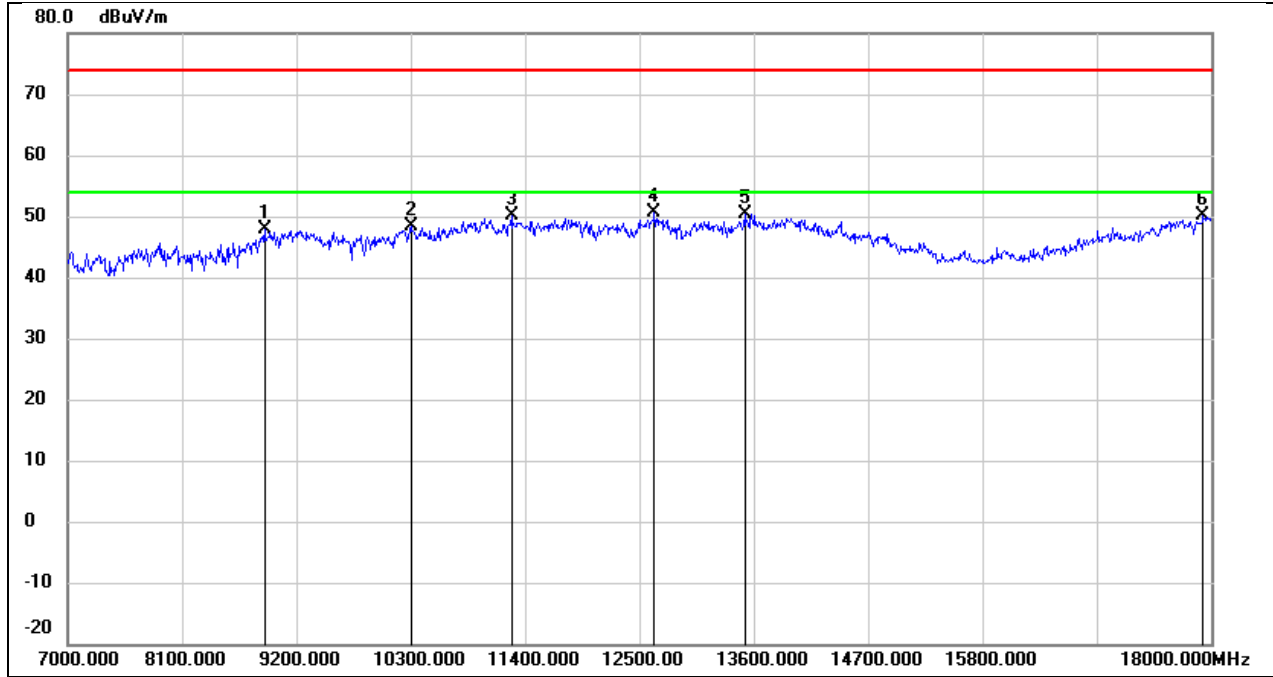


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8892.000	38.31	9.59	47.90	74.00	-26.10	peak
2	10300.000	36.07	12.40	48.47	74.00	-25.53	peak
3	11268.000	34.19	15.83	50.02	74.00	-23.98	peak
4	12643.000	32.65	18.01	50.66	74.00	-23.34	peak
5	13512.000	29.73	20.68	50.41	74.00	-23.59	peak
6	17923.000	24.61	25.60	50.21	74.00	-23.79	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.87 V

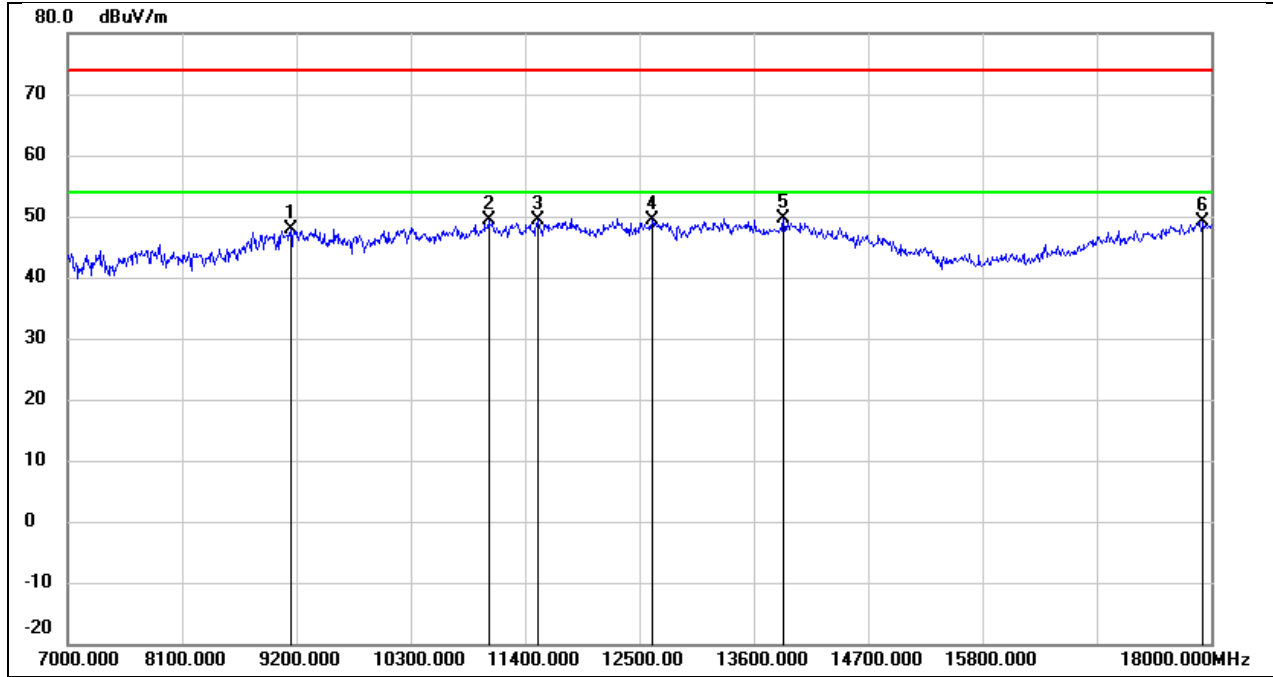


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.37	10.43	47.80	74.00	-26.20	peak
2	11048.000	34.41	14.91	49.32	74.00	-24.68	peak
3	11521.000	32.45	16.82	49.27	74.00	-24.73	peak
4	12621.000	31.46	17.98	49.44	74.00	-24.56	peak
5	13886.000	28.01	21.60	49.61	74.00	-24.39	peak
6	17923.000	23.51	25.60	49.11	74.00	-24.89	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

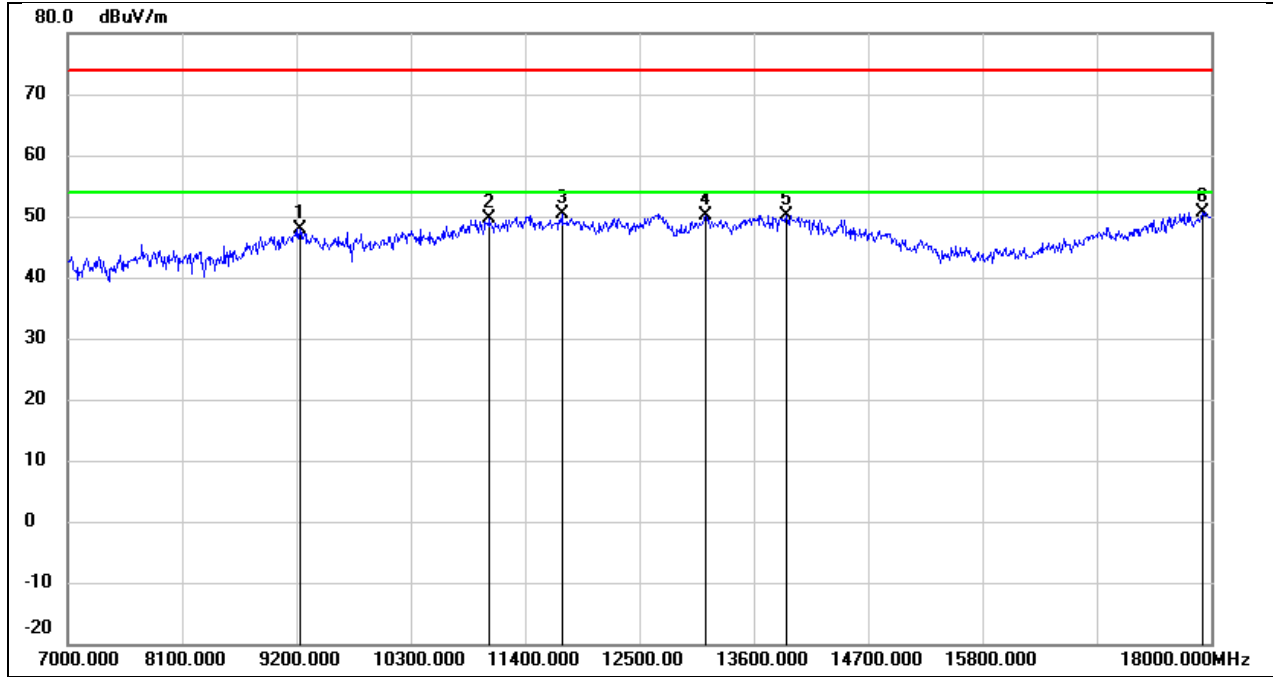


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.48	10.48	47.96	74.00	-26.04	peak
2	11059.000	34.59	14.96	49.55	74.00	-24.45	peak
3	11752.000	33.09	17.24	50.33	74.00	-23.67	peak
4	13138.000	31.20	19.05	50.25	74.00	-23.75	peak
5	13919.000	28.55	21.68	50.23	74.00	-23.77	peak
6	17912.000	25.02	25.52	50.54	74.00	-23.46	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.87 V

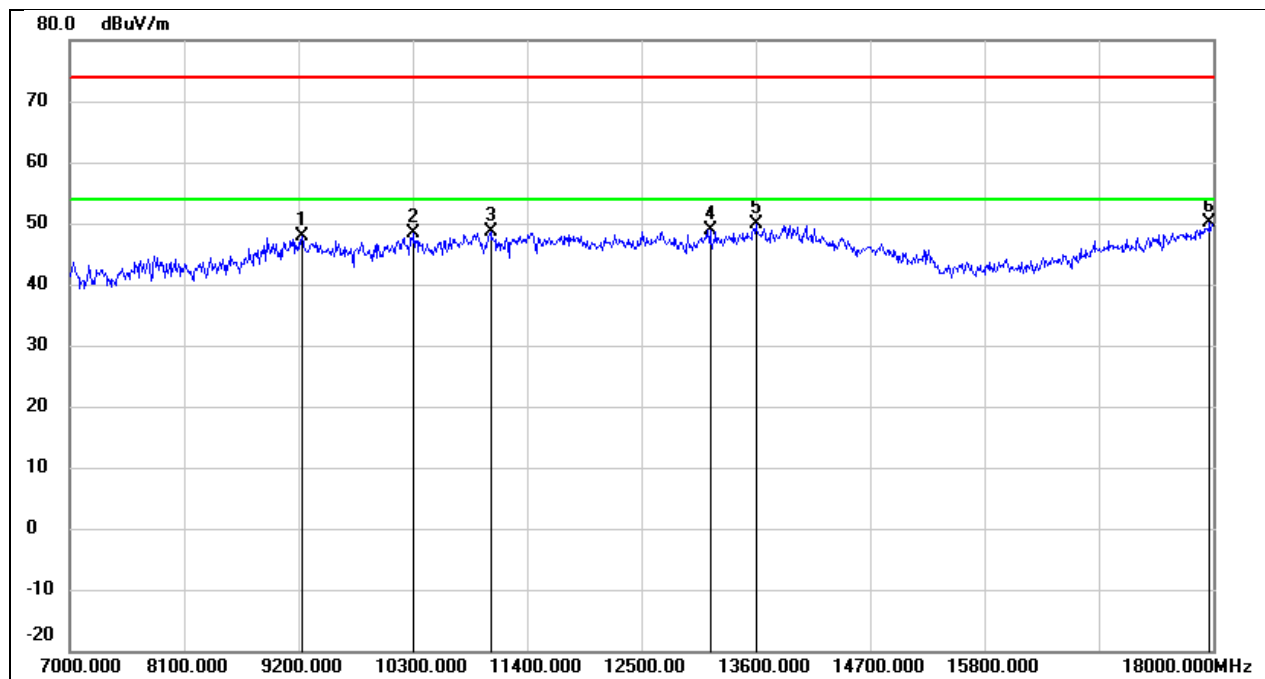


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.35	10.48	47.83	74.00	-26.17	peak
2	10311.000	36.04	12.42	48.46	74.00	-25.54	peak
3	11048.000	33.83	14.91	48.74	74.00	-25.26	peak
4	13160.000	29.83	19.15	48.98	74.00	-25.02	peak
5	13600.000	28.89	20.89	49.78	74.00	-24.22	peak
6	17967.000	24.24	25.89	50.13	74.00	-23.87	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

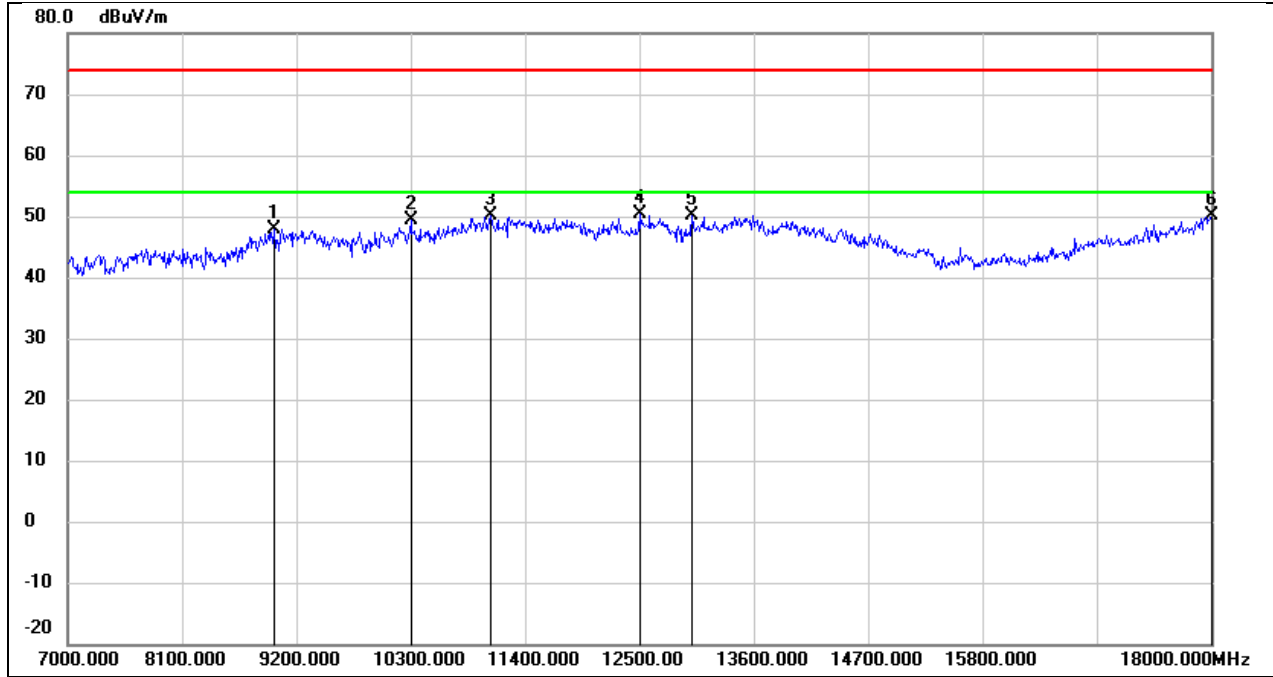


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.62	10.28	47.90	74.00	-26.10	peak
2	10300.000	36.87	12.40	49.27	74.00	-24.73	peak
3	11070.000	35.22	15.01	50.23	74.00	-23.77	peak
4	12500.000	32.47	17.83	50.30	74.00	-23.70	peak
5	13006.000	31.63	18.47	50.10	74.00	-23.90	peak
6	18000.000	23.90	26.12	50.02	74.00	-23.98	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.87 V

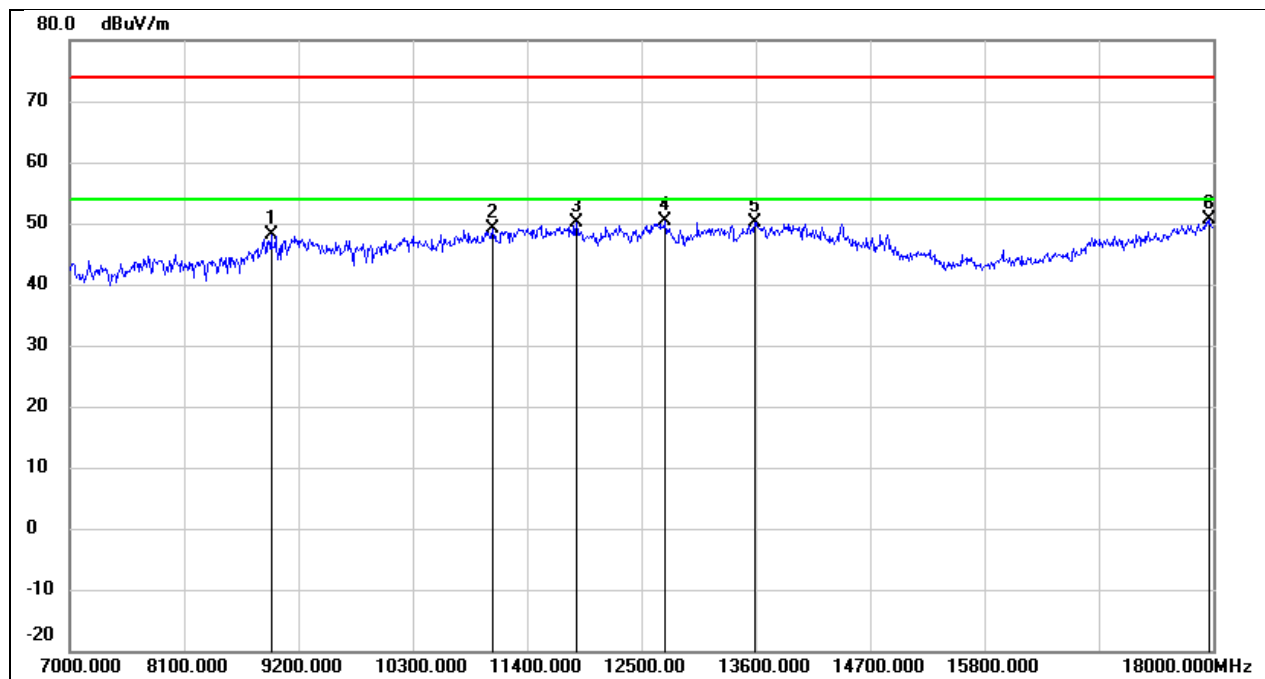


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	38.17	9.90	48.07	74.00	-25.93	peak
2	11070.000	34.21	15.01	49.22	74.00	-24.78	peak
3	11873.000	32.73	17.46	50.19	74.00	-23.81	peak
4	12731.000	32.37	18.12	50.49	74.00	-23.51	peak
5	13589.000	29.26	20.86	50.12	74.00	-23.88	peak
6	17967.000	24.79	25.89	50.68	74.00	-23.32	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

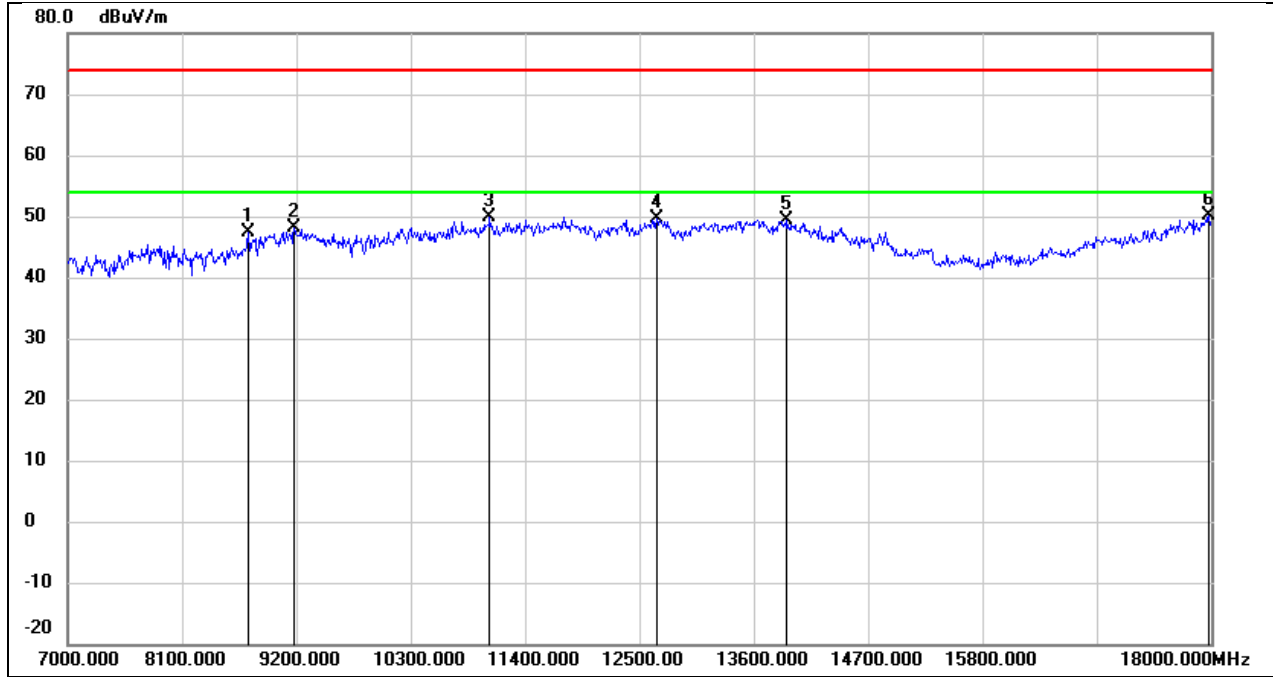


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8738.000	38.79	8.53	47.32	74.00	-26.68	peak
2	9178.000	37.57	10.45	48.02	74.00	-25.98	peak
3	11059.000	34.86	14.96	49.82	74.00	-24.18	peak
4	12665.000	31.66	18.04	49.70	74.00	-24.30	peak
5	13919.000	27.68	21.68	49.36	74.00	-24.64	peak
6	17978.000	24.05	25.97	50.02	74.00	-23.98	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.87 V

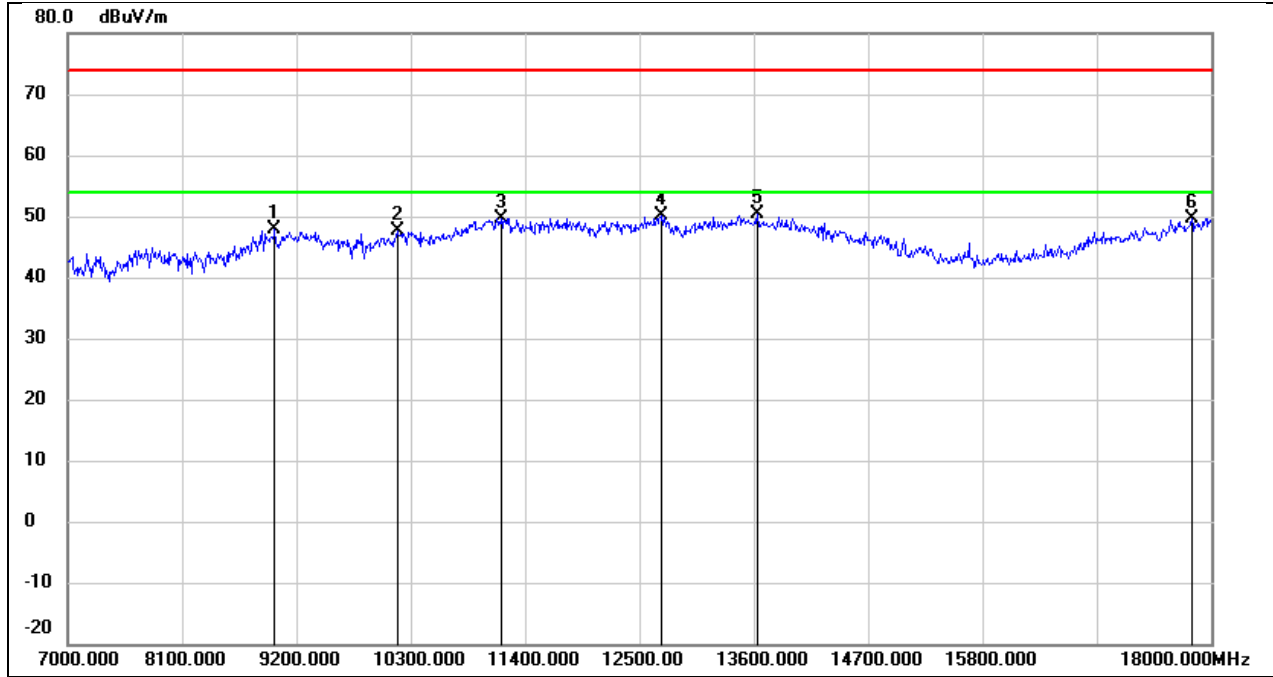


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.69	10.28	47.97	74.00	-26.03	peak
2	10168.000	35.42	12.13	47.55	74.00	-26.45	peak
3	11169.000	34.30	15.42	49.72	74.00	-24.28	peak
4	12709.000	31.93	18.09	50.02	74.00	-23.98	peak
5	13633.000	29.30	20.97	50.27	74.00	-23.73	peak
6	17813.000	24.89	24.84	49.73	74.00	-24.27	peak

Test Mode:	802.11ax HE20	Channel:	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

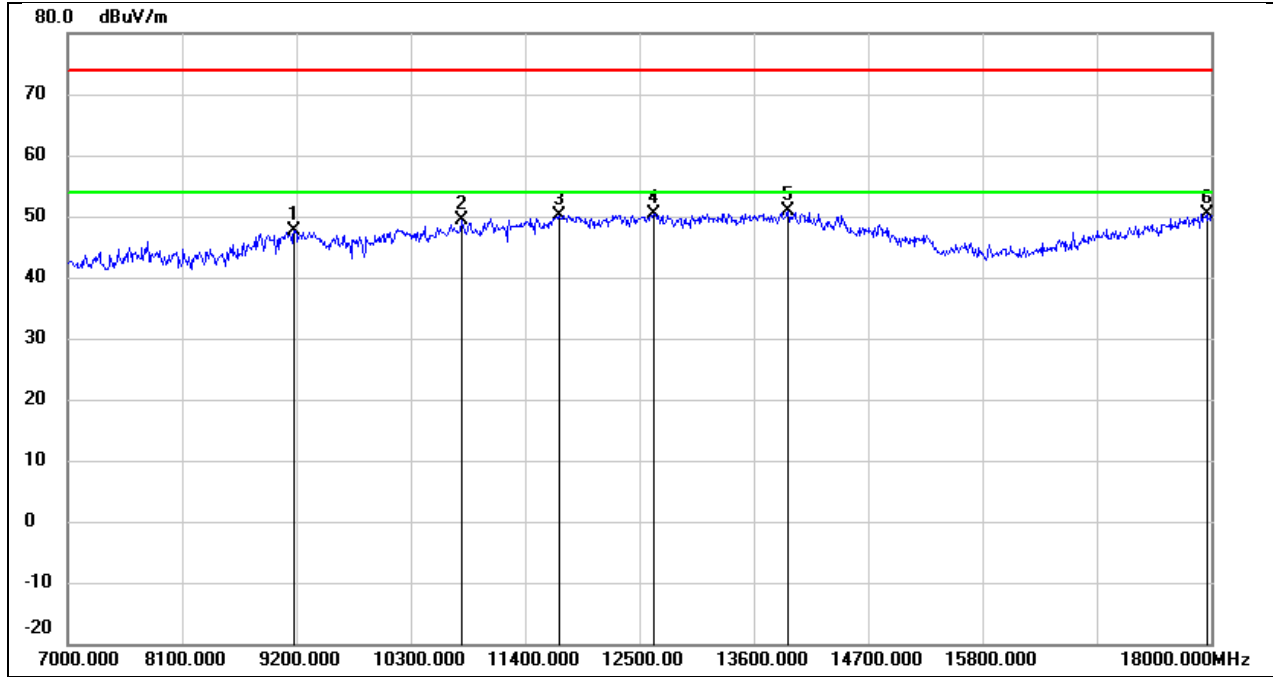


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.24	10.45	47.69	74.00	-26.31	peak
2	10784.000	35.52	13.91	49.43	74.00	-24.57	peak
3	11730.000	32.82	17.19	50.01	74.00	-23.99	peak
4	12632.000	32.46	17.99	50.45	74.00	-23.55	peak
5	13930.000	29.12	21.71	50.83	74.00	-23.17	peak
6	17956.000	24.58	25.82	50.40	74.00	-23.60	peak

Test Mode:	802.11ax HE20	Channel:	5180
Polarity:	Vertical	Test Voltage:	DC 3.87 V

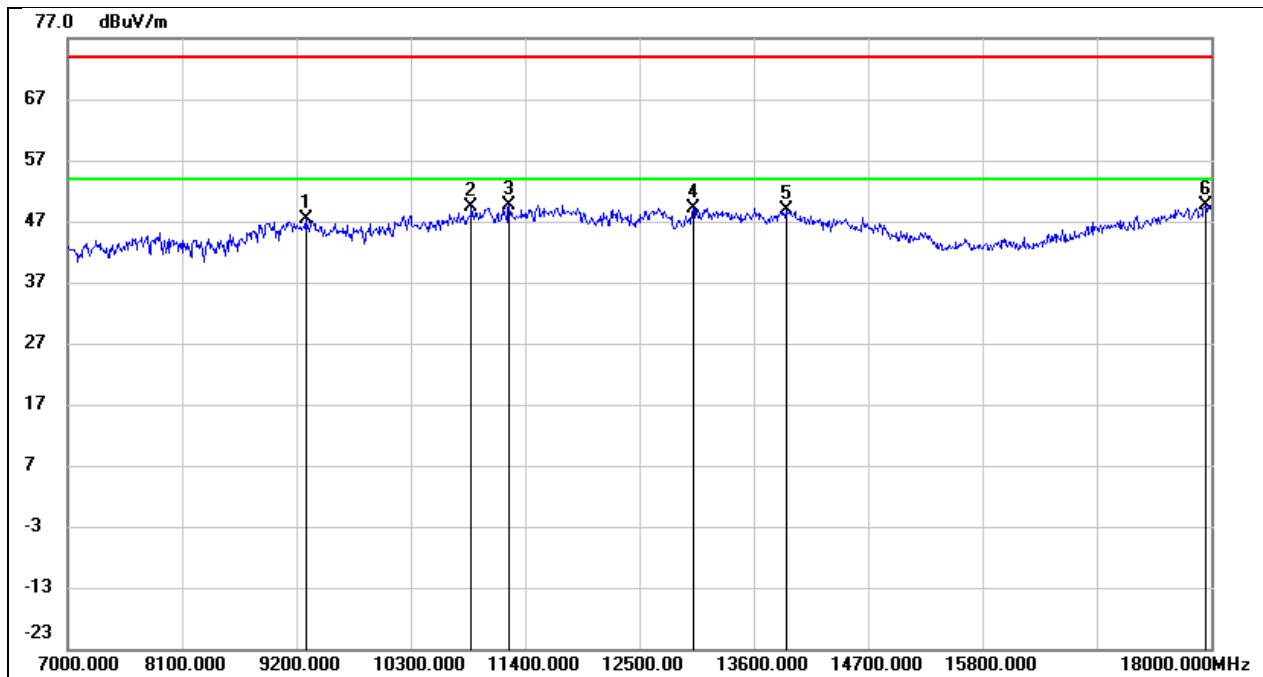


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	36.80	10.52	47.32	74.00	-26.68	peak
2	10883.000	35.18	14.27	49.45	74.00	-24.55	peak
3	11246.000	33.93	15.73	49.66	74.00	-24.34	peak
4	13017.000	30.72	18.53	49.25	74.00	-24.75	peak
5	13908.000	27.17	21.66	48.83	74.00	-25.17	peak
6	17945.000	24.00	25.75	49.75	74.00	-24.25	peak

Test Mode:	802.11ax HE20	Channel:	5200
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

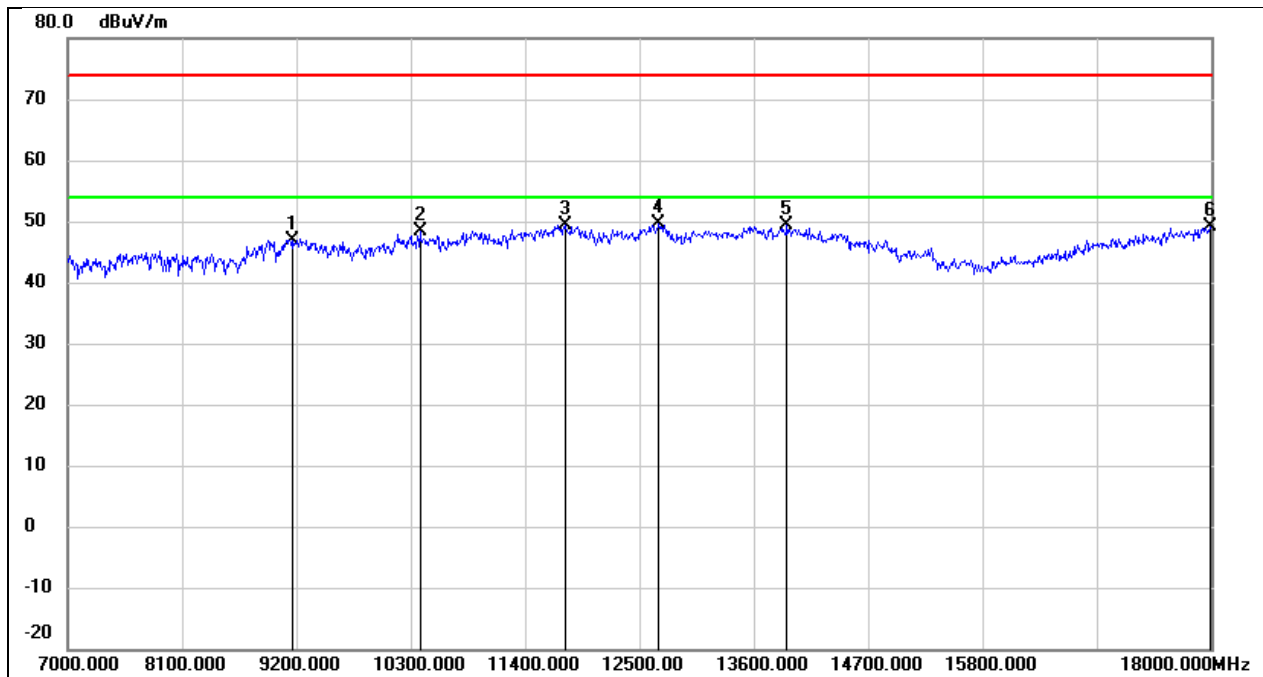


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.52	10.45	46.97	74.00	-27.03	peak
2	10388.000	35.73	12.59	48.32	74.00	-25.68	peak
3	11785.000	32.14	17.30	49.44	74.00	-24.56	peak
4	12687.000	31.62	18.05	49.67	74.00	-24.33	peak
5	13919.000	27.64	21.68	49.32	74.00	-24.68	peak
6	17989.000	23.00	26.04	49.04	74.00	-24.96	peak

Test Mode:	802.11ax HE20	Channel:	5200
Polarity:	Vertical	Test Voltage:	DC 3.87 V

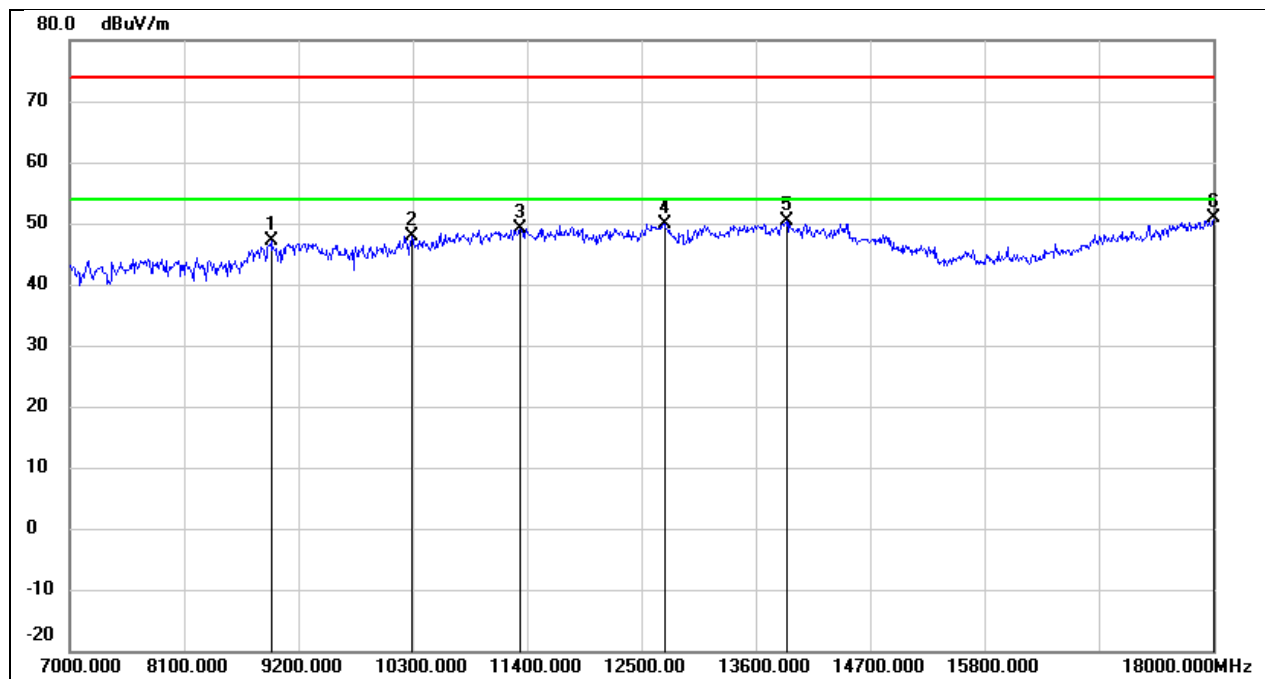


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.16	9.90	47.06	74.00	-26.94	peak
2	10289.000	35.43	12.38	47.81	74.00	-26.19	peak
3	11334.000	33.11	16.09	49.20	74.00	-24.80	peak
4	12720.000	31.86	18.09	49.95	74.00	-24.05	peak
5	13897.000	28.69	21.62	50.31	74.00	-23.69	peak
6	18000.000	24.85	26.12	50.97	74.00	-23.03	peak

Test Mode:	802.11ax HE20	Channel:	5240
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

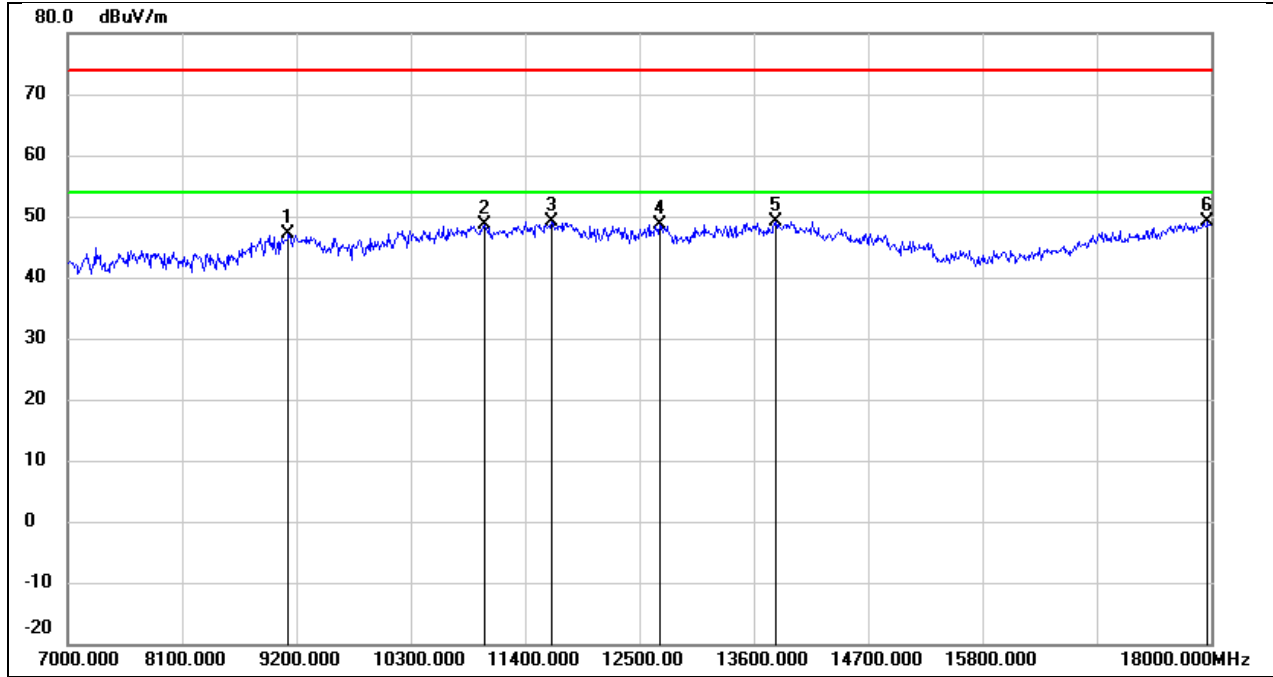


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.63	10.42	47.05	74.00	-26.95	peak
2	11015.000	33.87	14.79	48.66	74.00	-25.34	peak
3	11653.000	32.13	17.05	49.18	74.00	-24.82	peak
4	12698.000	30.60	18.08	48.68	74.00	-25.32	peak
5	13809.000	27.73	21.41	49.14	74.00	-24.86	peak
6	17967.000	23.34	25.89	49.23	74.00	-24.77	peak

Test Mode:	802.11ax HE20	Channel:	5240
Polarity:	Vertical	Test Voltage:	DC 3.87 V

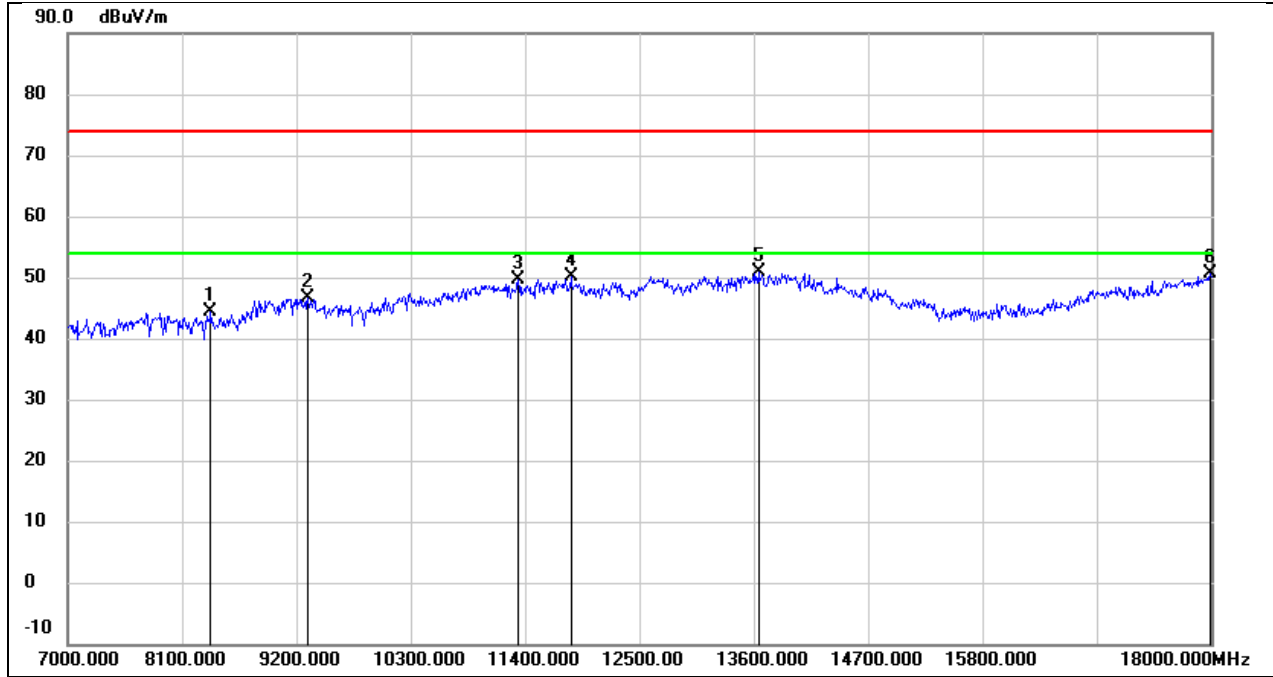


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8375.000	37.62	6.77	44.39	74.00	-29.61	peak
2	9310.000	36.02	10.54	46.56	74.00	-27.44	peak
3	11334.000	33.55	16.09	49.64	74.00	-24.36	peak
4	11840.000	32.76	17.40	50.16	74.00	-23.84	peak
5	13644.000	29.86	20.99	50.85	74.00	-23.15	peak
6	17989.000	24.50	26.04	50.54	74.00	-23.46	peak

Test Mode:	802.11ax HE20	Channel:	5260
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

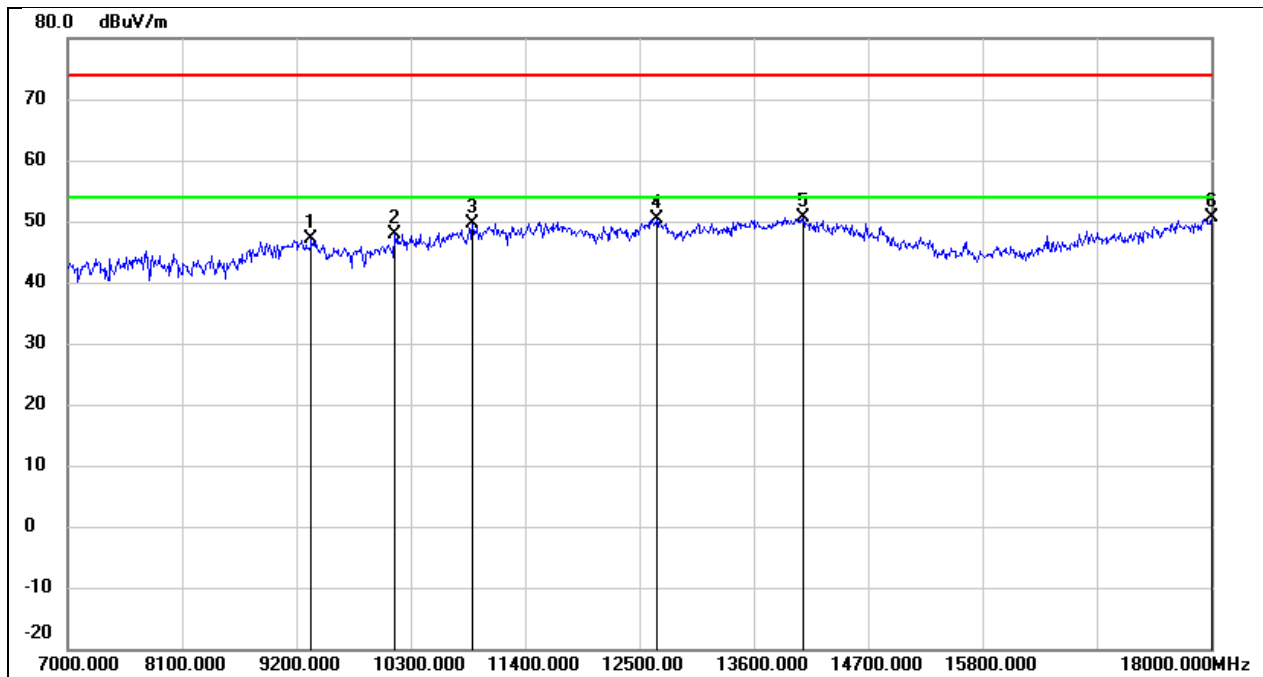


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.60	10.55	47.15	74.00	-26.85	peak
2	10146.000	35.80	12.07	47.87	74.00	-26.13	peak
3	10894.000	35.37	14.32	49.69	74.00	-24.31	peak
4	12665.000	32.44	18.04	50.48	74.00	-23.52	peak
5	14073.000	29.10	21.57	50.67	74.00	-23.33	peak
6	18000.000	24.47	26.12	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE20	Channel:	5260
Polarity:	Vertical	Test Voltage:	DC 3.87 V

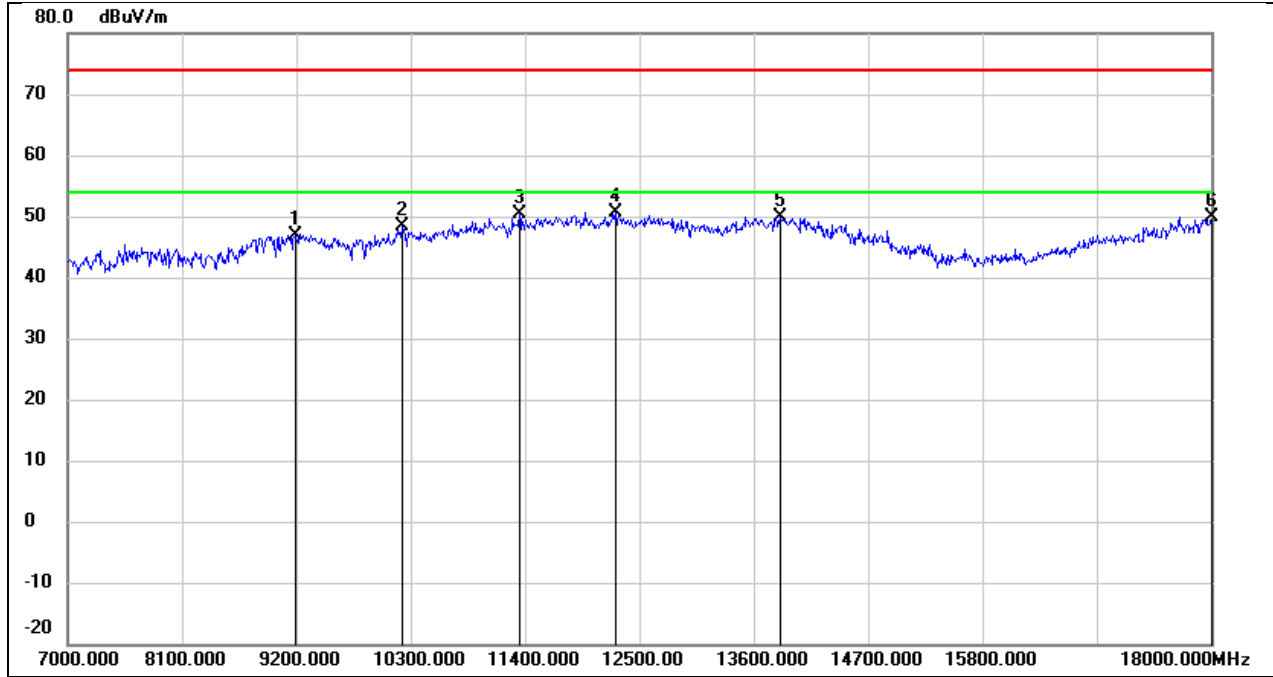


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.51	10.46	46.97	74.00	-27.03	peak
2	10212.000	36.11	12.21	48.32	74.00	-25.68	peak
3	11345.000	34.21	16.14	50.35	74.00	-23.65	peak
4	12269.000	32.92	17.77	50.69	74.00	-23.31	peak
5	13853.000	28.33	21.52	49.85	74.00	-24.15	peak
6	18000.000	23.82	26.12	49.94	74.00	-24.06	peak

Test Mode:	802.11ax HE20	Channel:	5280
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

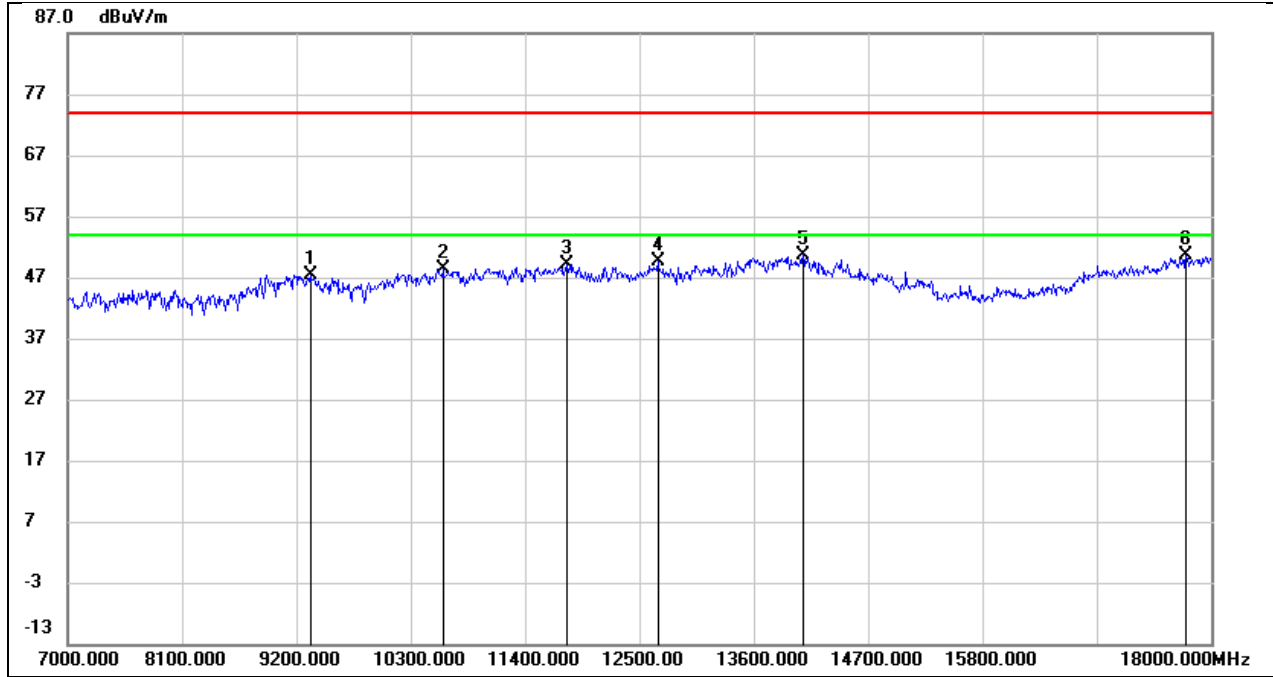


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.84	10.54	47.38	74.00	-26.62	peak
2	10608.000	35.25	13.23	48.48	74.00	-25.52	peak
3	11796.000	31.77	17.32	49.09	74.00	-24.91	peak
4	12676.000	31.67	18.05	49.72	74.00	-24.28	peak
5	14073.000	29.18	21.57	50.75	74.00	-23.25	peak
6	17758.000	26.06	24.46	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE20	Channel:	5280
Polarity:	Vertical	Test Voltage:	DC 3.87 V

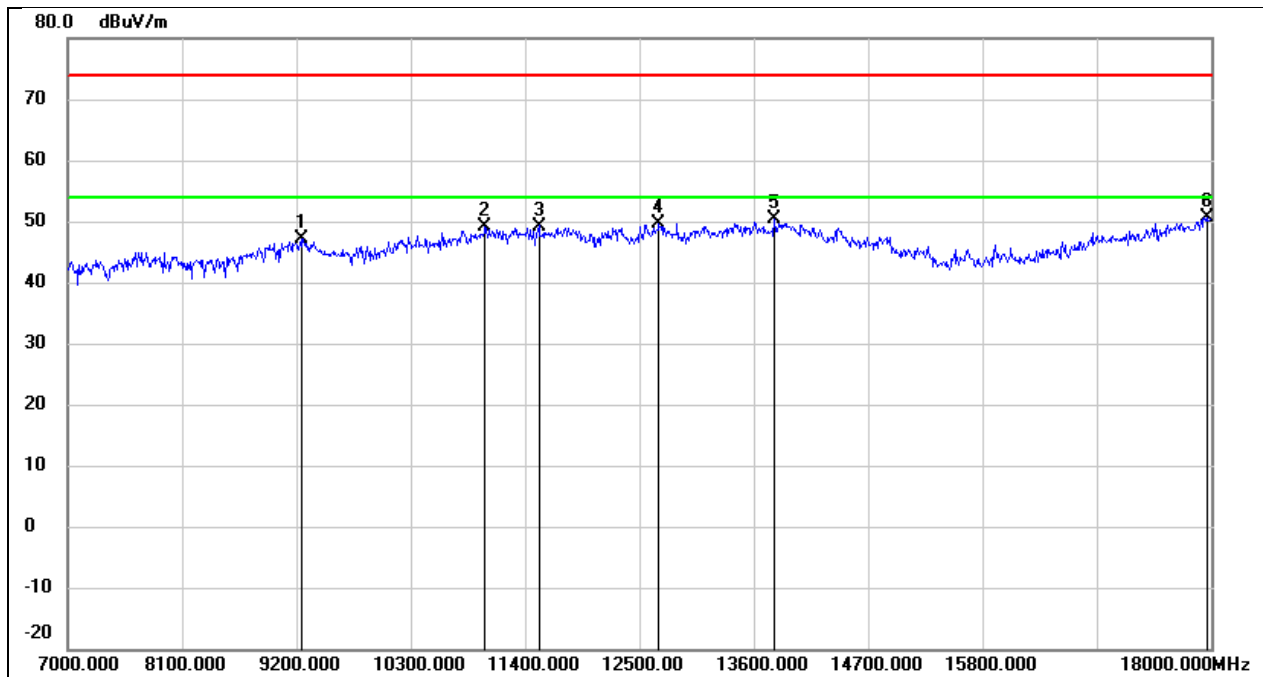


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.60	10.49	47.09	74.00	-26.91	peak
2	11015.000	34.34	14.79	49.13	74.00	-24.87	peak
3	11532.000	32.42	16.83	49.25	74.00	-24.75	peak
4	12687.000	31.58	18.05	49.63	74.00	-24.37	peak
5	13798.000	29.00	21.38	50.38	74.00	-23.62	peak
6	17956.000	24.91	25.82	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE20	Channel:	5320
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

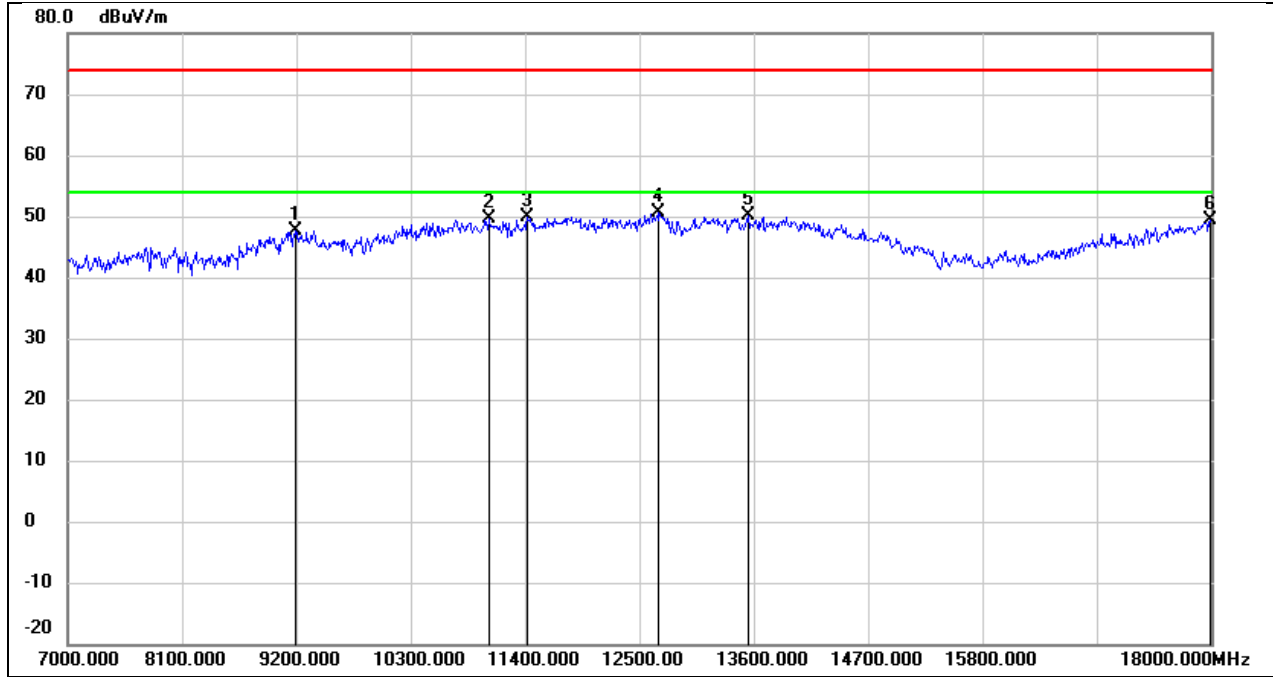


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.28	10.46	47.74	74.00	-26.26	peak
2	11048.000	34.66	14.91	49.57	74.00	-24.43	peak
3	11422.000	33.45	16.46	49.91	74.00	-24.09	peak
4	12687.000	32.62	18.05	50.67	74.00	-23.33	peak
5	13545.000	29.33	20.74	50.07	74.00	-23.93	peak
6	17989.000	23.42	26.04	49.46	74.00	-24.54	peak

Test Mode:	802.11ax HE20	Channel:	5320
Polarity:	Vertical	Test Voltage:	DC 3.87 V

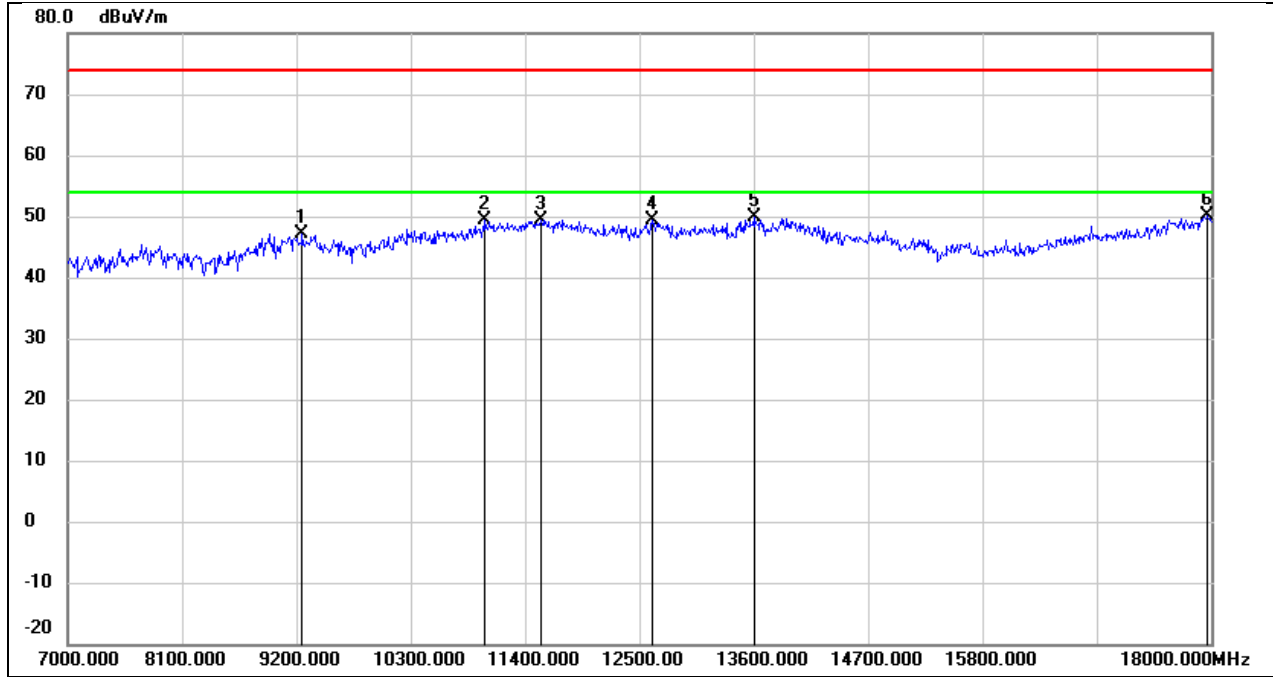


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.53	10.50	47.03	74.00	-26.97	peak
2	11015.000	34.51	14.79	49.30	74.00	-24.70	peak
3	11554.000	32.47	16.87	49.34	74.00	-24.66	peak
4	12621.000	31.28	17.98	49.26	74.00	-24.74	peak
5	13600.000	28.93	20.89	49.82	74.00	-24.18	peak
6	17967.000	24.20	25.89	50.09	74.00	-23.91	peak

Test Mode:	802.11ax HE20	Channel:	5500
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

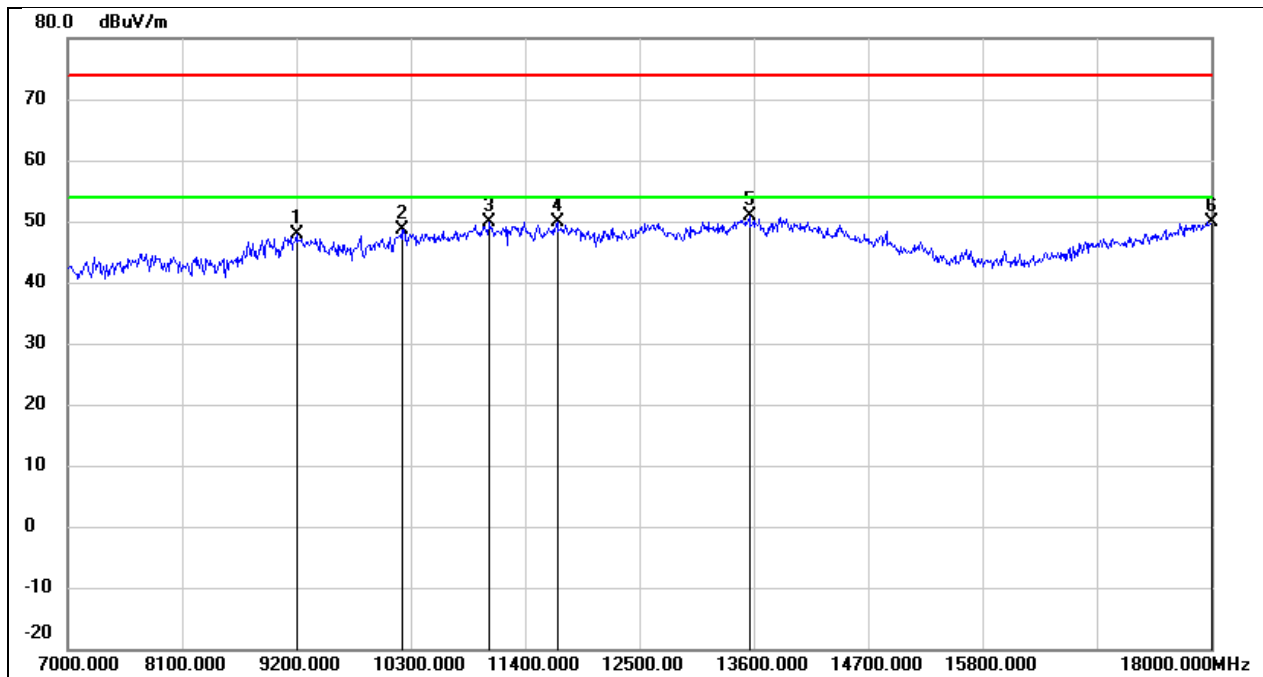


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.32	10.46	47.78	74.00	-26.22	peak
2	10212.000	36.52	12.21	48.73	74.00	-25.27	peak
3	11059.000	34.91	14.96	49.87	74.00	-24.13	peak
4	11708.000	32.60	17.16	49.76	74.00	-24.24	peak
5	13556.000	30.14	20.78	50.92	74.00	-23.08	peak
6	18000.000	23.79	26.12	49.91	74.00	-24.09	peak

Test Mode:	802.11ax HE20	Channel:	5500
Polarity:	Vertical	Test Voltage:	DC 3.87 V

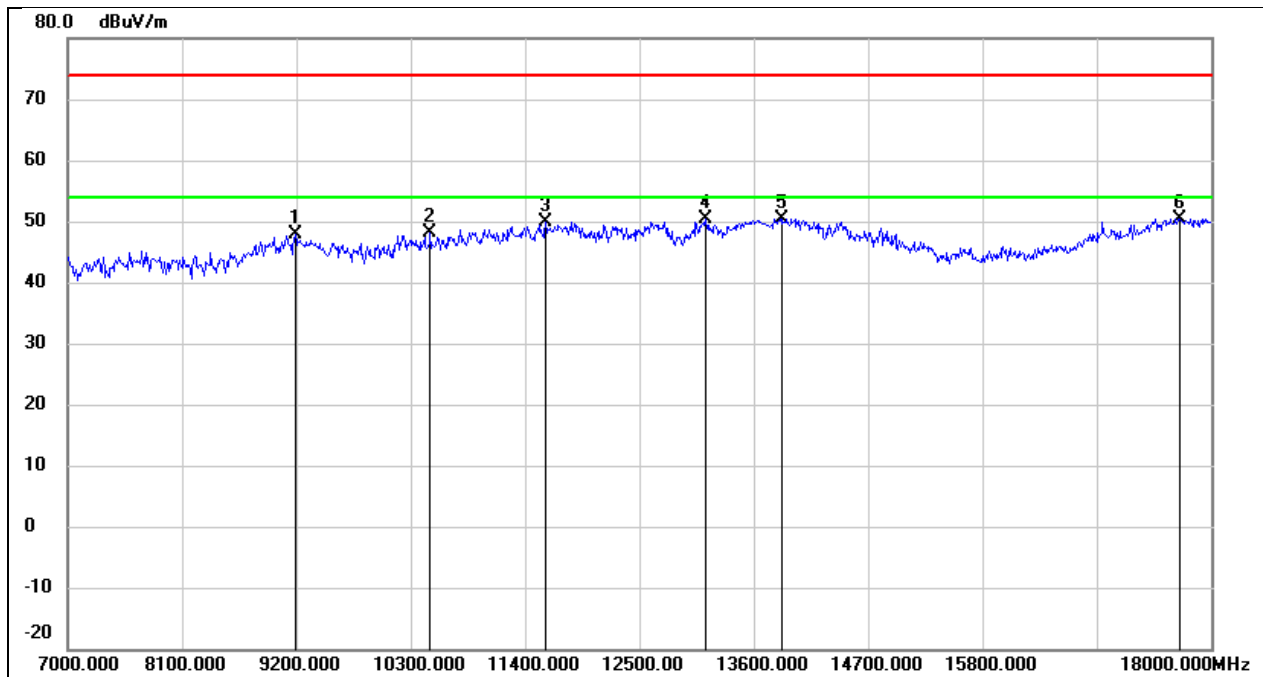


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.36	10.46	47.82	74.00	-26.18	peak
2	10487.000	35.32	12.79	48.11	74.00	-25.89	peak
3	11598.000	32.86	16.96	49.82	74.00	-24.18	peak
4	13138.000	31.40	19.05	50.45	74.00	-23.55	peak
5	13875.000	28.90	21.57	50.47	74.00	-23.53	peak
6	17703.000	26.39	24.09	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE20	Channel:	5580
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

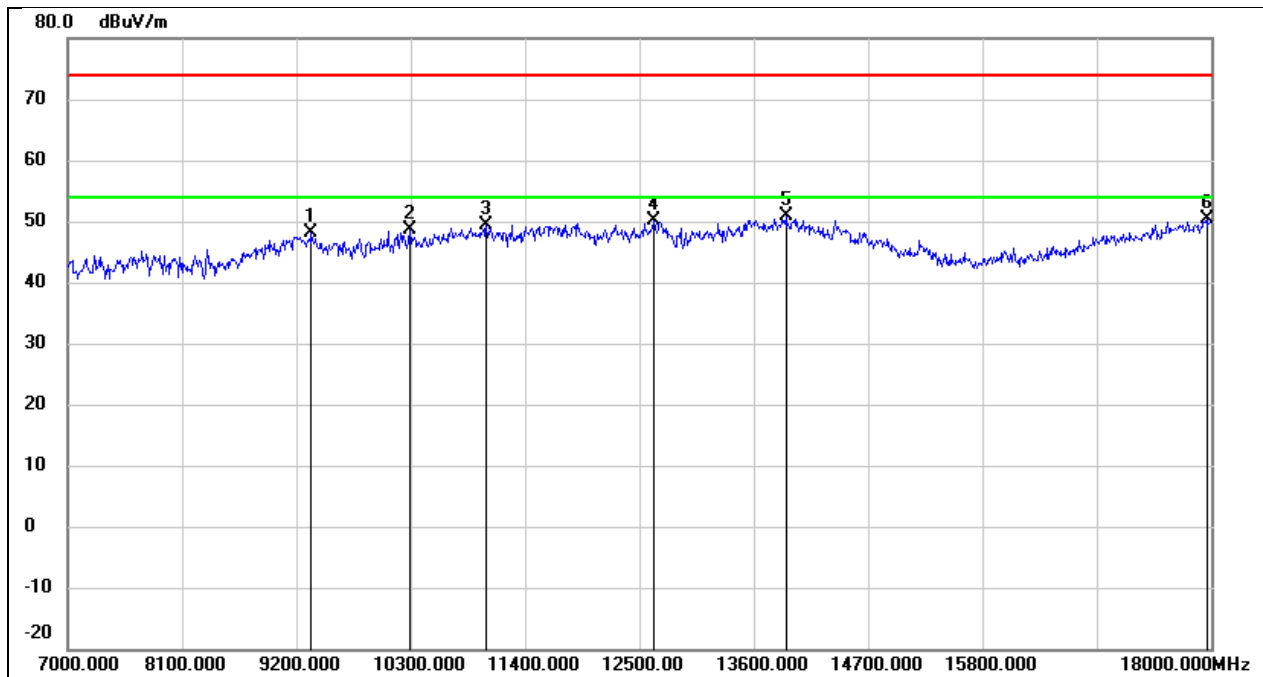


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.56	10.55	48.11	74.00	-25.89	peak
2	10289.000	36.28	12.38	48.66	74.00	-25.34	peak
3	11026.000	34.60	14.82	49.42	74.00	-24.58	peak
4	12643.000	32.18	18.01	50.19	74.00	-23.81	peak
5	13908.000	29.17	21.66	50.83	74.00	-23.17	peak
6	17956.000	24.55	25.82	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Channel:	5580
Polarity:	Vertical	Test Voltage:	DC 3.87 V

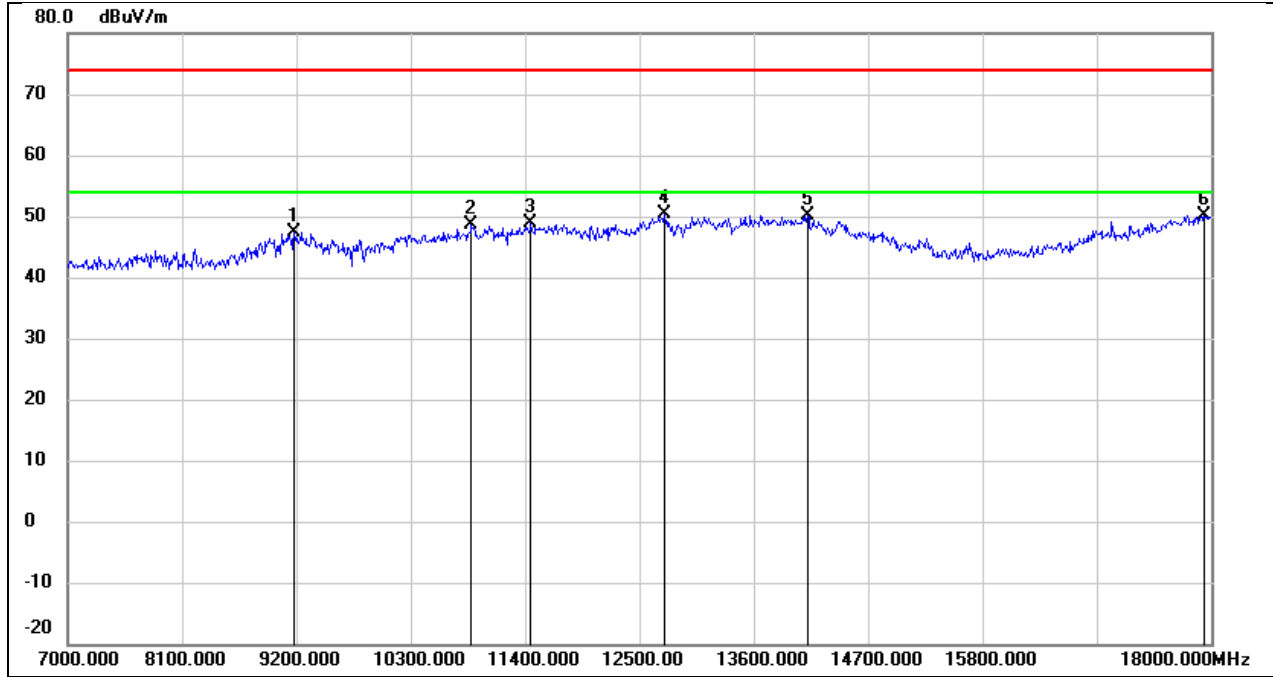


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.99	10.45	47.44	74.00	-26.56	peak
2	10883.000	34.28	14.27	48.55	74.00	-25.45	peak
3	11455.000	32.27	16.58	48.85	74.00	-25.15	peak
4	12742.000	32.15	18.13	50.28	74.00	-23.72	peak
5	14117.000	28.76	21.39	50.15	74.00	-23.85	peak
6	17934.000	24.53	25.67	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE20	Channel:	5700
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

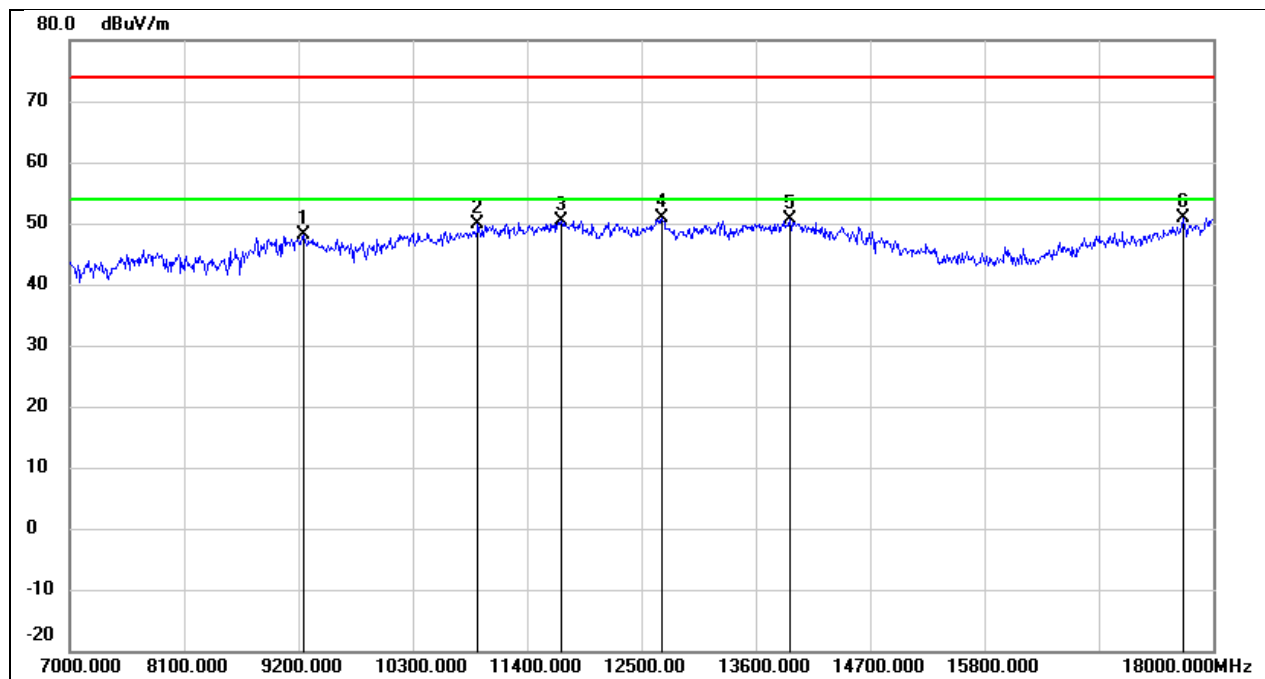


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.71	10.49	48.20	74.00	-25.80	peak
2	10927.000	35.49	14.45	49.94	74.00	-24.06	peak
3	11730.000	33.16	17.19	50.35	74.00	-23.65	peak
4	12698.000	32.77	18.08	50.85	74.00	-23.15	peak
5	13930.000	28.83	21.71	50.54	74.00	-23.46	peak
6	17714.000	26.76	24.16	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE20	Channel:	5700
Polarity:	Vertical	Test Voltage:	DC 3.87 V

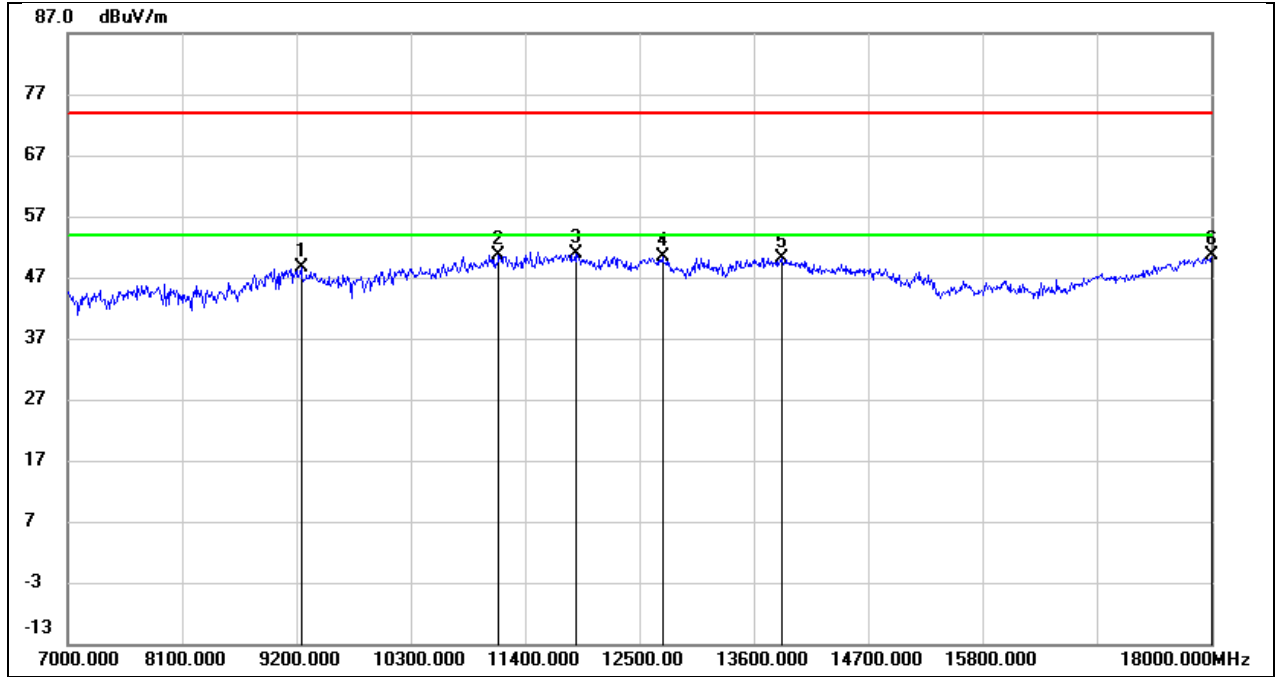


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.09	10.49	48.58	74.00	-25.42	peak
2	11147.000	35.31	15.32	50.63	74.00	-23.37	peak
3	11884.000	33.35	17.48	50.83	74.00	-23.17	peak
4	12720.000	32.27	18.09	50.36	74.00	-23.64	peak
5	13864.000	28.66	21.53	50.19	74.00	-23.81	peak
6	18000.000	24.60	26.12	50.72	74.00	-23.28	peak

Test Mode:	802.11ax HE20	Channel:	5720
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

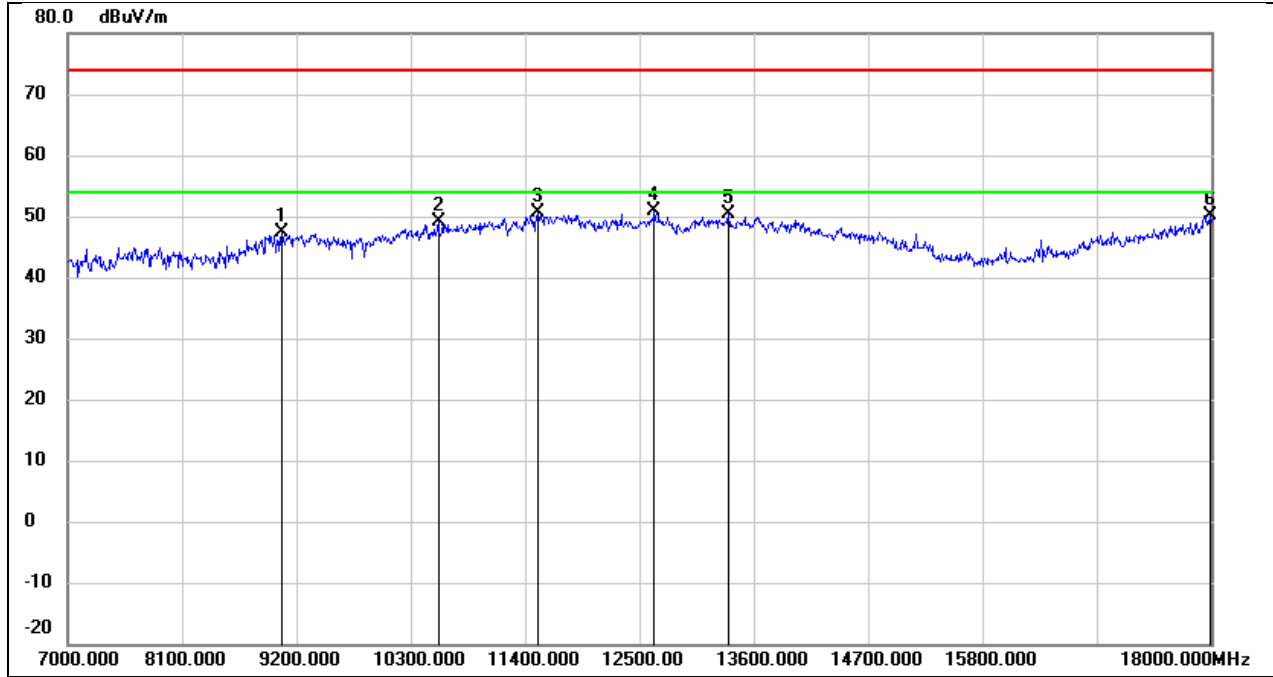


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.96	10.38	47.34	74.00	-26.66	peak
2	10564.000	36.08	13.06	49.14	74.00	-24.86	peak
3	11521.000	33.83	16.82	50.65	74.00	-23.35	peak
4	12643.000	32.85	18.01	50.86	74.00	-23.14	peak
5	13358.000	30.40	20.02	50.42	74.00	-23.58	peak
6	17989.000	24.13	26.04	50.17	74.00	-23.83	peak

Test Mode:	802.11ax HE20	Channel:	5720
Polarity:	Vertical	Test Voltage:	DC 3.87 V

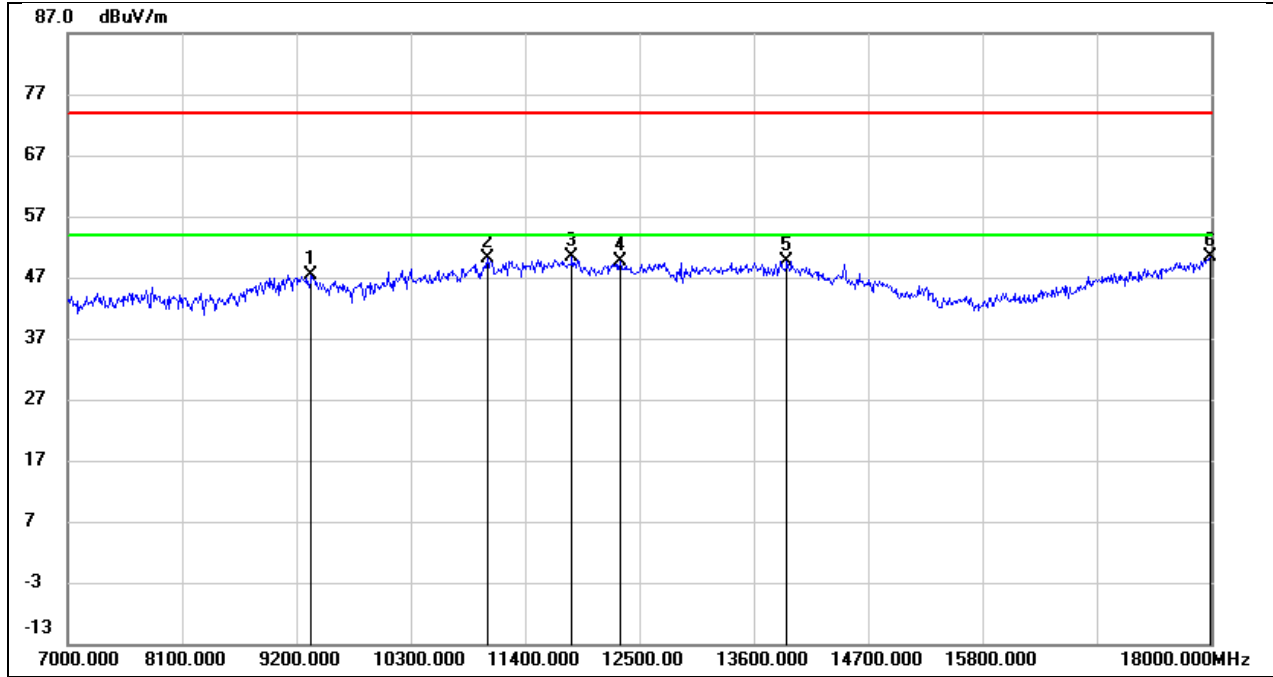


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.90	10.55	47.45	74.00	-26.55	peak
2	11037.000	35.17	14.87	50.04	74.00	-23.96	peak
3	11851.000	32.85	17.43	50.28	74.00	-23.72	peak
4	12313.000	31.74	17.78	49.52	74.00	-24.48	peak
5	13919.000	28.01	21.68	49.69	74.00	-24.31	peak
6	17989.000	24.43	26.04	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE20	Channel:	5745
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

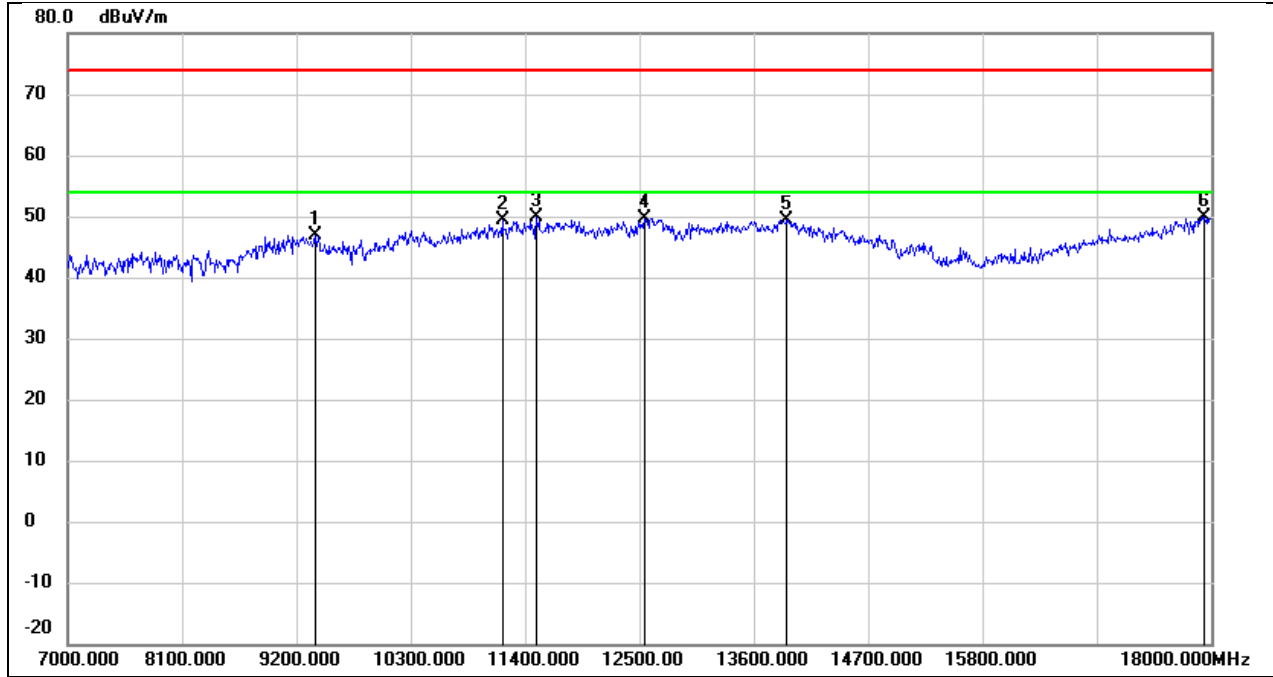


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	36.40	10.58	46.98	74.00	-27.02	peak
2	11180.000	34.00	15.46	49.46	74.00	-24.54	peak
3	11510.000	32.99	16.79	49.78	74.00	-24.22	peak
4	12544.000	31.85	17.88	49.73	74.00	-24.27	peak
5	13919.000	27.82	21.68	49.50	74.00	-24.50	peak
6	17934.000	24.20	25.67	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE20	Channel:	5745
Polarity:	Vertical	Test Voltage:	DC 3.87 V

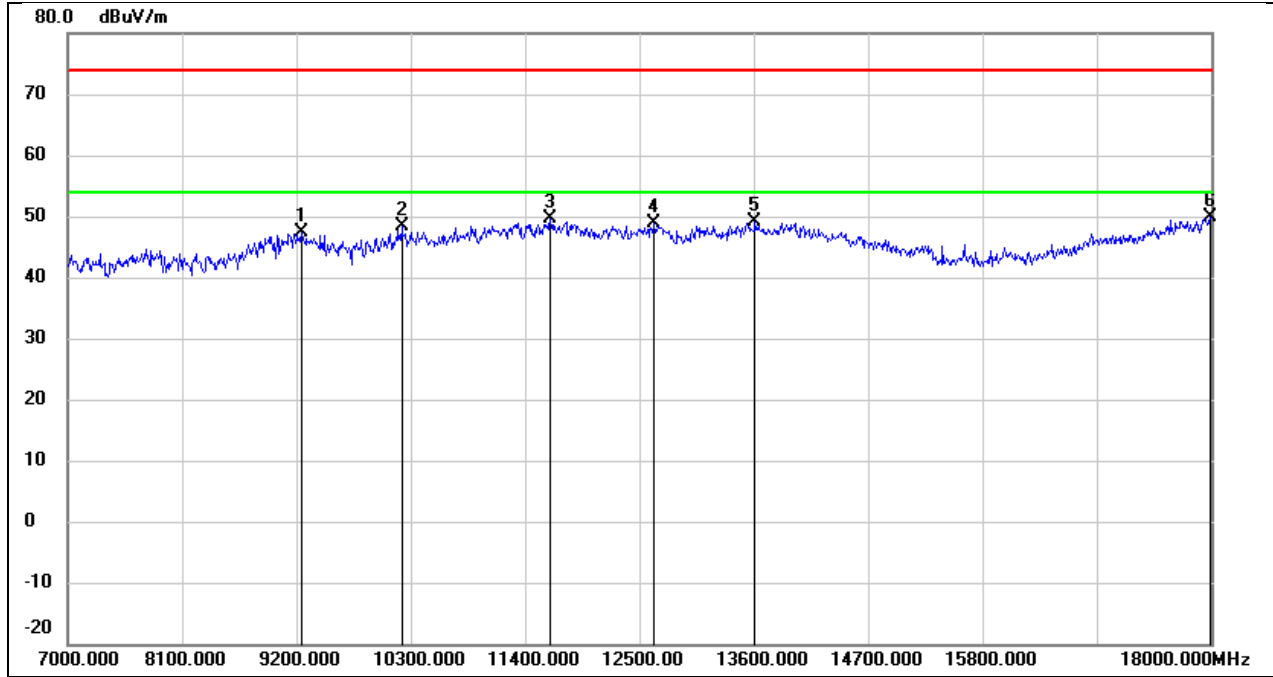


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.91	10.49	47.40	74.00	-26.60	peak
2	10212.000	36.05	12.21	48.26	74.00	-25.74	peak
3	11642.000	32.69	17.03	49.72	74.00	-24.28	peak
4	12643.000	30.78	18.01	48.79	74.00	-25.21	peak
5	13611.000	28.23	20.92	49.15	74.00	-24.85	peak
6	17989.000	23.75	26.04	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE20	Channel:	5785
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

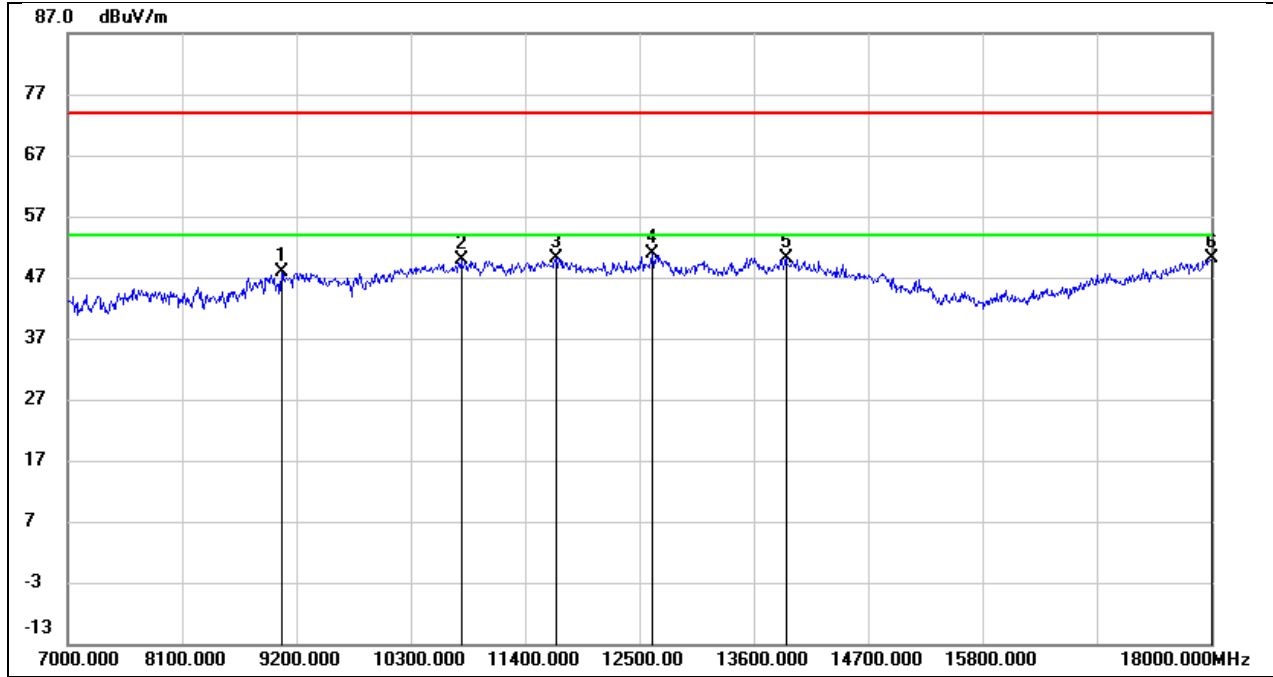


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.61	10.38	47.99	74.00	-26.01	peak
2	10784.000	36.05	13.91	49.96	74.00	-24.04	peak
3	11697.000	32.92	17.13	50.05	74.00	-23.95	peak
4	12621.000	32.89	17.98	50.87	74.00	-23.13	peak
5	13908.000	28.52	21.66	50.18	74.00	-23.82	peak
6	18000.000	24.01	26.12	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE20	Channel:	5785
Polarity:	Vertical	Test Voltage:	DC 3.87 V

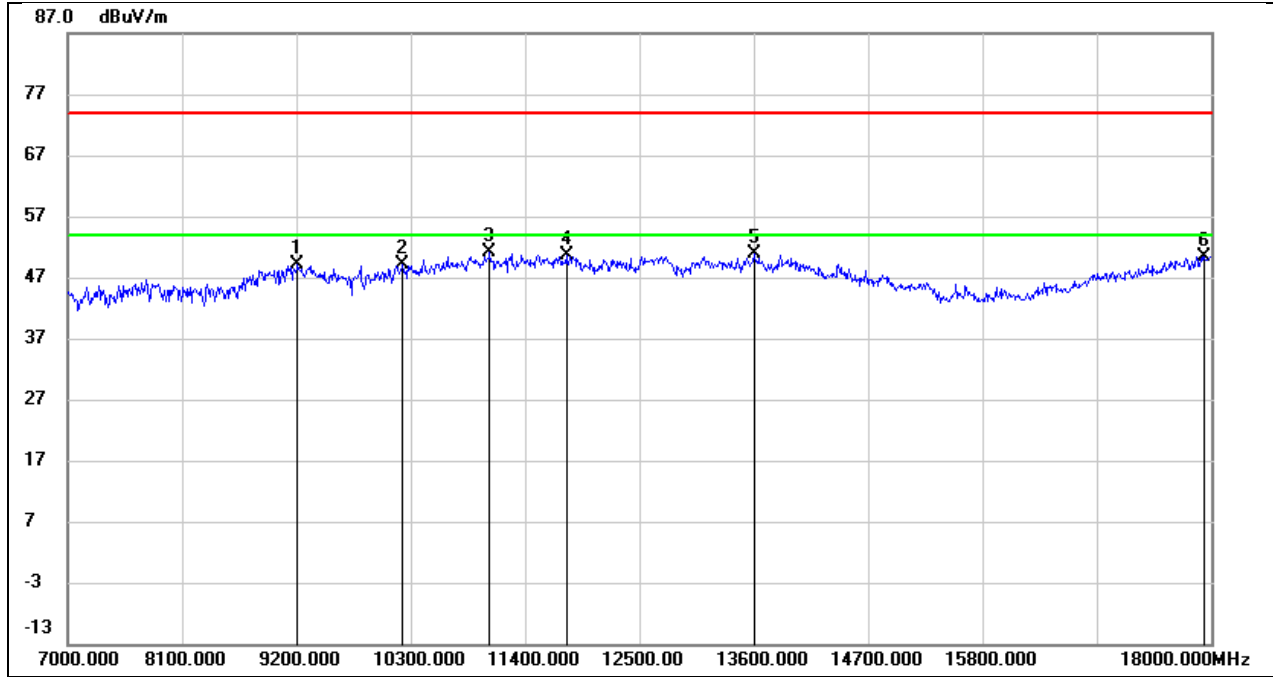


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.56	10.47	49.03	74.00	-24.97	peak
2	10223.000	36.88	12.24	49.12	74.00	-24.88	peak
3	11059.000	36.24	14.96	51.20	74.00	-22.80	peak
4	11796.000	33.23	17.32	50.55	74.00	-23.45	peak
5	13600.000	29.99	20.89	50.88	74.00	-23.12	peak
6	17934.000	24.69	25.67	50.36	74.00	-23.64	peak

Test Mode:	802.11ax HE20	Channel:	5825
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

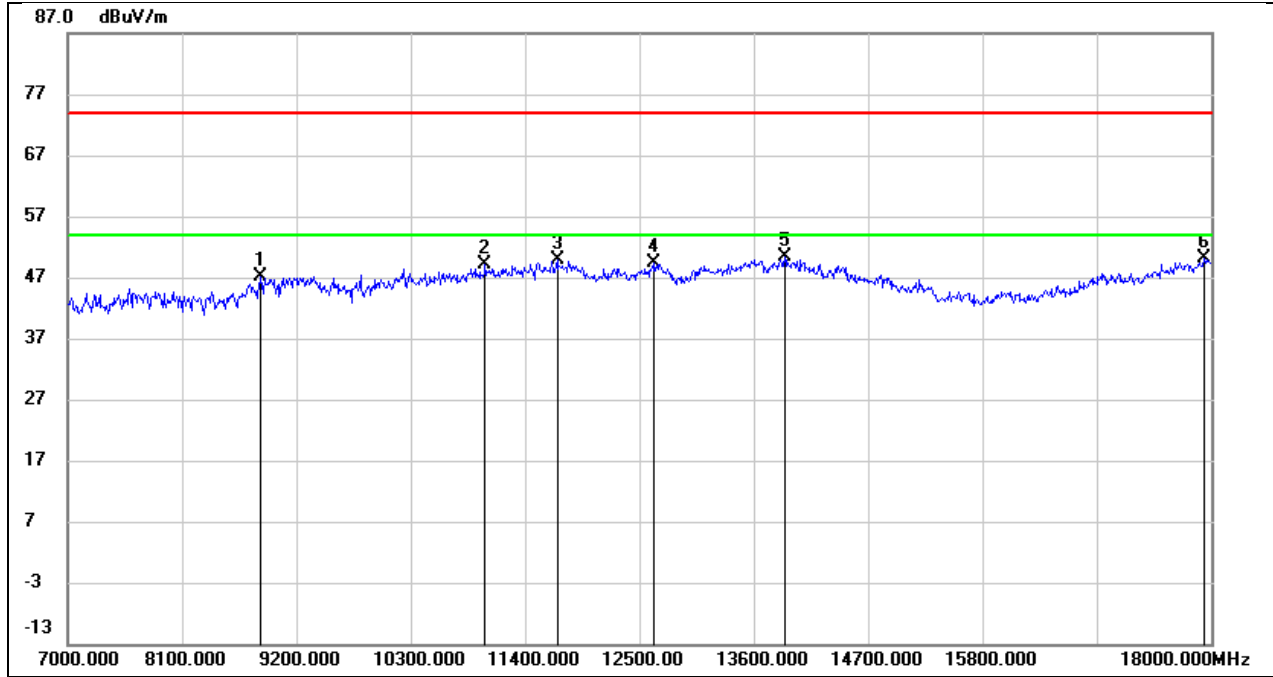


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8859.000	37.74	9.36	47.10	74.00	-26.90	peak
2	11015.000	34.33	14.79	49.12	74.00	-24.88	peak
3	11708.000	32.68	17.16	49.84	74.00	-24.16	peak
4	12643.000	31.35	18.01	49.36	74.00	-24.64	peak
5	13897.000	28.72	21.62	50.34	74.00	-23.66	peak
6	17934.000	24.50	25.67	50.17	74.00	-23.83	peak

Test Mode:	802.11ax HE20	Channel:	5825
Polarity:	Vertical	Test Voltage:	DC 3.87 V

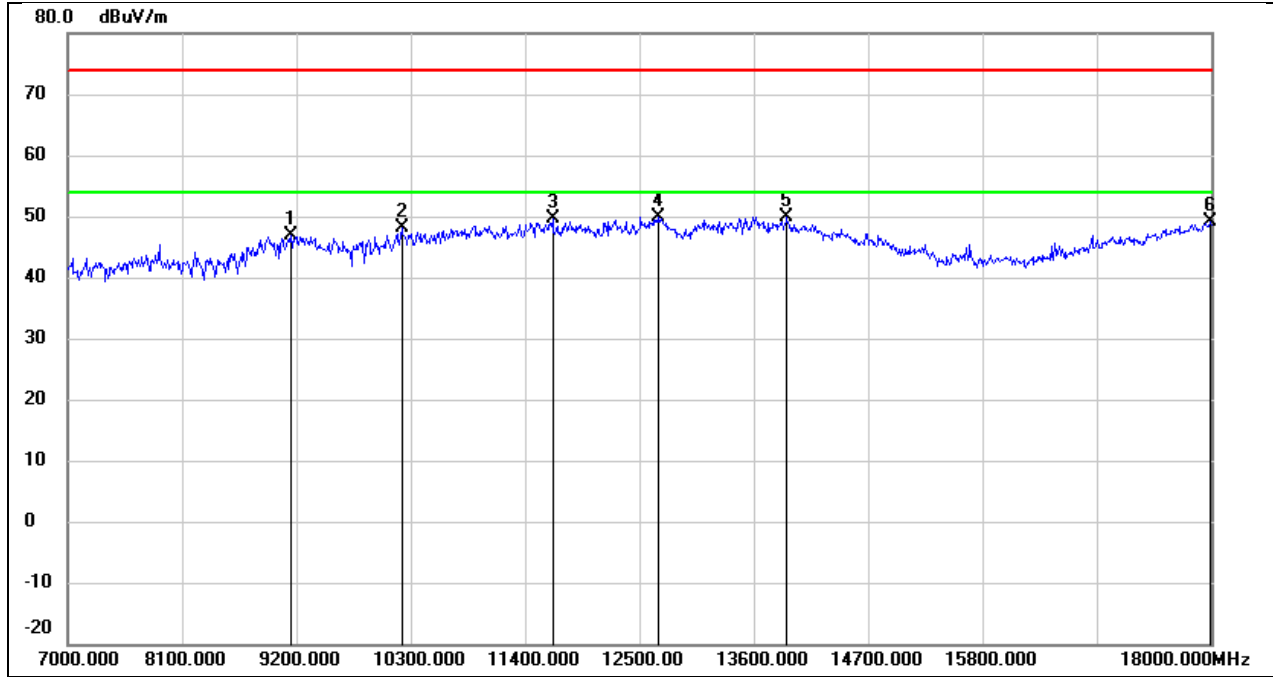


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.37	10.43	46.80	74.00	-27.20	peak
2	10212.000	35.93	12.21	48.14	74.00	-25.86	peak
3	11664.000	32.44	17.08	49.52	74.00	-24.48	peak
4	12676.000	31.79	18.05	49.84	74.00	-24.16	peak
5	13919.000	28.15	21.68	49.83	74.00	-24.17	peak
6	17989.000	23.09	26.04	49.13	74.00	-24.87	peak

Test Mode:	802.11ax HE40	Channel:	5190
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

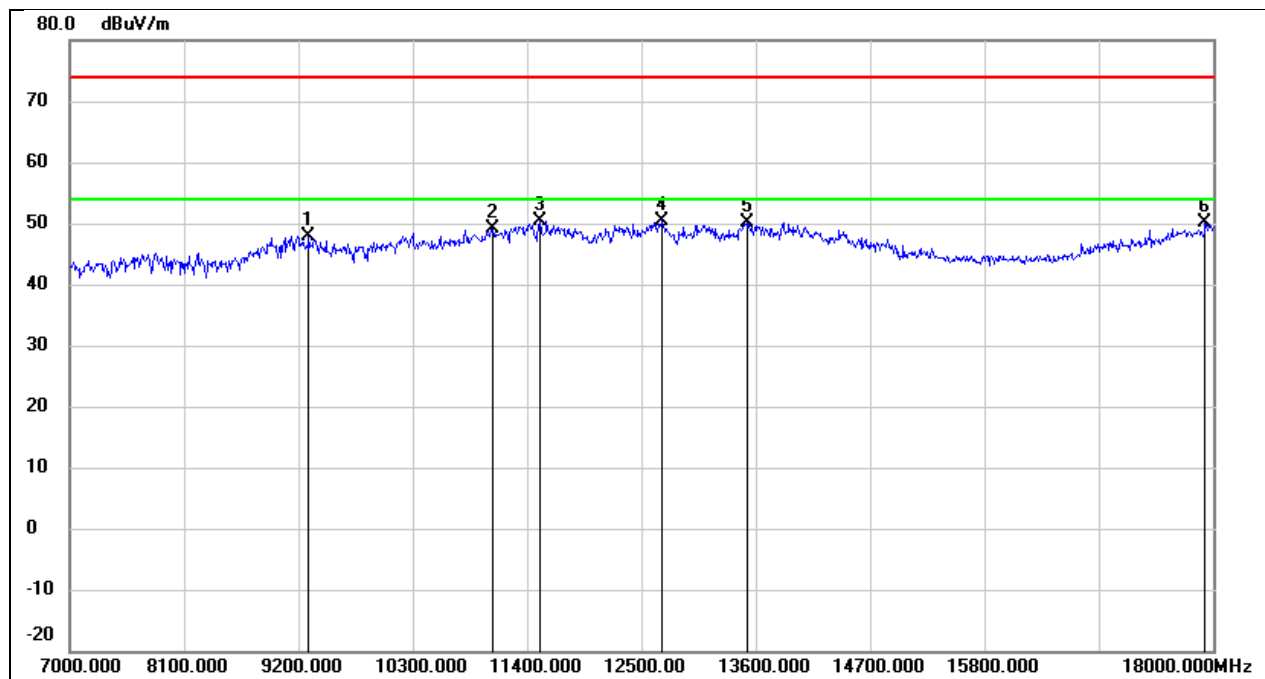


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.38	10.53	47.91	74.00	-26.09	peak
2	11070.000	34.13	15.01	49.14	74.00	-24.86	peak
3	11521.000	33.58	16.82	50.40	74.00	-23.60	peak
4	12698.000	32.27	18.08	50.35	74.00	-23.65	peak
5	13512.000	29.49	20.68	50.17	74.00	-23.83	peak
6	17923.000	24.42	25.60	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE40	Channel:	5190
Polarity:	Vertical	Test Voltage:	DC 3.87 V

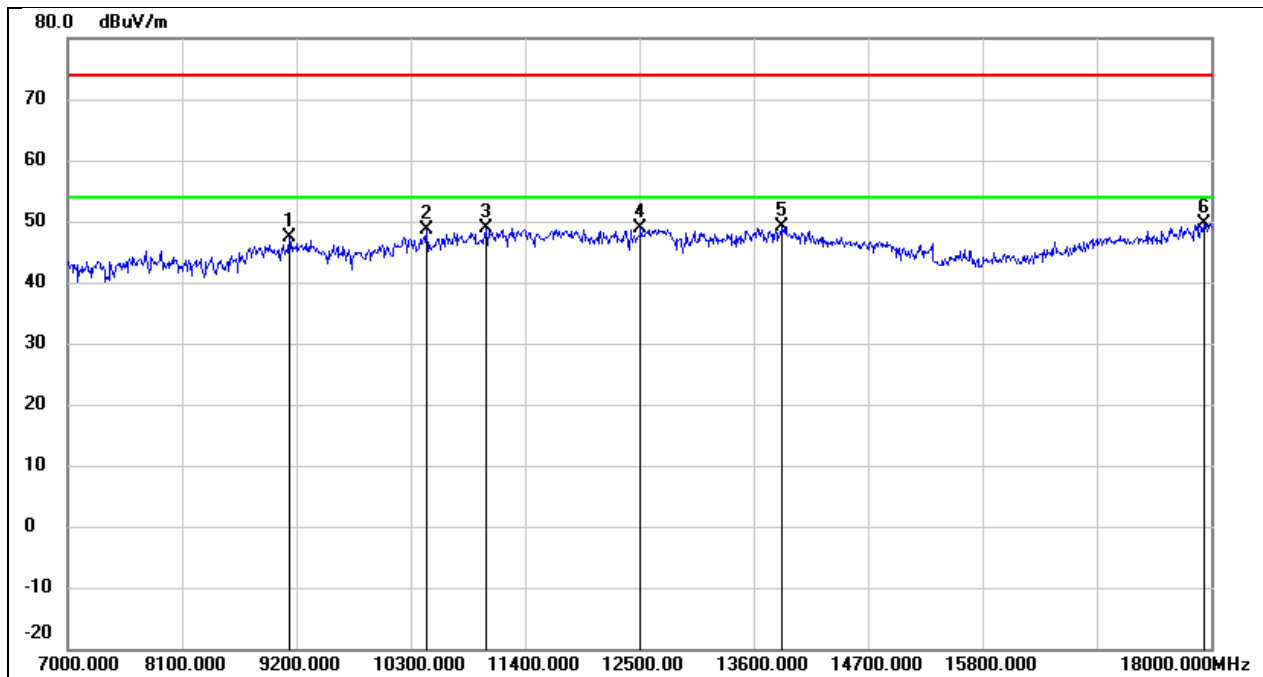


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.99	10.41	47.40	74.00	-26.60	peak
2	10454.000	35.78	12.73	48.51	74.00	-25.49	peak
3	11026.000	34.14	14.82	48.96	74.00	-25.04	peak
4	12511.000	31.16	17.84	49.00	74.00	-25.00	peak
5	13864.000	27.53	21.53	49.06	74.00	-24.94	peak
6	17934.000	23.90	25.67	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE40	Channel:	5230
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

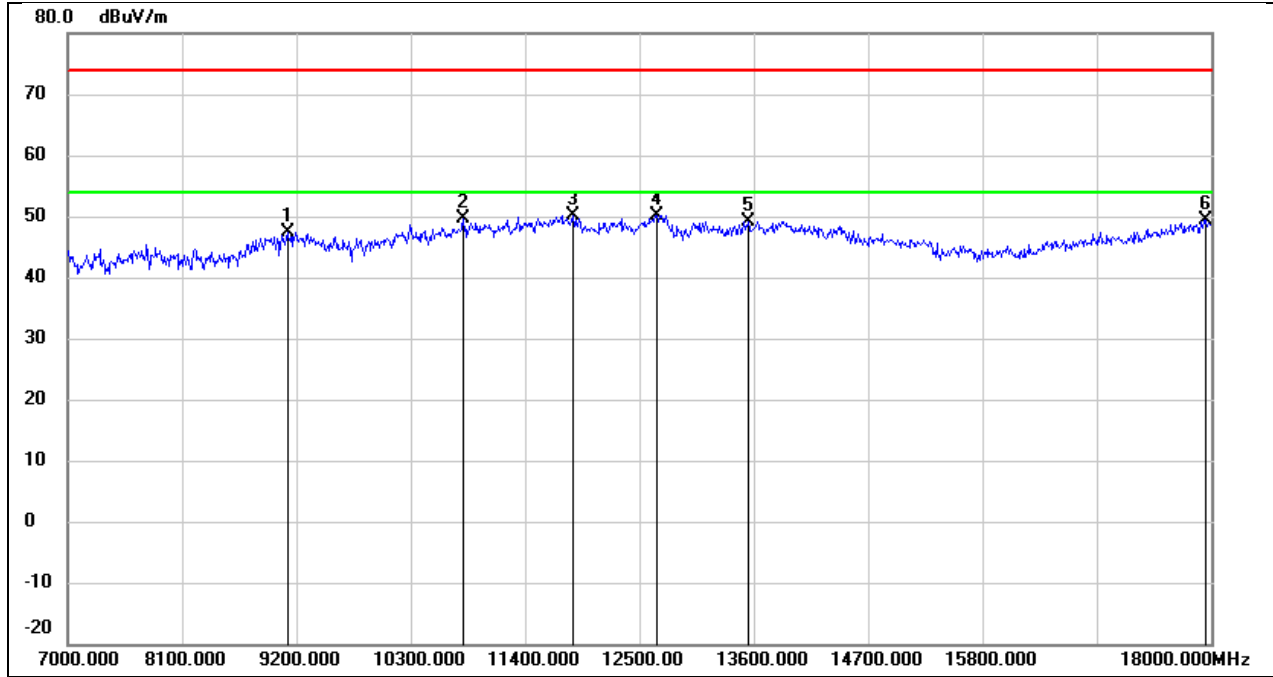


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	36.92	10.41	47.33	74.00	-26.67	peak
2	10806.000	35.68	13.98	49.66	74.00	-24.34	peak
3	11862.000	32.64	17.45	50.09	74.00	-23.91	peak
4	12665.000	32.17	18.04	50.21	74.00	-23.79	peak
5	13545.000	28.46	20.74	49.20	74.00	-24.80	peak
6	17945.000	23.74	25.75	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE40	Channel:	5230
Polarity:	Vertical	Test Voltage:	DC 3.87 V

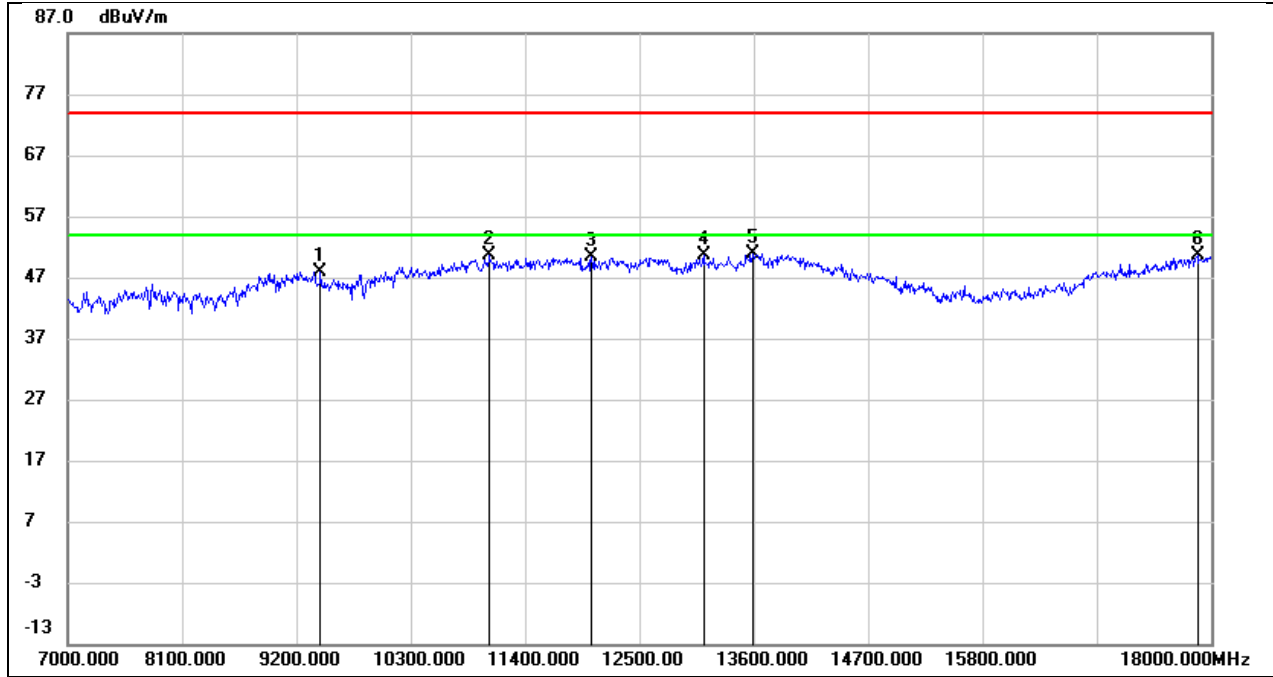


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	37.30	10.61	47.91	74.00	-26.09	peak
2	11059.000	35.69	14.96	50.65	74.00	-23.35	peak
3	12038.000	32.71	17.71	50.42	74.00	-23.58	peak
4	13116.000	31.56	18.96	50.52	74.00	-23.48	peak
5	13589.000	30.07	20.86	50.93	74.00	-23.07	peak
6	17868.000	25.53	25.22	50.75	74.00	-23.25	peak

Test Mode:	802.11ax HE40	Channel:	5270
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

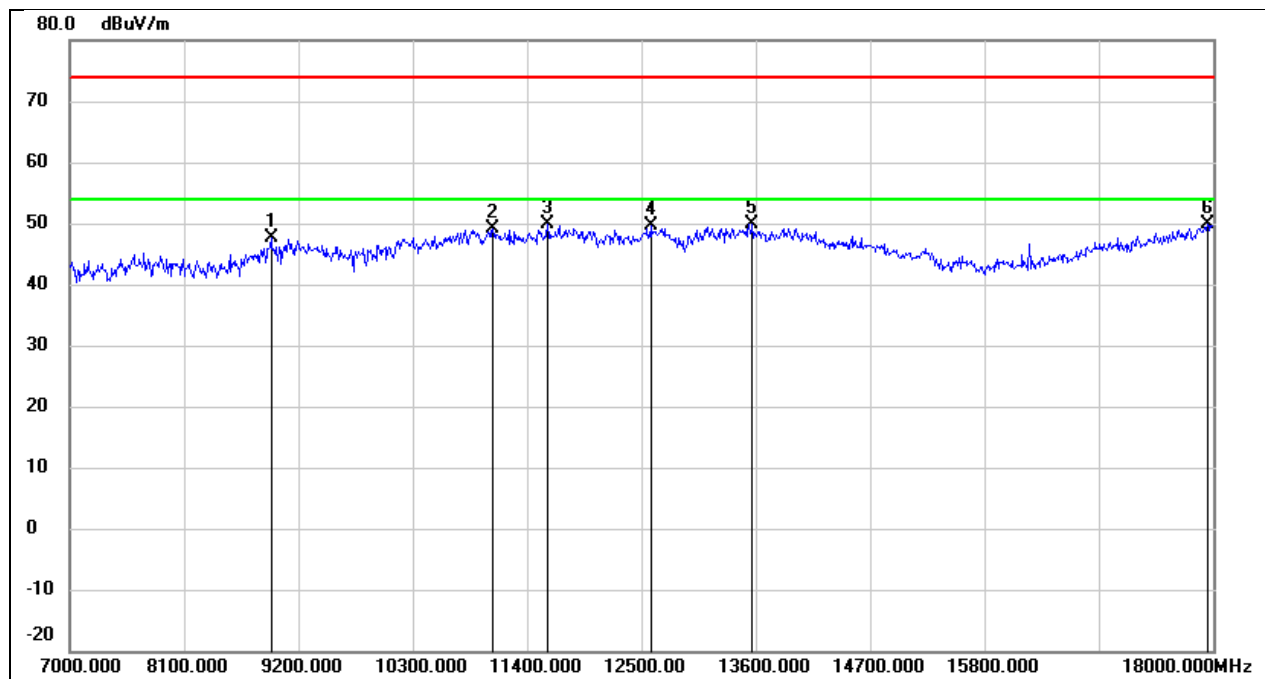


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.62	9.90	47.52	74.00	-26.48	peak
2	11070.000	34.01	15.01	49.02	74.00	-24.98	peak
3	11598.000	32.86	16.96	49.82	74.00	-24.18	peak
4	12588.000	31.59	17.94	49.53	74.00	-24.47	peak
5	13567.000	29.09	20.80	49.89	74.00	-24.11	peak
6	17945.000	24.12	25.75	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE40	Channel:	5270
Polarity:	Vertical	Test Voltage:	DC 3.87 V

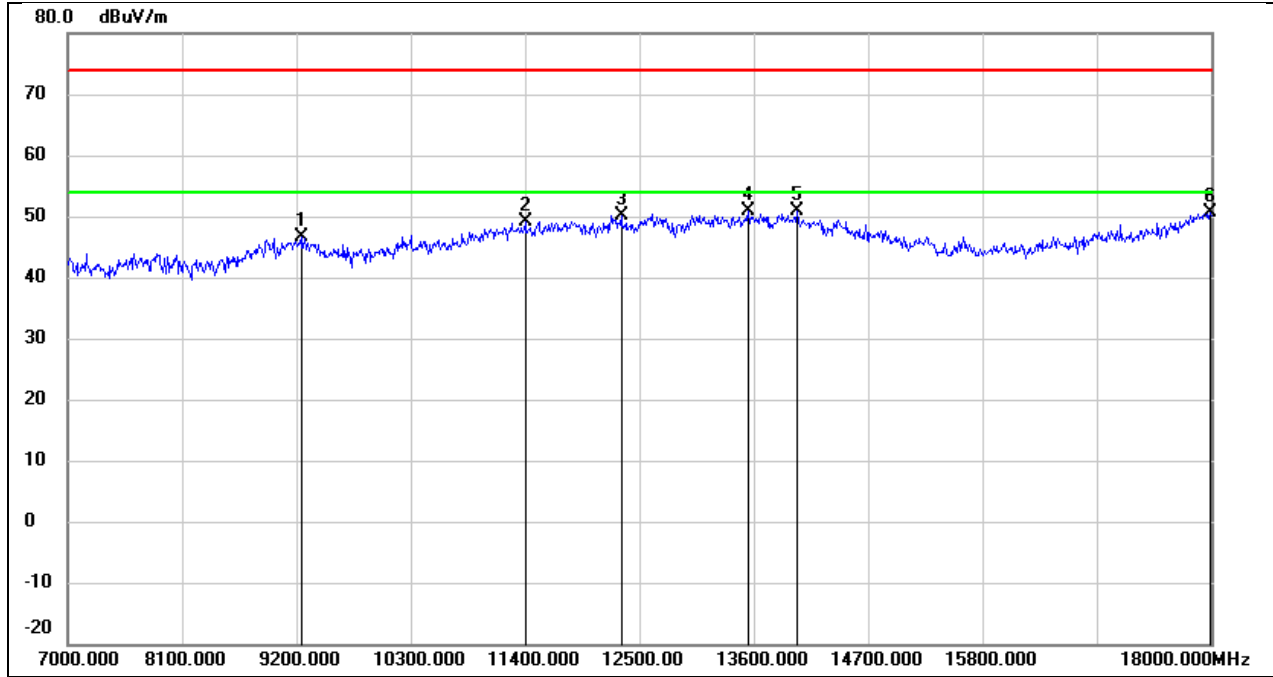


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.07	10.50	46.57	74.00	-27.43	peak
2	11400.000	32.75	16.36	49.11	74.00	-24.89	peak
3	12324.000	32.31	17.79	50.10	74.00	-23.90	peak
4	13545.000	30.17	20.74	50.91	74.00	-23.09	peak
5	14018.000	29.01	21.80	50.81	74.00	-23.19	peak
6	17989.000	24.59	26.04	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE40	Channel:	5310
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

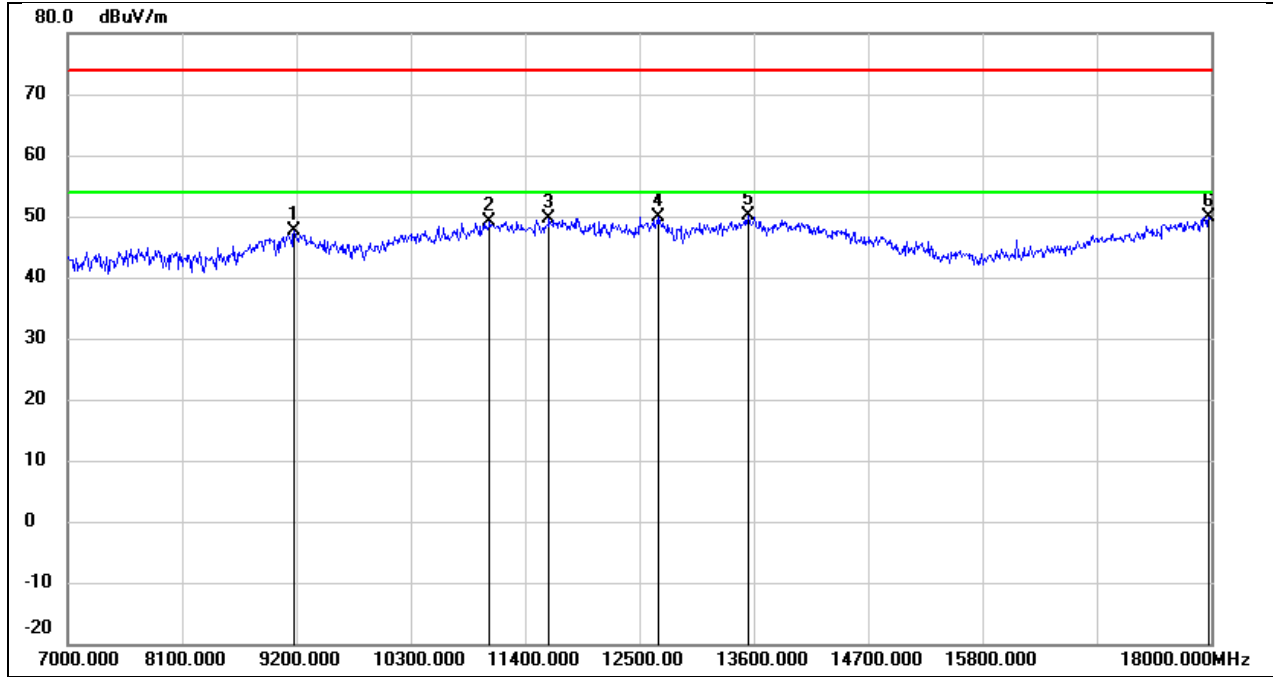


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.11	10.45	47.56	74.00	-26.44	peak
2	11059.000	34.10	14.96	49.06	74.00	-24.94	peak
3	11631.000	32.51	17.01	49.52	74.00	-24.48	peak
4	12687.000	31.91	18.05	49.96	74.00	-24.04	peak
5	13545.000	29.28	20.74	50.02	74.00	-23.98	peak
6	17978.000	23.91	25.97	49.88	74.00	-24.12	peak

Test Mode:	802.11ax HE40	Channel:	5310
Polarity:	Vertical	Test Voltage:	DC 3.87 V

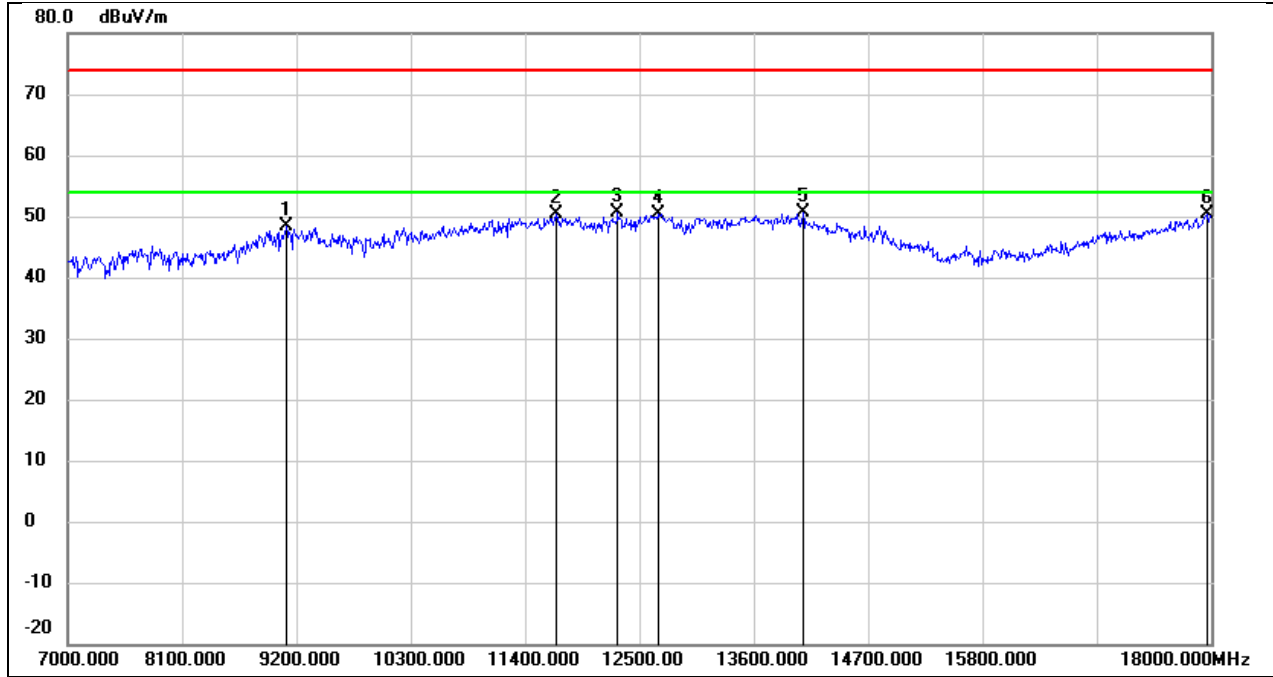


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	37.90	10.40	48.30	74.00	-25.70	peak
2	11697.000	33.33	17.13	50.46	74.00	-23.54	peak
3	12291.000	32.92	17.78	50.70	74.00	-23.30	peak
4	12676.000	32.42	18.05	50.47	74.00	-23.53	peak
5	14073.000	28.96	21.57	50.53	74.00	-23.47	peak
6	17956.000	24.48	25.82	50.30	74.00	-23.70	peak

Test Mode:	802.11ax HE40	Channel:	5510
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

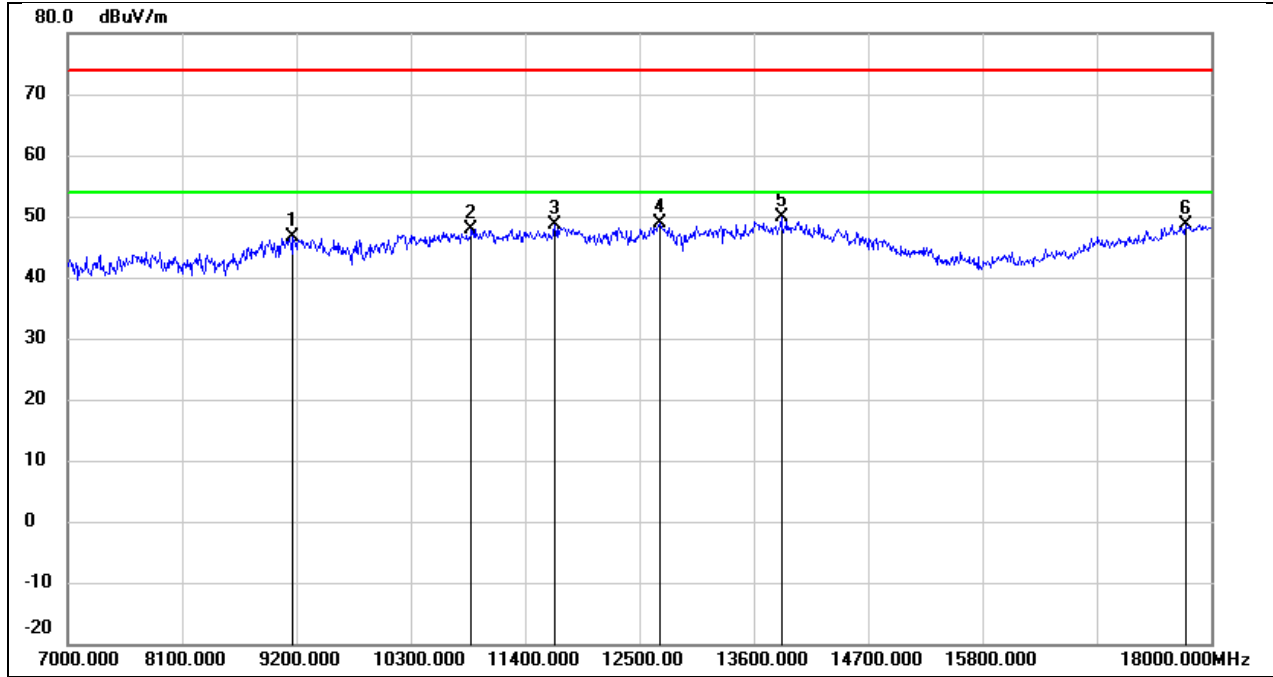


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.15	10.45	46.60	74.00	-27.40	peak
2	10883.000	33.55	14.27	47.82	74.00	-26.18	peak
3	11686.000	31.57	17.12	48.69	74.00	-25.31	peak
4	12698.000	30.89	18.08	48.97	74.00	-25.03	peak
5	13864.000	28.43	21.53	49.96	74.00	-24.04	peak
6	17758.000	24.24	24.46	48.70	74.00	-25.30	peak

Test Mode:	802.11ax HE40	Channel:	5510
Polarity:	Vertical	Test Voltage:	DC 3.87 V

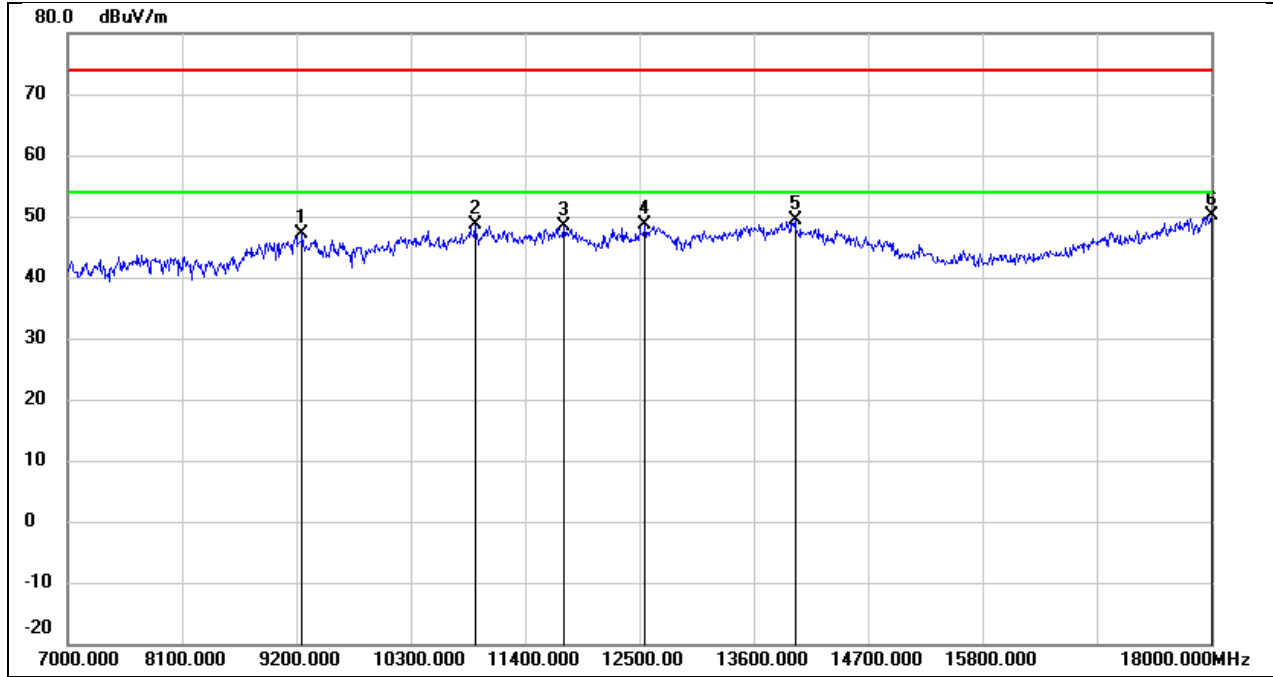


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.70	10.50	47.20	74.00	-26.80	peak
2	10916.000	34.25	14.39	48.64	74.00	-25.36	peak
3	11774.000	31.15	17.28	48.43	74.00	-25.57	peak
4	12555.000	30.61	17.90	48.51	74.00	-25.49	peak
5	13996.000	27.62	21.87	49.49	74.00	-24.51	peak
6	18000.000	23.99	26.12	50.11	74.00	-23.89	peak

Test Mode:	802.11ax HE40	Channel:	5550
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

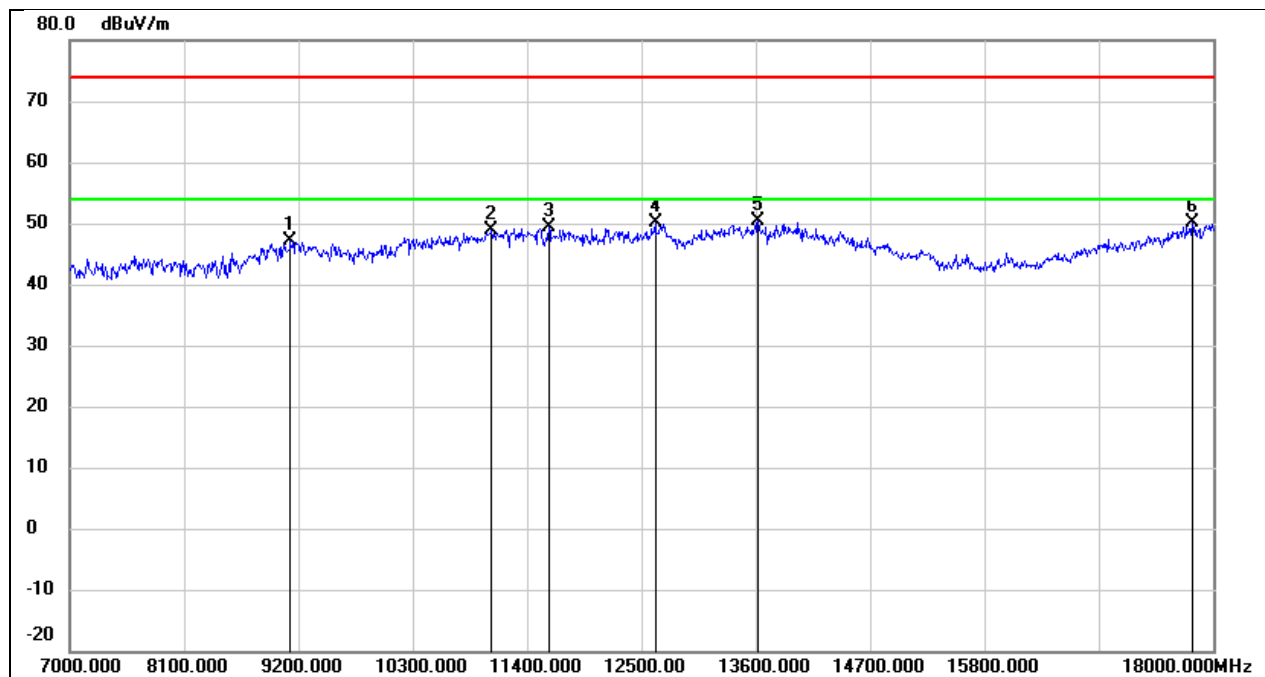


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.67	10.42	47.09	74.00	-26.91	peak
2	11059.000	33.90	14.96	48.86	74.00	-25.14	peak
3	11609.000	32.40	16.98	49.38	74.00	-24.62	peak
4	12632.000	32.17	17.99	50.16	74.00	-23.84	peak
5	13622.000	29.32	20.94	50.26	74.00	-23.74	peak
6	17802.000	25.27	24.76	50.03	74.00	-23.97	peak

Test Mode:	802.11ax HE40	Channel:	5550
Polarity:	Vertical	Test Voltage:	DC 3.87 V

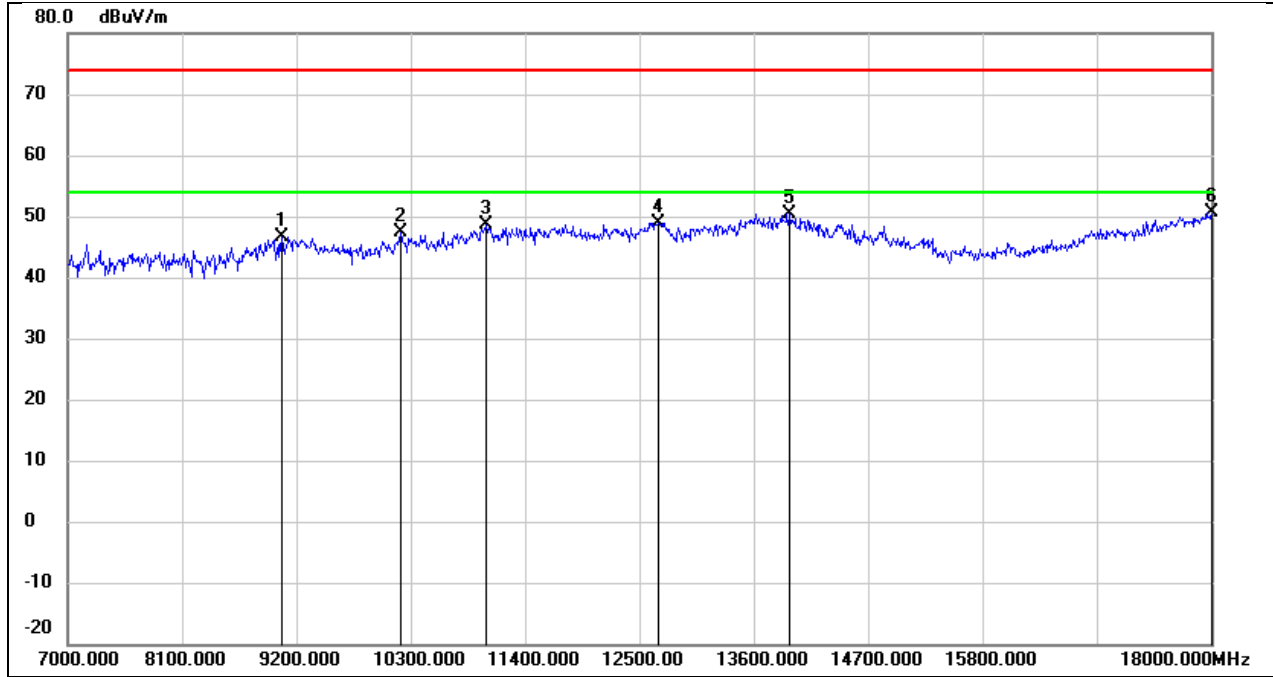


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.15	10.38	46.53	74.00	-27.47	peak
2	10201.000	35.16	12.19	47.35	74.00	-26.65	peak
3	11026.000	33.79	14.82	48.61	74.00	-25.39	peak
4	12676.000	30.93	18.05	48.98	74.00	-25.02	peak
5	13941.000	28.71	21.73	50.44	74.00	-23.56	peak
6	18000.000	24.56	26.12	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE40	Channel:	5670
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

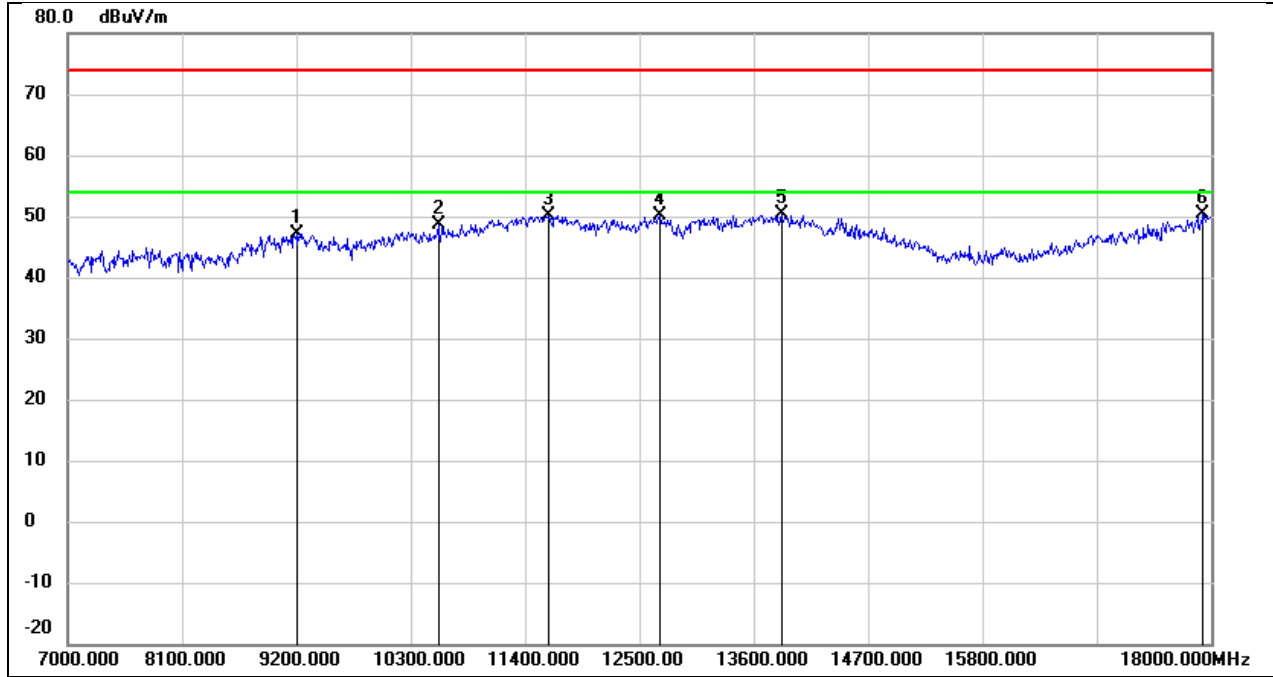


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.73	10.46	47.19	74.00	-26.81	peak
2	10564.000	35.53	13.06	48.59	74.00	-25.41	peak
3	11631.000	33.22	17.01	50.23	74.00	-23.77	peak
4	12698.000	32.10	18.08	50.18	74.00	-23.82	peak
5	13864.000	28.82	21.53	50.35	74.00	-23.65	peak
6	17923.000	24.68	25.60	50.28	74.00	-23.72	peak

Test Mode:	802.11ax HE40	Channel:	5670
Polarity:	Vertical	Test Voltage:	DC 3.87 V

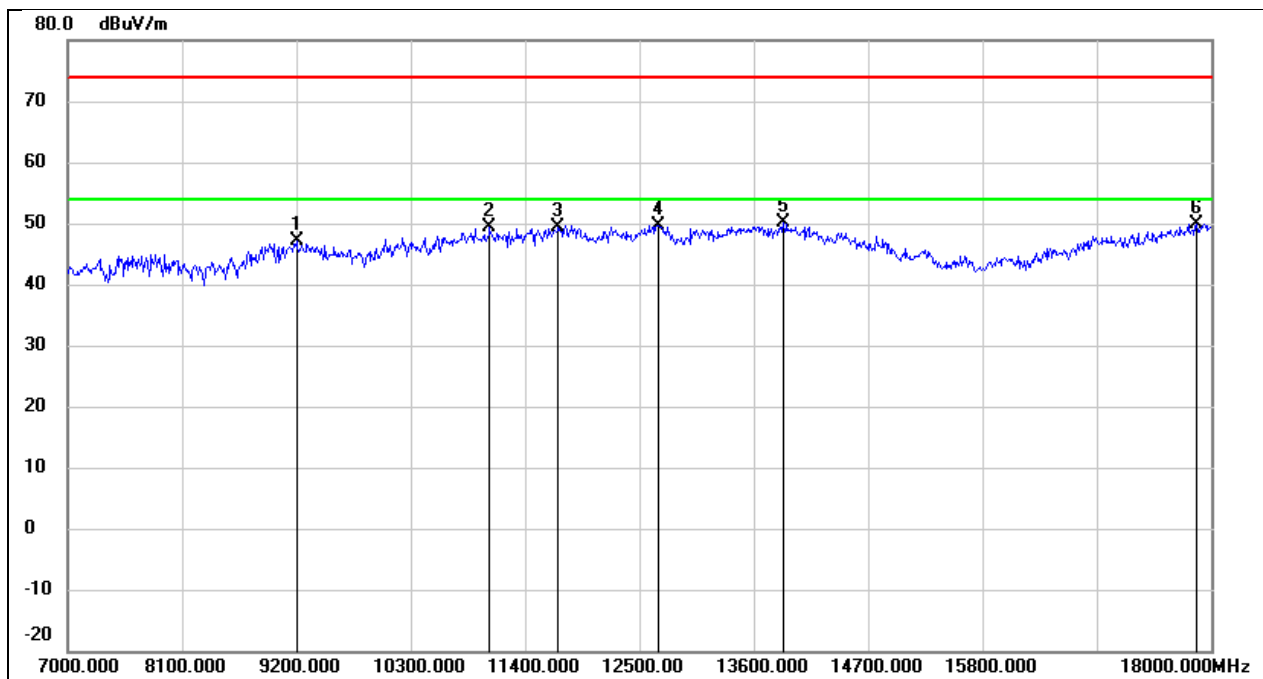


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.55	10.46	47.01	74.00	-26.99	peak
2	11059.000	34.44	14.96	49.40	74.00	-24.60	peak
3	11719.000	32.28	17.18	49.46	74.00	-24.54	peak
4	12687.000	31.61	18.05	49.66	74.00	-24.34	peak
5	13886.000	28.45	21.60	50.05	74.00	-23.95	peak
6	17857.000	24.77	25.14	49.91	74.00	-24.09	peak

Test Mode:	802.11ax HE40	Channel:	5710
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

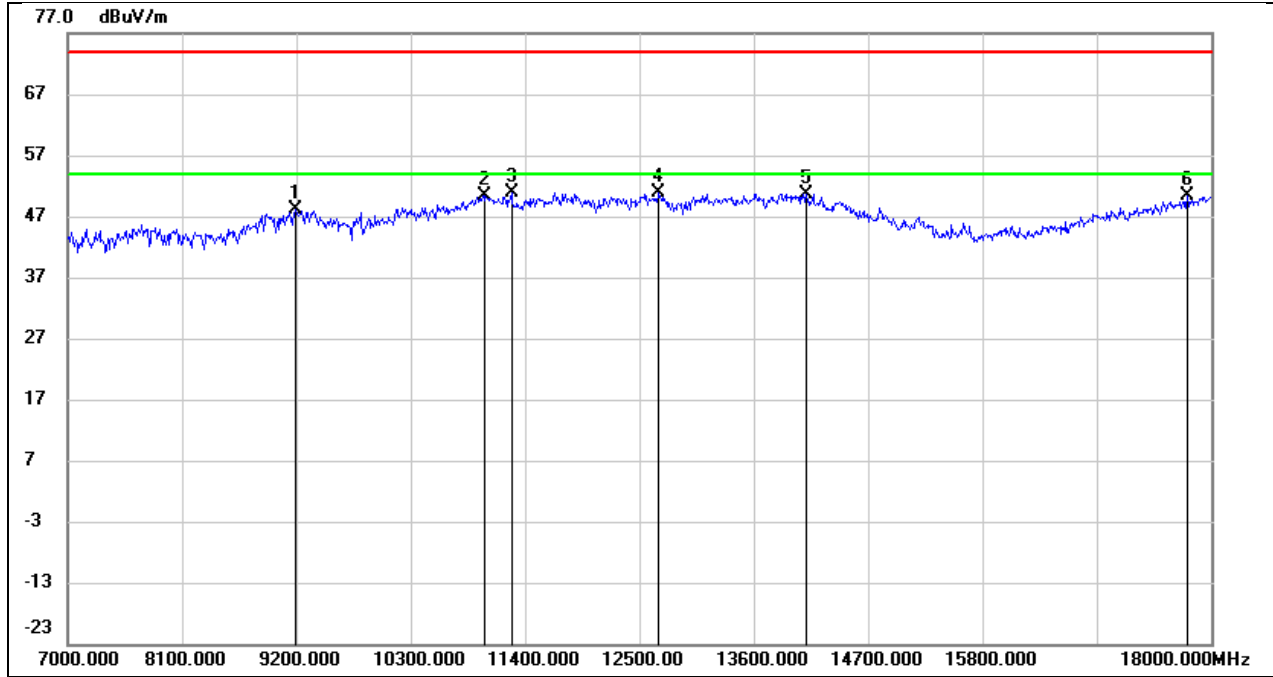


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.72	10.46	48.18	74.00	-25.82	peak
2	11004.000	35.66	14.74	50.40	74.00	-23.60	peak
3	11268.000	35.01	15.83	50.84	74.00	-23.16	peak
4	12687.000	32.93	18.05	50.98	74.00	-23.02	peak
5	14106.000	29.29	21.43	50.72	74.00	-23.28	peak
6	17769.000	25.75	24.53	50.28	74.00	-23.72	peak

Test Mode:	802.11ax HE40	Channel:	5710
Polarity:	Vertical	Test Voltage:	DC 3.87 V

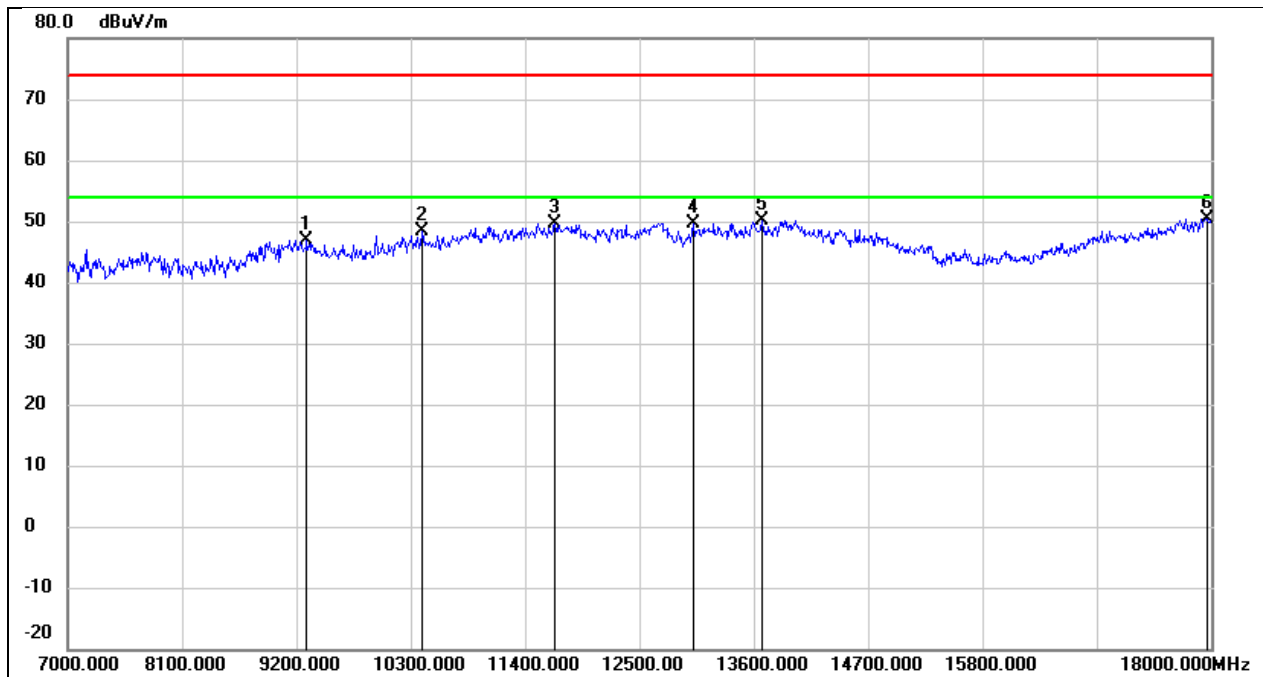


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	36.42	10.53	46.95	74.00	-27.05	peak
2	10410.000	35.69	12.62	48.31	74.00	-25.69	peak
3	11686.000	32.48	17.12	49.60	74.00	-24.40	peak
4	13017.000	31.19	18.53	49.72	74.00	-24.28	peak
5	13677.000	29.08	21.08	50.16	74.00	-23.84	peak
6	17956.000	24.66	25.82	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE40	Channel:	5755
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

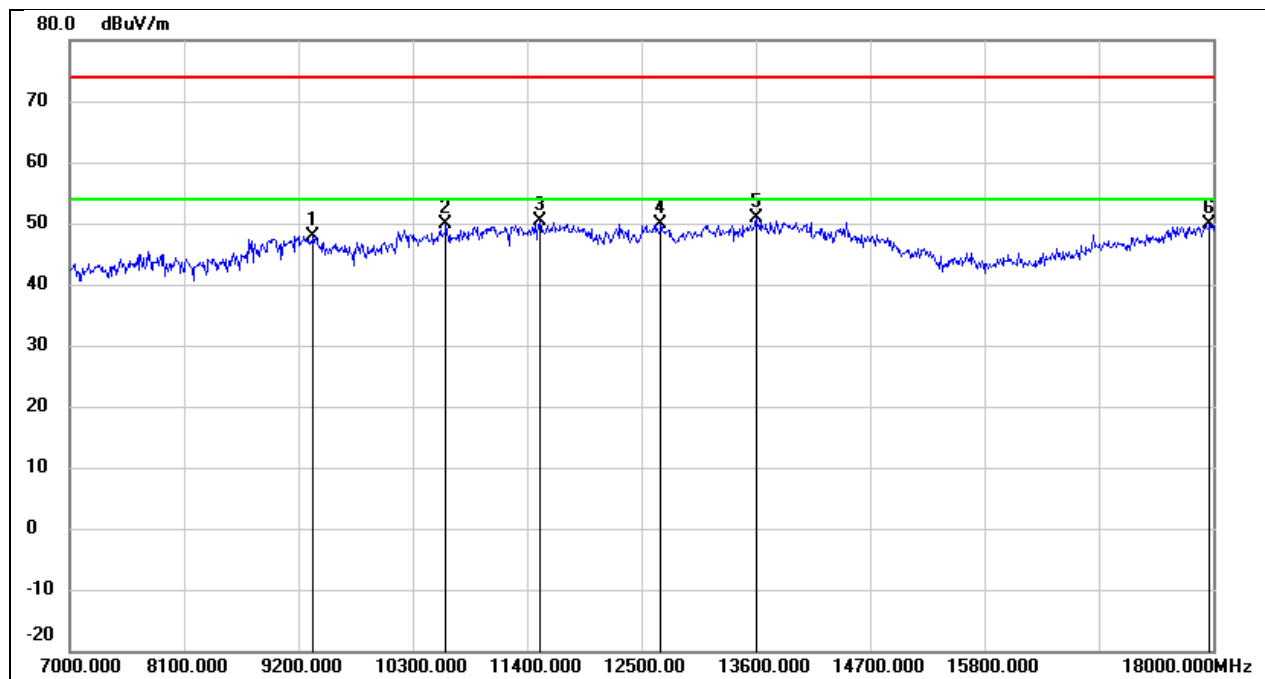


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.45	10.55	48.00	74.00	-26.00	peak
2	10619.000	36.64	13.28	49.92	74.00	-24.08	peak
3	11521.000	33.63	16.82	50.45	74.00	-23.55	peak
4	12687.000	31.72	18.05	49.77	74.00	-24.23	peak
5	13600.000	29.94	20.89	50.83	74.00	-23.17	peak
6	17967.000	23.95	25.89	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE40	Channel:	5755
Polarity:	Vertical	Test Voltage:	DC 3.87 V

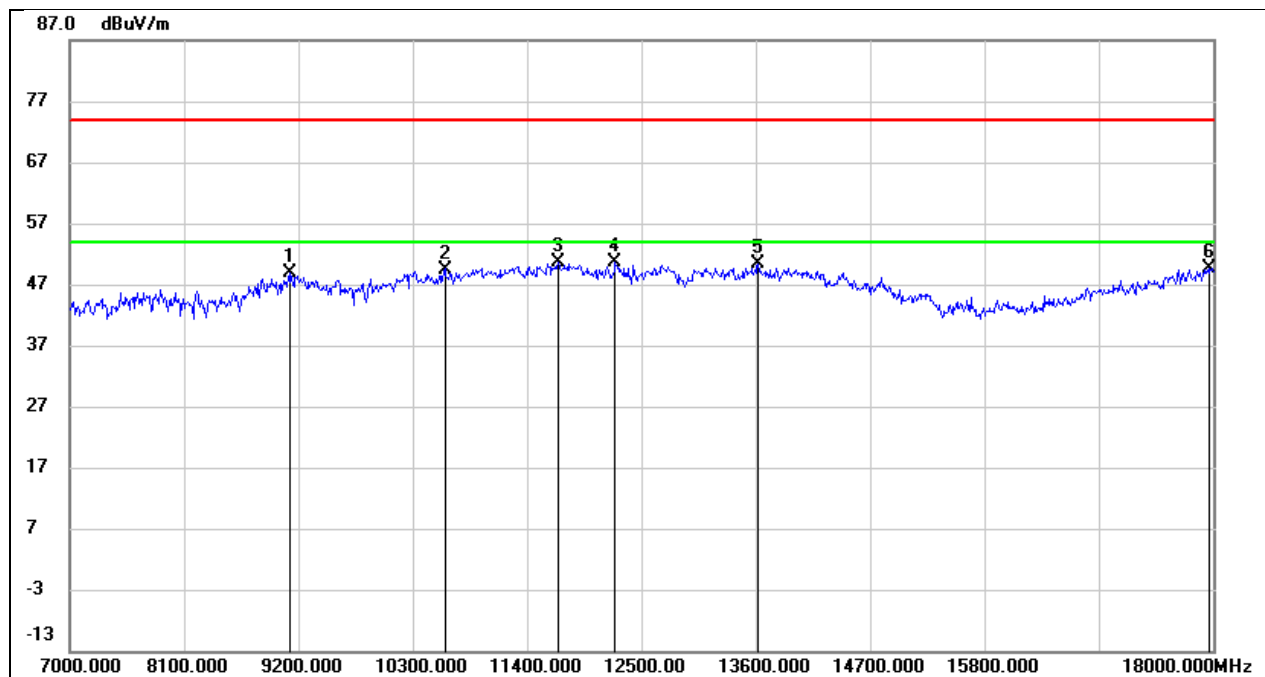


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	38.35	10.41	48.76	74.00	-25.24	peak
2	10608.000	36.27	13.23	49.50	74.00	-24.50	peak
3	11697.000	33.57	17.13	50.70	74.00	-23.30	peak
4	12247.000	32.74	17.77	50.51	74.00	-23.49	peak
5	13622.000	29.54	20.94	50.48	74.00	-23.52	peak
6	17967.000	23.70	25.89	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE40	Channel:	5795
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

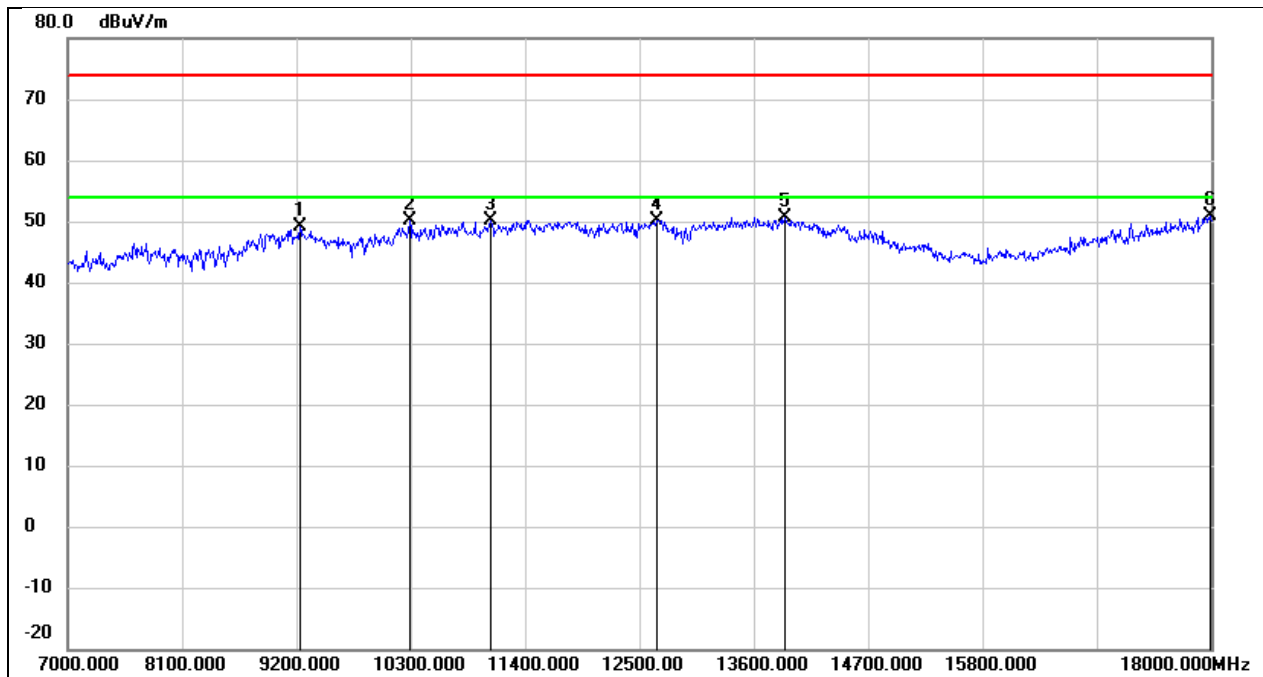


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.58	10.48	49.06	74.00	-24.94	peak
2	10289.000	37.63	12.38	50.01	74.00	-23.99	peak
3	11070.000	35.04	15.01	50.05	74.00	-23.95	peak
4	12665.000	32.06	18.04	50.10	74.00	-23.90	peak
5	13897.000	29.04	21.62	50.66	74.00	-23.34	peak
6	17989.000	24.76	26.04	50.80	74.00	-23.20	peak

Test Mode:	802.11ax HE40	Channel:	5795
Polarity:	Vertical	Test Voltage:	DC 3.87 V

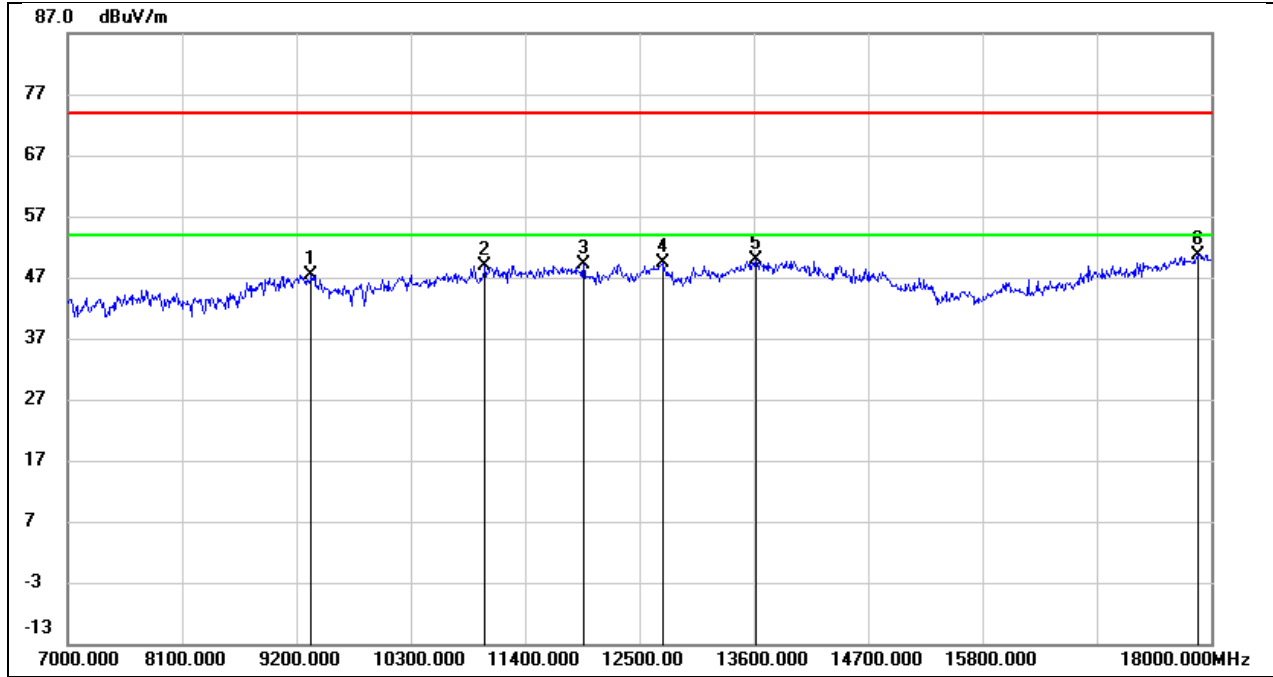


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.86	10.55	47.41	74.00	-26.59	peak
2	11015.000	34.15	14.79	48.94	74.00	-25.06	peak
3	11961.000	31.52	17.62	49.14	74.00	-24.86	peak
4	12720.000	31.39	18.09	49.48	74.00	-24.52	peak
5	13622.000	28.82	20.94	49.76	74.00	-24.24	peak
6	17879.000	25.45	25.29	50.74	74.00	-23.26	peak

Test Mode:	802.11ax HE80	Channel:	5210
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

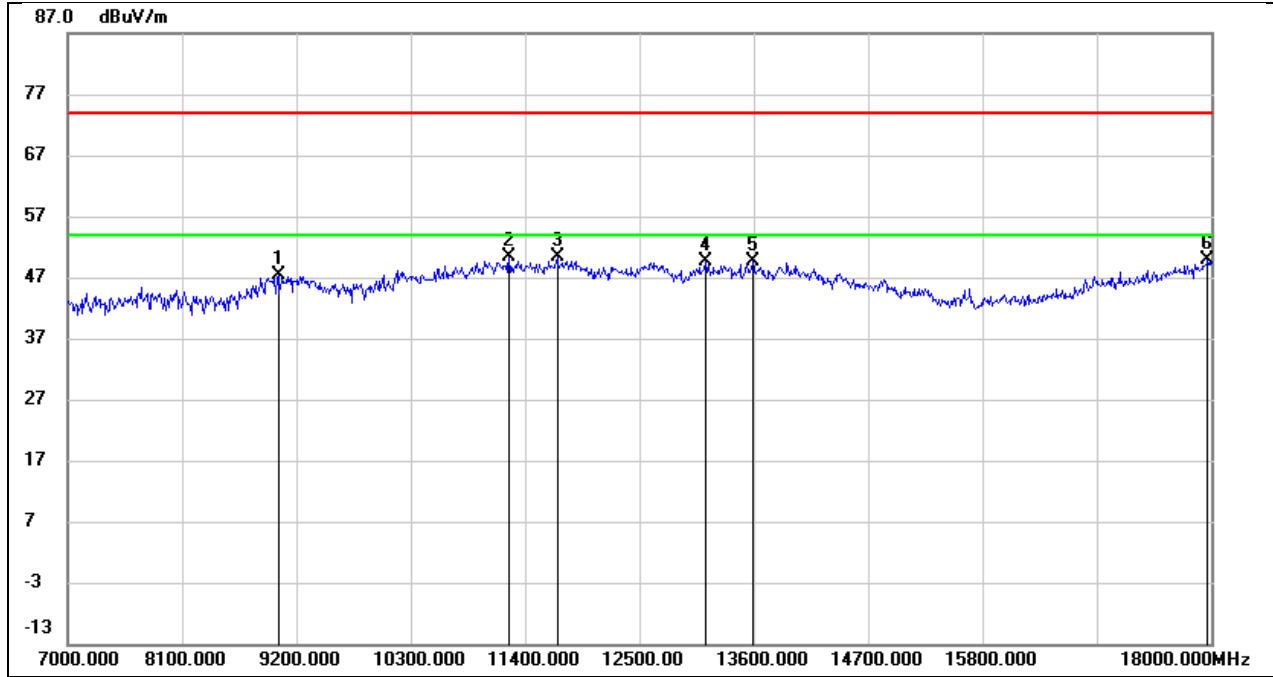


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9024.000	36.95	10.35	47.30	74.00	-26.70	peak
2	11246.000	34.54	15.73	50.27	74.00	-23.73	peak
3	11708.000	33.17	17.16	50.33	74.00	-23.67	peak
4	13138.000	30.50	19.05	49.55	74.00	-24.45	peak
5	13589.000	28.85	20.86	49.71	74.00	-24.29	peak
6	17967.000	24.07	25.89	49.96	74.00	-24.04	peak

Test Mode:	802.11ax HE80	Channel:	5210
Polarity:	Vertical	Test Voltage:	DC 3.87 V

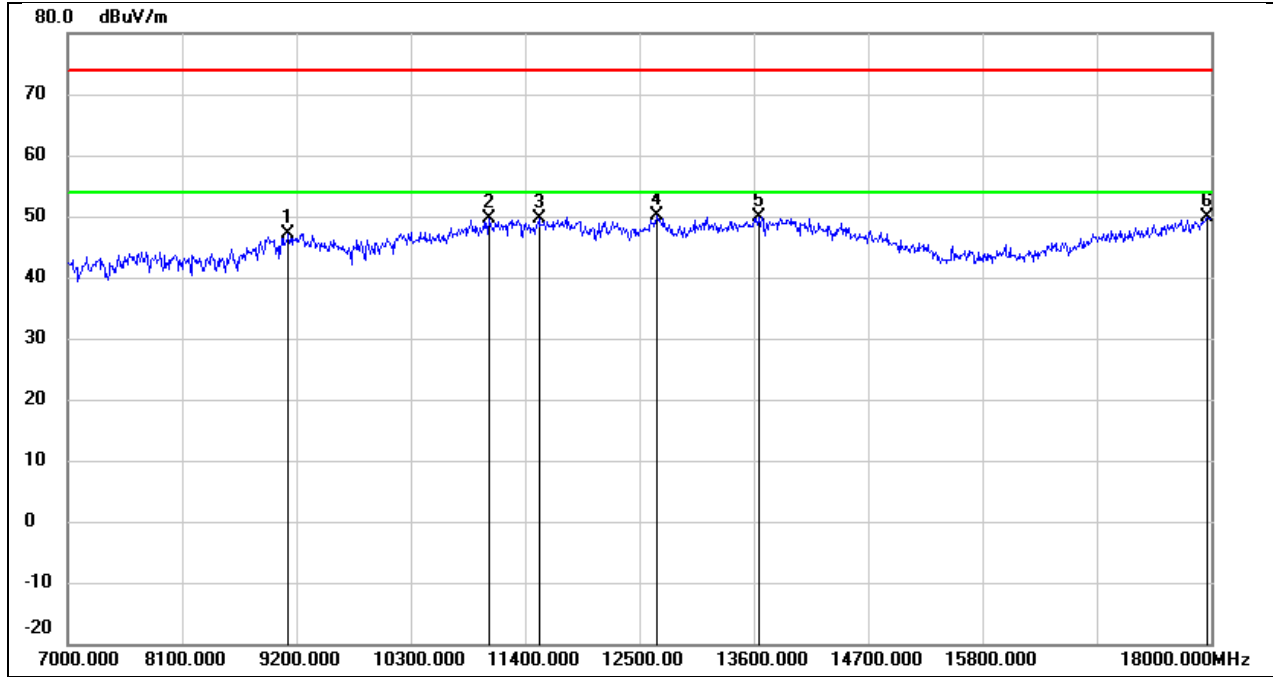


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.69	10.42	47.11	74.00	-26.89	peak
2	11048.000	34.65	14.91	49.56	74.00	-24.44	peak
3	11532.000	32.86	16.83	49.69	74.00	-24.31	peak
4	12665.000	32.11	18.04	50.15	74.00	-23.85	peak
5	13644.000	28.93	20.99	49.92	74.00	-24.08	peak
6	17956.000	24.16	25.82	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE80	Channel:	5290
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

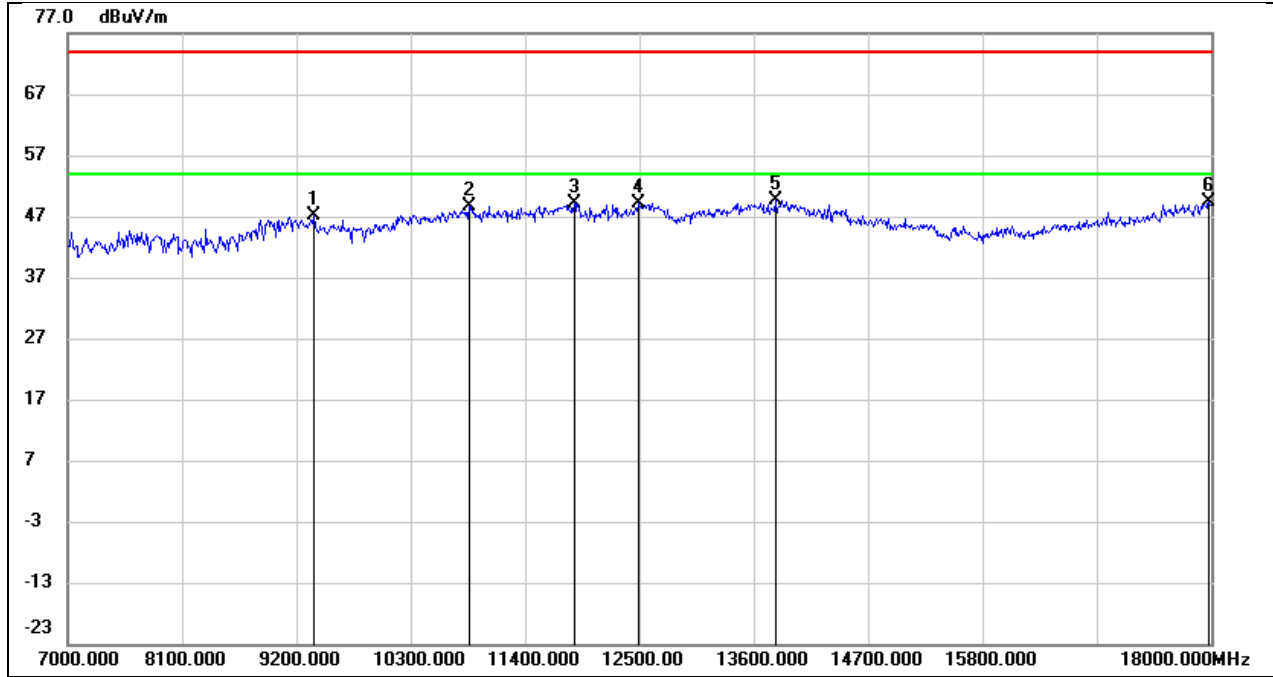


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	36.46	10.57	47.03	74.00	-26.97	peak
2	10861.000	34.42	14.20	48.62	74.00	-25.38	peak
3	11873.000	31.57	17.46	49.03	74.00	-24.97	peak
4	12489.000	31.32	17.83	49.15	74.00	-24.85	peak
5	13809.000	28.18	21.41	49.59	74.00	-24.41	peak
6	17978.000	23.29	25.97	49.26	74.00	-24.74	peak

Test Mode:	802.11ax HE80	Channel:	5290
Polarity:	Vertical	Test Voltage:	DC 3.87 V

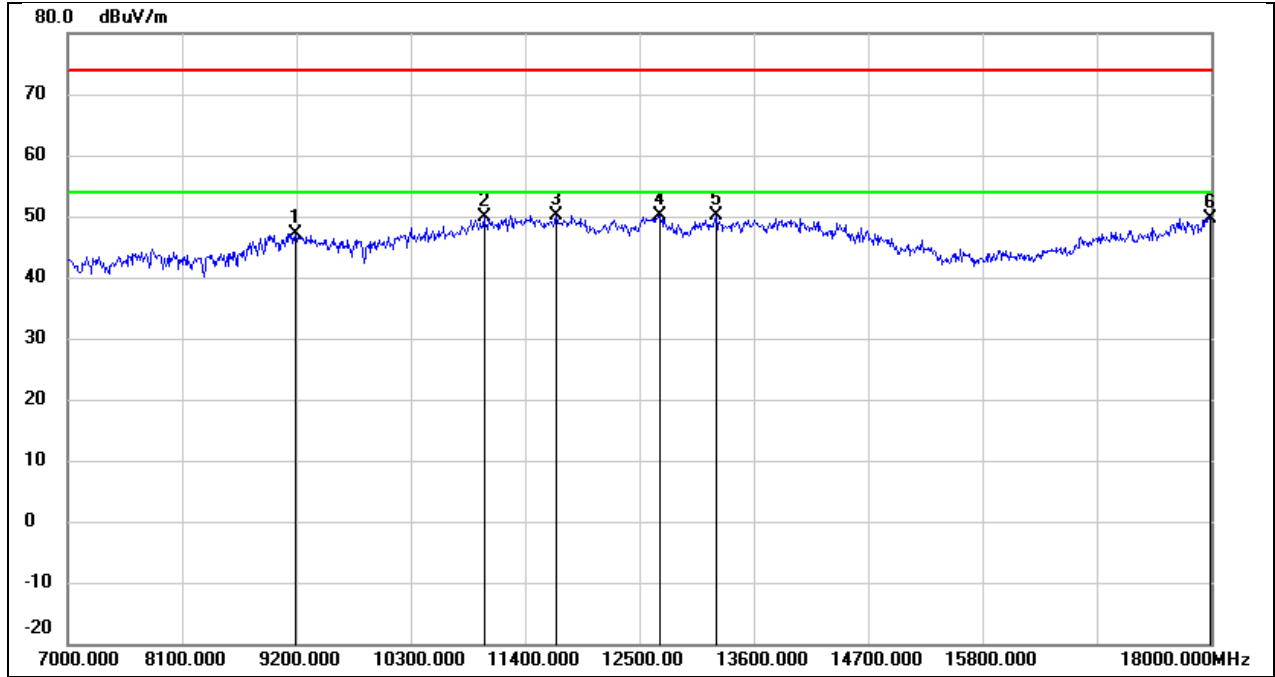


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.72	10.46	47.18	74.00	-26.82	peak
2	11004.000	35.08	14.74	49.82	74.00	-24.18	peak
3	11697.000	33.12	17.13	50.25	74.00	-23.75	peak
4	12698.000	32.17	18.08	50.25	74.00	-23.75	peak
5	13237.000	30.60	19.49	50.09	74.00	-23.91	peak
6	17989.000	23.53	26.04	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE80	Channel:	5530
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

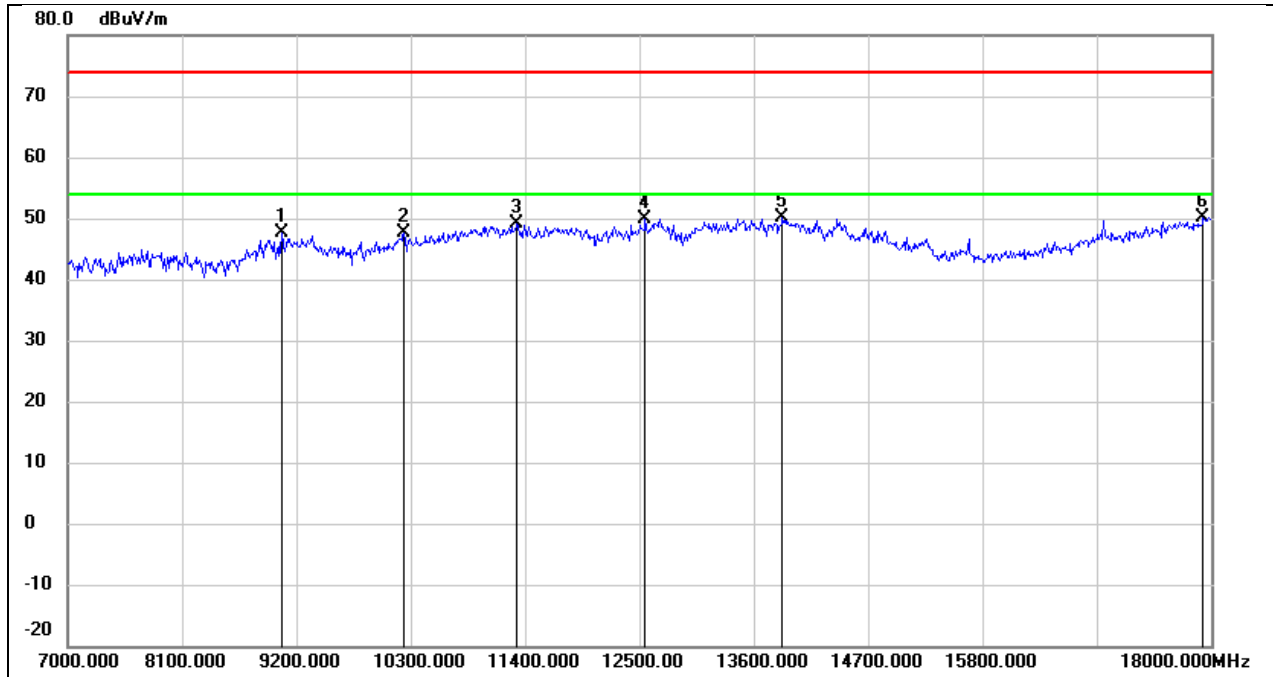


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.21	10.38	47.59	74.00	-26.41	peak
2	10234.000	35.32	12.26	47.58	74.00	-26.42	peak
3	11323.000	33.00	16.05	49.05	74.00	-24.95	peak
4	12555.000	32.05	17.90	49.95	74.00	-24.05	peak
5	13875.000	28.46	21.57	50.03	74.00	-23.97	peak
6	17923.000	24.54	25.60	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE80	Channel:	5530
Polarity:	Vertical	Test Voltage:	DC 3.87 V

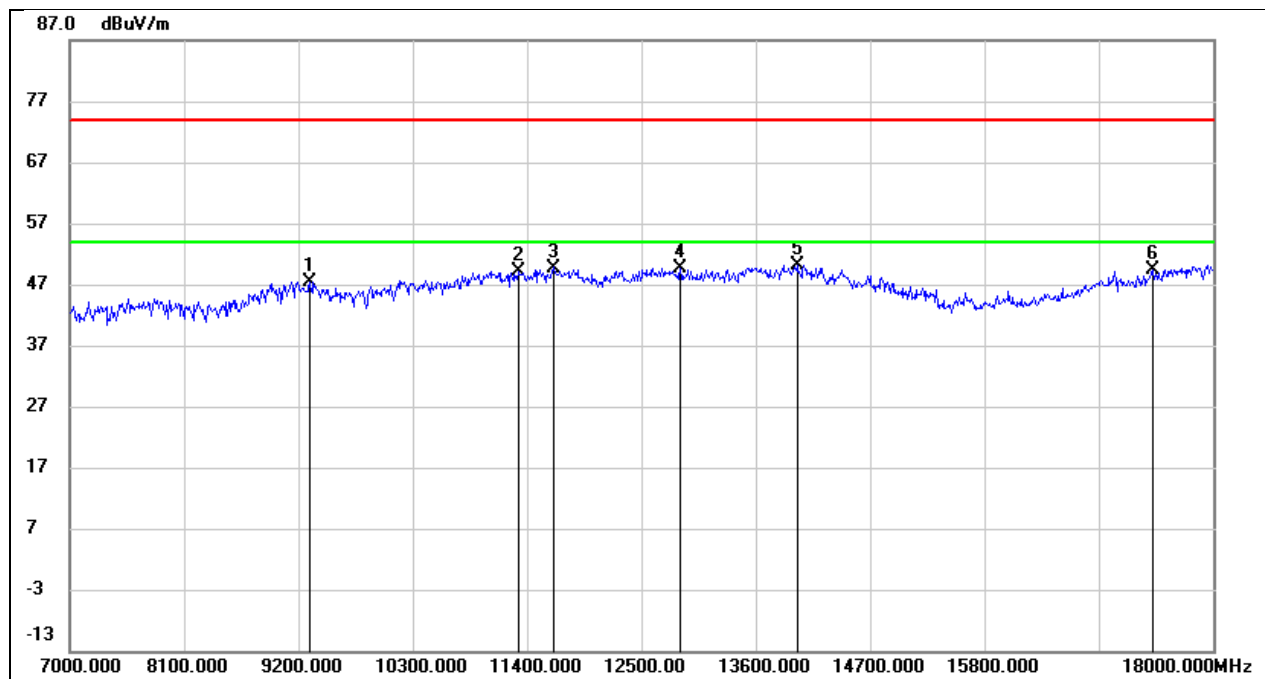


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	36.91	10.54	47.45	74.00	-26.55	peak
2	11323.000	33.04	16.05	49.09	74.00	-24.91	peak
3	11653.000	32.70	17.05	49.75	74.00	-24.25	peak
4	12874.000	31.37	18.30	49.67	74.00	-24.33	peak
5	13996.000	28.30	21.87	50.17	74.00	-23.83	peak
6	17417.000	27.05	22.36	49.41	74.00	-24.59	peak

Test Mode:	802.11ax HE80	Channel:	5610
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

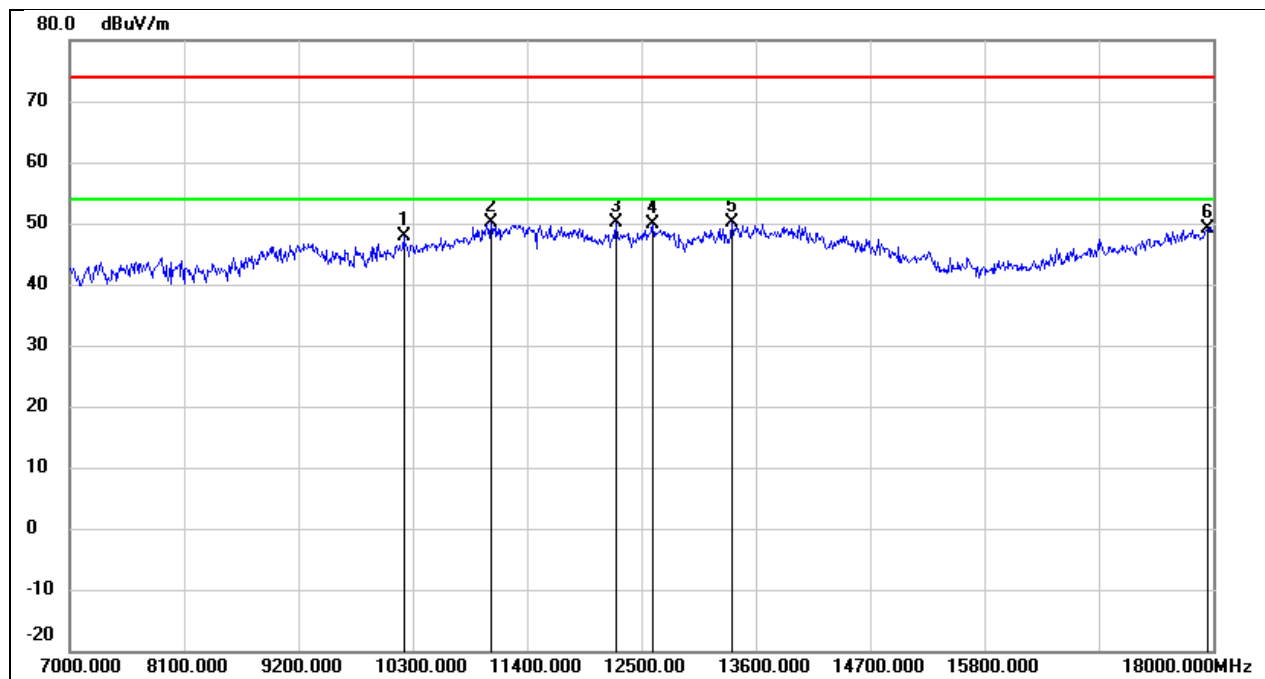


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10212.000	35.56	12.21	47.77	74.00	-26.23	peak
2	11059.000	35.11	14.96	50.07	74.00	-23.93	peak
3	12258.000	32.25	17.77	50.02	74.00	-23.98	peak
4	12610.000	31.81	17.97	49.78	74.00	-24.22	peak
5	13369.000	29.96	20.06	50.02	74.00	-23.98	peak
6	17945.000	23.35	25.75	49.10	74.00	-24.90	peak

Test Mode:	802.11ax HE80	Channel:	5610
Polarity:	Vertical	Test Voltage:	DC 3.87 V

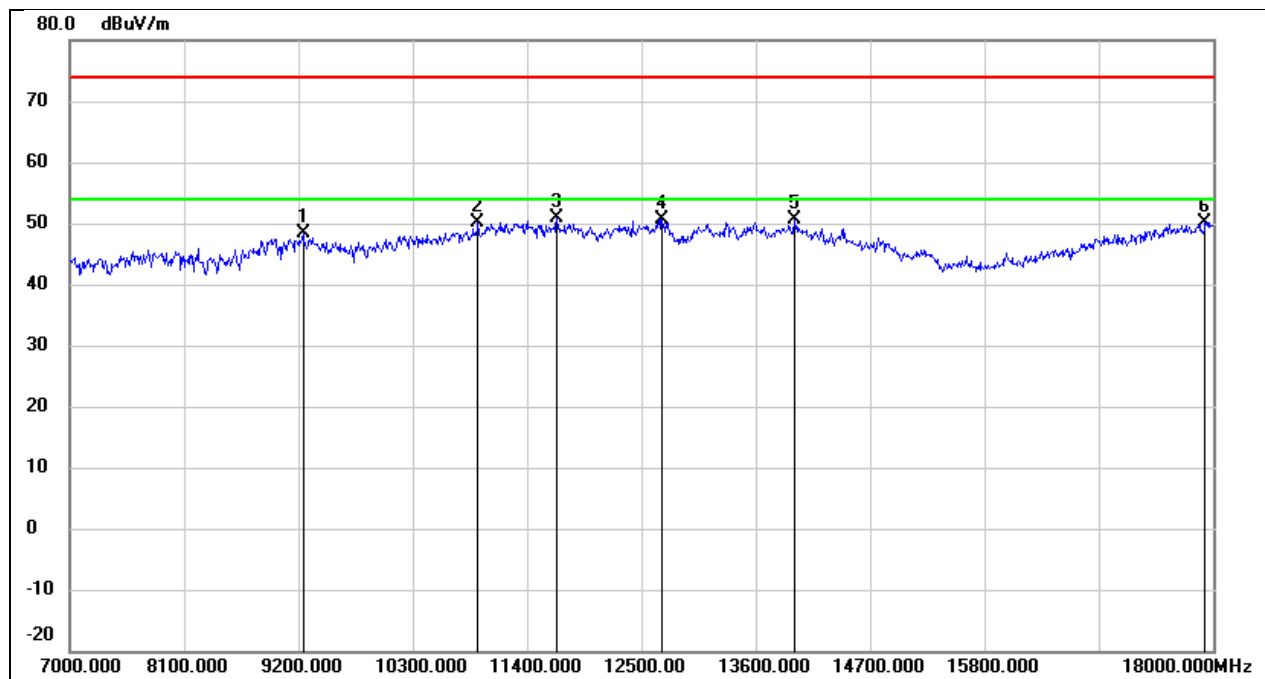


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.78	10.49	48.27	74.00	-25.73	peak
2	10927.000	35.66	14.45	50.11	74.00	-23.89	peak
3	11686.000	33.73	17.12	50.85	74.00	-23.15	peak
4	12698.000	32.52	18.08	50.60	74.00	-23.40	peak
5	13974.000	28.75	21.82	50.57	74.00	-23.43	peak
6	17923.000	24.53	25.60	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE80	Channel:	5690
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

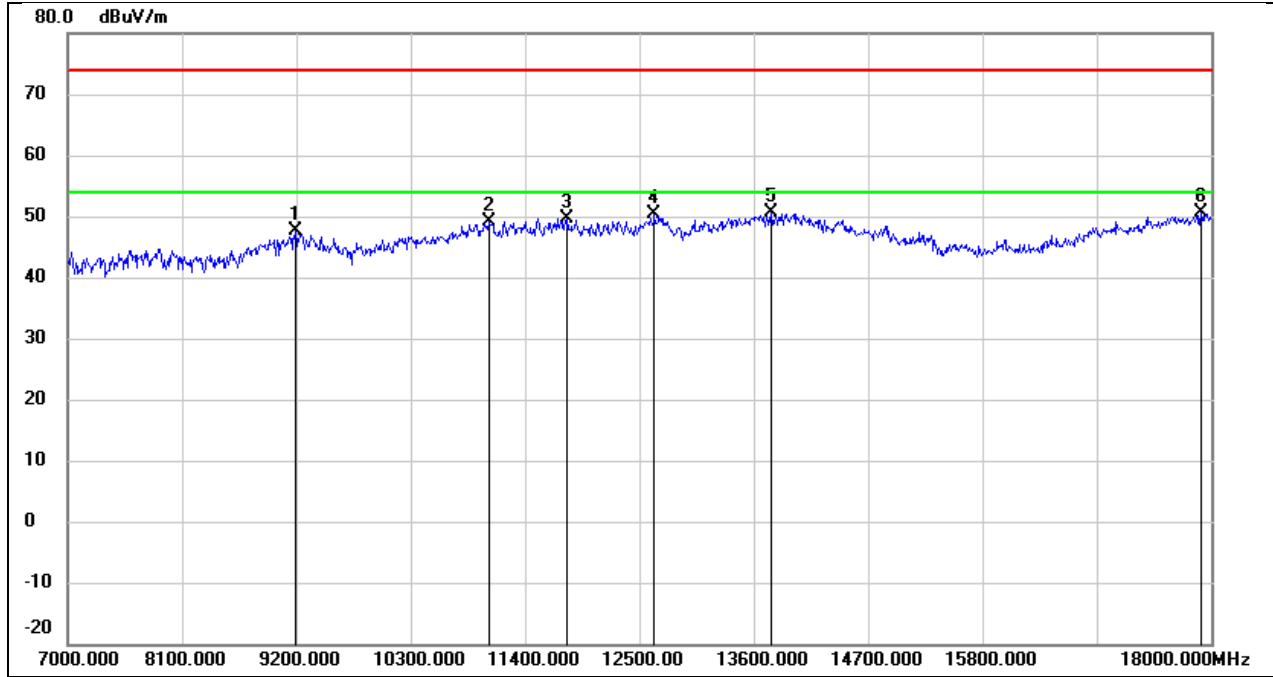


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.28	10.46	47.74	74.00	-26.26	peak
2	11048.000	34.29	14.91	49.20	74.00	-24.80	peak
3	11807.000	32.23	17.34	49.57	74.00	-24.43	peak
4	12643.000	32.36	18.01	50.37	74.00	-23.63	peak
5	13765.000	29.44	21.30	50.74	74.00	-23.26	peak
6	17901.000	25.28	25.45	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE80	Channel:	5690
Polarity:	Vertical	Test Voltage:	DC 3.87 V

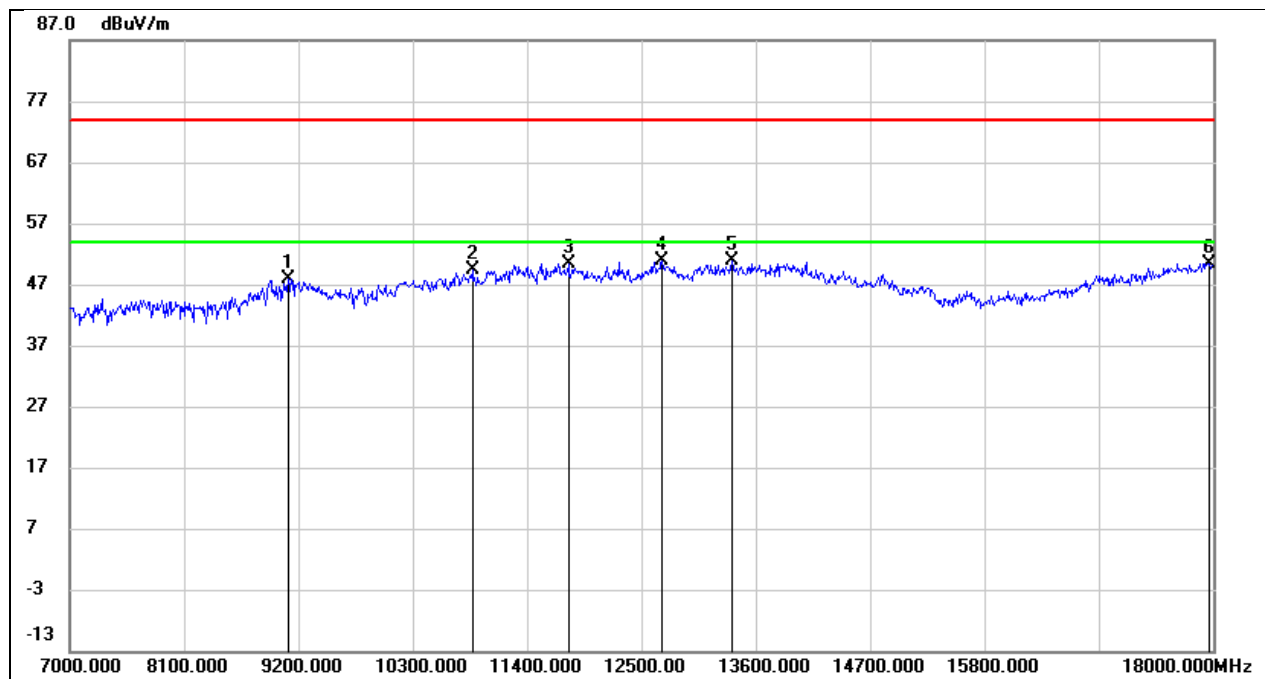


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	37.55	10.40	47.95	74.00	-26.05	peak
2	10872.000	35.04	14.23	49.27	74.00	-24.73	peak
3	11796.000	33.10	17.32	50.42	74.00	-23.58	peak
4	12698.000	32.84	18.08	50.92	74.00	-23.08	peak
5	13369.000	30.86	20.06	50.92	74.00	-23.08	peak
6	17967.000	24.60	25.89	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE80	Channel:	5775
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

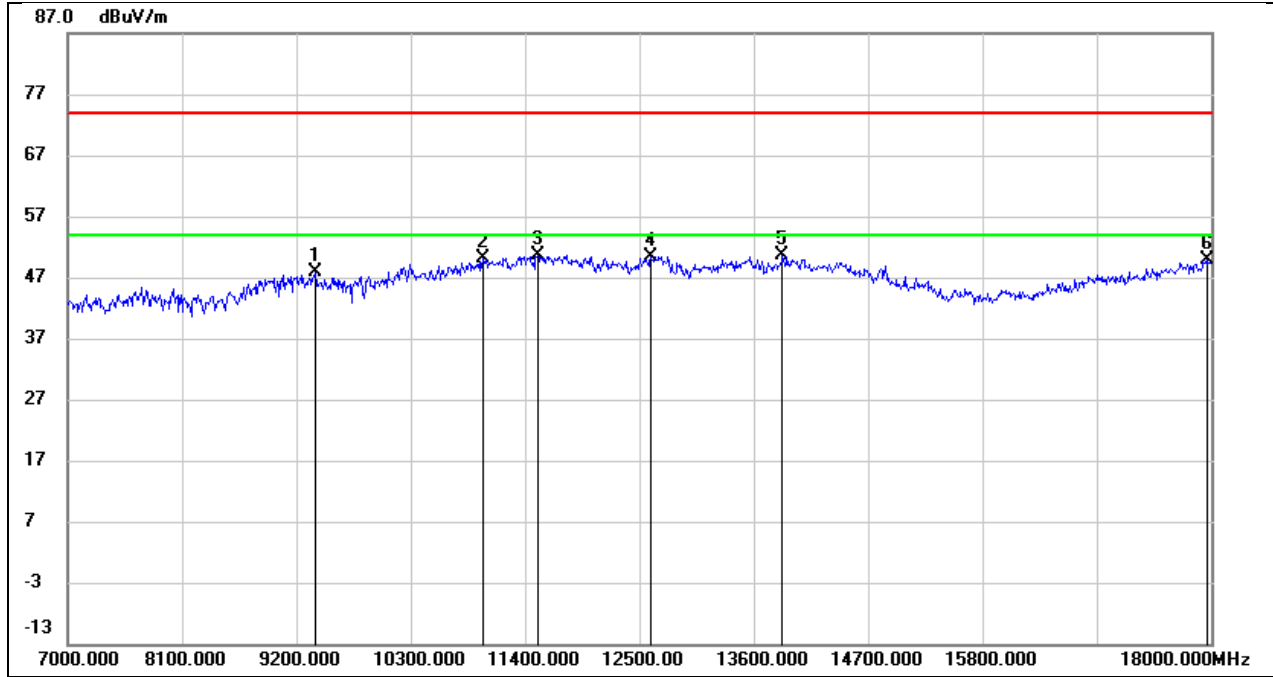

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	37.36	10.58	47.94	74.00	-26.06	peak
2	10993.000	35.50	14.70	50.20	74.00	-23.80	peak
3	11521.000	33.84	16.82	50.66	74.00	-23.34	peak
4	12610.000	32.43	17.97	50.40	74.00	-23.60	peak
5	13875.000	29.16	21.57	50.73	74.00	-23.27	peak
6	17967.000	23.99	25.89	49.88	74.00	-24.12	peak


Test Mode:	802.11ax HE80	Channel:	5775
Polarity:	Vertical	Test Voltage:	DC 3.87 V

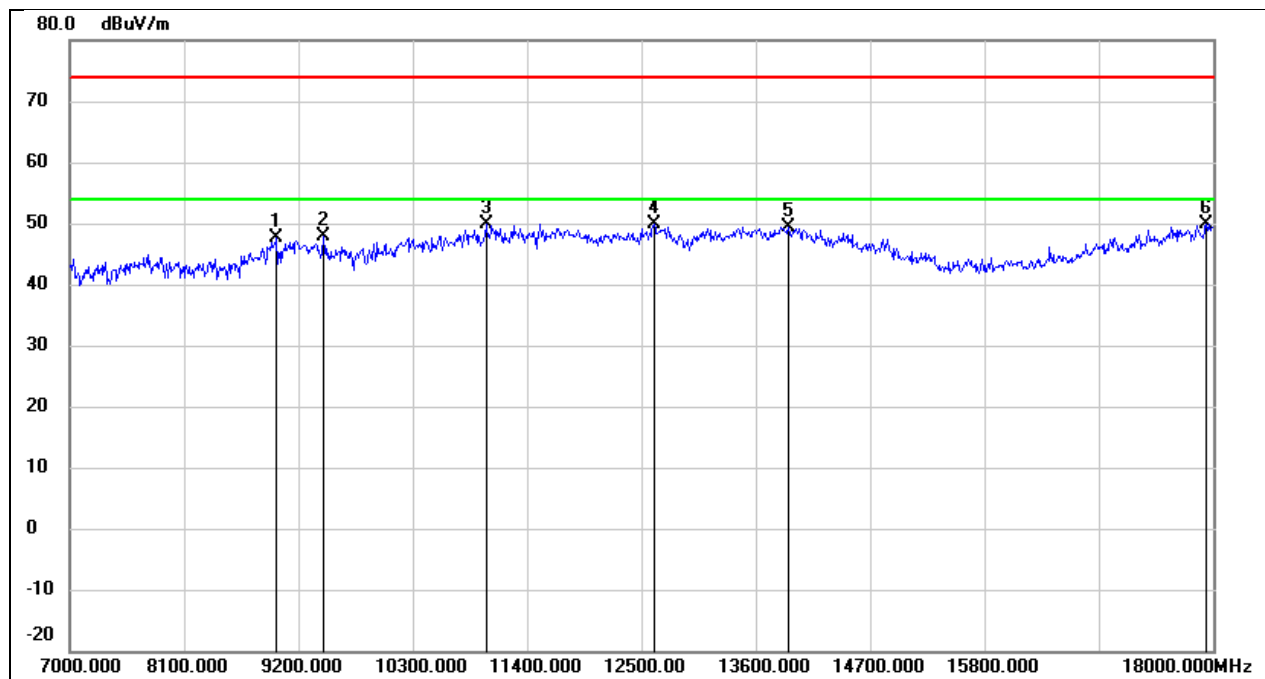

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.43	10.28	47.71	74.00	-26.29	peak
2	9442.000	37.16	10.61	47.77	74.00	-26.23	peak
3	11004.000	35.16	14.74	49.90	74.00	-24.10	peak
4	12621.000	32.00	17.98	49.98	74.00	-24.02	peak
5	13919.000	27.77	21.68	49.45	74.00	-24.55	peak
6	17934.000	24.20	25.67	49.87	74.00	-24.13	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

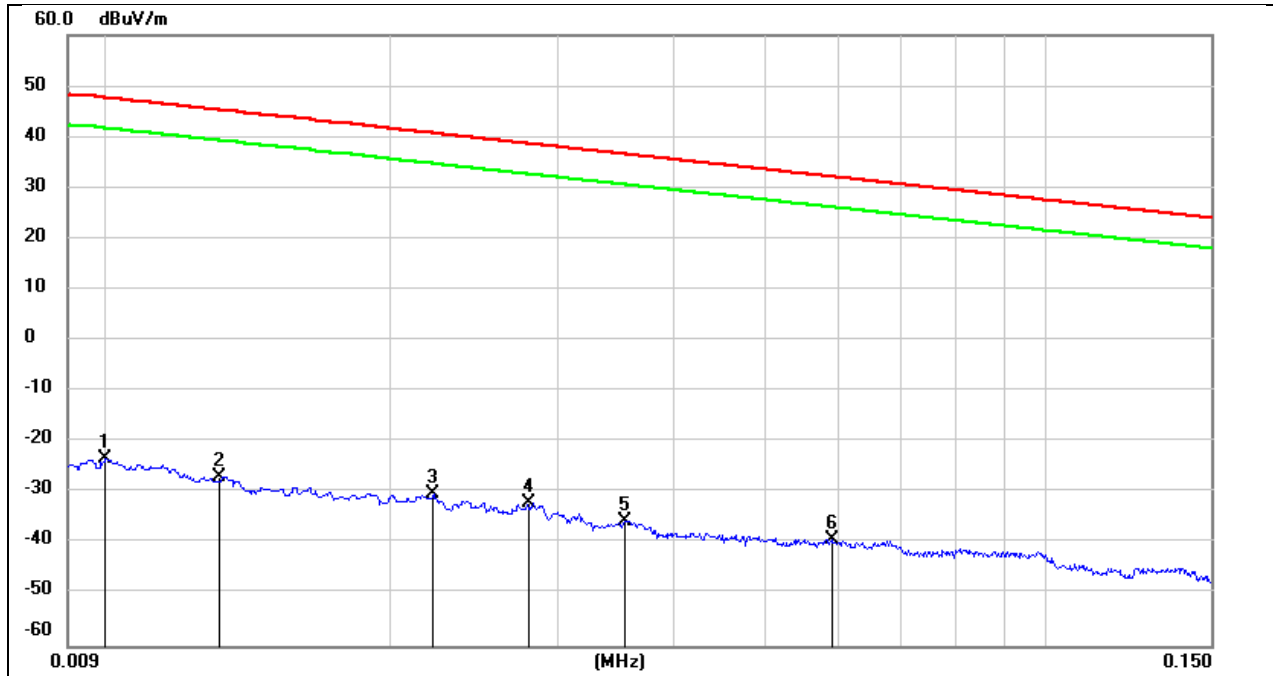


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	78.22	-101.40	-23.18	47.60	-70.78	peak
2	0.0131	74.47	-101.38	-26.91	45.25	-72.16	peak
3	0.0221	71.13	-101.35	-30.22	40.71	-70.93	peak
4	0.0280	69.29	-101.38	-32.09	38.66	-70.75	peak
5	0.0354	65.97	-101.41	-35.44	36.62	-72.06	peak
6	0.0589	62.31	-101.52	-39.21	32.20	-71.41	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

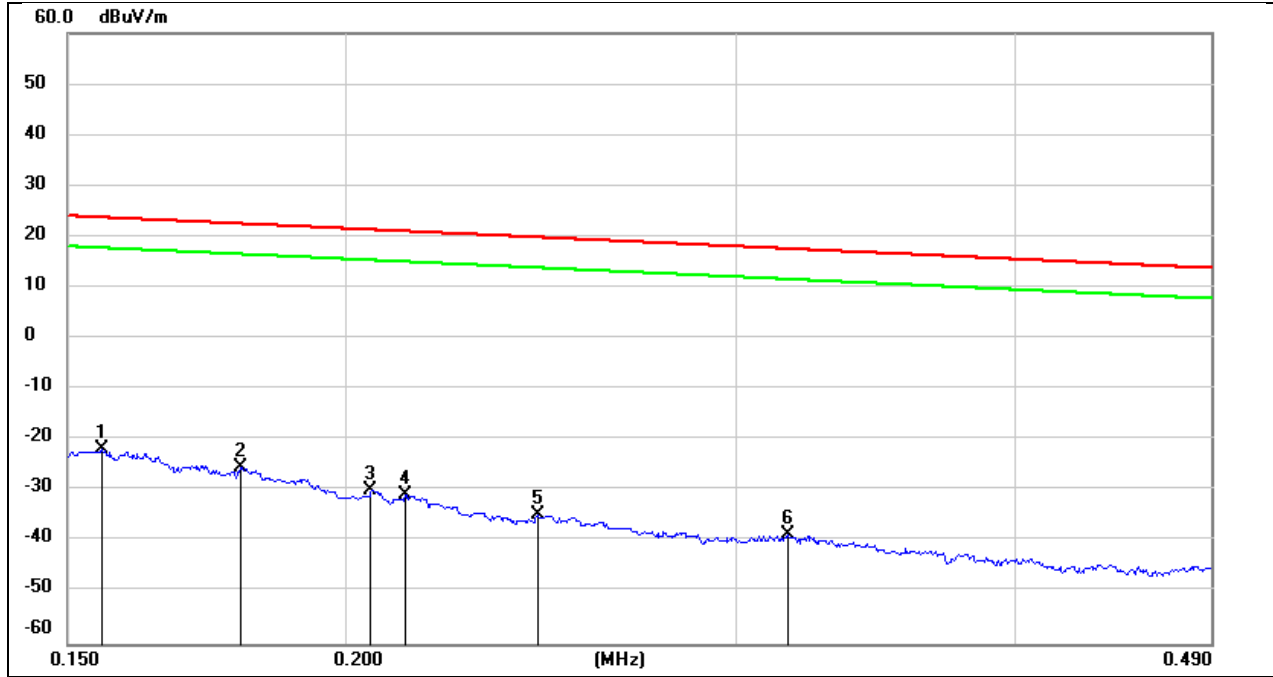

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	79.77	-101.65	-21.88	23.77	-45.65	peak
2	0.1794	76.27	-101.68	-25.41	22.53	-47.94	peak
3	0.2053	71.79	-101.73	-29.94	21.35	-51.29	peak
4	0.2127	70.95	-101.74	-30.79	21.04	-51.83	peak
5	0.2442	67.03	-101.79	-34.76	19.85	-54.61	peak
6	0.3163	63.20	-101.87	-38.67	17.60	-56.27	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

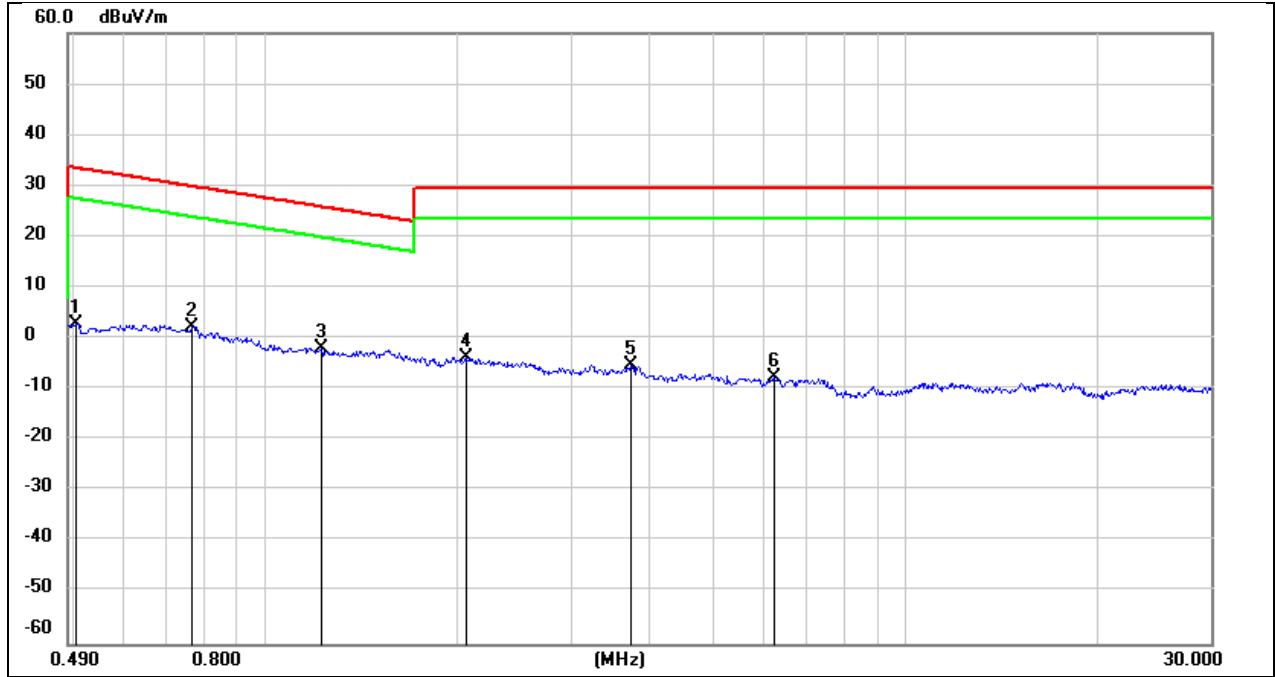

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	64.93	-62.07	2.86	33.56	-30.70	peak
2	0.7641	64.42	-62.12	2.30	29.94	-27.64	peak
3	1.2214	60.12	-62.16	-2.04	25.87	-27.91	peak
4	2.0539	58.20	-61.81	-3.61	29.54	-33.15	peak
5	3.7100	56.20	-61.41	-5.21	29.54	-34.75	peak
6	6.2445	53.63	-61.32	-7.69	29.54	-37.23	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

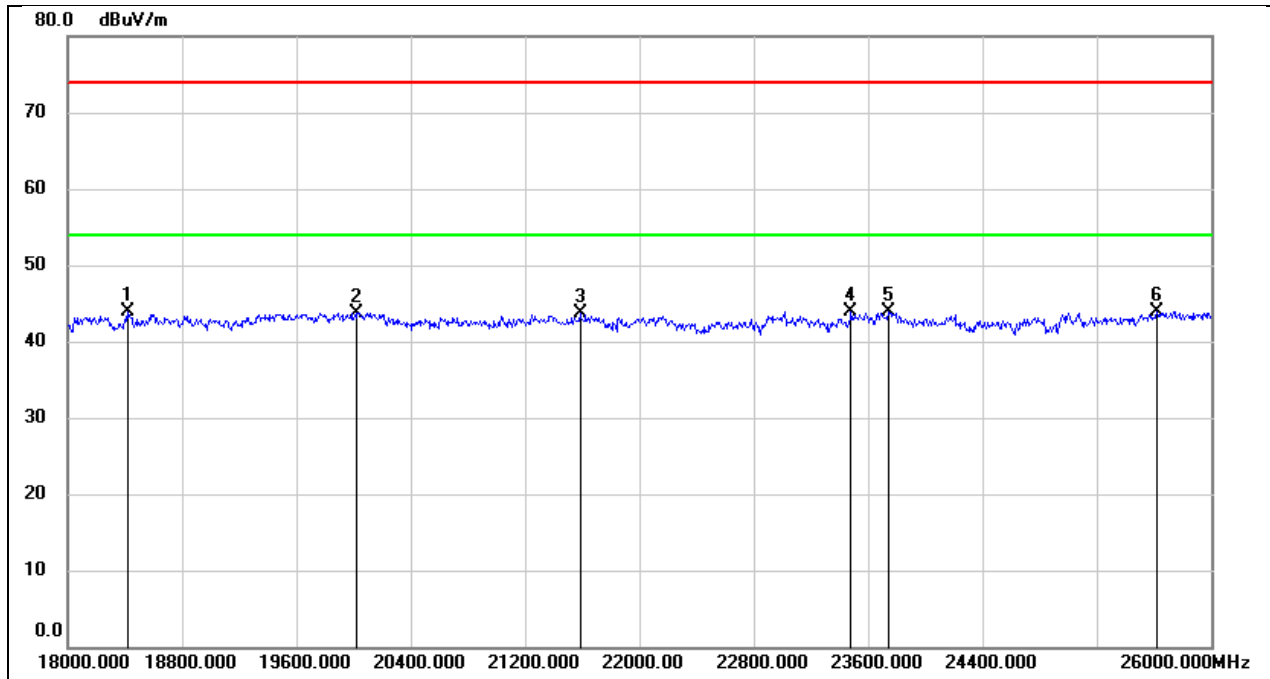

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18416.000	49.23	-5.35	43.88	74.00	-30.12	peak
2	20024.000	49.25	-5.47	43.78	74.00	-30.22	peak
3	21584.000	48.19	-4.56	43.63	74.00	-30.37	peak
4	23480.000	47.04	-3.16	43.88	74.00	-30.12	peak
5	23744.000	47.15	-3.20	43.95	74.00	-30.05	peak
6	25616.000	45.18	-1.24	43.94	74.00	-30.06	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.87 V

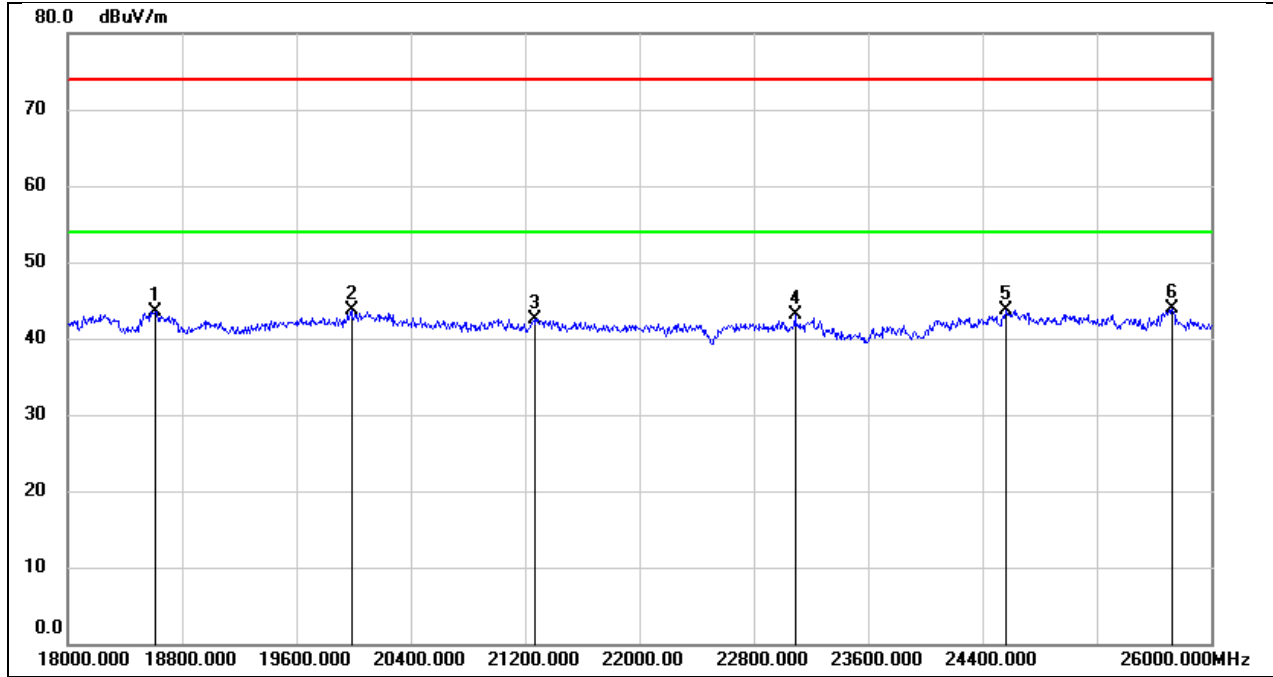

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	48.89	-5.34	43.55	74.00	-30.45	peak
2	19984.000	49.21	-5.44	43.77	74.00	-30.23	peak
3	21264.000	47.35	-4.76	42.59	74.00	-31.41	peak
4	23088.000	46.52	-3.41	43.11	74.00	-30.89	peak
5	24568.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.87 V

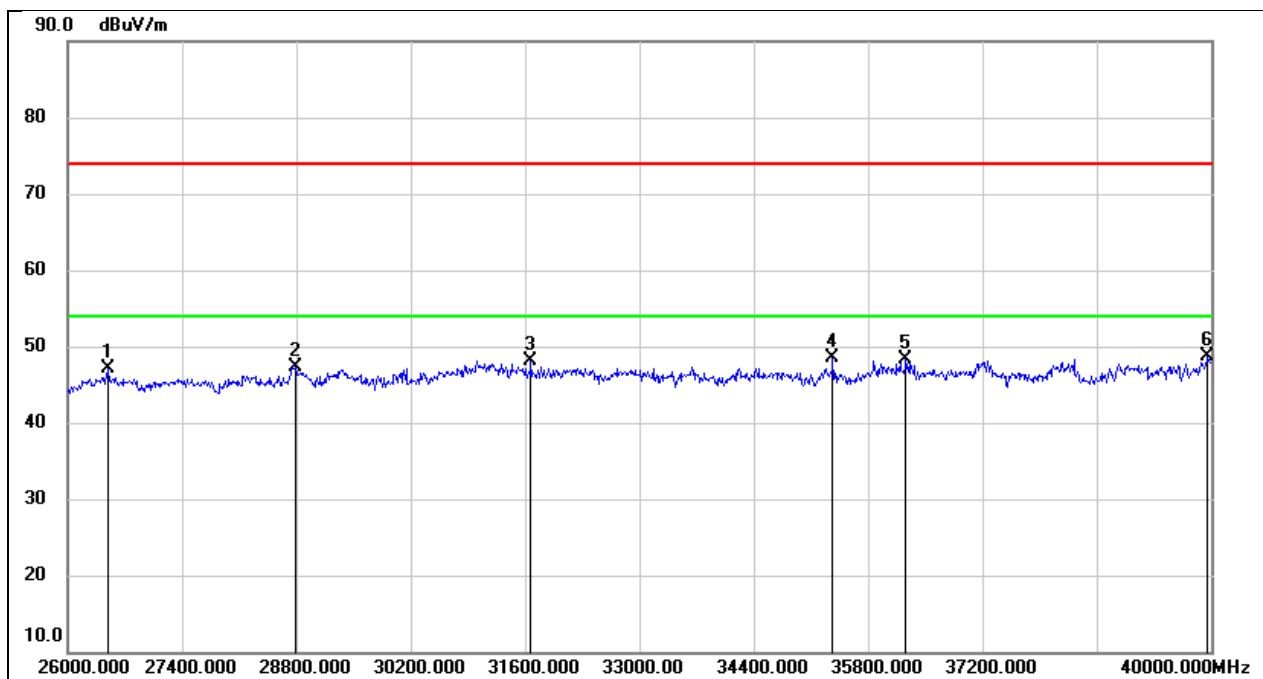

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	51.79	-4.74	47.05	74.00	-26.95	peak
2	28786.000	47.99	-0.64	47.35	74.00	-26.65	peak
3	31670.000	49.36	-1.21	48.15	74.00	-25.85	peak
4	35366.000	45.90	2.59	48.49	74.00	-25.51	peak
5	36262.000	45.10	3.28	48.38	74.00	-25.62	peak
6	39958.000	43.58	5.12	48.70	74.00	-25.30	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.87 V

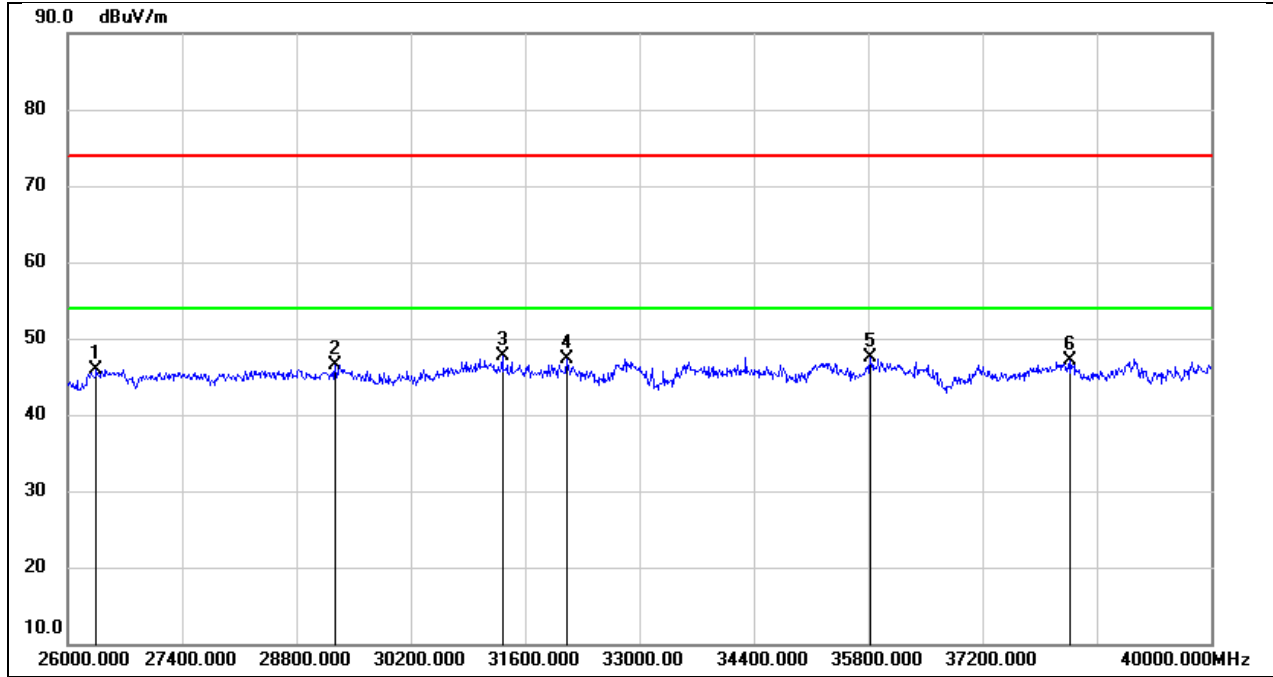

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26350.000	51.00	-5.11	45.89	74.00	-28.11	peak
2	29276.000	47.51	-1.01	46.50	74.00	-27.50	peak
3	31320.000	48.61	-0.93	47.68	74.00	-26.32	peak
4	32104.000	48.99	-1.75	47.24	74.00	-26.76	peak
5	35828.000	43.75	3.67	47.42	74.00	-26.58	peak
6	38278.000	43.32	3.82	47.14	74.00	-26.86	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC5V

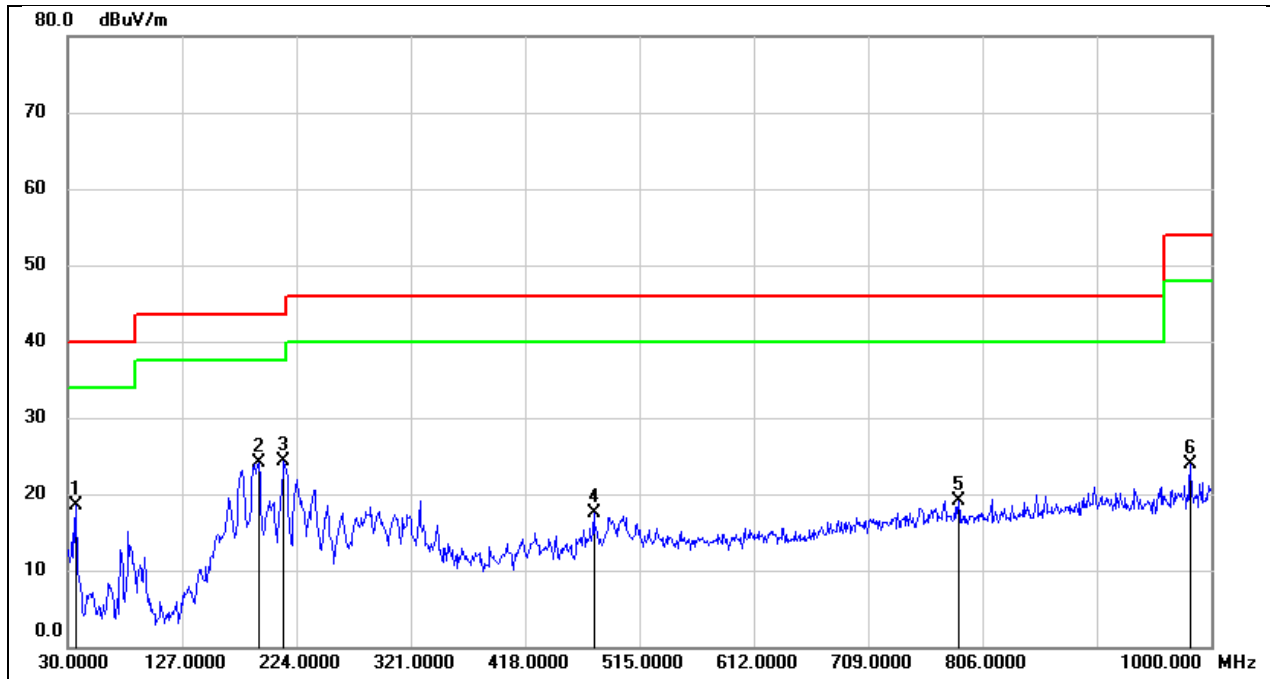

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7900	37.40	-18.83	18.57	40.00	-21.43	QP
2	191.9900	40.09	-16.00	24.09	43.50	-19.41	QP
3	213.3300	40.71	-16.49	24.22	43.50	-19.28	QP
4	476.2000	28.31	-10.84	17.47	46.00	-28.53	QP
5	785.6300	25.59	-6.39	19.20	46.00	-26.80	QP
6	982.5400	27.80	-3.95	23.85	54.00	-30.15	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC5V

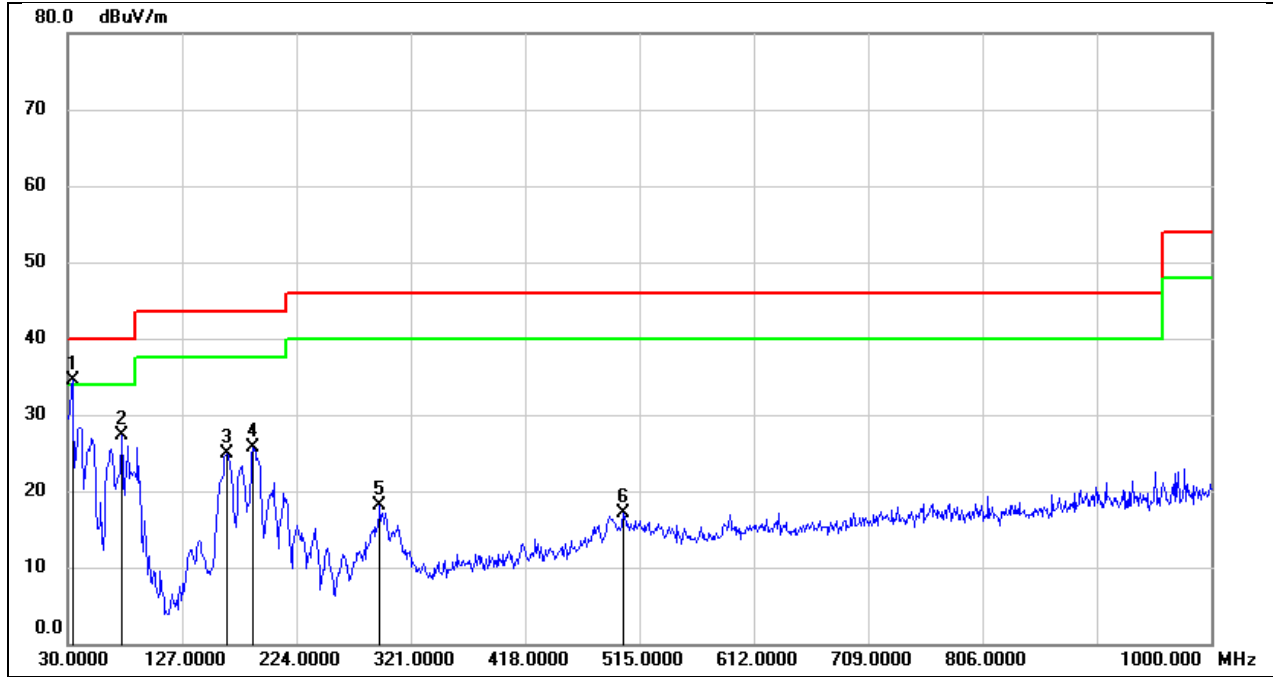

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	52.96	-18.37	34.59	40.00	-5.41	QP
2	75.5899	48.05	-20.68	27.37	40.00	-12.63	QP
3	164.8300	41.59	-16.68	24.91	43.50	-18.59	QP
4	187.1400	41.76	-16.01	25.75	43.50	-17.75	QP
5	294.8100	33.25	-15.17	18.08	46.00	-27.92	QP
6	501.4200	27.36	-10.33	17.03	46.00	-28.97	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

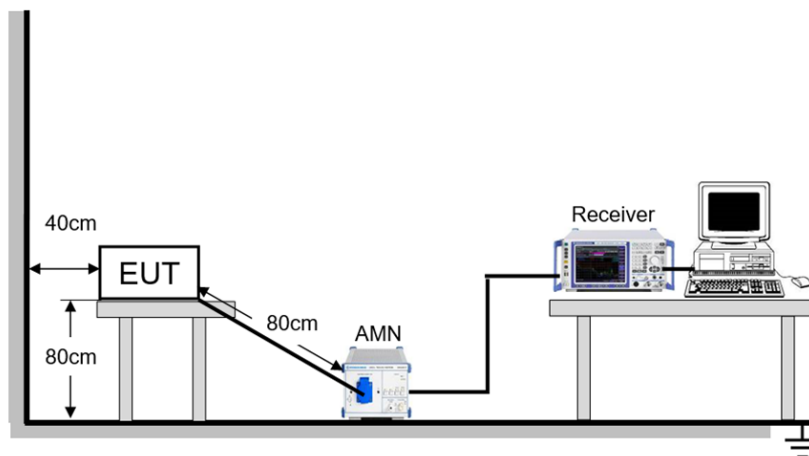

TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	December 25, 2023	Test By	Fanny Huang
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

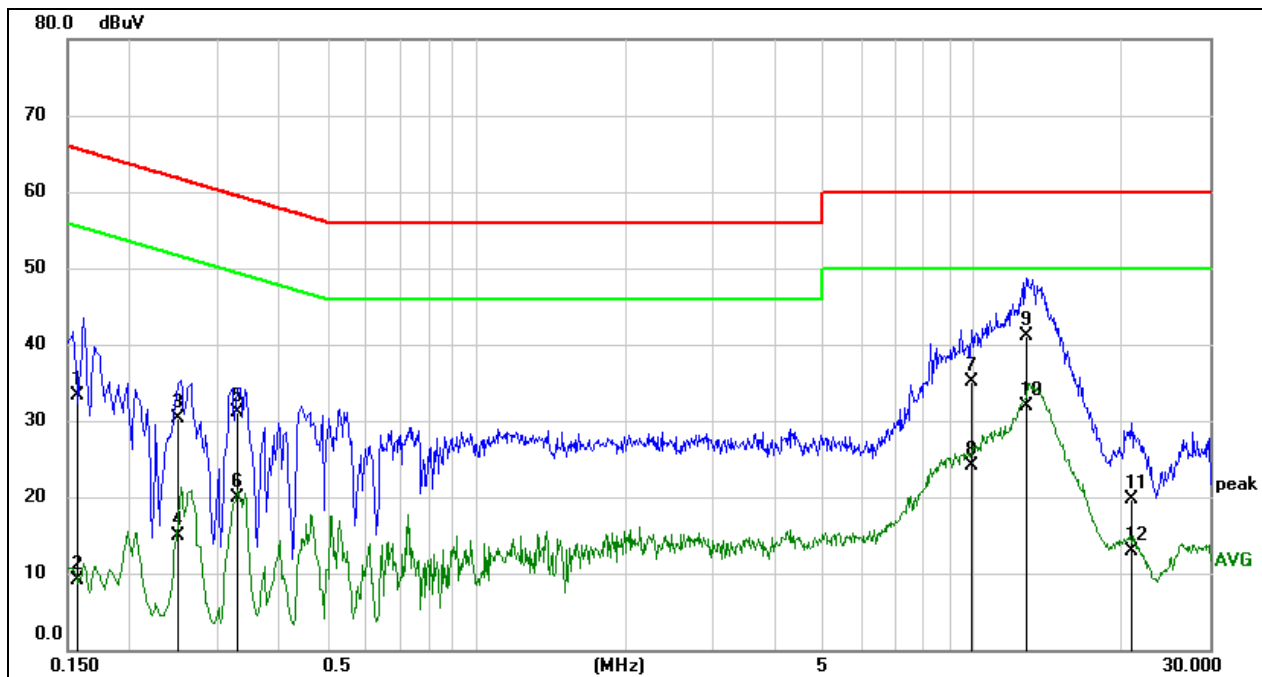


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1575	23.74	9.59	33.33	65.59	-32.26	QP
2	0.1575	-0.52	9.59	9.07	55.59	-46.52	AVG
3	0.2507	20.71	9.59	30.30	61.73	-31.43	QP
4	0.2507	5.41	9.59	15.00	51.73	-36.73	AVG
5	0.3300	21.48	9.59	31.07	59.45	-28.38	QP
6	0.3300	10.35	9.59	19.94	49.45	-29.51	AVG
7	9.9713	25.33	9.72	35.05	60.00	-24.95	QP
8	9.9713	14.41	9.72	24.13	50.00	-25.87	AVG
9	12.8607	31.40	9.76	41.16	60.00	-18.84	QP
10	12.8607	22.20	9.76	31.96	50.00	-18.04	AVG
11	20.8575	9.89	9.83	19.72	60.00	-40.28	QP
12	20.8575	3.01	9.83	12.84	50.00	-37.16	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

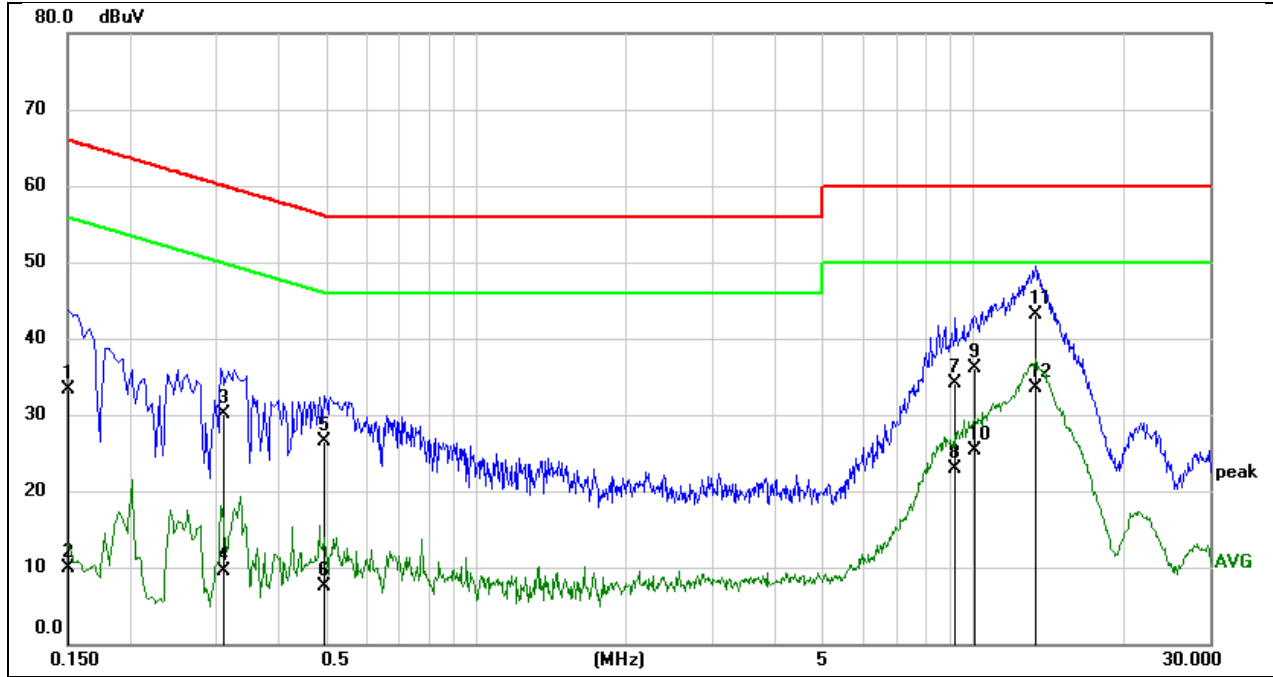

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1501	23.90	9.49	33.39	65.99	-32.60	QP
2	0.1501	0.36	9.49	9.85	55.99	-46.14	AVG
3	0.3087	20.48	9.55	30.03	60.01	-29.98	QP
4	0.3087	-0.02	9.55	9.53	50.01	-40.48	AVG
5	0.4953	17.06	9.50	26.56	56.08	-29.52	QP
6	0.4953	-2.04	9.50	7.46	46.08	-38.62	AVG
7	9.2603	24.55	9.62	34.17	60.00	-25.83	QP
8	9.2603	13.37	9.62	22.99	50.00	-27.01	AVG
9	10.1453	26.39	9.62	36.01	60.00	-23.99	QP
10	10.1453	15.73	9.62	25.35	50.00	-24.65	AVG
11	13.3593	33.44	9.66	43.10	60.00	-16.90	QP
12	13.3593	23.87	9.66	33.53	50.00	-16.47	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

Appendix A: Duty Cycle

11.1.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
a	100	100	1.0000	100.00	0.00	0.01	0.01
n20	100	100	1.0000	100.00	0.00	0.01	0.01
n40	100	100	1.0000	100.00	0.00	0.01	0.01
ac80	100	100	1.0000	100.00	0.00	0.01	0.01
ax20	100	100	1.0000	100.00	0.00	0.01	0.01
ax40	100	100	1.0000	100.00	0.00	0.01	0.01
ax80	100	100	1.0000	100.00	0.00	0.01	0.01

Note:




Duty Cycle Correction Factor = $10 \log(1/x)$.

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.




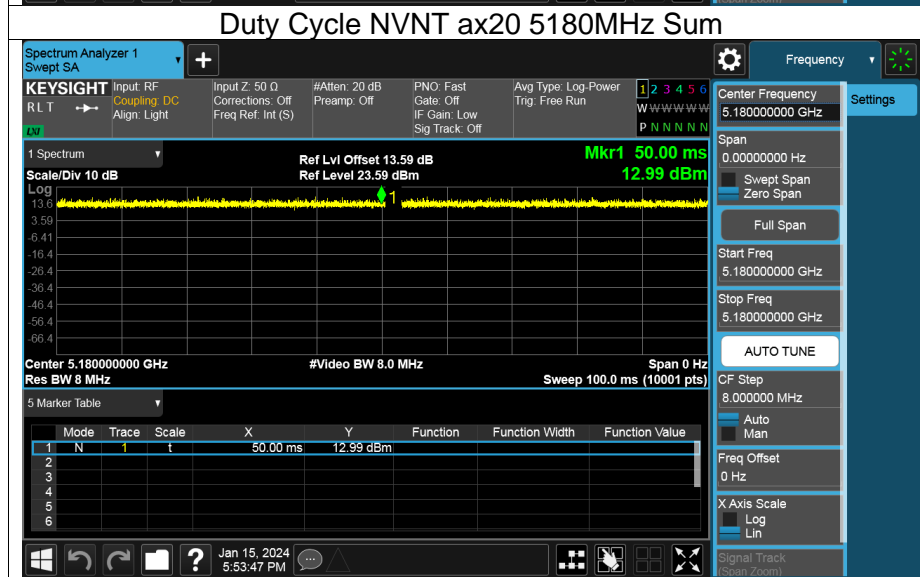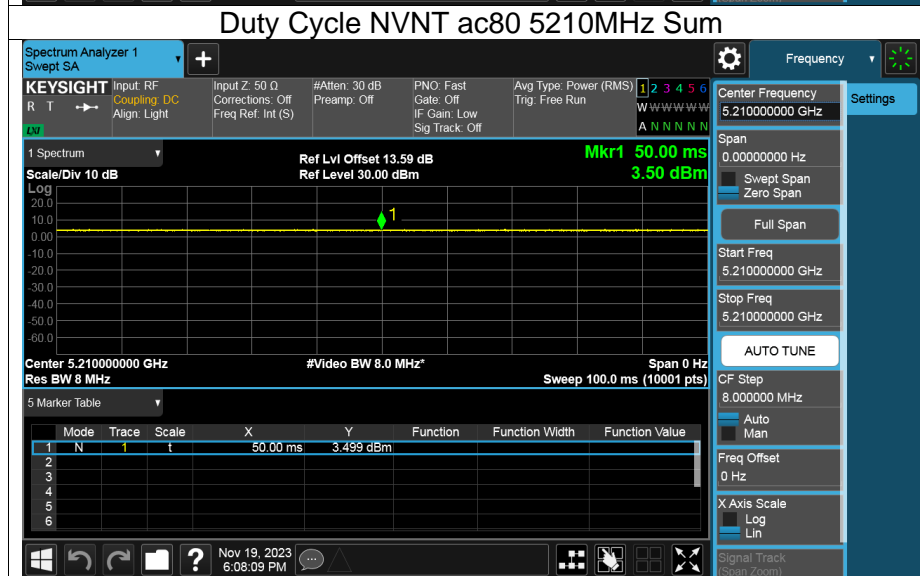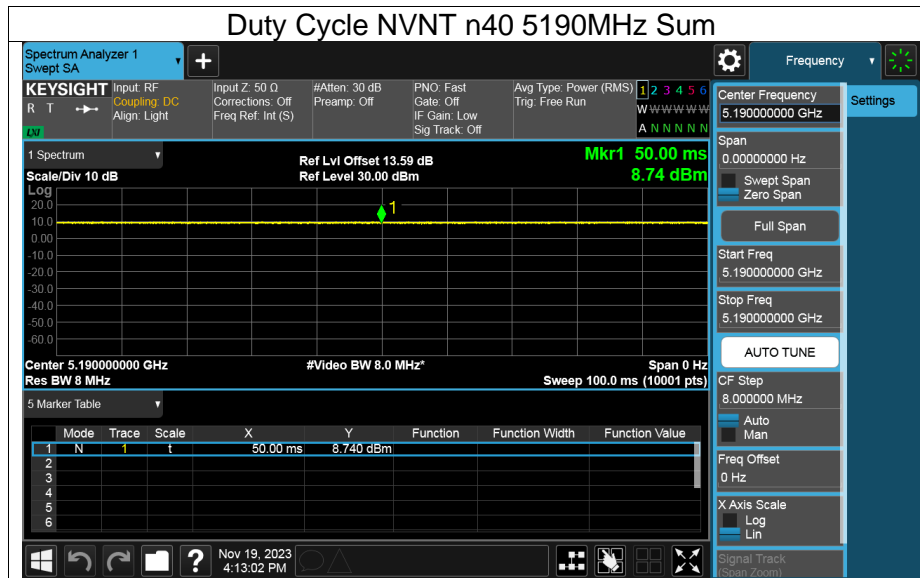

Duty Cycle NVNT ax40 5190MHz Sum

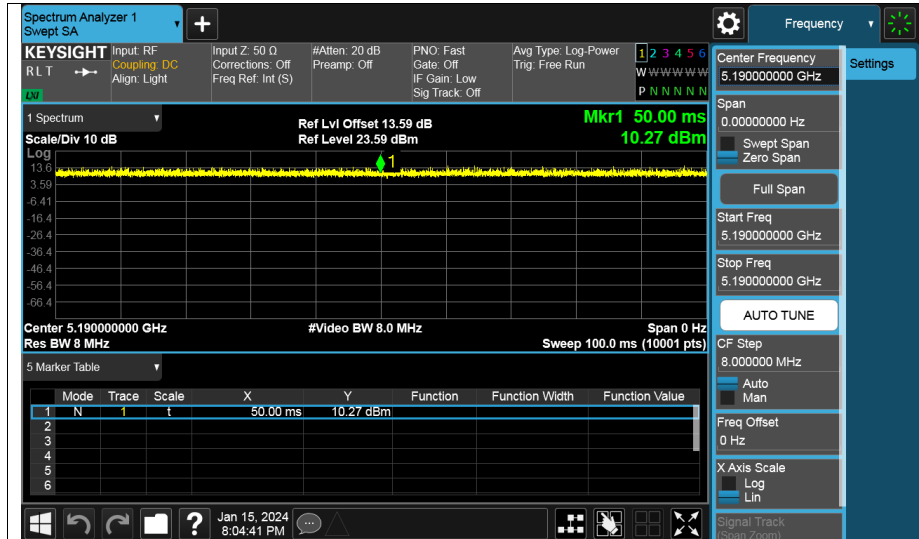

Duty Cycle NVNT ax80 5210MHz Sum

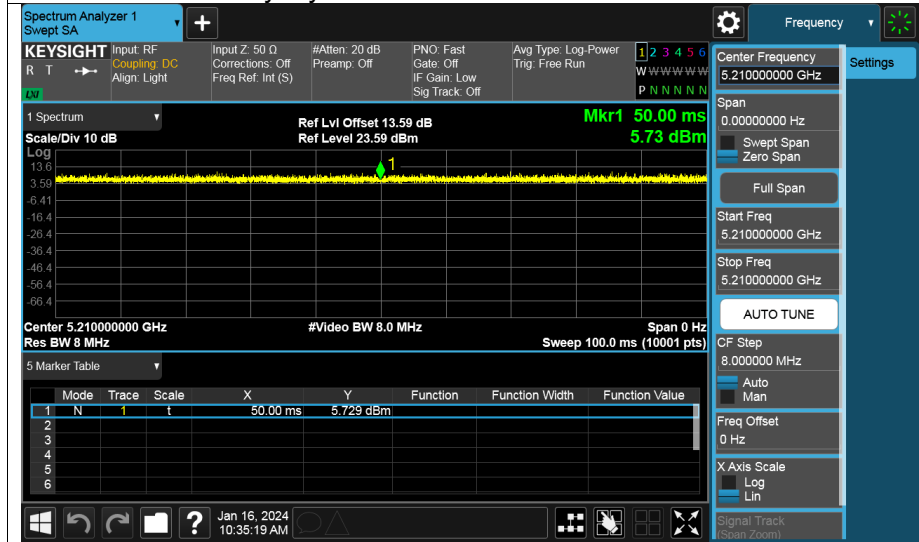

Appendix B: Maximum Conducted Output Power

11.1.2. Test Result

Mode	Freq(MHz)	Av.Power (dBm)			FCC Limit (dBm)
		ANT6	ANT8	Total	
802.11a	5180	11.68	15.65	/	24.00
	5200	11.85	15.03	/	24.00
	5240	11.611	15.93	/	24.00
	5260	11.98	15.31	/	24.00
	5280	12.06	15.65	/	24.00
	5320	11.98	15.80	/	24.00
	5500	10.54	14.47	/	24.00
	5580	10.52	14.27	/	24.00
	5700	10.51.	13.95	/	24.00
	5720-2C	10.07	13.28	/	24.00
	5720-3	1.97	5.15	/	30.00
	5745	10.61	12.80	/	30.00
	5785	10.67	12.24	/	30.00
	5825	10.81	12.77	/	30.00
802.11n 20M	5180	10.36	6.39	11.82	24.00
	5200	10.33	6.18	11.74	24.00
	5240	10.40	7.25	12.11	24.00
	5260	11.61	7.50	13.03	24.00
	5280	11.05	7.38	12.60	24.00
	5320	10.80	7.46	12.45	24.00
	5500	10.71	10.12	13.44	24.00
	5580	10.46	10.20	13.34	24.00
	5700	9.49	9.03	12.28	24.00
	5720-2C	8.77	8.38	11.59	25.00
	5720-3	1.31	0.74	4.04	29.00
	5745	11.25	9.47	13.46	30.00
	5785	11.06	9.47	13.35	30.00
	5825	11.28	9.30	13.41	30.00
802.11n 40M	5190	10.41	5.57	11.64	24.00
	5230	10.10	6.09	11.55	24.00
	5270	10.46	6.86	12.03	24.00
	5310	10.34	6.98	11.99	24.00
	5510	9.71	9.05	12.40	24.00
	5550	9.89	9.11	12.53	24.00
	5670	9.71	9.24	12.49	24.00
	5710-2C	9.34	8.94	12.15	24.00
	5710-3	-3.15	-3.86	-0.48	30.00

	5755	10.48	9.60	13.07	30.00
	5795	10.28	8.79	12.61	30.00
802.11ac 80M	5210	8.65	4.17	9.97	24.00
	5290	9.34	5.80	10.93	24.00
	5530	7.88	5.88	10.00	24.00
	5610	7.10	5.62	9.43	24.00
	5690-2C	7.55	6.19	9.93	24.00
	5690-3	-6.52	-7.87	-4.13	30.00
	5775	9.62	8.36	12.05	30.00
	802.11ax 20M	5180	9.29	5.12	10.70
5200		9.72	5.64	11.15	24.00
5240		9.69	6.14	11.28	24.00
5260		10.54	6.46	11.97	24.00
5280		10.65	6.82	12.15	24.00
5320		10.39	6.79	11.96	24.00
5500		9.81	9.37	12.61	24.00
5580		9.98	9.39	12.71	24.00
5700		9.02	8.81	11.93	24.00
5720-2C		8.13	7.71	10.94	25.00
5720-3		1.41	0.76	4.11	29.00
5745		10.23	9.35	12.82	30.00
5785		10.41	9.11	12.82	30.00
5825		10.60	8.94	12.86	30.00
802.11ax 40M		5190	10.00	5.99	11.45
	5230	9.92	6.07	11.42	24.00
	5270	10.23	6.34	11.72	24.00
	5310	10.29	6.52	11.81	24.00
	5510	9.85	9.20	12.55	24.00
	5550	9.81	9.27	12.56	24.00
	5670	8.99	8.69	11.85	24.00
	5710-2C	8.60	8.28	11.45	24.00
	5710-3	-2.50	-3.19	0.18	30.00
	5755	10.23	9.52	12.90	30.00
	5795	10.53	9.14	12.90	30.00
802.11ax 80M	5210	9.23	5.34	10.72	24.00
	5290	9.45	5.81	11.01	24.00
	5530	7.34	5.78	9.64	24.00
	5610	7.27	5.68	9.56	24.00
	5690-2C	7.64	7.09	10.38	24.00
	5690-3	-5.64	-6.57	-3.07	30.00
	5775	9.67	8.79	12.26	30.00

Note: 1. Conducted Power=Meas. Level+ Correction Factor
 2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

