

Measurement Report for Device, CHEEK, ISM 2.4 GHz Band, UID 10032 CAA, Channel 39 (2441.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.000, 39	7.85	1.86	39.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-21	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-21, 18:15	2023-12-21, 18:29
psSAR1g [W/kg]	0.327	0.334
psSAR10g [W/kg]	0.169	0.176
Power Drift [dB]	-0.07	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.4
Dist 3dB Peak [mm]		10.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

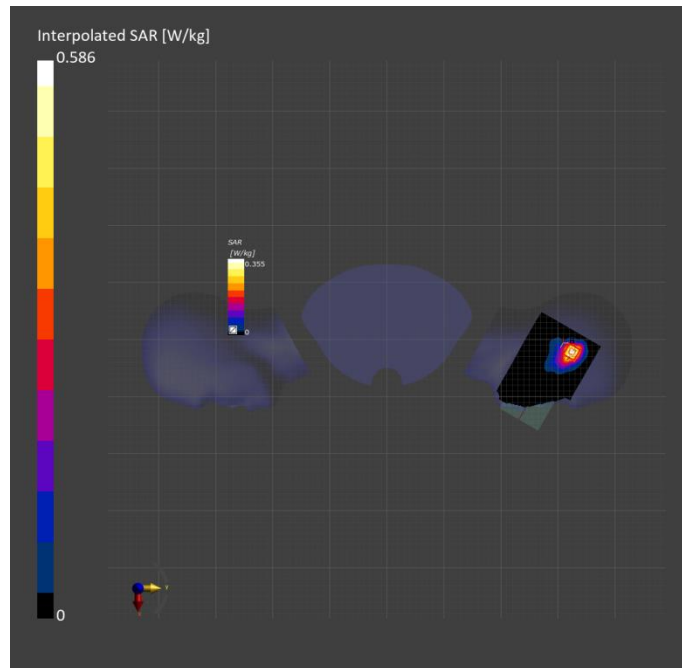

Measurement Report for Device, BACK, ISM 2.4 GHz Band, UID 10032 CAA, Channel 39 (2441.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm] 165.0 x 77.9 x 8.0	IMEI	DUT Type Phone
--------------------------------	---------------------------------------	------	-------------------

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.000, 39	7.85	1.86	39.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-23, 11:13	2023-12-23, 11:21
psSAR1g [W/kg]	0.113	0.112
psSAR10g [W/kg]	0.063	0.062
Power Drift [dB]	0.03	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		16.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

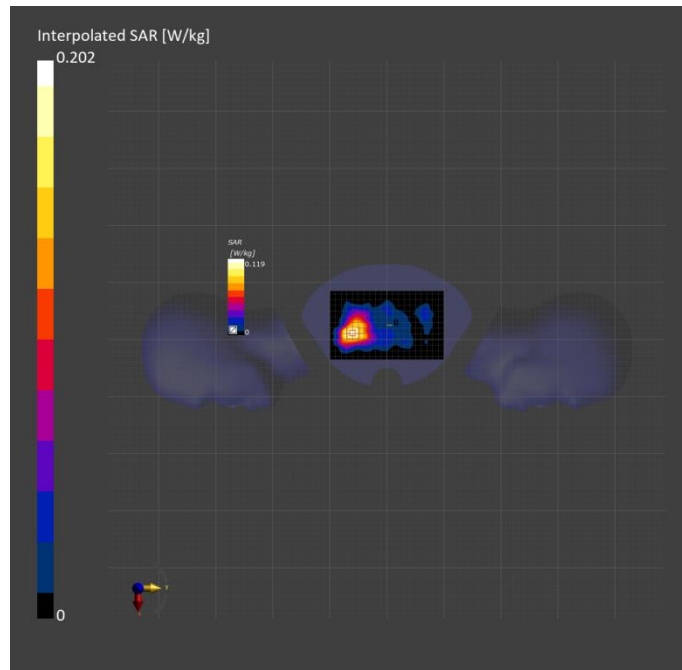

2.4G WIFI 11b 1CH Head ANT 7

Measurement Report for Device, CHEEK, WLAN 2.4GHz, UID 10315 AAB, Channel 1 (2412.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10315-AAB	2412.000, 1	7.85	1.83	39.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-18	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18, 14:08	2023-12-18, 14:22
psSAR1g [W/kg]	0.738	0.775
psSAR10g [W/kg]	0.385	0.407
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.9
Dist 3dB Peak [mm]		10.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

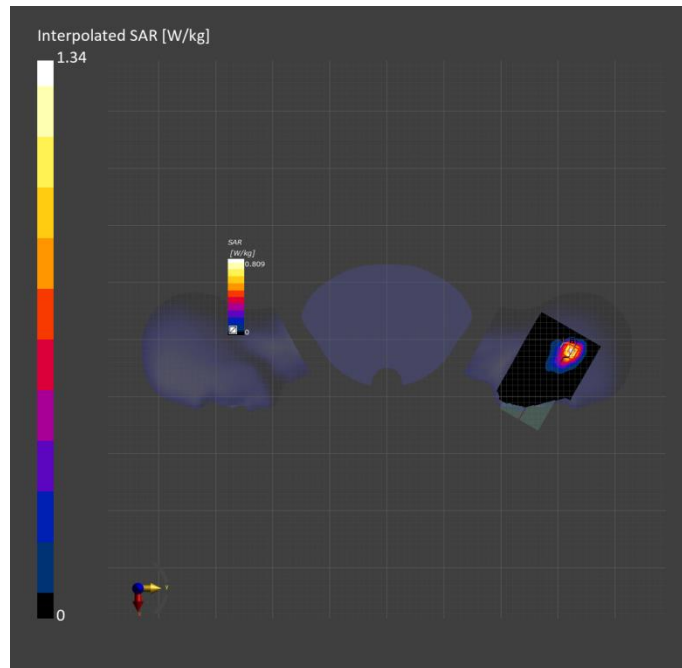

2.4G WIFI 11b 11CH Head ANT 6

Measurement Report for Device, CHEEK, WLAN 2.4GHz, UID 10315 AAB, Channel 11 (2462.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10315-AAB	2462.000, 11	7.85	1.86	39.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-18	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-18, 14:50	2023-12-18, 14:59
psSAR1g [W/kg]	0.200	0.226
psSAR10g [W/kg]	0.090	0.093
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.4
Dist 3dB Peak [mm]		6.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

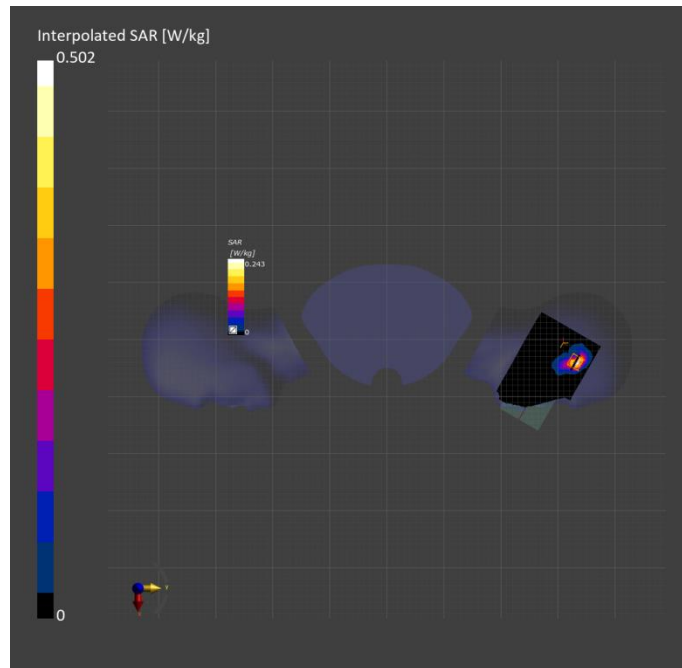

2.4G WIFI 11n20 11CH Head MIMO

Measurement Report for Device, CHEEK, WLAN 2.4GHz, UID 10315 AAB, Channel 11 (2462.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10315-AAB	2462.000, 11	7.85	1.85	39.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-21	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-21, 10:38	2023-12-21, 10:53
psSAR1g [W/kg]	0.489	0.518
psSAR10g [W/kg]	0.254	0.272
Power Drift [dB]	0.15	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.2
Dist 3dB Peak [mm]		11.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

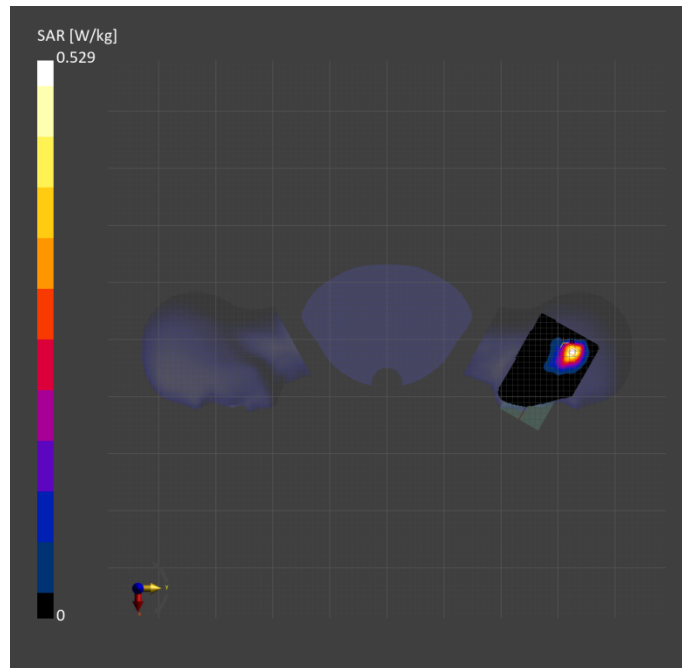

2.4G WIFI 11b 1CH Body ANT 7

Measurement Report for Device, BACK, WLAN 2.4GHz, UID 10315 AAB, Channel 1 (2412.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10315-AAB	2412.000, 1	7.85	1.83	39.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-23, 11:31	2023-12-23, 11:40
psSAR1g [W/kg]	0.194	0.193
psSAR10g [W/kg]	0.109	0.108
Power Drift [dB]	-0.04	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.5
Dist 3dB Peak [mm]		15.7

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

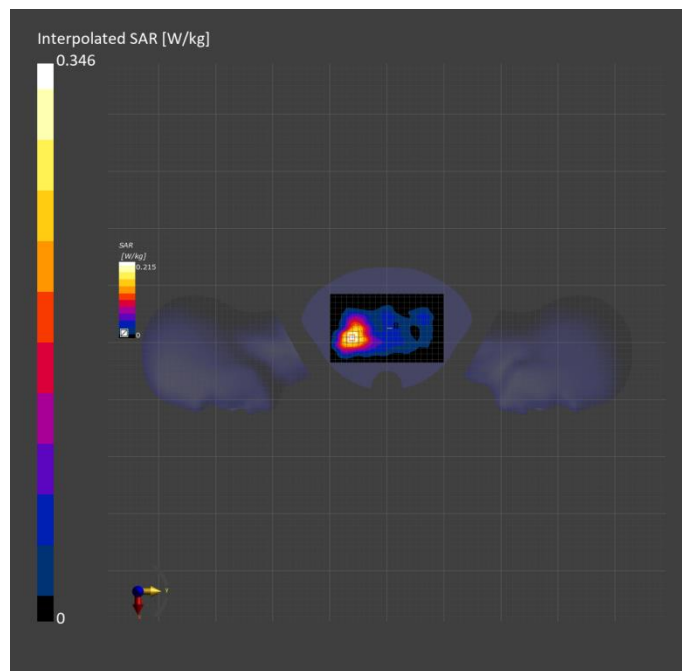

## 2.4G WIFI 11b 11CH Body ANT 6

Measurement Report for Device, BACK, WLAN 2.4GHz, UID 10315 AAB, Channel 11 (2462.000MHz)

### Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10315-AAB	2462.000, 11	7.85	1.85	39.6

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

### Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-23, 13:26	2023-12-23, 13:34
psSAR1g [W/kg]	0.423	0.431
psSAR10g [W/kg]	0.204	0.202
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		10.3

### Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

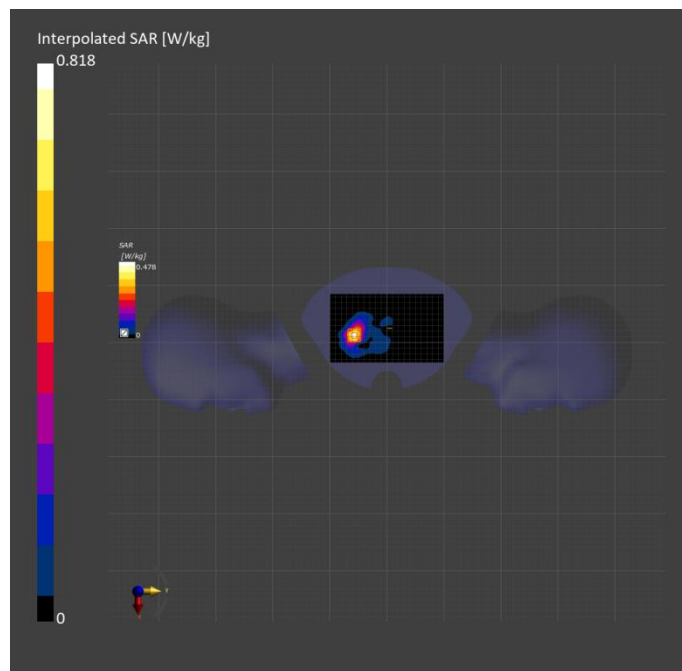

## 2.4G WIFI 11n20 11CH Body MIMO

Measurement Report for Device, BACK, WLAN 2.4GHz, UID 10315 AAB, Channel 11 (2462.000MHz)

### Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm] 165.0 x 77.9 x 8.0	IMEI	DUT Type Phone
--------------------------------	---------------------------------------	------	-------------------

### Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10315-AAB	2462.000, 11	7.85	1.85	39.6

### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

### Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

### Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-23, 13:43	2023-12-23, 13:51
psSAR1g [W/kg]	0.245	0.242
psSAR10g [W/kg]	0.130	0.126
Power Drift [dB]	-0.09	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.6
Dist 3dB Peak [mm]		14.0

### Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

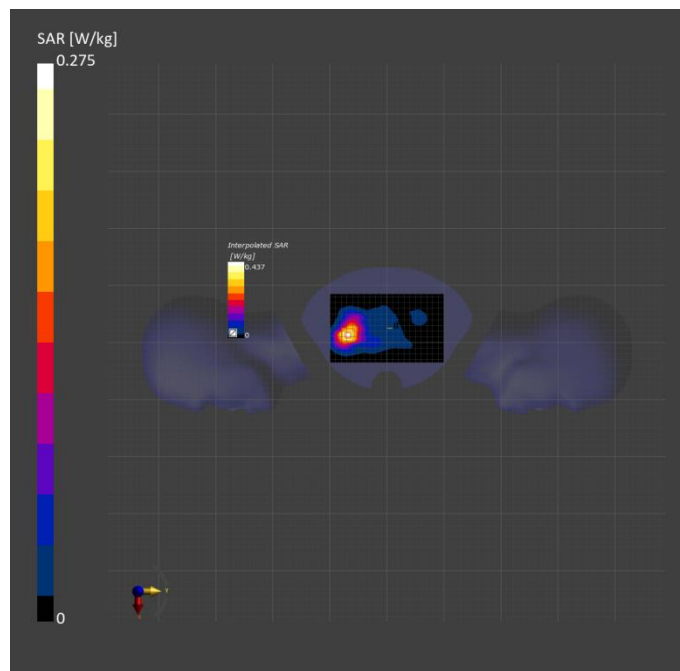



Measurement Report for Device, TILT, WLAN 5GHz, UID 10062 CAE, Channel 56 (5280.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.57	4.62	36.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 09:08	2023-12-27, 09:27
psSAR1g [W/kg]	0.651	0.731
psSAR10g [W/kg]	0.238	0.242
Power Drift [dB]	-0.07	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.5
Dist 3dB Peak [mm]		5.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

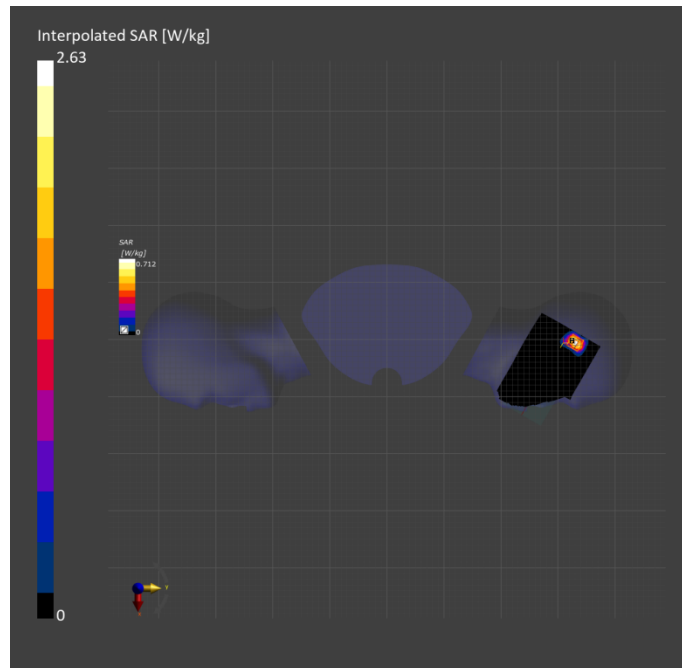

Measurement Report for Device, TILT, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.82	35.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 10:20	2023-12-27, 10:35
psSAR1g [W/kg]	0.624	0.719
psSAR10g [W/kg]	0.214	0.219
Power Drift [dB]	-0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.3
Dist 3dB Peak [mm]		5.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

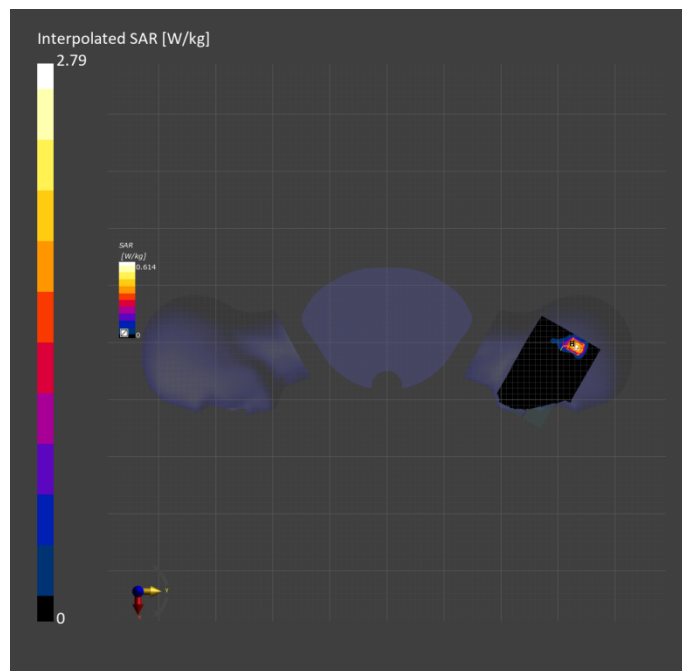

Measurement Report for Device, TILT, WLAN 5GHz, UID 10062 CAE, Channel 165 (5825.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	5.08	5.20	35.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 11:17	2023-12-27, 11:33
psSAR1g [W/kg]	0.714	0.748
psSAR10g [W/kg]	0.227	0.231
Power Drift [dB]	0.04	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.7
Dist 3dB Peak [mm]		5.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

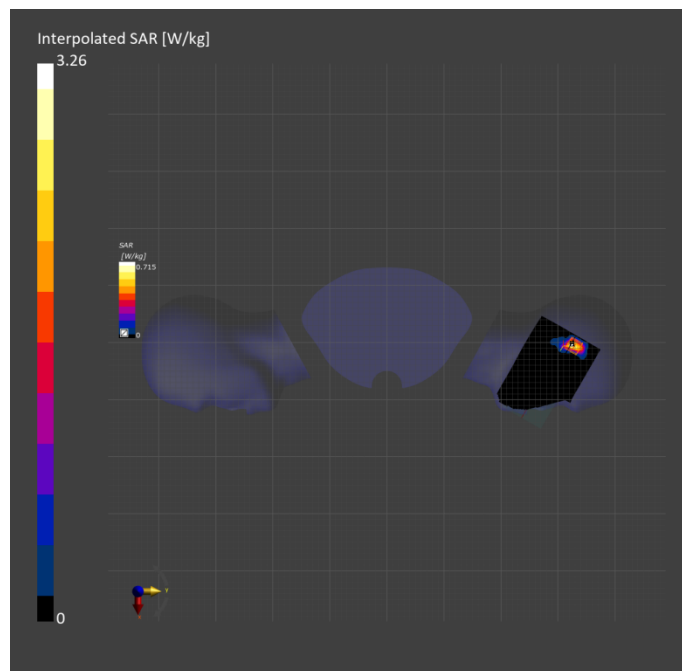

Measurement Report for Device, TILT, WLAN 5GHz, UID 10317 AAD, Channel 64 (5320.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10317-AAD	5320.000, 64	5.57	4.64	36.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-19	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-20, 09:22	2023-12-20, 09:33
psSAR1g [W/kg]	0.273	0.318
psSAR10g [W/kg]	0.080	0.085
Power Drift [dB]	-0.11	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.0
Dist 3dB Peak [mm]		5.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

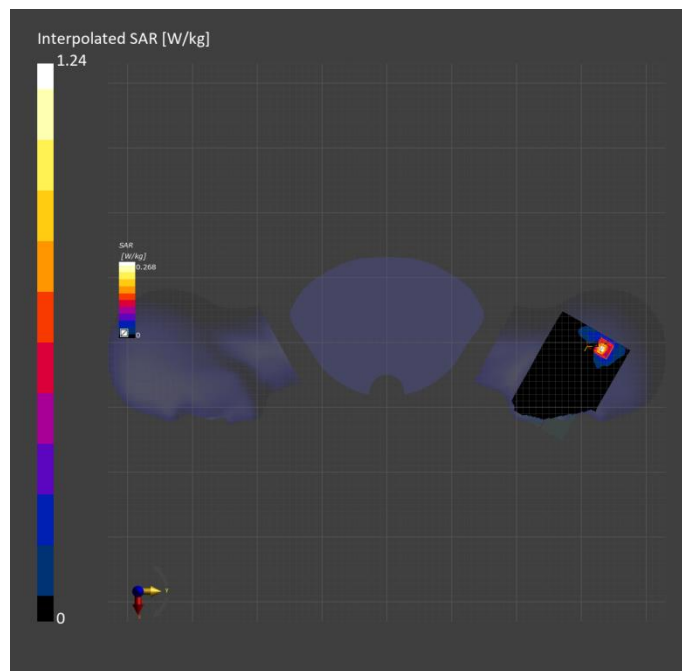

Measurement Report for Device, CHEEK, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.82	35.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 15:49	2023-12-27, 16:04
psSAR1g [W/kg]	0.219	0.313
psSAR10g [W/kg]	0.082	0.096
Power Drift [dB]	0.08	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.0
Dist 3dB Peak [mm]		4.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

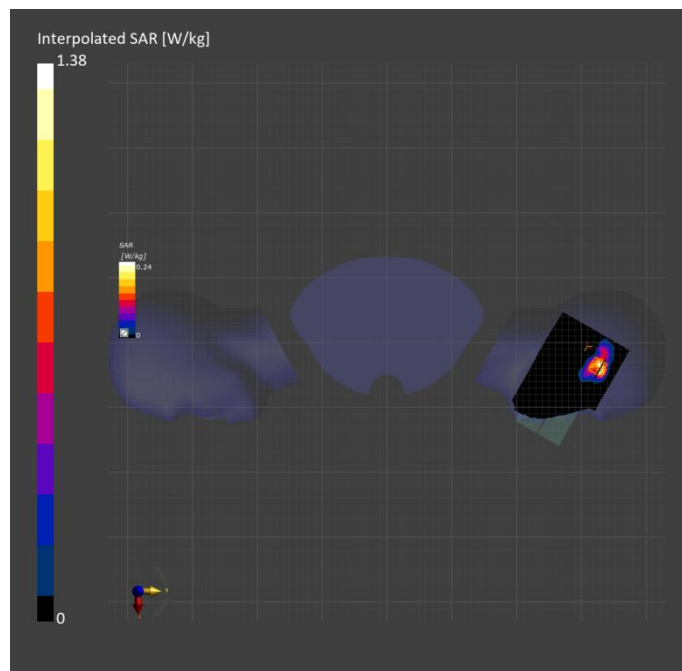

Measurement Report for Device, CHEEK, WLAN 5GHz, UID 10062 CAE, Channel 149 (5745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5745.000, 149	5.08	5.13	35.2

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 15:15	2023-12-27, 15:30
psSAR1g [W/kg]	0.568	0.664
psSAR10g [W/kg]	0.180	0.205
Power Drift [dB]	-0.07	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		6.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

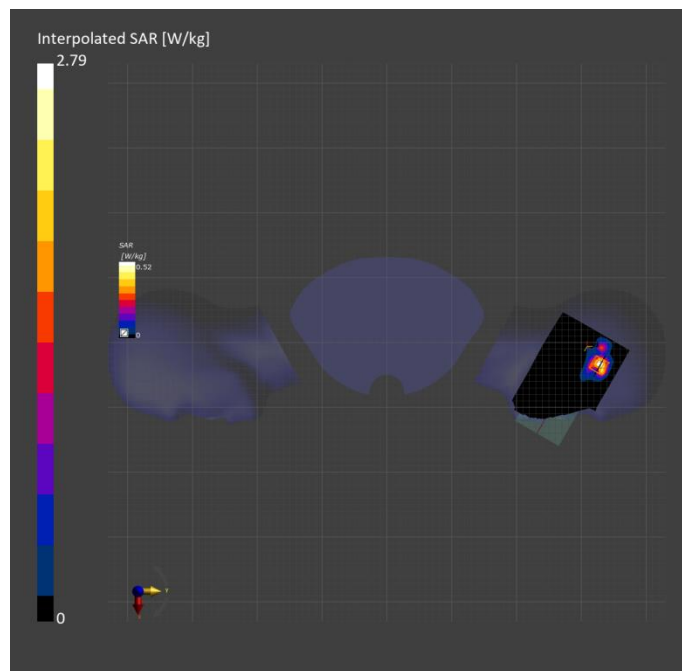

Measurement Report for Device, CHEEK, WLAN 5GHz, UID 10062 CAE, Channel 52 (5260.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5260.000, 52	5.57	4.58	36.2

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 16:54	2023-12-27, 17:10
psSAR1g [W/kg]	0.686	0.716
psSAR10g [W/kg]	0.220	0.227
Power Drift [dB]	-0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.6
Dist 3dB Peak [mm]		5.9

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

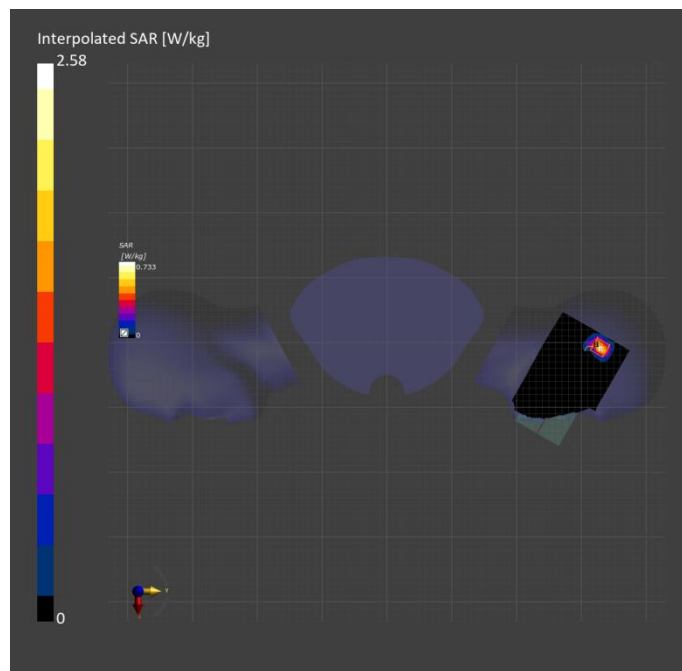

5G WIFI 11n20 100CH Head MIMO

Measurement Report for Device, CHEEK, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.82	35.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-27, 23:21	2023-12-27, 23:37
psSAR1g [W/kg]	0.656	0.729
psSAR10g [W/kg]	0.210	0.215
Power Drift [dB]	0.14	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.0
Dist 3dB Peak [mm]		5.5

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

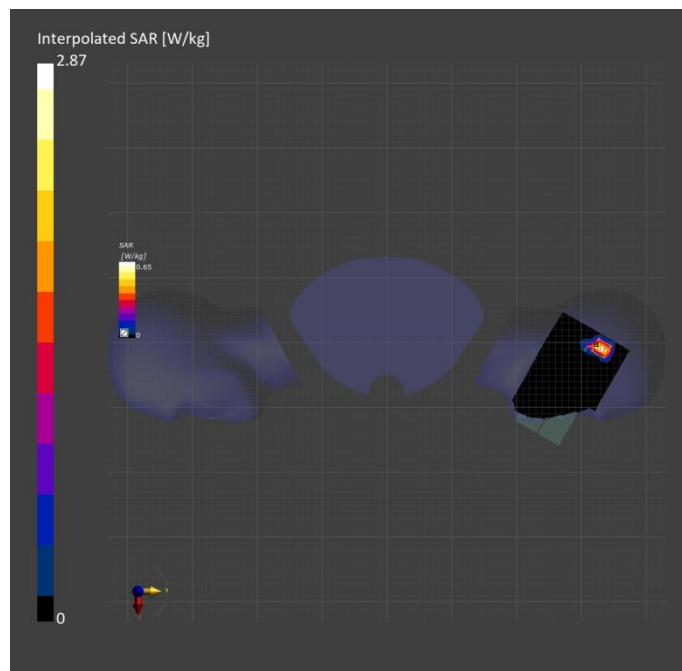



5G WIFI 11n20 165CH Head MIMO

Measurement Report for Device, TILT, WLAN 5GHz, UID 10062 CAE, Channel 165 (5825.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	5.08	5.20	35.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-27, 22:56	2023-12-27, 22:13
psSAR1g [W/kg]	0.751	0.736
psSAR10g [W/kg]	0.242	0.227
Power Drift [dB]	-0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		4.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

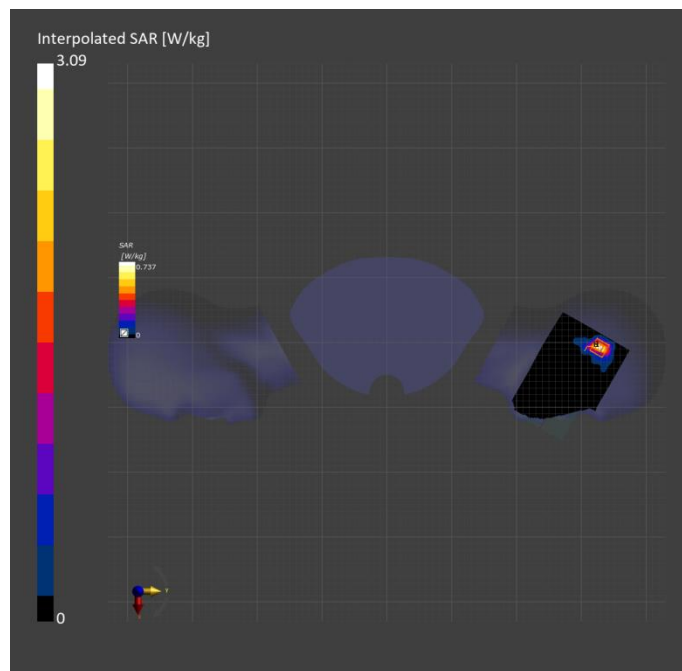

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 56 (5280.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.57	4.64	36.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 09:46	2024-01-02, 09:54
psSAR1g [W/kg]	0.501	0.531
psSAR10g [W/kg]	0.186	0.190
Power Drift [dB]	0.03	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.4
Dist 3dB Peak [mm]		9.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

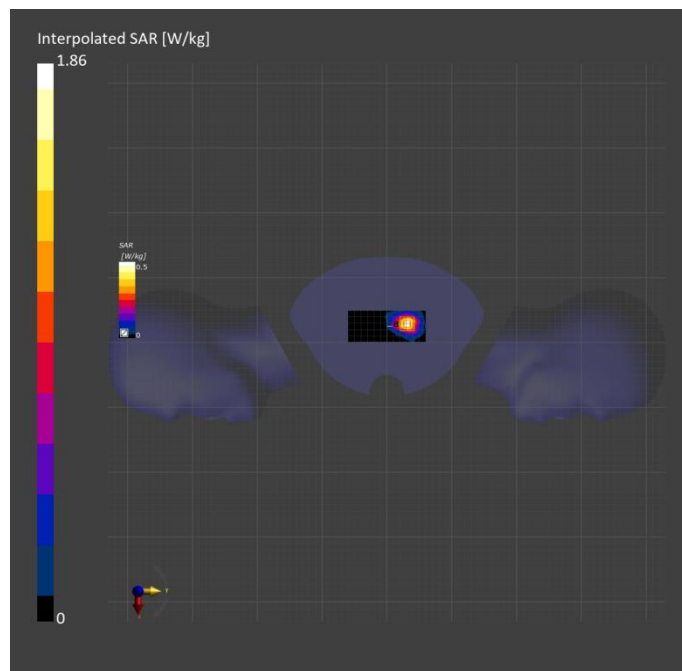

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.85	35.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 10:00	2024-01-02, 10:08
psSAR1g [W/kg]	0.277	0.287
psSAR10g [W/kg]	0.104	0.099
Power Drift [dB]	-0.01	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.5
Dist 3dB Peak [mm]		9.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

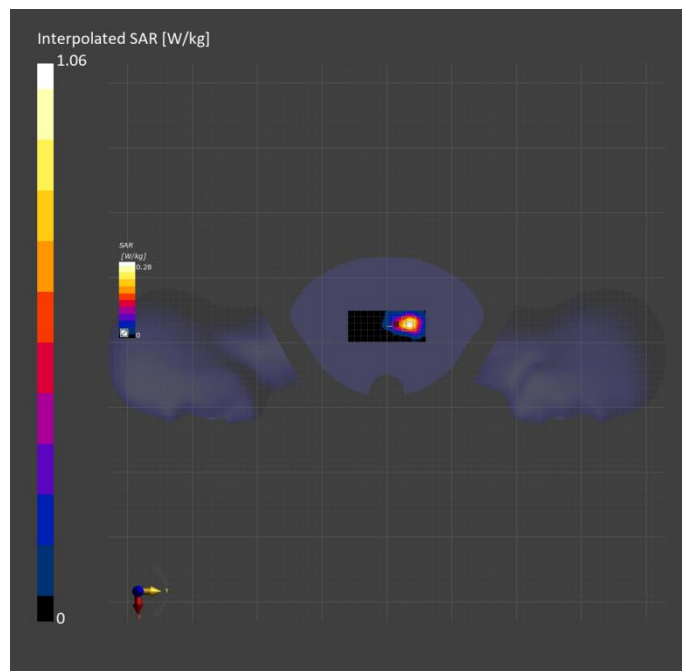

Measurement Report for Device, BACK, WLAN 5GHz, UID 10062 CAE, Channel 165 (5825.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	5.08	5.20	35.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-27, 22:29	2023-12-27, 22:41
psSAR1g [W/kg]	0.141	0.148
psSAR10g [W/kg]	0.047	0.047
Power Drift [dB]	0.03	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.1
Dist 3dB Peak [mm]		8.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

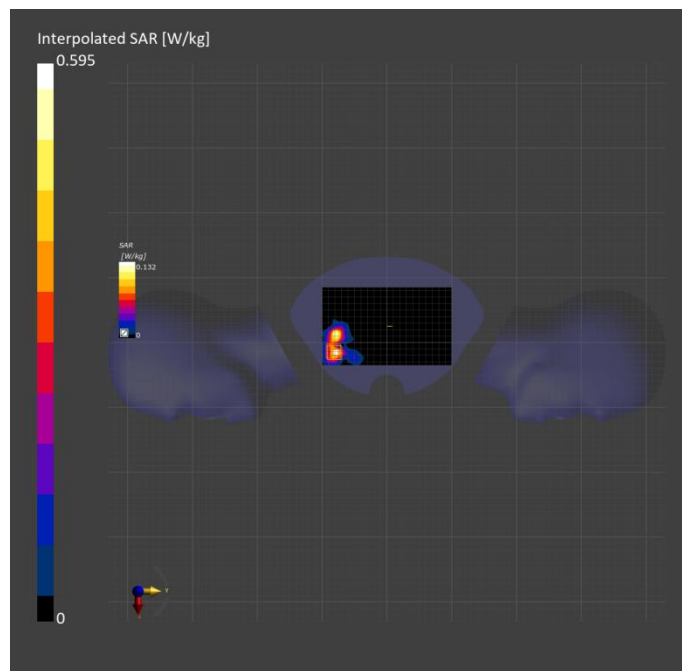

Measurement Report for Device, BACK, WLAN 5GHz, UID 10317 AAD, Channel 64 (5320.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10317-AAD	5320.000, 64	5.57	4.63	36.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-23, 18:22	2023-12-23, 18:38
psSAR1g [W/kg]	0.409	0.387
psSAR10g [W/kg]	0.172	0.156
Power Drift [dB]	-0.07	-0.17
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.2
Dist 3dB Peak [mm]		10.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

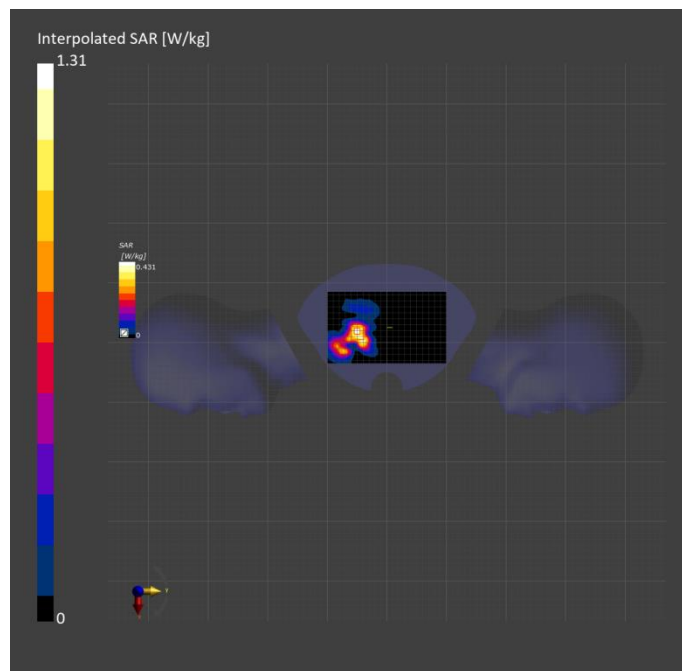

Measurement Report for Device, BACK, WLAN 5GHz, UID 10317 AAD, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10317-AAD	5500.000, 100	5.01	4.79	35.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-23, 18:49	2023-12-23, 18:58
psSAR1g [W/kg]	0.165	0.167
psSAR10g [W/kg]	0.055	0.047
Power Drift [dB]	-0.03	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.6
Dist 3dB Peak [mm]		7.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

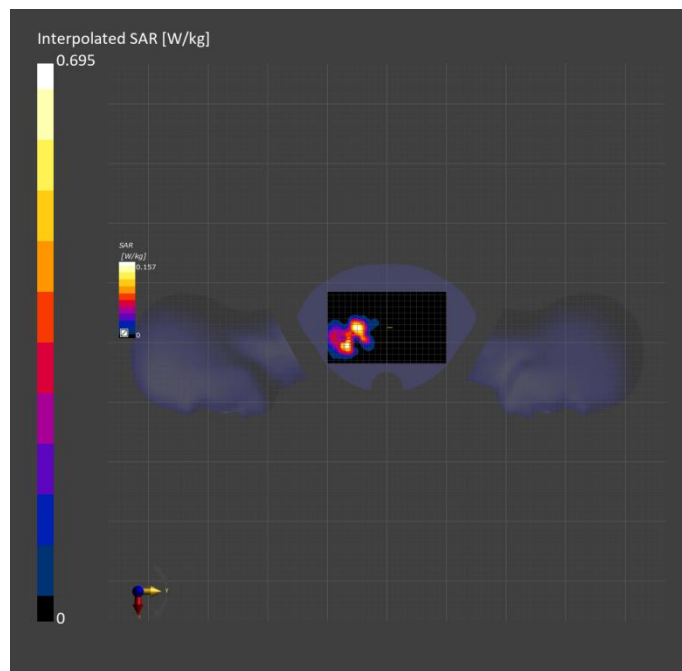

Measurement Report for Device, BACK, WLAN 5GHz, UID 10062 CAE, Channel 149 (5745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5745.000, 149	5.08	5.13	35.2

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-28, 13:12	2023-12-28, 13:25
psSAR1g [W/kg]	0.251	0.258
psSAR10g [W/kg]	0.082	0.079
Power Drift [dB]	-0.10	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.7
Dist 3dB Peak [mm]		8.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

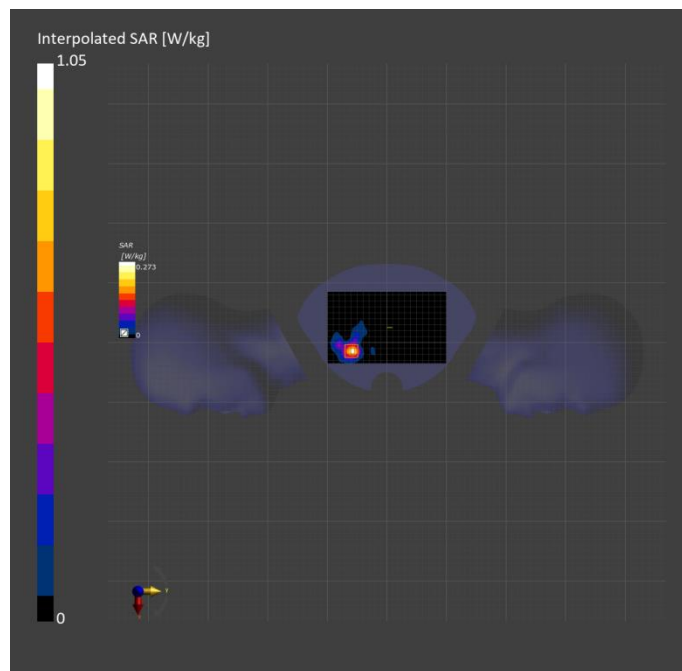

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 52 (5260.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5260.000, 52	5.57	4.61	36.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 09:25	2024-01-02, 09:33
psSAR1g [W/kg]	0.394	0.407
psSAR10g [W/kg]	0.144	0.145
Power Drift [dB]	0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.6
Dist 3dB Peak [mm]		9.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

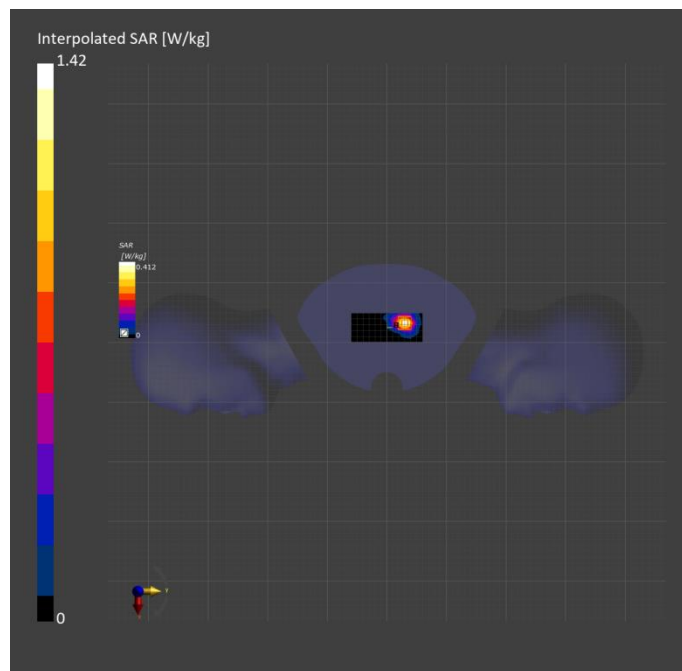



# 5G WIFI 11n20 100CH Body MIMO

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

## Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.85	35.8

## Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

## Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-02, 09:08	2024-01-02, 09:15
psSAR1g [W/kg]	0.280	0.297
psSAR10g [W/kg]	0.101	0.099
Power Drift [dB]	-0.01	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.0
Dist 3dB Peak [mm]		8.3

## Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

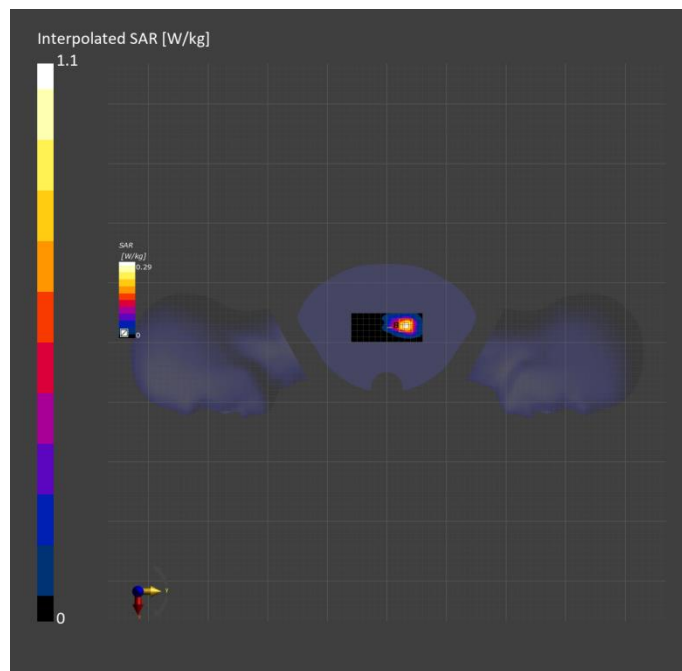

# 5G WIFI 11n20 165CH Body MIMO

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 165 (5825.000MHz)

## Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	5.08	5.20	35.1

## Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2023-Dec-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

## Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-28, 13:35	2023-12-28, 13:43
psSAR1g [W/kg]	0.262	0.270
psSAR10g [W/kg]	0.096	0.093
Power Drift [dB]	-0.03	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.5
Dist 3dB Peak [mm]		7.2

## Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

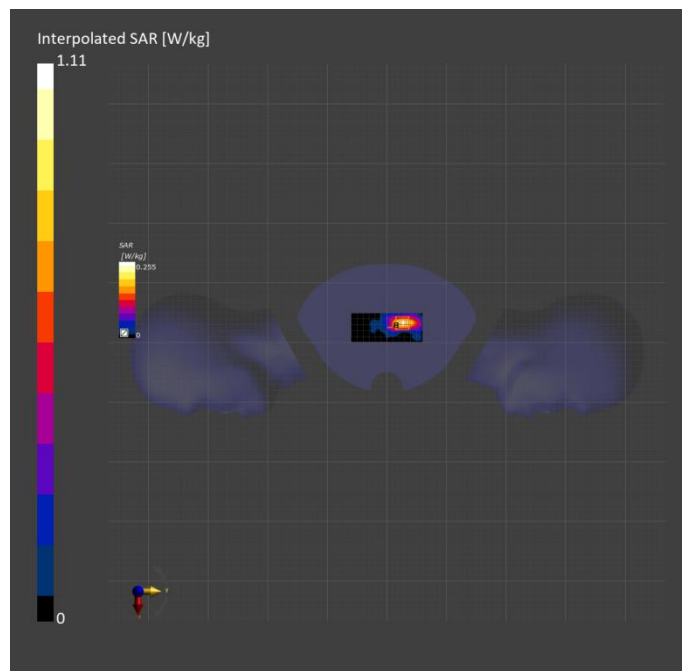

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 56 (5280.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5280.000, 56	5.57	4.64	36.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 10:57	2024-01-02, 11:08
psSAR1g [W/kg]	5.96	6.64
psSAR10g [W/kg]	1.19	1.29
Power Drift [dB]	0.00	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.6
Dist 3dB Peak [mm]		4.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

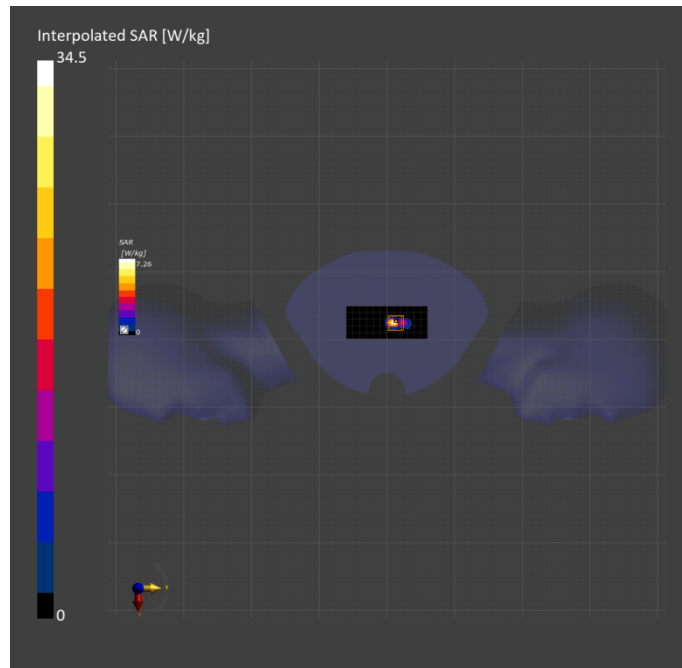

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.85	35.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	3.5 x 3.5 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 11:15	2024-01-02, 11:24
psSAR1g [W/kg]	4.58	5.16
psSAR10g [W/kg]	0.893	0.961
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.4
Dist 3dB Peak [mm]		4.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

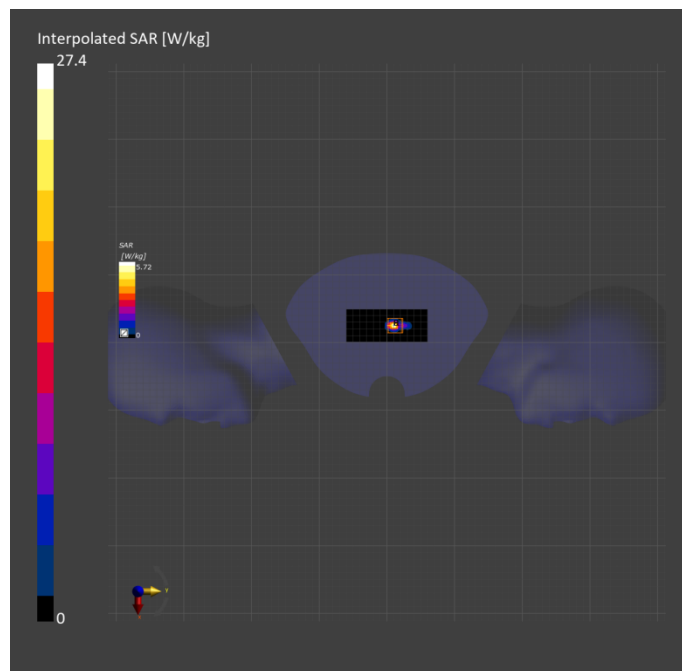

Measurement Report for Device, EDGE RIGHT, WLAN 5GHz, UID 10317 AAD, Channel 64 (5320.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	WLAN 5GHz	WLAN, 10317-AAD	5320.000, 64	5.57	4.66	36.2

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-25	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	2.7 x 2.7 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.2
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-25, 15:46	2023-12-25, 16:28
psSAR1g [W/kg]	1.70	1.84
psSAR10g [W/kg]	0.464	0.519
Power Drift [dB]	-0.15	0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.8
Dist 3dB Peak [mm]		3.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

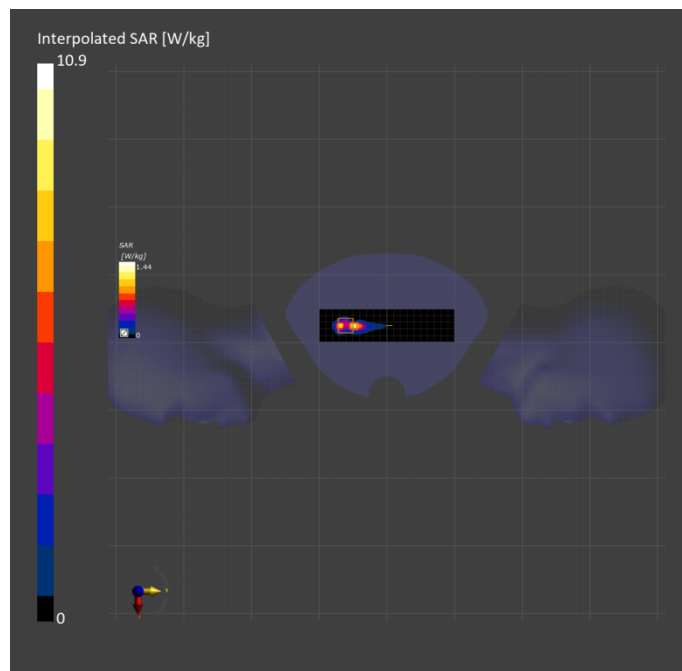

Measurement Report for Device, EDGE RIGHT, WLAN 5GHz, UID 10317 AAD, Channel 100 (5500.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	WLAN 5GHz	WLAN, 10317-AAD	5500.000, 100	5.01	4.82	35.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-25	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	2.7 x 2.7 x 1.2
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.2
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-25, 16:35	2023-12-25, 17:15
psSAR1g [W/kg]	1.86	1.91
psSAR10g [W/kg]	0.480	0.481
Power Drift [dB]	-0.03	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.2
Dist 3dB Peak [mm]		3.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

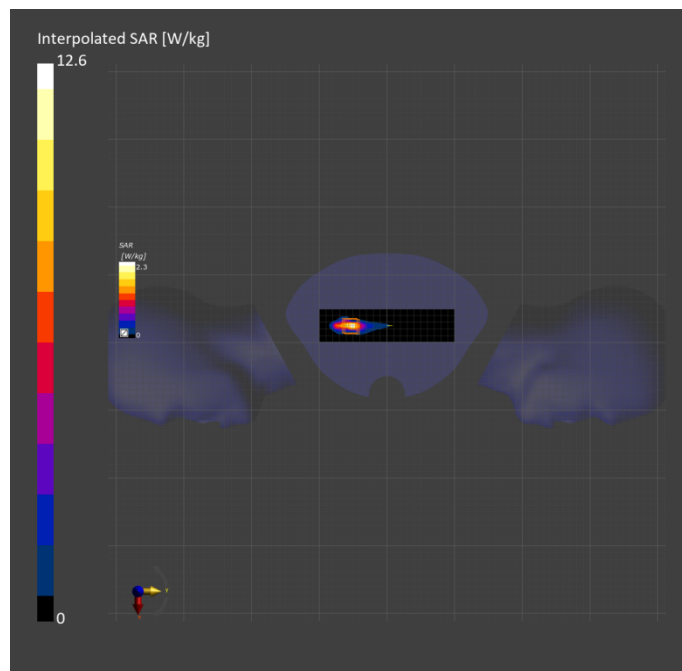

# 5G WIFI 11n20 52CH Extremity ANT 6

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 52 (5260.000MHz)

## Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5260.000, 52	5.57	4.61	36.3

## Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

## Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-02, 11:56	2024-01-02, 12:07
psSAR1g [W/kg]	4.51	5.23
psSAR10g [W/kg]	0.980	1.07
Power Drift [dB]	-0.04	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.8
Dist 3dB Peak [mm]		4.6

## Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

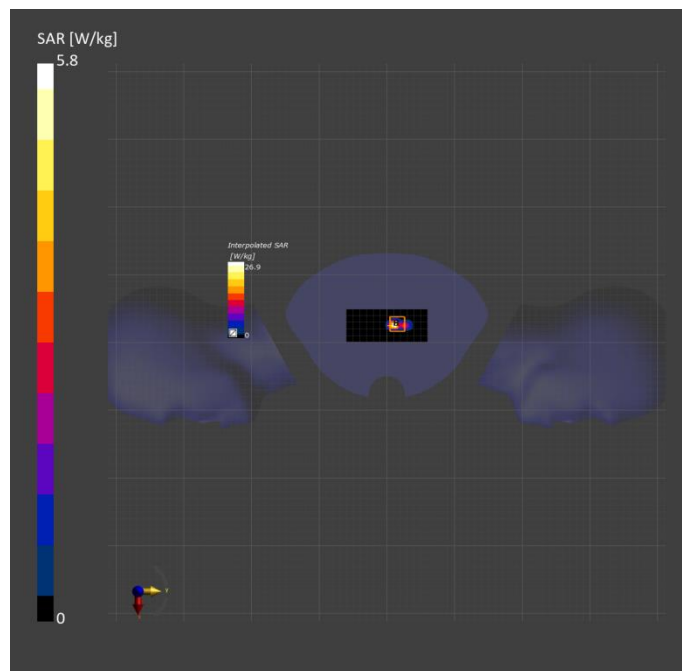

5G WIFI 11n20 100CH Extremity ANT 6

Measurement Report for Device, EDGE TOP, WLAN 5GHz, UID 10062 CAE, Channel 100 (5500.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5500.000, 100	5.01	4.85	35.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-02, 11:36	2024-01-02, 11:46
psSAR1g [W/kg]	3.83	4.22
psSAR10g [W/kg]	0.753	0.791
Power Drift [dB]	-0.04	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.0
Dist 3dB Peak [mm]		4.4

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

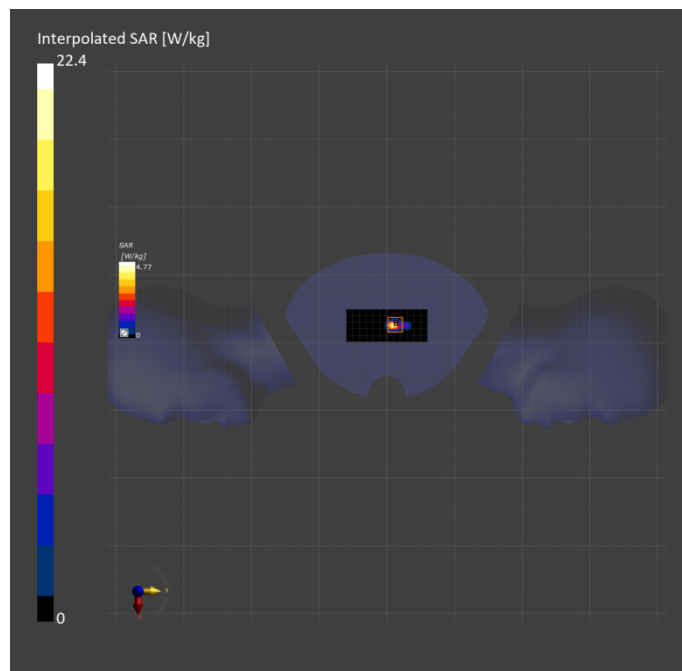



# GSM 850 190CH Head ANT 0

Measurement Report for Device, CHEEK, GSM 850, UID 10021 DAC, Channel 190 (836.600MHz)

## Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	GSM 850	GSM, 10021-DAC	836.600, 190	10.05	0.952	41.9

## Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

## Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25, 10:43	2023-11-25, 10:52
psSAR1g [W/kg]	0.226	0.242
psSAR10g [W/kg]	0.156	0.183
Power Drift [dB]	-0.04	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		89.8
Dist 3dB Peak [mm]		11.4

## Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

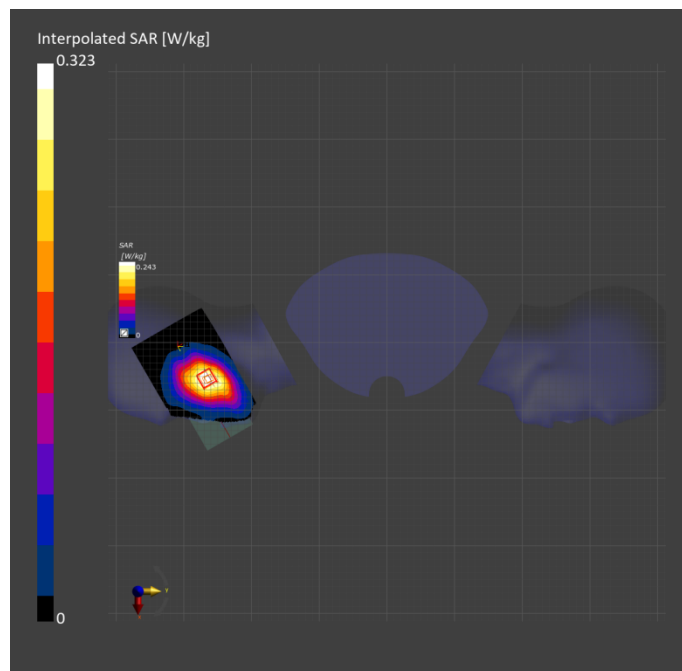

# GSM 850 190CH Body ANT 0

Measurement Report for Device, BACK, GSM 850, UID 10021 DAC, Channel 190 (836.600MHz)

## Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

## Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	GSM 850	GSM, 10021-DAC	836.600, 190	10.05	0.952	41.9

## Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

## Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

## Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25, 13:51	2023-11-25, 14:05
psSAR1g [W/kg]	0.494	0.531
psSAR10g [W/kg]	0.305	0.291
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		74.5
Dist 3dB Peak [mm]		9.2

## Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

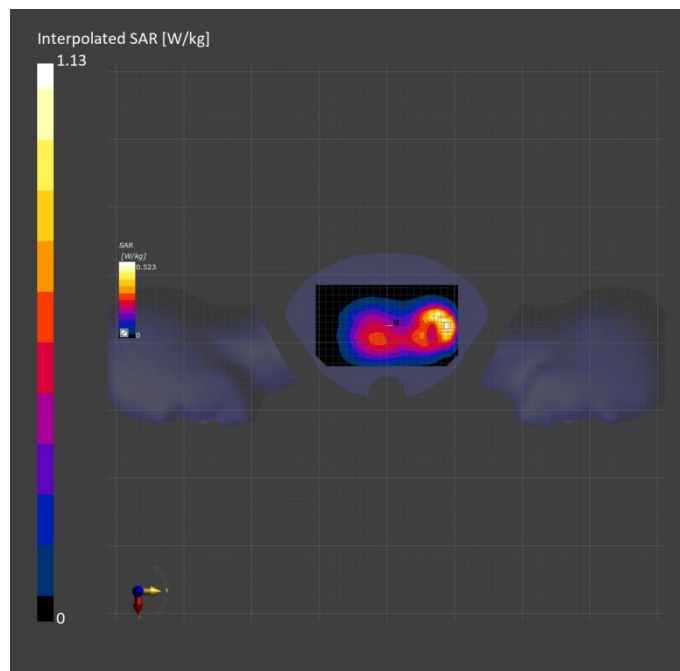

GSM 1900 661CH Head ANT 0

Measurement Report for Device, CHEEK, PCS 1900, UID 10021 DAC, Channel 661 (1880.000MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 10.00	PCS 1900	GSM, 10021-DAC	1880.000, 661	8.42	1.41	40.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02, 16:30	2023-12-02, 16:43
psSAR1g [W/kg]	0.025	0.027
psSAR10g [W/kg]	0.015	0.017
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.1
Dist 3dB Peak [mm]		11.6

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

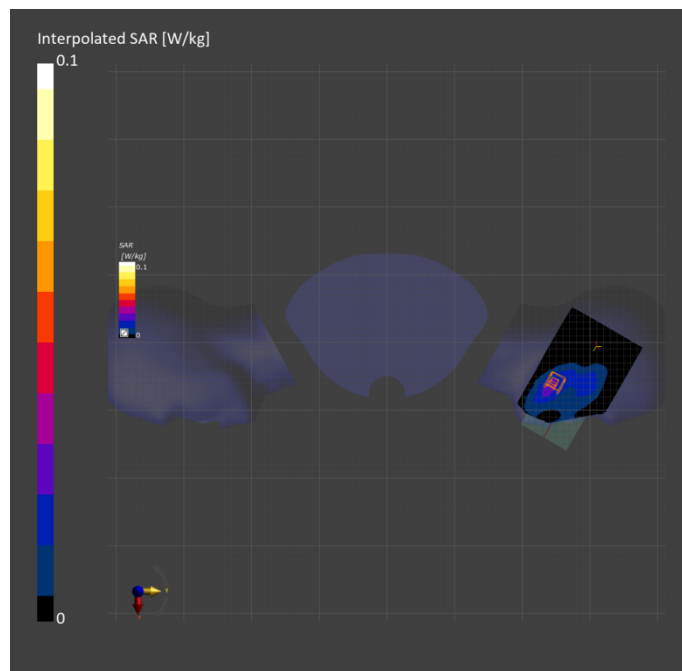

GSM 1900 512CH Body ANT 0

Measurement Report for Device, EDGE BOTTOM, PCS 1900, UID 10021 DAC, Channel 512 (1850.200MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10021-DAC	1850.200, 512	8.42	1.45	40.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-02, 17:26	2024-01-02, 17:33
psSAR1g [W/kg]	0.947	0.978
psSAR10g [W/kg]	0.502	0.512
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.0
Dist 3dB Peak [mm]		11.1

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

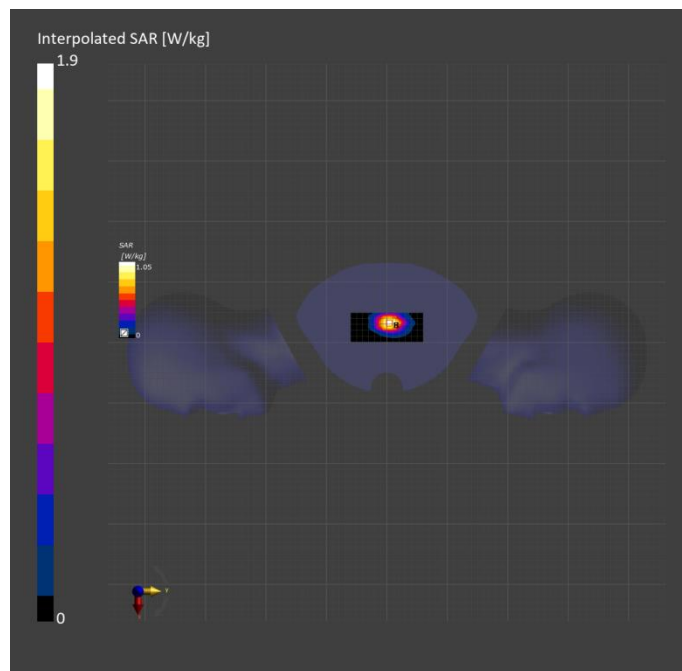

GSM 1900 512CH Extremity ANT 0

Measurement Report for Device, EDGE BOTTOM, PCS 1900, UID 10021 DAC, Channel 512 (1850.200MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	PCS 1900	GSM, 10021-DAC	1850.200, 512	8.42	1.42	40.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	4.2 x 4.2 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-12, 10:15	2024-01-12, 10:28
psSAR1g [W/kg]	3.02	3.27
psSAR10g [W/kg]	1.47	1.30
Power Drift [dB]	-0.00	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.0
Dist 3dB Peak [mm]		5.1

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

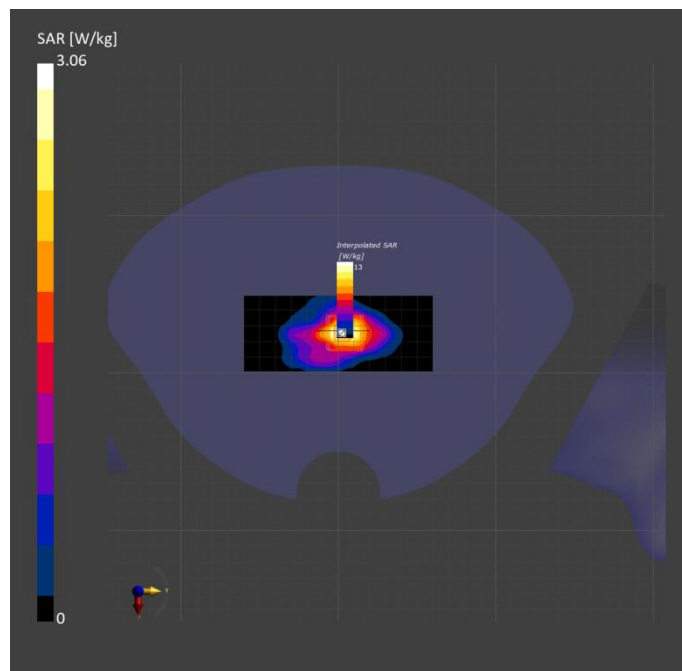

Measurement Report for Device, CHEEK, Band 2, UTRA/FDD, UID 10457 AAA, Channel 9400 (1880.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 2, UTRA/FDD	WCDMA, 10457-AAA	1880.000, 9400	8.42	1.41	40.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-02, 16:58	2023-12-02, 17:10
psSAR1g [W/kg]	0.039	0.043
psSAR10g [W/kg]	0.023	0.027
Power Drift [dB]	-0.07	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.6
Dist 3dB Peak [mm]		12.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

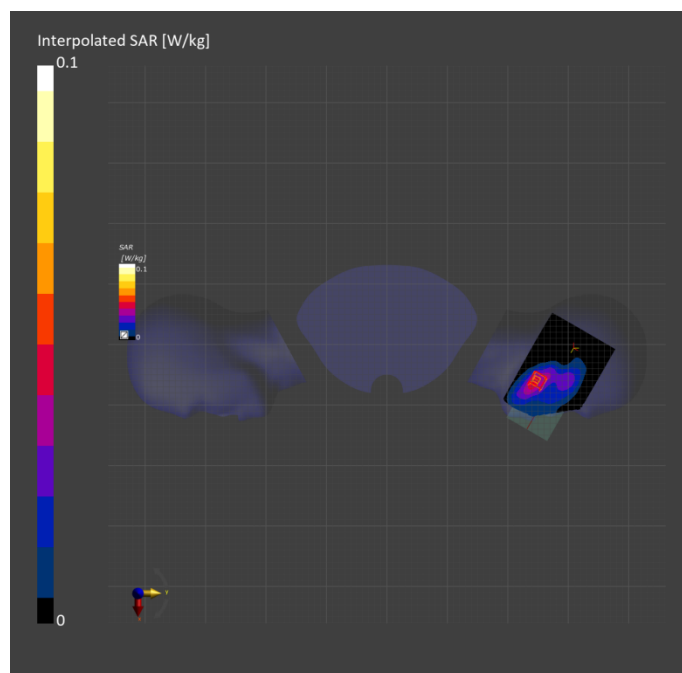

Measurement Report for Device, EDGE BOTTOM, Band 2, UTRA/FDD, UID 10457 AAA, Channel 9262 (1852.400MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 2, UTRA/FDD	WCDMA, 10457-AAA	1852.400, 9262	8.42	1.43	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-09	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-09, 13:38	2023-12-09, 13:50
psSAR1g [W/kg]	1.00	1.06
psSAR10g [W/kg]	0.519	0.546
Power Drift [dB]	-0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.7
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

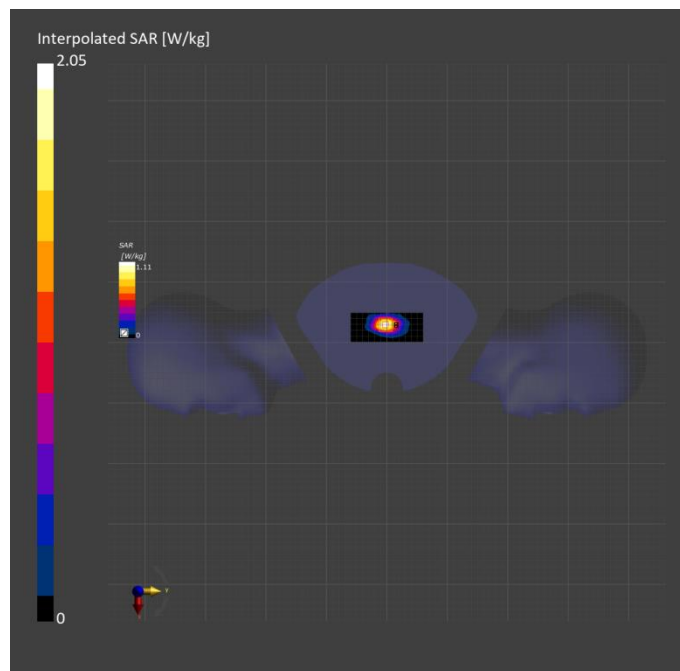

Measurement Report for Device, EDGE BOTTOM, Band 2, UID 10457 AAB, Channel 9262 (1852.400MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band 2	WCDMA, 10457-AAB	1852.400, 9262	8.42	1.42	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	4.2 x 4.2 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-12, 10:39	2024-01-12, 10:54
psSAR1g [W/kg]	2.10	2.25
psSAR10g [W/kg]	1.16	1.06
Power Drift [dB]	0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		67.0
Dist 3dB Peak [mm]		6.1

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

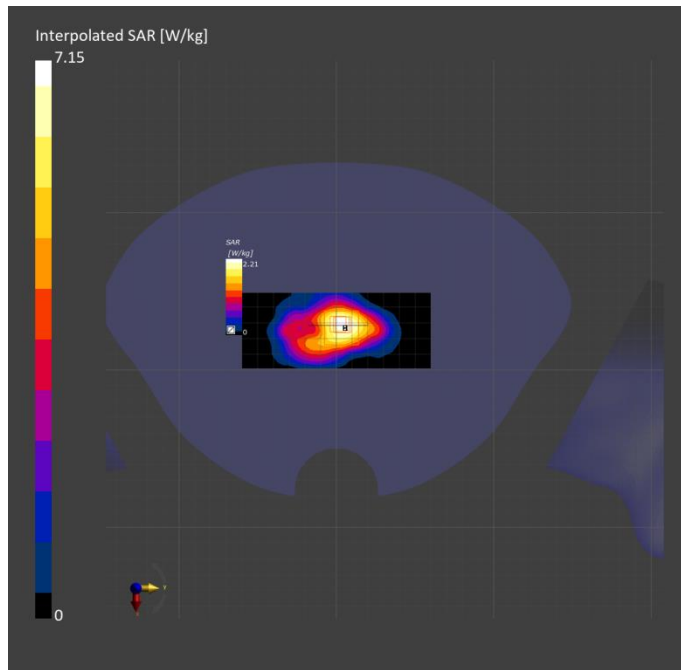



Measurement Report for Device, CHEEK, Band 4, UTRA/FDD, UID 10457 AAA, Channel 1413 (1732.600MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 4, UTRA/FDD	WCDMA, 10457-AAA	1732.600, 1413	8.6	1.38	39.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-23, 14:56	2023-11-23, 15:08
psSAR1g [W/kg]	0.044	0.047
psSAR10g [W/kg]	0.027	0.031
Power Drift [dB]	0.01	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.2
Dist 3dB Peak [mm]		16.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

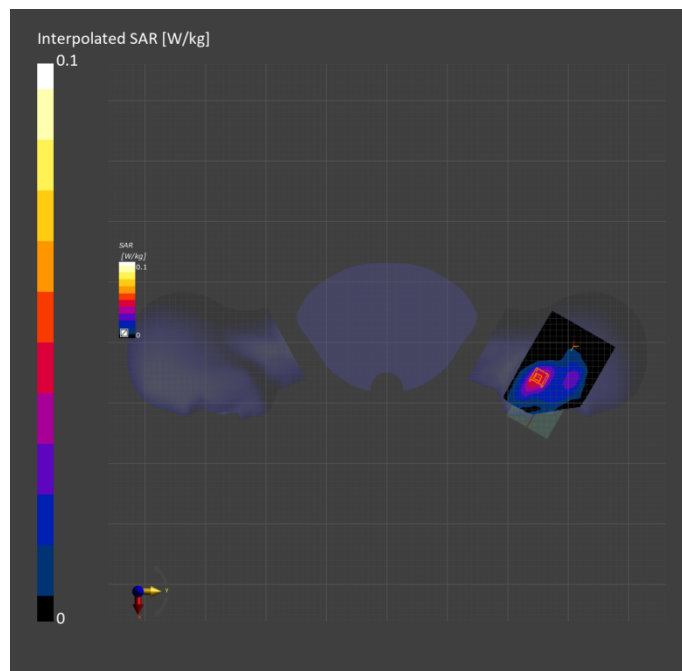

Measurement Report for Device, EDGE BOTTOM, Band 4, UID 10457 AAB, Channel 1513 (1752.600MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 4	WCDMA, 10457-AAB	1752.600, 1513	8.6	1.39	40.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-23, 22:56	2023-11-23, 23:08
psSAR1g [W/kg]	0.944	0.985
psSAR10g [W/kg]	0.501	0.514
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.8
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

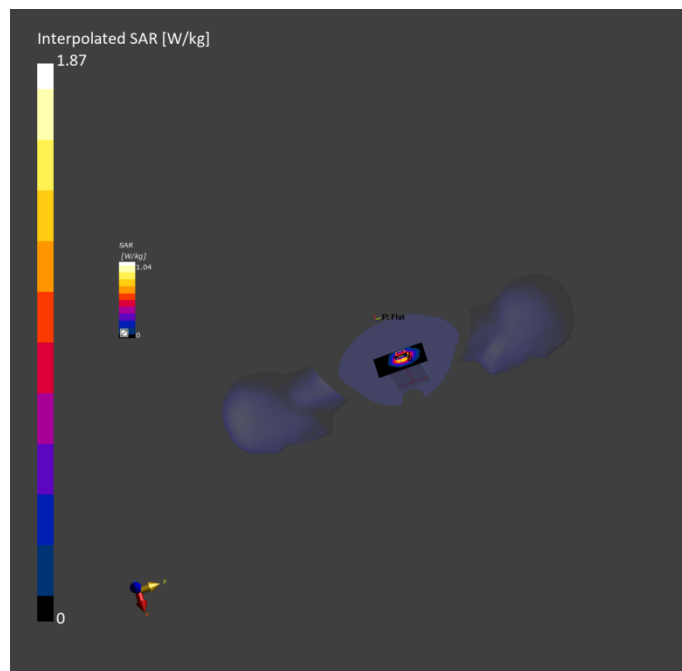

Measurement Report for Device, CHEEK, Band 5, UTRA/FDD, UID 10457 AAA, Channel 4183 (836.600MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 5, UTRA/FDD	WCDMA, 10457-AAA	836.600, 4183	10.05	0.952	41.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-23, 15:42	2023-11-23, 15:52
psSAR1g [W/kg]	0.133	0.142
psSAR10g [W/kg]	0.092	0.110
Power Drift [dB]	-0.04	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		91.6
Dist 3dB Peak [mm]		26.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

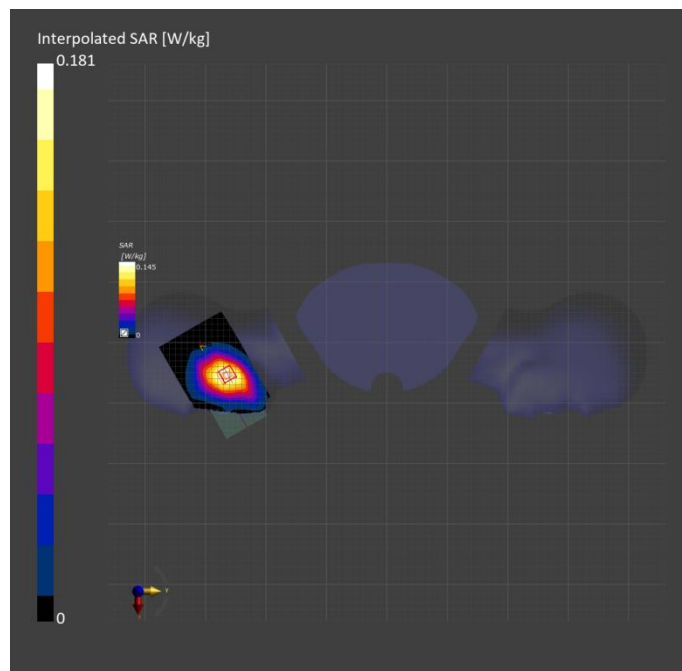

Measurement Report for Device, BACK, Band 5, UTRA/FDD, UID 10457 AAA, Channel 4183 (836.600MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	Band 5, UTRA/FDD	WCDMA, 10457-AAA	836.600, 4183	10.05	0.952	41.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-25, 15:34	2023-11-25, 15:41
psSAR1g [W/kg]	0.302	0.300
psSAR10g [W/kg]	0.189	0.169
Power Drift [dB]	-0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		78.2
Dist 3dB Peak [mm]		10.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

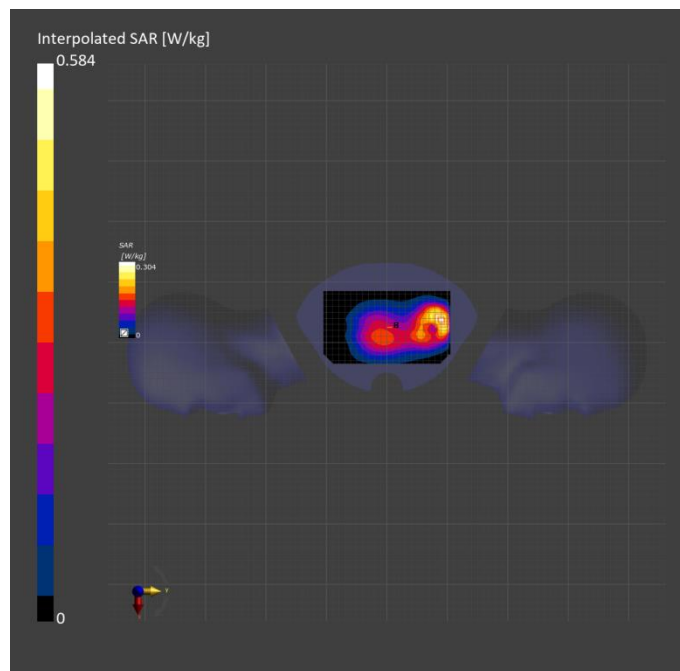

Measurement Report for Device, CHEEK, Band 2, E-UTRA/FDD, UID 10169 CAE, Channel 18700 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 2, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.000, 18700	8.42	1.42	40.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-02, 18:02	2023-12-02, 18:14
psSAR1g [W/kg]	0.054	0.059
psSAR10g [W/kg]	0.032	0.037
Power Drift [dB]	-0.05	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.8
Dist 3dB Peak [mm]		12.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

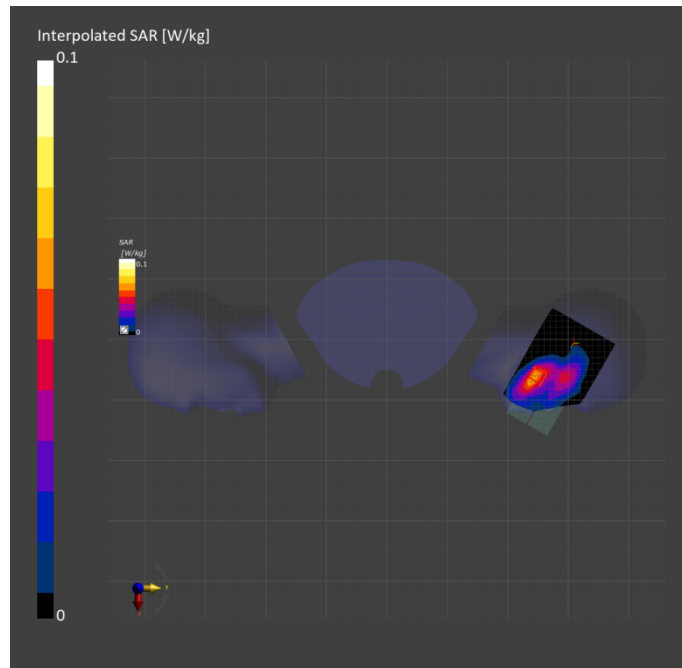

Measurement Report for Device, EDGE BOTTOM, Band 2, E-UTRA/FDD, UID 10297 AAD, Channel 18700 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 2, E-UTRA/FDD	LTE-FDD, 10297-AAD	1860.000, 18700	8.42	1.43	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-09	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-09, 15:07	2023-12-09, 15:18
psSAR1g [W/kg]	1.10	1.15
psSAR10g [W/kg]	0.562	0.587
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.6
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

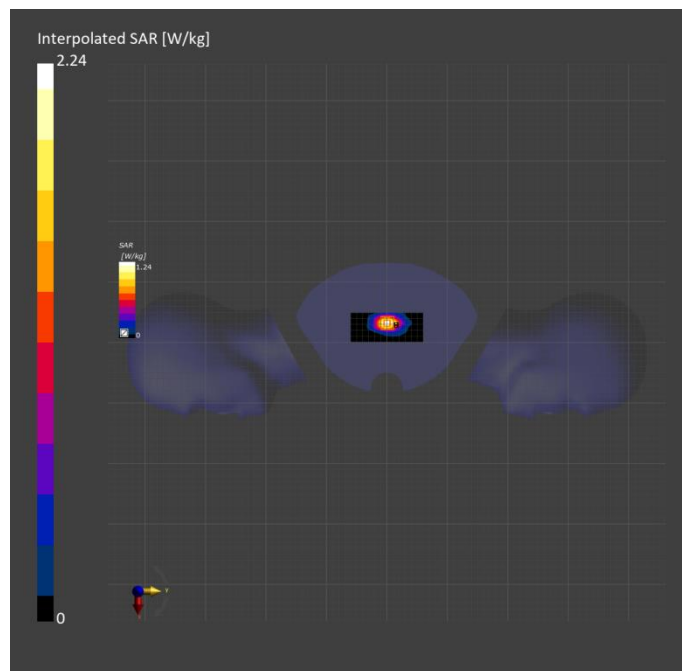

Measurement Report for Device, EDGE BOTTOM, Band 2, UID 10149 CAF, Channel 18700 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band 2	LTE-FDD, 10149-CAF	1860.000, 18700	8.42	1.42	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-12, 11:01	2024-01-12, 11:07
psSAR1g [W/kg]	2.40	2.52
psSAR10g [W/kg]	1.21	1.17
Power Drift [dB]	-0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.1
Dist 3dB Peak [mm]		7.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

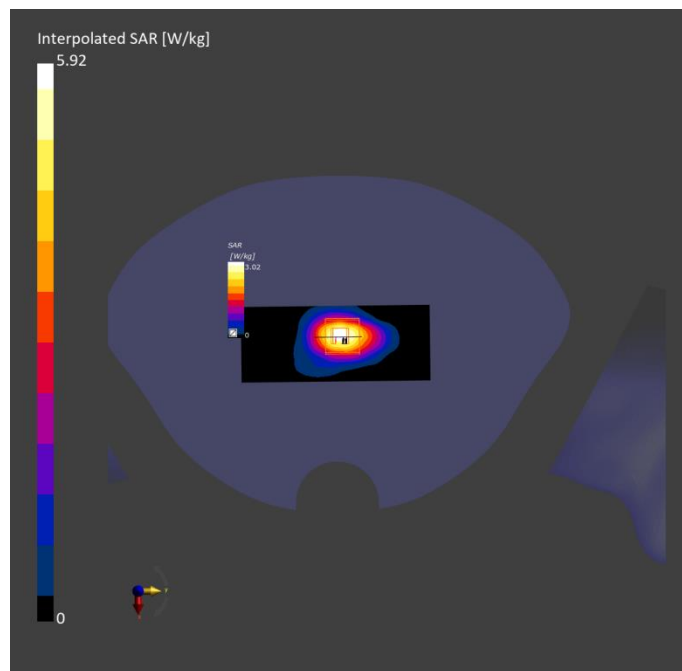

Measurement Report for Device, CHEEK, Band 2, UID 10169 CAF, Channel 18700 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 2	LTE-FDD, 10169-CAF	1860.000, 18700	8.42	1.43	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 12:10	2024-01-05, 12:21
psSAR1g [W/kg]	0.011	0.010
psSAR10g [W/kg]	0.007	0.006
Power Drift [dB]	0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		84.9
Dist 3dB Peak [mm]		12.1

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

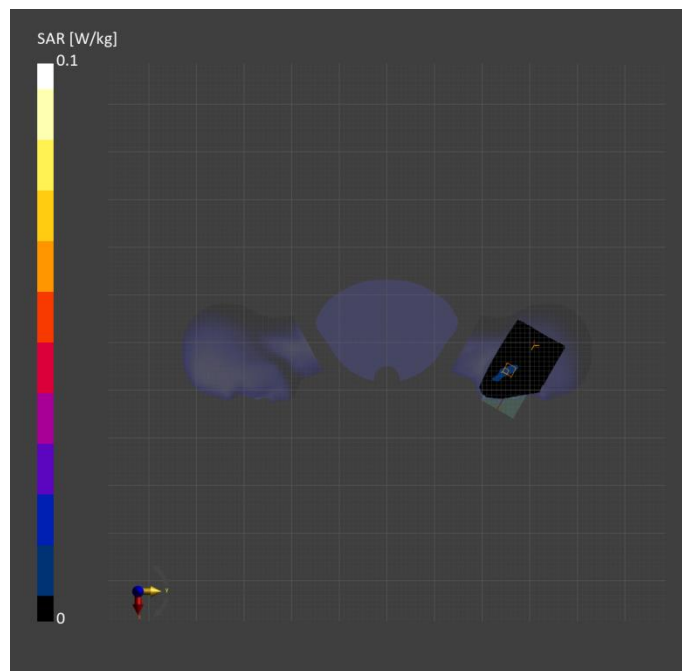



Measurement Report for Device, EDGE BOTTOM, Band 2, UID 10169 CAF, Channel 18700 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 2	LTE-FDD, 10169-CAF	1860.000, 18700	8.42	1.43	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 11:27	2024-01-05, 11:33
psSAR1g [W/kg]	0.314	0.329
psSAR10g [W/kg]	0.165	0.171
Power Drift [dB]	-0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.7
Dist 3dB Peak [mm]		9.9

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

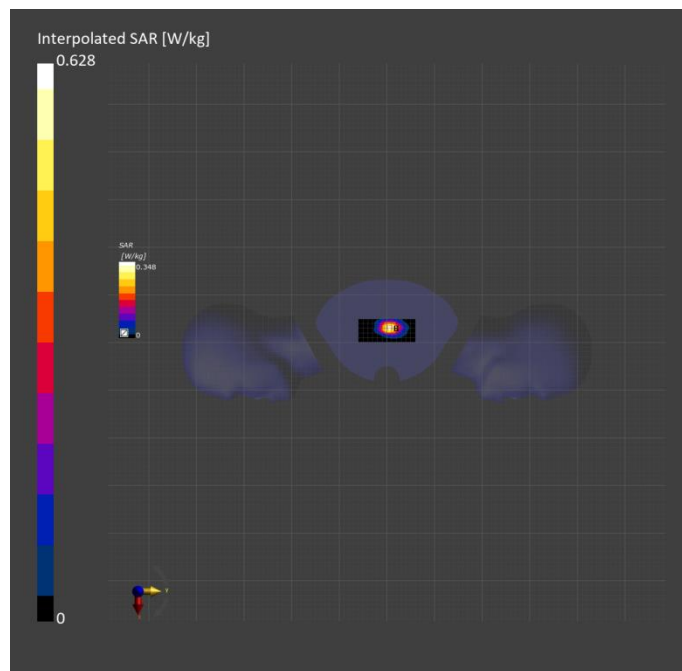

Measurement Report for Device, CHEEK, Band 4, E-UTRA/FDD, UID 10169 CAE, Channel 20300 (1745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 4, E-UTRA/FDD	LTE-FDD, 10169-CAE	1745.000, 20300	8.6	1.39	39.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-23, 18:38	2023-11-23, 18:48
psSAR1g [W/kg]	0.045	0.049
psSAR10g [W/kg]	0.027	0.032
Power Drift [dB]	-0.05	0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.4
Dist 3dB Peak [mm]		14.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

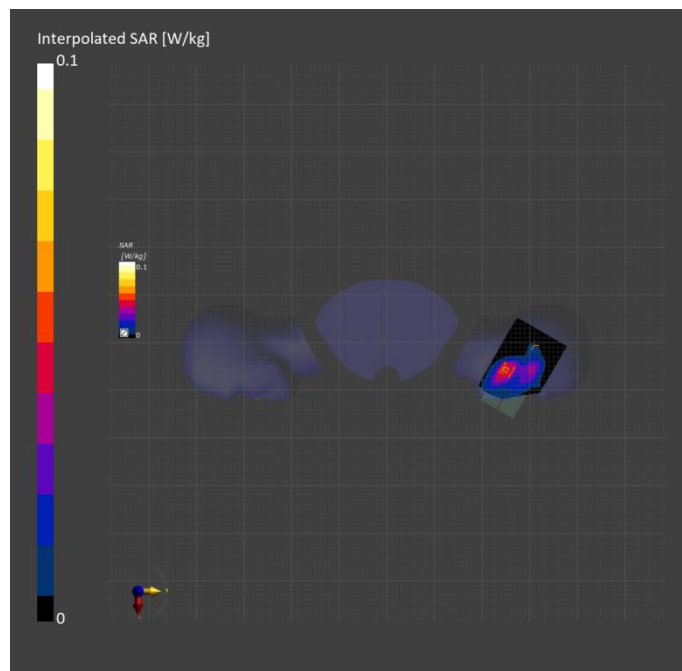

Measurement Report for Device, EDGE BOTTOM, Band 4, E-UTRA/FDD, UID 10169 CAE, Channel 20175 (1732.500MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 4, E-UTRA/FDD	LTE-FDD, 10169-CAE	1732.500, 20175	8.6	1.38	39.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-25, 17:11	2023-11-25, 17:22
psSAR1g [W/kg]	1.01	1.05
psSAR10g [W/kg]	0.530	0.553
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.7
Dist 3dB Peak [mm]		9.9

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

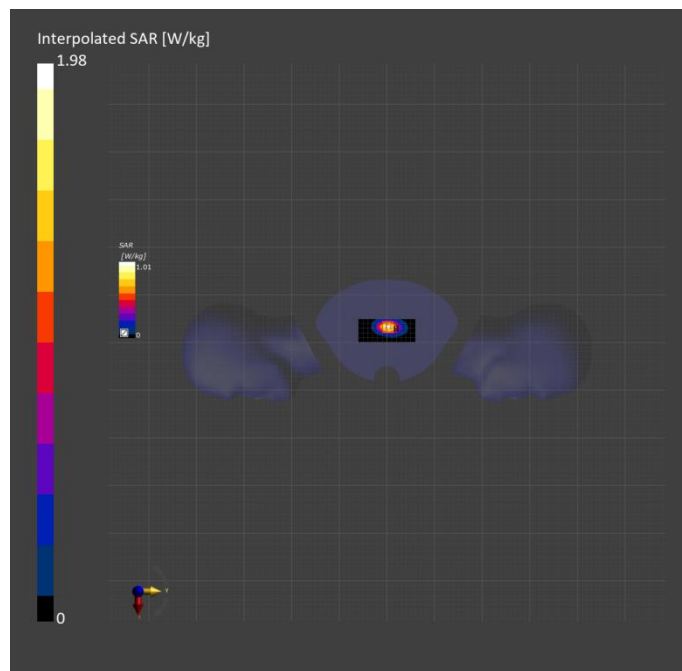

Measurement Report for Device, CHEEK, Band 5, E-UTRA/FDD, UID 10175 CAG, Channel 20600 (844.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	844.000, 20600	10.05	0.952	41.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 10:11	2023-11-24, 10:21
psSAR1g [W/kg]	0.150	0.161
psSAR10g [W/kg]	0.104	0.124
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		92.0
Dist 3dB Peak [mm]		22.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

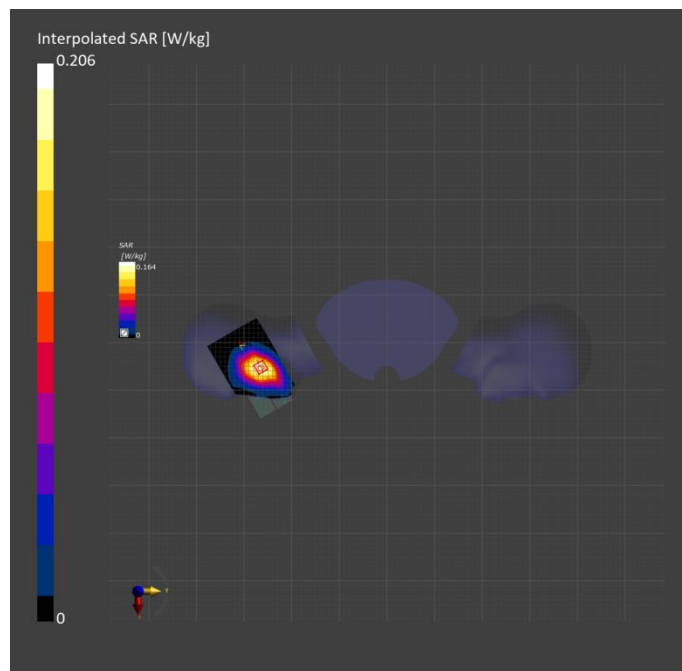

Measurement Report for Device, BACK, Band 5, E-UTRA/FDD, UID 10175 CAG, Channel 20600 (844.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	844.000, 20600	10.05	0.949	42.0

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-27, 13:40	2023-11-27, 13:46
psSAR1g [W/kg]	0.315	0.336
psSAR10g [W/kg]	0.200	0.191
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		78.9
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

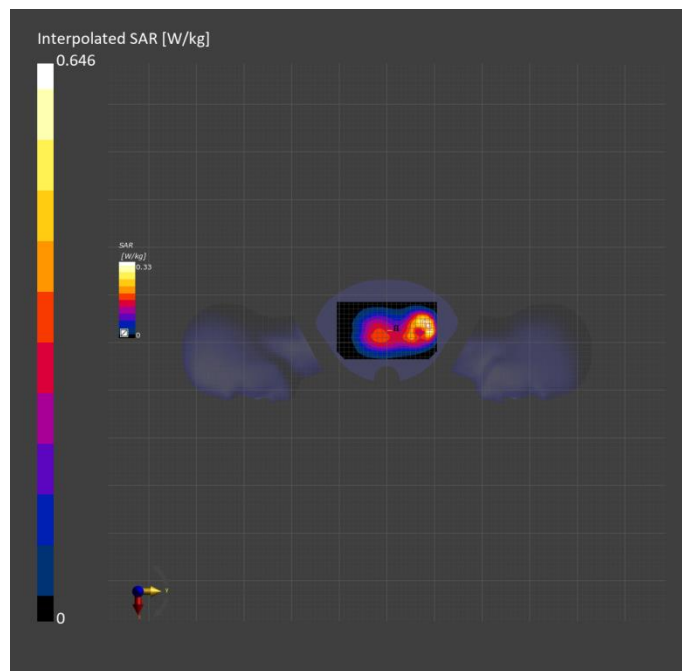

Measurement Report for Device, TILT, Band 7, E-UTRA/FDD, UID 10169 CAE, Channel 21350 (2560.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	TILT, 0.00	Band 7, E-UTRA/FDD	LTE-FDD, 10169-CAE	2560.000, 21350	7.65	1.97	39.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 13:11	2023-11-24, 13:20
psSAR1g [W/kg]	0.011	0.014
psSAR10g [W/kg]	0.005	0.006
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.9
Dist 3dB Peak [mm]		5.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

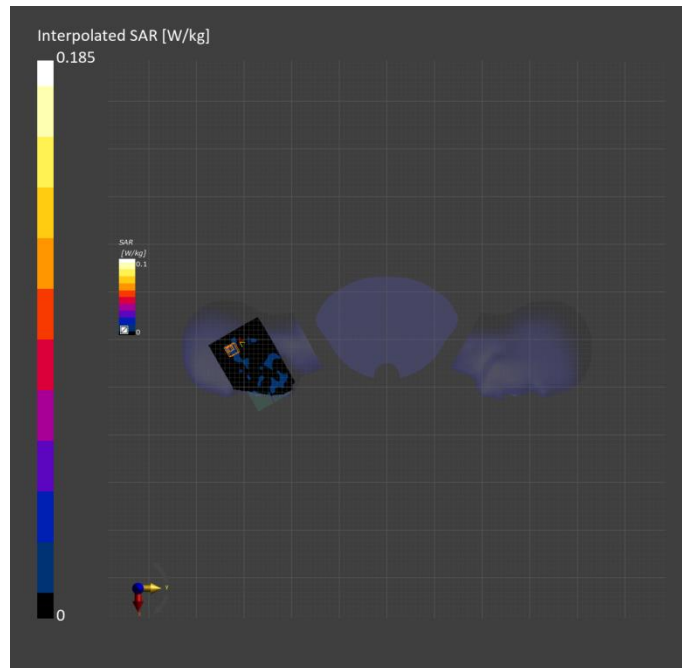

Measurement Report for Device, EDGE BOTTOM, Band 7, E-UTRA/FDD, UID 10169 CAE, Channel 21350 (2560.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 7, E-UTRA/FDD	LTE-FDD, 10169-CAE	2560.000, 21350	7.65	1.96	39.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-29, 15:36	2023-11-29, 15:44
psSAR1g [W/kg]	0.454	0.461
psSAR10g [W/kg]	0.217	0.222
Power Drift [dB]	-0.00	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.7
Dist 3dB Peak [mm]		9.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

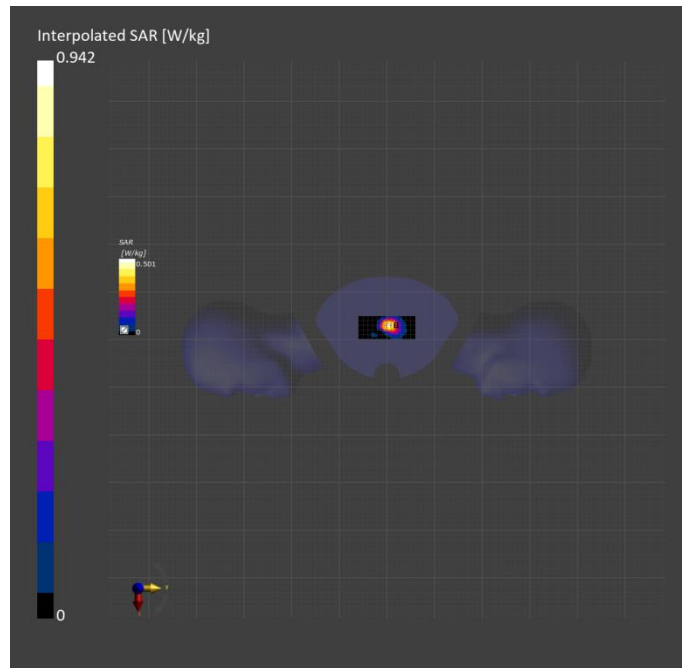

Measurement Report for Device, CHEEK, Band 12, E-UTRA/FDD, UID 10175 CAG, Channel 23060 (704.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	704.000, 23060	10.45	0.894	41.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 14:10	2023-11-24, 14:20
psSAR1g [W/kg]	0.074	0.081
psSAR10g [W/kg]	0.052	0.064
Power Drift [dB]	-0.05	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		93.0
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

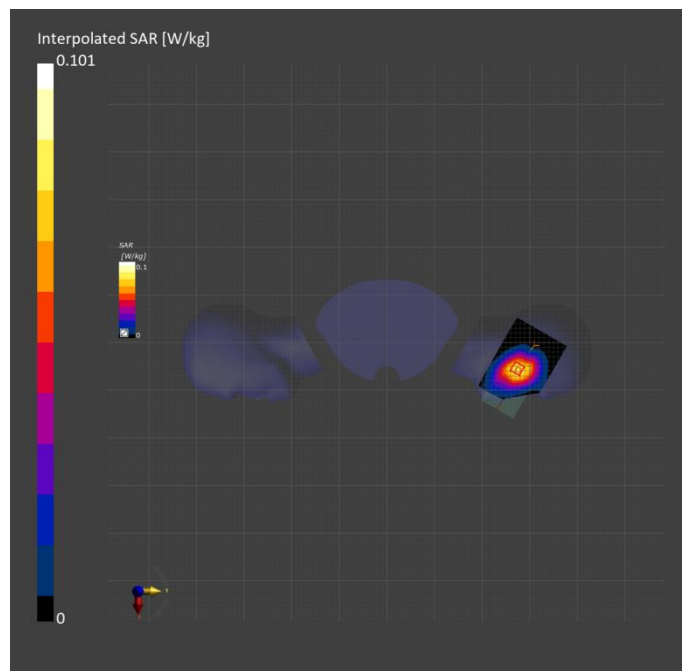



Measurement Report for Device, EDGE RIGHT, Band 12, E-UTRA/FDD, UID 10175 CAG, Channel 23060 (704.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	704.000, 23060	10.45	0.891	42.0

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-27	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-29, 18:05	2023-11-29, 18:40
psSAR1g [W/kg]	0.155	0.156
psSAR10g [W/kg]	0.107	0.109
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.1
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

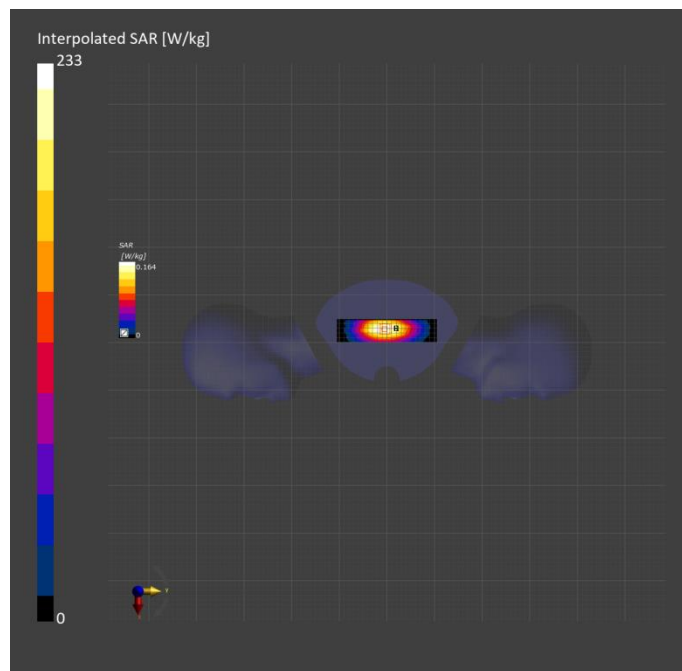

Measurement Report for Device, CHEEK, Band 13, E-UTRA/FDD, UID 10175 CAG, Channel 23230 (782.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.000, 23230	10.45	0.926	42.2

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 15:36	2023-11-24, 15:45
psSAR1g [W/kg]	0.155	0.166
psSAR10g [W/kg]	0.108	0.129
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		92.2
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

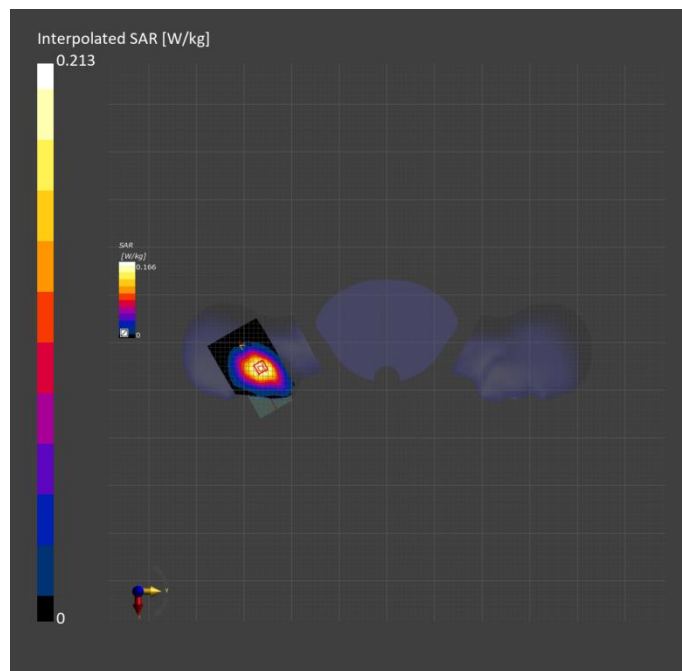

Measurement Report for Device, BACK, Band 13, E-UTRA/FDD, UID 10175 CAG, Channel 23230 (782.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.000, 23230	10.45	0.923	42.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-01, 17:11	2023-12-01, 17:17
psSAR1g [W/kg]	0.260	0.275
psSAR10g [W/kg]	0.168	0.155
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.6
Dist 3dB Peak [mm]		10.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

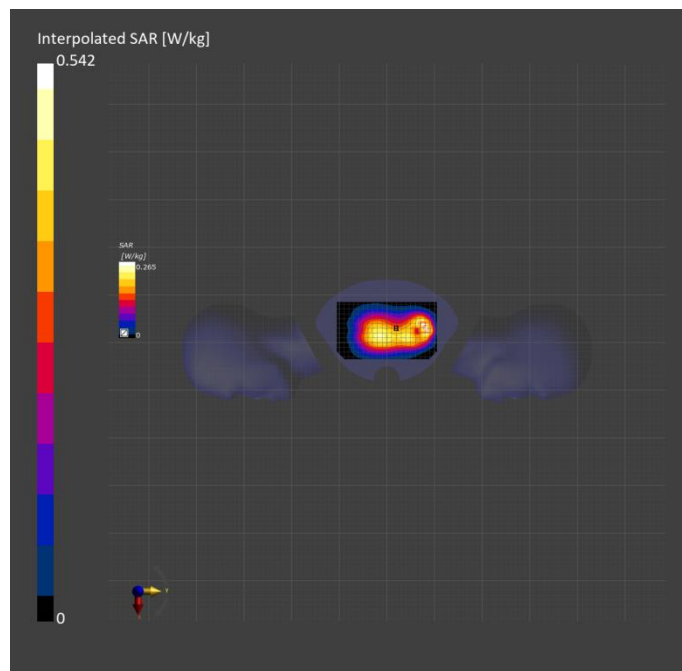

Measurement Report for Device, CHEEK, Band 25, E-UTRA/FDD, UID 10169 CAE, Channel 26140 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.000, 26140	8.42	1.42	40.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-02, 18:37	2023-12-02, 18:48
psSAR1g [W/kg]	0.055	0.060
psSAR10g [W/kg]	0.032	0.038
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		85.3
Dist 3dB Peak [mm]		12.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

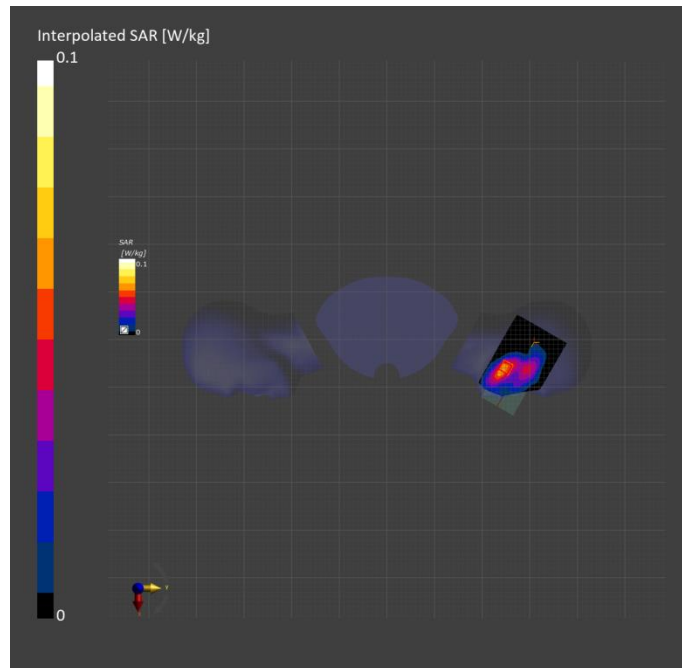

Measurement Report for Device, EDGE BOTTOM, Band 25, E-UTRA/FDD, UID 10169 CAE, Channel 26140 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1860.000, 26140	8.42	1.43	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-09	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-09, 16:48	2023-12-09, 16:59
psSAR1g [W/kg]	1.02	1.08
psSAR10g [W/kg]	0.532	0.559
Power Drift [dB]	-0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.1
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

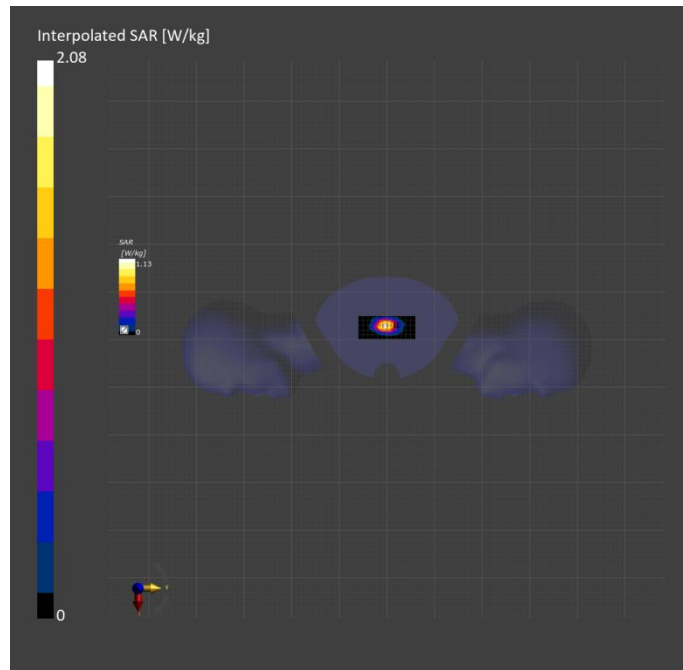

Measurement Report for Device, EDGE BOTTOM, Band 25, UID 10169 CAF, Channel 26140 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band 25	LTE-FDD, 10169-CAF	1860.000, 26140	8.42	1.42	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	5.2 x 5.2 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-12, 12:03	2024-01-12, 12:12
psSAR1g [W/kg]	1.58	1.67
psSAR10g [W/kg]	0.839	0.756
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.4
Dist 3dB Peak [mm]		4.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

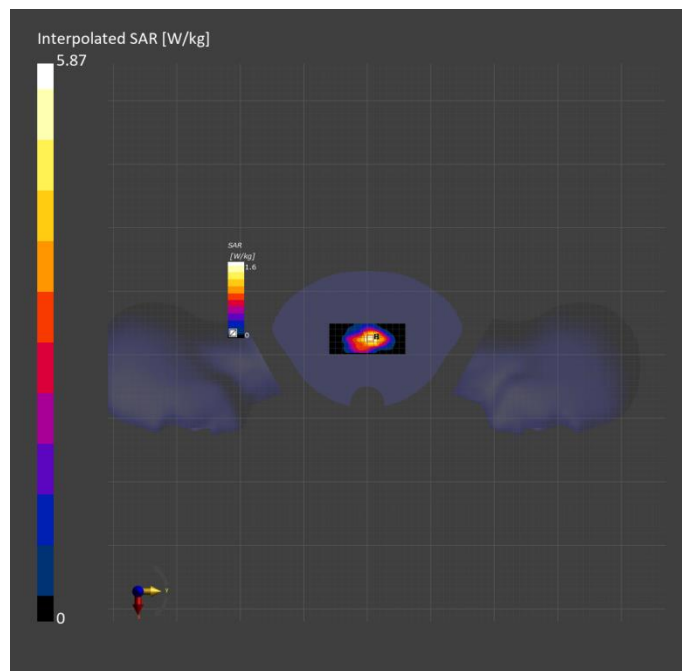

Measurement Report for Device, CHEEK, Band 26 E-UTRA/FDD, UID 10181 CAE, Channel 26765 (821.500MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 26 E-UTRA/FDD	LTE-FDD, 10181-CAE	821.500, 26765	10.05	0.938	41.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 17:12	2023-11-24, 17:20
psSAR1g [W/kg]	0.129	0.139
psSAR10g [W/kg]	0.089	0.107
Power Drift [dB]	-0.03	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		92.0
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

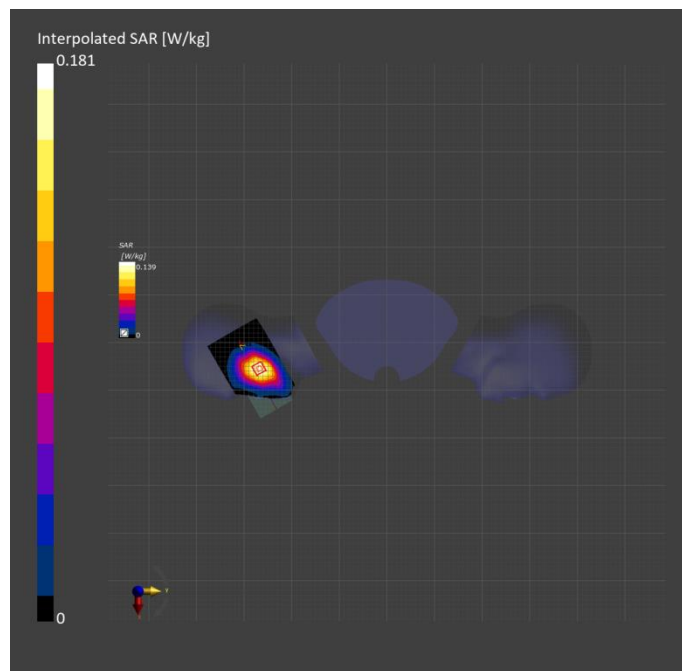

Measurement Report for Device, BACK, Band 26 E-UTRA/FDD, UID 10181 CAE, Channel 26765 (821.500MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 26 E-UTRA/FDD	LTE-FDD, 10181-CAE	821.500, 26765	10.05	0.935	42.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-01, 19:13	2023-12-01, 19:19
psSAR1g [W/kg]	0.242	0.247
psSAR10g [W/kg]	0.152	0.140
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.5
Dist 3dB Peak [mm]		10.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

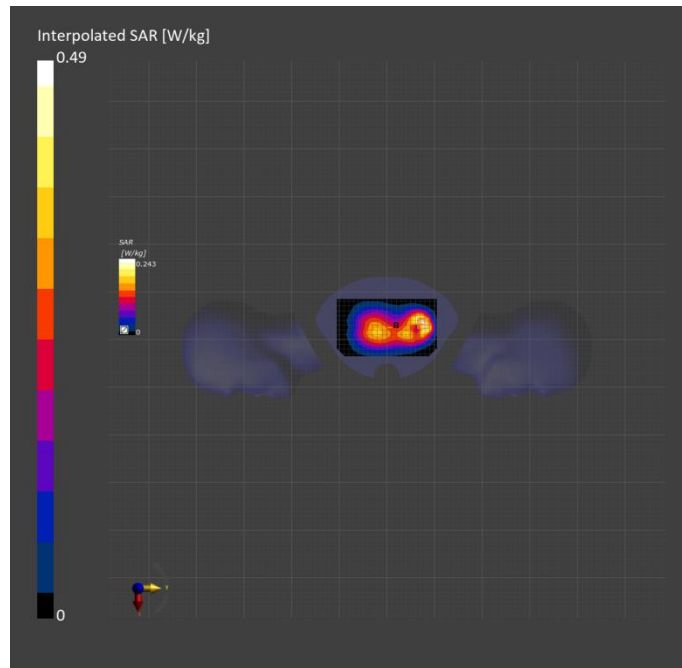



Measurement Report for Device, TILT, Band 41, UID 10172 CAH, Channel 39750 (2506.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Band 41	LTE-TDD, 10172-CAH	2506.000, 39750	7.85	1.90	39.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-02	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-02, 14:01	2024-01-02, 14:10
psSAR1g [W/kg]	0.729	0.767
psSAR10g [W/kg]	0.367	0.386
Power Drift [dB]	0.02	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.2
Dist 3dB Peak [mm]		10.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

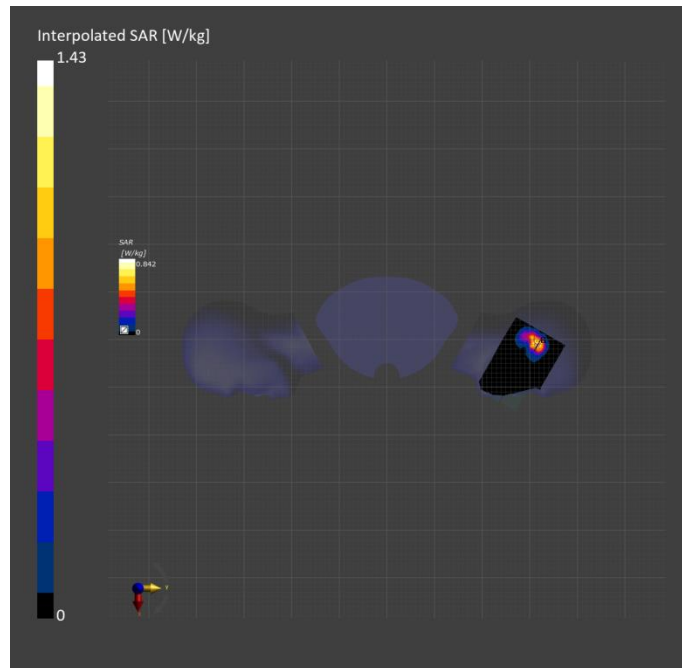

Measurement Report for Device, BACK, Band 41, E-UTRA/TDD, UID 10435 AAF, Channel 39750 (2506.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 41, E-UTRA/TDD	LTE-TDD, 10435-AAF	2506.000, 39750	7.85	1.88	39.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-09	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-09, 18:31	2023-12-09, 18:38
psSAR1g [W/kg]	0.389	0.388
psSAR10g [W/kg]	0.211	0.214
Power Drift [dB]	-0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		14.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

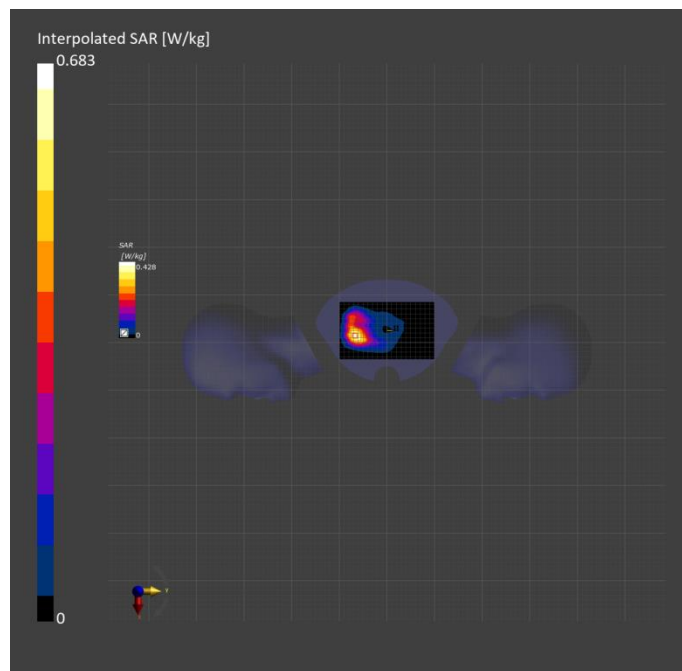

Measurement Report for Device, TILT, Band 41, UID 10172 CAH, Channel 39750 (2506.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Band 41	LTE-TDD, 10172-CAH	2506.000, 39750	7.85	1.90	39.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-04	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-04, 16:59	2024-01-04, 17:08
psSAR1g [W/kg]	0.356	0.369
psSAR10g [W/kg]	0.179	0.187
Power Drift [dB]	0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.4
Dist 3dB Peak [mm]		10.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

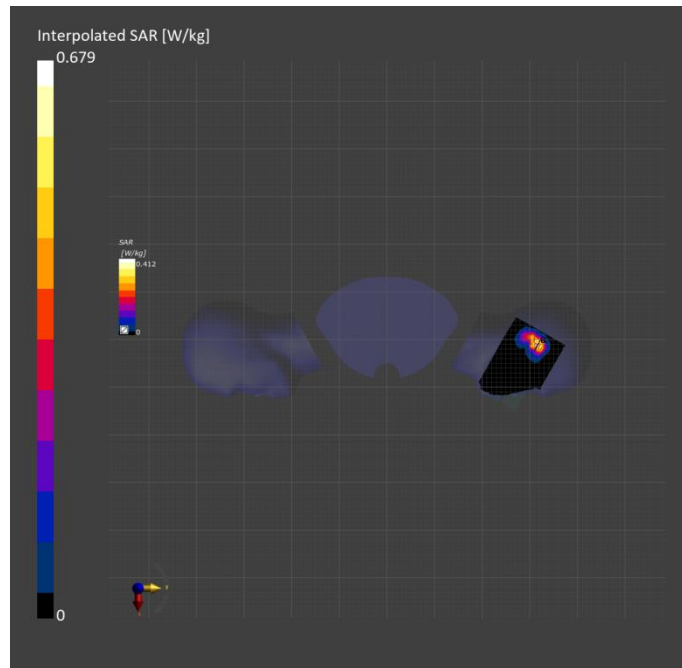

Measurement Report for Device, BACK, Band 41, UID 10172 CAH, Channel 39750 (2506.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 41	LTE-TDD, 10172-CAH	2506.000, 39750	7.85	1.88	39.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 16:00	2024-01-05, 16:07
psSAR1g [W/kg]	0.185	0.187
psSAR10g [W/kg]	0.101	0.103
Power Drift [dB]	0.03	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.8
Dist 3dB Peak [mm]		16.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

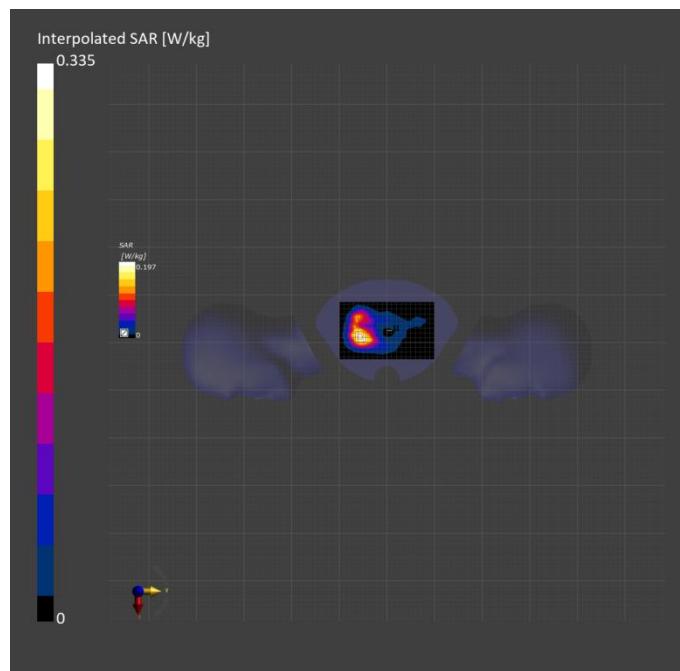

Measurement Report for Device, CHEEK, Band 66, E-UTRA/FDD, UID 10169 CAE, Channel 132322 (1745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 66, E-UTRA/FDD	LTE-FDD, 10169-CAE	1745.000, 132322	8.6	1.39	39.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-24, 18:03	2023-11-24, 18:14
psSAR1g [W/kg]	0.046	0.048
psSAR10g [W/kg]	0.027	0.032
Power Drift [dB]	-0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		89.2
Dist 3dB Peak [mm]		15.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

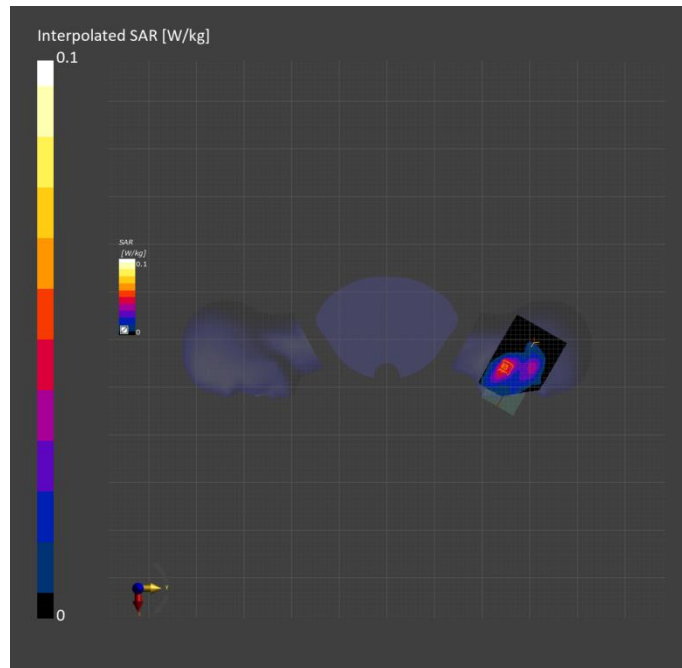

Measurement Report for Device, EDGE BOTTOM, Band 66, E-UTRA/FDD, UID 10169 CAE, Channel 132572 (1770.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 66, E-UTRA/FDD	LTE-FDD, 10169-CAE	1770.000, 132572	8.6	1.42	40.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-09	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-09, 19:26	2023-12-09, 19:37
psSAR1g [W/kg]	0.975	1.02
psSAR10g [W/kg]	0.509	0.530
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.3
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

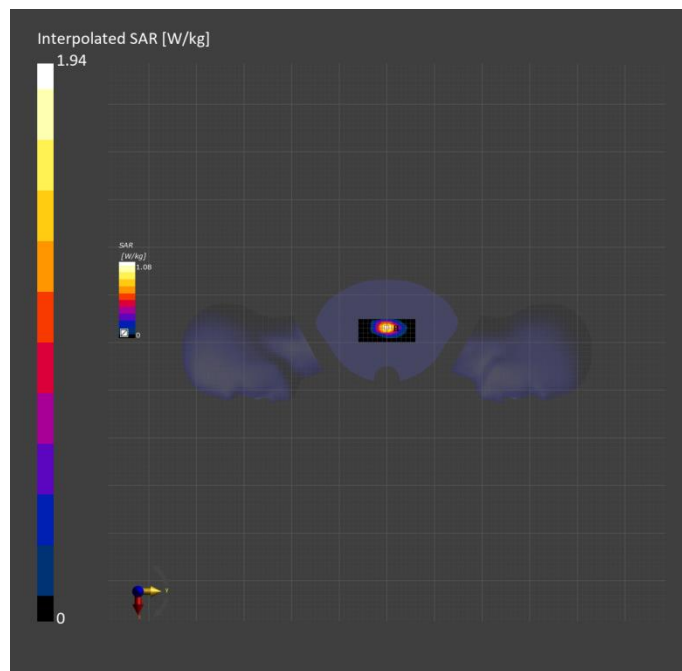

Measurement Report for Device, EDGE BOTTOM, Band 66, UID 10169 CAF, Channel 132572 (1770.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band 66	LTE-FDD, 10169-CAF	1770.000, 132572	8.6	1.43	40.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-03	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-03, 14:23	2024-01-03, 14:30
psSAR1g [W/kg]	4.03	3.86
psSAR10g [W/kg]	1.82	1.68
Power Drift [dB]	-0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		72.5
Dist 3dB Peak [mm]		8.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

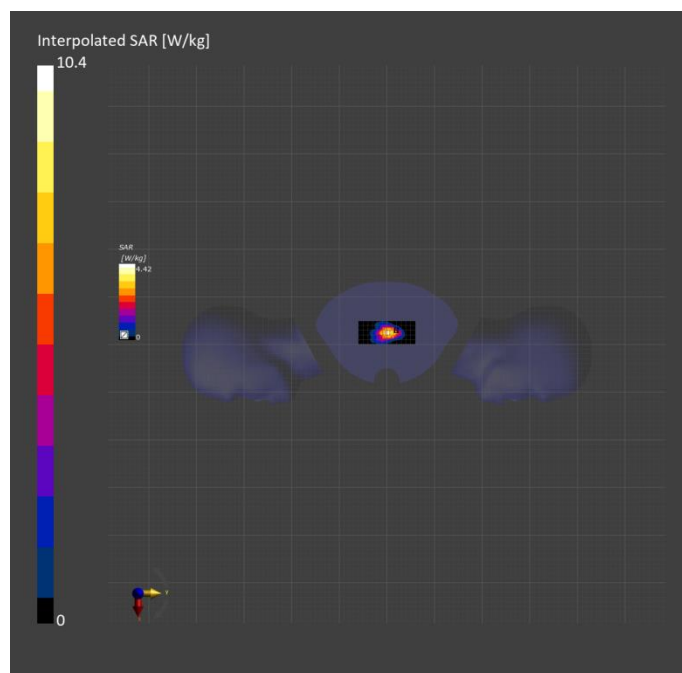

Measurement Report for Device, CHEEK, Band 66, UID 10169 CAF, Channel 132322 (1745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 66	LTE-FDD, 10169-CAF	1745.000, 132322	8.6	1.40	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 13:19	2024-01-05, 13:34
psSAR1g [W/kg]	0.029	0.033
psSAR10g [W/kg]	0.018	0.022
Power Drift [dB]	-0.17	-0.16
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.4
Dist 3dB Peak [mm]		12.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

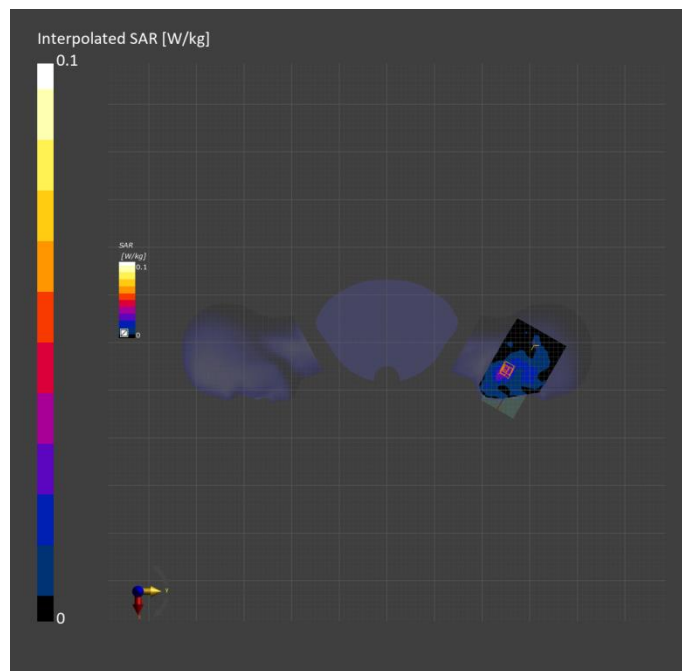



Measurement Report for Device, EDGE BOTTOM, Band 66, UID 10169 CAF, Channel 132322 (1745.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 66	LTE-FDD, 10169-CAF	1745.000, 132322	8.6	1.40	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 13:49	2024-01-05, 13:55
psSAR1g [W/kg]	0.559	0.579
psSAR10g [W/kg]	0.297	0.305
Power Drift [dB]	-0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.8
Dist 3dB Peak [mm]		10.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

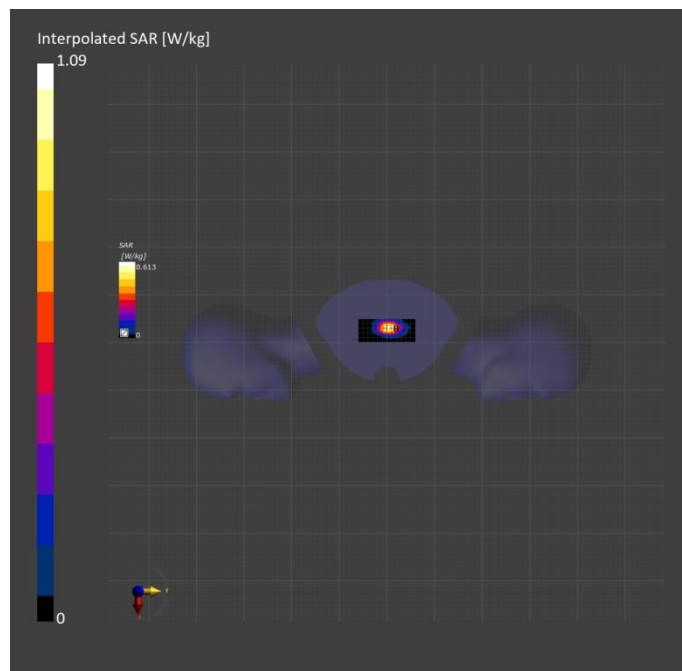

Measurement Report for Device, CHEEK, Band 71, E-UTRA/FDD, UID 10297 AAD, Channel 133372 (688.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 71, E-UTRA/FDD	LTE-FDD, 10297-AAD	688.000, 133372	10.45	0.891	41.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Nov-23	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-11-25, 09:54	2023-11-25, 10:03
psSAR1g [W/kg]	0.110	0.119
psSAR10g [W/kg]	0.078	0.092
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		91.9
Dist 3dB Peak [mm]		24.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

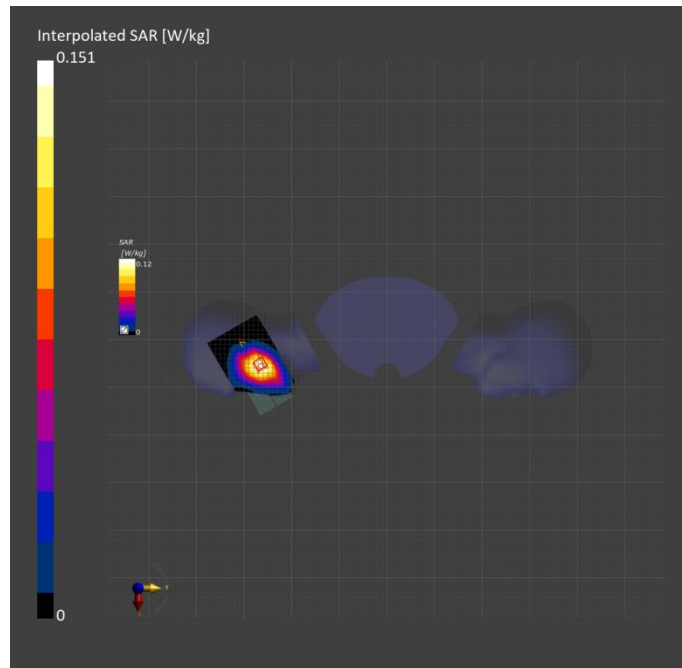

Measurement Report for Device, EDGE RIGHT, Band 71, E-UTRA/FDD, UID 10169 CAE, Channel 133322 (683.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	Band 71, E-UTRA/FDD	LTE-FDD, 10169-CAE	683.000, 133322	10.45	0.888	42.0

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-01	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-02, 13:45	2023-12-02, 14:02
psSAR1g [W/kg]	0.182	0.190
psSAR10g [W/kg]	0.126	0.133
Power Drift [dB]	0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		87.1
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

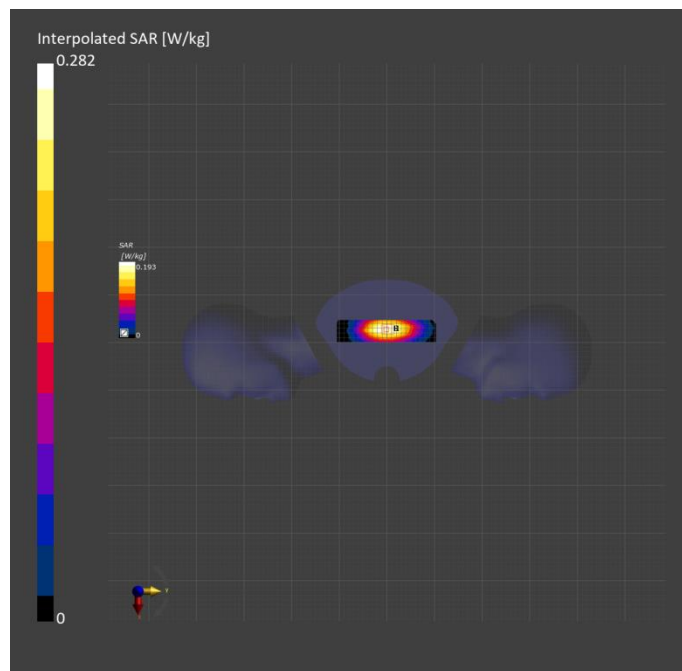

Measurement Report for Device, CHEEK, Band n2, UID 10939 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n2	5G NR FR1 FDD, 10939-AAC	1860.000, 372000	8.42	1.44	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 18:38	2023-12-13, 18:48
psSAR1g [W/kg]	0.055	0.058
psSAR10g [W/kg]	0.032	0.037
Power Drift [dB]	0.01	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		89.1
Dist 3dB Peak [mm]		14.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

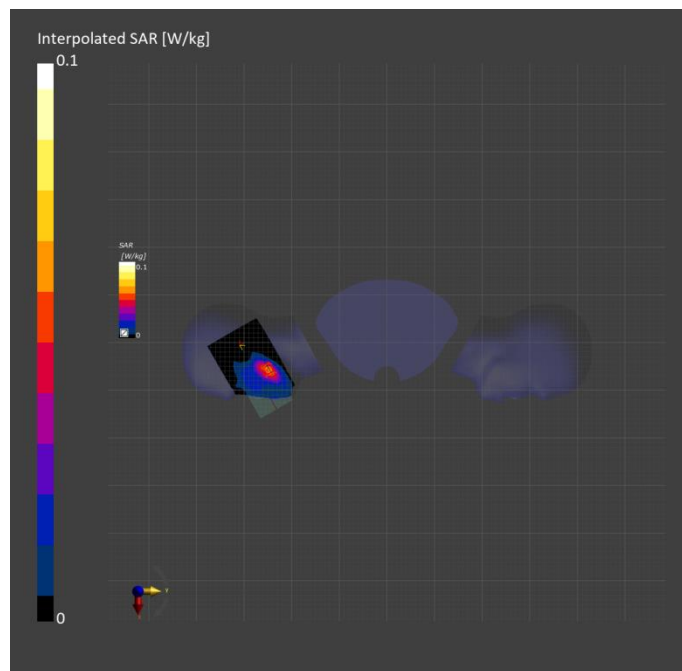

Measurement Report for Device, EDGE BOTTOM, Band n2, UID 10939 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n2	5G NR FR1 FDD, 10939-AAC	1860.000, 372000	8.42	1.44	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 14:54	2023-12-13, 15:05
psSAR1g [W/kg]	1.11	1.16
psSAR10g [W/kg]	0.565	0.585
Power Drift [dB]	0.02	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.3
Dist 3dB Peak [mm]		8.5

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

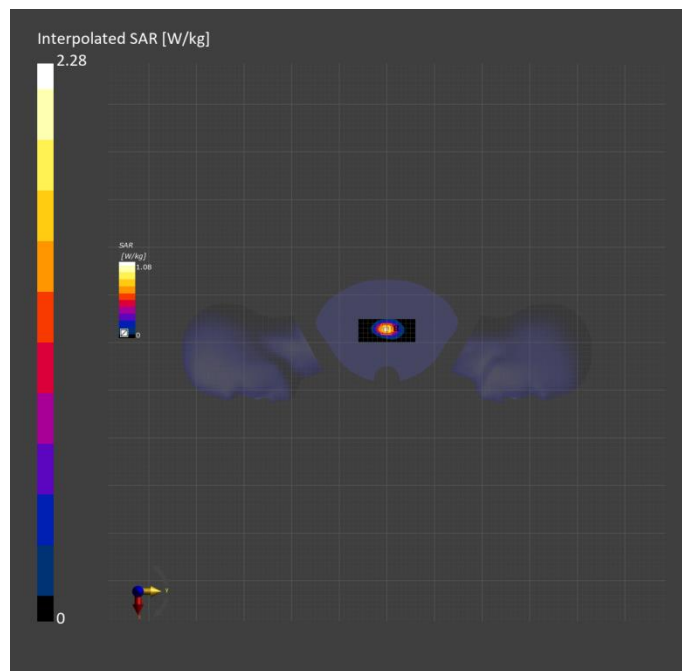

Measurement Report for Device, EDGE BOTTOM, Band n2, UID 10939 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band n2	5G NR FR1 FDD, 10939-AAC	1860.000, 372000	8.42	1.42	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	4.6 x 4.6 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-12, 09:57	2024-01-12, 10:08
psSAR1g [W/kg]	1.63	1.72
psSAR10g [W/kg]	0.816	0.757
Power Drift [dB]	-0.00	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		68.5
Dist 3dB Peak [mm]		6.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

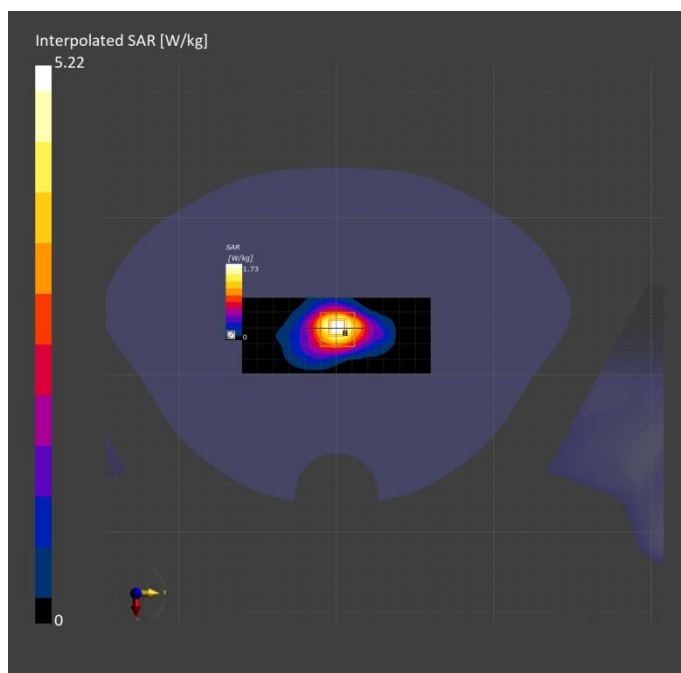

Measurement Report for Device, CHEEK, Band n5, UID 10939 AAC, Channel 167800 (839.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n5	5G NR FR1 FDD, 10939-AAC	839.000, 167800	10.05	0.954	42.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 09:35	2023-12-14, 09:44
psSAR1g [W/kg]	0.170	0.183
psSAR10g [W/kg]	0.117	0.140
Power Drift [dB]	-0.06	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		91.0
Dist 3dB Peak [mm]		25.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

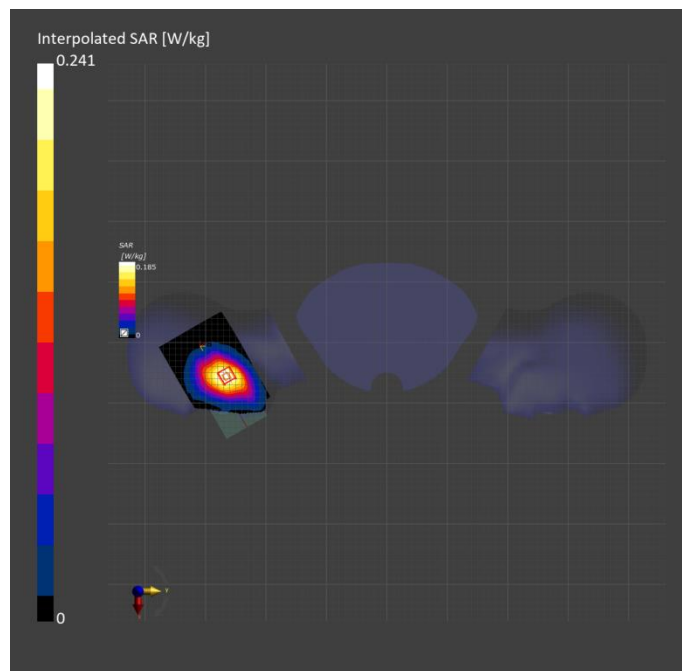

Measurement Report for Device, BACK, Band n5, UID 10939 AAC, Channel 167800 (839.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n5	5G NR FR1 FDD, 10939-AAC	839.000, 167800	10.05	0.956	42.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 14:23	2023-12-13, 14:30
psSAR1g [W/kg]	0.341	0.354
psSAR10g [W/kg]	0.211	0.200
Power Drift [dB]	-0.16	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.6
Dist 3dB Peak [mm]		10.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

