

Measurement Report for Device, CHEEK, Band n7, UID 10942 AAC, Channel 510000 (2550.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band n7	5G NR FR1 FDD, 10942-AAC	2550.000, 510000	7.85	1.97	39.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 10:56	2023-12-14, 11:08
psSAR1g [W/kg]	0.054	0.059
psSAR10g [W/kg]	0.027	0.033
Power Drift [dB]	0.05	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.0
Dist 3dB Peak [mm]		11.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

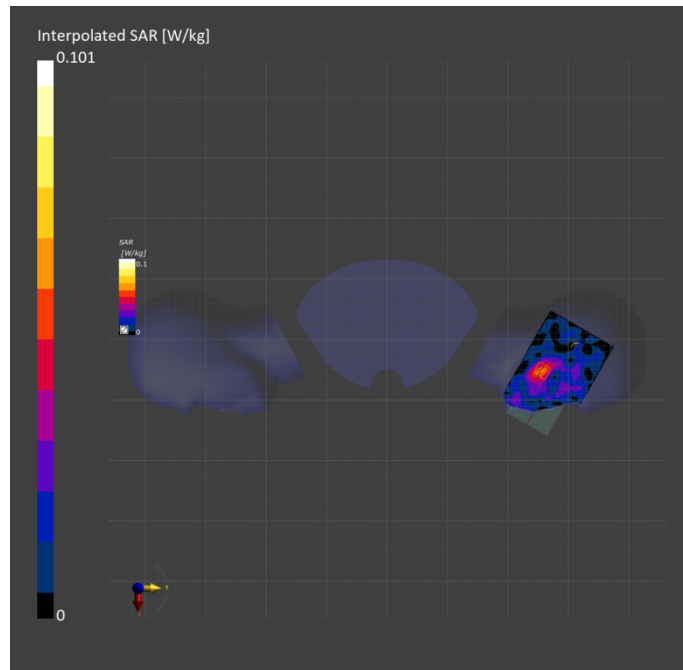

Measurement Report for Device, EDGE BOTTOM, Band n7, UID 10942 AAC, Channel 507000 (2535.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n7	5G NR FR1 FDD, 10942-AAC	2535.000, 507000	7.85	1.95	39.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 13:28	2023-12-13, 13:42
psSAR1g [W/kg]	0.938	0.949
psSAR10g [W/kg]	0.454	0.455
Power Drift [dB]	0.01	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.6
Dist 3dB Peak [mm]		10.1

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

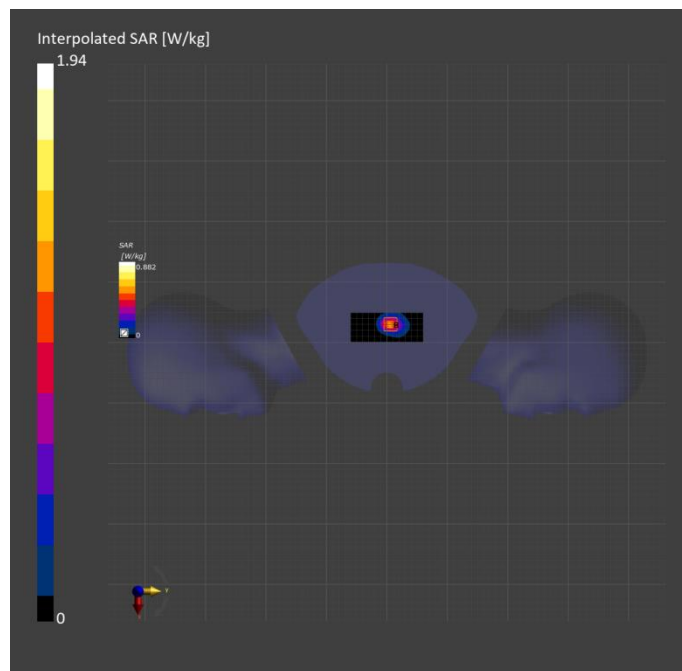

Measurement Report for Device, CHEEK, Band n25, UID 10939 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band n25	5G NR FR1 FDD, 10939-AAC	1860.000, 372000	8.42	1.44	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 13:50	2023-12-14, 14:01
psSAR1g [W/kg]	0.047	0.050
psSAR10g [W/kg]	0.027	0.032
Power Drift [dB]	0.04	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.7
Dist 3dB Peak [mm]		13.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

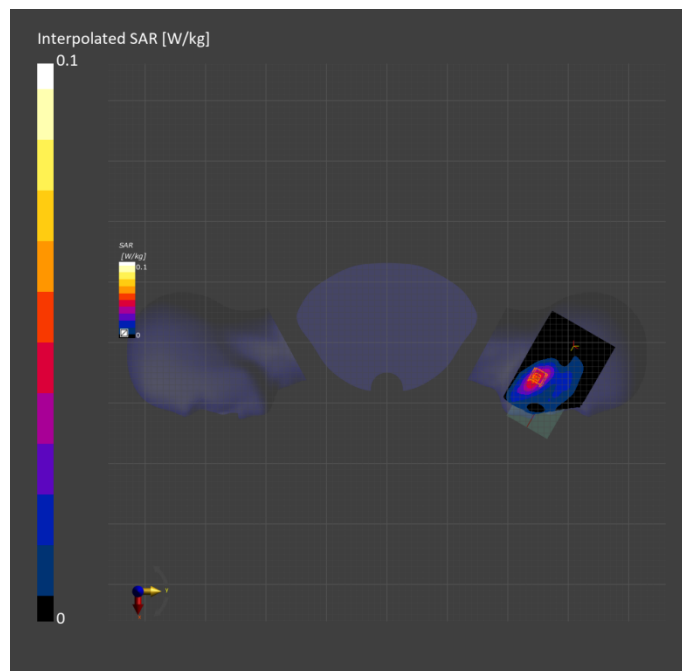

Measurement Report for Device, EDGE BOTTOM, Band n25, UID 10947 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band n25	5G NR FR1 FDD, 10947-AAC	1860.000, 372000	8.42	1.44	40.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 11:12	2023-12-13, 11:24
psSAR1g [W/kg]	1.06	1.11
psSAR10g [W/kg]	0.540	0.562
Power Drift [dB]	-0.01	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		78.7
Dist 3dB Peak [mm]		9.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

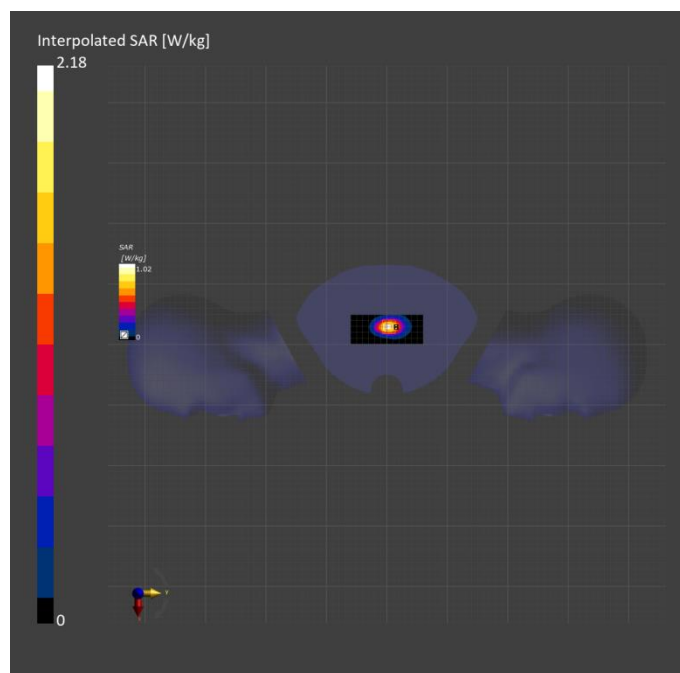

Measurement Report for Device, EDGE BOTTOM, Band n25, UID 10947 AAC, Channel 372000 (1860.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band n25	5G NR FR1 FDD, 10947-AAC	1860.000, 372000	8.42	1.42	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-12	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-12, 11:14	2024-01-12, 11:51
psSAR1g [W/kg]	1.52	1.65
psSAR10g [W/kg]	0.821	0.746
Power Drift [dB]	0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.4
Dist 3dB Peak [mm]		4.1

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

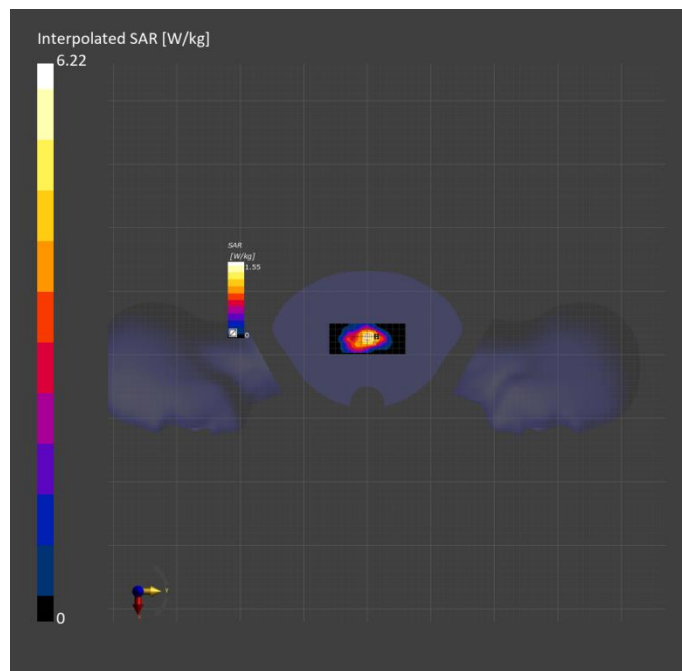

Measurement Report for Device, CHEEK, Band n66, UID 10942 AAC, Channel 352000 (1760.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n66	5G NR FR1 FDD, 10942-AAC	1760.000, 352000	8.6	1.41	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 15:17	2023-12-14, 15:27
psSAR1g [W/kg]	0.056	0.061
psSAR10g [W/kg]	0.034	0.039
Power Drift [dB]	-0.04	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		90.9
Dist 3dB Peak [mm]		15.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

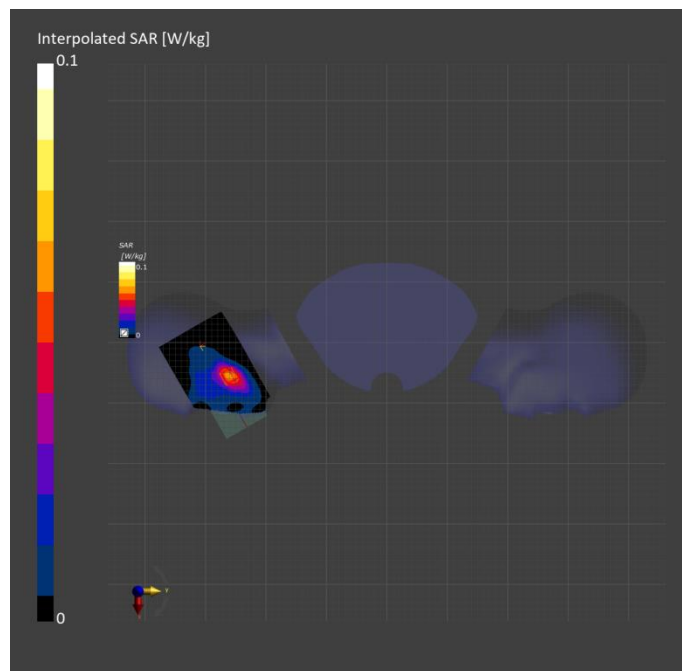

Measurement Report for Device, EDGE BOTTOM, Band n66, UID 10942 AAC, Channel 352000 (1760.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n66	5G NR FR1 FDD, 10942-AAC	1760.000, 352000	8.6	1.41	40.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 09:37	2023-12-13, 09:49
psSAR1g [W/kg]	1.06	1.10
psSAR10g [W/kg]	0.549	0.574
Power Drift [dB]	-0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.7
Dist 3dB Peak [mm]		9.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

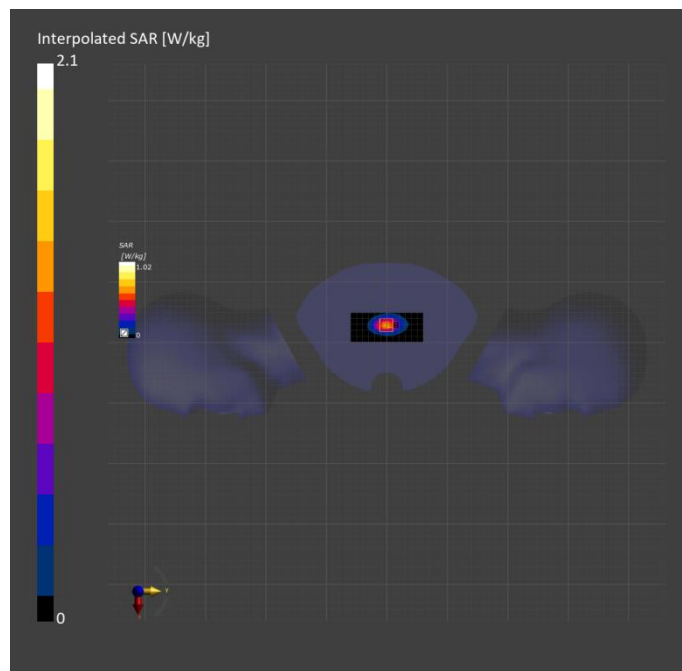

Measurement Report for Device, CHEEK, Band n71, UID 10939 AAC, Channel 137600 (688.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n71	5G NR FR1 FDD, 10939-AAC	688.000, 137600	10.45	0.895	42.3

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 15:54	2023-12-14, 16:02
psSAR1g [W/kg]	0.095	0.100
psSAR10g [W/kg]	0.066	0.077
Power Drift [dB]	0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		92.7
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

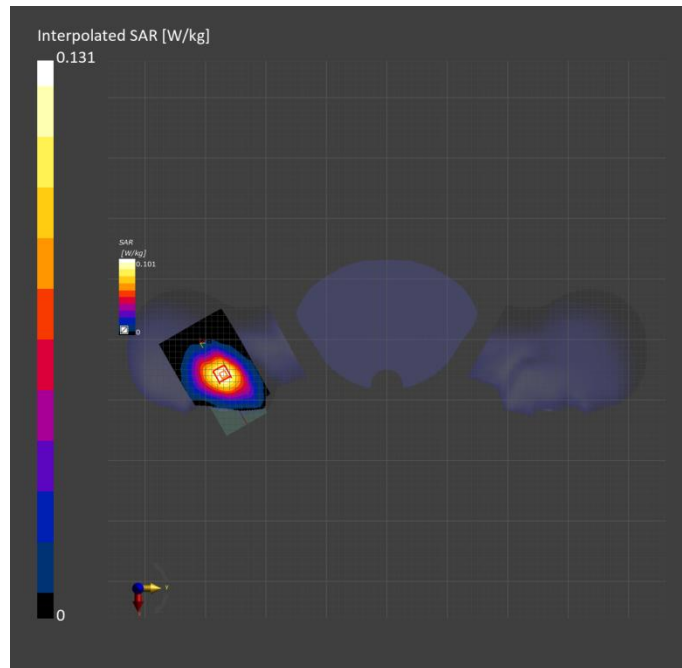



Measurement Report for Device, EDGE RIGHT, Band n71, UID 10939 AAC, Channel 137600 (688.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	Band n71	5G NR FR1 FDD, 10939-AAC	688.000, 137600	10.45	0.896	42.4

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-11	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-13, 09:10	2023-12-13, 09:21
psSAR1g [W/kg]	0.174	0.184
psSAR10g [W/kg]	0.121	0.128
Power Drift [dB]	-0.02	0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		82.3
Dist 3dB Peak [mm]		> 15.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

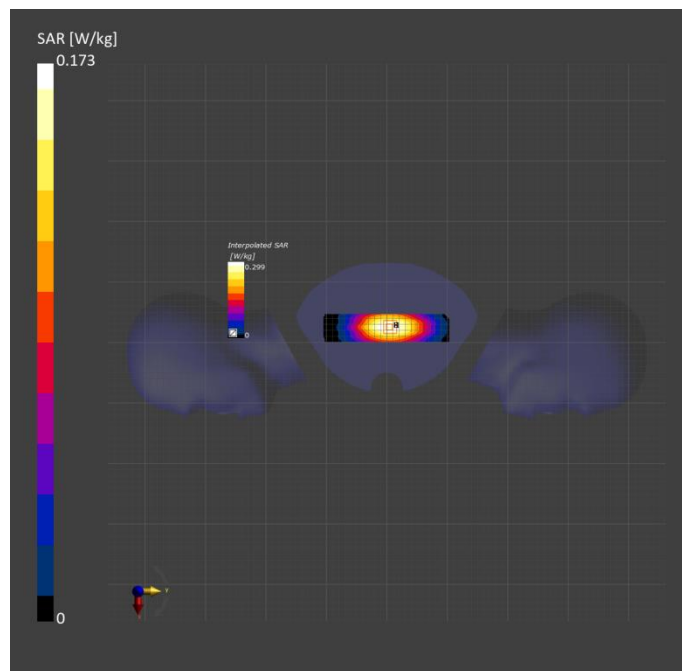

Measurement Report for Device, TILT, Band n41, UID 10917 AAB, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	TILT, 0.00	Band n41	5G NR FR1 TDD, 10917-AAB	2546.010, 509202	7.85	1.96	39.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-14, 18:38	2023-12-14, 18:58
psSAR1g [W/kg]	1.08	1.09
psSAR10g [W/kg]	0.548	0.534
Power Drift [dB]	0.01	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.9
Dist 3dB Peak [mm]		9.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

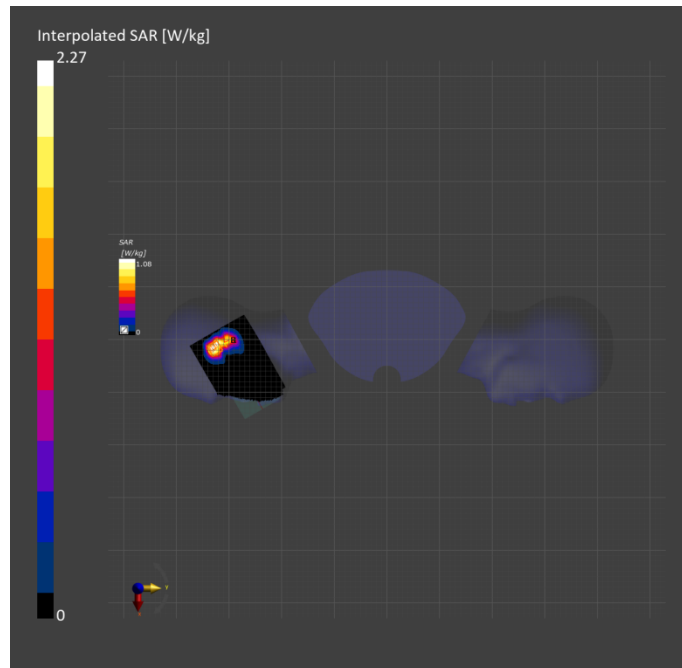

Measurement Report for Device, EDGE TOP, Band n41, UID 10917 AAB, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band n41	5G NR FR1 TDD, 10917-AAB	2546.010, 509202	7.85	1.96	39.6

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-16, 18:26	2023-12-16, 18:39
psSAR1g [W/kg]	0.824	0.833
psSAR10g [W/kg]	0.424	0.431
Power Drift [dB]	0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.4
Dist 3dB Peak [mm]		12.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

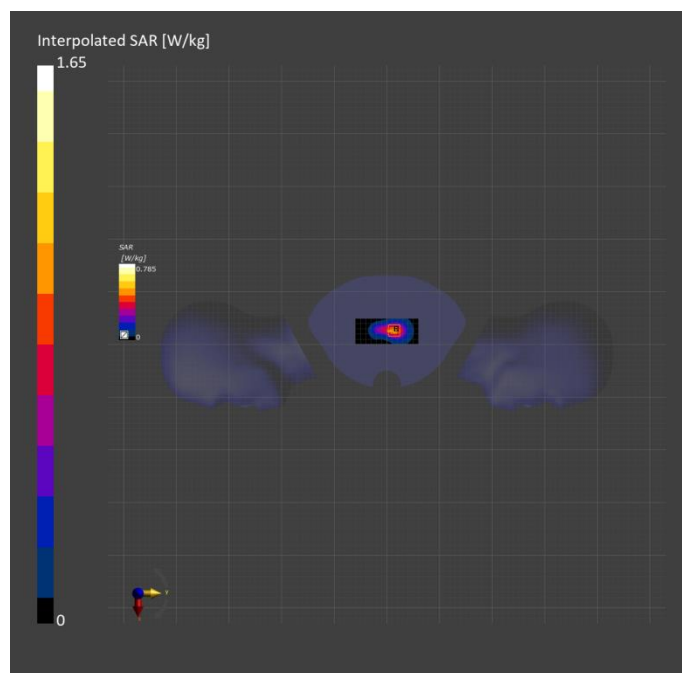

Measurement Report for Device, TILT, Band n41, UID 10917 AAD, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	TILT, 0.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	7.85	1.97	39.8

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-04	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-04, 17:38	2024-01-04, 17:51
psSAR1g [W/kg]	0.426	0.404
psSAR10g [W/kg]	0.206	0.194
Power Drift [dB]	-0.05	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.8
Dist 3dB Peak [mm]		8.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

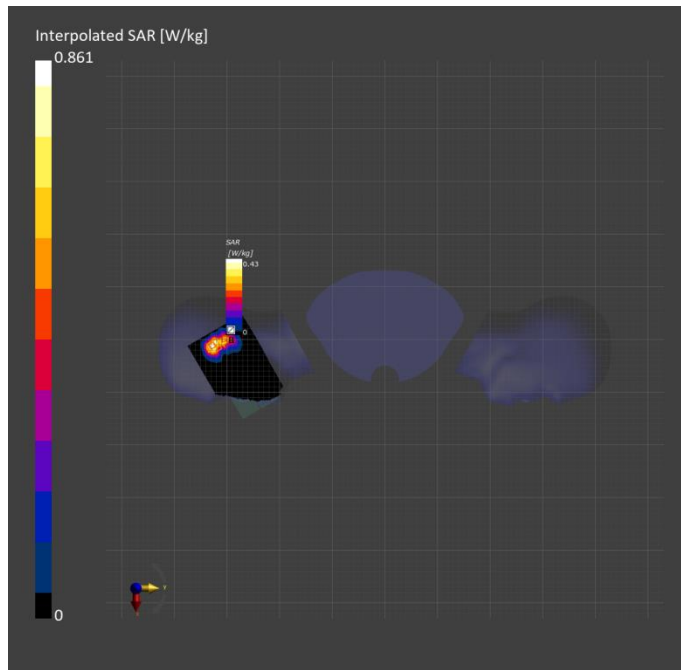

Measurement Report for Device, EDGE TOP, Band n41, UID 10917 AAD, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm] 165.0 x 77.9 x 8.0	IMEI	DUT Type Phone
--------------------------------	---------------------------------------	------	-------------------

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	7.85	1.96	39.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 15:01	2024-01-05, 15:09
psSAR1g [W/kg]	0.184	0.188
psSAR10g [W/kg]	0.096	0.096
Power Drift [dB]	0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.2
Dist 3dB Peak [mm]		12.7

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

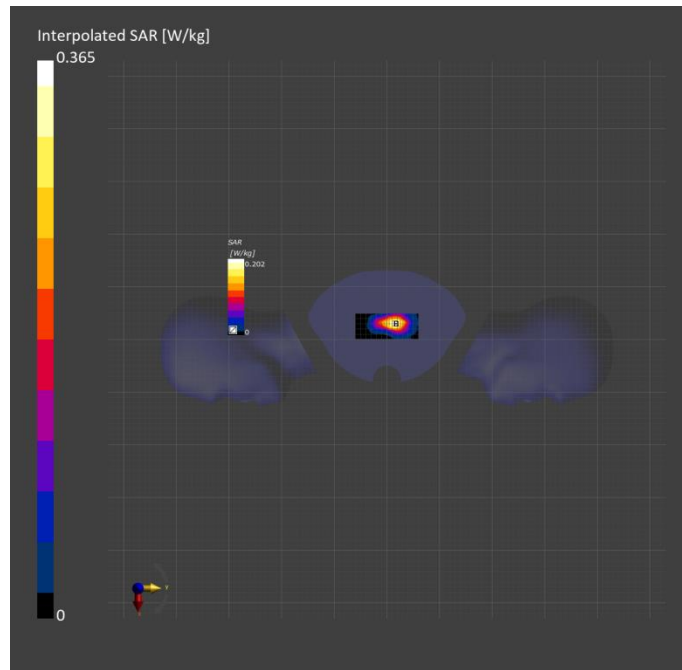

Measurement Report for Device, TILT, Band n41, UID 10917 AAD, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	TILT, 0.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	7.85	1.96	39.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 10:11	2024-01-05, 10:24
psSAR1g [W/kg]	0.374	0.367
psSAR10g [W/kg]	0.184	0.176
Power Drift [dB]	-0.08	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.3
Dist 3dB Peak [mm]		7.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

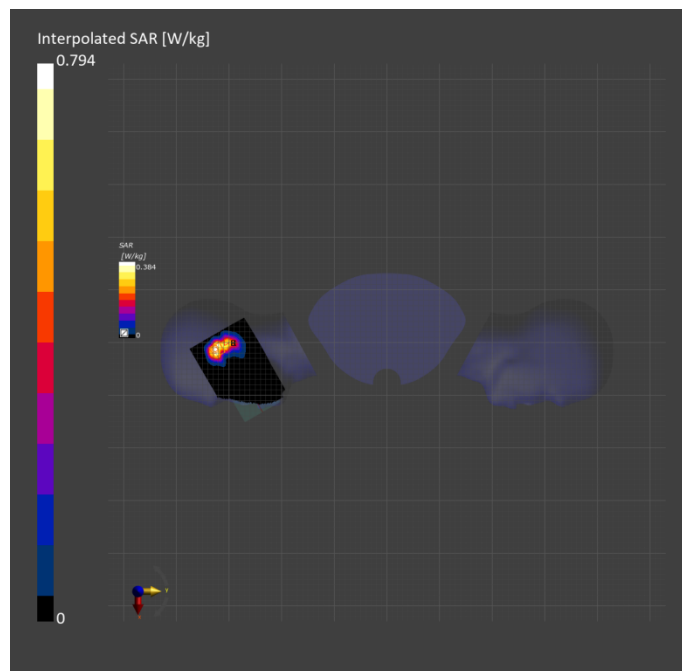

Measurement Report for Device, EDGE TOP, Band n41, UID 10917 AAD, Channel 509202 (2546.010MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	7.85	1.96	39.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 10:40	2024-01-05, 10:48
psSAR1g [W/kg]	0.154	0.156
psSAR10g [W/kg]	0.080	0.081
Power Drift [dB]	-0.02	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		80.6
Dist 3dB Peak [mm]		13.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

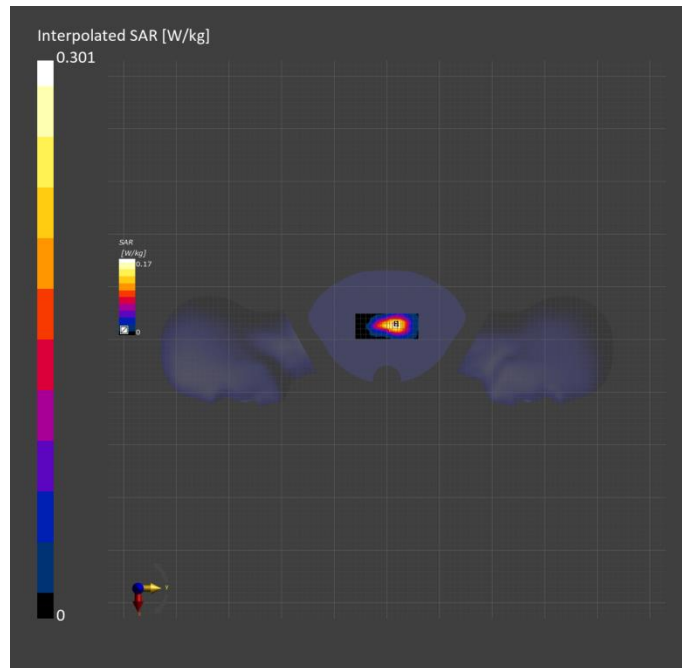

Measurement Report for Device, CHEEK, Band n77, UID 10829 AAD, Channel 633332 (3499.980MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10829-AAD	3499.980, 633332	7.03	2.99	37.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-15, 10:34	2023-12-15, 10:52
psSAR1g [W/kg]	0.961	1.10
psSAR10g [W/kg]	0.424	0.439
Power Drift [dB]	0.06	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		73.3
Dist 3dB Peak [mm]		7.4

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

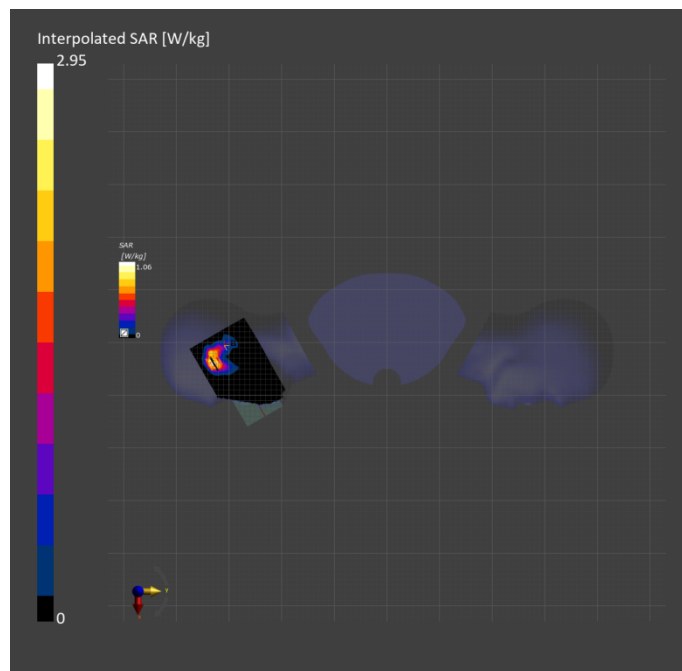



Measurement Report for Device, BACK, Band n77, UID 10917 AAB, Channel 633332 (3499.980MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm] 165.0 x 77.9 x 8.0	IMEI	DUT Type Phone
--------------------------------	---------------------------------------	------	-------------------

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10917-AAB	3499.980, 633332	7.03	2.99	37.9

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-16, 15:38	2023-12-16, 15:46
psSAR1g [W/kg]	0.433	0.443
psSAR10g [W/kg]	0.199	0.197
Power Drift [dB]	-0.08	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.1
Dist 3dB Peak [mm]		10.3

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

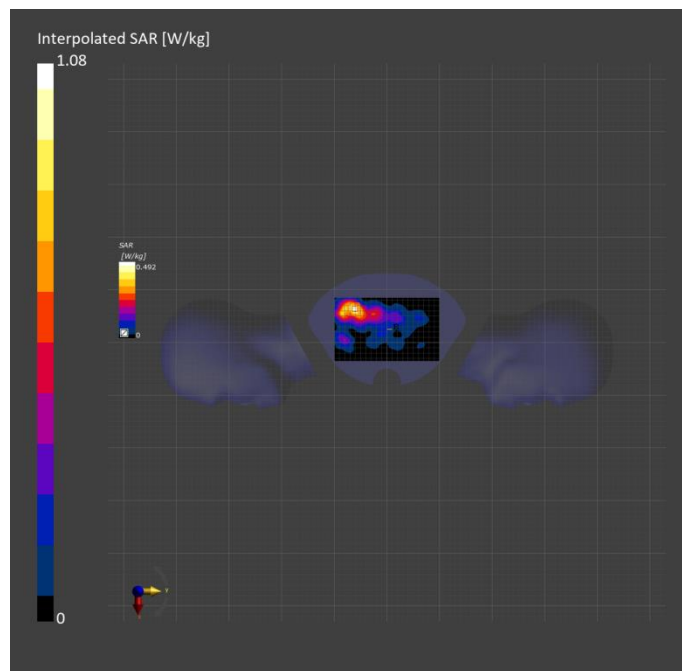

Measurement Report for Device, CHEEK, Band n77, UID 10917 AAB, Channel 633332 (3499.980MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10917-AAB	3499.980, 633332	7.03	3.01	38.1

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-04	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-04, 20:30	2024-01-04, 20:39
psSAR1g [W/kg]	0.366	0.400
psSAR10g [W/kg]	0.155	0.160
Power Drift [dB]	0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		73.5
Dist 3dB Peak [mm]		6.6

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
---------	-----------	-----------

Warning(s)  
Error(s)

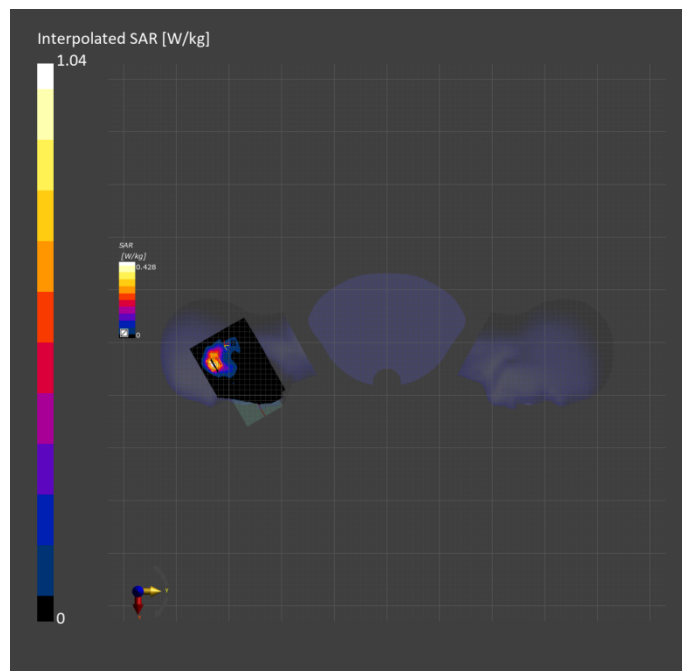

Measurement Report for Device, BACK, Band n77, UID 10829 AAF, Channel 633332 (3499.980MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm] 165.0 x 77.9 x 8.0	IMEI	DUT Type Phone
--------------------------------	---------------------------------------	------	-------------------

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10829-AAF	3499.980, 633332	7.03	2.98	38.0

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 15:22	2024-01-05, 15:29
psSAR1g [W/kg]	0.124	0.127
psSAR10g [W/kg]	0.057	0.055
Power Drift [dB]	-0.11	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		73.1
Dist 3dB Peak [mm]		10.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

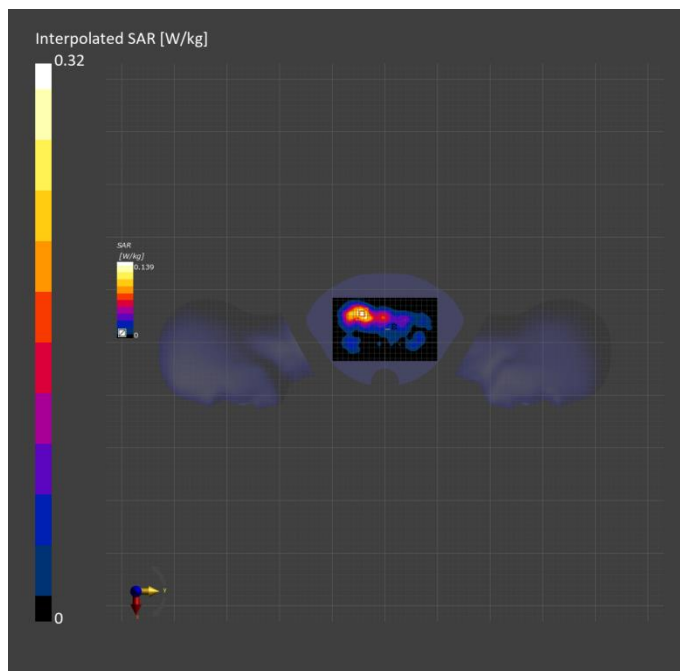

Measurement Report for Device, CHEEK, Band n77, UID 10917 AAB, Channel 656000 (3840.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10917-AAB	3840.000, 656000	6.7	3.34	37.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-15, 15:41	2023-12-15, 15:59
psSAR1g [W/kg]	0.914	1.02
psSAR10g [W/kg]	0.422	0.440
Power Drift [dB]	0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.2
Dist 3dB Peak [mm]		7.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

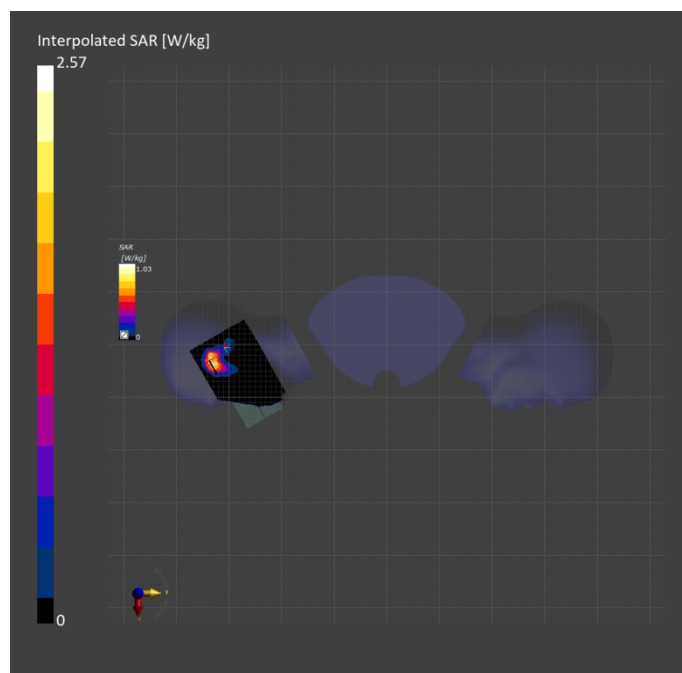

Measurement Report for Device, BACK, Band n77, UID 10917 AAB, Channel 656000 (3840.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10917-AAB	3840.000, 656000	6.7	3.34	37.5

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HSL600-10000 Charge: xxxx, 2023-Dec-14	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2023-12-16, 14:21	2023-12-16, 14:28
psSAR1g [W/kg]	0.810	0.849
psSAR10g [W/kg]	0.358	0.365
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		72.9
Dist 3dB Peak [mm]		11.2

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

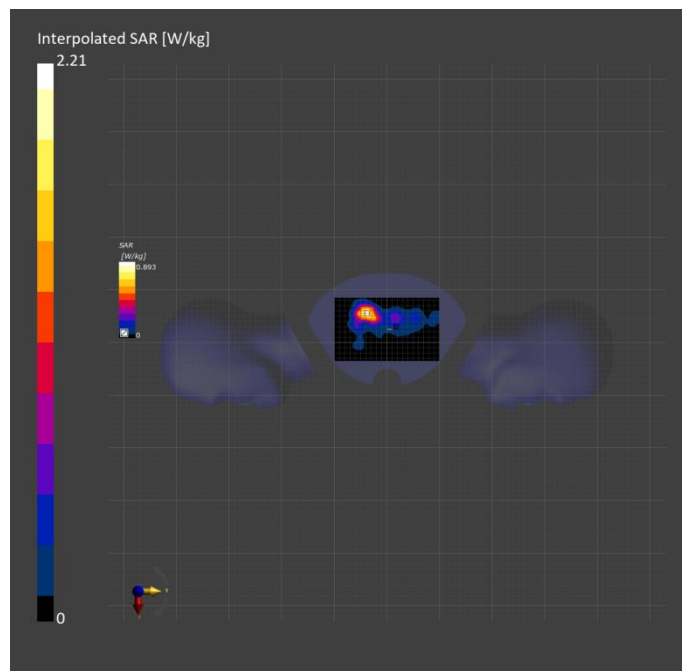

Measurement Report for Device, CHEEK, Band n77, UID 10917 AAD, Channel 656000 (3840.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10917-AAD	3840.000, 656000	6.7	3.36	37.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-04	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**


	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-04, 23:58	2024-01-05, 00:20
psSAR1g [W/kg]	0.480	0.531
psSAR10g [W/kg]	0.208	0.220
Power Drift [dB]	0.06	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		72.8
Dist 3dB Peak [mm]		8.0

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

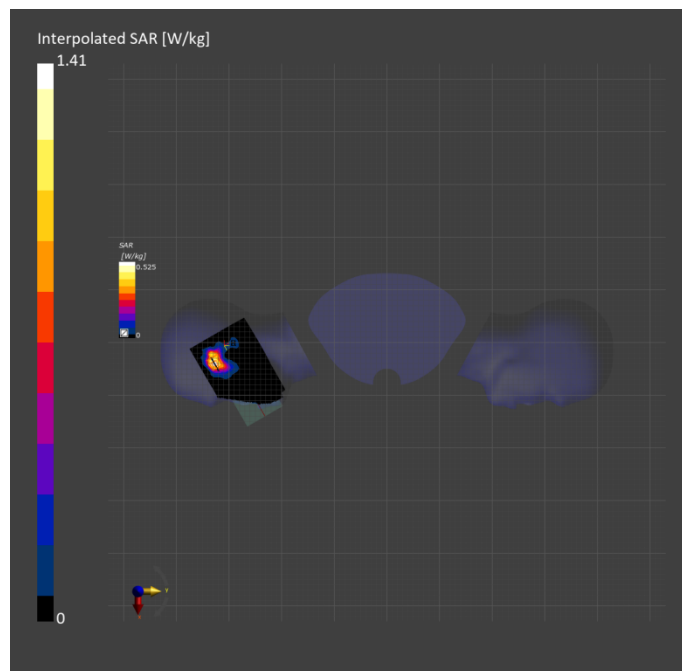

Measurement Report for Device, BACK, Band n77, UID 10917 AAD, Channel 656000 (3840.000MHz)

**Device under Test Properties**

Model, Manufacturer Device,	Dimensions [mm]	IMEI	DUT Type
	165.0 x 77.9 x 8.0		Phone

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10917-AAD	3840.000, 656000	6.7	3.34	37.7

**Hardware Setup**

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - xxxx	HBBL-600-10000 Charge:xxxx, 2024-Jan-05	EX3DV4 - SN7383, 2023-06-05	DAE3 Sn427, 2023-05-17

**Scan Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

**Measurement Results**

	Area Scan	Zoom Scan
Date	2024-01-05, 15:39	2024-01-05, 15:46
psSAR1g [W/kg]	0.272	0.283
psSAR10g [W/kg]	0.126	0.124
Power Drift [dB]	0.02	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		71.4
Dist 3dB Peak [mm]		10.8

**Warning(s) / Error(s)**

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

