


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant1	-2.681	30	Pass
NVNT	BLE	2442	Ant1	-2.101	30	Pass
NVNT	BLE	2478	Ant1	-1.799	30	Pass



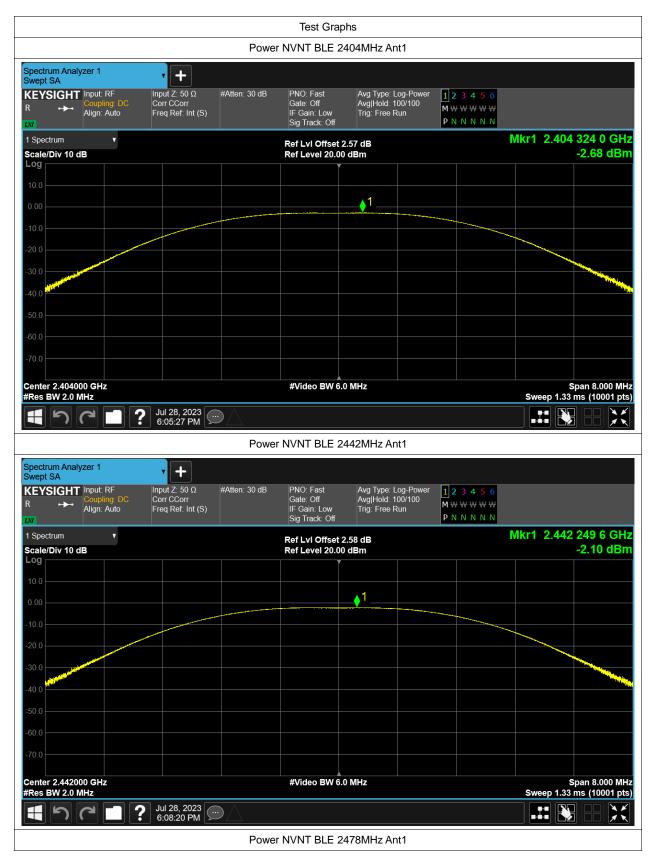



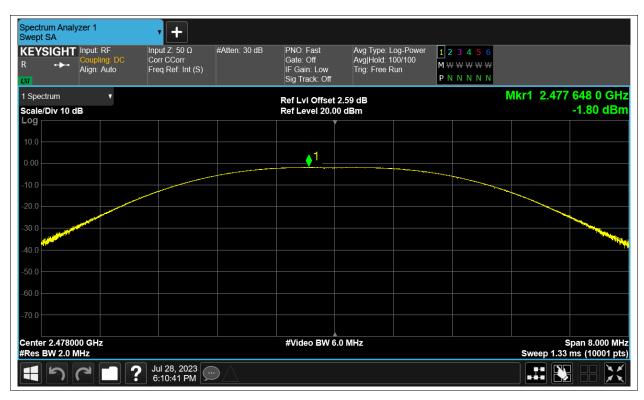



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant1	1.151	0.5	Pass
NVNT	BLE	2442	Ant1	1.115	0.5	Pass
NVNT	BLE	2478	Ant1	1.151	0.5	Pass











Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2404	Ant1	2.054
NVNT	BLE	2442	Ant1	2.06
NVNT	BLE	2478	Ant1	2.064











Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant1	-19.954	8	Pass
NVNT	BLE	2442	Ant1	-19.372	8	Pass
NVNT	BLE	2478	Ant1	-19.076	8	Pass











Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant1	-48.8	-20	Pass
NVNT	BLE	2478	Ant1	-50.76	-20	Pass











Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant1	-44.98	-20	Pass
NVNT	BLE	2442	Ant1	-44.81	-20	Pass
NVNT	BLE	2478	Ant1	-45.89	-20	Pass



