

**Test Plot 1#: GSM 850\_Body Back\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.433 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.867 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.380 \text{ W/kg}$   
**SAR(1 g) =  $0.268 \text{ W/kg}$ ; SAR(10 g) =  $0.158 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.306 \text{ W/kg}$

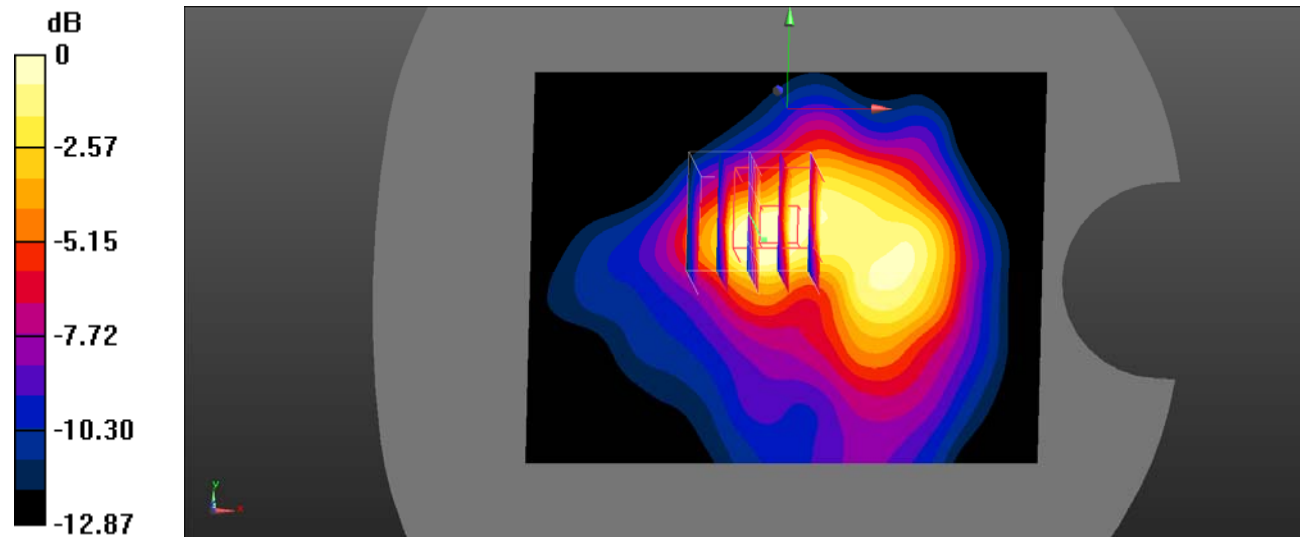

0 dB =  $0.306 \text{ W/kg}$  =  $-5.14 \text{ dBW/kg}$

**Test Plot 2#: GSM 850\_Body Left\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.241 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.94 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.207 \text{ W/kg}$   
**SAR(1 g) =  $0.164 \text{ W/kg}$ ; SAR(10 g) =  $0.109 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.184 \text{ W/kg}$

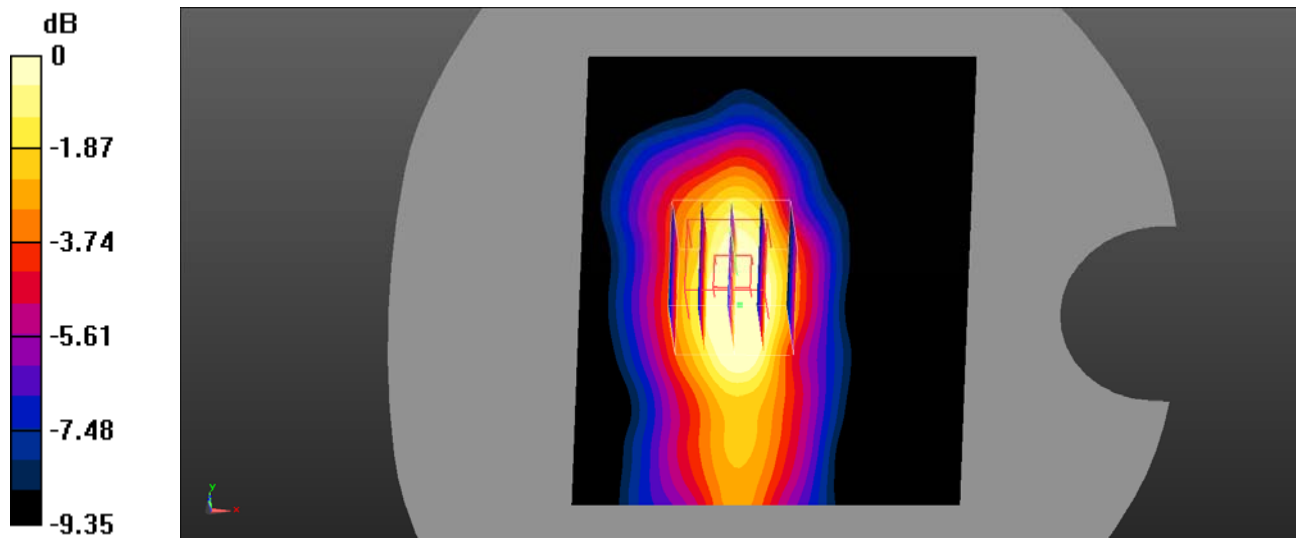

0 dB =  $0.184 \text{ W/kg}$  =  $-7.35 \text{ dBW/kg}$

**Test Plot 3#: GSM 850\_Body Right\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 41.999$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0415 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.659 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 0.0490 W/kg  
**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg**  
 Maximum value of SAR (measured) = 0.0440 W/kg

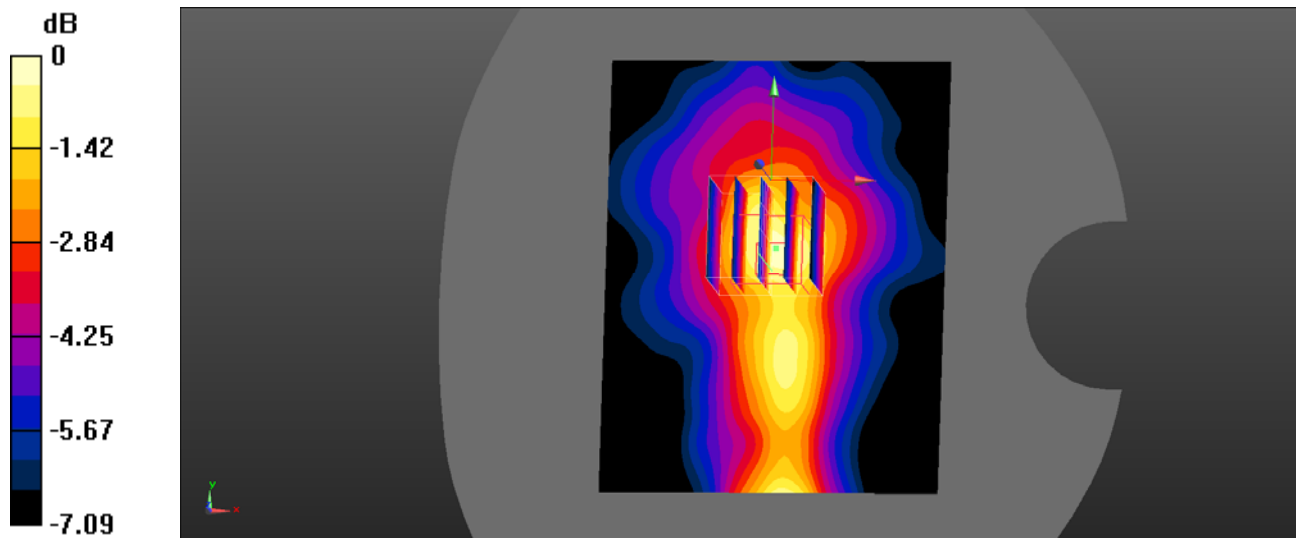

0 dB = 0.0440 W/kg = -13.57 dBW/kg

**Test Plot 4#: GSM 850\_Body Top\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.240 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.13 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.249 \text{ W/kg}$   
**SAR(1 g) =  $0.174 \text{ W/kg}$ ; SAR(10 g) =  $0.102 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.200 \text{ W/kg}$

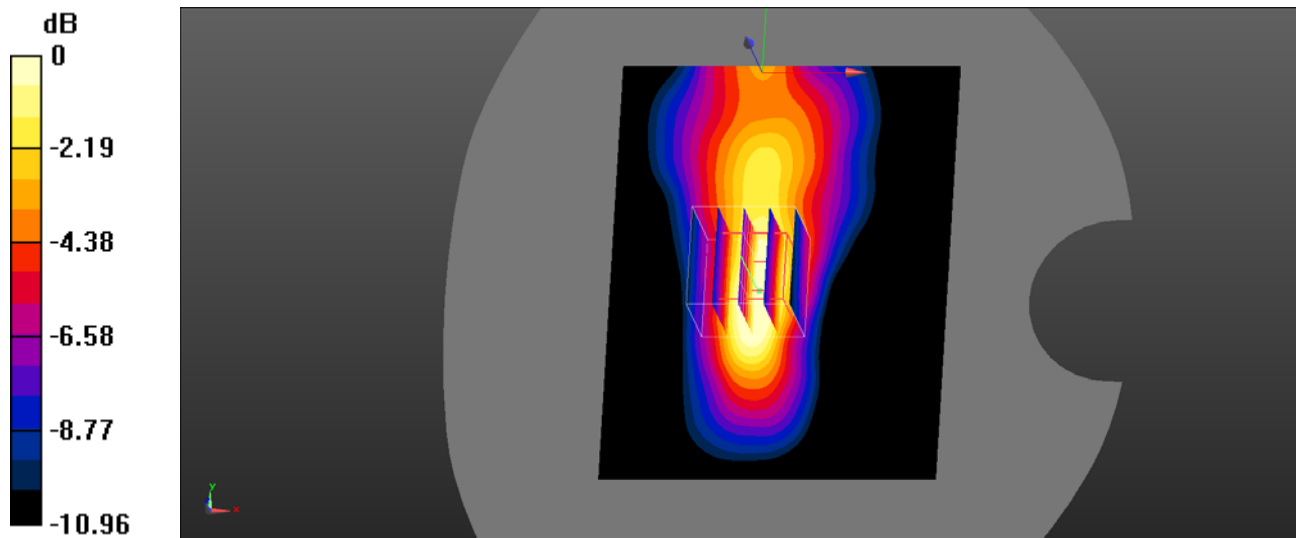

0 dB =  $0.200 \text{ W/kg}$  =  $-6.99 \text{ dBW/kg}$

**Test Plot 5#: GSM 850\_Body Bottom\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.00886 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.777 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0110 \text{ W/kg}$   
**SAR(1 g) =  $0.00537 \text{ W/kg}$ ; SAR(10 g) =  $0.00453 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.00723 \text{ W/kg}$

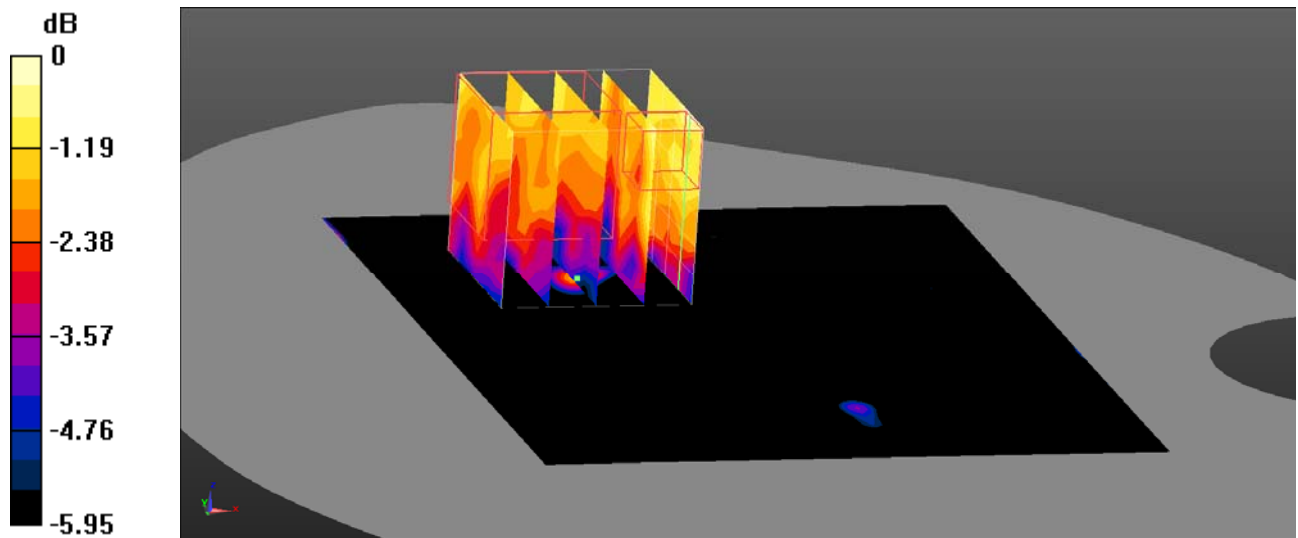

0 dB =  $0.00723 \text{ W/kg}$  =  $-21.41 \text{ dBW/kg}$

**Test Plot 6#: GSM 850\_Body Back\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.478 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $14.08 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.436 \text{ W/kg}$   
**SAR(1 g) =  $0.385 \text{ W/kg}$ ; SAR(10 g) =  $0.296 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.401 \text{ W/kg}$

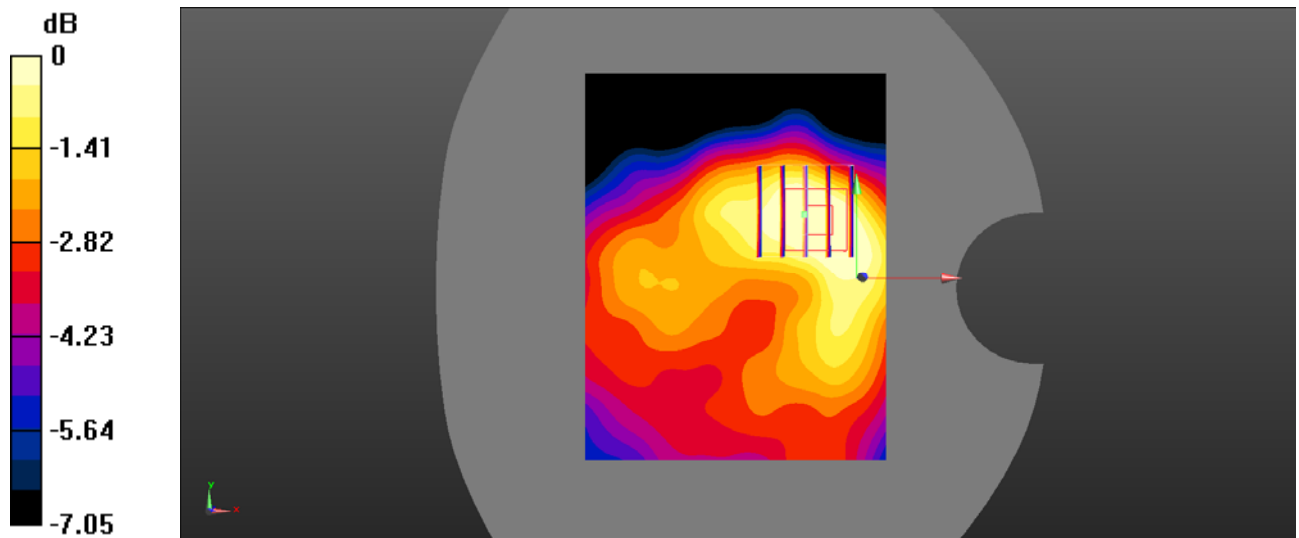

0 dB =  $0.401 \text{ W/kg}$  =  $-3.97 \text{ dBW/kg}$

**Test Plot 7#: GSM 850\_Body Left\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.182 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.98 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.170 \text{ W/kg}$   
**SAR(1 g) =  $0.143 \text{ W/kg}$ ; SAR(10 g) =  $0.104 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.150 \text{ W/kg}$

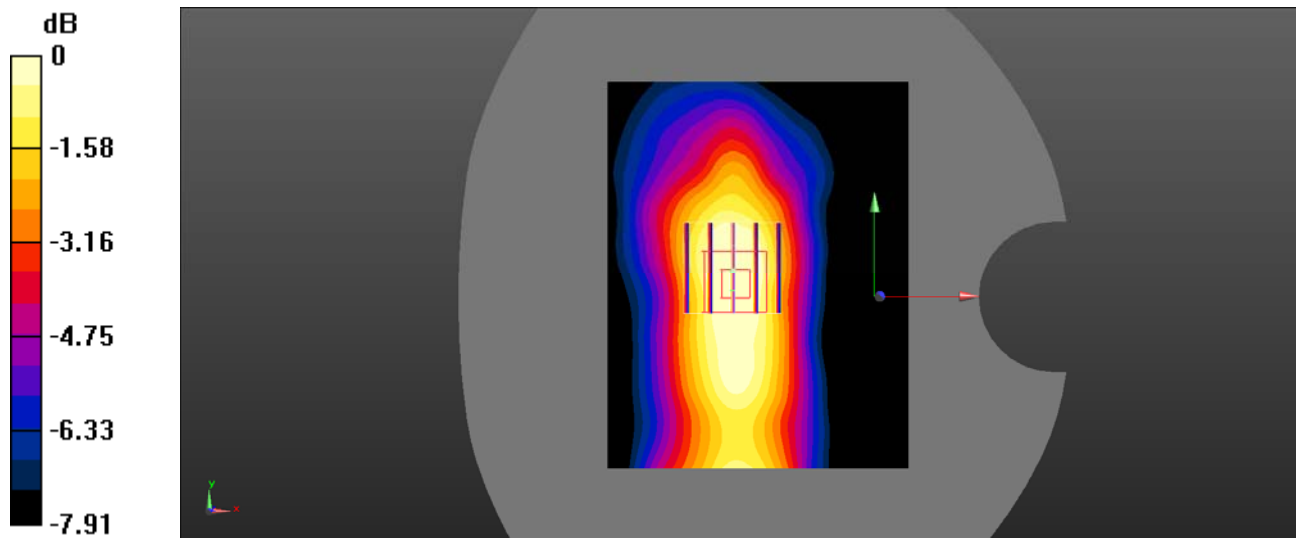

0 dB =  $0.150 \text{ W/kg}$  =  $-8.24 \text{ dBW/kg}$

**Test Plot 8#: GSM 850\_Body Top\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0362 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.102 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0340 \text{ W/kg}$   
**SAR(1 g) =  $0.031 \text{ W/kg}$ ; SAR(10 g) =  $0.024 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0324 \text{ W/kg}$

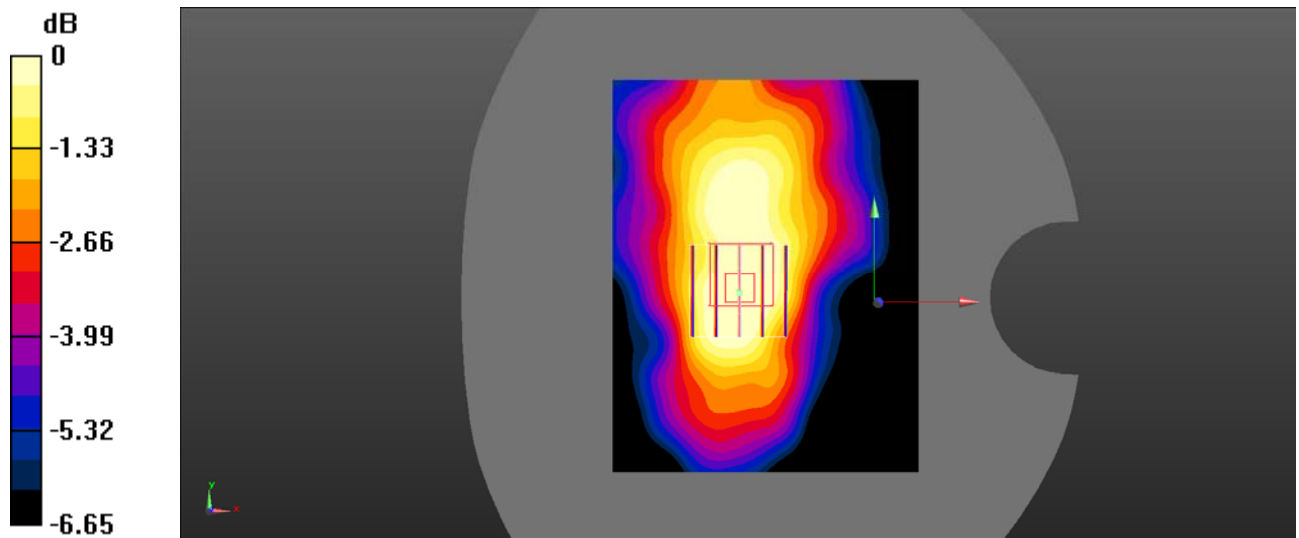

0 dB =  $0.0324 \text{ W/kg} = -14.89 \text{ dBW/kg}$



**Test Plot 9#: PCS 1900\_Body Back\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f=1850.2$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 39.585$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.48 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 16.43 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.54 W/kg  
**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.650 W/kg**  
 Maximum value of SAR (measured) = 1.21 W/kg

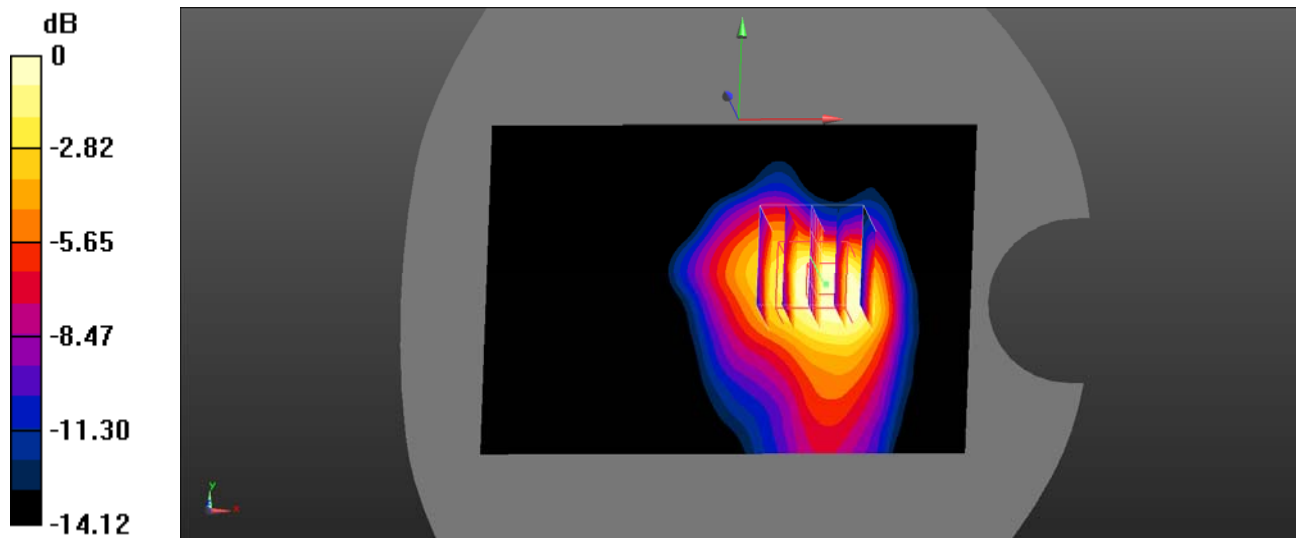

0 dB = 1.21 W/kg = 0.83 dBW/kg

**Test Plot 10#: PCS 1900\_Body Back\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.16 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.07 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 1.19 W/kg  
**SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.503 W/kg**  
 Maximum value of SAR (measured) = 0.903 W/kg

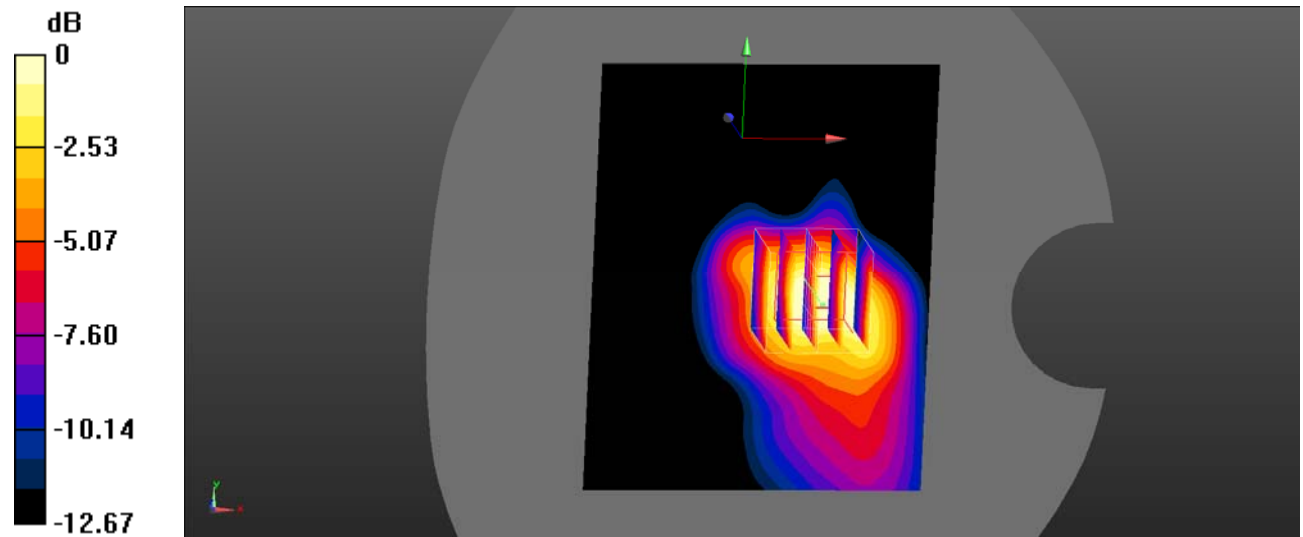

0 dB = 0.903 W/kg = -0.44 dBW/kg

**Test Plot 11#: PCS 1900\_Body Back\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.378 \text{ S/m}$ ;  $\epsilon_r = 39.721$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.53 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.71 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 1.64 W/kg  
**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.690 W/kg**  
 Maximum value of SAR (measured) = 1.27 W/kg

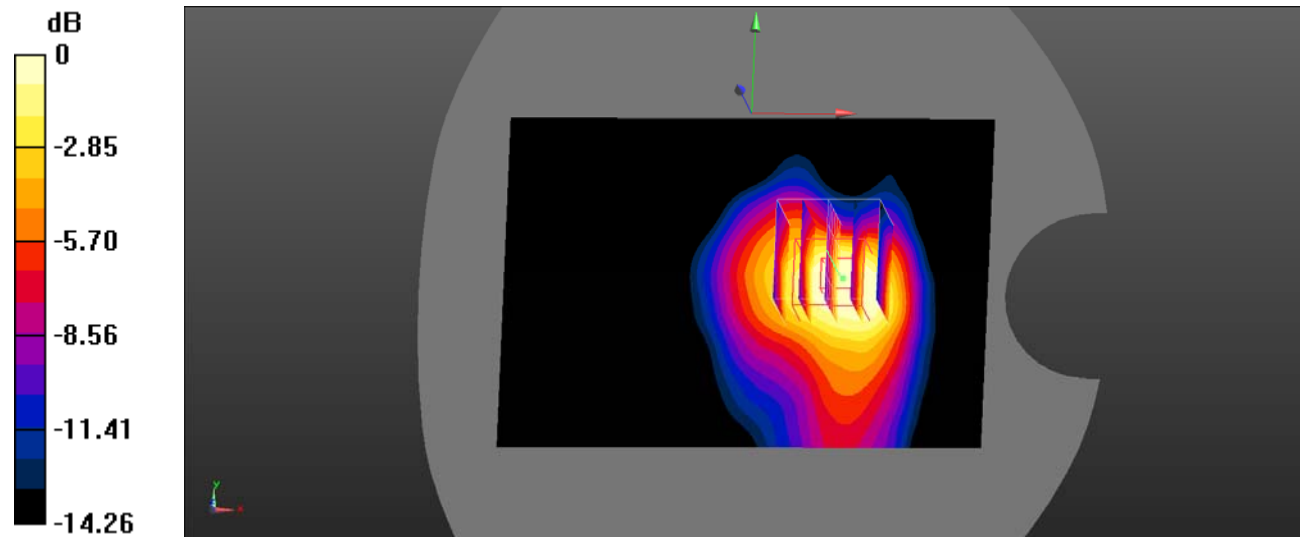

0 dB = 1.27 W/kg = 1.04 dBW/kg

**Test Plot 12#: PCS 1900\_Body Left\_Middle\_0mm****DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.399$  S/m;  $\epsilon_r = 39.874$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.486 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.03 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.477 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

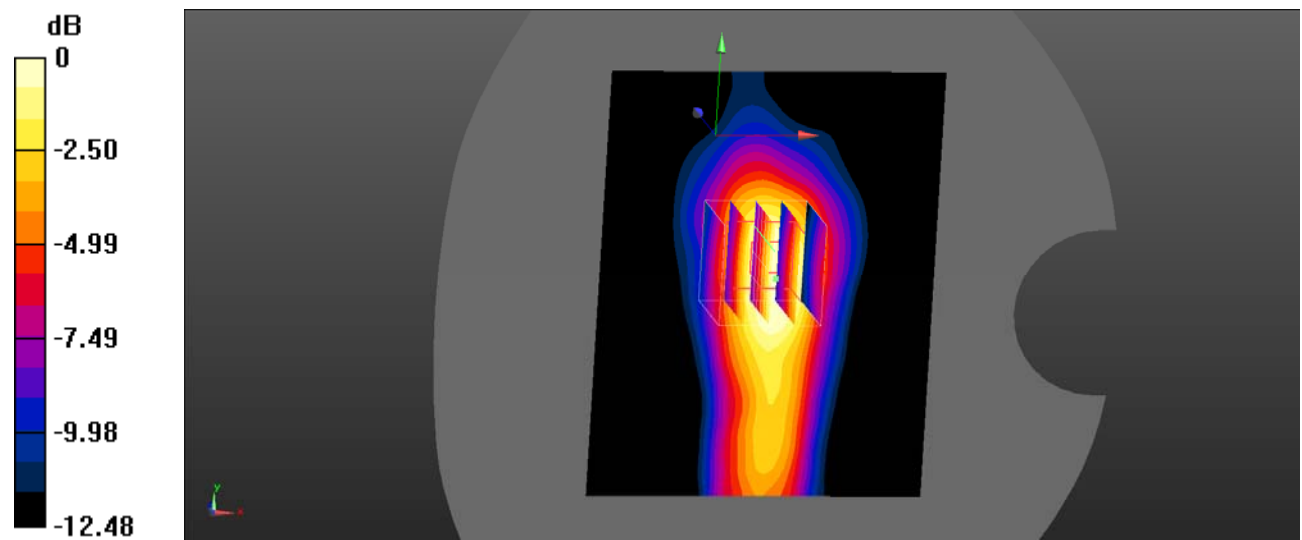

**Test Plot 13#: PCS 1900\_Body Right\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.00838 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $0.9950 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.00704 \text{ W/kg}$   
**SAR(1 g) =  $0.00523 \text{ W/kg}$ ; SAR(10 g) =  $0.00454 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.00701 \text{ W/kg}$

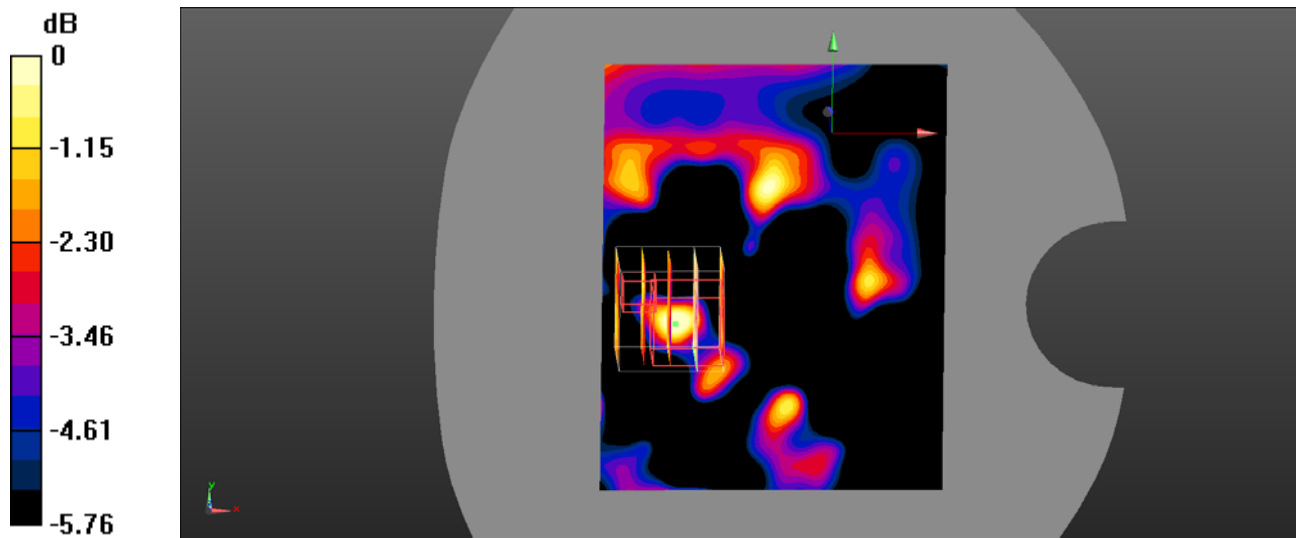

0 dB =  $0.00701 \text{ W/kg}$  =  $-21.54 \text{ dBW/kg}$

**Test Plot 14#: PCS 1900\_Body Top\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.461 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.51 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.472 \text{ W/kg}$   
**SAR(1 g) =  $0.336 \text{ W/kg}$ ; SAR(10 g) =  $0.192 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.382 \text{ W/kg}$

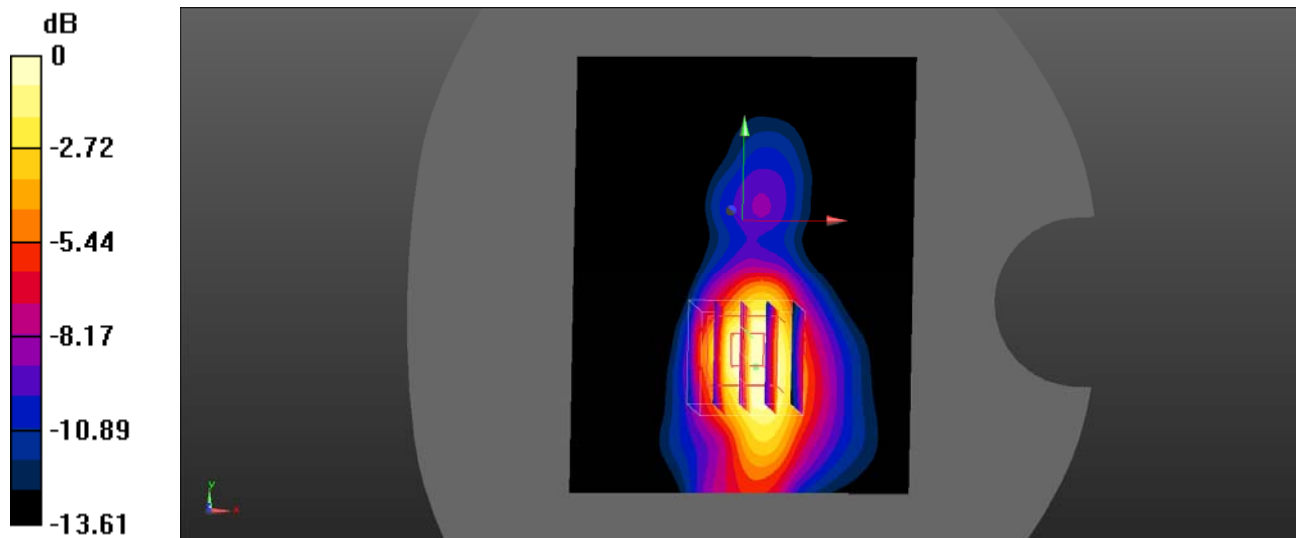

0 dB =  $0.382 \text{ W/kg}$  =  $-4.18 \text{ dBW/kg}$

**Test Plot 15#: PCS 1900\_Body Back\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.315 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.934 \text{ V/m}$ ; Power Drift =  $0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.296 \text{ W/kg}$   
**SAR(1 g) =  $0.255 \text{ W/kg}$ ; SAR(10 g) =  $0.192 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.270 \text{ W/kg}$

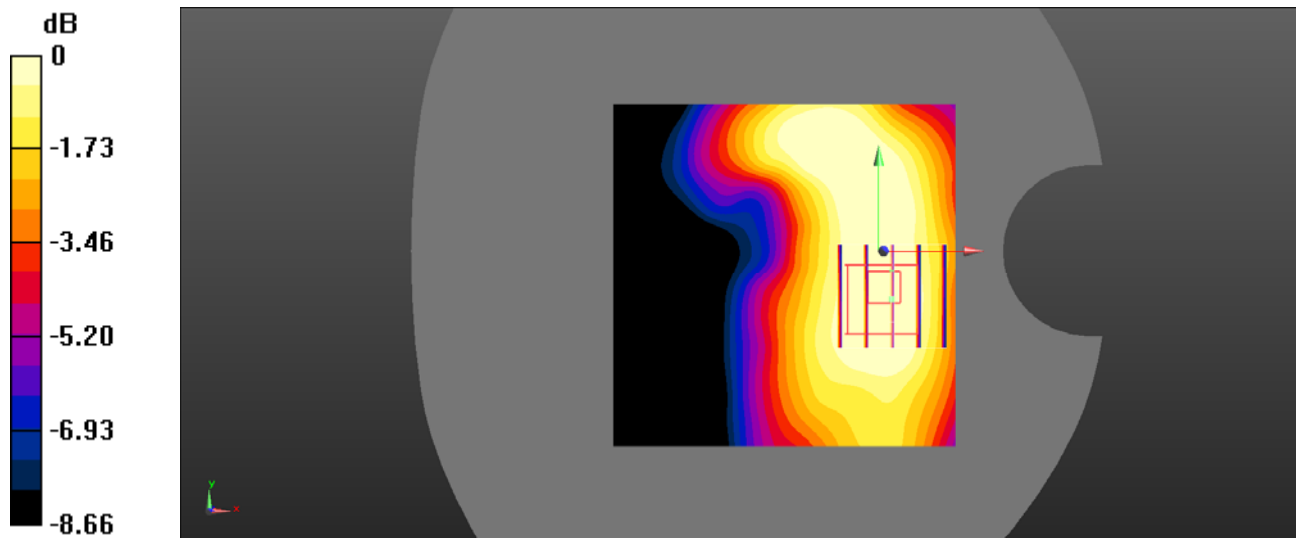

0 dB =  $0.270 \text{ W/kg}$  =  $-5.69 \text{ dBW/kg}$

**Test Plot 16#: PCS 1900\_Body Left\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.575 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.96 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.552 \text{ W/kg}$   
**SAR(1 g) =  $0.455 \text{ W/kg}$ ; SAR(10 g) =  $0.321 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.491 \text{ W/kg}$

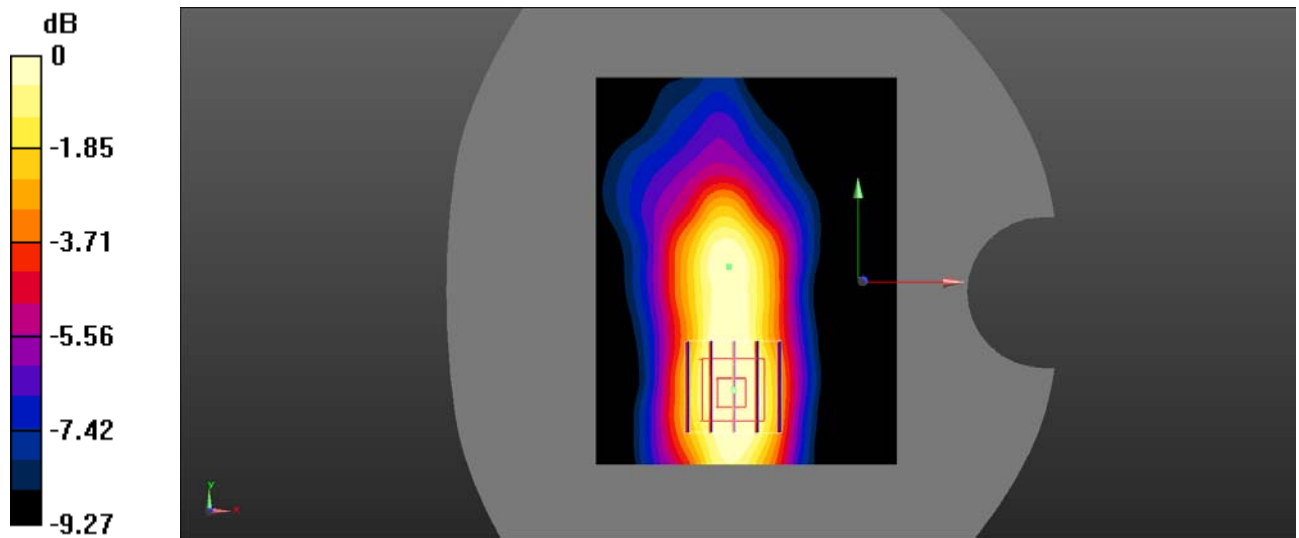

0 dB =  $0.491 \text{ W/kg}$  =  $-3.09 \text{ dBW/kg}$



**Test Plot 17#: PCS 1900\_Body Top\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.126 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.703 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.110 \text{ W/kg}$   
**SAR(1 g) =  $0.096 \text{ W/kg}$ ; SAR(10 g) =  $0.068 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.101 \text{ W/kg}$

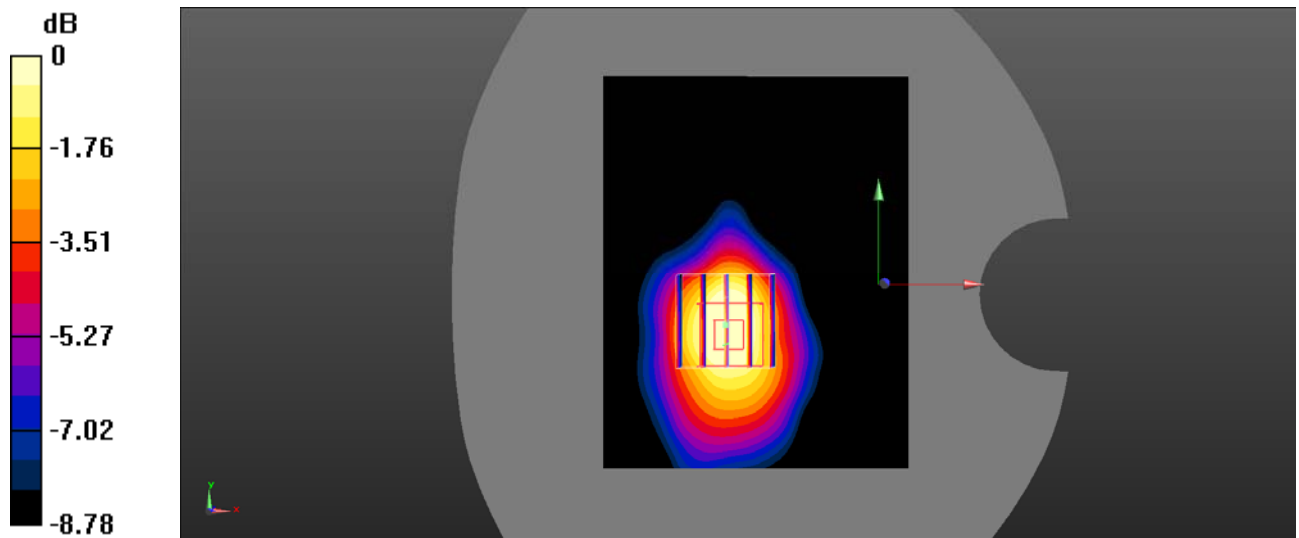

0 dB =  $0.101 \text{ W/kg}$  =  $-9.96 \text{ dBW/kg}$

**Test Plot 18#: WCDMA Band 2\_Body Back\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.921 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $22.44 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.03 \text{ W/kg}$   
**SAR(1 g) =  $0.704 \text{ W/kg}$ ; SAR(10 g) =  $0.417 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.784 \text{ W/kg}$

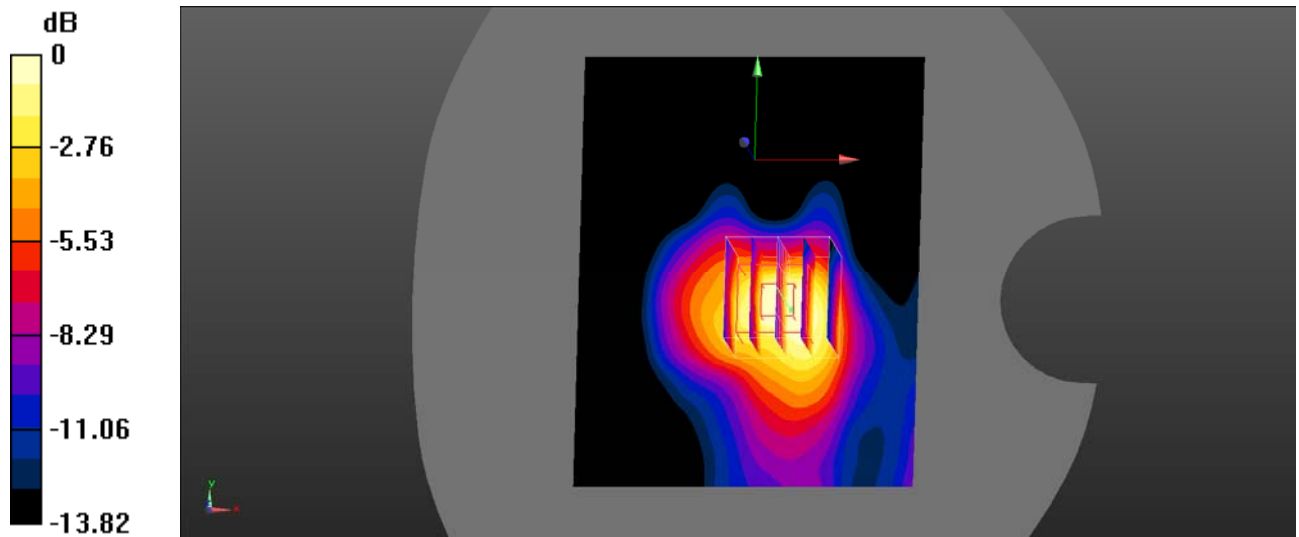

0 dB =  $0.784 \text{ W/kg}$  =  $-1.06 \text{ dBW/kg}$

**Test Plot 19#: WCDMA Band 2\_Body Left\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.368 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.87 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.350 \text{ W/kg}$   
**SAR(1 g) =  $0.265 \text{ W/kg}$ ; SAR(10 g) =  $0.163 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.302 \text{ W/kg}$

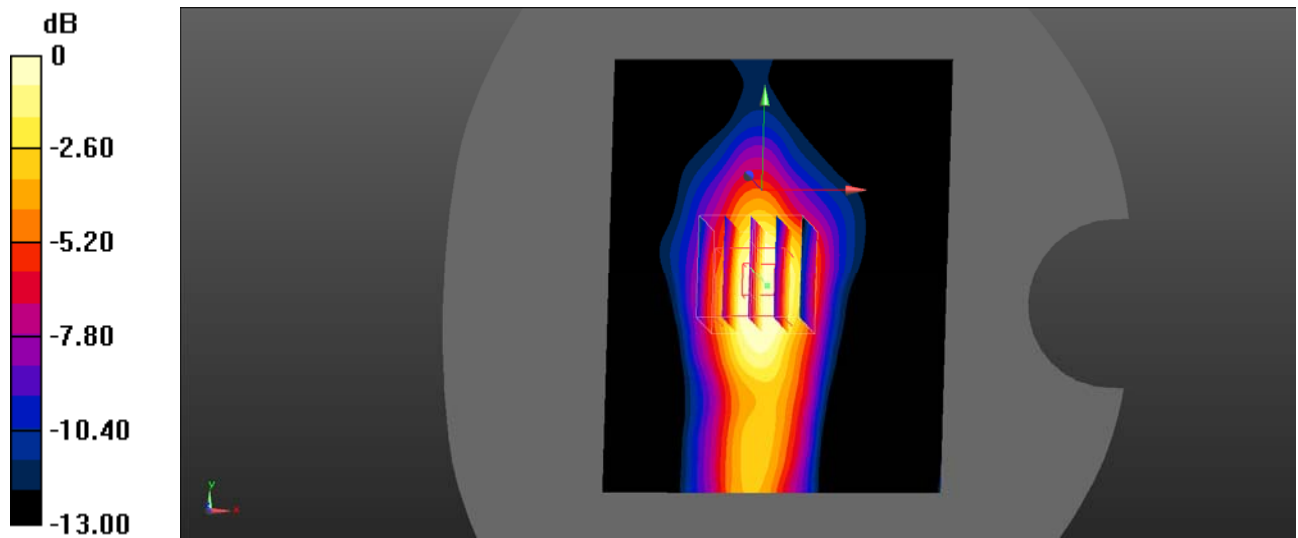

0 dB =  $0.302 \text{ W/kg}$  =  $-5.20 \text{ dBW/kg}$

**Test Plot 20#: WCDMA Band 2\_Body Top\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.378 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.99 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.425 \text{ W/kg}$   
**SAR(1 g) =  $0.311 \text{ W/kg}$ ; SAR(10 g) =  $0.179 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.354 \text{ W/kg}$

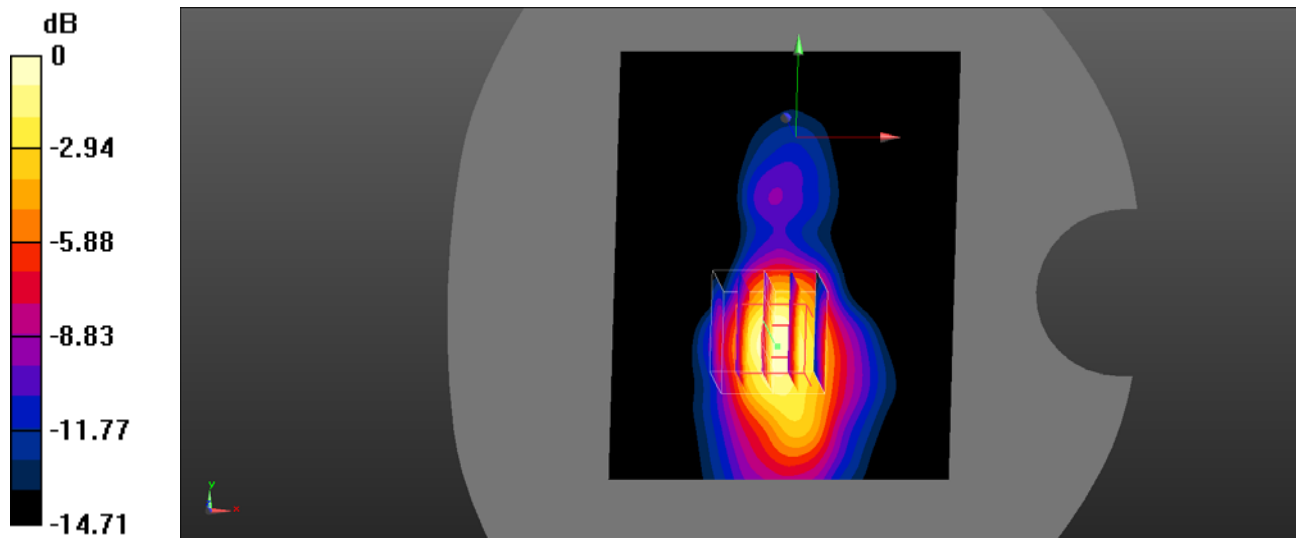

0 dB =  $0.354 \text{ W/kg}$  =  $-4.51 \text{ dBW/kg}$

**Test Plot 21#: WCDMA Band 2\_Body Back\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.116 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.207 \text{ V/m}$ ; Power Drift =  $0.20 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.110 \text{ W/kg}$   
**SAR(1 g) =  $0.101 \text{ W/kg}$ ; SAR(10 g) =  $0.075 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.108 \text{ W/kg}$

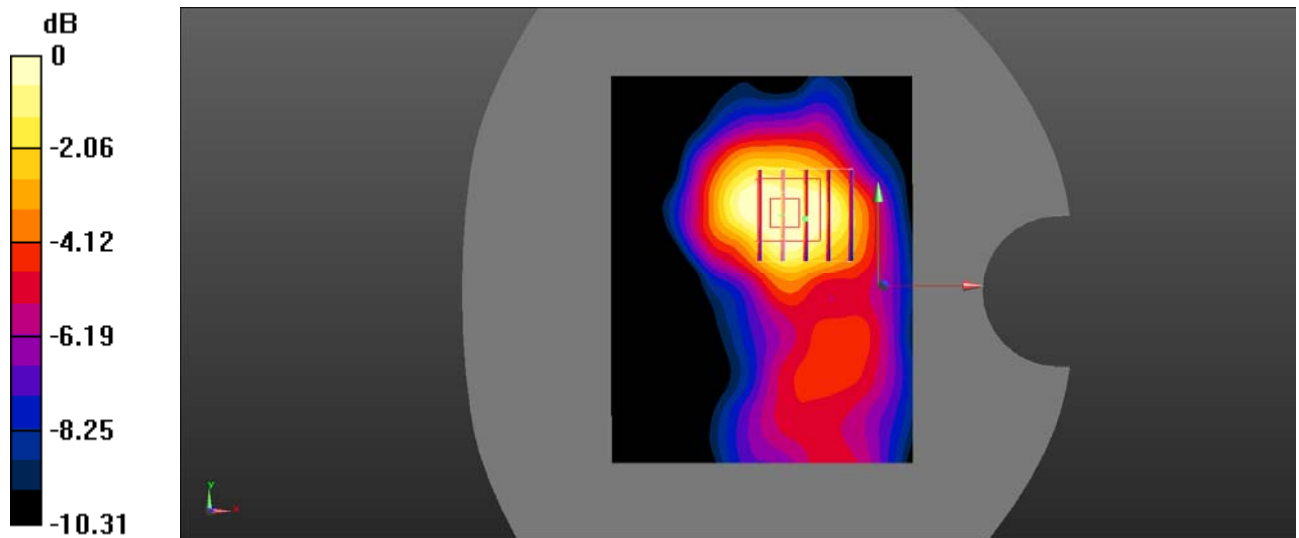

0 dB =  $0.108 \text{ W/kg}$  =  $-9.67 \text{ dBW/kg}$

**Test Plot 22#: WCDMA Band 2\_Body Left\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.399 \text{ S/m}$ ;  $\epsilon_r = 39.874$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.140 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.522 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.128 \text{ W/kg}$

**SAR(1 g) =  $0.106 \text{ W/kg}$ ; SAR(10 g) =  $0.073 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.114 \text{ W/kg}$

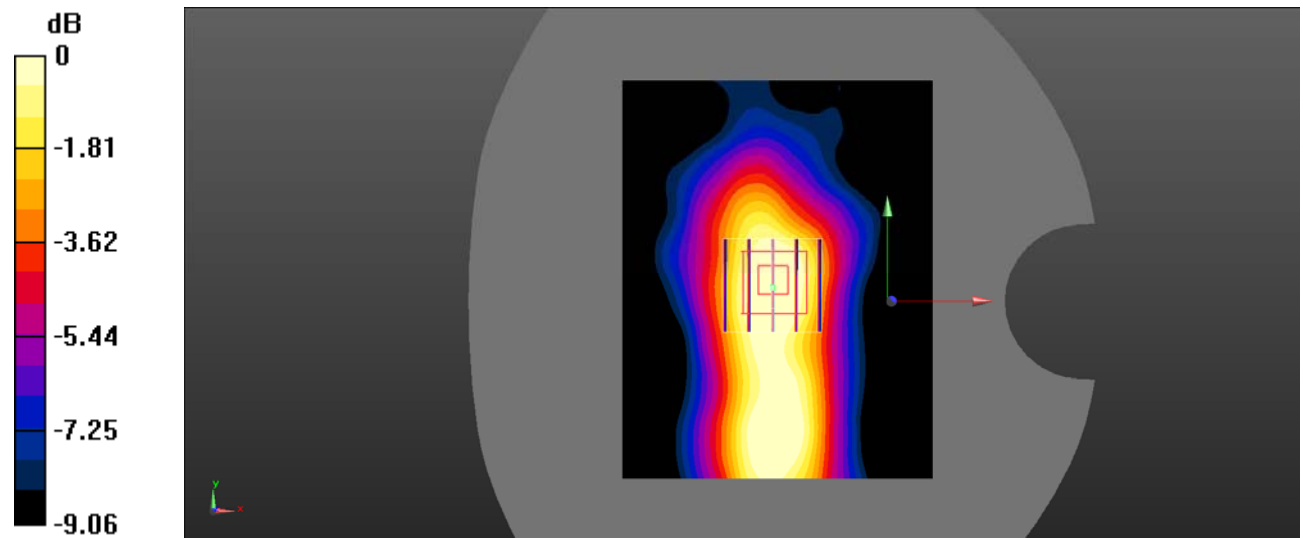

0 dB =  $0.114 \text{ W/kg}$  =  $-9.43 \text{ dBW/kg}$

**Test Plot 23#: WCDMA Band 2\_Body Top\_Middle\_19mm****DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.399$  S/m;  $\epsilon_r = 39.874$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0133 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6370 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.010 W/kg**

Maximum value of SAR (measured) = 0.0138 W/kg

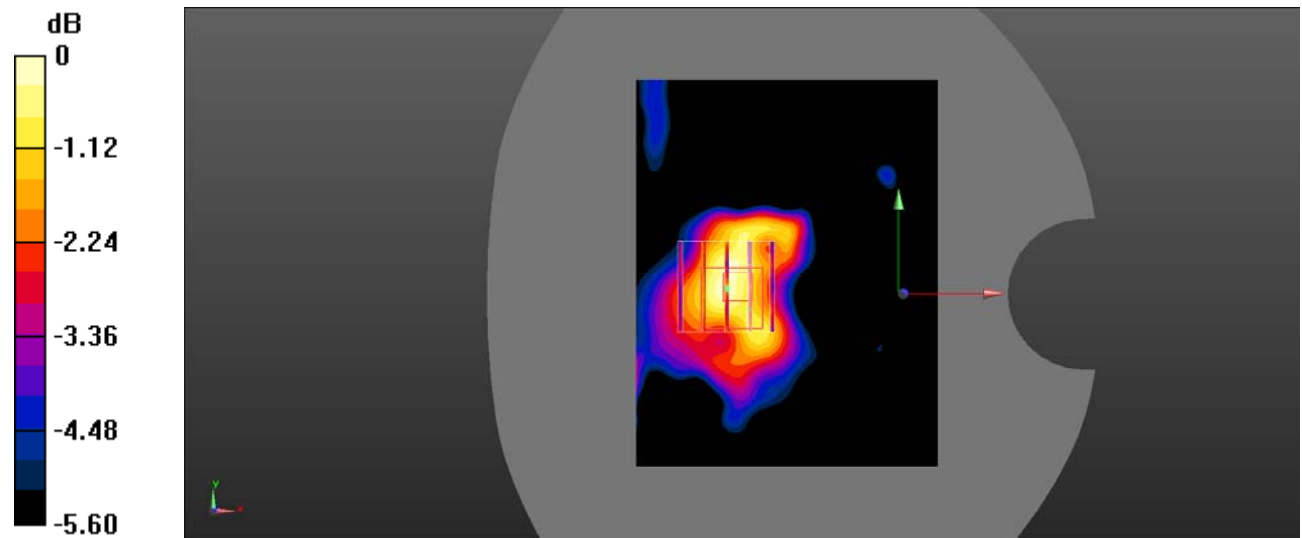

0 dB = 0.0138 W/kg = -18.60 dBW/kg

**Test Plot 24#: WCDMA Band 4 \_Body Back\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.342 \text{ S/m}$ ;  $\epsilon_r = 40.661$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.53 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.788 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 1.56 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.602 W/kg**  
 Maximum value of SAR (measured) = 1.10 W/kg

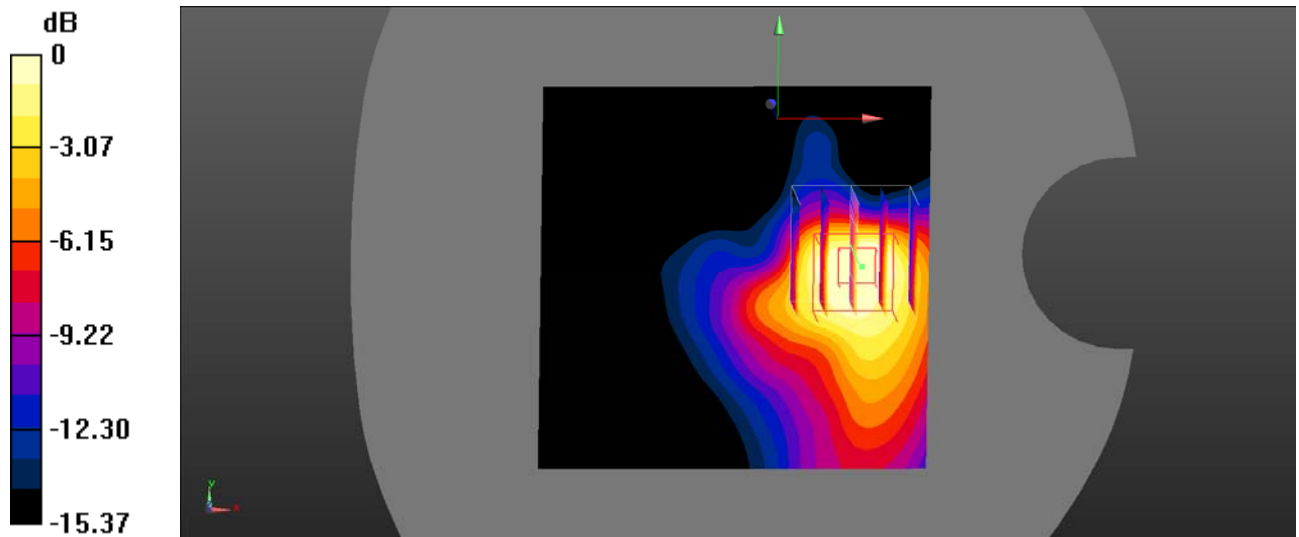

0 dB = 1.10 W/kg = 0.41 dBW/kg



**Test Plot 25#: WCDMA Band 4\_Body Back\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.51 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.841 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 1.59 W/kg  
**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.615 W/kg**  
 Maximum value of SAR (measured) = 1.13 W/kg

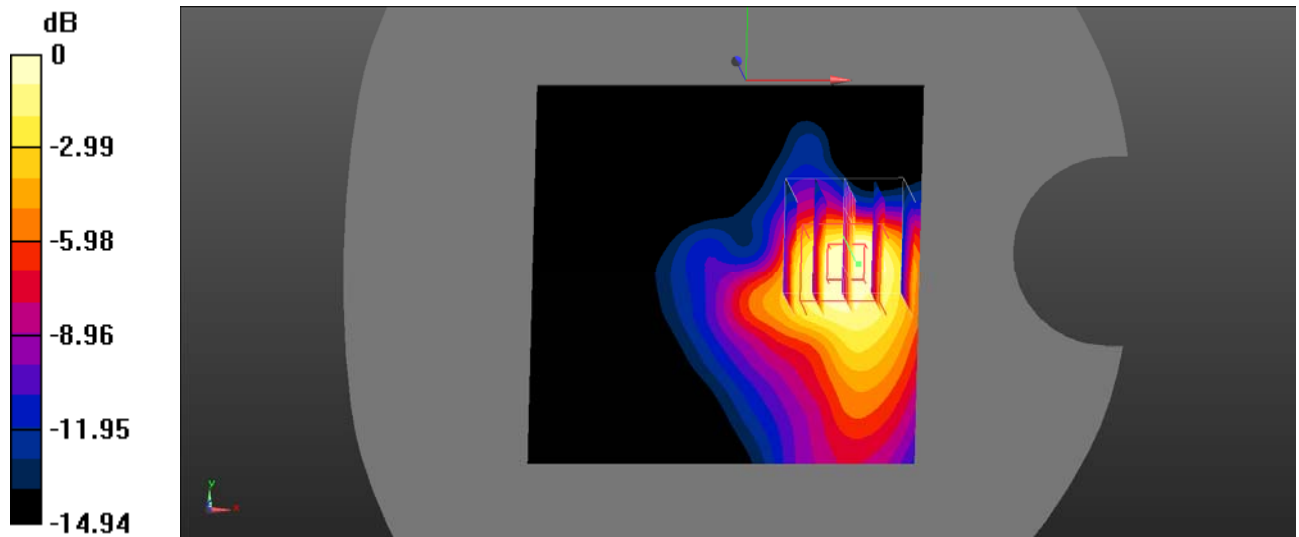

0 dB = 1.13 W/kg = 0.53 dBW/kg

**Test Plot 26#: WCDMA Band 4\_Body Back\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.183$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.37 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 23.80 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.52 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.602 W/kg**  
 Maximum value of SAR (measured) = 1.10 W/kg

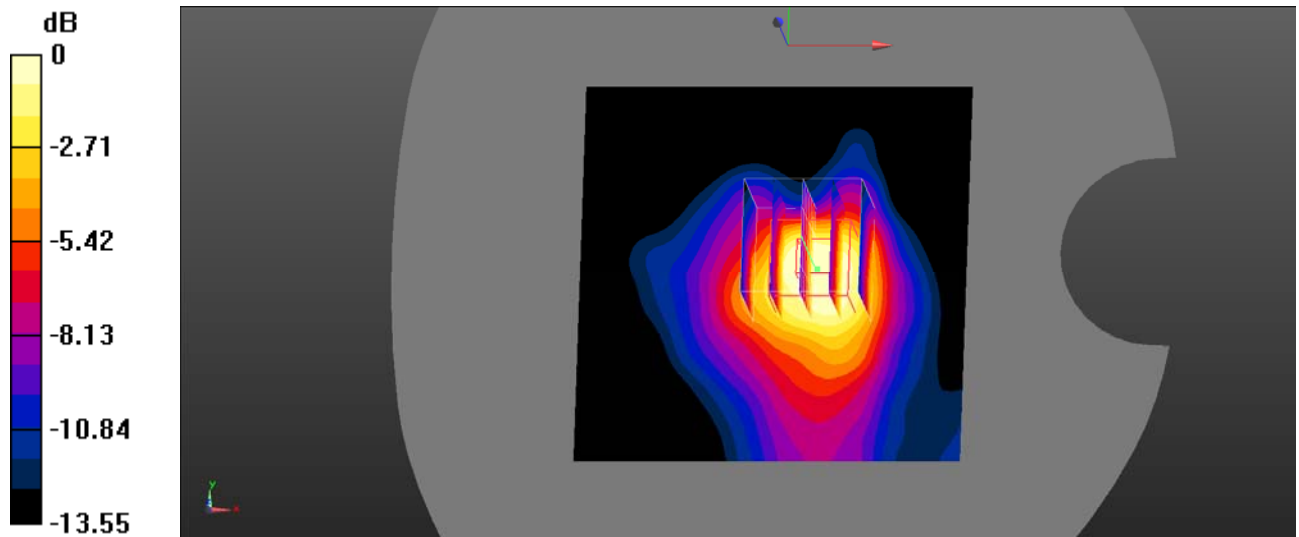

0 dB = 1.10 W/kg = 0.41 dBW/kg

**Test Plot 27#: WCDMA Band 4\_Body Left\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.421 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.32 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.426 \text{ W/kg}$   
**SAR(1 g) =  $0.328 \text{ W/kg}$ ; SAR(10 g) =  $0.203 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.370 \text{ W/kg}$

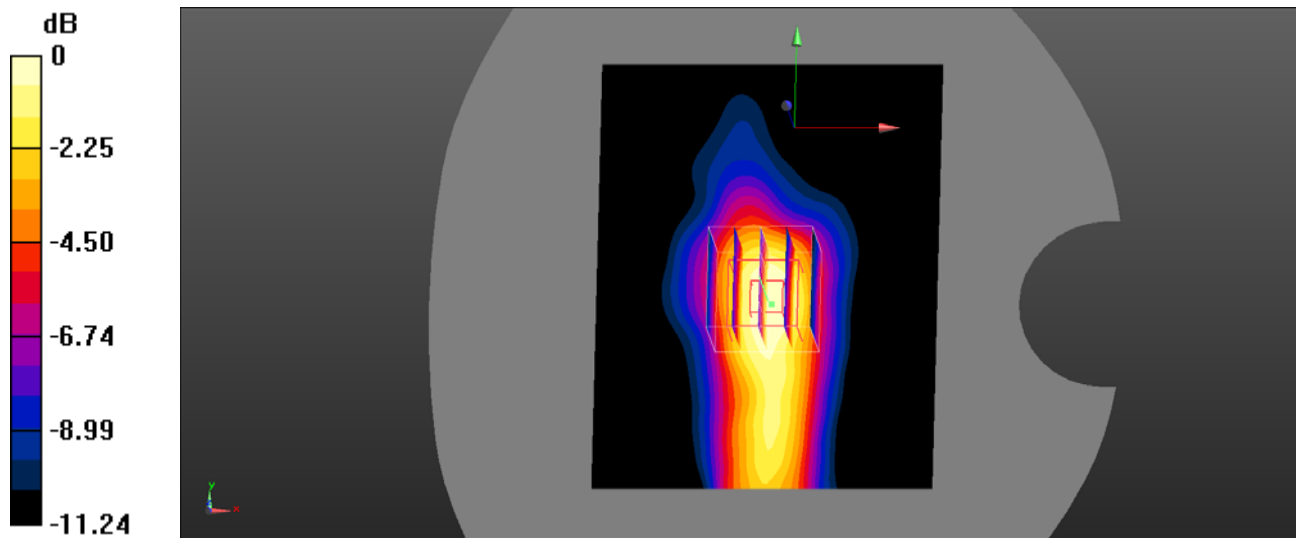

0 dB =  $0.370 \text{ W/kg}$  =  $-4.32 \text{ dBW/kg}$

**Test Plot 28#: WCDMA Band 4\_Body Right\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0410 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.851 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0410 \text{ W/kg}$   
**SAR(1 g) =  $0.032 \text{ W/kg}$ ; SAR(10 g) =  $0.021 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0361 \text{ W/kg}$

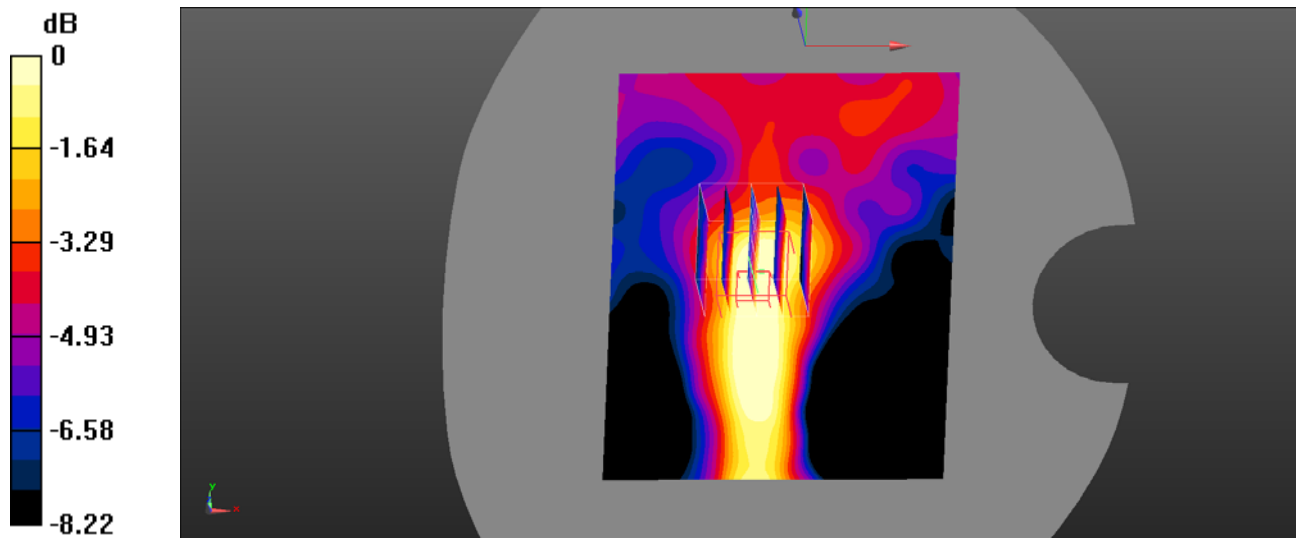

0 dB =  $0.0361 \text{ W/kg}$  =  $-14.42 \text{ dBW/kg}$

**Test Plot 29#: WCDMA Band 4\_Body Top\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0375 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.785 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0257 W/kg

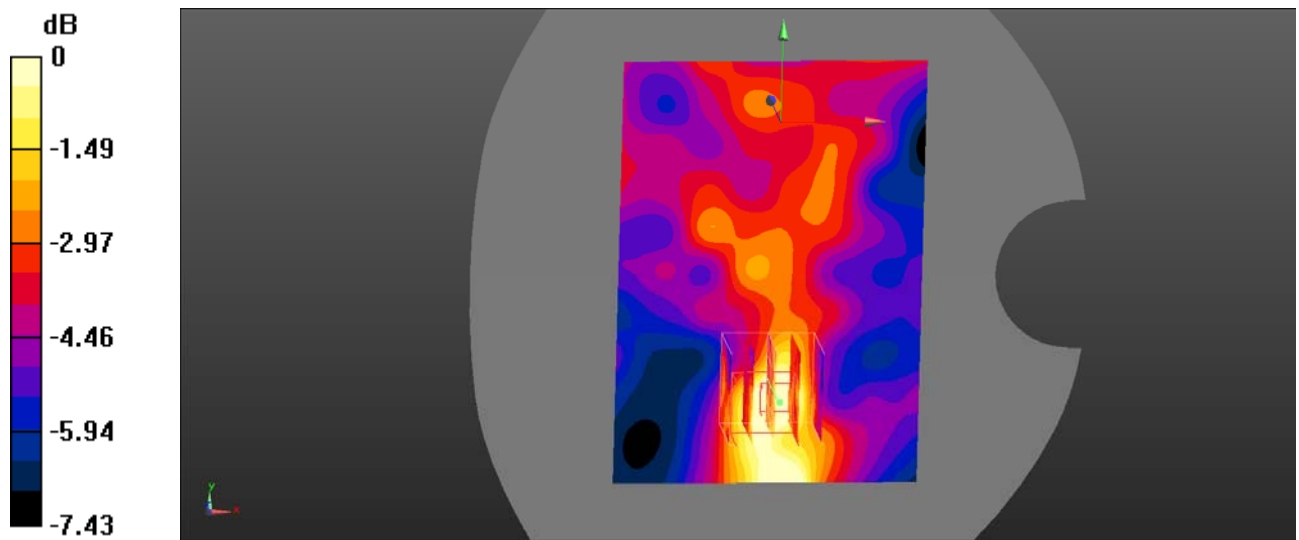

0 dB = 0.0257 W/kg = -15.90 dBW/kg

**Test Plot 30#: WCDMA Band 4\_Body Back\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0752 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.995 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0620 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0601 W/kg

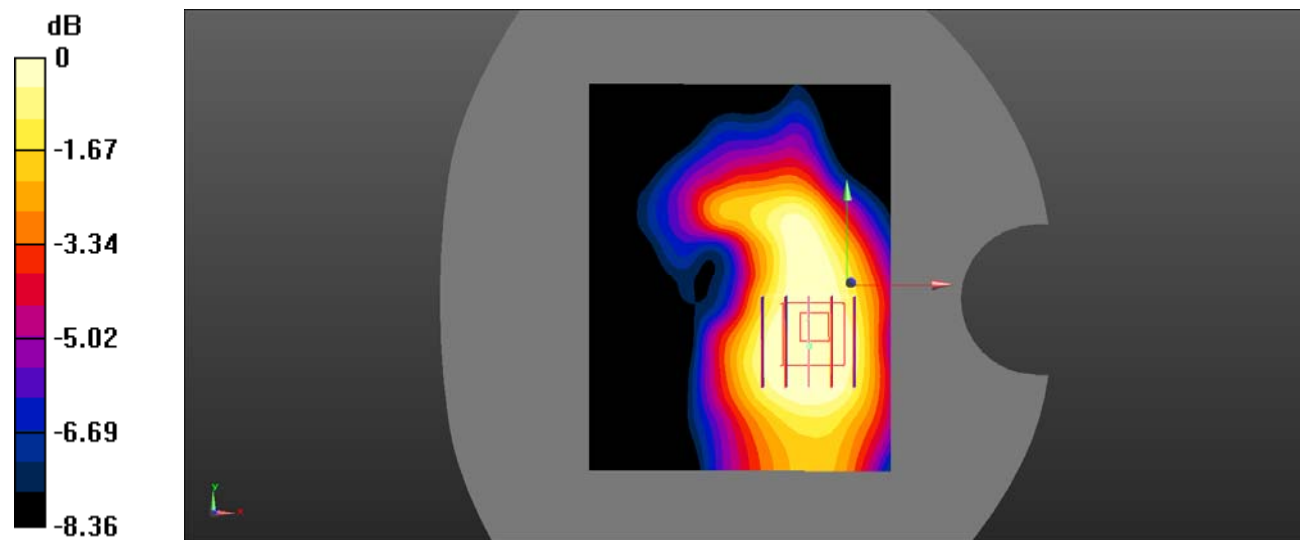

0 dB = 0.0601 W/kg = -12.21 dBW/kg

**Test Plot 31#: WCDMA Band 4\_Body Left\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.354$  S/m;  $\epsilon_r = 40.311$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.126 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 8.458 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.113 W/kg  
**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.068 W/kg**  
 Maximum value of SAR (measured) = 0.102 W/kg

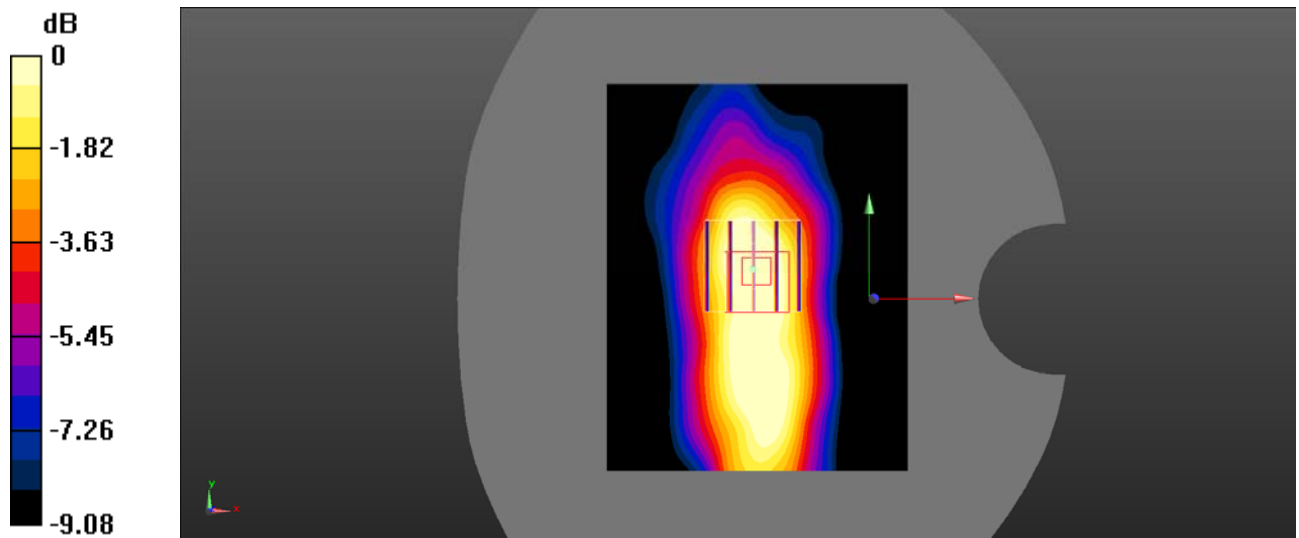

0 dB = 0.102 W/kg = -9.91 dBW/kg

**Test Plot 32#: WCDMA Band 4\_Body Top\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.354 \text{ S/m}$ ;  $\epsilon_r = 40.311$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0101 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.905 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0150 \text{ W/kg}$   
**SAR(1 g) =  $0.00884 \text{ W/kg}$ ; SAR(10 g) =  $0.00677 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0103 \text{ W/kg}$

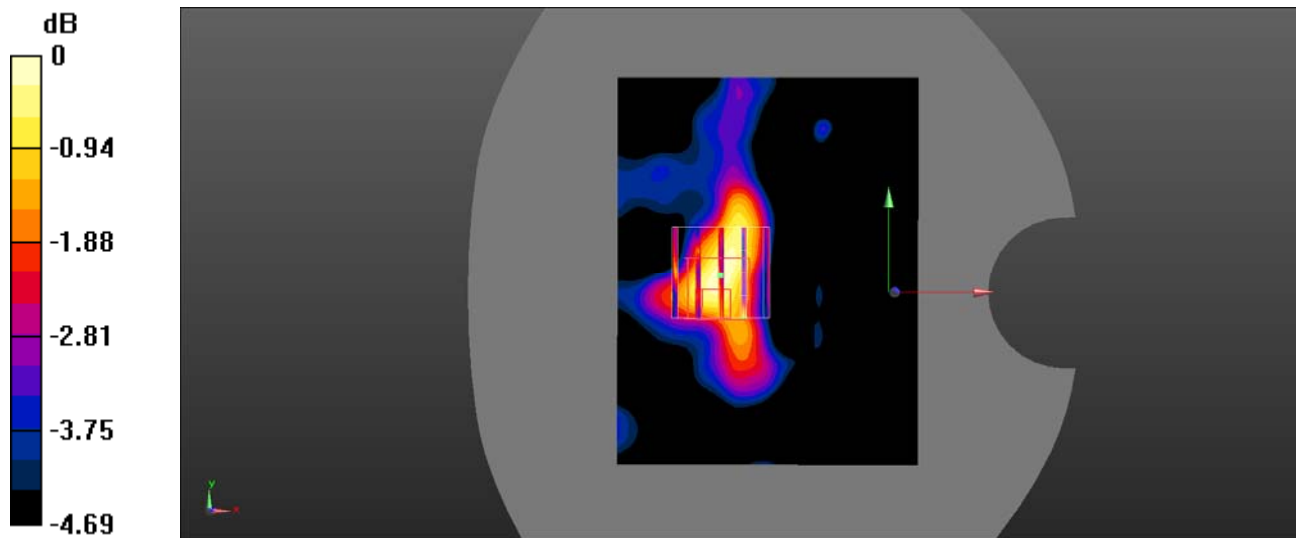

0 dB =  $0.0103 \text{ W/kg}$  =  $-19.87 \text{ dBW/kg}$



**Test Plot 33#: WCDMA Band 5\_Body Back\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.866 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.62 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.837 \text{ W/kg}$   
**SAR(1 g) =  $0.650 \text{ W/kg}$ ; SAR(10 g) =  $0.416 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.748 \text{ W/kg}$

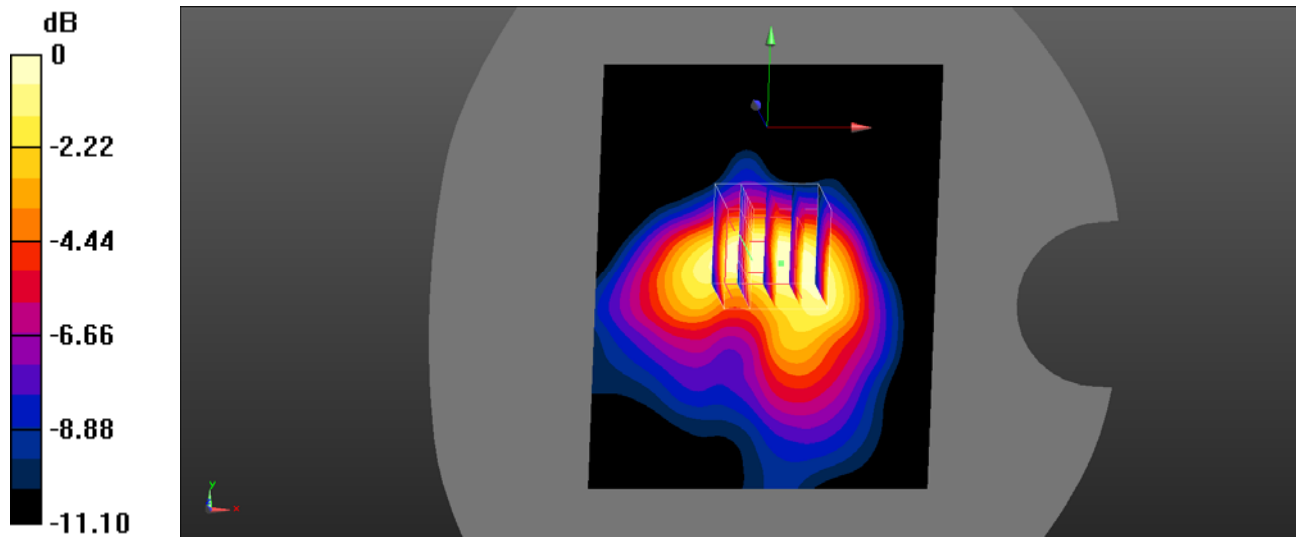

0 dB =  $0.748 \text{ W/kg}$  =  $-1.26 \text{ dBW/kg}$

**Test Plot 34#: WCDMA Band 5\_Body Left\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.365 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.55 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.409 \text{ W/kg}$   
**SAR(1 g) =  $0.317 \text{ W/kg}$ ; SAR(10 g) =  $0.208 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.362 \text{ W/kg}$

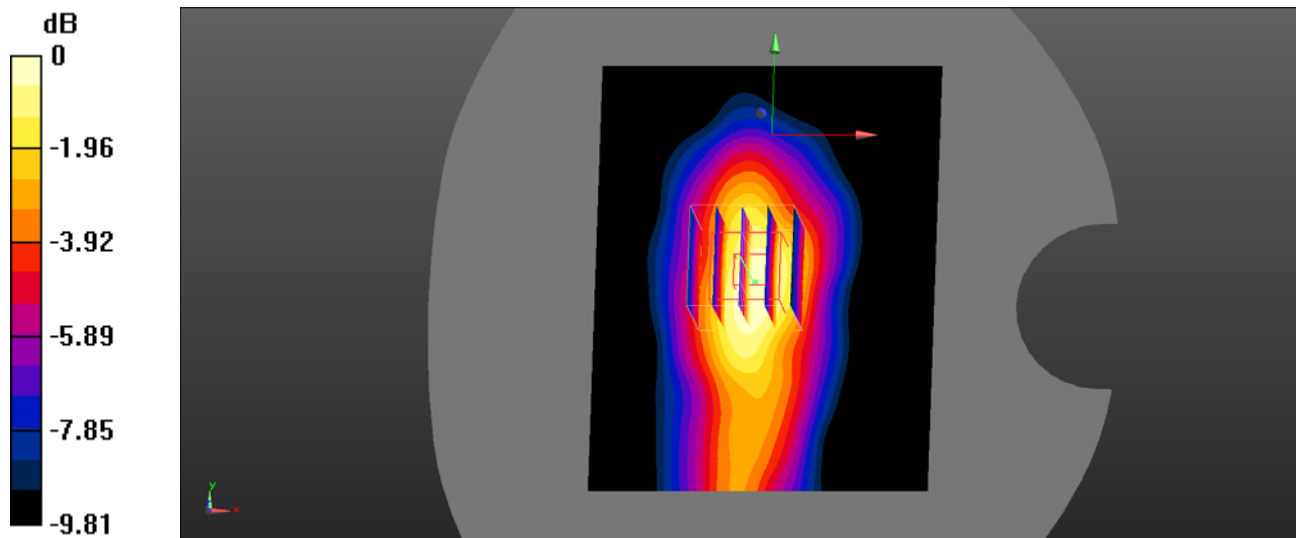

0 dB =  $0.362 \text{ W/kg}$  =  $-4.41 \text{ dBW/kg}$

**Test Plot 35#: WCDMA Band 5\_ Body Right\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0657 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.848 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0530 \text{ W/kg}$   
**SAR(1 g) =  $0.043 \text{ W/kg}$ ; SAR(10 g) =  $0.030 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0489 \text{ W/kg}$

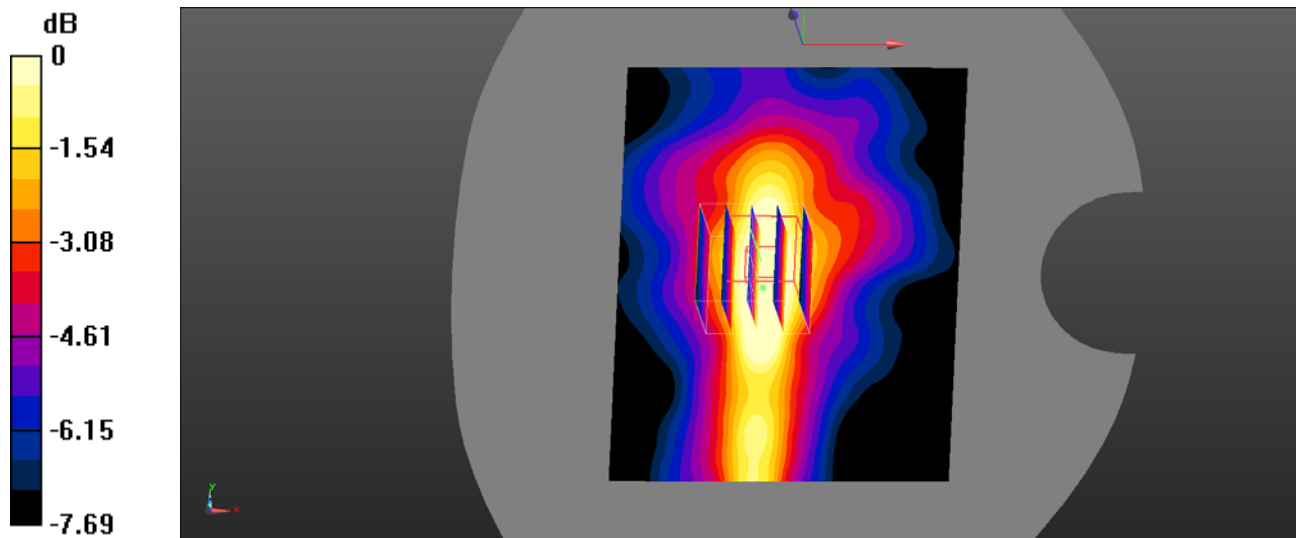

0 dB =  $0.0489 \text{ W/kg}$  =  $-13.11 \text{ dBW/kg}$

**Test Plot 36#: WCDMA Band 5\_Body Top\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.644 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $25.38 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.794 \text{ W/kg}$   
**SAR(1 g) =  $0.544 \text{ W/kg}$ ; SAR(10 g) =  $0.314 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.665 \text{ W/kg}$

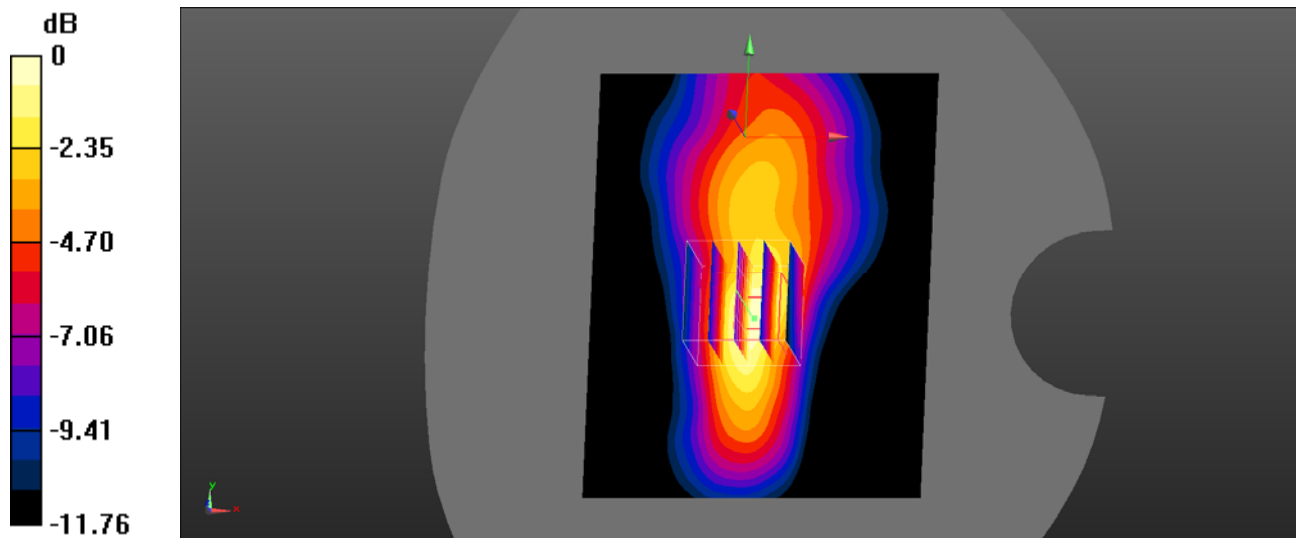

0 dB =  $0.665 \text{ W/kg}$  =  $-1.77 \text{ dBW/kg}$

**Test Plot 37#: WCDMA Band 5 \_Body Back\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.155 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.325 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.127 \text{ W/kg}$   
**SAR(1 g) =  $0.116 \text{ W/kg}$ ; SAR(10 g) =  $0.092 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.120 \text{ W/kg}$

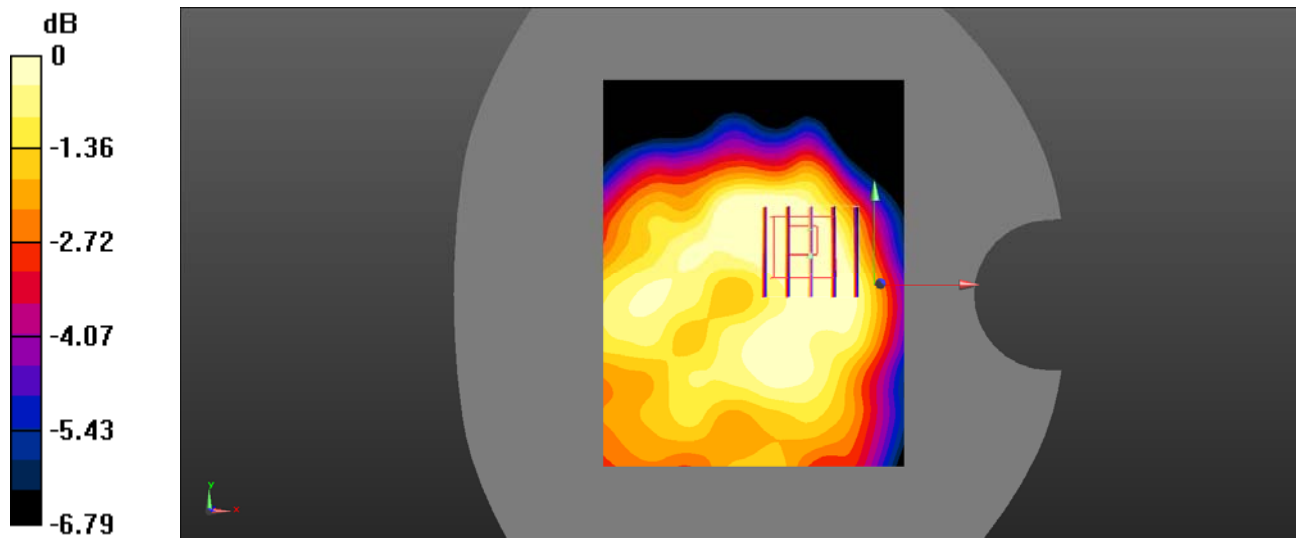

0 dB =  $0.120 \text{ W/kg}$  =  $-9.21 \text{ dBW/kg}$

**Test Plot 38#: WCDMA Band 5\_Body Left\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.114 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.05 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.212 \text{ W/kg}$   
**SAR(1 g) =  $0.120 \text{ W/kg}$ ; SAR(10 g) =  $0.059 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0965 \text{ W/kg}$

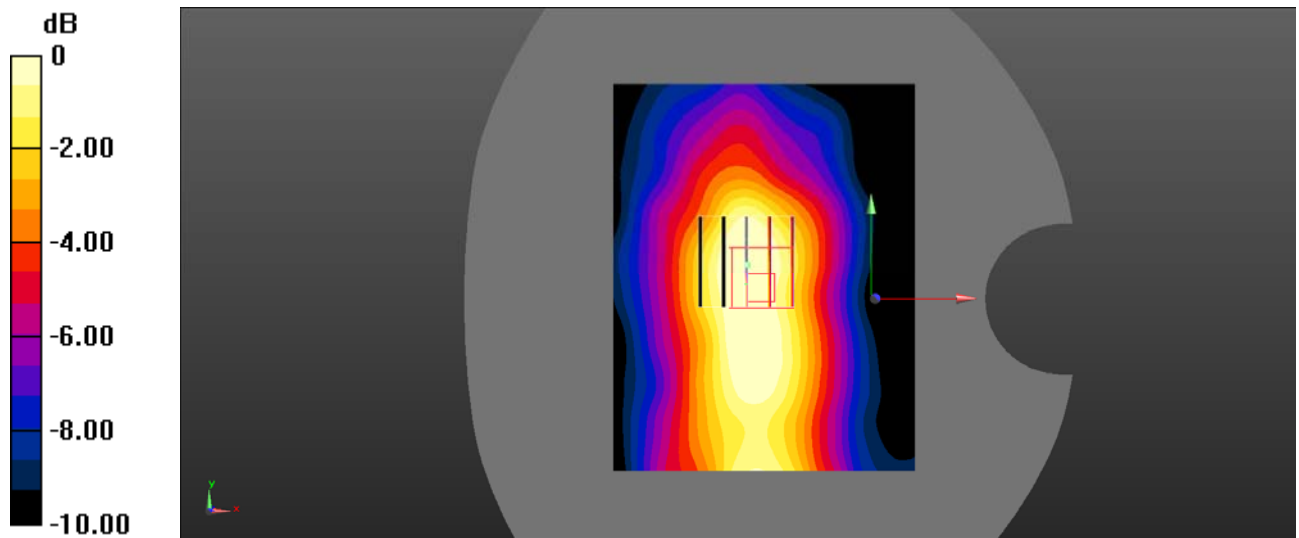

0 dB =  $0.0965 \text{ W/kg} = -10.15 \text{ dBW/kg}$

**Test Plot 39#: WCDMA Band 5\_Body Top\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.892 \text{ S/m}$ ;  $\epsilon_r = 41.999$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.105 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.722 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0910 \text{ W/kg}$   
**SAR(1 g) =  $0.084 \text{ W/kg}$ ; SAR(10 g) =  $0.067 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0869 \text{ W/kg}$

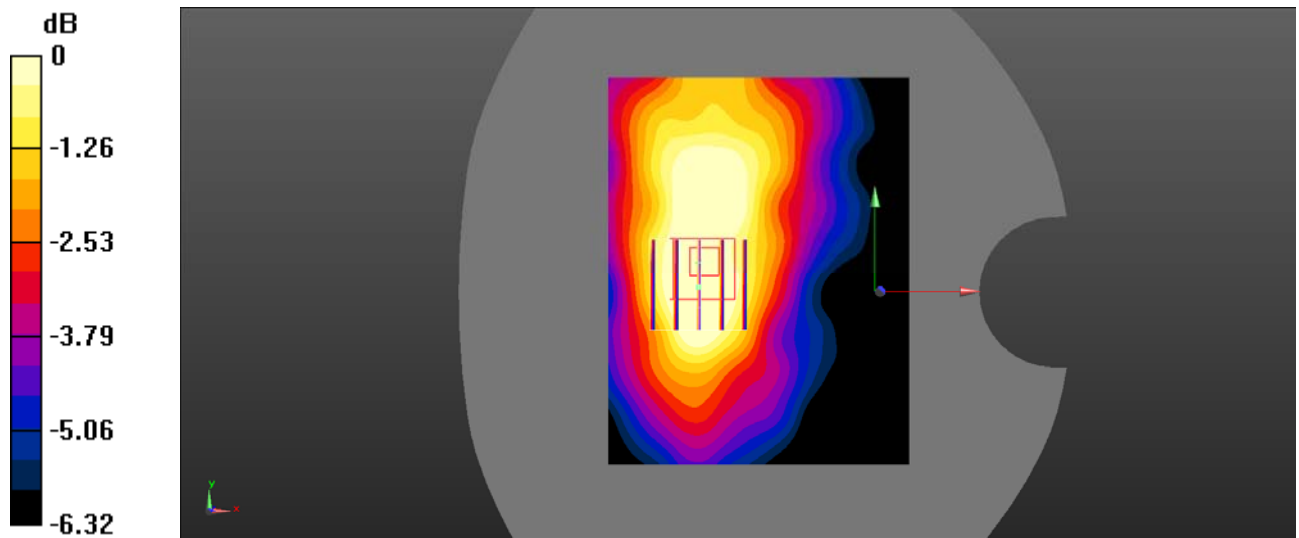

0 dB =  $0.0869 \text{ W/kg}$  =  $-10.61 \text{ dBW/kg}$

**Test Plot 40#: LTE Band 7\_Body Back\_1RB\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2510 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 38.407$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.72 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.27 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.517 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

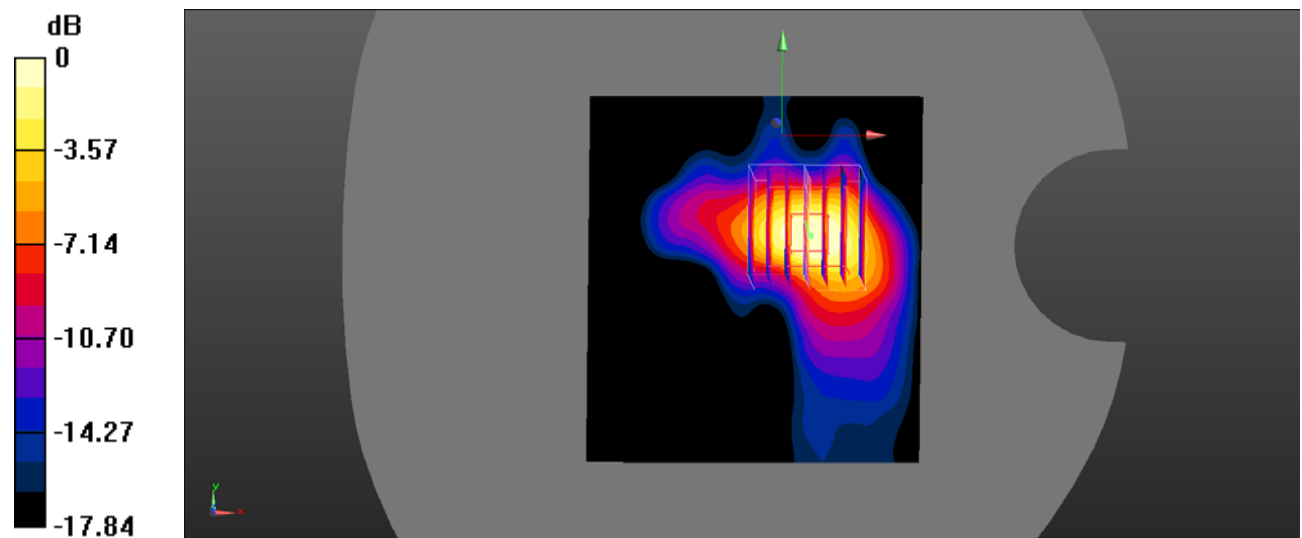

0 dB = 1.37 W/kg = 1.37 dBW/kg



**Test Plot 41#: LTE Band 7\_Body Back\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.73 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.18 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 1.96 W/kg  
**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.499 W/kg**  
 Maximum value of SAR (measured) = 1.40 W/kg

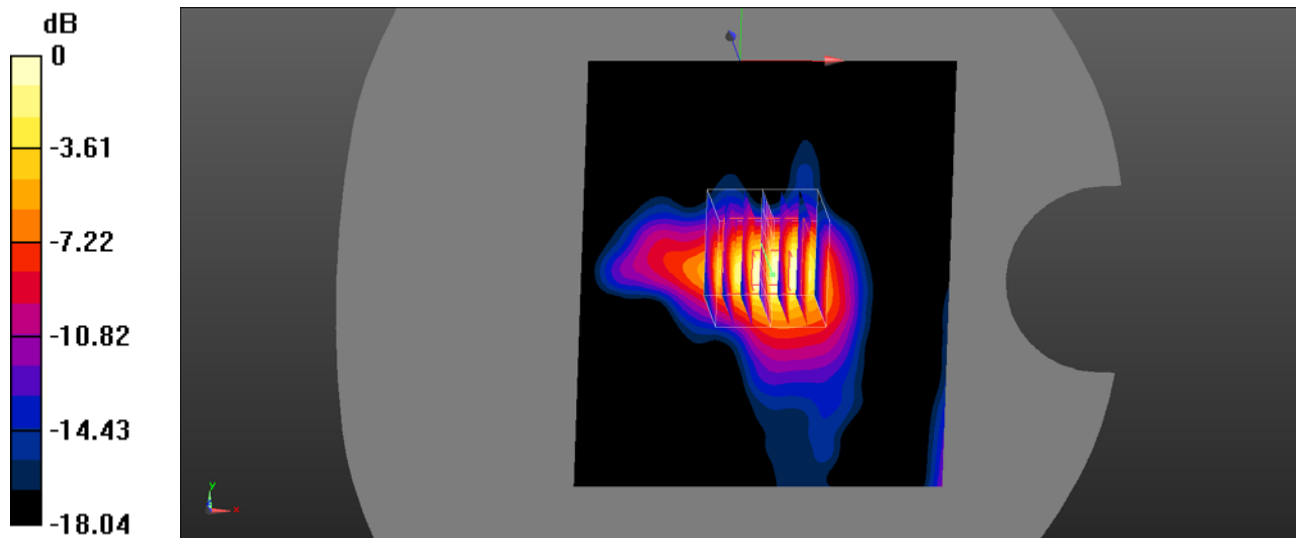

0 dB = 1.40 W/kg = 1.46 dBW/kg

**Test Plot 42#: LTE Band 7\_Body Back\_1RB\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_B15;**


Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2560 \text{ MHz}$ ;  $\sigma = 1.944 \text{ S/m}$ ;  $\epsilon_r = 38.134$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 9.918 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.50 W/kg  
**SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.395 W/kg**  
 Maximum value of SAR (measured) = 1.07 W/kg

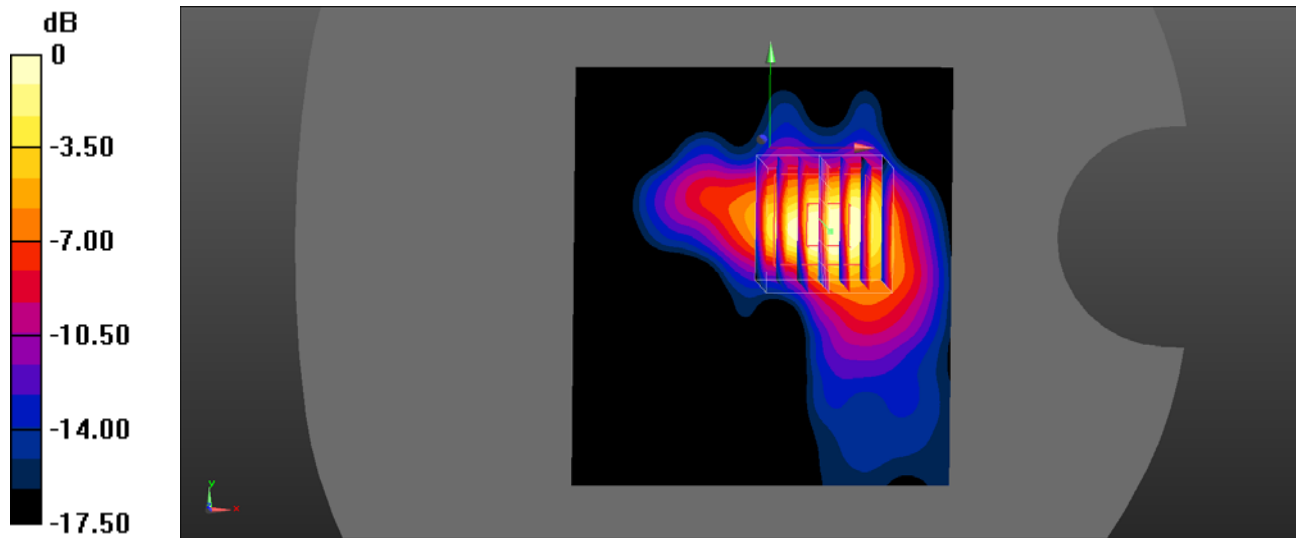

0 dB = 1.07 W/kg = 0.29 dBW/kg

**Test Plot 43#: LTE Band 7\_Body Back\_50%RB\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2510 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 38.407$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.74 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.84 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 1.82 W/kg  
**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.513 W/kg**  
 Maximum value of SAR (measured) = 1.33 W/kg

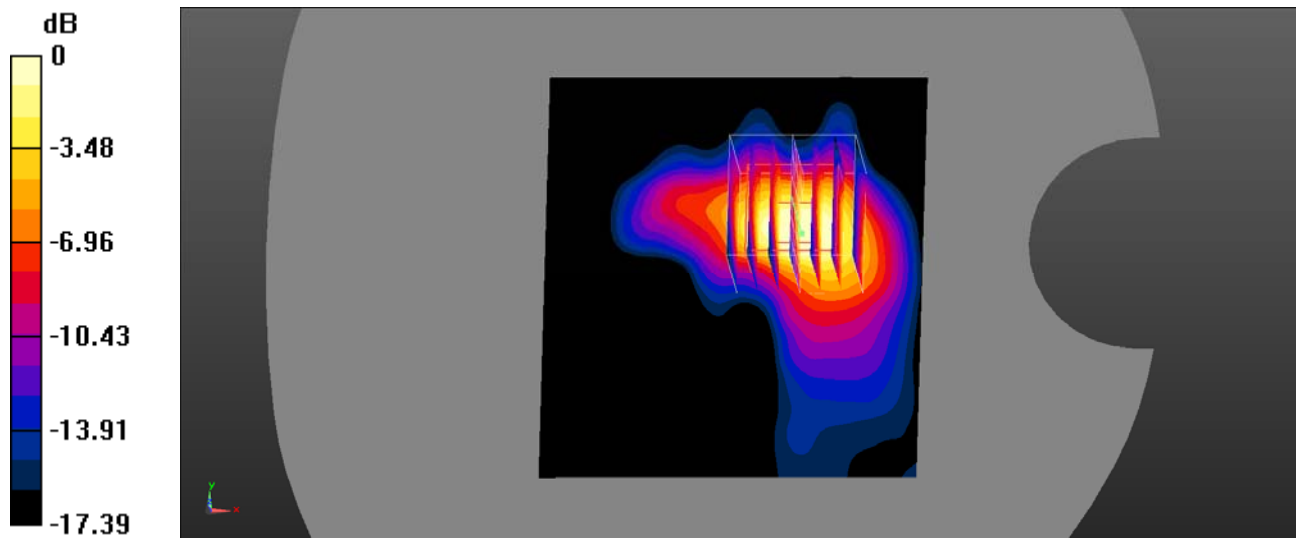

0 dB = 1.33 W/kg = 1.24 dBW/kg

**Test Plot 44#: LTE Band 7\_Body Back\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.36 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.34 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 1.79 W/kg  
**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.471 W/kg**  
 Maximum value of SAR (measured) = 1.28 W/kg

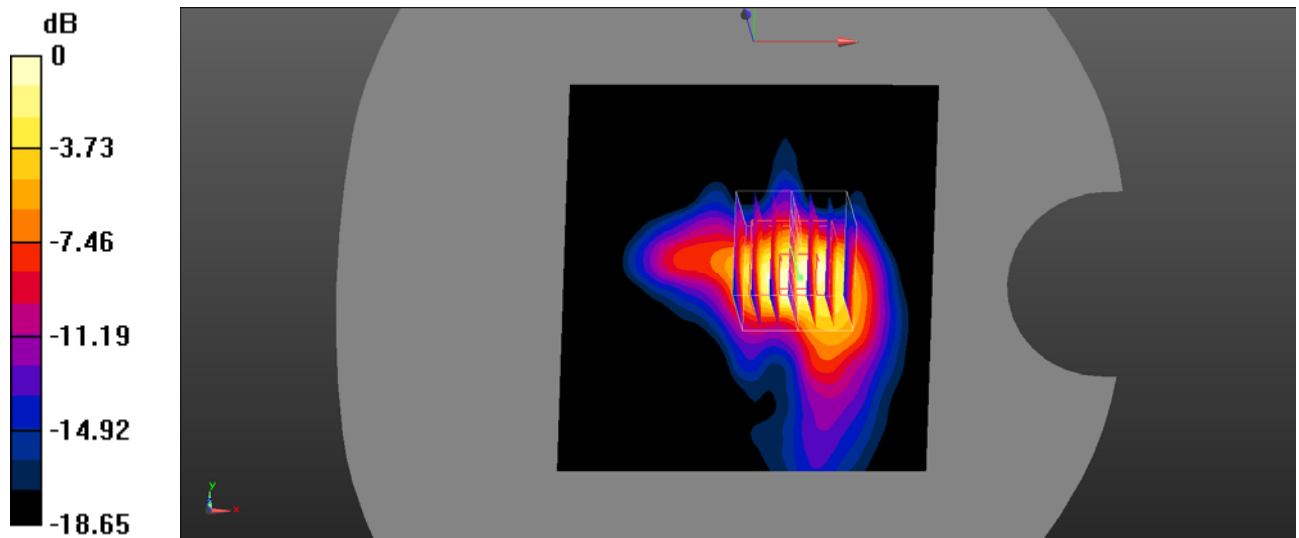

0 dB = 1.28 W/kg = 1.07 dBW/kg

**Test Plot 45#: LTE Band 7\_Body Back\_50%RB\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2560 \text{ MHz}$ ;  $\sigma = 1.944 \text{ S/m}$ ;  $\epsilon_r = 38.134$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.01 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 9.630 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.379 W/kg**  
 Maximum value of SAR (measured) = 1.02 W/kg

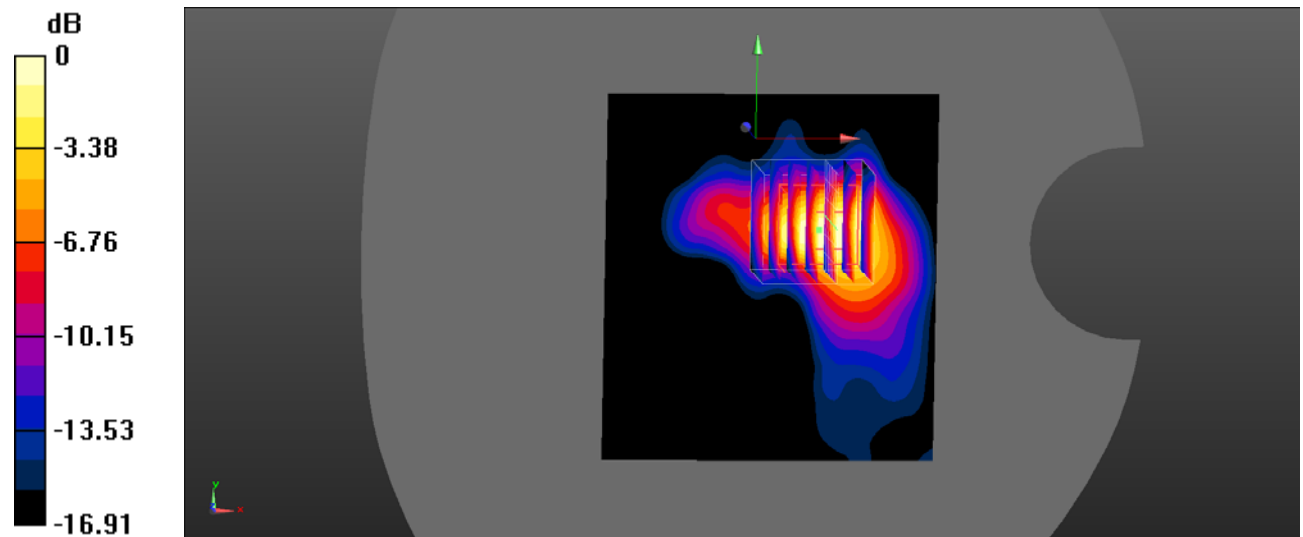

0 dB = 1.02 W/kg = 0.09 dBW/kg

**Test Plot 46#: LTE Band 7\_Body Back\_100%RB\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2510 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2510 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 38.407$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.61 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.52 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 1.77 W/kg  
**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.486 W/kg**  
 Maximum value of SAR (measured) = 1.30 W/kg

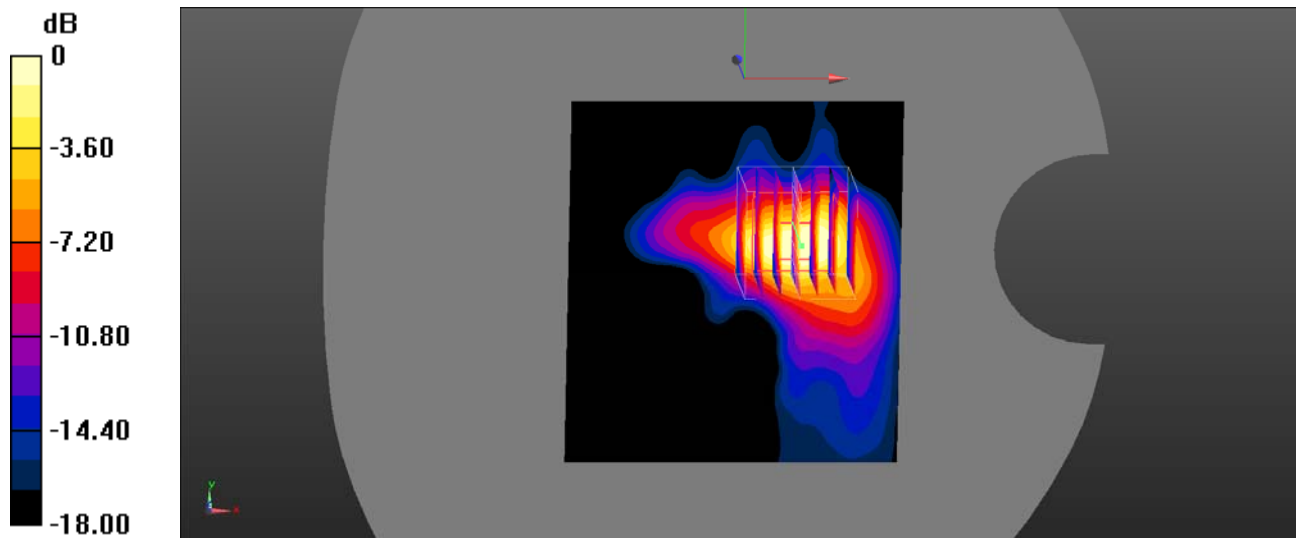

0 dB = 1.30 W/kg = 1.14 dBW/kg

**Test Plot 47#: LTE Band 7\_Body Back\_100%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.35 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.29 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 1.63 W/kg  
**SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.450 W/kg**  
 Maximum value of SAR (measured) = 1.18 W/kg

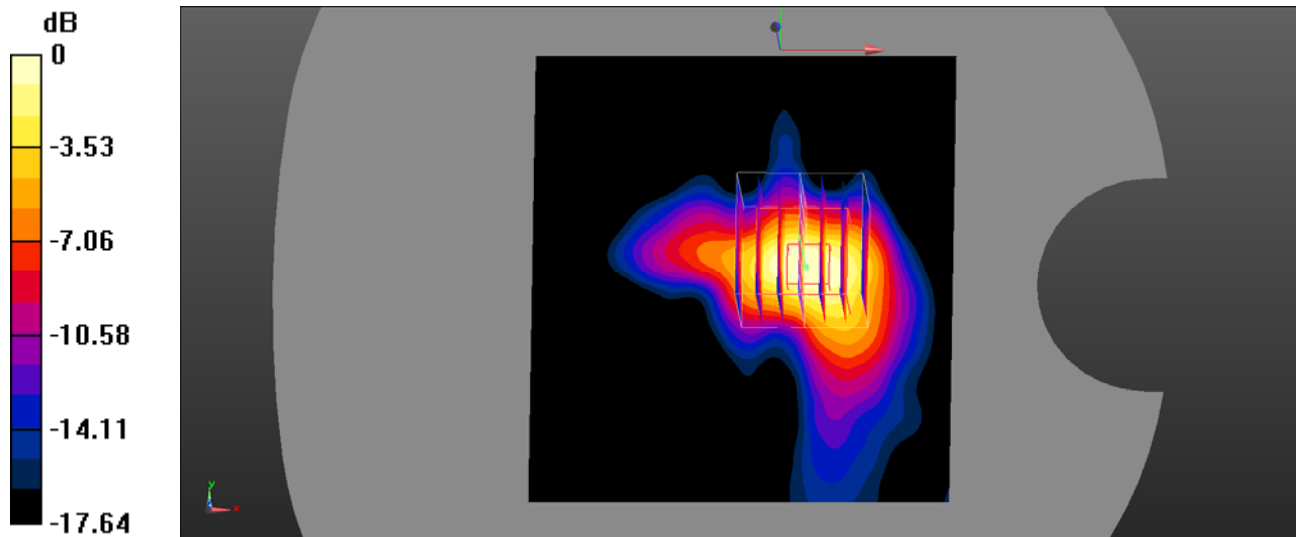

0 dB = 1.18 W/kg = 0.72 dBW/kg

**Test Plot 48#: LTE Band 7\_Body Back\_100%RB\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2560 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.944$  S/m;  $\epsilon_r = 38.134$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 1.10 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 15.55 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 1.44 W/kg  
**SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.326 W/kg**  
 Maximum value of SAR (measured) = 1.04 W/kg

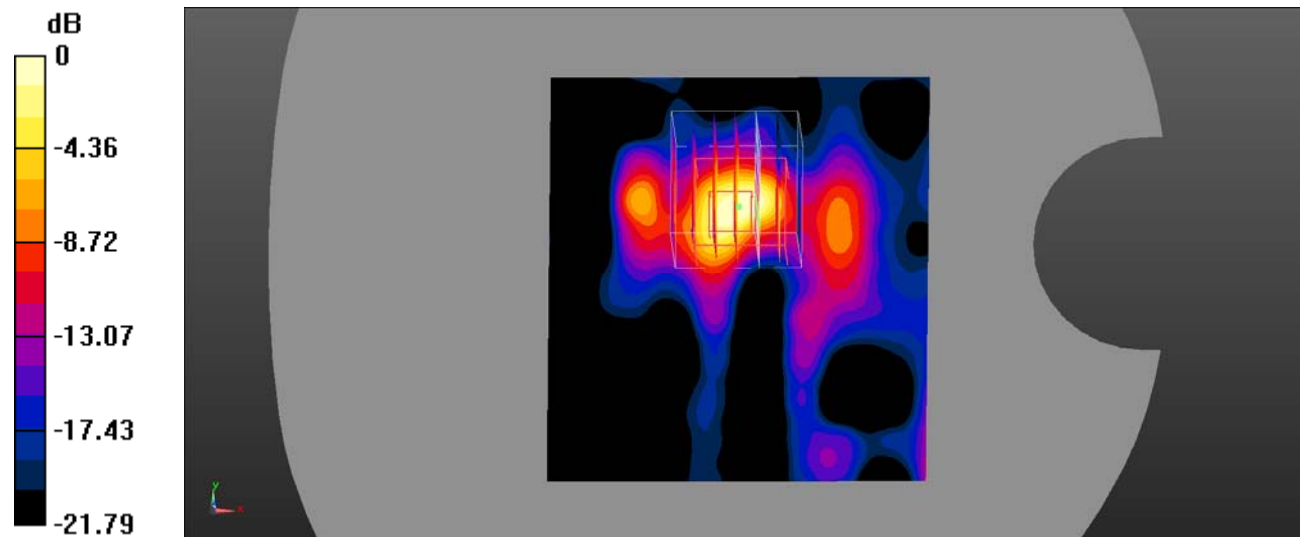

0 dB = 1.04 W/kg = 0.17 dBW/kg



**Test Plot 49#: LTE Band 7\_Body Left\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.294 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.009 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.255 \text{ W/kg}$   
**SAR(1 g) =  $0.182 \text{ W/kg}$ ; SAR(10 g) =  $0.107 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.210 \text{ W/kg}$

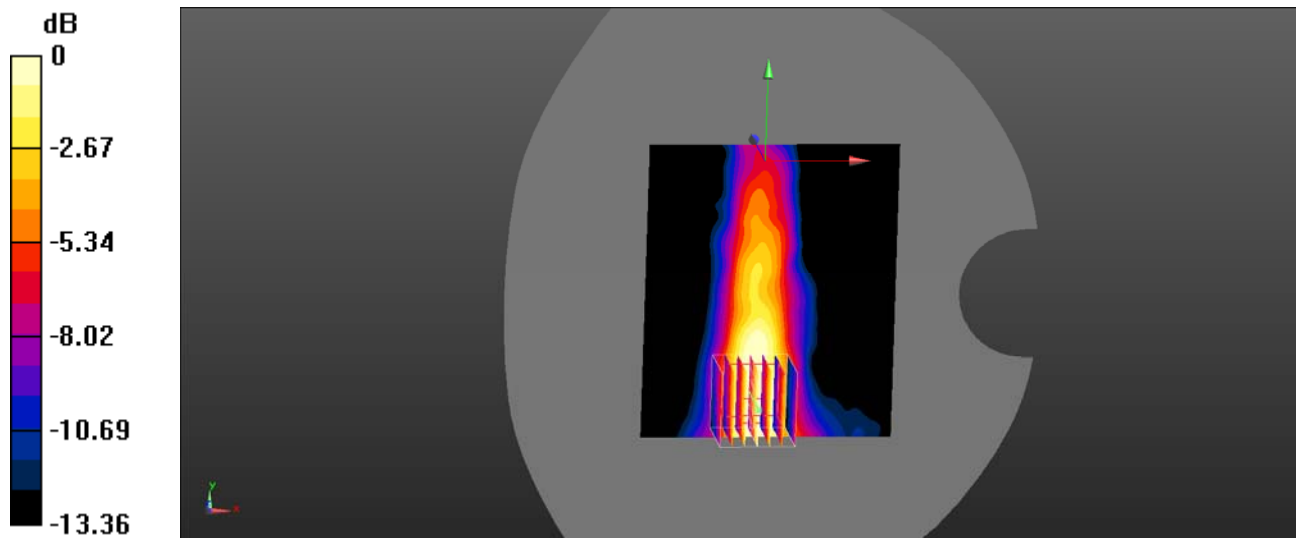

0 dB =  $0.210 \text{ W/kg}$  =  $-6.78 \text{ dBW/kg}$

**Test Plot 50#: LTE Band 7\_ Body Left\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.226 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.831 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.222 \text{ W/kg}$   
**SAR(1 g) =  $0.155 \text{ W/kg}$ ; SAR(10 g) =  $0.087 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.179 \text{ W/kg}$

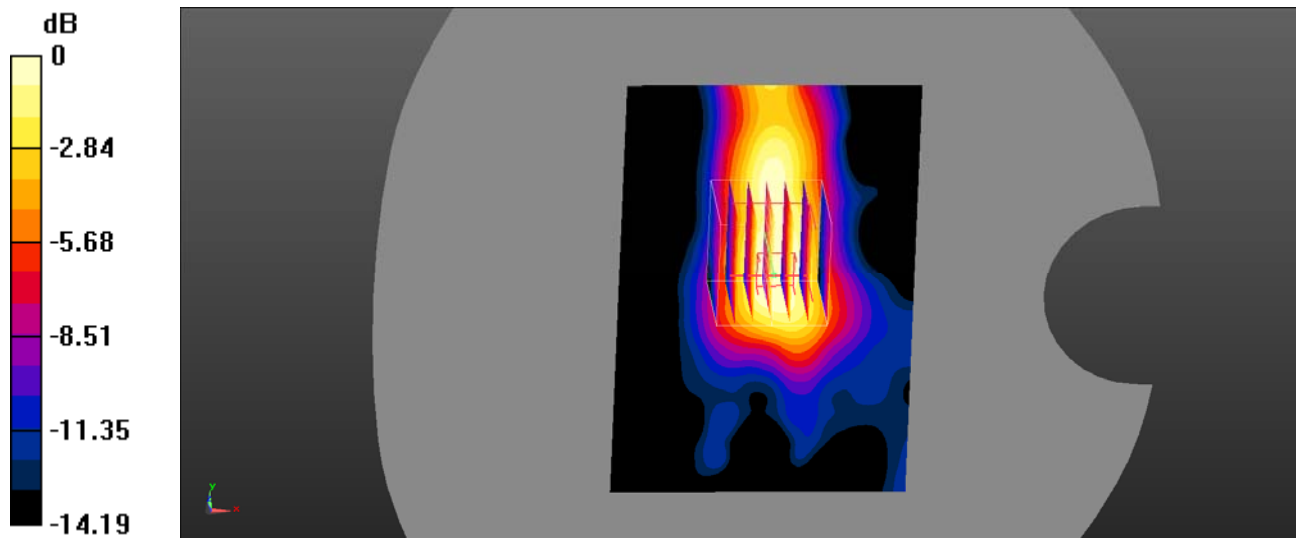

0 dB =  $0.179 \text{ W/kg}$  =  $-7.47 \text{ dBW/kg}$

**Test Plot 51#: LTE Band 7\_Body Right\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.000423 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $0.9560 \text{ V/m}$ ; Power Drift =  $-0.21 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.00981 \text{ W/kg}$   
**SAR(1 g) =  $0.00231 \text{ W/kg}$ ; SAR(10 g) =  $0.000489 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.00511 \text{ W/kg}$

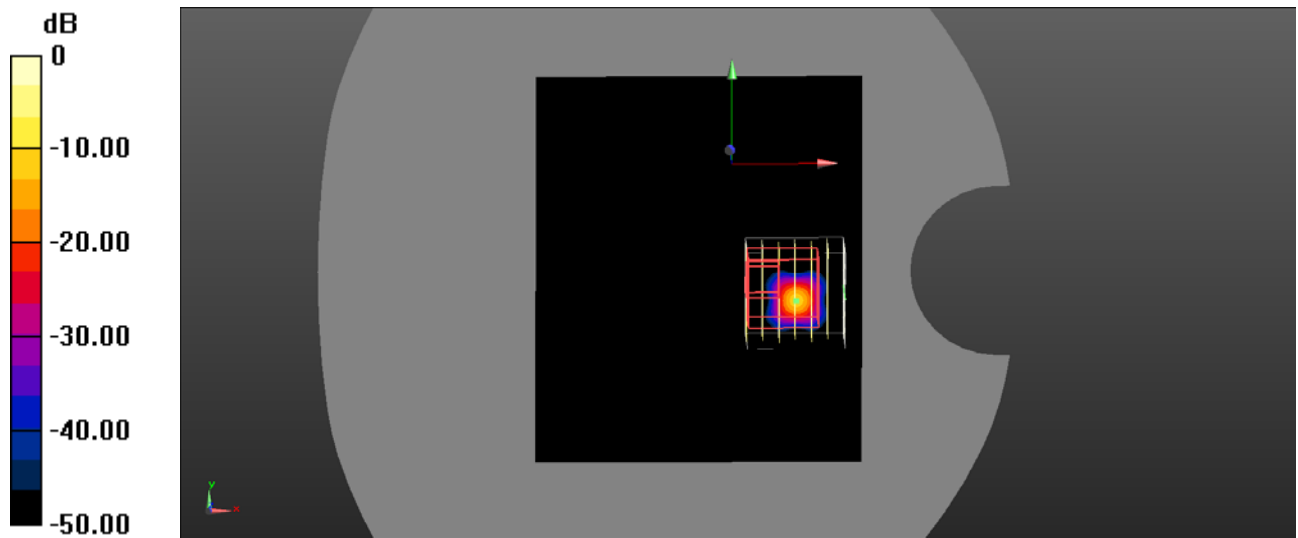

0 dB =  $0.00511 \text{ W/kg}$  =  $-22.92 \text{ dBW/kg}$

**Test Plot 52#: LTE Band 7\_Body Right\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.00111 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.065 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0120 \text{ W/kg}$   
**SAR(1 g) =  $0.00359 \text{ W/kg}$ ; SAR(10 g) =  $0.00133 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.00509 \text{ W/kg}$

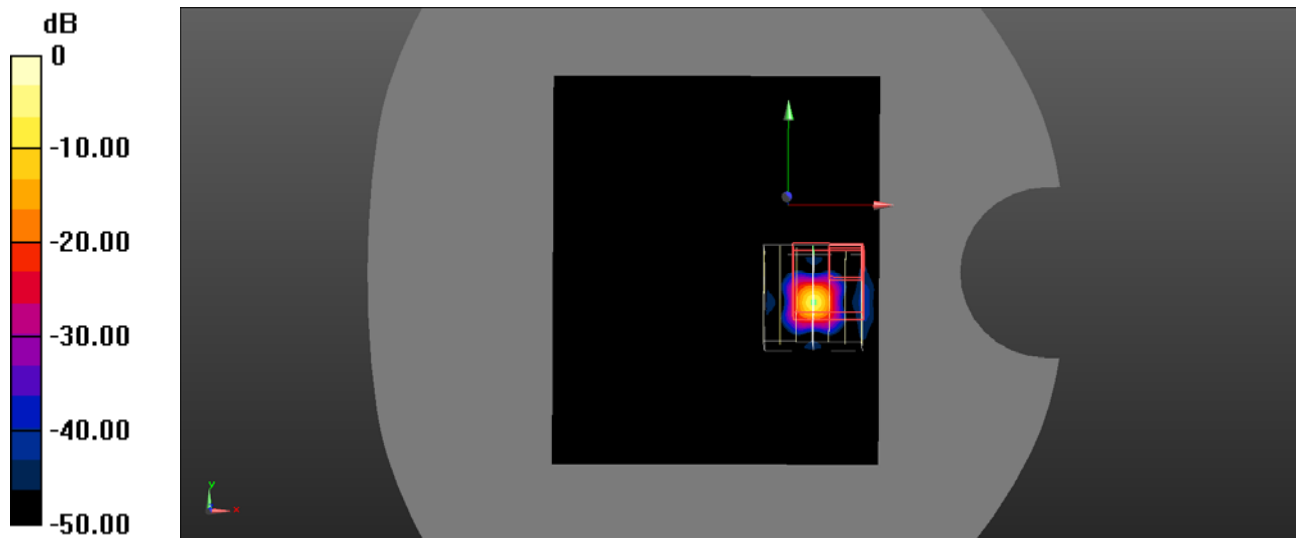

0 dB =  $0.00509 \text{ W/kg}$  =  $-22.93 \text{ dBW/kg}$

**Test Plot 53#: LTE Band 7\_Body Top\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (91x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.334 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.767 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.339 \text{ W/kg}$   
**SAR(1 g) =  $0.232 \text{ W/kg}$ ; SAR(10 g) =  $0.131 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.271 \text{ W/kg}$

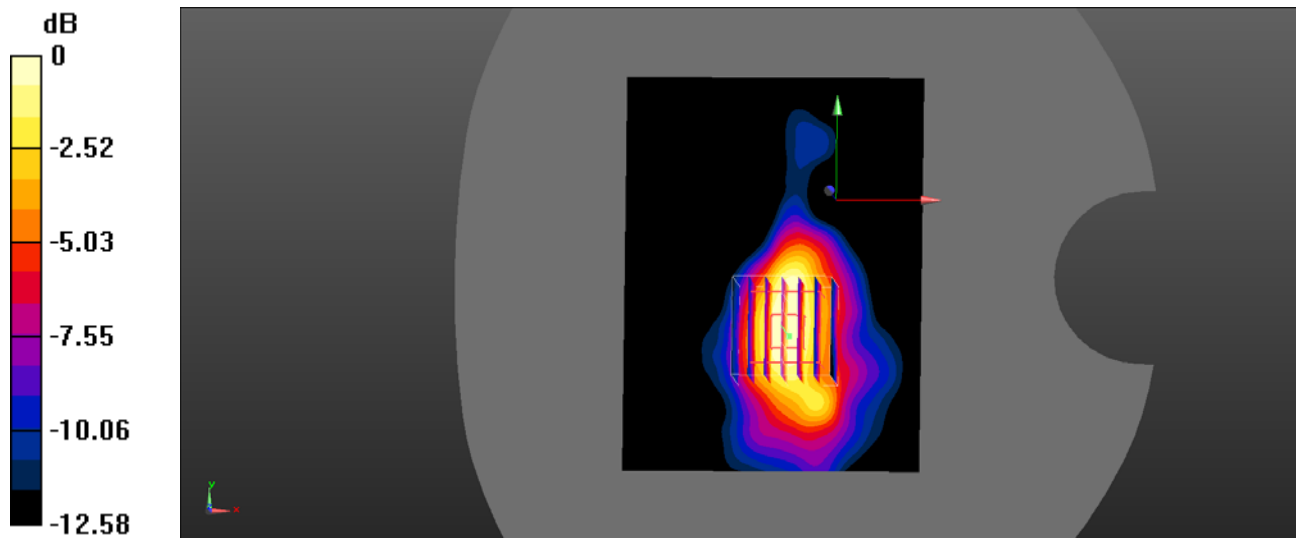

0 dB =  $0.271 \text{ W/kg}$  =  $-5.67 \text{ dBW/kg}$

**Test Plot 54#: LTE Band 7\_Body Top\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0611 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.477 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.268 \text{ W/kg}$   
**SAR(1 g) =  $0.181 \text{ W/kg}$ ; SAR(10 g) =  $0.084 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.207 \text{ W/kg}$

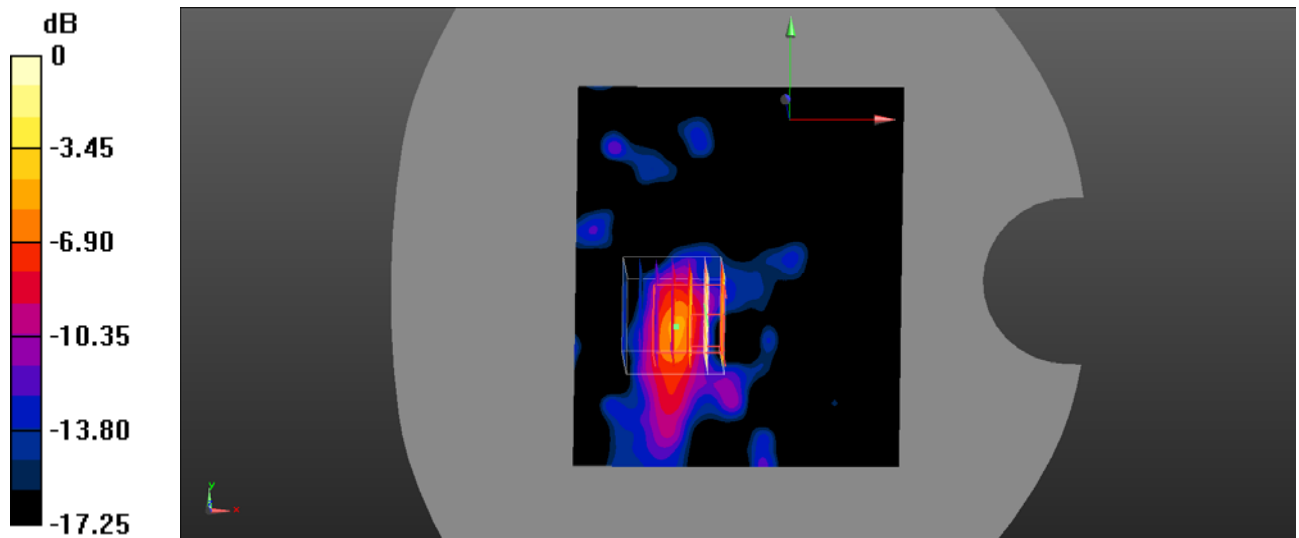

0 dB =  $0.207 \text{ W/kg}$  =  $-6.84 \text{ dBW/kg}$

**Test Plot 55#: LTE Band 7\_Body Back\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.115 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.512 \text{ V/m}$ ; Power Drift =  $0.20 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0960 \text{ W/kg}$   
**SAR(1 g) =  $0.078 \text{ W/kg}$ ; SAR(10 g) =  $0.050 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0856 \text{ W/kg}$

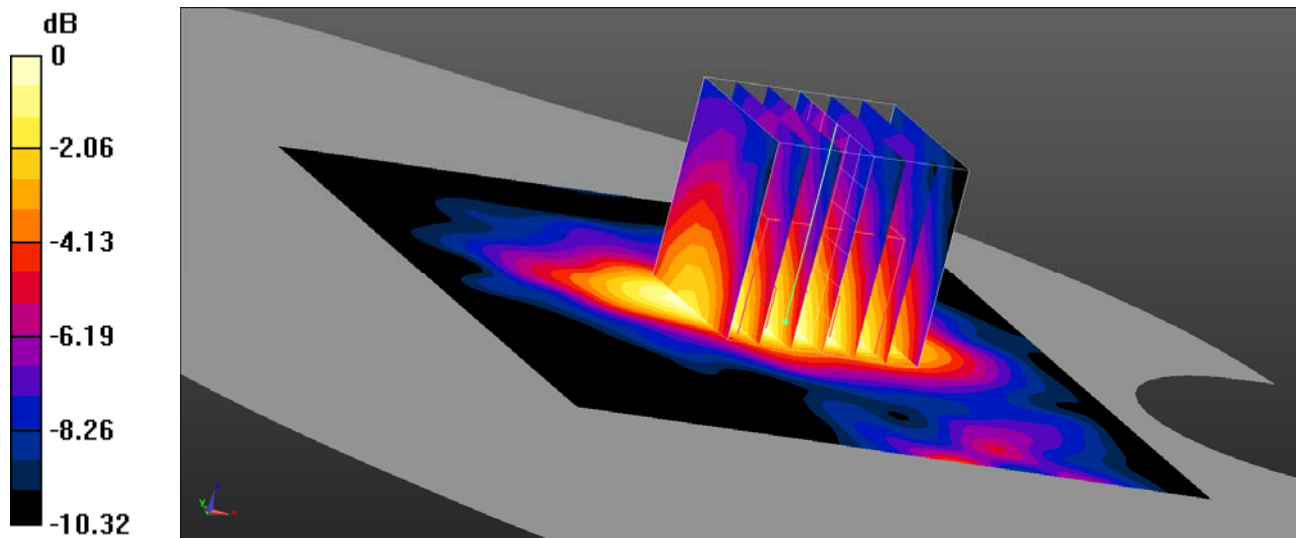

0 dB =  $0.0856 \text{ W/kg}$  =  $-10.68 \text{ dBW/kg}$

**Test Plot 56#: LTE Band 7\_Body Back\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.122 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.913 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0850 \text{ W/kg}$   
**SAR(1 g) =  $0.064 \text{ W/kg}$ ; SAR(10 g) =  $0.042 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0852 \text{ W/kg}$

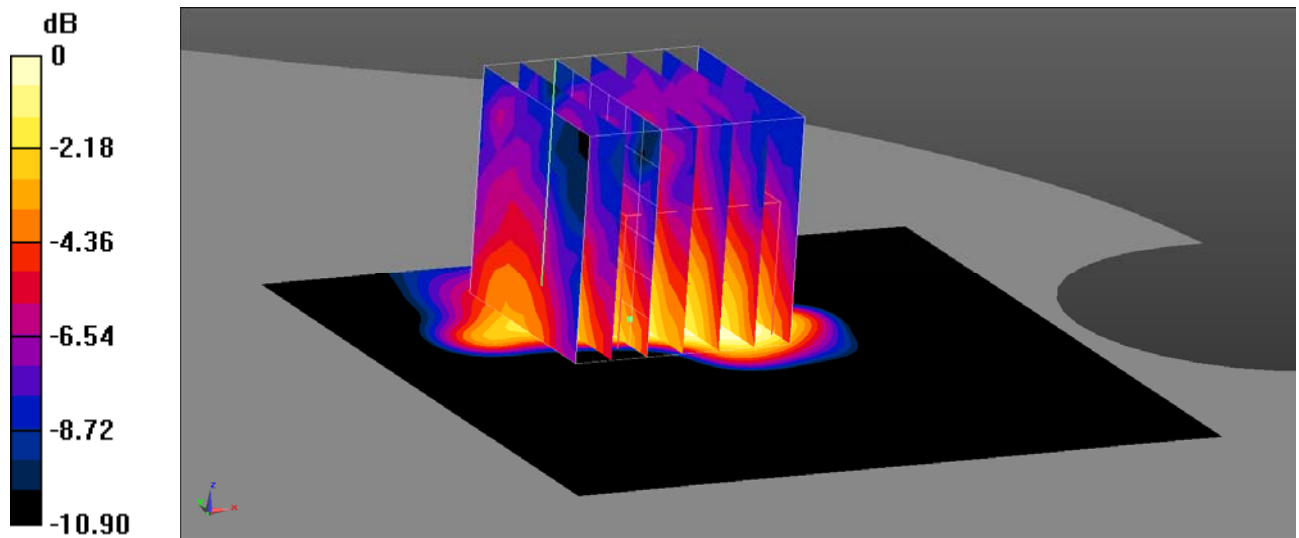

0 dB =  $0.0852 \text{ W/kg}$  =  $-10.70 \text{ dBW/kg}$



**Test Plot 57#: LTE Band 7\_Body Left\_1RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (81x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.111 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.806 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.114 \text{ W/kg}$   
**SAR(1 g) =  $0.084 \text{ W/kg}$ ; SAR(10 g) =  $0.051 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0950 \text{ W/kg}$

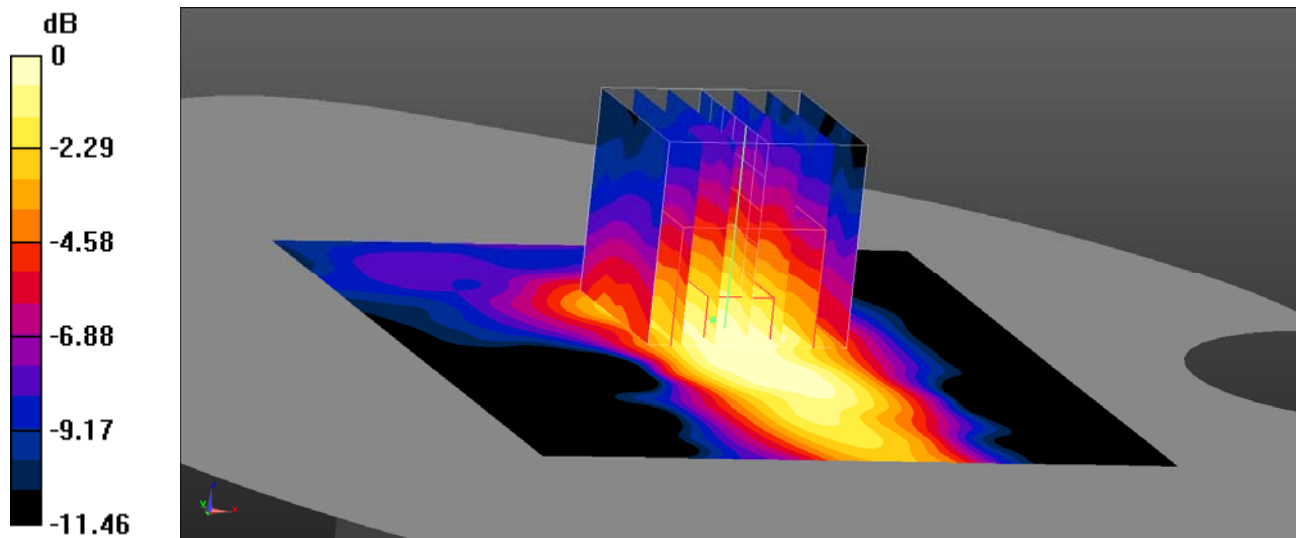

0 dB =  $0.0950 \text{ W/kg}$  =  $-10.22 \text{ dBW/kg}$

**Test Plot 58#: LTE Band 7\_Body Left\_50%RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (81x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0906 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.227 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0950 \text{ W/kg}$   
**SAR(1 g) =  $0.070 \text{ W/kg}$ ; SAR(10 g) =  $0.042 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0762 \text{ W/kg}$

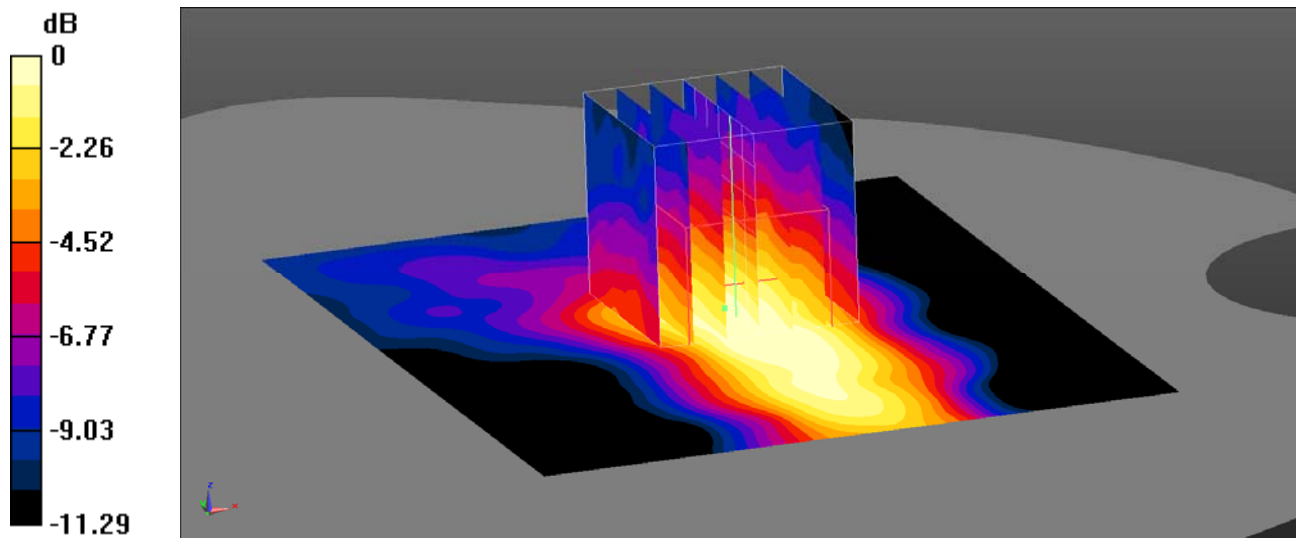

0 dB =  $0.0762 \text{ W/kg}$  =  $-11.18 \text{ dBW/kg}$

**Test Plot 59#: LTE Band 7\_Body Top\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (81x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.00636 \text{ W/kg}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $1.997 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.0100 \text{ W/kg}$

**SAR(1 g) =  $0.0087 \text{ W/kg}$ ; SAR(10 g) =  $0.00718 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0105 \text{ W/kg}$

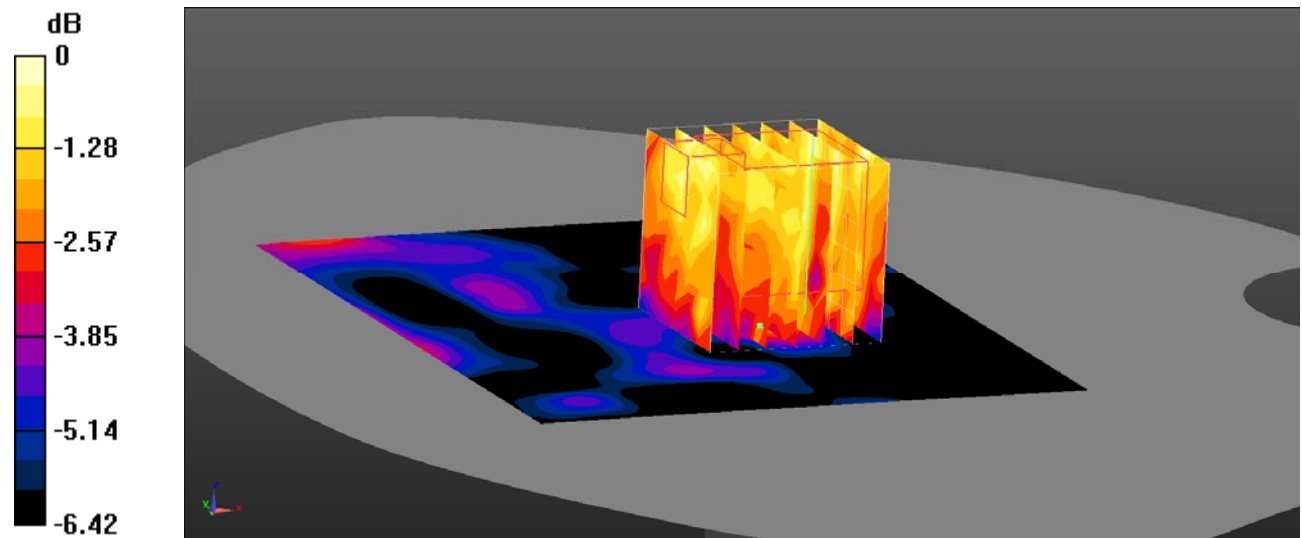

0 dB =  $0.0105 \text{ W/kg} = -19.79 \text{ dBW/kg}$

**Test Plot 60#: LTE Band 7\_Body Top\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.852 \text{ S/m}$ ;  $\epsilon_r = 38.329$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.00542 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.191 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0110 \text{ W/kg}$   
**SAR(1 g) =  $0.00871 \text{ W/kg}$ ; SAR(10 g) =  $0.00739 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0108 \text{ W/kg}$

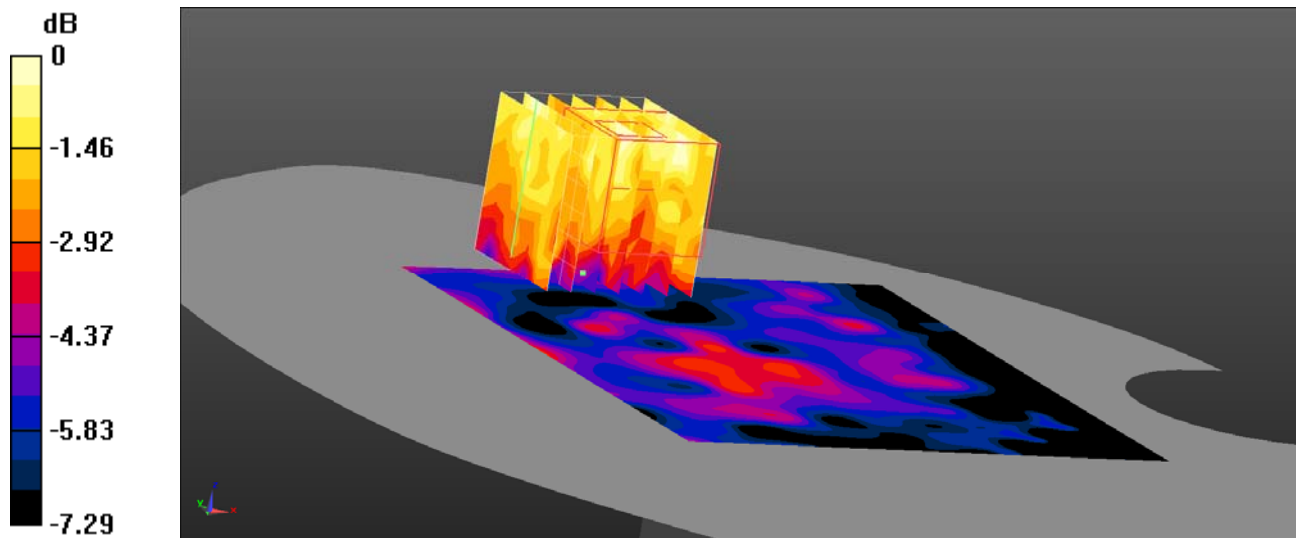

0 dB =  $0.0108 \text{ W/kg}$  =  $-19.67 \text{ dBW/kg}$

**Test Plot 61#: LTE Band 12\_Body Back\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.815 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 26.08 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 1.07 W/kg  
**SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.458 W/kg**  
 Maximum value of SAR (measured) = 0.846 W/kg

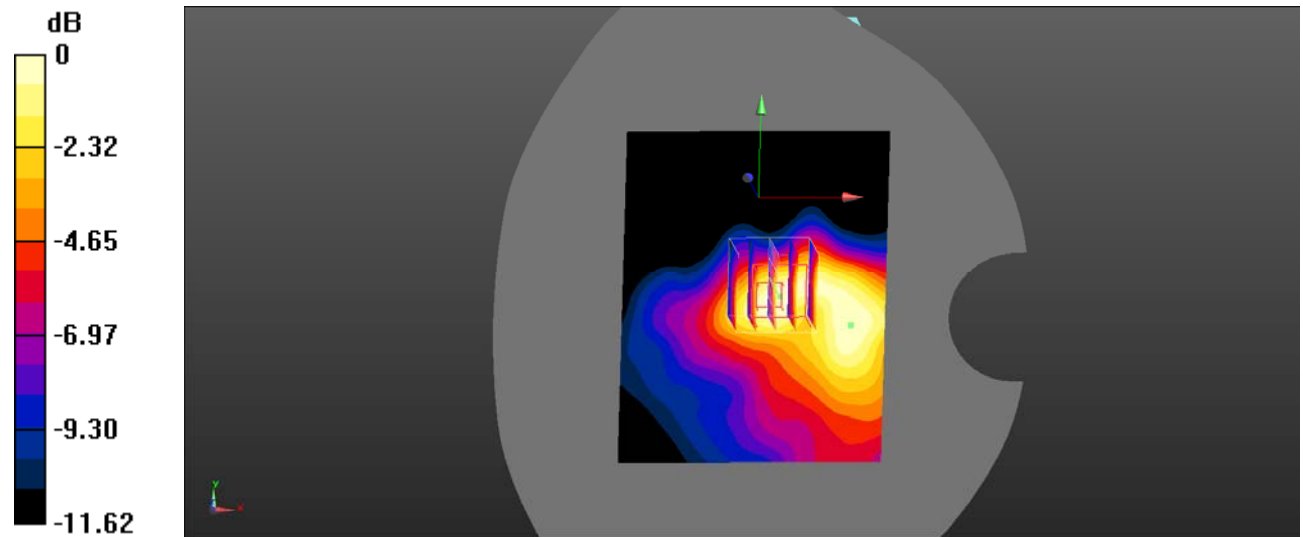

0 dB = 0.846 W/kg = -0.73 dBW/kg

**Test Plot 62#: LTE Band 12\_Body Back\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.808 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 25.38 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 1.00 W/kg  
**SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.452 W/kg**  
 Maximum value of SAR (measured) = 0.764 W/kg

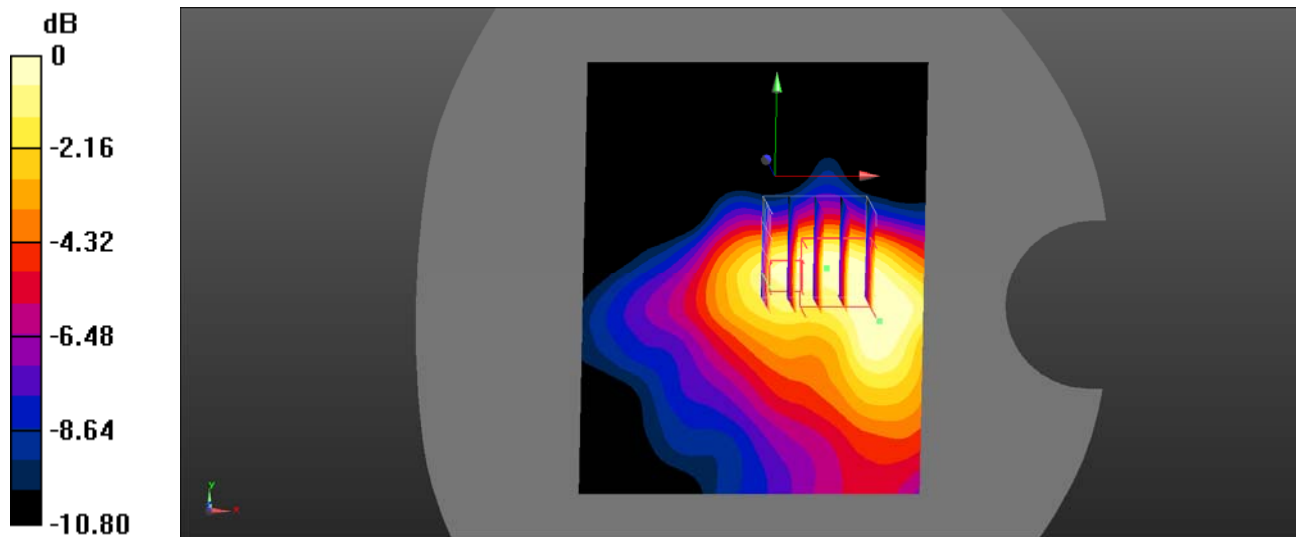

0 dB = 0.764 W/kg = -1.17 dBW/kg

**Test Plot 63#: LTE Band 12\_Body Left\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0714 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 7.659 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.0670 W/kg  
**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.040 W/kg**  
 Maximum value of SAR (measured) = 0.0597 W/kg

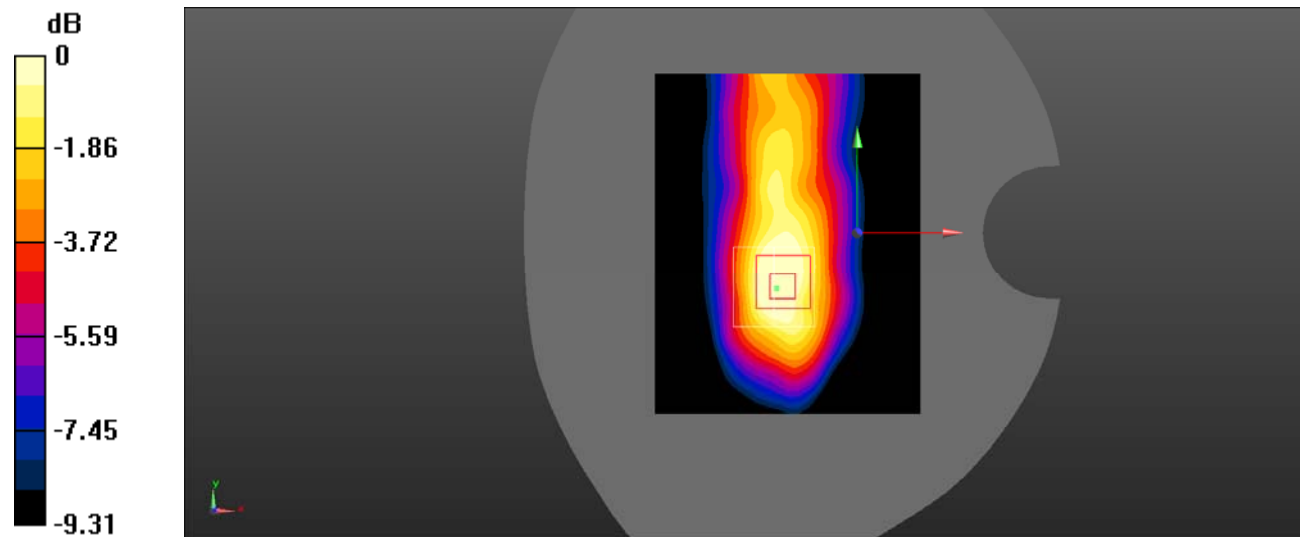

0 dB = 0.0597 W/kg = -12.24 dBW/kg

**Test Plot 64#: LTE Band 12\_ Body Left\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0712 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.227 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0710 \text{ W/kg}$   
**SAR(1 g) =  $0.060 \text{ W/kg}$ ; SAR(10 g) =  $0.041 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0620 \text{ W/kg}$

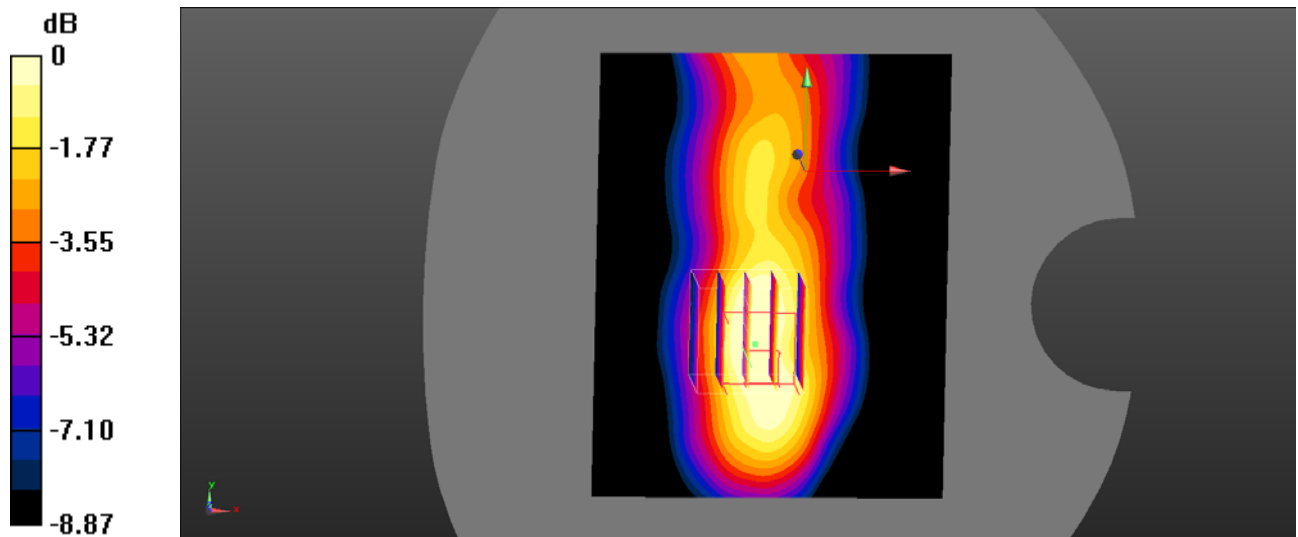

0 dB =  $0.0620 \text{ W/kg}$  =  $-12.08 \text{ dBW/kg}$



**Test Plot 65#: LTE Band 12\_Body Right\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0156 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.345 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.0140 W/kg  
**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00963 W/kg**  
 Maximum value of SAR (measured) = 0.0125 W/kg

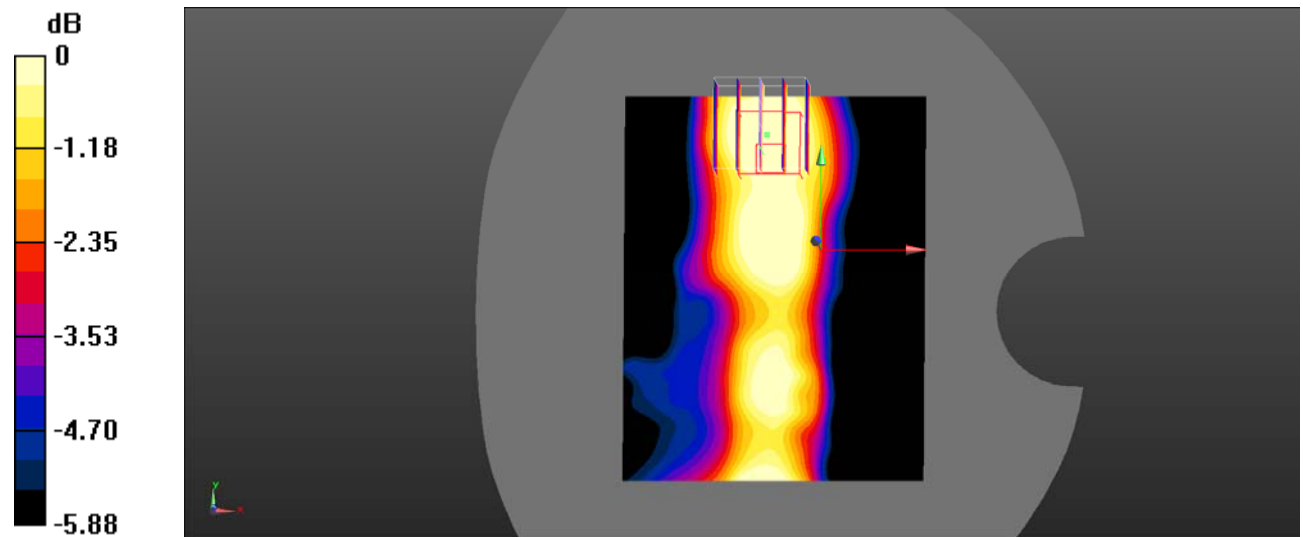

0 dB = 0.0125 W/kg = -19.03 dBW/kg

**Test Plot 66#: LTE Band 12\_Body Right\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0198 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.600 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.0130 W/kg  
**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00986 W/kg**  
 Maximum value of SAR (measured) = 0.0130 W/kg

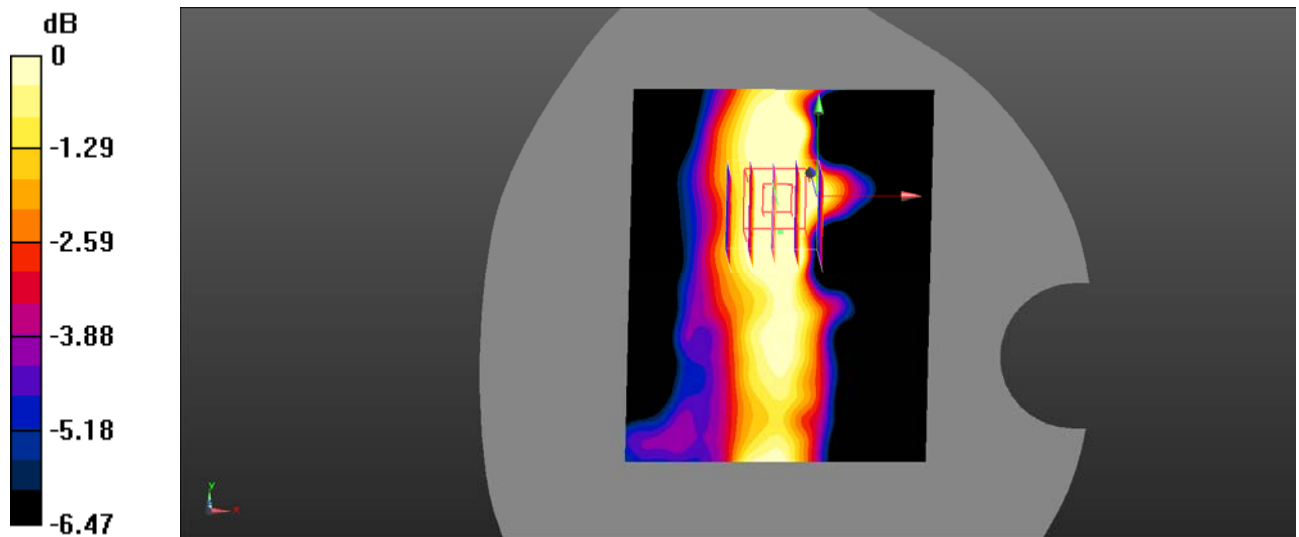

0 dB = 0.0130 W/kg = -18.86 dBW/kg

**Test Plot 67#: LTE Band 12\_Body Top\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.270 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.95 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.380 \text{ W/kg}$   
**SAR(1 g) =  $0.274 \text{ W/kg}$ ; SAR(10 g) =  $0.167 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.310 \text{ W/kg}$

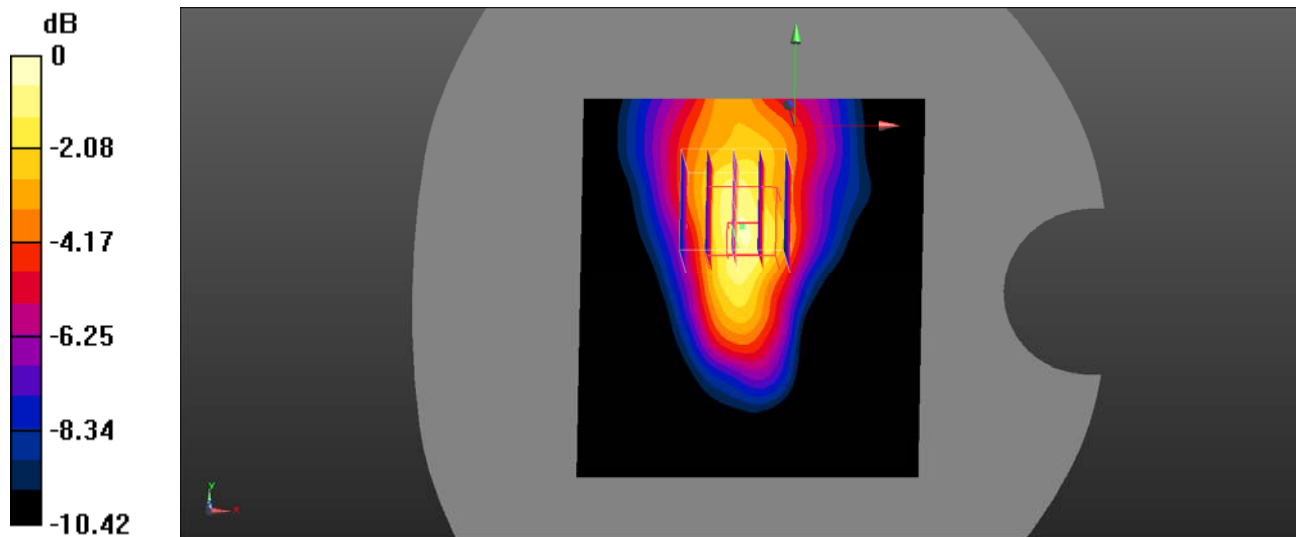

0 dB =  $0.310 \text{ W/kg} = -5.09 \text{ dBW/kg}$

**Test Plot 68#: LTE Band 12\_Body Top\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.256 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.80 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.366 \text{ W/kg}$   
**SAR(1 g) =  $0.260 \text{ W/kg}$ ; SAR(10 g) =  $0.156 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.314 \text{ W/kg}$

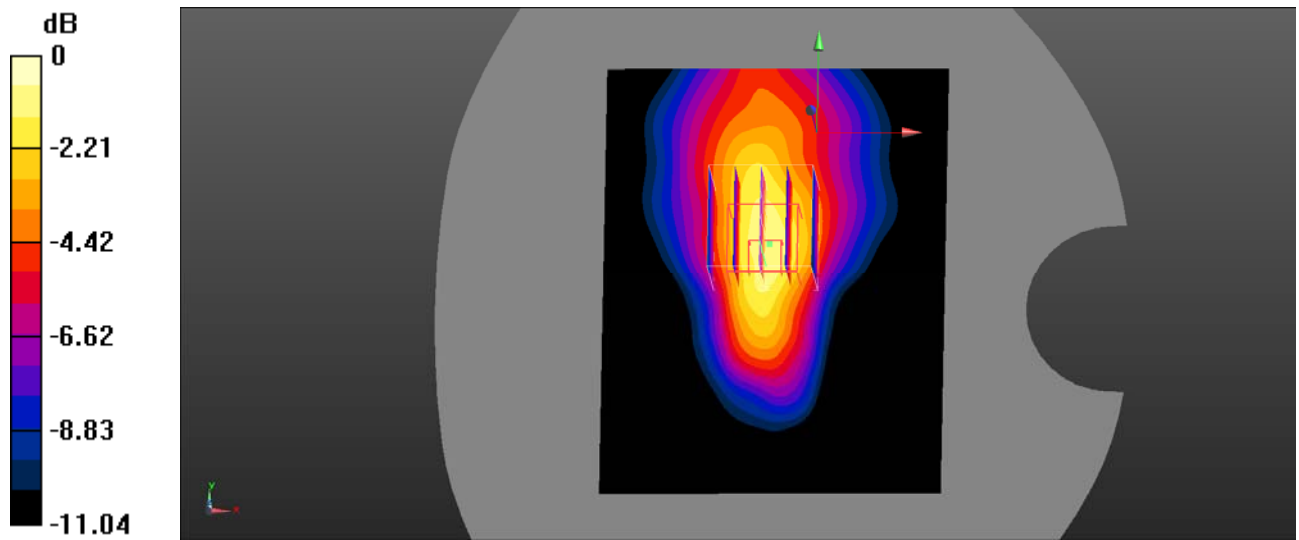

**Test Plot 69#: LTE Band 12\_Body Back\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.161 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.64 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.132 W/kg  
**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.102 W/kg**  
 Maximum value of SAR (measured) = 0.130 W/kg

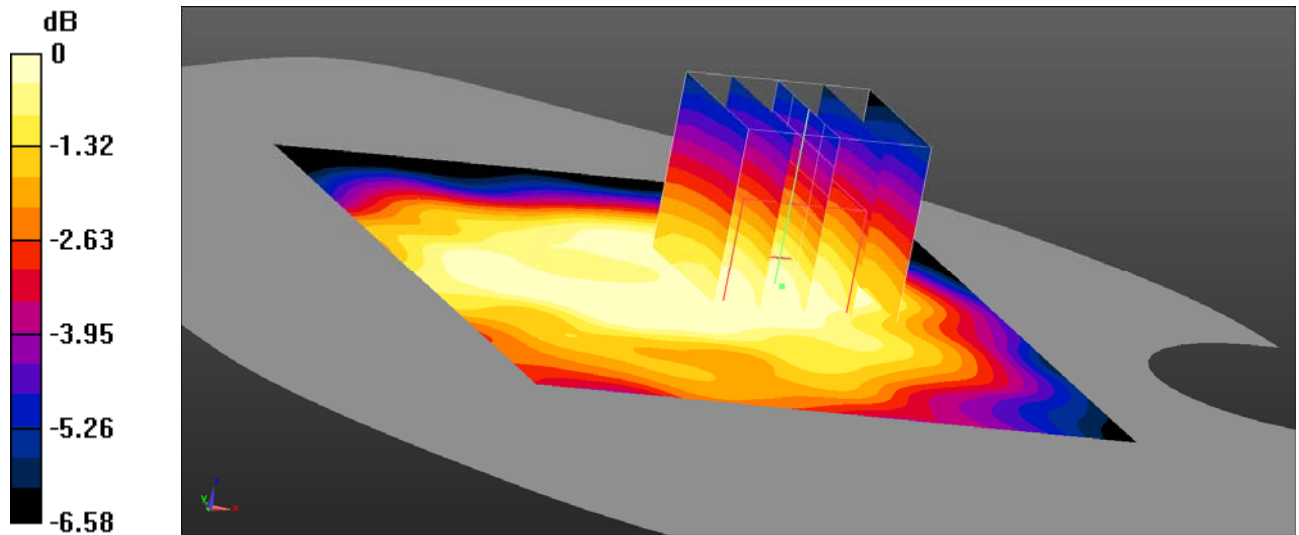

0 dB = 0.130 W/kg = -8.86 dBW/kg

**Test Plot 70#: LTE Band 12\_Body Back\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.128 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.18 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 0.105 W/kg  
**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.082 W/kg**  
 Maximum value of SAR (measured) = 0.103 W/kg

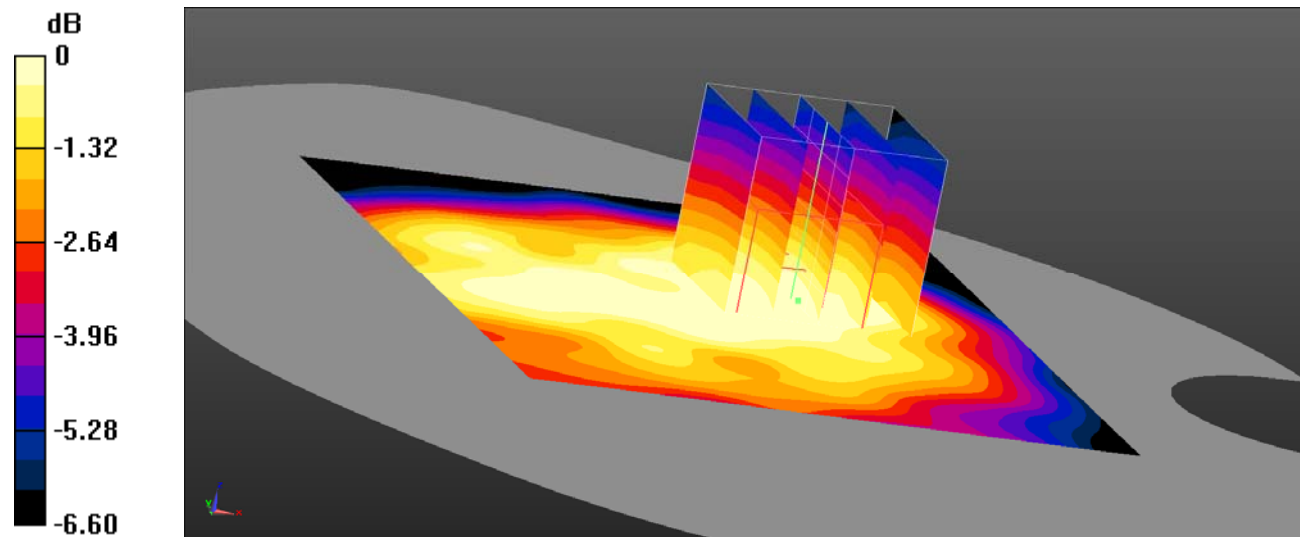

0 dB = 0.103 W/kg = -9.87 dBW/kg

**Test Plot 71#: LTE Band 12\_Body Left\_1RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.111 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.560 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0930 \text{ W/kg}$   
**SAR(1 g) =  $0.088 \text{ W/kg}$ ; SAR(10 g) =  $0.071 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0906 \text{ W/kg}$

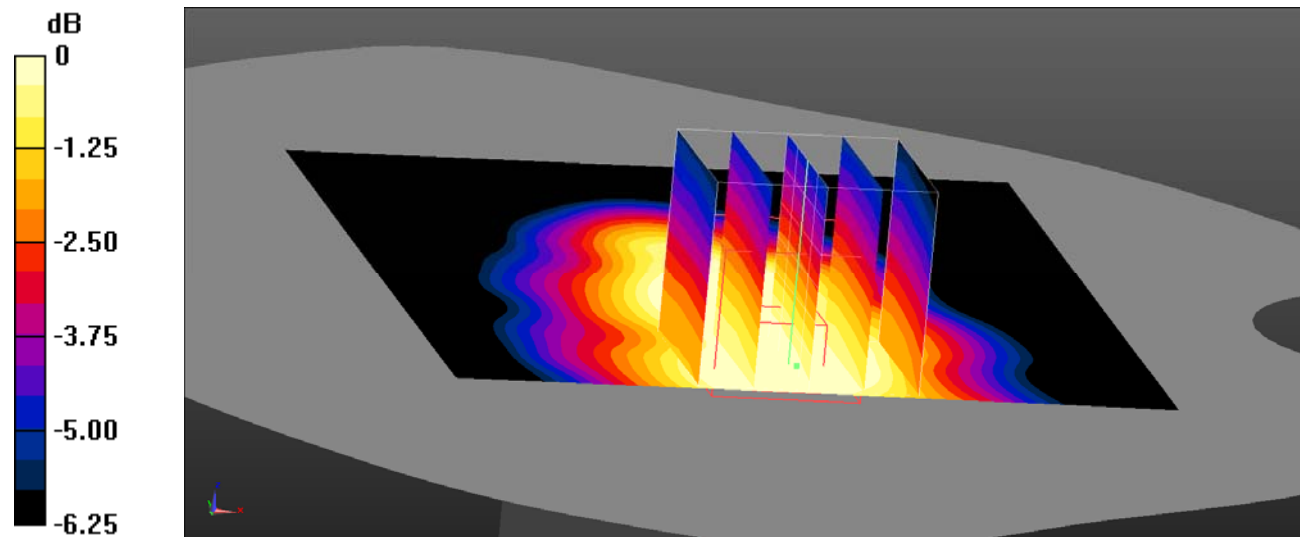

0 dB =  $0.0906 \text{ W/kg}$  =  $-10.43 \text{ dBW/kg}$

**Test Plot 72#: LTE Band 12\_Body Left\_50%RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0907 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 8.618 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.0760 W/kg  
**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.057 W/kg**  
 Maximum value of SAR (measured) = 0.0731 W/kg

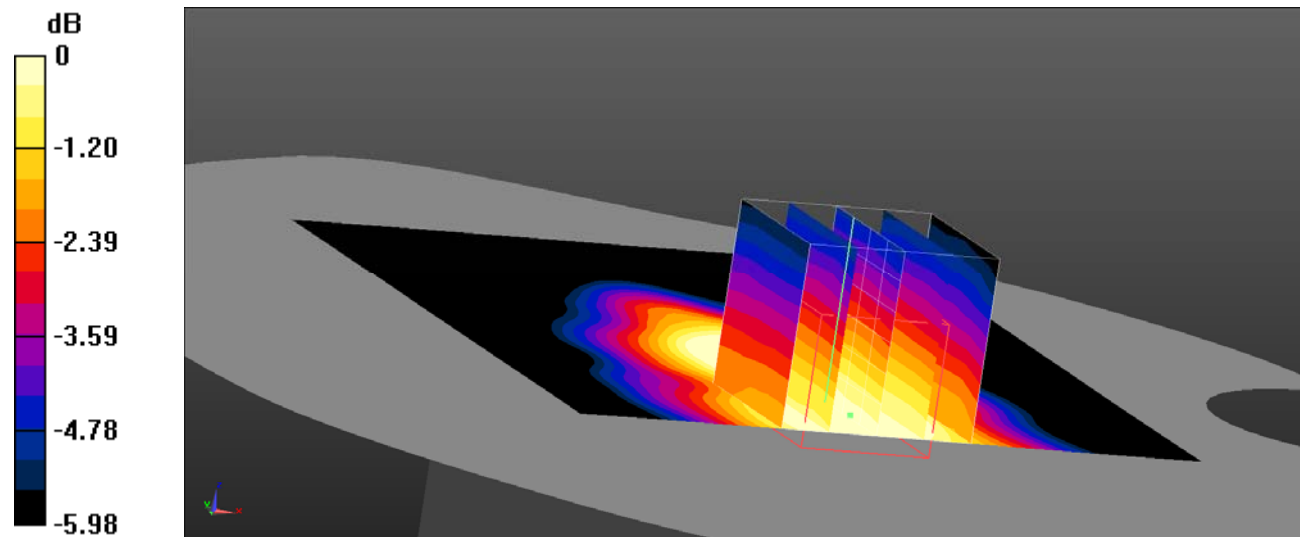

0 dB = 0.0731 W/kg = -11.36 dBW/kg



**Test Plot 73#: LTE Band 12\_Body Top\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.124 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.863 \text{ V/m}$ ; Power Drift =  $-0.20 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.105 \text{ W/kg}$   
**SAR(1 g) =  $0.102 \text{ W/kg}$ ; SAR(10 g) =  $0.083 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.103 \text{ W/kg}$

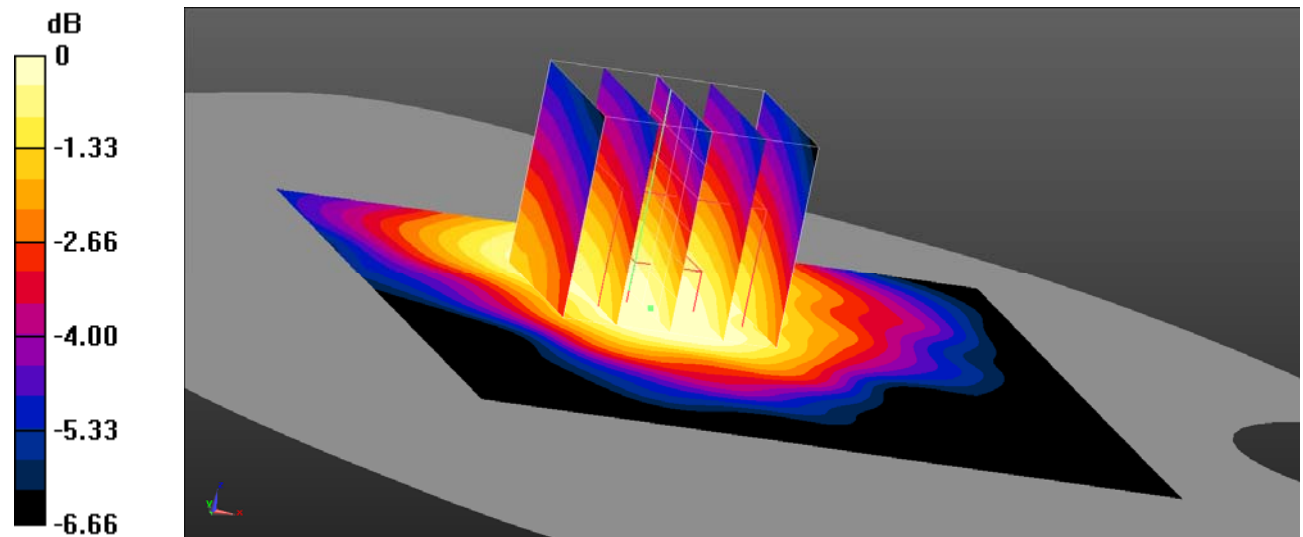

0 dB =  $0.103 \text{ W/kg}$  =  $-9.87 \text{ dBW/kg}$

**Test Plot 74#: LTE Band 12\_Body Top\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 41.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0987 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.960 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0850 \text{ W/kg}$   
**SAR(1 g) =  $0.082 \text{ W/kg}$ ; SAR(10 g) =  $0.066 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0821 \text{ W/kg}$

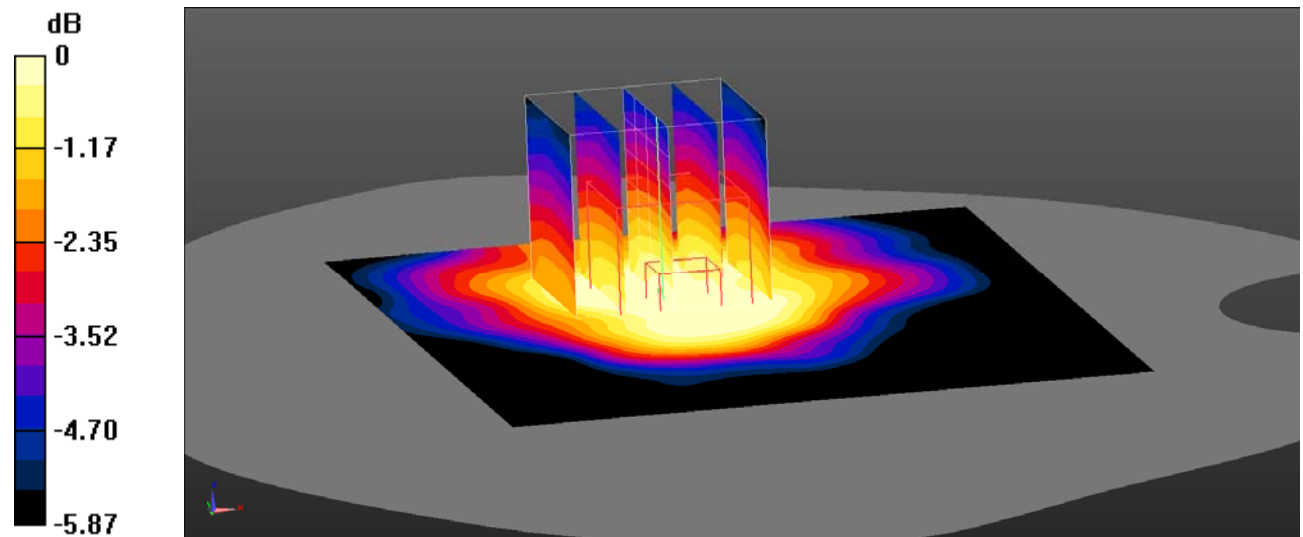

0 dB =  $0.0821 \text{ W/kg}$  =  $-10.86 \text{ dBW/kg}$

**Test Plot 75#: LTE Band 13\_Body Back\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.05 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 25.48 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.514 W/kg**  
 Maximum value of SAR (measured) = 0.887 W/kg

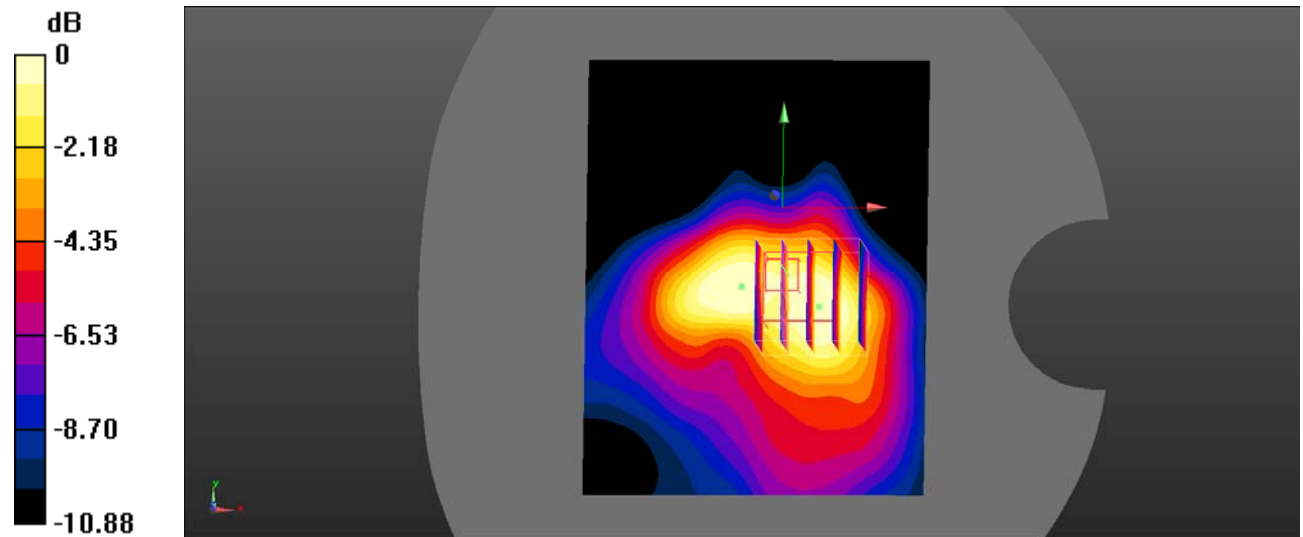

0 dB = 0.887 W/kg = -0.52 dBW/kg

**Test Plot 76#: LTE Band 13\_Body Back\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.22 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 28.86 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 1.11 W/kg  
**SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.462 W/kg**  
 Maximum value of SAR (measured) = 0.894 W/kg

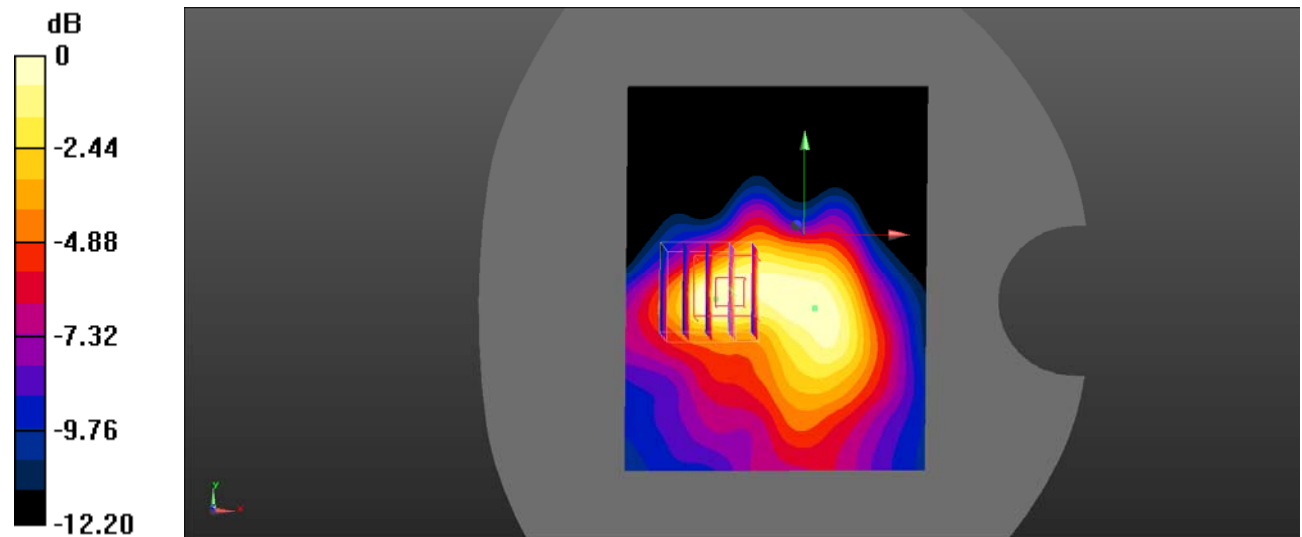

0 dB = 0.894 W/kg = -0.49 dBW/kg

**Test Plot 77#: LTE Band 13\_Body Back\_100%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.28 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 28.54 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 1.11 W/kg  
**SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.471 W/kg**  
 Maximum value of SAR (measured) = 0.881 W/kg

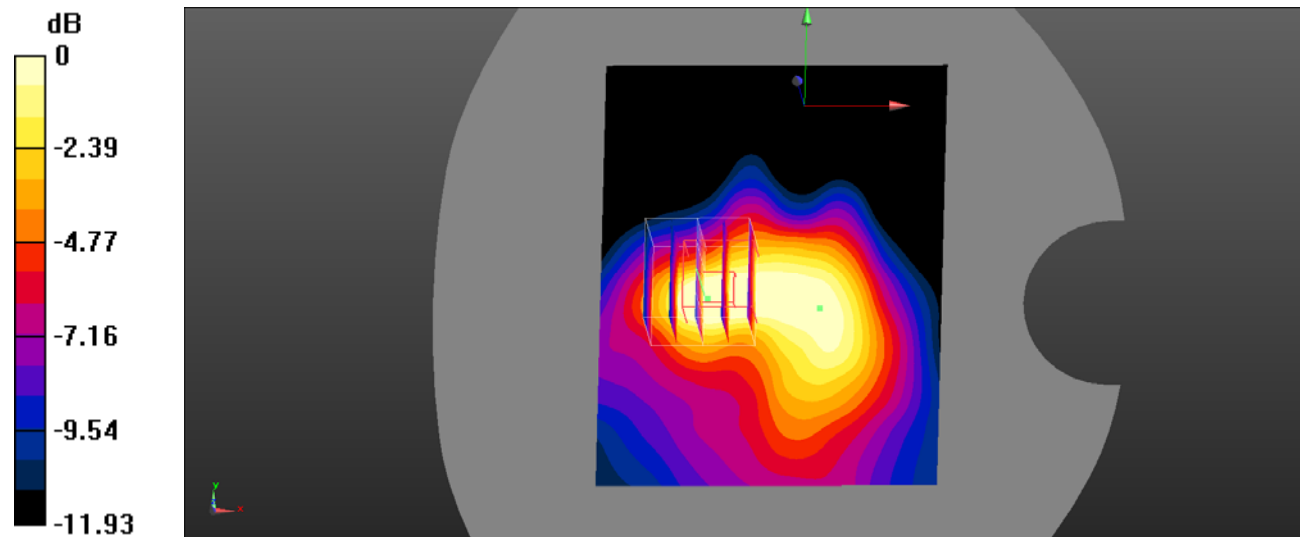

0 dB = 0.881 W/kg = -0.55 dBW/kg

**Test Plot 78#: LTE Band 13\_Body Left\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (61x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.341 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.64 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.308 \text{ W/kg}$   
**SAR(1 g) =  $0.253 \text{ W/kg}$ ; SAR(10 g) =  $0.169 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.287 \text{ W/kg}$

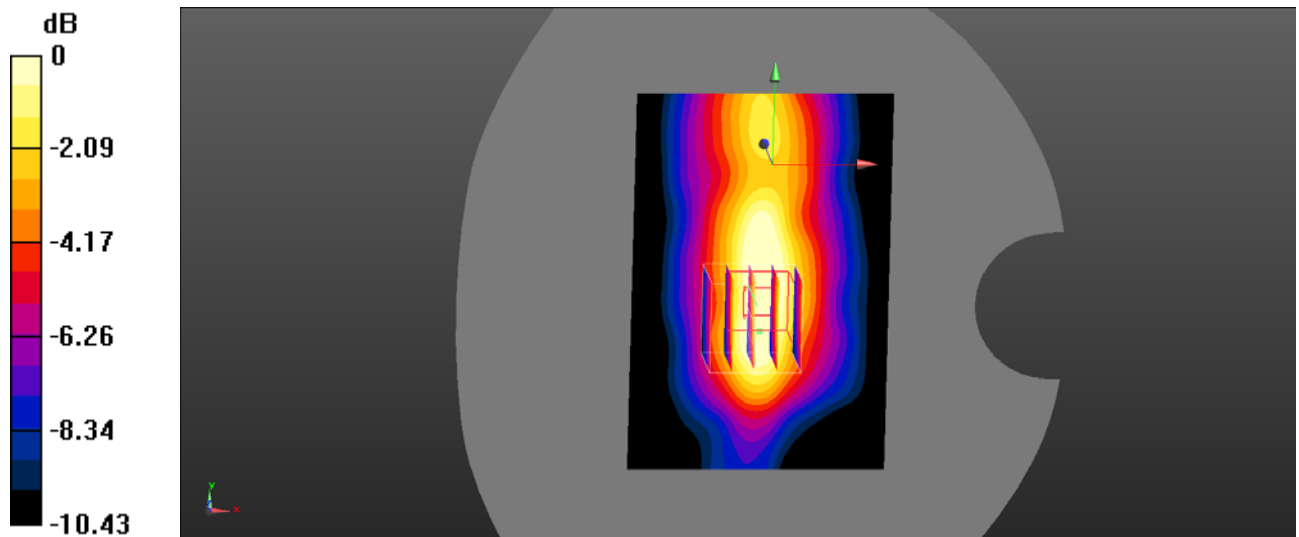

0 dB =  $0.287 \text{ W/kg}$  =  $-5.42 \text{ dBW/kg}$

**Test Plot 79#: LTE Band 13\_ Body Left\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (61x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.393 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.47 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.297 \text{ W/kg}$   
**SAR(1 g) =  $0.243 \text{ W/kg}$ ; SAR(10 g) =  $0.163 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.272 \text{ W/kg}$

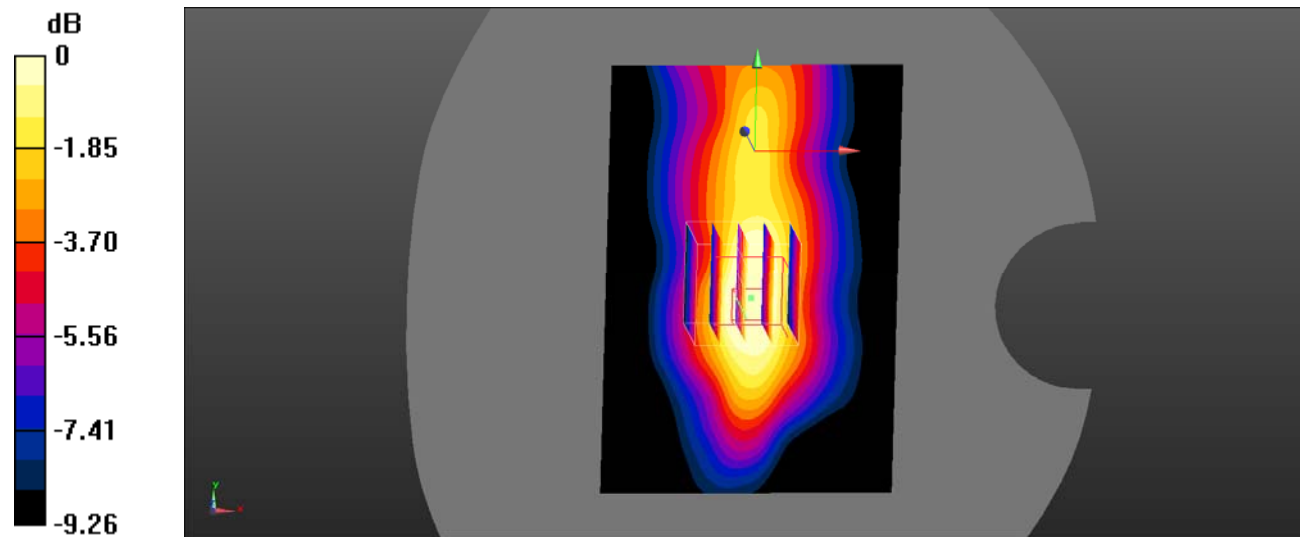

0 dB =  $0.272 \text{ W/kg}$  =  $-5.65 \text{ dBW/kg}$

**Test Plot 80#: LTE Band 13\_Body Right\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.122 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.999 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0940 \text{ W/kg}$   
**SAR(1 g) =  $0.084 \text{ W/kg}$ ; SAR(10 g) =  $0.062 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0916 \text{ W/kg}$

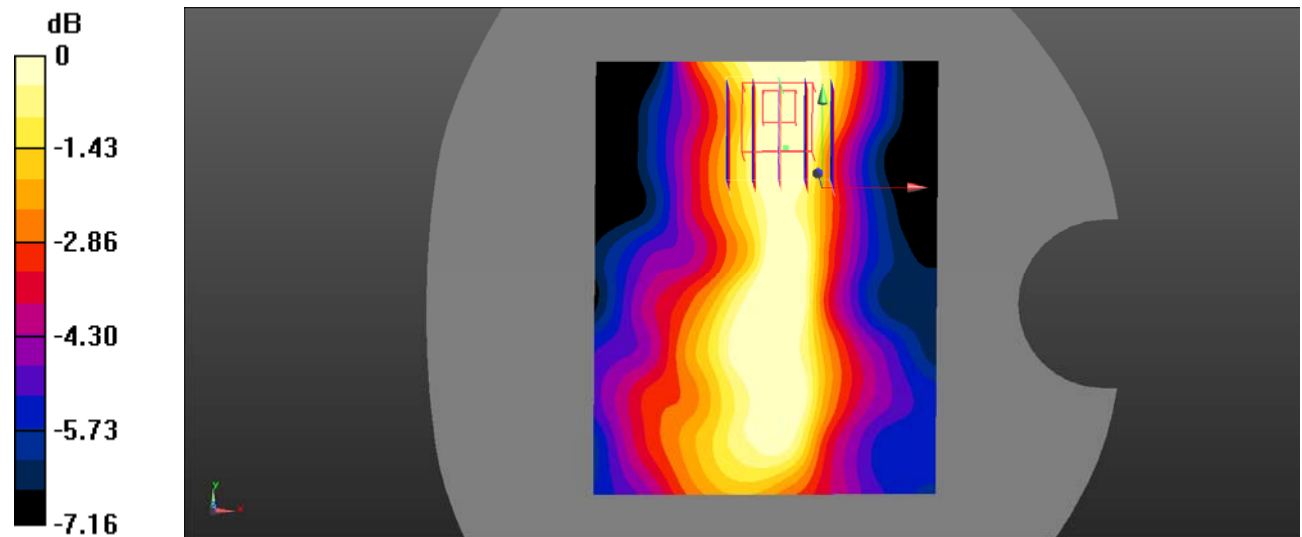

0 dB =  $0.0916 \text{ W/kg}$  =  $-10.38 \text{ dBW/kg}$



**Test Plot 81#: LTE Band 13\_Body Right\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.102 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.657 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0870 \text{ W/kg}$   
**SAR(1 g) =  $0.073 \text{ W/kg}$ ; SAR(10 g) =  $0.052 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0843 \text{ W/kg}$

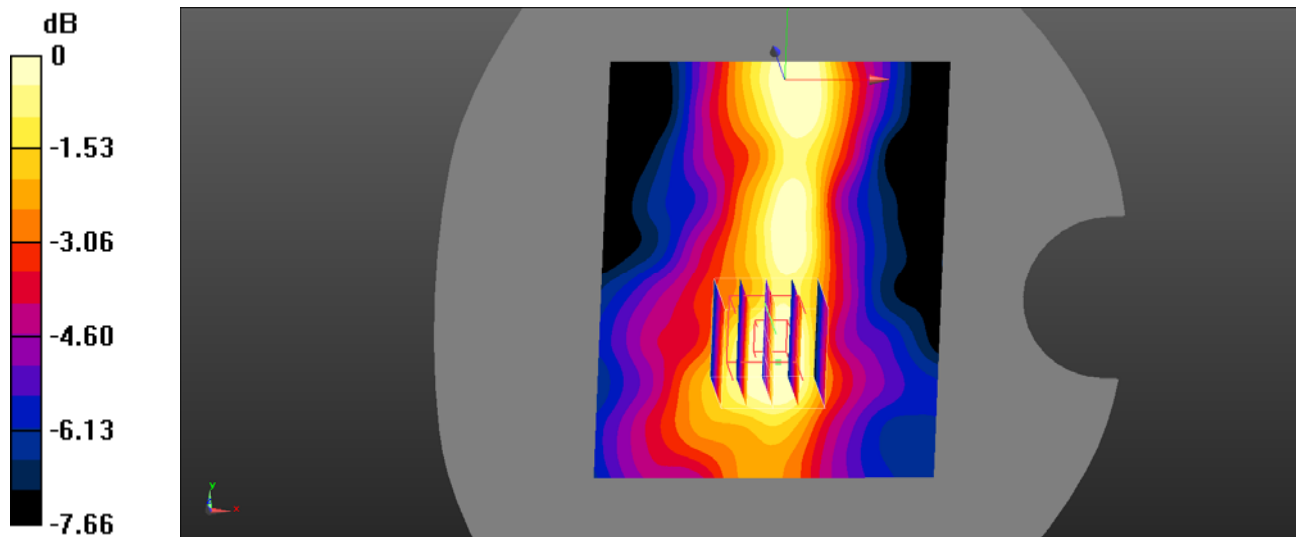

0 dB =  $0.0843 \text{ W/kg}$  =  $-10.74 \text{ dBW/kg}$

**Test Plot 82#: LTE Band 13\_Body Top\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.451 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.63 V/m; Power Drift = -0.20 dB  
 Peak SAR (extrapolated) = 0.550 W/kg  
**SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.223 W/kg**  
 Maximum value of SAR (measured) = 0.427 W/kg

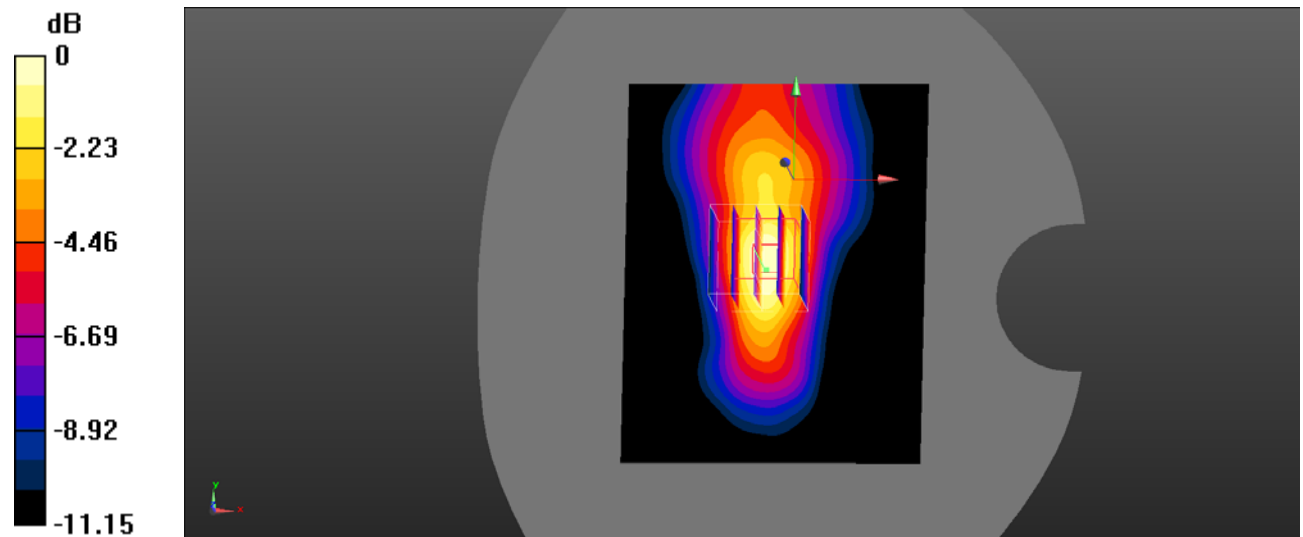

0 dB = 0.427 W/kg = -3.70 dBW/kg

**Test Plot 83#: LTE Band 13\_Body Top\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.452 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 19.61 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.576 W/kg  
**SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.229 W/kg**  
 Maximum value of SAR (measured) = 0.458 W/kg

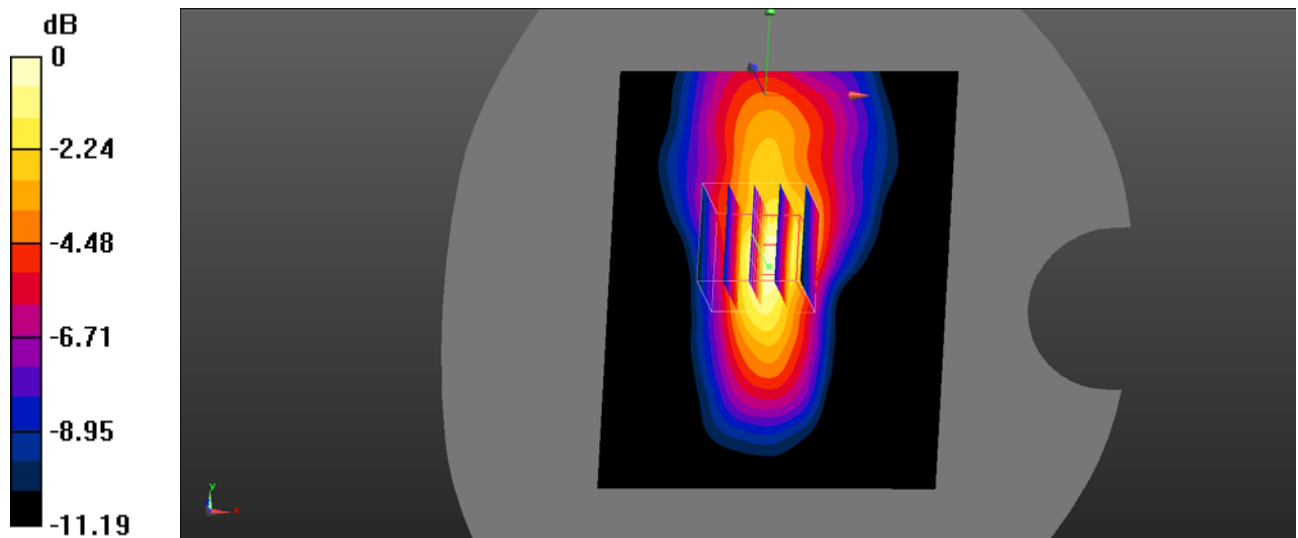

0 dB = 0.458 W/kg = -3.39 dBW/kg

**Test Plot 84#: LTE Band 13\_Body Back\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.280 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 14.93 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.228 W/kg  
**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.173 W/kg**  
 Maximum value of SAR (measured) = 0.225 W/kg

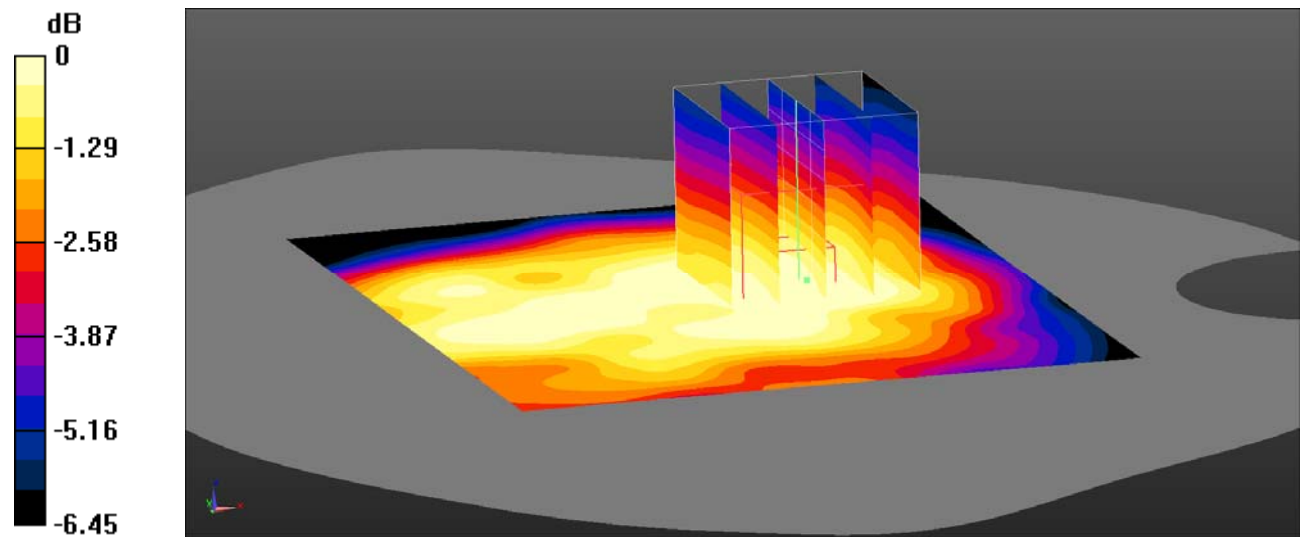

0 dB = 0.225 W/kg = -6.48 dBW/kg

**Test Plot 85#: LTE Band 13\_Body Back\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.222 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.53 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.183 \text{ W/kg}$   
**SAR(1 g) =  $0.172 \text{ W/kg}$ ; SAR(10 g) =  $0.137 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.179 \text{ W/kg}$

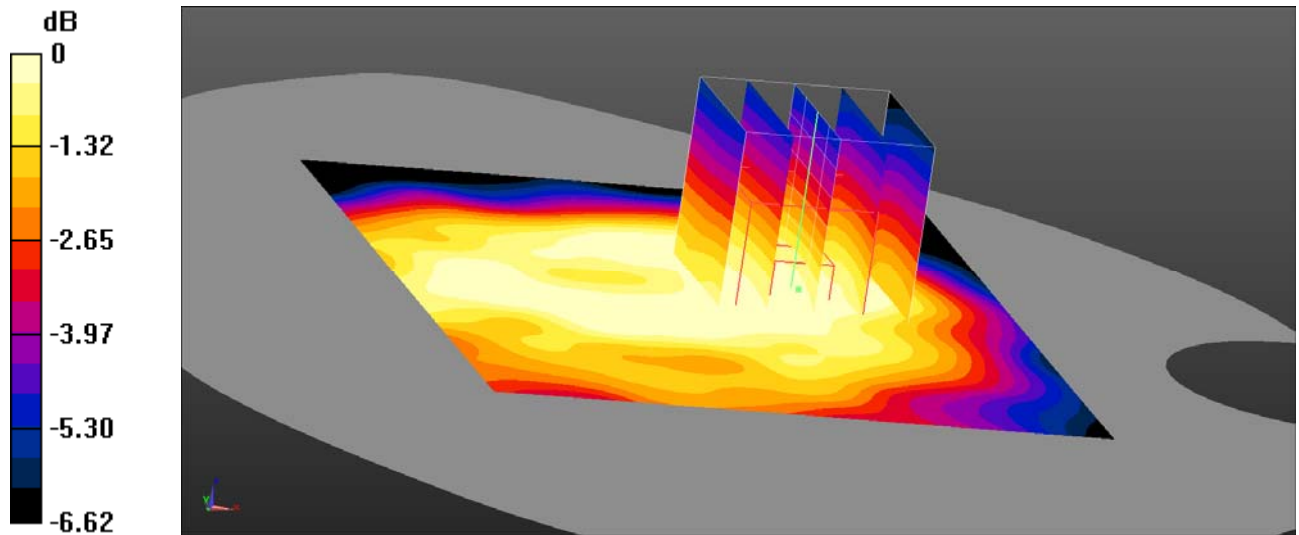

0 dB =  $0.179 \text{ W/kg}$  =  $-7.47 \text{ dBW/kg}$

**Test Plot 86#: LTE Band 13\_Body Left\_1RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.317 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.45 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.282 \text{ W/kg}$   
**SAR(1 g) =  $0.250 \text{ W/kg}$ ; SAR(10 g) =  $0.185 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.263 \text{ W/kg}$

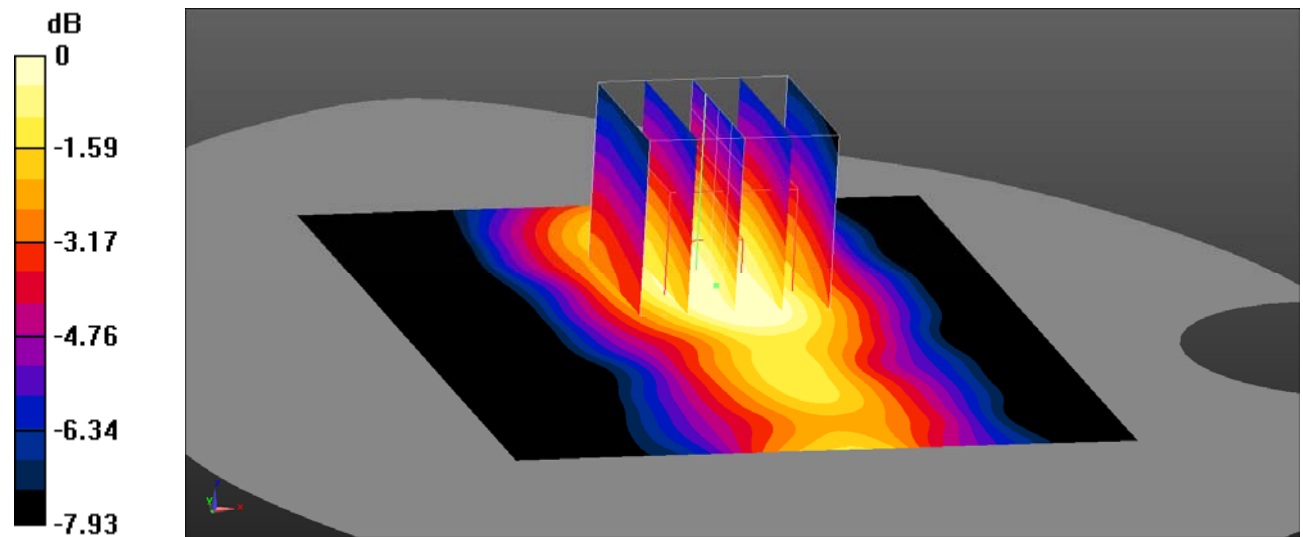

0 dB =  $0.263 \text{ W/kg}$  =  $-5.80 \text{ dBW/kg}$

**Test Plot 87#: LTE Band 13\_Body Left\_50%RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.245 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.53 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.225 W/kg  
**SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.146 W/kg**  
 Maximum value of SAR (measured) = 0.211 W/kg

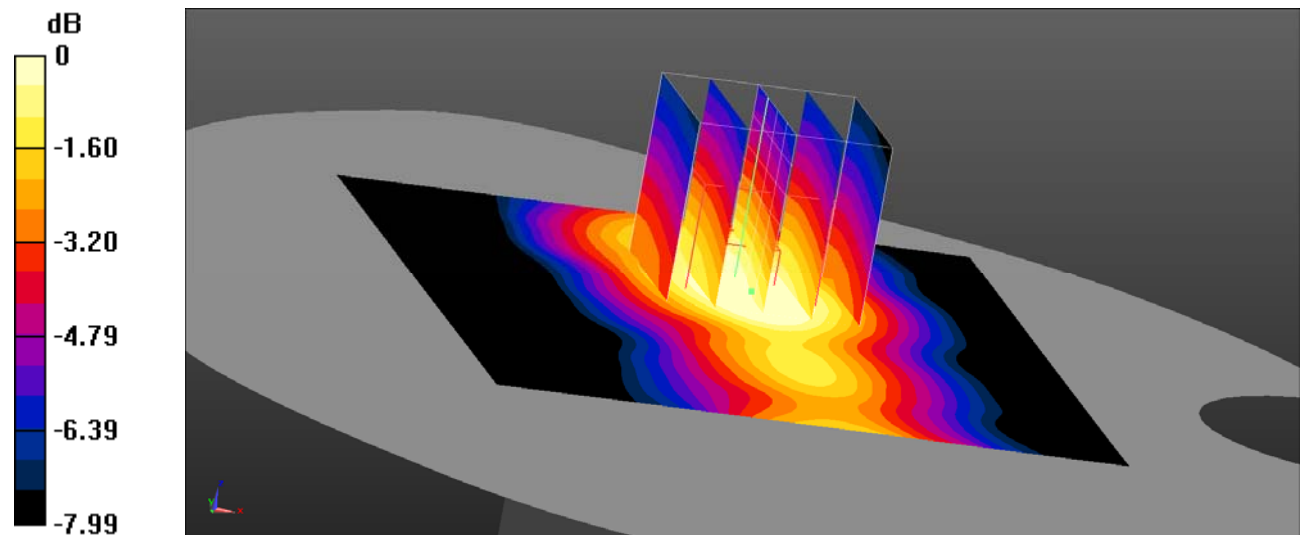

0 dB = 0.211 W/kg = -6.76 dBW/kg

**Test Plot 88#: LTE Band 13\_Body Top\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0810 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.258 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0720 \text{ W/kg}$   
**SAR(1 g) =  $0.069 \text{ W/kg}$ ; SAR(10 g) =  $0.056 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0703 \text{ W/kg}$

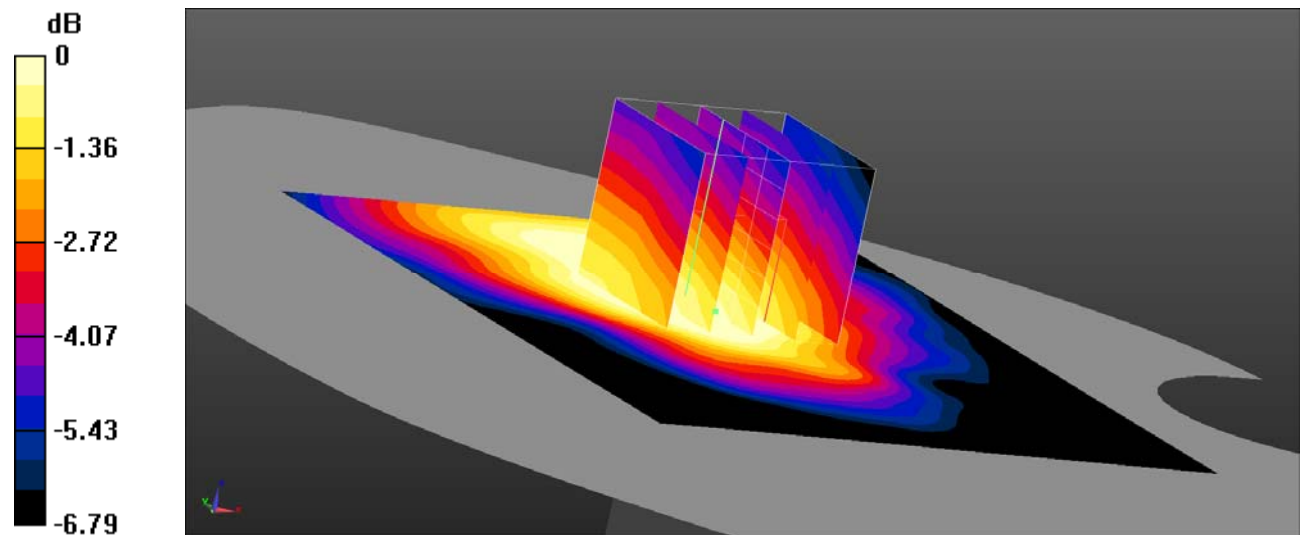

0 dB =  $0.0703 \text{ W/kg}$  =  $-11.53 \text{ dBW/kg}$



**Test Plot 89#: LTE Band 13\_Body Top\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 41.575$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0808 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.646 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0720 \text{ W/kg}$   
**SAR(1 g) =  $0.069 \text{ W/kg}$ ; SAR(10 g) =  $0.056 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0707 \text{ W/kg}$

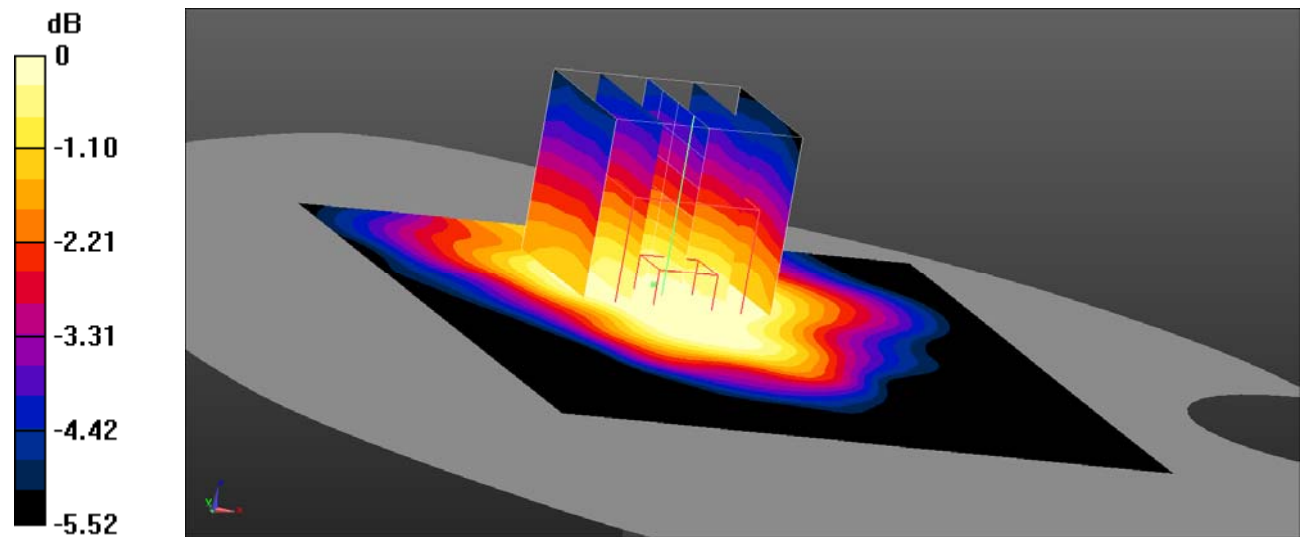

0 dB =  $0.0707 \text{ W/kg}$  =  $-11.51 \text{ dBW/kg}$

**Test Plot 90#: LTE Band 14\_Body Back\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 30.17 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.05 W/kg  
**SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.563 W/kg**  
 Maximum value of SAR (measured) = 0.931 W/kg

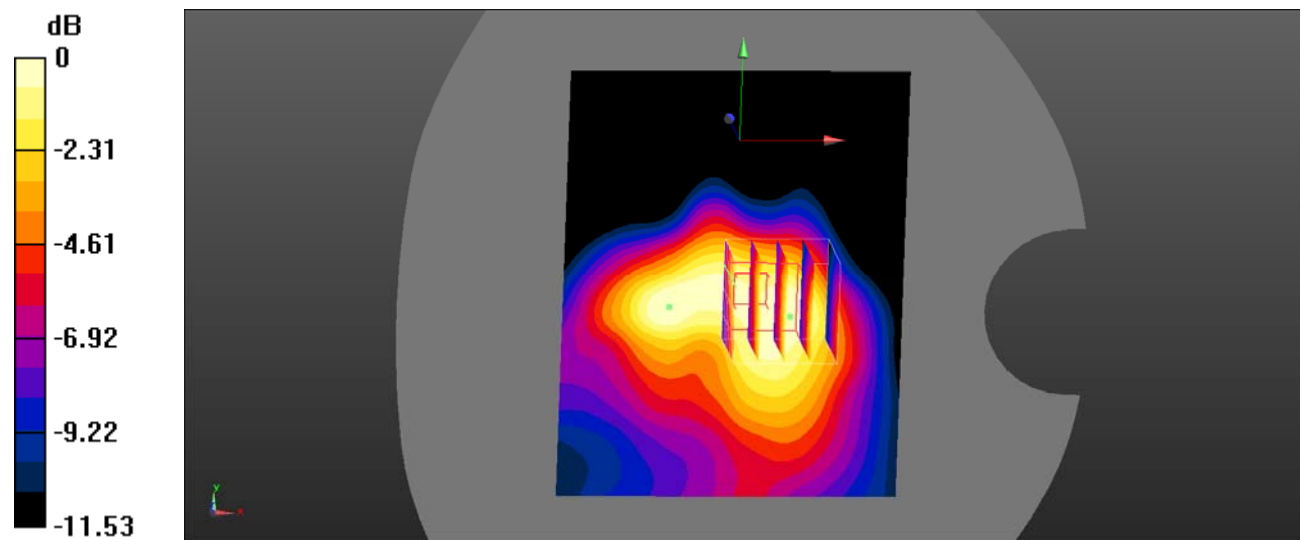

0 dB = 0.931 W/kg = -0.31 dBW/kg

**Test Plot 91#: LTE Band 14\_Body Back\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.16 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 32.04 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.539 W/kg**  
 Maximum value of SAR (measured) = 0.962 W/kg

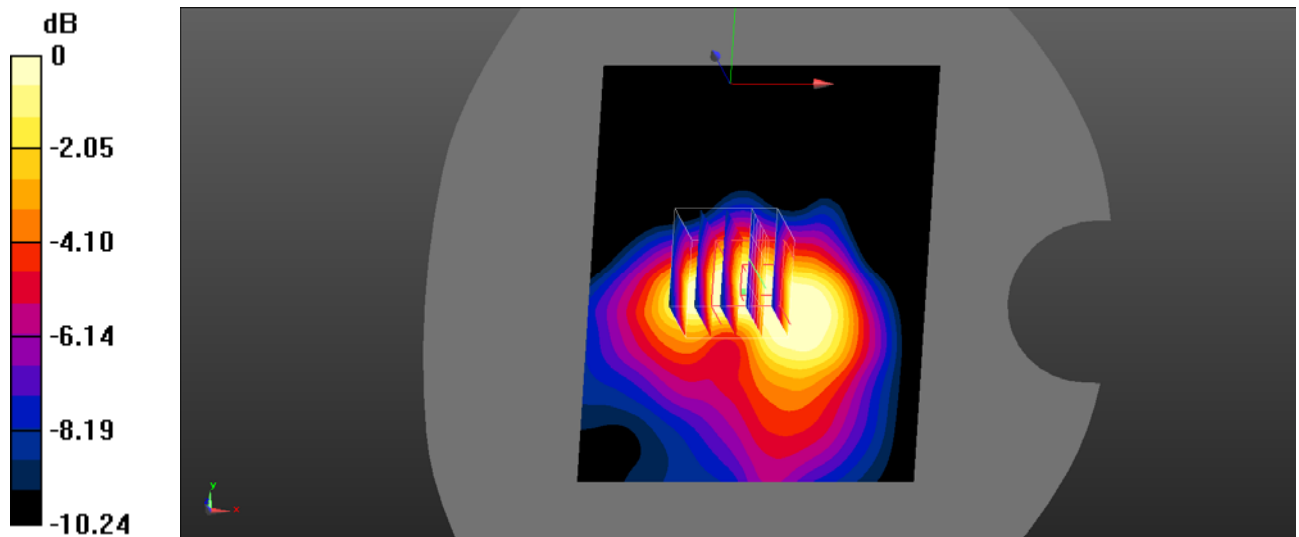

0 dB = 0.962 W/kg = -0.17 dBW/kg

**Test Plot 92#: LTE Band 14\_Body Back\_100%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.08 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 30.63 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.544 W/kg**  
 Maximum value of SAR (measured) = 0.979 W/kg

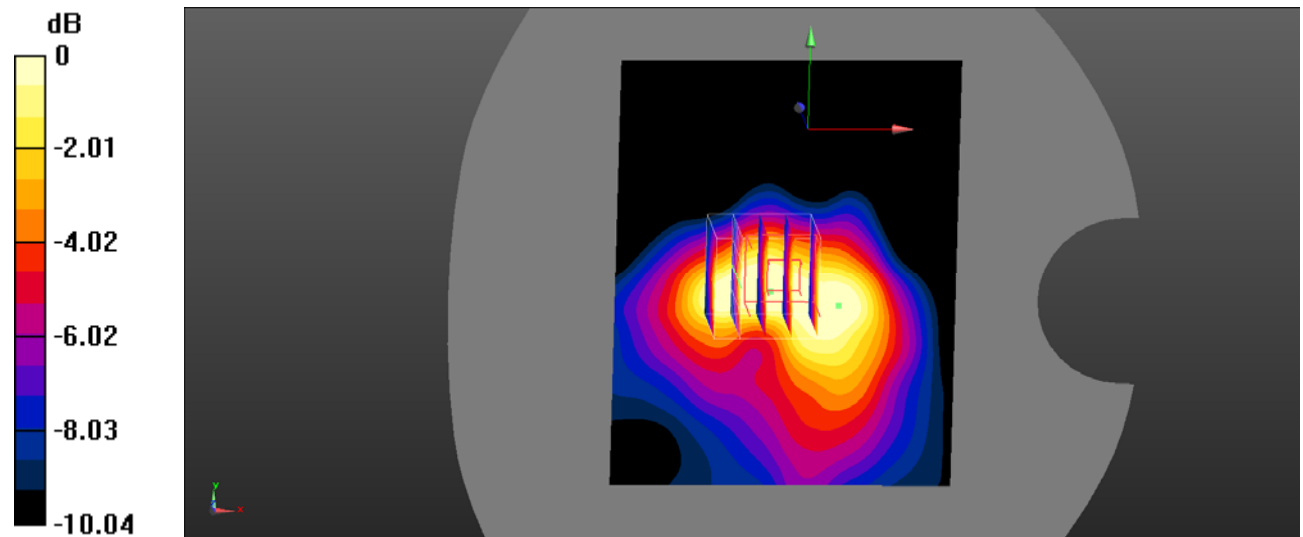

**Test Plot 93#: LTE Band 14\_Body Left\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.760 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 27.44 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.716 W/kg  
**SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.394 W/kg**  
 Maximum value of SAR (measured) = 0.669 W/kg

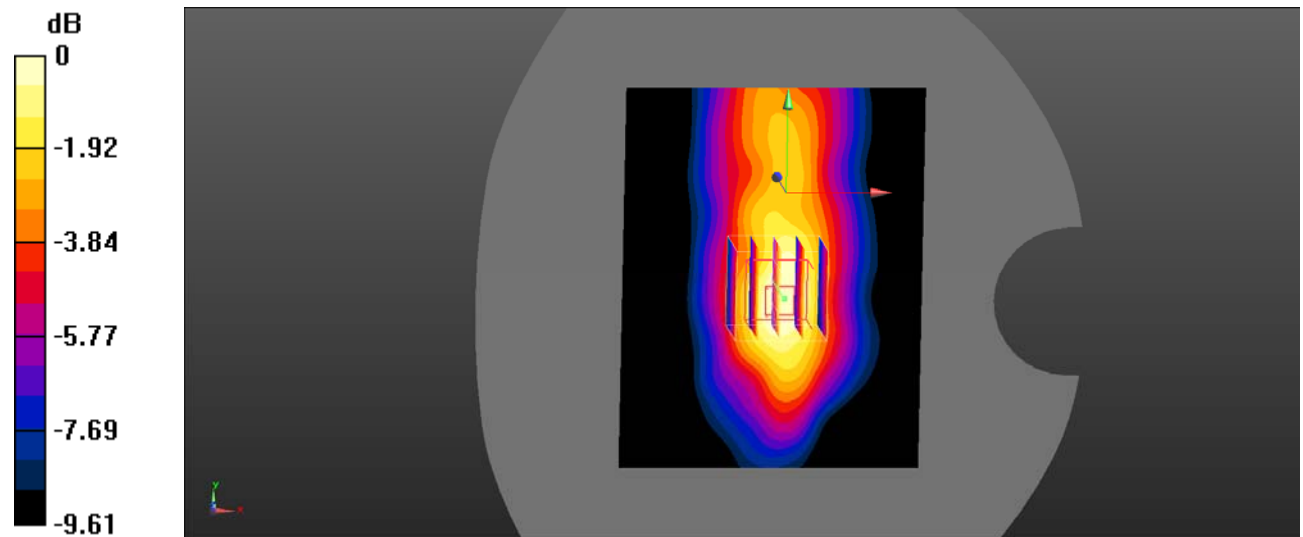

0 dB = 0.669 W/kg = -1.75 dBW/kg

**Test Plot 94#: LTE Band 14\_ Body Left\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (61x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.626 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $24.03 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.585 \text{ W/kg}$   
**SAR(1 g) =  $0.477 \text{ W/kg}$ ; SAR(10 g) =  $0.317 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.544 \text{ W/kg}$

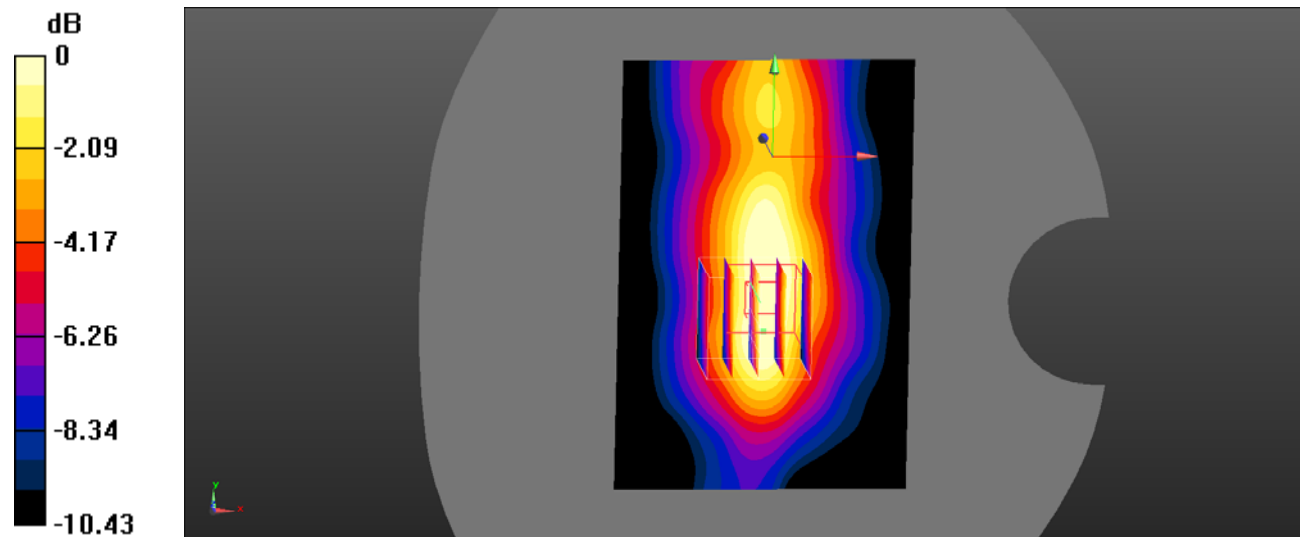

0 dB =  $0.544 \text{ W/kg}$  =  $-2.64 \text{ dBW/kg}$

**Test Plot 95#: LTE Band 14\_Body Right\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0811 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.704 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0650 \text{ W/kg}$   
**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.042 W/kg**  
 Maximum value of SAR (measured) =  $0.0628 \text{ W/kg}$

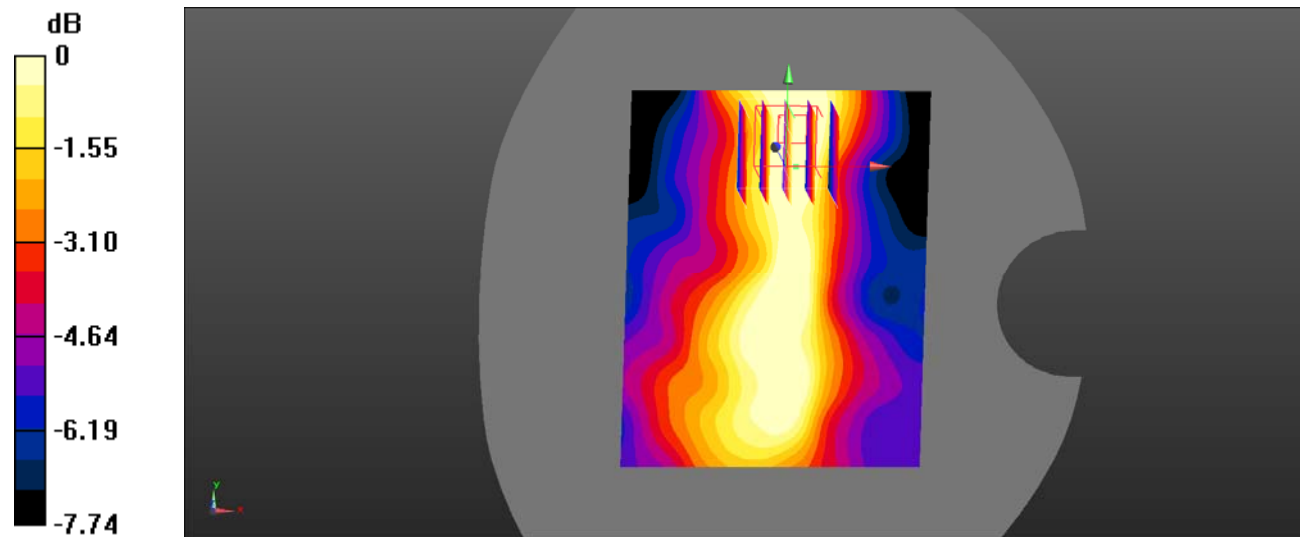

0 dB =  $0.0628 \text{ W/kg} = -12.02 \text{ dBW/kg}$

**Test Plot 96#: LTE Band 14\_Body Right\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.106 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.187 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0920 \text{ W/kg}$   
**SAR(1 g) =  $0.077 \text{ W/kg}$ ; SAR(10 g) =  $0.056 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0901 \text{ W/kg}$

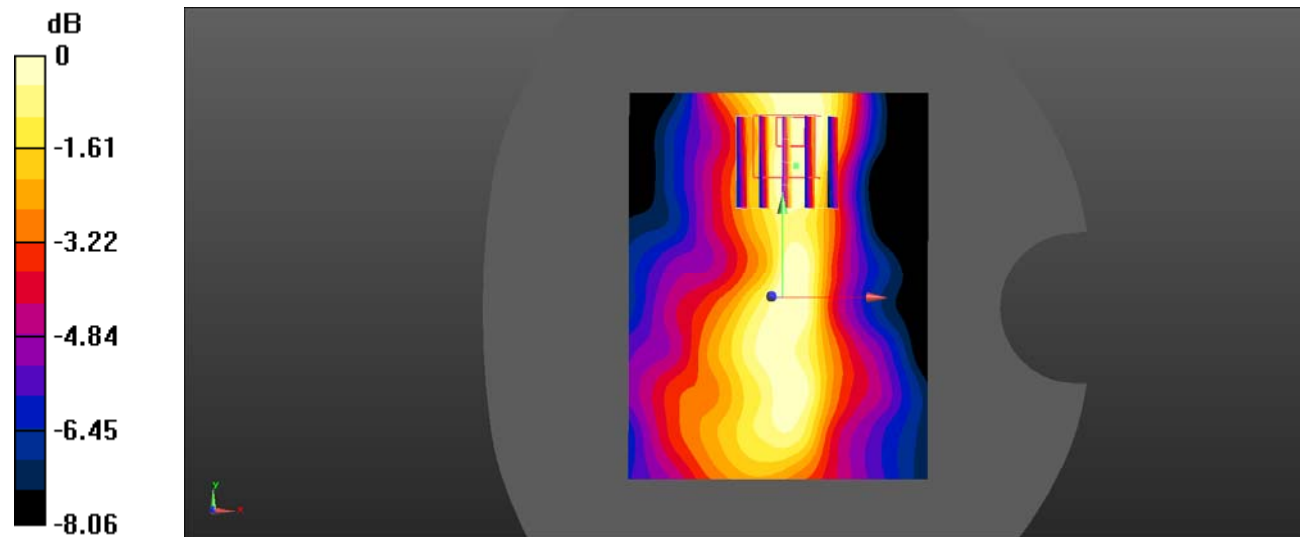

0 dB =  $0.0901 \text{ W/kg}$  =  $-10.45 \text{ dBW/kg}$



**Test Plot 97#: LTE Band 14\_Body Top\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.594 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.582 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.672 \text{ W/kg}$   
**SAR(1 g) =  $0.454 \text{ W/kg}$ ; SAR(10 g) =  $0.262 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.547 \text{ W/kg}$

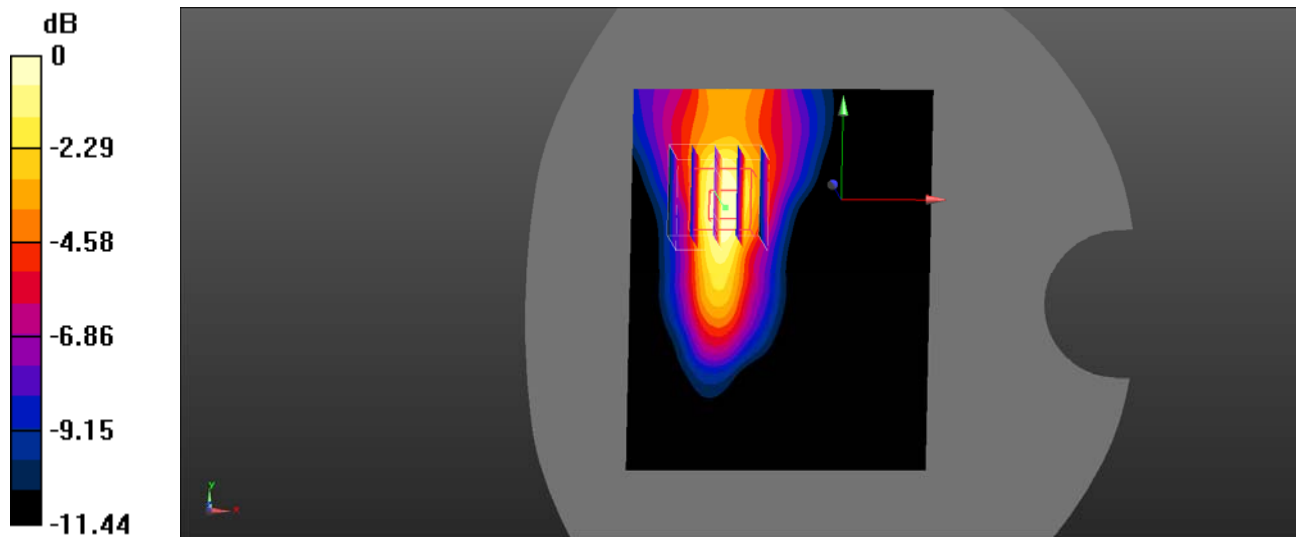

0 dB =  $0.547 \text{ W/kg}$  =  $-2.62 \text{ dBW/kg}$

**Test Plot 98#: LTE Band 14\_Body Top\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.482 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $19.87 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.600 \text{ W/kg}$   
**SAR(1 g) =  $0.411 \text{ W/kg}$ ; SAR(10 g) =  $0.240 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.475 \text{ W/kg}$

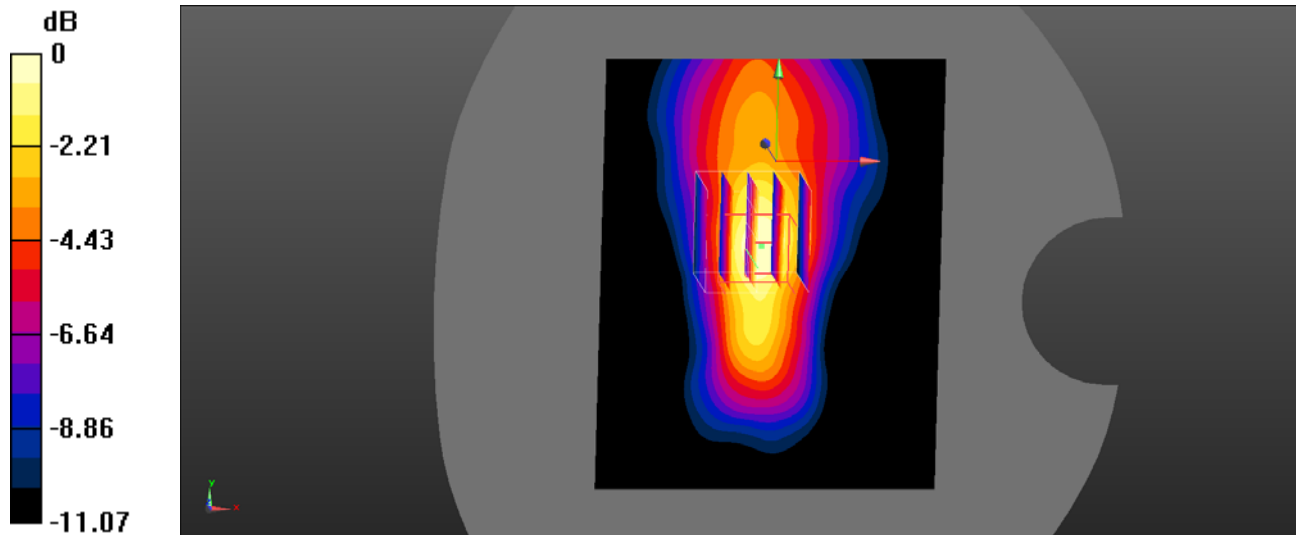

0 dB =  $0.475 \text{ W/kg} = -3.23 \text{ dBW/kg}$

**Test Plot 99#: LTE Band 14\_Body Back\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.314 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.79 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.257 W/kg  
**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.193 W/kg**  
 Maximum value of SAR (measured) = 0.248 W/kg

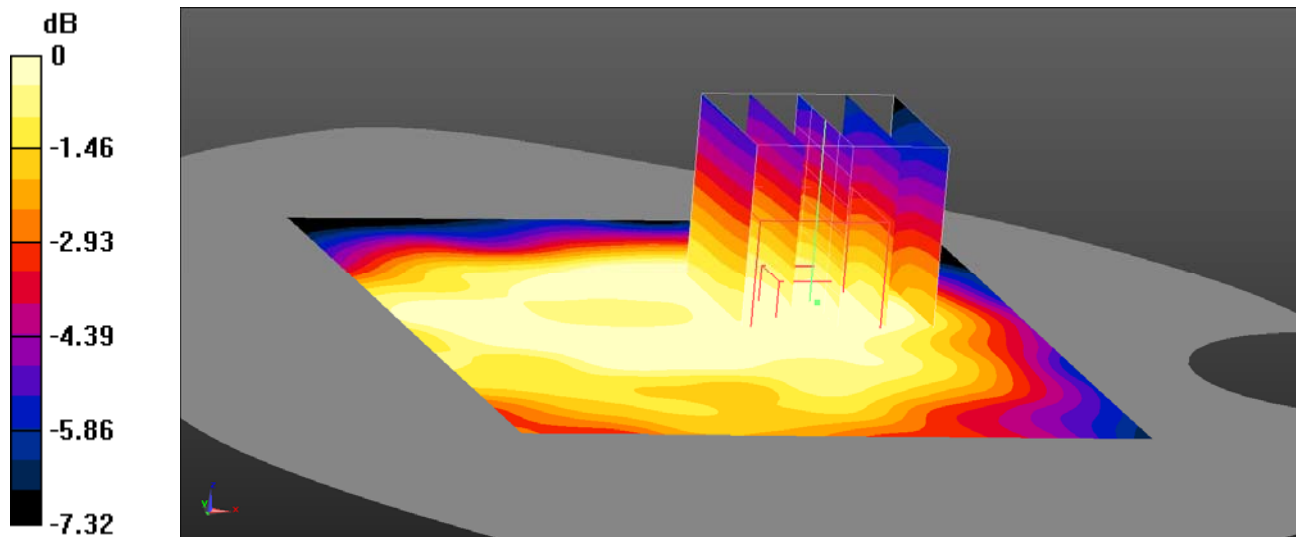

0 dB = 0.248 W/kg = -6.06 dBW/kg

**Test Plot 100#: LTE Band 14\_Body Back\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.246 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.114 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.203 \text{ W/kg}$   
**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.152 W/kg**  
 Maximum value of SAR (measured) =  $0.198 \text{ W/kg}$

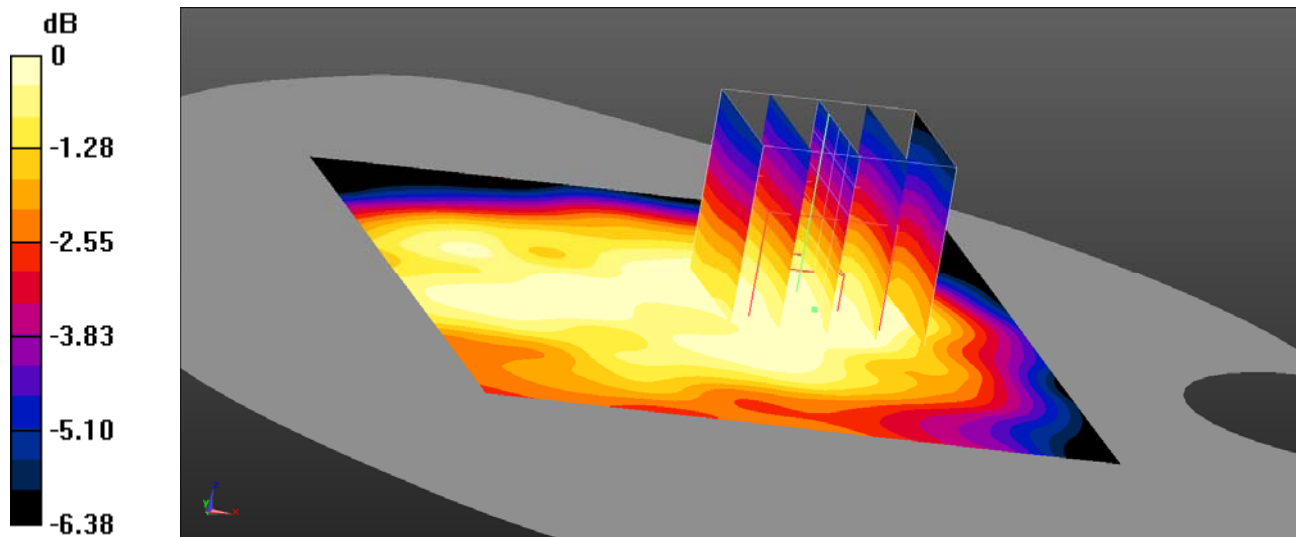

0 dB =  $0.198 \text{ W/kg}$  =  $-7.03 \text{ dBW/kg}$

**Test Plot 101#: LTE Band 14\_Body Left\_1RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.372 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.05 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.334 \text{ W/kg}$   
**SAR(1 g) =  $0.292 \text{ W/kg}$ ; SAR(10 g) =  $0.216 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.302 \text{ W/kg}$

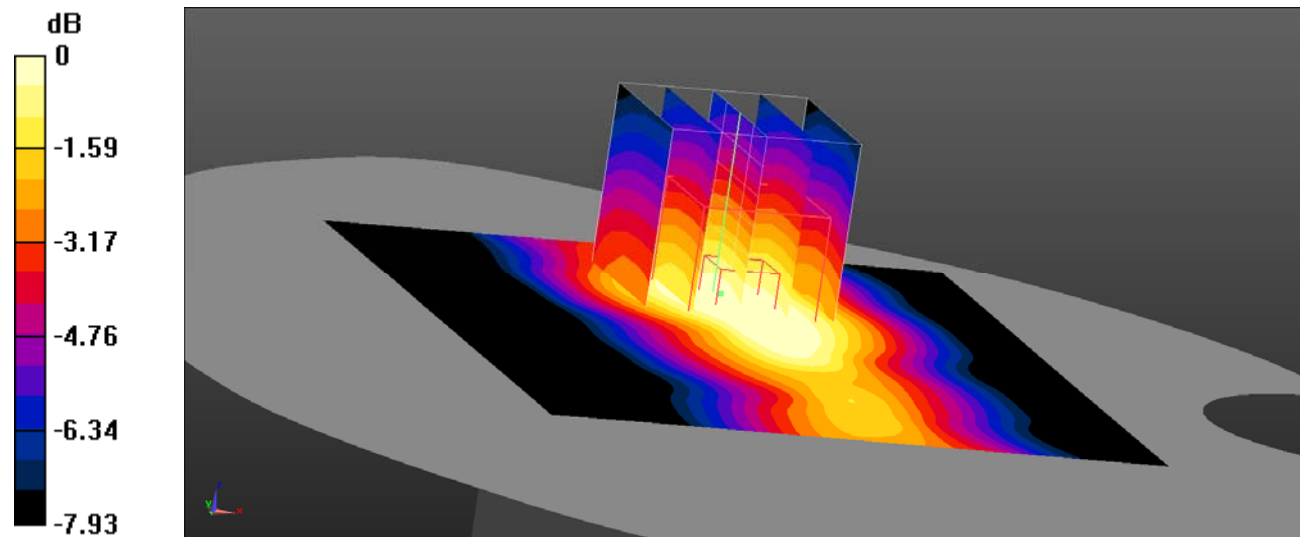

0 dB =  $0.302 \text{ W/kg}$  =  $-5.20 \text{ dBW/kg}$

**Test Plot 102#: LTE Band 14\_Body Left\_50%RB\_Middle\_4mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.301 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.35 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.263 \text{ W/kg}$   
**SAR(1 g) =  $0.232 \text{ W/kg}$ ; SAR(10 g) =  $0.172 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.243 \text{ W/kg}$

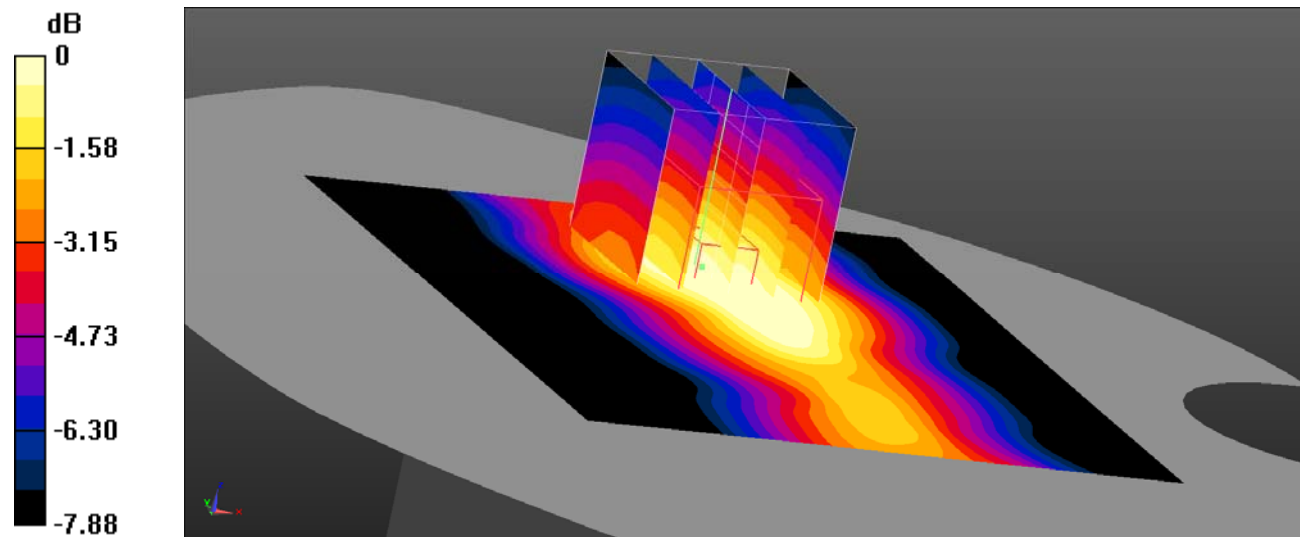

0 dB =  $0.243 \text{ W/kg}$  =  $-6.14 \text{ dBW/kg}$

**Test Plot 103#: LTE Band 14\_Body Top\_1RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.210 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.73 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.177 W/kg  
**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.137 W/kg**  
 Maximum value of SAR (measured) = 0.171 W/kg

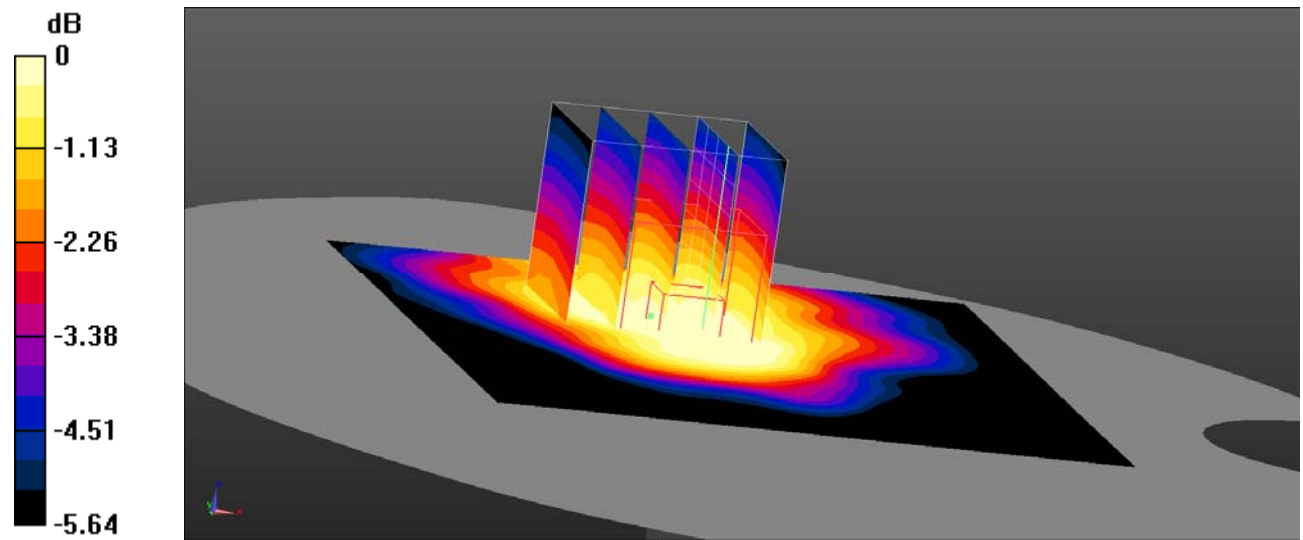

0 dB = 0.171 W/kg = -7.67 dBW/kg

**Test Plot 104#: LTE Band 14\_Body Top\_50%RB\_Middle\_19mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.779$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.122 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.301 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.140 \text{ W/kg}$   
**SAR(1 g) =  $0.128 \text{ W/kg}$ ; SAR(10 g) =  $0.098 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.137 \text{ W/kg}$

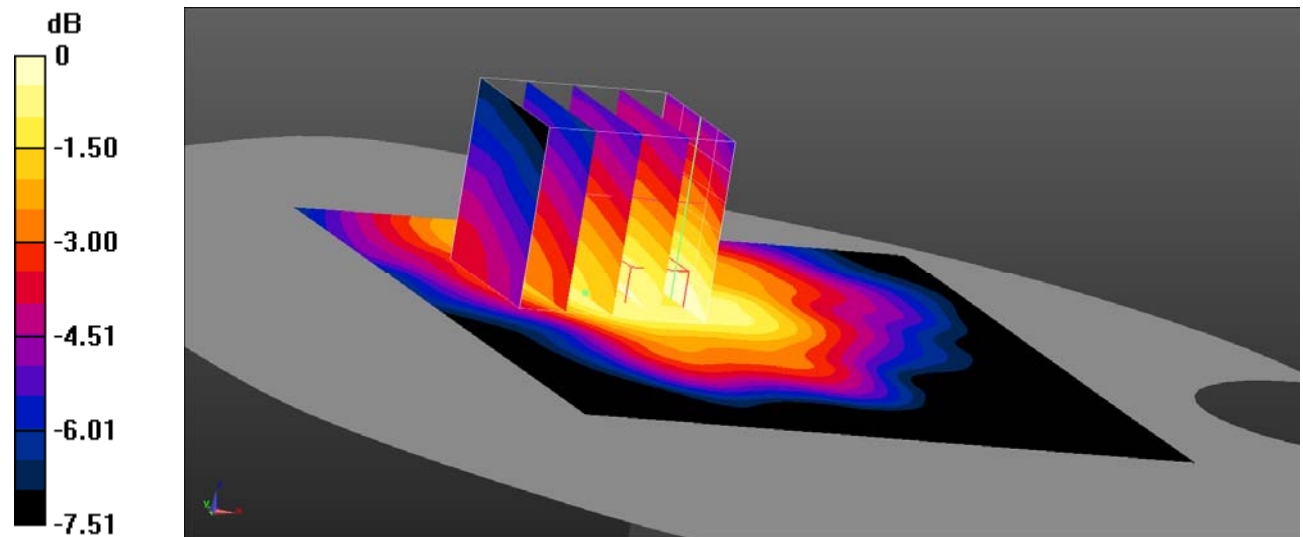

0 dB =  $0.137 \text{ W/kg}$  =  $-8.63 \text{ dBW/kg}$



**Test Plot 105#: LTE Band 25\_Body Back\_1RB\_Low\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.392 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.779 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.15 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.822 \text{ W/kg}$   
**SAR(1 g) =  $0.589 \text{ W/kg}$ ; SAR(10 g) =  $0.360 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.615 \text{ W/kg}$

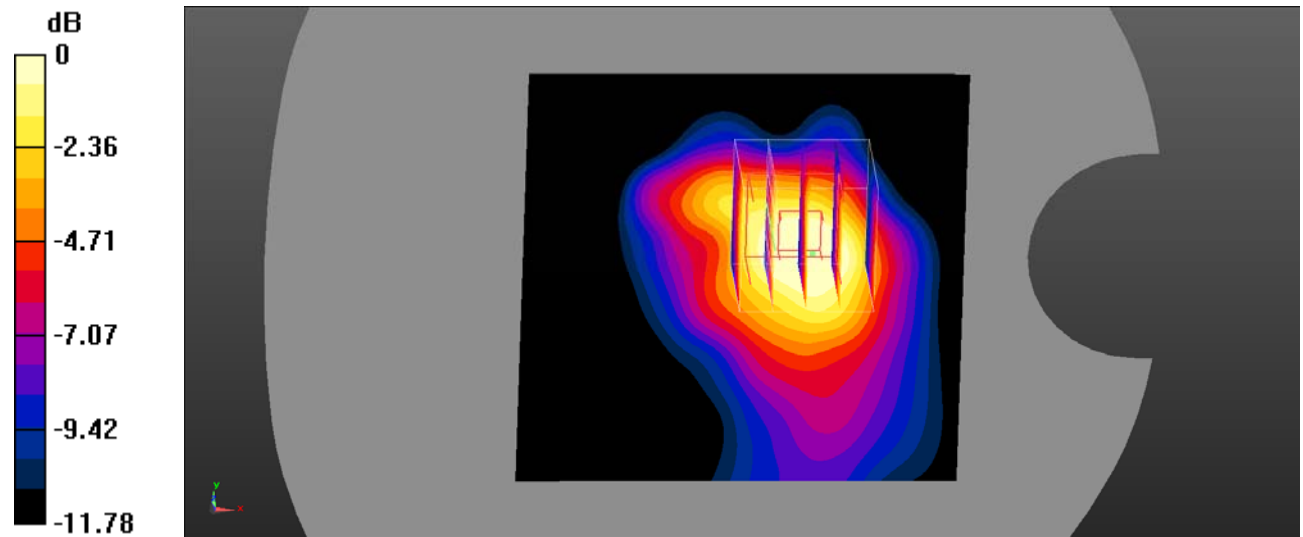

0 dB =  $0.615 \text{ W/kg} = -2.11 \text{ dBW/kg}$

**Test Plot 106#: LTE Band 25\_Body Back\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.588$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.980 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 16.48 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 1.19 W/kg  
**SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.513 W/kg**  
 Maximum value of SAR (measured) = 0.959 W/kg

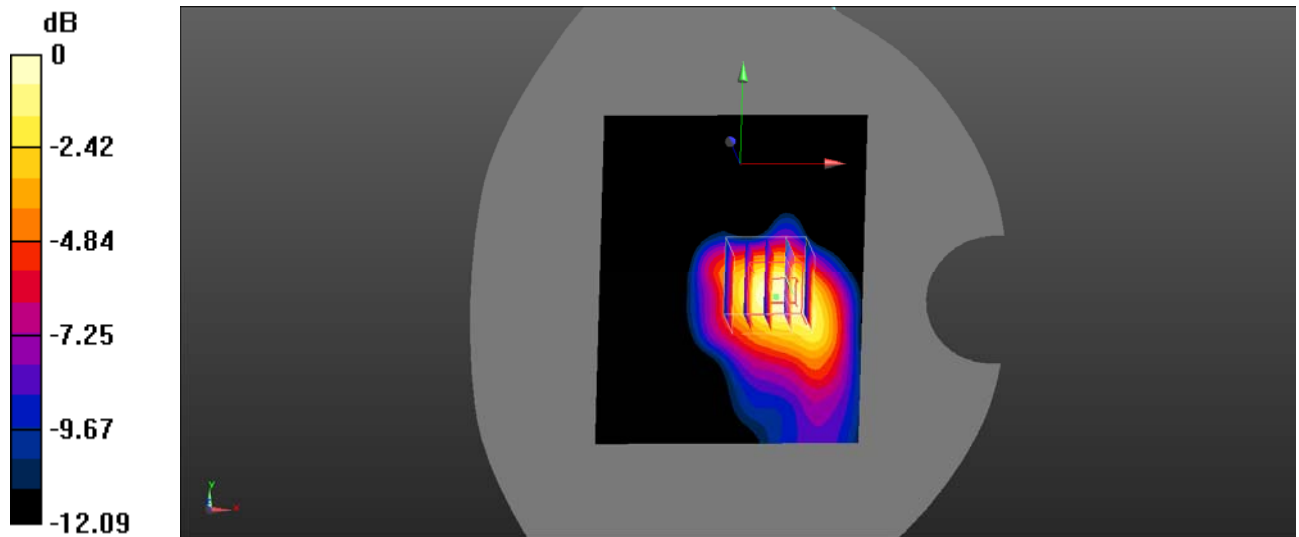

0 dB = 0.959 W/kg = -0.18 dBW/kg

**Test Plot 107#: LTE Band 25\_Body Back\_1RB\_High\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1905 \text{ MHz}$ ;  $\sigma = 1.388 \text{ S/m}$ ;  $\epsilon_r = 39.899$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.646 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.37 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.812 \text{ W/kg}$   
**SAR(1 g) =  $0.573 \text{ W/kg}$ ; SAR(10 g) =  $0.353 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.611 \text{ W/kg}$

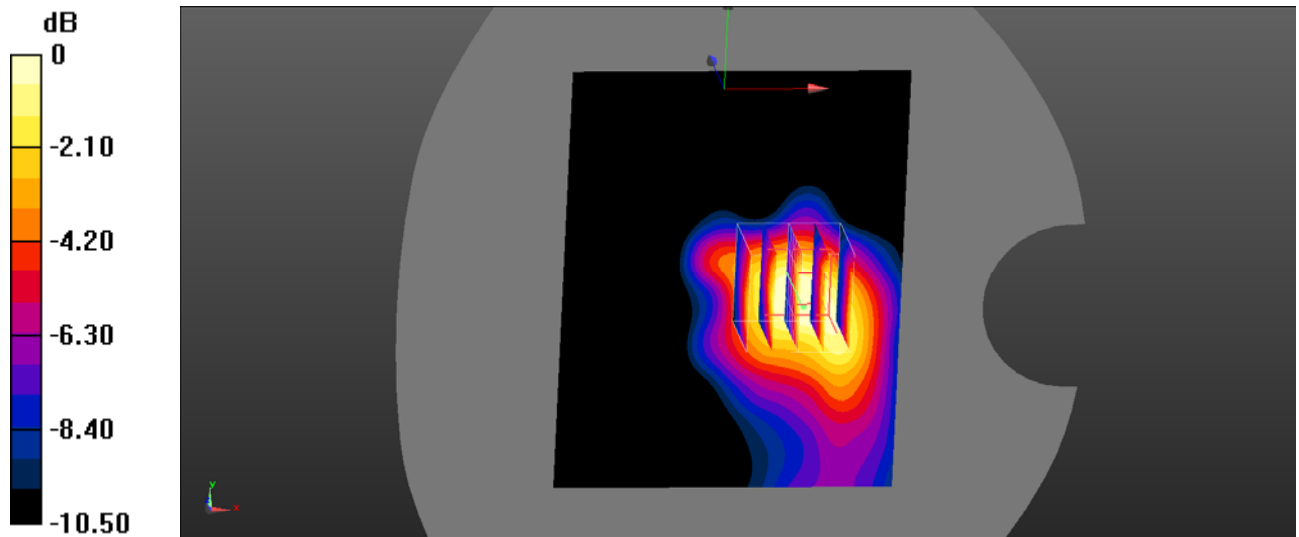

0 dB =  $0.611 \text{ W/kg}$  =  $-2.14 \text{ dBW/kg}$

**Test Plot 108#: LTE Band 25\_Body Back\_50%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.588$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.757 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $22.55 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.878 \text{ W/kg}$   
**SAR(1 g) =  $0.622 \text{ W/kg}$ ; SAR(10 g) =  $0.384 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.663 \text{ W/kg}$

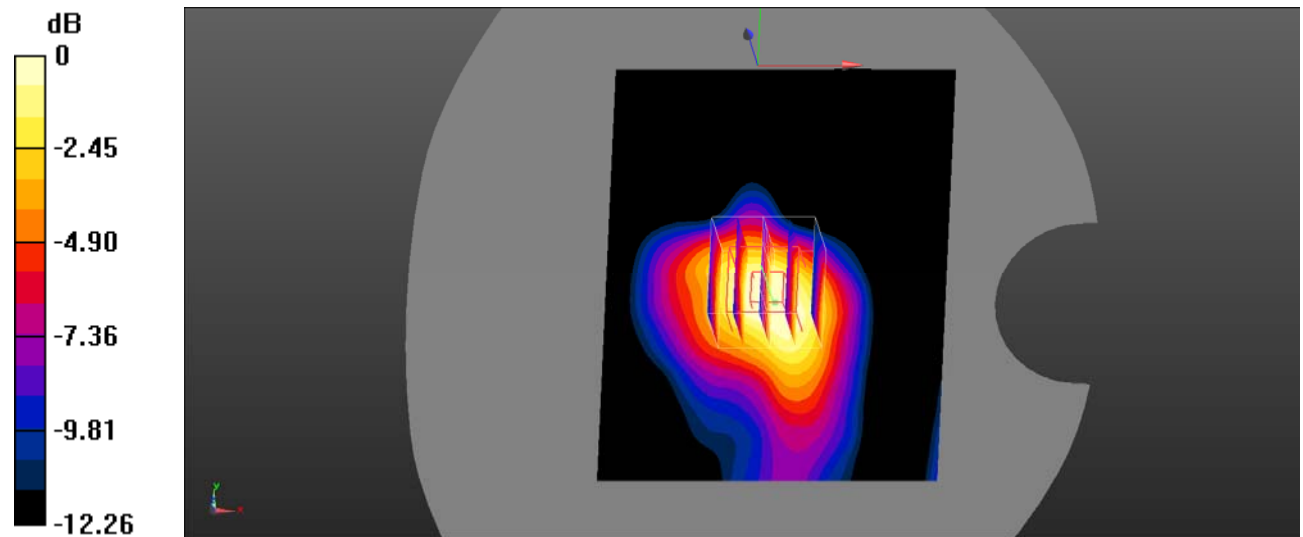

0 dB =  $0.663 \text{ W/kg}$  =  $-1.78 \text{ dBW/kg}$

**Test Plot 109#: LTE Band 25\_Body Back\_100%RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.588$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.792 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.11 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.894 \text{ W/kg}$   
**SAR(1 g) =  $0.634 \text{ W/kg}$ ; SAR(10 g) =  $0.388 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.703 \text{ W/kg}$

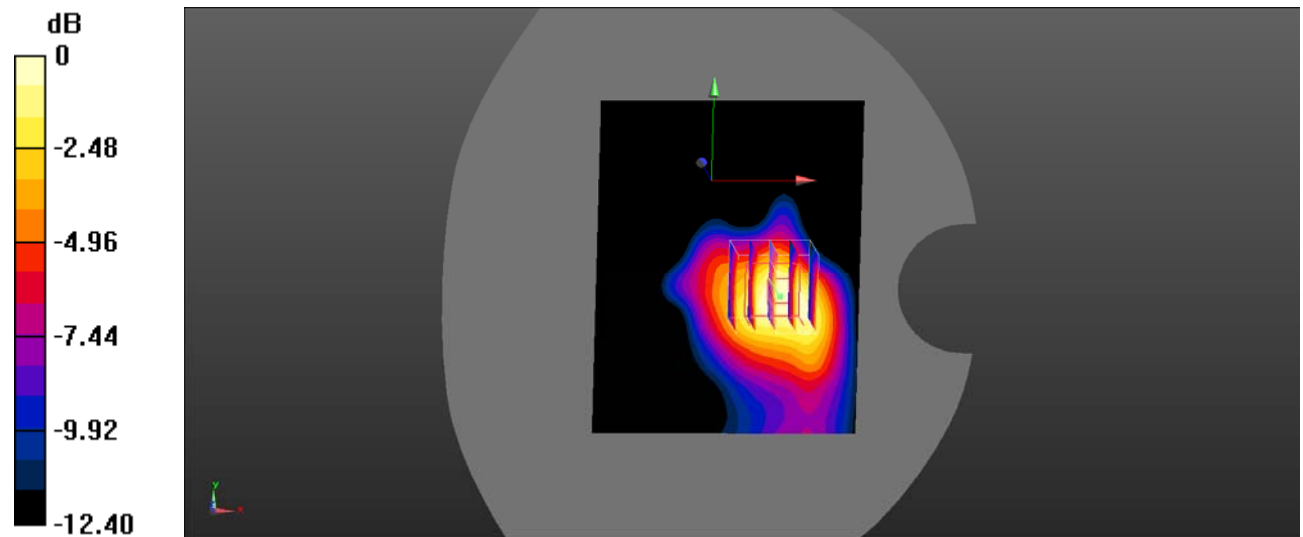

0 dB =  $0.703 \text{ W/kg} = -1.53 \text{ dBW/kg}$

**Test Plot 110#: LTE Band 25\_Body Left\_1RB\_Middle\_0mm**

**DUT: Tablet; Type: T1001L; Serial: SZ1210628-25933E-SA-S\_BI5;**


Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.588$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.119 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.450 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 0.107 W/kg  
**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.060 W/kg**  
 Maximum value of SAR (measured) = 0.0939 W/kg

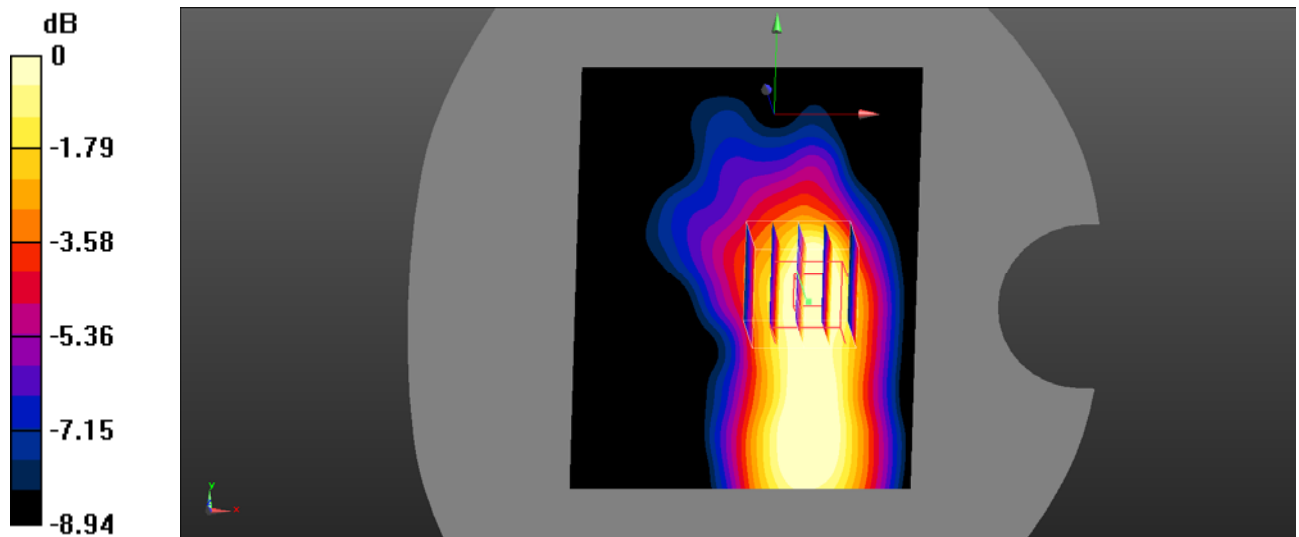

0 dB = 0.0939 W/kg = -10.27 dBW/kg