

Report No.: EED32N80069303 Page 1 of 8

RF Exposure Evaluation Report

Product: Sleep Tracker

Trade mark : N/A

Model/Type reference : Z400TWP, Z400TWP-X

(X is any data from 1-20 and letter from A-Z)

Serial Number : N/A

Report Number : EED32N80069303 FCC ID : 2ADIOZ400TWP-3

Date of Issue : Mar. 30, 2021

: 47 CFR Part 1.1307 47 CFR Part 2.1093

Test Standards KDB447498D01 General RF

Exposure Guidance v06

Test result : PASS

Prepared for:

Shenzhen Medica Technology Development Co., Ltd Floor 12, Block A, Building 7, Vanke Cloud city, XingKe 1st street, NanShan District, Shenzhen City.

Prepared by:

Centre Testing International Group Co., Ltd. Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China

TEL: +86-755-3368 3668 FAX: +86-755-3368 3385

Approved by:

Report Seal

Tom Chen

David Wang

David Wang

Wane Date:

Reviewed by:


Aaron Ma


Mar. 30, 2021

Check No.:5308200221









2 Version

Version No.	Date	Description Original			
00	Mar. 30, 2021				
5)	(0,0)	6,	0	6	











































































Report No.: EED32N80069303

Page 3 of 8

3 Contents

							ı age
1 COVER PAGE		•••••	•••••	•••••	•••••	•••••	•••••••
2 VERSION	•••••	•••••		•••••		•••••	
3 CONTENTS		•••••					
4 GENERAL INF	ORMATION					•••••	
4.2 GENERAL I 4.3 PRODUCT : 4.4 TEST LOCA 4.5 DEVIATION 4.6 ABNORMAL	FORMATIONDESCRIPTION OF E SPECIFICATION SU ATION FROM STANDARD LITIES FROM STANI	EUT BJECTIVE TO T S DARD CONDITI	THIS STANDARE)			
	ORMATION REQUE						
5.1 RF Expos 5.1.1 Stand	URE COMPLIANCE lard Requirement RF Exposure	REQUIREMEN	Т				
	S OF EUT CONS						



Report No.: EED32N80069303 Page 4 of 8

4 General Information

4.1 Client Information

Applicant:	Shenzhen Medica Technology Development Co., Ltd	
Address of Applicant:	Floor 12, Block A, Building 7, Vanke Cloud city, XingKe 1st street, NanShan District, Shenzhen City.	
Manufacturer: Shenzhen Medica Technology Development Co., Ltd		(0)
Address of Manufacturer:	Floor 12, Block A, Building 7, Vanke Cloud city, XingKe 1st street, NanShan District, Shenzhen City.	
Factory:	Shenzhen Medica Technology Development Co., Ltd	
Address of Factory:	Floor 12, Block A, Building 7, Vanke Cloud city, XingKe 1st street, NanShan District, Shenzhen City.	

4.2 General Description of EUT

Product Name:	Sleep Tracker
Model No.:	Z400TWP, Z400TWP-X (X is any data from 1-20 and letter from A-Z)
Test model:	Z400TWP
Trade Mark:	N/A
EUT Supports Radios application:	BT 4.2 Single module 2402MHz to 2480MHz; WIFI: IEEE 802.11 b/g/n(HT20): 2412MHz to 2462MHz

4.3 Product Specification subjective to this standard

BT 4.2 Single modu	le 2402MHz to 2480MHz;			
WIFI: IEEE 802.11 b/g/n(HT20): 2412MHz to 2462MHz				
BT: GFSK; WIFI: IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM,QPSK,BPSK)				
Default	/**	/'5		
ESP_RF_test_tool_v2.5				
PCB antenna				
0.5dBi				
AC/DC ADAPTER	MODEL:SK01G-0500100U INPUT:100-240V~,50/60Hz ,02A OUTPUT:5V1A		(41)	
BLE:1.59dBm; WIFI:9.08dBm				
The Max Conducted Peak Output Power data refer to the report EED32N80069301, EED32N80069302				
Feb. 20, 2021		(3)		
Feb. 20, 2021 to Mar. 08, 2021		(6,)		
	WIFI: IEEE 802.11 II BT: GFSK; WIFI: IEEE for 802.11g :C IEEE for 802.11n(H) Default ESP_RF_test_tool_ PCB antenna 0.5dBi AC/DC ADAPTER BLE:1.59dBm; WIF The Max Conducted EED32N80069301, Feb. 20, 2021	BT: GFSK; WIFI: IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM,QPSK) Default ESP_RF_test_tool_v2.5 PCB antenna 0.5dBi AC/DC ADAPTER MODEL:SK01G-0500100U INPUT:100-240V~,50/60Hz ,02A OUTPUT:5V1A BLE:1.59dBm; WIFI:9.08dBm The Max Conducted Peak Output Power data refer to the EED32N80069301, EED32N80069302 Feb. 20, 2021	WIFI: IEEE 802.11 b/g/n(HT20): 2412MHz to 2462MHz BT: GFSK; WIFI: IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM,QPSK,BPSK) Default ESP_RF_test_tool_v2.5 PCB antenna 0.5dBi AC/DC ADAPTER MODEL:SK01G-0500100U INPUT:100-240V~,50/60Hz ,02A OUTPUT:5V1A BLE:1.59dBm; WIFI:9.08dBm The Max Conducted Peak Output Power data refer to the report EED32N80069301, EED32N80069302 Feb. 20, 2021	

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: Z400TWP, Z400TWP-X (X is any data from 1-20 and letter from A-Z)

Only the model Z400TWP was tested, Z400TWP-X compared with Z400TWP, all parts of the product, Their electrical circuit design, layout, components used and internal wiring are identical,, except only the model name different.



Report No.: EED32N80069303 Page 5 of 8

4.4 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted. FCC Designation No.: CN1164

4.5 Deviation from Standards

None.

4.6 Abnormalities from Standard Conditions

None.

4.7 Other Information Requested by the Customer

None















Report No.: EED32N80069303 Page 6 of 8

5 SAR Evaluation

5.1 RF Exposure Compliance Requirement

5.1.1 Standard Requirement

According to KDB447498D01 General RF Exposure Guidance v06 Standalone SAR test exclusion considerations

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

Limits

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:


[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $[\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation¹⁷

The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is \leq 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

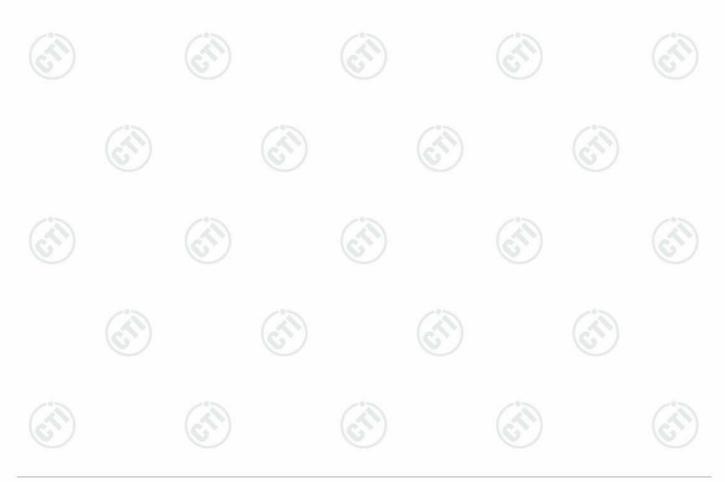



Report No.: EED32N80069303

Page 7 of 8

5.1.2 EUT RF Exposure

The Max Conducted Peak Output Power is 9.080 (8.09 mW) @ 2412 MHz

When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

So,

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] * $[\sqrt{f(GHz)}] = 2.5 < 3.0$

Therefore, standalone SAR measurements are not required for both head and body





Report No.: EED32N80069303



PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32N80069301 for EUT external and internal photos.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

