


Job No.: DING11 #53  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 55 %  
 EUT: Interactive Flat Panel  
 Mode: Memory Playing  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 16/09/20/  
 Time: 10/49/27  
 Engineer Signature: DING  
 Distance: 3m

Note: Report NO:ATE20161916

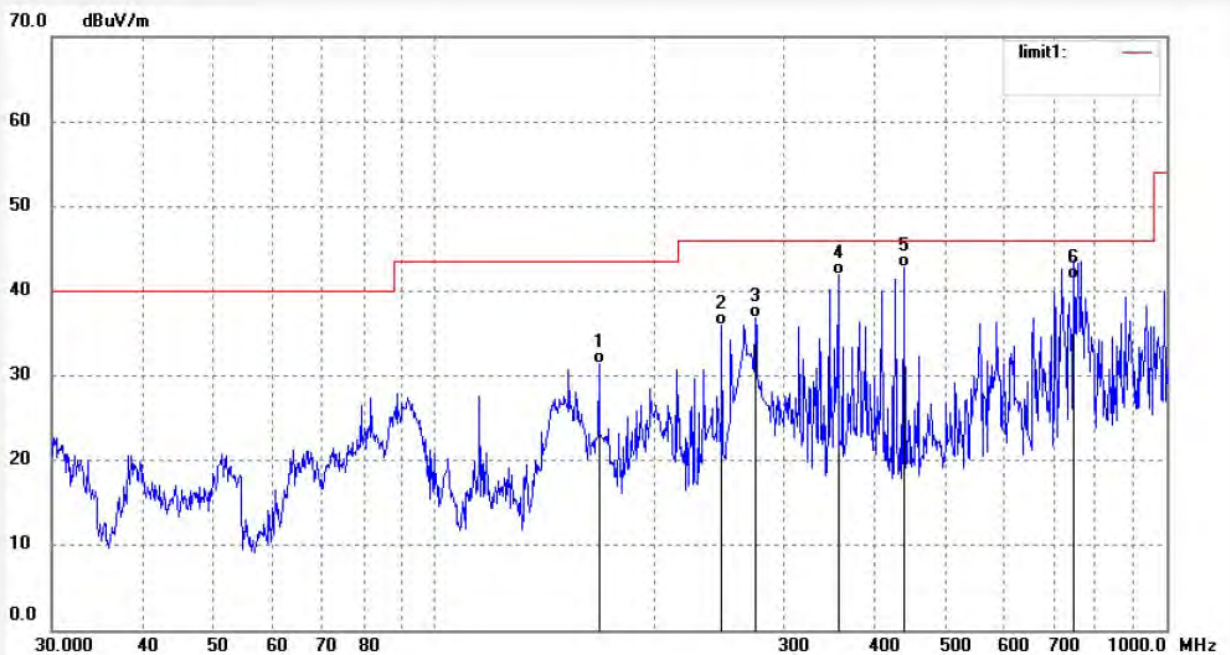

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	167.8136	51.85	-20.51	31.34	43.50	-12.16	QP			
2	246.9901	54.15	-18.19	35.96	46.00	-10.04	QP			
3	274.4464	53.91	-17.00	36.91	46.00	-9.09	QP			
4	355.9397	56.35	-14.44	41.91	46.00	-4.09	QP			
5	437.9316	56.09	-13.31	42.78	46.00	-3.22	QP			
6	747.0467	48.25	-6.82	41.43	46.00	-4.57	QP			

Above 1GHz



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING #733	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/09/20
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 12:40:11
EUT: Interactive Flat Panel	Engineer Signature:
Mode: USB IN	Distance: 3m
Model: ST-700	
Manufacturer: Recordex USA, Inc.	

Note: Report NO.:ATE20161916

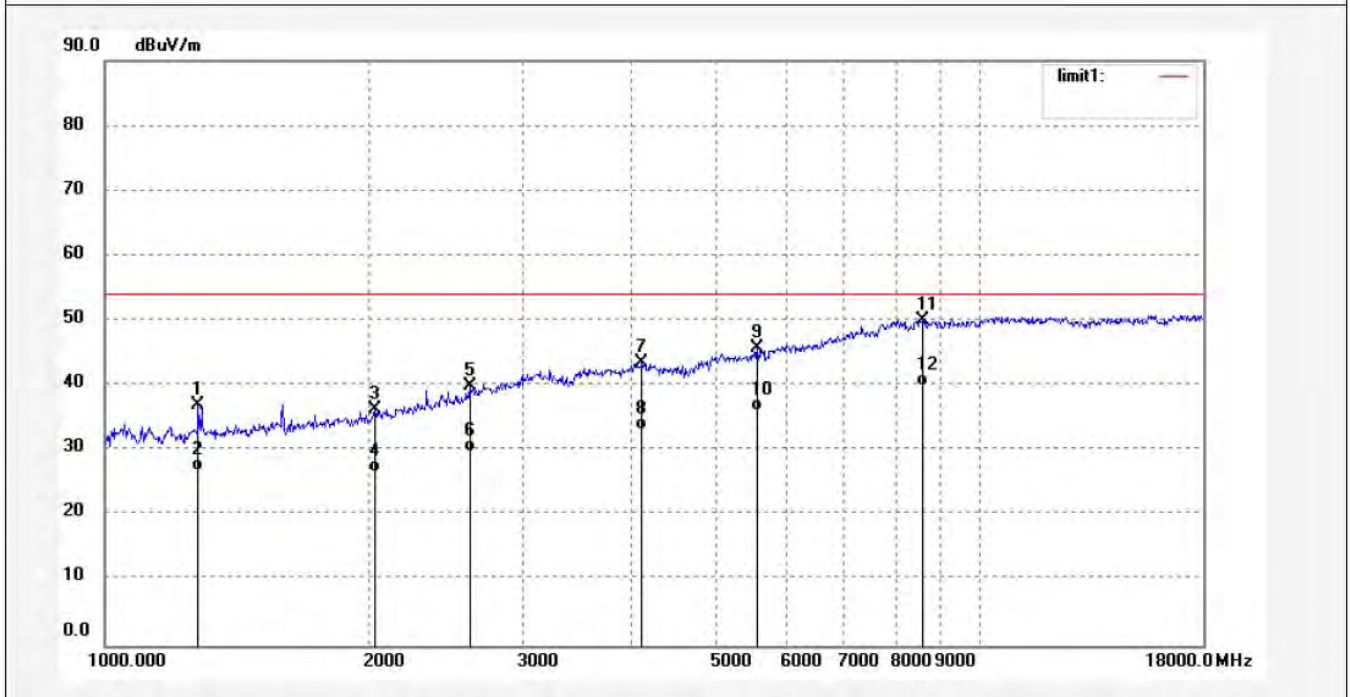


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1278.492	49.34	-12.24	37.10	54.00	-16.90	peak			
2	1278.492	39.15	-12.24	26.91	54.00	-27.09	AVG			
3	2036.090	45.32	-8.98	36.34	54.00	-17.66	peak			
4	2036.090	35.56	-8.98	26.58	54.00	-27.42	AVG			
5	2610.661	46.65	-6.71	39.94	54.00	-14.06	peak			
6	2610.661	36.48	-6.71	29.77	54.00	-24.23	AVG			
7	4109.872	44.94	-1.49	43.45	54.00	-10.55	peak			
8	4109.872	34.69	-1.49	33.20	54.00	-20.80	AVG			
9	5567.136	44.40	1.38	45.78	54.00	-8.22	peak			
10	5567.136	34.70	1.38	36.08	54.00	-17.92	AVG			
11	8588.607	42.36	7.65	50.01	54.00	-3.99	peak			
12	8588.607	32.28	7.65	39.93	54.00	-14.07	AVG			

Job No.: DING #734  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: USB IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 12:41:43  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

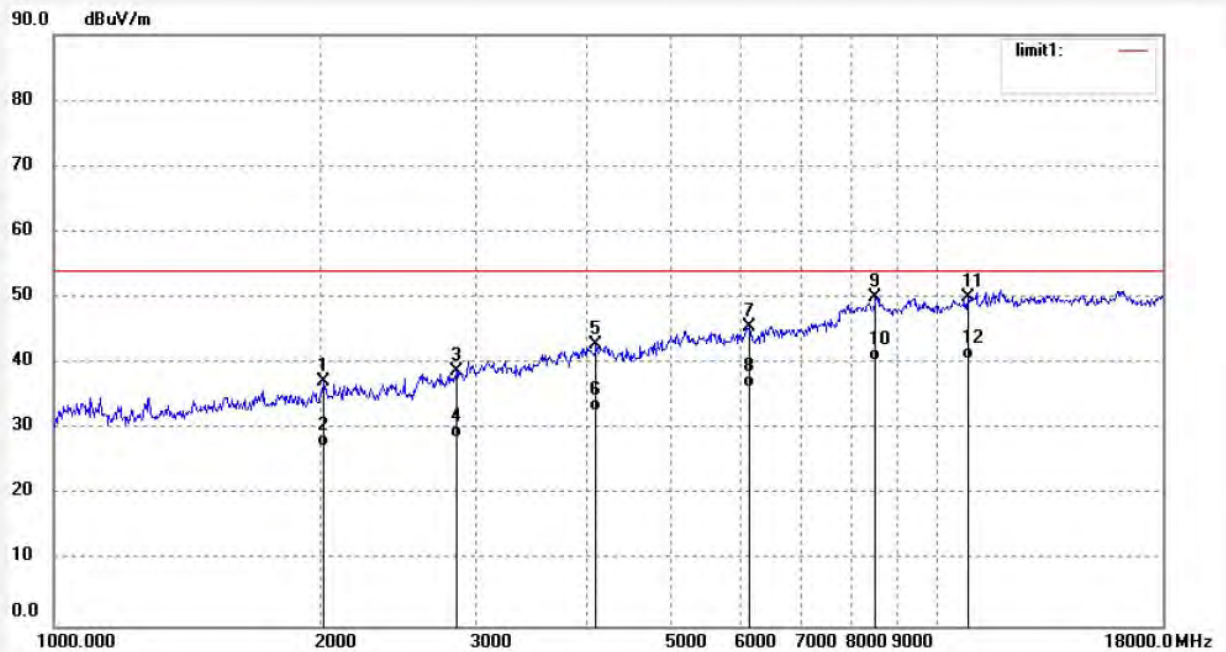

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2018.512	46.21	-8.99	37.22	54.00	-16.78	peak			
2	2018.512	36.25	-8.99	27.26	54.00	-26.74	AVG			
3	2855.380	44.79	-5.93	38.86	54.00	-15.14	peak			
4	2855.380	34.69	-5.93	28.76	54.00	-25.24	AVG			
5	4109.872	44.26	-1.49	42.77	54.00	-11.23	peak			
6	4109.872	34.15	-1.49	32.66	54.00	-21.34	AVG			
7	6124.292	43.13	2.39	45.52	54.00	-8.48	peak			
8	6124.292	33.90	2.39	36.29	54.00	-17.71	AVG			
9	8514.456	42.21	7.86	50.07	54.00	-3.93	peak			
10	8514.456	32.54	7.86	40.40	54.00	-13.60	AVG			
11	10822.922	41.15	9.00	50.15	54.00	-3.85	peak			
12	10822.922	31.60	9.00	40.60	54.00	-13.40	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #735

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: HDMI IN

Model: ST-700

Manufacturer: Recordex USA, Inc.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/09/20

Time: 12:43:05

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161916

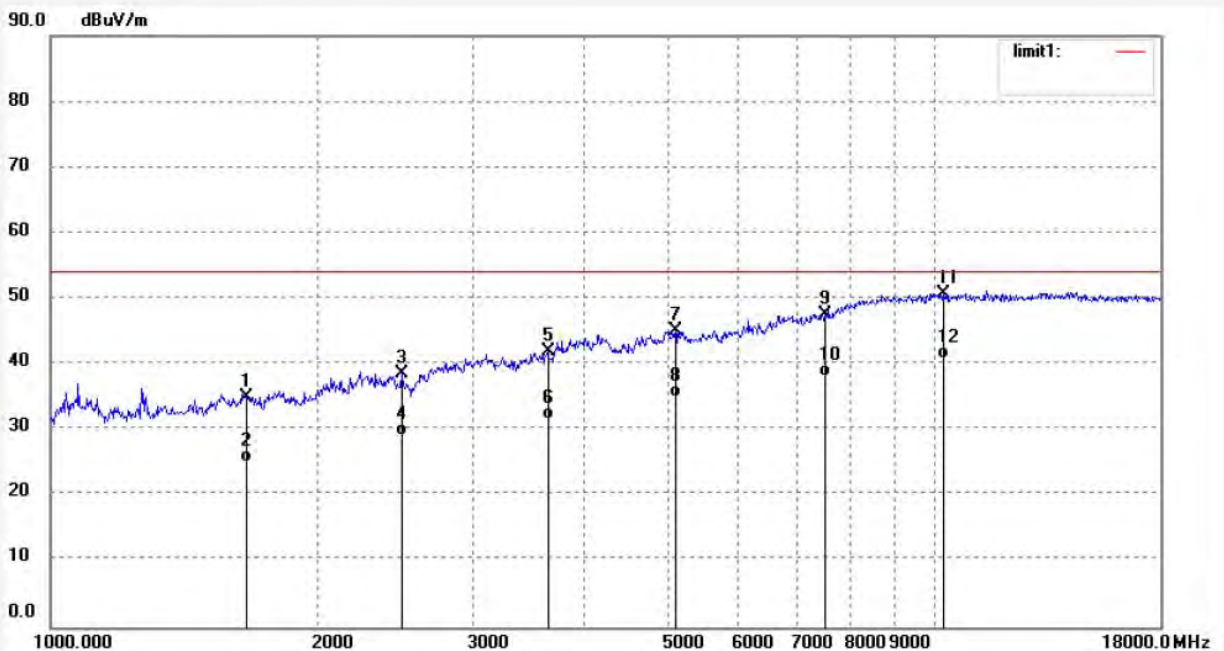


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1667.951	45.68	-10.58	35.10	54.00	-18.90	peak			
2	1667.951	35.67	-10.58	25.09	54.00	-28.91	AVG			
3	2492.678	46.03	-7.39	38.64	54.00	-15.36	peak			
4	2492.678	36.50	-7.39	29.11	54.00	-24.89	AVG			
5	3650.582	44.45	-2.60	41.85	54.00	-12.15	peak			
6	3650.582	34.15	-2.60	31.55	54.00	-22.45	AVG			
7	5090.007	44.69	0.38	45.07	54.00	-8.93	peak			
8	5090.007	34.68	0.38	35.06	54.00	-18.94	AVG			
9	7519.348	43.44	4.24	47.68	54.00	-6.32	peak			
10	7519.348	33.84	4.24	38.08	54.00	-15.92	AVG			
11	10215.017	41.35	9.30	50.65	54.00	-3.35	peak			
12	10215.017	31.54	9.30	40.84	54.00	-13.16	AVG			

Job No.: DING #736  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: HDMI IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 12:44:21  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

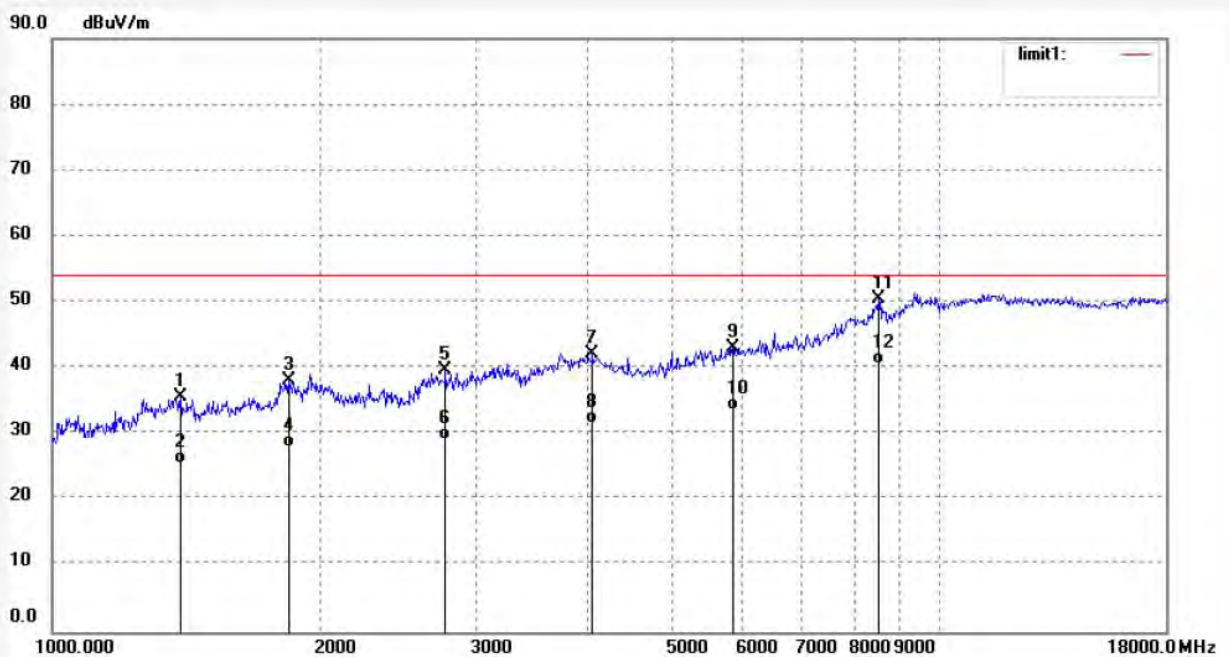

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1394.300	47.44	-11.83	35.61	54.00	-18.39	peak			
2	1394.300	37.26	-11.83	25.43	54.00	-28.57	AVG			
3	1845.516	47.64	-9.58	38.06	54.00	-15.94	peak			
4	1845.516	37.60	-9.58	28.02	54.00	-25.98	AVG			
5	2774.030	45.71	-6.08	39.63	54.00	-14.37	peak			
6	2774.030	35.18	-6.08	29.10	54.00	-24.90	AVG			
7	4062.629	43.80	-1.52	42.28	54.00	-11.72	peak			
8	4062.629	33.18	-1.52	31.66	54.00	-22.34	AVG			
9	5847.517	41.05	1.97	43.02	54.00	-10.98	peak			
10	5847.517	31.62	1.97	33.59	54.00	-20.41	AVG			
11	8539.102	42.62	7.79	50.41	54.00	-3.59	peak			
12	8539.102	32.81	7.79	40.60	54.00	-13.40	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #737  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: VGA IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 12:45:46  
Engineer Signature:  
Distance: 3m


Note: Report NO.:ATE20161916

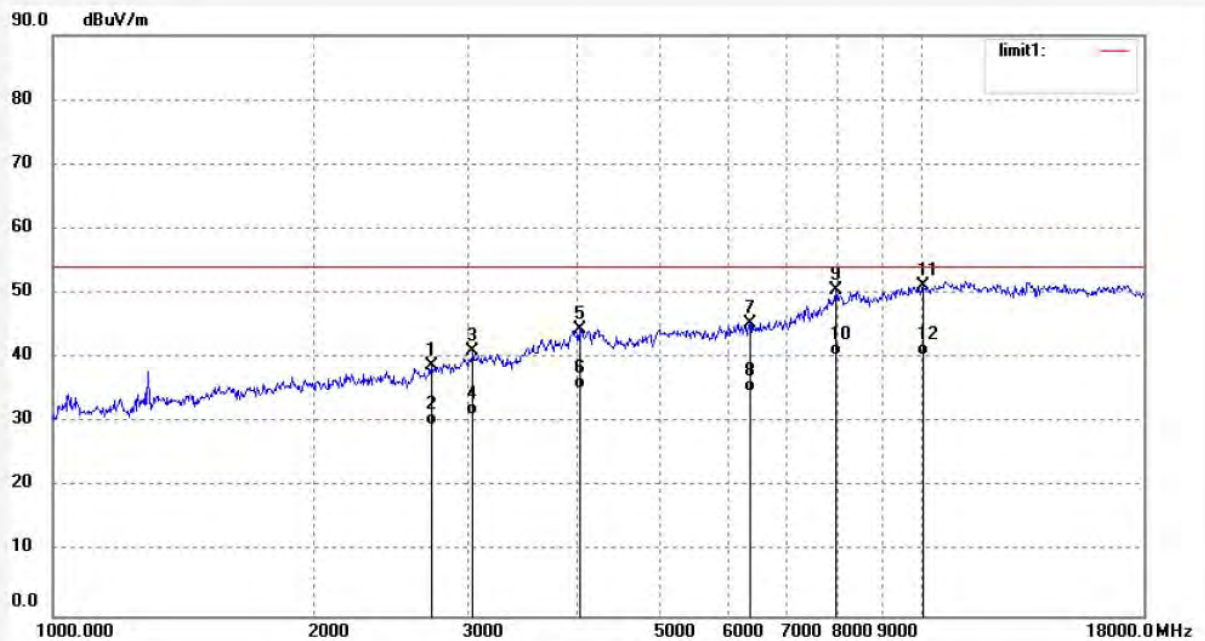

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2726.337	45.00	-6.22	38.78	54.00	-15.22	peak			
2	2726.337	35.74	-6.22	29.52	54.00	-24.48	AVG			
3	3042.846	45.92	-4.85	41.07	54.00	-12.93	peak			
4	3042.846	36.11	-4.85	31.26	54.00	-22.74	AVG			
5	4039.212	46.02	-1.55	44.47	54.00	-9.53	peak			
6	4039.212	36.85	-1.55	35.30	54.00	-18.70	AVG			
7	6340.436	42.74	2.68	45.42	54.00	-8.58	peak			
8	6340.436	32.10	2.68	34.78	54.00	-19.22	AVG			
9	7966.832	43.80	6.71	50.51	54.00	-3.49	peak			
10	7966.832	33.69	6.71	40.40	54.00	-13.60	AVG			
11	10039.393	41.74	9.55	51.29	54.00	-2.71	peak			
12	10039.393	30.79	9.55	40.34	54.00	-13.66	AVG			

Job No.: DING #738	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/09/20
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 12:47:16
EUT: Interactive Flat Panel	Engineer Signature:
Mode: VGA IN	Distance: 3m
Model: ST-700	
Manufacturer: Recordex USA, Inc.	

Note: Report NO.:ATE20161916

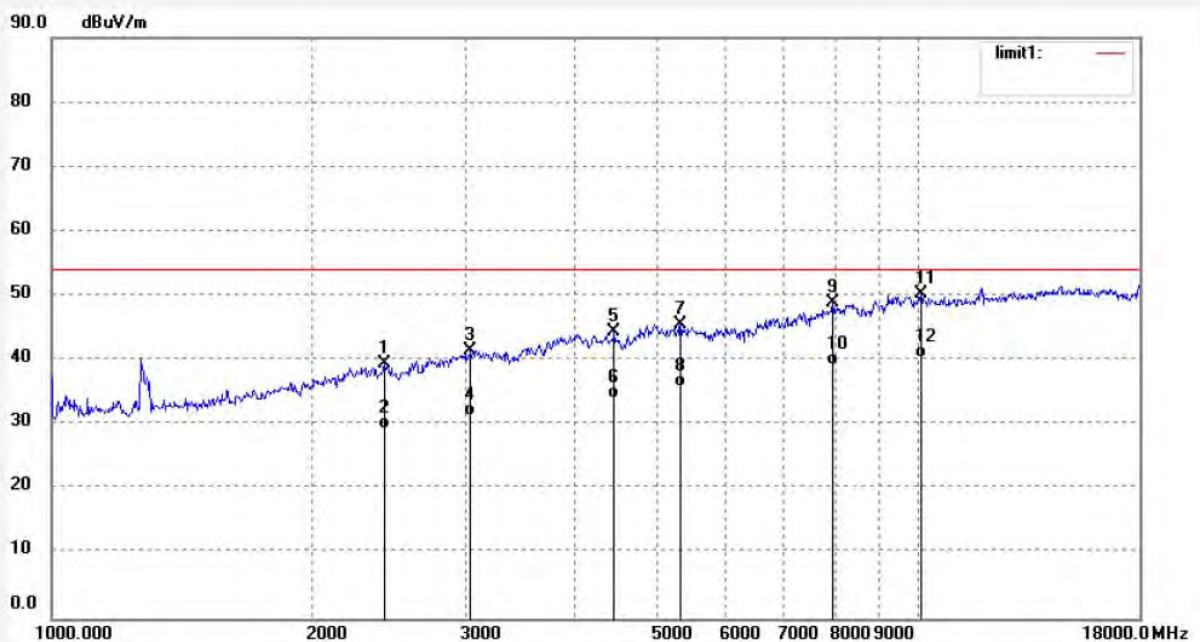


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2421.661	46.81	-7.40	39.41	54.00	-14.59	peak			
2	2421.661	36.84	-7.40	29.44	54.00	-24.56	AVG			
3	3042.846	46.42	-4.85	41.57	54.00	-12.43	peak			
4	3042.846	36.13	-4.85	31.28	54.00	-22.72	AVG			
5	4456.315	45.89	-1.48	44.41	54.00	-9.59	peak			
6	4456.315	35.61	-1.48	34.13	54.00	-19.87	AVG			
7	5315.541	44.71	0.96	45.67	54.00	-8.33	peak			
8	5315.541	34.83	0.96	35.79	54.00	-18.21	AVG			
9	7966.832	42.30	6.71	49.01	54.00	-4.99	peak			
10	7966.832	32.60	6.71	39.31	54.00	-14.69	AVG			
11	10068.453	40.68	9.51	50.19	54.00	-3.81	peak			
12	10068.453	30.91	9.51	40.42	54.00	-13.58	AVG			

Job No.: DING #739  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: DP IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 12:48:28  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

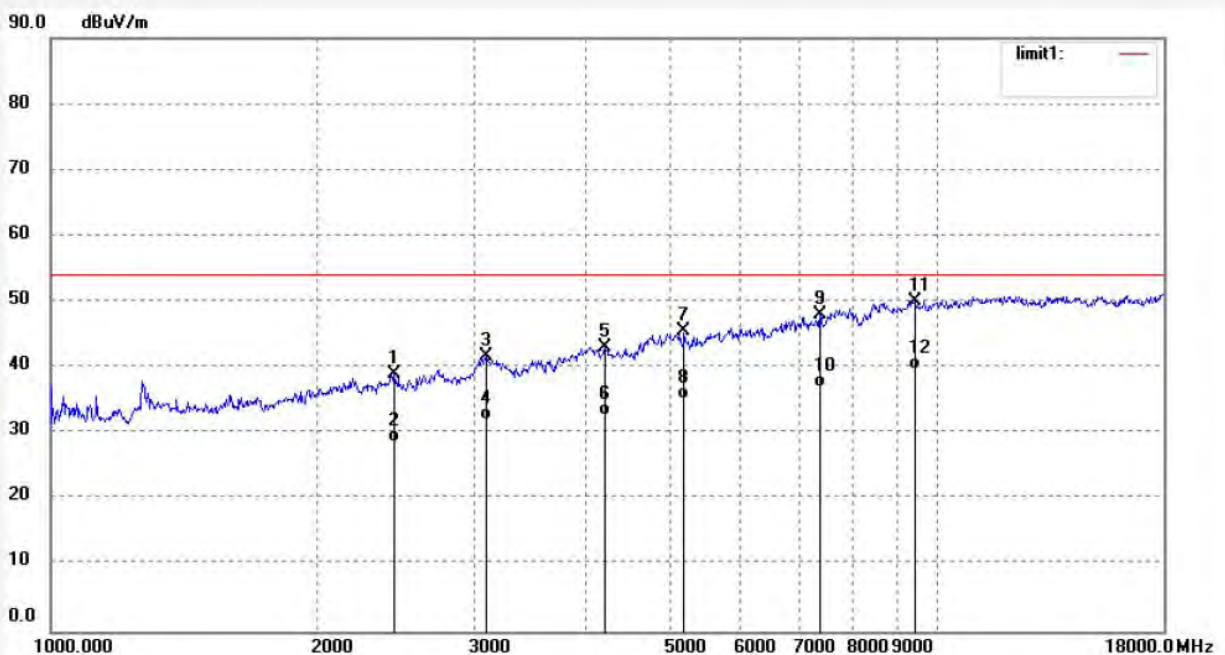

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2435.701	46.36	-7.37	38.99	54.00	-15.01	peak			
2	2435.701	36.15	-7.37	28.78	54.00	-25.22	AVG			
3	3096.075	46.13	-4.43	41.70	54.00	-12.30	peak			
4	3096.075	36.57	-4.43	32.14	54.00	-21.86	AVG			
5	4218.186	44.82	-1.64	43.18	54.00	-10.82	peak			
6	4218.186	34.27	-1.64	32.63	54.00	-21.37	AVG			
7	5179.049	44.84	0.61	45.45	54.00	-8.55	peak			
8	5179.049	34.68	0.61	35.29	54.00	-18.71	AVG			
9	7368.741	44.63	3.34	47.97	54.00	-6.03	peak			
10	7368.741	33.74	3.34	37.08	54.00	-16.92	AVG			
11	9448.149	40.58	9.46	50.04	54.00	-3.96	peak			
12	9448.149	30.18	9.46	39.64	54.00	-14.36	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161916

Page 59 of 99

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #740  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: DP IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 12:50:05  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

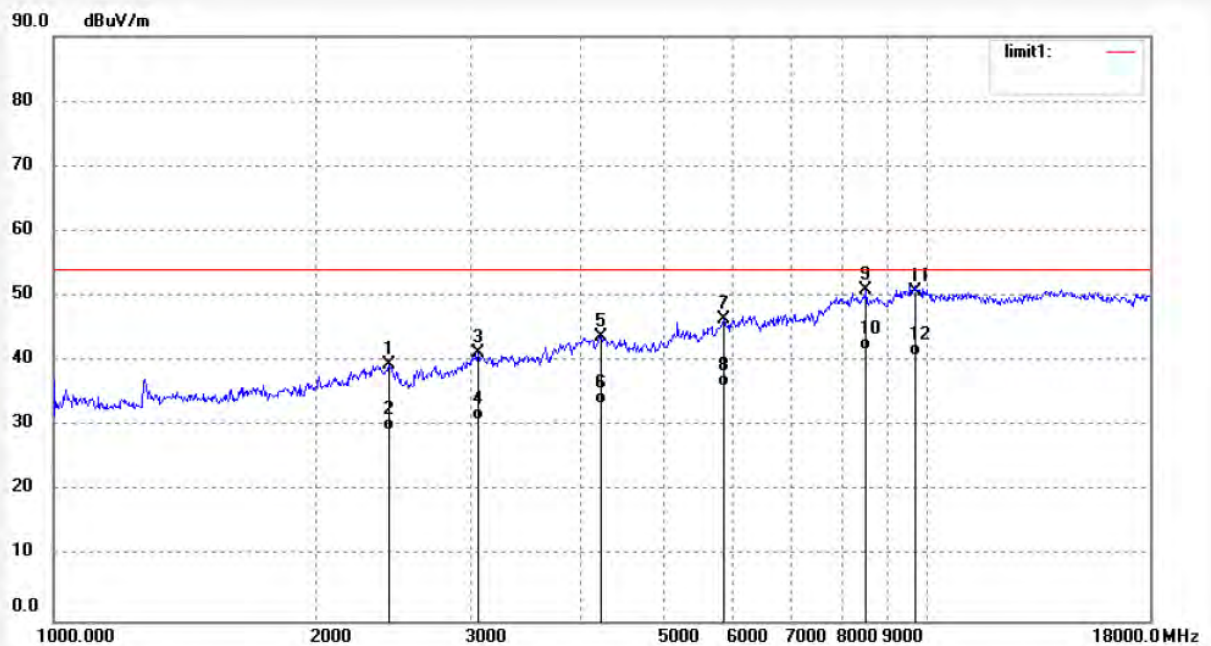

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2421.661	46.81	-7.40	39.41	54.00	-14.59	peak			
2	2421.661	36.79	-7.40	29.39	54.00	-24.61	AVG			
3	3060.486	45.91	-4.72	41.19	54.00	-12.81	peak			
4	3060.486	35.60	-4.72	30.88	54.00	-23.12	AVG			
5	4230.396	45.42	-1.70	43.72	54.00	-10.28	peak			
6	4230.396	35.17	-1.70	33.47	54.00	-20.53	AVG			
7	5847.517	44.46	1.97	46.43	54.00	-7.57	peak			
8	5847.517	34.22	1.97	36.19	54.00	-17.81	AVG			
9	8514.456	43.01	7.86	50.87	54.00	-3.13	peak			
10	8514.456	33.82	7.86	41.68	54.00	-12.32	AVG			
11	9697.152	41.20	9.53	50.73	54.00	-3.27	peak			
12	9697.152	31.25	9.53	40.78	54.00	-13.22	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #741  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: AV IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 12:51:49  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

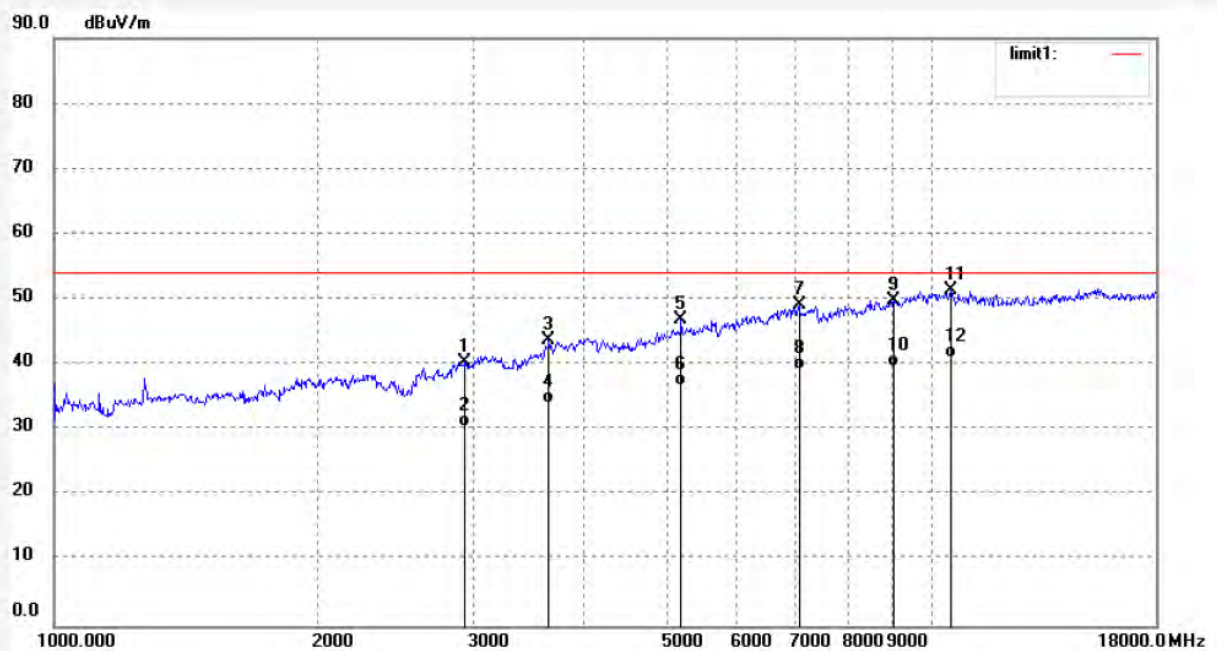

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2939.115	46.06	-5.63	40.43	54.00	-13.57	peak			
2	2939.115	36.15	-5.63	30.52	54.00	-23.48	AVG			
3	3661.149	46.24	-2.56	43.68	54.00	-10.32	peak			
4	3661.149	36.59	-2.56	34.03	54.00	-19.97	AVG			
5	5179.049	46.34	0.61	46.95	54.00	-7.05	peak			
6	5179.049	36.10	0.61	36.71	54.00	-17.29	AVG			
7	7056.092	45.52	3.56	49.08	54.00	-4.92	peak			
8	7056.092	35.67	3.56	39.23	54.00	-14.77	AVG			
9	9047.272	42.30	7.63	49.93	54.00	-4.07	peak			
10	9047.272	32.14	7.63	39.77	54.00	-14.23	AVG			
11	10514.577	42.85	8.51	51.36	54.00	-2.64	peak			
12	10514.577	32.60	8.51	41.11	54.00	-12.89	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #742  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: AV IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 12:54:03  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

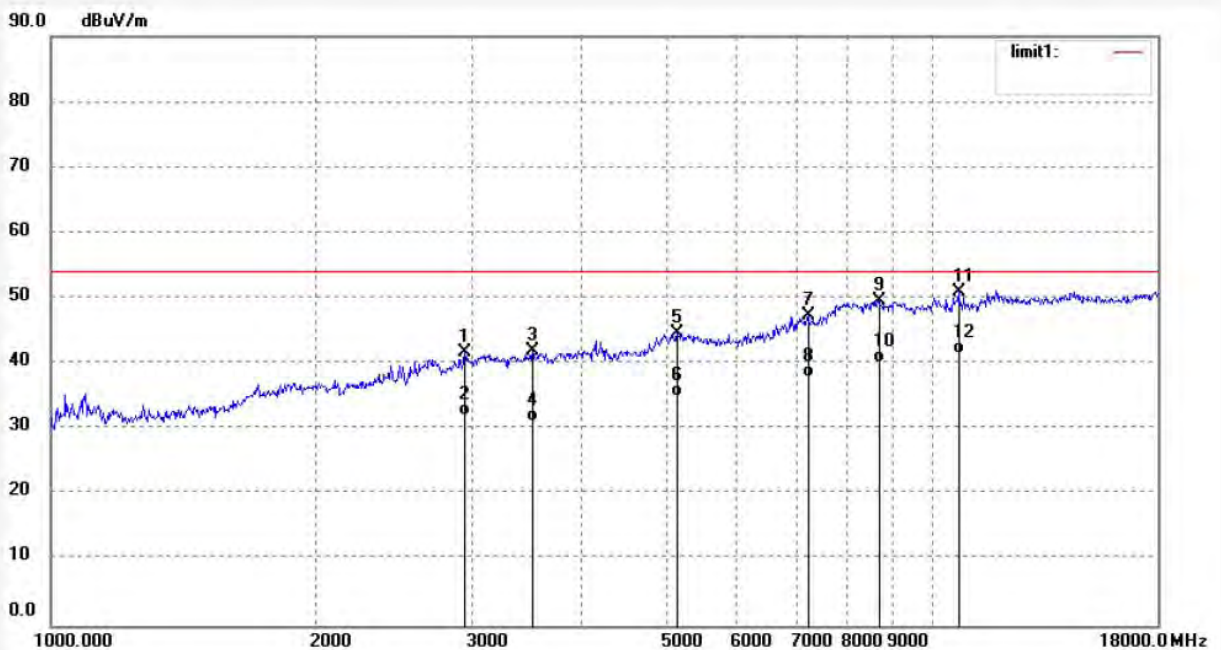


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2947.623	47.27	-5.56	41.71	54.00	-12.29	peak			
2	2947.623	37.68	-5.56	32.12	54.00	-21.88	AVG			
3	3515.957	44.90	-3.05	41.85	54.00	-12.15	peak			
4	3515.957	34.18	-3.05	31.13	54.00	-22.87	AVG			
5	5134.335	44.13	0.46	44.59	54.00	-9.41	peak			
6	5134.335	34.60	0.46	35.06	54.00	-18.94	AVG			
7	7221.150	44.43	3.01	47.44	54.00	-6.56	peak			
8	7221.150	34.81	3.01	37.82	54.00	-16.18	AVG			
9	8688.481	42.13	7.51	49.64	54.00	-4.36	peak			
10	8688.481	32.68	7.51	40.19	54.00	-13.81	AVG			
11	10698.514	42.24	8.64	50.88	54.00	-3.12	peak			
12	10698.514	32.81	8.64	41.45	54.00	-12.55	AVG			

Job No.: DING #743  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: Memory Playing  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 12:55:10  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

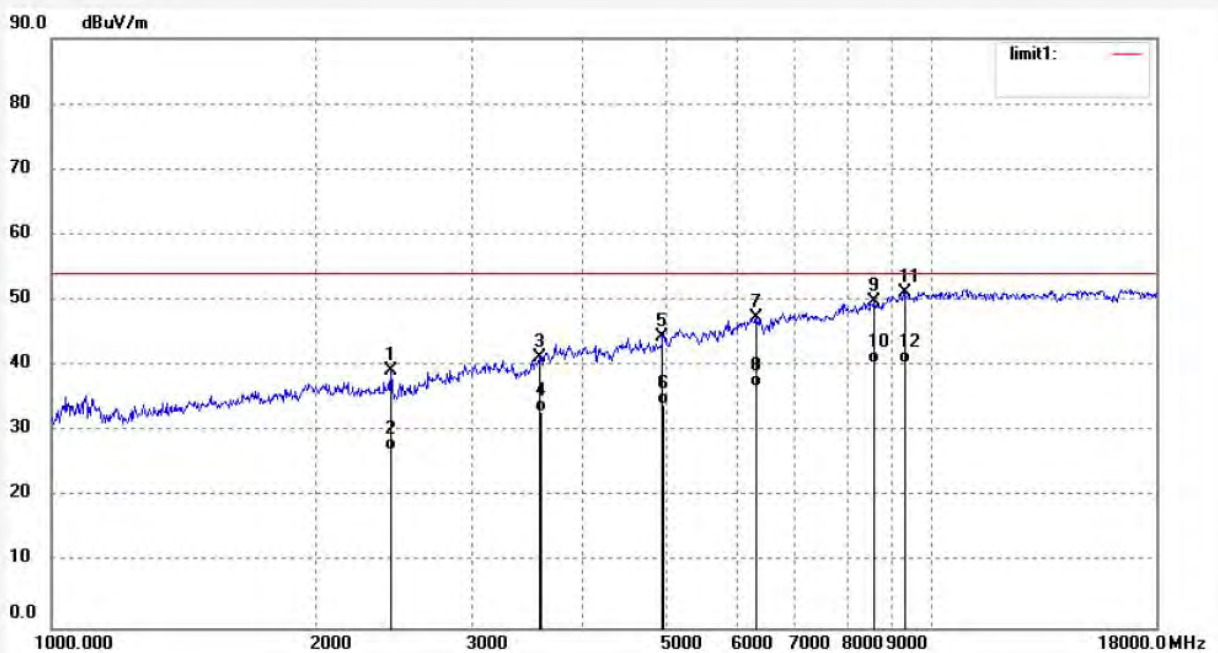

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2428.671	46.71	-7.39	39.32	54.00	-14.68	peak			
2	2428.671	34.51	-7.39	27.12	54.00	-26.88	AVG			
3	3587.818	44.18	-2.83	41.35	54.00	-12.65	peak			
4	3587.818	35.71	-2.83	32.88	54.00	-21.12	AVG			
5	4944.993	43.90	0.45	44.35	54.00	-9.65	peak			
6	4944.993	33.61	0.45	34.06	54.00	-19.94	AVG			
7	6322.136	44.75	2.65	47.40	54.00	-6.60	peak			
8	6322.136	34.05	2.65	36.70	54.00	-17.30	AVG			
9	8588.607	42.29	7.65	49.94	54.00	-4.06	peak			
10	8588.607	32.70	7.65	40.35	54.00	-13.65	AVG			
11	9312.588	42.40	8.82	51.22	54.00	-2.78	peak			
12	9312.588	31.54	8.82	40.36	54.00	-13.64	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Report No.: ATE20161916

Page 63 of 99

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #744  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: Memory Playing  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 12:56:39  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

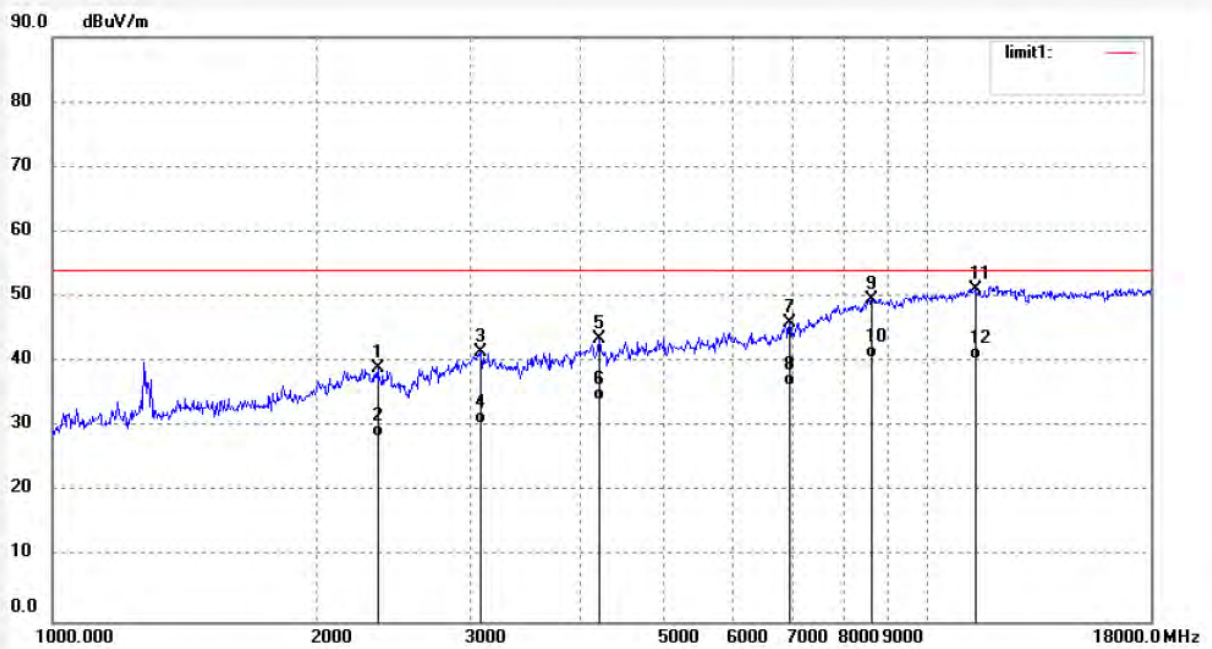

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2352.668	46.75	-7.77	38.98	54.00	-15.02	peak			
2	2352.668	36.15	-7.77	28.38	54.00	-25.62	AVG			
3	3087.140	46.00	-4.51	41.49	54.00	-12.51	peak			
4	3087.140	34.96	-4.51	30.45	54.00	-23.55	AVG			
5	4218.186	45.26	-1.64	43.62	54.00	-10.38	peak			
6	4218.186	35.83	-1.64	34.19	54.00	-19.81	AVG			
7	6954.851	42.30	3.80	46.10	54.00	-7.90	peak			
8	6954.851	32.50	3.80	36.30	54.00	-17.70	AVG			
9	8638.400	42.14	7.57	49.71	54.00	-4.29	peak			
10	8638.400	32.94	7.57	40.51	54.00	-13.49	AVG			
11	11335.193	40.96	10.28	51.24	54.00	-2.76	peak			
12	11335.193	30.22	10.28	40.50	54.00	-13.50	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #745  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: Memory Playing  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 13:19:58  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

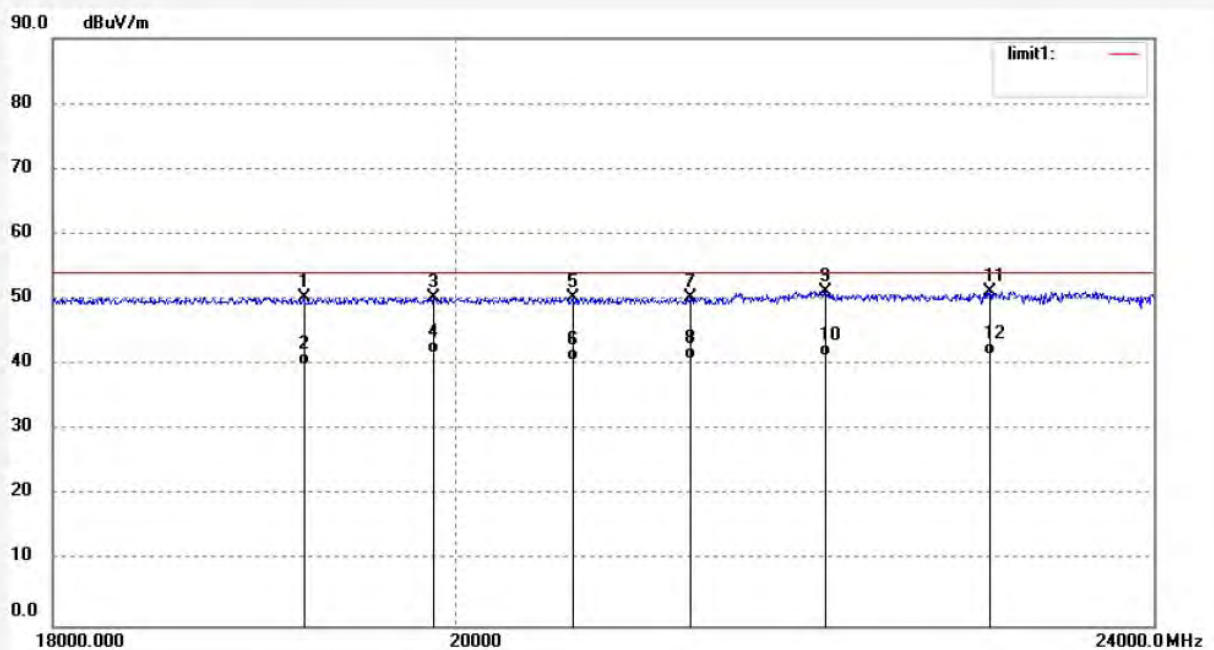

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19224.000	32.64	17.63	50.27	54.00	-3.73	peak			
2	19224.000	22.41	17.63	40.04	54.00	-13.96	AVG			
3	19884.000	32.13	18.14	50.27	54.00	-3.73	peak			
4	19884.000	23.53	18.14	41.67	54.00	-12.33	AVG			
5	20622.000	32.75	17.52	50.27	54.00	-3.73	peak			
6	20622.000	23.17	17.52	40.69	54.00	-13.31	AVG			
7	21264.000	32.28	17.99	50.27	54.00	-3.73	peak			
8	21264.000	22.91	17.99	40.90	54.00	-13.10	AVG			
9	22032.000	33.74	17.49	51.23	54.00	-2.77	peak			
10	22032.000	23.69	17.49	41.18	54.00	-12.82	AVG			
11	22998.000	33.52	17.60	51.12	54.00	-2.88	peak			
12	22998.000	23.94	17.60	41.54	54.00	-12.46	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING #746	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/09/20
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 13:21:10
EUT: Interactive Flat Panel	Engineer Signature:
Mode: Memory Playing	Distance: 3m
Model: ST-700	
Manufacturer: Recordex USA, Inc.	

Note: Report NO.:ATE20161916

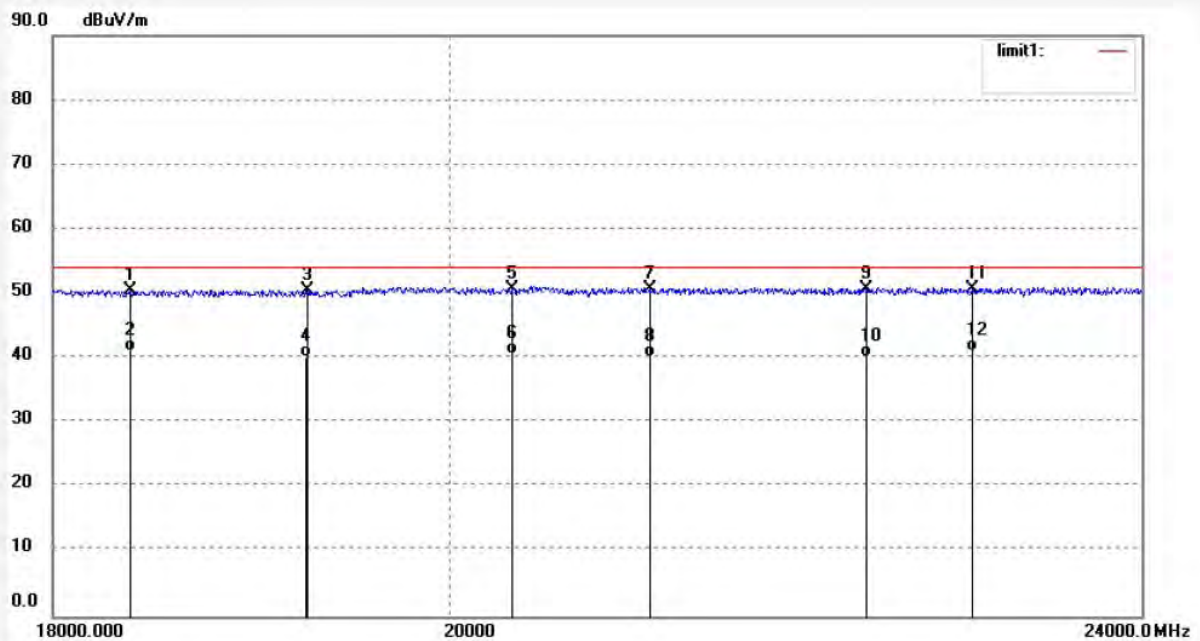

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18372.000	32.79	17.66	50.45	54.00	-3.55	peak			
2	18372.000	23.48	17.66	41.14	54.00	-12.86	AVG			
3	19254.000	33.42	17.06	50.48	54.00	-3.52	peak			
4	19254.000	23.16	17.06	40.22	54.00	-13.78	AVG			
5	20328.000	33.35	17.42	50.77	54.00	-3.23	peak			
6	20328.000	23.30	17.42	40.72	54.00	-13.28	AVG			
7	21078.000	33.64	17.18	50.82	54.00	-3.18	peak			
8	21078.000	22.94	17.18	40.12	54.00	-13.88	AVG			
9	22320.000	32.99	17.79	50.78	54.00	-3.22	peak			
10	22320.000	22.37	17.79	40.16	54.00	-13.84	AVG			
11	22956.000	33.31	17.39	50.70	54.00	-3.30	peak			
12	22956.000	23.71	17.39	41.10	54.00	-12.90	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #747

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: AV IN

Model: ST-700

Manufacturer: Recordex USA, Inc.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/09/20

Time: 13:23:31

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161916

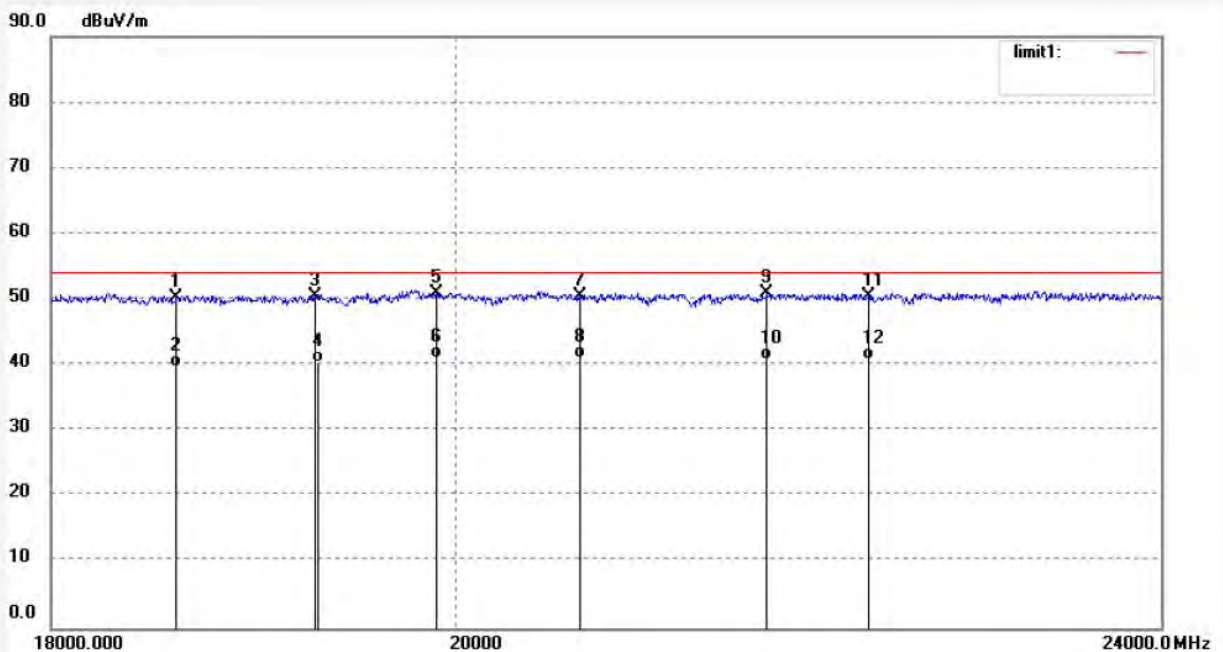

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18600.000	32.97	17.25	50.22	54.00	-3.78	peak			
2	18600.000	22.57	17.25	39.82	54.00	-14.18	AVG			
3	19278.000	33.48	17.08	50.56	54.00	-3.44	peak			
4	19278.000	23.40	17.08	40.48	54.00	-13.52	AVG			
5	19890.000	33.37	17.56	50.93	54.00	-3.07	peak			
6	19890.000	23.61	17.56	41.17	54.00	-12.83	AVG			
7	20652.000	33.23	17.27	50.50	54.00	-3.50	peak			
8	20652.000	23.83	17.27	41.10	54.00	-12.90	AVG			
9	21672.000	33.59	17.27	50.86	54.00	-3.14	peak			
10	21672.000	23.64	17.27	40.91	54.00	-13.09	AVG			
11	22254.000	32.81	17.77	50.58	54.00	-3.42	peak			
12	22254.000	23.05	17.77	40.82	54.00	-13.18	AVG			





ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #748  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: AV IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 13:25:15  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

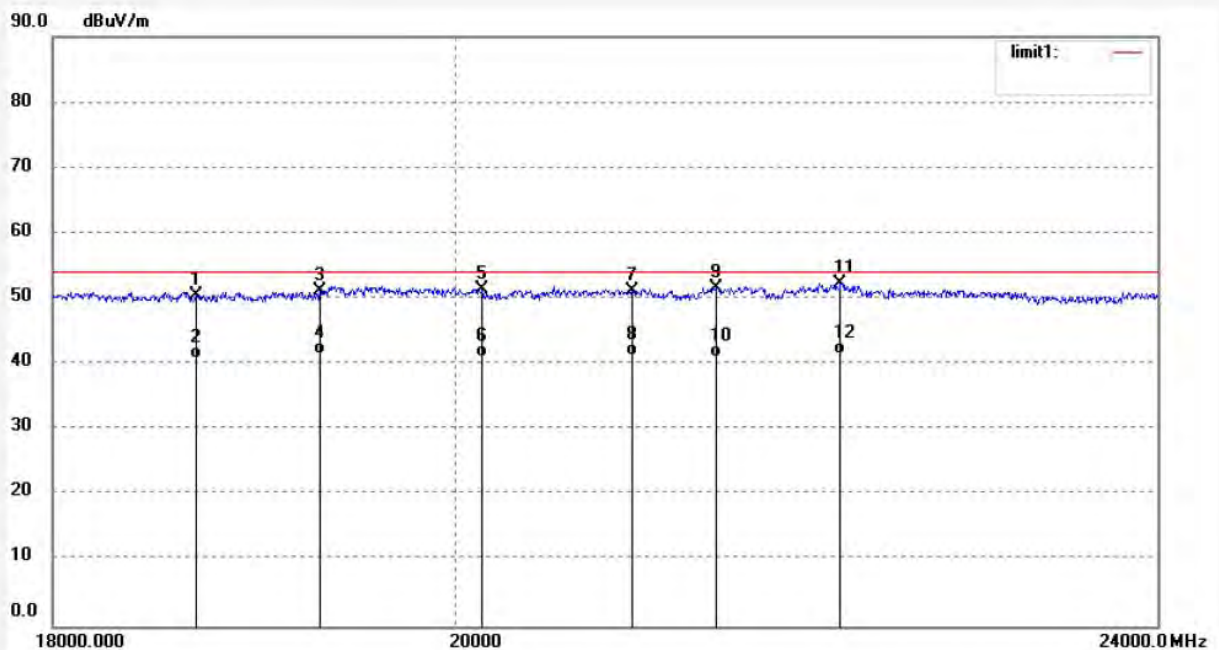

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18690.000	33.32	17.16	50.48	54.00	-3.52	peak			
2	18690.000	23.61	17.16	40.77	54.00	-13.23	AVG			
3	19302.000	34.19	17.10	51.29	54.00	-2.71	peak			
4	19302.000	24.33	17.10	41.43	54.00	-12.57	AVG			
5	20136.000	33.82	17.55	51.37	54.00	-2.63	peak			
6	20136.000	23.54	17.55	41.09	54.00	-12.91	AVG			
7	20940.000	34.09	17.21	51.30	54.00	-2.70	peak			
8	20940.000	24.00	17.21	41.21	54.00	-12.79	AVG			
9	21402.000	34.53	17.08	51.61	54.00	-2.39	peak			
10	21402.000	23.94	17.08	41.02	54.00	-12.98	AVG			
11	22104.000	34.64	17.72	52.36	54.00	-1.64	peak			
12	22104.000	23.69	17.72	41.41	54.00	-12.59	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #749  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: DP IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 13:27:20  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

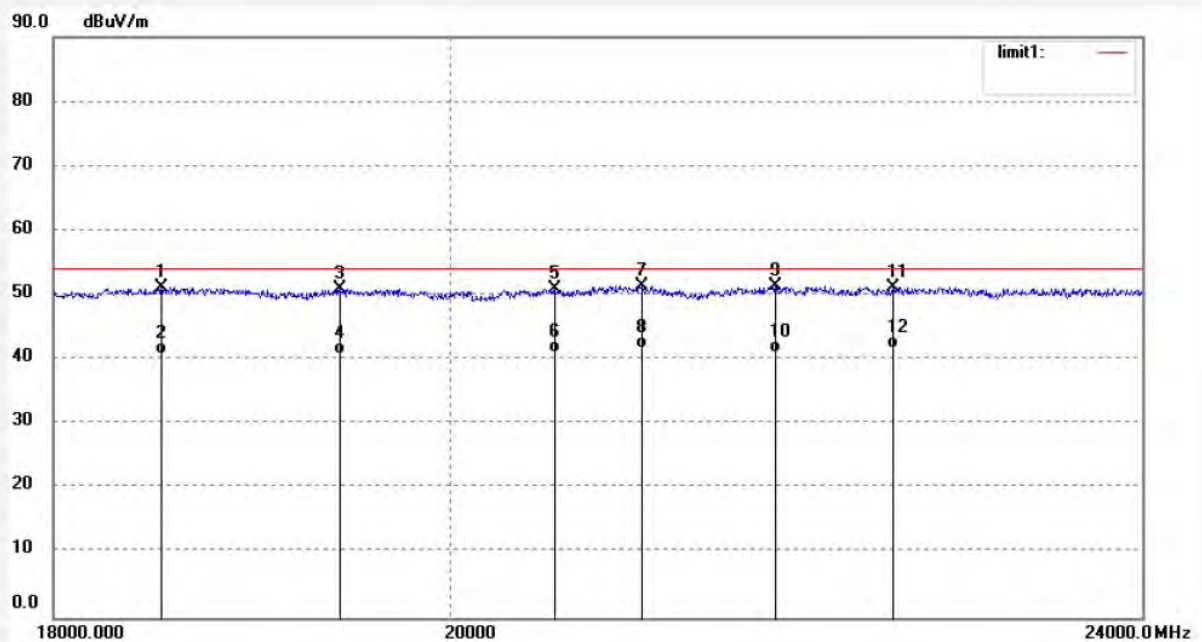


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18522.000	33.77	17.33	51.10	54.00	-2.90	peak			
2	18522.000	23.47	17.33	40.80	54.00	-13.20	AVG			
3	19416.000	33.69	17.18	50.87	54.00	-3.13	peak			
4	19416.000	23.61	17.18	40.79	54.00	-13.21	AVG			
5	20550.000	33.76	17.29	51.05	54.00	-2.95	peak			
6	20550.000	23.80	17.29	41.09	54.00	-12.91	AVG			
7	21030.000	34.16	17.19	51.35	54.00	-2.65	peak			
8	21030.000	24.44	17.19	41.63	54.00	-12.37	AVG			
9	21786.000	33.93	17.41	51.34	54.00	-2.66	peak			
10	21786.000	23.60	17.41	41.01	54.00	-12.99	AVG			
11	22470.000	33.45	17.85	51.30	54.00	-2.70	peak			
12	22470.000	23.91	17.85	41.76	54.00	-12.24	AVG			

Job No.: DING #750  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: DP IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 13:29:34  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

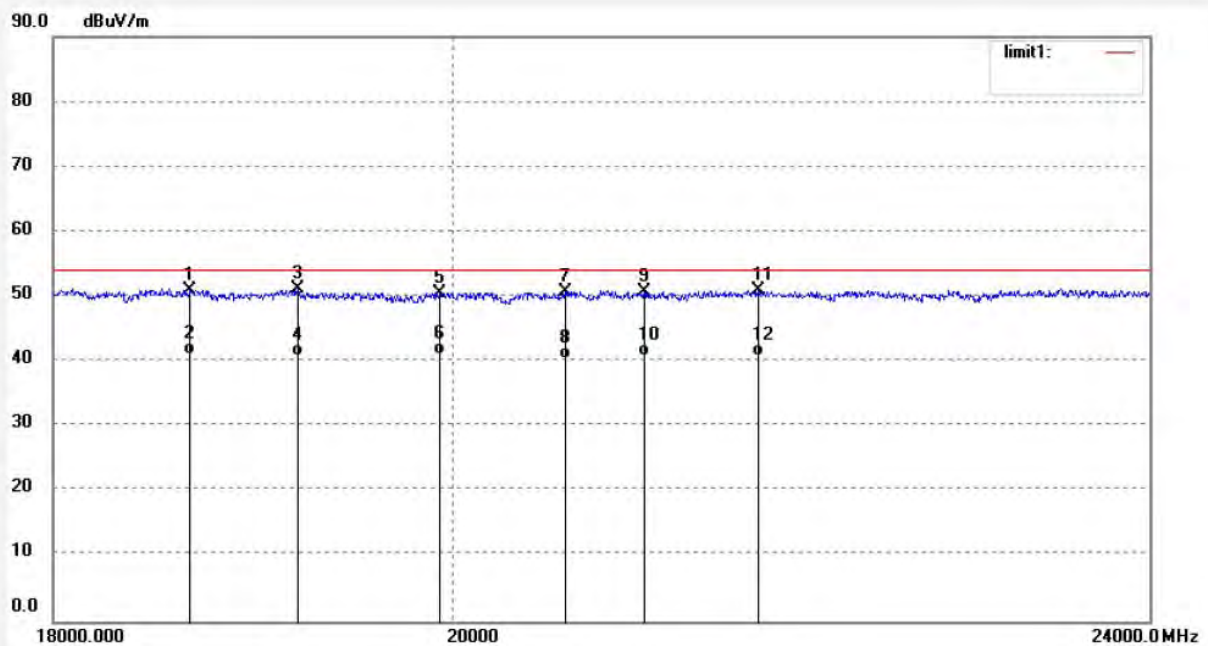

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18660.000	33.84	17.19	51.03	54.00	-2.97	peak			
2	18660.000	23.76	17.19	40.95	54.00	-13.05	AVG			
3	19194.000	34.09	17.01	51.10	54.00	-2.90	peak			
4	19194.000	23.89	17.01	40.90	54.00	-13.10	AVG			
5	19920.000	33.02	17.59	50.61	54.00	-3.39	peak			
6	19920.000	23.41	17.59	41.00	54.00	-13.00	AVG			
7	20592.000	33.52	17.28	50.80	54.00	-3.20	peak			
8	20592.000	23.02	17.28	40.30	54.00	-13.70	AVG			
9	21024.000	33.45	17.19	50.64	54.00	-3.36	peak			
10	21024.000	23.61	17.19	40.80	54.00	-13.20	AVG			
11	21660.000	33.63	17.25	50.88	54.00	-3.12	peak			
12	21660.000	23.49	17.25	40.74	54.00	-13.26	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #751  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: VGA IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 13:31:56  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

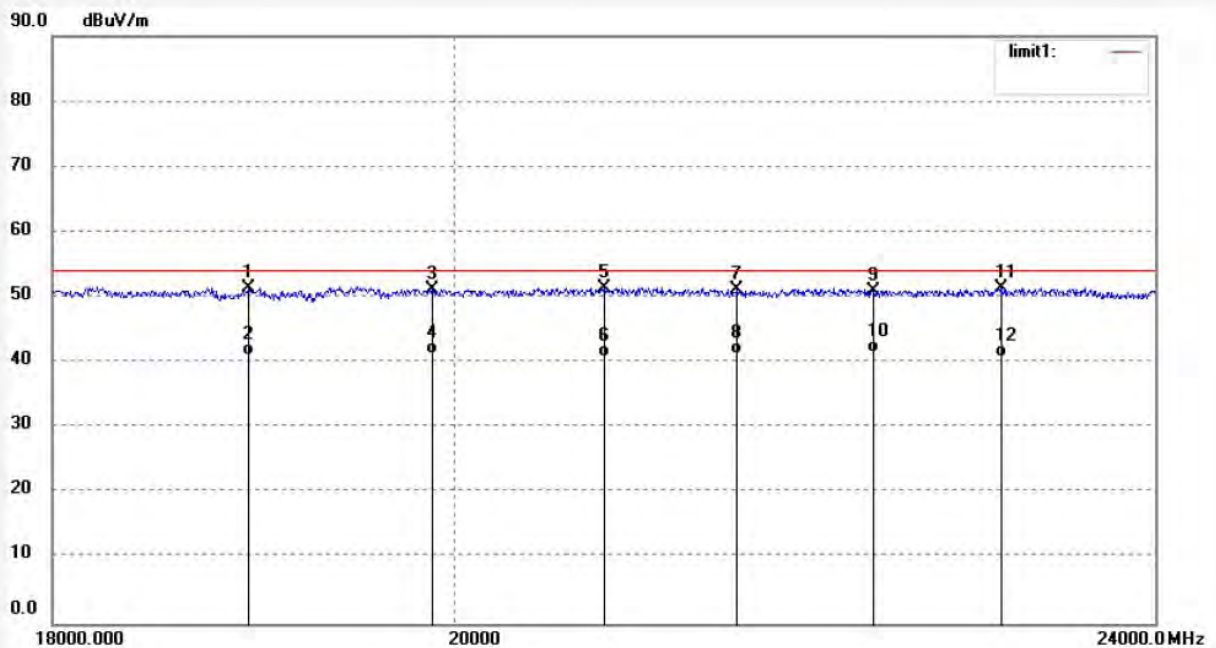


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18948.000	34.48	16.91	51.39	54.00	-2.61	peak			
2	18948.000	24.17	16.91	41.08	54.00	-12.92	AVG			
3	19878.000	33.71	17.55	51.26	54.00	-2.74	peak			
4	19878.000	23.65	17.55	41.20	54.00	-12.80	AVG			
5	20790.000	34.11	17.24	51.35	54.00	-2.65	peak			
6	20790.000	23.54	17.24	40.78	54.00	-13.22	AVG			
7	21522.000	34.02	17.08	51.10	54.00	-2.90	peak			
8	21522.000	24.23	17.08	41.31	54.00	-12.69	AVG			
9	22308.000	33.27	17.79	51.06	54.00	-2.94	peak			
10	22308.000	23.81	17.79	41.60	54.00	-12.40	AVG			
11	23058.000	33.97	17.37	51.34	54.00	-2.66	peak			
12	23058.000	23.40	17.37	40.77	54.00	-13.23	AVG			

Job No.: DING #752  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: VGA IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 13:34:06  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

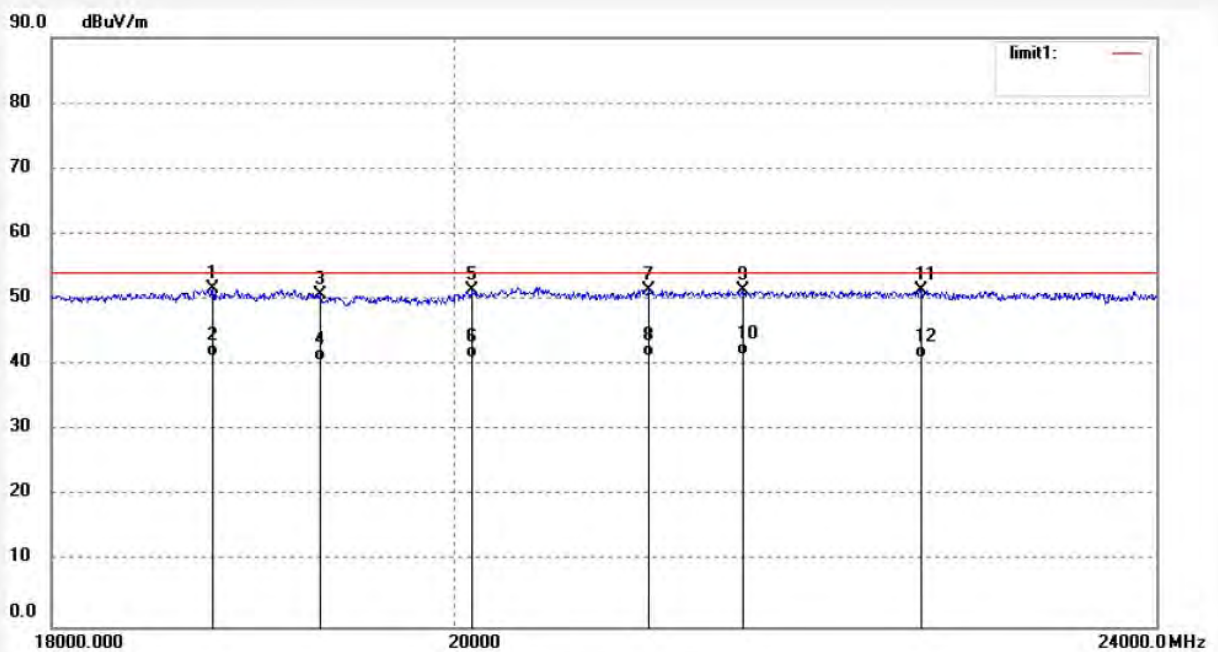


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18774.000	34.47	17.08	51.55	54.00	-2.45	peak			
2	18774.000	24.12	17.08	41.20	54.00	-12.80	AVG			
3	19308.000	33.67	17.10	50.77	54.00	-3.23	peak			
4	19308.000	23.50	17.10	40.60	54.00	-13.40	AVG			
5	20088.000	33.77	17.59	51.36	54.00	-2.64	peak			
6	20088.000	23.44	17.59	41.03	54.00	-12.97	AVG			
7	21030.000	34.16	17.19	51.35	54.00	-2.65	peak			
8	21030.000	24.02	17.19	41.21	54.00	-12.79	AVG			
9	21552.000	34.20	17.12	51.32	54.00	-2.68	peak			
10	21552.000	24.38	17.12	41.50	54.00	-12.50	AVG			
11	22578.000	33.59	17.78	51.37	54.00	-2.63	peak			
12	22578.000	23.25	17.78	41.03	54.00	-12.97	AVG			

Job No.: DING #753  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Interactive Flat Panel  
 Mode: HDMI IN  
 Model: ST-700  
 Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 2016/09/20  
 Time: 13:37:10  
 Engineer Signature:  
 Distance: 3m

Note: Report NO.:ATE20161916

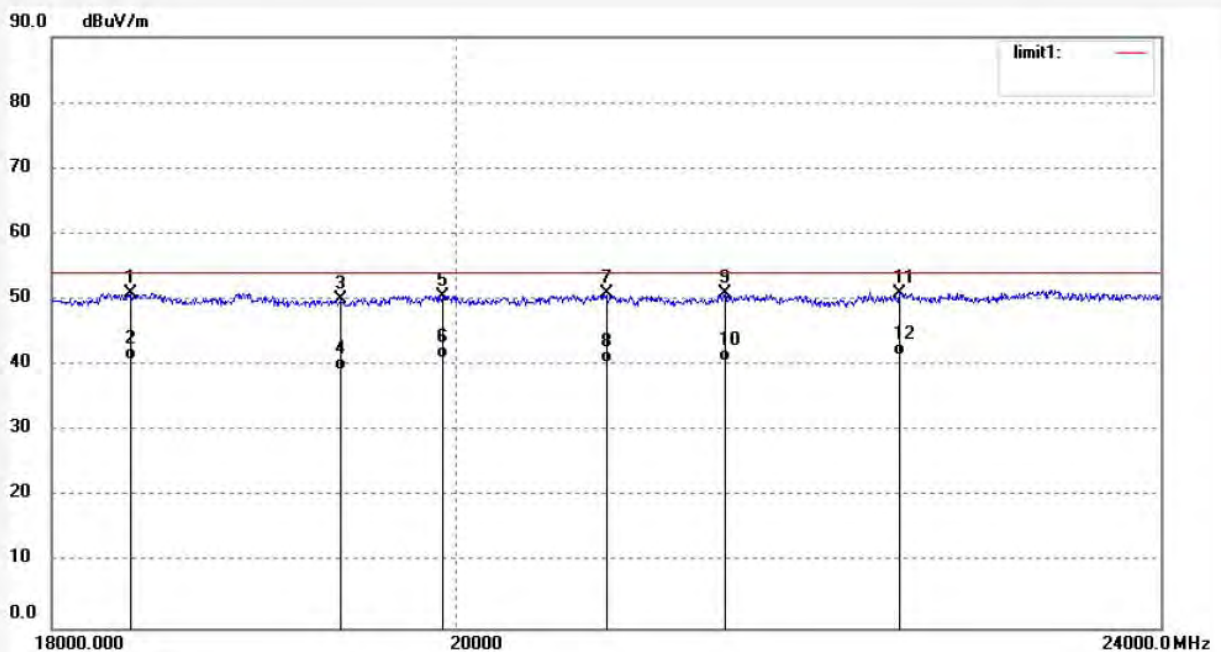

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18372.000	33.29	17.66	50.95	54.00	-3.05	peak			
2	18372.000	23.27	17.66	40.93	54.00	-13.07	AVG			
3	19404.000	32.86	17.18	50.04	54.00	-3.96	peak			
4	19404.000	22.16	17.18	39.34	54.00	-14.66	AVG			
5	19920.000	33.02	17.59	50.61	54.00	-3.39	peak			
6	19920.000	23.40	17.59	40.99	54.00	-13.01	AVG			
7	20790.000	33.61	17.24	50.85	54.00	-3.15	peak			
8	20790.000	23.11	17.24	40.35	54.00	-13.65	AVG			
9	21438.000	33.96	17.07	51.03	54.00	-2.97	peak			
10	21438.000	23.64	17.07	40.71	54.00	-13.29	AVG			
11	22428.000	33.22	17.83	51.05	54.00	-2.95	peak			
12	22428.000	23.76	17.83	41.59	54.00	-12.41	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: DING #754	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/09/20
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 13:39:51
EUT: Interactive Flat Panel	Engineer Signature:
Mode: HDMI IN	Distance: 3m
Model: ST-700	
Manufacturer: Recordex USA, Inc.	

Note: Report NO.:ATE20161916

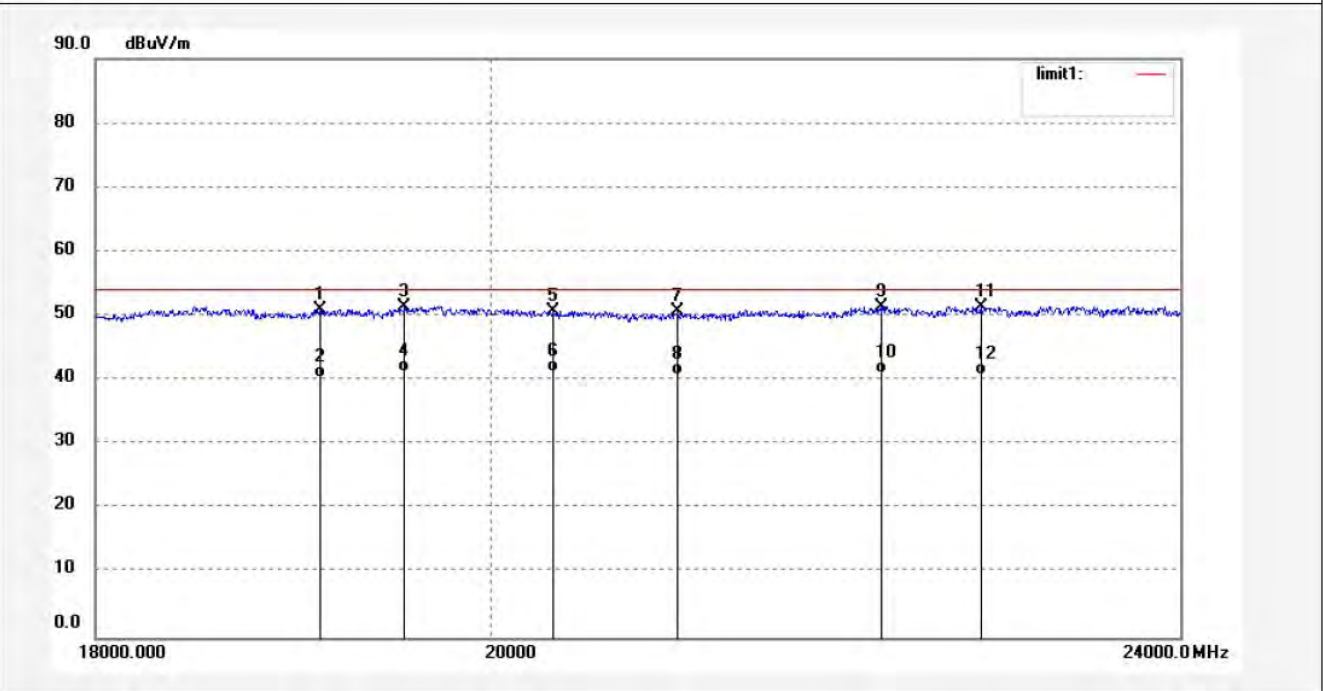

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19104.463	34.08	16.94	51.02	54.00	-2.98	peak			
2	19104.463	23.51	16.94	40.45	54.00	-13.55	AVG			
3	19542.000	34.07	17.28	51.35	54.00	-2.65	peak			
4	19542.000	24.03	17.28	41.31	54.00	-12.69	AVG			
5	20328.000	33.35	17.42	50.77	54.00	-3.23	peak			
6	20328.000	23.80	17.42	41.22	54.00	-12.78	AVG			
7	21012.000	33.60	17.20	50.80	54.00	-3.20	peak			
8	21012.000	23.54	17.20	40.74	54.00	-13.26	AVG			
9	22176.000	33.59	17.74	51.33	54.00	-2.67	peak			
10	22176.000	23.31	17.74	41.05	54.00	-12.95	AVG			
11	22764.000	33.79	17.59	51.38	54.00	-2.62	peak			
12	22764.000	23.18	17.59	40.77	54.00	-13.23	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #755

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Interactive Flat Panel

Mode: USB IN

Model: ST-700

Manufacturer: Recordex USA, Inc.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/09/20

Time: 13:41:06

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20161916

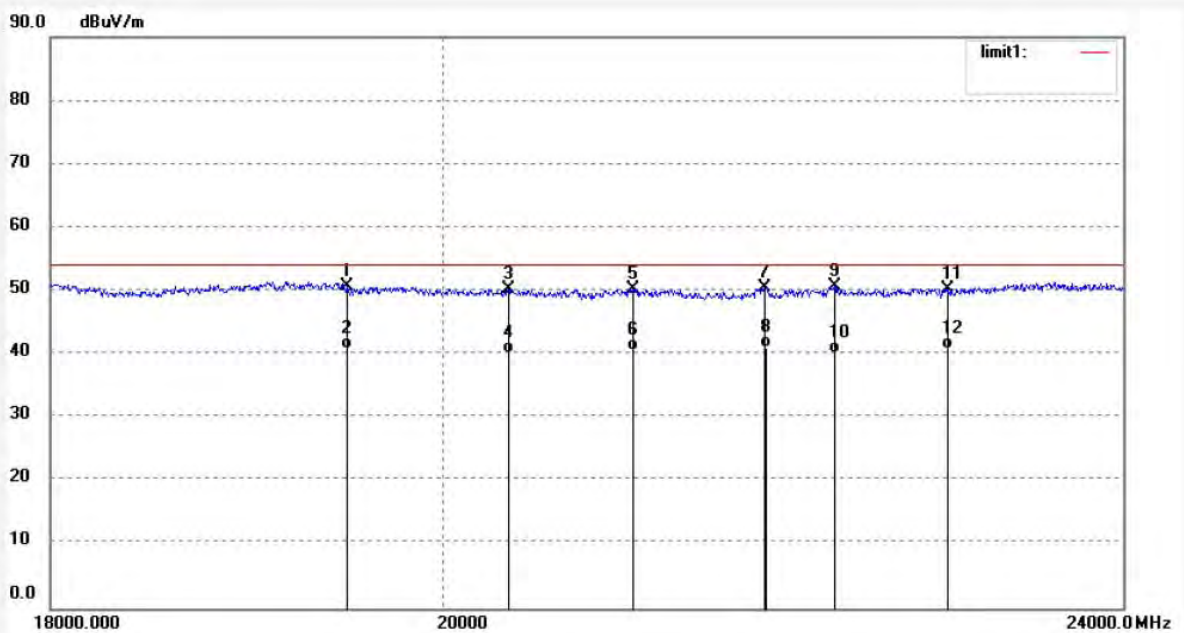

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19494.000	33.59	17.25	50.84	54.00	-3.16	peak			
2	19494.000	23.48	17.25	40.73	54.00	-13.27	AVG			
3	20358.000	32.80	17.40	50.20	54.00	-3.80	peak			
4	20358.000	22.72	17.40	40.12	54.00	-13.88	AVG			
5	21048.000	33.21	17.19	50.40	54.00	-3.60	peak			
6	21048.000	23.51	17.19	40.70	54.00	-13.30	AVG			
7	21804.000	33.13	17.43	50.56	54.00	-3.44	peak			
8	21804.000	23.71	17.43	41.14	54.00	-12.86	AVG			
9	22218.000	32.87	17.76	50.63	54.00	-3.37	peak			
10	22218.000	22.30	17.76	40.06	54.00	-13.94	AVG			
11	22902.000	32.90	17.45	50.35	54.00	-3.65	peak			
12	22902.000	23.47	17.45	40.92	54.00	-13.08	AVG			





ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #756  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Interactive Flat Panel  
Mode: USB IN  
Model: ST-700  
Manufacturer: Recordex USA, Inc.

Polarization: Vertical  
Power Source: AC 120V/60Hz  
Date: 2016/09/20  
Time: 13:44:12  
Engineer Signature:  
Distance: 3m

Note: Report NO.:ATE20161916

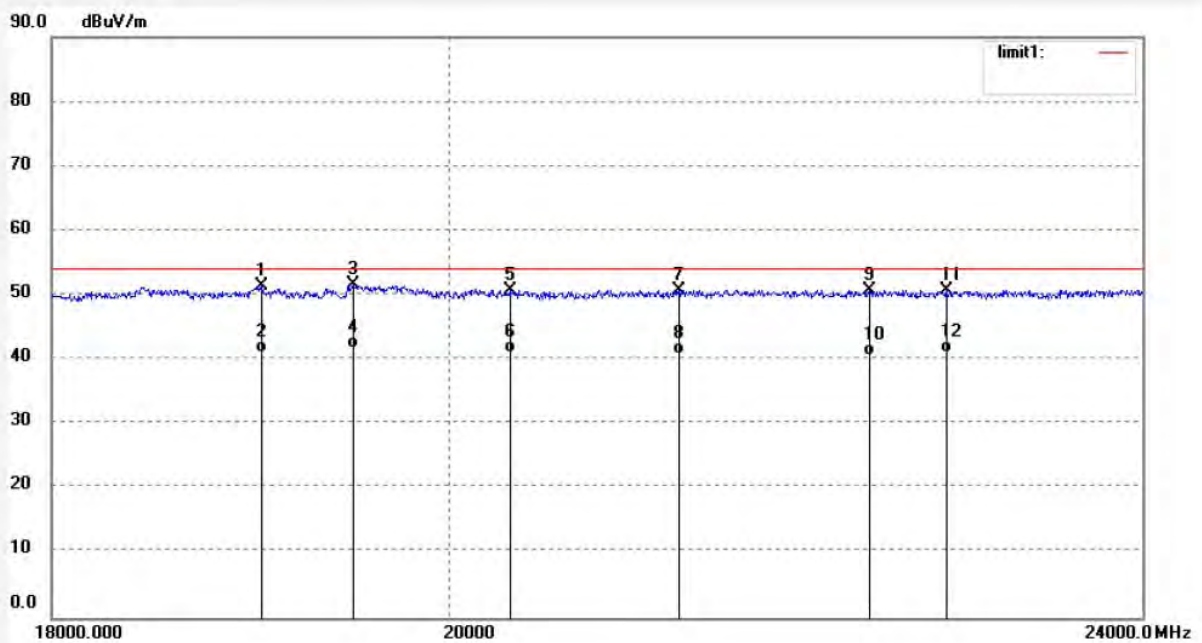

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	19032.000	34.60	16.88	51.48	54.00	-2.52	peak			
2	19032.000	24.23	16.88	41.11	54.00	-12.89	AVG			
3	19488.000	34.30	17.24	51.54	54.00	-2.46	peak			
4	19488.000	24.51	17.24	41.75	54.00	-12.25	AVG			
5	20322.000	33.21	17.42	50.63	54.00	-3.37	peak			
6	20322.000	23.60	17.42	41.02	54.00	-12.98	AVG			
7	21240.000	33.54	17.13	50.67	54.00	-3.33	peak			
8	21240.000	23.81	17.13	40.94	54.00	-13.06	AVG			
9	22338.000	32.87	17.80	50.67	54.00	-3.33	peak			
10	22338.000	22.81	17.80	40.61	54.00	-13.39	AVG			
11	22794.000	33.07	17.56	50.63	54.00	-3.37	peak			
12	22794.000	23.40	17.56	40.96	54.00	-13.04	AVG			

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	USB IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

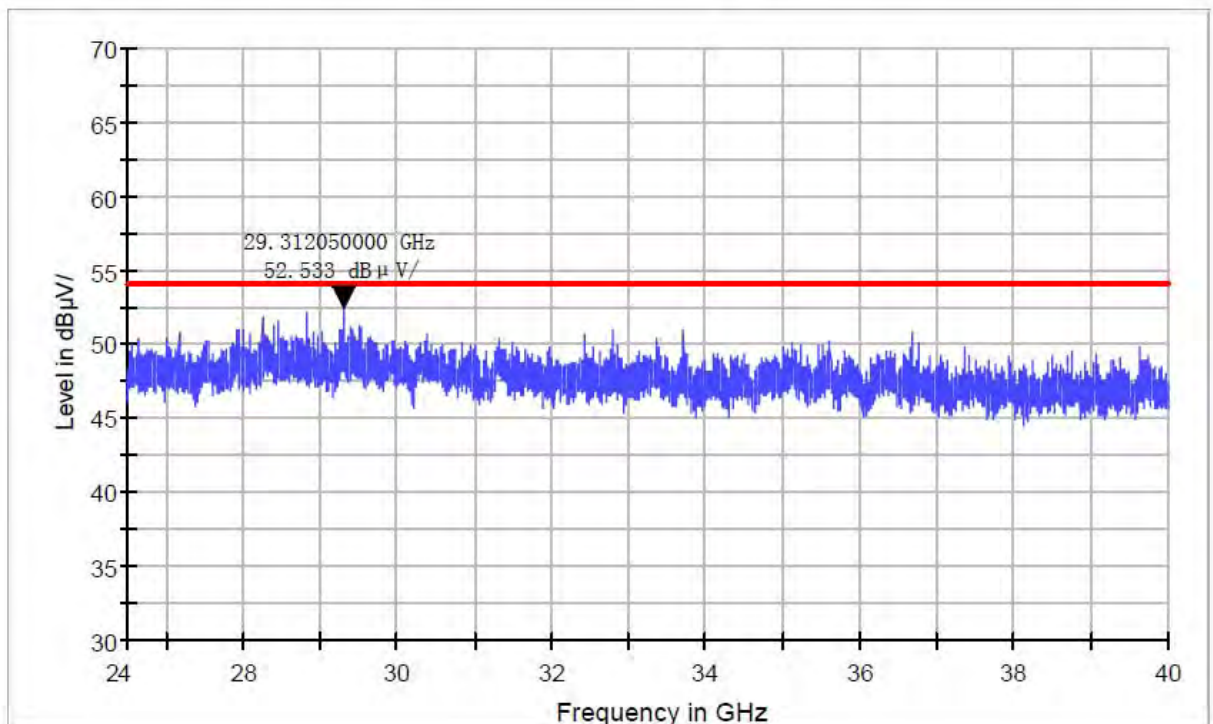

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	USB IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Vertical
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

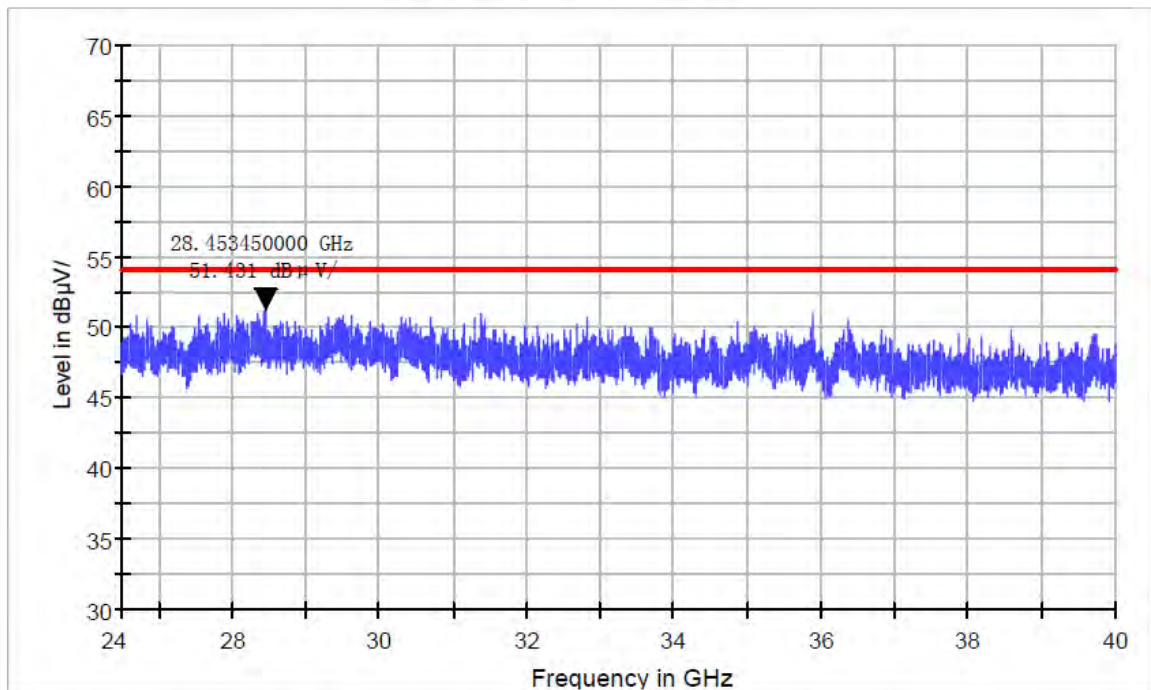

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	AV IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

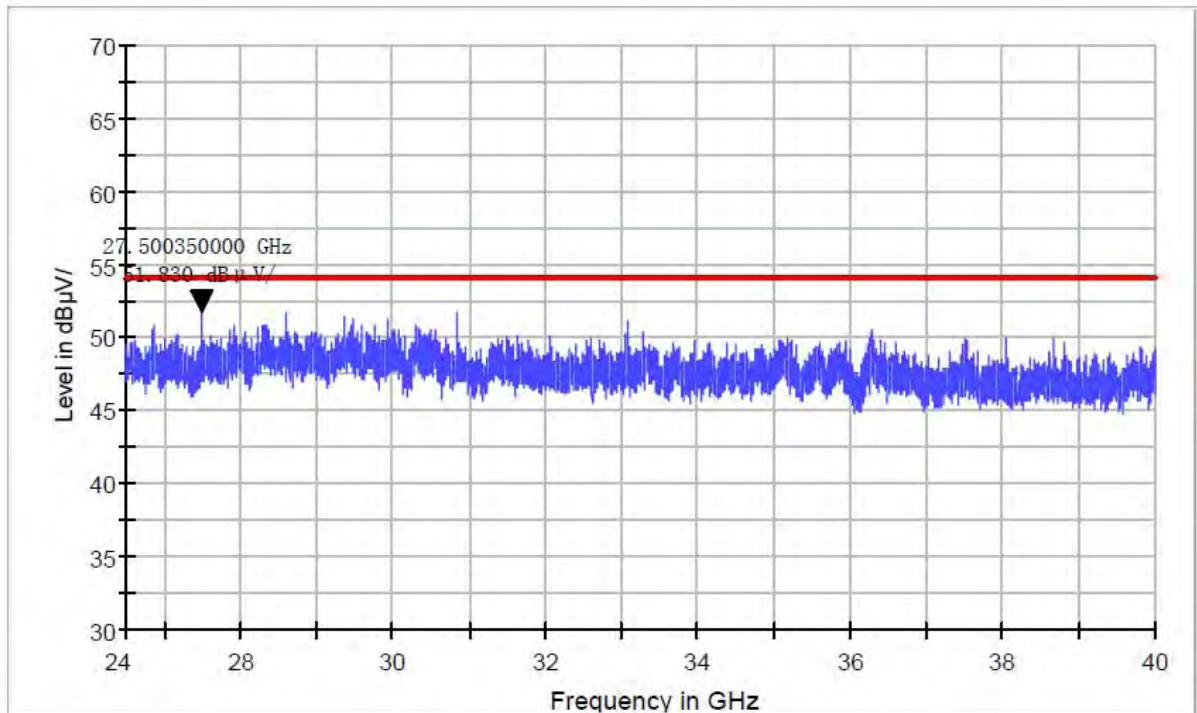

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	AV IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Vertical
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

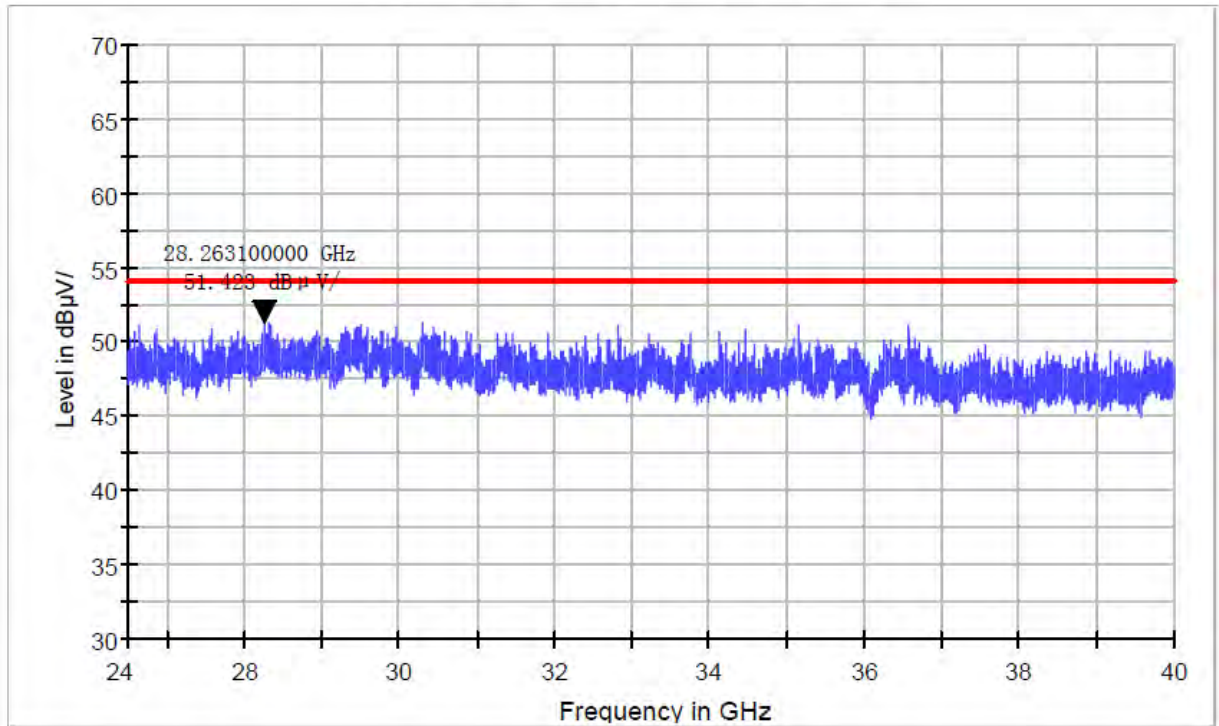

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	VGA IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

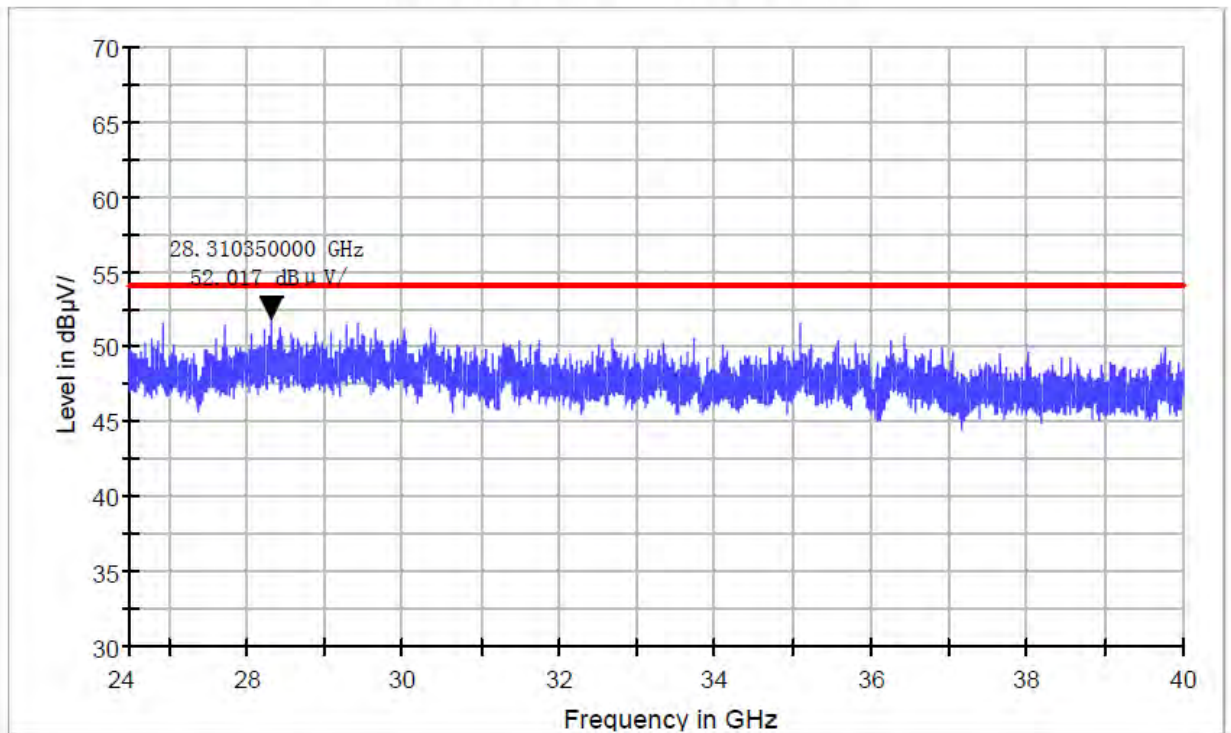

# Radiated Emission


## EUT Information

EUT Model Name: Interactive Flat Pane M/N:ST-700  
Operation mode: VGA IN  
Test Voltage: AC 120V/60Hz  
Comment: ATE20161916

## Common Information

Test Site: EMC Lab.  
Environment Conditions: 23C / 48 %  
Antenna Polarization: Vertical  
Operator Name: DING  
Comment:

Copy of FCC Electric Field Strength 24-40GHz

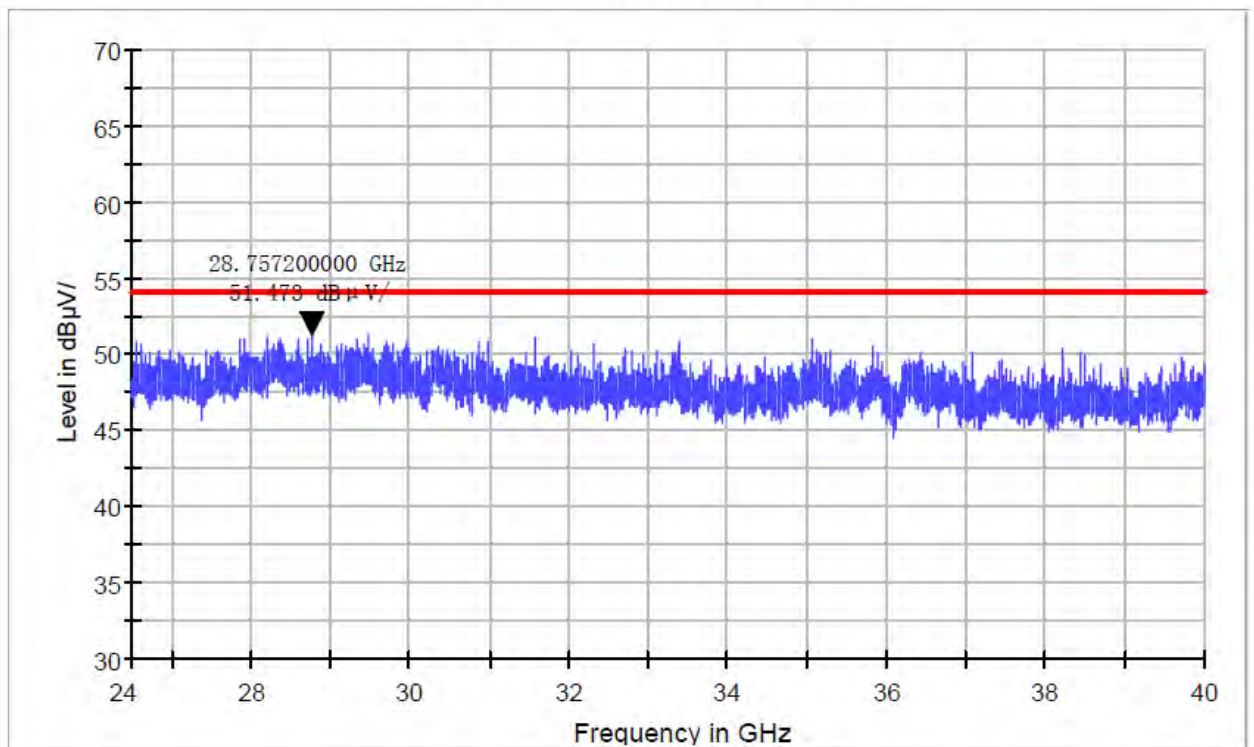

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	DP IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

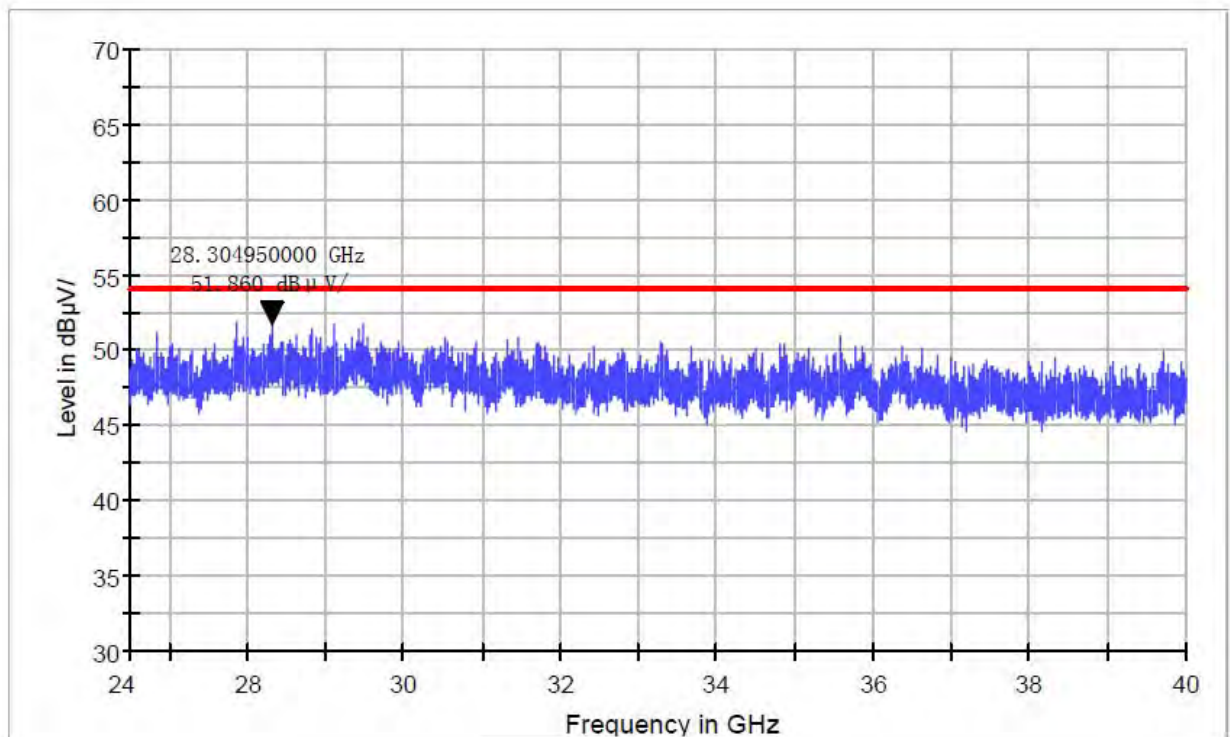



# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	DP IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Vertical
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

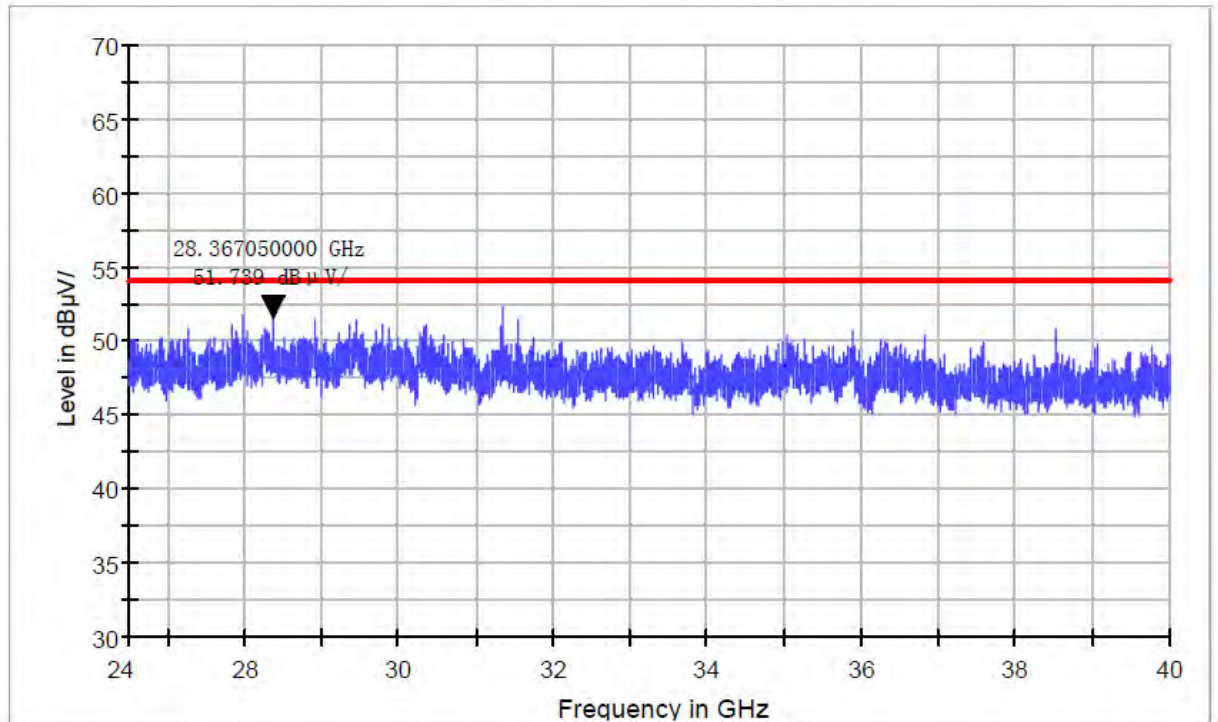

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	HDMI IN	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

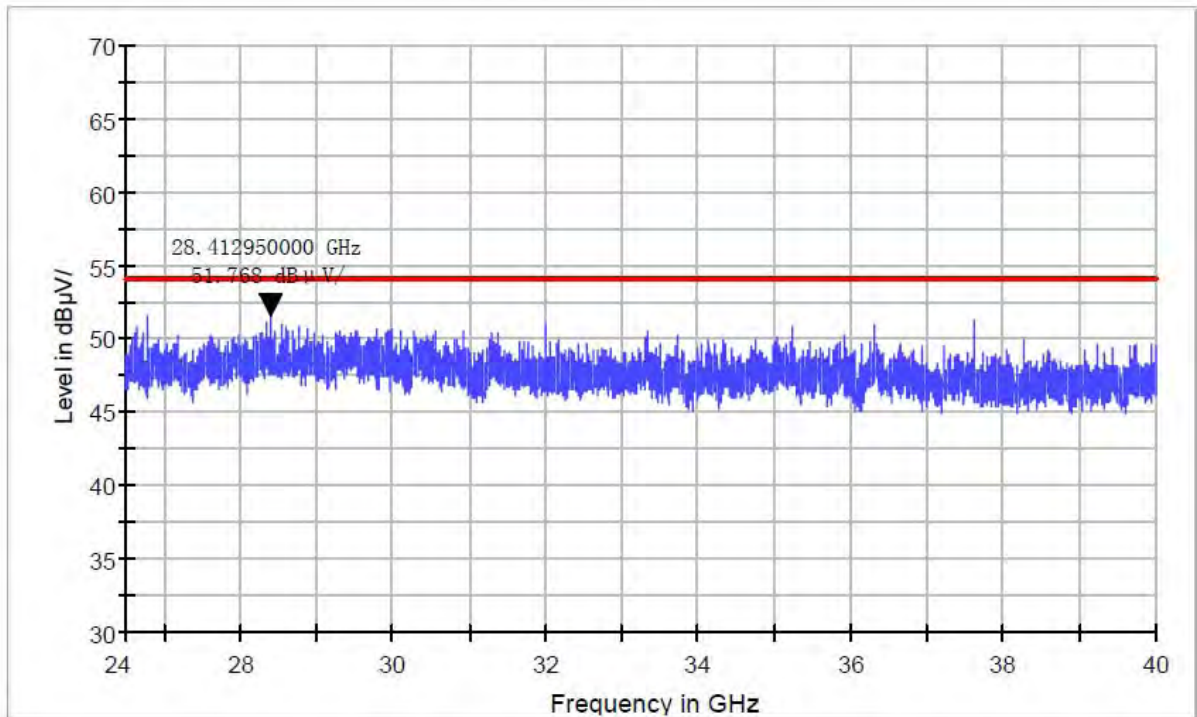

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane M/N:ST-700
Operation mode:	HDMI IN
Test Voltage:	AC 120V/60Hz
Comment:	ATE20161916

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Vertical
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

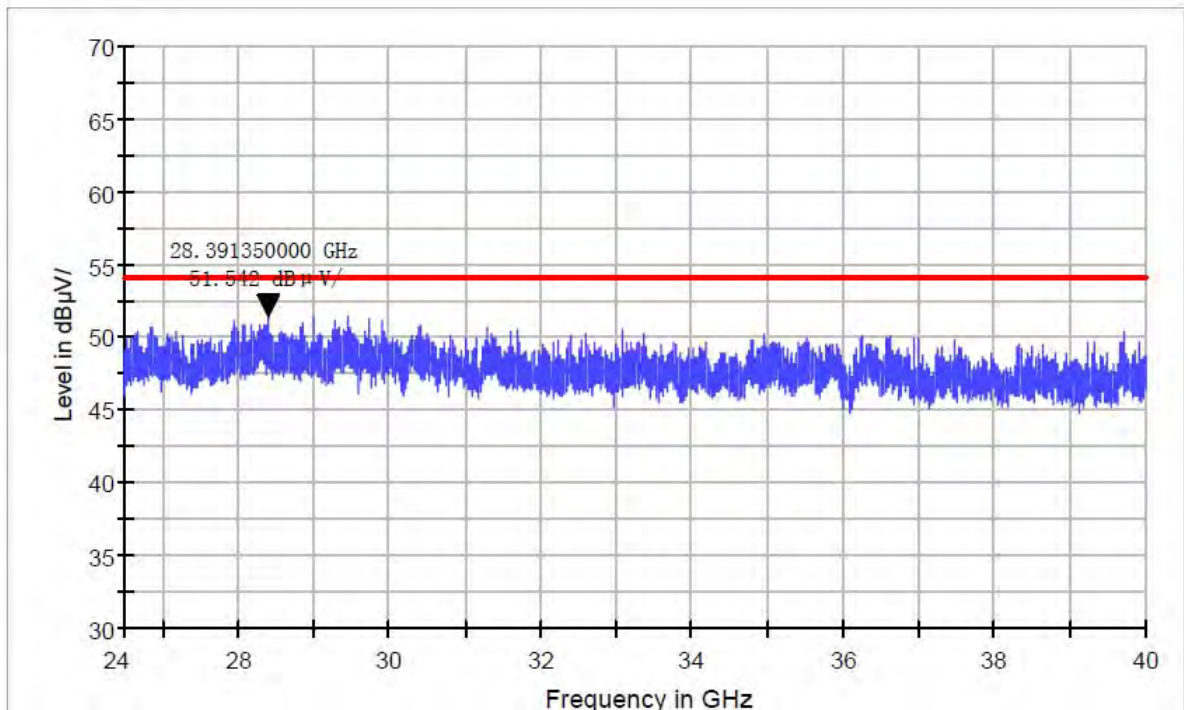

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	Memory Playing	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information

Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Vertical
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

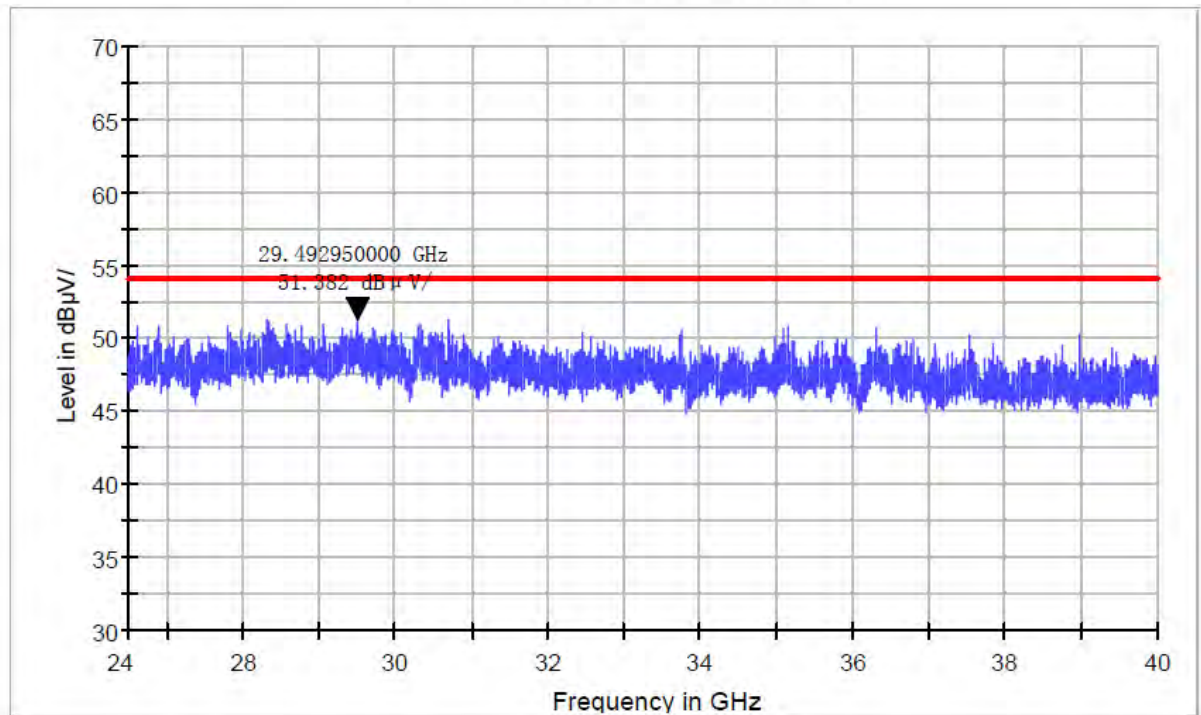

# Radiated Emission


## EUT Information

EUT Model Name:	Interactive Flat Pane	M/N:ST-700
Operation mode:	Memory Playing	
Test Voltage:	AC 120V/60Hz	
Comment:	ATE20161916	

## Common Information


Test Site:	EMC Lab.
Environment Conditions:	23C / 48 %
Antenna Polarization:	Horizontal
Operator Name:	DING
Comment:	

Copy of FCC Electric Field Strength 24-40GHz

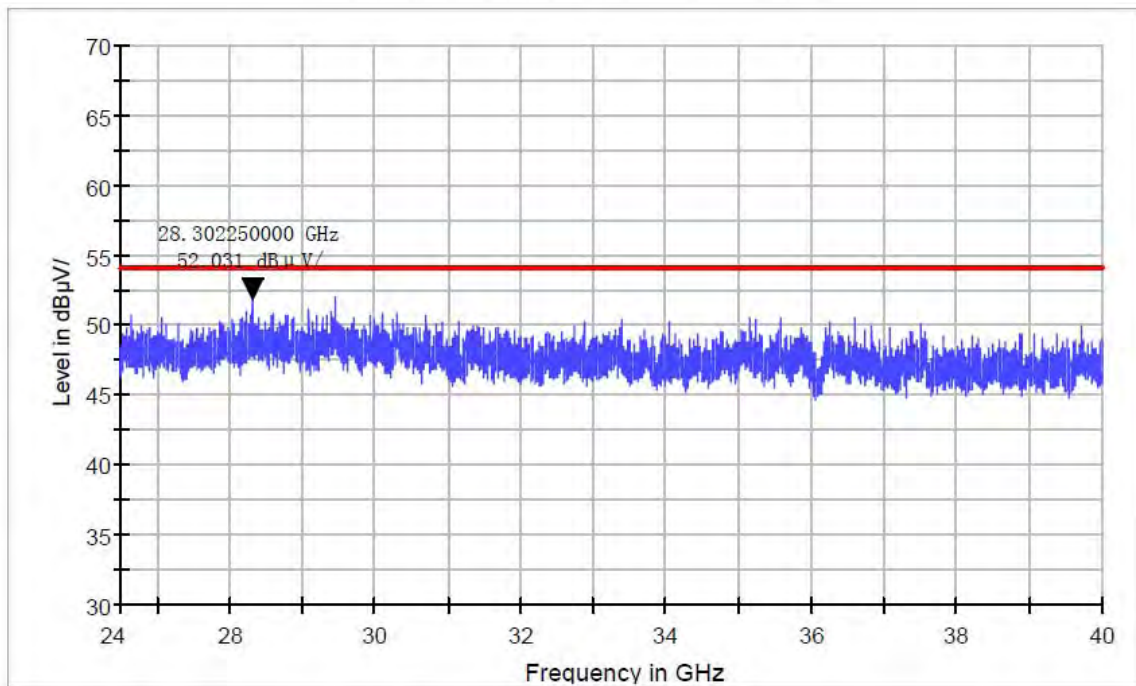

## 6. PHOTOGRAPHS

### 6.1.Photos of Radiated Emission Measurement

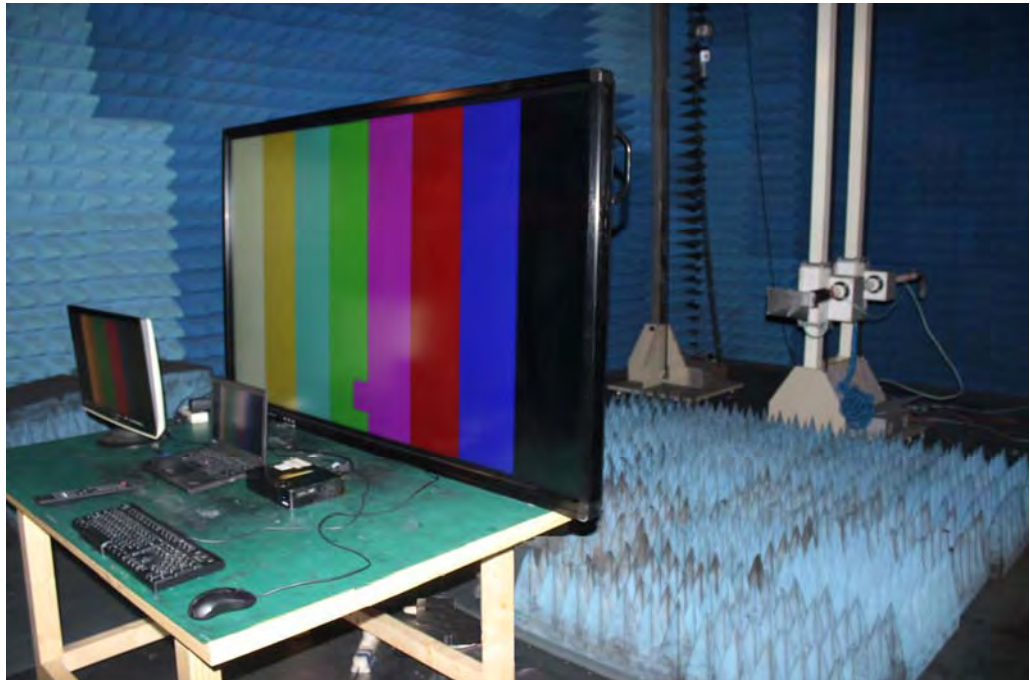

6.2.Photo of Conducted Emission Measurement





6.3.Photo of EUT
















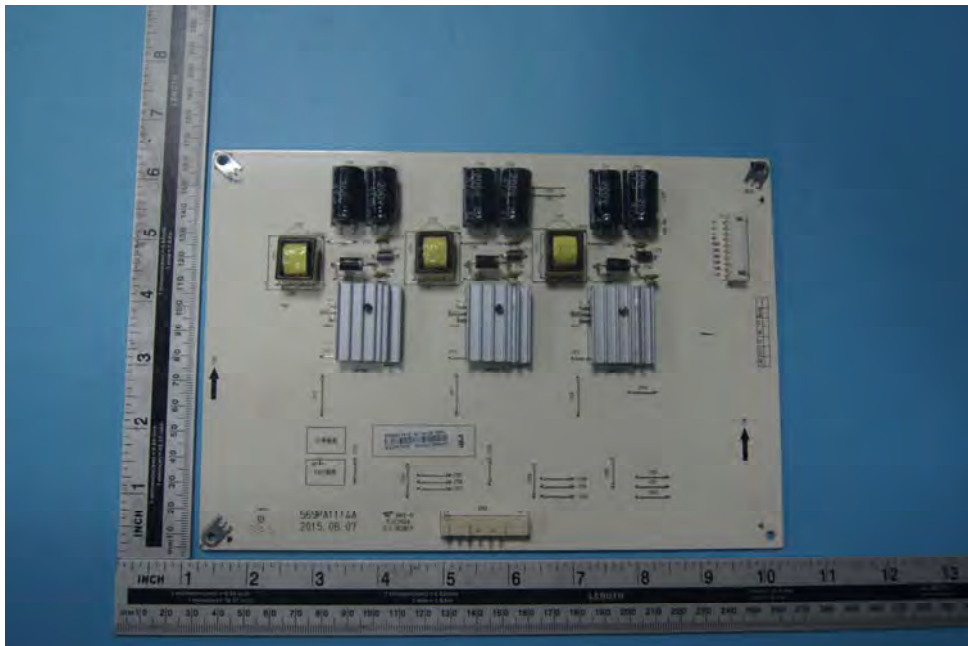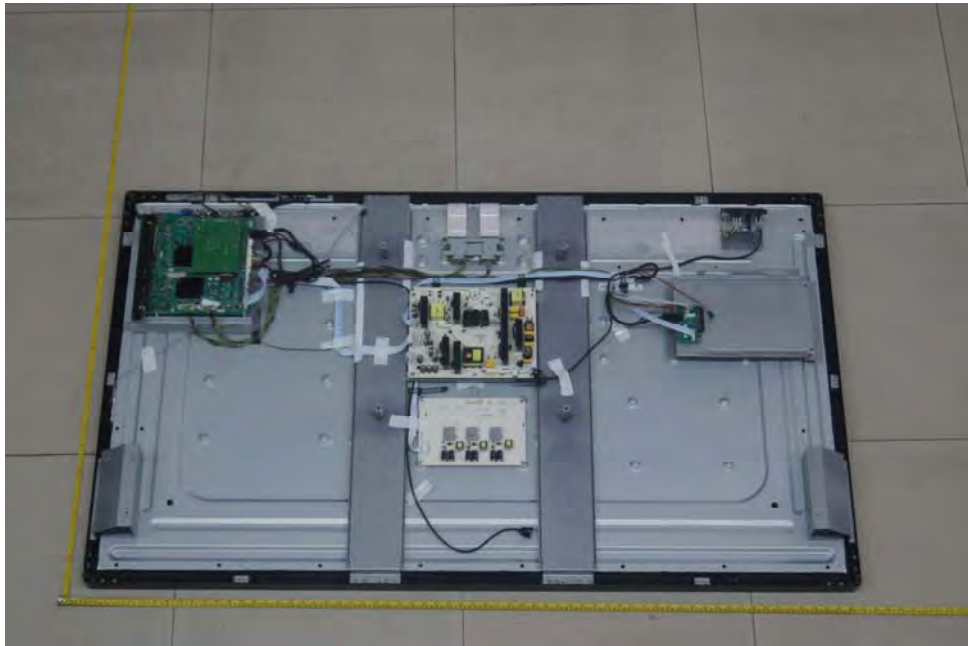

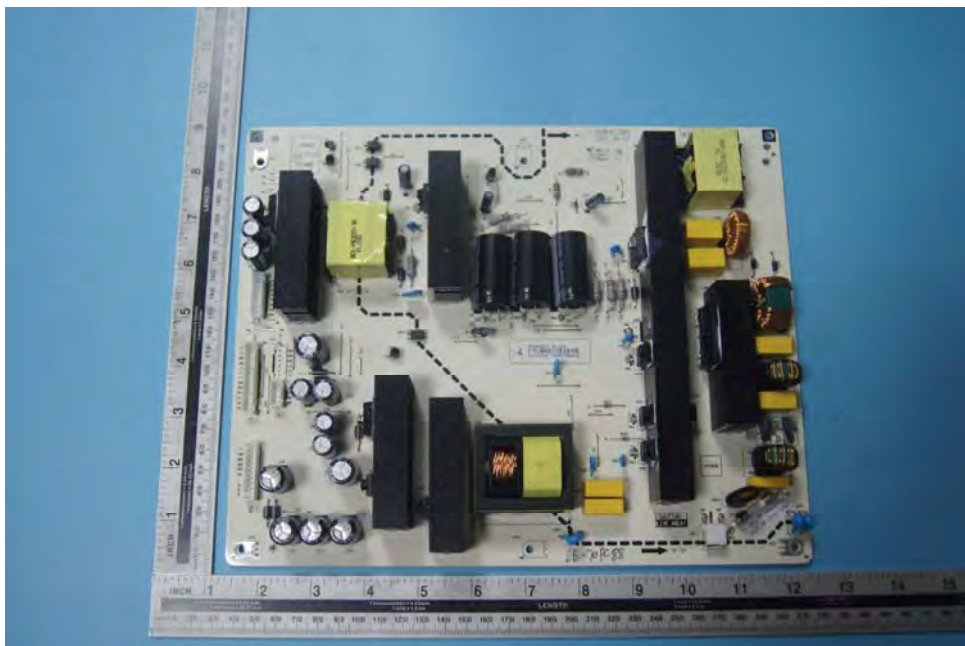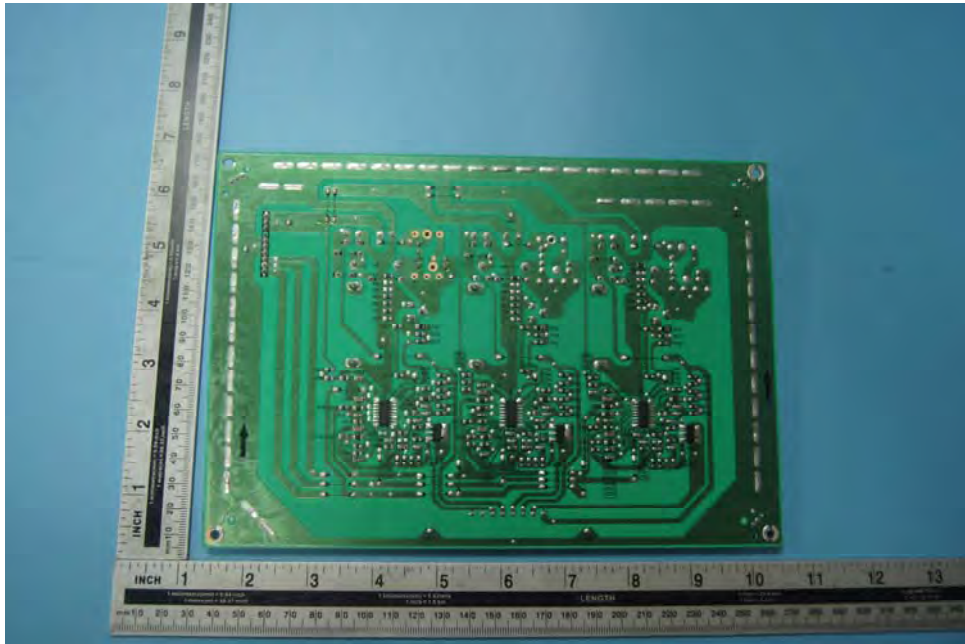


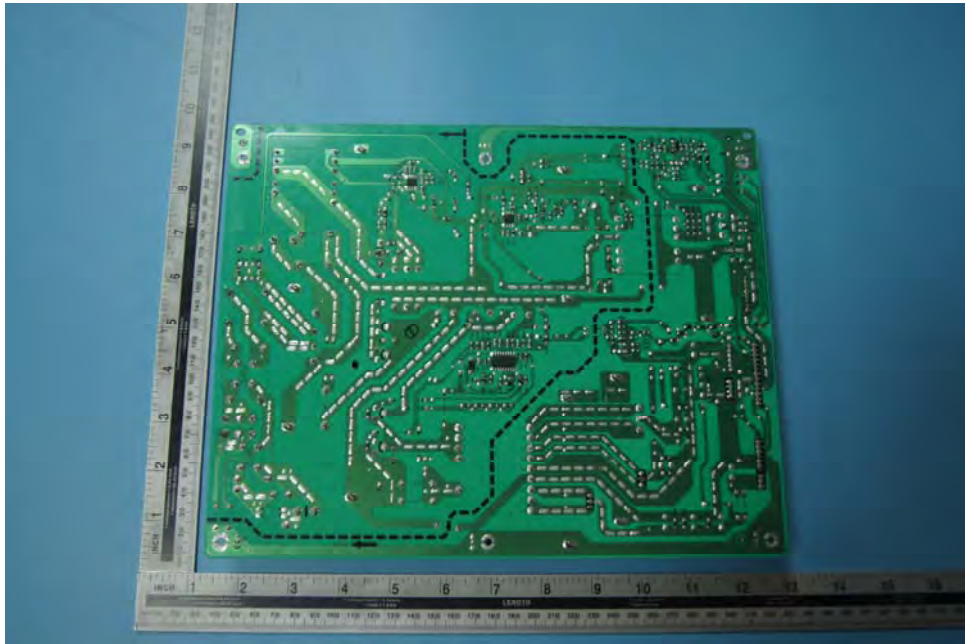

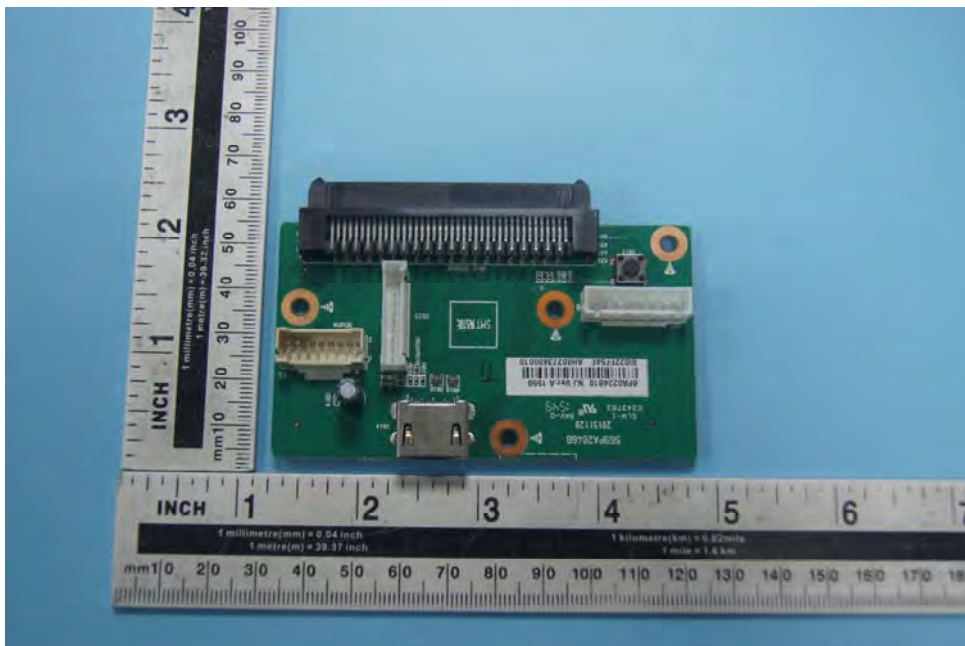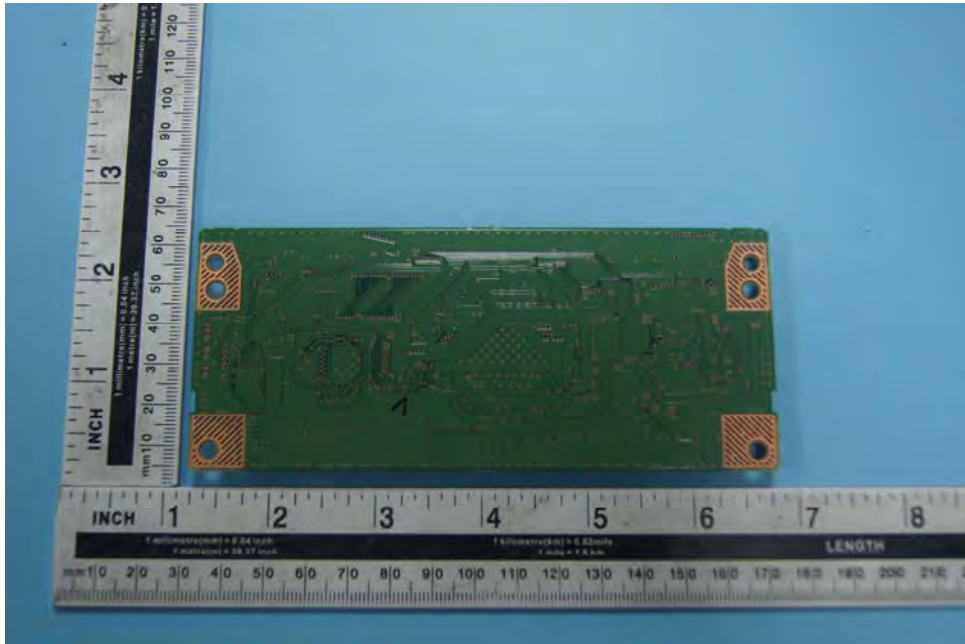


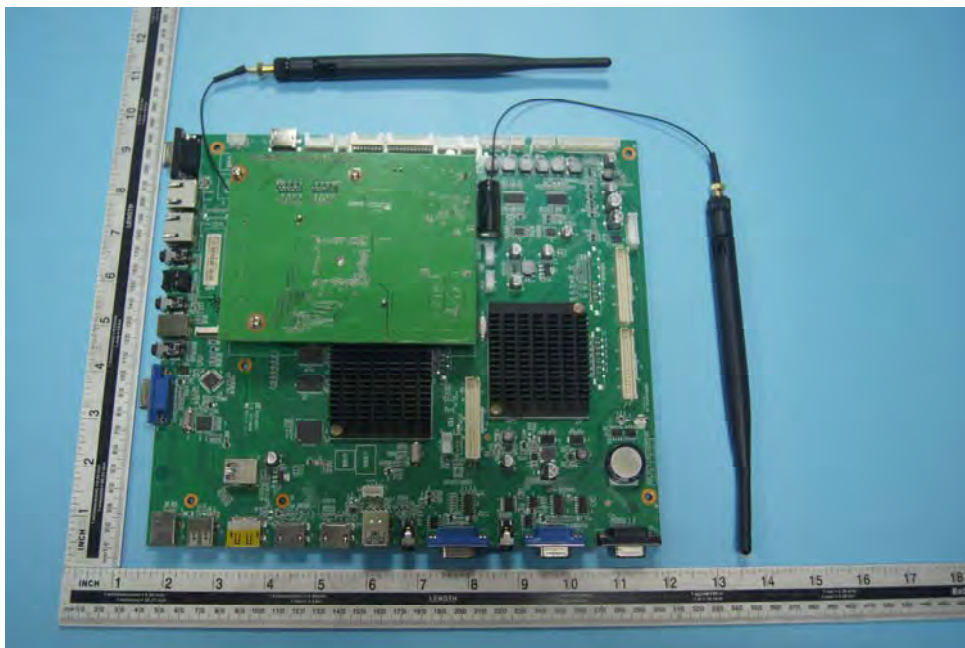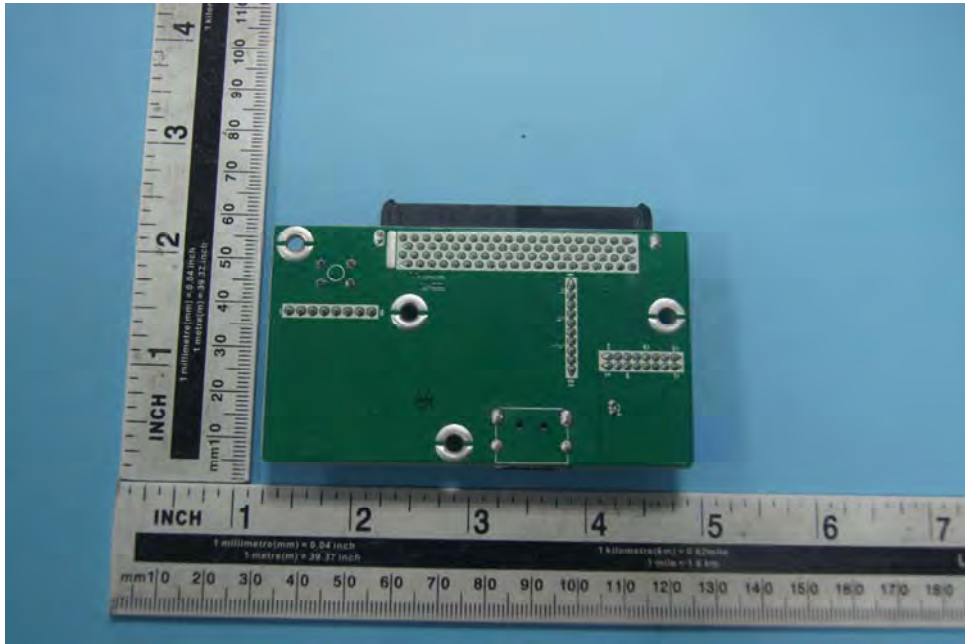



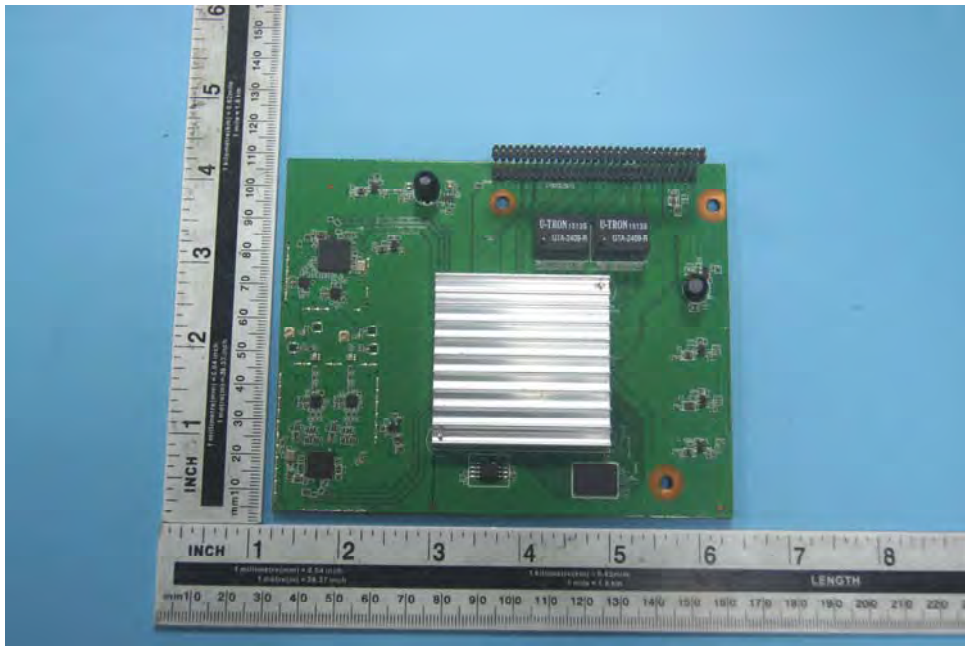



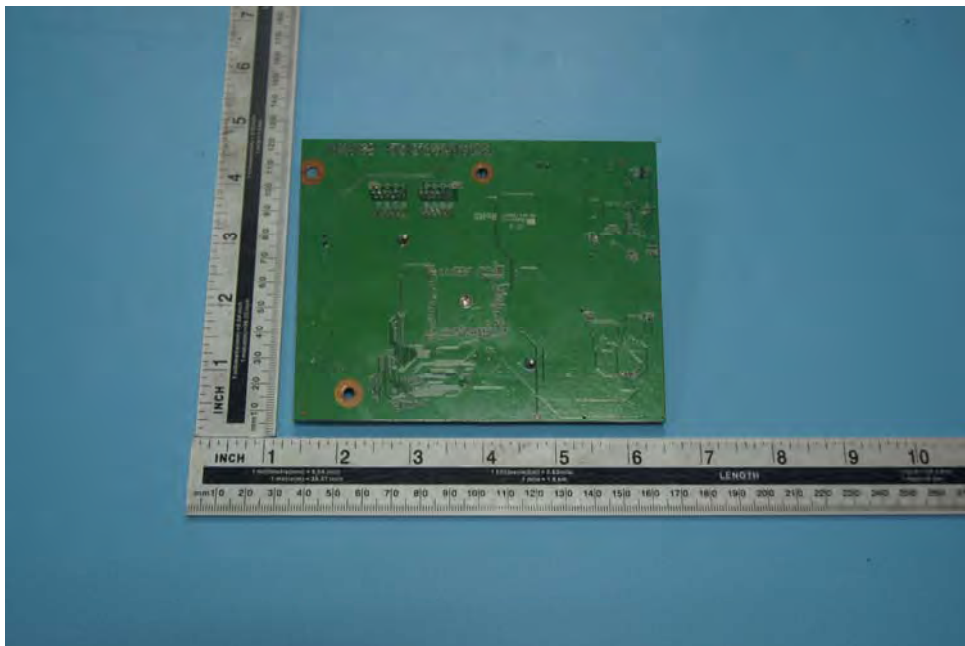

\*\*\*\*\* End of Test Report \*\*\*\*\*