



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #1159
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/03/
Time: 9/57/02
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

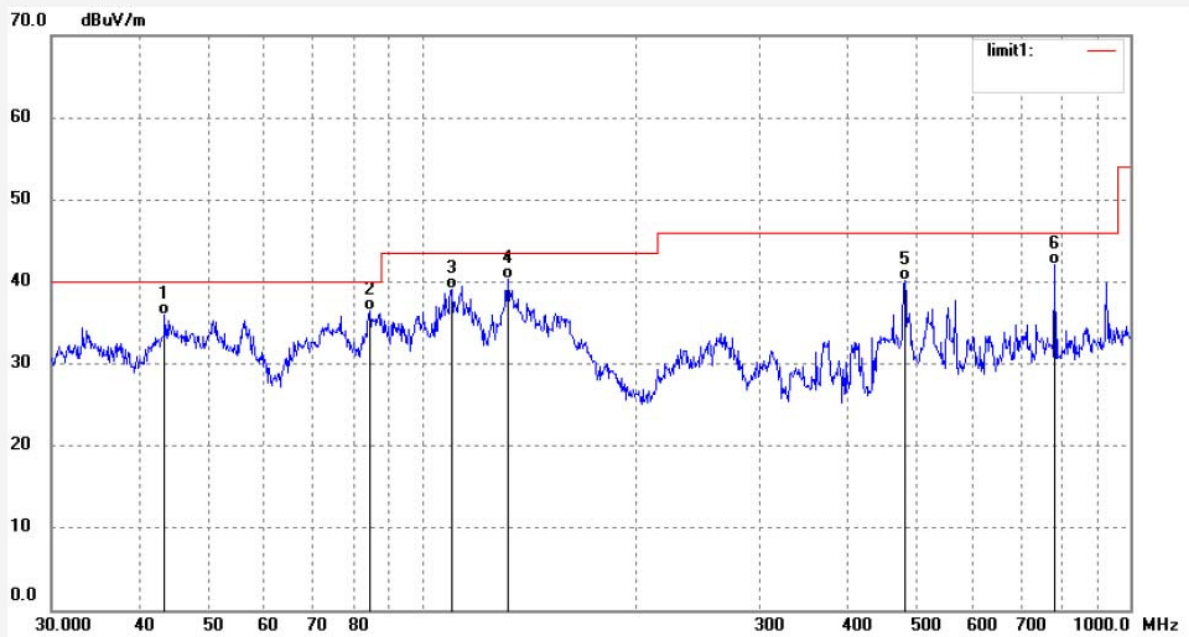

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	43.3534	48.23	-12.27	35.96	40.00	-4.04	QP			
2	84.4054	52.03	-15.47	36.56	40.00	-3.44	QP			
3	110.1816	52.84	-13.80	39.04	43.50	-4.46	QP			
4	132.2204	54.14	-13.84	40.30	43.50	-3.20	QP			
5	480.5276	45.04	-4.88	40.16	46.00	-5.84	QP			
6	782.3451	41.76	0.41	42.17	46.00	-3.83	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #1160
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/03/
Time: 9/59/40
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

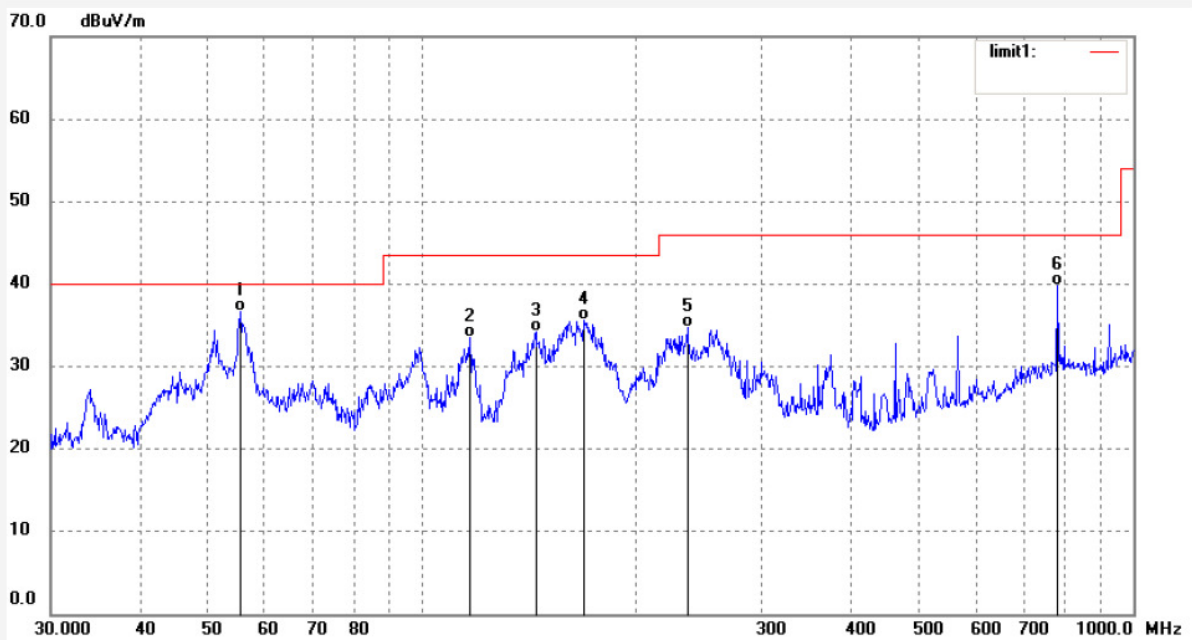

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	49.72	-13.03	36.69	40.00	-3.31	QP			
2	116.5400	46.56	-13.06	33.50	43.50	-10.00	QP			
3	144.3348	49.26	-15.11	34.15	43.50	-9.35	QP			
4	168.4138	49.34	-13.79	35.55	43.50	-7.95	QP			
5	235.8163	45.50	-10.81	34.69	46.00	-11.31	QP			
6	782.3451	39.45	0.41	39.86	46.00	-6.14	QP			

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #1161
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 12/44/45
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

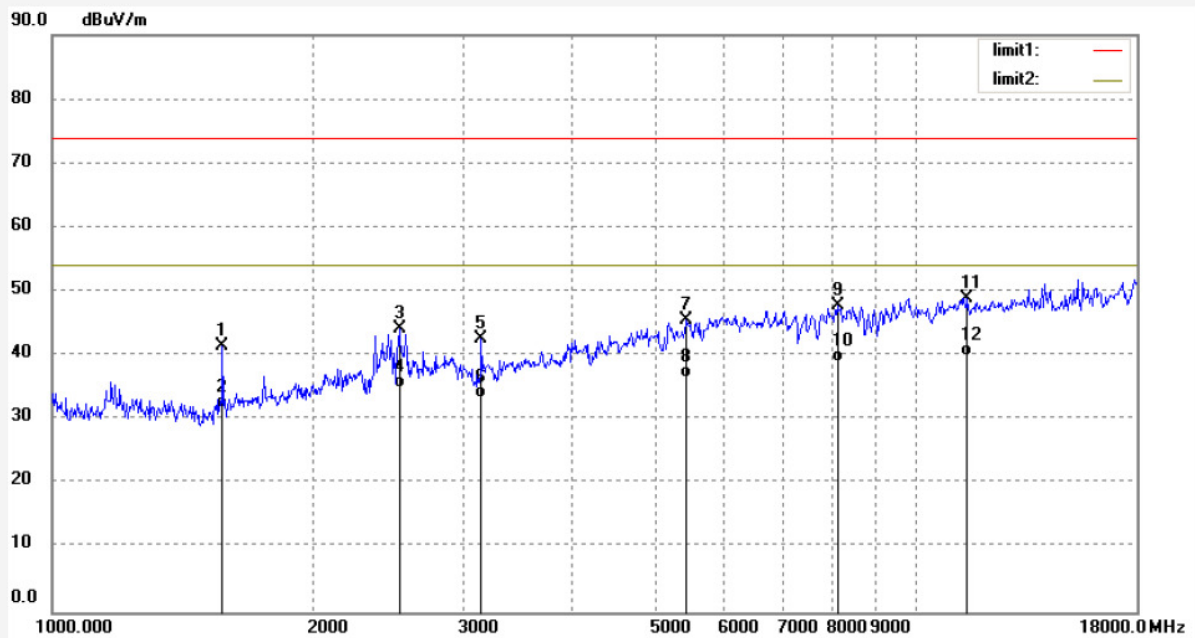

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1574.718	51.37	-9.84	41.53	74.00	-32.47	peak			
2	1574.718	41.59	-9.84	31.75	54.00	-22.25	AVG			
3	2523.426	49.39	-5.27	44.12	74.00	-29.88	peak			
4	2523.426	40.22	-5.27	34.95	54.00	-19.05	AVG			
5	3139.061	44.01	-1.48	42.53	74.00	-31.47	peak			
6	3139.061	34.87	-1.48	33.39	54.00	-20.61	AVG			
7	5425.684	40.36	5.09	45.45	74.00	-28.55	peak			
8	5425.684	31.56	5.09	36.65	54.00	-17.35	AVG			
9	8107.804	35.42	12.36	47.78	74.00	-26.22	peak			
10	8107.804	26.78	12.36	39.14	54.00	-14.86	AVG			
11	11463.934	33.66	15.32	48.98	74.00	-25.02	peak			
12	11463.934	24.65	15.32	39.97	54.00	-14.03	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #1162
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 12/46/46
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

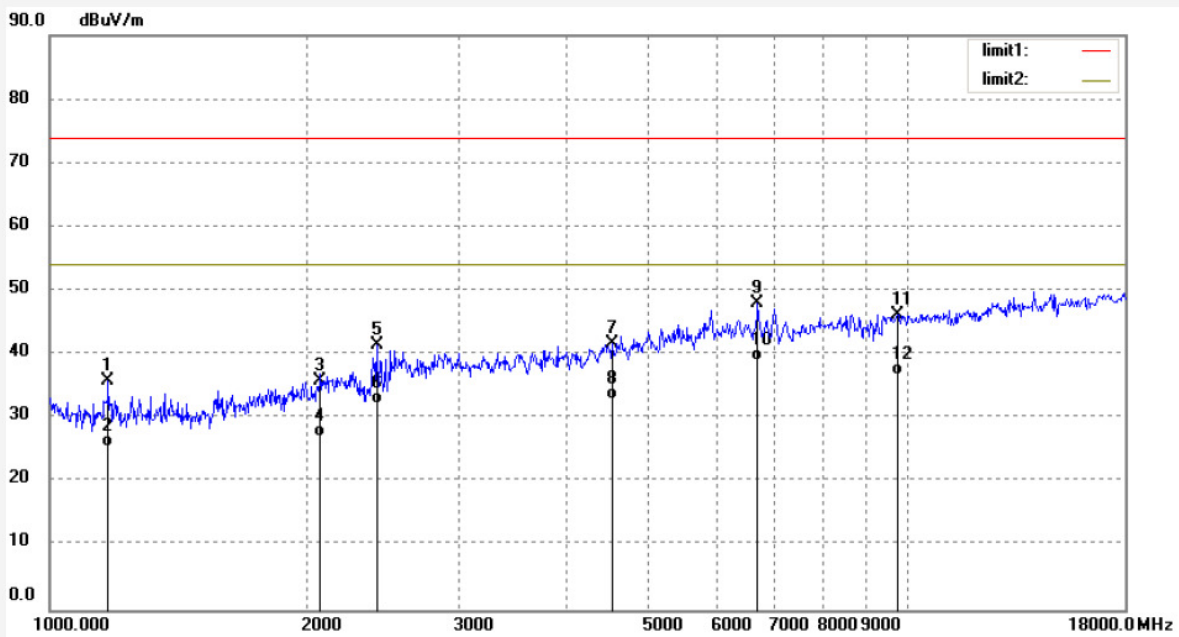

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1170.207	46.82	-10.97	35.85	74.00	-38.15	peak			
2	1170.207	36.48	-10.97	25.51	54.00	-28.49	AVG			
3	2064.269	43.65	-7.69	35.96	74.00	-38.04	peak			
4	2064.269	34.77	-7.69	27.08	54.00	-26.92	AVG			
5	2408.600	47.29	-5.76	41.53	74.00	-32.47	peak			
6	2408.600	38.14	-5.76	32.38	54.00	-21.62	AVG			
7	4543.004	39.33	2.33	41.66	74.00	-32.34	peak			
8	4543.004	30.54	2.33	32.87	54.00	-21.13	AVG			
9	6710.199	39.70	8.37	48.07	74.00	-25.93	peak			
10	6710.199	30.76	8.37	39.13	54.00	-14.87	AVG			
11	9768.031	32.54	13.72	46.26	74.00	-27.74	peak			
12	9768.031	23.11	13.72	36.83	54.00	-17.17	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1163	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 12/49/14
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: USB PLAY	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

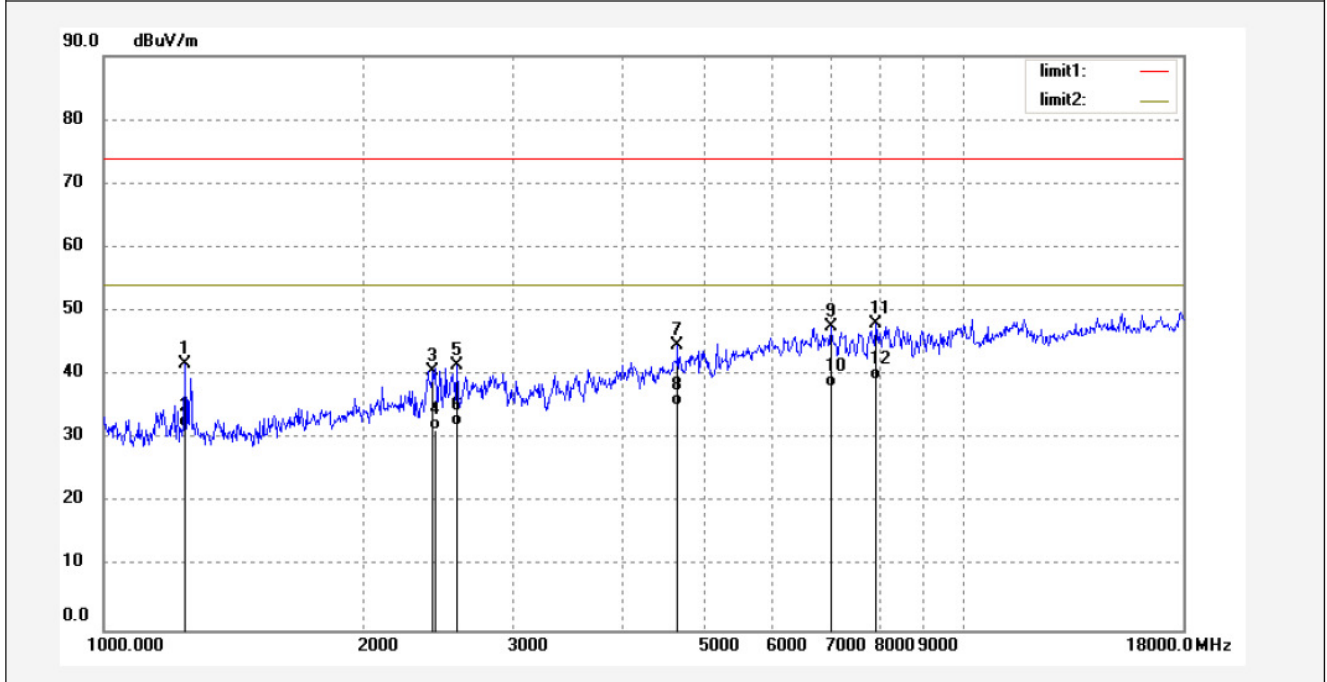

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1243.968	52.66	-10.87	41.79	74.00	-32.21	peak			
2	1243.968	42.79	-10.87	31.92	54.00	-22.08	AVG			
3	2415.621	46.37	-5.72	40.65	74.00	-33.35	peak			
4	2415.621	37.15	-5.72	31.43	54.00	-22.57	AVG			
5	2575.369	46.41	-4.83	41.58	74.00	-32.42	peak			
6	2575.369	36.84	-4.83	32.01	54.00	-21.99	AVG			
7	4650.033	41.83	2.81	44.64	74.00	-29.36	peak			
8	4650.033	32.34	2.81	35.15	54.00	-18.85	AVG			
9	7009.664	38.23	9.25	47.48	74.00	-26.52	peak			
10	7009.664	29.00	9.25	38.25	54.00	-15.75	AVG			
11	7898.164	36.51	11.42	47.93	74.00	-26.07	peak			
12	7898.164	27.94	11.42	39.36	54.00	-14.64	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING #1164

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Interactive Flat Panel

Mode: USB PLAY

Model: ST-860U

Manufacturer: Recordex USA,Inc.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/06/05/

Time: 12/51/02

Engineer Signature: BLACK

Distance: 3m

Note: Report NO.:ATE20170899

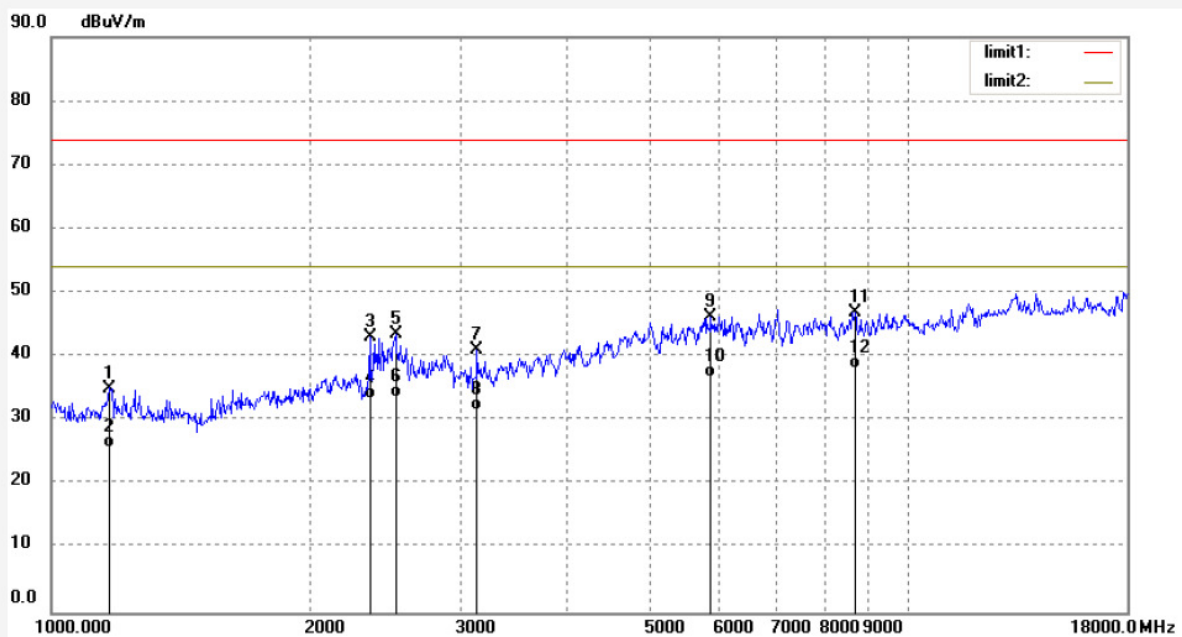

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1166.805	46.07	-10.97	35.10	74.00	-38.90	peak			
2	1166.805	36.74	-10.97	25.77	54.00	-28.23	AVG			
3	2353.161	49.37	-6.22	43.15	74.00	-30.85	peak			
4	2353.161	39.62	-6.22	33.40	54.00	-20.60	AVG			
5	2523.426	48.86	-5.27	43.59	74.00	-30.41	peak			
6	2523.426	38.97	-5.27	33.70	54.00	-20.30	AVG			
7	3139.061	42.58	-1.48	41.10	74.00	-32.90	peak			
8	3139.061	33.18	-1.48	31.70	54.00	-22.30	AVG			
9	5886.402	40.20	6.13	46.33	74.00	-27.67	peak			
10	5886.402	30.59	6.13	36.72	54.00	-17.28	AVG			
11	8669.181	35.14	11.70	46.84	74.00	-27.16	peak			
12	8669.181	26.47	11.70	38.17	54.00	-15.83	AVG			

Job No.: DING #1165

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Interactive Flat Panel

Mode: AV IN

Model: ST-860U

Manufacturer: Recordex USA,Inc.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/06/05/

Time: 12/52/53

Engineer Signature: BLACK

Distance: 3m

Note: Report NO.:ATE20170899

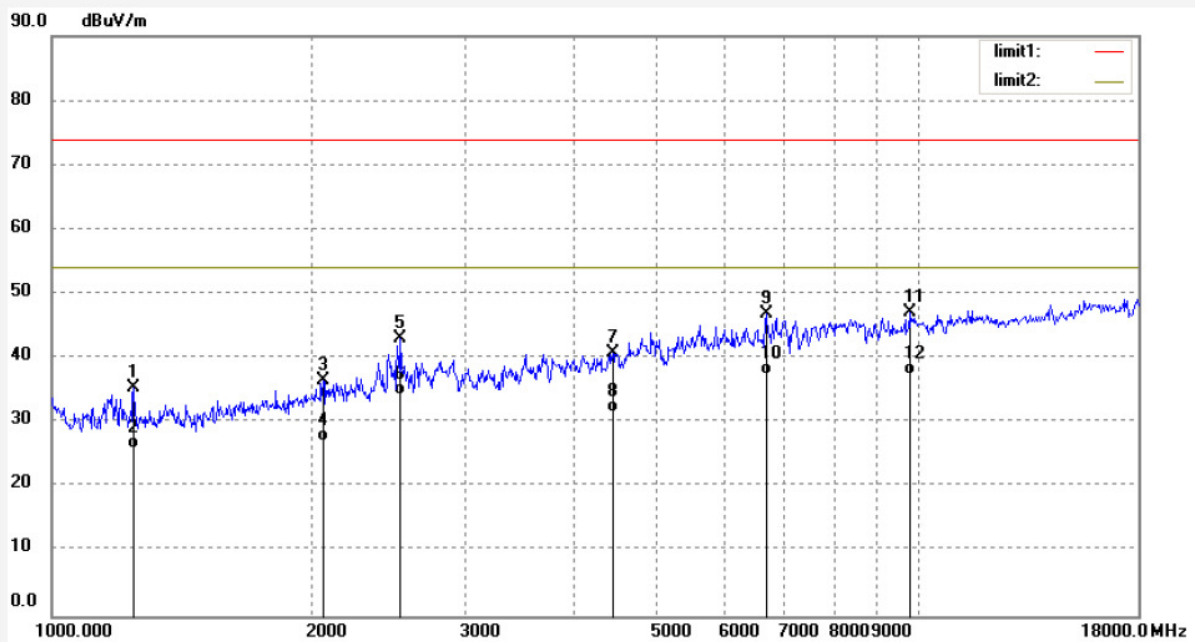


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1243.968	46.40	-10.87	35.53	74.00	-38.47	peak			
2	1243.968	36.76	-10.87	25.89	54.00	-28.11	AVG			
3	2058.269	44.37	-7.76	36.61	74.00	-37.39	peak			
4	2058.269	34.84	-7.76	27.08	54.00	-26.92	AVG			
5	2530.782	48.32	-5.20	43.12	74.00	-30.88	peak			
6	2530.782	39.58	-5.20	34.38	54.00	-19.62	AVG			
7	4451.376	38.89	1.86	40.75	74.00	-33.25	peak			
8	4451.376	29.78	1.86	31.64	54.00	-22.36	AVG			
9	6690.695	38.58	8.28	46.86	74.00	-27.14	peak			
10	6690.695	29.16	8.28	37.44	54.00	-16.56	AVG			
11	9796.504	33.41	13.77	47.18	74.00	-26.82	peak			
12	9796.504	23.69	13.77	37.46	54.00	-16.54	AVG			

Job No.: DING #1166
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: AV IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 12/54/39
Engineer Signature: BLACK
Distance: 3m


Note: Report NO.:ATE20170899

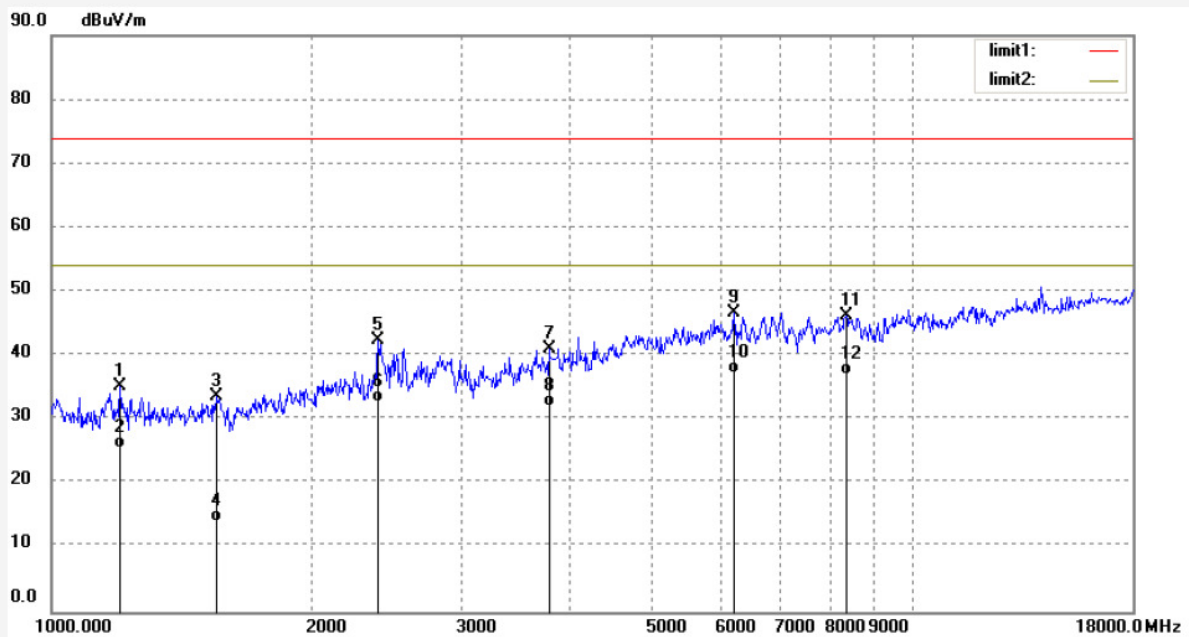

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1201.267	46.36	-11.04	35.32	74.00	-38.68	peak			
2	1201.267	36.49	-11.04	25.45	54.00	-28.55	AVG			
3	1551.966	43.33	-9.79	33.54	74.00	-40.46	peak			
4	1551.966	23.78	-9.79	13.99	54.00	-40.01	AVG			
5	2394.619	48.32	-5.84	42.48	74.00	-31.52	peak			
6	2394.619	38.61	-5.84	32.77	54.00	-21.23	AVG			
7	3781.843	40.54	0.59	41.13	74.00	-32.87	peak			
8	3781.843	31.57	0.59	32.16	54.00	-21.84	AVG			
9	6203.033	39.96	6.73	46.69	74.00	-27.31	peak			
10	6203.033	30.44	6.73	37.17	54.00	-16.83	AVG			
11	8371.602	33.82	12.44	46.26	74.00	-27.74	peak			
12	8371.602	24.65	12.44	37.09	54.00	-16.91	AVG			

Job No.: DING #1167	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 12/56/05
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: DP IN	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

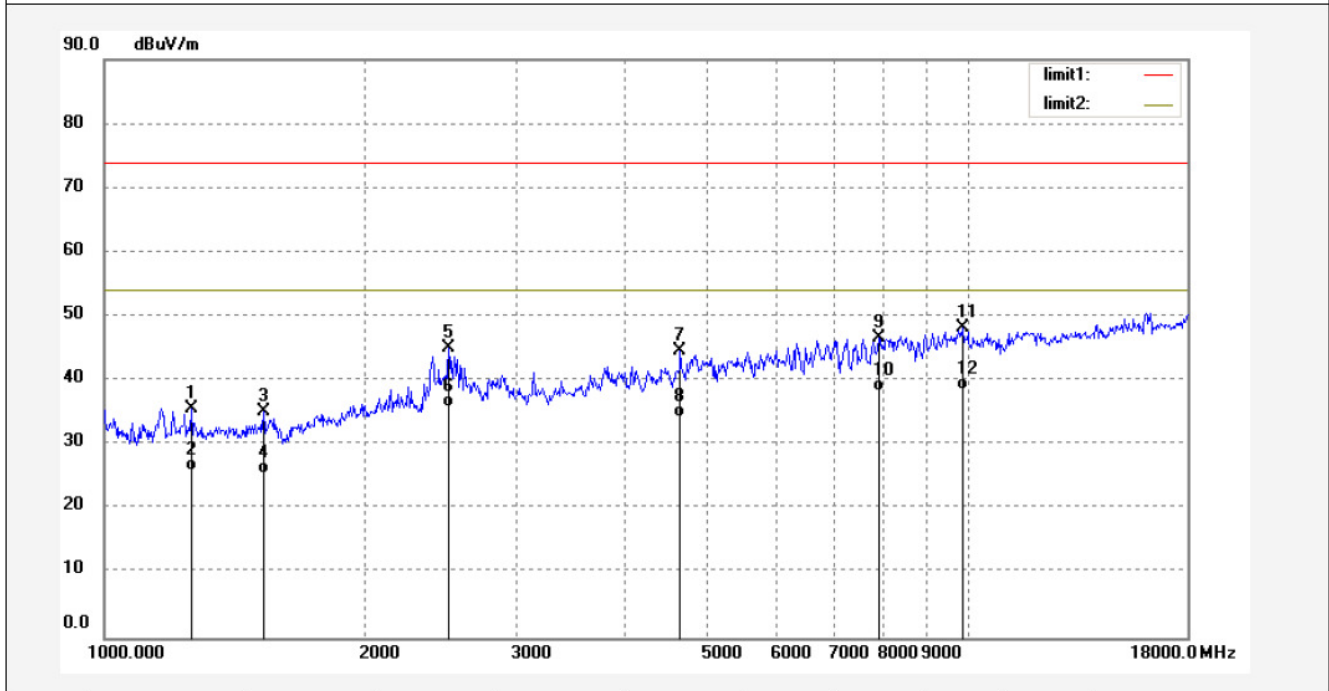


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1262.205	46.58	-10.83	35.75	74.00	-38.25	peak			
2	1262.205	36.87	-10.83	26.04	54.00	-27.96	AVG			
3	1529.543	45.17	-10.00	35.17	74.00	-38.83	peak			
4	1529.543	35.48	-10.00	25.48	54.00	-28.52	AVG			
5	2508.779	50.60	-5.42	45.18	74.00	-28.82	peak			
6	2508.779	41.23	-5.42	35.81	54.00	-18.19	AVG			
7	4650.033	41.83	2.81	44.64	74.00	-29.36	peak			
8	4650.033	31.59	2.81	34.40	54.00	-19.60	AVG			
9	7898.164	35.25	11.42	46.67	74.00	-27.33	peak			
10	7898.164	26.98	11.42	38.40	54.00	-15.60	AVG			
11	9882.424	34.29	13.90	48.19	74.00	-25.81	peak			
12	9882.424	24.67	13.90	38.57	54.00	-15.43	AVG			

Job No.: DING #1168
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: DP IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 12/57/46
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

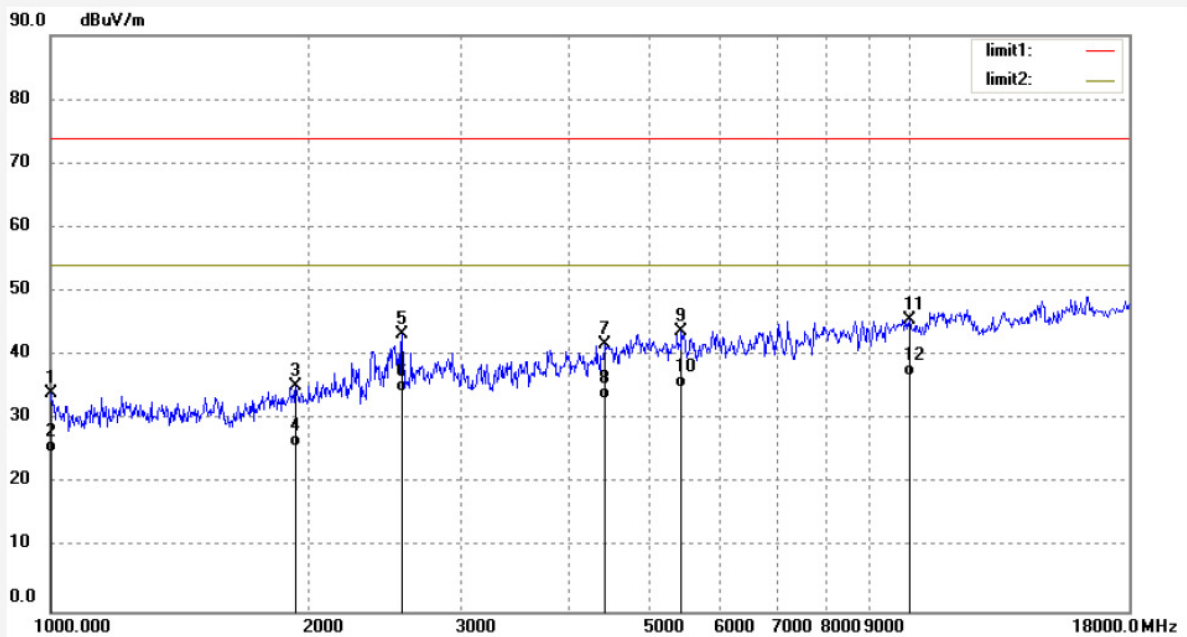

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1002.915	44.80	-10.71	34.09	74.00	-39.91	peak			
2	1002.915	35.64	-10.71	24.93	54.00	-29.07	AVG			
3	1930.596	43.65	-8.41	35.24	74.00	-38.76	peak			
4	1930.596	34.19	-8.41	25.78	54.00	-28.22	AVG			
5	2567.883	48.10	-4.88	43.22	74.00	-30.78	peak			
6	2567.883	39.27	-4.88	34.39	54.00	-19.61	AVG			
7	4425.537	40.00	1.73	41.73	74.00	-32.27	peak			
8	4425.537	31.56	1.73	33.29	54.00	-20.71	AVG			
9	5425.684	38.66	5.09	43.75	74.00	-30.25	peak			
10	5425.684	29.84	5.09	34.93	54.00	-19.07	AVG			
11	9998.158	31.55	14.10	45.65	74.00	-28.35	peak			
12	9998.158	22.68	14.10	36.78	54.00	-17.22	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1169	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 12/59/05
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: HDMI IN	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

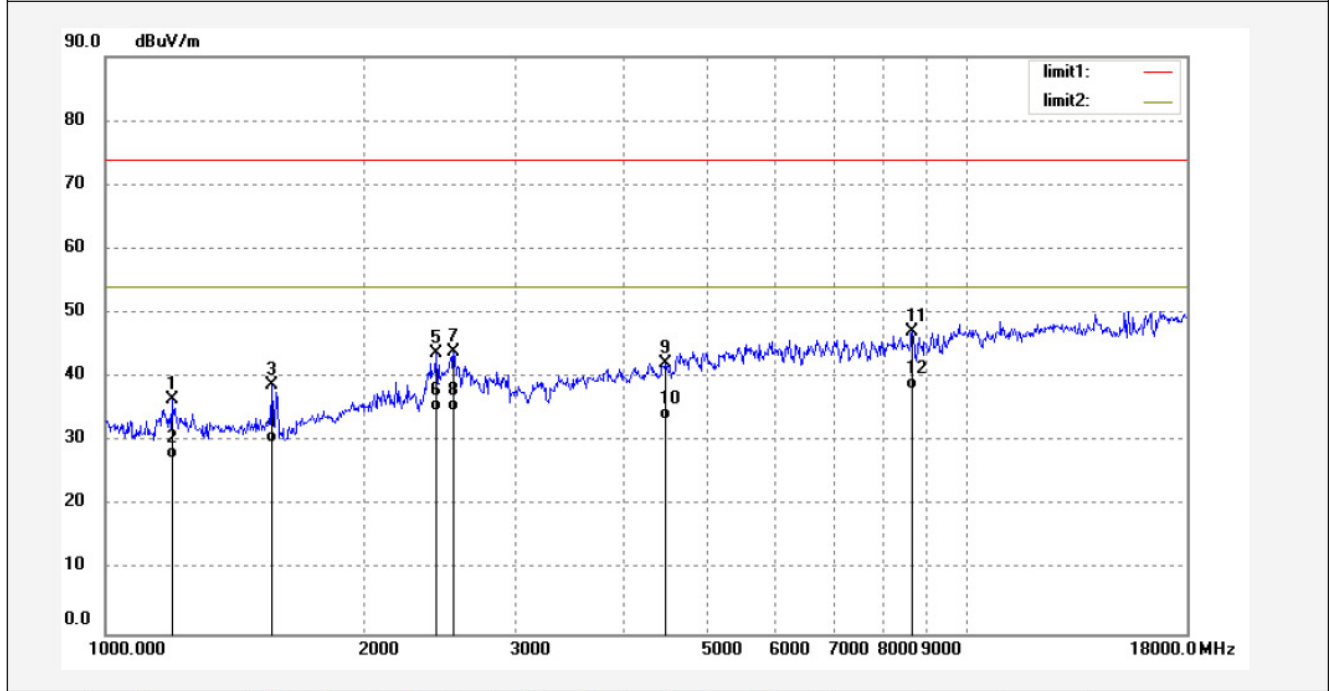


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1194.294	47.61	-11.03	36.58	74.00	-37.42	peak			
2	1194.294	38.42	-11.03	27.39	54.00	-26.61	AVG			
3	1561.027	48.55	-9.81	38.74	74.00	-35.26	peak			
4	1561.027	39.61	-9.81	29.80	54.00	-24.20	AVG			
5	2422.662	49.45	-5.69	43.76	74.00	-30.24	peak			
6	2422.662	40.48	-5.69	34.79	54.00	-19.21	AVG			
7	2538.159	49.18	-5.13	44.05	74.00	-29.95	peak			
8	2538.159	39.87	-5.13	34.74	54.00	-19.26	AVG			
9	4464.351	40.24	1.93	42.17	74.00	-31.83	peak			
10	4464.351	31.45	1.93	33.38	54.00	-20.62	AVG			
11	8643.983	35.48	11.73	47.21	74.00	-26.79	peak			
12	8643.983	26.38	11.73	38.11	54.00	-15.89	AVG			

Job No.: DING #1170
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: HDMI IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/01/08
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

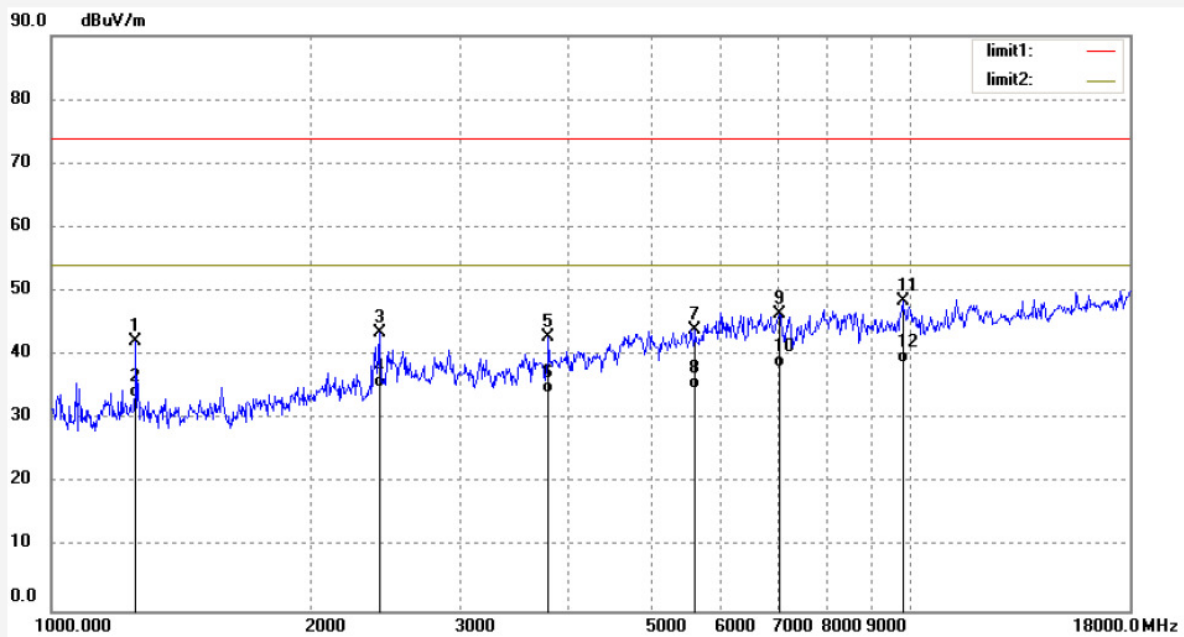

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1254.878	53.11	-10.84	42.27	74.00	-31.73	peak			
2	1254.878	44.25	-10.84	33.41	54.00	-20.59	AVG			
3	2408.600	49.19	-5.76	43.43	74.00	-30.57	peak			
4	2408.600	40.67	-5.76	34.91	54.00	-19.09	AVG			
5	3792.867	42.23	0.63	42.86	74.00	-31.14	peak			
6	3792.867	33.48	0.63	34.11	54.00	-19.89	AVG			
7	5618.546	38.45	5.60	44.05	74.00	-29.95	peak			
8	5618.546	29.13	5.60	34.73	54.00	-19.27	AVG			
9	7030.097	37.43	9.11	46.54	74.00	-27.46	peak			
10	7030.097	29.01	9.11	38.12	54.00	-15.88	AVG			
11	9796.504	34.78	13.77	48.55	74.00	-25.45	peak			
12	9796.504	24.96	13.77	38.73	54.00	-15.27	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1171	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/02/53
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: Mmemory Play	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

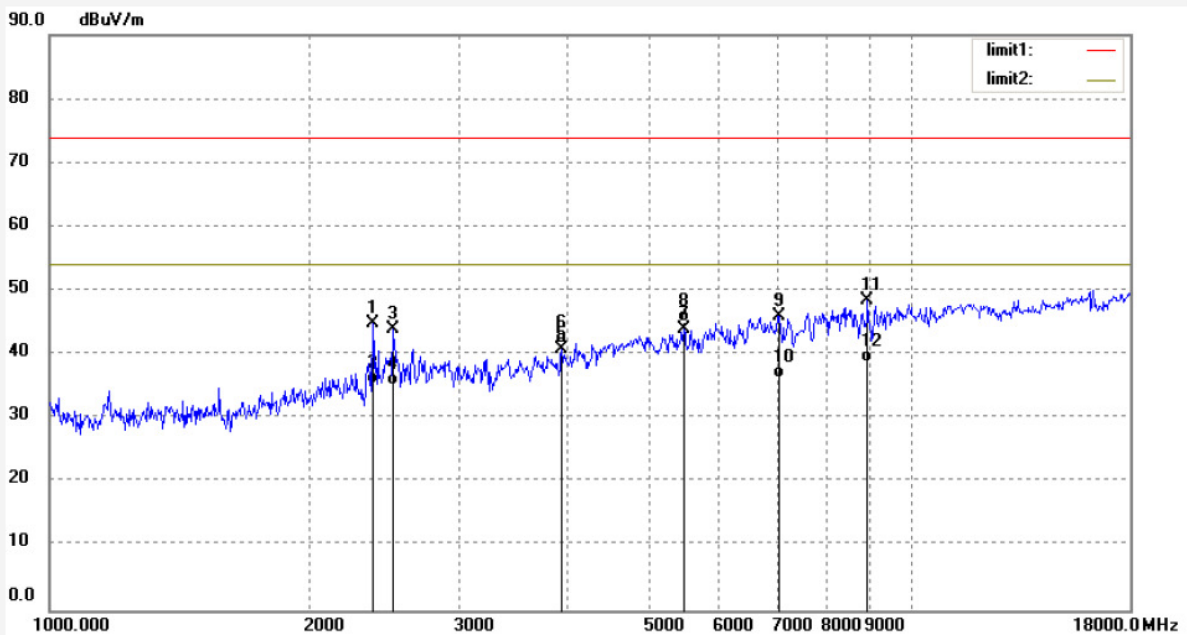

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2373.800	50.99	-6.03	44.96	74.00	-29.04	peak			
2	2373.800	41.36	-6.03	35.33	54.00	-18.67	AVG			
3	2508.779	49.42	-5.42	44.00	74.00	-30.00	peak			
4	2508.779	40.71	-5.42	35.29	54.00	-18.71	AVG			
5	3939.138	39.94	0.94	40.88	74.00	-33.12	peak			
6	3939.138	40.69	0.94	41.63	54.00	-12.37	AVG			
7	5457.362	38.66	5.22	43.88	74.00	-30.12	peak			
8	5457.362	39.84	5.22	45.06	54.00	-8.94	AVG			
9	7030.097	36.98	9.11	46.09	74.00	-27.91	peak			
10	7030.097	27.19	9.11	36.30	54.00	-17.70	AVG			
11	8925.227	36.93	11.46	48.39	74.00	-25.61	peak			
12	8925.227	27.46	11.46	38.92	54.00	-15.08	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1172
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: Mmemory Play
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/04/22
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

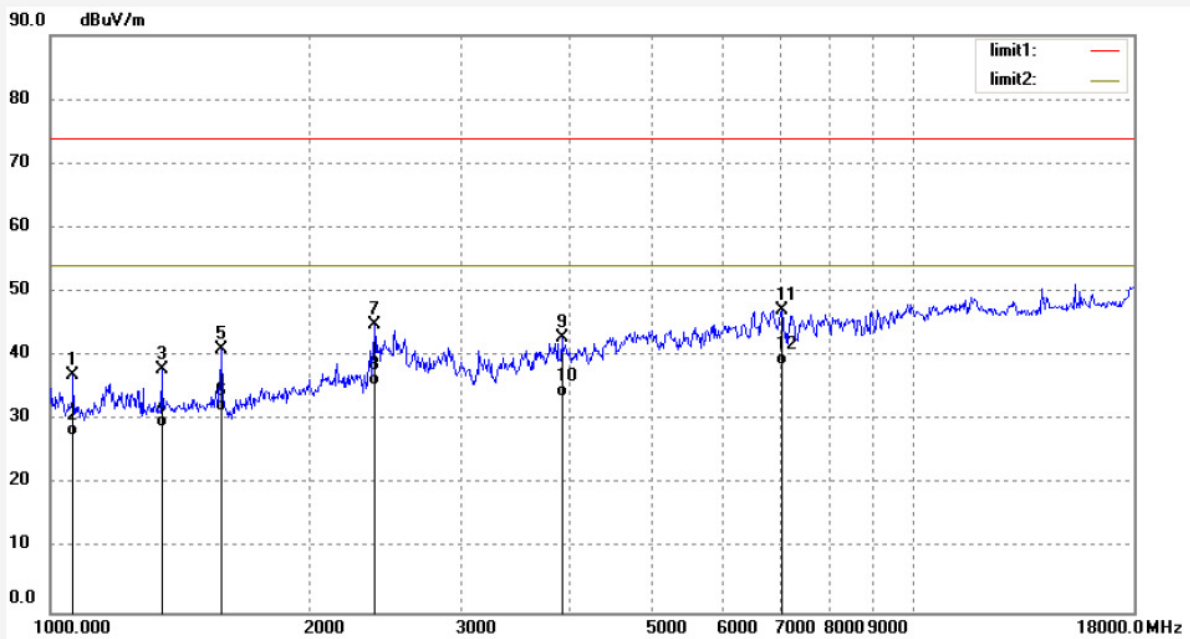

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1063.033	47.94	-11.01	36.93	74.00	-37.07	peak			
2	1063.033	38.55	-11.01	27.54	54.00	-26.46	AVG			
3	1345.676	48.66	-10.77	37.89	74.00	-36.11	peak			
4	1345.676	39.78	-10.77	29.01	54.00	-24.99	AVG			
5	1579.309	50.95	-9.85	41.10	74.00	-32.90	peak			
6	1579.309	41.13	-9.85	31.28	54.00	-22.72	AVG			
7	2373.800	50.99	-6.03	44.96	74.00	-29.04	peak			
8	2373.800	41.52	-6.03	35.49	54.00	-18.51	AVG			
9	3916.273	41.98	0.83	42.81	74.00	-31.19	peak			
10	3916.273	32.89	0.83	33.72	54.00	-20.28	AVG			
11	7050.590	38.10	9.00	47.10	74.00	-26.90	peak			
12	7050.590	29.64	9.00	38.64	54.00	-15.36	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1173	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/07/38
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: Mmemory Play	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

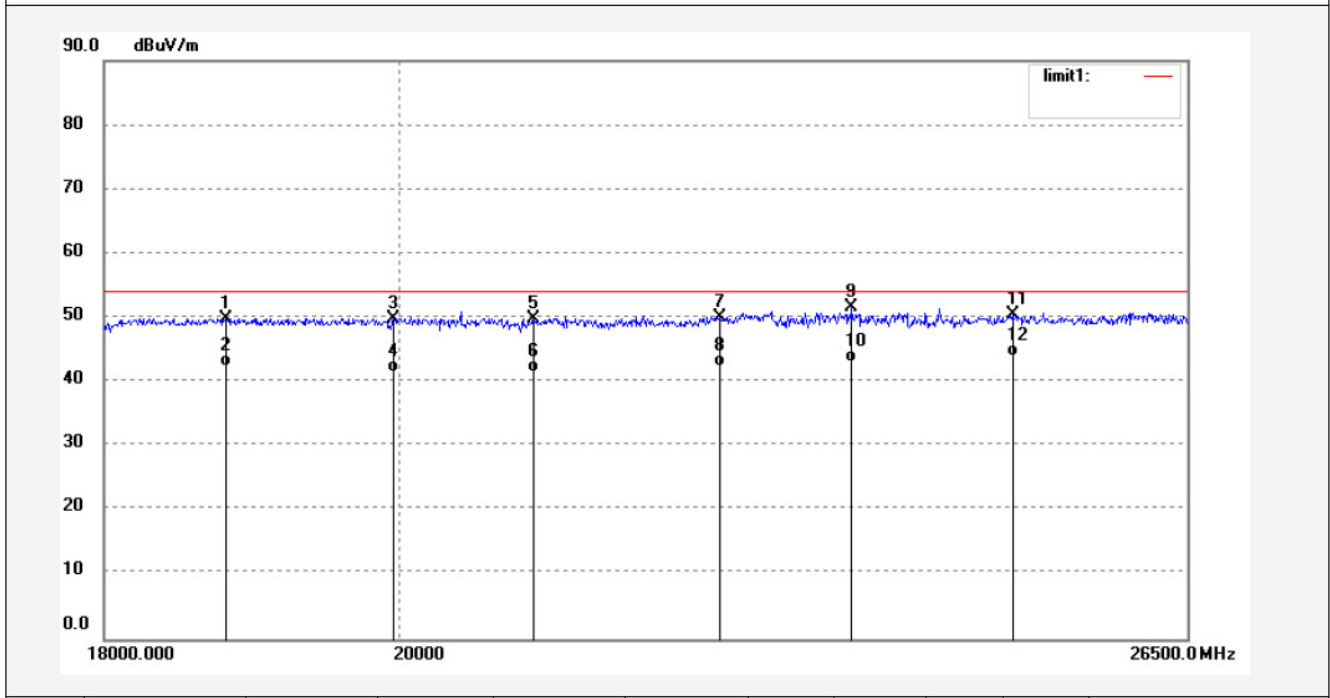


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18805.788	16.03	33.79	49.82	54.00	-4.18	peak			
2	18805.788	8.69	33.79	42.48	54.00	-11.52	AVG			
3	19962.332	15.60	34.32	49.92	54.00	-4.08	peak			
4	19962.332	7.15	34.32	41.47	54.00	-12.53	AVG			
5	20985.690	16.56	33.36	49.92	54.00	-4.08	peak			
6	20985.690	8.16	33.36	41.52	54.00	-12.48	AVG			
7	22423.545	17.29	32.80	50.09	54.00	-3.91	peak			
8	22423.545	9.54	32.80	42.34	54.00	-11.66	AVG			
9	23509.213	18.83	32.74	51.57	54.00	-2.43	peak			
10	23509.213	10.26	32.74	43.00	54.00	-11.00	AVG			
11	24897.054	15.98	34.51	50.49	54.00	-3.51	peak			
12	24897.054	9.47	34.51	43.98	54.00	-10.02	AVG			

Job No.: DING #1174
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: Mmemory Play
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/14/46
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

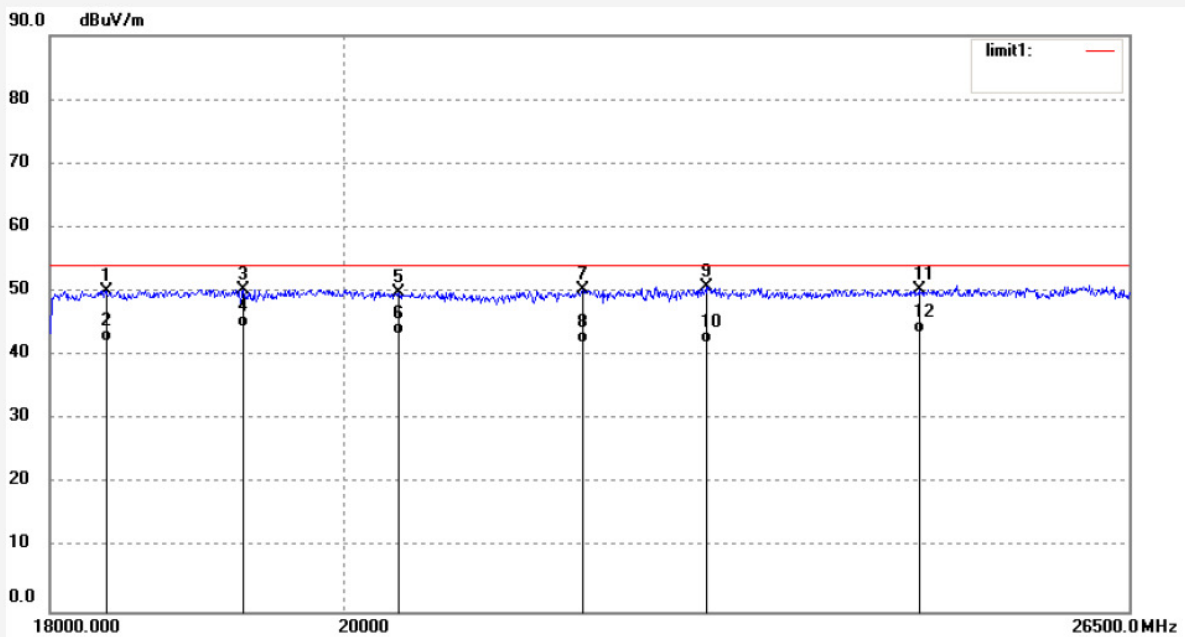

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18366.425	18.42	31.67	50.09	54.00	-3.91	peak			
2	18366.425	10.54	31.67	42.21	54.00	-11.79	AVG			
3	19293.010	15.67	34.71	50.38	54.00	-3.62	peak			
4	19293.010	9.63	34.71	44.34	54.00	-9.66	AVG			
5	20400.304	16.26	33.57	49.83	54.00	-4.17	peak			
6	20400.304	9.75	33.57	43.32	54.00	-10.68	AVG			
7	21789.604	17.39	32.91	50.30	54.00	-3.70	peak			
8	21789.604	9.14	32.91	42.05	54.00	-11.95	AVG			
9	22773.861	17.76	32.94	50.70	54.00	-3.30	peak			
10	22773.861	8.96	32.94	41.90	54.00	-12.10	AVG			
11	24580.671	16.20	34.02	50.22	54.00	-3.78	peak			
12	24580.671	9.43	34.02	43.45	54.00	-10.55	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1175	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/16/52
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: HDMI IN	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

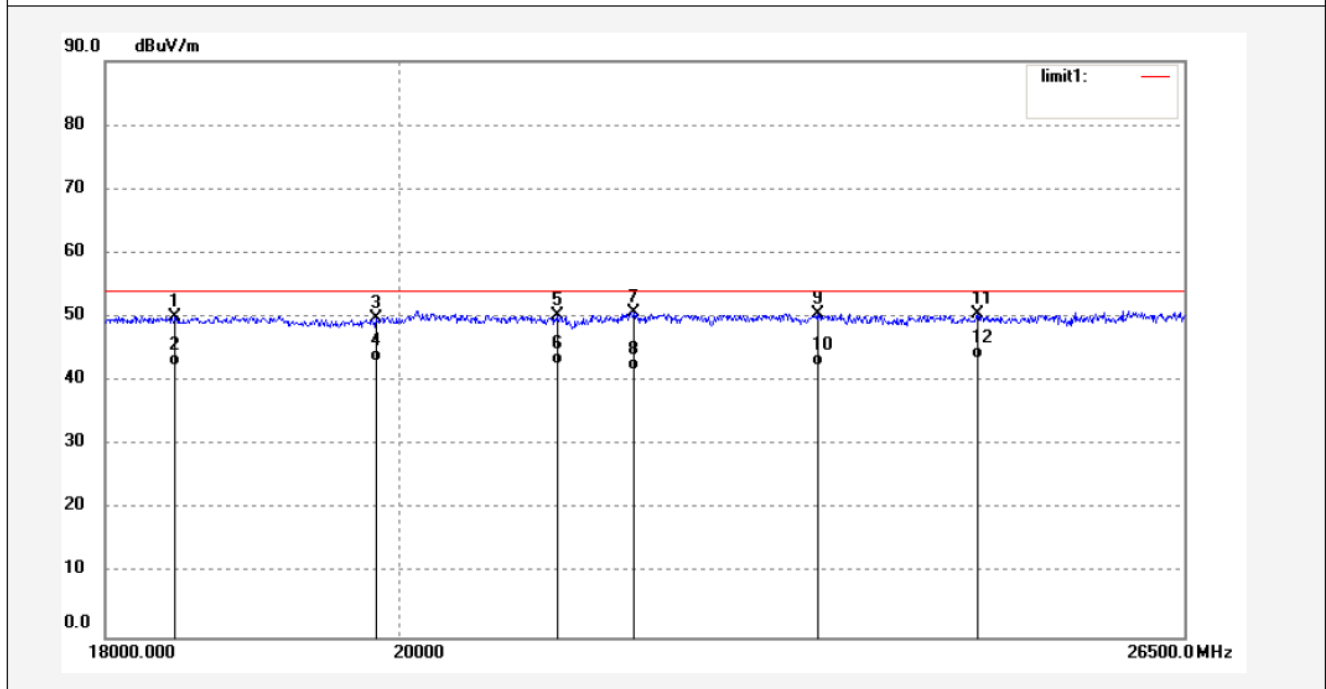

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18459.191	18.17	31.88	50.05	54.00	-3.95	peak			
2	18459.191	10.57	31.88	42.45	54.00	-11.55	AVG			
3	19838.933	15.47	34.38	49.85	54.00	-4.15	peak			
4	19838.933	8.64	34.38	43.02	54.00	-10.98	AVG			
5	21165.380	16.99	33.25	50.24	54.00	-3.76	peak			
6	21165.380	9.36	33.25	42.61	54.00	-11.39	AVG			
7	21755.852	17.75	32.92	50.67	54.00	-3.33	peak			
8	21755.852	8.76	32.92	41.68	54.00	-12.32	AVG			
9	23237.467	17.54	32.91	50.45	54.00	-3.55	peak			
10	23237.467	9.58	32.91	42.49	54.00	-11.51	AVG			
11	24609.266	16.37	34.06	50.43	54.00	-3.57	peak			
12	24609.266	9.47	34.06	43.53	54.00	-10.47	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1176
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: HDMI IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/18/47
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

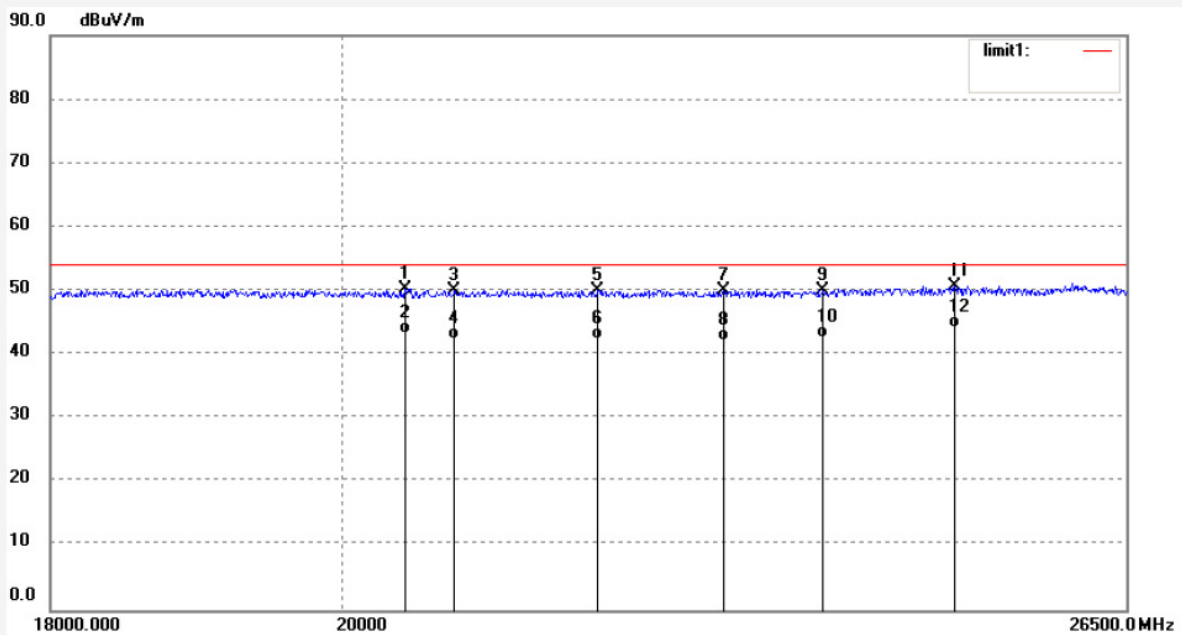


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20447.795	16.80	33.47	50.27	54.00	-3.73	peak			
2	20447.795	9.77	33.47	43.24	54.00	-10.76	AVG			
3	20815.591	16.61	33.37	49.98	54.00	-4.02	peak			
4	20815.591	8.94	33.37	42.31	54.00	-11.69	AVG			
5	21916.640	17.14	32.85	49.99	54.00	-4.01	peak			
6	21916.640	9.61	32.85	42.46	54.00	-11.54	AVG			
7	22933.284	16.96	33.02	49.98	54.00	-4.02	peak			
8	22933.284	9.20	33.02	42.22	54.00	-11.78	AVG			
9	23765.709	17.33	32.67	50.00	54.00	-4.00	peak			
10	23765.709	10.03	32.67	42.70	54.00	-11.30	AVG			
11	24916.359	16.23	34.54	50.77	54.00	-3.23	peak			
12	24916.359	9.76	34.54	44.30	54.00	-9.70	AVG			

Job No.: DING #1177
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: Interactive Flat Panel
 Mode: DP IN
 Model: ST-860U
 Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 17/06/05/
 Time: 13/25/10
 Engineer Signature: BLACK
 Distance: 3m

Note: Report NO.:ATE20170899

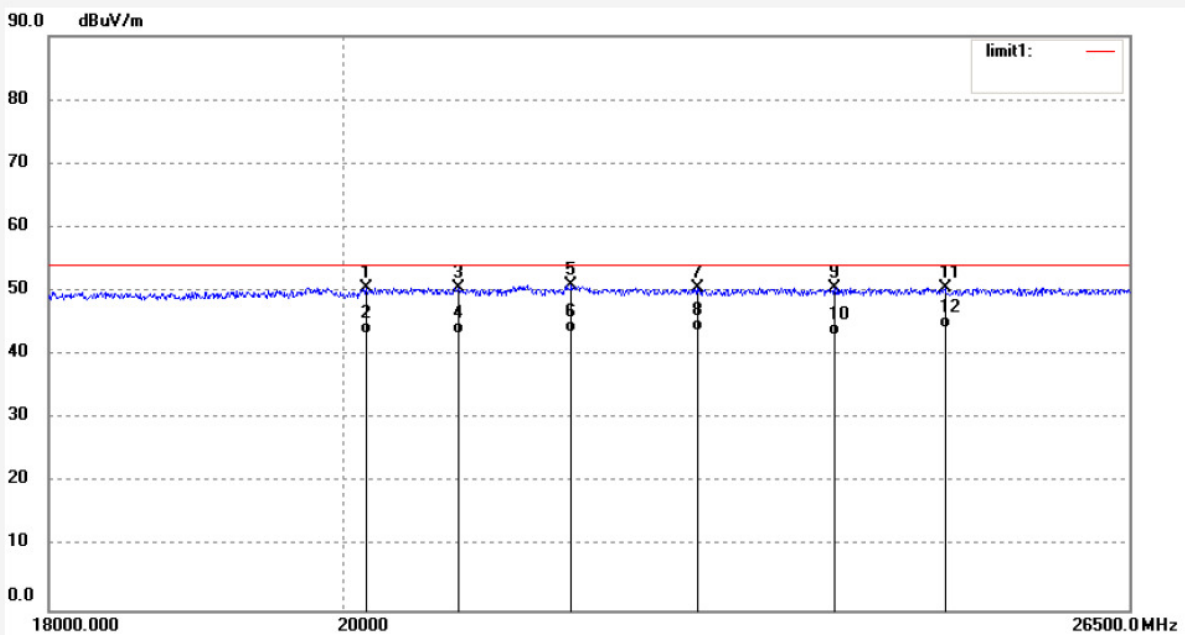

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	20164.494	16.48	34.00	50.48	54.00	-3.52	peak			
2	20164.494	9.34	34.00	43.34	54.00	-10.66	AVG			
3	20847.884	17.12	33.37	50.49	54.00	-3.51	peak			
4	20847.884	10.05	33.37	43.42	54.00	-10.58	AVG			
5	21705.322	17.91	32.95	50.86	54.00	-3.14	peak			
6	21705.322	10.54	32.95	43.49	54.00	-10.51	AVG			
7	22703.363	17.52	32.90	50.42	54.00	-3.58	peak			
8	22703.363	10.76	32.90	43.66	54.00	-10.34	AVG			
9	23848.747	17.76	32.65	50.41	54.00	-3.59	peak			
10	23848.747	10.35	32.65	43.00	54.00	-11.00	AVG			
11	24810.366	16.04	34.37	50.41	54.00	-3.59	peak			
12	24810.366	9.87	34.37	44.24	54.00	-9.76	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1178
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: DP IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/27/38
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

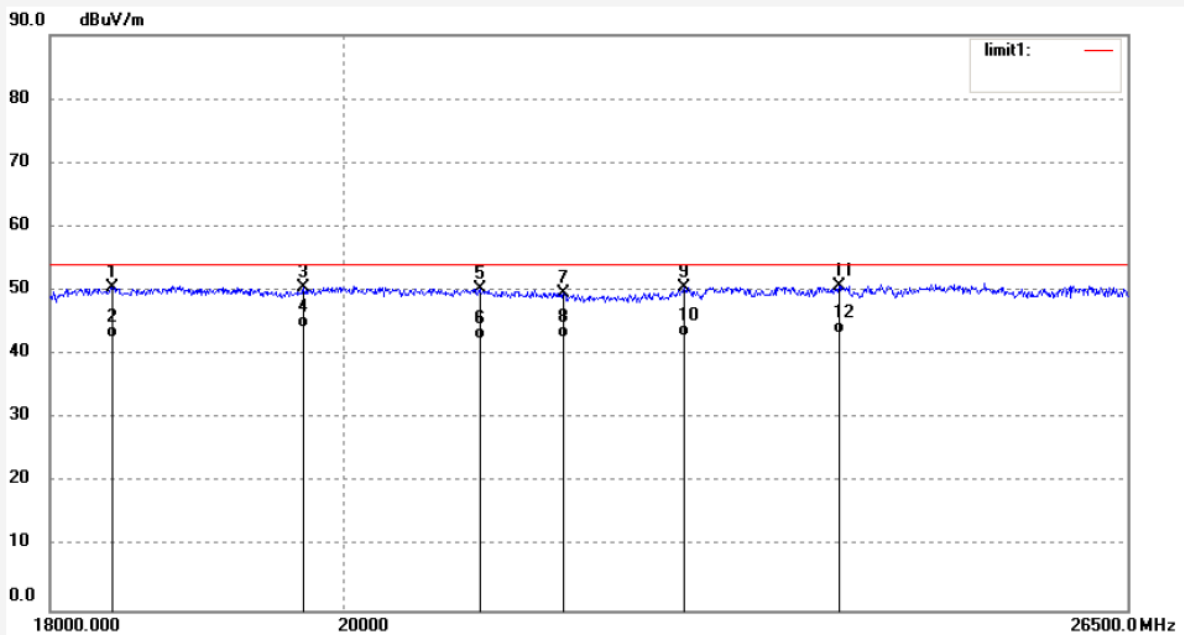

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18409.182	18.85	31.76	50.61	54.00	-3.39	peak			
2	18409.182	10.78	31.76	42.54	54.00	-11.46	AVG			
3	19716.297	15.98	34.43	50.41	54.00	-3.59	peak			
4	19716.297	9.85	34.43	44.28	54.00	-9.72	AVG			
5	21001.963	16.86	33.36	50.22	54.00	-3.78	peak			
6	21001.963	8.97	33.36	42.33	54.00	-11.67	AVG			
7	21646.518	16.73	32.97	49.70	54.00	-4.30	peak			
8	21646.518	9.71	32.97	42.68	54.00	-11.32	AVG			
9	22598.024	17.67	32.84	50.51	54.00	-3.49	peak			
10	22598.024	10.02	32.84	42.86	54.00	-11.14	AVG			
11	23895.004	18.15	32.64	50.79	54.00	-3.21	peak			
12	23895.004	10.64	32.64	43.28	54.00	-10.72	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1179	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/29/53
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: AV IN	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

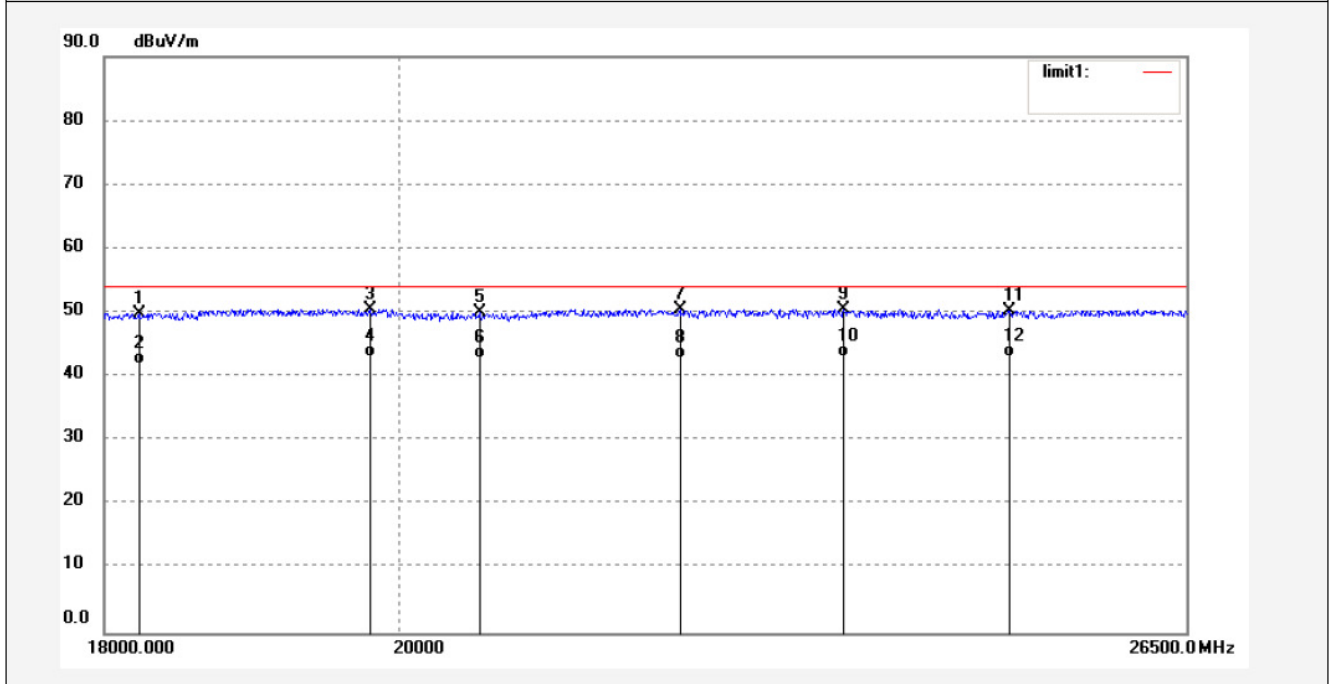

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18224.618	18.61	31.32	49.93	54.00	-4.07	peak			
2	18224.618	10.68	31.32	42.00	54.00	-12.00	AVG			
3	19792.855	16.09	34.39	50.48	54.00	-3.52	peak			
4	19792.855	8.74	34.39	43.13	54.00	-10.87	AVG			
5	20582.957	16.62	33.37	49.99	54.00	-4.01	peak			
6	20582.957	9.51	33.37	42.88	54.00	-11.12	AVG			
7	22112.870	17.63	32.81	50.44	54.00	-3.56	peak			
8	22112.870	9.97	32.81	42.78	54.00	-11.22	AVG			
9	23445.523	17.68	32.77	50.45	54.00	-3.55	peak			
10	23445.523	10.25	32.77	43.02	54.00	-10.98	AVG			
11	24877.764	15.84	34.48	50.32	54.00	-3.68	peak			
12	24877.764	8.67	34.48	43.15	54.00	-10.85	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1180	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/31/05
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: AV IN	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

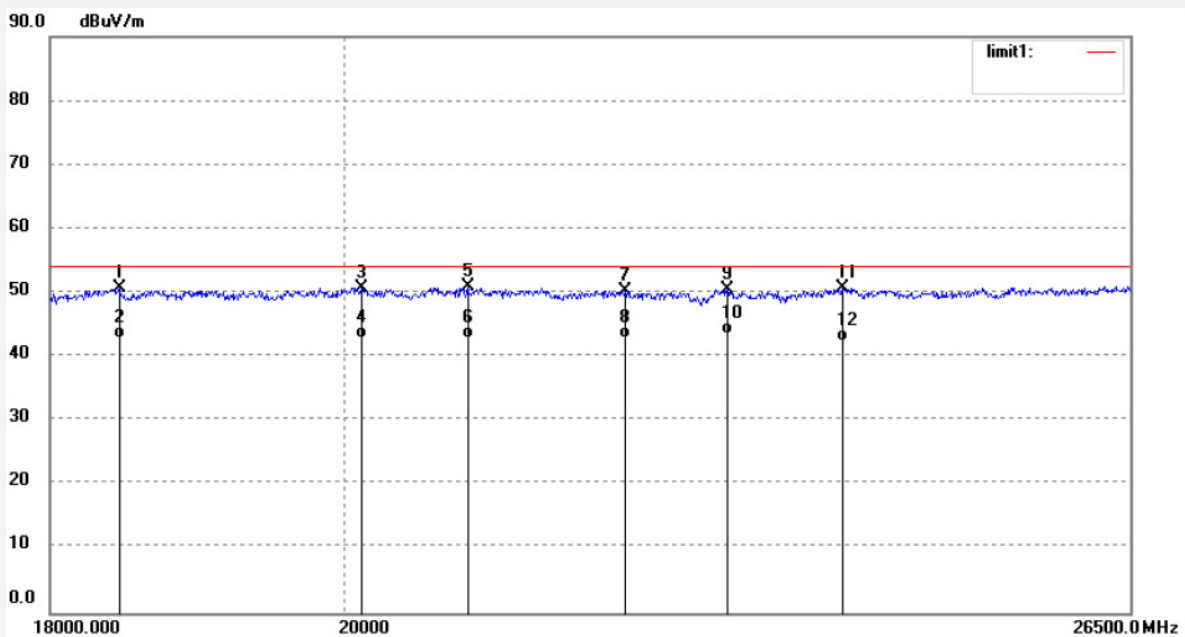

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18452.038	18.88	31.86	50.74	54.00	-3.26	peak			
2	18452.038	10.94	31.86	42.80	54.00	-11.20	AVG			
3	20125.458	16.67	34.07	50.74	54.00	-3.26	peak			
4	20125.458	8.76	34.07	42.83	54.00	-11.17	AVG			
5	20904.518	17.49	33.36	50.85	54.00	-3.15	peak			
6	20904.518	9.58	33.36	42.94	54.00	-11.06	AVG			
7	22121.441	17.40	32.81	50.21	54.00	-3.79	peak			
8	22121.441	10.01	32.81	42.82	54.00	-11.18	AVG			
9	22942.173	17.41	33.04	50.45	54.00	-3.55	peak			
10	22942.173	10.56	33.04	43.60	54.00	-10.40	AVG			
11	23904.266	18.06	32.64	50.70	54.00	-3.30	peak			
12	23904.266	9.84	32.64	42.48	54.00	-11.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1181
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/33/26
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

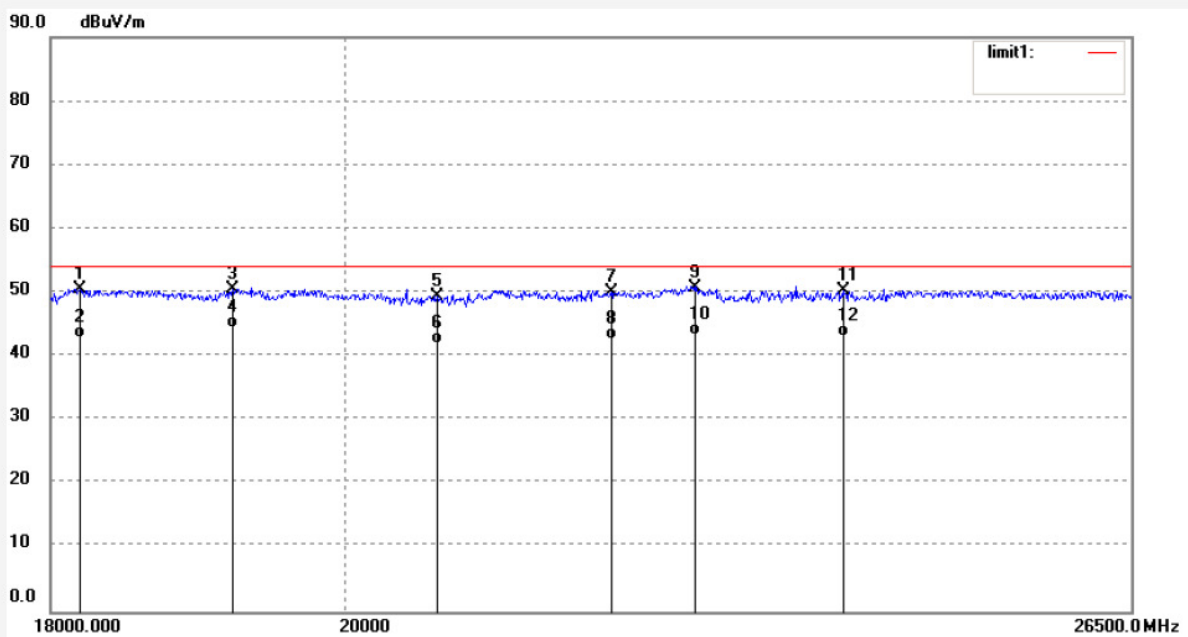


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18189.337	19.37	31.25	50.62	54.00	-3.38	peak			
2	18189.337	11.68	31.25	42.93	54.00	-11.07	AVG			
3	19210.939	15.74	34.77	50.51	54.00	-3.49	peak			
4	19210.939	9.77	34.77	44.54	54.00	-9.46	AVG			
5	20670.890	15.99	33.38	49.37	54.00	-4.63	peak			
6	20670.890	8.64	33.38	42.02	54.00	-11.98	AVG			
7	22001.743	17.24	32.81	50.05	54.00	-3.95	peak			
8	22001.743	9.82	32.81	42.63	54.00	-11.37	AVG			
9	22685.772	17.88	32.89	50.77	54.00	-3.23	peak			
10	22685.772	10.45	32.89	43.34	54.00	-10.66	AVG			
11	23904.266	17.56	32.64	50.20	54.00	-3.80	peak			
12	23904.266	10.39	32.64	43.03	54.00	-10.97	AVG			

Job No.: DING #1182
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 55 %
EUT: Interactive Flat Panel
Mode: VGA IN
Model: ST-860U
Manufacturer: Recordex USA,Inc.

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 17/06/05/
Time: 13/35/48
Engineer Signature: BLACK
Distance: 3m

Note: Report NO.:ATE20170899

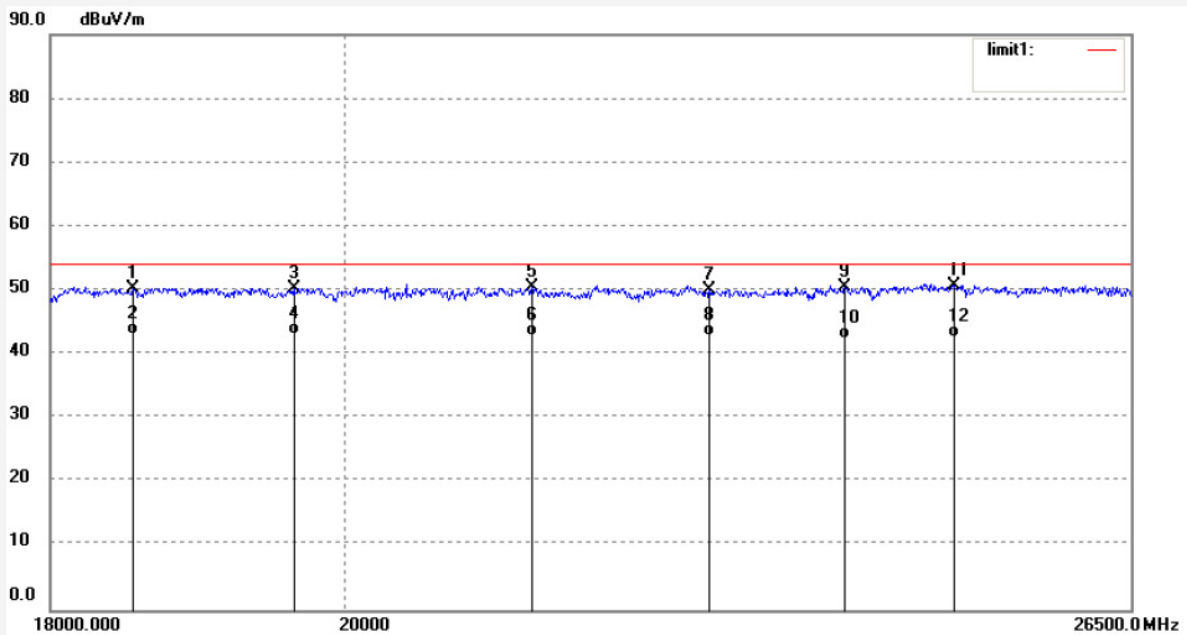

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18538.051	18.04	32.20	50.24	54.00	-3.76	peak			
2	18538.051	10.78	32.20	42.98	54.00	-11.02	AVG			
3	19640.035	15.84	34.47	50.31	54.00	-3.69	peak			
4	19640.035	8.61	34.47	43.08	54.00	-10.92	AVG			
5	21388.014	17.40	33.11	50.51	54.00	-3.49	peak			
6	21388.014	9.74	33.11	42.85	54.00	-11.15	AVG			
7	22791.520	17.08	32.95	50.03	54.00	-3.97	peak			
8	22791.520	9.83	32.95	42.78	54.00	-11.22	AVG			
9	23922.802	17.79	32.64	50.43	54.00	-3.57	peak			
10	23922.802	9.84	32.64	42.48	54.00	-11.52	AVG			
11	24877.764	16.34	34.48	50.82	54.00	-3.18	peak			
12	24877.764	8.24	34.48	42.72	54.00	-11.28	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DING #1183	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 17/06/05/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 13/37/55
EUT: Interactive Flat Panel	Engineer Signature: BLACK
Mode: USB PLAY	Distance: 3m
Model: ST-860U	
Manufacturer: Recordex USA,Inc.	

Note: Report NO.:ATE20170899

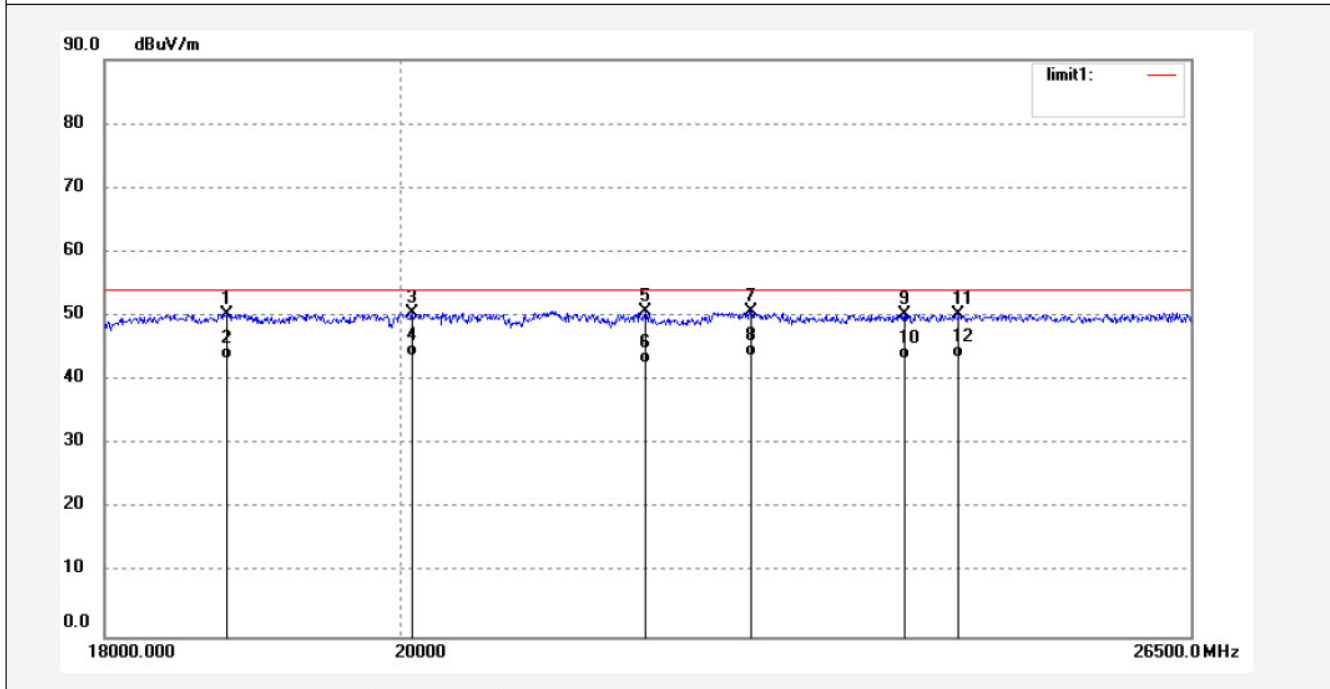


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18805.788	16.53	33.79	50.32	54.00	-3.68	peak			
2	18805.788	9.48	33.79	43.27	54.00	-10.73	AVG			
3	20086.498	16.33	34.15	50.48	54.00	-3.52	peak			
4	20086.498	9.67	34.15	43.82	54.00	-10.18	AVG			
5	21823.408	17.92	32.89	50.81	54.00	-3.19	peak			
6	21823.408	9.78	32.89	42.67	54.00	-11.33	AVG			
7	22659.412	17.78	32.87	50.65	54.00	-3.35	peak			
8	22659.412	10.86	32.87	43.73	54.00	-10.27	AVG			
9	23932.074	17.56	32.64	50.20	54.00	-3.80	peak			
10	23932.074	10.64	32.64	43.28	54.00	-10.72	AVG			
11	24400.338	16.57	33.64	50.21	54.00	-3.79	peak			
12	24400.338	9.98	33.64	43.62	54.00	-10.38	AVG			

Job No.: DING #1184
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 55 %
 EUT: Interactive Flat Panel
 Mode: USB PLAY
 Model: ST-860U
 Manufacturer: Recordex USA,Inc.

Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 17/06/05/
 Time: 13/40/02
 Engineer Signature: BLACK
 Distance: 3m

Note: Report NO.:ATE20170899

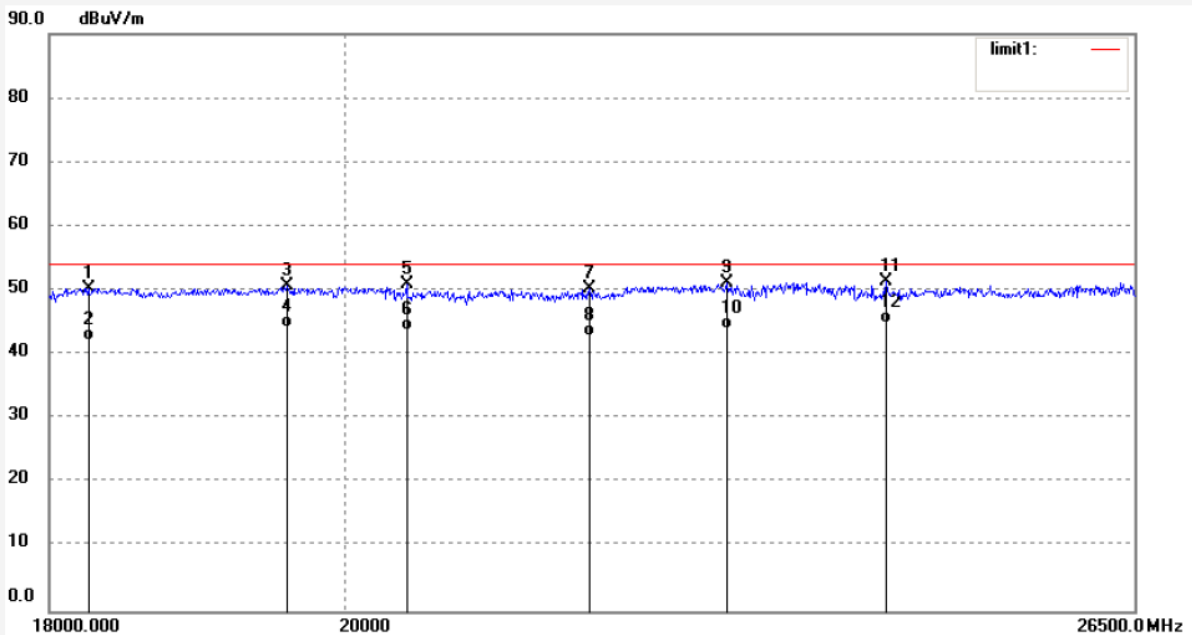

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	18252.891	18.91	31.40	50.31	54.00	-3.69	peak			
2	18252.891	10.89	31.40	42.29	54.00	-11.71	AVG			
3	19594.419	16.33	34.48	50.81	54.00	-3.19	peak			
4	19594.419	9.74	34.48	44.22	54.00	-9.78	AVG			
5	20447.795	17.51	33.47	50.98	54.00	-3.02	peak			
6	20447.795	10.22	33.47	43.69	54.00	-10.31	AVG			
7	21823.408	17.42	32.89	50.31	54.00	-3.69	peak			
8	21823.408	10.03	32.89	42.92	54.00	-11.08	AVG			
9	22924.398	18.06	33.02	51.08	54.00	-2.92	peak			
10	22924.398	10.89	33.02	43.91	54.00	-10.09	AVG			
11	24258.905	18.23	33.28	51.51	54.00	-2.49	peak			
12	24258.905	11.64	33.28	44.92	54.00	-9.08	AVG			

6. PHOTOGRAPHS

6.1.Photos of Radiated Emission Measurement





6.2.Photo of Conducted Emission Measurement




6.3.Photo of EUT

















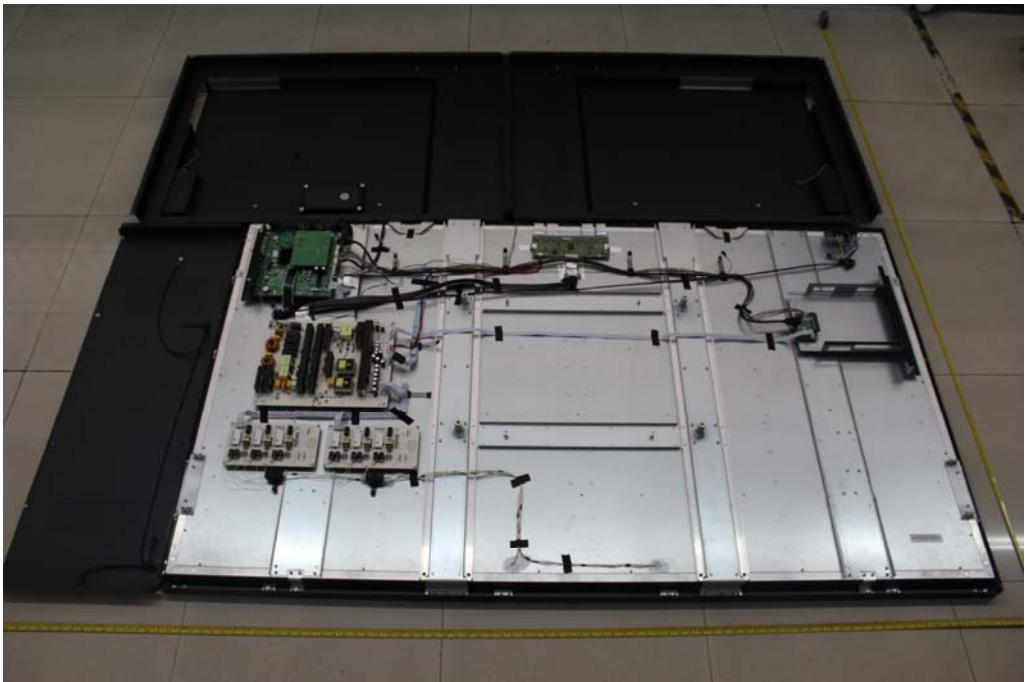


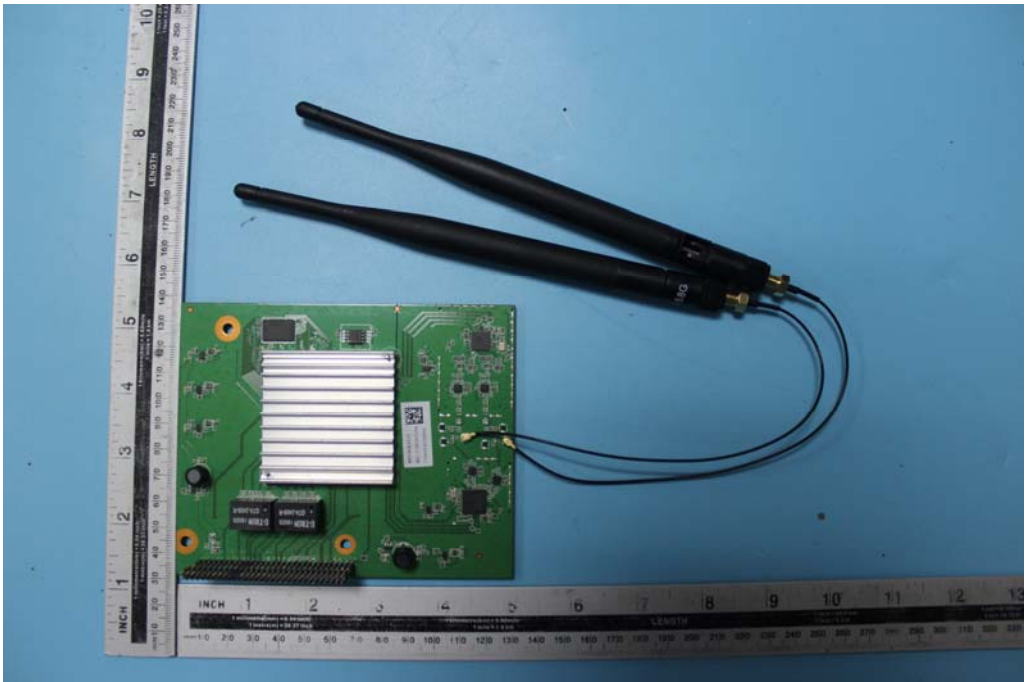
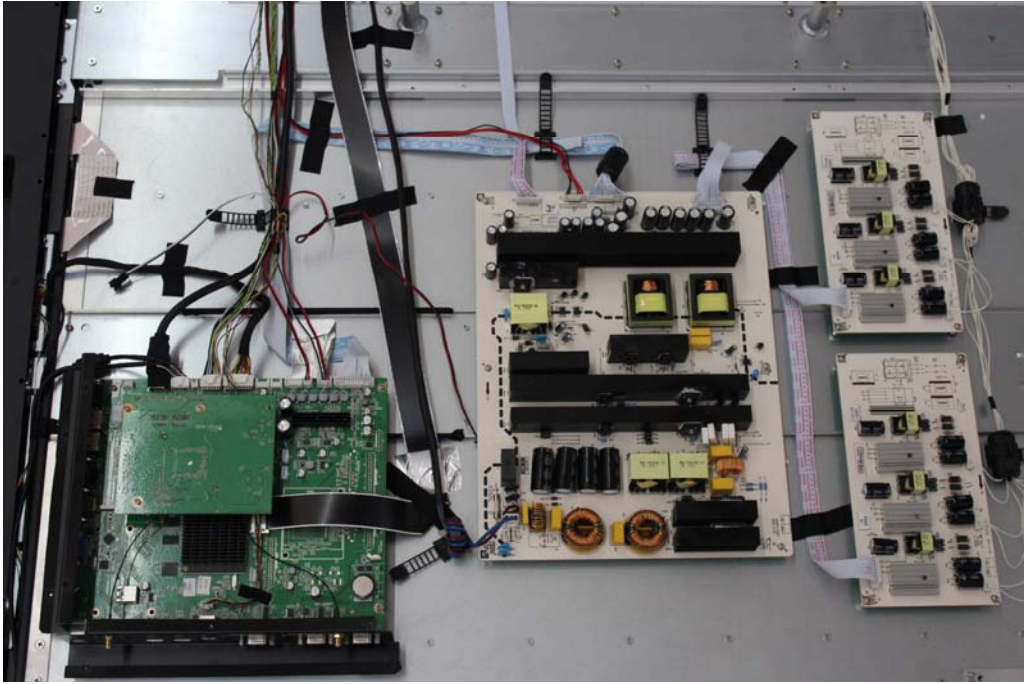


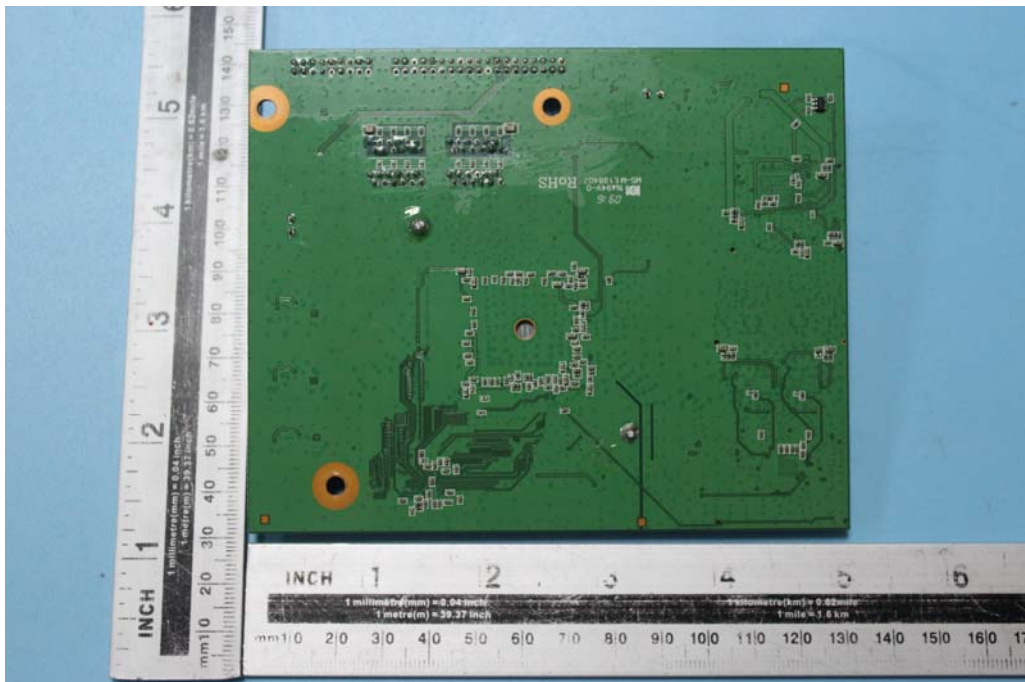
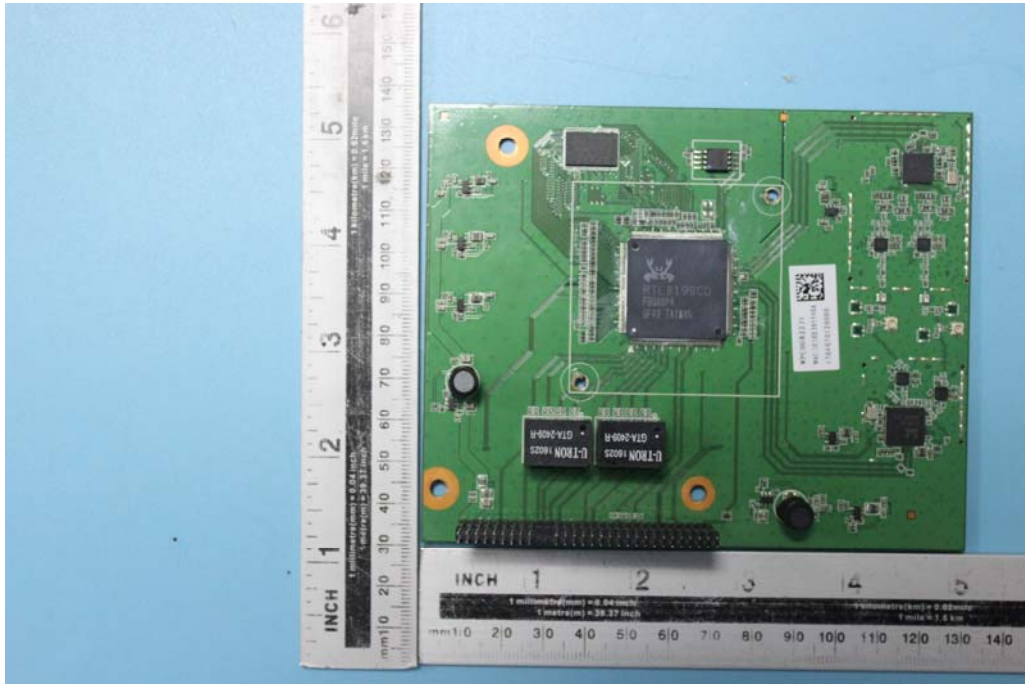


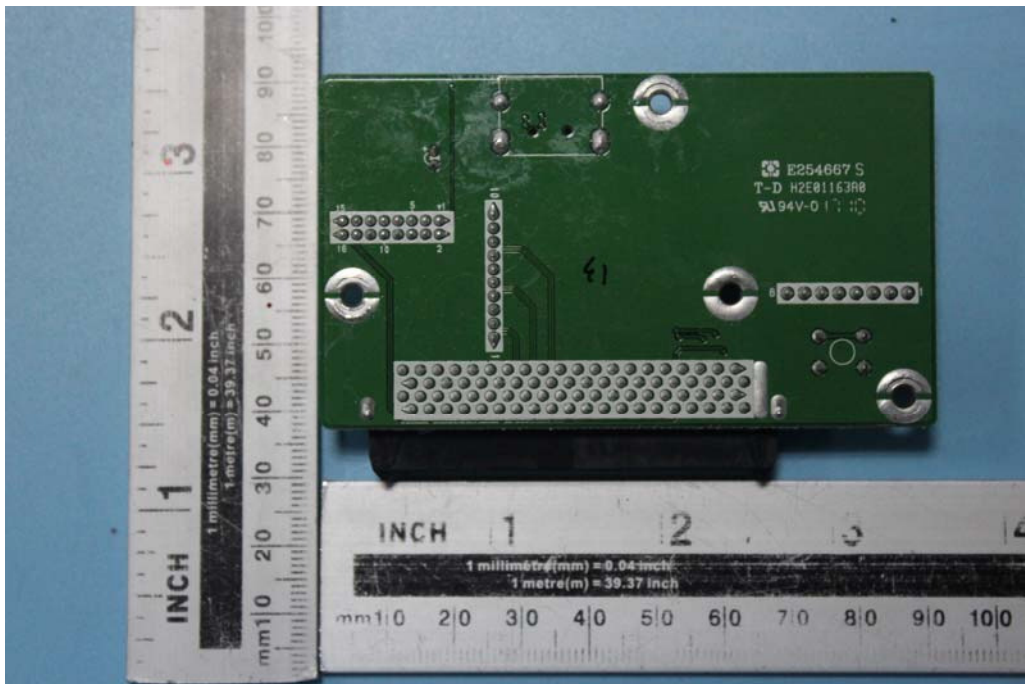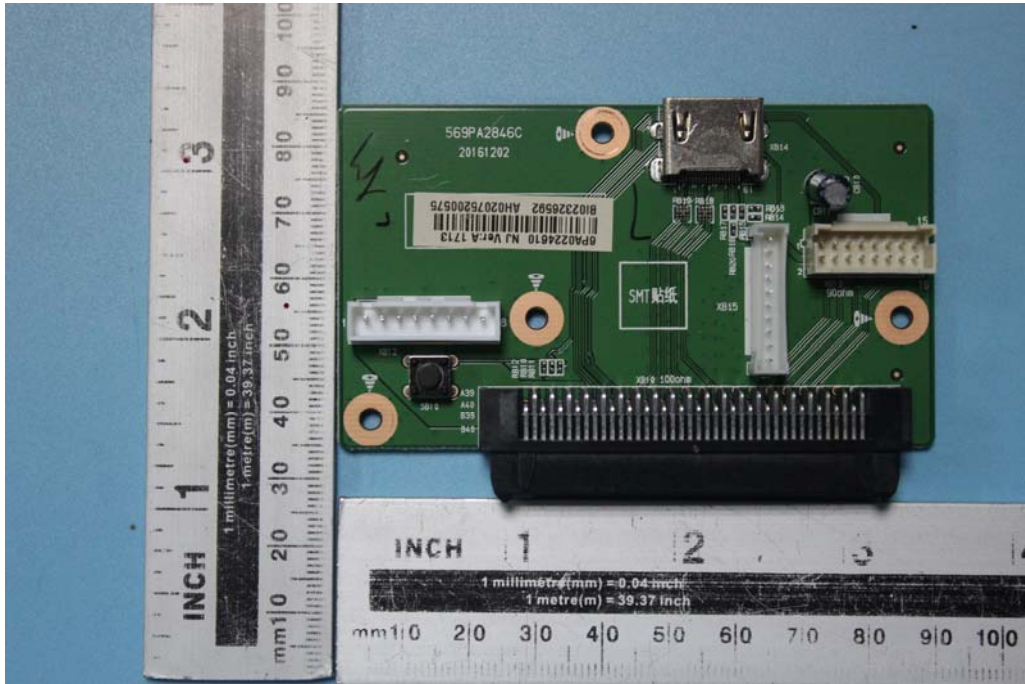

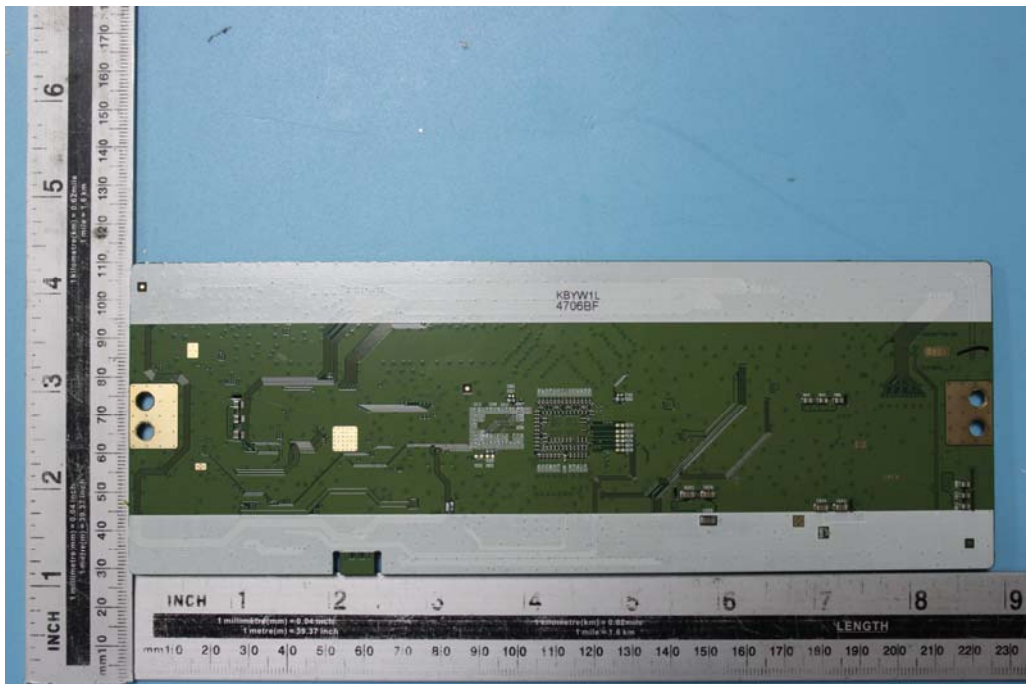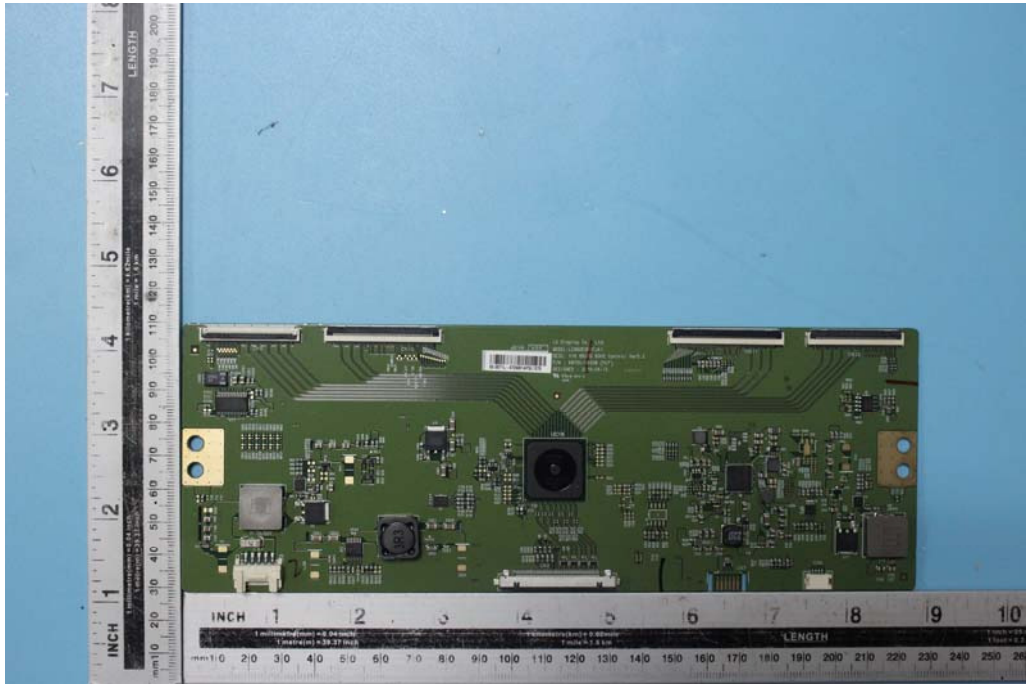

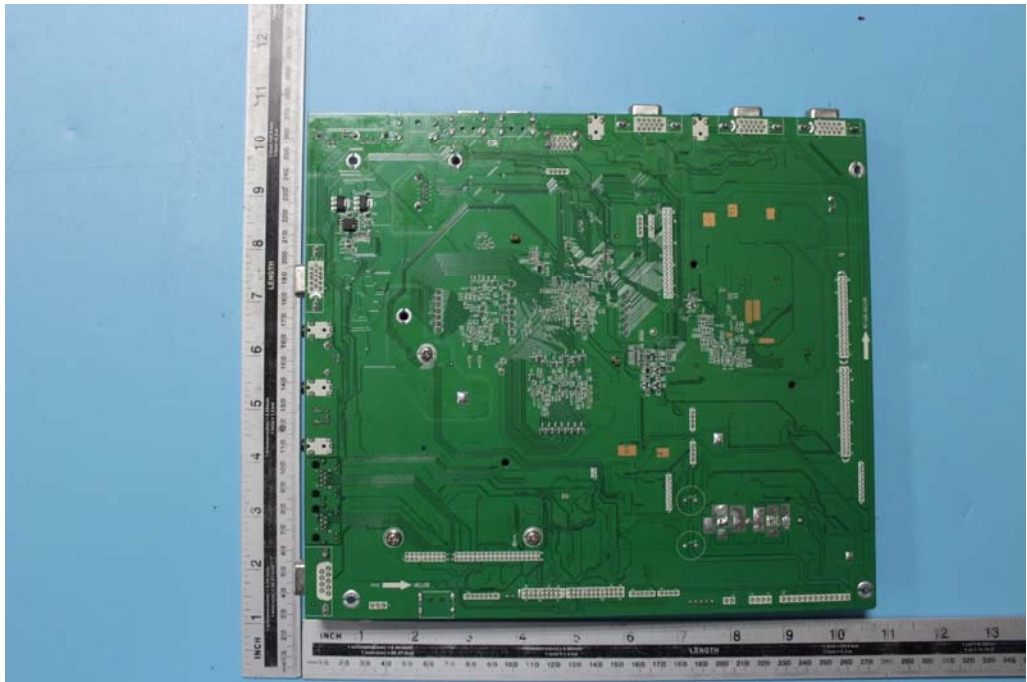

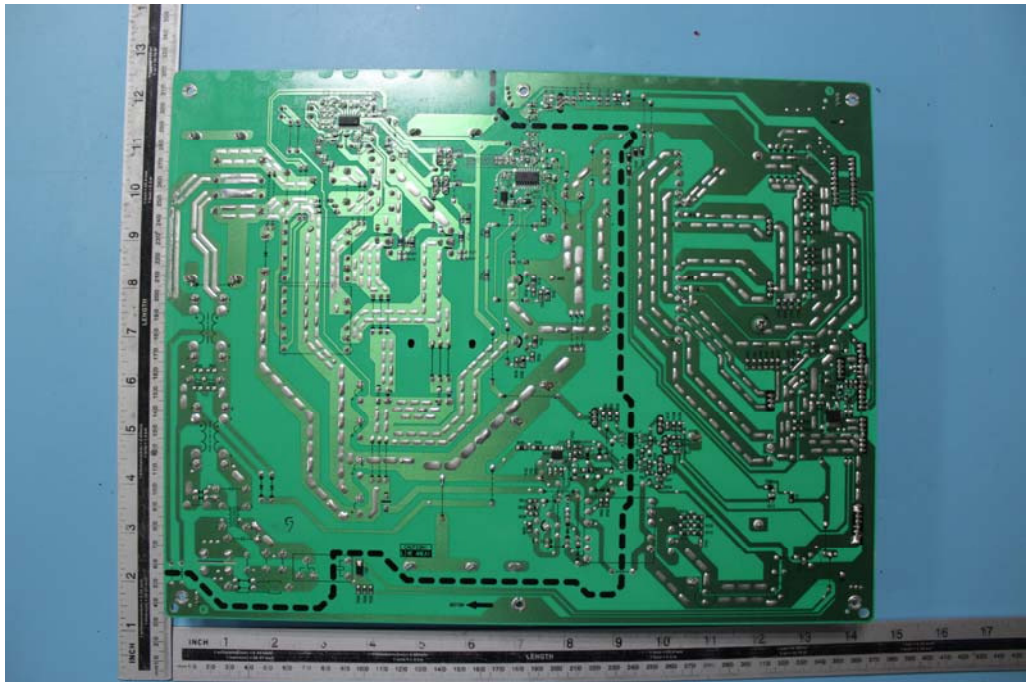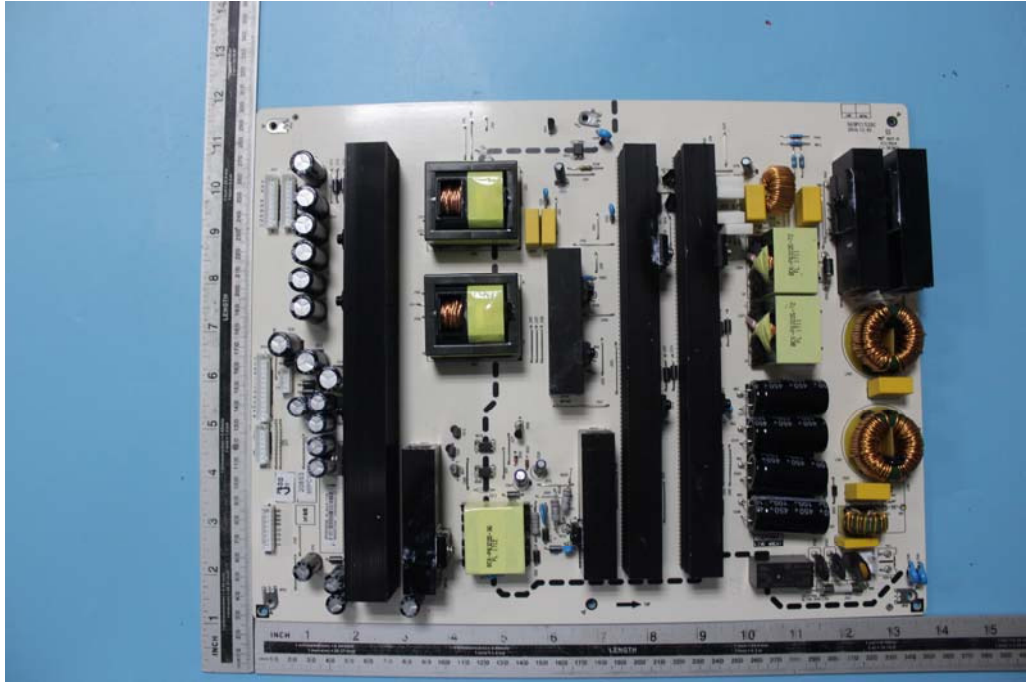

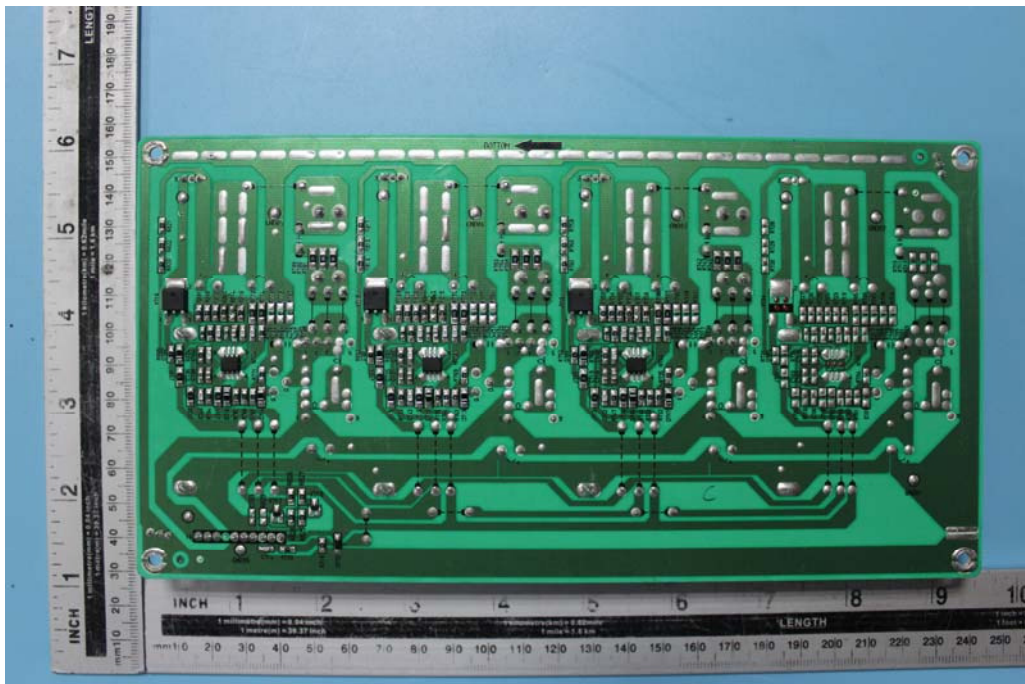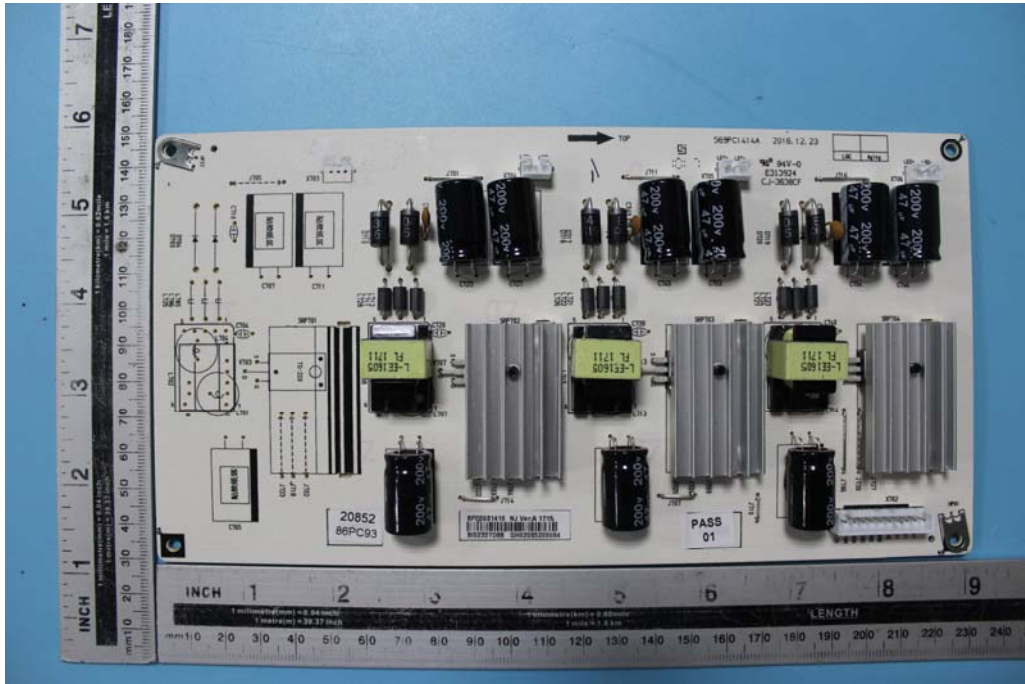

**** End of Test Report ****