



# FCC RADIO TEST REPORT

**FCC ID** : 2ADL6MTPT20WB  
**Equipment** : Mobile EFT- POS  
**Brand Name** : AEVI  
**Model Name** : MTPT20-W  
**Applicant** : MITAC COMPUTING TECHNOLOGY CORPORATION  
No. 200, Wen Hwa 2nd Rd., Kuei Shan Dist., TAOYUAN, 33383 Taiwan  
**Manufacturer** : Mitac Computer (Shun De) LTD.  
1 SHUNDA RD, LUNJIAO, SHUNDE GUANGDONG, CHINA  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Mar. 20, 2018 and testing was started from Apr. 23, 2018 and completed on Jun. 05, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards.....	5
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>6</b>
2.1 Carrier Frequency Channel .....	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system .....	8
2.5 EUT Operation Test Setup .....	8
2.6 Measurement Results Explanation Example.....	9
<b>3 Test Result.....</b>	<b>10</b>
3.1 Number of Channel Measurement .....	10
3.2 Hopping Channel Separation Measurement .....	12
3.3 Dwell Time Measurement.....	18
3.4 20dB and 99% Bandwidth Measurement .....	20
3.5 Output Power Measurement.....	30
3.6 Conducted Band Edges Measurement.....	31
3.7 Conducted Spurious Emission Measurement .....	38
3.8 Radiated Band Edges and Spurious Emission Measurement .....	48
3.9 AC Conducted Emission Measurement.....	52
3.10 Antenna Requirements.....	54
<b>4 List of Measuring Equipment .....</b>	<b>55</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>57</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(1)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 3.93 dB at 722.100 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 11.50 dB at 0.179 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Reviewed by: Joseph Lin**

**Report Producer: Natasha Hsieh**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, and NFC

Product Specification subjective to this standard	
Sample 1	Giant Plus + WNC
Sample 2	KingDisplay + WNC
Sample 3	Giant Plus + Pulse
Sample 4	KingDisplay + Pulse
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	<b>Sporton Site No.</b>		
	TH05-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




### 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane for Sample 1 and Y plane for Sample 3) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
<b>Conducted Test Cases</b>	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
<b>Radiated Test Cases</b>	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz for Sample 1 Mode 2: CH39_2441 MHz for Sample 1 Mode 3: CH78_2480 MHz for Sample 1 Mode 4: CH00_2402 MHz for Sample 3 Mode 5: CH39_2441 MHz for Sample 3 Mode 6: CH78_2480 MHz for Sample 3		
<b>AC Conducted Emission</b>	Mode 1: EUT with Cradle (Charging from Adapter 1) + WLAN Link + Bluetooth Link + Earphone + NFC Link + Smart Card + MSR Card (Load) for Sample 1		
<b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			

### 2.3 Connection Diagram of Test System

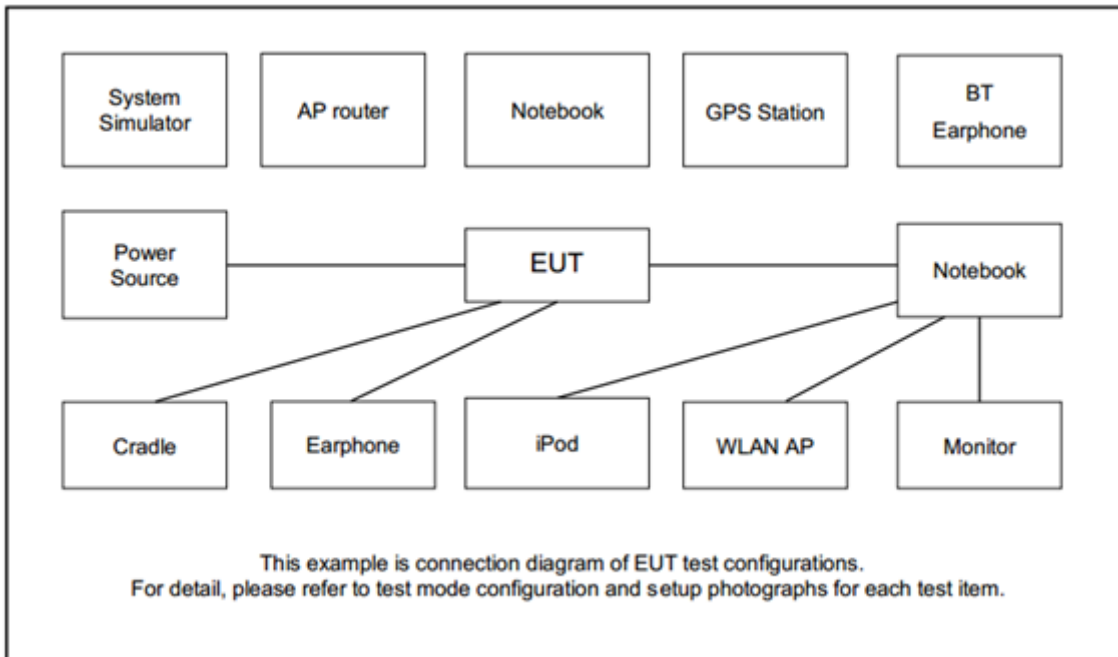

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A
7.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

### 2.5 EUT Operation Test Setup

The RF test items, utility “cmd” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.





## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

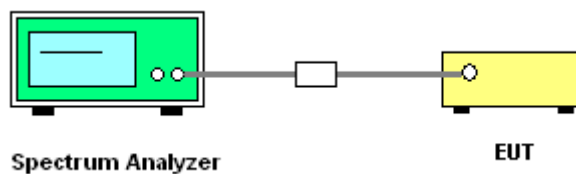





### 3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

#### Number of Hopping Channel Plot on Channel 00 - 78

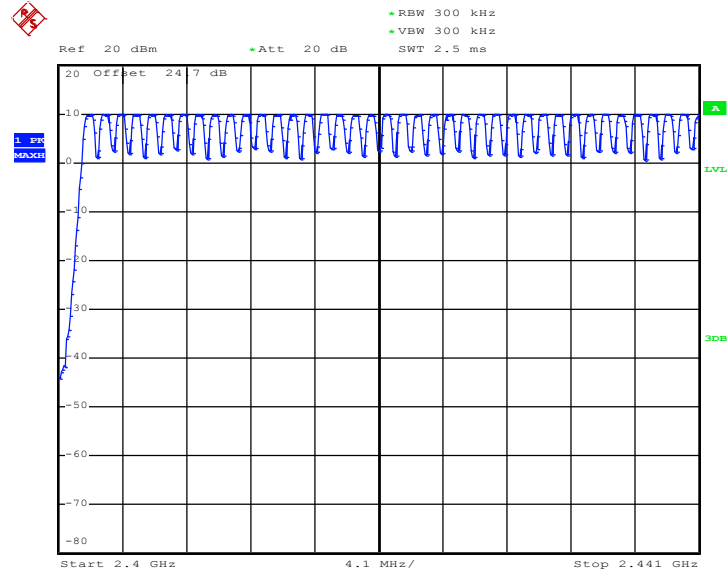

Date: 1.MAY.2018 05:49:27

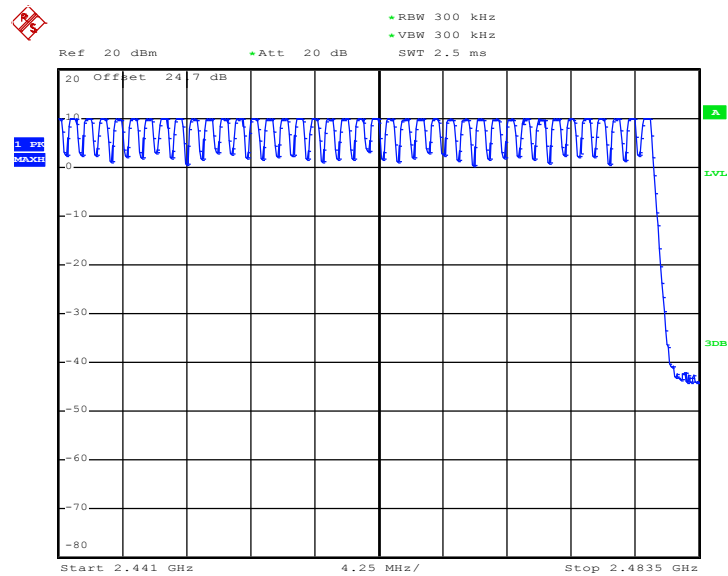

Date: 1.MAY.2018 05:53:02

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

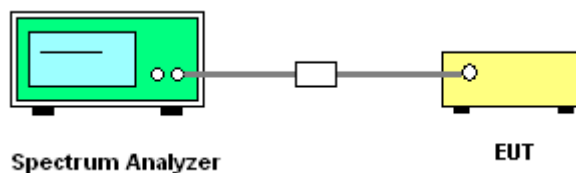


### 3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<1Mbps>

Channel Separation Plot on Channel 00 - 01

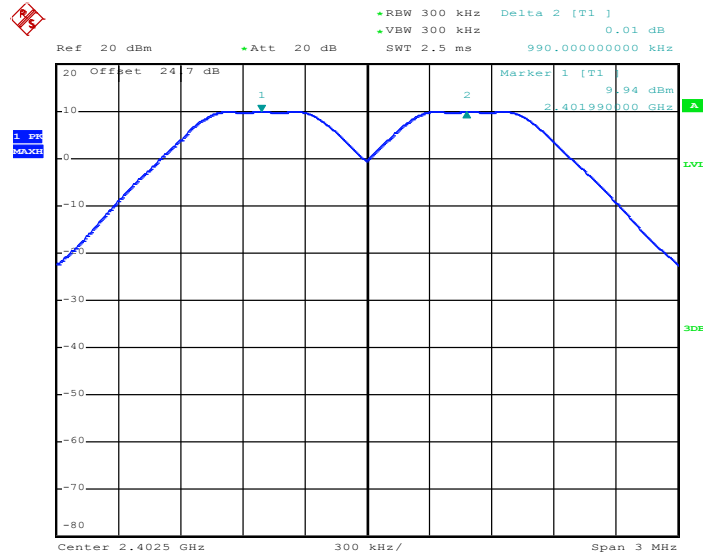

Date: 1.MAY.2018 05:27:03


Channel Separation Plot on Channel 39 - 40

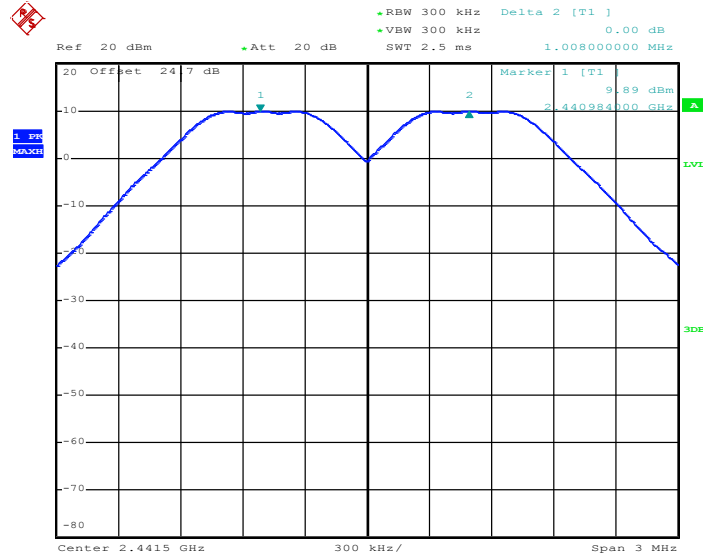

Date: 1.MAY.2018 05:28:04




Channel Separation Plot on Channel 77 - 78

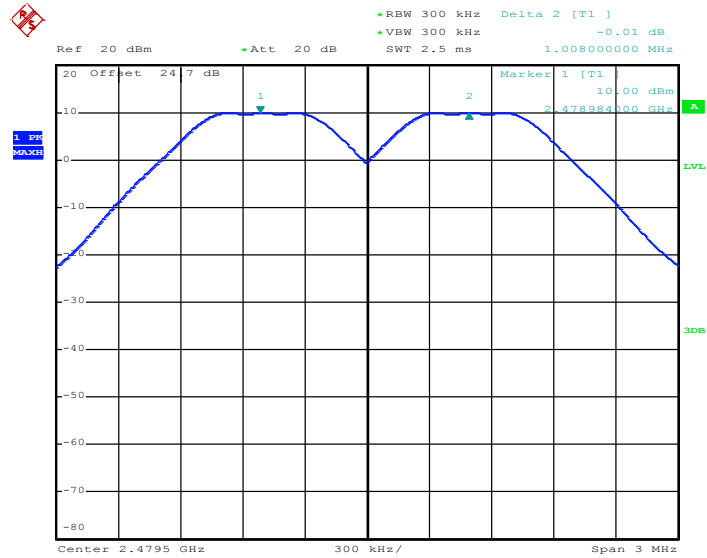

Date: 1.MAY.2018 05:28:58

<2Mbps>


Channel Separation Plot on Channel 00 - 01

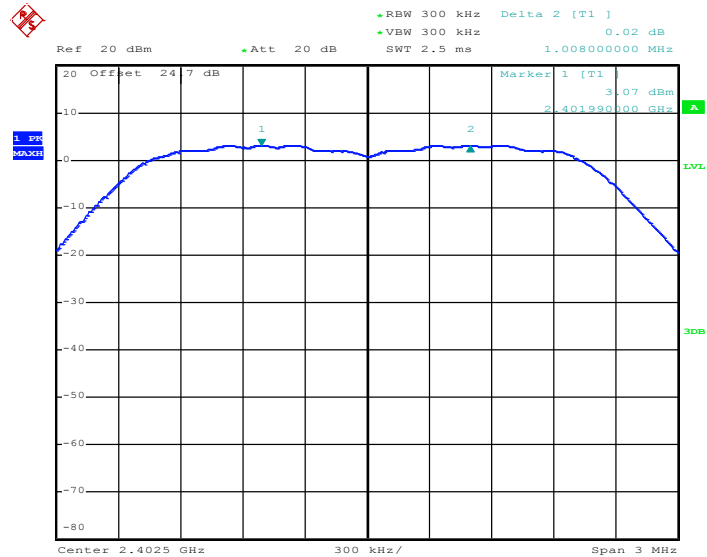

Date: 1.MAY.2018 06:14:28




Channel Separation Plot on Channel 39 - 40

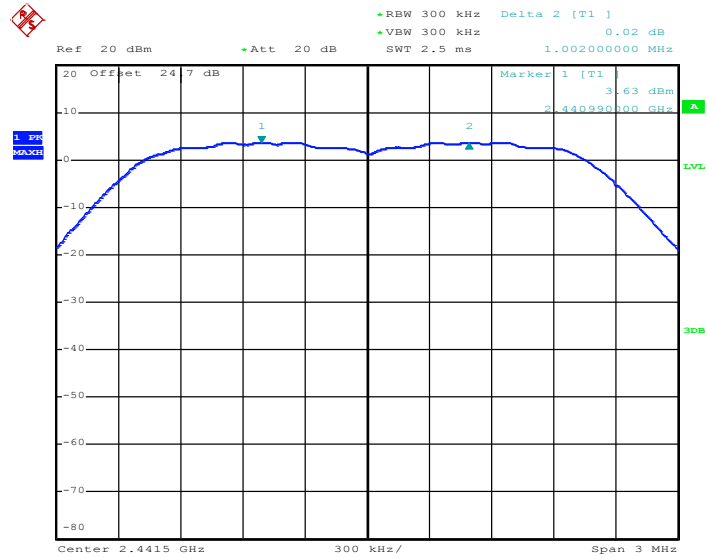

Date: 1.MAY.2018 06:06:20

Channel Separation Plot on Channel 77 - 78

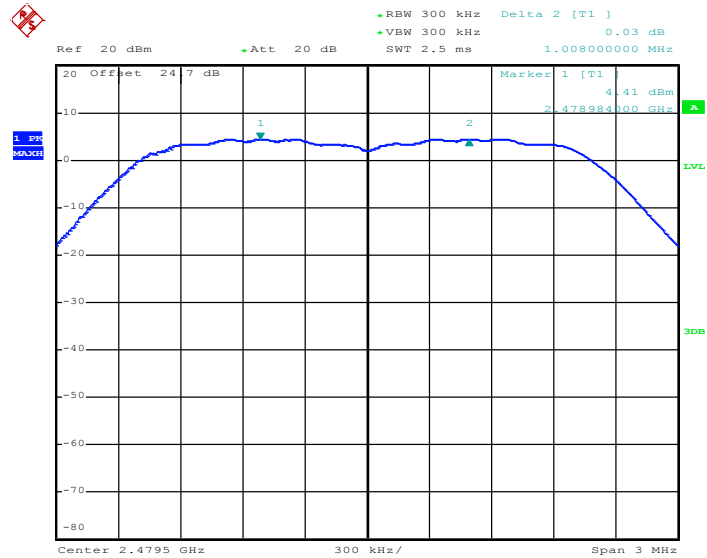


Date: 1.MAY.2018 06:05:14




<3Mbps>

Channel Separation Plot on Channel 00 - 01

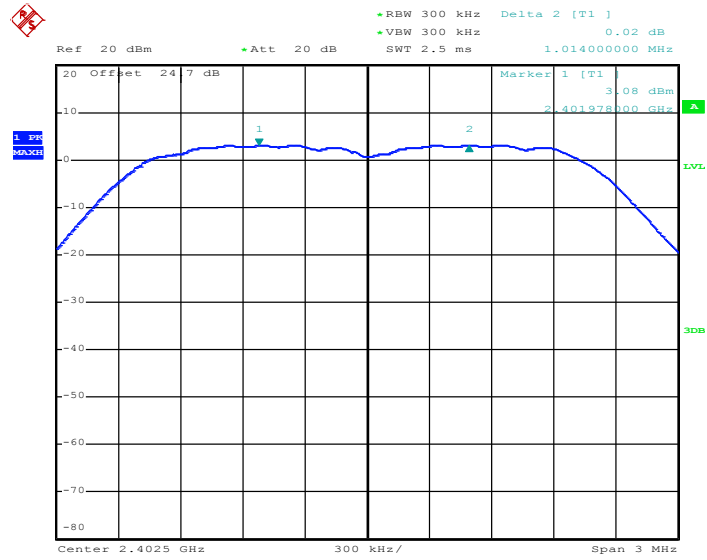

Date: 1.MAY.2018 07:06:46

Channel Separation Plot on Channel 39 - 40

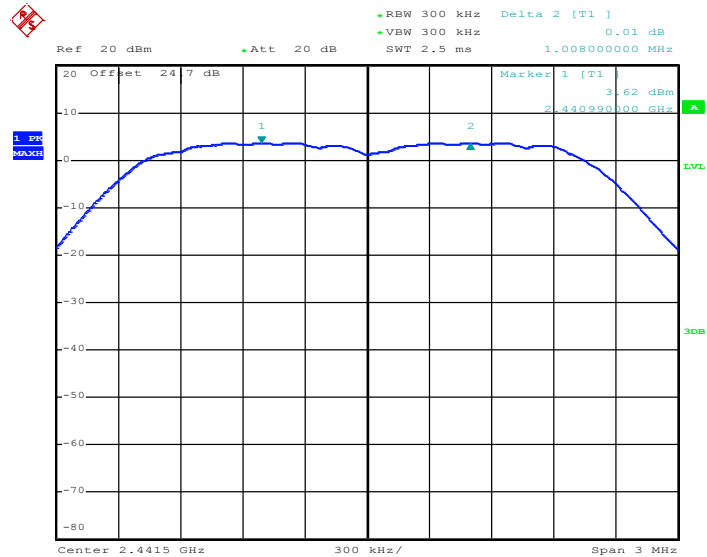


Date: 1.MAY.2018 07:11:47





Channel Separation Plot on Channel 77 - 78

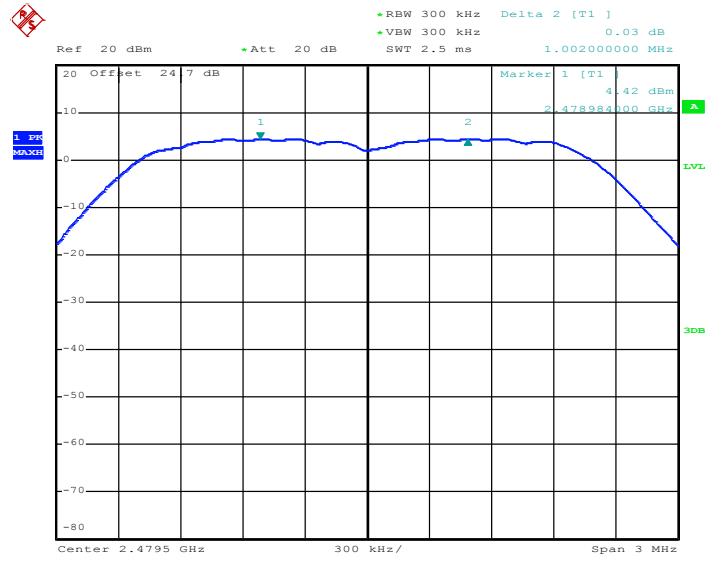

Date: 1.MAY.2018 07:15:34

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

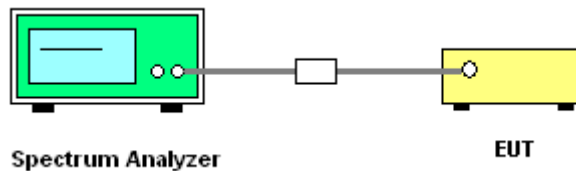


#### 3.3.5 Test Result of Dwell Time

Please refer to Appendix A.



Package Transfer Time Plot

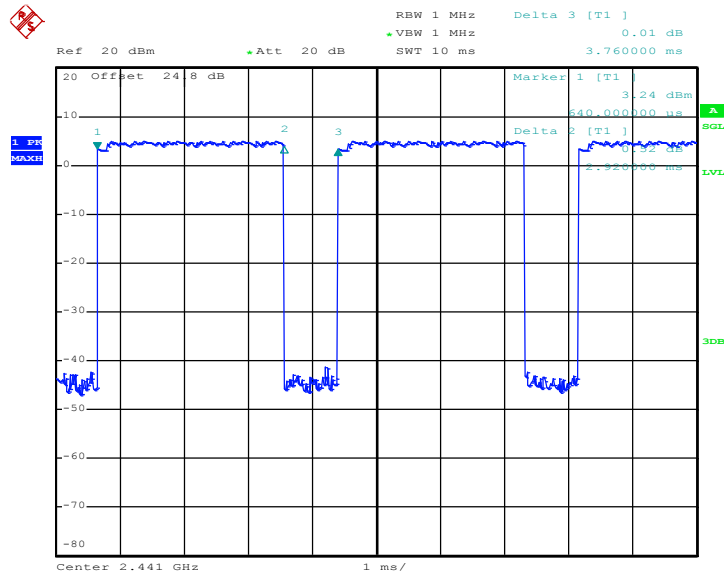

Date: 23.APR.2018 16:43:45

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

## 3.4 20dB and 99% Bandwidth Measurement

### 3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. Measure and record the results in the test report.

### 3.4.4 Test Setup

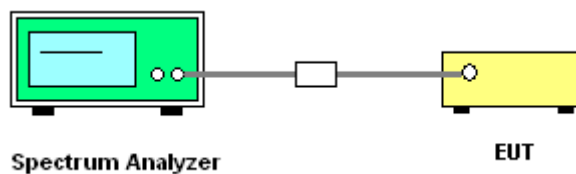


### 3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00

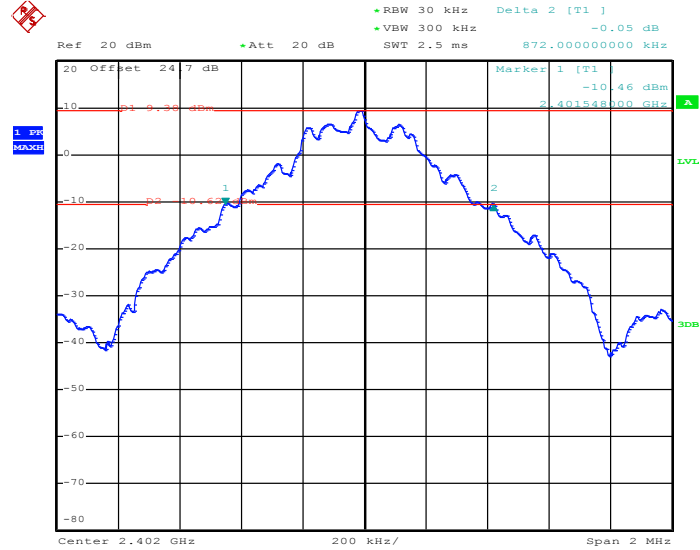

Date: 1.MAY.2018 05:40:19


20 dB Bandwidth Plot on Channel 39

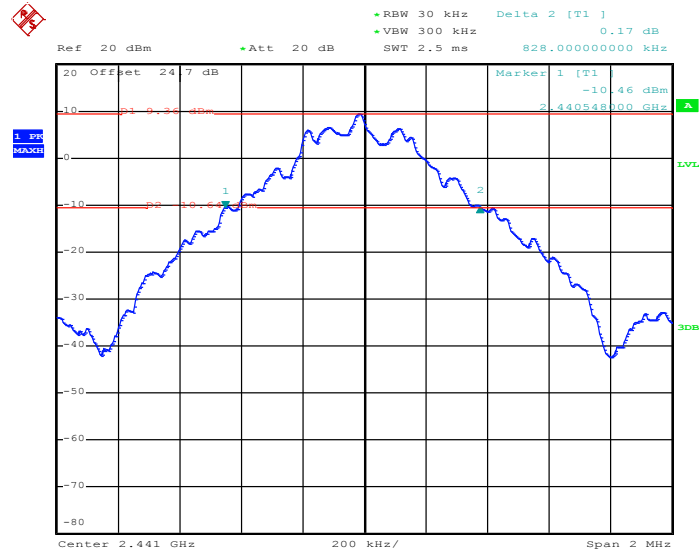

Date: 1.MAY.2018 05:38:53




20 dB Bandwidth Plot on Channel 78

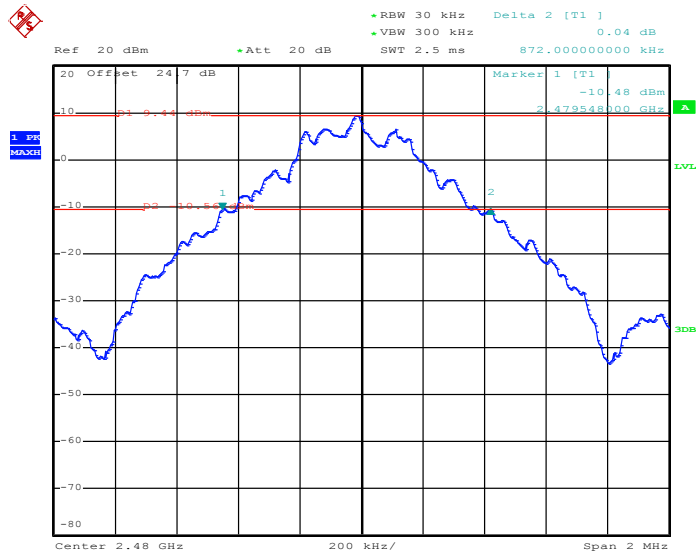

Date: 1.MAY.2018 05:34:45

<2Mbps>


20 dB Bandwidth Plot on Channel 00

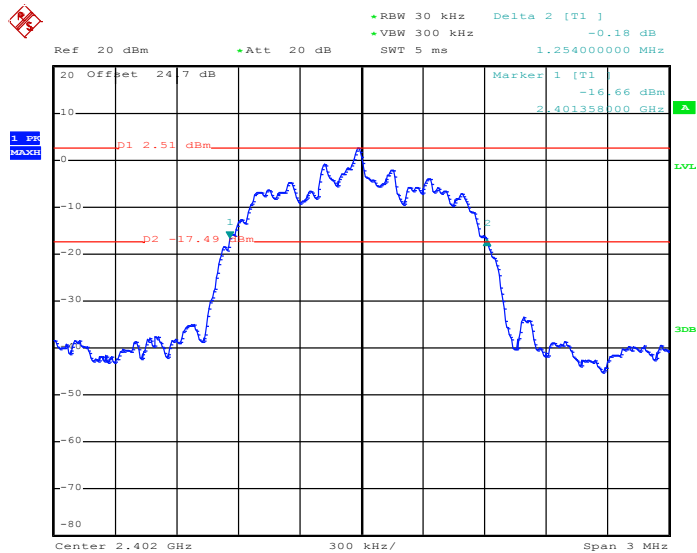

Date: 1.MAY.2018 06:53:03




### 20 dB Bandwidth Plot on Channel 39

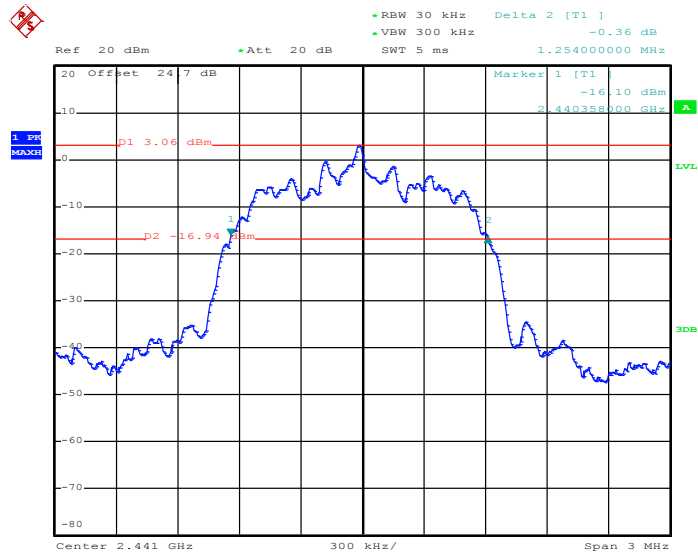

Date: 1.MAY.2018 06:12:19

### 20 dB Bandwidth Plot on Channel 78

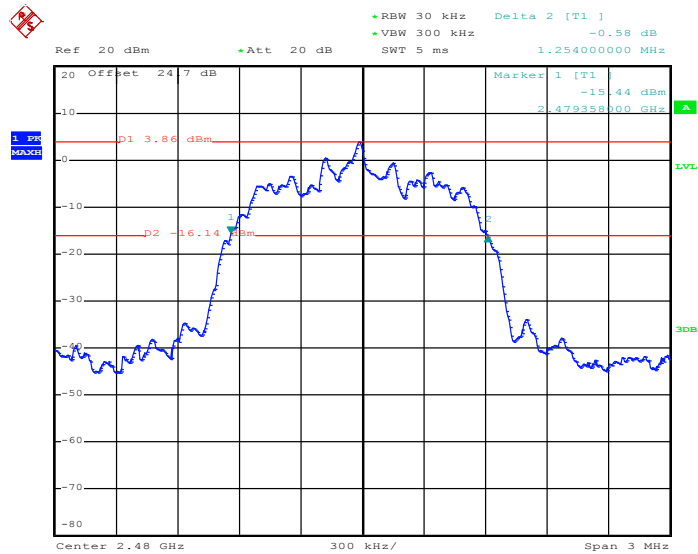


Date: 1.MAY.2018 06:03:39




<3Mbps>

20 dB Bandwidth Plot on Channel 00

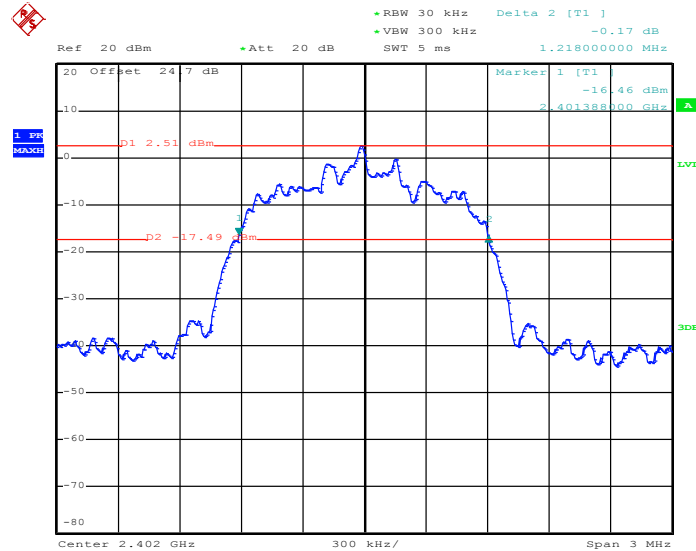

Date: 1.MAY.2018 07:05:18

20 dB Bandwidth Plot on Channel 39

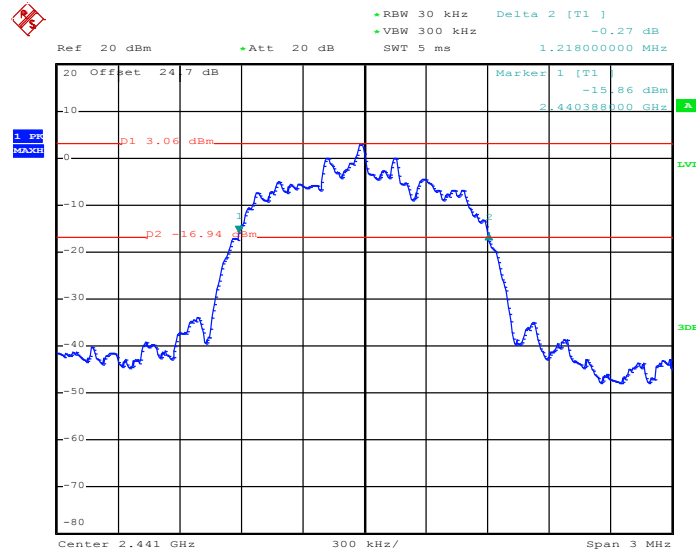


Date: 1.MAY.2018 07:10:28





20 dB Bandwidth Plot on Channel 78

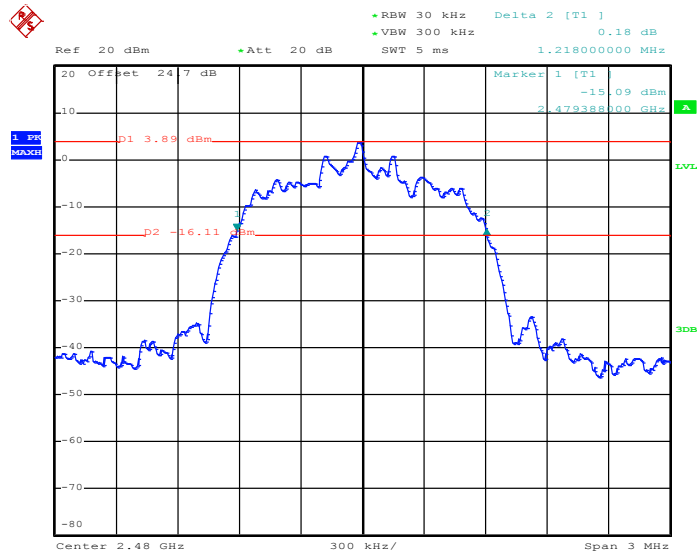


Date: 1.MAY.2018 07:16:39

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

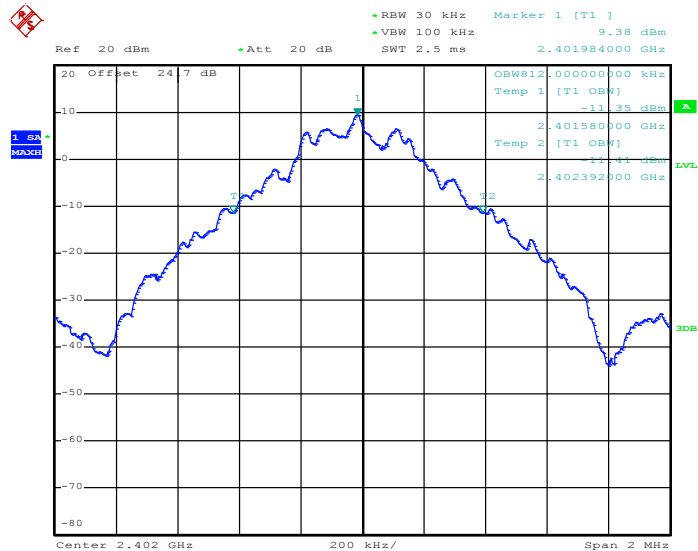

Date: 1.MAY.2018 05:41:50




99% Occupied Bandwidth Plot on Channel 39

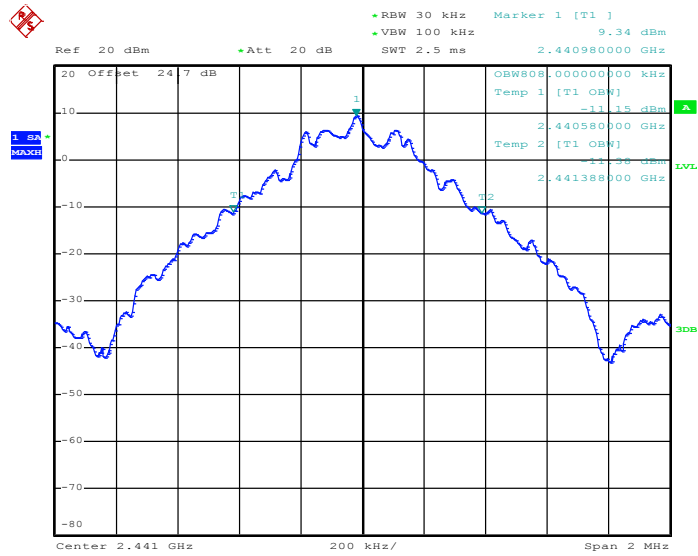

Date: 1.MAY.2018 05:37:39

99% Occupied Bandwidth Plot on Channel 78

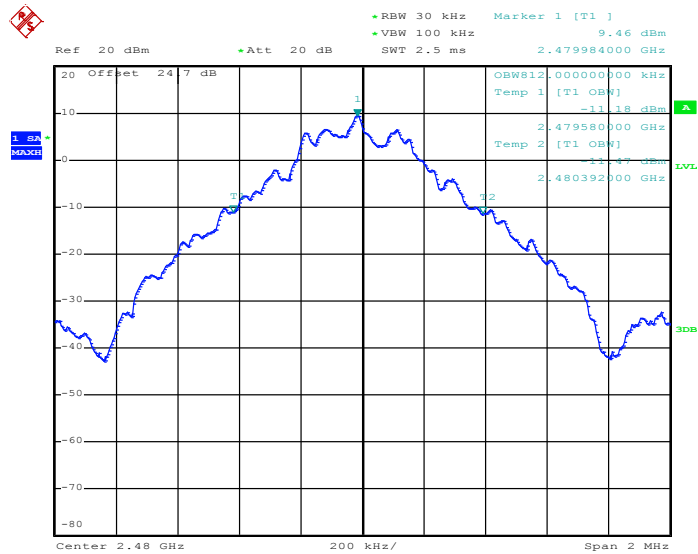

Date: 1.MAY.2018 05:29:54




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 1.MAY.2018 06:17:33


99% Occupied Bandwidth Plot on Channel 39

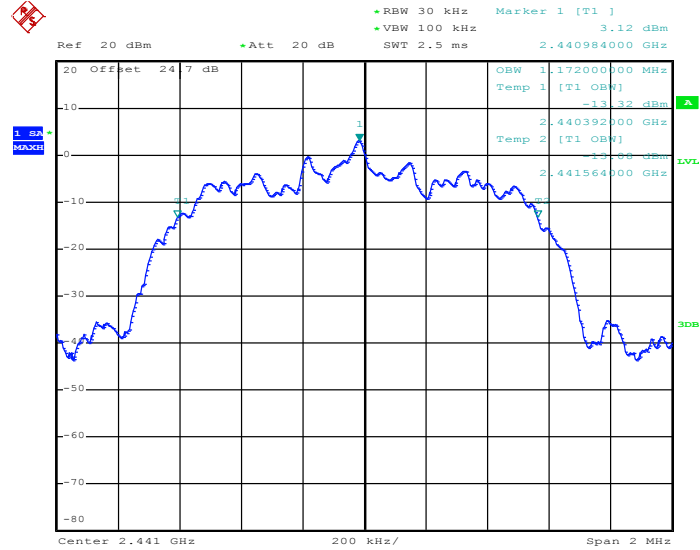

Date: 1.MAY.2018 06:07:12




99% Occupied Bandwidth Plot on Channel 78

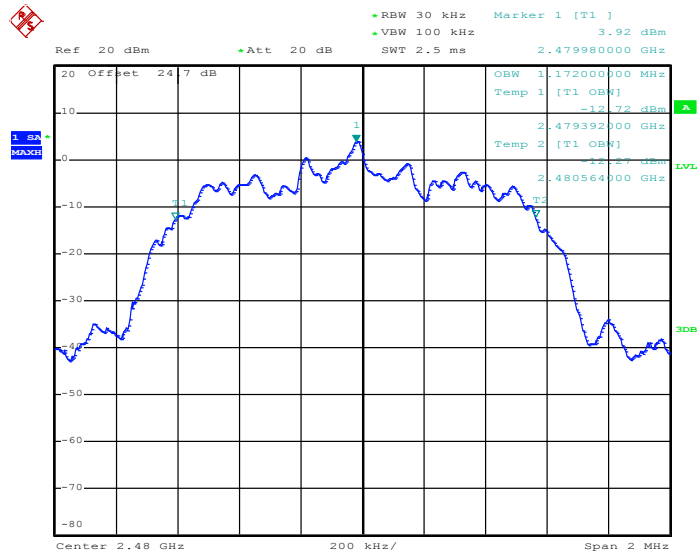

Date: 1.MAY.2018 06:00:06

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

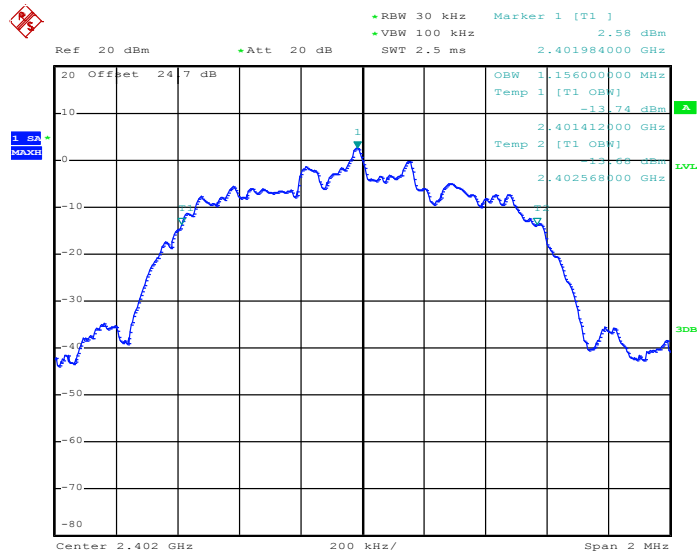

Date: 1.MAY.2018 07:02:25




99% Occupied Bandwidth Plot on Channel 39

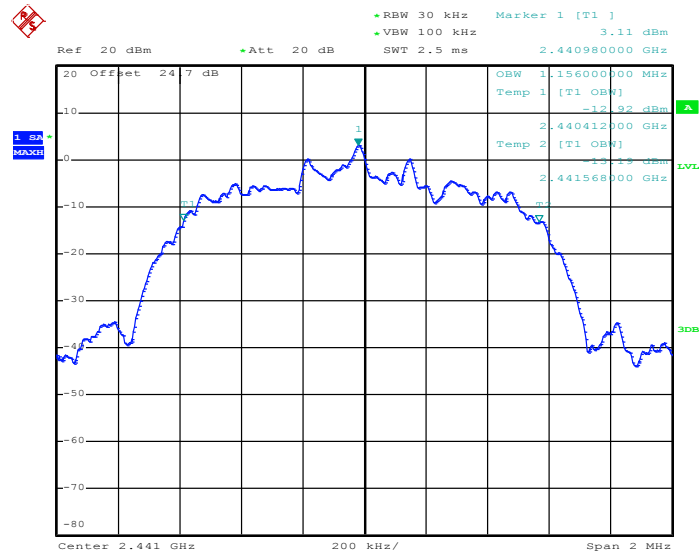

Date: 1.MAY.2018 07:08:50

99% Occupied Bandwidth Plot on Channel 78

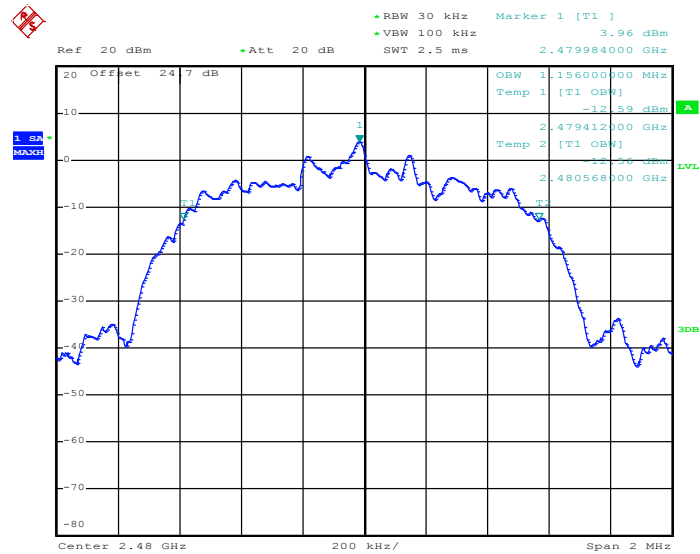

Date: 1.MAY.2018 07:17:45

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

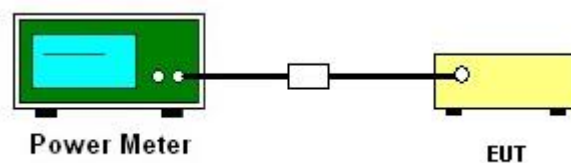

### 3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

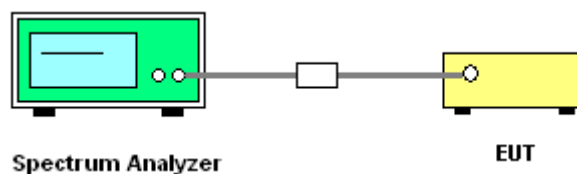




### 3.6.5 Test Result of Conducted Band Edges


<1Mbps>

#### Low Band Edge Plot on Channel 00

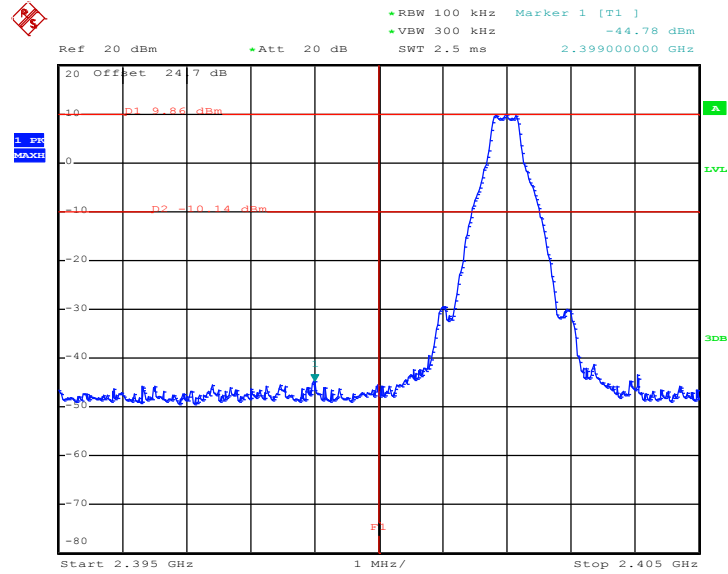

Date: 1.MAY.2018 05:40:42

#### High Band Edge Plot on Channel 78

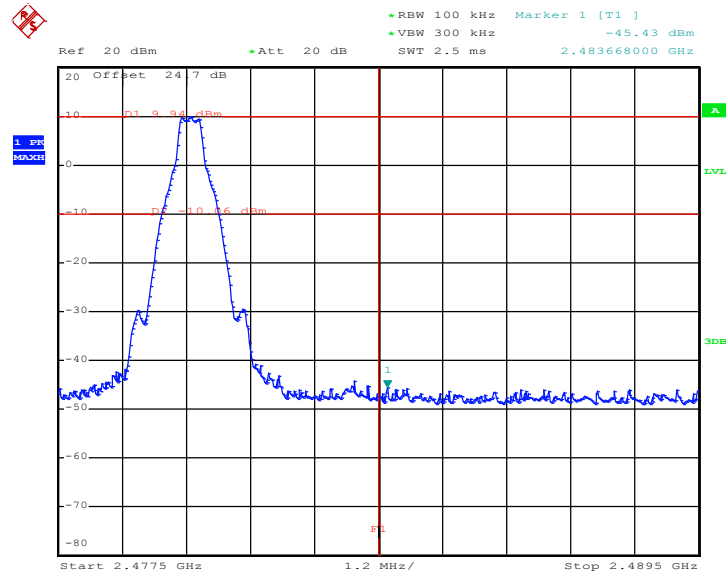


Date: 1.MAY.2018 05:33:14






<2Mbps>

Low Band Edge Plot on Channel 00

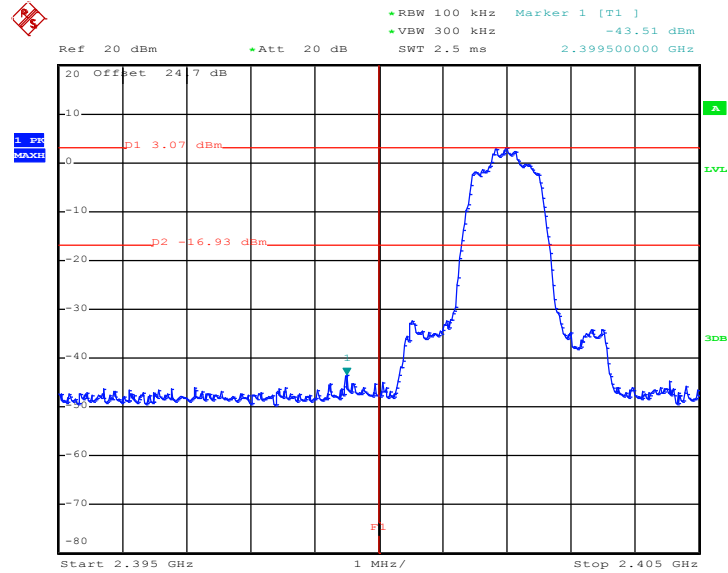

Date: 1.MAY.2018 06:16:56

High Band Edge Plot on Channel 78

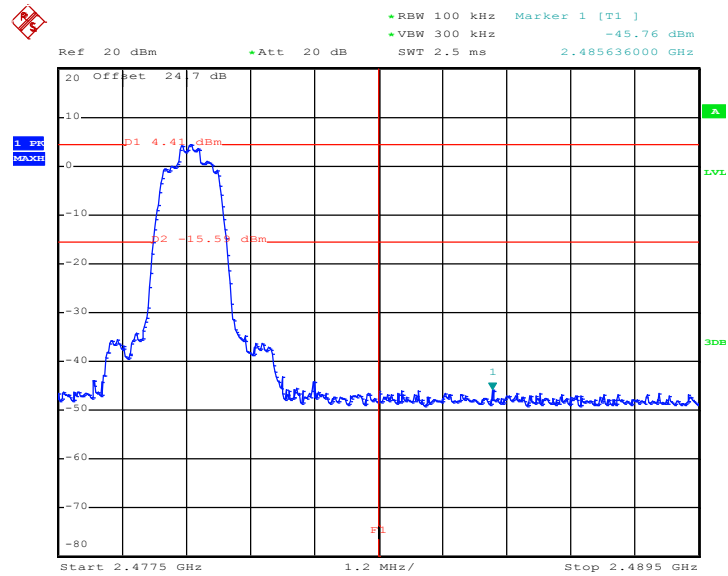


Date: 1.MAY.2018 06:01:51




<3Mbps>

Low Band Edge Plot on Channel 00

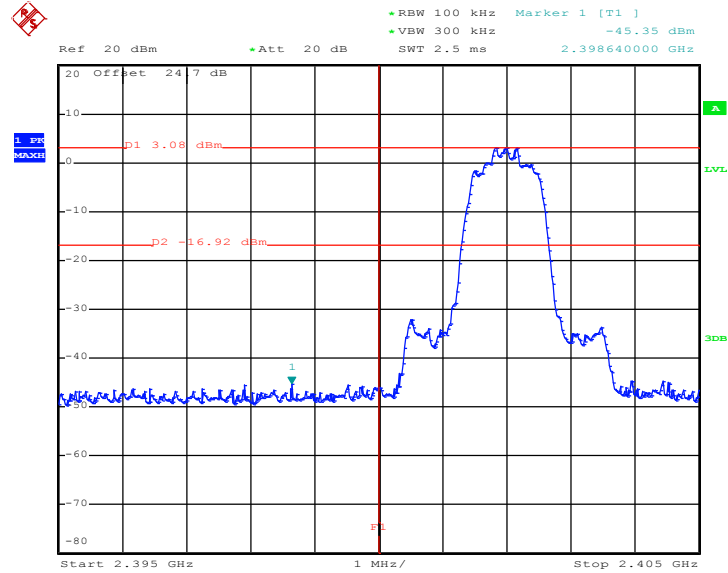

Date: 1.MAY.2018 07:02:48

High Band Edge Plot on Channel 78

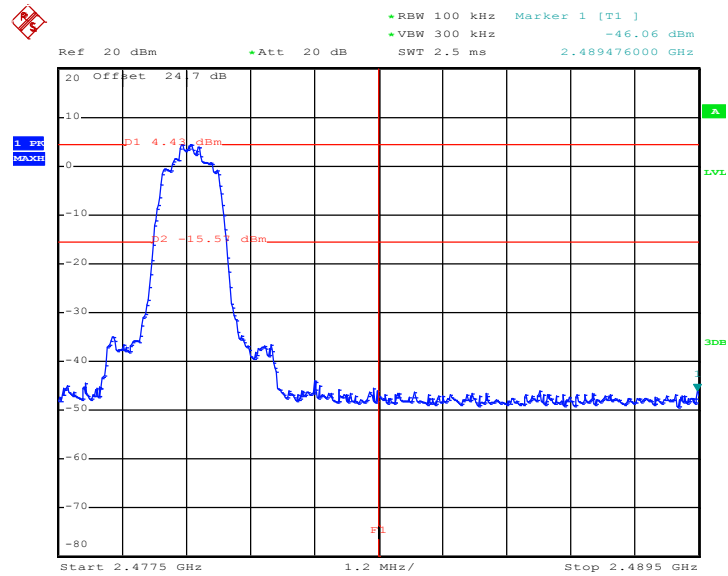


Date: 1.MAY.2018 07:17:09



### 3.6.6 Test Result of Conducted Hopping Mode Band Edges


<1Mbps>

#### Hopping Mode Low Band Edge Plot

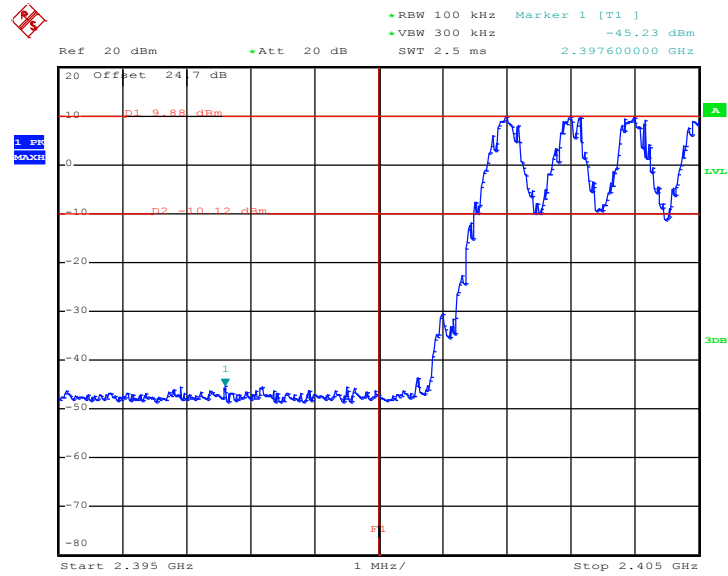

Date: 1.MAY.2018 05:47:32

#### Hopping Mode High Band Edge Plot

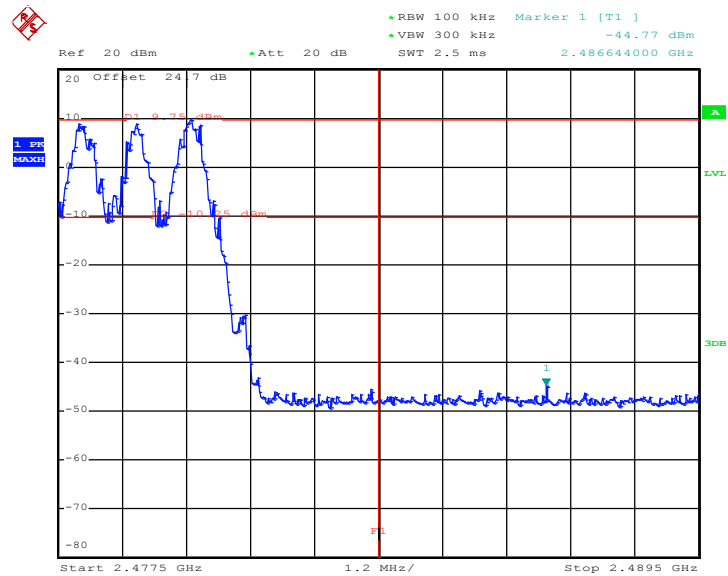


Date: 1.MAY.2018 05:54:31




<2Mbps>

Hopping Mode Low Band Edge Plot

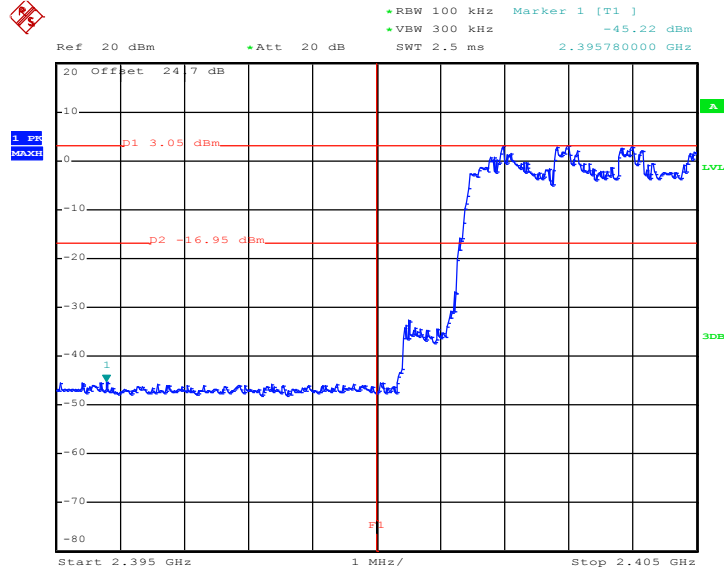

Date: 1.MAY.2018 06:22:21

Hopping Mode High Band Edge Plot

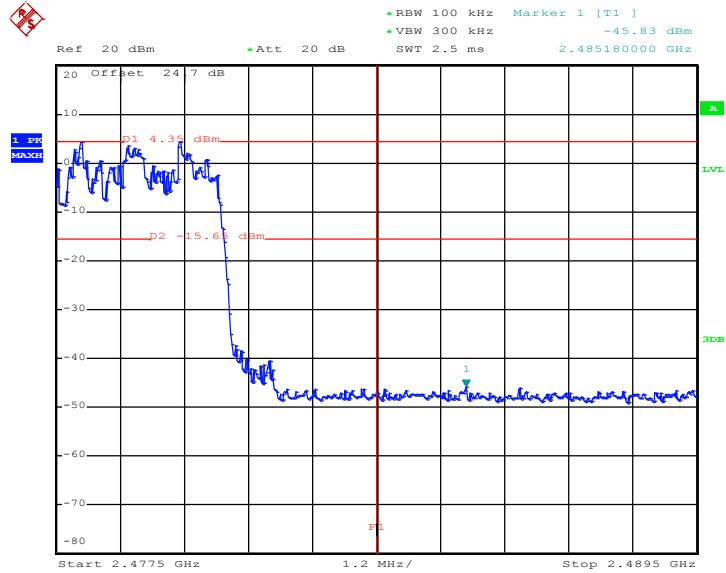


Date: 1.MAY.2018 05:59:13




<3Mbps>

Hopping Mode Low Band Edge Plot

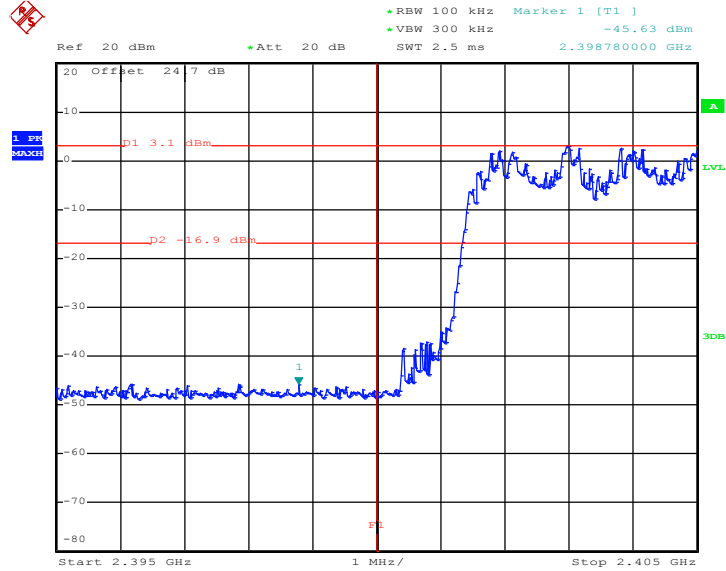

Date: 1.MAY.2018 07:07:48

Hopping Mode High Band Edge Plot

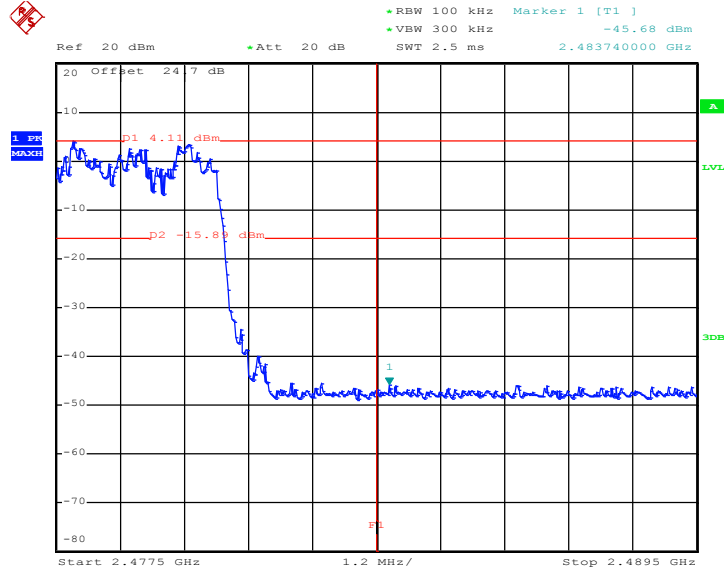

Date: 1.MAY.2018 07:20:37

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup






### 3.7.5 Test Result of Conducted Spurious Emission


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

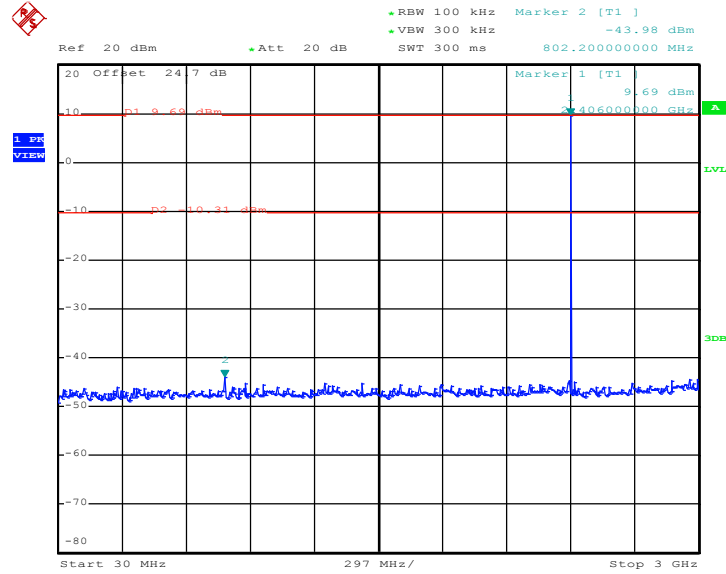

Date: 1.MAY.2018 14:20:49


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

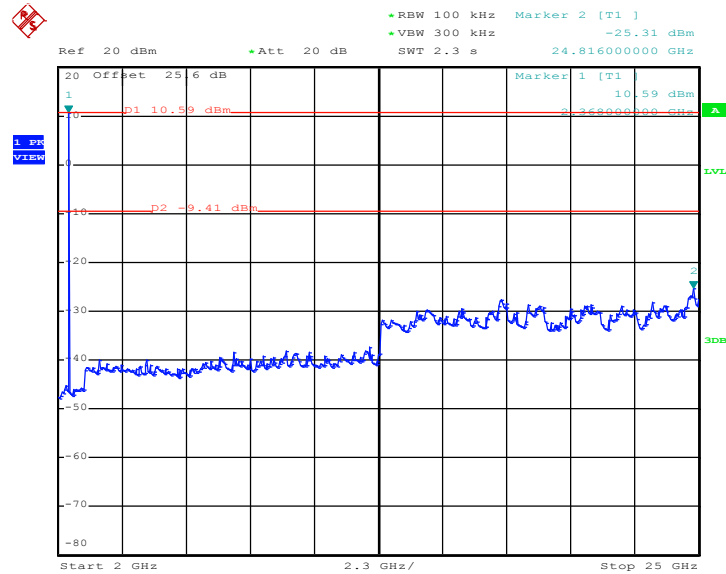

Date: 1.MAY.2018 05:45:48




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

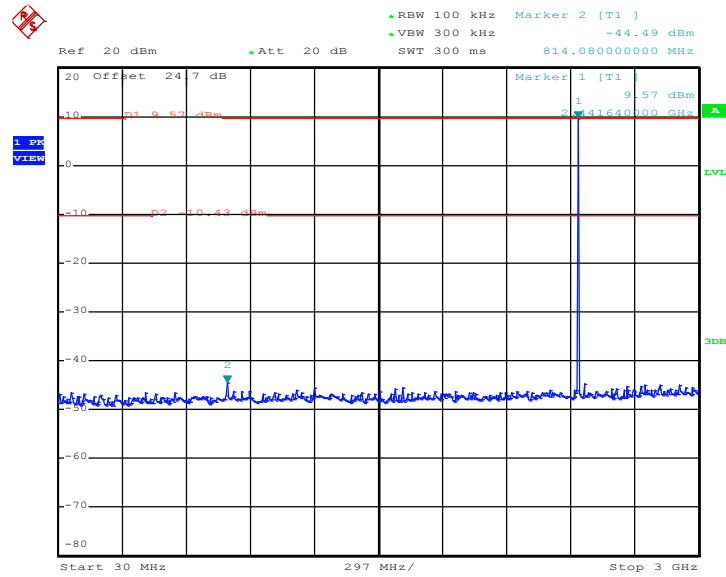

Date: 1.MAY.2018 05:36:32

CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

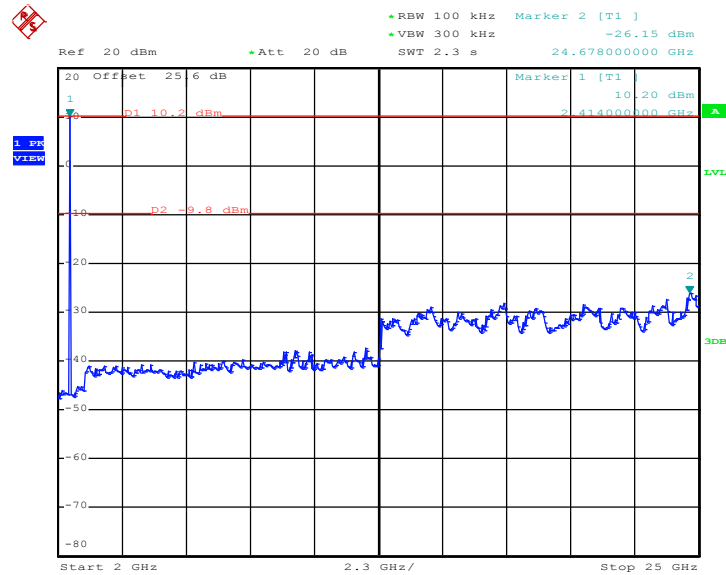


Date: 1.MAY.2018 05:37:01






CSE Plot on Ch 78 between 30MHz ~ 3 GHz

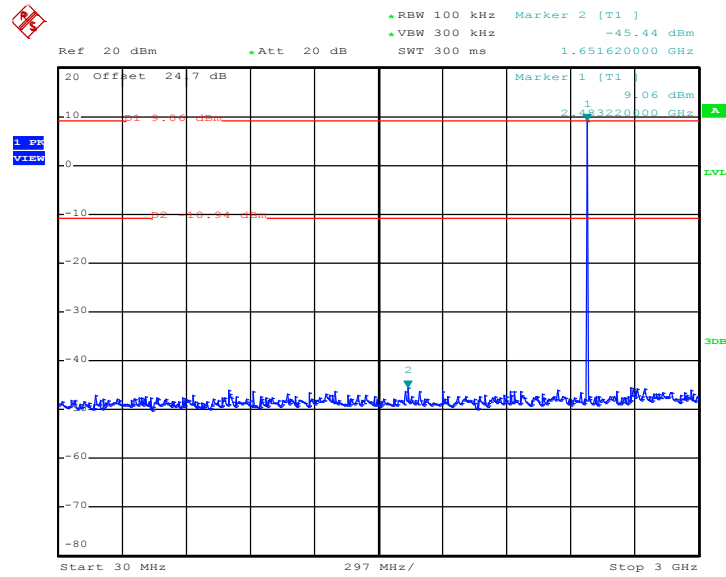

Date: 1.MAY.2018 05:31:47

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

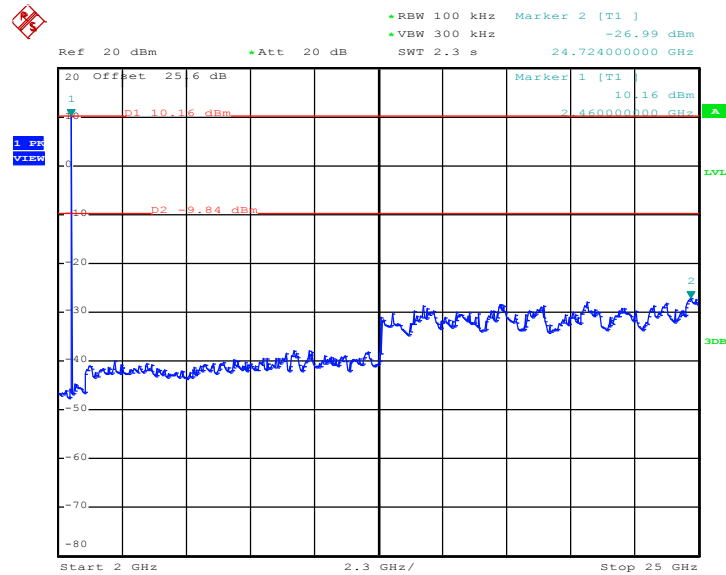


Date: 1.MAY.2018 05:32:39




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

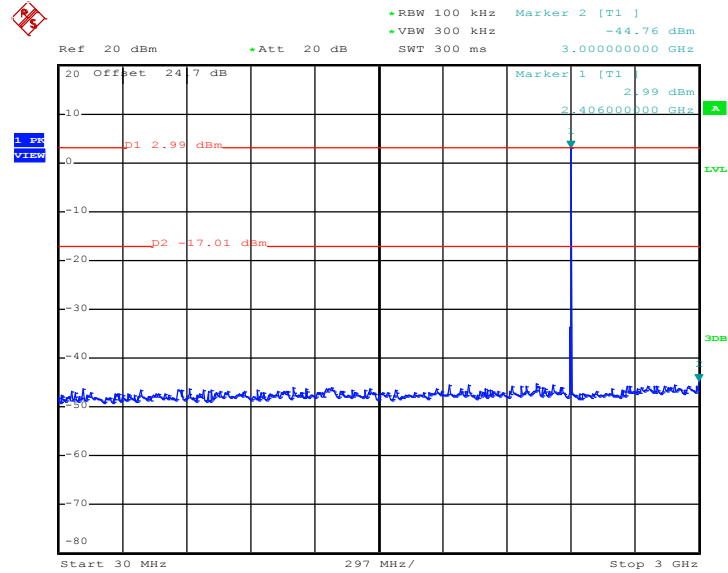

Date: 1.MAY.2018 06:18:10


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

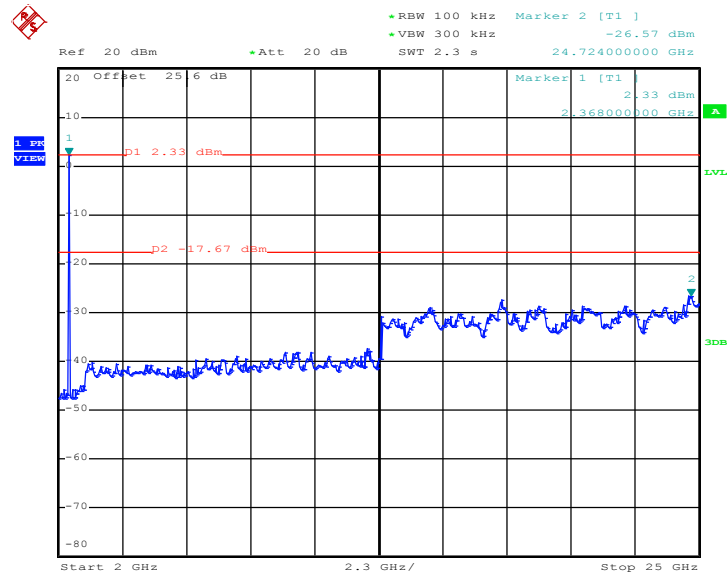

Date: 1.MAY.2018 06:18:38




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

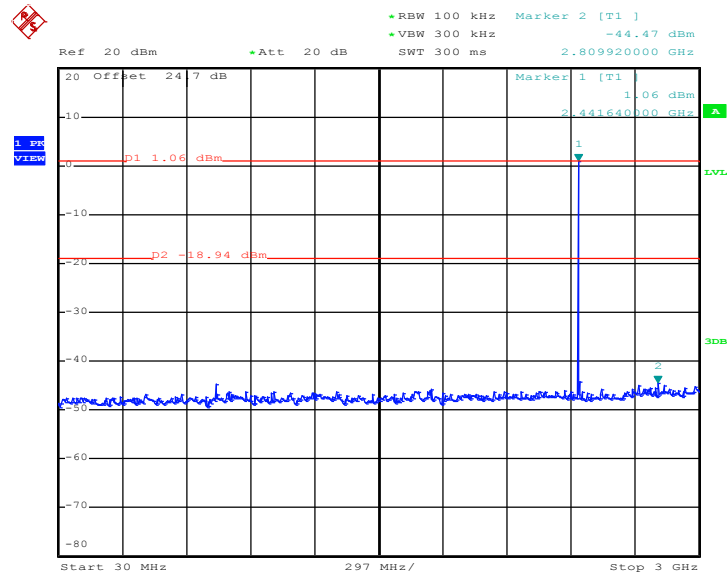

Date: 1.MAY.2018 06:07:59


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

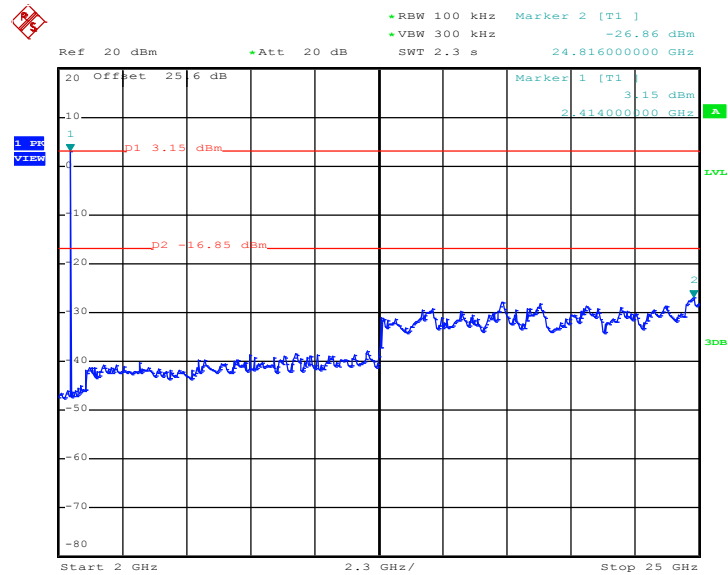

Date: 1.MAY.2018 06:09:31




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

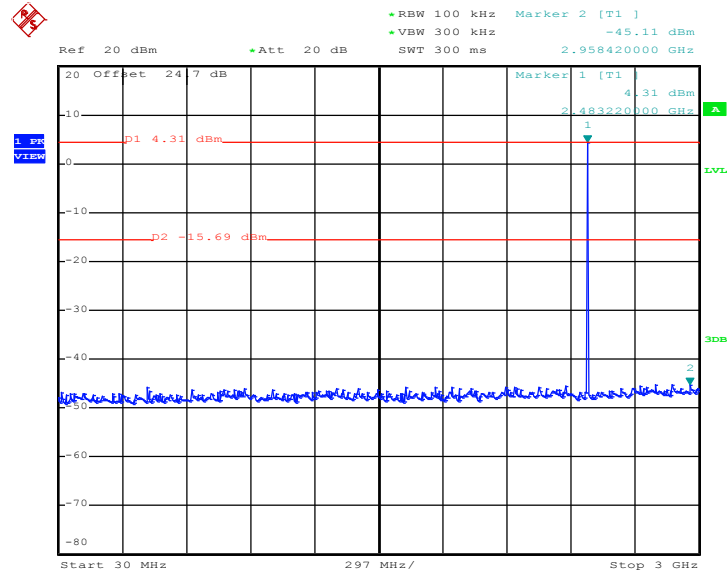

Date: 1.MAY.2018 06:00:55

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

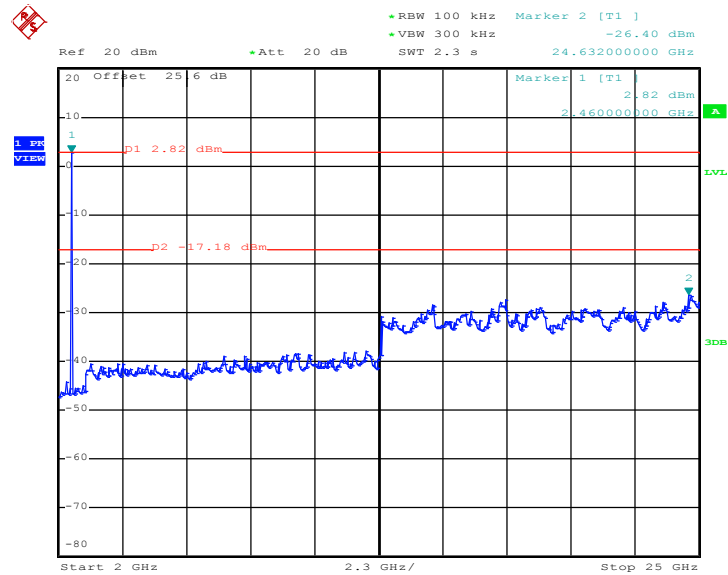


Date: 1.MAY.2018 06:01:29




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

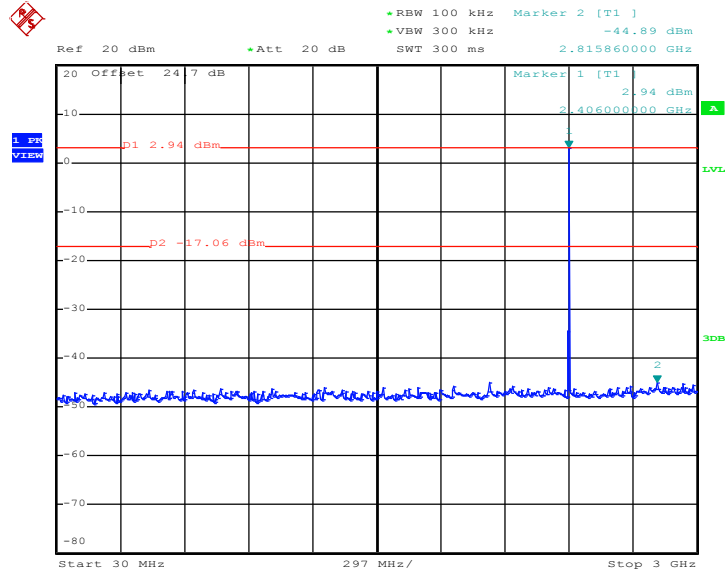

Date: 1.MAY.2018 07:03:44


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

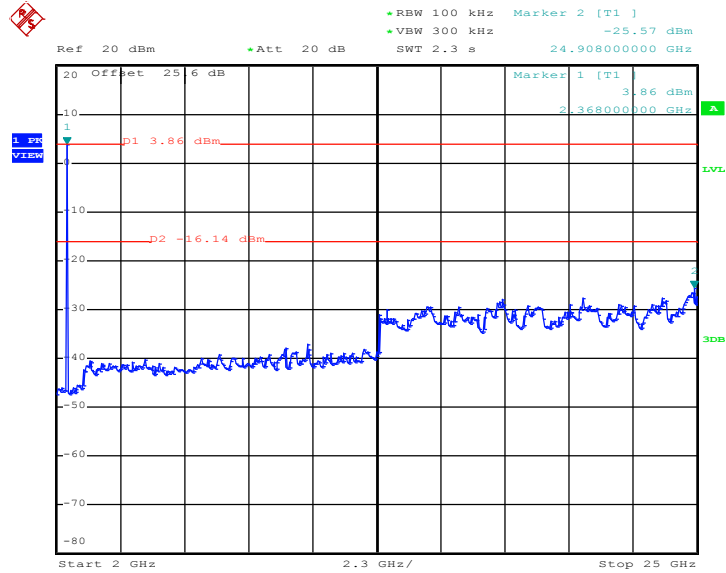

Date: 1.MAY.2018 07:04:13




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

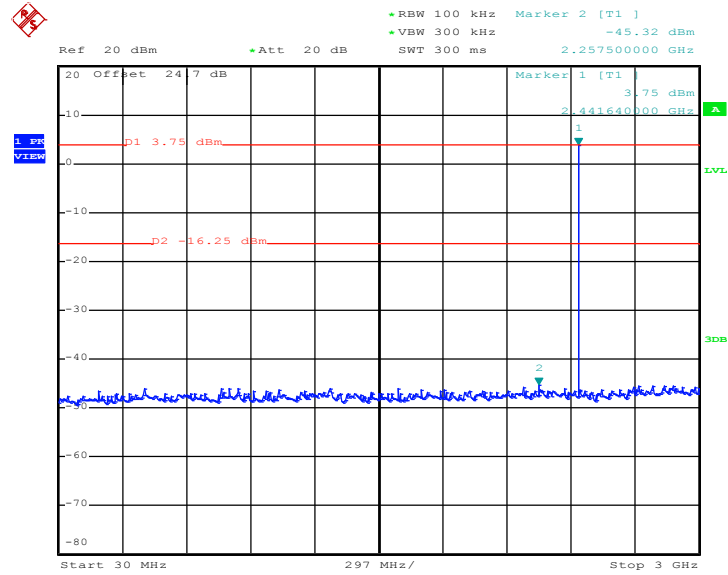

Date: 1.MAY.2018 07:21:25


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

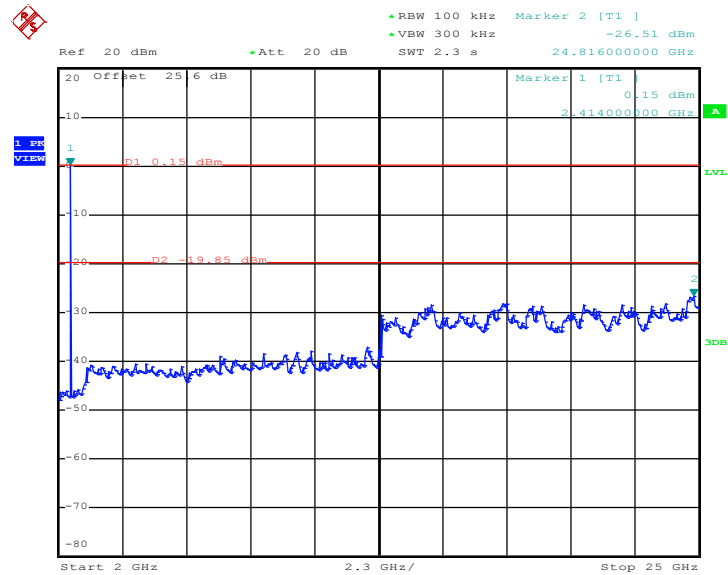

Date: 1.MAY.2018 07:22:17




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

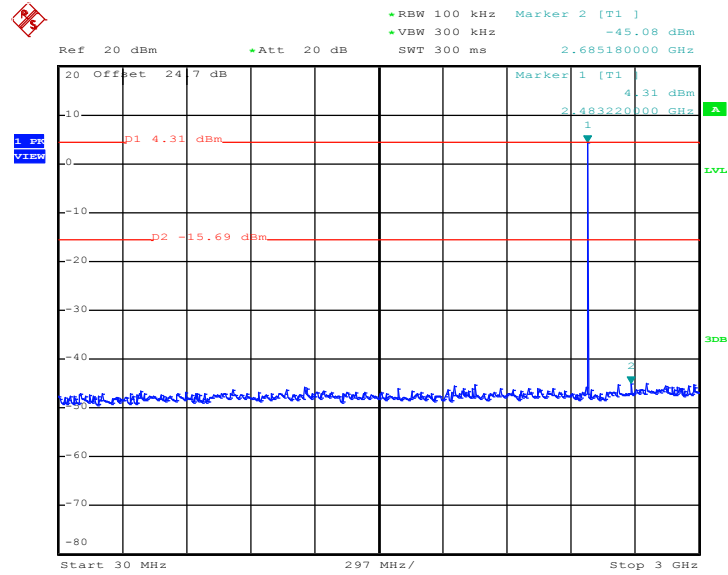

Date: 1.MAY.2018 07:18:53

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

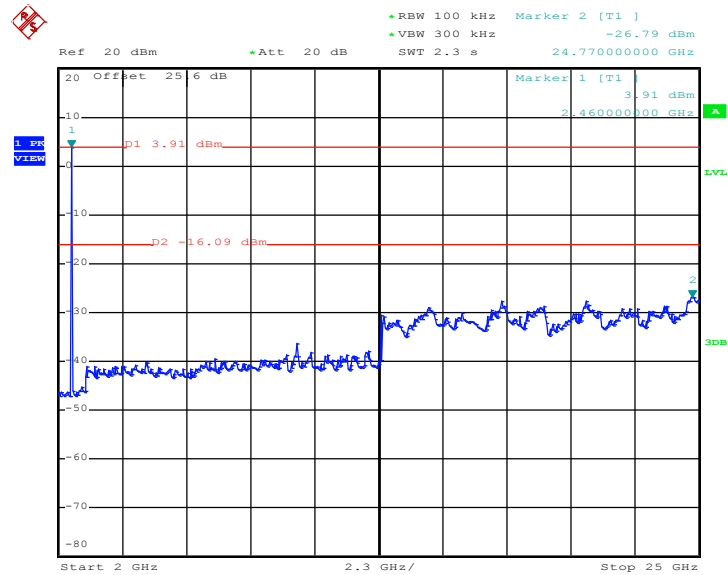

Date: 1.MAY.2018 07:19:30



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring equipment of this test report.






### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.70dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

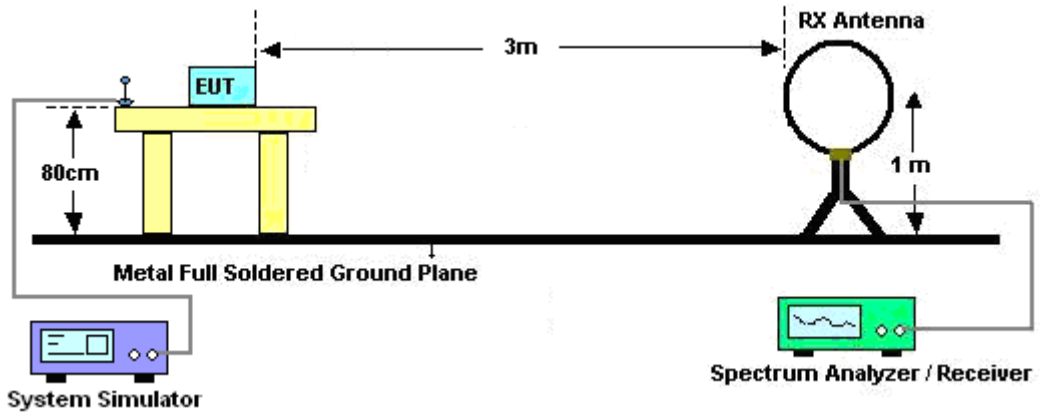

For radiated emissions from 30MHz to 1GHz

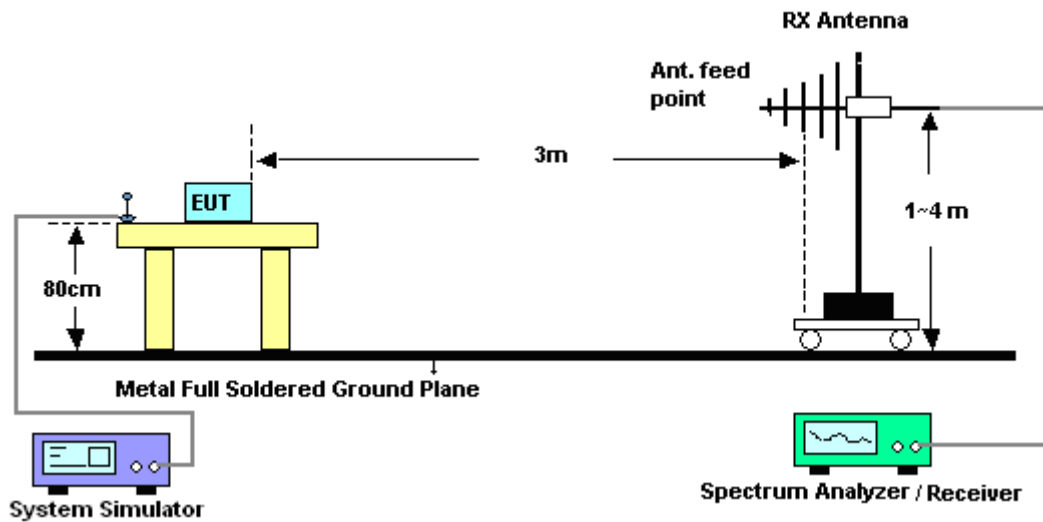

For radiated emissions above 1GHz

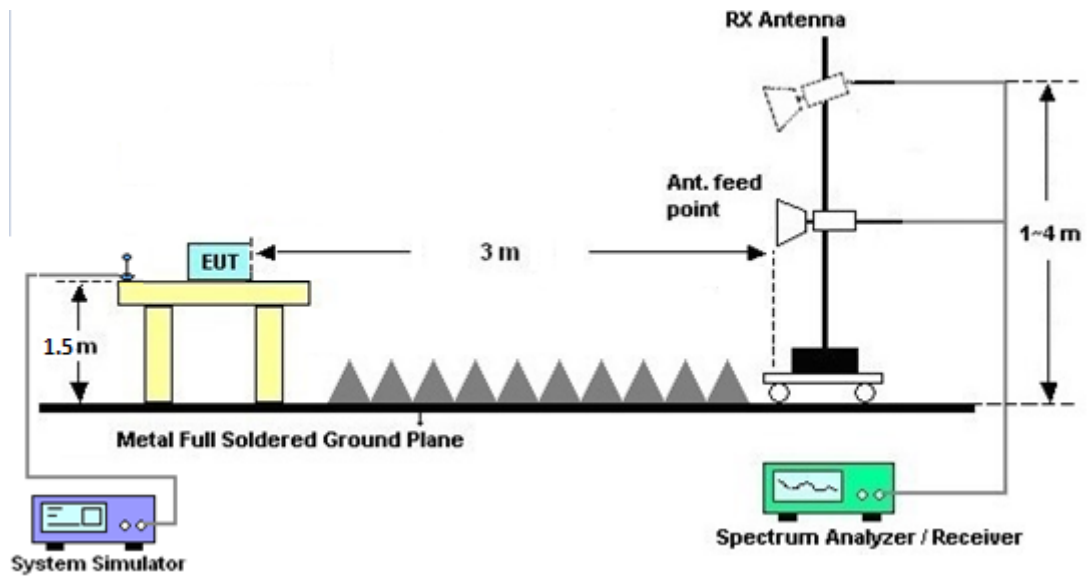

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.8.7 Duty Cycle

Please refer to Appendix E.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

The verified testing which follows the KDB 174176 D01 Q5 to make sure the 13.56MHz signal is coupling by NFC antenna.


#### 3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

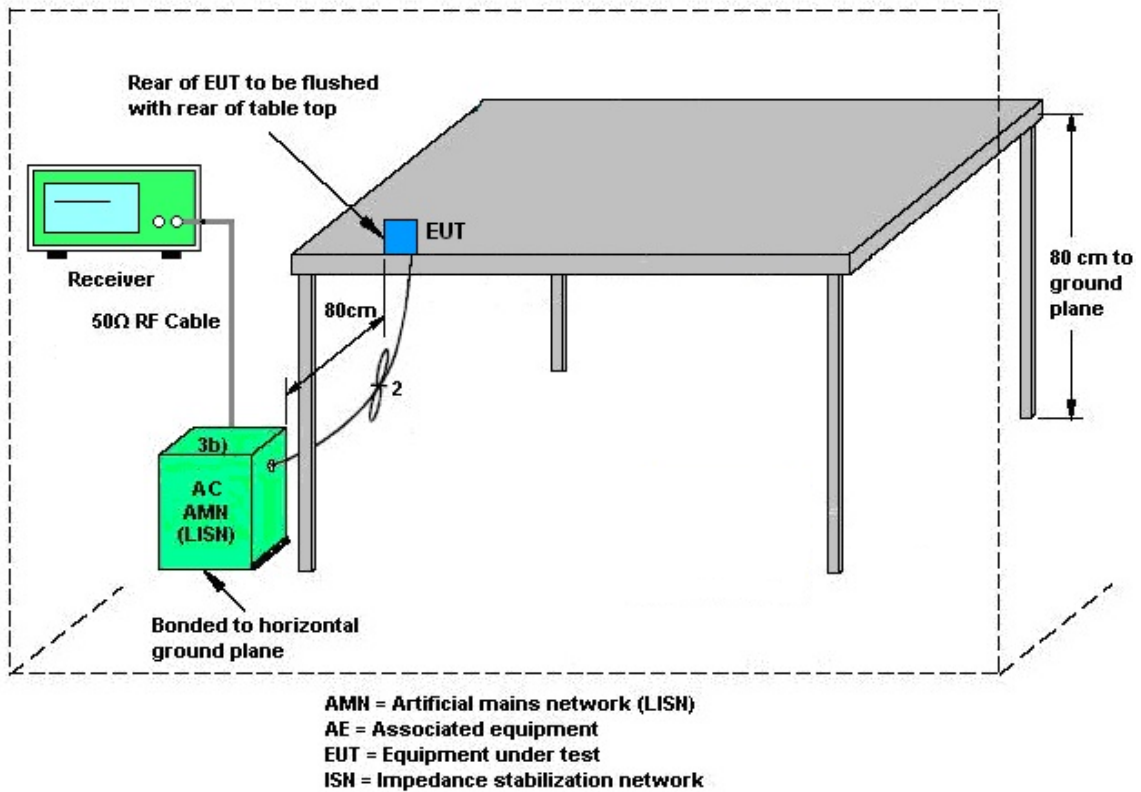

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB4129234 4	N/A	Dec. 20, 2017	Apr. 23, 2018 ~ Jun. 05, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Apr. 23, 2018 ~ Jun. 05, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Apr. 23, 2018 ~ Jun. 05, 2018	Jun. 19, 2018	Conducted (TH05-HY)
BT Base Station (Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 20, 2017	Apr. 23, 2018 ~ Jun. 05, 2018	Sep. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Apr. 23, 2018 ~ Jun. 05, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 15, 2018 ~ May 22, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	May 15, 2018 ~ May 22, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	May 15, 2018 ~ May 22, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 15, 2018 ~ May 22, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	May 15, 2018 ~ May 22, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	May 15, 2018 ~ May 22, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	May 04, 2018 ~ May 10, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	May 04, 2018 ~ May 10, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	May 04, 2018 ~ May 10, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	May 04, 2018 ~ May 10, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	May 04, 2018 ~ May 10, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY5347011 8	10Hz~44GHz	Apr. 17, 2018	May 04, 2018 ~ May 10, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	May 04, 2018 ~ May 10, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	May 04, 2018 ~ May 10, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	May 04, 2018 ~ May 10, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz- 40GHz	Nov. 10, 2017	May 04, 2018 ~ May 10, 2018	Nov. 09, 2018	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187231	9kHz~1GHz	Jan. 08, 2018	May 04, 2018 ~ May 10, 2018	Jan. 07, 2019	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY5329005 3	20Hz to 26.5GHz	Jan. 16, 2018	May 04, 2018 ~ May 10, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8 -24	N/A	N/A	N/A	May 04, 2018 ~ May 10, 2018	N/A	Radiation (03CH07-HY)





## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.7
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2018/04/23 ~ 2018/06/05	Relative Humidity:	51~54	%

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.872	0.812	0.990	0.5813	Pass
DH	1Mbps	1	39	2441	0.828	0.808	1.008	0.5520	Pass
DH	1Mbps	1	78	2480	0.872	0.812	1.008	0.5813	Pass
2DH	2Mbps	1	0	2402	1.254	1.172	1.008	0.8360	Pass
2DH	2Mbps	1	39	2441	1.254	1.172	1.002	0.8360	Pass
2DH	2Mbps	1	78	2480	1.254	1.172	1.008	0.8360	Pass
3DH	3Mbps	1	0	2402	1.218	1.156	1.014	0.8120	Pass
3DH	3Mbps	1	39	2441	1.218	1.156	1.008	0.8120	Pass
3DH	3Mbps	1	78	2480	1.218	1.156	1.002	0.8120	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.92	0.31	0.4	Pass
AFH	20	53.33	2.92	0.16	0.4	Pass

<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	10.20	20.97	Pass
	39	1	10.14	20.97	Pass
	78	1	10.24	20.97	Pass
2DH1	0	1	6.05	20.97	Pass
	39	1	6.52	20.97	Pass
	78	1	7.27	20.97	Pass
3DH1	0	1	6.74	20.97	Pass
	39	1	7.12	20.97	Pass
	78	1	7.75	20.97	Pass

<b>TEST RESULTS DATA</b>				
<b>Average Power Table (Reporting Only)</b>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	10.14	4.94
	39	1	10.11	4.94
	78	1	10.15	4.94
2DH1	0	1	3.17	4.85
	39	1	3.63	4.85
	78	1	4.51	4.85
3DH1	0	1	3.26	4.94
	39	1	3.72	4.94
	78	1	4.54	4.94

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Shateef Yu and Arthur Hsieh	Temperature :	21~25°C
		Relative Humidity :	51~55%

## EUT Information

Report NO : 821203-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line  
 Original Mode: testing with NFC work

Full Spectrum

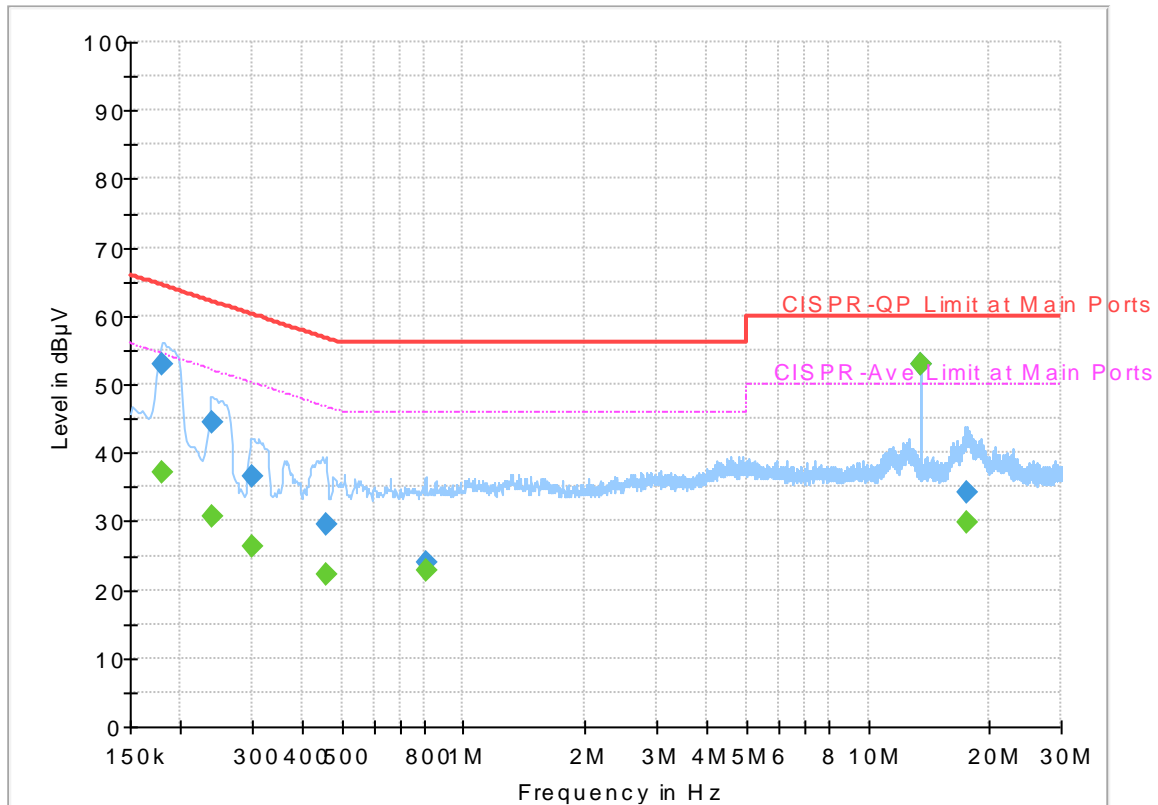


## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.179250	---	37.27	54.52	17.25	L1	OFF	19.5
0.179250	53.02	---	64.52	11.50	L1	OFF	19.5
0.240000	---	30.67	52.10	21.43	L1	OFF	19.5
0.240000	44.34	---	62.10	17.76	L1	OFF	19.5
0.300750	---	26.17	50.22	24.05	L1	OFF	19.5
0.300750	36.62	---	60.22	23.60	L1	OFF	19.5
0.456000	---	22.26	46.77	24.51	L1	OFF	19.5
0.456000	29.60	---	56.77	27.17	L1	OFF	19.5
0.807000	---	22.69	46.00	23.31	L1	OFF	19.5
0.807000	24.04	---	56.00	31.96	L1	OFF	19.5
13.560000	---	53.01	50.00	-3.01	L1	OFF	19.7
13.560000	52.88	---	60.00	7.12	L1	OFF	19.7
17.580750	---	29.81	50.00	20.19	L1	OFF	19.8
17.580750	34.28	---	60.00	25.72	L1	OFF	19.8

# EUT Information

Report NO : 821203-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral  
 Original Mode: testing with NFC work

Full Spectrum

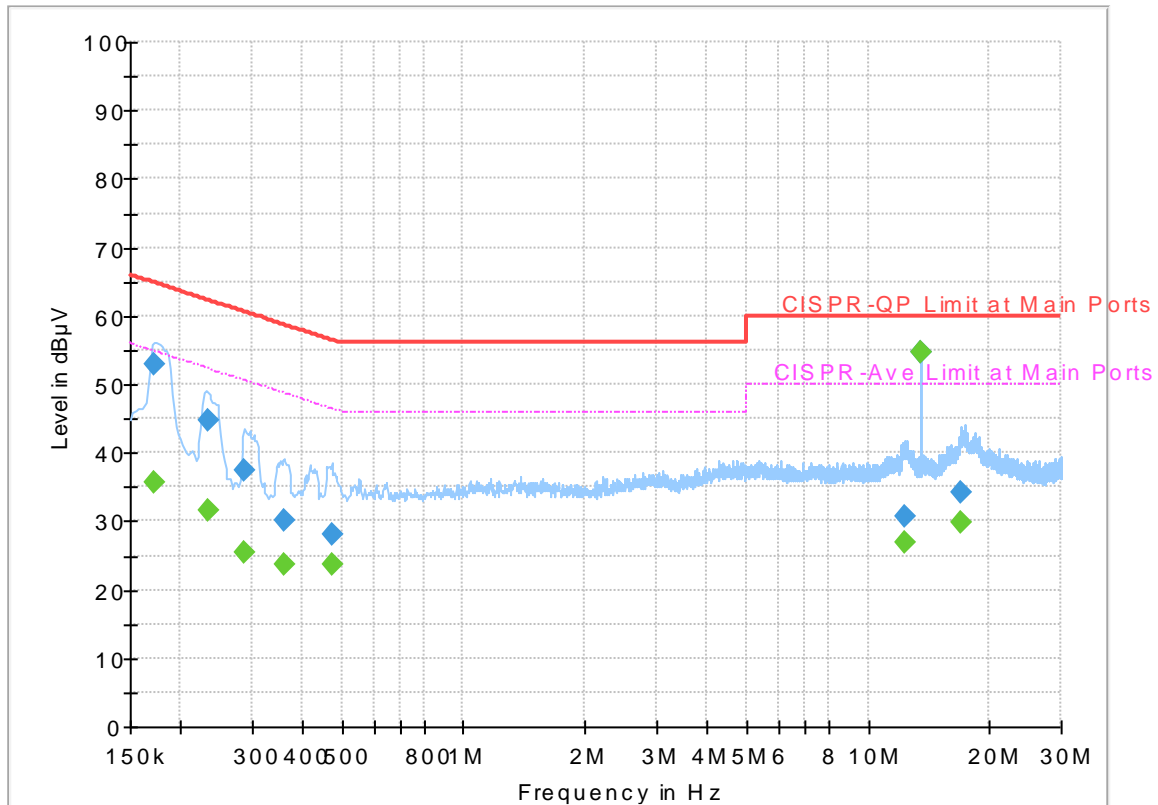


## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	---	35.81	54.84	19.03	N	OFF	19.5
0.172500	52.82	---	64.84	12.02	N	OFF	19.5
0.233250	---	31.53	52.33	20.80	N	OFF	19.5
0.233250	44.76	---	62.33	17.57	N	OFF	19.5
0.287250	---	25.41	50.60	25.19	N	OFF	19.5
0.287250	37.39	---	60.60	23.21	N	OFF	19.5
0.359250	---	23.72	48.75	25.03	N	OFF	19.5
0.359250	30.02	---	58.75	28.73	N	OFF	19.5
0.471750	---	23.66	46.48	22.82	N	OFF	19.5
0.471750	28.17	---	56.48	28.31	N	OFF	19.5
12.306750	---	26.95	50.00	23.05	N	OFF	19.7
12.306750	30.72	---	60.00	29.28	N	OFF	19.7
13.560000	---	54.72	50.00	-4.72	N	OFF	19.8
13.560000	54.60	---	60.00	5.40	N	OFF	19.8
17.013750	---	29.90	50.00	20.10	N	OFF	19.8
17.013750	34.28	---	60.00	25.72	N	OFF	19.8

## EUT Information

Report NO : 821203-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line  
 Terminal Mode: testing with NFC antenna terminated

Full Spectrum

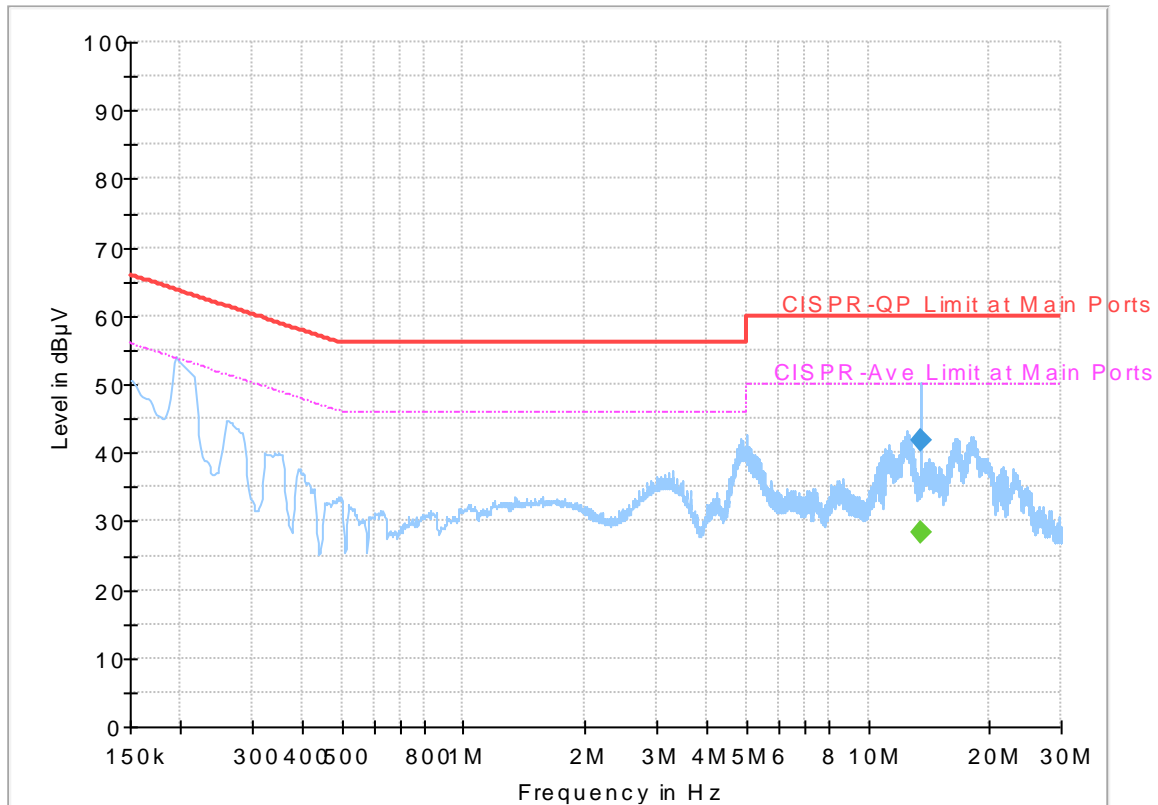


## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	28.29	50.00	21.71	L1	OFF	19.7
13.560000	41.86	---	60.00	18.14	L1	OFF	19.7

## EUT Information

Report NO : 821203-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral  
 Terminal Mode: testing with NFC antenna terminated

Full Spectrum

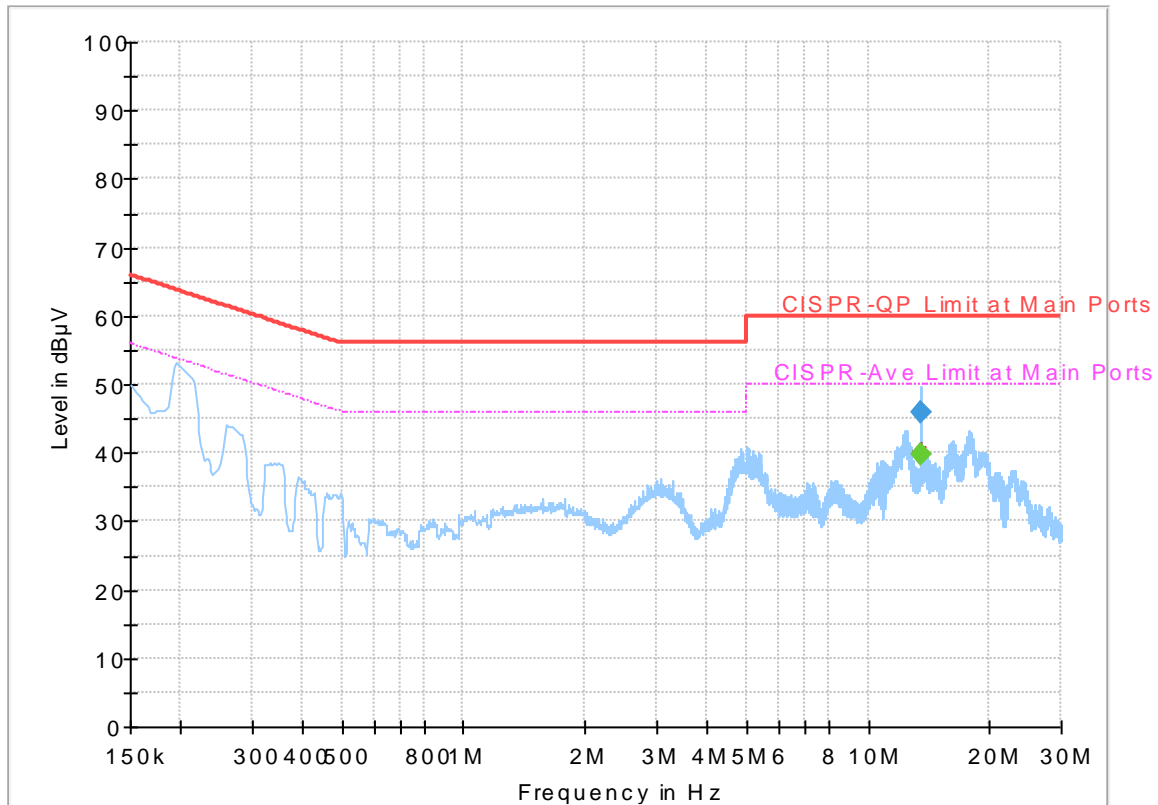

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	37.50	50.00	12.50	N	OFF	19.8
13.560000	46.00	---	60.00	14.00	N	OFF	19.8



### Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, and Lance Chuang	Temperature :	24~26°C
		Relative Humidity :	50~54%

<Sample 1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH00 2402MHz		2377.095	54.59	-19.41	74	50.34	31.91	7.38	35.04	315	48	P	H	
		2377.095	29.89	-24.11	54							A	H	
	*	2402	105.71	-	-	101.37	31.95	7.44	35.05	315	48	P	H	
	*	2402	81.01	-	-							A	H	
													H	
													H	
			2376.675	53.03	-20.97	74	48.78	31.91	7.38	35.04	301	143	P	V
			2376.675	28.33	-25.67	54							A	V
	*	2402	104.25	-	-	99.91	31.95	7.44	35.05	301	143	P	V	
	*	2402	79.55	-	-								A	V
														V
														V
BT CH 39 2441MHz		2389.38	46.3	-27.7	74	41.95	31.95	7.44	35.04	304	46	P	H	
		2389.38	21.6	-32.4	54							A	H	
	*	2441	105.97	-	-	101.45	32.08	7.5	35.06	304	46	P	H	
	*	2441	81.27	-	-							A	H	
			2491.88	52.89	-21.11	74	48.21	32.2	7.56	35.08	304	46	P	H
			2491.88	28.19	-25.81	54							A	H
			2389.66	45.41	-28.59	74	41.06	31.95	7.44	35.04	291	143	P	V
			2389.66	20.71	-33.29	54							A	V
	*	2441	103.9	-	-	99.38	32.08	7.5	35.06	291	143	P	V	
	*	2441	79.2	-	-								A	V
			2491.81	50.88	-23.12	74	46.2	32.2	7.56	35.08	291	143	P	V
			2491.81	26.18	-27.82	54							A	V





BT CH 78 2480MHz	*	2480	106.42	-	-	101.77	32.16	7.56	35.07	330	46	P	H	
	*	2480	81.72	-	-							A	H	
		2489.44	55.85	-18.15	74	51.16	32.2	7.56	35.07	330	46	P	H	
		2489.44	31.15	-22.85	54							A	H	
													H	
													H	
	*	2480	104.48	-	-	99.83	32.16	7.56	35.07	317	148	P	V	
	*	2480	79.78	-	-								A	V
		2486.72	54.17	-19.83	74	49.52	32.16	7.56	35.07	317	148	P	V	
		2486.72	29.47	-24.53	54							A	V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	54.73	-19.27	74	68.81	34.24	11.08	59.4	100	0	P	H
		4804	30.03	-23.97	54							A	H
		12010	57.05	-16.95	74	56.08	38.81	18.68	56.52	100	0	P	H
		12010	32.35	-21.65	54							A	H
		4804	57.82	-16.18	74	71.9	34.24	11.08	59.4	100	0	P	V
		4804	33.12	-20.88	54							A	V
		12010	61.1	-12.9	74	60.13	38.81	18.68	56.52	100	0	P	V
		12010	36.4	-17.6	54							A	V
BT CH 39 2441MHz		4882	59.28	-14.72	74	73.19	34.22	11.16	59.29	100	0	P	H
		4882	34.58	-19.42	54							A	H
		7323	50.35	-23.65	74	59.1	35.7	13.61	58.06	100	0	P	H
		7323	25.65	-27.35	54							A	H
		4882	61.29	-12.71	74	75.2	34.22	11.16	59.29	100	0	P	V
		4882	36.59	-17.41	54							A	V
		7323	50.93	-23.07	74	59.68	35.7	13.61	58.06	100	0	P	V
													V
BT CH 78 2480MHz		4960	63.73	-10.27	74	77.42	34.21	11.26	59.16	100	0	P	H
		4960	39.03	-14.97	54							A	H
		7440	54.1	-19.9	74	62.92	35.63	13.71	58.16	100	0	P	H
		7440	29.4	-24.6	54							A	H
		4960	63.38	-10.62	74	77.07	34.21	11.26	59.16	100	0	P	V
		4960	38.68	-15.32	54							A	V
		7440	53.43	-20.57	74	62.25	35.63	13.71	58.16	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		122.61	28.46	-15.04	43.5	40.52	17.53	1.94	31.53	-	-	P	H	
		177.69	39.53	-3.97	43.5	53.65	15.13	2.23	31.48	100	0	P	H	
		281.1	33.87	-12.13	46	43.7	18.76	2.74	31.33	-	-	P	H	
		400.1	32.51	-13.49	46	38.64	21.71	3.29	31.13	-	-	P	H	
		600.3	30.56	-15.44	46	32.07	25.46	3.86	30.83	-	-	P	H	
		724.2	37.91	-8.09	46	37.35	26.96	4.26	30.66	-	-	P	H	
														H
														H
														H
														H
														H
														H
			233.58	22.05	-23.95	46	34.38	16.57	2.5	31.4	-	-	P	V
			293.52	32.59	-13.41	46	42.11	19.03	2.76	31.31	-	-	P	V
			299.19	35.28	-10.72	46	44.65	19.16	2.77	31.3	-	-	P	V
			454	28.97	-17.03	46	33.55	23.05	3.42	31.05	-	-	P	V
			720.7	39.42	-6.58	46	39.04	26.78	4.26	30.66	-	-	P	V
			724.9	41.29	-4.71	46	40.73	26.96	4.26	30.66	100	0	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<Sample 3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH00 2402MHz		2376.675	51.9	-22.1	74	47.65	31.91	7.38	35.04	157	56	P	H	
		2376.675	27.2	-26.8	54							A	H	
	*	2402	106.17	-	-	101.83	31.95	7.44	35.05	157	56	P	H	
	*	2402	81.47	-	-							A	H	
													H	
													H	
			2376.675	57.61	-16.39	74	53.36	31.91	7.38	35.04	335	286	P	V
			2376.675	32.91	-21.09	54							A	V
	*		2402	106.82	-	-	102.48	31.95	7.44	35.05	335	286	P	V
	*		2402	82.12	-	-							A	V
														V
														V
BT CH 39 2441MHz		2389.66	49.64	-24.36	74	45.29	31.95	7.44	35.04	196	56	P	H	
		2389.66	24.94	-29.06	54							A	H	
	*	2441	107.6	-	-	103.08	32.08	7.5	35.06	196	56	P	H	
	*	2441	82.9	-	-							A	H	
			2491.6	49.23	-24.77	74	44.54	32.2	7.56	35.07	196	56	P	H
			2491.6	24.53	-29.47	54							A	H
			2389.52	46.93	-27.07	74	42.58	31.95	7.44	35.04	366	274	P	V
			2389.52	22.23	-31.77	54							A	V
	*		2441	106.75	-	-	102.23	32.08	7.5	35.06	366	274	P	V
	*		2441	82.05	-	-							A	V
			2491.74	48.44	-25.56	74	43.75	32.2	7.56	35.07	366	274	P	V
			2491.74	23.74	-30.26	54							A	V



<b>BT CH 78 2480MHz</b>	*	2480	107.78	-	-	103.13	32.16	7.56	35.07	237	56	P	H
	*	2480	83.08	-	-							A	H
		2486.68	53.66	-20.34	74	49.01	32.16	7.56	35.07	237	56	P	H
		2486.68	28.96	-25.04	54							A	H
													H
													H
	*	2480	106.61	-	-	101.96	32.16	7.56	35.07	307	278	P	V
	*	2480	81.91	-	-							A	V
		2489.48	56.19	-17.81	74	51.5	32.2	7.56	35.07	307	278	P	V
		2489.48	31.49	-22.51	54							A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	60.1	-13.9	74	74.18	34.24	11.08	59.4	100	0	P	H
		4804	35.4	-18.6	54							A	H
		12010	61.19	-12.81	74	60.22	38.81	18.68	56.52	100	0	P	H
		12010	36.49	-17.51	54							A	H
		4804	60.3	-13.7	74	74.38	34.24	11.08	59.4	100	0	P	V
		4804	35.6	-18.4	54							A	V
		12010	59.4	-14.6	74	58.43	38.81	18.68	56.52	100	0	P	V
		12010	34.7	-19.3	54							A	V
BT CH 39 2441MHz		4882	59.46	-14.54	74	73.37	34.22	11.16	59.29	100	0	P	H
		4882	34.76	-19.24	54							A	H
		7323	54.38	-19.62	74	63.13	35.7	13.61	58.06	100	0	P	H
		7323	29.68	-24.32	54							A	H
		4882	58.96	-15.04	74	72.87	34.22	11.16	59.29	100	0	P	V
		4882	34.26	-19.74	54							A	V
		7323	53.78	-20.22	74	62.53	35.7	13.61	58.06	100	0	P	V
													V
BT CH 78 2480MHz		4960	61.12	-12.88	74	74.81	34.21	11.26	59.16	100	0	P	H
		4960	36.42	-17.58	54							A	H
		7440	56.25	-17.75	74	65.07	35.63	13.71	58.16	100	0	P	H
		7440	31.55	-22.45	54							A	H
		4960	60.42	-13.58	74	74.11	34.21	11.26	59.16	100	0	P	V
		4960	35.72	-18.28	54							A	V
		7440	55.65	-18.35	74	64.47	35.63	13.71	58.16	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		233.31	25.61	-20.39	46	37.94	16.57	2.5	31.4	-	-	P	H	
		248.43	28.21	-17.79	46	38.93	18.15	2.51	31.38	-	-	P	H	
		284.07	29.11	-16.89	46	38.87	18.82	2.74	31.32	-	-	P	H	
		307.7	28.88	-17.12	46	38.02	19.26	2.89	31.29	-	-	P	H	
		722.1	42.07	-3.93	46	41.6	26.87	4.26	30.66	100	0	P	H	
		839.7	33.52	-12.48	46	30.9	28.51	4.67	30.56	-	-	P	H	
														H
														H
														H
														H
														H
														H
			120.72	17.24	-26.26	43.5	29.36	17.48	1.94	31.54	-	-	P	V
			195.51	18.54	-24.96	43.5	32.86	14.85	2.29	31.46	-	-	P	V
			227.37	19.28	-26.72	46	32.25	15.94	2.5	31.41	-	-	P	V
			428.8	41.9	-4.1	46	46.84	22.68	3.47	31.09	-	-	P	V
			440	42.04	-3.96	46	46.83	22.83	3.45	31.07	-	-	P	V
			507.2	42.13	-3.87	46	45.55	23.89	3.66	30.97	100	0	P	V
														V
														V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, and Lance Chuang	Temperature :	24~26°C
		Relative Humidity :	50~54%



<Sample 1>

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : 1</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : 1</p>


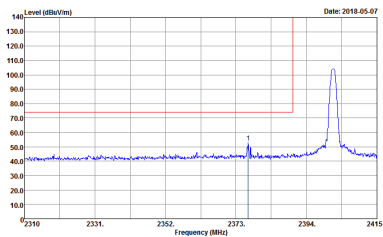
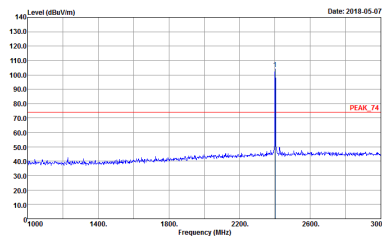


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-111          Condition : PEAK_BE_74 3m HF_ ANT_00075962 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : 1</p>	 <p>Site : 03CH07-111          Condition : PEAK_74 3m HF_ ANT_00075962 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : 1</p>

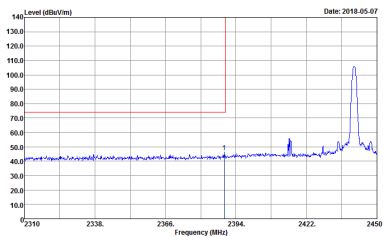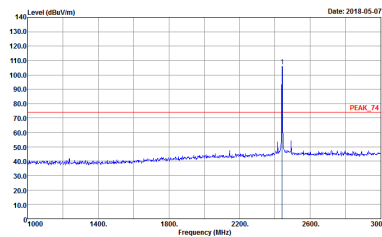
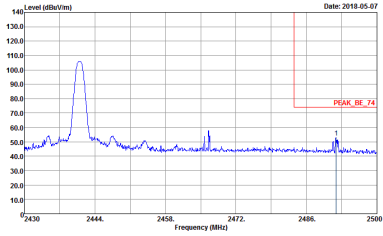


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_0007596Z HORIZONTAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_74 3m HF_ANT_0007596Z HORIZONTAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>
Peak	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_0007596Z HORIZONTAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>	Left blank

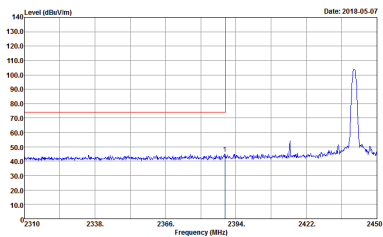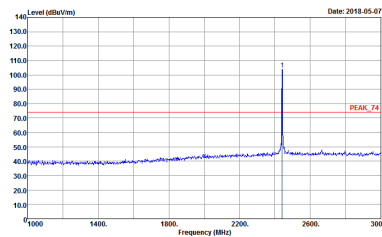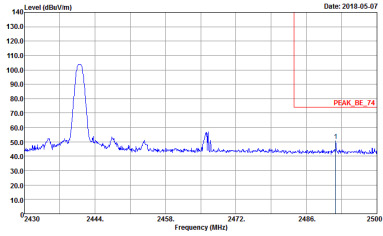

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>
Peak	 <p>Date: 2018-05-07</p> <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z</p>	Left blank

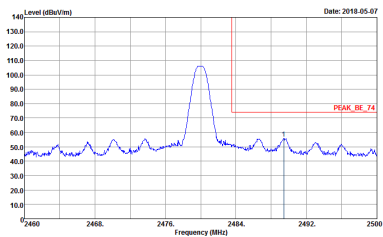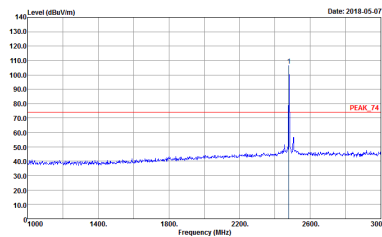

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>           Site : 03C407-111            Condition : PEAK_BE_74 3m HF ANT_00075962 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 821203-02            Mode : 3         </p>	 <p>           Site : 03C407-111            Condition : PEAK_74 3m HF ANT_00075962 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 821203-02            Mode : 3         </p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03C407-111 Condition : PEAK_BE_74 3m HF ANT_00075962 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : 3</p>	<p>Site : 03C407-111 Condition : PEAK_74 3m HF ANT_00075962 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : 3</p>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

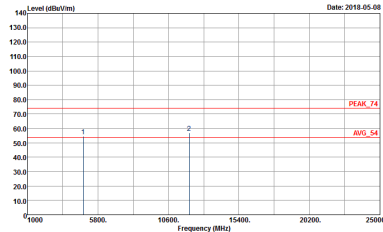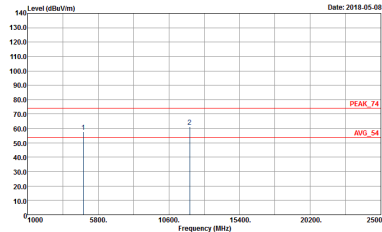BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH07-4Y          Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : 1</p>	 <p>Site : 03CH07-4Y          Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL          Detector : Peak          Project : 821203-02          Mode : 1</p>



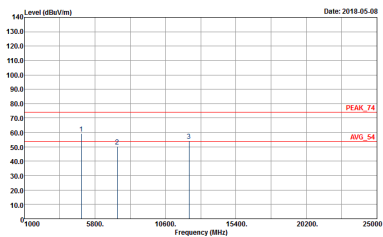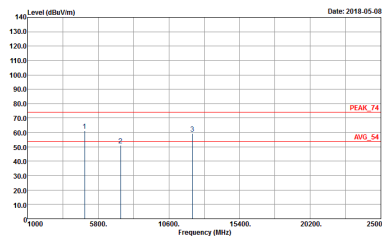

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH07-11Y          Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : 2</p>	 <p>Site : 03CH07-11Y          Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL          Detector : Peak          Project : 821203-02          Mode : 2</p>





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 821203-02 Mode : 3</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 821203-02 Mode : 3</p>



Emission below 1GHz

2.4GHz BT (LF)

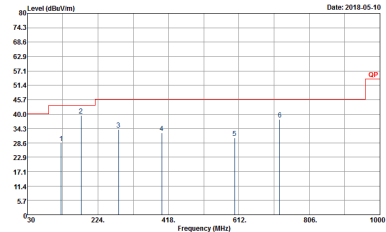
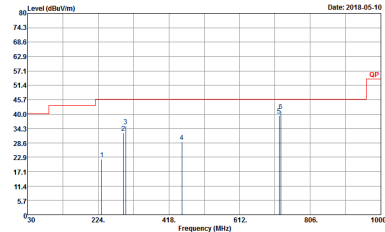
BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH07-HY          Condition : QP 3m LF-ANT-35419(6) HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : 19</p>	 <p>Site : 03CH07-HY          Condition : QP 3m LF-ANT-35419(6) VERTICAL          Detector : Peak          Project : 821203-02          Mode : 19</p>





<Sample 3>

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

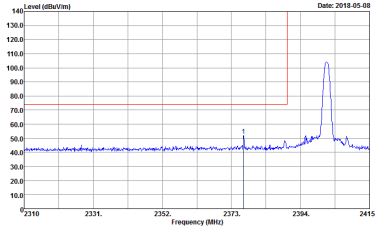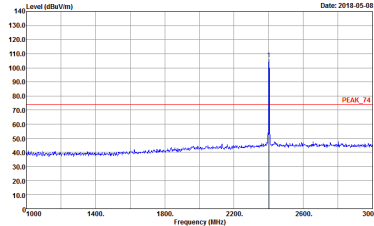BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : 22</p>	 <p>Site : 03CH07-HY          Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : 22</p>


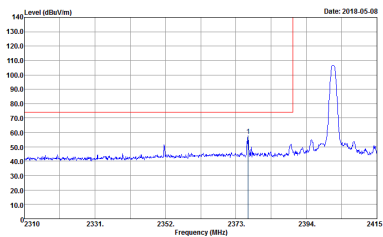
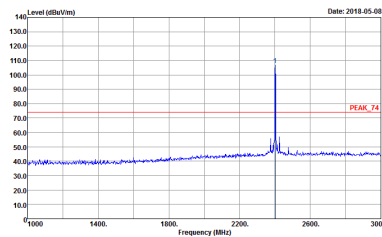


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-11Y          Condition : PEAK_BE_74 3m HF_ ANT_0007596z VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z2</p>	 <p>Site : 03CH07-11Y          Condition : PEAK_74 3m HF_ ANT_0007596z VERTICAL          : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z2</p>

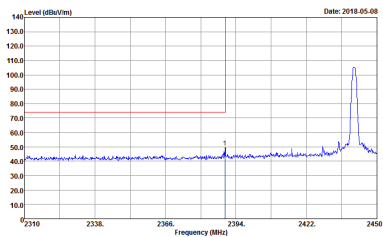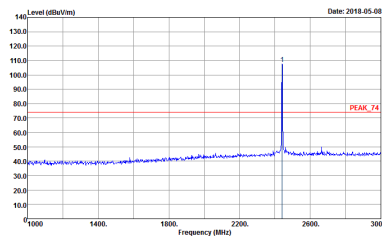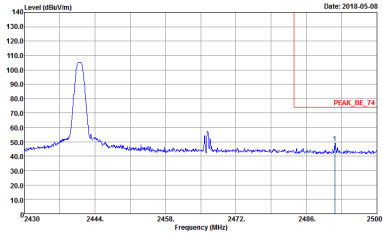

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z3</p>	 <p>Site : 03CH07-HY          Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z3</p>
Peak	 <p>Site : 03CH07-HY          Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 821203-02          Mode : Z3</p>	Left blank

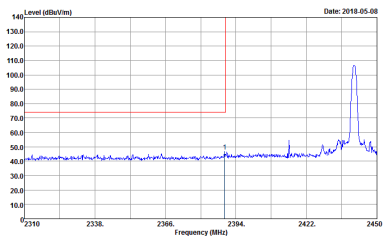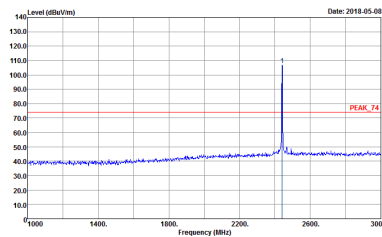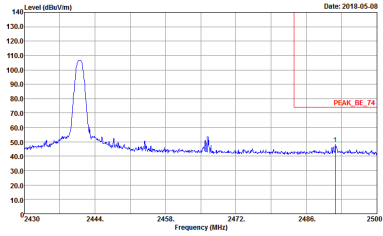

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2018-05-08</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 821203-02            Mode : Z3</p>	 <p>Date: 2018-05-08</p> <p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 821203-02            Mode : Z3</p>
<p><b>Peak</b></p>	 <p>Date: 2018-05-08</p> <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 821203-02            Mode : Z3</p>	<p><b>Left blank</b></p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03C407-111 Condition : PEAK_BE_74 3m HF ANT_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : Z4</p>	<p>Site : 03C407-111 Condition : PEAK_74 3m HF ANT_00075962 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : Z4</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
<b>Peak</b>	<p>Site : 03C407-111 Condition : PEAK_BE_74 3m HF ANT_00075962 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : Z4</p>	<p>Site : 03C407-111 Condition : PEAK_74 3m HF ANT_00075962 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 821203-02 Mode : Z4</p>





2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	<p>Site : 09CH07-4Y          Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : Z2</p>	<p>Site : 09CH07-4Y          Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL          Detector : Peak          Project : 821203-02          Mode : Z2</p>

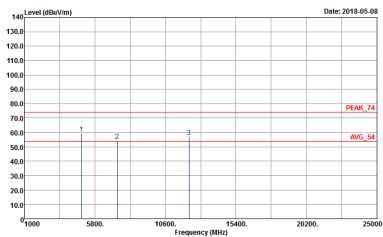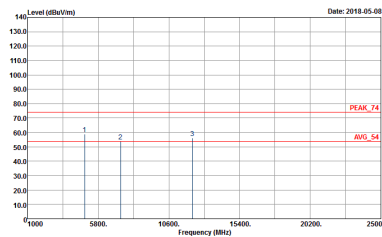

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH07-11Y          Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : 23</p>	 <p>Site : 03CH07-11Y          Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL          Detector : Peak          Project : 821203-02          Mode : 23</p>

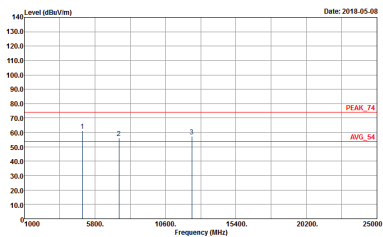
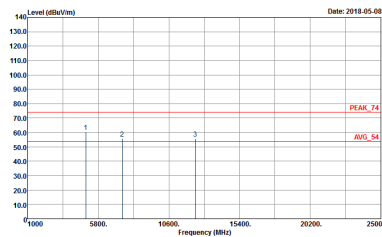


<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH07-4M          Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL          Detector : Peak          Project : 821203-02          Mode : 24</p>	 <p>Site : 03CH07-4M          Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL          Detector : Peak          Project : 821203-02          Mode : 24</p>



Emission below 1GHz


2.4GHz BT (LF)

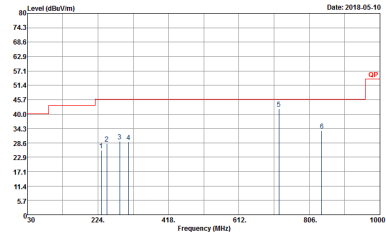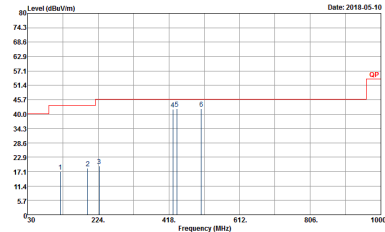BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH07-HY            Condition : QP 3m LF-ANT-35419(6) HORIZONTAL            Detector : Peak            Project : 821203-02            Mode : 40</p>	 <p>Site : 03CH07-HY            Condition : QP 3m LF-ANT-35419(6) VERTICAL            Detector : Peak            Project : 821203-02            Mode : 40</p>


## Appendix E. Duty Cycle Plots

<Sample 1>

DH5 on time (One Pulse) Plot on Channel 39

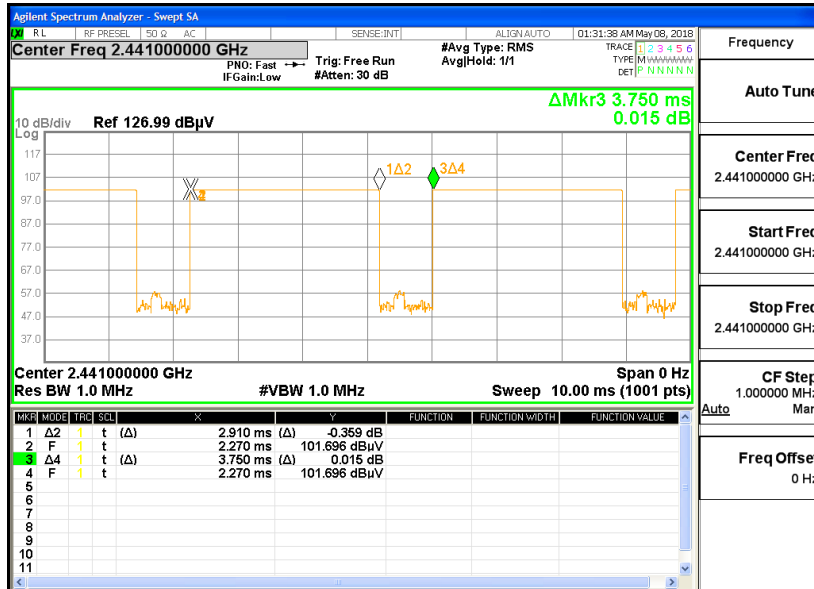

on time (Count Pulses) Plot on Channel 39

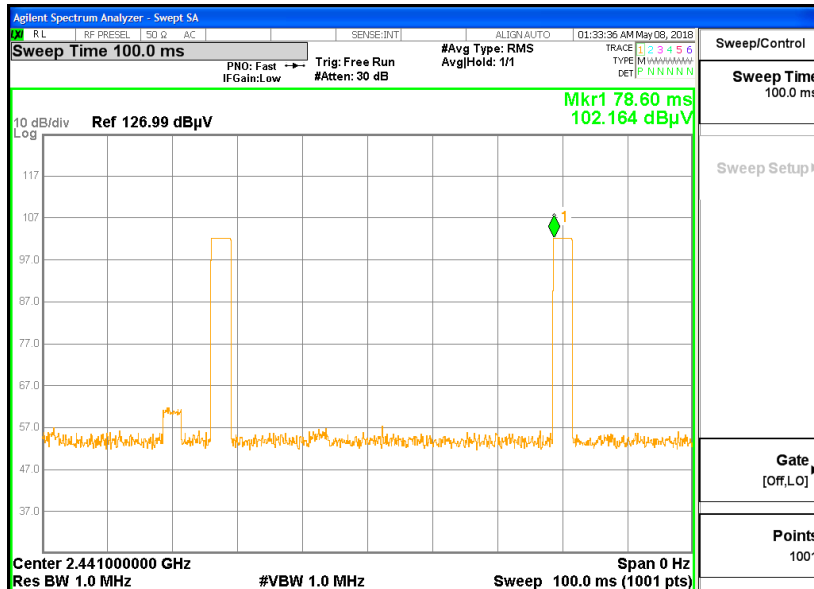


**Note:**


1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.91 / 100 = 5.82 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.70 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

<Sample 3>

DH5 on time (One Pulse) Plot on Channel 39

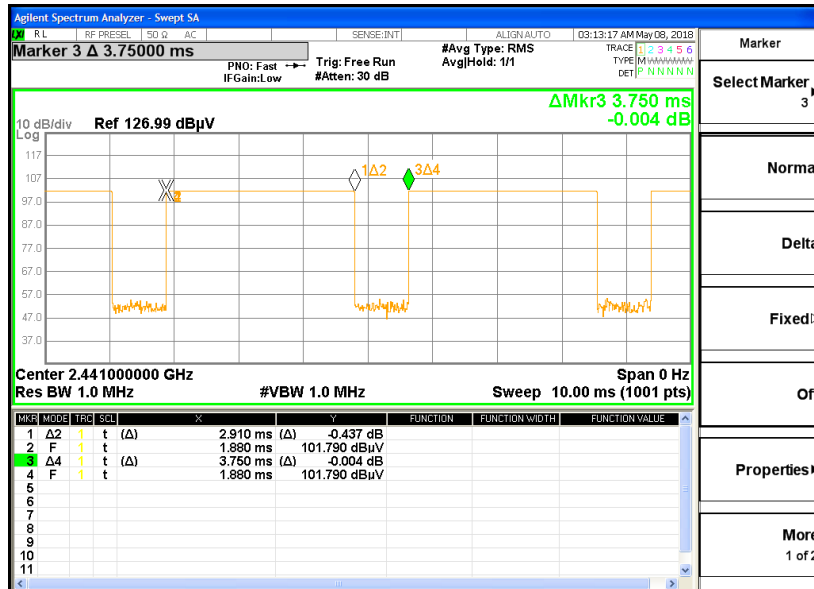

on time (Count Pulses) Plot on Channel 39

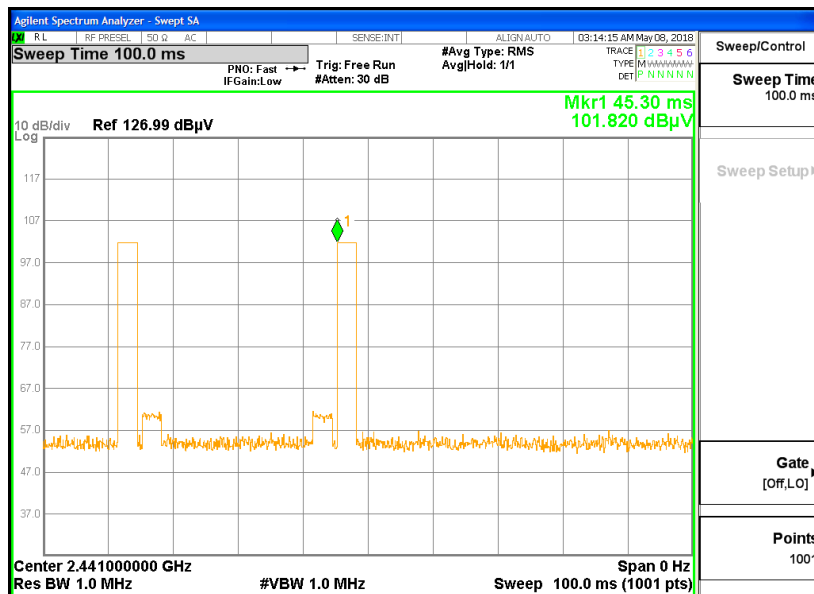

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.91 / 100 = 5.82 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.70 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.91 \text{ ms} \times 20 \text{ channels} = 58.2 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.91 \text{ ms} \times 2 = 5.82 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.82 \text{ ms}/100\text{ms}) = -24.70 \text{ dB}$$