

# FCC Part 15C Measurement and Test Report

For

**Xwireless LLC**

**11426 Rockville pike, Rockville Md**

**FCC ID: 2ADLJBEAT**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>Mobile Phone</u>
<b>Tested Model:</b>	<u>Beat</u>
<b>Report No.:</b>	<u>STR15018110I-4</u>
<b>Tested Date:</b>	<u>2015-01-13 to 2015-01-27</u>
<b>Issued Date:</b>	<u>2015-01-27</u>
<b>Tested By:</b>	<u>Lebron Wang / Engineer</u> <i>Lebron Wang</i>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....5

1.3 TEST METHODOLOGY.....5

1.4 TEST FACILITY.....5

1.5 EUT SETUP AND TEST MODE.....6

**2. SUMMARY OF TEST RESULTS .....7**

**3. RF EXPOSURE .....8**

3.1 STANDARD APPLICABLE.....8

3.2 TEST RESULT.....8

**4. ANTENNA REQUIREMENT .....9**

4.1 STANDARD APPLICABLE.....9

4.2 EVALUATION INFORMATION .....9

**5. POWER SPECTRAL DENSITY .....10**

5.1 STANDARD APPLICABLE.....10

5.2 TEST EQUIPMENT LIST AND DETAILS .....10

5.3 TEST PROCEDURE.....10

5.4 ENVIRONMENTAL CONDITIONS .....10

5.5 SUMMARY OF TEST RESULTS/PLOTS .....11

**6. 6DB BANDWIDTH .....18**

6.1 STANDARD APPLICABLE.....18

6.2 TEST EQUIPMENT LIST AND DETAILS .....18

6.3 TEST PROCEDURE.....18

6.4 ENVIRONMENTAL CONDITIONS .....18

6.5 SUMMARY OF TEST RESULTS/PLOTS .....19

**7. RF OUTPUT POWER .....26**

7.1 STANDARD APPLICABLE.....26

7.2 TEST EQUIPMENT LIST AND DETAILS .....26

7.3 TEST PROCEDURE.....26

7.4 ENVIRONMENTAL CONDITIONS .....26

7.5 SUMMARY OF TEST RESULTS/PLOTS .....27

**8. FIELD STRENGTH OF SPURIOUS EMISSIONS .....34**

8.1 MEASUREMENT UNCERTAINTY .....34

8.2 STANDARD APPLICABLE.....34

8.3 TEST EQUIPMENT LIST AND DETAILS .....34

8.4 TEST PROCEDURE.....35

8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....35

8.6 ENVIRONMENTAL CONDITIONS .....36

8.7 SUMMARY OF TEST RESULTS/PLOTS .....36

**9. OUT OF BAND EMISSIONS.....65**

9.1 STANDARD APPLICABLE.....65

9.2 TEST EQUIPMENT LIST AND DETAILS .....65

9.3 TEST PROCEDURE.....65

9.4 ENVIRONMENTAL CONDITIONS .....66

9.5 SUMMARY OF TEST RESULTS/PLOTS .....66

**10. CONDUCTED EMISSIONS .....75**

10.1 MEASUREMENT UNCERTAINTY .....75

10.2 TEST EQUIPMENT LIST AND DETAILS .....75

10.3 TEST PROCEDURE.....75

10.4 BASIC TEST SETUP BLOCK DIAGRAM.....75

10.5 ENVIRONMENTAL CONDITIONS .....76

10.6 TEST RECEIVER SETUP.....76

10.7 SUMMARY OF TEST RESULTS/PLOTS .....76

10.8 CONDUCTED EMISSIONS TEST DATA.....76

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Xwireless LLC  
 Address of applicant: 11426 Rockville pike, Rockville Md

Manufacturer: Xwireless LLC  
 Address of manufacturer: 11426 Rockville pike, Rockville Md

General Description of EUT	
Product Name:	Mobile Phone
Brand Name:	/
Model No.:	Beat
Adding Model:	/
Hardware Version:	S136MWD_V1.3
Software Version:	beat20150131
IMEI:	359674055456569
Rated Voltage:	DC 3.7V Li-ion Battery
Battery:	2000mAh
Power Adaptor:	Beat
	Input 100-260V, 50/60Hz, Output DC 5V/500mA
Device Category:	Portable Device
<p><i>The EUT is GSM850/900/DCS1800/PCS1900, WCDMA Band II/V, Mobile Phone. the Mobile Phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, GPS and camera functions. For more information see the following datasheet</i></p>	
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Support Standards:	802.11b, 802.11g, 802.11n(HT20)
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	15.30dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11/7
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0.26dBi
Lowest Internal Frequency	32.768KHz

## 1.2 Test Standards

The following report is prepared on behalf of the Xwireless LLC in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r02 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.8	Shielded	Without Core
Earphone	1.2	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 5.3 Test Procedure

According to the KDB 558074 D01 V03r02, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-8.540	8
	2437	-9.724	8
	2462	-10.800	8
802.11g	2412	-14.49	8
	2437	-15.48	8
	2462	-16.56	8
802.11n HT20	2412	-16.16	8
	2437	-16.19	8
	2462	-17.40	8
802.11n HT40	2422	-17.44	8
	2437	-18.07	8
	2452	-18.76	8

Please refer to the following test plots:


802.11b-Low Channel

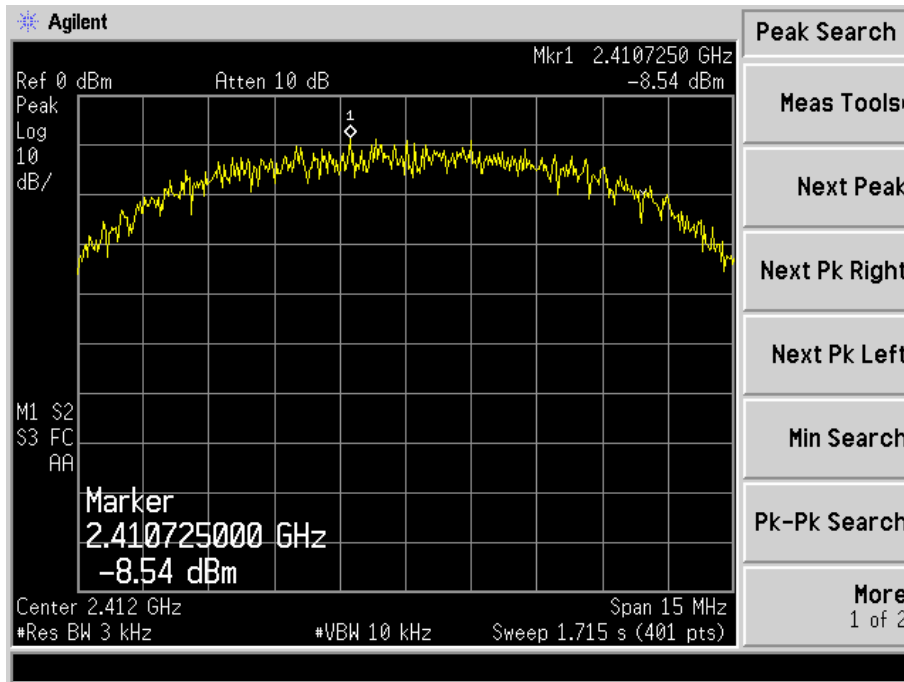


802.11b-Middle Channel

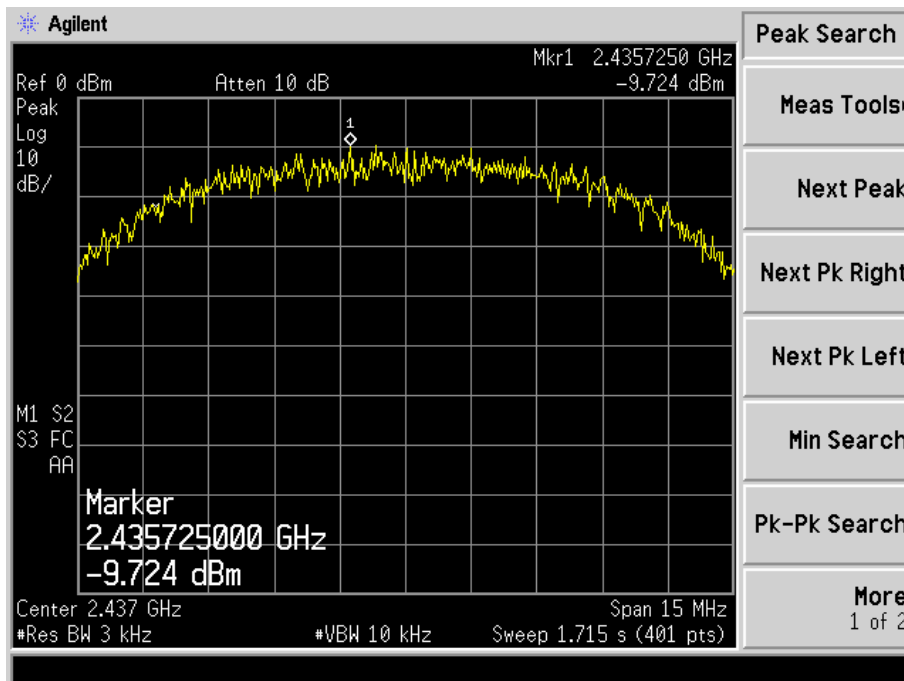


802.11b-High Channel

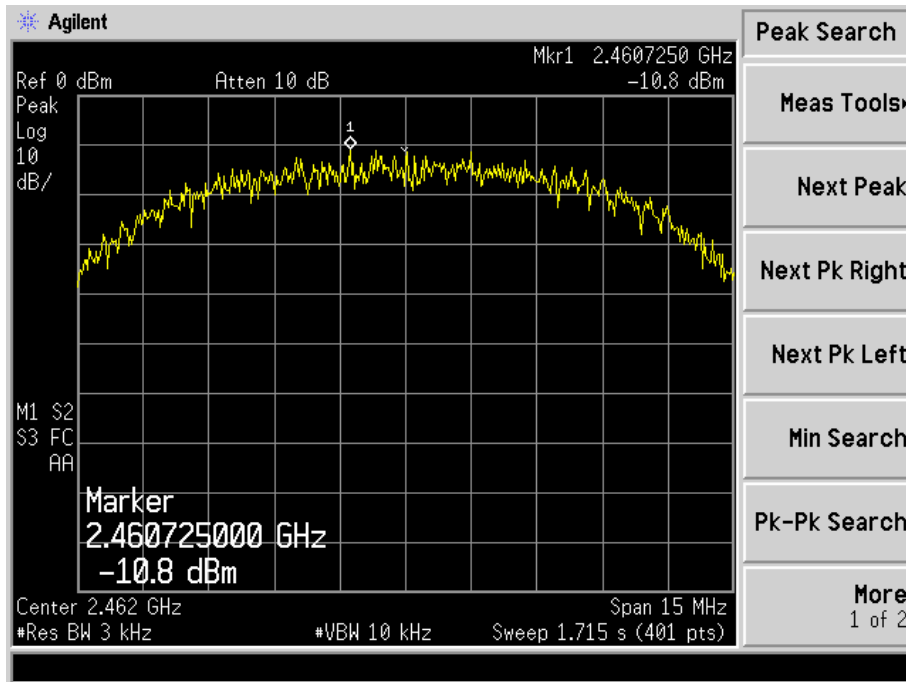


802.11g-Low Channel

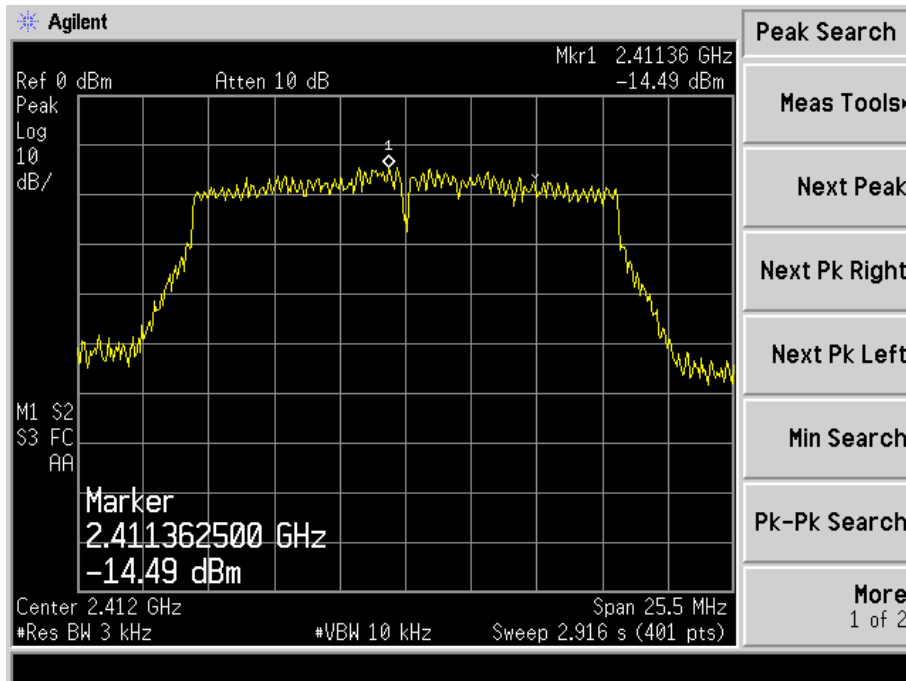


802.11g-Middle Channel

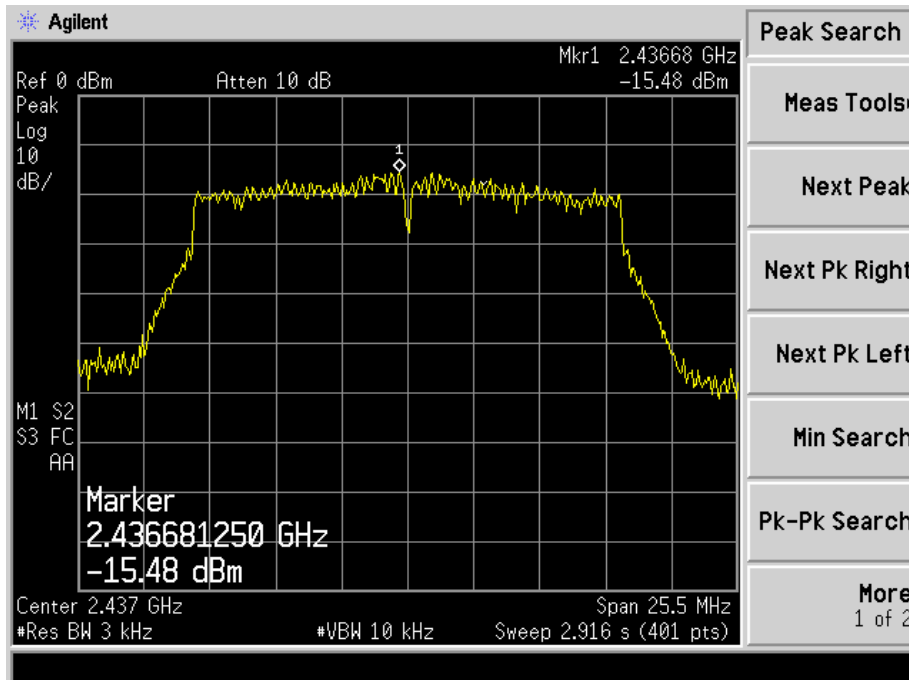


802.11g-High Channel

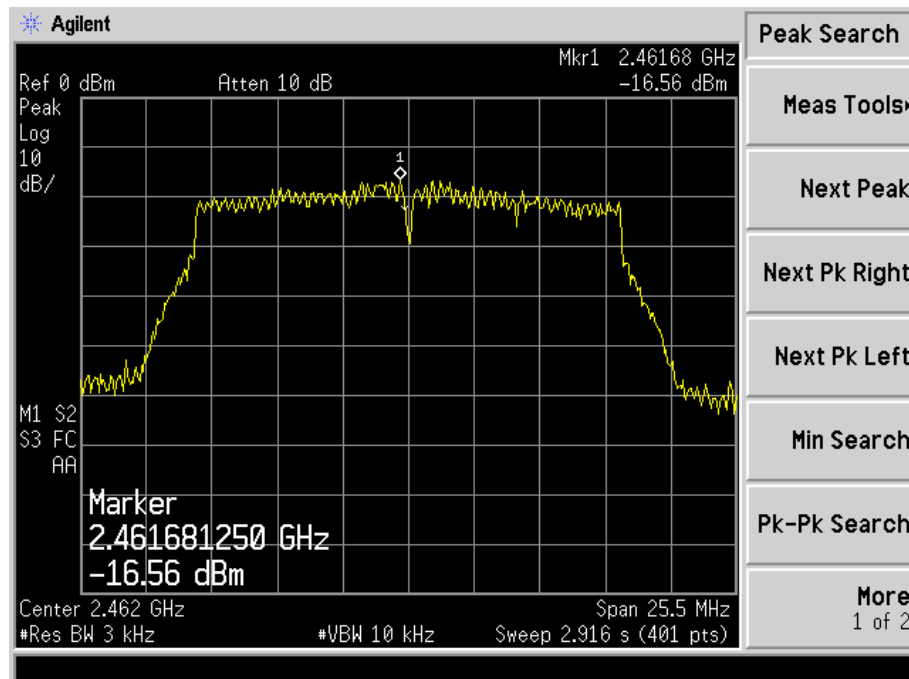


802.11n-HT20-Low Channel

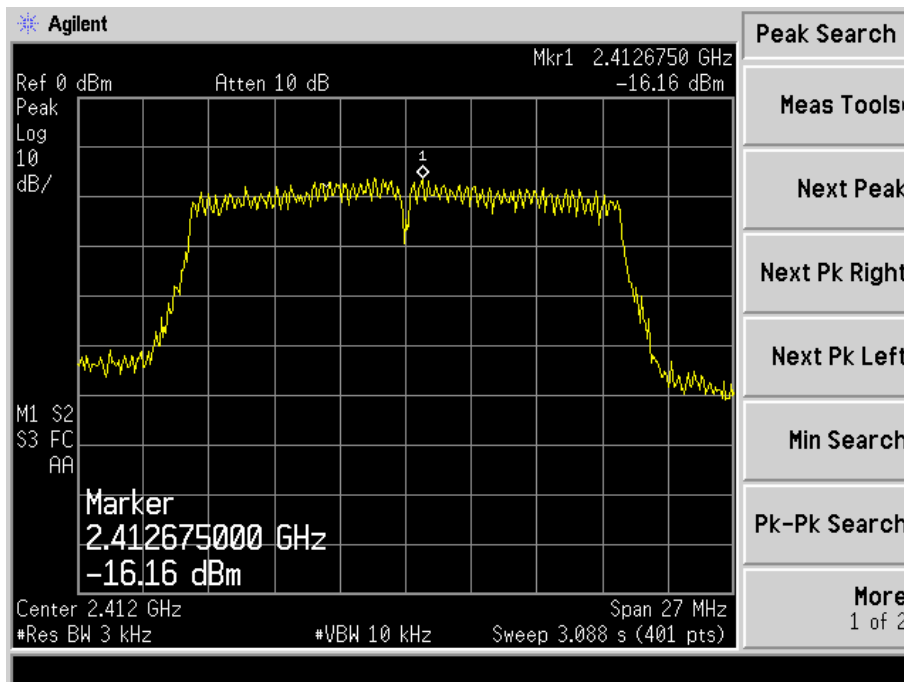


802.11n-HT20-Middle Channel

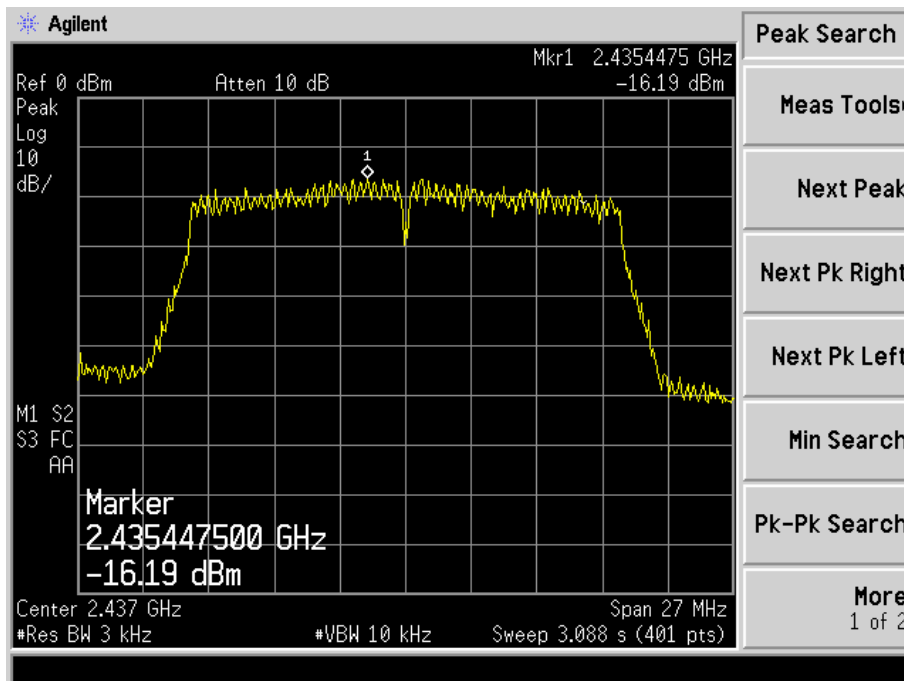

802.11n-HT20-High Channel

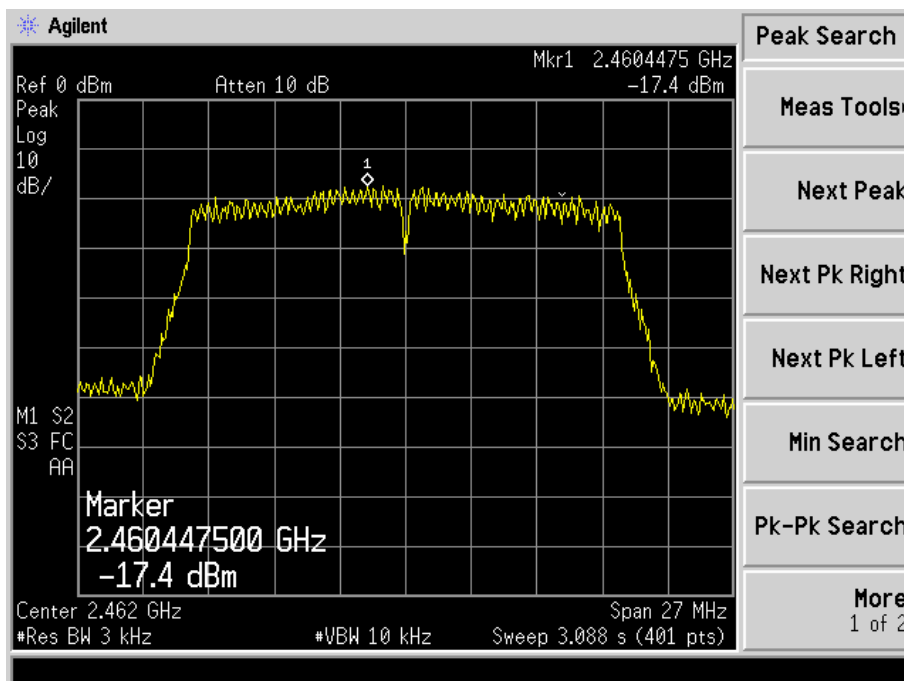


802.11n-HT40-Low Channel

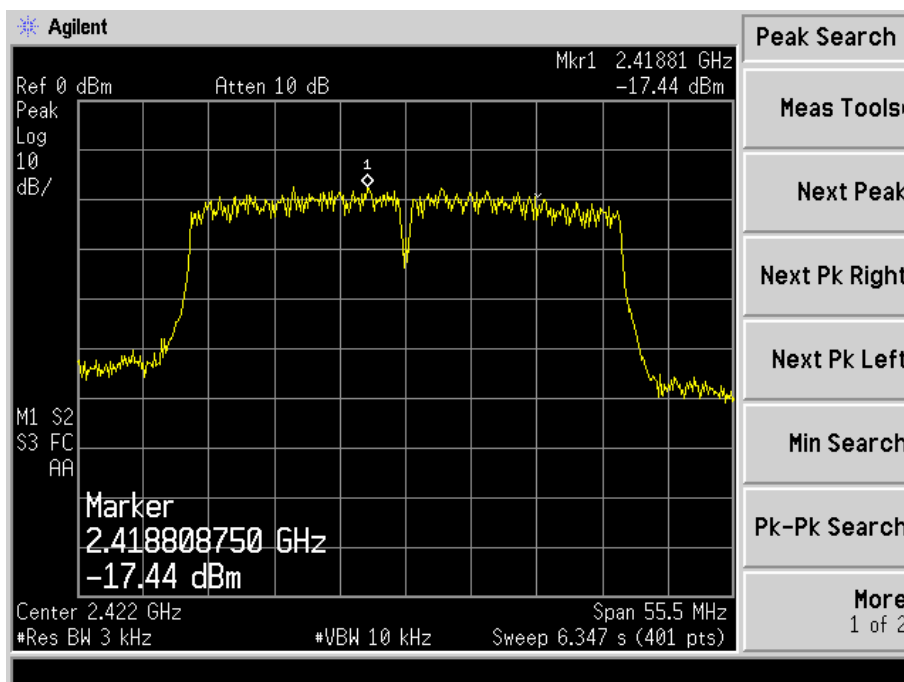




802.11n-HT20-Middle Channel

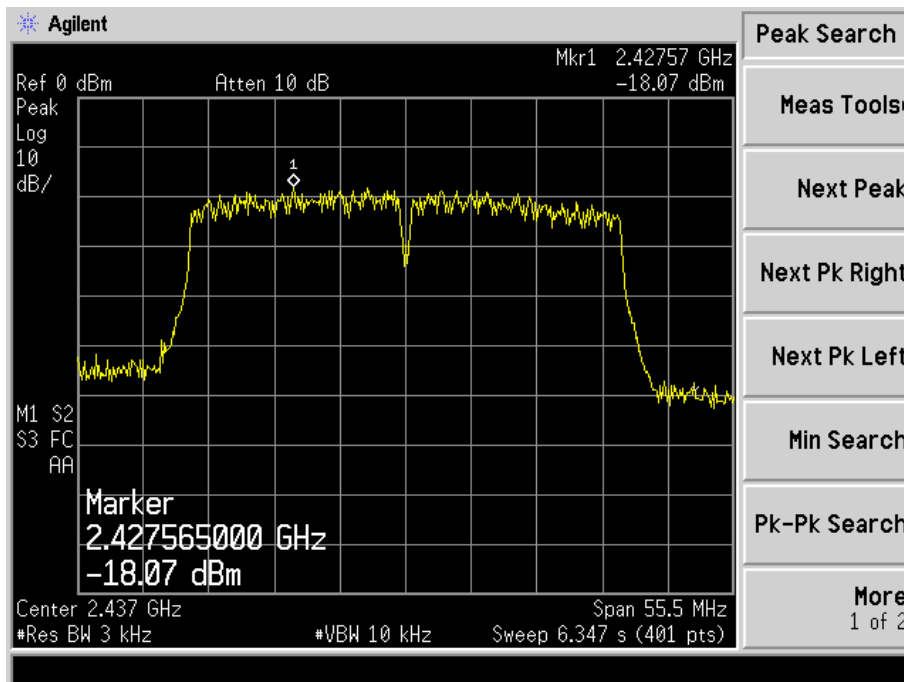

802.11n-HT20-High Channel

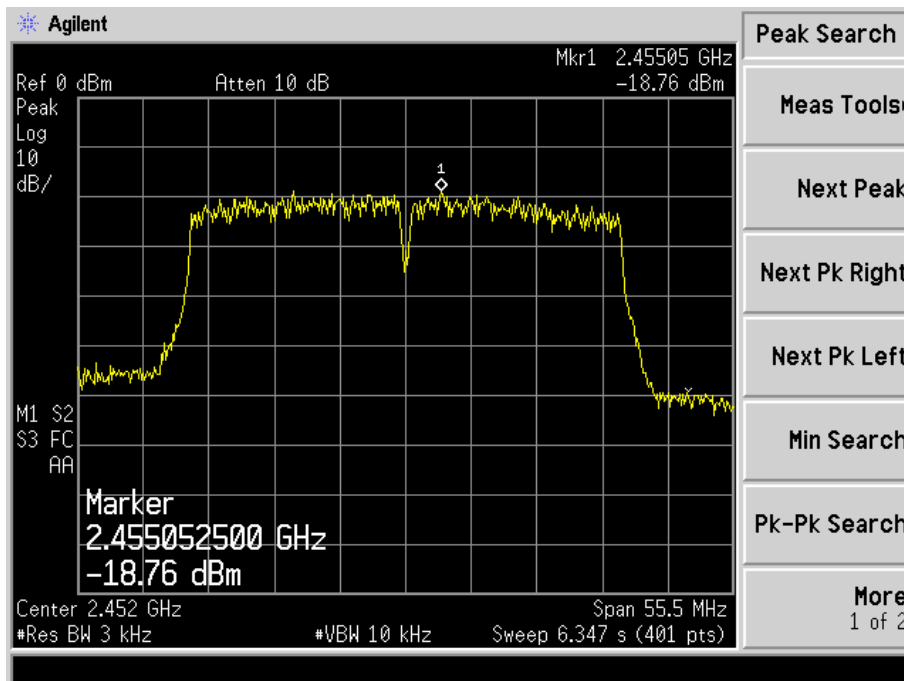

## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 6.3 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

## 6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	9903	12395.9	500
	2437	9464	12366.3	500
	2462	9513	12366.0	500
802.11g	2412	16529	16391.8	500
	2437	16505	16372.6	500
	2462	16534	16385.5	500
802.11n-HT20	2412	17363	17515.9	500
	2437	17279	17510.7	500
	2462	17663	17551.4	500
802.11n-HT20	2422	36123	35821.8	500
	2437	36090	35831.2	500
	2452	36162	35853.6	500

Please refer to the following test plots:


802.11b-Low Channel

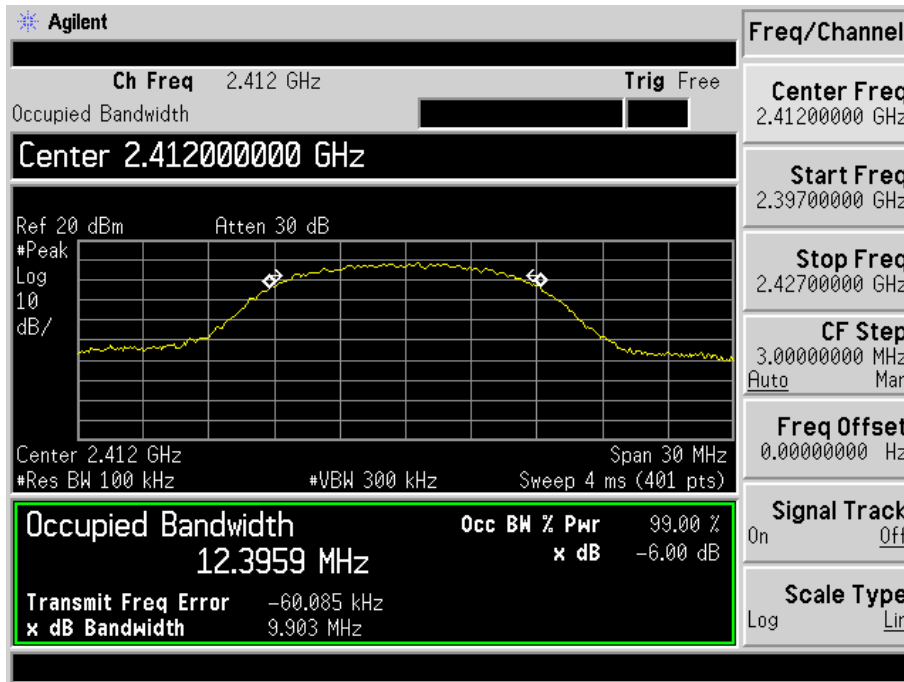


802.11b-Middle Channel

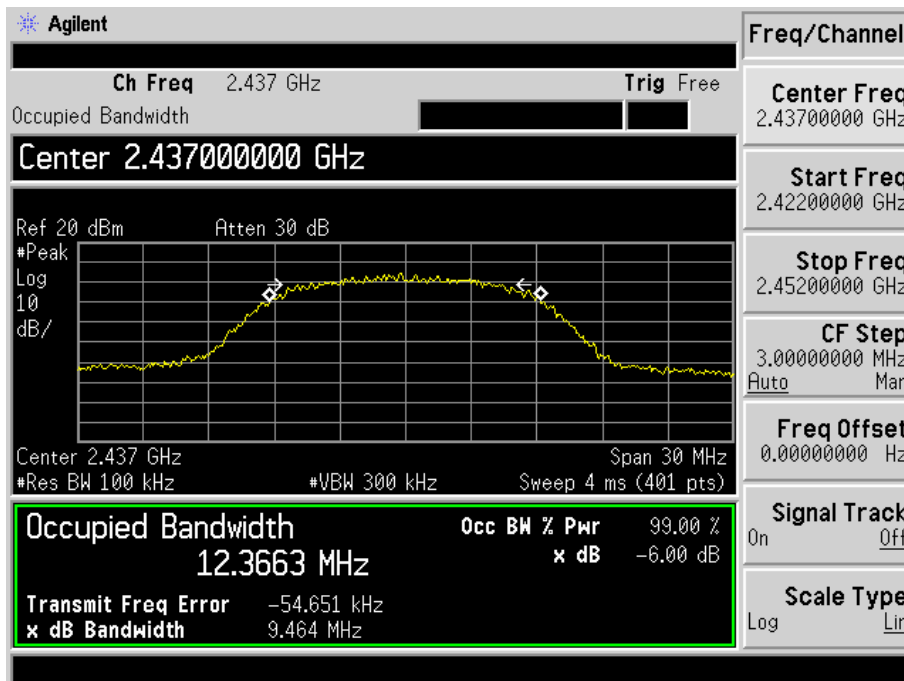


802.11b-High Channel

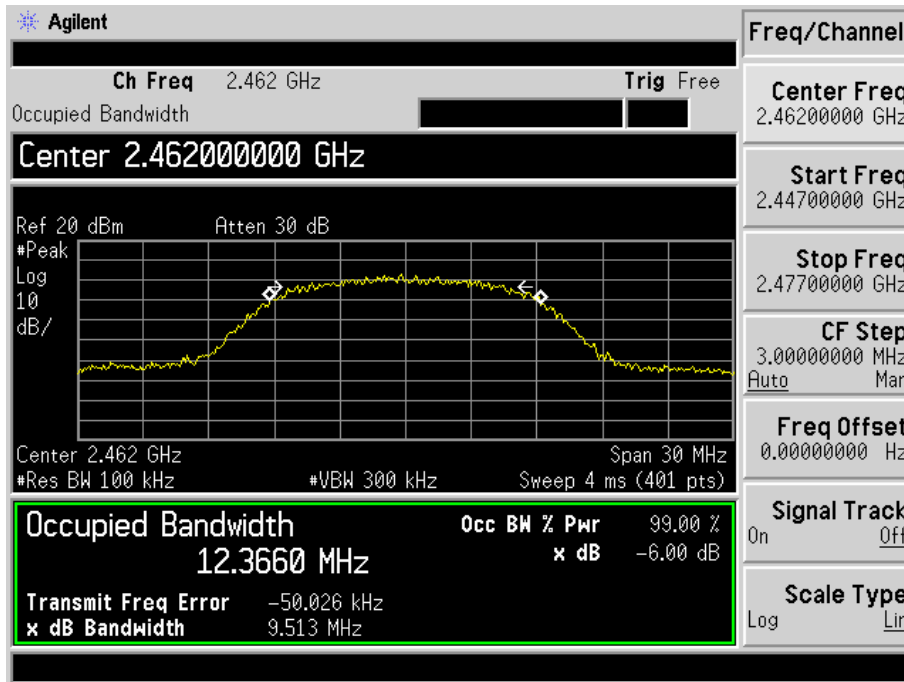


802.11g-Low Channel

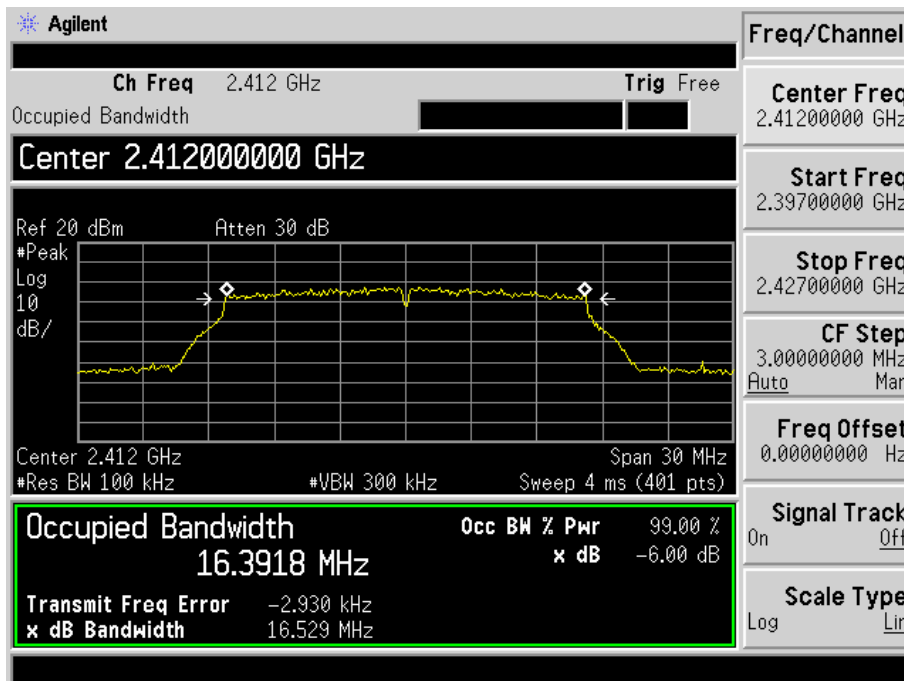


802.11g-Middle Channel

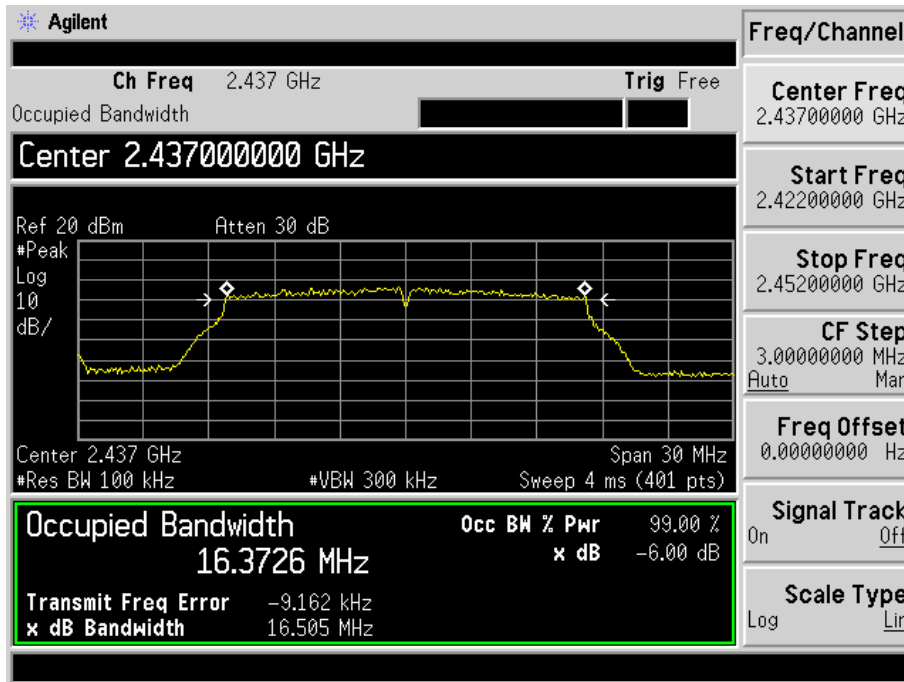


802.11g-High Channel

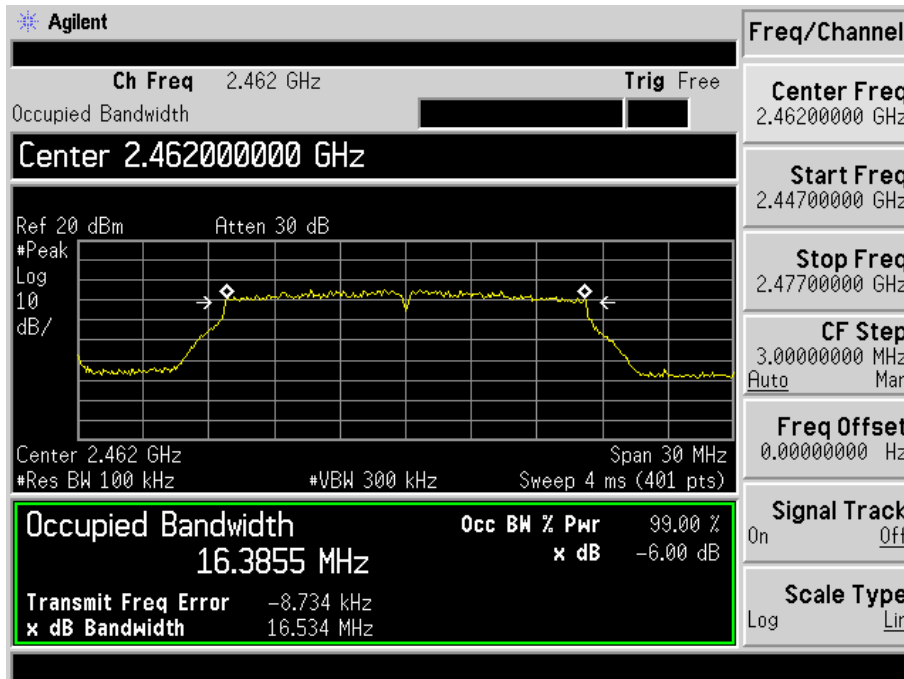


802.11n-HT20-Low Channel

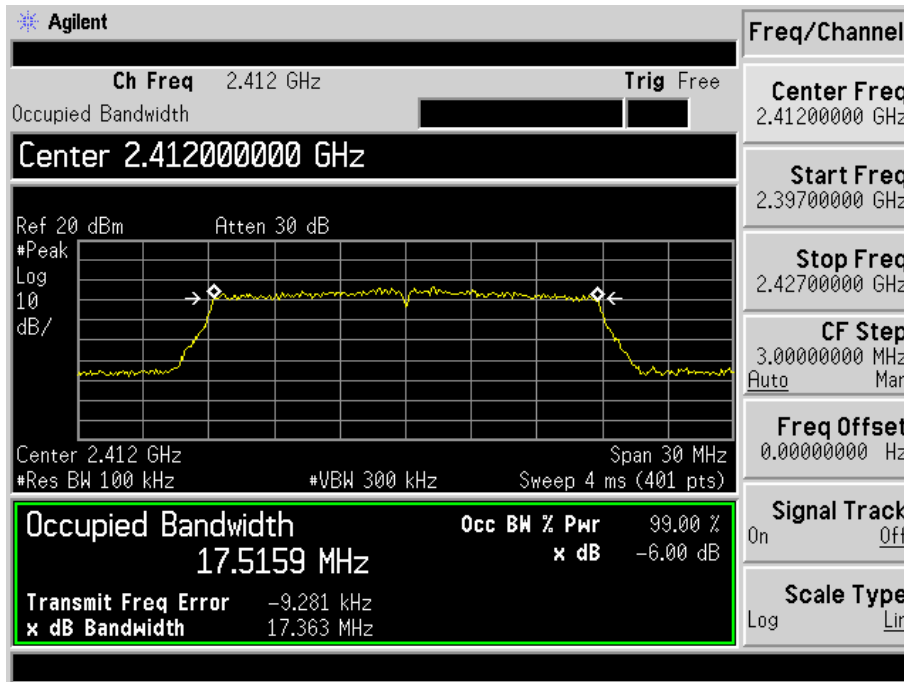


802.11n-HT20-Middle Channel

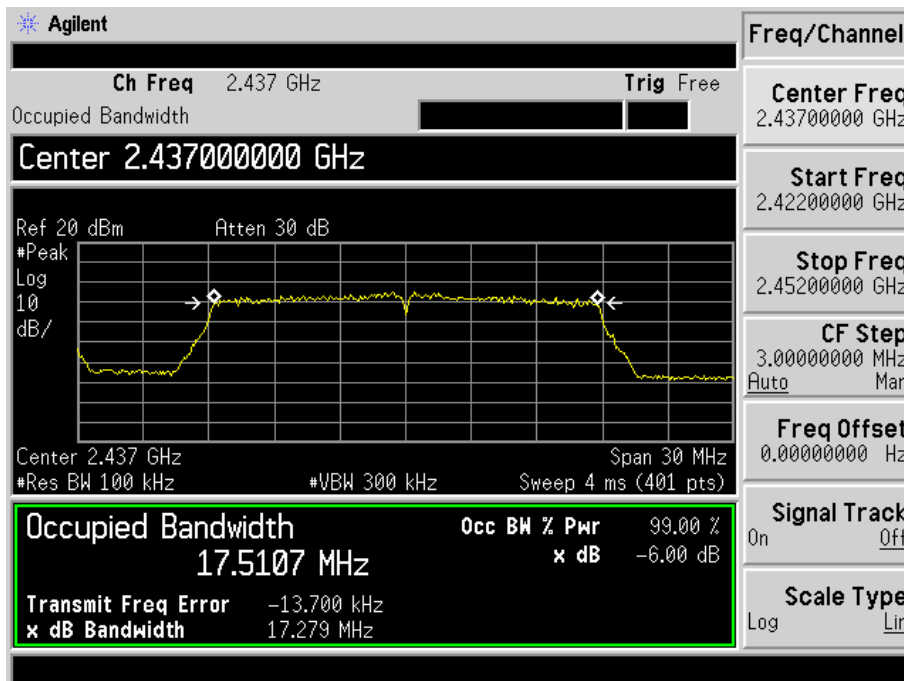

802.11n-HT20-High Channel

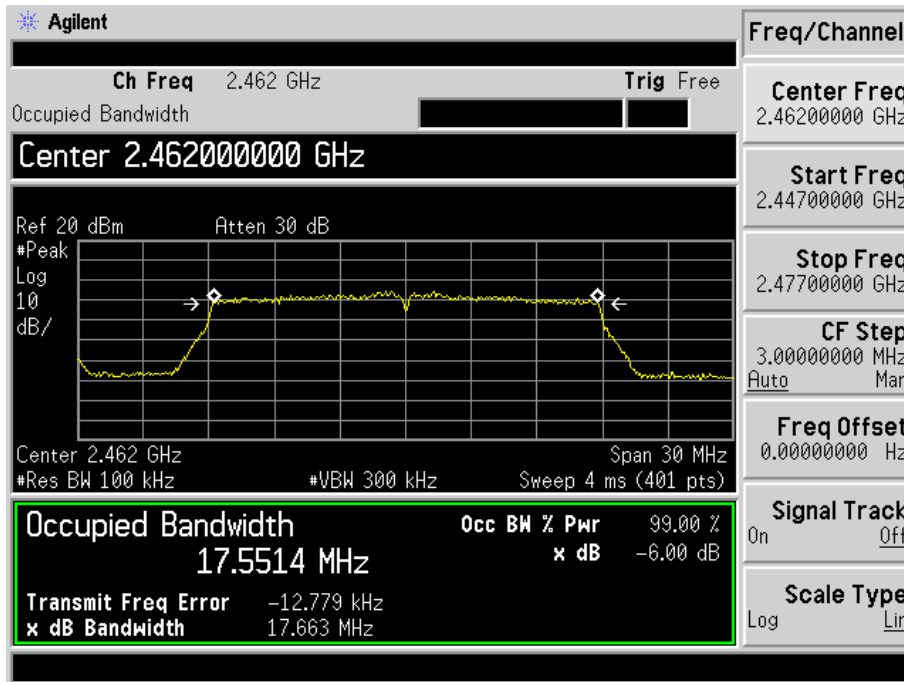


802.11n-HT40-Low Channel

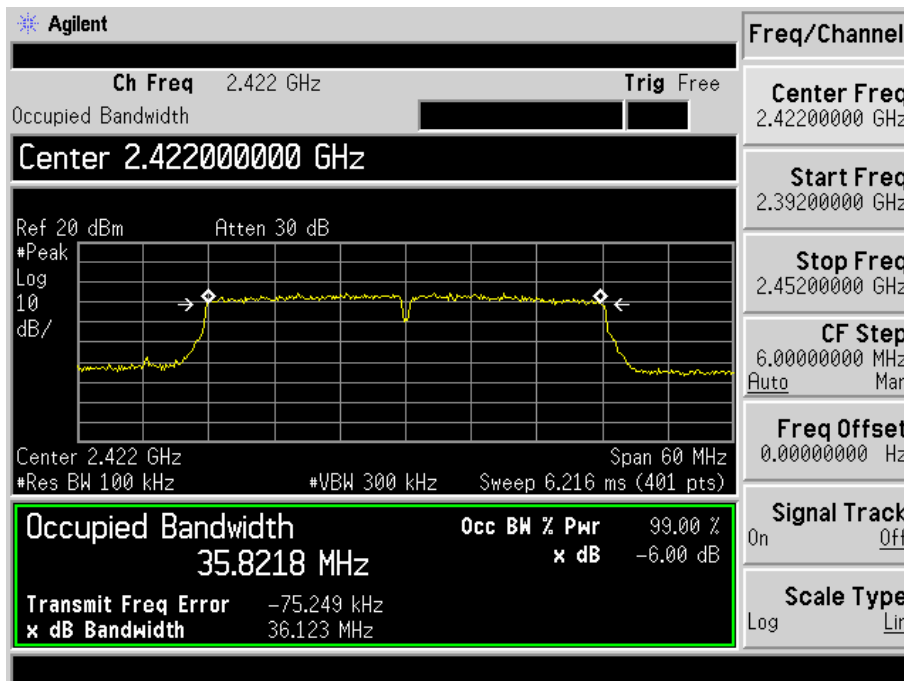




802.11n-HT40-Middle Channel

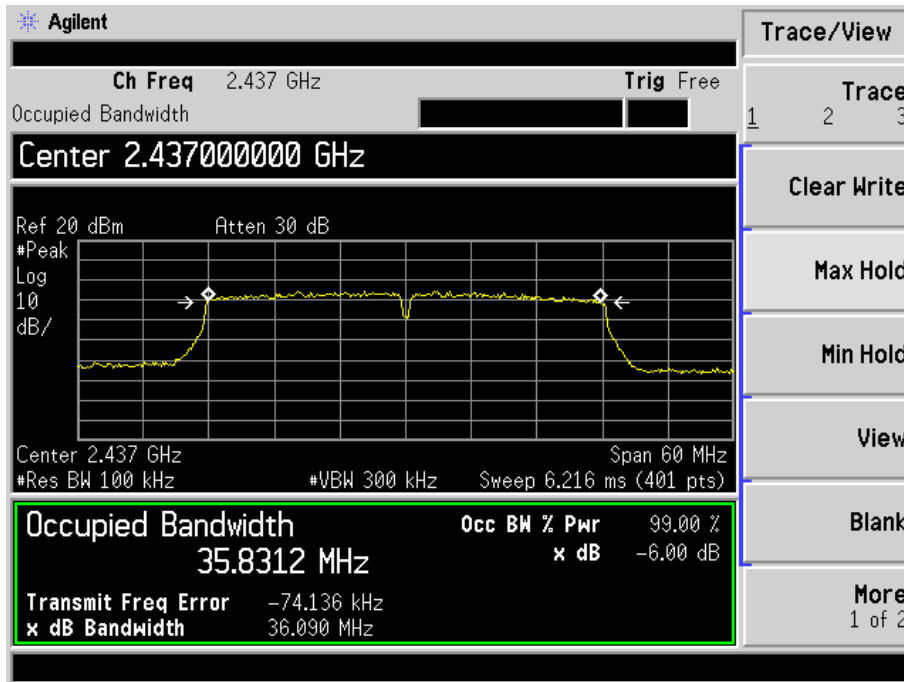

802.11n-HT20-High Channel

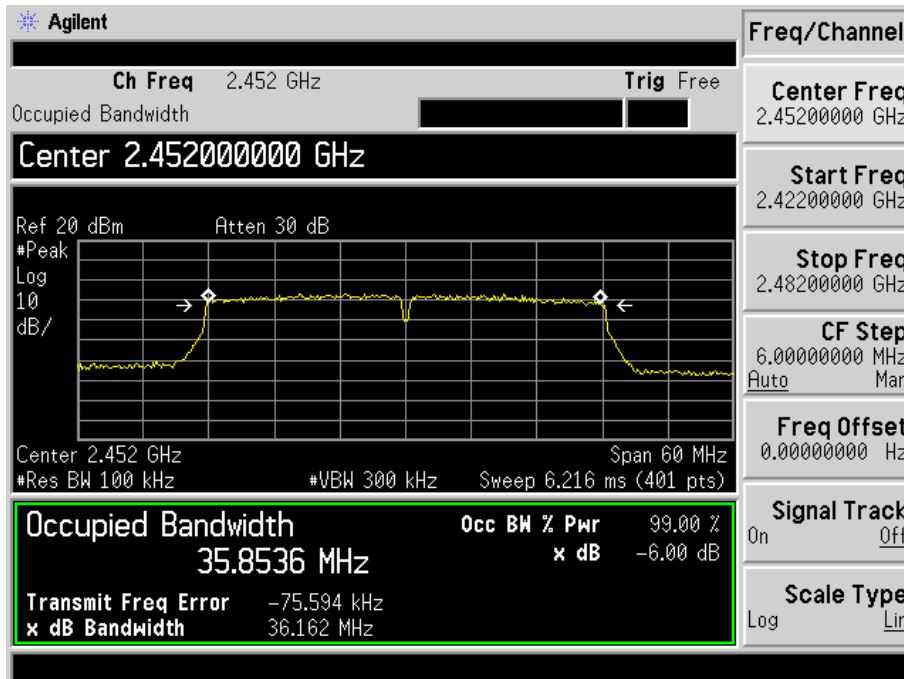

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2014-05-28	2015-05-27
Attenuator	ATTEN	ATS100-4-20	/	2014-05-28	2015-05-27

### 7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r02, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

## 7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	15.30	33.88	1000
	2437	14.33	27.10	1000
	2462	13.15	20.65	1000
802.11g_54Mbps	2412	10.64	11.59	1000
	2437	9.92	9.82	1000
	2462	8.97	7.89	1000
802.11n HT20_MCS7	2412	10.44	11.07	1000
	2437	9.50	8.91	1000
	2462	8.27	6.71	1000
802.11n HT40_MCS7	2422	8.83	7.64	1000
	2437	8.36	6.85	1000
	2452	8.06	6.40	1000

Please refer to the following test plots:


802.11b-11Mbps-Low Channel

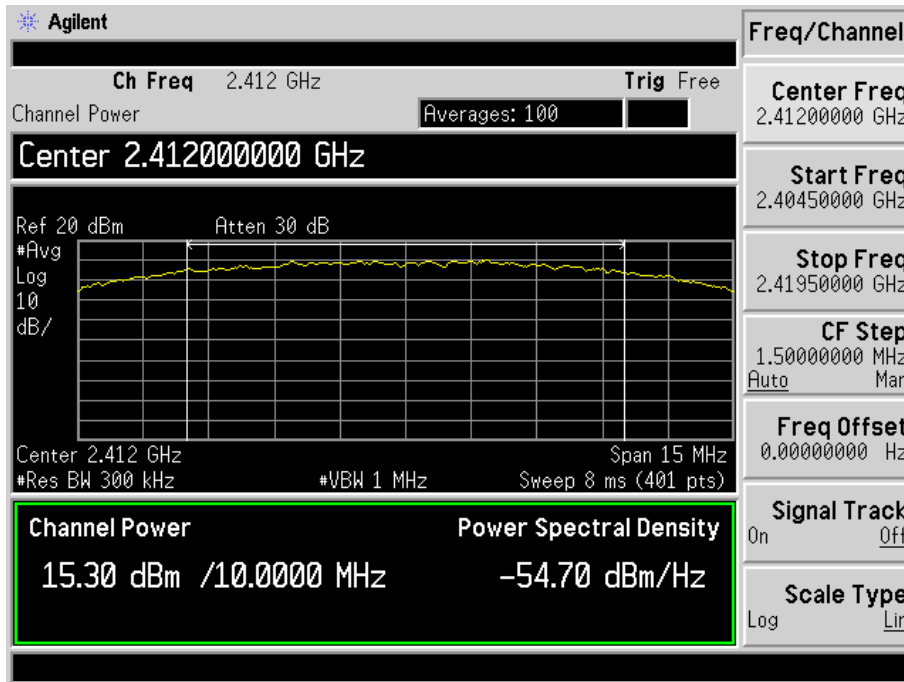


802.11b -11Mbps-Middle Channel

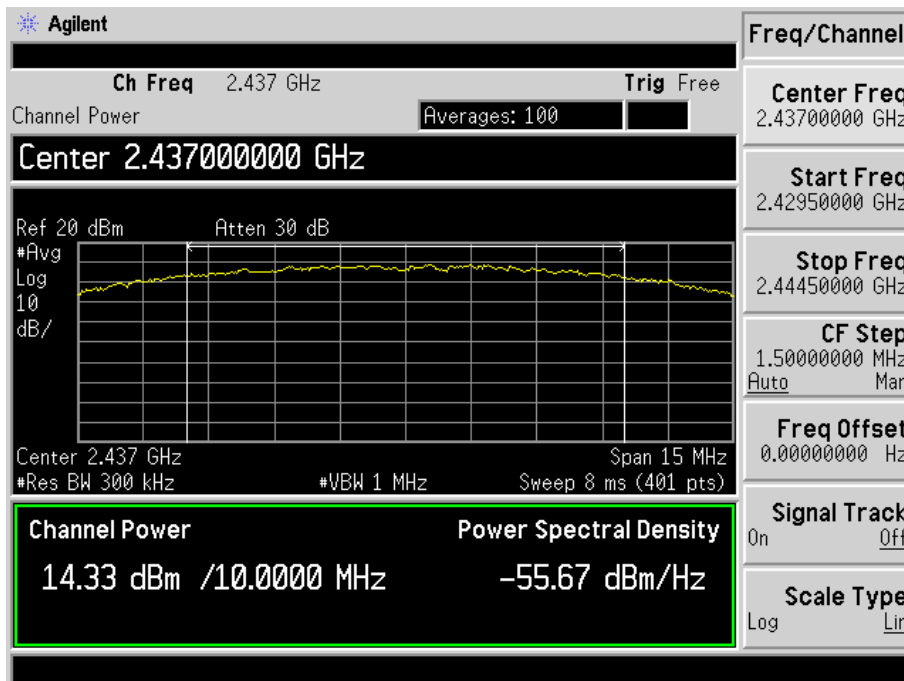


802.11b -11Mbps-High Channel

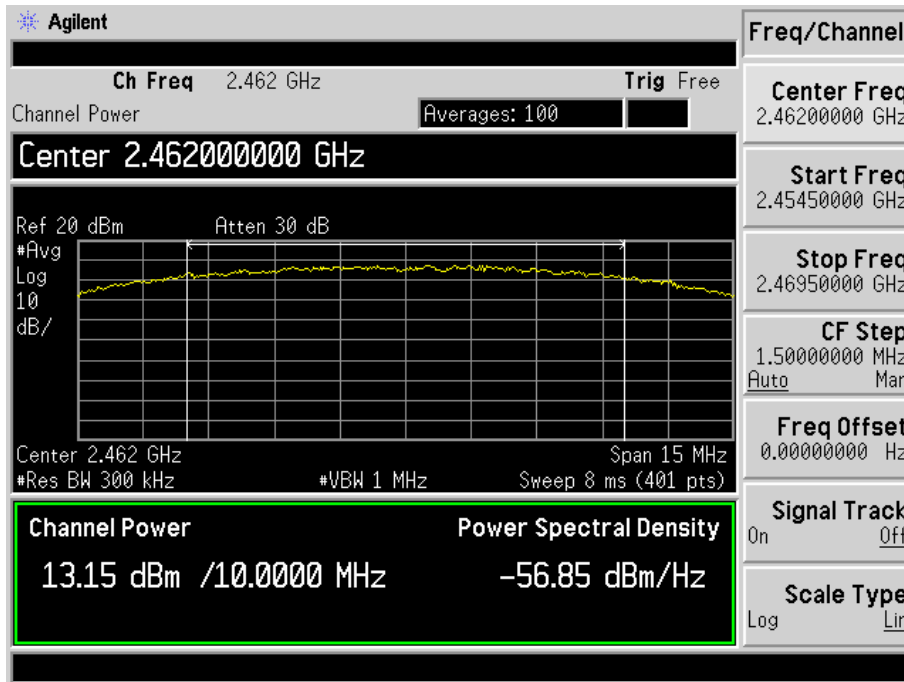


802.11g-54Mbps-Low Channel

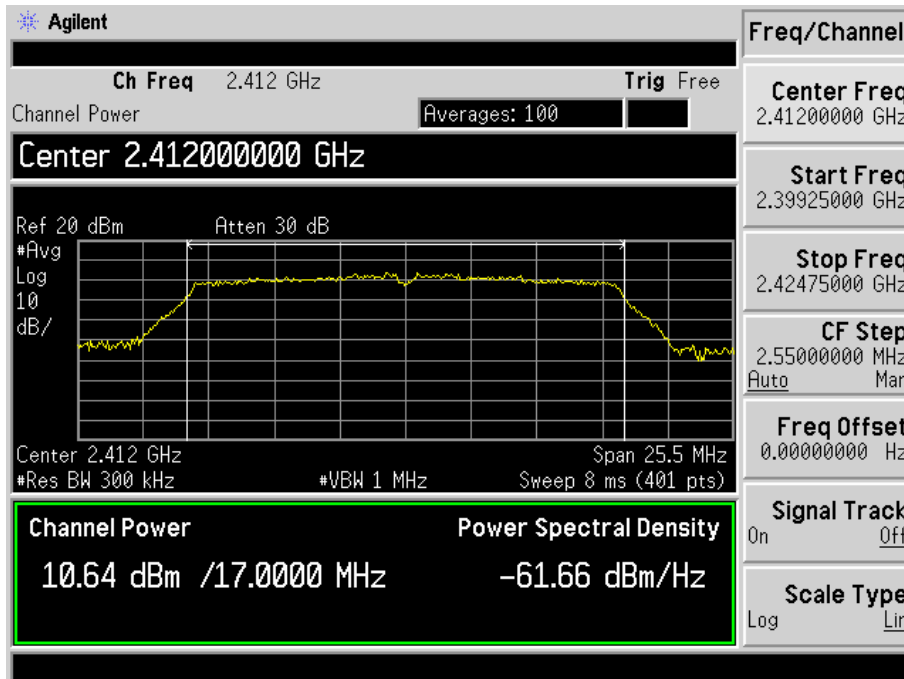


802.11g-54Mbps-Middle Channel

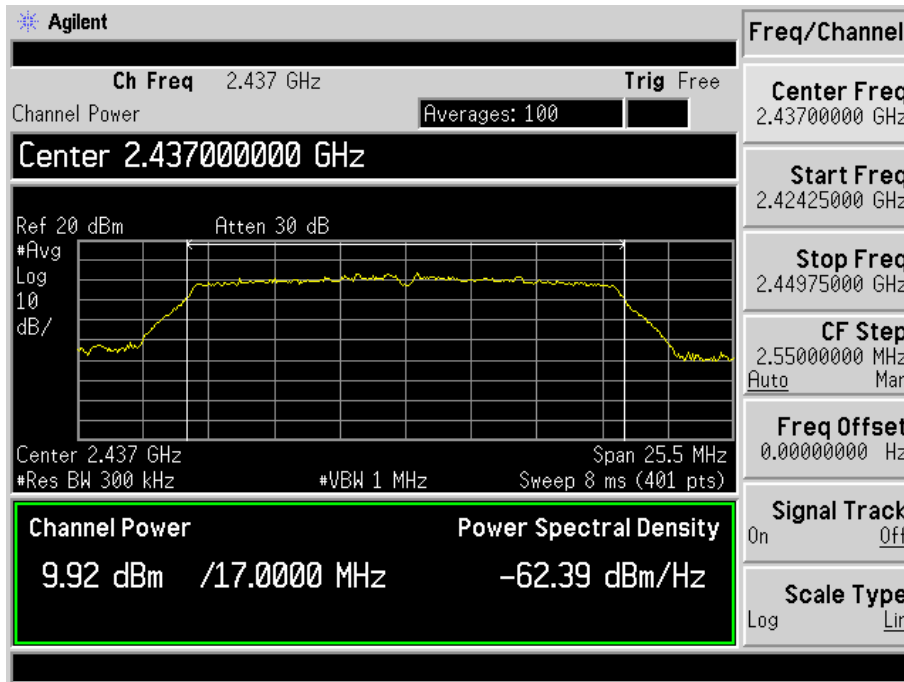


802.11g-54Mbps-High Channel

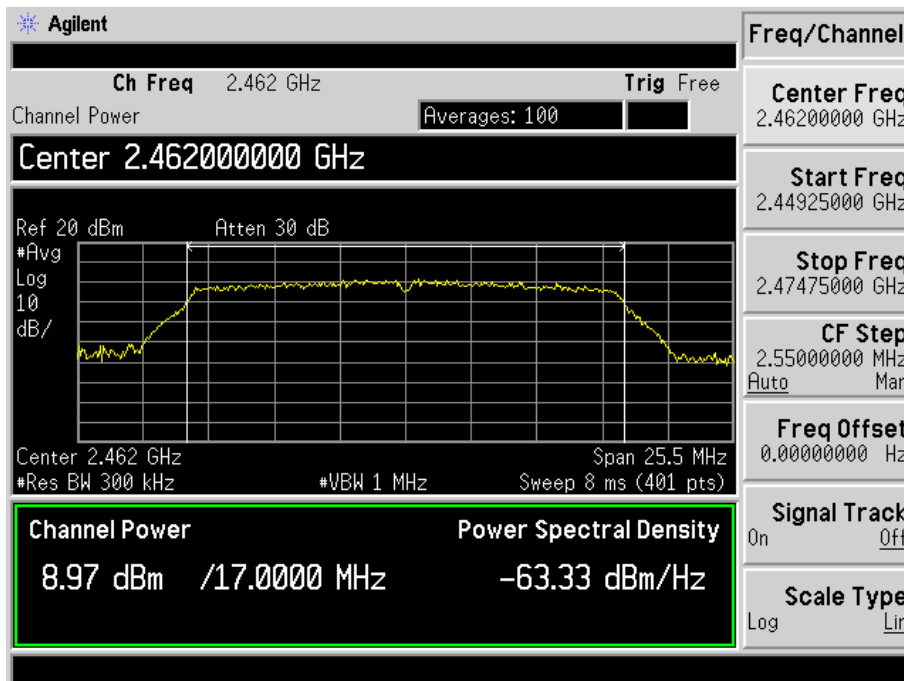


802.11n-HT20-MCS7-Low Channel

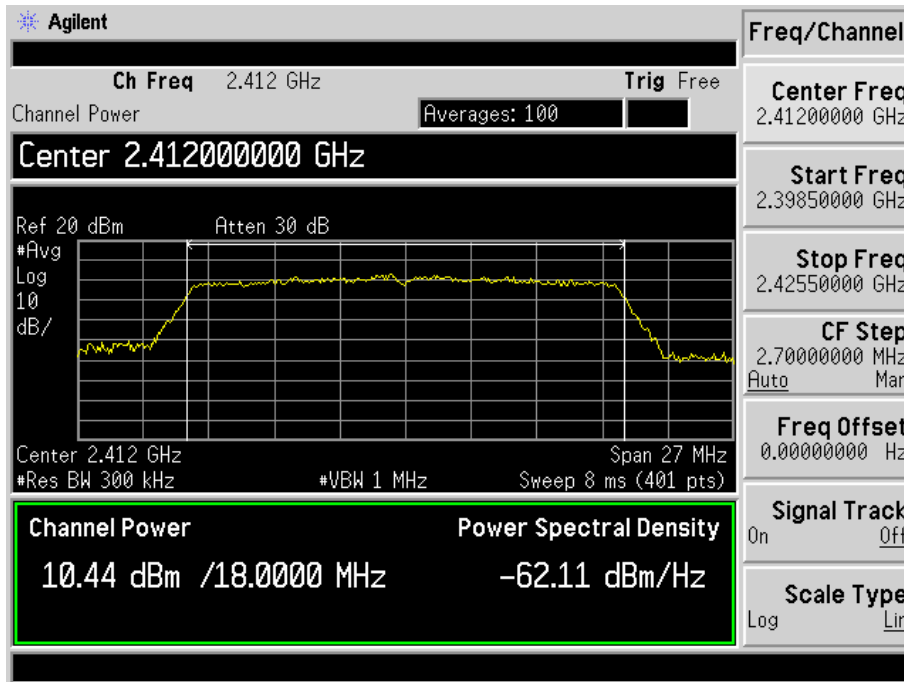


802.11n-HT20-MCS7-Middle Channel

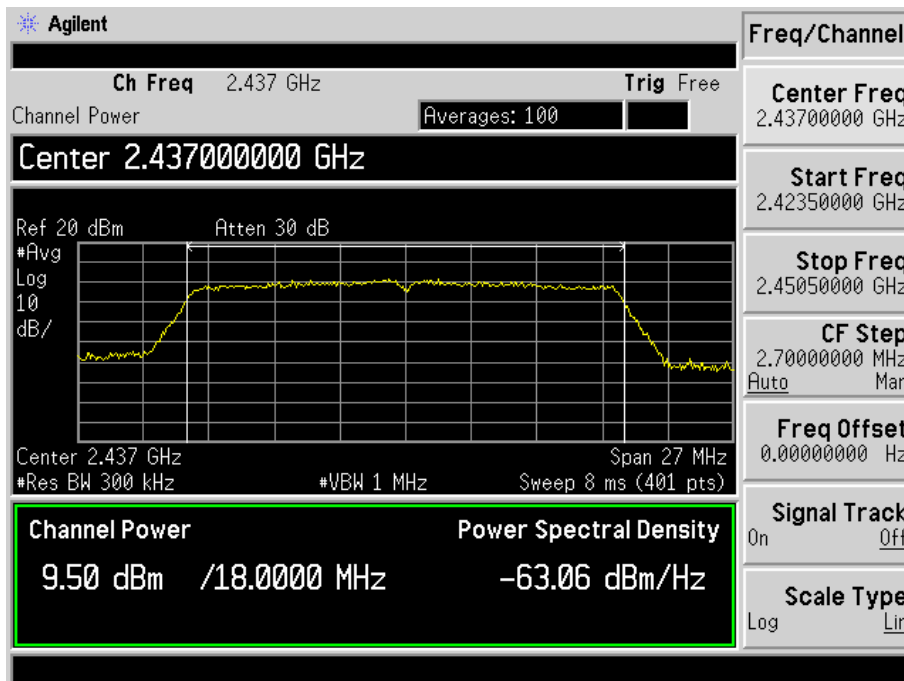

802.11n-HT20-MCS7-High Channel

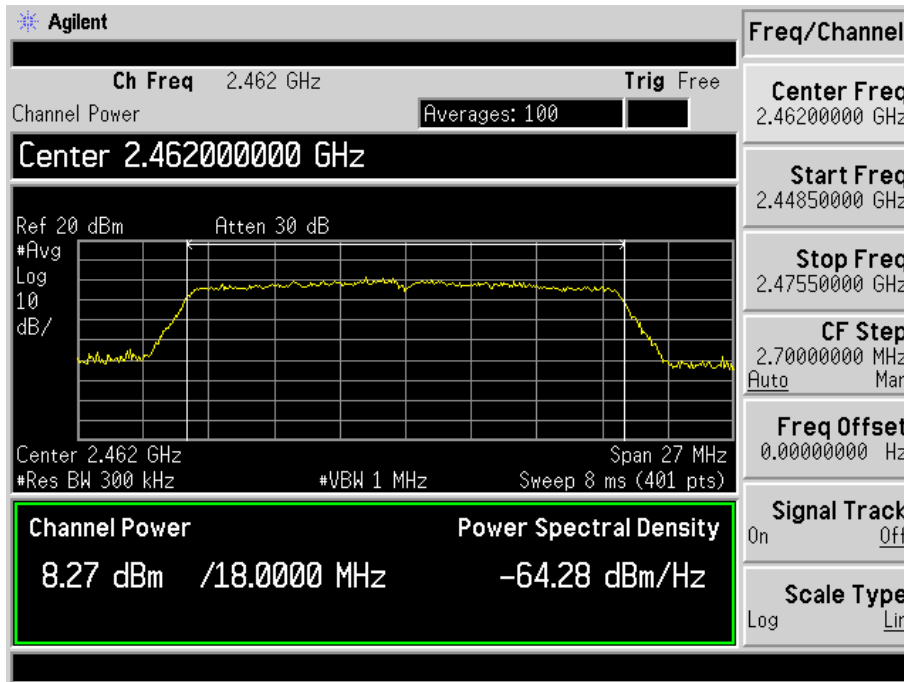


802.11n-HT40-MCS7-Low Channel

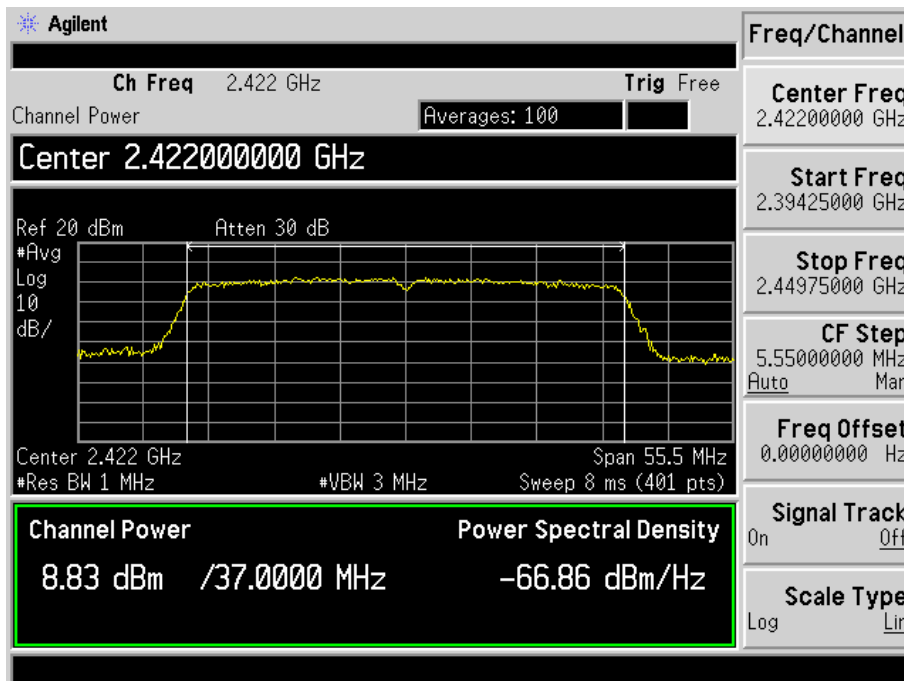




802.11n-HT40-MCS7-Middle Channel

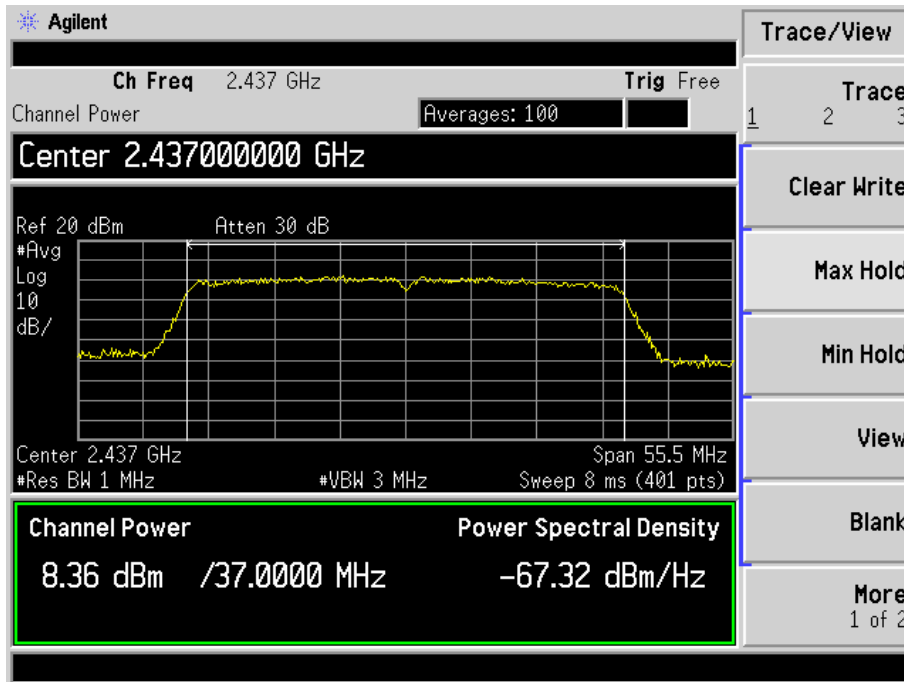

802.11n-HT40-MCS7-High Channel

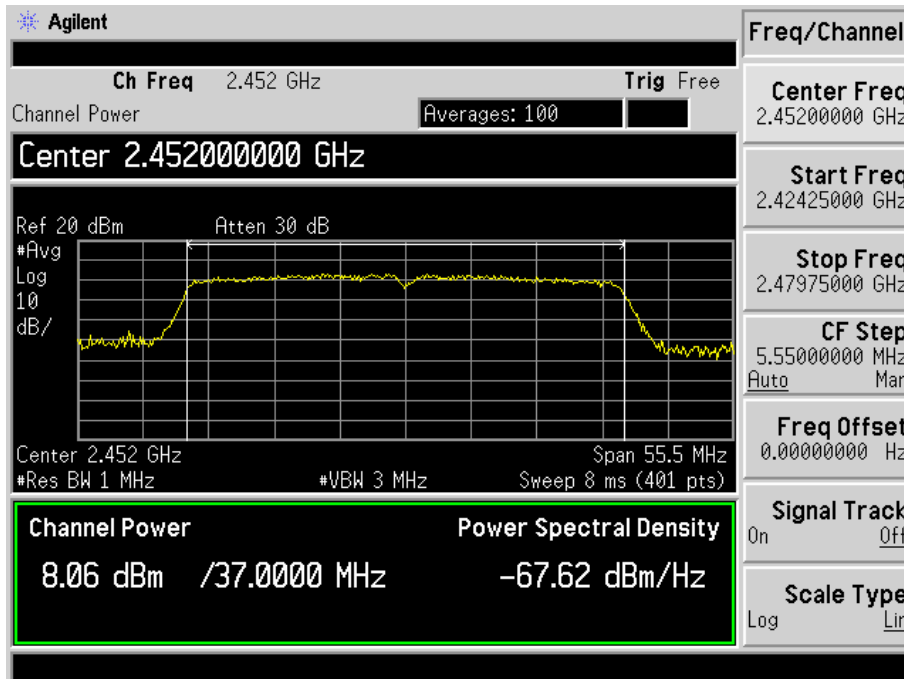

## 8. Field Strength of Spurious Emissions

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Horn Antenna	ETS	3116B	00088203	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

### 8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

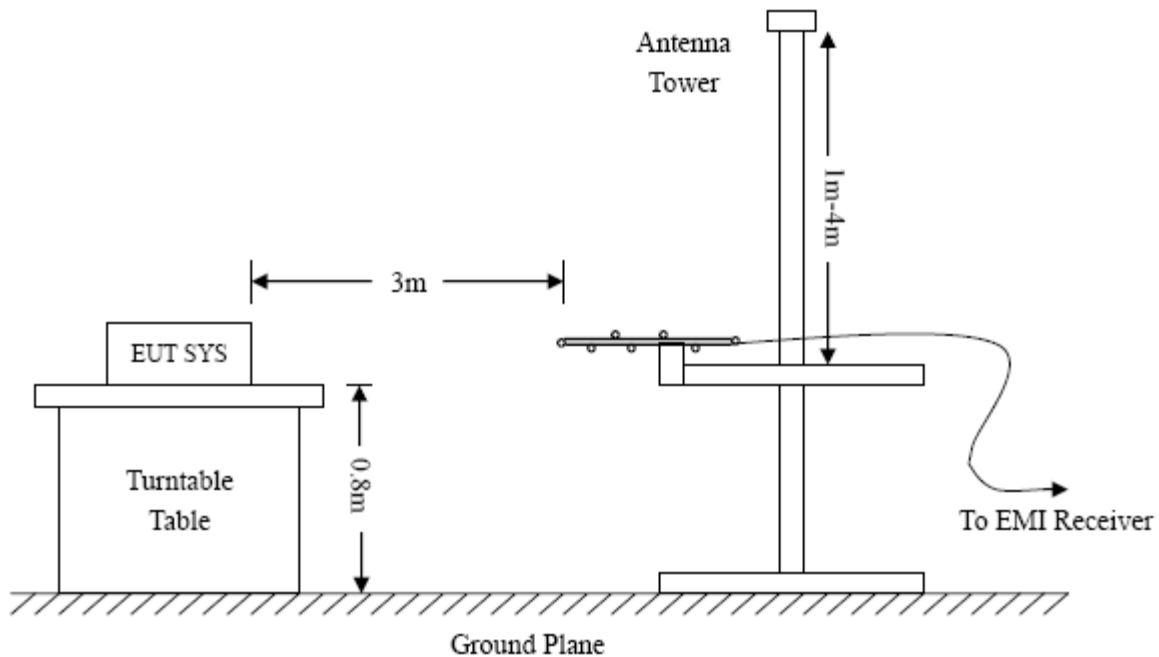

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

## 8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 8.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Mobile Phone*  
 Tested Model: *Beat*  
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz*  
 Comment: *Battery: DC3.7V*

Test Specification: *Horizontal*

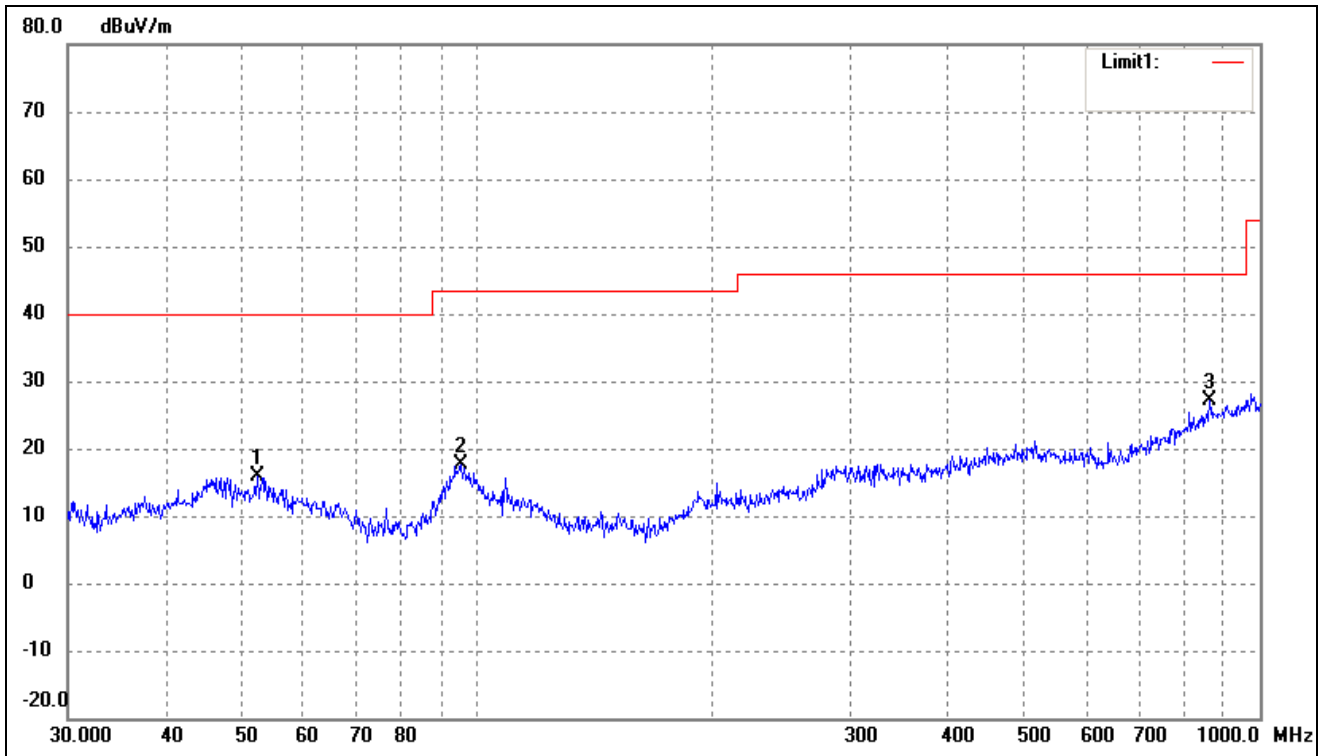

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	52.3913	23.49	-7.68	15.81	40.00	-24.19	105	100	peak
2	95.4270	27.86	-10.14	17.72	43.50	-25.78	160	100	peak
3	863.0562	22.89	4.28	27.17	46.00	-18.83	180	100	peak

Test Specification: Vertical

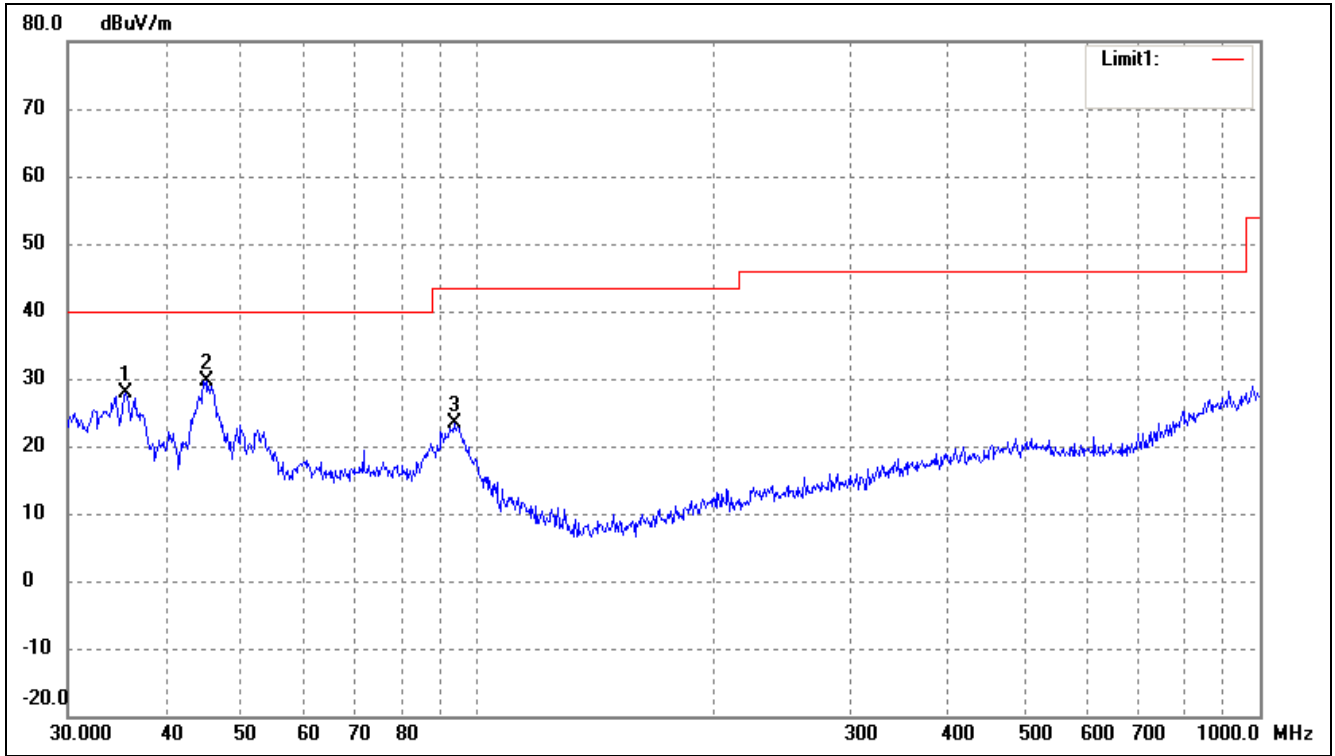


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.4993	37.71	-9.88	27.83	40.00	-12.17	140	100	peak
2	45.0583	37.12	-7.47	29.65	40.00	-10.35	250	100	peak
3	93.4402	33.89	-10.51	23.38	43.50	-20.12	120	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

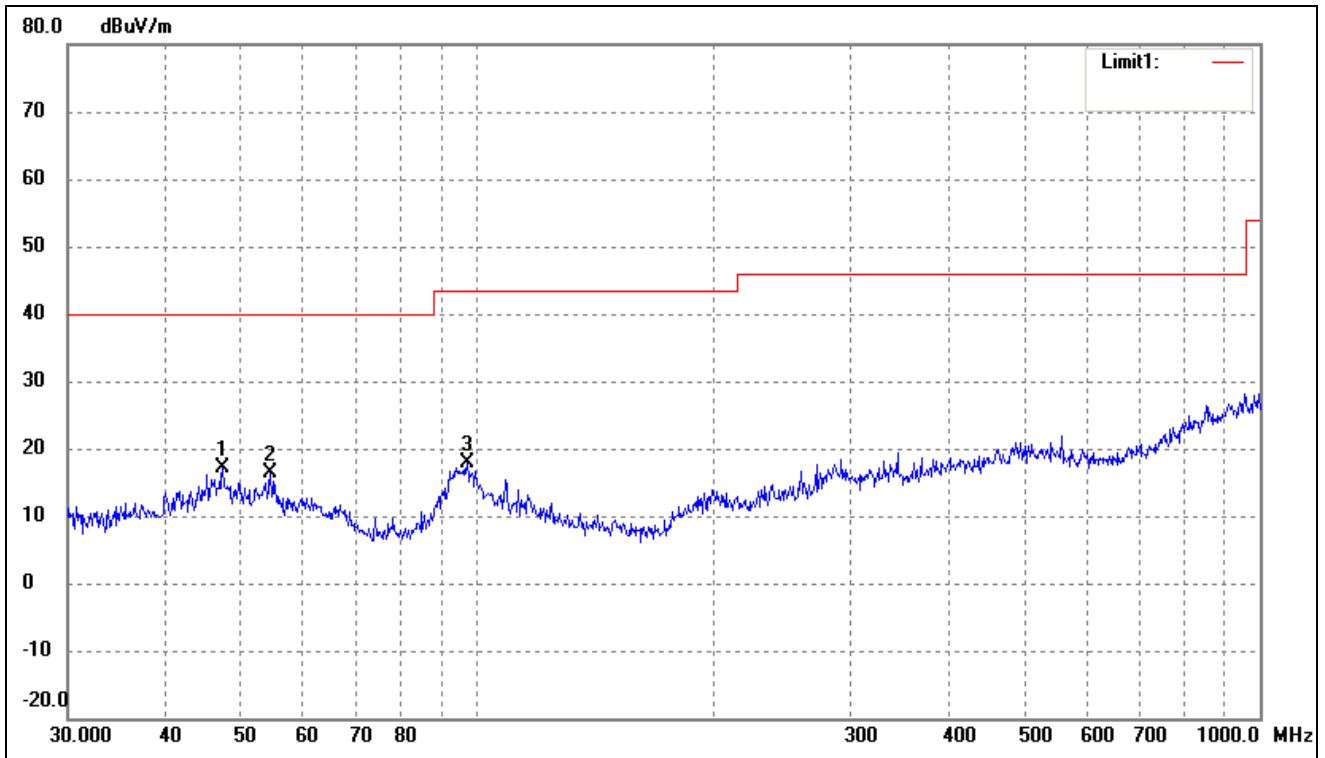

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.3255	24.56	-7.45	17.11	40.00	-22.89	145	100	peak
2	54.4516	24.20	-7.90	16.30	40.00	-23.70	120	100	peak
3	97.1148	27.75	-9.91	17.84	43.50	-25.66	108	100	peak

Test Specification: Vertical

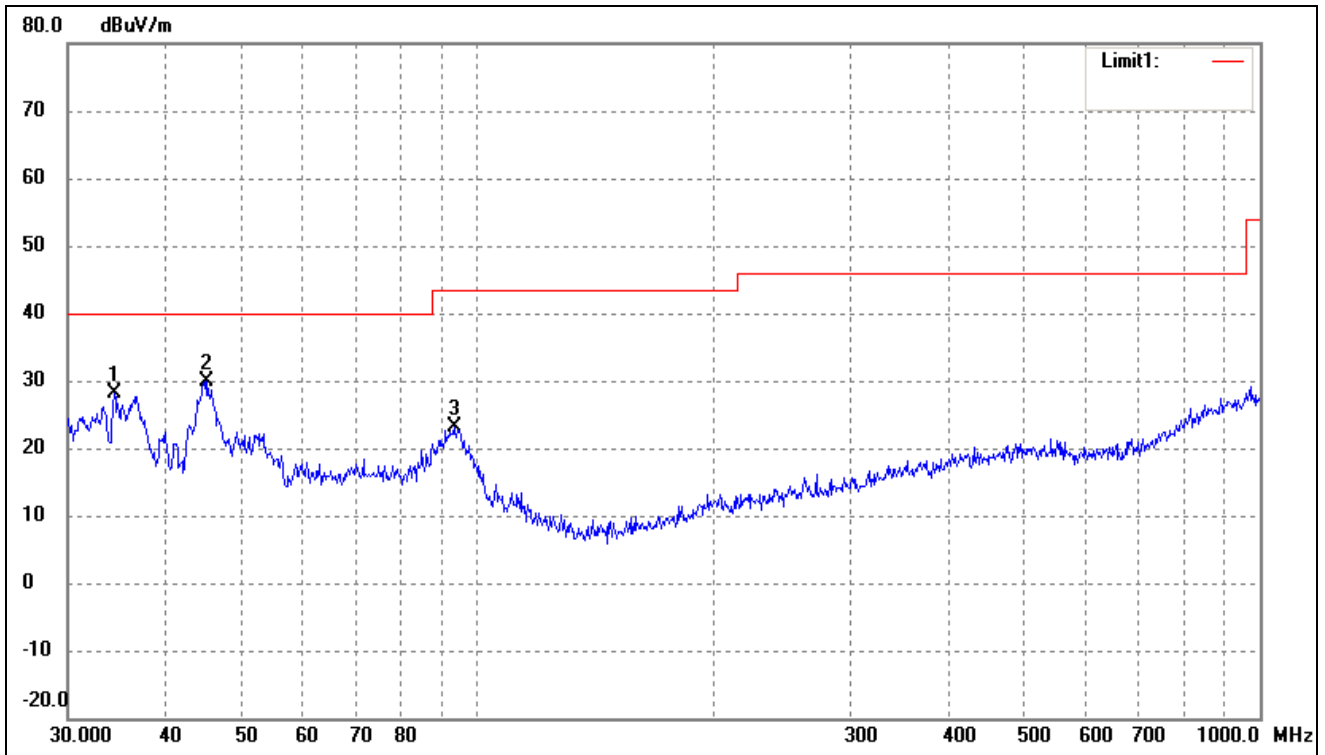


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.3964	38.20	-10.19	28.01	40.00	-11.99	120	100	peak
2	45.2166	37.43	-7.47	29.96	40.00	-10.04	113	100	peak
3	93.4402	33.74	-10.51	23.23	43.50	-20.27	157	100	peak



Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

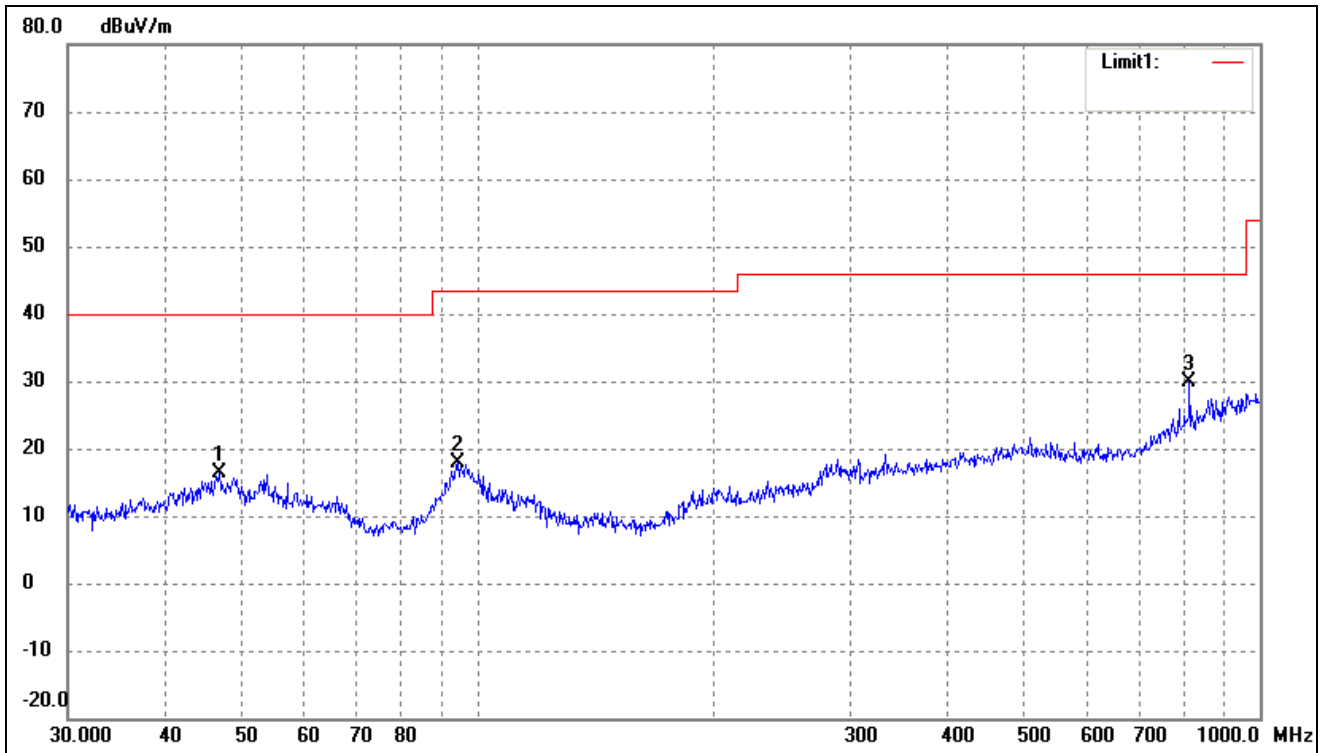

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.8303	23.87	-7.45	16.42	40.00	-23.58	120	100	peak
2	94.4284	28.09	-10.32	17.77	43.50	-25.73	250	100	peak
3	813.1116	26.78	3.03	29.81	46.00	-16.19	360	100	peak

Test Specification: Vertical

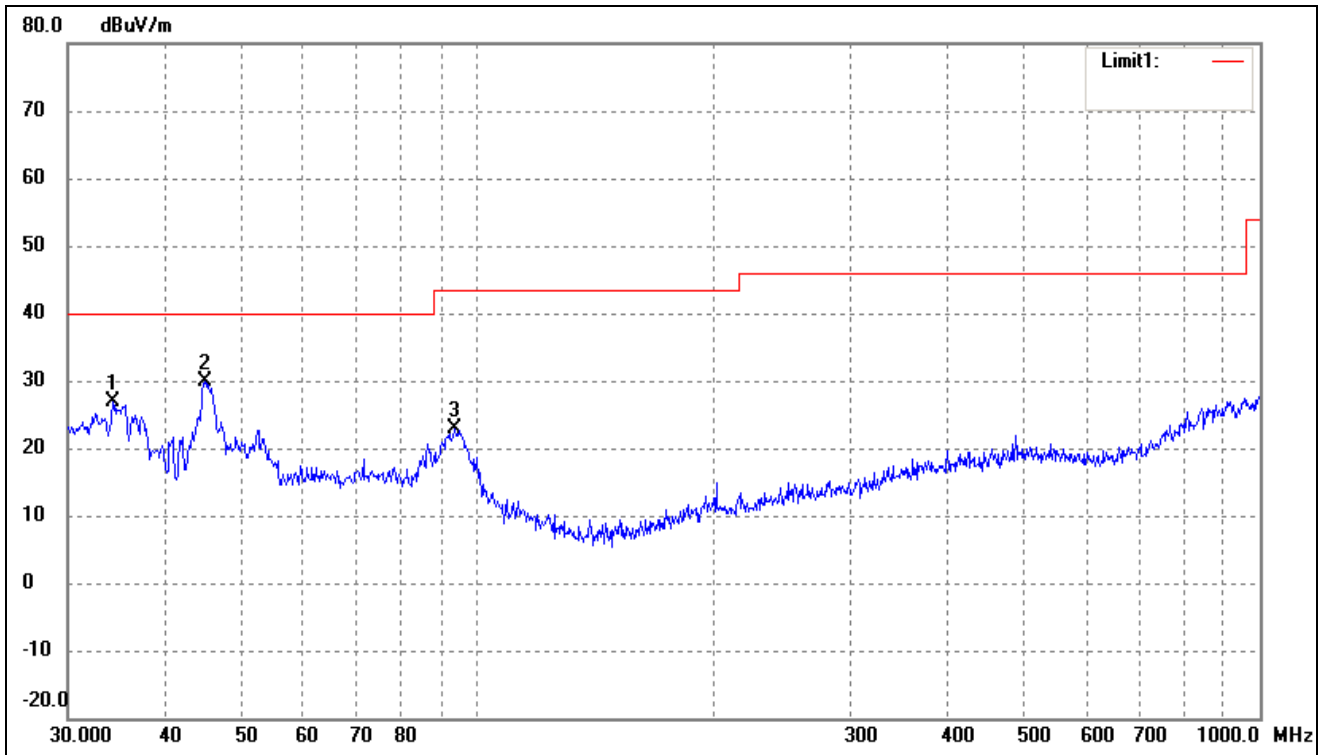


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.2760	36.97	-10.21	26.76	40.00	-13.24	360	100	peak
2	44.9006	37.44	-7.49	29.95	40.00	-10.05	200	100	peak
3	93.7685	33.21	-10.44	22.77	43.50	-20.73	120	100	peak

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Mobile Phone*  
 Tested Model: *Beat*  
 Operating Condition: *802.11g Transmitting Low Channel-2412MHz*  
 Comment: *Battery: DC3.7V*

Test Specification: *Horizontal*

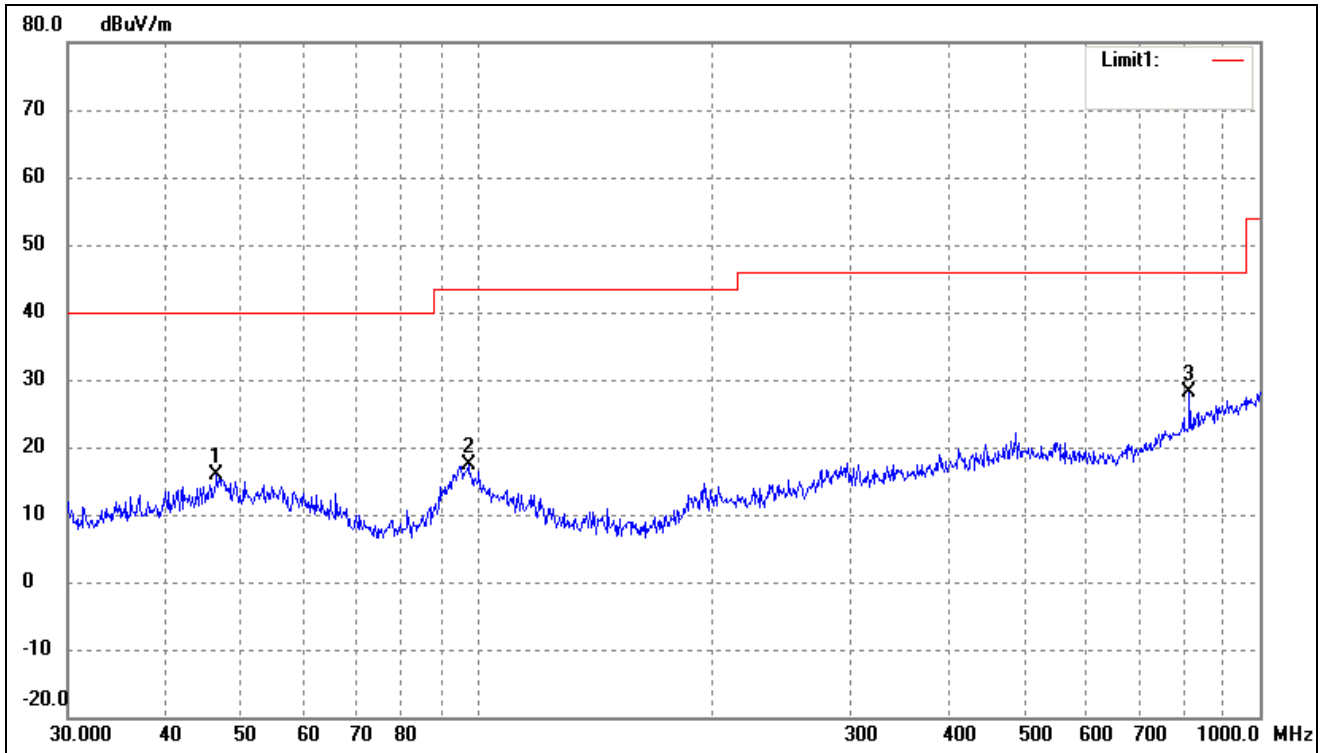

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.5030	23.25	-7.46	15.79	40.00	-24.21	170	100	peak
2	97.4560	27.13	-9.87	17.26	43.50	-26.24	20	100	peak
3	813.1116	25.02	3.03	28.05	46.00	-17.95	320	100	peak

Test Specification: Vertical

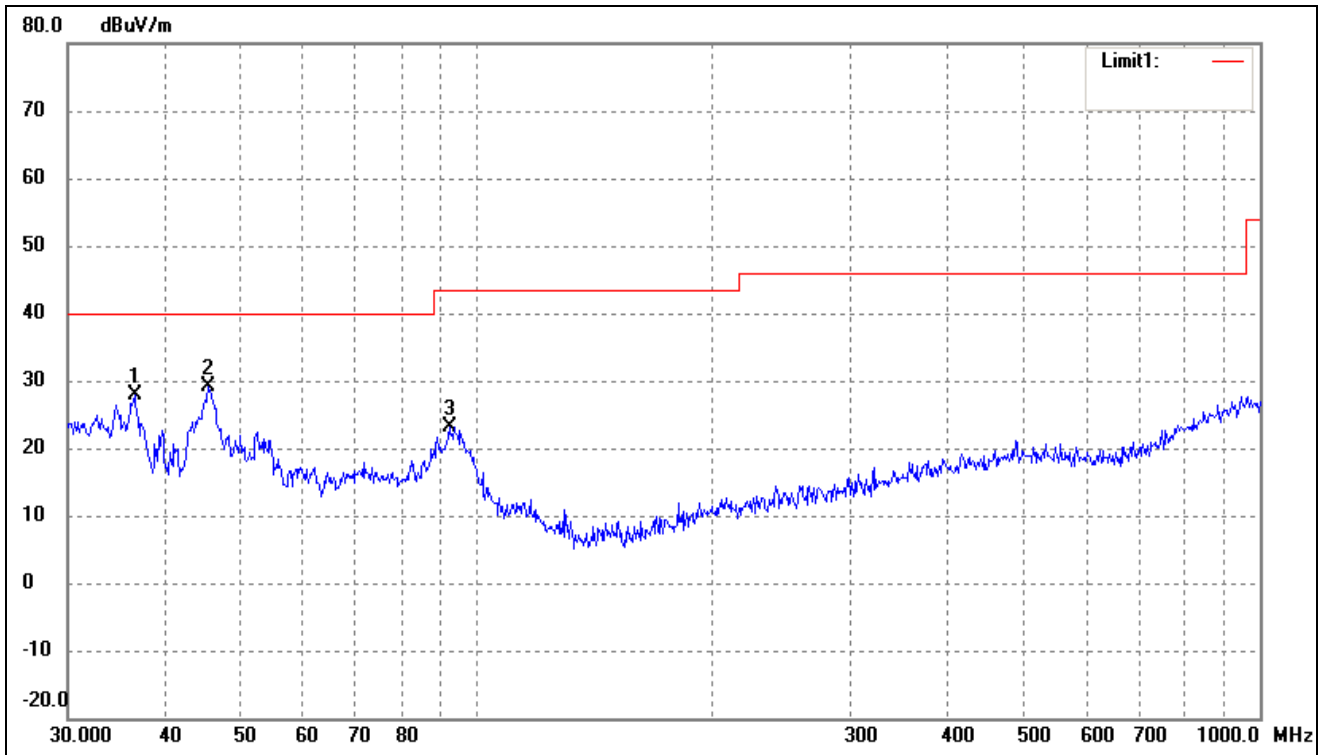


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.5092	37.38	-9.46	27.92	40.00	-12.08	270	100	peak
2	45.3755	36.71	-7.46	29.25	40.00	-10.75	190	100	peak
3	92.1388	33.93	-10.76	23.17	43.50	-20.33	360	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

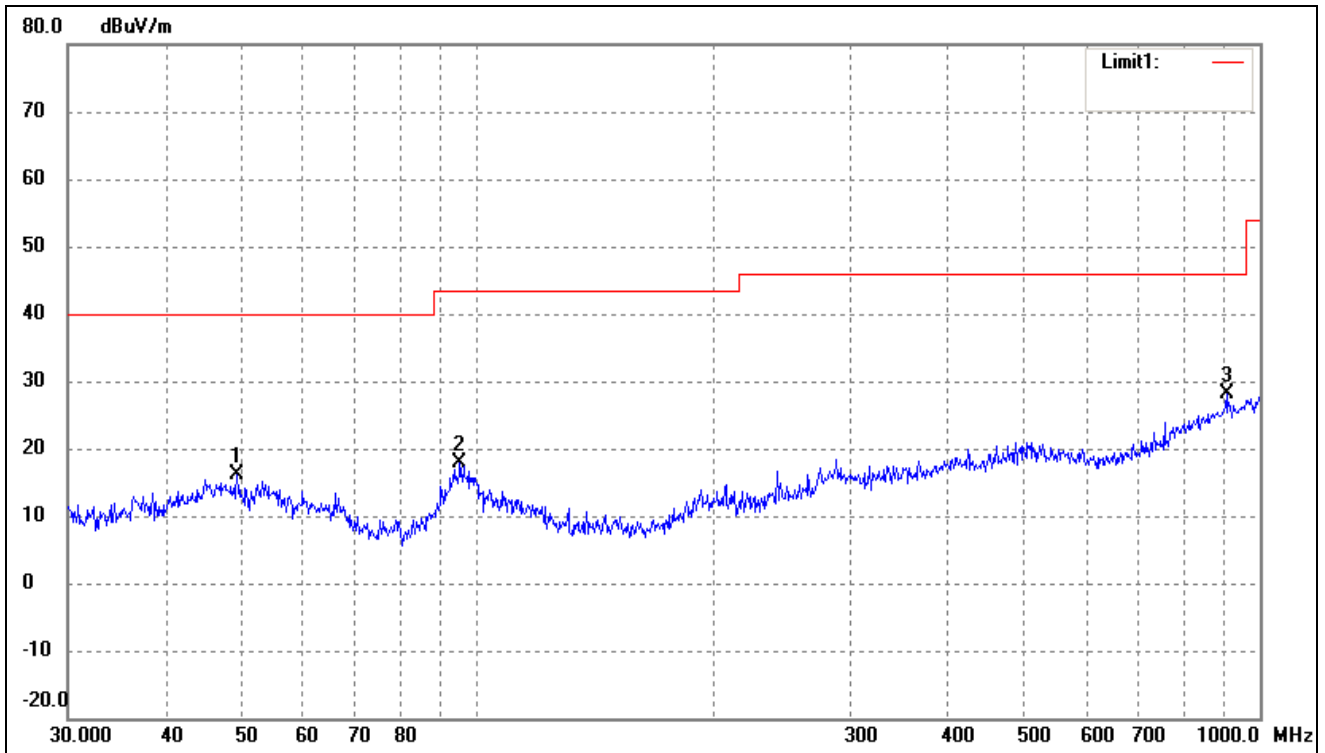

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.3594	23.47	-7.45	16.02	40.00	-23.98	270	100	peak
2	95.0930	28.08	-10.19	17.89	43.50	-25.61	160	100	peak
3	906.4824	22.59	5.45	28.04	46.00	-17.96	228	200	peak

Test Specification: Vertical

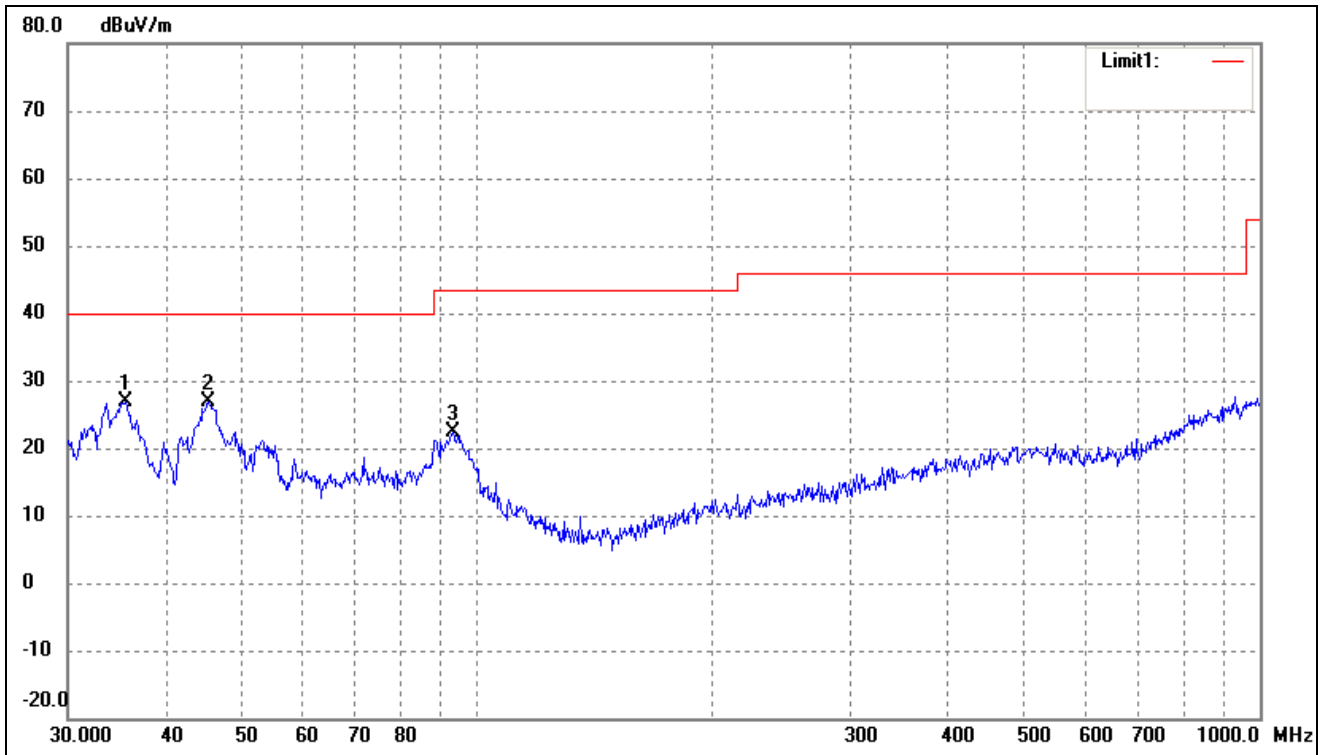


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.4993	36.79	-9.88	26.91	40.00	-13.09	360	100	peak
2	45.3755	34.39	-7.46	26.93	40.00	-13.07	120	100	peak
3	93.1132	33.00	-10.57	22.43	43.50	-21.07	270	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

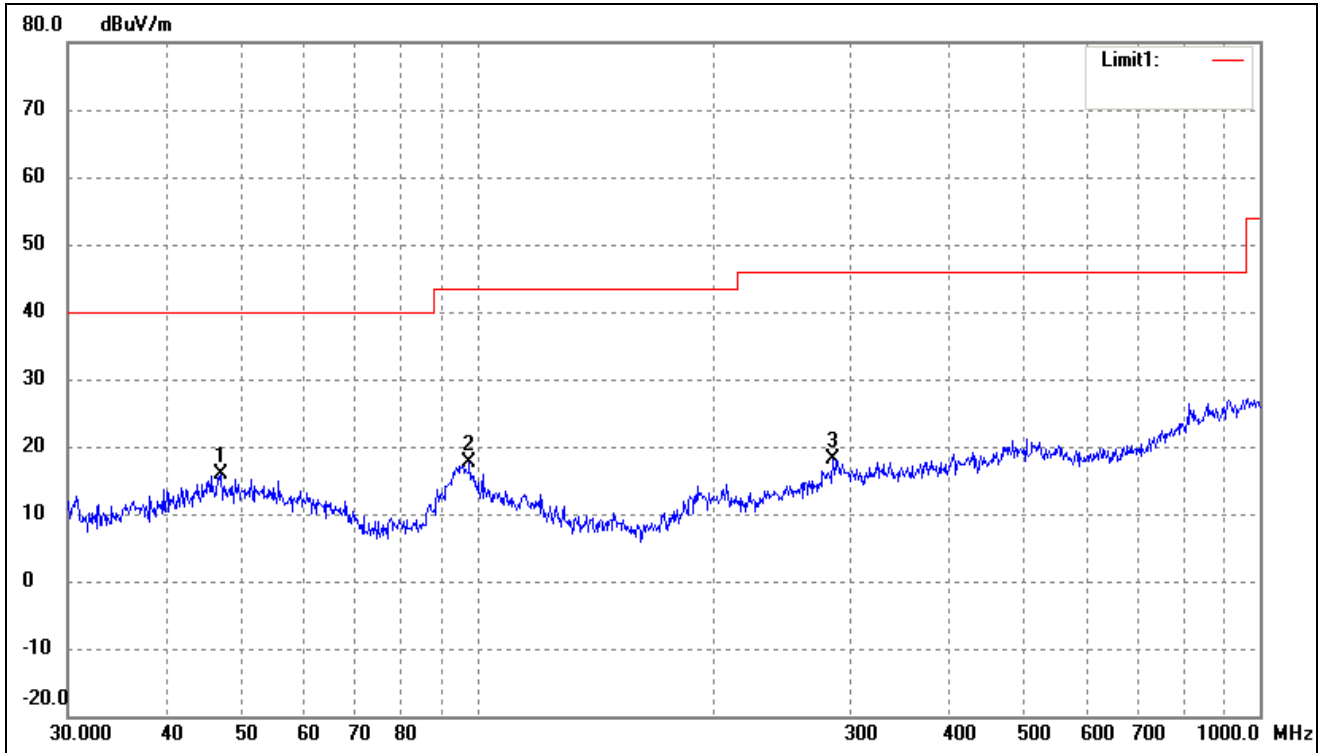

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.1599	23.27	-7.45	15.82	40.00	-24.18	270	100	peak
2	97.7983	27.51	-9.82	17.69	43.50	-25.81	150	100	peak
3	284.9767	24.60	-6.56	18.04	46.00	-27.96	360	100	peak

Test Specification: Vertical

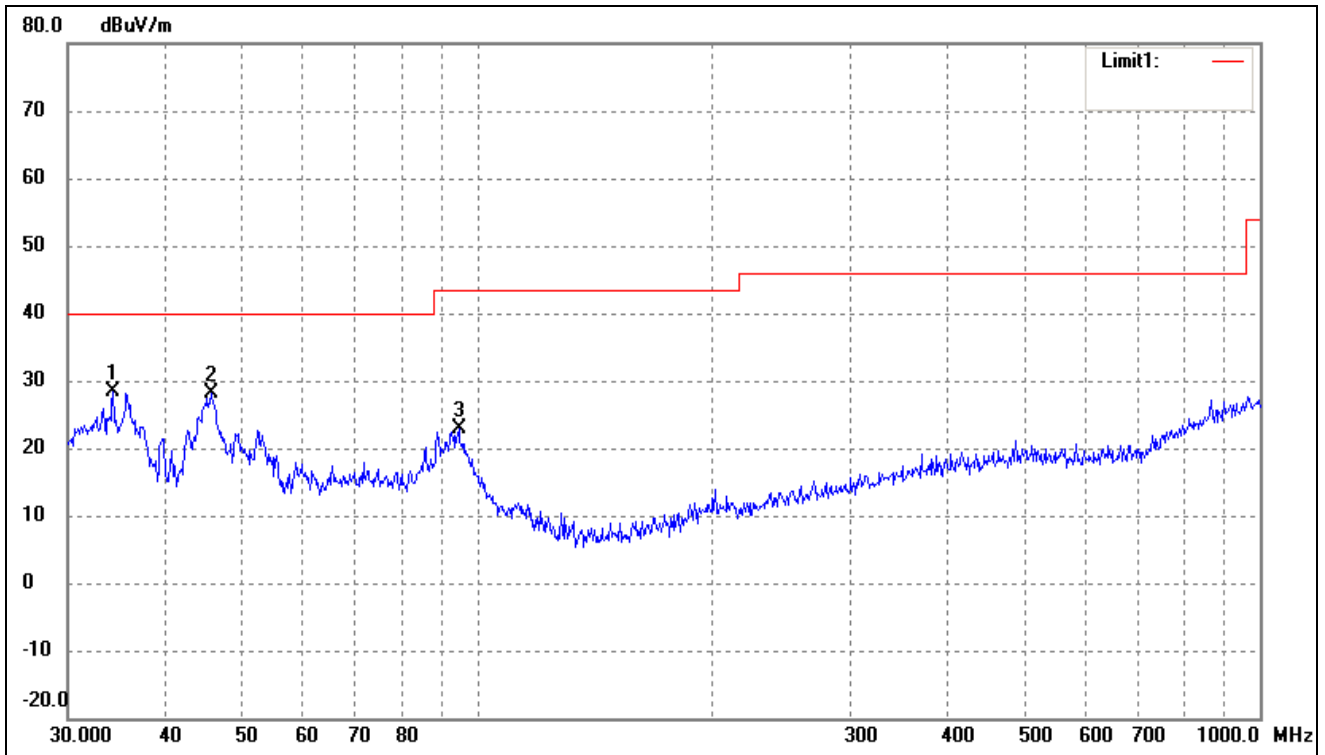


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.2760	38.52	-10.21	28.31	40.00	-11.69	360	100	peak
2	45.6948	35.65	-7.46	28.19	40.00	-11.81	180	100	peak
3	94.7601	33.11	-10.25	22.86	43.50	-20.64	120	100	peak



**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Mobile Phone*  
 Tested Model: *Beat*  
 Operating Condition: *802.11n-HT20 Transmitting Low Channel-2412MHz*  
 Comment: *Battery: DC3.7V*

Test Specification: *Horizontal*

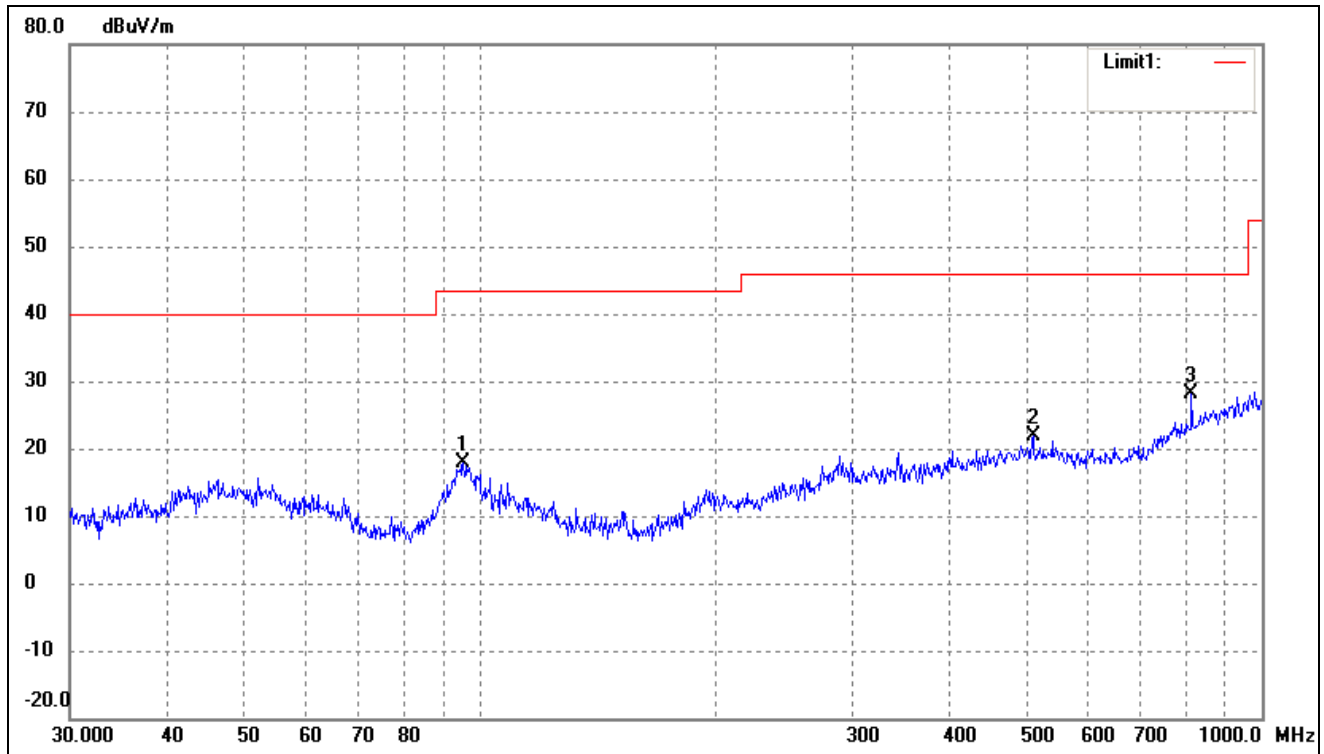

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	95.4270	28.11	-10.14	17.97	43.50	-25.53	260	100	peak
2	510.0436	23.13	-1.18	21.95	46.00	-24.05	120	200	peak
3	813.1116	25.20	3.03	28.23	46.00	-17.77	289	200	peak

Test Specification: Vertical

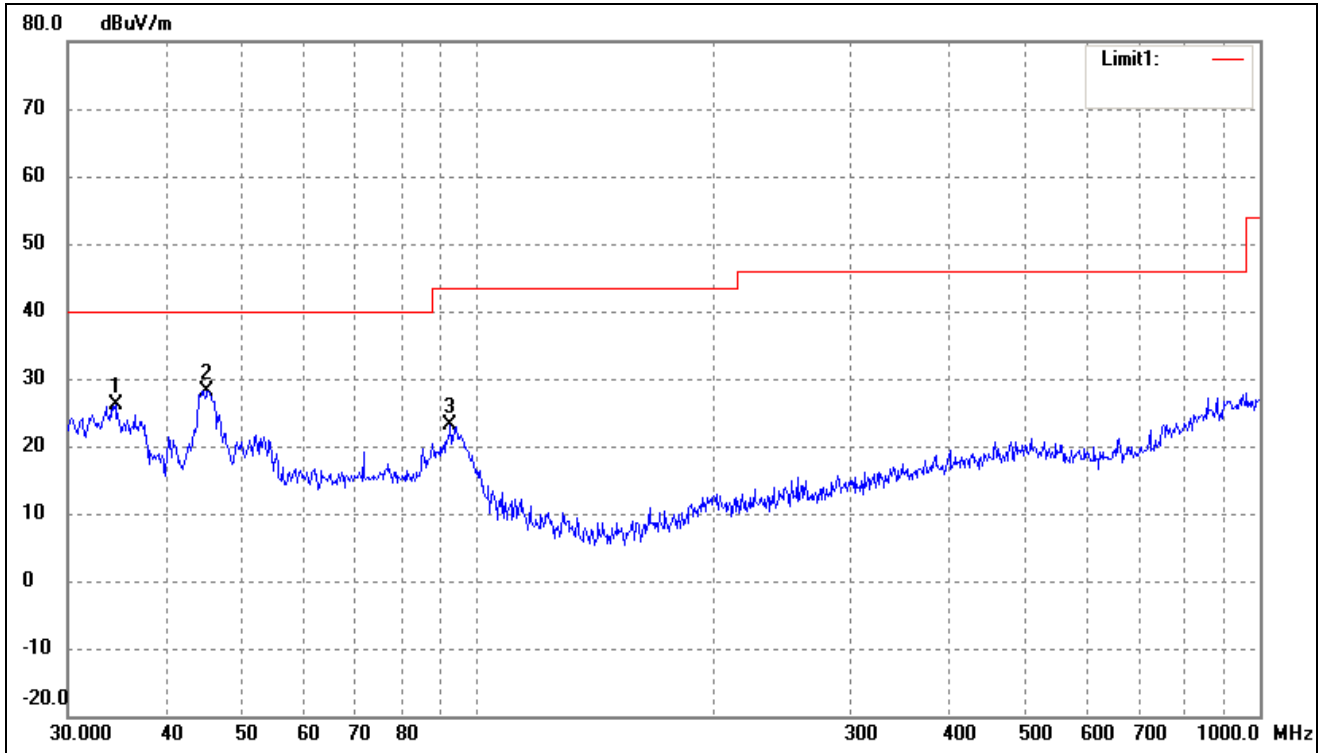


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.5173	36.31	-10.17	26.14	40.00	-13.86	130	100	peak
2	45.2166	35.70	-7.47	28.23	40.00	-11.77	120	100	peak
3	92.4624	33.85	-10.69	23.16	43.50	-20.34	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

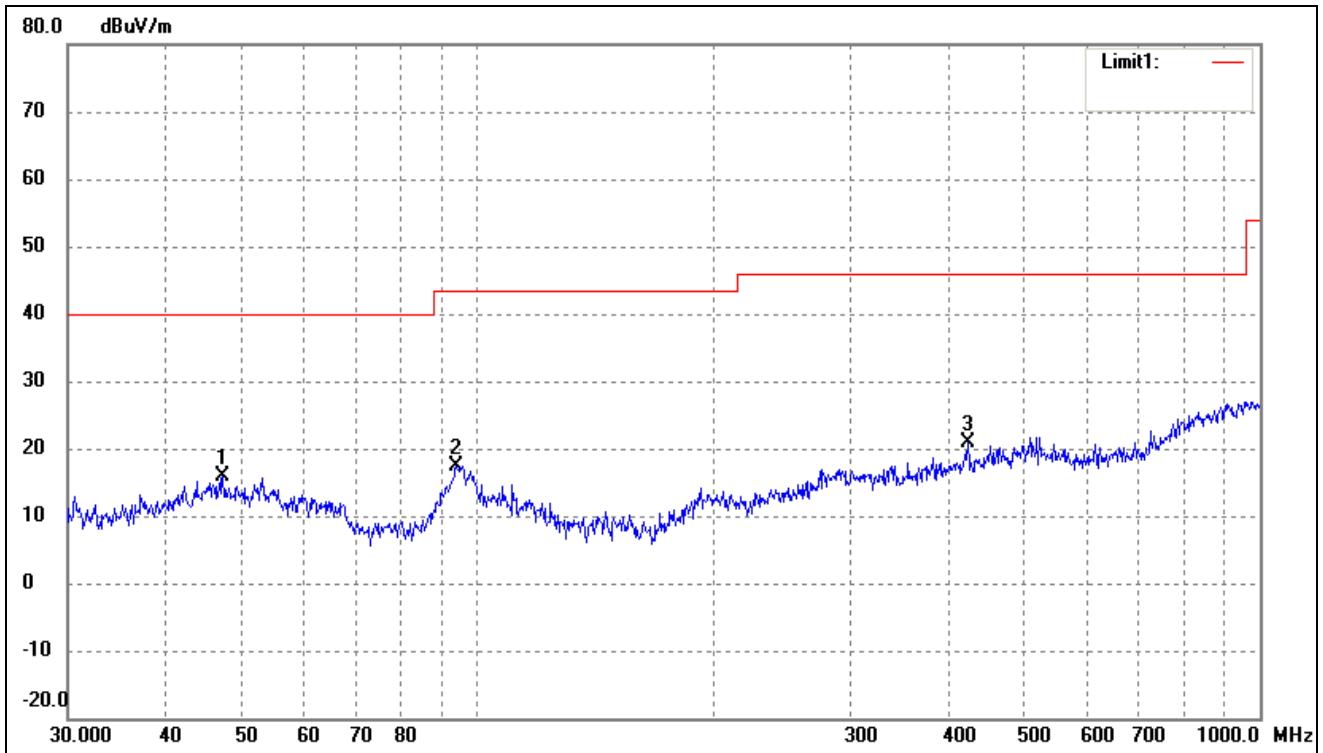

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.3255	23.24	-7.45	15.79	40.00	-24.21	274	100	peak
2	94.0979	27.85	-10.38	17.47	43.50	-26.03	130	100	peak
3	423.5403	23.37	-2.43	20.94	46.00	-25.06	120	100	peak

Test Specification: Vertical

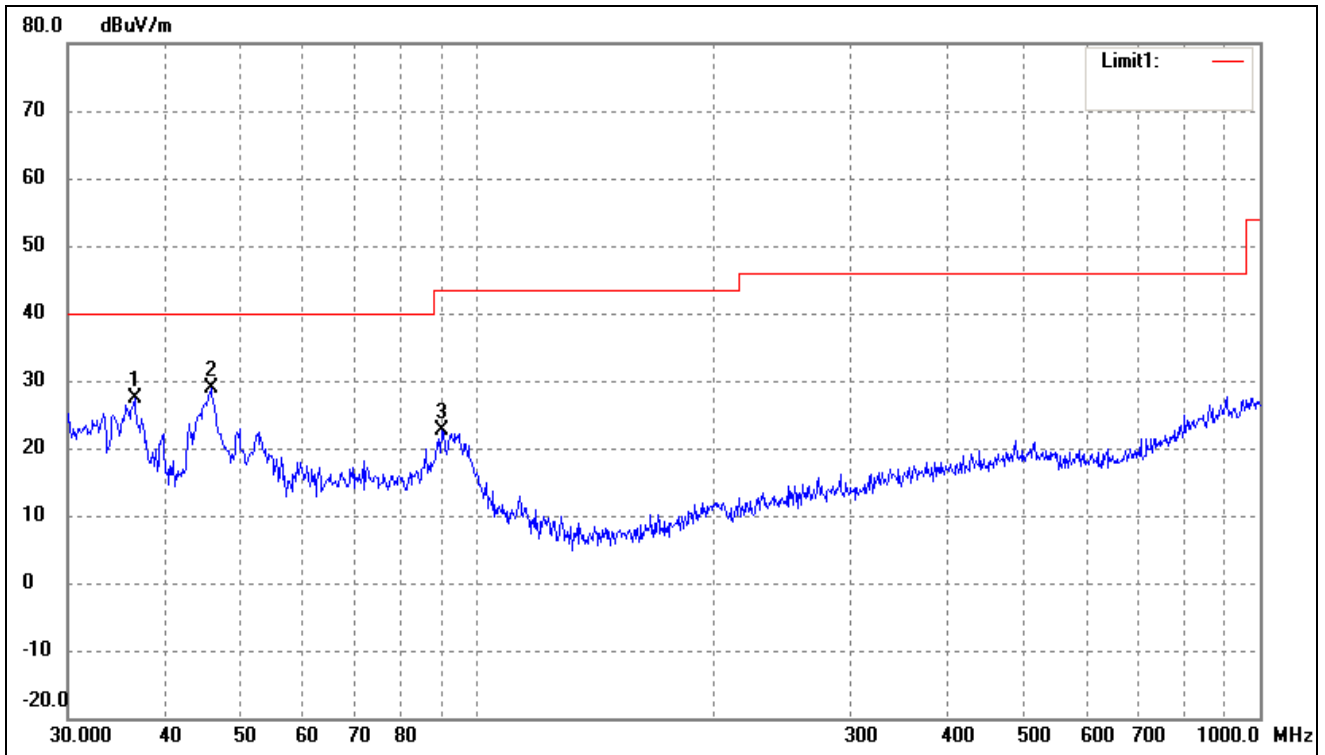


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.5092	36.93	-9.46	27.47	40.00	-12.53	360	100	peak
2	45.6948	36.30	-7.46	28.84	40.00	-11.16	110	100	peak
3	90.2205	33.66	-11.13	22.53	43.50	-20.97	120	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

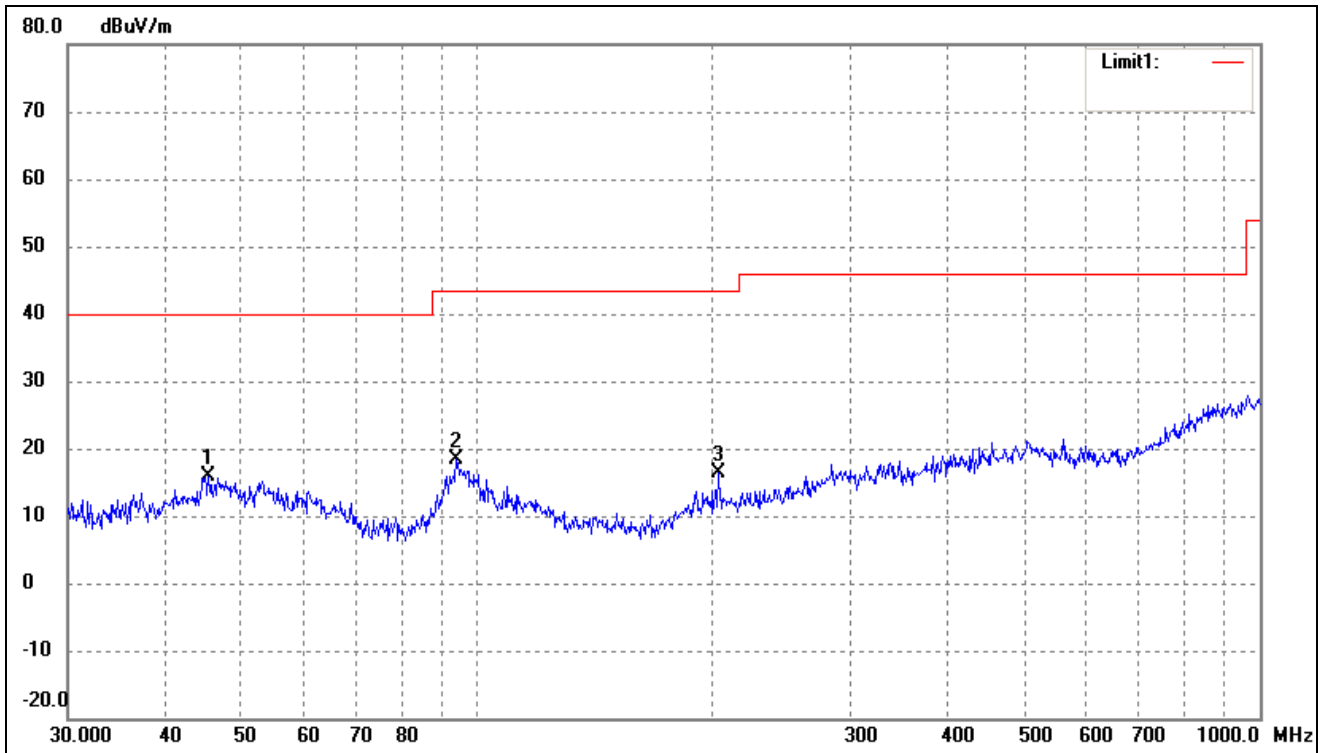

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	45.3755	23.27	-7.46	15.81	40.00	-24.19	360	100	peak
2	94.0979	28.78	-10.38	18.40	43.50	-25.10	138	100	peak
3	203.5228	25.47	-9.03	16.44	43.50	-27.06	180	200	peak

Test Specification: Vertical

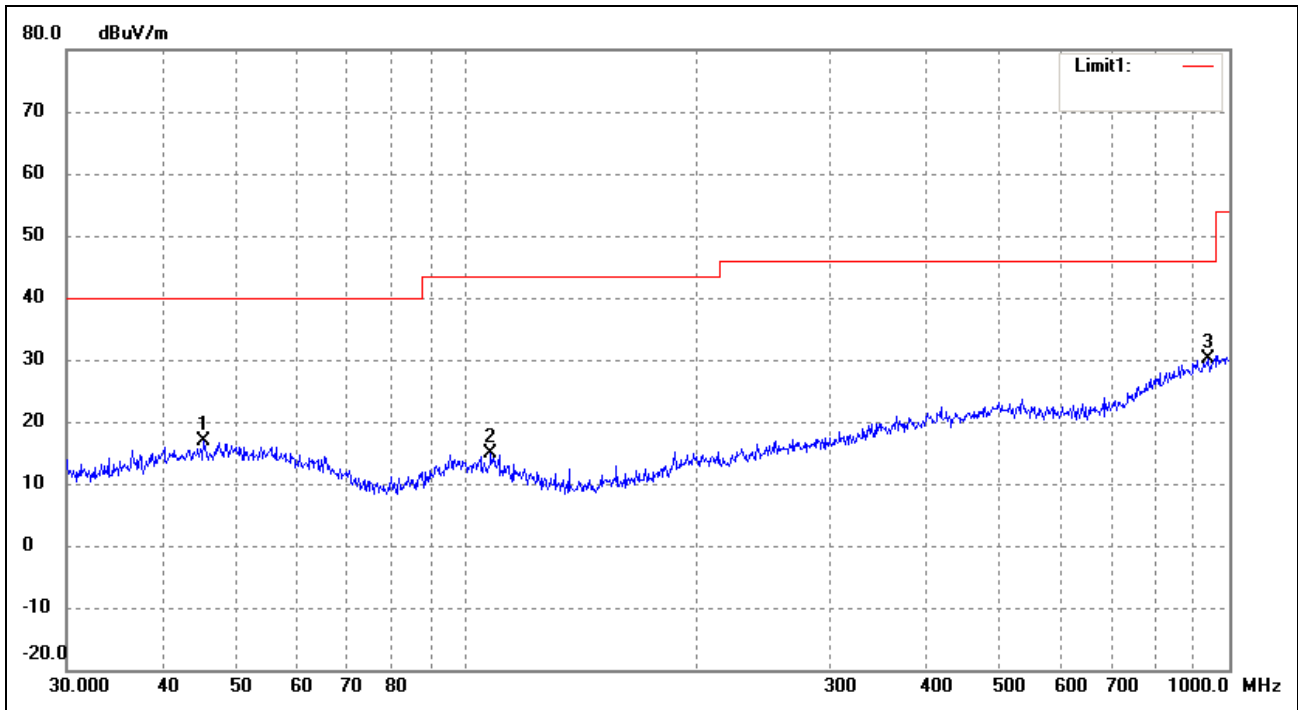


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.7662	36.81	-9.33	27.48	40.00	-12.52	270	100	peak
2	45.6948	36.11	-7.46	28.65	40.00	-11.35	120	100	peak
3	92.4624	33.80	-10.69	23.11	43.50	-20.39	360	100	peak

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Mobile Phone*  
 Tested Model: *Beat*  
 Operating Condition: *802.11n-HT40 Transmitting Low Channel-2422MHz*  
 Comment: *Battery: DC3.7V*

Test Specification: *Horizontal*

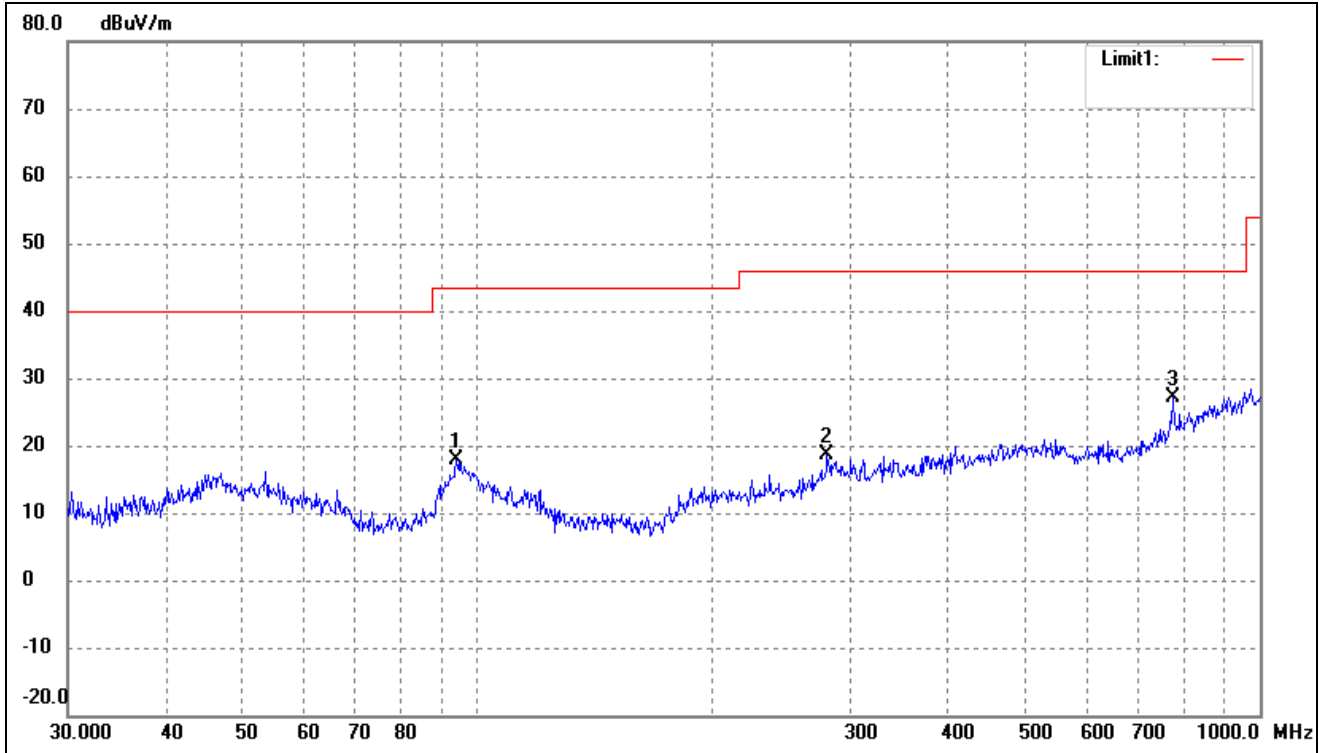

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	94.0979	28.16	-10.38	17.78	43.50	-25.72	260	100	peak
2	280.0238	25.24	-6.69	18.55	46.00	-27.45	120	200	peak
3	774.1584	25.29	1.85	27.14	46.00	-18.86	289	200	peak

Test Specification: Vertical

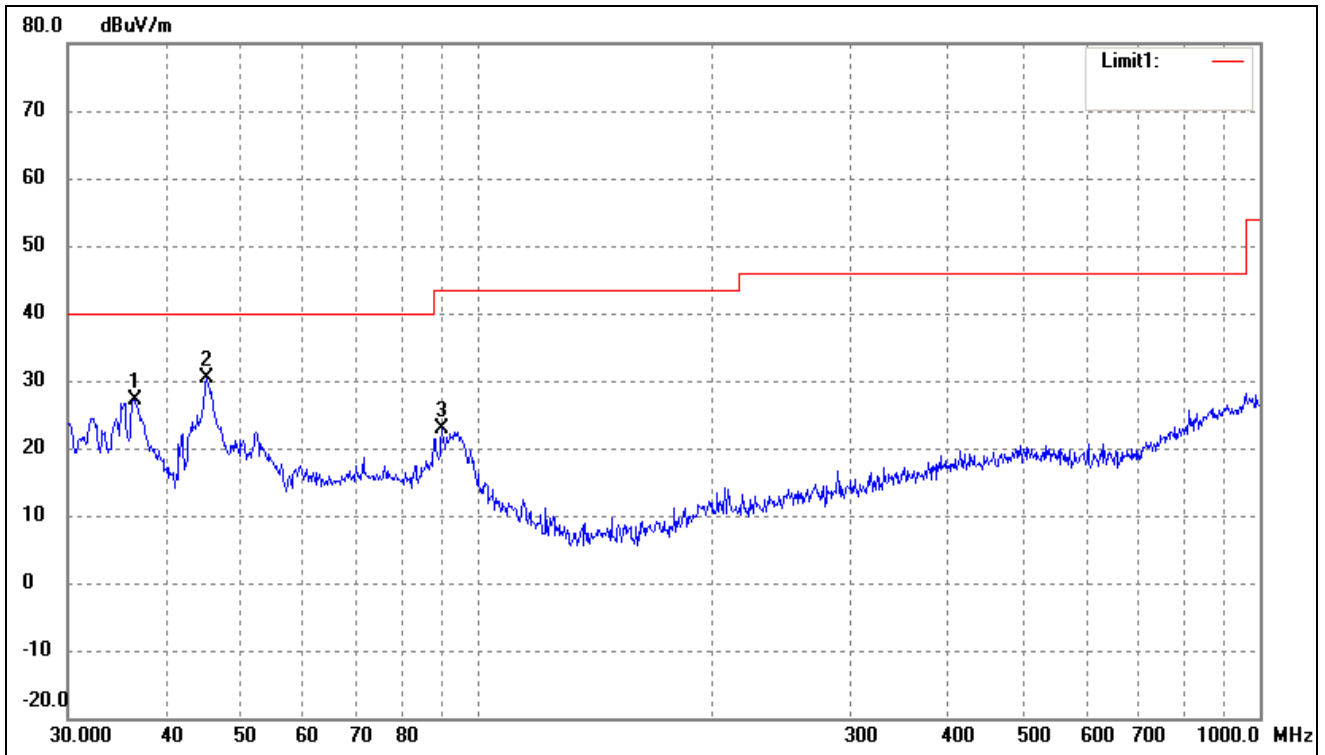


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.5092	36.63	-9.46	27.17	40.00	-12.83	130	100	peak
2	45.0583	37.88	-7.47	30.41	40.00	-9.59	120	100	peak
3	90.2205	33.90	-11.13	22.77	43.50	-20.73	360	100	peak



Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

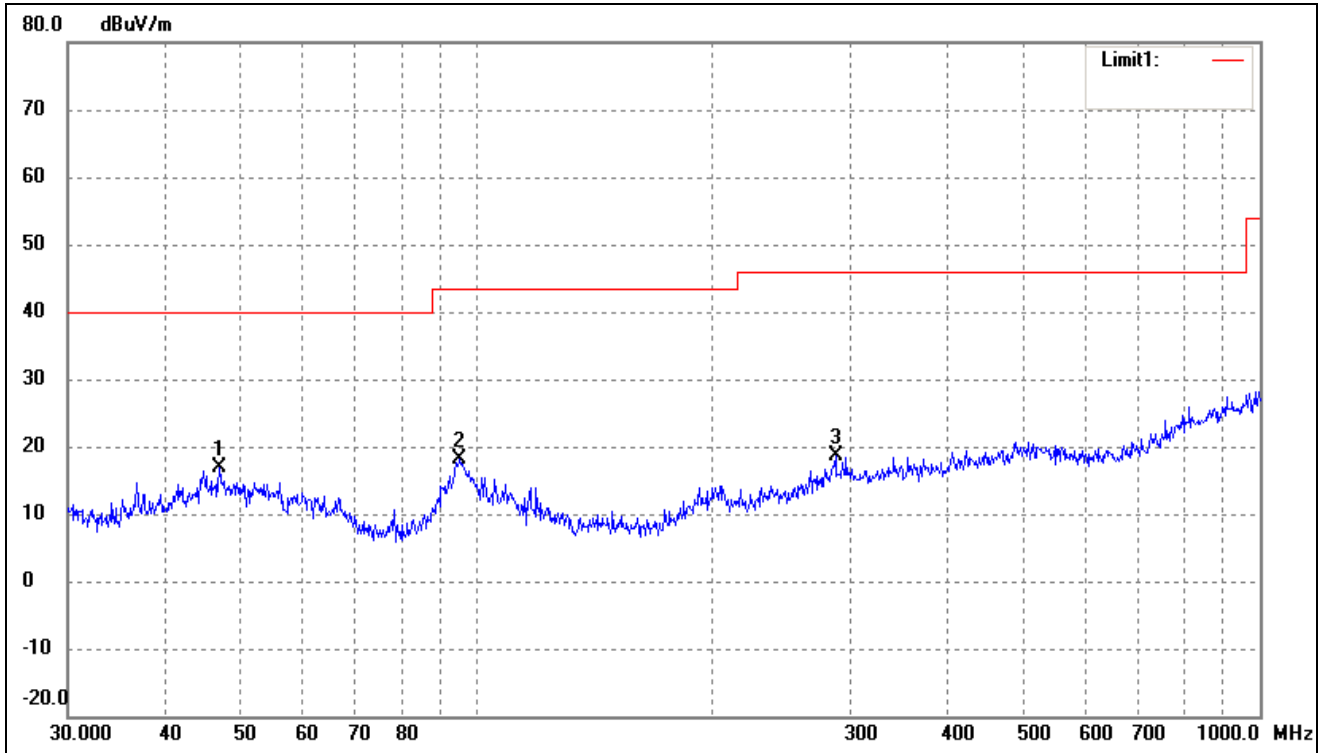

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.8303	24.43	-7.45	16.98	40.00	-23.02	274	100	peak
2	95.0930	28.21	-10.19	18.02	43.50	-25.48	130	100	peak
3	286.9823	25.22	-6.51	18.71	46.00	-27.29	120	100	peak

Test Specification: Vertical

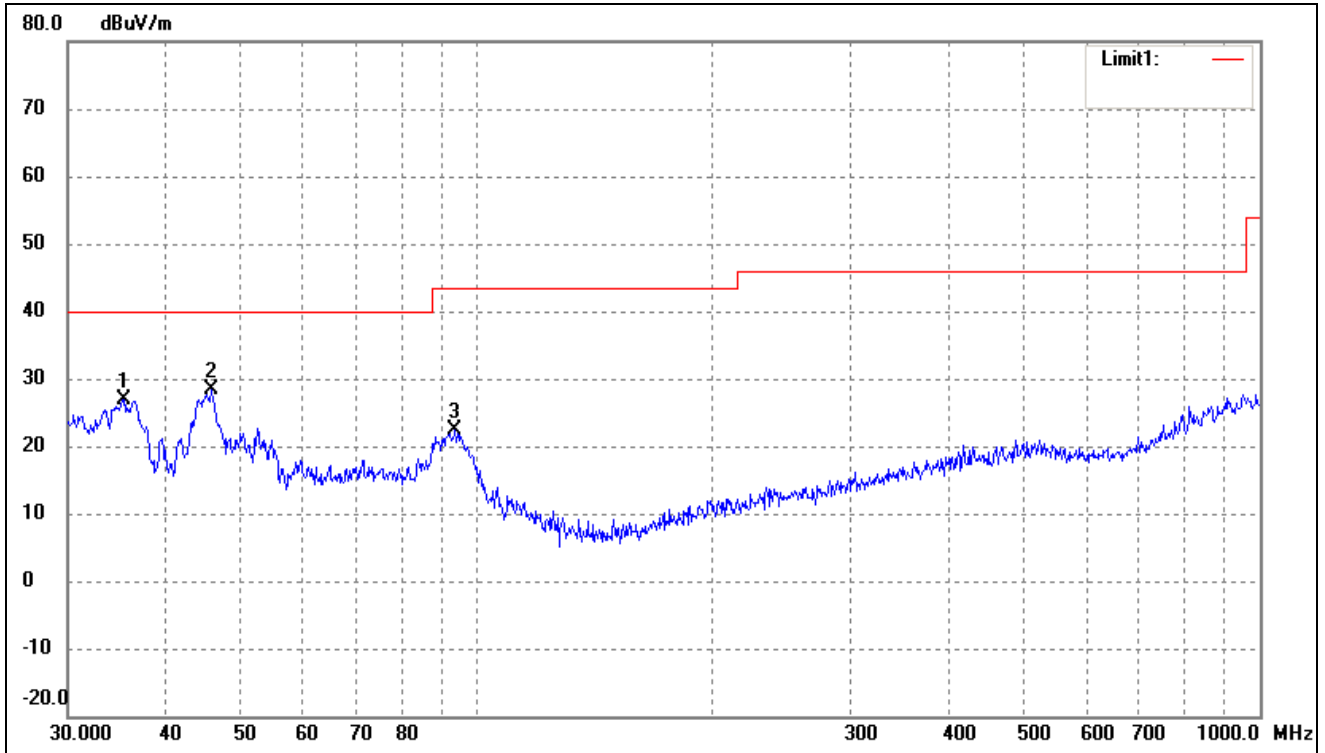


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	35.3750	36.91	-9.92	26.99	40.00	-13.01	360	100	peak
2	45.6948	35.89	-7.46	28.43	40.00	-11.57	110	100	peak
3	93.7685	32.83	-10.44	22.39	43.50	-21.11	120	100	peak

Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

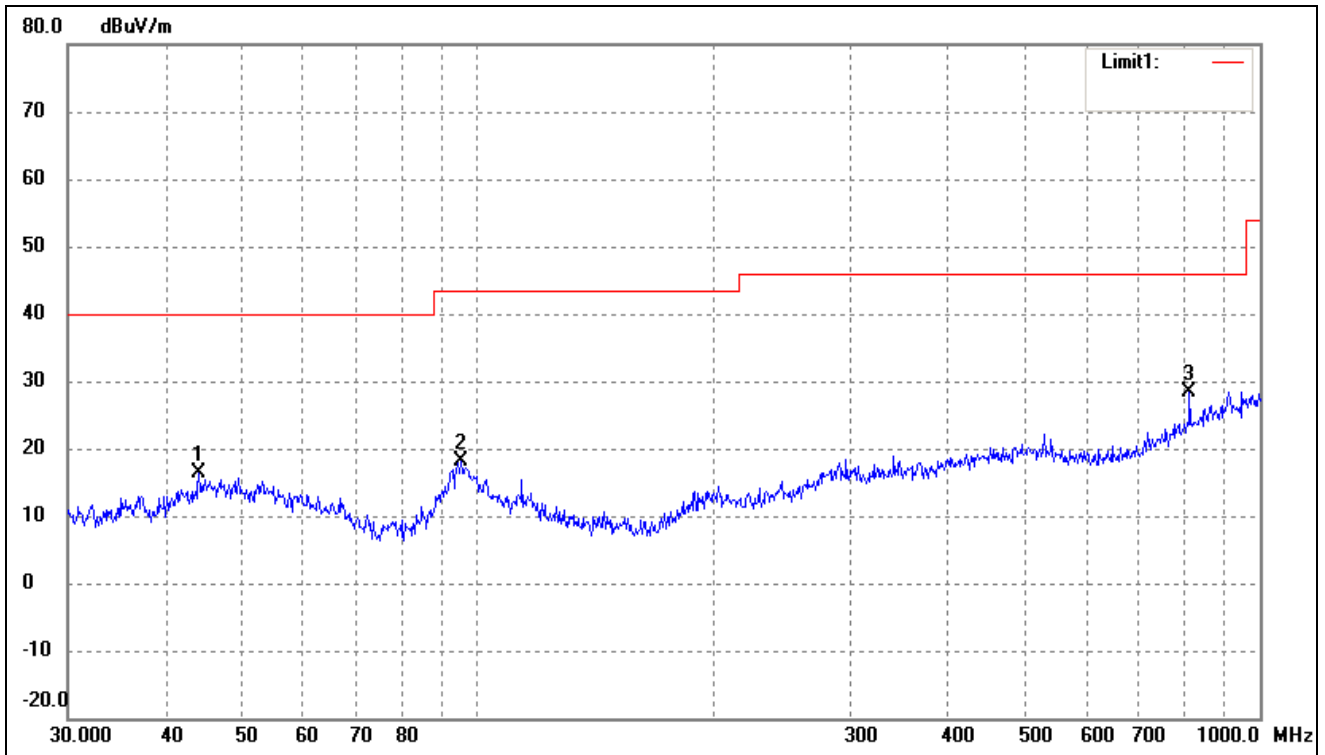

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	44.1202	23.91	-7.65	16.26	40.00	-23.74	360	100	peak
2	95.4270	28.22	-10.14	18.08	43.50	-25.42	138	100	peak
3	813.1116	25.28	3.03	28.31	46.00	-17.69	180	200	peak

Test Specification: Vertical

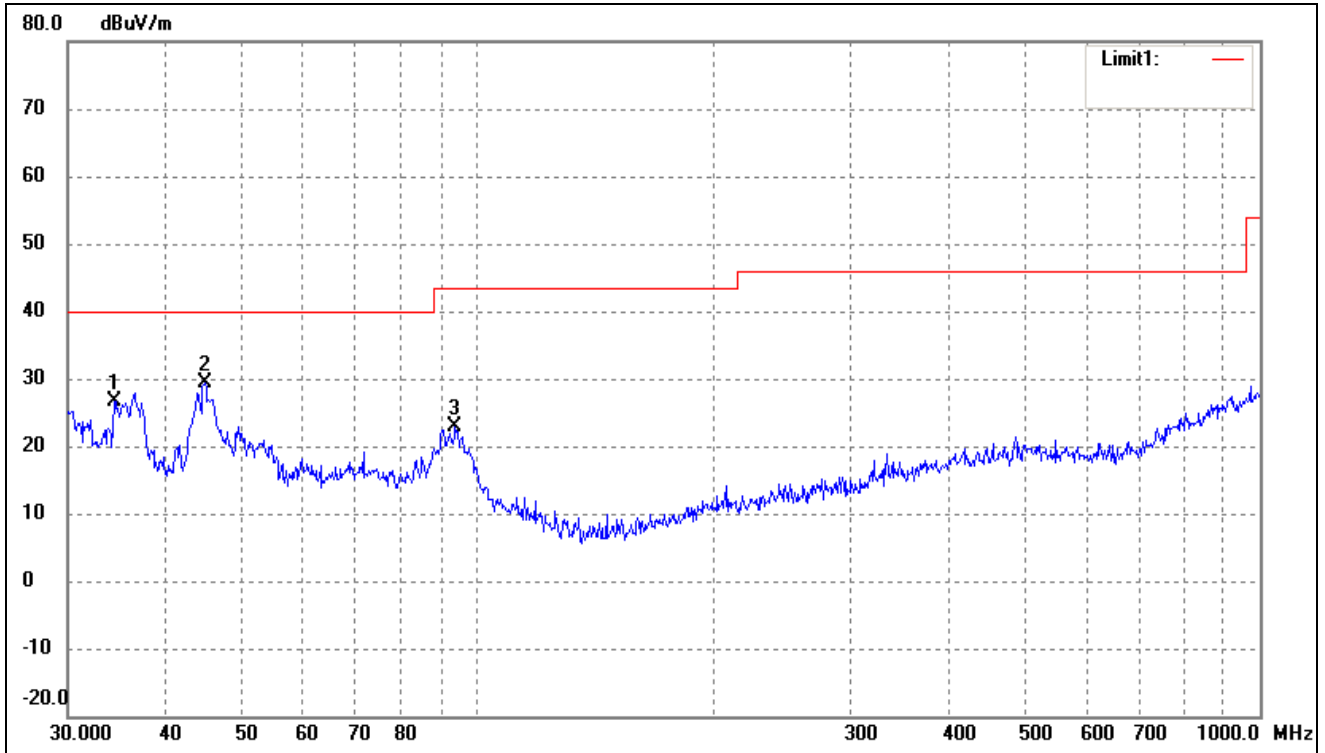

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.3964	36.91	-10.19	26.72	40.00	-13.28	270	100	peak
2	44.9006	36.78	-7.49	29.29	40.00	-10.71	120	100	peak
3	93.7685	33.20	-10.44	22.76	43.50	-20.74	360	100	peak

*Spurious Emissions Above 1GHz*

*Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	59.24	0.57	59.81	74.00	-14.19	H	PK
4824.000	44.84	0.57	45.41	54.00	-8.59	H	AV
7236.000	35.01	3.69	38.70	74.00	-35.30	H	PK
7236.000	23.58	3.69	27.27	54.00	-26.73	H	AV
4824.000	50.85	0.57	51.42	74.00	-22.58	V	PK
4824.000	37.17	0.57	37.74	54.00	-16.26	V	AV
7236.000	34.80	3.69	38.49	74.00	-35.51	V	PK
7236.000	23.41	3.69	27.10	54.00	-26.90	V	AV
Middle Channel-2437MHz							
4874.000	57.35	0.66	58.01	74.00	-15.99	H	PK
4874.000	42.77	0.66	43.43	54.00	-10.57	H	AV
7311.000	37.61	3.76	41.37	74.00	-32.63	H	PK
7311.000	25.87	3.76	29.63	54.00	-24.37	H	AV
4874.000	51.19	0.66	51.85	74.00	-22.15	V	PK
4874.000	37.61	0.66	38.27	54.00	-15.73	V	AV
7311.000	38.83	3.76	42.59	74.00	-31.41	V	PK
7311.000	25.84	3.76	29.60	54.00	-24.40	V	AV
High Channel-2462MHz							
4924.000	56.32	0.74	57.06	74.00	-16.94	H	PK
4924.000	42.94	0.74	43.68	54.00	-10.32	H	AV
7386.000	37.91	3.83	41.74	74.00	-32.26	H	PK
7386.000	27.26	3.83	31.09	54.00	-22.91	H	AV
4924.000	53.07	0.74	53.81	74.00	-20.19	V	PK
4924.000	39.42	0.74	40.16	54.00	-13.84	V	AV
7386.000	38.69	3.83	42.52	74.00	-31.48	V	PK
7386.000	27.20	3.83	31.03	54.00	-22.97	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBUV/m)	dB/m	(dBUV/m)	(dBUV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.00	0.57	54.57	74.00	-19.43	H	PK
4824.000	47.78	0.57	48.35	54.00	-5.65	H	AV
7236.000	35.17	3.69	38.86	74.00	-35.14	H	PK
7236.000	23.82	3.69	27.51	54.00	-26.49	H	AV
4824.000	42.22	0.57	42.79	74.00	-31.21	V	PK
4824.000	33.11	0.57	33.68	54.00	-20.32	V	AV
7236.000	35.08	3.69	38.77	74.00	-35.23	V	PK
7236.000	23.89	3.69	27.58	54.00	-26.42	V	AV
Middle Channel-2437MHz							
4874.000	53.19	0.66	53.85	74.00	-20.15	H	PK
4874.000	46.35	0.66	47.01	54.00	-6.99	H	AV
7311.000	37.62	3.76	41.38	74.00	-32.62	H	PK
7311.000	26.04	3.76	29.80	54.00	-24.20	H	AV
4874.000	43.36	0.66	44.02	74.00	-29.98	V	PK
4874.000	32.19	0.66	32.85	54.00	-21.15	V	AV
7311.000	37.03	3.76	40.79	74.00	-33.21	V	PK
7311.000	26.65	3.76	30.41	54.00	-23.59	V	AV
High Channel-2462MHz							
4924.000	55.79	0.74	56.53	74.00	-17.47	H	PK
4924.000	33.00	0.74	33.74	54.00	-20.26	H	AV
7386.000	37.86	3.83	41.69	74.00	-32.31	H	PK
7386.000	27.21	3.83	31.04	54.00	-22.96	H	AV
4924.000	45.15	0.74	45.89	74.00	-28.11	V	PK
4924.000	33.60	0.74	34.34	54.00	-19.66	V	AV
7386.000	38.93	3.83	42.76	74.00	-31.24	V	PK
7386.000	27.12	3.83	30.95	54.00	-23.05	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.85	0.57	56.42	74.00	-17.58	H	PK
4824.000	32.67	0.57	33.24	54.00	-20.76	H	AV
7236.000	34.49	3.69	38.18	74.00	-35.82	H	PK
7236.000	23.28	3.69	26.97	54.00	-27.03	H	AV
4824.000	43.03	0.57	43.60	74.00	-30.40	V	PK
4824.000	31.74	0.57	32.31	54.00	-21.69	V	AV
7236.000	34.59	3.69	38.28	74.00	-35.72	V	PK
7236.000	23.31	3.69	27.00	54.00	-27.00	V	AV
Middle Channel-2437MHz							
4874.000	53.08	0.66	53.74	74.00	-20.26	H	PK
4874.000	31.66	0.66	32.32	54.00	-21.68	H	AV
7311.000	36.80	3.76	40.56	74.00	-33.44	H	PK
7311.000	26.16	3.76	29.92	54.00	-24.08	H	AV
4874.000	44.14	0.66	44.80	74.00	-29.20	V	PK
4874.000	32.41	0.66	33.07	54.00	-20.93	V	AV
7311.000	37.59	3.76	41.35	74.00	-32.65	V	PK
7311.000	25.48	3.76	29.24	54.00	-24.76	V	AV
High Channel-2462MHz							
4924.000	53.25	0.74	53.99	74.00	-20.01	H	PK
4924.000	31.69	0.74	32.43	54.00	-21.57	H	AV
7386.000	38.35	3.83	42.18	74.00	-31.82	H	PK
7386.000	27.19	3.83	31.02	54.00	-22.98	H	AV
4924.000	43.52	0.74	44.26	74.00	-29.74	V	PK
4924.000	31.12	0.74	31.86	54.00	-22.14	V	AV
7386.000	38.66	3.83	42.49	74.00	-31.51	V	PK
7386.000	26.99	3.83	30.82	54.00	-23.18	V	AV

Test Mode: 802.11n-HT40

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.000	53.25	0.60	53.85	74.00	-20.15	H	PK
4824.000	38.25	0.60	38.85	54.00	-15.15	H	AV
7266.000	46.48	3.72	50.20	74.00	-23.80	H	PK
7266.000	32.56	3.72	36.28	54.00	-17.72	H	AV
4844.000	54.22	0.60	54.82	74.00	-19.18	V	PK
4824.000	39.42	0.60	40.02	54.00	-13.98	V	AV
7266.000	48.81	3.72	52.53	74.00	-21.47	V	PK
7266.000	34.78	3.72	38.50	54.00	-15.50	V	AV
Middle Channel-2437MHz							
4874.000	52.53	0.66	53.19	74.00	-20.81	H	PK
4874.000	37.88	0.66	38.54	54.00	-15.46	H	AV
7311.000	44.88	3.76	48.64	74.00	-25.36	H	PK
7311.000	32.03	3.76	35.79	54.00	-18.21	H	AV
4874.000	53.74	0.66	54.40	74.00	-19.60	V	PK
4874.000	39.95	0.66	40.61	54.00	-13.39	V	AV
7311.000	45.78	3.76	49.54	74.00	-24.46	V	PK
7311.000	34.00	3.76	37.76	54.00	-16.24	V	AV
High Channel-2452MHz							
4904.000	52.65	0.72	53.37	74.00	-20.63	H	PK
4904.000	39.37	0.72	40.09	54.00	-13.91	H	AV
7356.000	45.63	3.81	49.44	74.00	-24.56	H	PK
7356.000	30.73	3.81	34.54	54.00	-19.46	H	AV
4904.000	54.84	0.72	55.56	74.00	-18.44	V	PK
4904.000	40.83	0.72	41.55	54.00	-12.45	V	AV
7356.000	48.18	3.81	51.99	74.00	-22.01	V	PK
7356.000	35.12	3.81	38.93	54.00	-15.07	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.



## 9. Out of Band Emissions

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23

### 9.3 Test Procedure

According to the KDB 558074D01 v03r02, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r02, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

#### 9.4 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 9.5 Summary of Test Results/Plots

Please refer to the test plots as below.

802.11b-Lowest Bandedge


Vertical (Worst case)

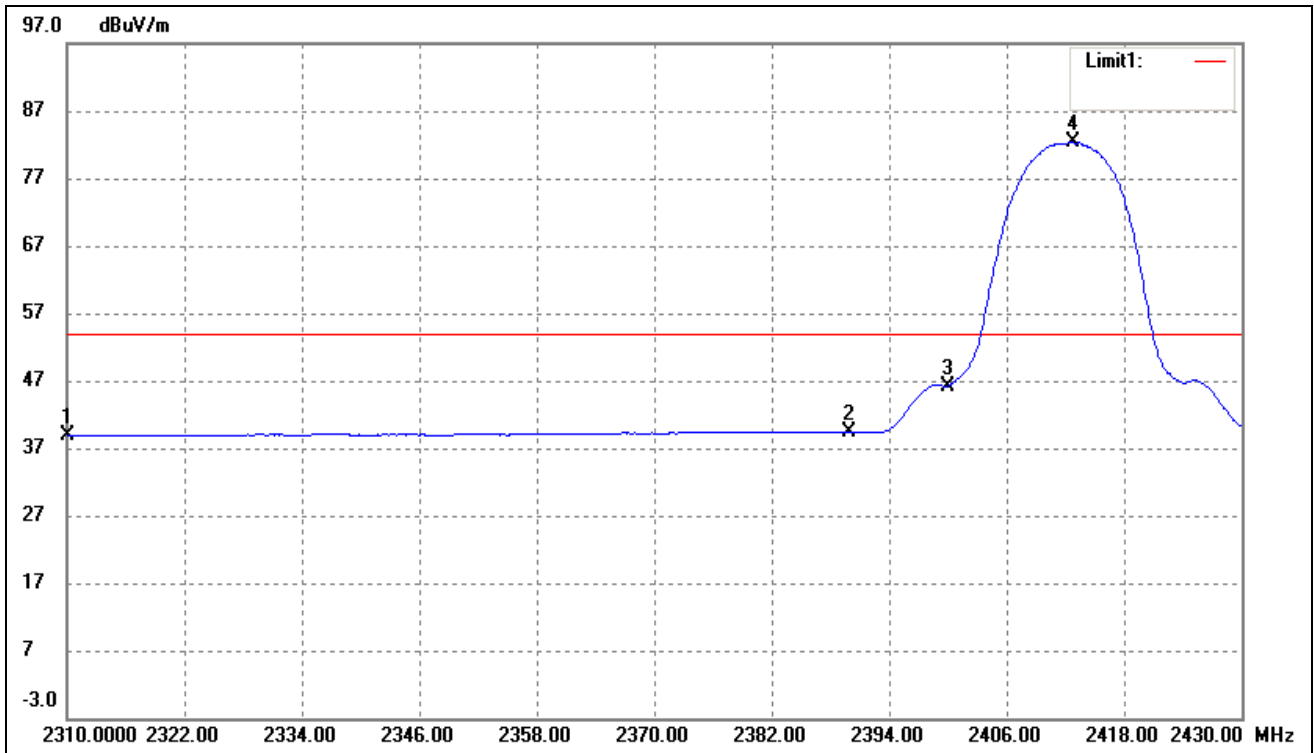

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	22.64	16.34	38.98	54.00	-15.02	Average Detector
	2310.000	35.01	16.34	51.35	74.00	-22.65	Peak Detector
2	2390.000	22.25	17.03	39.28	54.00	-14.72	Average Detector
	2390.000	34.79	17.03	51.82	74.00	-22.18	Peak Detector
3	2400.000	29.09	17.11	46.20	Delta =36.11dBc		Average Detector
4	2412.720	65.11	17.20	82.31			Average Detector

802.11b-Highest Bandedge


Vertical (Worst case)

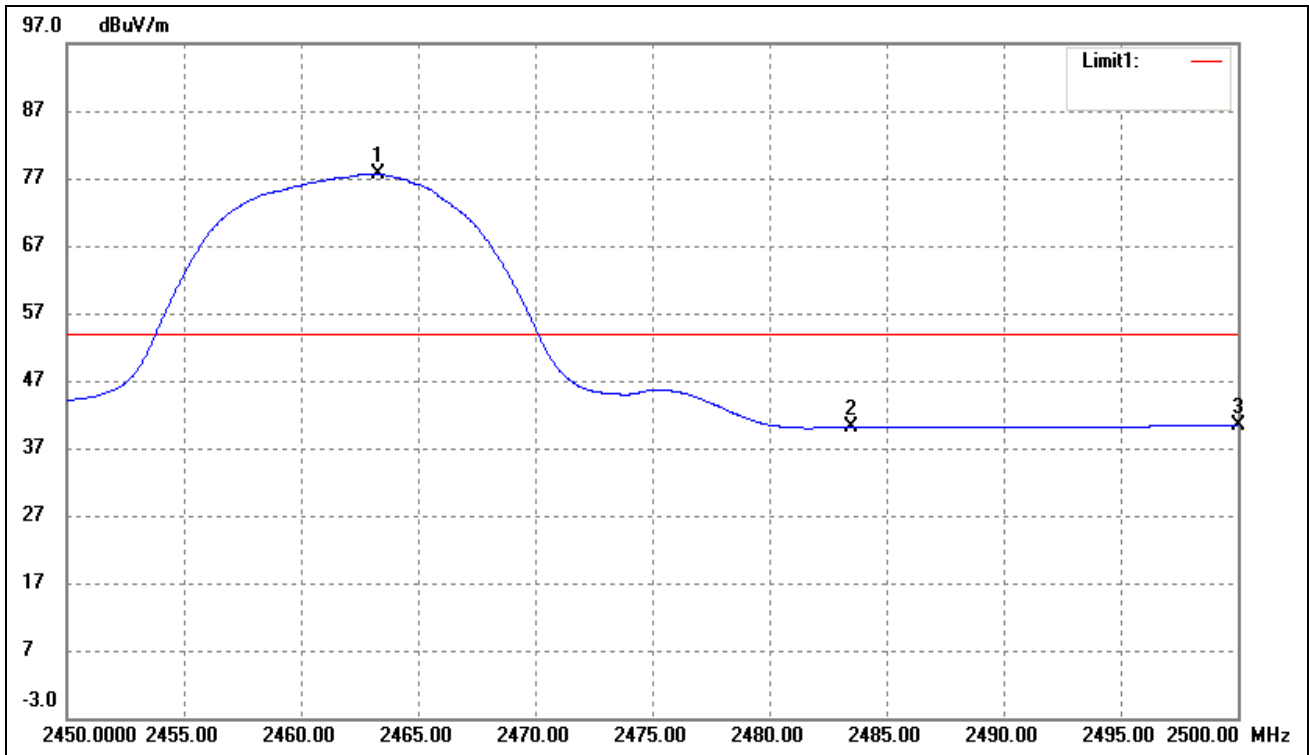

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.300	60.10	17.58	77.68	/	/	Average Detector
	2463.350	68.50	17.58	86.08	/	/	Peak Detector
2	2483.500	Delta = 33.59dBc		44.09	54.00	-9.91	Average Detector
	2483.500			52.49	74.00	-21.51	Peak Detector
3	2500.000	22.44	17.86	40.30	54.00	-13.70	Average Detector
	2500.000	34.13	17.86	51.99	74.00	-22.01	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

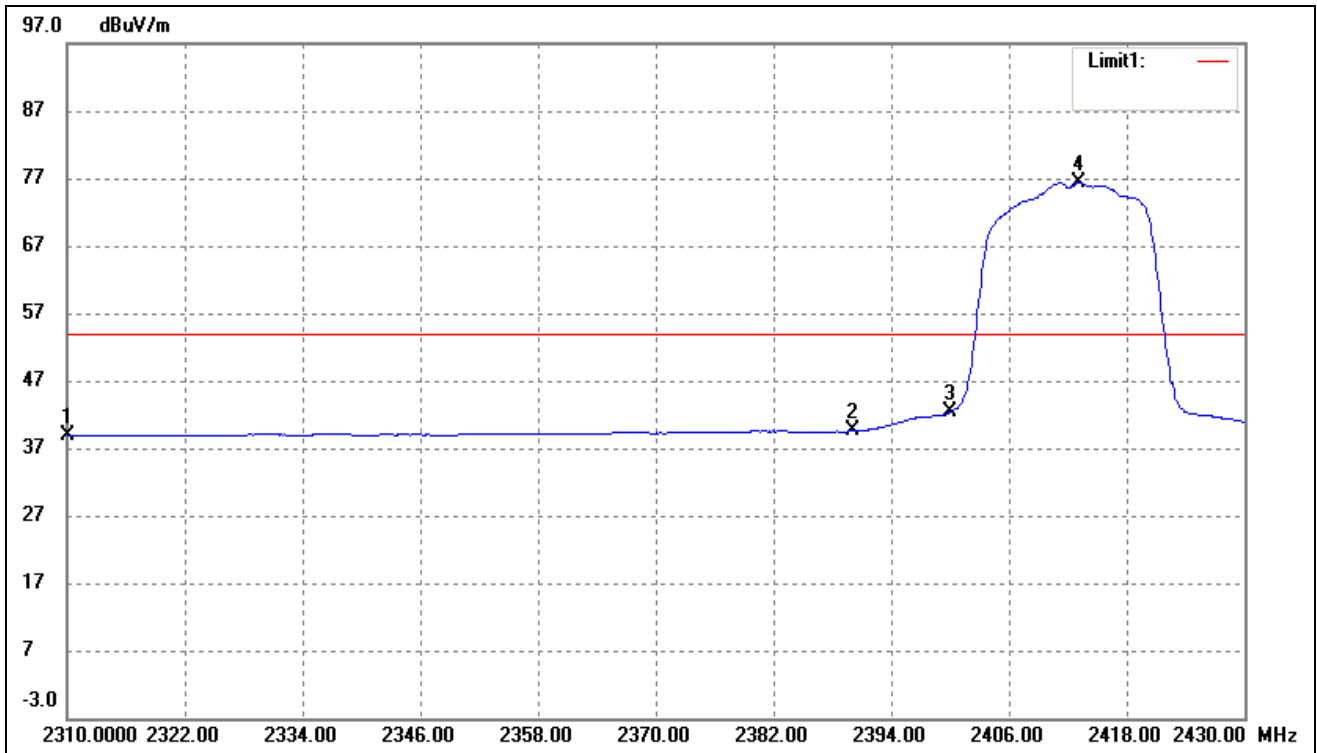

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	22.61	16.34	38.95	54.00	-15.05	Average Detector
		36.01	16.34	52.35	74.00	-21.65	Peak Detector
2	2390.000	22.49	17.03	39.52	54.00	-14.48	Average Detector
		35.04	17.03	52.07	74.00	-21.93	Peak Detector
3	2400.000	25.26	17.11	42.37	Delta =33.97dBc		Average Detector
4	2413.080	59.14	17.20	76.34			Average Detector

802.11g-Highest Bandedge


Vertical (Worst case)

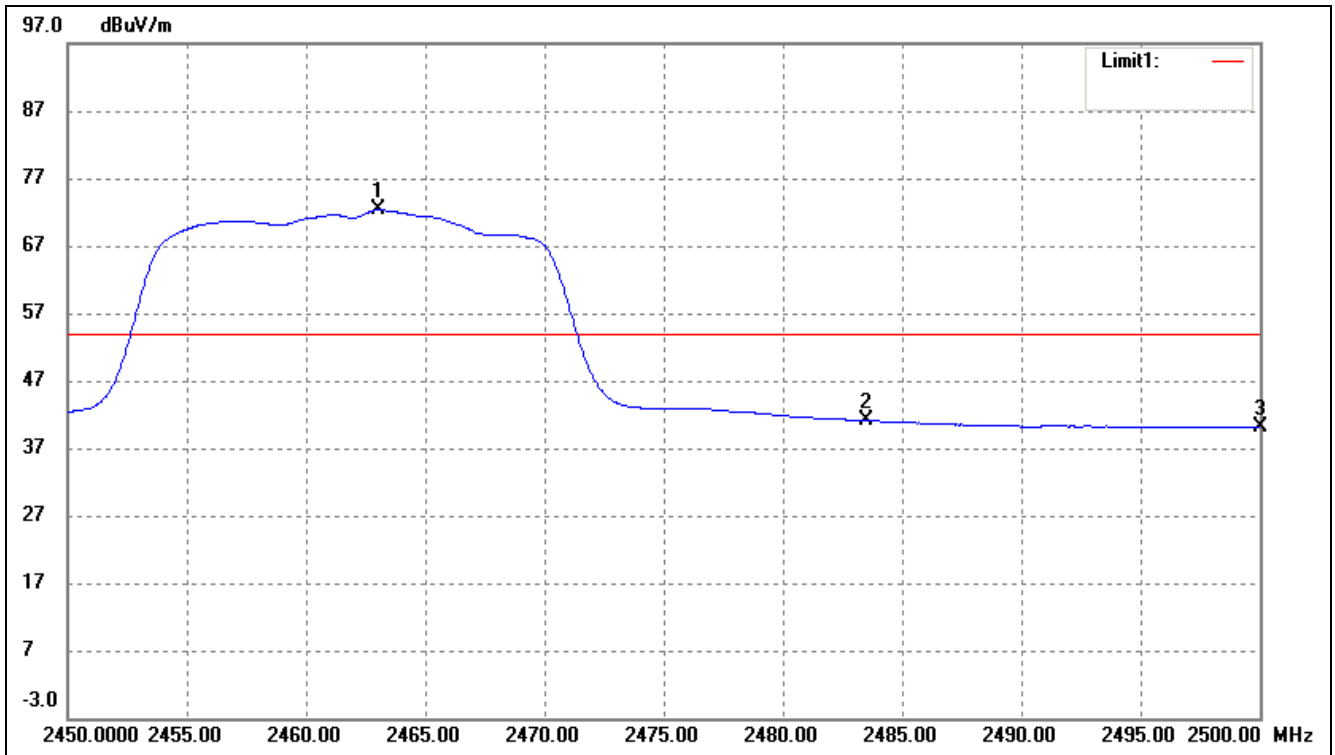

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.050	54.75	17.58	72.33	/	/	Average Detector
	2463.300	65.68	17.58	83.26	/	/	Peak Detector
2	2483.500	Delta = 29.06dBc		43.27	54.00	-10.73	Average Detector
	2483.500			54.20	74.00	-19.80	Peak Detector
3	2500.000	22.33	17.86	40.19	54.00	-13.81	Average Detector
	2500.000	35.56	17.86	53.42	74.00	-20.58	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

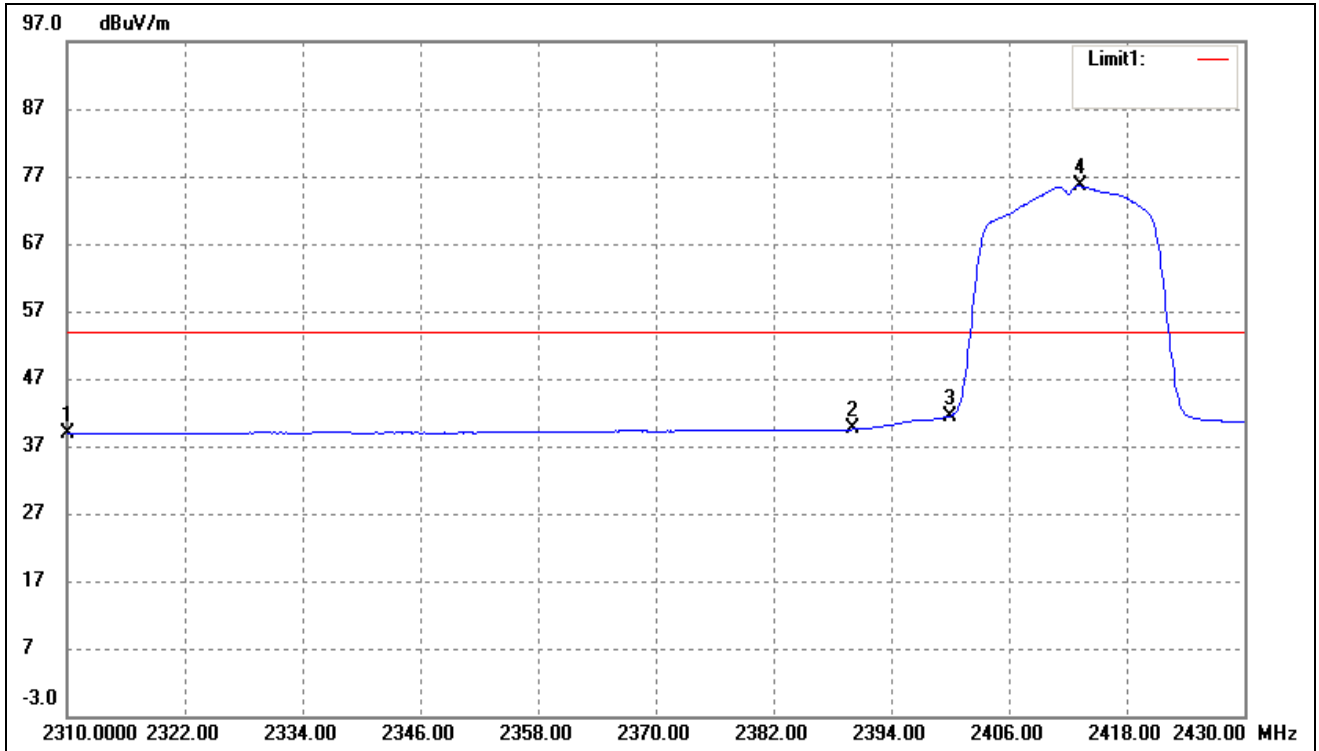

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	22.64	16.34	38.98	54.00	-15.02	Average Detector
	2310.000	33.82	16.34	50.16	74.00	-23.84	Peak Detector
2	2390.000	22.50	17.03	39.53	54.00	-14.47	Average Detector
	2390.000	34.31	17.03	51.34	74.00	-22.66	Peak Detector
3	2400.000	24.39	17.11	41.50	Delta =34.04dBc		Average Detector
4	2413.200	58.33	17.21	75.54			Average Detector

802.11n-HT20-Highest Bandedge

Vertical (Worst case)

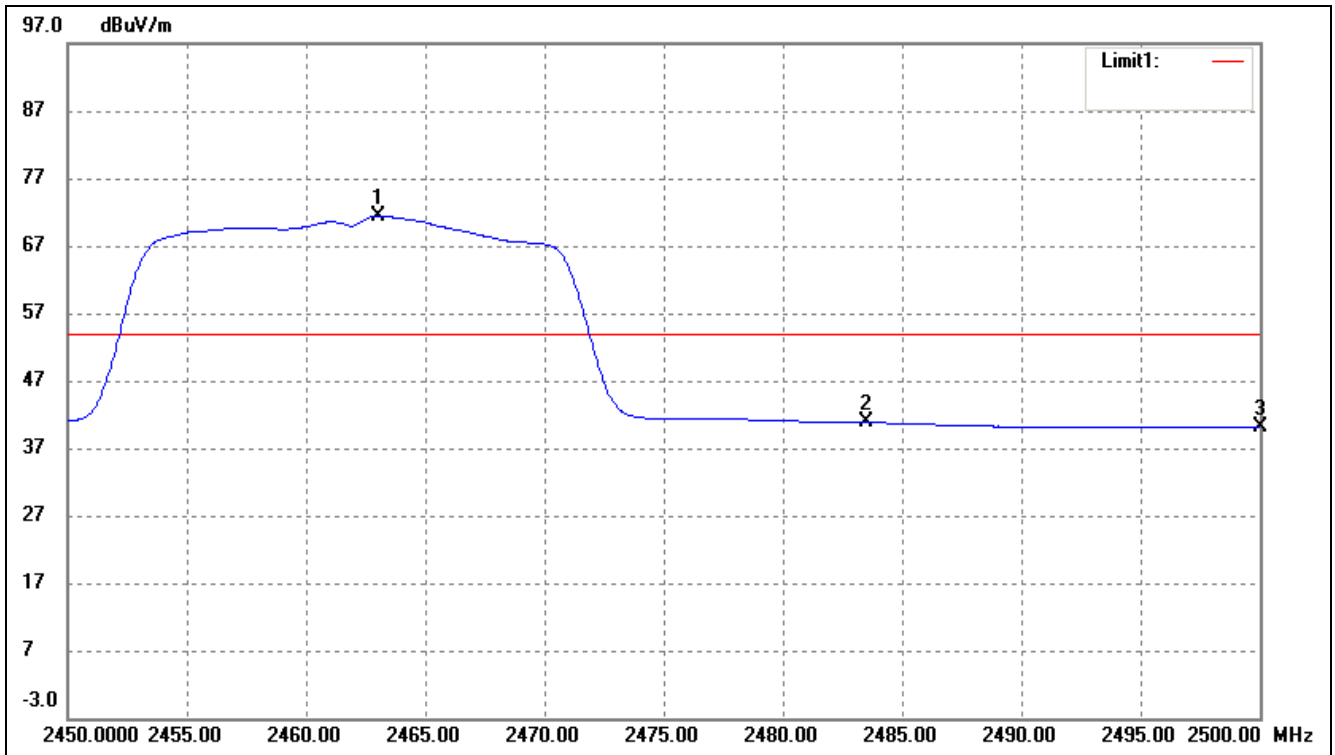


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.000	53.87	17.58	71.45	/	/	Average Detector
	2463.250	64.91	17.58	82.49	/	/	Peak Detector
2	2483.500	Delta = 27.73dBc		43.72	54.00	-10.28	Average Detector
	2483.500			54.76	74.00	-19.24	Peak Detector
3	2500.000	22.36	17.86	40.22	54.00	-13.78	Average Detector
	2500.000	33.95	17.86	51.81	74.00	-22.19	Peak Detector



802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

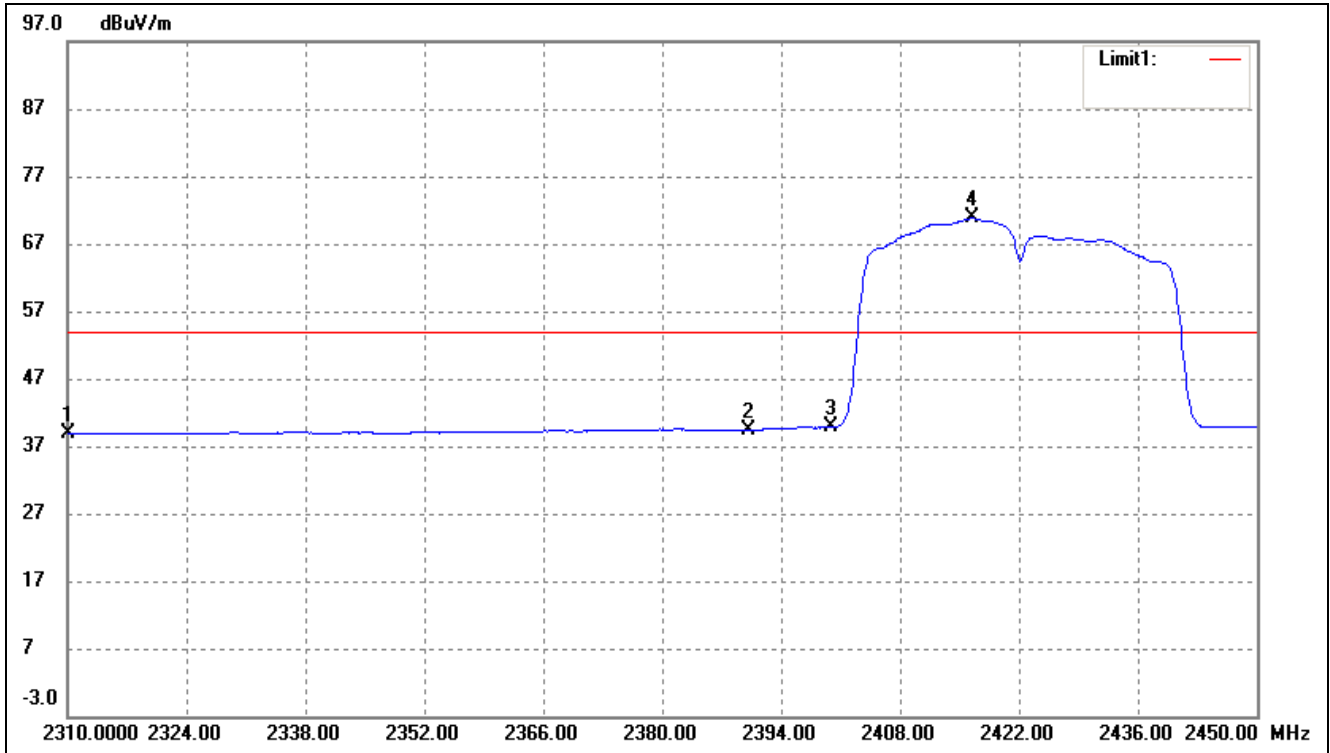

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	22.64	16.34	38.98	54.00	-15.02	Average Detector
		35.59	16.34	51.93	74.00	-22.07	Peak Detector
2	2390.000	22.43	17.03	39.46	54.00	-14.54	Average Detector
		36.72	17.03	53.75	74.00	-20.25	Peak Detector
3	2400.000	22.73	17.11	39.84	Delta =30.95dBc		Average Detector
4	2416.540	53.55	17.24	70.79			Average Detector

802.11n-HT40-Highest Bandedge

Vertical (Worst case)

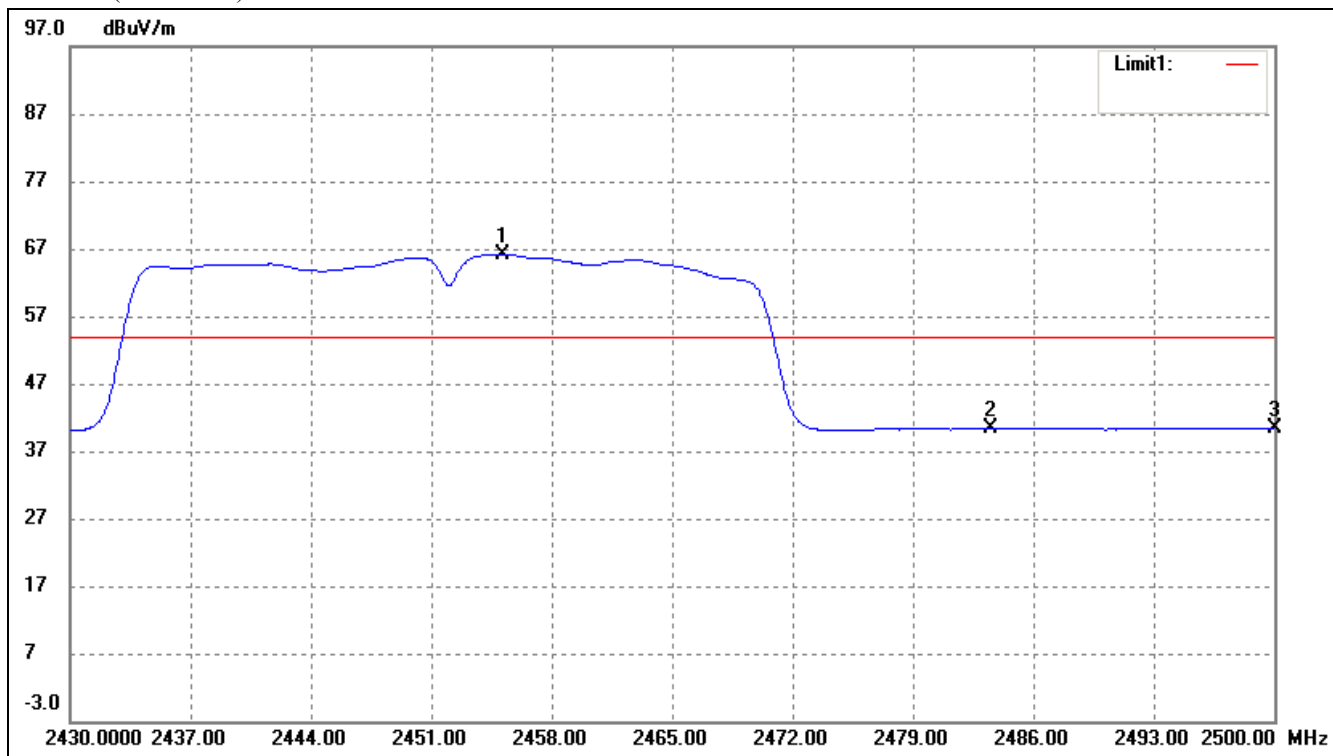

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.130	48.69	17.53	66.22	/	/	Average Detector
	2455.130	60.08	17.53	77.61	/	/	Peak Detector
2	2483.500	Delta = 22.67dBc		43.55	54.00	-10.45	Average Detector
	2483.500			54.94	74.00	-19.06	Peak Detector
3	2500.000	22.46	17.86	40.32	54.00	-13.68	Average Detector
	2500.000	33.48	17.86	51.34	74.00	-22.66	Peak Detector

## 10. Conducted Emissions

### 10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

### 10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27


### 10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 10.4 Basic Test Setup Block Diagram

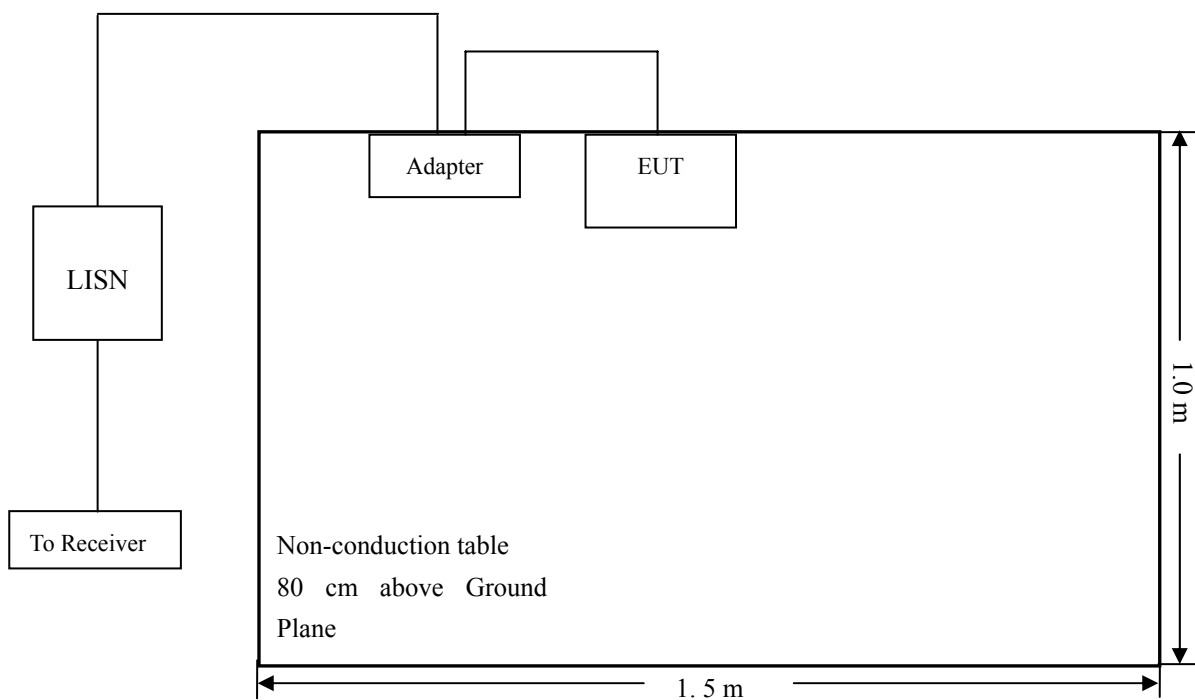

## 10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

## 10.7 Summary of Test Results/Plots

According to the data in section 9.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


**-7.16 dB at 0.1940 MHz in the Line, Peak detector, 0.15-30MHz**

## 10.8 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


EUT: *Mobile Phone*  
 Tested Model: *Beat*  
 Operating Condition: *(WIFI)Transmitting*  
 Comment: *AC 120V/60Hz*

Test Specification: *Neutral*

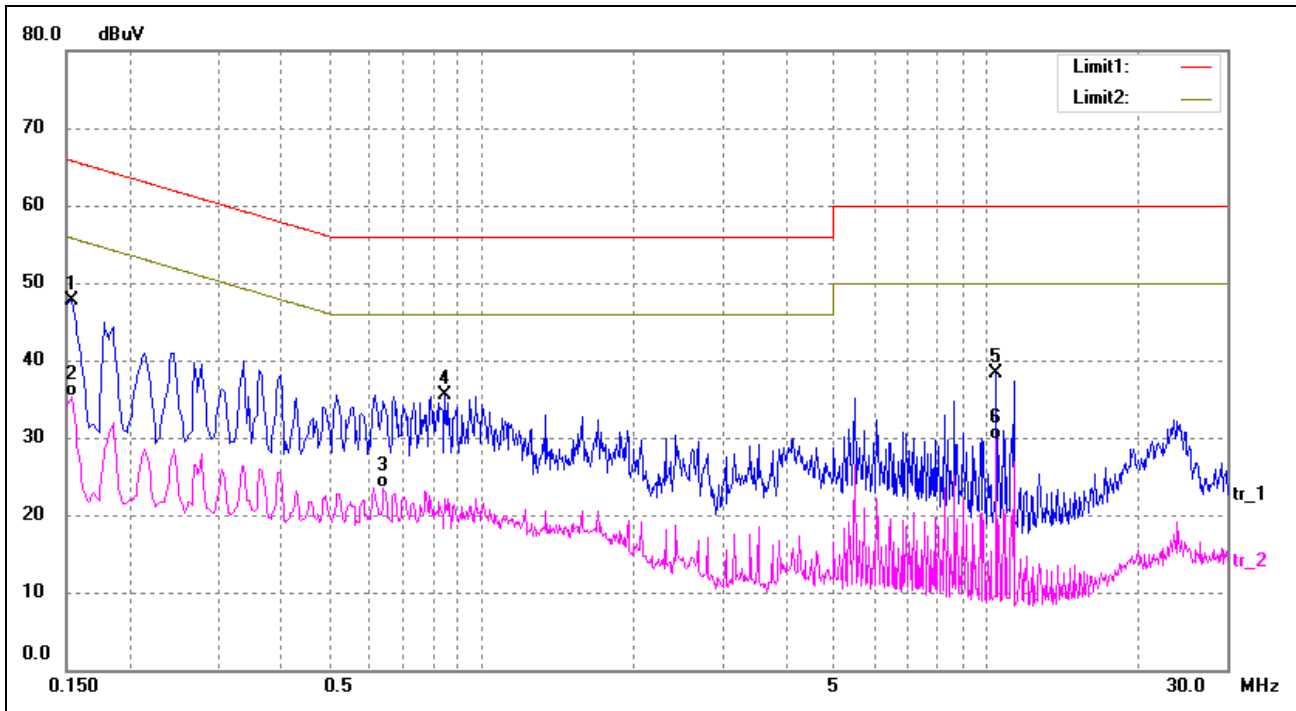

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	43.85	9.50	53.35	65.57	-12.22	peak
2	0.1580	28.70	9.50	38.20	55.57	-17.37	AVG
3	0.1900	27.70	9.50	37.20	54.04	-16.84	AVG
4	0.1940	42.37	9.50	51.87	63.86	-11.99	peak
5	0.7340	33.24	9.73	42.97	56.00	-13.03	peak
6	0.7340	20.30	9.73	30.03	46.00	-15.97	AVG

Test Specification: Line

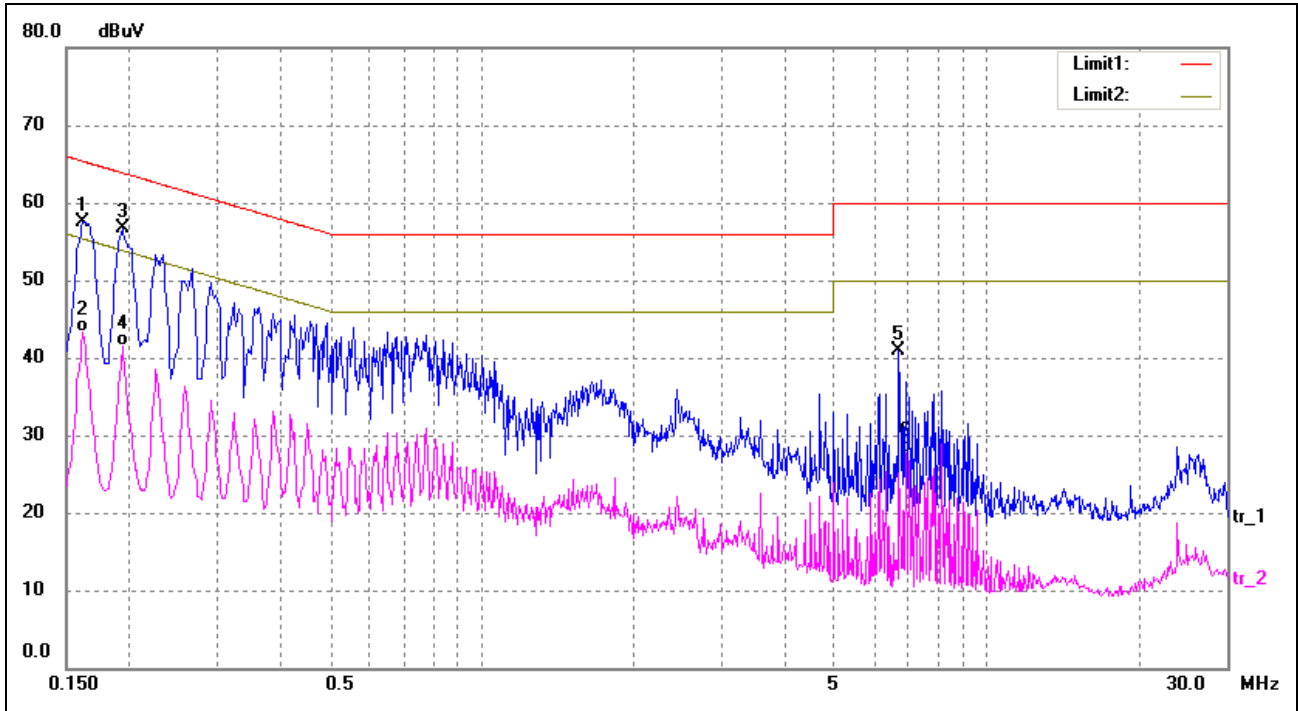

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	48.04	9.50	57.54	65.36	-7.82	peak
2	0.1620	33.72	9.50	43.22	55.36	-12.14	AVG
3	0.1940	47.20	9.50	56.70	63.86	-7.16	peak
4	0.1940	32.04	9.50	41.54	53.86	-12.32	AVG
5	6.7300	30.86	10.00	40.86	60.00	-19.14	peak
6	6.9380	17.80	10.00	27.80	50.00	-22.20	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*