




**FCC Part 15B**  
**Measurement and Test Report**  
**For**  
**Xwireless LLC**

**11426 Rockville pike, Rockville Md**

**FCC ID: 2ADLJPULSE**

<b>Test Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>mobile phone</u>
<b>Tested Model:</b>	<u>Pulse</u>
<b>Report No.:</b>	<u>STR15018270I-5</u>
<b>Tested Date:</b>	<u>2015-01-28 to 2015-02-07</u>
<b>Issued Date:</b>	<u>2015-02-07</u>
<b>Tested By:</b>	<u>Vigoss Liang / Engineer</u> 
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> 
<b>Prepared By:</b>	<b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....3**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    1.2 TEST STANDARDS.....4

    1.3 TEST METHODOLOGY .....4

    1.4 TEST FACILITY .....4

    1.5 EUT SETUP AND OPERATION MODE .....5

**2. SUMMARY OF TEST RESULTS .....6**

**3. CONDUCTED EMISSIONS .....7**

    3.1 MEASUREMENT UNCERTAINTY .....7

    3.2 TEST EQUIPMENT LIST AND DETAILS .....7

    3.3 TEST PROCEDURE.....7

    3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7

    3.5 ENVIRONMENTAL CONDITIONS .....8

    3.6 SUMMARY OF TEST RESULTS/PLOTS .....8

    3.7V CONDUCTED EMISSIONS TEST DATA .....8

**4. RADIATED EMISSIONS.....11**

    4.1 MEASUREMENT UNCERTAINTY .....11

    4.2 TEST EQUIPMENT LIST AND DETAILS .....11

    4.3 TEST PROCEDURE.....11

    4.4 TEST RECEIVER SETUP .....12

    4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....12

    4.6 ENVIRONMENTAL CONDITIONS .....12

    4.7 SUMMARY OF TEST RESULTS/PLOTS .....13

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Xwireless LLC  
 Address of applicant: 11426 Rockville pike, Rockville Md

Manufacturer: Xwireless LLC  
 Address of manufacturer: 11426 Rockville pike, Rockville Md

General Description of EUT	
Product Name:	mobile phone
Trade Name:	/
Model No.:	Pulse
Hardware Version:	V350_Mainbord_V1.1
Software Version:	Pulse20150205
IMEI:	864505000231848
Battery:	EB-615268VU/1000mAh
Device Category:	Portable Device
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	AC120V/60Hz; Battery: DC 3.7V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	Pulse
	INPUT: AC100-260V 50/6Hz; OUTPUT: DC5V-500mA
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	1.3GHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the Xwireless LLC in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

### Test Mode List:

Test Mode	Description	Remark
TM1	Charging + Playing	With earphone
TM2	Charging + Camera	/
TM3	Downloading	Connected to PC

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone Cable	1.2	Unshielded	Without Core
USB Cable	0.8	Shielded	Without Core

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	/

### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


#### 3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

#### 3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.4 Basic Test Setup Block Diagram

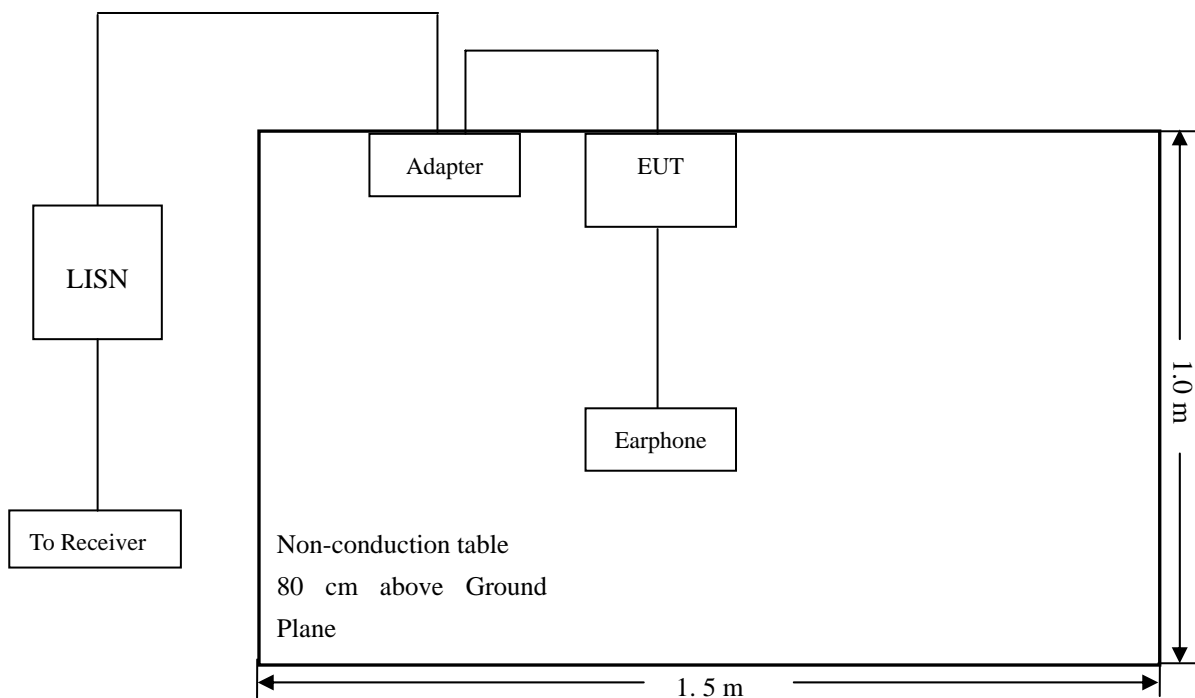

### 3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.6 Summary of Test Results/Plots

According to the data in section 3.7V, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-5.94 dB at 0.1860 MHz in the Line, Peak detector, 0.15-30MHz**


### 3.7V Conducted Emissions Test Data



**Plot of Conducted Emissions Test Data**


EUT: *mobile phone*  
 Tested Model: *Pulse*  
 Operating Condition: *TM1*  
 Comment: *AC 120V/60Hz*

Test Specification: *Neutral*

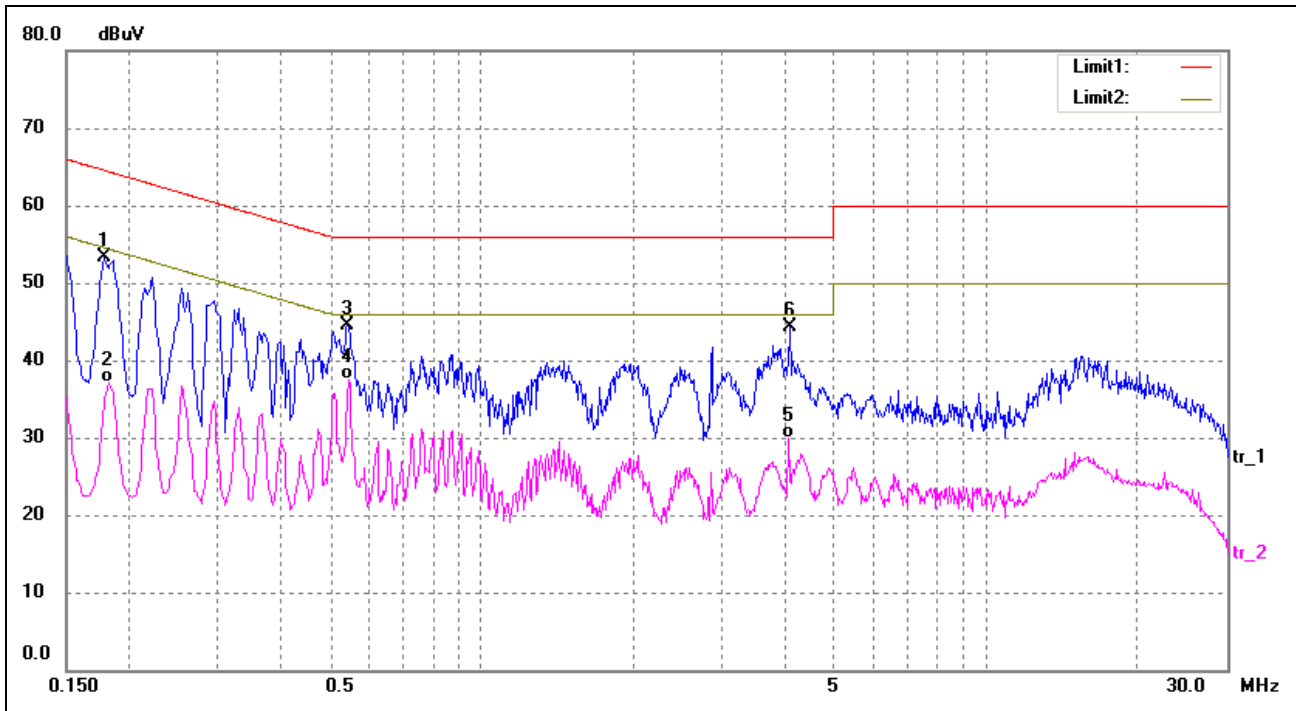

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	43.72	9.50	53.22	64.58	-11.36	peak
2	0.1820	27.59	9.50	37.09	54.39	-17.30	AVG
3	0.5420	35.03	9.54	44.57	56.00	-11.43	peak
4	0.5460	27.93	9.55	37.48	46.00	-8.52	AVG
5	4.0700	19.86	10.00	29.86	46.00	-16.14	AVG
6	4.0820	34.28	10.00	44.28	56.00	-11.72	peak

Test Specification: Line

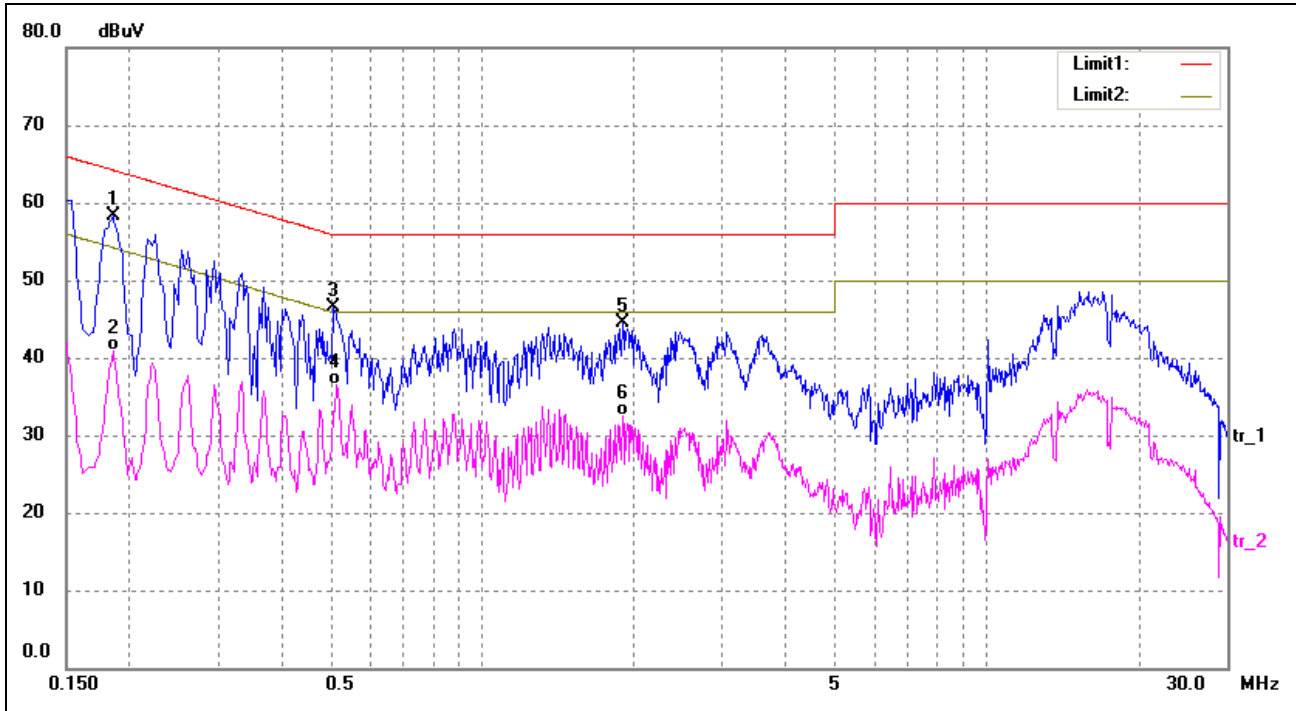

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	48.77	9.50	58.27	64.21	-5.94	peak
2	0.1860	31.37	9.50	40.87	54.21	-13.34	AVG
3	0.5100	37.06	9.51	46.57	56.00	-9.43	peak
4	0.5140	27.03	9.51	36.54	46.00	-9.46	AVG
5	1.9060	34.56	10.00	44.56	56.00	-11.44	peak
6	1.9060	22.57	10.00	32.57	46.00	-13.43	AVG

## 4. Radiated Emissions

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23


### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

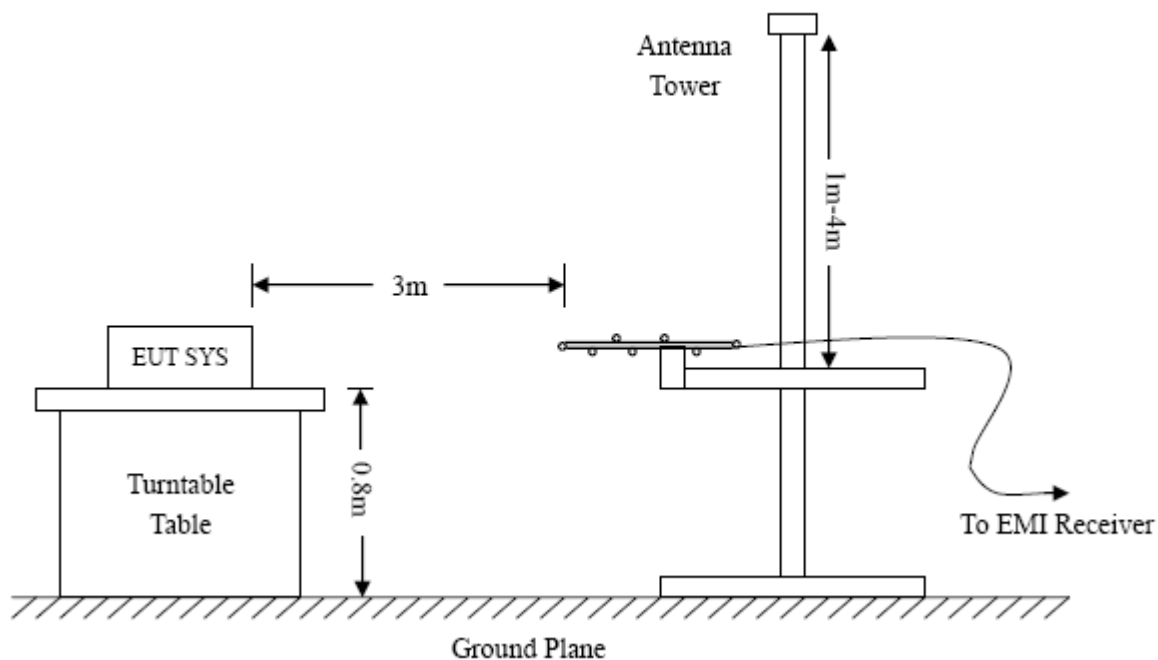

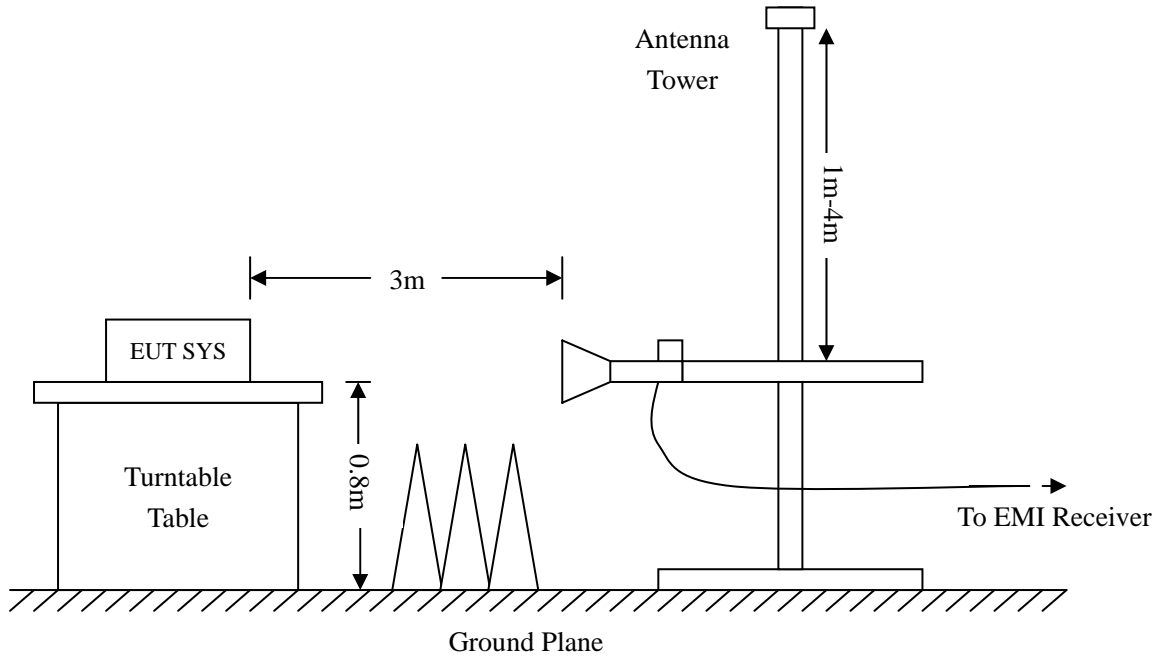

#### 4.4 Test Receiver Setup

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

#### 4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


### 4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-2.14 dB at 807.4290 MHz in the **Horizontal** polarization, **TM2** mode, **9 kHz to 1 GHz, 3Meters****


#### Plot of Radiated Emissions Test Data

EUT: *mobile phone*  
 Tested Model: *Pulse*  
 Operating Condition: *TM1*  
 Comment: *AC 120V/60Hz*  
  
 Test Specification: *Horizontal*

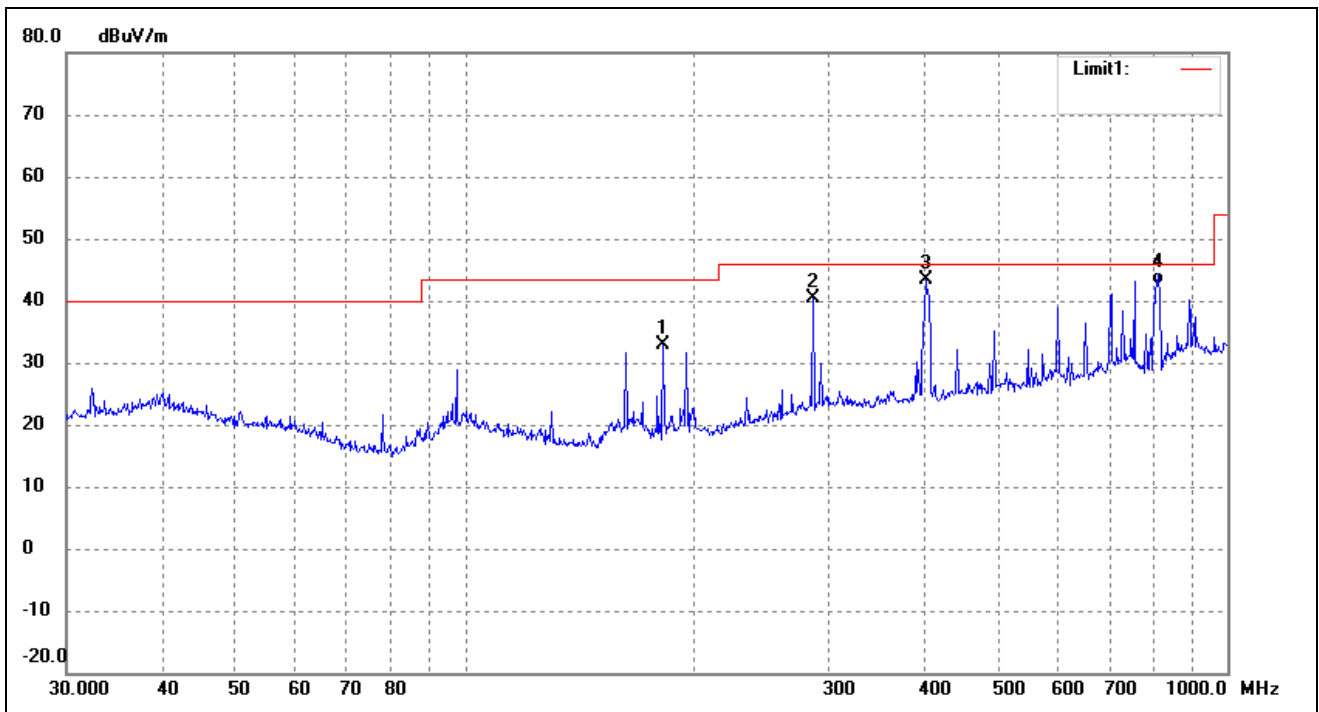

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	181.9202	30.06	2.84	32.90	43.50	-10.60	0	150	peak
2	285.9778	31.86	8.64	40.50	46.00	-5.50	30	100	peak
3	401.8385	33.27	10.06	43.33	46.00	-2.67	29	150	peak
4	810.2653	28.05	14.63	42.68	46.00	-3.32	20	100	peak


Test Specification: Vertical

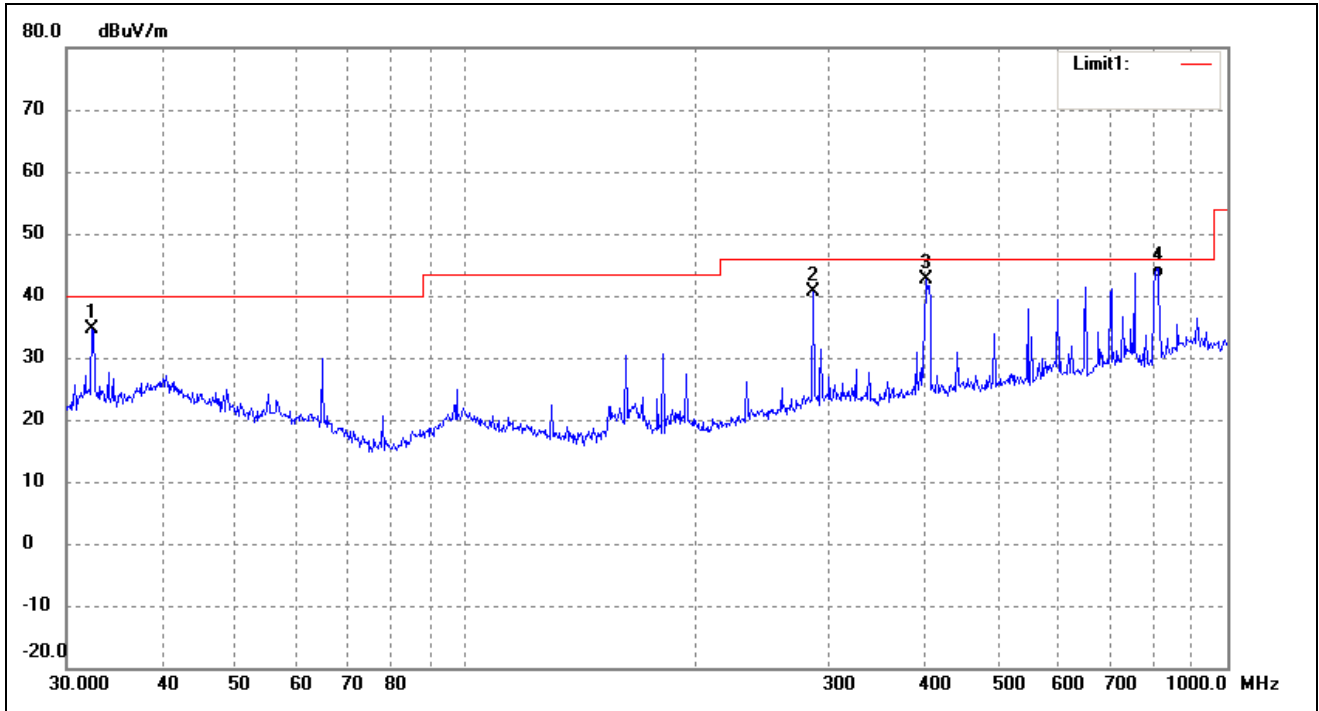

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	26.53	8.00	34.53	40.00	-5.47	51	100	peak
2	285.9778	32.10	8.64	40.74	46.00	-5.26	308	100	peak
3	403.2500	32.62	10.01	42.63	46.00	-3.37	120	100	peak
4	810.2653	28.13	14.63	42.76	46.00	-3.24	359	100	peak


**Plot of Radiated Emissions Test Data**

EUT: *mobile phone*  
 Tested Model: *Pulse*  
 Operating Condition: *TM2*  
 Comment: *AC 120V/60Hz*  
  
 Test Specification: *Horizontal*

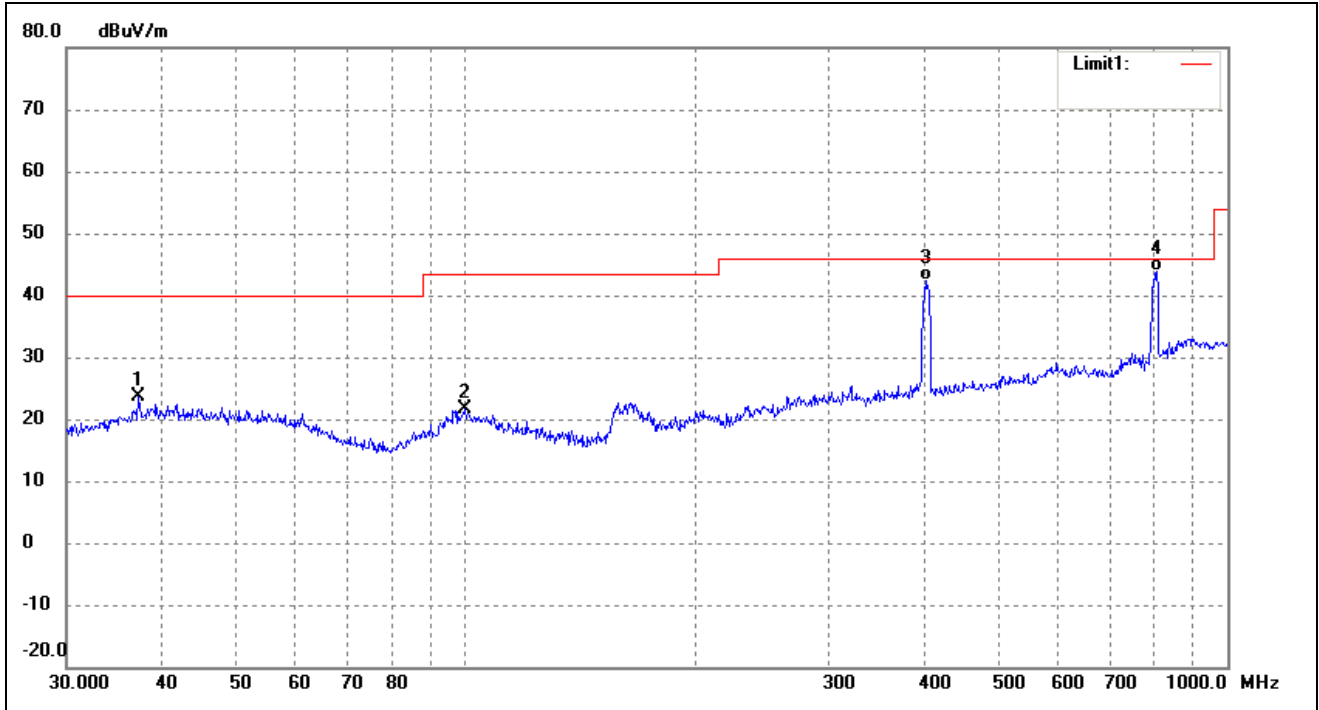

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.2854	17.12	6.52	23.64	40.00	-16.36	0	100	peak
2	99.8777	15.59	6.10	21.69	43.50	-21.81	0	100	peak
3	401.8385	32.38	10.06	42.44	46.00	-3.56	120	100	QP
4	807.4290	29.33	14.53	43.86	46.00	-2.14	120	100	QP

Test Specification: Vertical

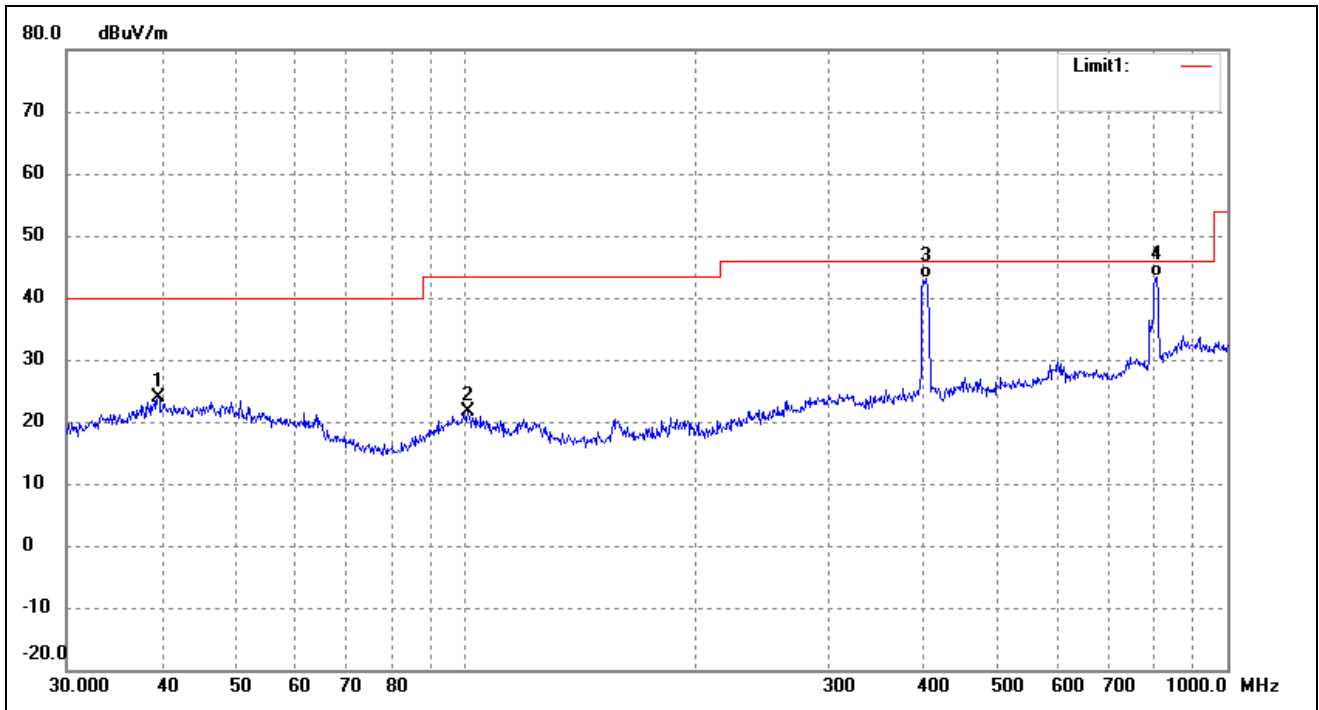

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.5756	14.78	9.18	23.96	40.00	-16.04	0	100	peak
2	100.9339	15.61	6.03	21.64	43.50	-21.86	0	100	peak
3	401.8385	33.07	10.06	43.13	46.00	-2.87	120	100	QP
4	807.4290	28.93	14.53	43.46	46.00	-2.54	120	100	QP



**Plot of Radiated Emissions Test Data**

EUT: *mobile phone*  
 Tested Model: *Pulse*  
 Operating Condition: *TM3*  
 Comment: *AC 120V/60Hz*  
  
 Test Specification: *Horizontal*



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	65.1824	26.10	3.72	29.82	40.00	-10.18	158	150	peak
2	73.4219	29.47	1.78	31.25	40.00	-8.75	226	100	peak
3	192.2858	28.15	3.32	31.47	43.50	-12.03	129	150	peak
4	240.5778	35.20	6.35	41.55	46.00	-4.45	109	100	QP

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	65.4110	32.99	3.65	36.64	40.00	-3.36	51	100	peak
2	179.2827	29.89	2.74	32.63	43.50	-10.87	308	100	peak
3	240.5778	34.60	6.35	40.95	46.00	-5.05	120	100	peak
4	479.4934	23.66	10.12	33.78	46.00	-12.22	359	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

\*\*\*\*\* END OF REPORT \*\*\*\*\*