

FCC Part 15B
Measurement and Test Report
For
Xwireless LLC
11426 Rockville pike, Rockville Md

FCC ID: 2ADLJZR1

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Mobile phone</u>
Tested Model:	<u>ZR1</u>
Report No.:	<u>STR14118016I-3</u>
Tested Date:	<u>2014-11-05 to 2014-11-18</u>
Issued Date:	<u>2014-11-20</u>
Tested By:	<u>Susan Su / Engineer</u> <i>Susan Su</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY.....	7
3.2 TEST EQUIPMENT LIST AND DETAILS.....	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS.....	8
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
4. RADIATED EMISSIONS	11
4.1 MEASUREMENT UNCERTAINTY.....	11
4.2 TEST EQUIPMENT LIST AND DETAILS.....	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP.....	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS.....	12
4.7 SUMMARY OF TEST RESULTS/PLOTS.....	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Xwireless LLC
 Address of applicant: 11426 Rockville pike, Rockville Md

Manufacturer: Xwireless LLC
 Address of manufacturer: 11426 Rockville pike, Rockville Md

General Description of EUT	
Product Name:	Mobile phone
Brand Name:	X Wireless
Model No.:	ZR1
Hardware Version:	6178B_MB_V1.2
Software Version:	6178B-XWireless-ZR1-V1.16-141121
IMEI:	357698051520450
Rated Voltage:	DC 3.7V Battery
Battery:	BL-5C / 600mAh
Adapter Model:	ZR1
Device Category:	Portable Device
<p><i>The EUT is GSM850/PCS1900, mobile phone. The mobile phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850 and PCS1900 and Bluetooth, and camera functions. For more information see the following datasheet</i></p> <p><i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	DC 3.7V Battery
Rated Current:	/
Rated Power:	/
Power Adapter Model:	ZR1
Lowest Internal Frequency:	26MHz
Highest Internal Frequency:	26MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Xwireless LLC in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	/
TM2	Downloading	Connected to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Power Cable	1.5	Unshielded	Without Core
Earphone	1.0	Unshielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook Computer	Lenovo	20007	EB12648265

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.0	Shielded	Without Core

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Note: Base on the calibrated result, for the impedance characteristic and insertion loss, the effect shall be ignored from the placed multiple outlet power strip between the device and LISN.

3.4 Basic Test Setup Block Diagram

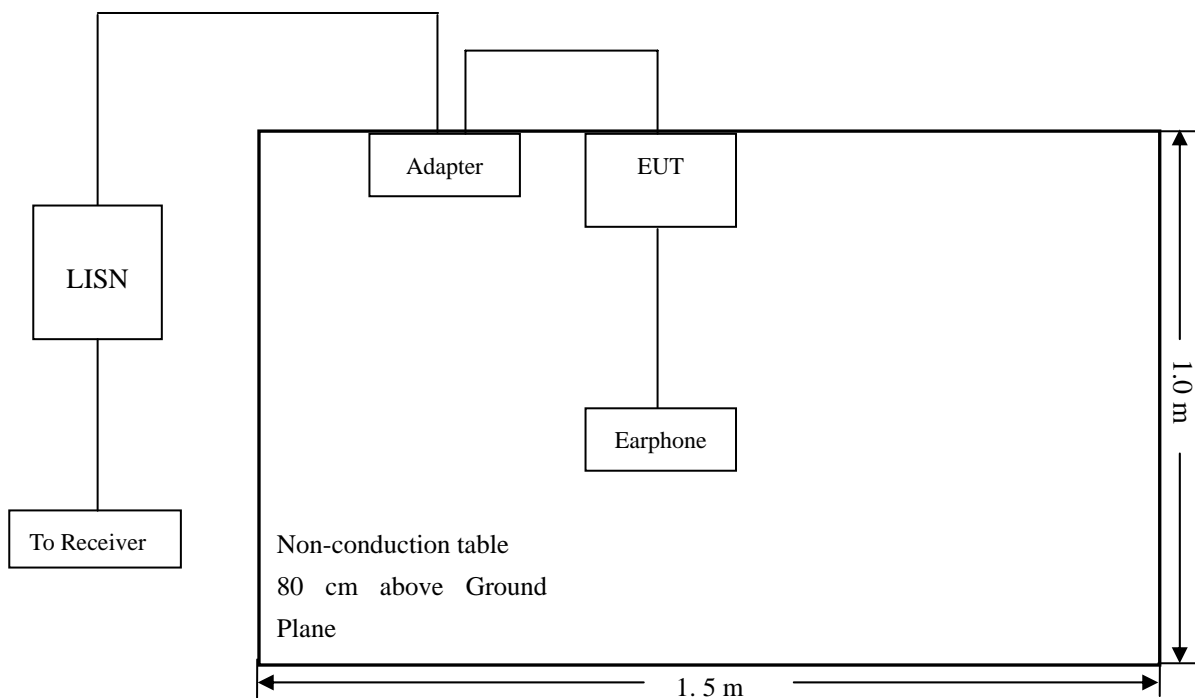

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-11.51dB at 1.5620 MHz in the *Line* mode, **peak** detector, **0.15-30MHz**

3.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Mobile phone*
 Tested Model: *ZR1*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Neutral*

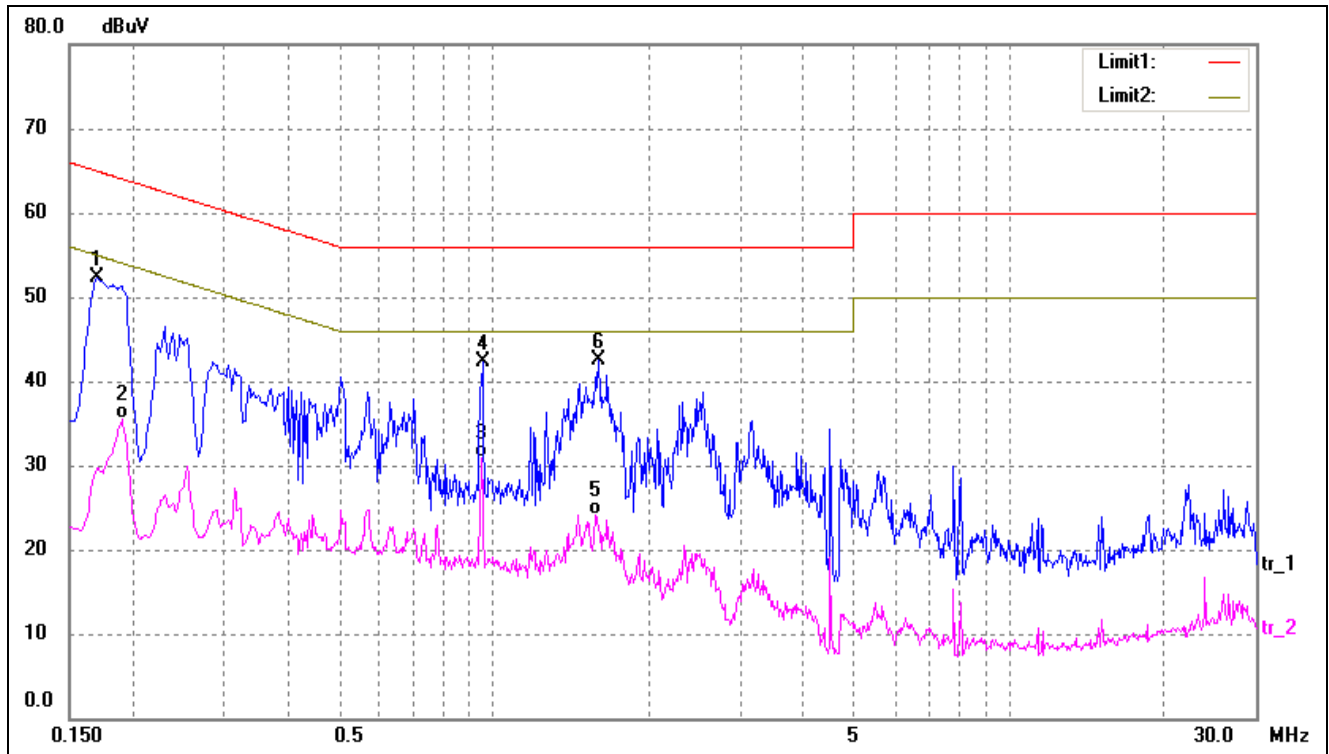

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1700	42.76	9.50	52.26	64.96	-12.70	peak
2	0.1900	25.92	9.50	35.42	54.04	-18.62	AVG
3	0.9460	20.93	9.95	30.88	46.00	-15.12	AVG
4	0.9500	32.28	9.95	42.23	56.00	-13.77	peak
5	1.5740	14.03	10.00	24.03	46.00	-21.97	AVG
6	1.5980	32.60	10.00	42.60	56.00	-13.40	peak

Test Specification: Line

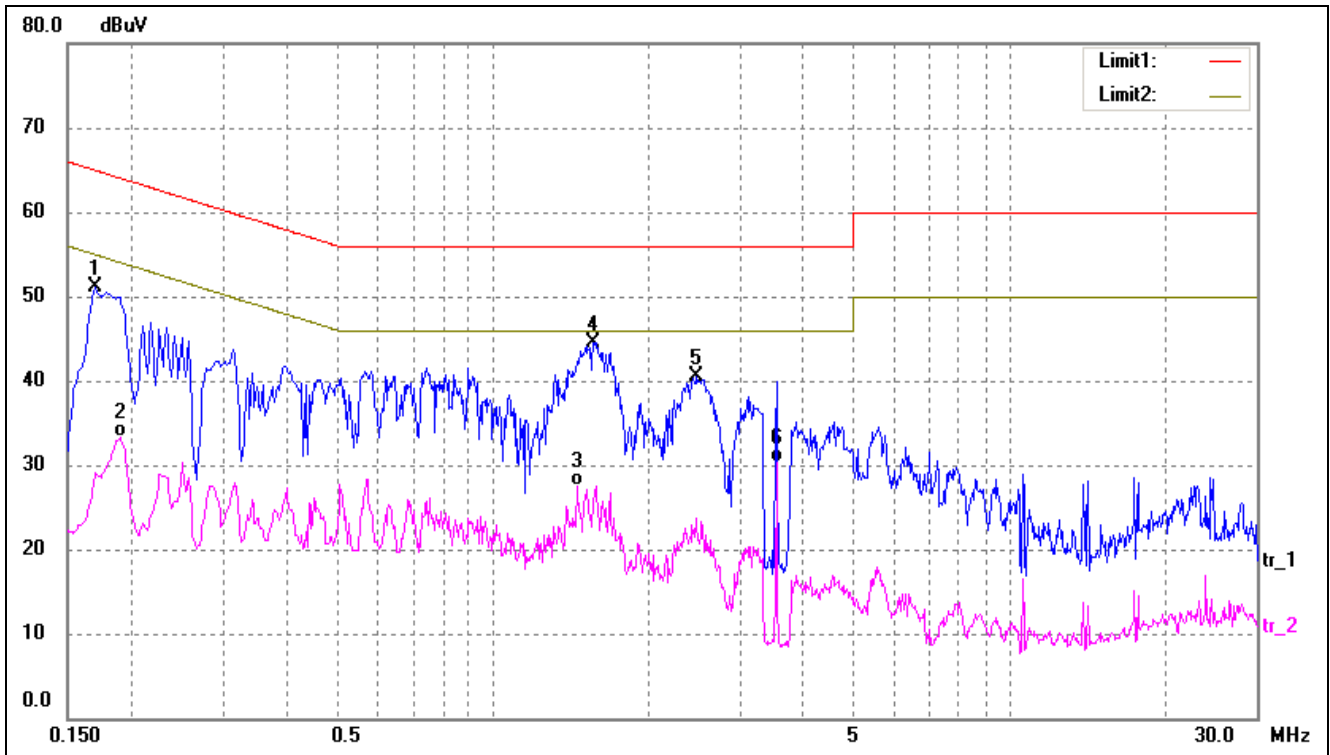

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	41.52	9.50	51.02	64.96	-13.94	peak
2	0.1900	23.84	9.50	33.34	54.04	-20.70	AVG
3	1.4500	17.52	10.00	27.52	46.00	-18.48	AVG
4*	1.5620	34.49	10.00	44.49	56.00	-11.51	peak
5	2.4780	30.52	10.00	40.52	56.00	-15.48	peak
6	3.5380	20.21	10.00	30.21	46.00	-15.79	AVG

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-28	2015-05-27

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

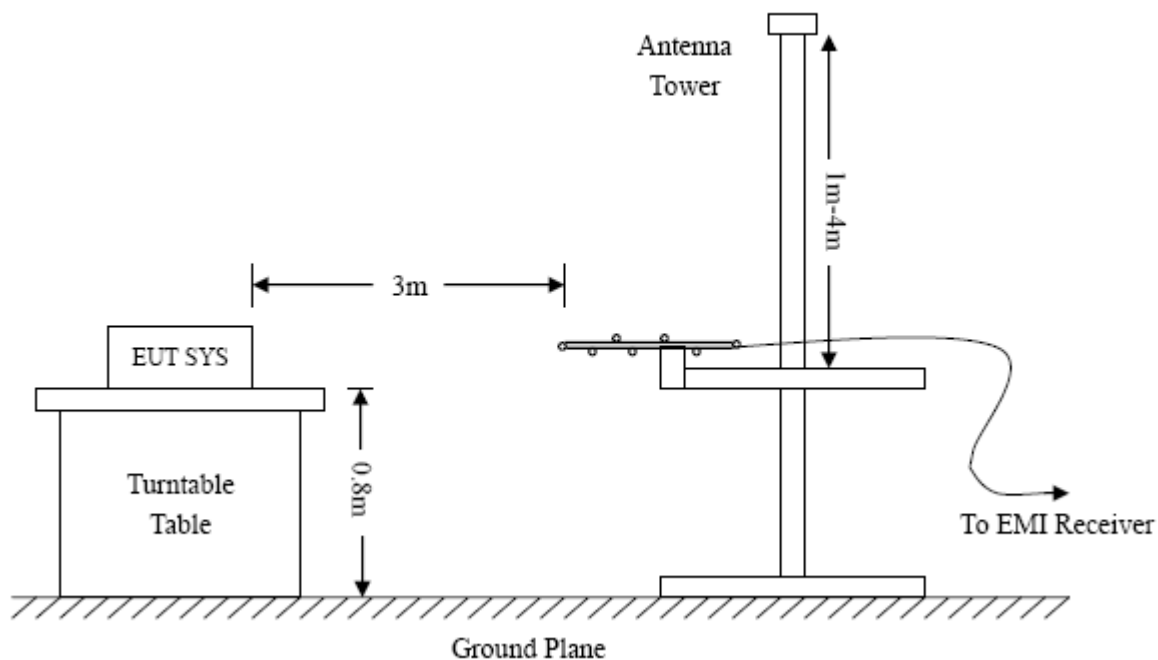

4.4 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-3.47 dB at 239.9874 MHz in the Horizontal polarization, TM2 mode, 9 kHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: *Mobile phone*
 Tested Model: *ZR1*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Adapter DC 5V*

 Test Specification: *Horizontal*

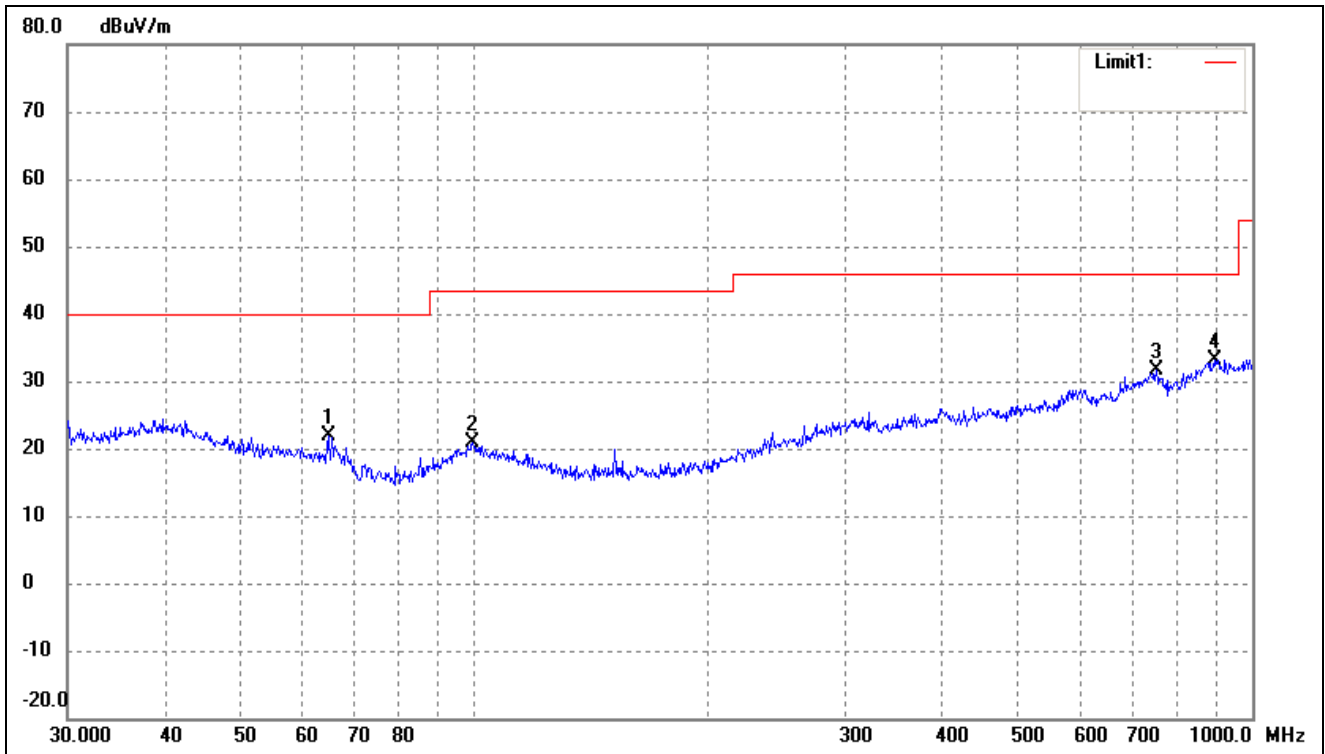

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	64.8865	17.94	3.82	21.76	40.00	-18.24	245	100	peak
2	99.5281	14.77	6.01	20.78	43.50	-22.72	44	100	peak
3	752.7432	17.30	14.25	31.55	46.00	-14.45	235	100	peak
4*	893.8567	16.30	16.85	33.15	46.00	-12.85	145	100	peak

Test Specification: Vertical

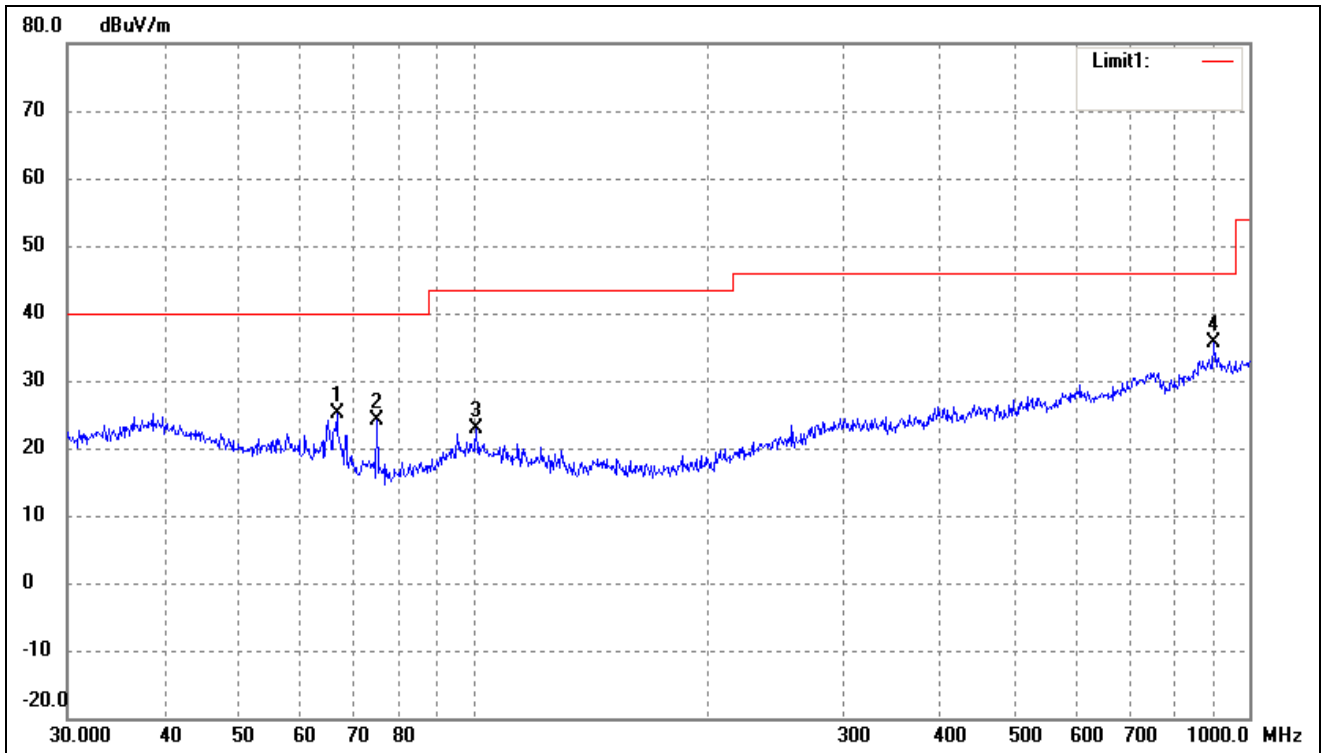


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	66.7325	21.90	3.24	25.14	40.00	-14.86	136	100	peak
2	75.1823	22.53	1.58	24.11	40.00	-15.89	247	100	peak
3	100.9340	16.80	6.03	22.83	43.50	-20.67	15	100	peak
4*	900.1474	18.85	16.85	35.70	46.00	-10.30	235	100	peak

Plot of Radiated Emissions Test Data


EUT: *Mobile phone*
 Tested Model: *ZR1*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz; USB 5V*

 Test Specification: *Horizontal*

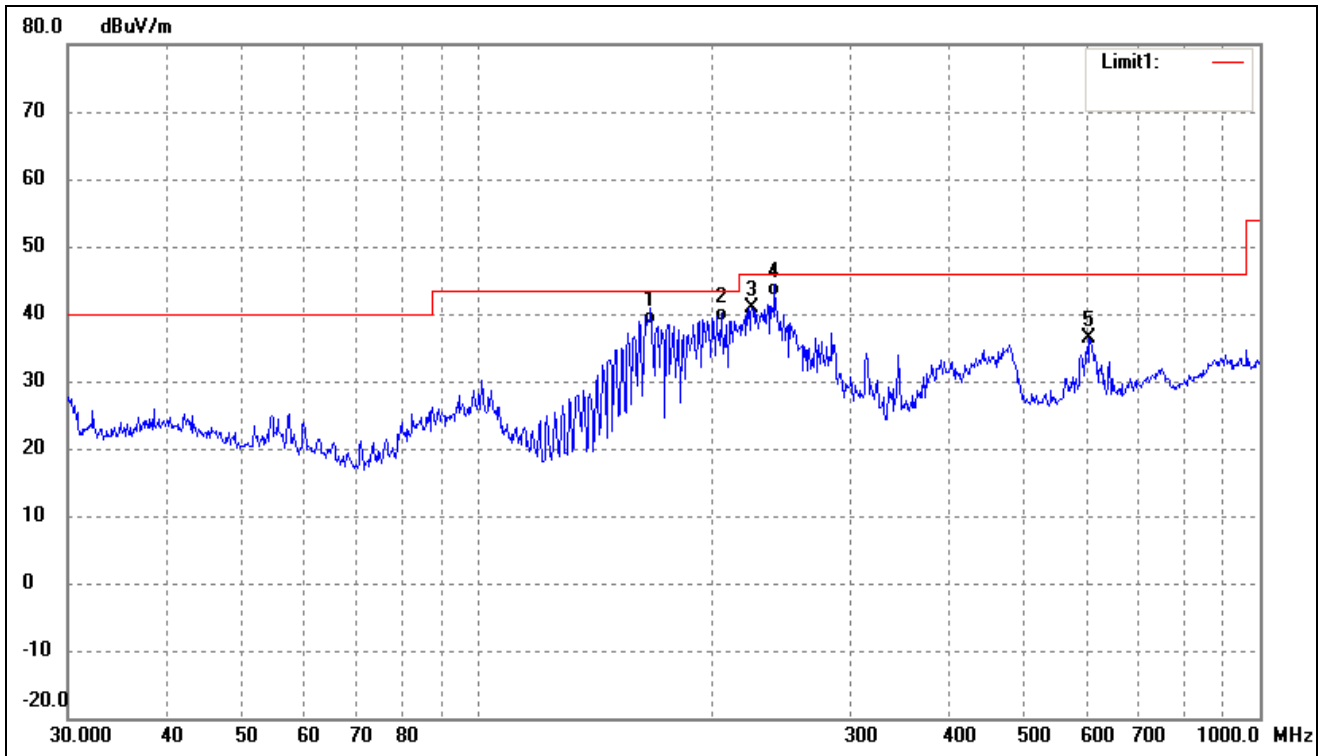

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	166.6514	35.60	2.66	38.26	43.50	-5.24	158	100	QP
2	204.9551	34.90	4.03	38.93	43.50	-4.57	226	100	QP
3	224.5193	35.52	5.39	40.91	46.00	-5.09	295	100	peak
4	239.9874	36.20	6.33	42.53	46.00	-3.47	178	100	QP
5	605.6592	23.45	12.92	36.37	46.00	-9.63	214	100	peak

Test Specification: Vertical

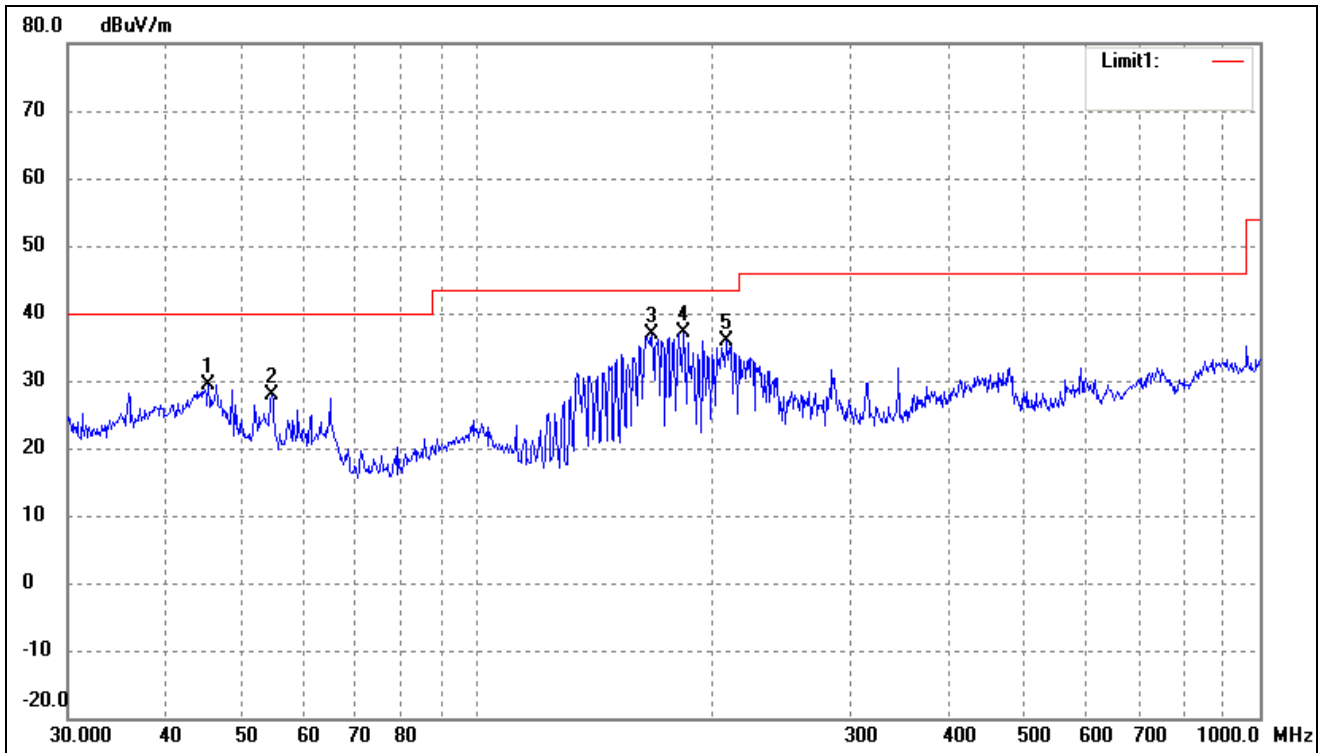

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	45.3755	21.61	7.65	29.26	40.00	-10.74	145	100	peak
2	54.6429	22.14	5.85	27.99	40.00	-12.01	102	100	peak
3	167.2368	34.14	2.66	36.80	43.50	-6.70	174	100	peak
4	183.8440	34.14	2.93	37.07	43.50	-6.43	178	100	peak
5	208.5803	31.54	4.29	35.83	43.50	-7.67	186	100	peak

Remark:

Testing is carried out with frequency rang 9kHz to the 1GHz, The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

***** END OF REPORT *****