



**FCC 47 CFR PART 15 SUBPART C  
ISED RSS-210 ISSUE 10**

**CERTIFICATION TEST REPORT**

*For*

**WALL CONTROL**

**FCC ID: 2ADLL-1108940  
IC: 2143B-1108940**

**MODEL NUMBER: 1108940**

**REPORT NUMBER: 4790439417.1-5**

**ISSUE DATE: September 29, 2022**

*Prepared for*

**Shenzhen H&T Intelligent Control Co., Ltd  
518132. GUANGDONG. SHENZHEN. H&T INDUSTRY PARK.18 BaoShan Road  
TIANLIAO COMMUNITY. GONGMING GUANGMING DISTRICT**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Room 101, Building 10, Innovation Technology Park,  
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China  
Tel: +86 769 33817100  
Fax: +86 769 33244054  
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	08/30/2022	Initial Issue	\



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	6
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>7</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	7
5.2. <i>MAXIMUM EMISSIONS FIELD STRENGTH</i> .....	7
5.3. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	8
5.4. <i>TEST ENVIRONMENT</i> .....	8
5.5. <i>TEST CHANNEL CONFIGURATION</i> .....	8
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	9
5.7. <i>DESCRIPTION OF TEST SETUP</i> .....	10
5.8. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i> .....	11
<b>6. SUMMARY OF TEST RESULTS</b> .....	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>14</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	14
<b>8. RADIATED TEST RESULTS</b> .....	<b>19</b>
8.1. <i>LIMITS AND PROCEDURE</i> .....	19
8.2. <i>FIELD STRENGTH OF INTENTIONAL EMISSIONS</i> .....	25
8.3. <i>SPURIOUS EMISSIONS BELOW 30M</i> .....	27
8.4. <i>SPURIOUS EMISSIONS BELOW 1 GHz</i> .....	30
8.5. <i>SPURIOUS EMISSIONS 1 ~ 10GHz</i> .....	32
<b>9. ANTENNA REQUIREMENTS</b> .....	<b>34</b>



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Shenzhen H&T Intelligent Control Co., Ltd  
Address: 518132. GUANGDONG. SHENZHEN. H&T INDUSTRY PARK.18  
BaoShan Road TIANLIAO COMMUNITY. GONGMING  
GUANGMING DISTRICT

## Manufacturer Information

Company Name: Shenzhen H&T Intelligent Control Co., Ltd  
Address: 518132. GUANGDONG. SHENZHEN. H&T INDUSTRY PARK.18  
BaoShan Road TIANLIAO COMMUNITY. GONGMING  
GUANGMING DISTRICT

## EUT Information

EUT Name: WALL CONTROL  
Model: 1108940  
Sample Received Date: August 9, 2022  
Sample Status: Normal  
Sample ID: 5216078  
Date of Tested: August 9, 2022 ~ September 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS
ISED RSS-210 Issue 10	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

James Qin  
Project Engineer  
Approved By:

Stephen Guo  
Laboratory Manager

Checked By:

Denny Huang  
Senior Project Engineer



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, ISED RSS-210 Issue 10 and RSS-GEN Issue 5

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.          Facility Name:          Chamber D, the VCCI registration No. is G-20019 and R-20004          Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment	WALL CONTROL	
Model Name	1108940	
Data Rates	915.0 MHz:100kbps/GFSK	
Transmit Channel Tested:	Channel ID	Channel Frequency (MHz)
	1	915
Battery	DC 3 V	

### 5.2. MAXIMUM EMISSIONS FIELD STRENGTH

Operation Frequency (MHz)	Number of Transmit Chains (NTX)	Channel Number	Max. Emissions Field Strength (dB $\mu$ V/m)
915	1	1	86.51





### 5.3. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 915MHz		
Test Software		sscom5.13.1
Modulation Type	Transmit Antenna Number	Test Channel
		915MHz
Z-wave	1	Default

Note:

1. raw is the test software setting description provide by customer.
2. All tests executed under maximum input levels.

### 5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	DC 3 V
	VH	N/A

Note: VL= Lower Extreme Test Voltage  
 VN= Nominal Voltage  
 VH= Upper Extreme Test Voltage  
 TN= Normal Temperature

### 5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel Number	Test Channel
Z-wave	CH 1	915 MHz



### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	915	PCB	-8.10

Test Mode	Transmit and Receive Mode	Description
Z-wave	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

## 5.7. DESCRIPTION OF TEST SETUP

### ACCESSORY


Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode by keep pressing the key.

New battery is used during the testing.

### SETUP DIAGRAM FOR TESTS



**5.8. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1



Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022



## 6. SUMMARY OF TEST RESULTS

Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	20dB Bandwidth	FCC Part 15.215(c)	Pass
2	99% Emission Bandwidth	RSS-Gen Clause 6.7	Pass
3	TX Spurious Emission	FCC 15.249 (a)(d)(e) FCC 15.209 FCC 15.205 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
4	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass




## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only

#### TEST SETUP

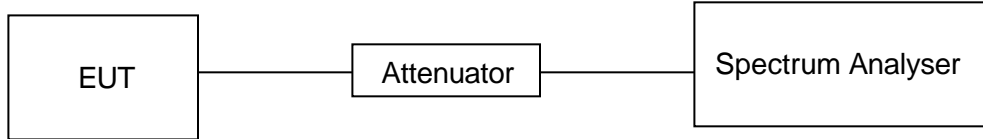

#### TEST ENVIRONMENT

Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V



**RESULTS**

Test Channel	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)
1	9.35	100	0.0935	9.35%	20.58


Note: Duty Cycle Correction Factor=20log(1/x).

Where: x is Duty Cycle (Linear)


Where: T is On Time (transmit duration)

All test modes have been tested and the results are the same, so only one mode test data record in this report.

**ON TIME AND DUTY CYCLE**

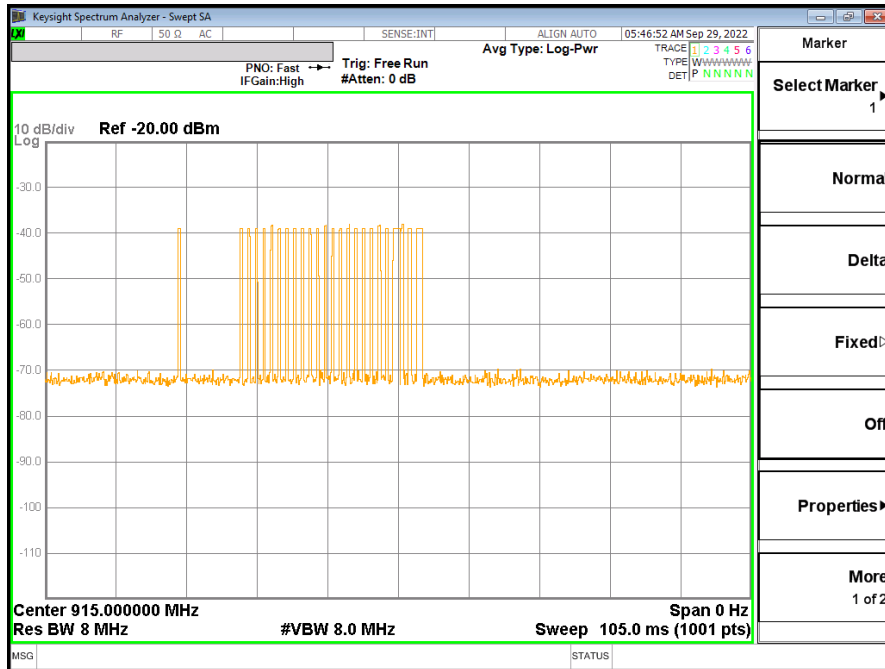



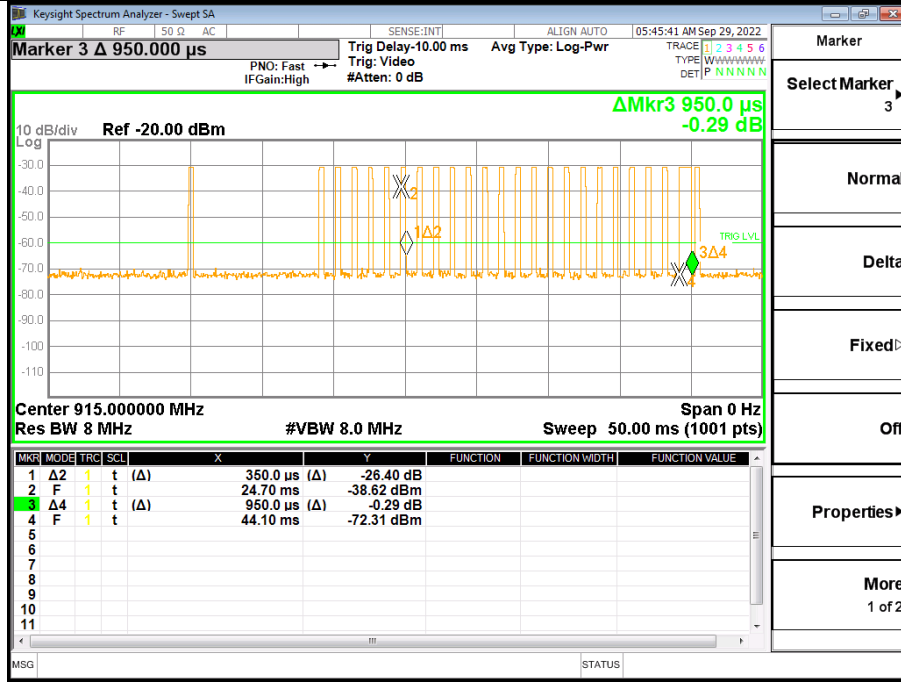

## 20 dB AND 99% EMISSION BANDWIDTH

**LIMITS**

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.215(c)	20dB Bandwidth	for reporting purposes only	902-928 MHz
RSS-Gen Clause 6.7	99% Emission Bandwidth	N/A	902-928 MHz

**TEST PROCEDURE**


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the occupied bandwidth
VBW	$\geq 3 \times \text{RBW}$
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

**TEST ENVIRONMENT**


Temperature	22.8 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

**TEST SETUP**




**RESULTS**

Channel	20dB bandwidth (KHz)	99% bandwidth (KHz)	Result
1	8.164	18.465	Pass

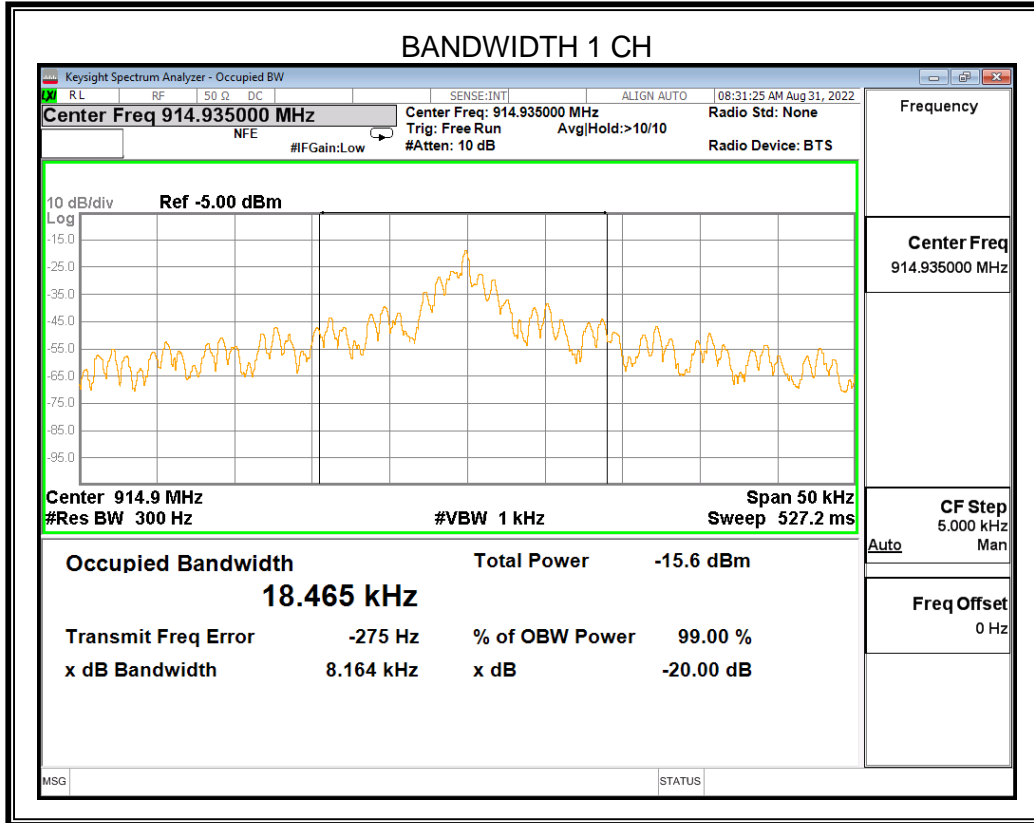



## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC §15.249 (a)(d)(e)

RSS-210 Issue 10 Clause Annex B B.10

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10

The field strength of emissions from intentional radiators operated within these frequency bands			
Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94 dBuV/m)	500 uV/m (54d BuV/m)	3
2400 – 2483.5	50 mV/m (94 dBuV/m)	500 uV/m (54d BuV/m)	3
5725 – 5875	50 mV/m (94 dBuV/m)	500 uV/m (54 dBuV/m)	3

Radiation Disturbance Test Limit for FCC (Class B)(9 kHz-1 GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note:

(1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).



(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.


#### Radiation Disturbance Test Limit for FCC (Above 1GHz)

Frequency (MHz)	dB (uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC §15.205 (a)

## TEST SETUP AND PROCEDURE

Below 30 MHz

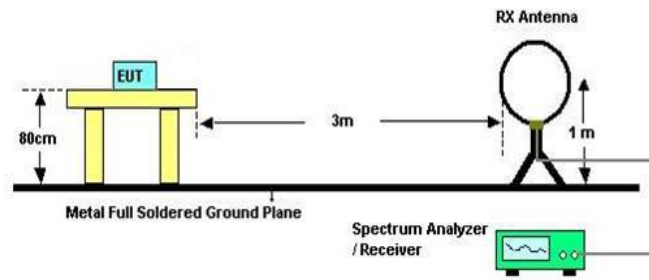


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

BELOW 1G

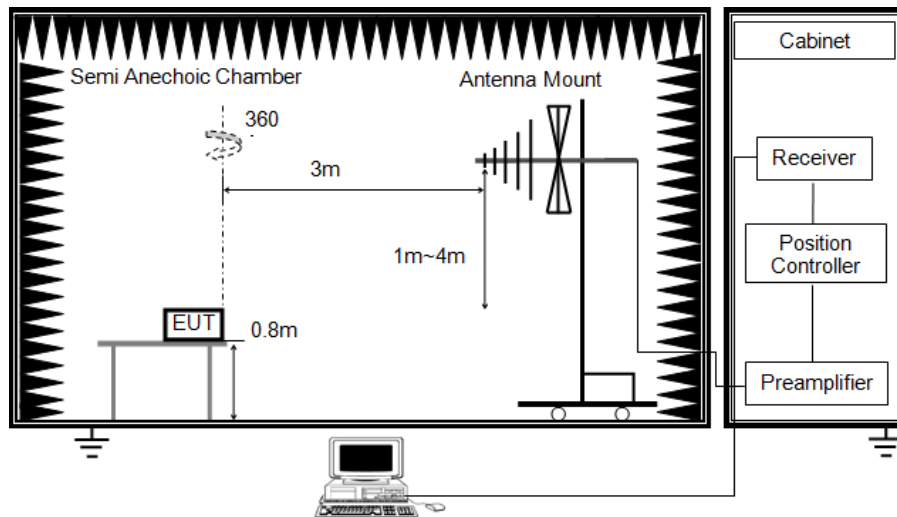

The setting of the spectrum analyser. (For Bandedge and Field strength)


RBW	$\geq$ OBW (125 kHz)
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

The setting of the spectrum analyser. (For Spurious emissions)

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Measurement = Reading Level + Correct Factor
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

ABOVE 1G

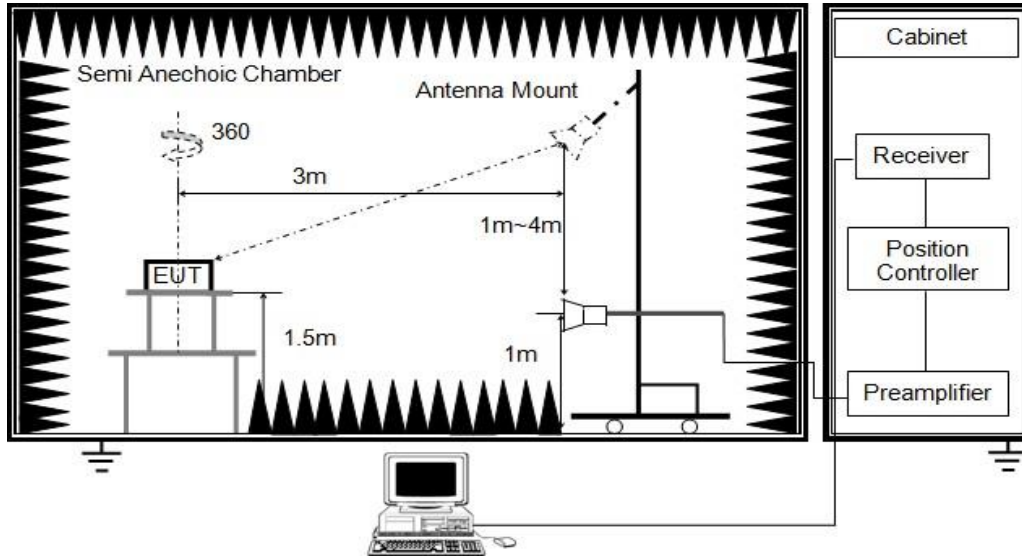


The setting of the spectrum analyser

RBW	1M MHz
VBW	PEAK: 3MHz AVG: See Note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average power measurement, set the detector to AVG, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)



X axis, Y axis, Z axis positions:

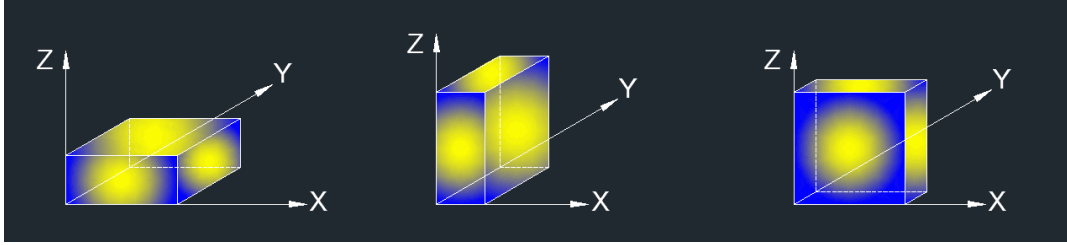

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### **TEST ENVIRONMENT**


Temperature	23.8 °C	Relative Humidity	65 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3 V

### **RESULTS**



## 8.2. FIELD STRENGTH OF INTENTIONAL EMISSIONS

### FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

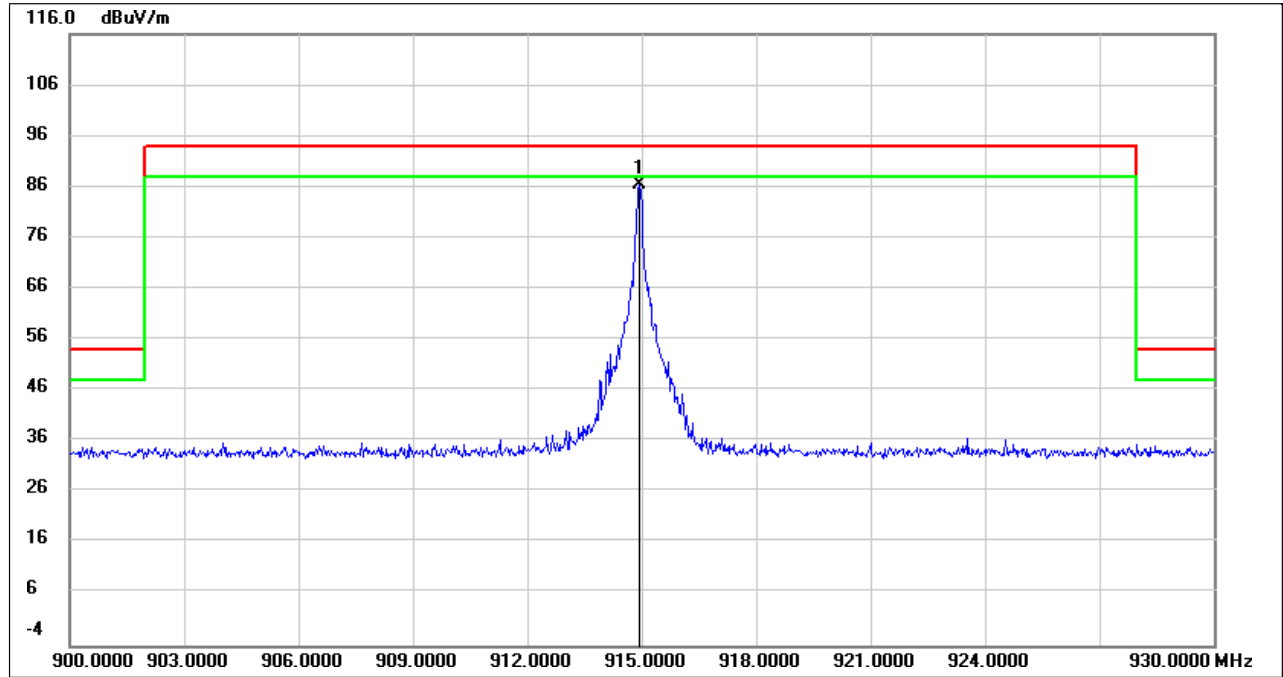


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	914.9400	91.39	-4.88	86.51	94.00	-7.49	QP

Note:

1. Measurement = Reading Level + Correct Factor.
2. QP detector.
3. Only the worst emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)**

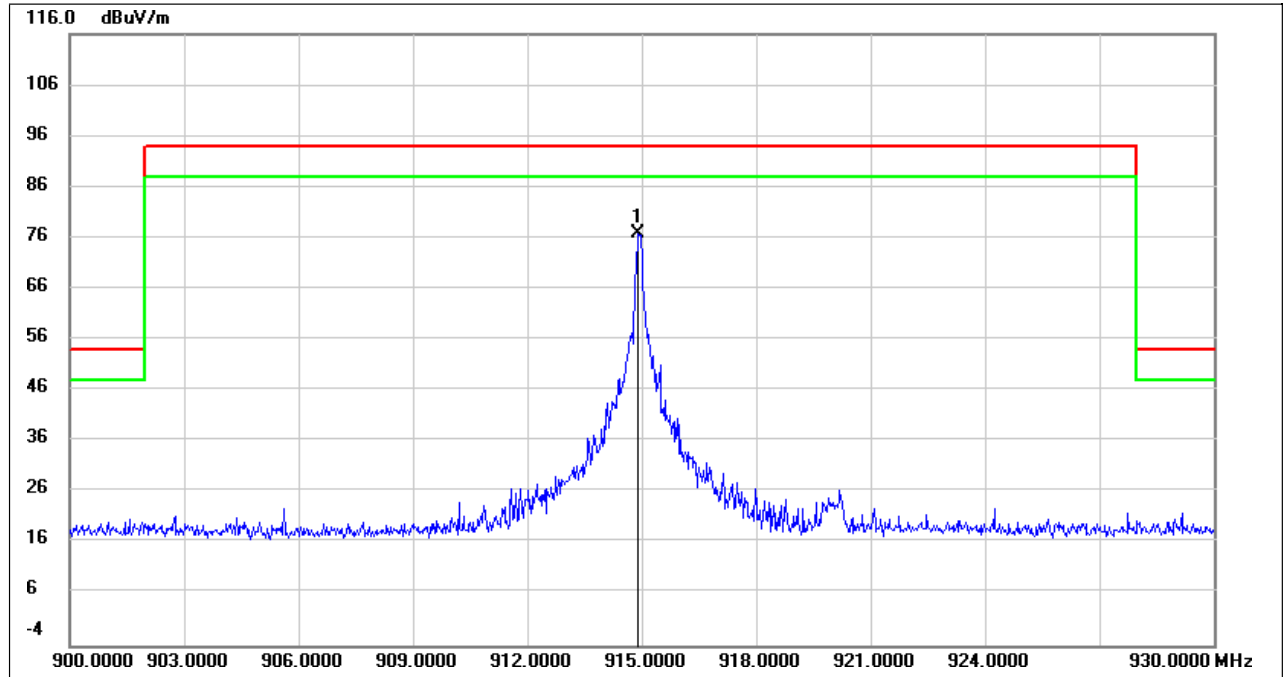

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	914.9100	81.81	-4.88	76.93	94.00	-17.07	QP

Note:


1. Measurement = Reading Level + Correct Factor.
2. QP detector.
3. Only the worst emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### 8.3. SPURIOUS EMISSIONS BELOW 30M

#### SPURIOUS EMISSIONS

(LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

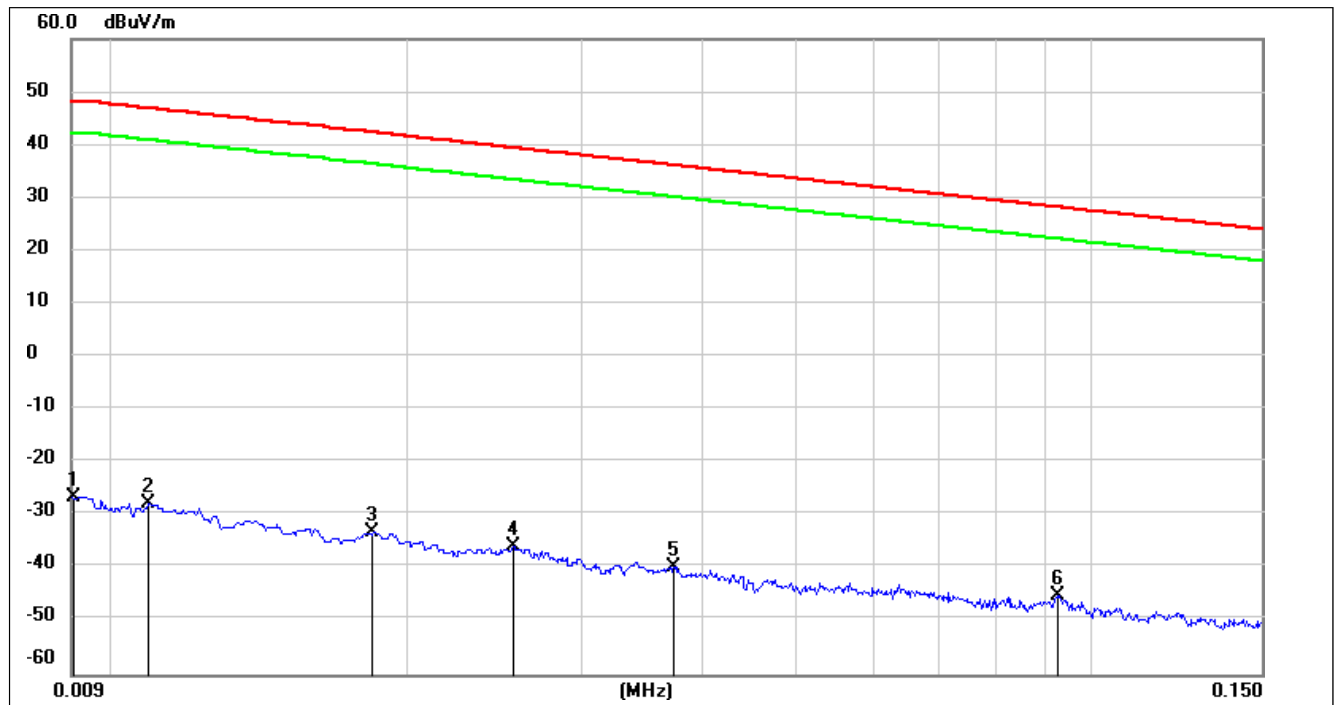


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0091	74.84	-101.33	-26.49	48.28	-77.99	-3.22	-74.77	peak
2	0.0108	73.61	-101.39	-27.78	46.93	-79.28	-4.57	-74.71	peak
3	0.0183	68.31	-101.36	-33.05	42.35	-84.55	-9.15	-75.40	peak
4	0.0256	65.41	-101.37	-35.96	39.44	-87.46	-12.06	-75.40	peak
5	0.0374	61.70	-101.42	-39.72	36.14	-91.22	-15.36	-75.86	peak
6	0.0926	56.57	-101.74	-45.17	28.27	-96.67	-23.23	-73.44	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

**150kHz ~ 490kHz**

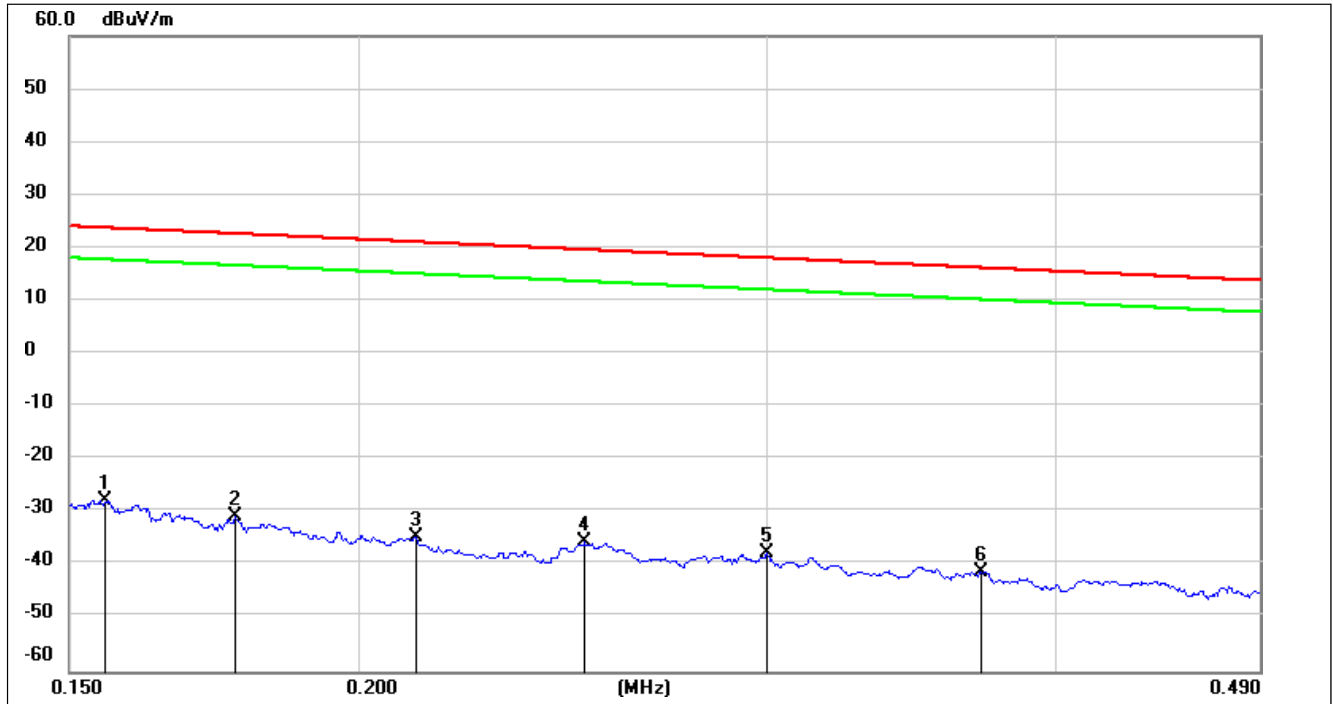


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1556	74.02	-101.65	-27.63	23.76	-79.13	-27.74	-51.39	peak
2	0.1768	71.05	-101.68	-30.63	22.66	-82.13	-28.84	-53.29	peak
3	0.2116	67.05	-101.73	-34.68	21.09	-86.18	-30.41	-55.77	peak
4	0.2505	66.18	-101.80	-35.62	19.62	-87.12	-31.88	-55.24	peak
5	0.3003	64.16	-101.85	-37.69	18.05	-89.19	-33.45	-55.74	peak
6	0.3714	60.75	-101.93	-41.18	16.2	-92.68	-35.30	-57.38	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

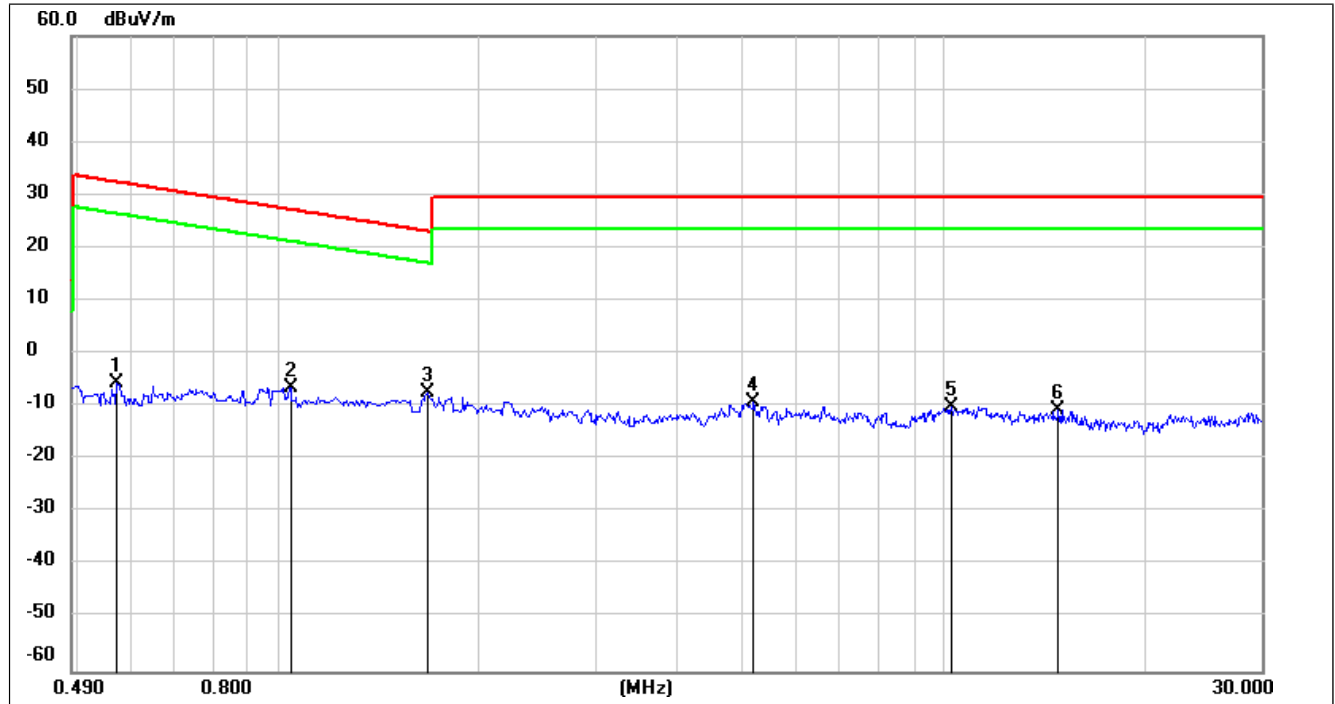490kHz ~ 30MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5725	56.53	-62.07	-5.54	32.45	-57.04	-19.05	-37.99	peak
2	1.0443	55.89	-62.25	-6.36	27.23	-57.86	-24.27	-33.59	peak
3	1.6768	54.68	-61.97	-7.29	23.11	-58.79	-28.39	-30.40	peak
4	5.1821	52.30	-61.46	-9.16	29.54	-60.66	-21.96	-38.70	peak
5	10.2576	50.86	-60.81	-9.95	29.54	-61.45	-21.96	-39.49	peak
6	14.8612	50.26	-61.02	-10.76	29.54	-62.26	-21.96	-40.30	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).


2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels had been tested, but only the worst data recorded in the report.

## 8.4. SPURIOUS EMISSIONS BELOW 1 GHz


### SPURIOUS EMISSIONS BELOW 1GHz (HORIZONTAL)

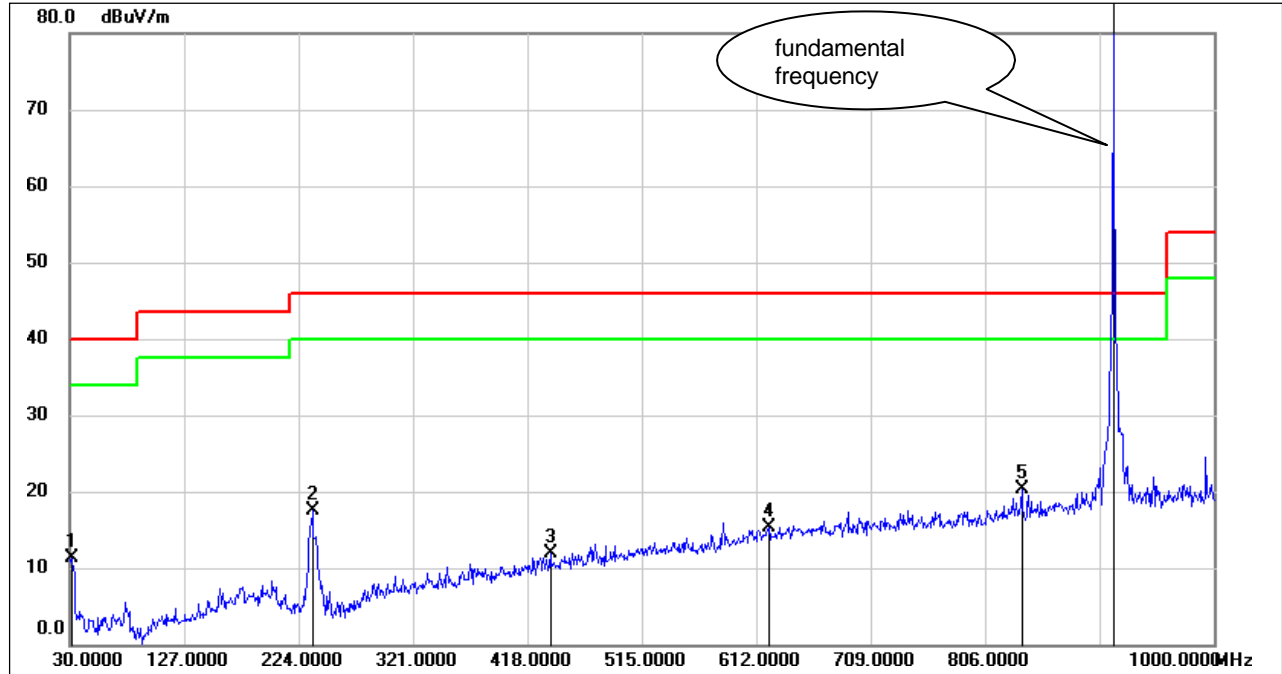

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	30.34	-19.13	11.21	40.00	-28.79	QP
2	235.6400	36.49	-18.96	17.53	46.00	-28.47	QP
3	437.4000	24.41	-12.60	11.81	46.00	-34.19	QP
4	622.6700	24.69	-9.36	15.33	46.00	-30.67	QP
5	837.0400	26.79	-6.53	20.26	46.00	-25.74	QP
6	915.00	92.20	-4.88	87.32	\	\	Fundamental

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
 4. About the Fundamental emission test result please refer to section 8.2.

**SPURIOUS EMISSIONS BELOW 1GHz (VERTICAL)**

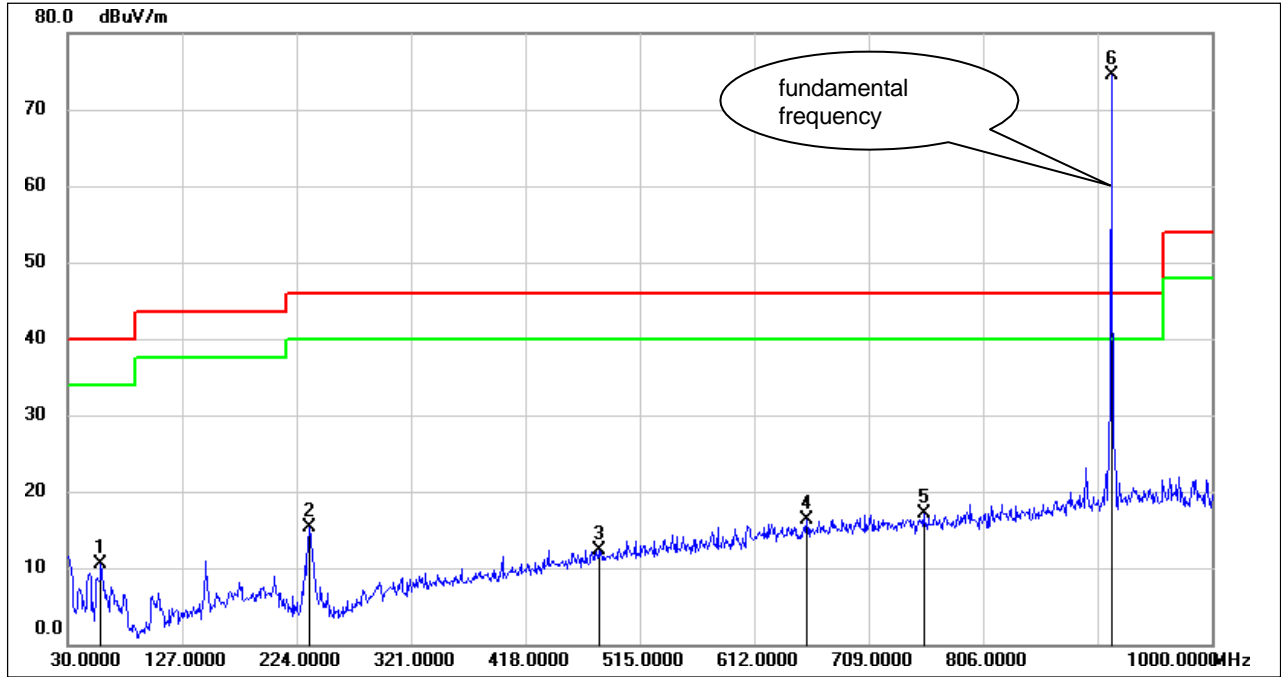


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	58.1300	31.14	-20.55	10.59	40.00	-29.41	QP
2	234.6700	34.11	-18.90	15.21	46.00	-30.79	QP
3	480.0800	24.10	-11.79	12.31	46.00	-33.69	QP
4	656.6200	25.08	-8.81	16.27	46.00	-29.73	QP
5	755.5600	24.98	-7.82	17.16	46.00	-28.84	QP
6	915.00	79.45	-4.88	74.57	\	\	Fundamental

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto  
 4. About the Fundamental emission test result please refer to section 8.2.

Note: All the modes and channels had been tested, but only the worst data recorded in the report.

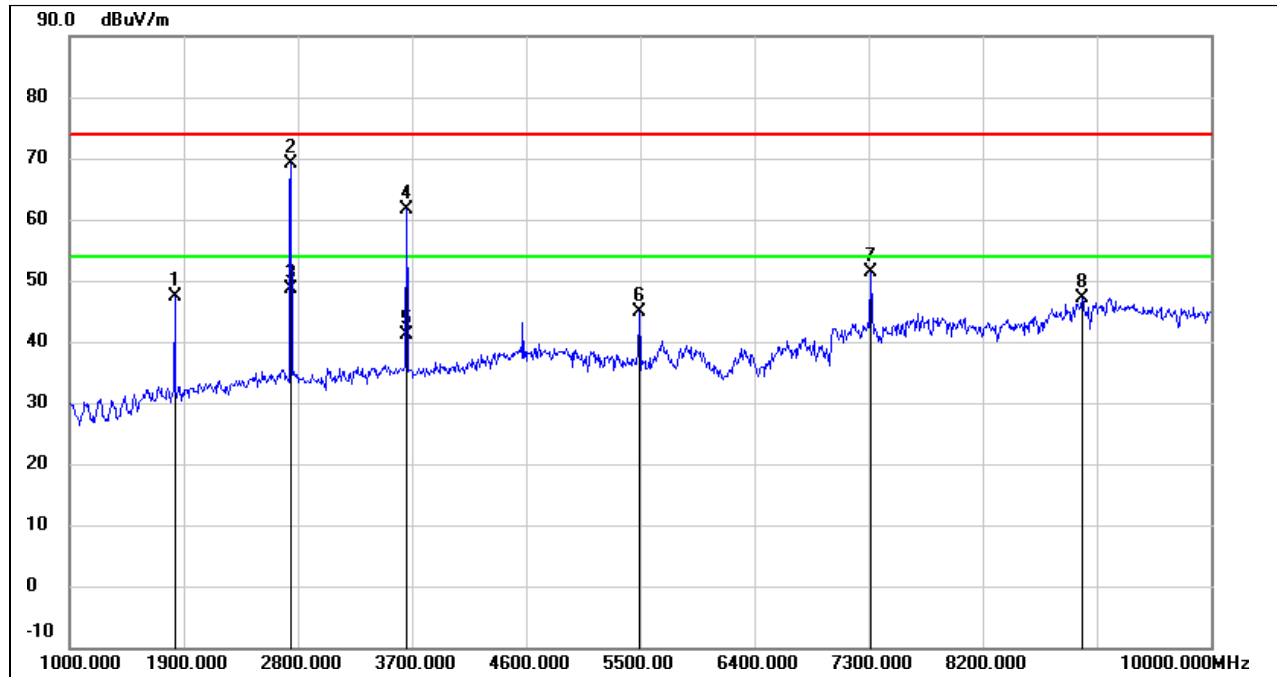


**8.5. SPURIOUS EMISSIONS 1 ~ 10GHz****HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	59.03	-11.62	47.41	74.00	-26.59	peak
2	2746.000	76.92	-7.75	69.17	74.00	-4.83	peak
3	2746.000	76.92	-7.75	48.59	54.00	-5.41	AVG
4	3655.000	67.14	-5.43	61.71	74.00	-12.29	peak
5	3655.000	67.14	-5.43	41.13	54.00	-12.87	AVG
6	5491.000	44.54	0.41	44.95	74.00	-29.05	peak
7	7318.000	45.56	5.88	51.44	74.00	-22.56	peak
8	8983.000	37.48	9.62	47.10	74.00	-26.90	peak

Note:

1. Peak Result = Reading + Correct Factor.
2. Average Result = Peak Result – DCCF (DCCF refer to section 7.1).
3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
4. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

**HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)**

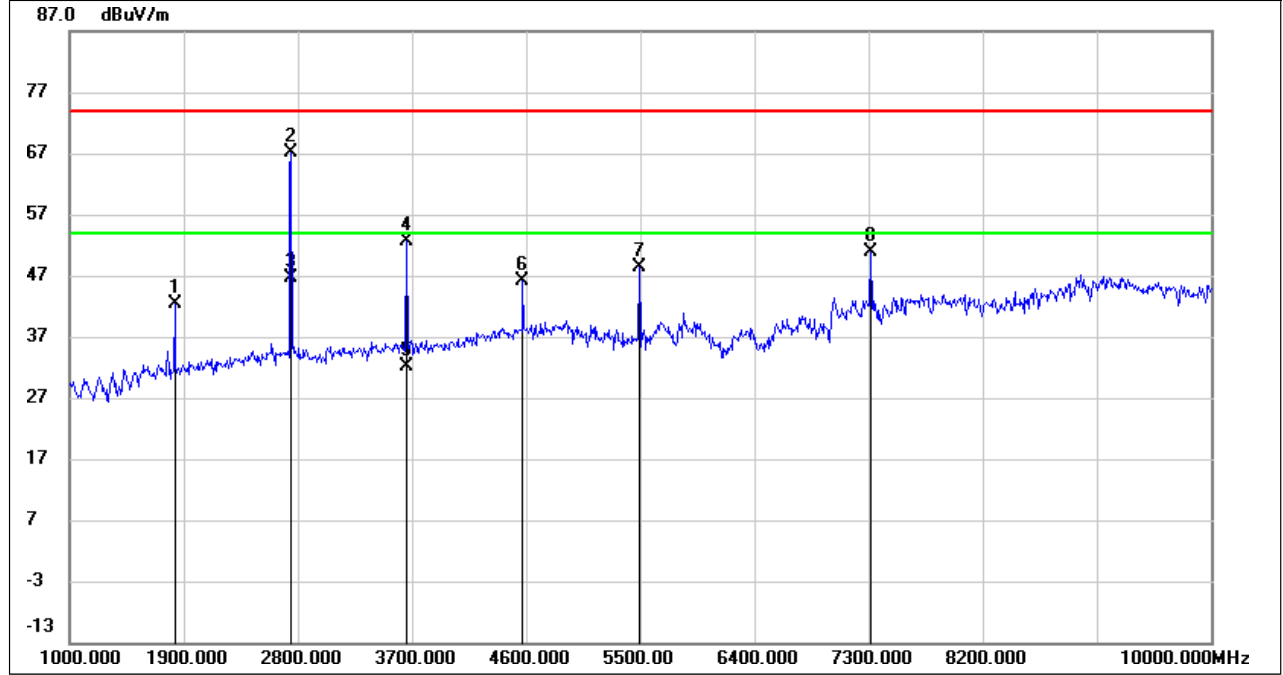

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	54.10	-11.62	42.48	74.00	-31.52	peak
2	2746.000	74.93	-7.75	67.18	74.00	-6.82	peak
3	2746.000	74.93	-7.75	46.60	54.00	-7.40	AVG
4	3655.000	58.16	-5.43	52.73	74.00	-21.27	peak
5	3655.000	74.93	-5.43	32.15	54.00	-21.85	AVG
6	4573.000	48.08	-1.85	46.23	74.00	-27.77	peak
7	5491.000	48.01	0.41	48.42	74.00	-25.58	peak
8	7318.000	44.96	5.88	50.84	74.00	-23.16	peak

Note:

1. Peak Result = Reading + Correct Factor.
2. Average Result = Peak Result – DCCF (DCCF refer to section 7.1).
3. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
4. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



## 9. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### RESULTS

Complies

**END OF REPORT**