



RF TEST REPORT

Report No.: SET2015-06453

Product: 3G Smart Phone

FCC ID: 2ADLMFRV506

Model No.: Admiral 506

Applicant: G53 Limited

Address: ROOM 1701 , 17/F,FEE TAT COMMERCIAL CENTRE,613
NATHAN ROAD,MONGKOK HONG KONG

Dates of Testing: 04/20/2015 — 05/12/2015

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzh China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 85 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product.....: 3G Smart Phone

Brand Name.....: ADMIRAL

Trade Name.....: N/A

Applicant.....: G53 Limited


Applicant Address.....: ROOM 1701, 17/F,FEE TAT COMMERCIAL CENTRE,613 NATHAN ROAD,MONGKOK HONG KONG

Manufacturer.....: G53 Limited

Manufacturer Address....: ROOM 1701, 17/F,FEE TAT COMMERCIAL CENTRE,613 NATHAN ROAD,MONGKOK HONG KONG

Test Standards.....: 47 CFR FCC Part 2: 2013
47 CFR FCC Part 22(H): 2013
47 CFR FCC Part 24(E): 2013

Test Result.....: PASS

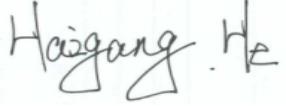Tested by.....: 

Haigang He, Test Engineer

Reviewed by.....: 

Zhu Qi, Senior Engineer

Approved by.....: 

Wu Li'an, Manager



Table of Contents

| | | |
|-----|--|----|
| 1. | GENERAL INFORMATION | 4 |
| 1.1 | EUT Description | 4 |
| 1.2 | Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator | 5 |
| 1.3 | Test Standards and Results..... | 5 |
| 1.4 | Test Configuration of Equipment under Test..... | 6 |
| 1.5 | Measurement Results Explanation Example | 7 |
| 1.6 | Facilities and Accreditations..... | 7 |
| 2. | 47 CFR PART 2, PART 22H & 24E REQUIREMENTS | 8 |
| 2.1 | Conducted RF Output Power | 8 |
| 2.2 | Peak to Average Radio | 11 |
| 2.3 | 99% Occupied Bandwidth | 21 |
| 2.4 | Frequency Stability..... | 41 |
| 2.5 | Conducted Out of Band Emissions | 46 |
| 2.6 | Band Edge | 66 |
| 2.7 | Transmitter Radiated Power (EIRP/ERP) | 74 |
| 2.8 | Radiated Out of Band Emissions | 78 |

| Change History | | |
|----------------|------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | 2015-05-12 | First edition |
| | | |
| | | |

1. GENERAL INFORMATION

1.1 EUT Description

| | |
|---------------------------------|--|
| EUT Type | 3G Smart Phone |
| Hardware Version | TMAW |
| Software Version | FRV506.V1.0.0.2015.05.19 |
| EUT supports Radios application | GSM/GPRS/WCDMA/HSPA WLAN2.4GHz 802.11b/g/n (HT20/HT40) Bluetooth V3.0+EDR / Bluetooth V4.0LE |
| Frequency Range | GSM 850MHz: Tx: 824.2 - 848.8MHz (at intervals of 200kHz); Rx: 869.2 - 893.8MHz (at intervals of 200kHz) GSM 1900MHz: Tx: 1850.2 - 1909.8MHz (at intervals of 200kHz); Rx: 1930.2 - 1989.8MHz (at intervals of 200kHz) WCDMA 850MHz Tx: 826.4 - 846.6MHz (at intervals of 200kHz); Rx: 871.4 - 891.6MHz (at intervals of 200kHz) WCDMA 1900MHz Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz); Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz) |
| Multislot Class.....: | GPRS: Multislot Class12, EGPRS: Multislot Class12 |
| Maximum Output Power to Antenna | GSM 850: 32.66dBm GSM 1900: 29.57dBm EDGE 850: 32.62dBm EDGE 1900: 29.53dBm WCDMA 850: 23.26dBm WCDMA 1900: 23.24dBm |
| Antenna Type : | PIFA Antenna |
| Type of Modulation | GSM / GPRS:GMSK EDGE:GMSK / 8PSK WCDMA: QPSK(Uplink) HSDPA:QPSK(Downlink) HSUPA:QPSK(Uplink) |

1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| System | Type of Modulation | Emission Designator | Frequency Tolerance (ppm) | Maximum ERP/EIRP(W) |
|----------------------------|--------------------|---------------------|---------------------------|---------------------|
| GSM 850 | GMSK | 250KGXW | 0.06 | 2.11 |
| GSM 1900 | GMSK | 250KGXW | 0.04 | 0.98 |
| EDGE 850 | 8PSK | 244KG7W | 0.07 | 1.77 |
| EDGE 1900 | 8PSK | 246KG7W | 0.04 | 0.97 |
| WCDMA 850 RMC 12.2Kbps | QPSK | 4M18F9W | 0.05 | 0.38 |
| WCDMA 1900 RMC 12.2Kbps | QPSK | 4M20F9W | 0.04 | 0.37 |

1.3 Test Standards and Results

1. 47 CFR Part 2, 22(H), 24(E)
2. ANSI / TIA / EIA-603-C-2004
3. FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Limit | Result |
|-----|----------------------------------|------------------------|--------------------------|--------|
| | FCC | | | |
| 1 | 2.1046 | Conducted Output Power | Reporting Only | PASS |
| 2 | 24.232(d) | Peak to Average Radio | <13dBm | PASS |
| 3 | 2.1049 22.917(b) 24.238(b) | Occupied Bandwidth | Reporting Only | PASS |
| 4 | 2.1055 22.355 | Frequency Stability | $\leq \pm 2.5\text{ppm}$ | PASS |

| | | | | |
|---|----------------------------|---|-------------------------|--------------|
| | 24.235 | | | |
| 5 | 2.1051 22.917 24.238 | Conducted Out of Band Emissions | < 43+10log10 (P[Watts]) | PASS |
| 6 | 2.1051 22.917 24.238 | Band Edge | < 43+10log10 (P[Watts]) | PASS |
| 7 | 22.913 24.232 | Effective Radiated Power Equivalent Isotropic Radiated Power | <7Watts <2Watts | PASS PASS |
| 8 | 2.1053 22.917 24.238 | Radiated Spurious Emissions | < 43+10log10 (P[Watts]) | PASS |

1.4 Test Configuration of Equipment under Test

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 20000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes | | |
|---------------|-----------------------|-----------------------|
| Band | Radiated TCs | Conducted TCs |
| GSM 850 | GSM Link EDGE Link | GSM Link EDGE Link |
| GSM 1900 | GSM Link EDGE Link | GSM Link EDGE Link |
| WCDMA Band V | RMC 12.2Kbps Link | RMC 12.2Kbps Link |
| WCDMA Band II | RMC 12.2Kbps Link | RMC 12.2Kbps Link |

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GSM mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7 + 10 = 17 \text{ (dB)}\end{aligned}$$

1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

IC-Registration No.: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|--------------|
| Temperature (°C): | 15°C- 35°C |
| Relative Humidity (%): | 30% -60% |
| Atmospheric Pressure (kPa): | 86KPa-106KPa |

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

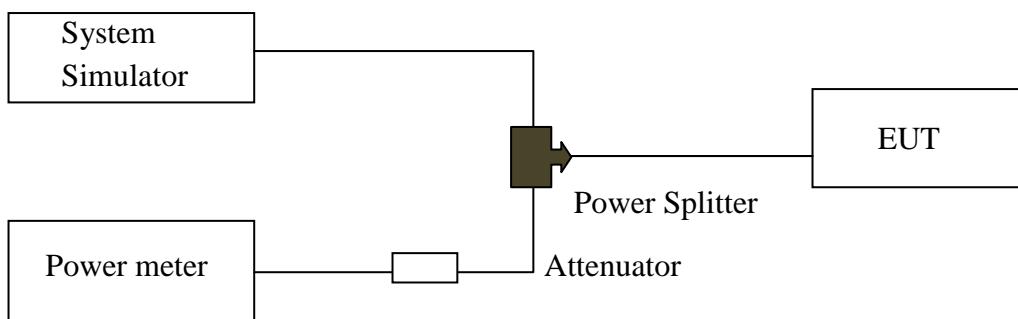

The EUT, which is powered by the Battery, is coupled to the Power meter and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due Date |
|------------------|--------------|--------|--------------|------------|---------------|
| System Simulator | Agilent | E5515C | MY47510547 | 2014.06.11 | 2015.06.10 |
| Power Meter | R&S | NRV2 | 1020.1809.02 | 2014.06.08 | 2015.06.07 |
| Power Sensor | R&S | NRV-Z4 | 823.3618.03 | 2014.06.08 | 2015.06.07 |
| Attenuator | MCE | 10dB | BN3693 | 2014.06.11 | 2015.06.10 |

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:

| Band | Channel | Frequency (MHz) | Measured Output Power dBm | Verdict |
|--------------|---------|-----------------|---------------------------|---------|
| GSM 850MHz | 128 | 824.2 | 32.43 | PASS |
| | 190 | 836.6 | 32.66 | PASS |
| | 251 | 848.8 | 32.58 | PASS |
| GSM 1900MHz | 512 | 1850.2 | 29.52 | PASS |
| | 661 | 1880.0 | 29.57 | PASS |
| | 810 | 1909.8 | 29.47 | PASS |
| GPRS 850MHz | 128 | 824.2 | 32.40 | PASS |
| | 190 | 836.6 | 32.64 | PASS |
| | 251 | 848.8 | 32.58 | PASS |
| GPRS 1900MHz | 512 | 1850.2 | 29.47 | PASS |
| | 661 | 1880.0 | 29.55 | PASS |
| | 810 | 1909.8 | 29.46 | PASS |
| EDGE 850MHz | 128 | 824.2 | 32.35 | PASS |
| | 190 | 836.6 | 32.62 | PASS |
| | 251 | 848.8 | 32.56 | PASS |
| EDGE 1900MHz | 512 | 1850.2 | 29.46 | PASS |
| | 661 | 1880.0 | 29.53 | PASS |
| | 810 | 1909.8 | 29.45 | PASS |

Note 1: For the GPRS and EDGE model, all the slots were tested and just the worst data was record in this report.

2. WCDMA Model Test Verdict:


| Item | band | WCDMA 850 | | | WCDMA 1900 | | |
|-------|-----------------|-----------|--------------|-------|------------|--------------|-------|
| | Frequency | 4132 | 4183 | 4233 | 9262 | 9400 | 9538 |
| | Subtest | dBm | | | dBm | | |
| WCDMA | RMC 12.2Kbps | 23.18 | 23.26 | 23.21 | 23.22 | 23.24 | 23.19 |
| HSDPA | 1 | 23.12 | 23.18 | 23.14 | 23.15 | 23.20 | 23.07 |
| | 2 | 22.70 | 22.78 | 22.81 | 22.67 | 22.76 | 22.68 |
| | 3 | 22.43 | 22.62 | 22.51 | 22.47 | 22.35 | 22.54 |
| | 4 | 21.71 | 21.82 | 21.76 | 21.85 | 21.87 | 21.90 |
| HSUPA | 1 | 21.62 | 21.54 | 21.58 | 21.77 | 21.82 | 21.79 |
| | 2 | 22.30 | 22.35 | 22.42 | 22.24 | 22.32 | 22.37 |
| | 3 | 22.21 | 22.30 | 22.23 | 22.19 | 22.14 | 22.21 |
| | 4 | 21.86 | 22.05 | 22.00 | 21.92 | 22.03 | 22.06 |
| | 5 | 22.05 | 22.04 | 22.13 | 22.12 | 22.10 | 22.15 |

2.2 Peak to Average Radio

2.2.1 Definition

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

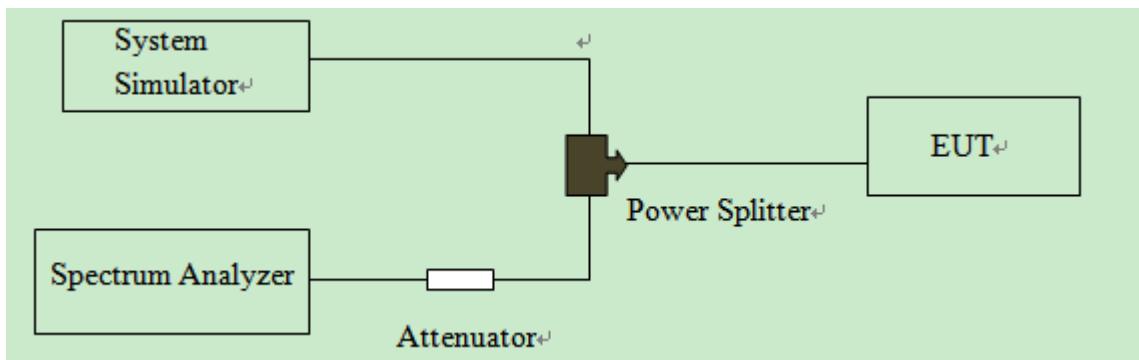

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due Date |
|-------------------|--------------|--------|------------|------------|---------------|
| System Simulator | R&S | CMW500 | 149333 | 2014.07.21 | 2015.07.20 |
| Spectrum Analyzer | R&S | FSP40 | 100341 | 2014.07.07 | 2015.07.06 |
| Attenuator 1 | Resent | 10dB | (n.a.) | 2014.06.11 | 2015.06.10 |
| Attenuator 2 | Resent | 3dB | (n.a.) | 2014.06.11 | 2015.06.10 |

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM operating mode:

- Set RBW=1MHz, VBW=3MHz, Peak detector on spectrum analyzer for first trace.
- Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
- The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.


B. For UMTS operating mode:

- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
- Record the deviation as Peak to Average Ratio.



1. Test Verdict:

| Band | Channel | Frequency (MHz) | Peak to Average radio | | Limit dBm | Verdict |
|------------------|---------|--------------------|-----------------------|---------------|--------------|---------|
| | | | dBm | Refer to Plot | | |
| GSM 1900MHz | 512 | 1850.2 | 0.06 | Plot A1 to A3 | 13 | PASS |
| | 661 | 1880.0 | 0.04 | | | PASS |
| | 810 | 1909.8 | 0.06 | | | PASS |
| EDGE 1900MHz | 512 | 1850.2 | 0.06 | Plot B1 to B3 | 13 | PASS |
| | 661 | 1880.0 | 0.05 | | | PASS |
| | 810 | 1909.8 | 0.06 | | | PASS |
| WCDMA 1900MHz | 9262 | 1852.4 | 6.40 | Plot D1 to D3 | 13 | PASS |
| | 9400 | 1880.0 | 5.88 | | | PASS |
| | 9538 | 1907.6 | 5.88 | | | PASS |



2. GSM Model Test Plots:

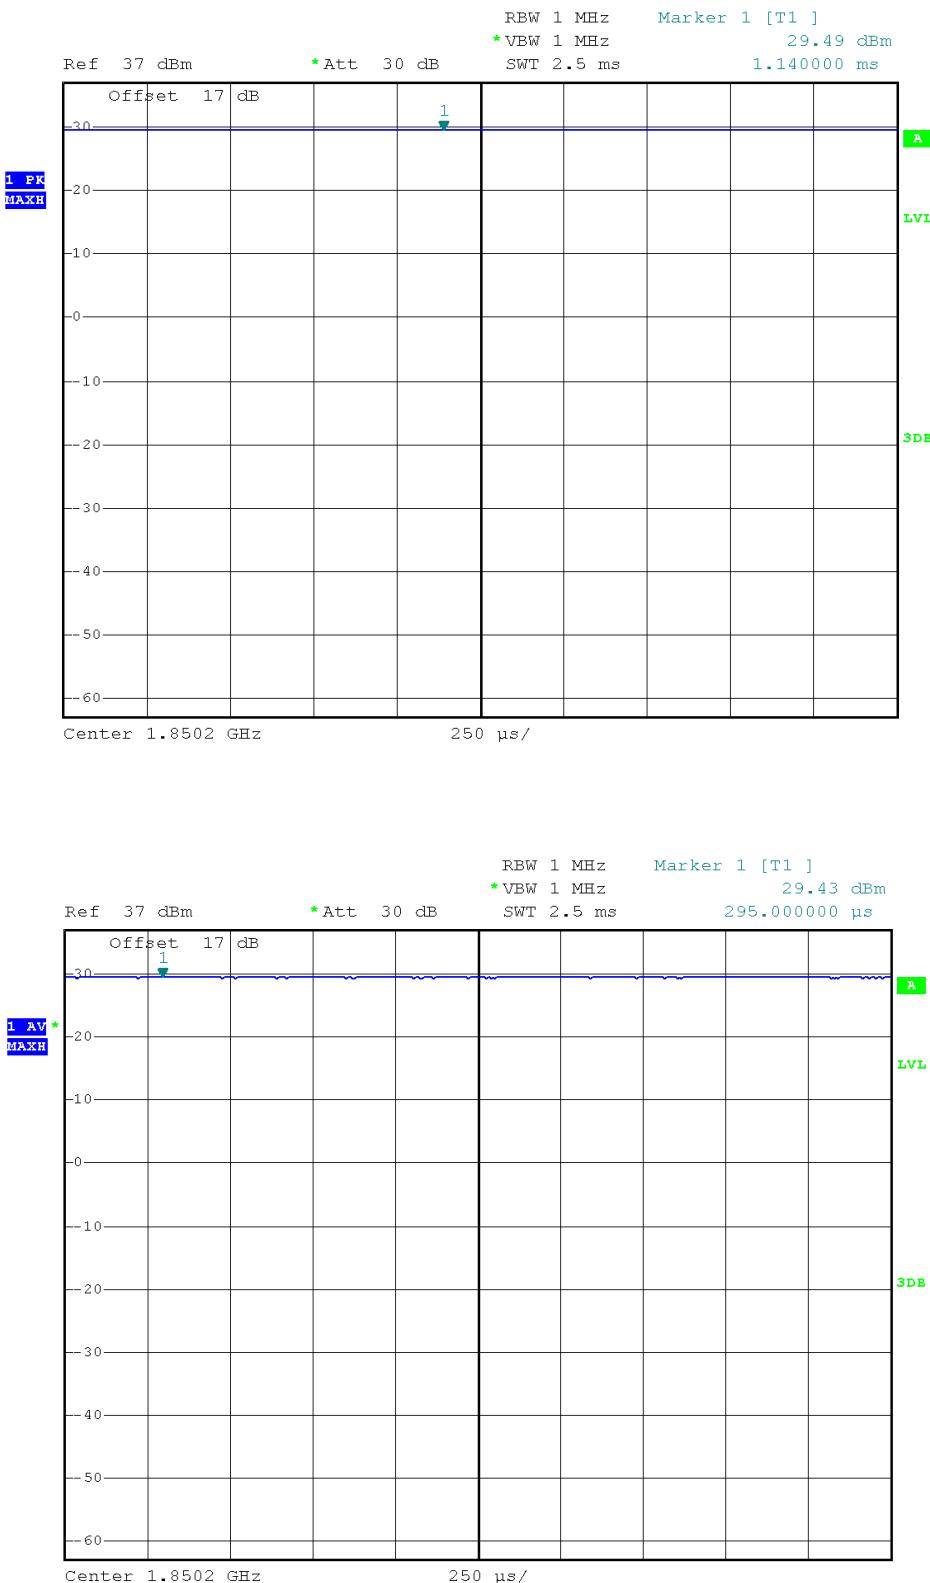



(Plot A1: GSM 1900 MHz Channel = 512)

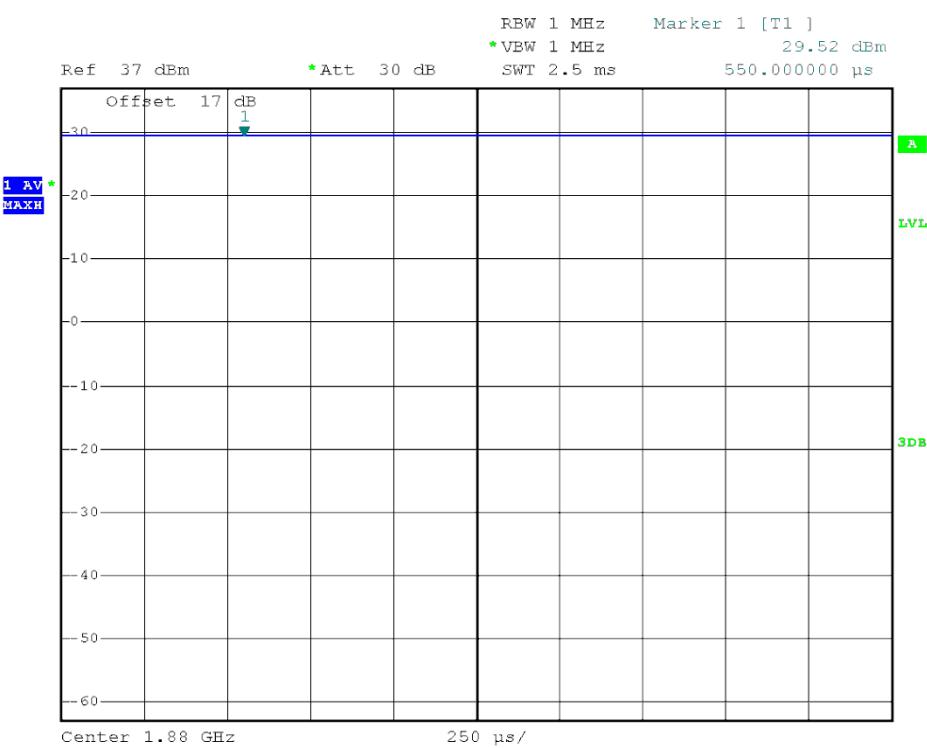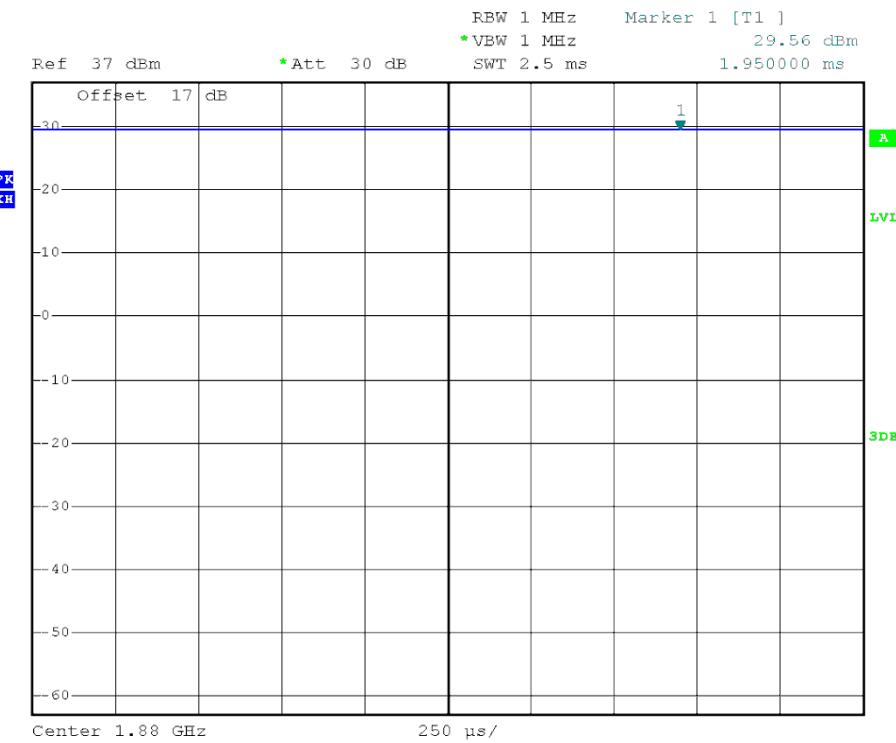


(Plot A2: GSM 1900 MHz Channel = 661)

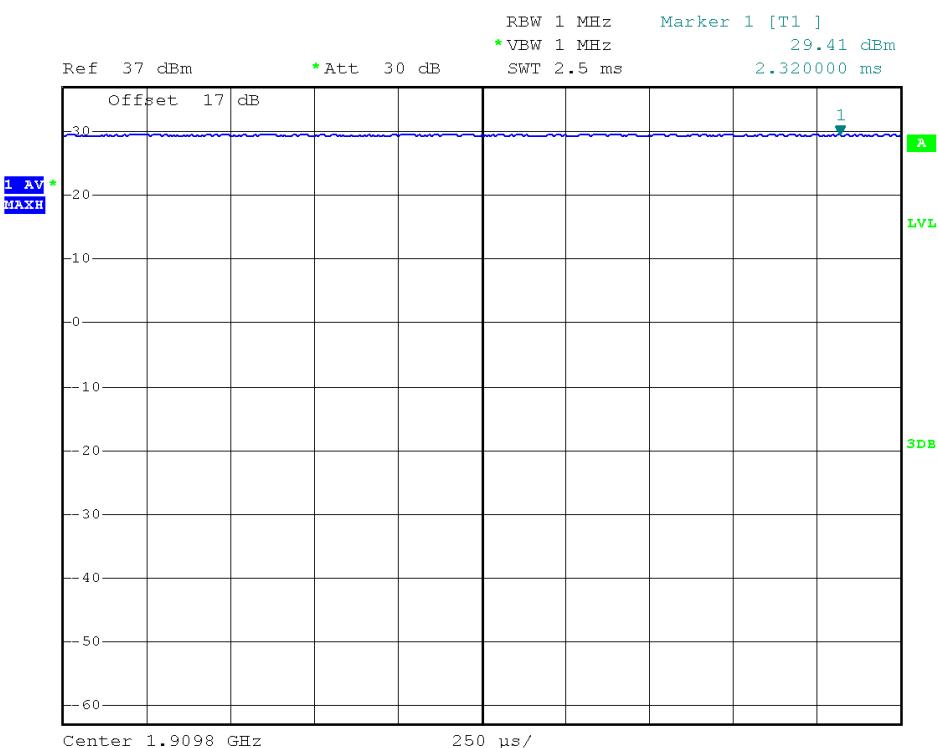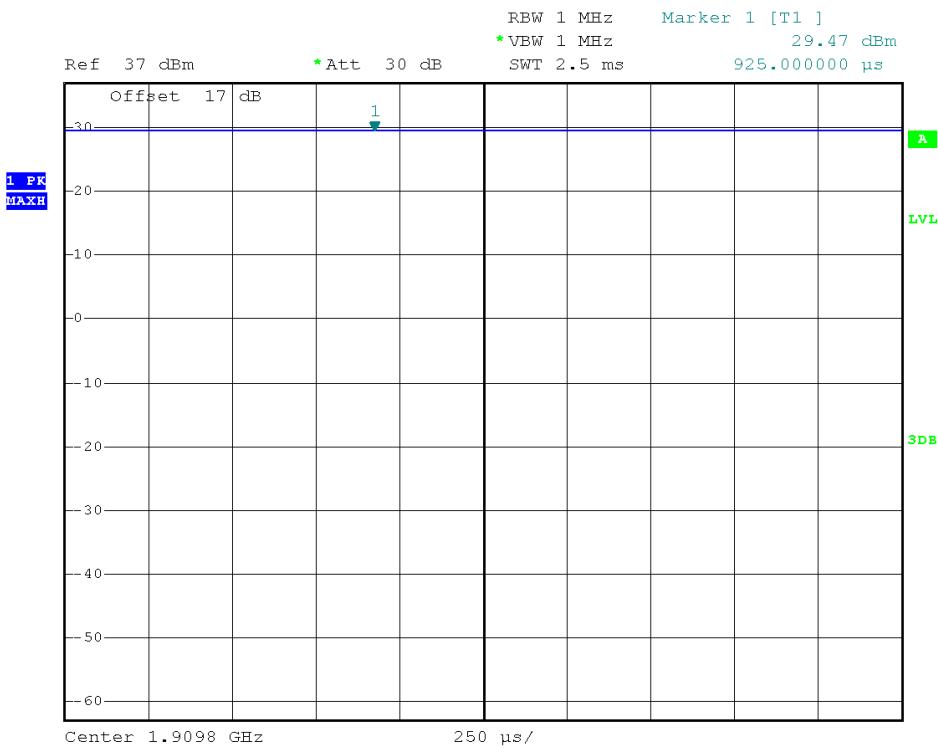



(Plot A3: GSM 1900MHz Channel = 810)

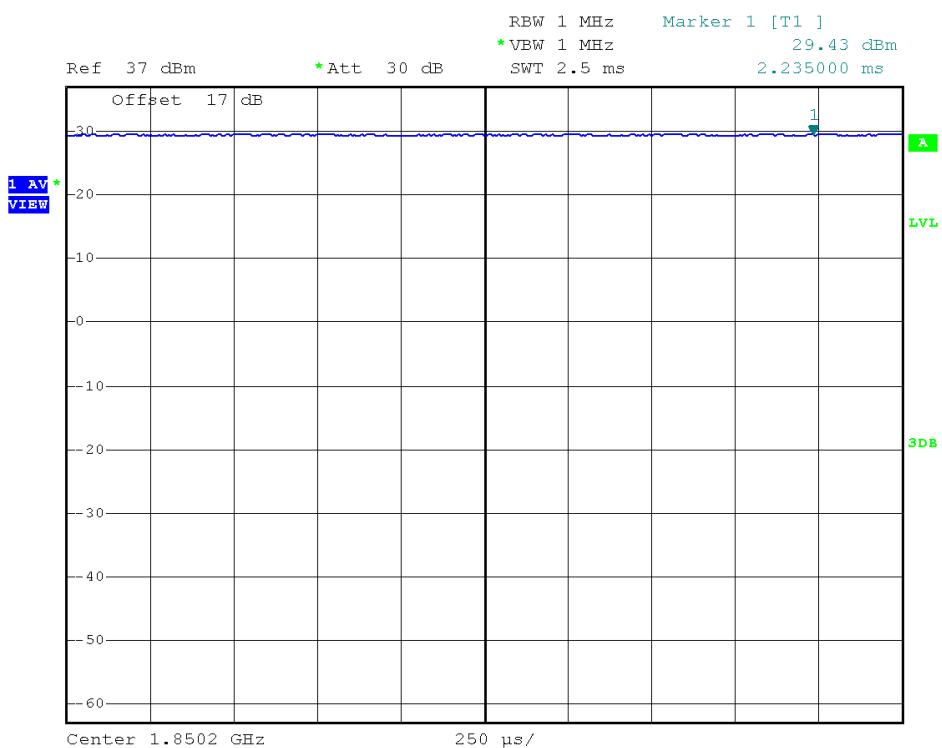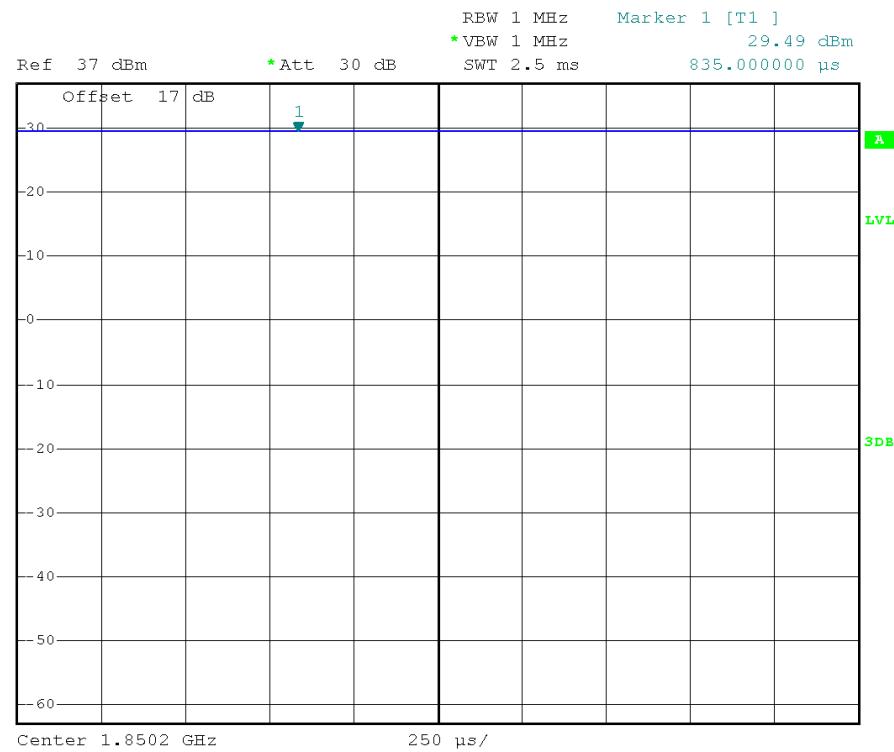


(Plot B1: EDGE 1900 MHz Channel = 512)

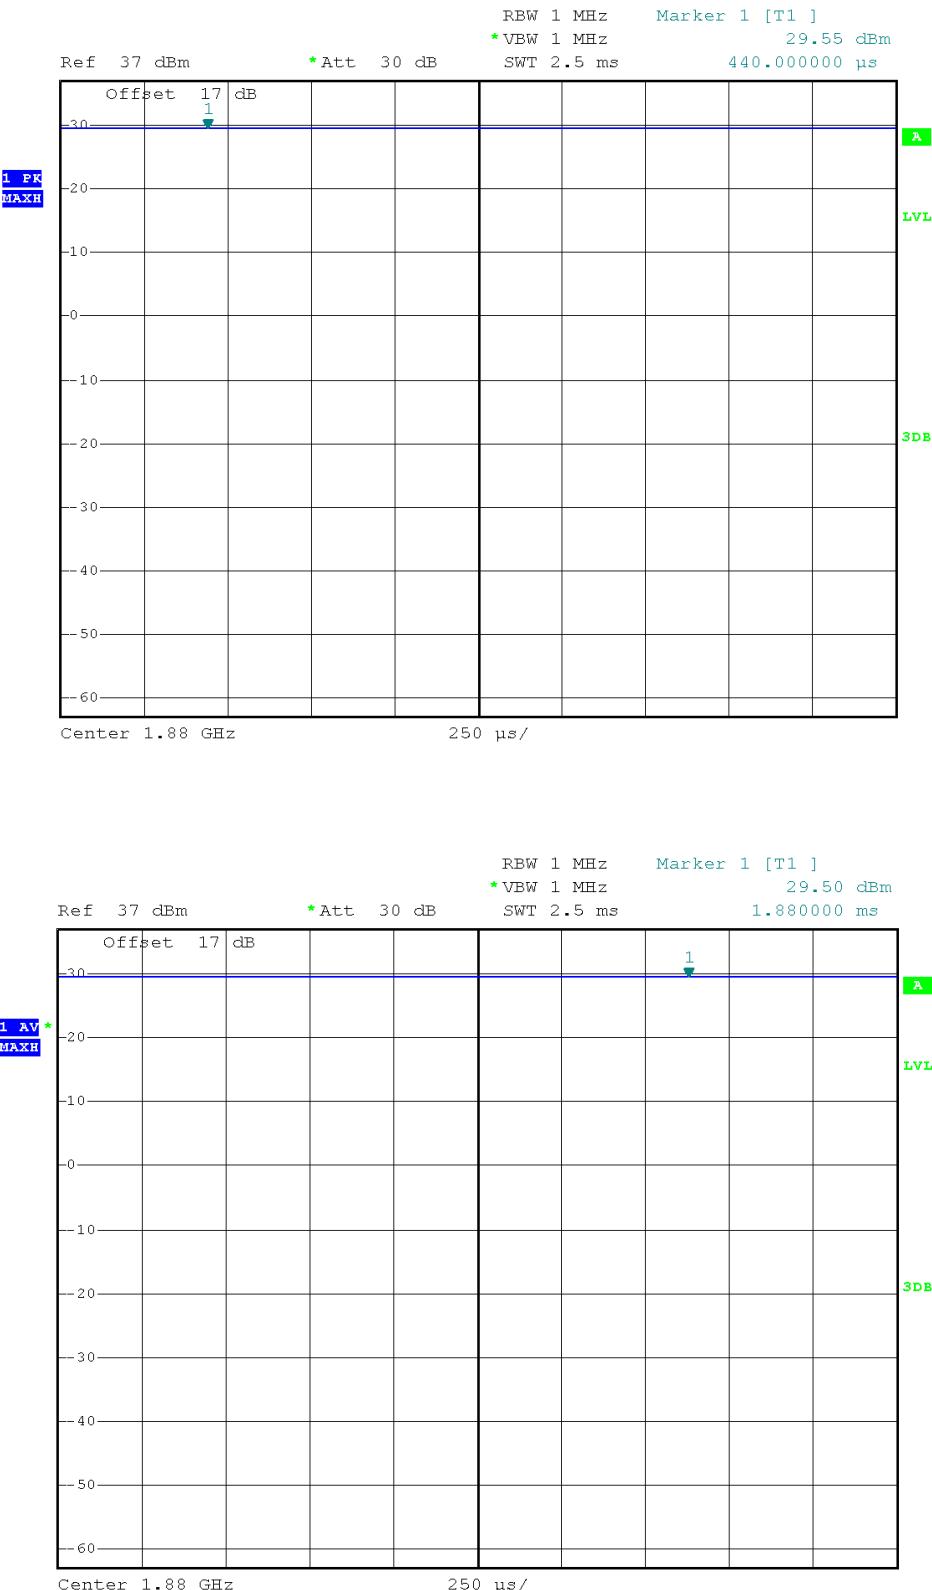


(Plot B2: EDGE 1900 MHz Channel = 661)

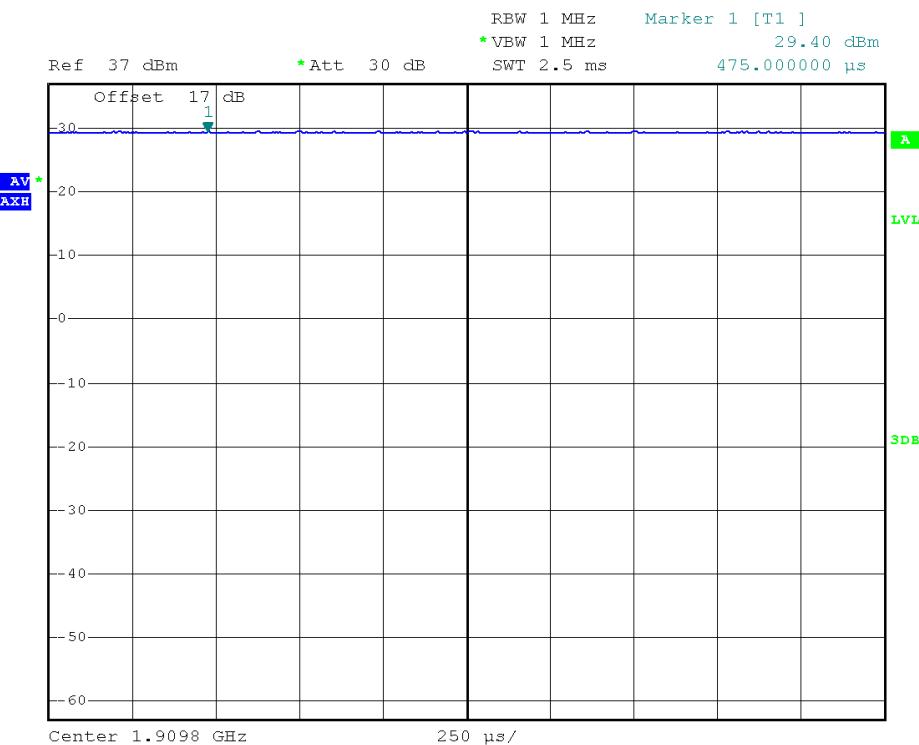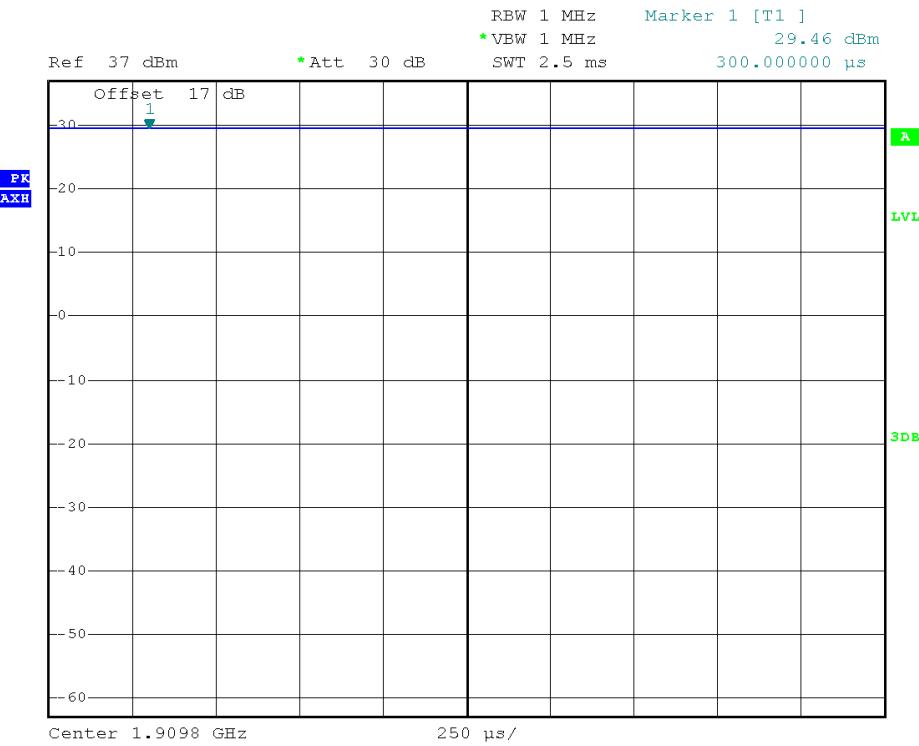


(Plot B3: EDGE 1900MHz Channel = 810)

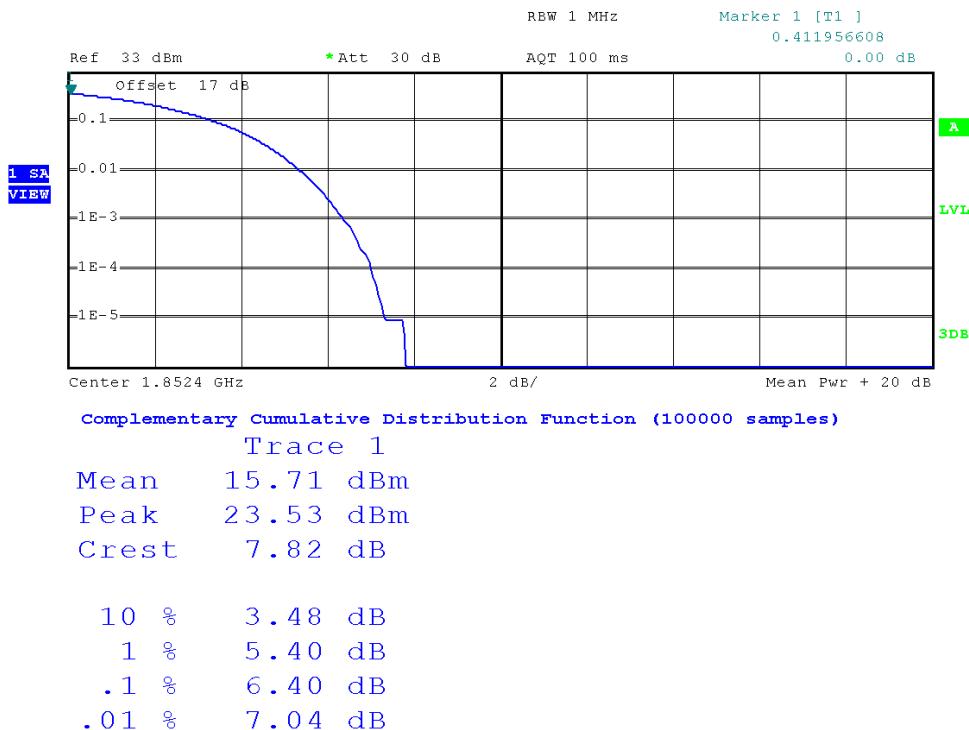

(Plot C1: WCDMA 1900MHz Channel = 9262)

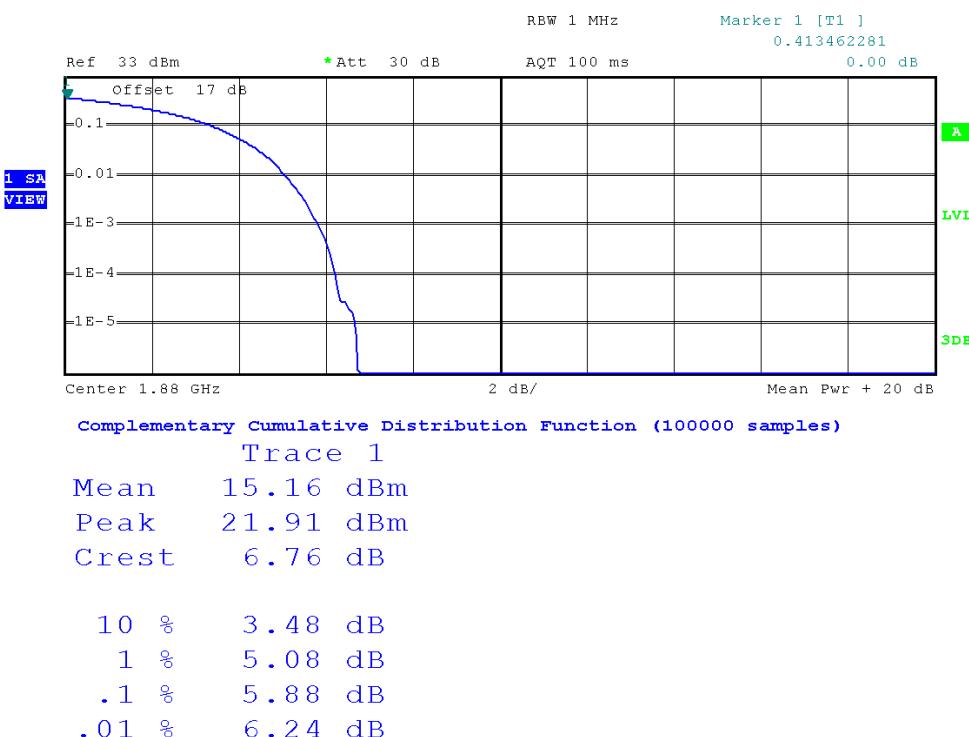

(Plot C2: WCDMA 1900MHz Channel = 9400)

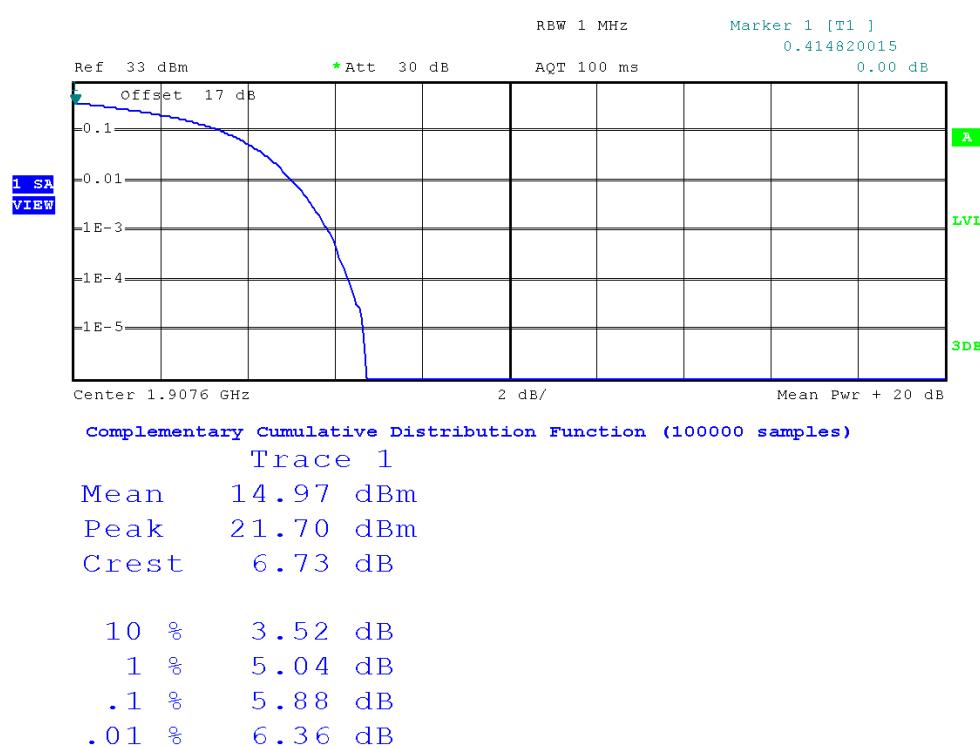

(Plot C3: WCDMA 1900MHz Channel = 9538)

2.3 99% Occupied Bandwidth

2.3.1 Definition

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

2.3.4 Test Verdict


Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

1. Test Verdict:


| Band | Channel | Frequency (MHz) | 26dB bandwidth | 99% Occupied Bandwidth | Refer to Plot |
|-------------|---------|-----------------|----------------|------------------------|---------------|
| GSM 850MHz | 128 | 824.2 | 316 kHz | 248 kHz | Plot A1-A2 |
| | 190 | 836.6 | 320 kHz | 248 kHz | Plot A3-A4 |
| | 251 | 848.8 | 314 kHz | 250 kHz | Plot A5-A6 |
| GSM 1900MHz | 512 | 1850.2 | 314 kHz | 250 kHz | Plot B1-B2 |
| | 661 | 1880.0 | 314 kHz | 248 kHz | Plot B3-B4 |
| | 810 | 1909.8 | 312 kHz | 248 kHz | Plot B5-B6 |

| Band | Channel | Frequency (MHz) | 26dB bandwidth | 99% Occupied Bandwidth | Refer to Plot |
|---------------|---------|-----------------|----------------|------------------------|---------------|
| EDGE 850MHz | 128 | 824.2 | 310 kHz | 242 kHz | Plot C1-C2 |
| | 190 | 836.6 | 312 kHz | 244 kHz | Plot C3-C4 |
| | 251 | 848.8 | 308 kHz | 244 kHz | Plot C5-C6 |
| EDGE 1900MHz | 512 | 1850.2 | 310 kHz | 244 kHz | Plot D1-D2 |
| | 661 | 1880.0 | 310 kHz | 246 kHz | Plot D3-D4 |
| | 810 | 1909.8 | 304 kHz | 246 kHz | Plot D5-D6 |
| WCDMA 850MHz | 4132 | 826.4 | 4.76MHz | 4.18 MHz | Plot E1-E2 |
| | 4183 | 836.6 | 4.74 MHz | 4.18 MHz | Plot E3-E4 |
| | 4233 | 846.6 | 4.76 MHz | 4.18 MHz | Plot E5-E6 |
| WCDMA 1900MHz | 9262 | 1852.4 | 4.76 MHz | 4.18 MHz | Plot F1-F2 |
| | 9400 | 1880 | 4.74 MHz | 4.20 MHz | Plot F3-F4 |
| | 9538 | 1907.6 | 4.74 MHz | 4.18 MHz | Plot F5-F6 |


2. Test Plots:

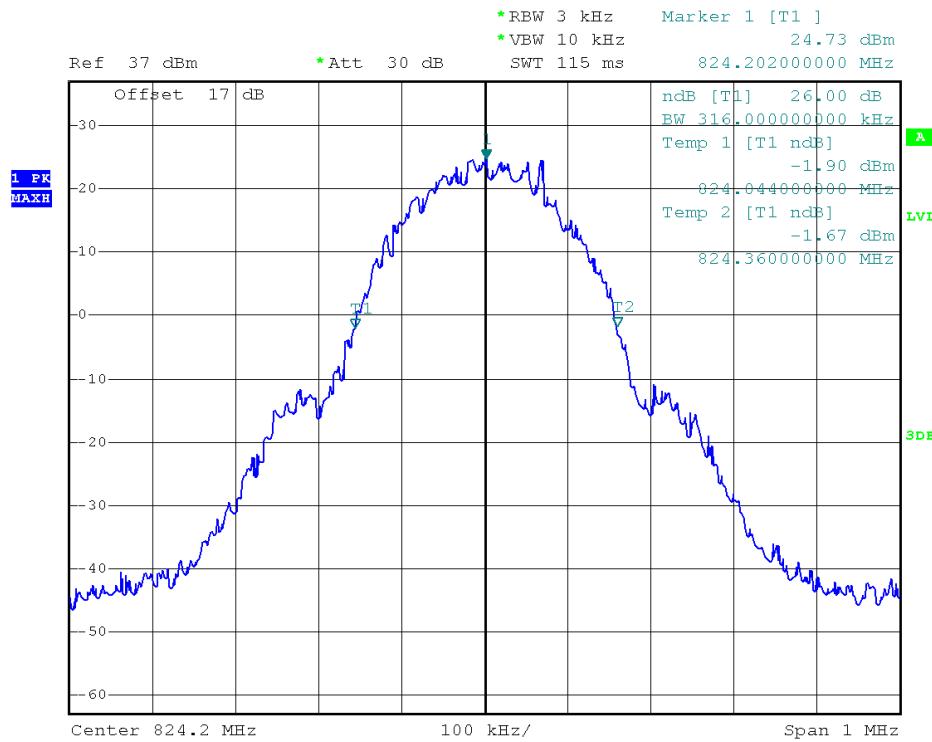


(Plot A1: GSM 850MHz Channel = 128 26dB bandwidth)

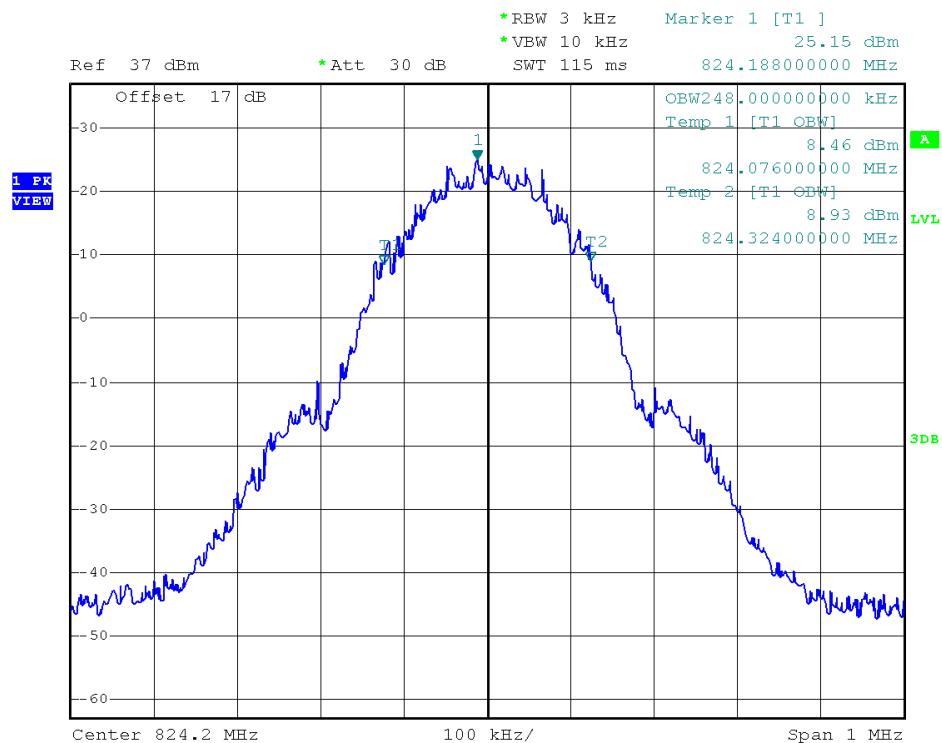


(Plot A2: GSM 850MHz Channel = 128 99% Occupied Bandwidth)

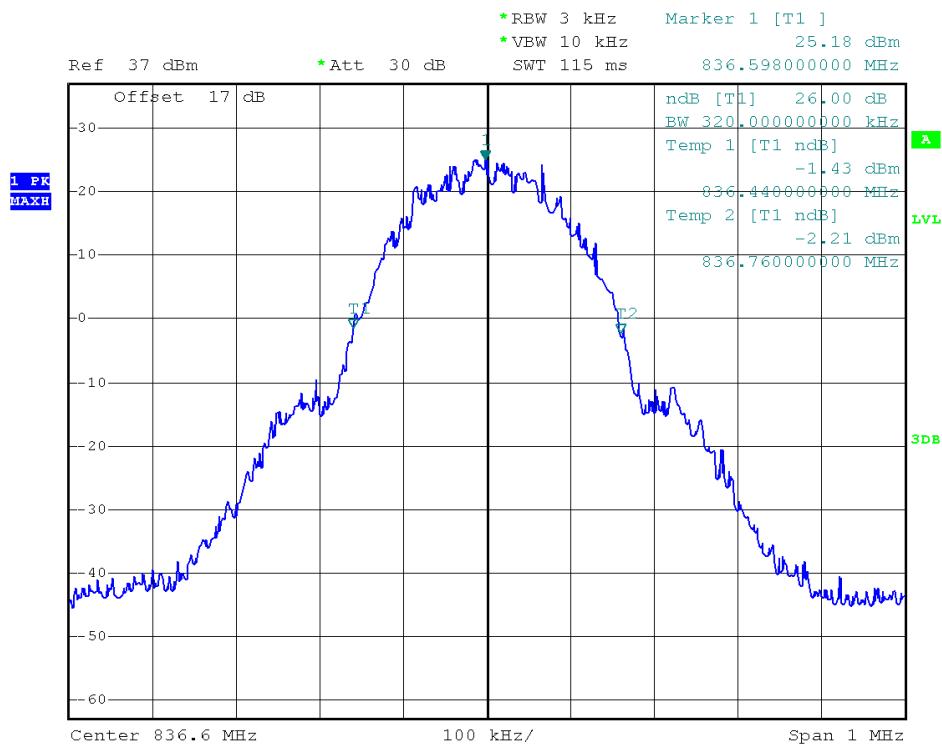


(Plot A3: GSM 850MHz Channel = 190 26dB bandwidth)

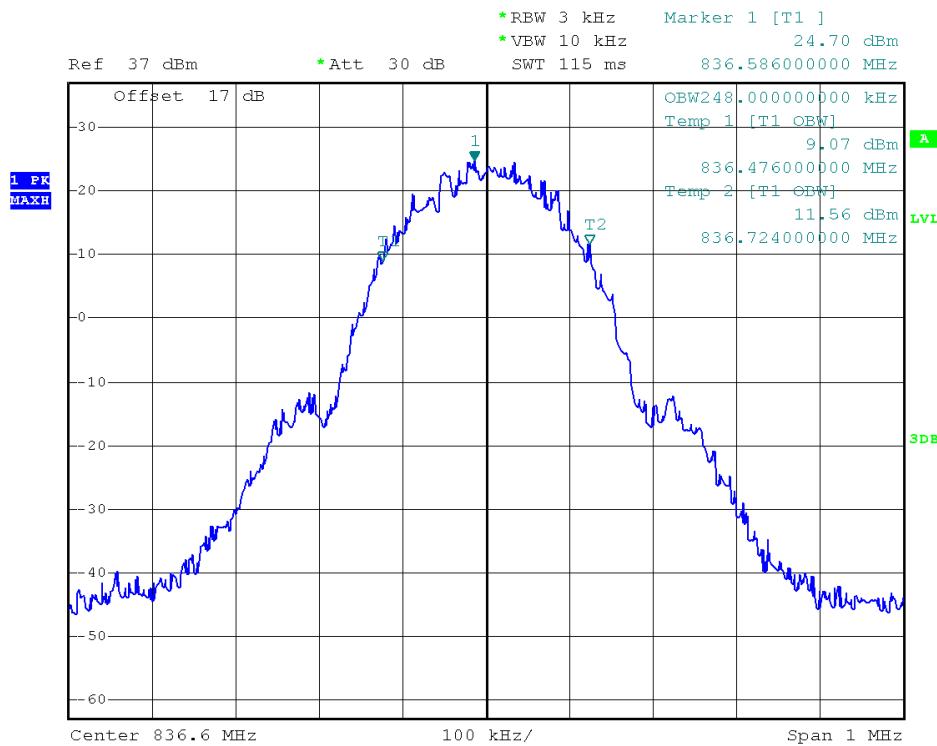


(Plot A4: GSM 850MHz Channel = 190 99% Occupied Bandwidth)

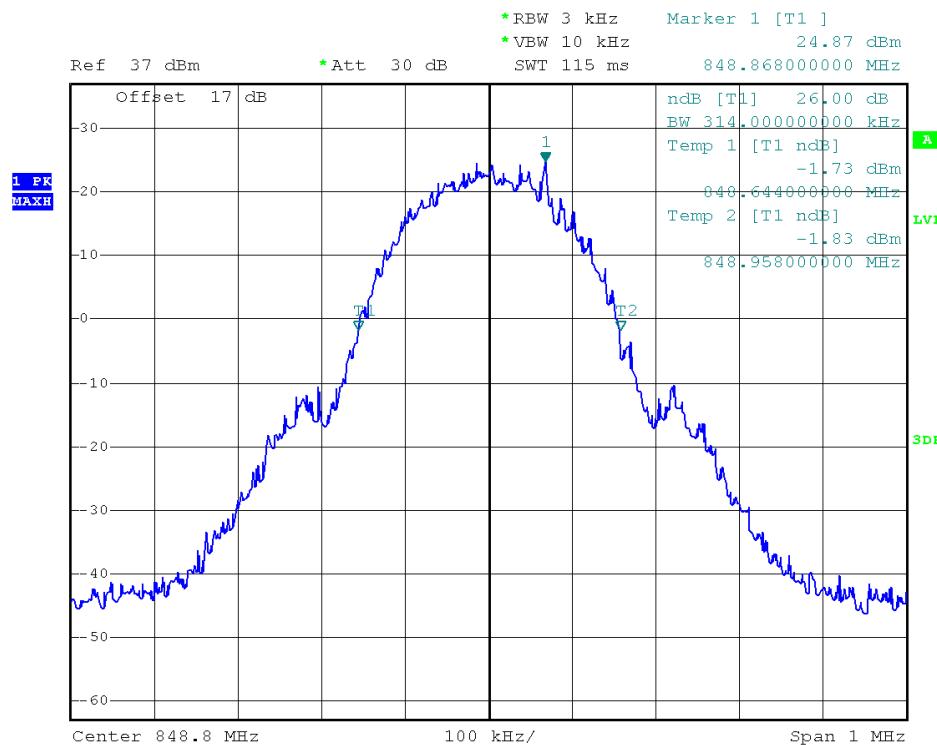


(Plot A5: GSM 850MHz Channel = 251 26dB bandwidth)

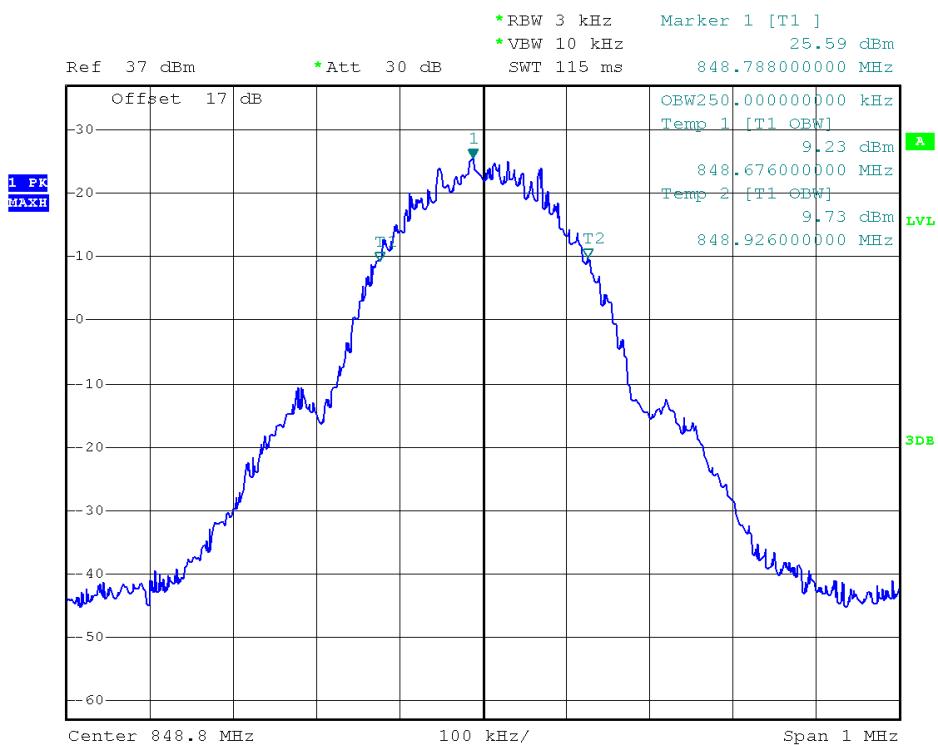


(Plot A6: GSM 850MHz Channel = 251 99% Occupied Bandwidth)

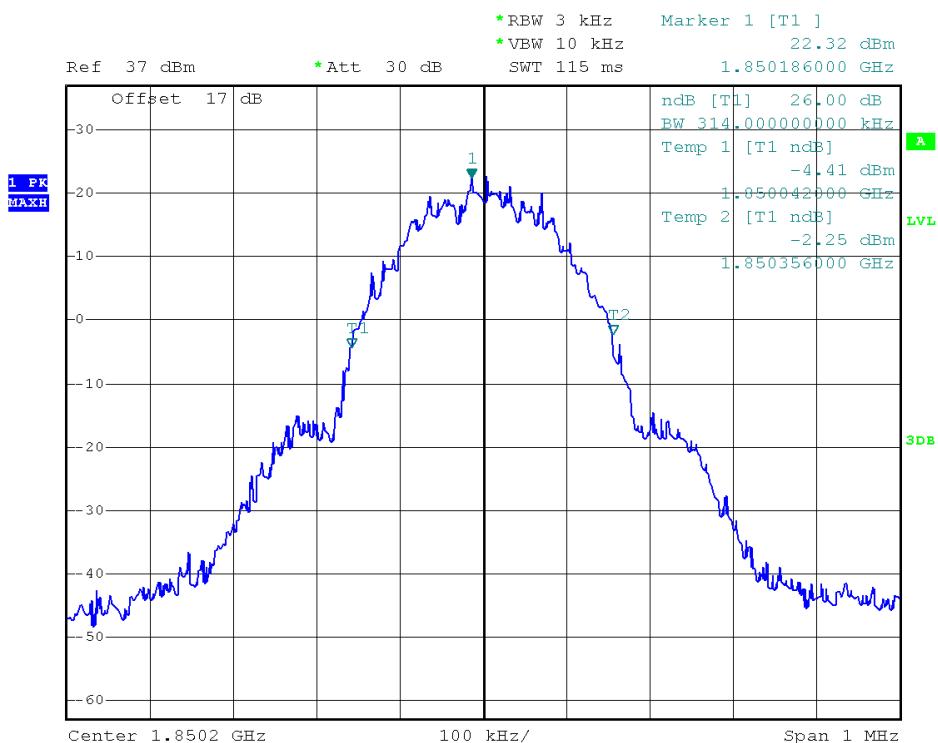


(Plot B1: GSM 1900MHz Channel = 512 26dB bandwidth)

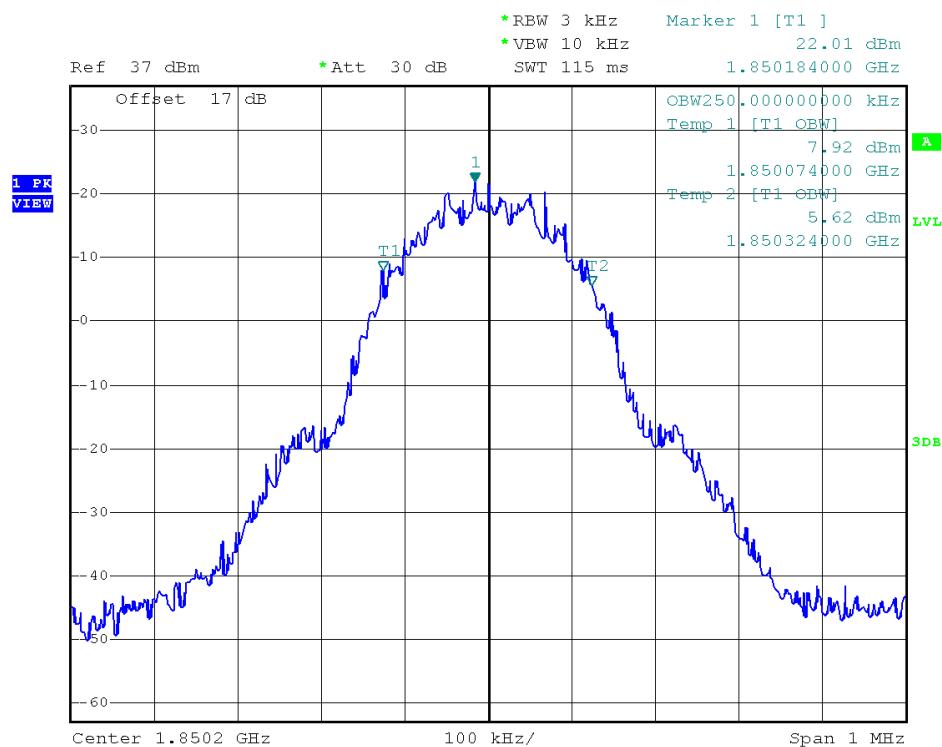


(Plot B2: GSM 1900MHz Channel = 512 99% Occupied Bandwidth)

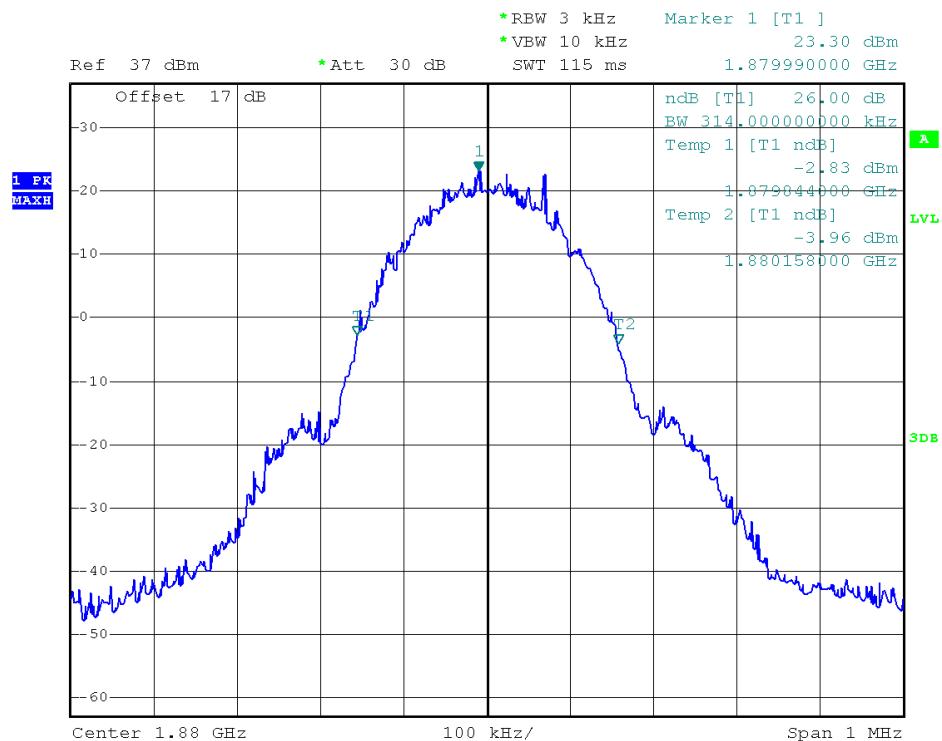


(Plot B3: GSM 1900MHz Channel = 661 26dB bandwidth)

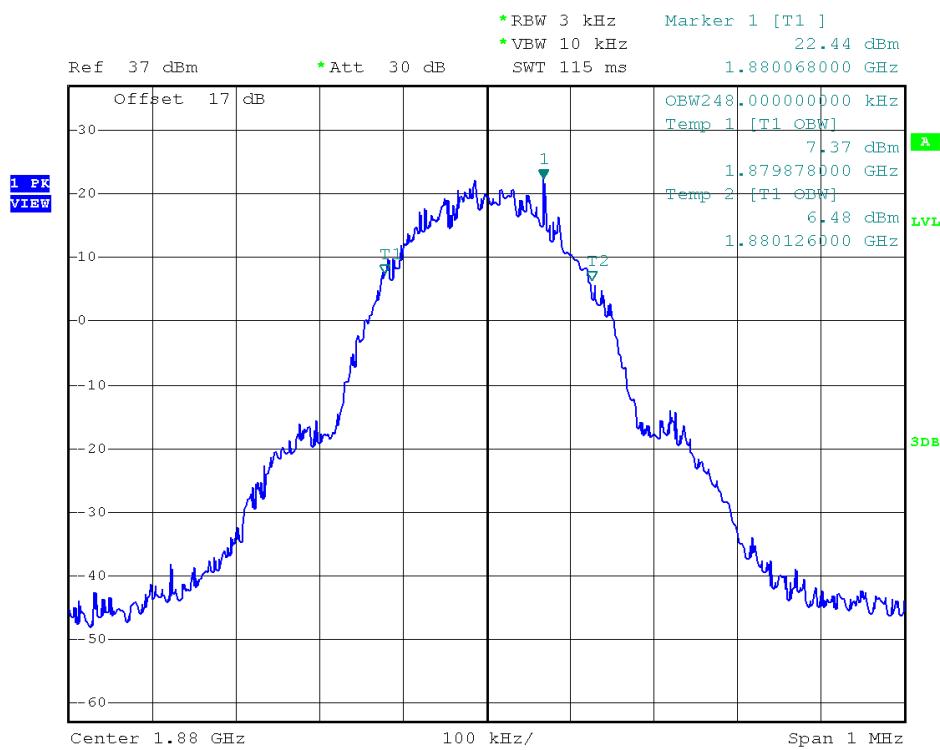


(Plot B4: GSM 1900MHz Channel = 661 99% Occupied Bandwidth)

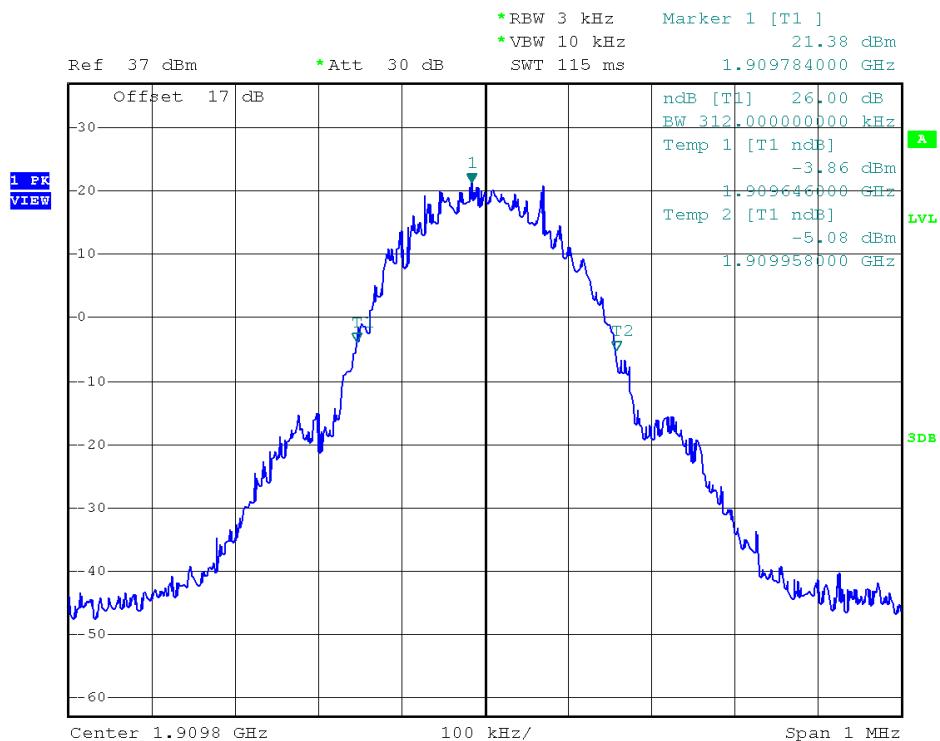



(Plot B5: GSM 1900MHz Channel = 810 26dB bandwidth)

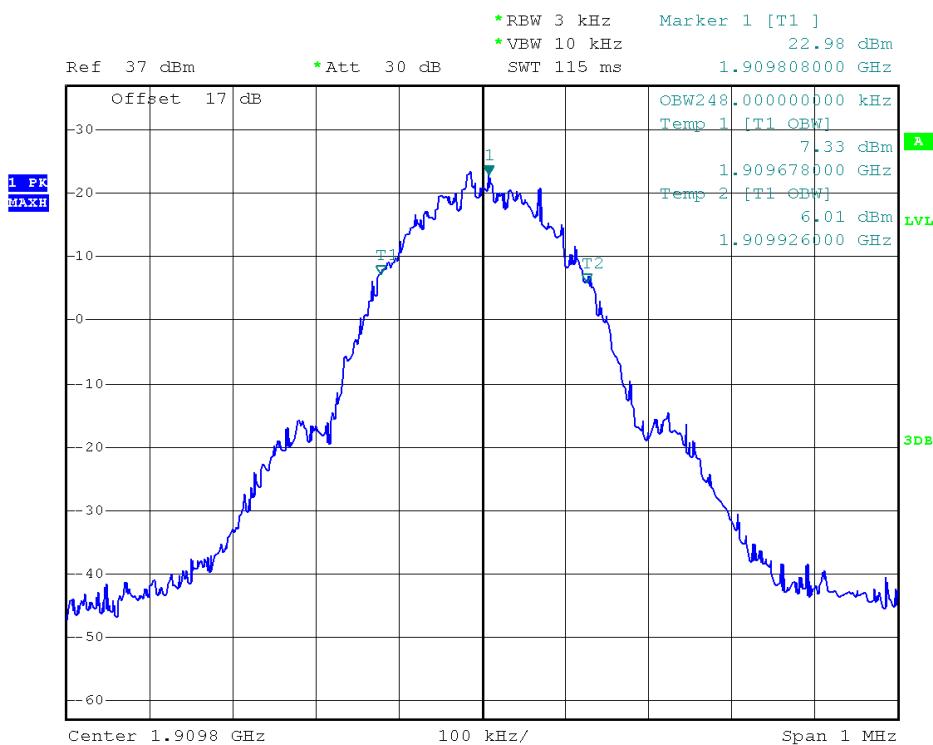


(Plot B6: GSM 1900MHz Channel = 810 99% Occupied Bandwidth)

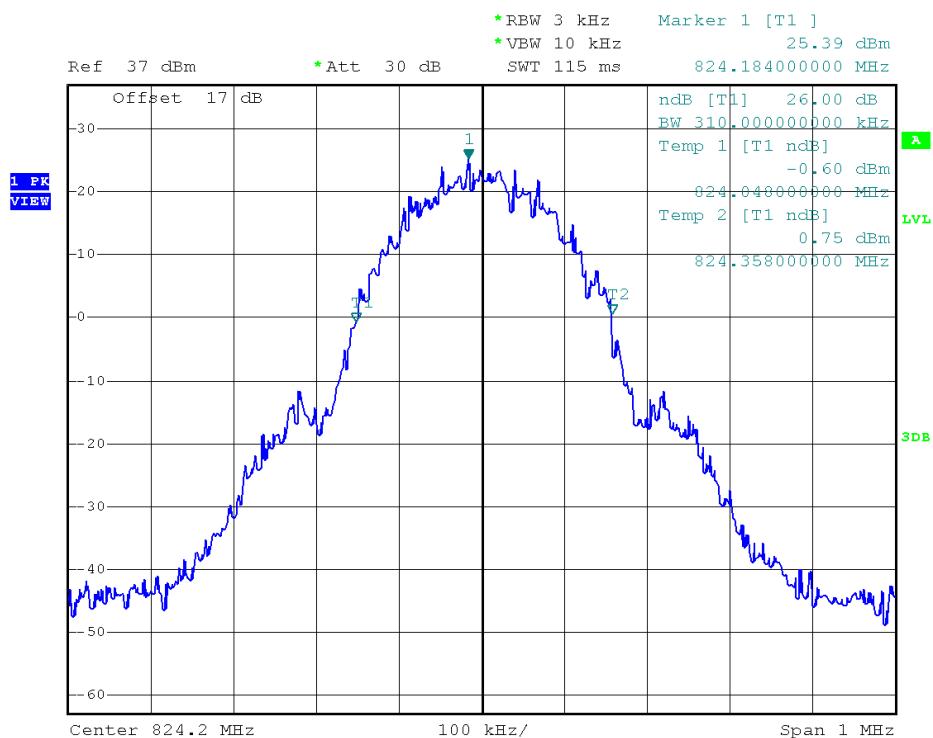


(Plot C1: EDGE 850MHz Channel = 128 26dB bandwidth)

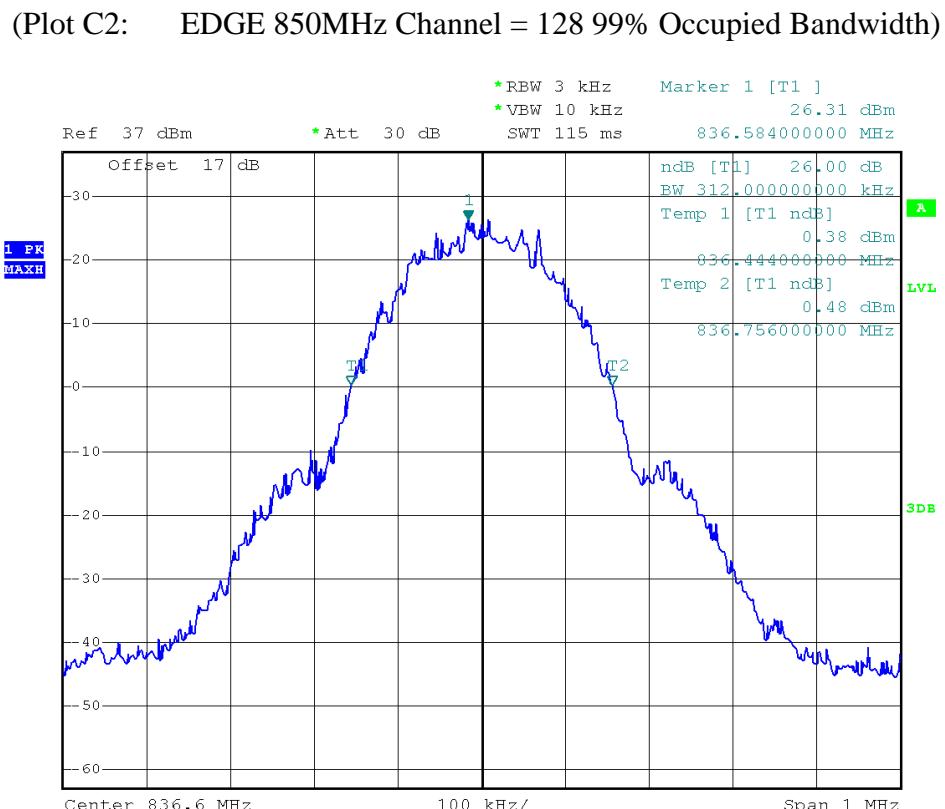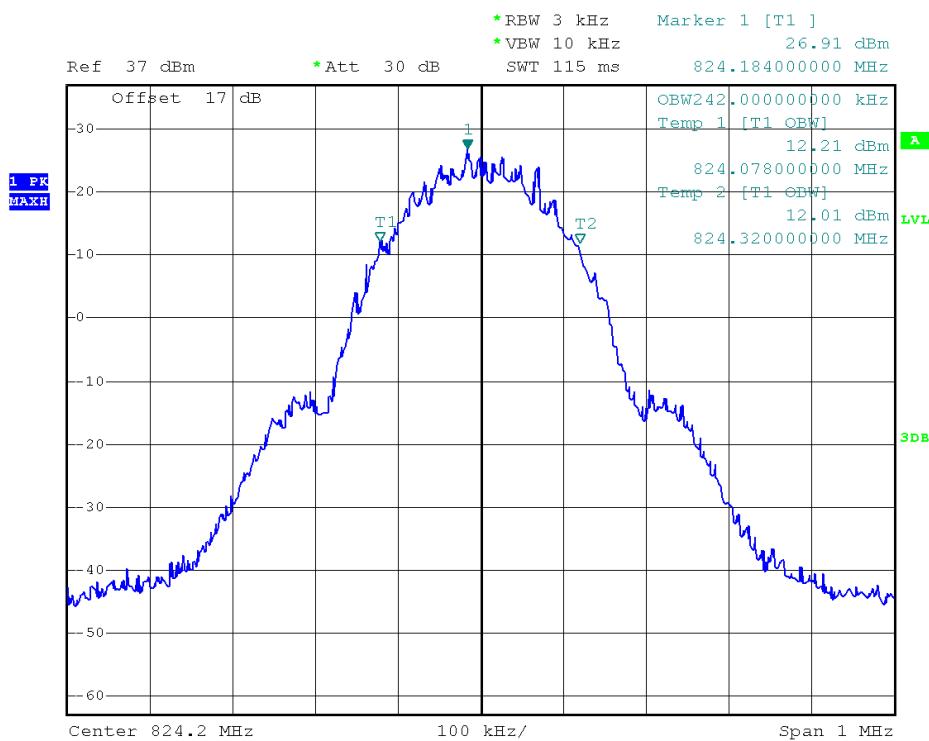


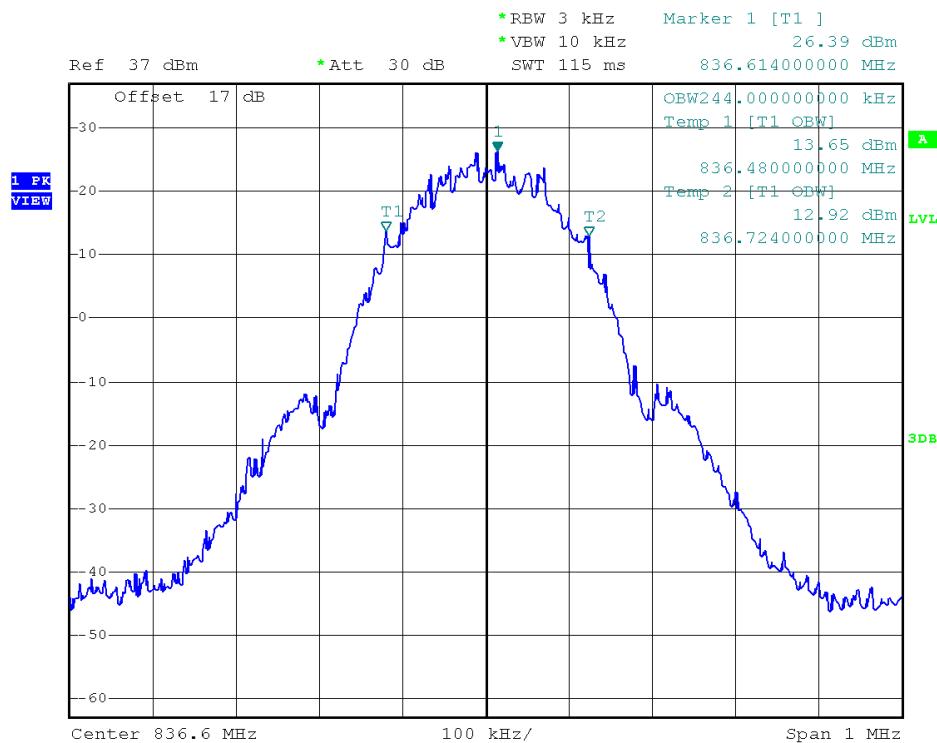


(Plot C4: EDGE 850MHz Channel = 190 99% Occupied Bandwidth)

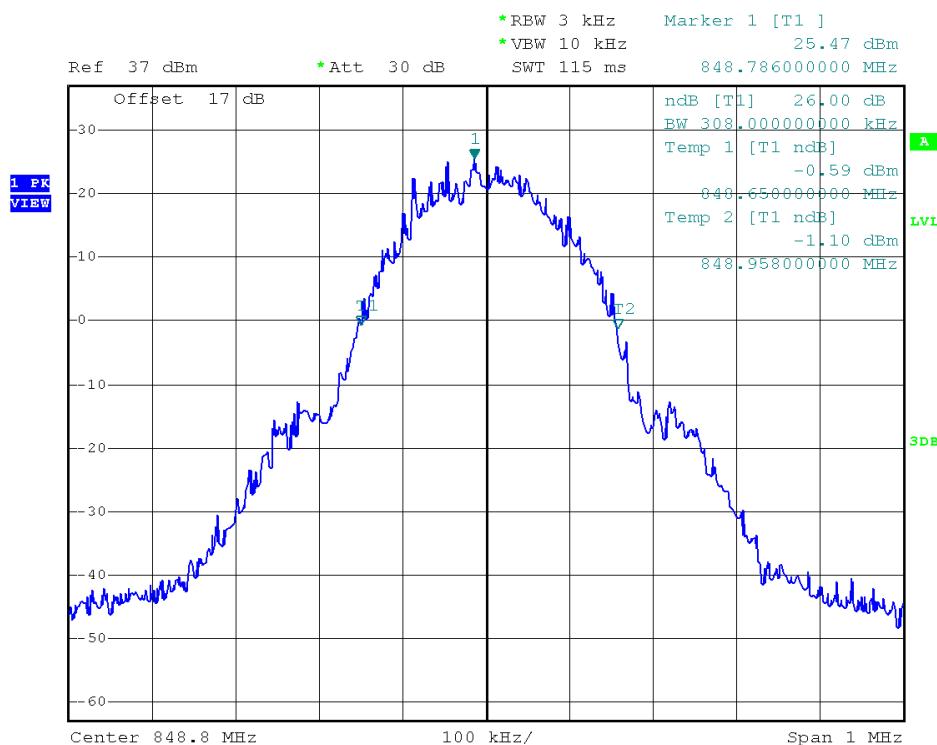


(Plot C5: EDGE 850MHz Channel = 251 26dB bandwidth)

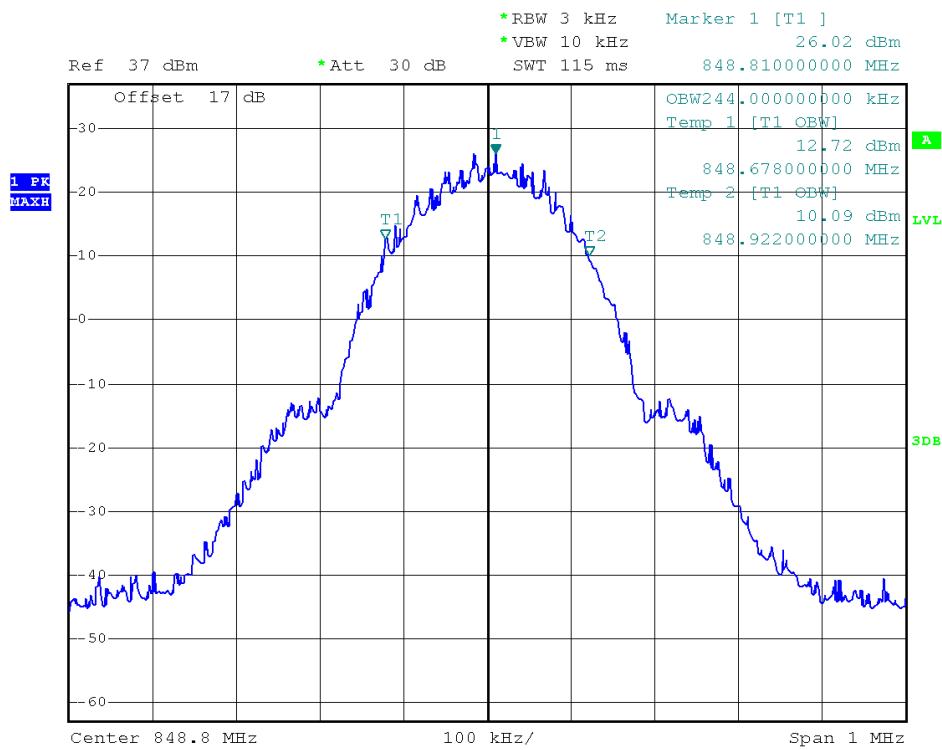


(Plot C6: EDGE 850MHz Channel = 251 99% Occupied Bandwidth)

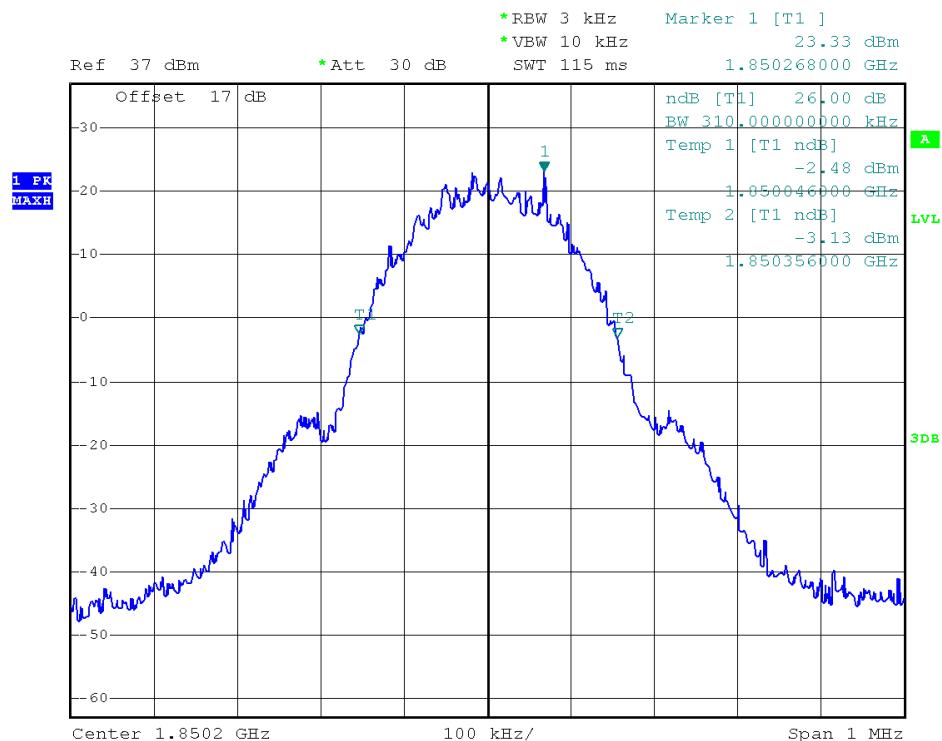


(Plot D1: EDGE 1900MHz Channel = 512 26dB bandwidth)

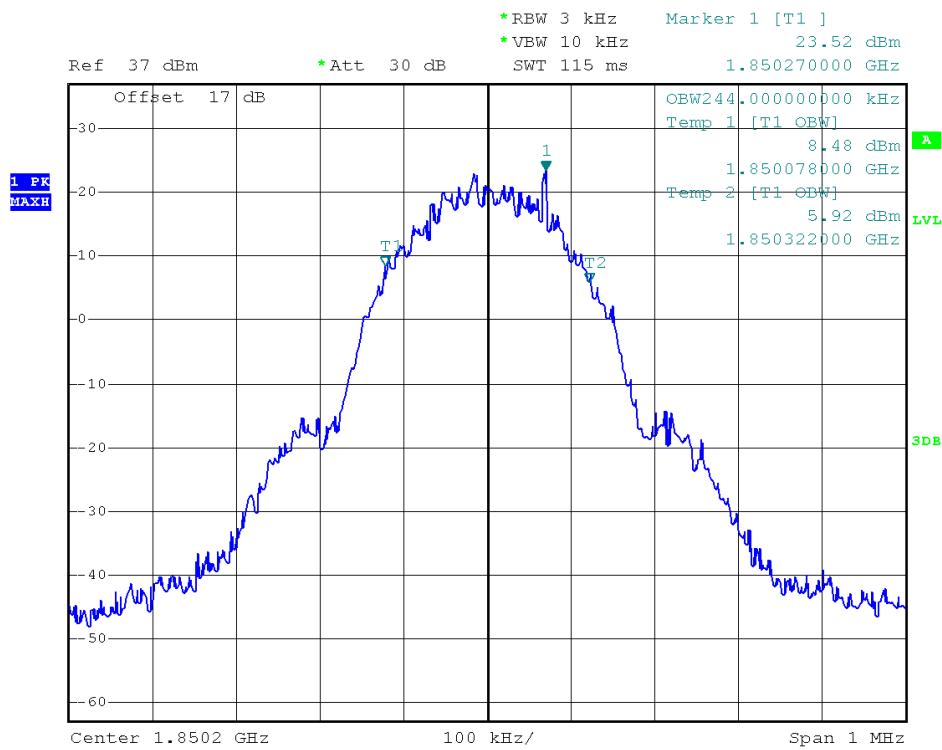


(Plot D2: EDGE 1900MHz Channel = 512 99% Occupied Bandwidth)

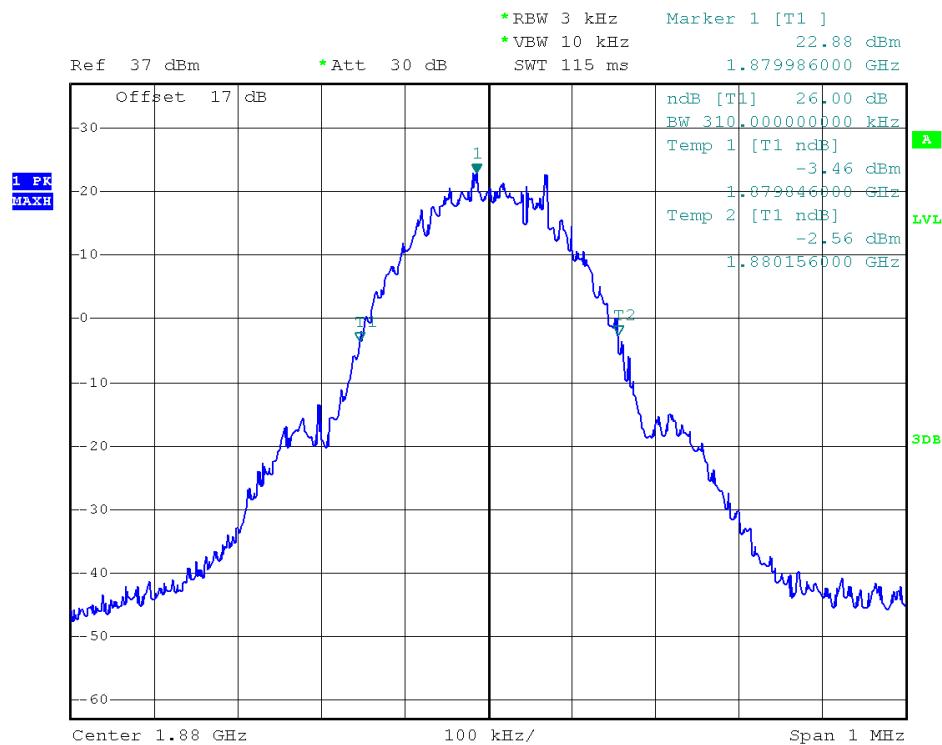


(Plot D3: EDGE 1900MHz Channel = 661 26dB bandwidth)

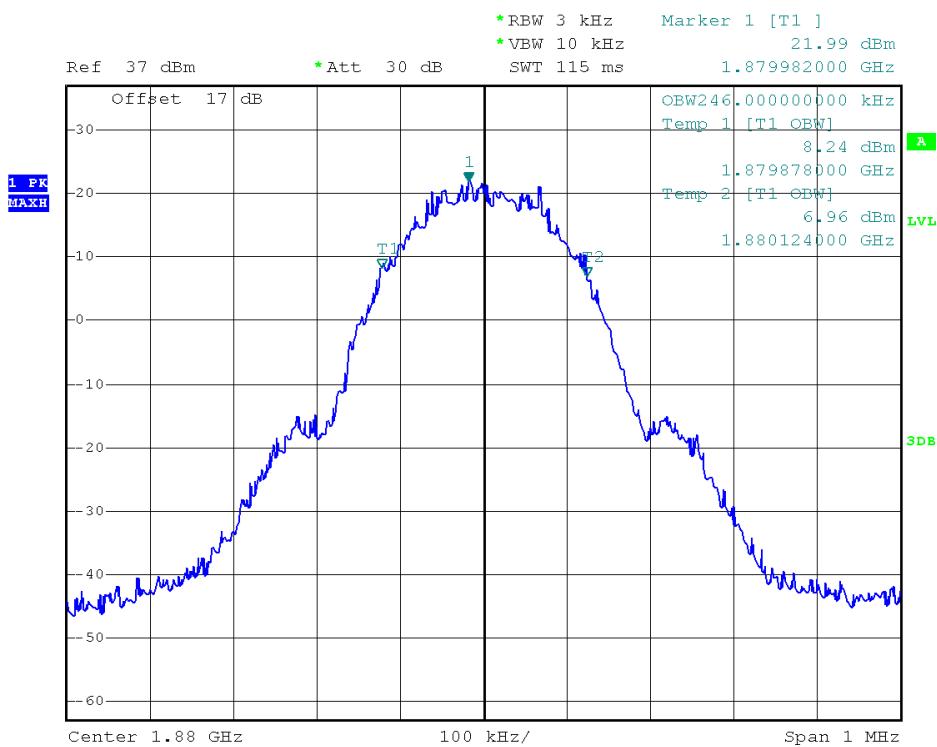


(Plot D4: EDGE 1900MHz Channel = 661 99% Occupied Bandwidth)

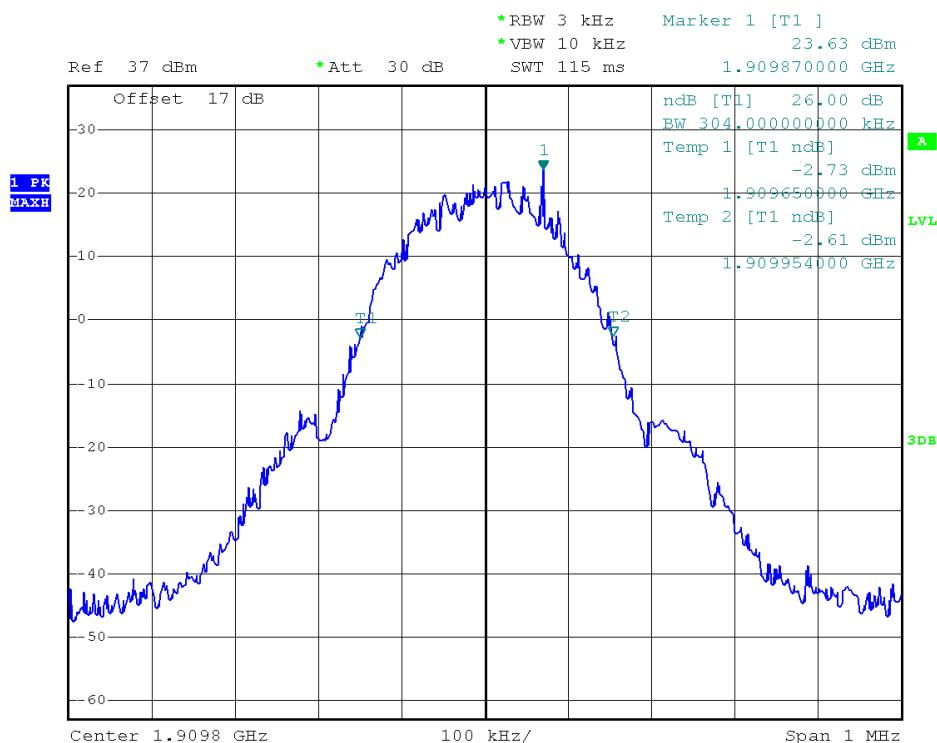



(Plot D5: EDGE 1900MHz Channel = 810 26dB bandwidth)

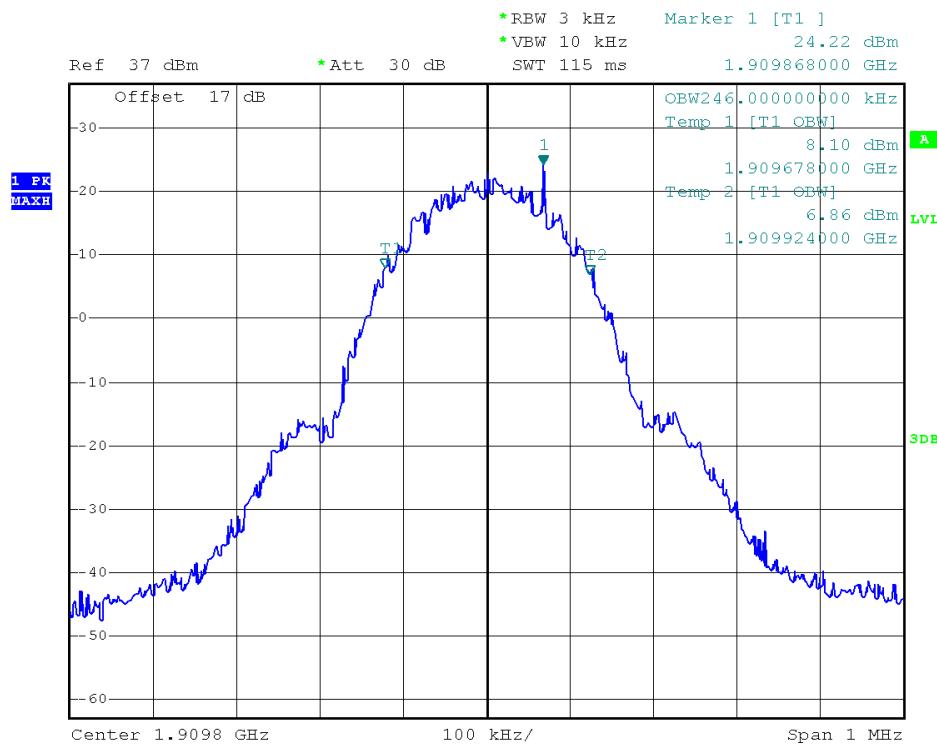


(Plot D6: EDGE 1900MHz Channel = 810 99% Occupied Bandwidth)

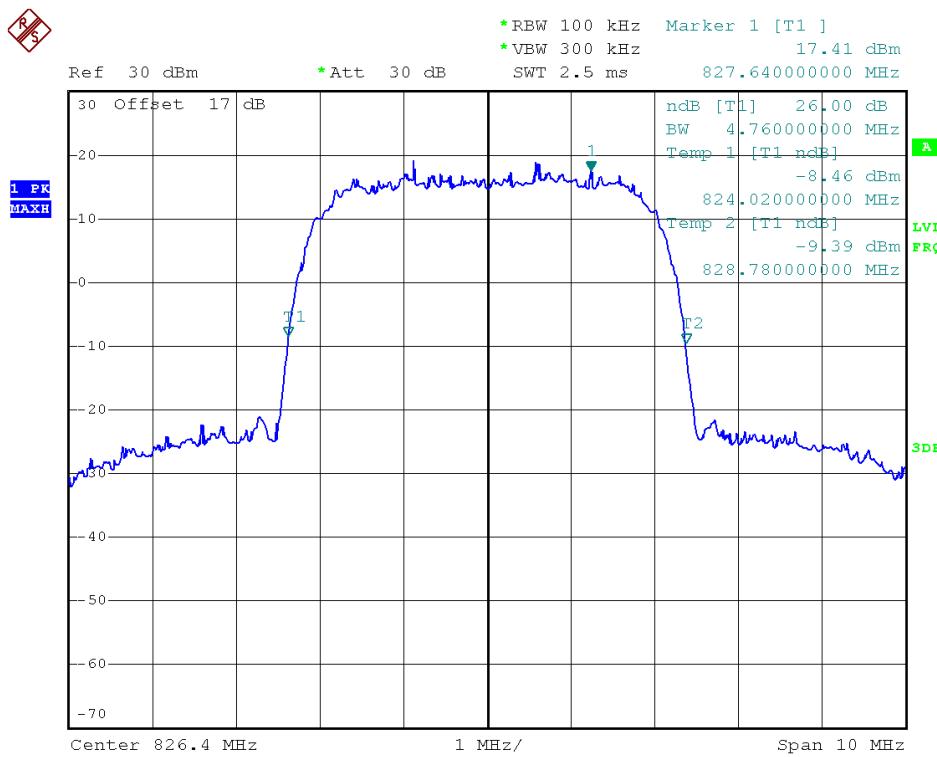


(Plot E1: WCDMA 850MHz Channel = 4132 26dB bandwidth)

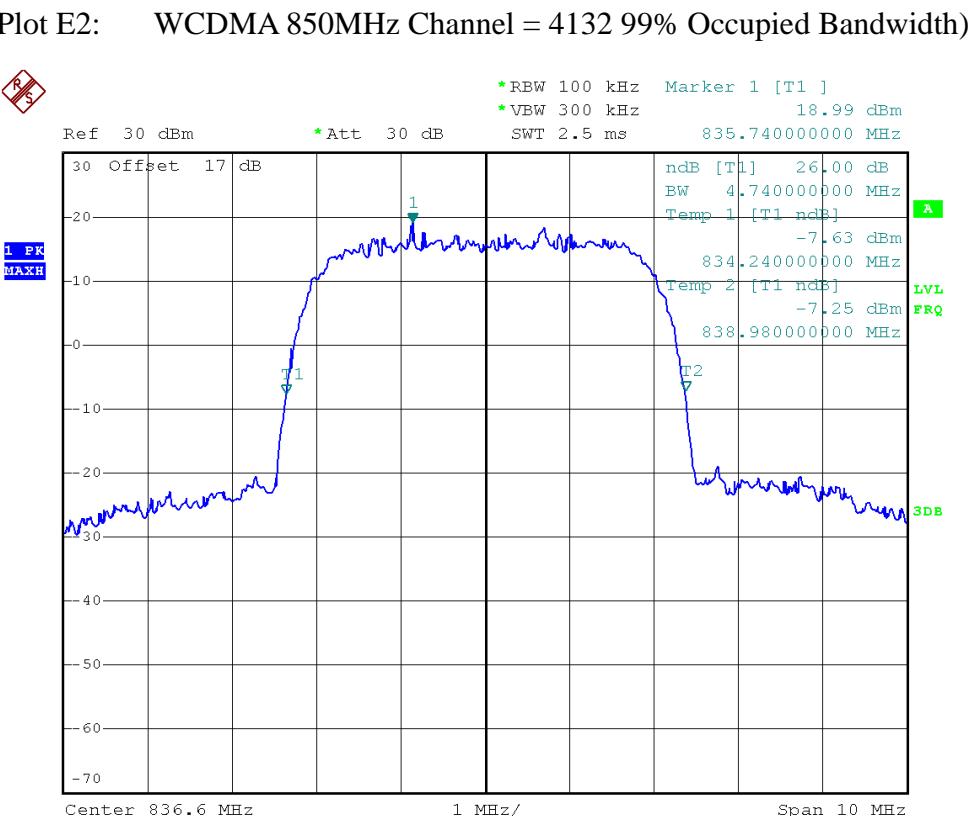
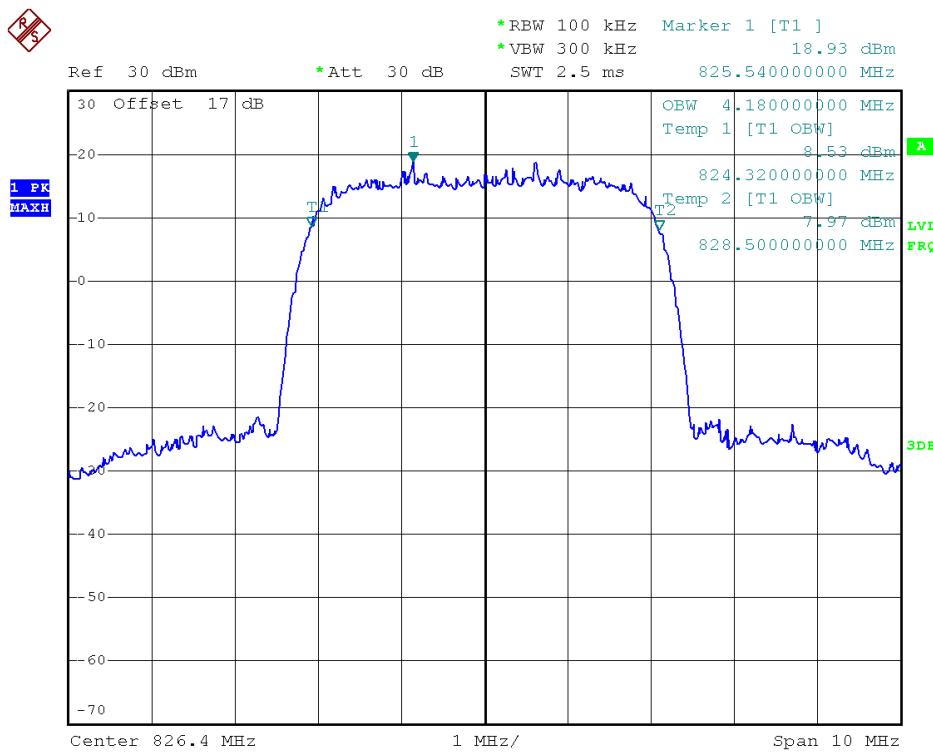


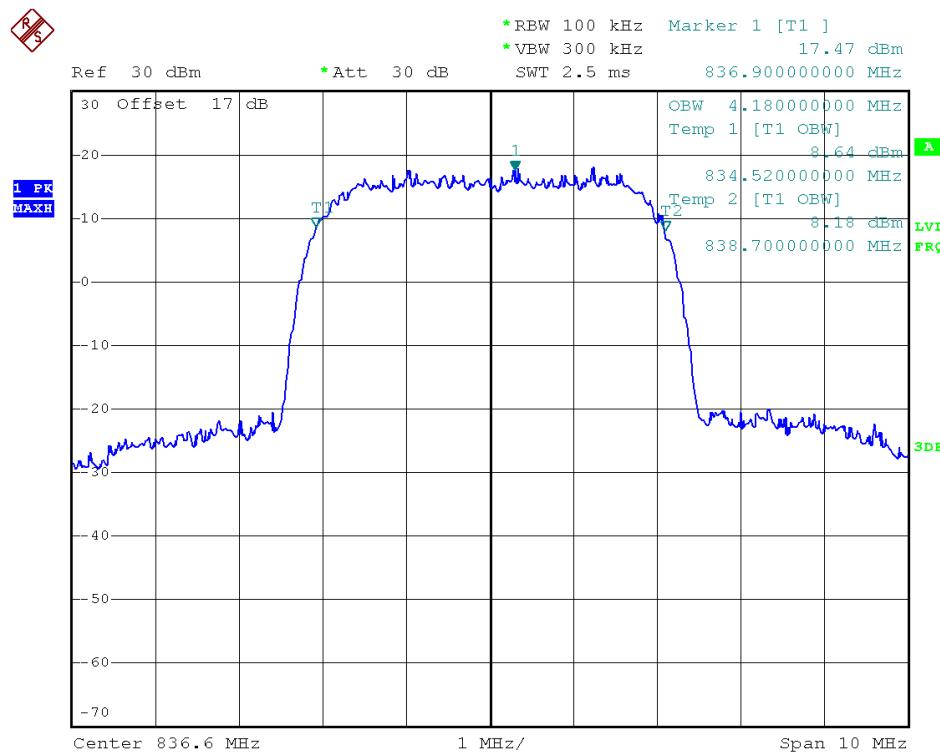


(Plot E4: WCDMA 850MHz Channel = 4183 99% Occupied Bandwidth)

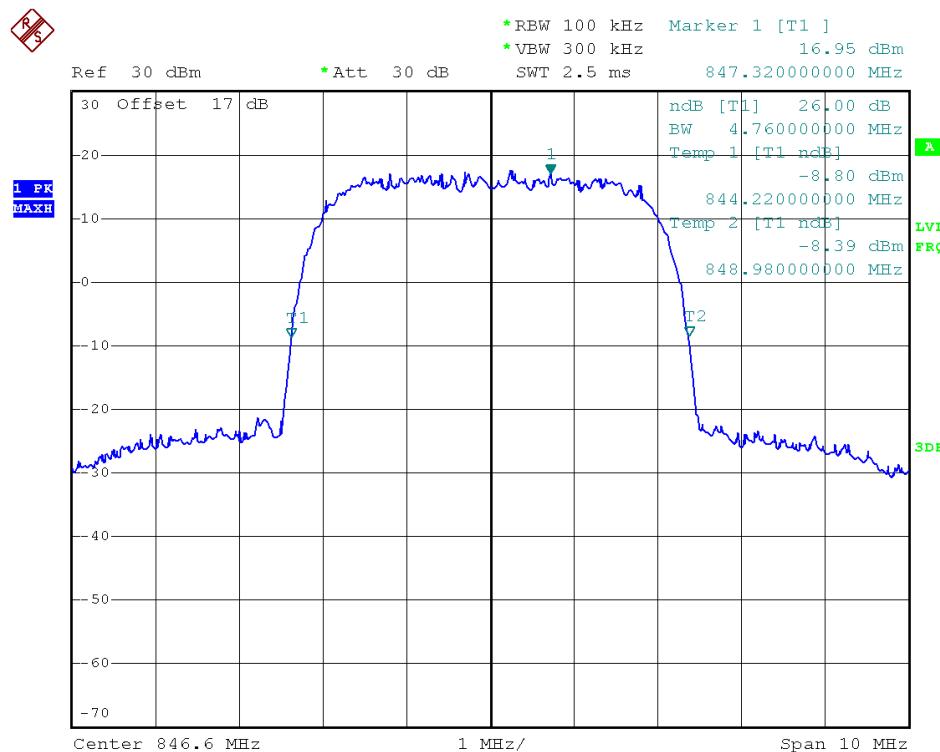


(Plot E5: WCDMA 850MHz Channel = 4233 26dB bandwidth)

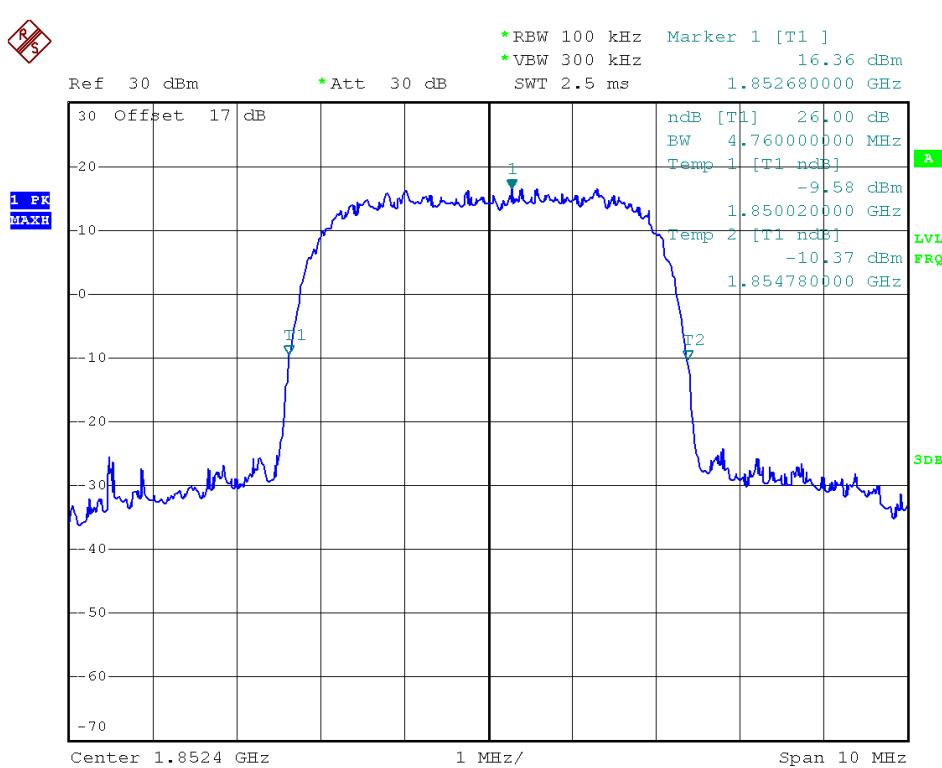
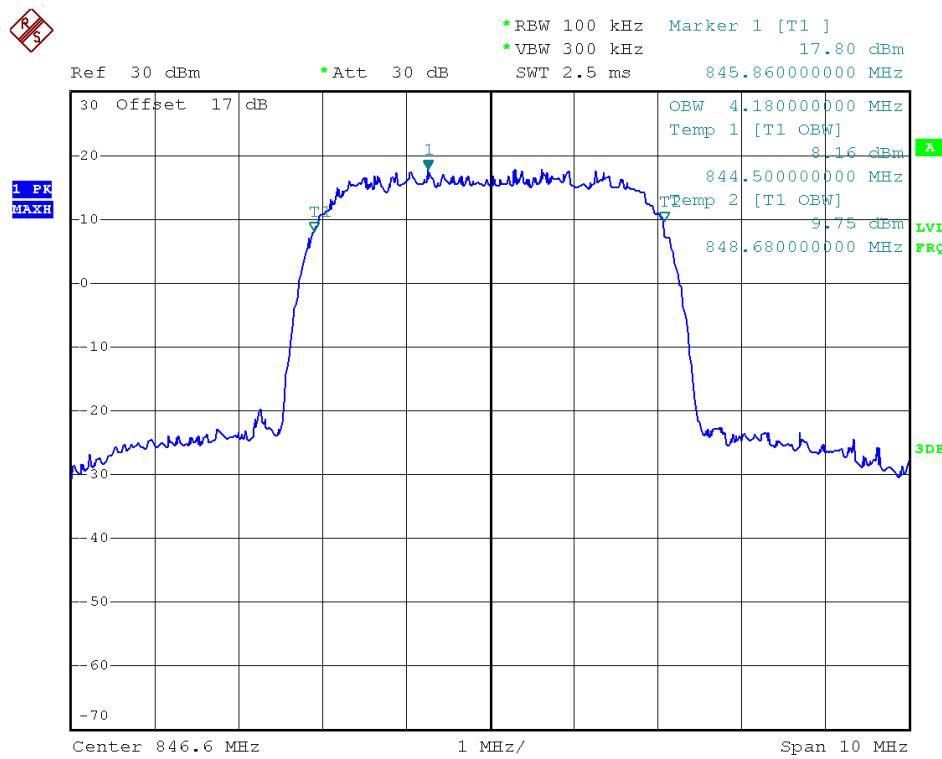


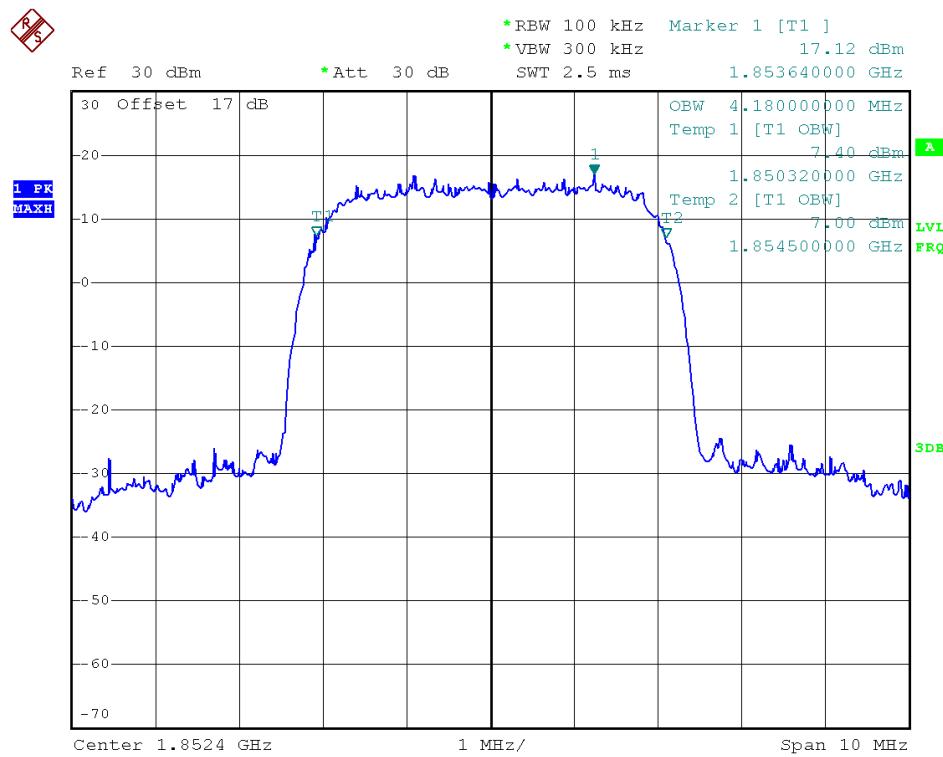


(Plot F2: WCDMA 1900MHz Channel = 9262 99% Occupied Bandwidth)

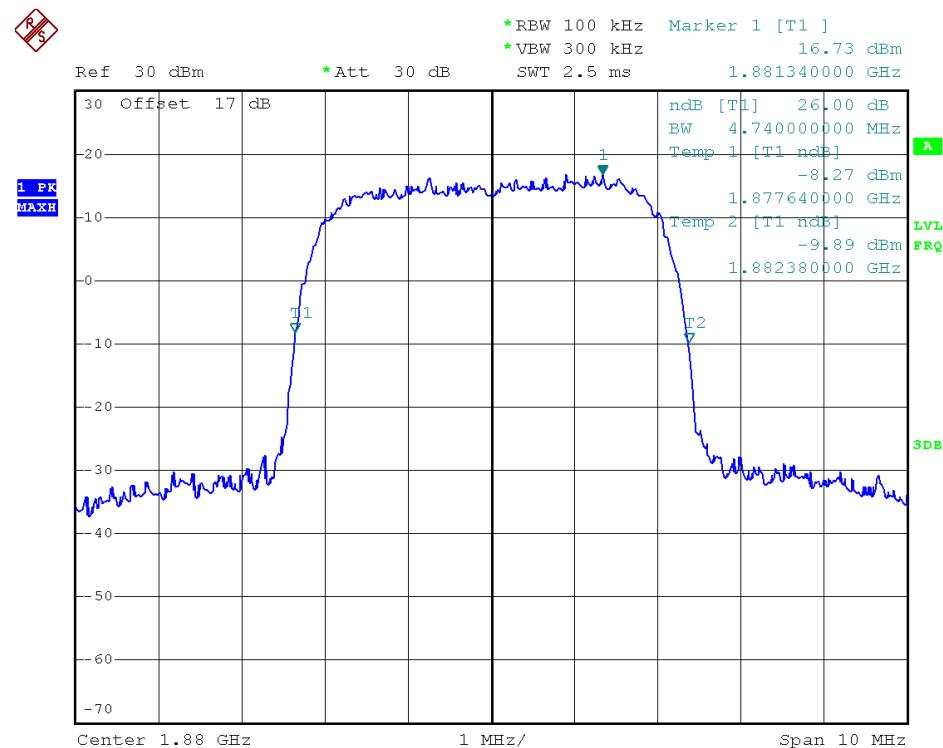

(Plot F3: WCDMA 1900MHz Channel = 9400 26dB bandwidth)

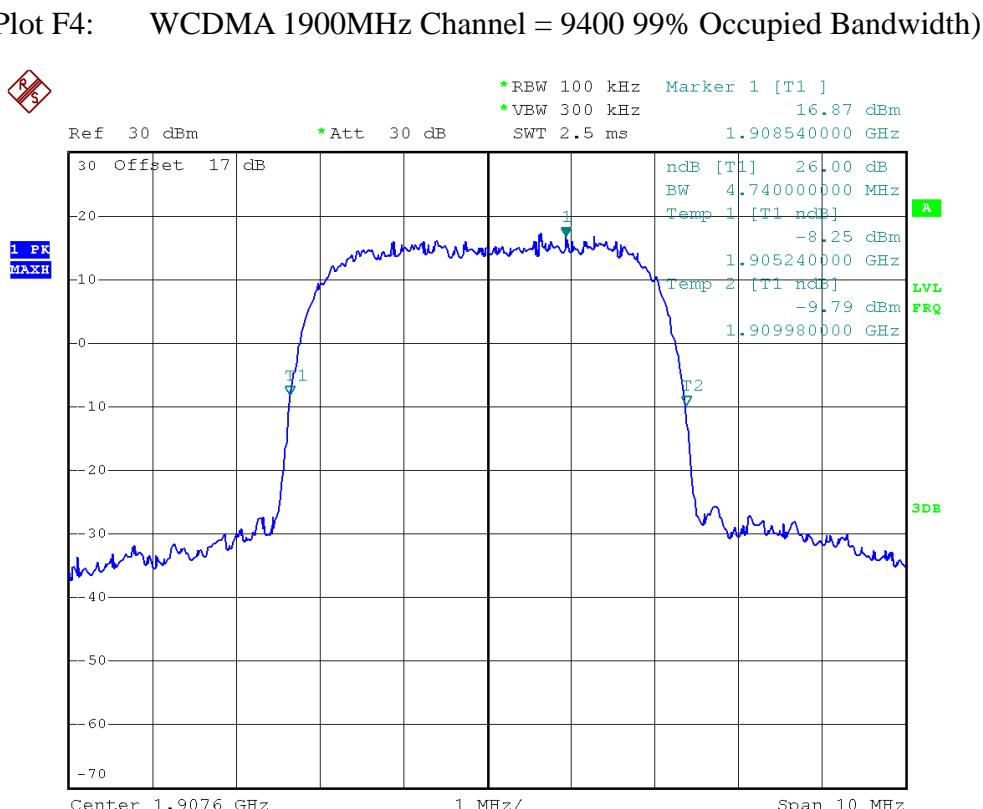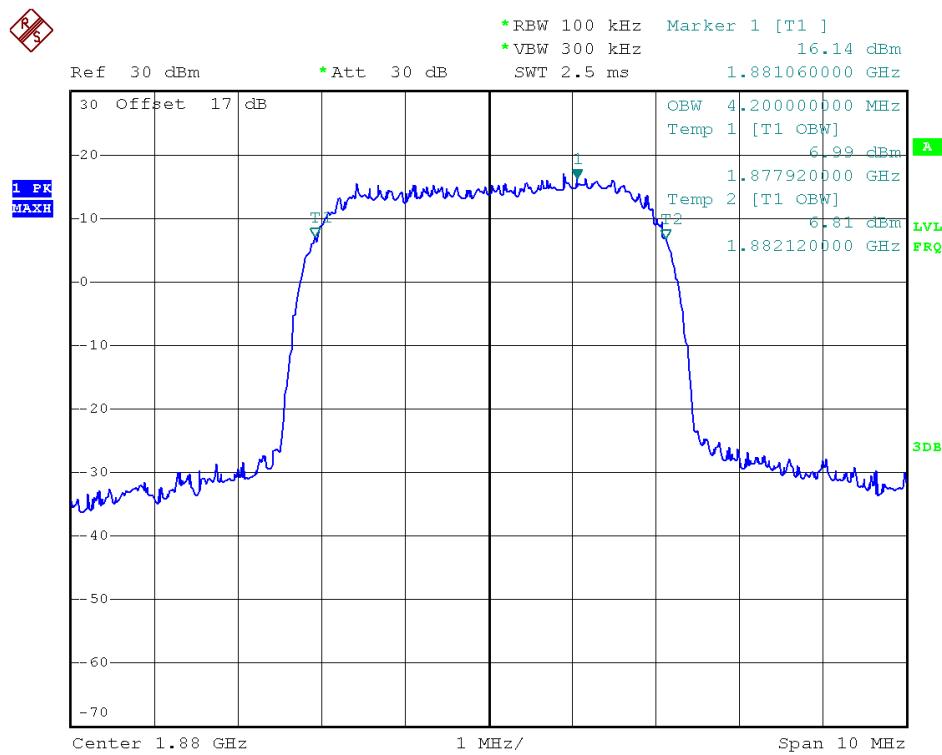

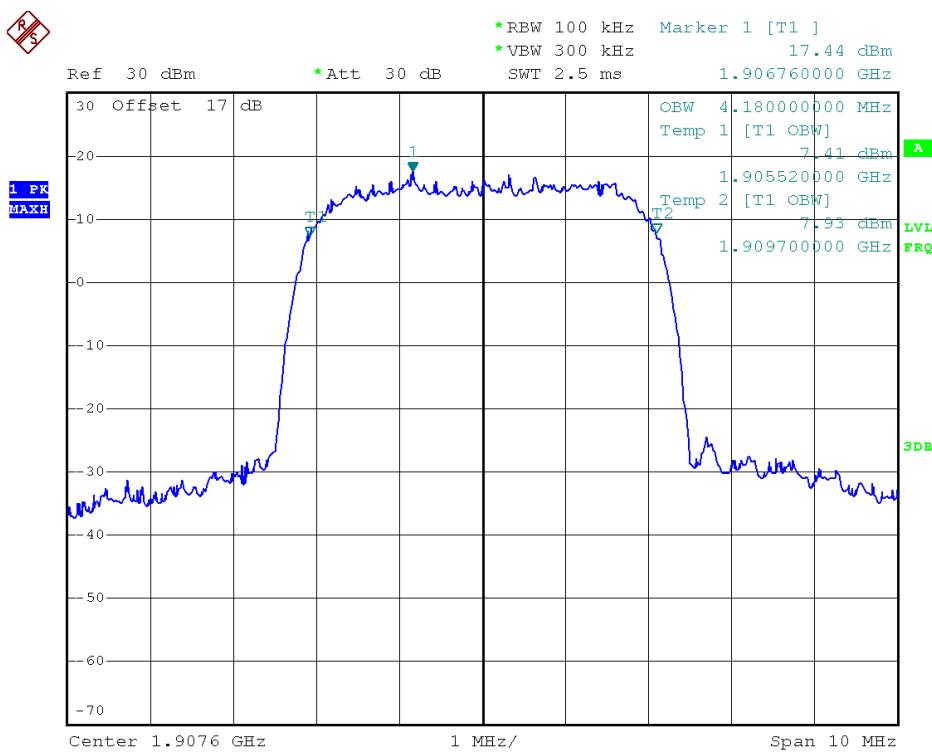

(Plot F6: WCDMA 1900MHz Channel = 9538 99% Occupied Bandwidth)


2.4 Frequency Stability

2.4.1 Requirement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

2.4.2 Test Description

1. Test Setup:

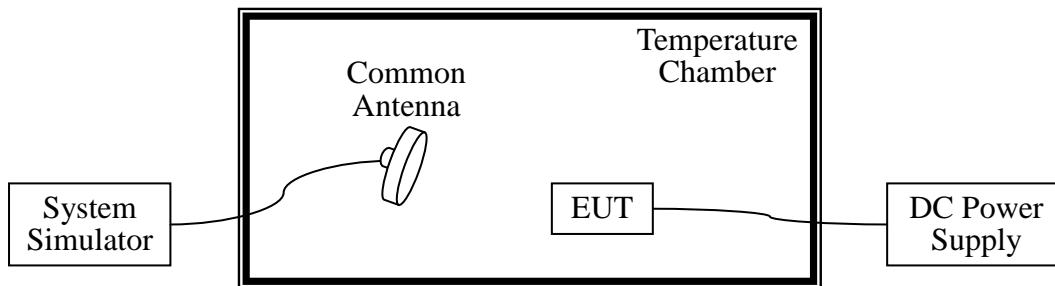

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Data | Cal. Due Data |
|---------------------|---------------------------|--------------|------------|------------|---------------|
| System Simulator | Agilent | E5515C | GB43130131 | 2014.06.11 | 2015.06.10 |
| DC Power Supply | Good Will | GPS-3030DD | EF920938 | 2014.06.11 | 2015.06.10 |
| Temperature Chamber | YinHe Experimental Equip. | HL4003T | (n.a.) | 2014.06.11 | 2015.06.10 |
| Cable | SUNHNER | SUCOFLEX 100 | / | 2014.06.05 | 2015.06.04 |

2.4.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.

3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

2.4.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

2.4.5 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C.

1. GSM 850MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|------------------|--------------------------|--------------|--------------------------|--------------|--------------------------|------------|---------|--|
| Power (VDC) | Temperature (°C) | Channel = 128 (824.2MHz) | | Channel = 190 (836.6MHz) | | Channel = 251 (848.8MHz) | | | |
| | | Hz | Limits | Hz | Limits | Hz | Limits | | |
| 3.8 | -30 | 24.89 | ± 2060.5 | 4.43 | ± 2091.5 | 5.30 | ± 2122 | PASS | |
| | -20 | 38.66 | | -15.01 | | 37.67 | | | |
| | -10 | 41.47 | | 34.03 | | -12.80 | | | |
| | 0 | 13.21 | | 44.86 | | 39.77 | | | |
| | +10 | 10.35 | | 51.87 | | 45.48 | | | |
| | +20 | -12.03 | | 51.00 | | 9.68 | | | |
| | +30 | 21.03 | | 38.12 | | -12.23 | | | |
| | +40 | 25.80 | | 17.07 | | 5.04 | | | |
| | +50 | 27.93 | | 29.71 | | 2.61 | | | |
| | 4.2 | +25 | | 42.55 | | 42.18 | | | |
| | 3.6 | +25 | | 53.57 | | 48.27 | | | |

2. GSM 1900MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|-------------------|---------------------------|---------|---------------------------|---------|---------------------------|---------|---------|--|
| Power (VDC) | Temperatur e (°C) | Channel = 512 (1850.2MHz) | | Channel = 661 (1880.0MHz) | | Channel = 810 (1909.8MHz) | | | |
| | | Hz | Limits | Hz | Limits | Hz | Limits | | |
| 3.8 | -30 | -5.19 | ±1850.2 | 68.91 | ±1880.0 | 29.27 | ±1909.8 | PASS | |
| | -20 | 19.00 | | 11.01 | | -8.57 | | | |
| | -10 | 38.22 | | 15.79 | | 36.13 | | | |
| | 0 | 25.23 | | 41.59 | | -14.70 | | | |
| | +10 | -1.45 | | -10.89 | | -8.71 | | | |
| | +20 | 6.94 | | -7.13 | | -55.98 | | | |
| | +30 | 21.13 | | 59.44 | | 21.63 | | | |
| | +40 | 51.23 | | -10.34 | | -2.73 | | | |
| | +50 | 30.96 | | 15.41 | | 8.69 | | | |
| | 4.2 | +25 | | 32.72 | | 48.24 | | | |
| | 3.6 | +25 | | -9.80 | | 36.41 | | | |

3. EDGE 850MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|------------------|--------------------------|---------|--------------------------|---------|--------------------------|--------|---------|--|
| Power (VDC) | Temperature (°C) | Channel = 128 (824.2MHz) | | Channel = 190 (836.6MHz) | | Channel = 251 (848.8MHz) | | | |
| | | Hz | Limits | Hz | Limits | Hz | Limits | | |
| 3.8 | -30 | 53.12 | ±2060.5 | 26.32 | ±2091.5 | 18.24 | ±2122 | PASS | |
| | -20 | 45.27 | | 49.22 | | 48.85 | | | |
| | -10 | 30.81 | | 0.87 | | 42.82 | | | |
| | 0 | 54.90 | | 34.76 | | 27.61 | | | |
| | +10 | -5.95 | | 41.21 | | 34.98 | | | |
| | +20 | 30.97 | | 53.40 | | 37.51 | | | |
| | +30 | 38.53 | | 33.93 | | 24.02 | | | |
| | +40 | 28.67 | | 16.43 | | -2.96 | | | |
| | +50 | 14.09 | | 10.68 | | -2.48 | | | |
| | 4.2 | +25 | | 25.06 | | 36.37 | | | |
| | 3.6 | +25 | | 34.97 | | 15.30 | | | |

4. EDGE 1900MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|-------------------|---------------------------|---------|---------------------------|---------|---------------------------|---------|---------|--|
| Power (VDC) | Temperatur e (°C) | Channel = 512 (1850.2MHz) | | Channel = 661 (1880.0MHz) | | Channel = 810 (1909.8MHz) | | | |
| | | Hz | Limits | Hz | Limits | Hz | Limits | | |
| 3.8 | -30 | 21.88 | ±1850.2 | 39.06 | ±1880.0 | 39.43 | ±1909.8 | PASS | |
| | -20 | 17.62 | | 48.73 | | 39.04 | | | |
| | -10 | -1.53 | | 32.16 | | 37.00 | | | |
| | 0 | -6.03 | | 19.61 | | 17.81 | | | |
| | +10 | 9.99 | | 53.81 | | 42.53 | | | |
| | +20 | 35.96 | | 18.77 | | 38.33 | | | |
| | +30 | 10.10 | | 65.01 | | 19.75 | | | |
| | +40 | 51.32 | | 0.50 | | 32.86 | | | |
| | +50 | 14.47 | | -0.56 | | 4.44 | | | |
| | 4.2 | +25 | | 19.71 | | 52.20 | | | |
| | 3.6 | +25 | | 23.51 | | 53.04 | | | |

5. WCDMA 850MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|------------------|---------------------------|-------|---------------------------|---------|---------------------------|---------|---------|--|
| Power (VDC) | Temperature (°C) | Channel = 4123 (826.4MHz) | | Channel = 4183 (836.6MHz) | | Channel = 4233 (846.6MHz) | | | |
| | | Hz | Limit | Hz | Limit | Hz | Limit | | |
| 3.8 | -30 | -4.32 | ±2066 | 27.18 | ±2091.5 | 5.05 | ±2116.5 | PASS | |
| | -20 | 35.25 | | 30.07 | | 7.49 | | | |
| | -10 | -19.21 | | 5.48 | | 0.19 | | | |
| | 0 | 27.75 | | -1.82 | | 34.30 | | | |
| | +10 | -13.73 | | 19.02 | | 45.99 | | | |
| | +20 | -6.95 | | 44.78 | | -16.51 | | | |
| | +30 | 48.07 | | 21.99 | | 19.46 | | | |
| | +40 | 42.00 | | 17.67 | | -6.80 | | | |
| | +50 | 38.85 | | -19.44 | | 7.58 | | | |
| | 4.2 | +25 | | -6.76 | | 3.11 | | | |
| | 3.6 | +25 | | 14.09 | | -4.93 | | | |

6. WCDMA 1900MHz Band

| Test Conditions | | Frequency Deviation | | | | | | Verdict | |
|-----------------|------------------|----------------------------|---------|----------------------------|---------|----------------------------|---------|---------|--|
| Power (VDC) | Temperature (°C) | Channel = 9262 (1852.4MHz) | | Channel = 9400 (1880.0MHz) | | Channel = 9538 (1907.6MHz) | | | |
| | | Hz | Limits | Hz | Limits | Hz | Limits | | |
| 3.8 | -30 | -0.97 | ±1852.4 | 51.25 | ±1880.0 | 1.12 | ±1907.6 | PASS | |
| | -20 | 35.71 | | 51.56 | | 8.81 | | | |
| | -10 | 54.73 | | 48.10 | | 22.21 | | | |
| | 0 | 25.45 | | 43.19 | | 47.37 | | | |
| | +10 | 18.46 | | 6.50 | | 14.85 | | | |
| | +20 | 20.42 | | 3.76 | | 33.63 | | | |
| | +30 | 0.36 | | 7.11 | | 38.27 | | | |
| | +40 | 26.25 | | 5.70 | | 69.38 | | | |
| | +55 | 24.14 | | -5.74 | | 21.22 | | | |
| | 4.2 | +25 | | 42.11 | | 50.98 | | | |
| 3.6 | +25 | 46.55 | | 5.31 | | 0.95 | | | |

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

2.5.4 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


1. Test Verdict:

| Band | Channel | Frequency (MHz) | Measured Max. Spurious Emission (dBm) | Refer to Plot | Limit (dBm) | Verdict |
|----------------|---------|-----------------|---------------------------------------|---------------|-------------|---------|
| GSM 850MHz | 128 | 824.2 | -28.25 | Plot A1toA1.1 | -13 | PASS |
| | 190 | 836.6 | -27.59 | Plot A2toA2.1 | | PASS |
| | 251 | 848.8 | -29.21 | Plot A3toA3.1 | | PASS |
| GSM 1900MHz | 512 | 1850.2 | -20.27 | Plot B1toB1.1 | -13 | PASS |
| | 661 | 1880.0 | -20.51 | Plot B2toB2.1 | | PASS |
| | 810 | 1909.8 | -19.88 | Plot B3toB3.1 | | PASS |


| Band | Channel | Frequency (MHz) | Measured Max. Spurious Emission (dBm) | Refer to Plot | Limit (dBm) | Verdict |
|------------------|---------|-----------------|---------------------------------------|---------------|-------------|---------|
| EDGE 850MHz | 128 | 824.2 | -24.77 | Plot C1toC1.1 | -13 | PASS |
| | 190 | 836.6 | -28.51 | Plot C2toC2.1 | | PASS |
| | 251 | 848.8 | -28.18 | Plot C3toC3.1 | | PASS |
| EDGE 1900MHz | 512 | 1850.2 | -20.73 | Plot D1toD1.1 | -13 | PASS |
| | 661 | 1880.0 | -20.69 | Plot D2toD2.1 | | PASS |
| | 810 | 1909.8 | -20.72 | Plot D3toD3.1 | | PASS |
| WCDMA 850MHz | 4132 | 826.4 | -28.23 | Plot E1toE1.1 | -13 | PASS |
| | 4183 | 836.6 | -27.84 | Plot E2toE2.1 | | PASS |
| | 4233 | 846.6 | -27.74 | Plot E3toE3.1 | | PASS |
| WCDMA 1900MHz | 9262 | 1852.4 | -19.28 | Plot F1toF1.1 | -13 | PASS |
| | 9400 | 1880 | -19.92 | Plot F2toF2.1 | | PASS |
| | 9538 | 1907.6 | -18.78 | Plot F3toF3.1 | | PASS |

2. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

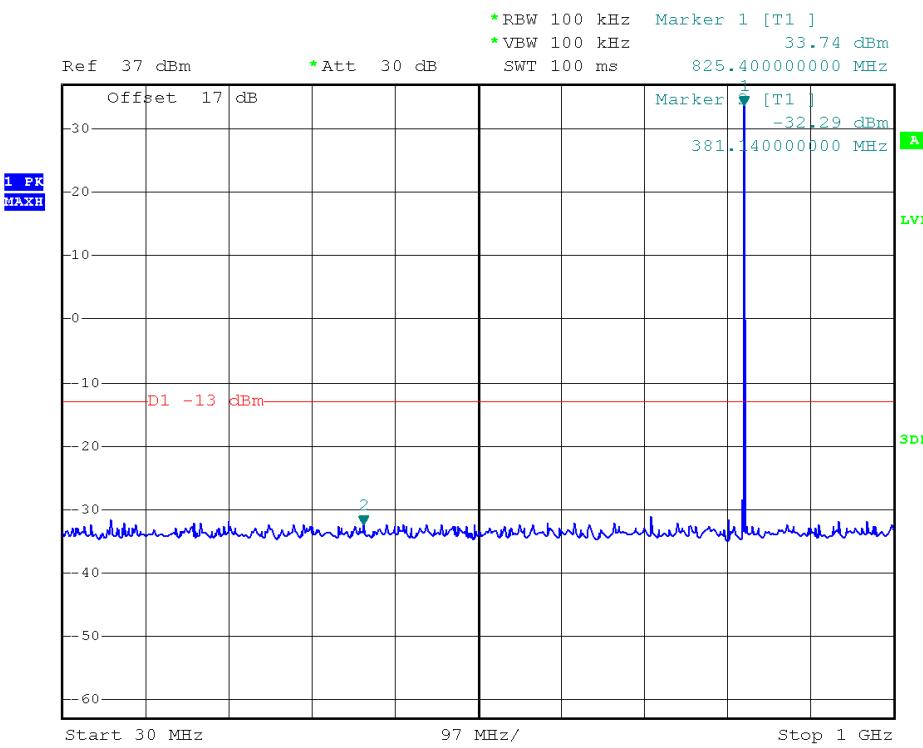



(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)


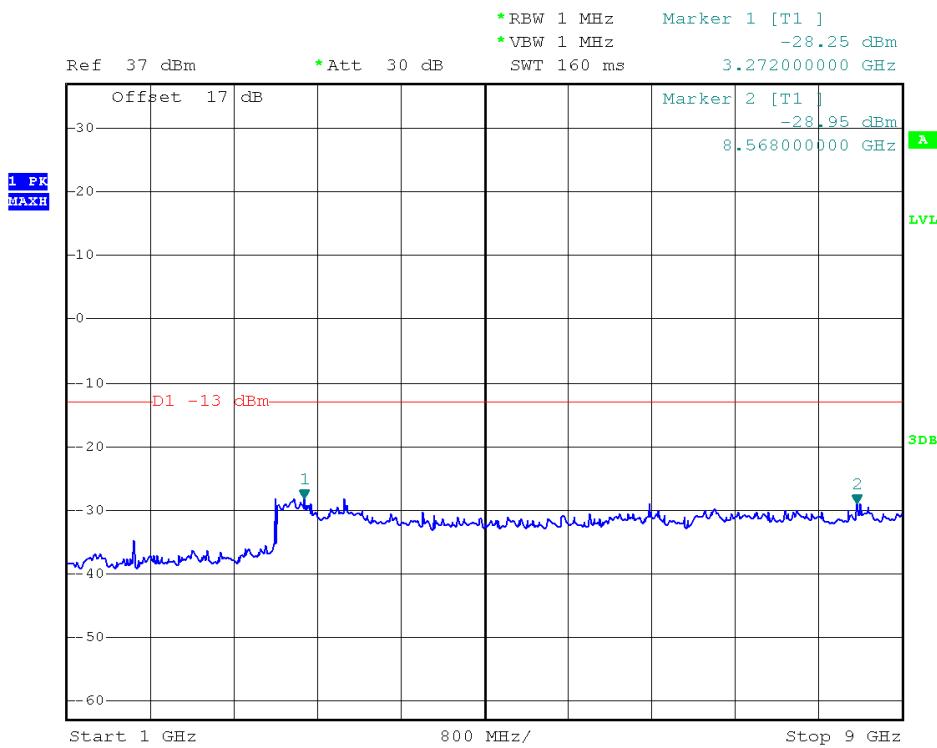



(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

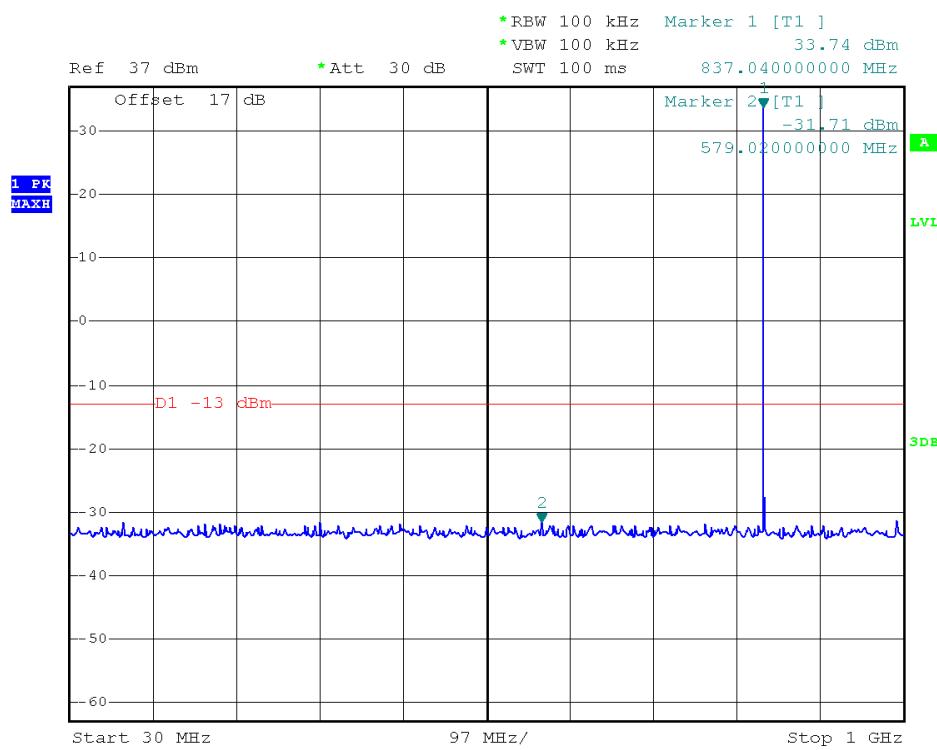


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

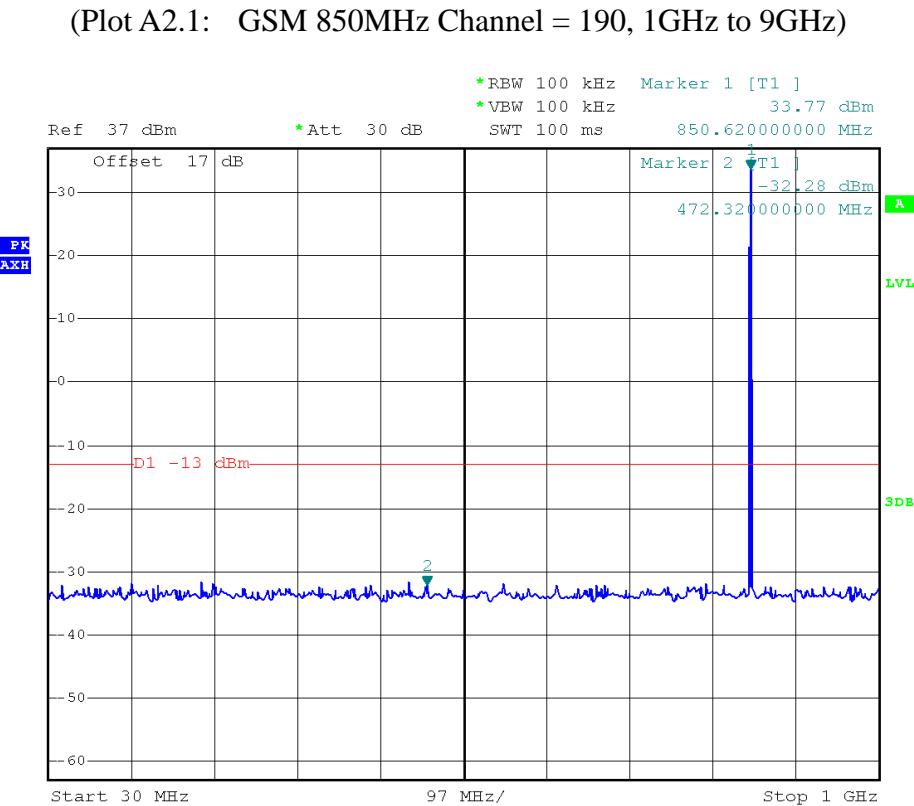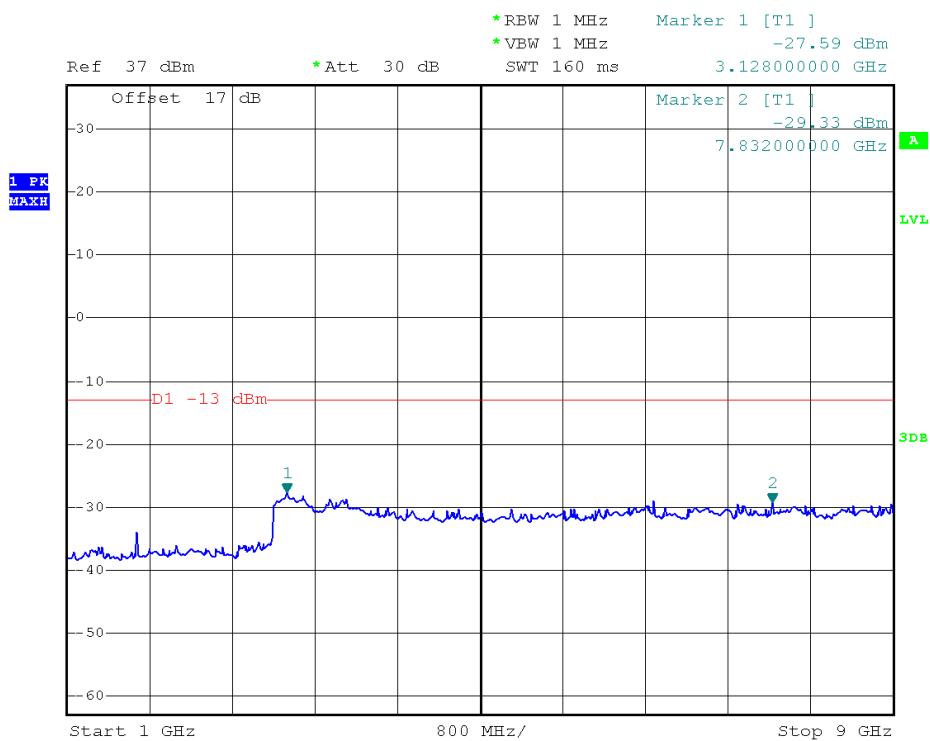

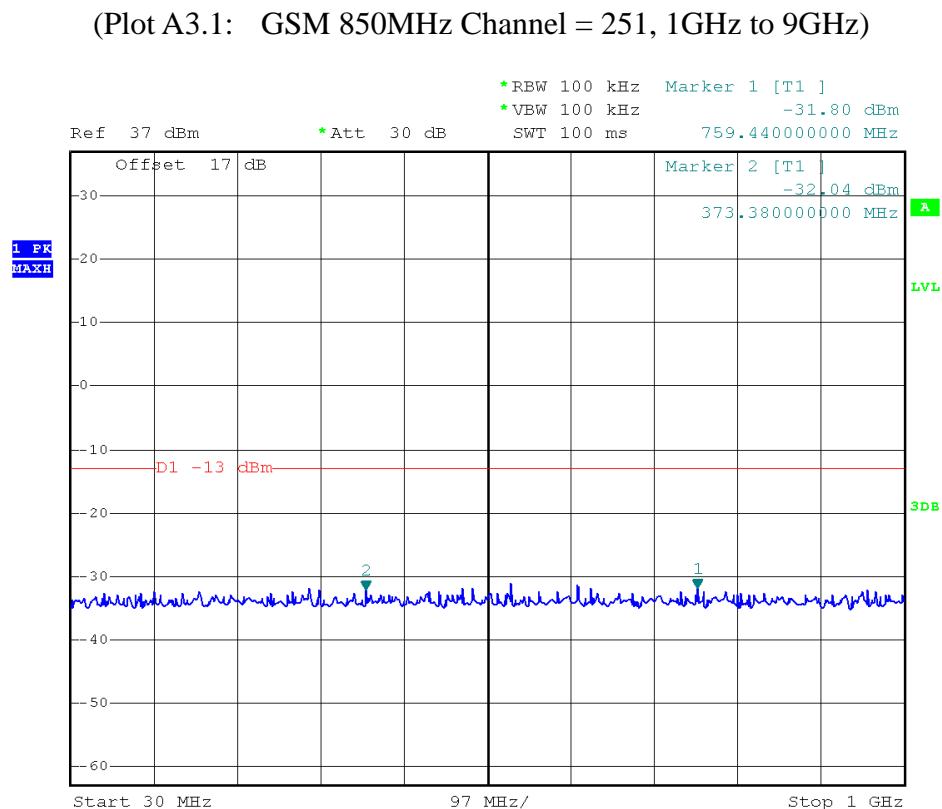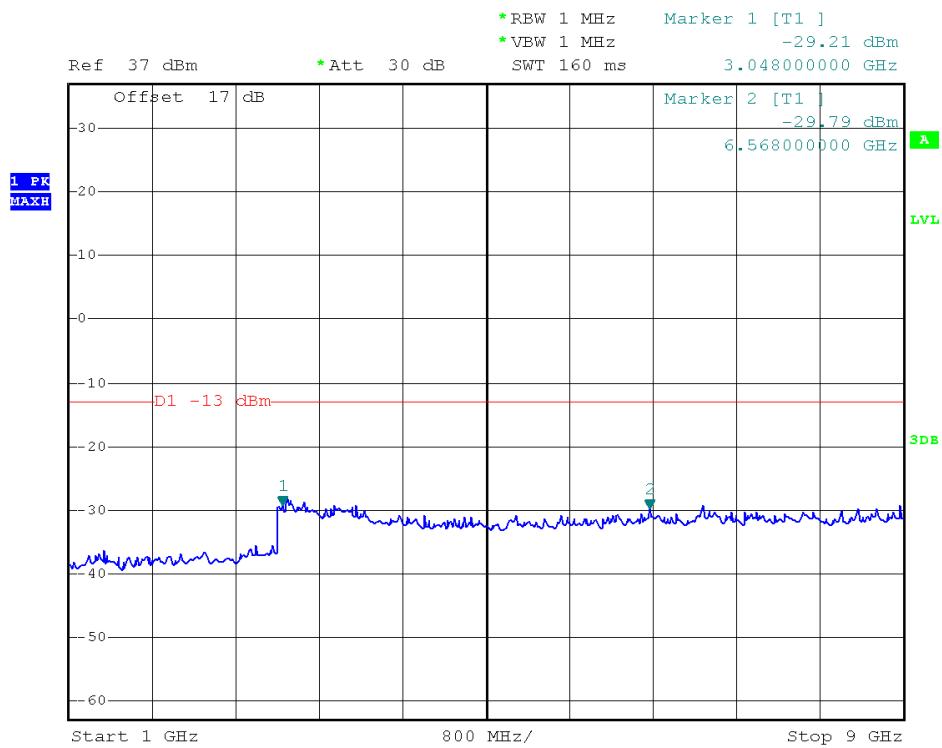


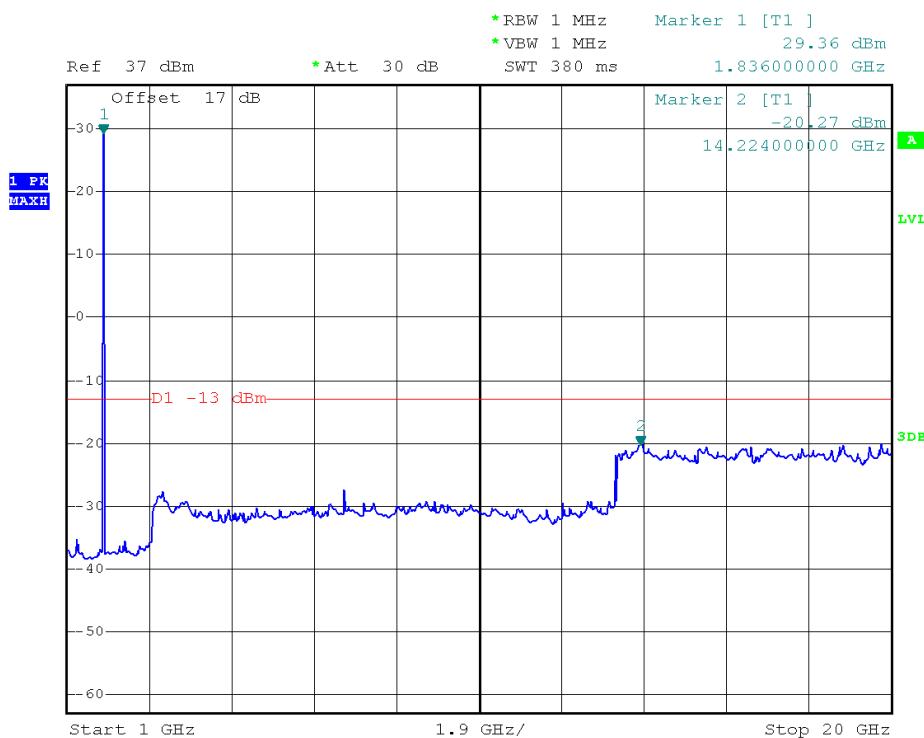


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

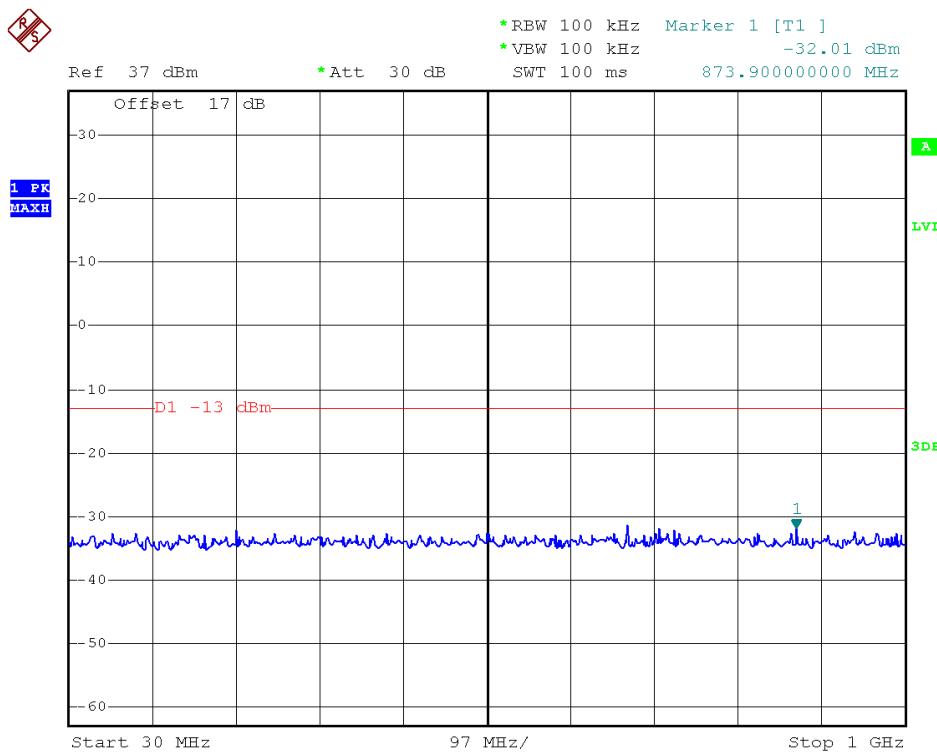



(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)


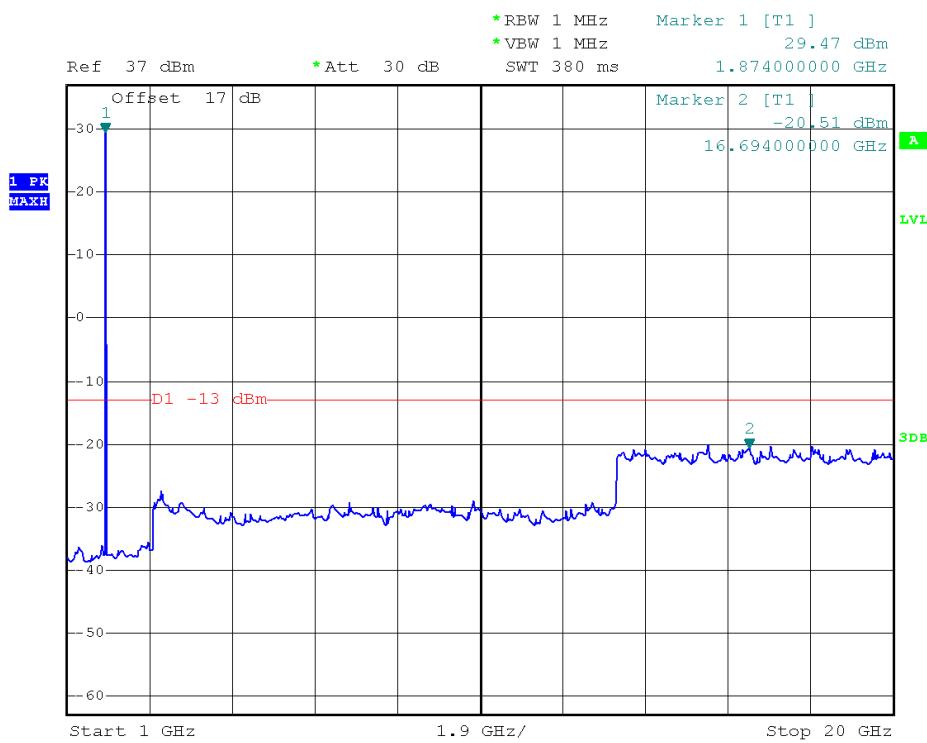




(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

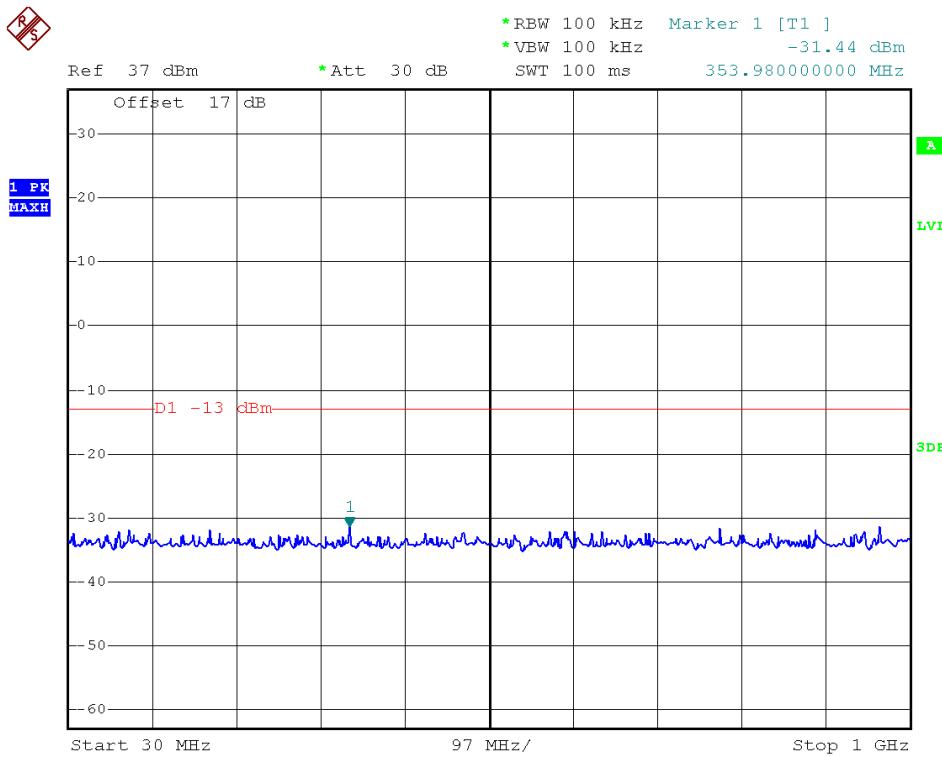


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

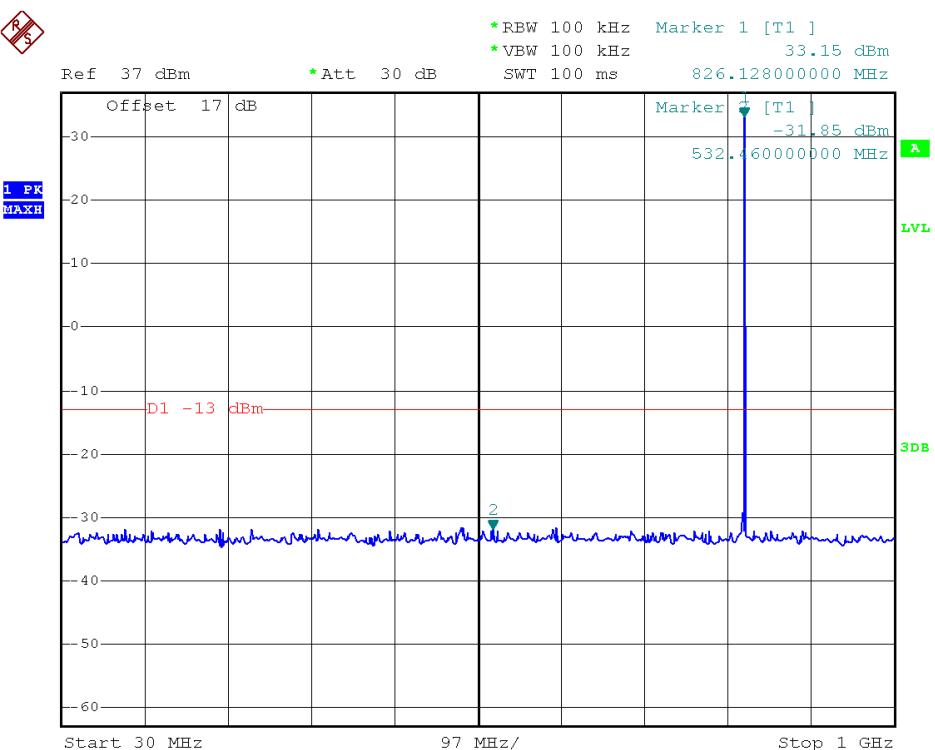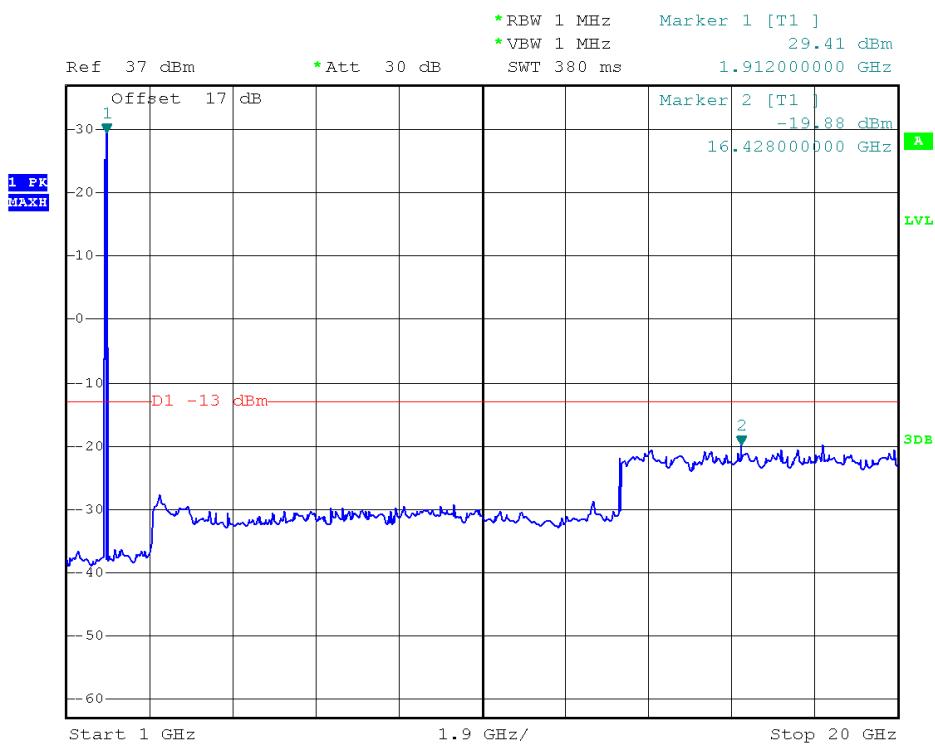


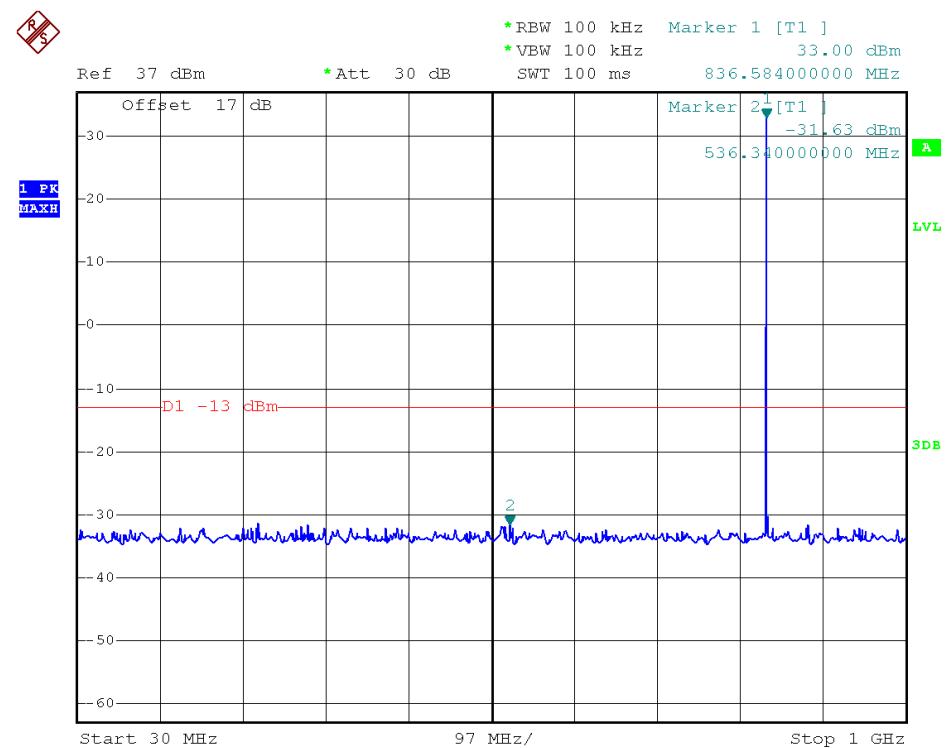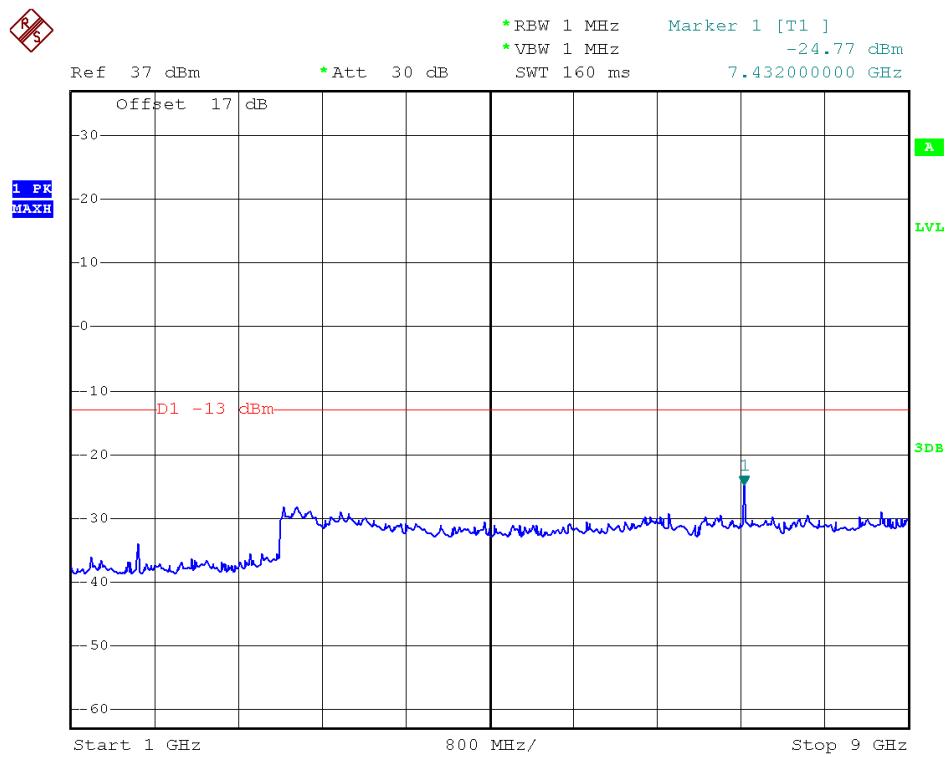

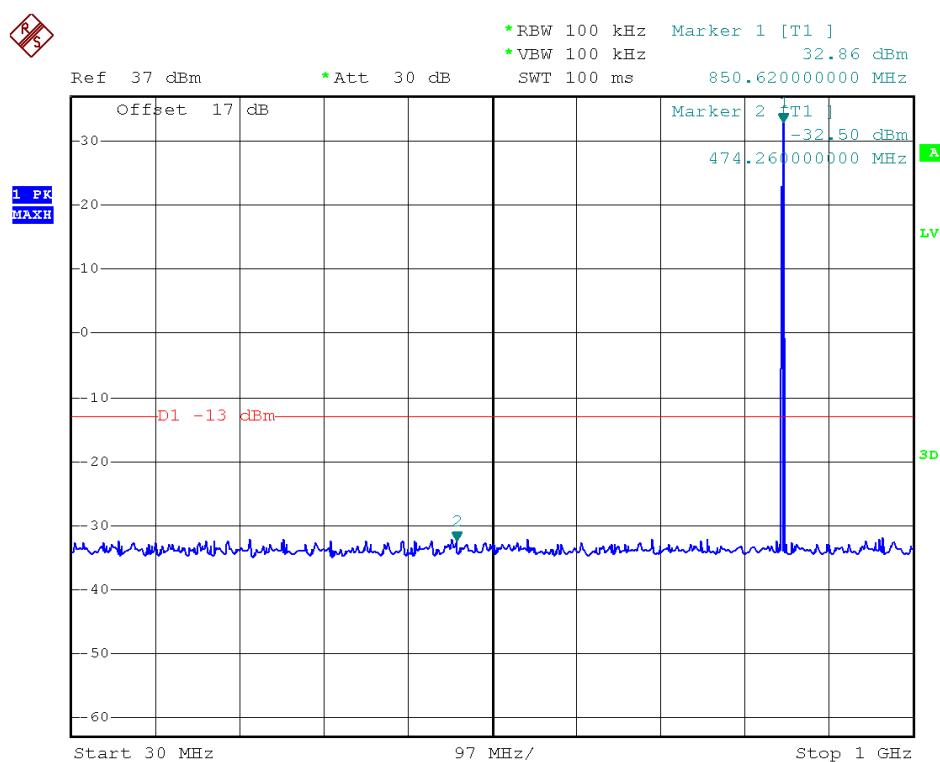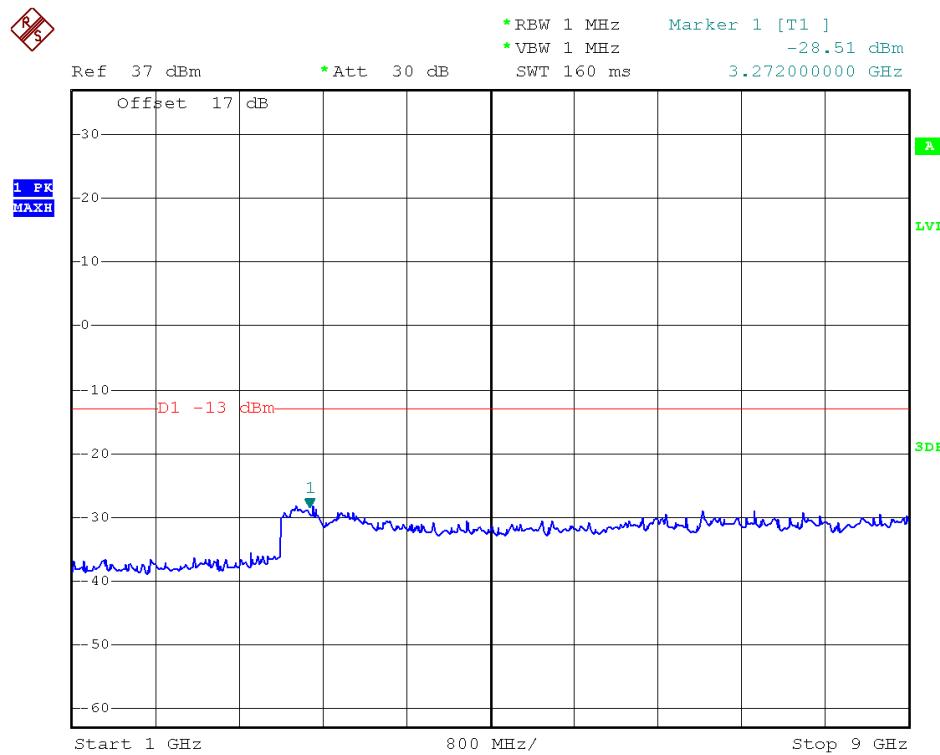


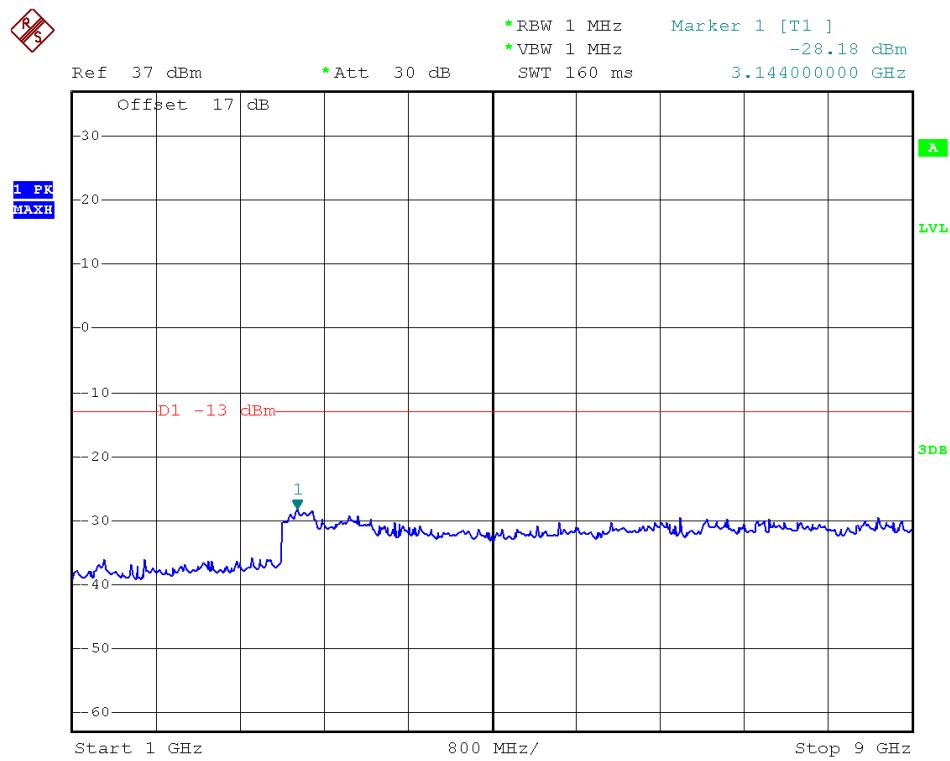


(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

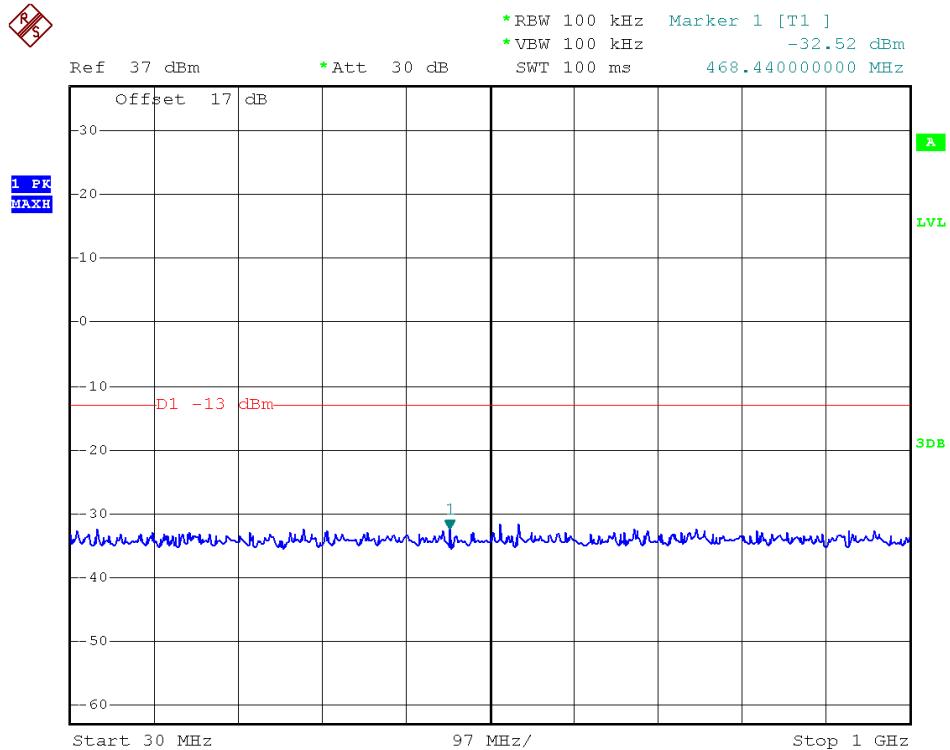



(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)


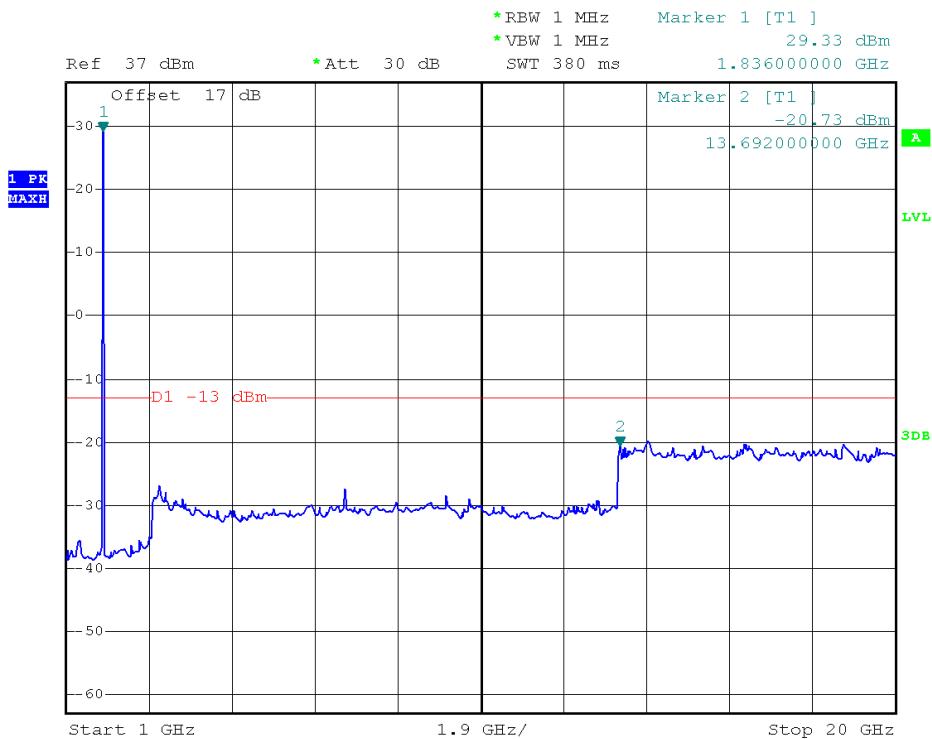




(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)


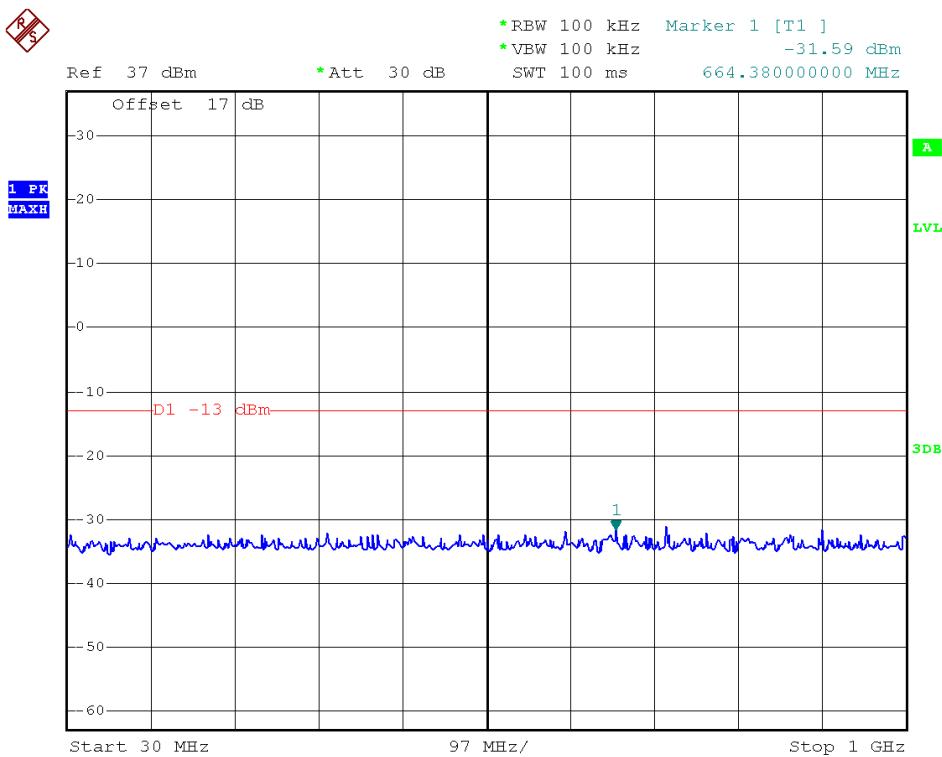




(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

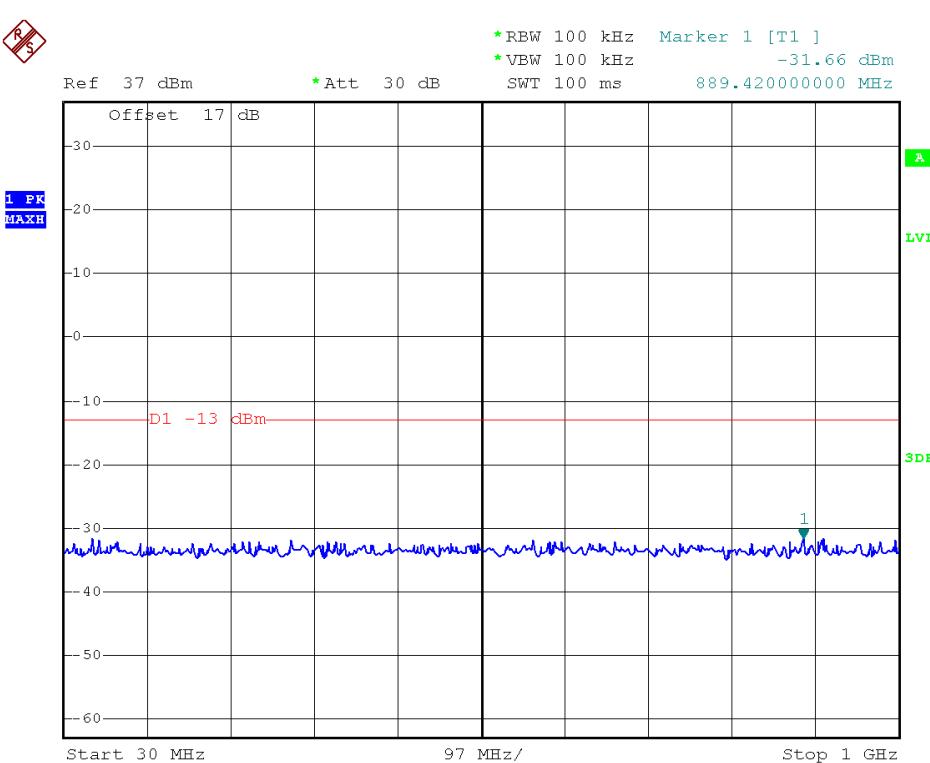
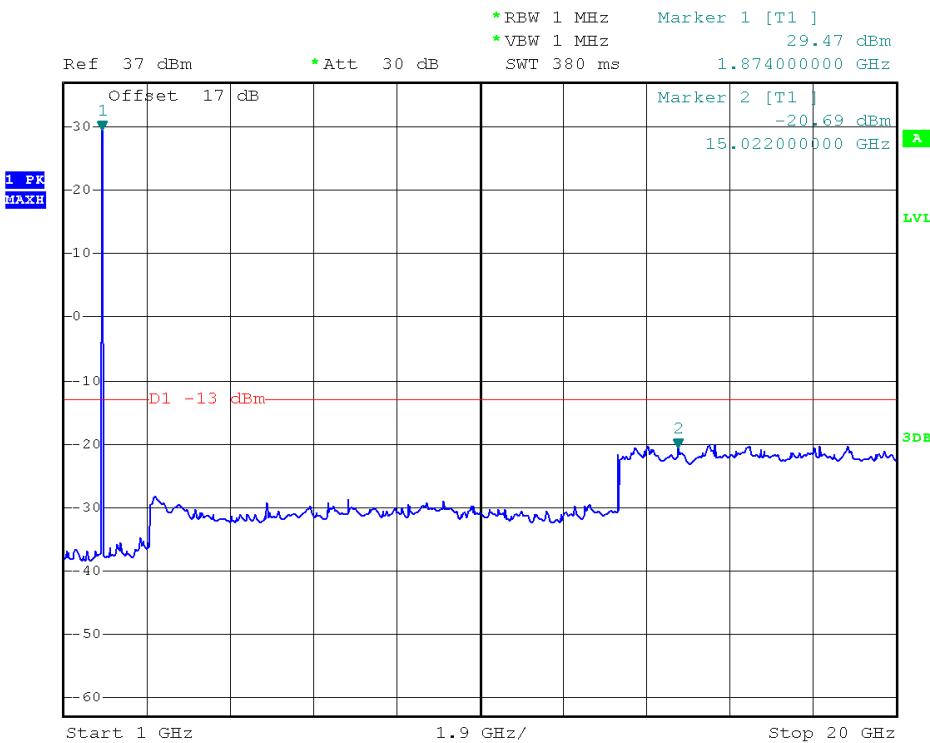


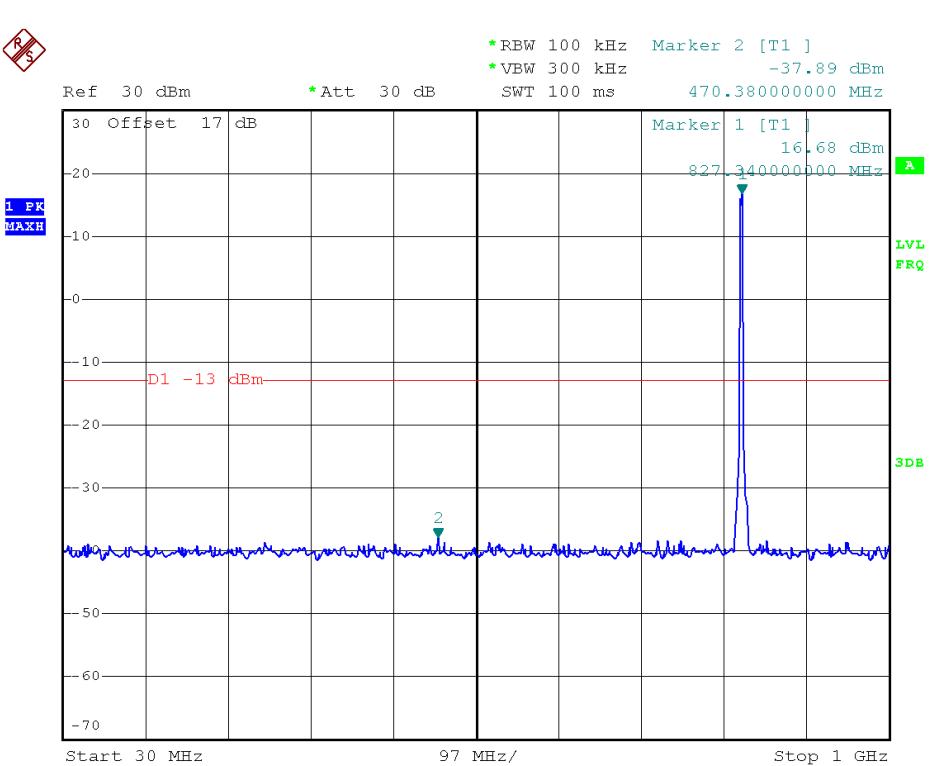
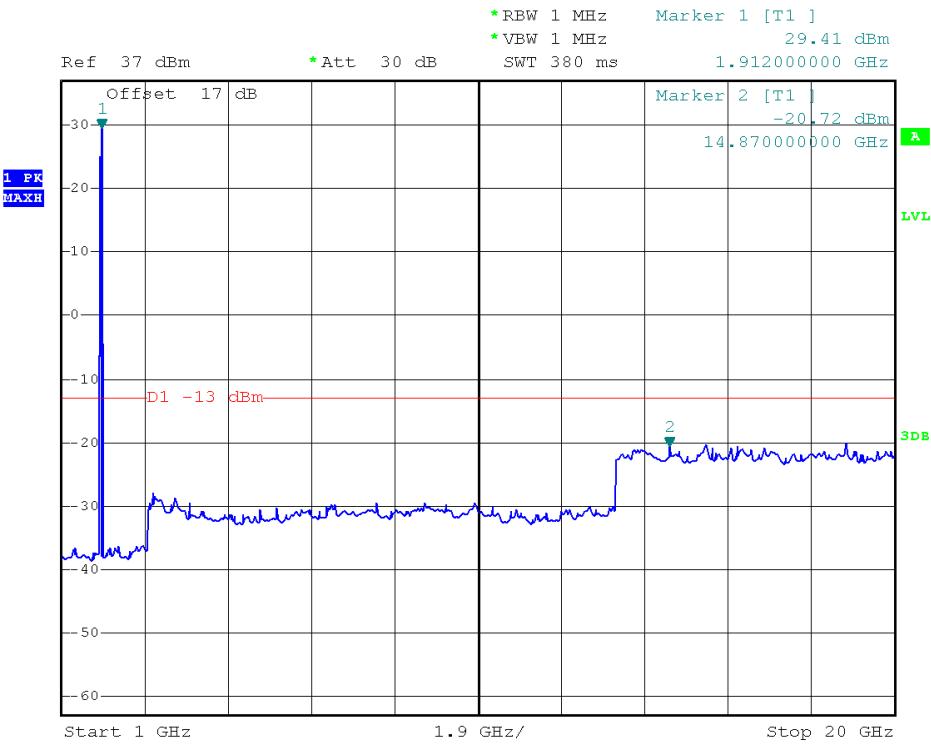


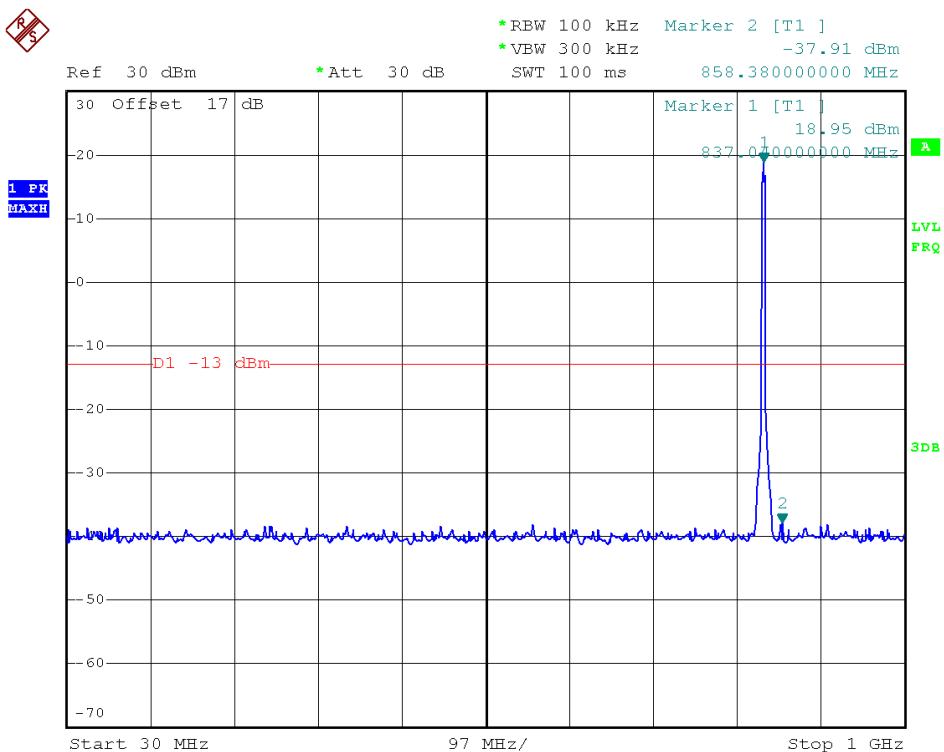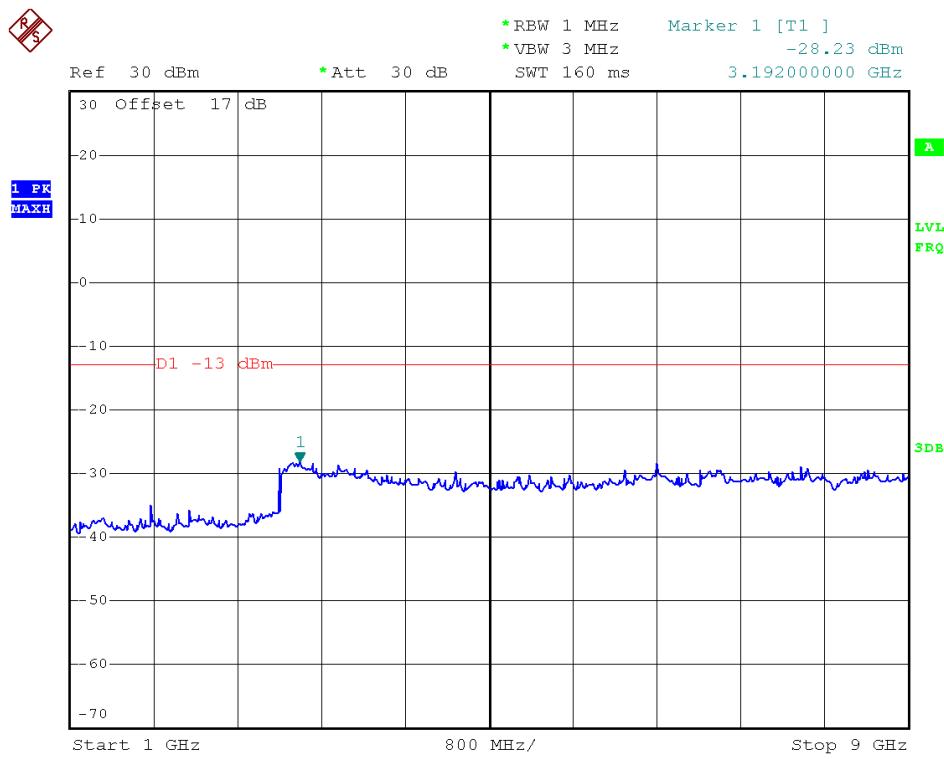


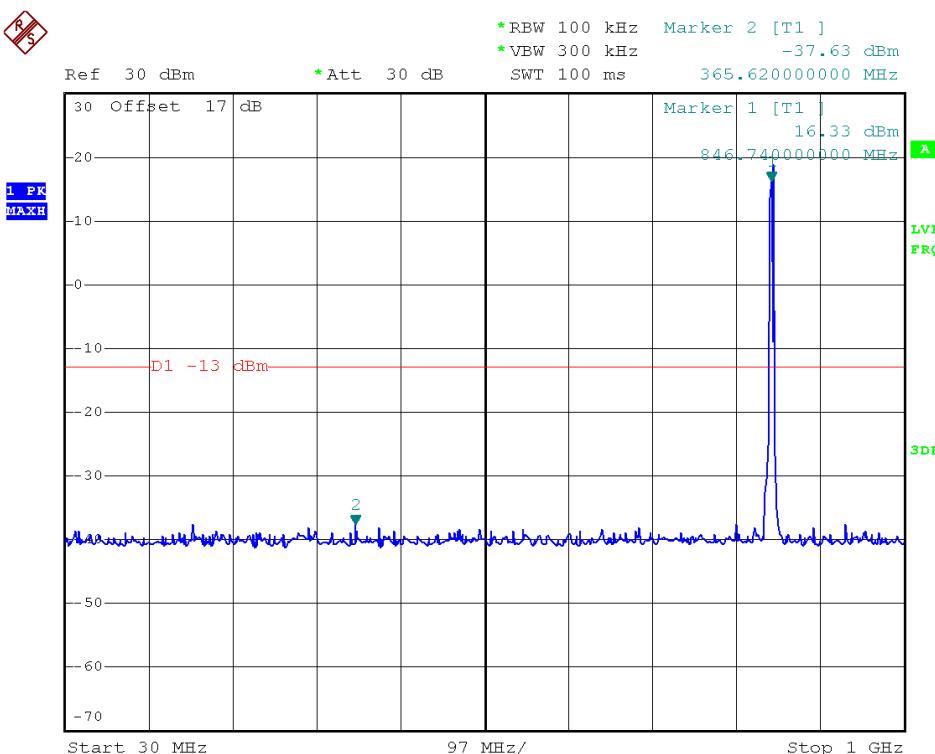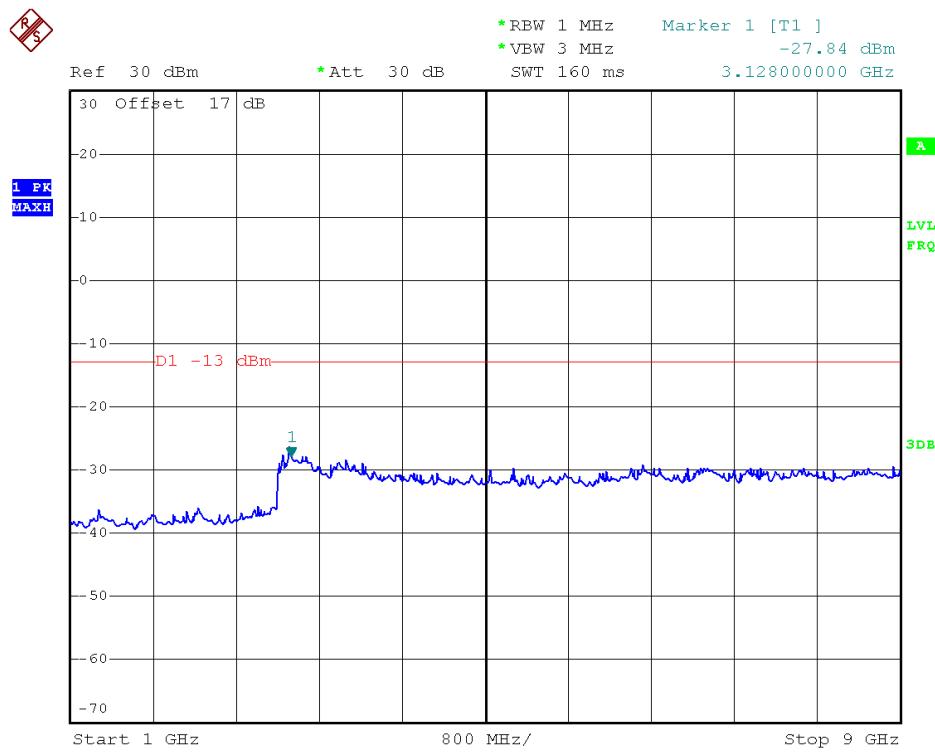

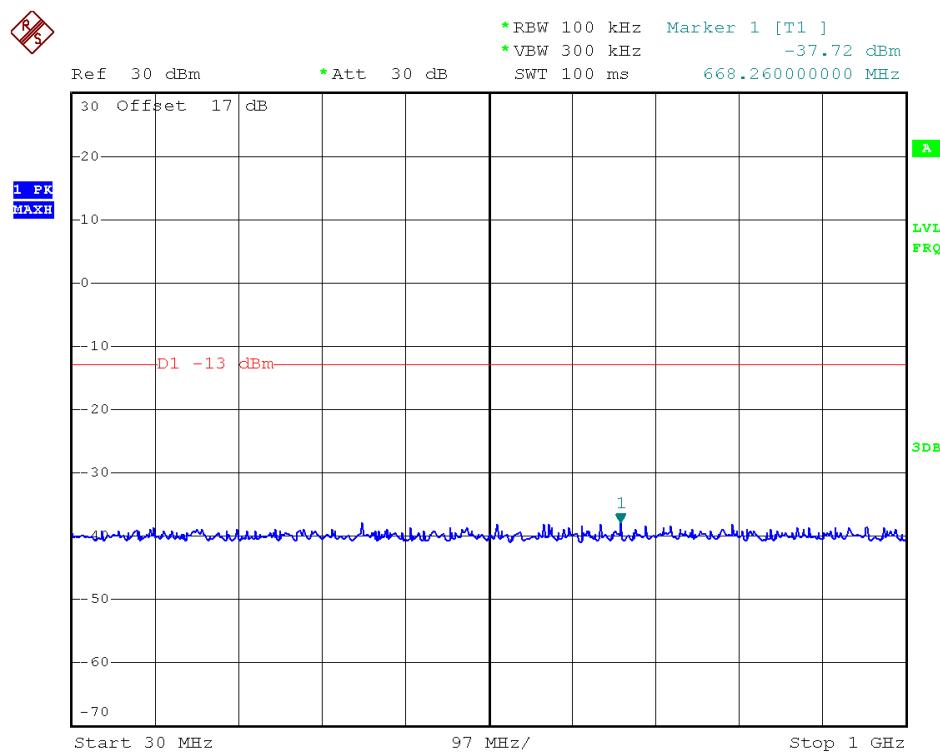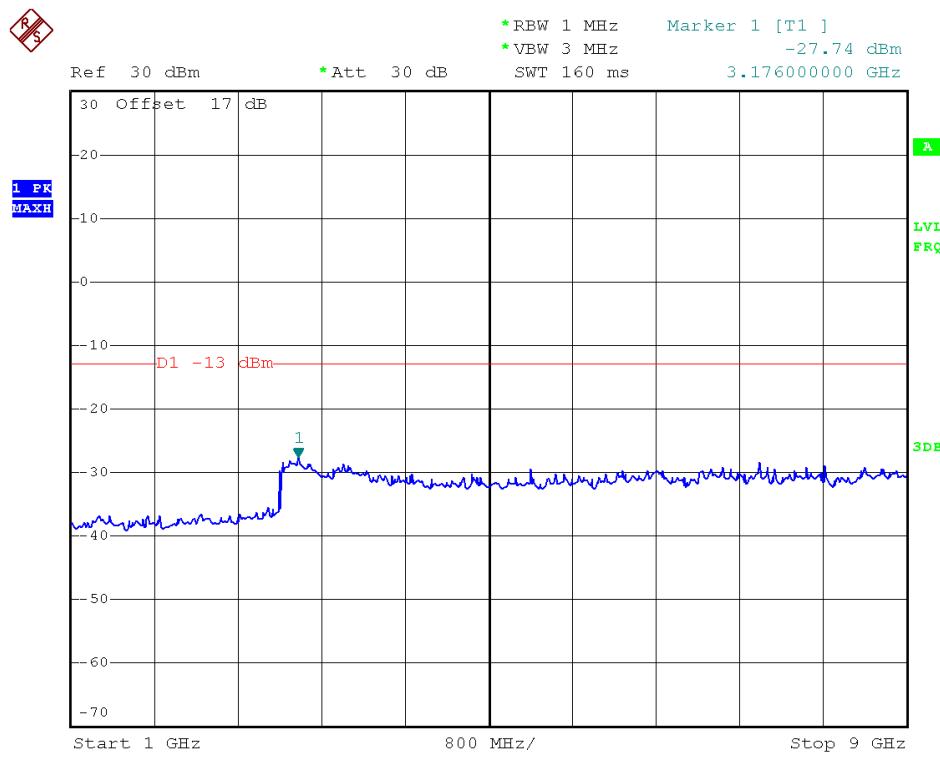

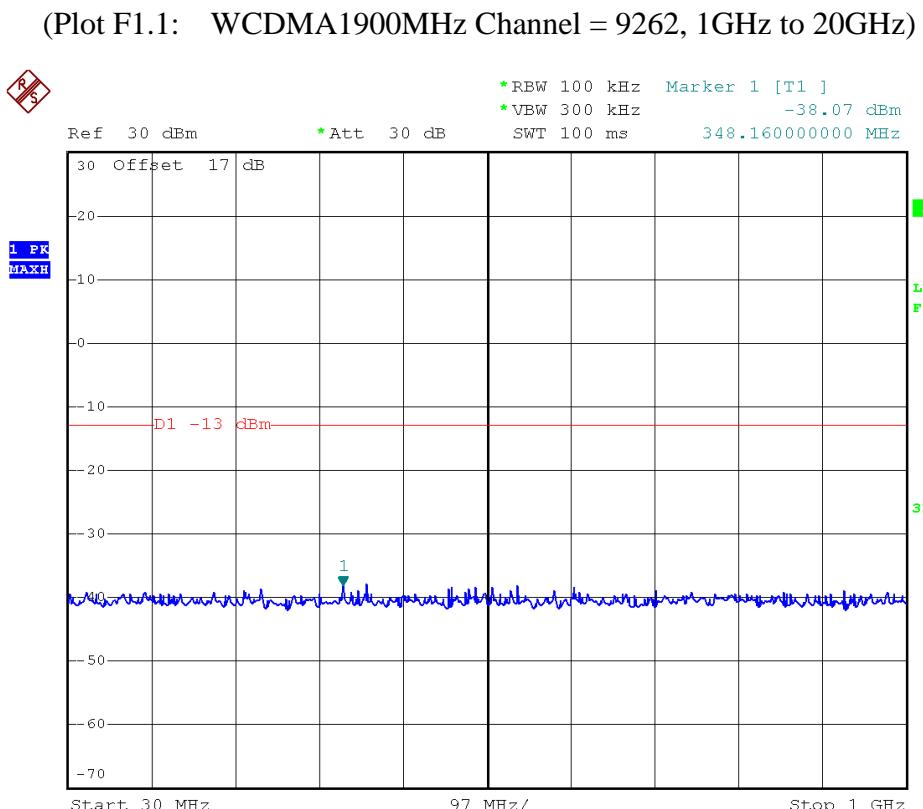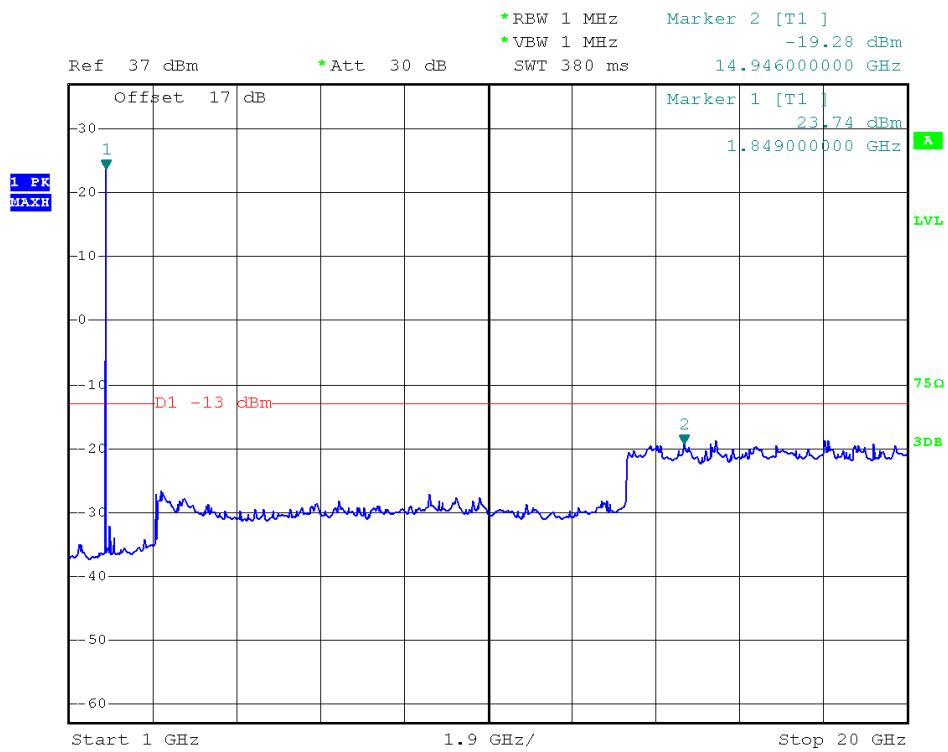

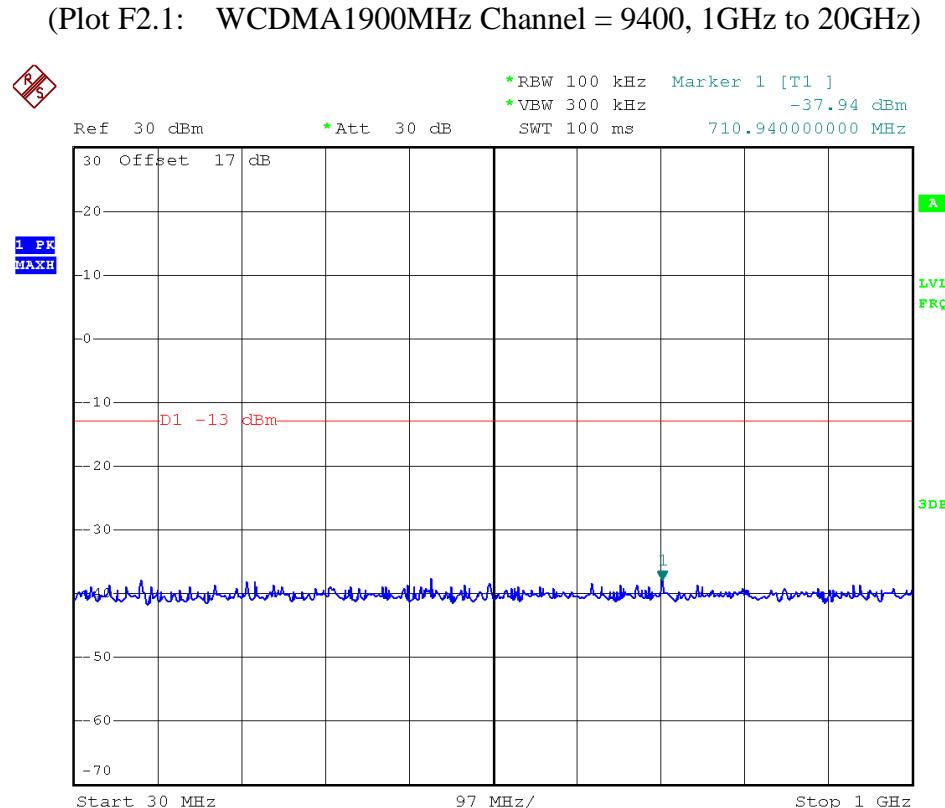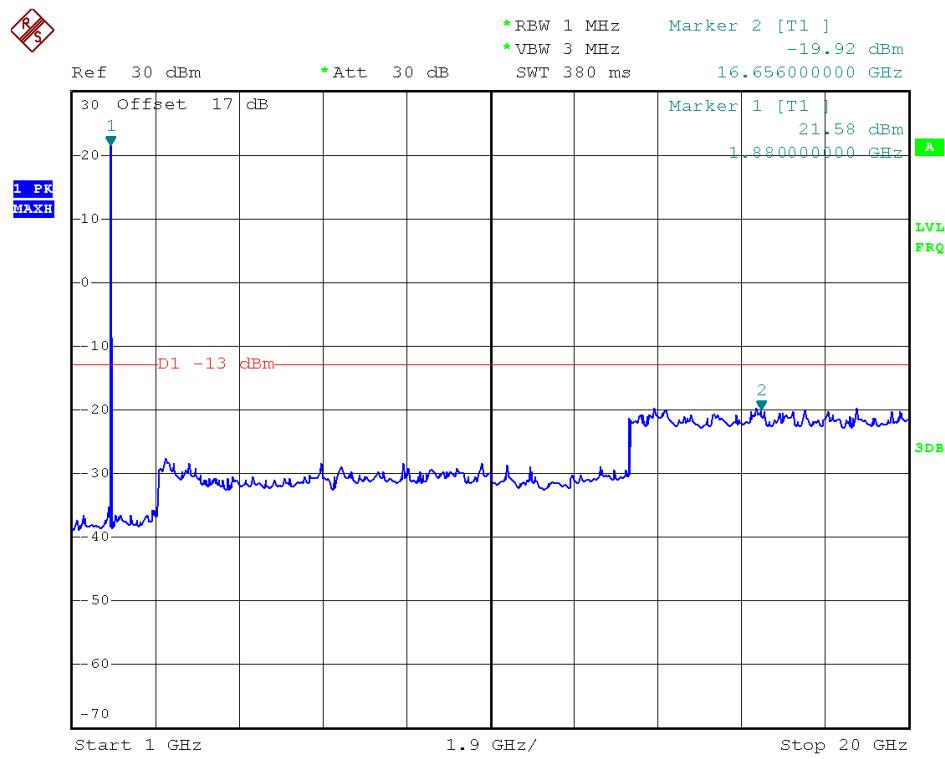

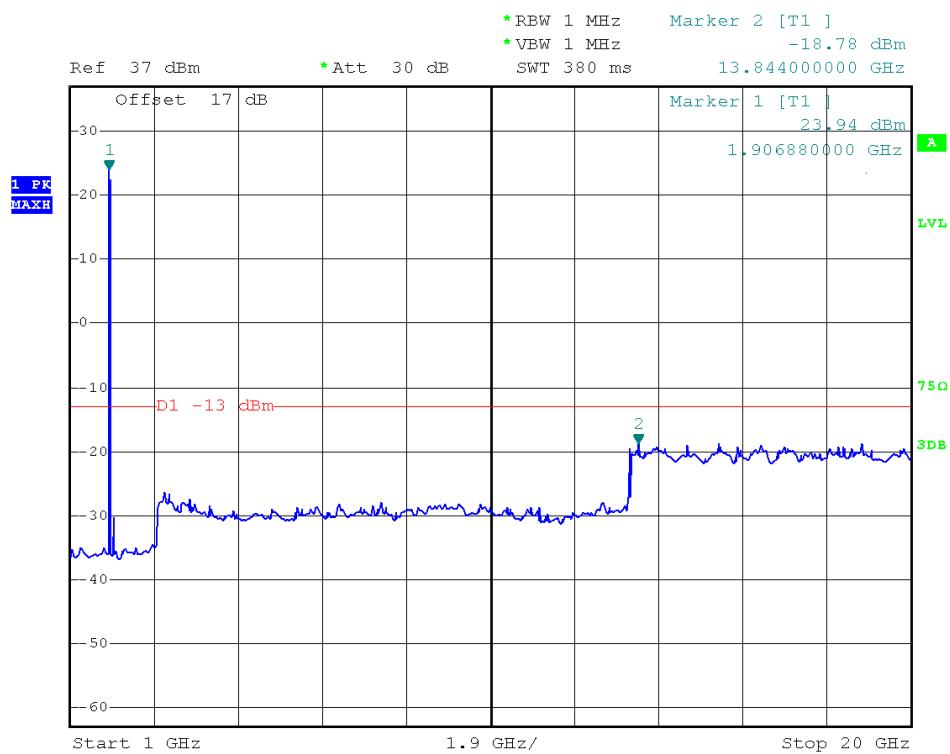

(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)

2.6 Band Edge

2.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

2.6.4 Test Result


The lowest and highest channels are tested to verify the band edge emissions.

1. Test Verdict:


| Band | Channel | Frequency (MHz) | Measured Max. Band Edge Emission (dBm) | Refer to Plot | Limit (dBm) | Verdict |
|-----------------|---------|-----------------|--|---------------|-------------|---------|
| GSM 850MHz | 128 | 824.2 | -13.50 | Plot A | -13 | PASS |
| | 251 | 848.8 | -15.26 | Plot B | | PASS |
| GSM 1900MHz | 512 | 1850.2 | -15.01 | Plot C | -13 | PASS |
| | 810 | 1909.8 | -14.52 | Plot D | | PASS |
| EDGE 850MHz | 128 | 824.2 | -13.39 | Plot E | -13 | PASS |
| | 251 | 848.8 | -13.37 | Plot F | | PASS |
| EDGE 1900MHz | 512 | 1850.2 | -14.67 | Plot G | -13 | PASS |
| | 810 | 1909.8 | -15.35 | Plot H | | PASS |
| WCDMA 850MHz | 4132 | 826.4 | -13.65 | Plot I | -13 | PASS |
| | 4233 | 846.6 | -13.18 | Plot J | | PASS |

| | | | | | | |
|---------|------|--------|--------|--------|-----|------|
| WCDMA | 9262 | 1852.4 | -13.92 | Plot K | -13 | PASS |
| 1900MHz | 9538 | 1907.6 | -13.06 | Plot L | | PASS |


2. Test Plots:

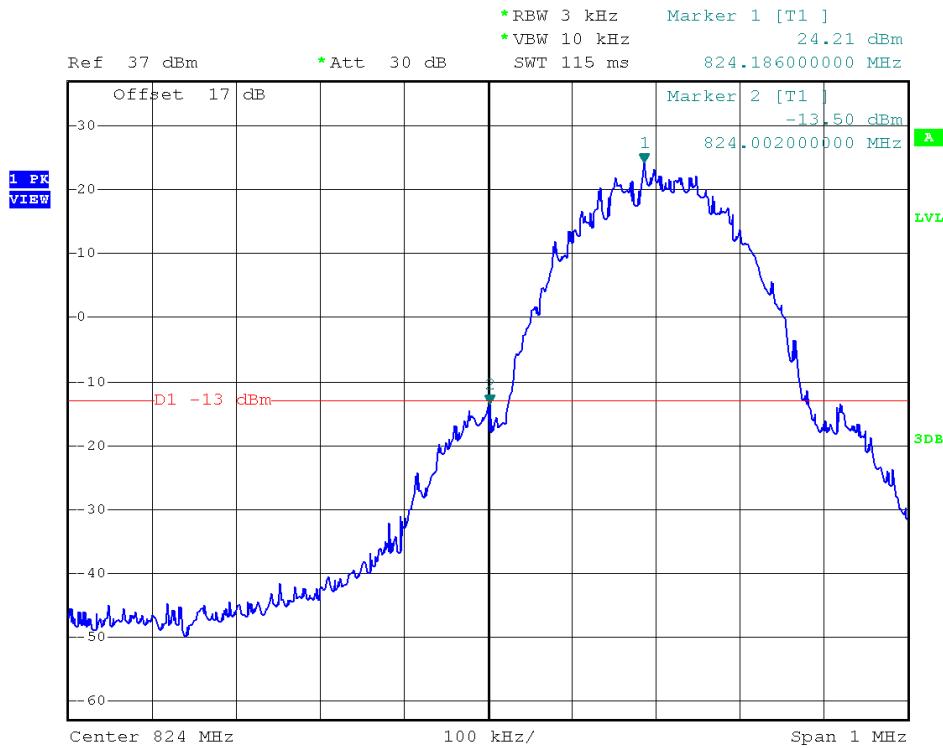


(Plot A: GSM 850 Channel = 128)

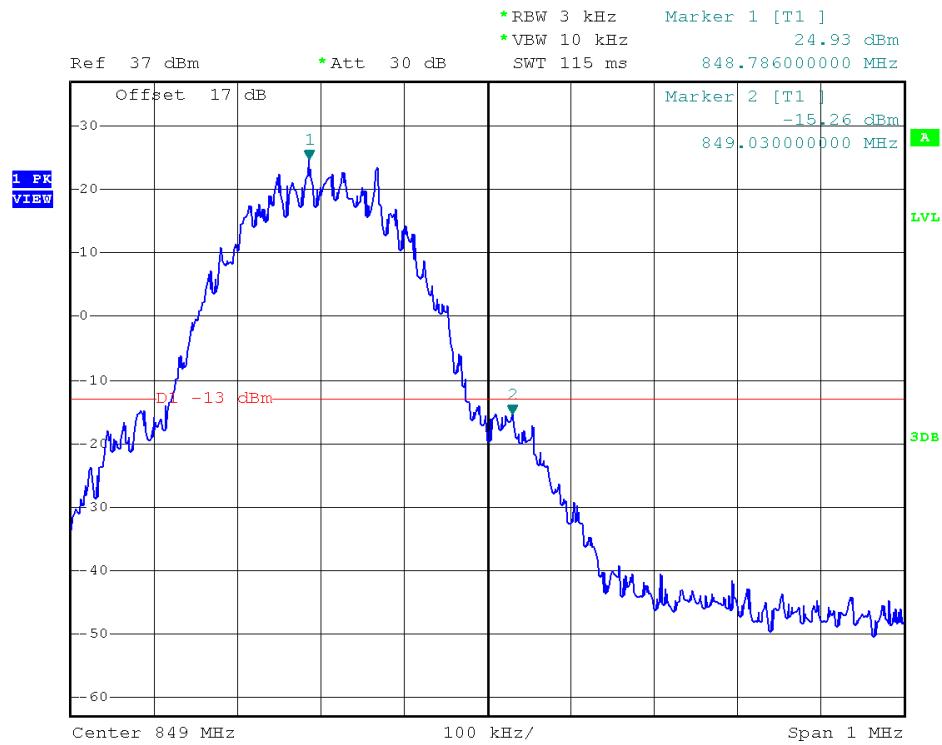


(Plot B: GSM 850 Channel = 251)

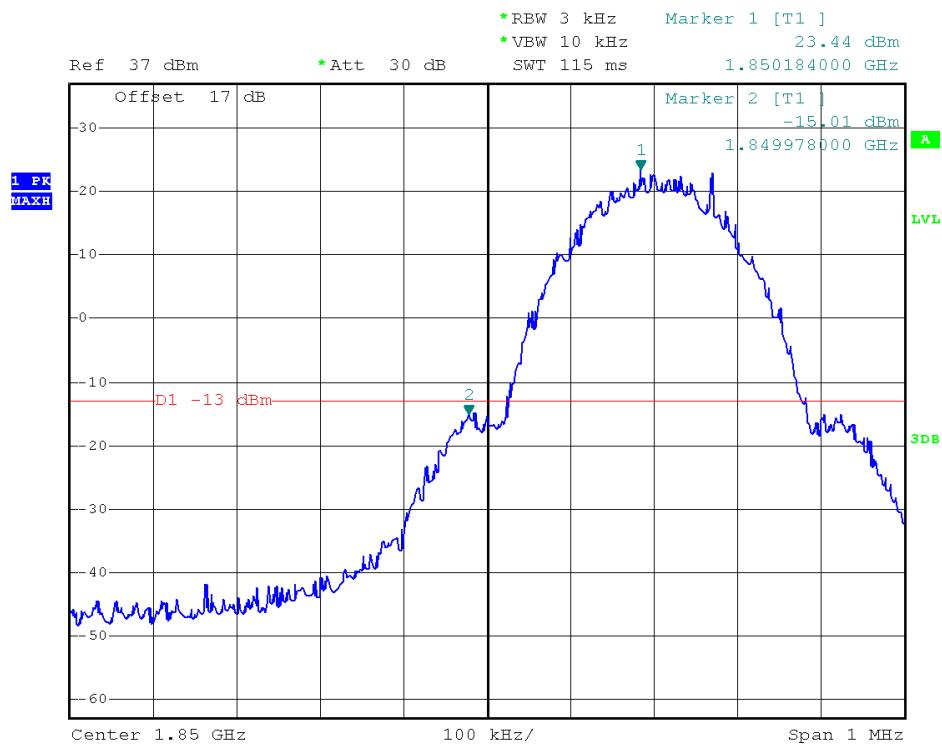


(Plot C: GSM 1900 Channel = 512)

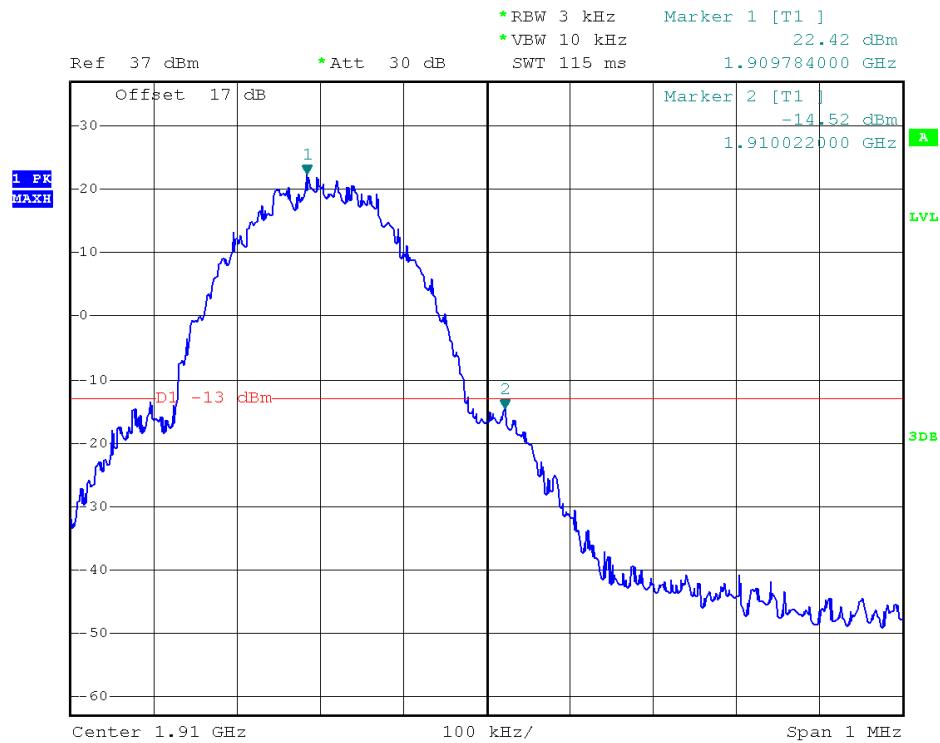


(Plot D: GSM 1900 Channel = 810)

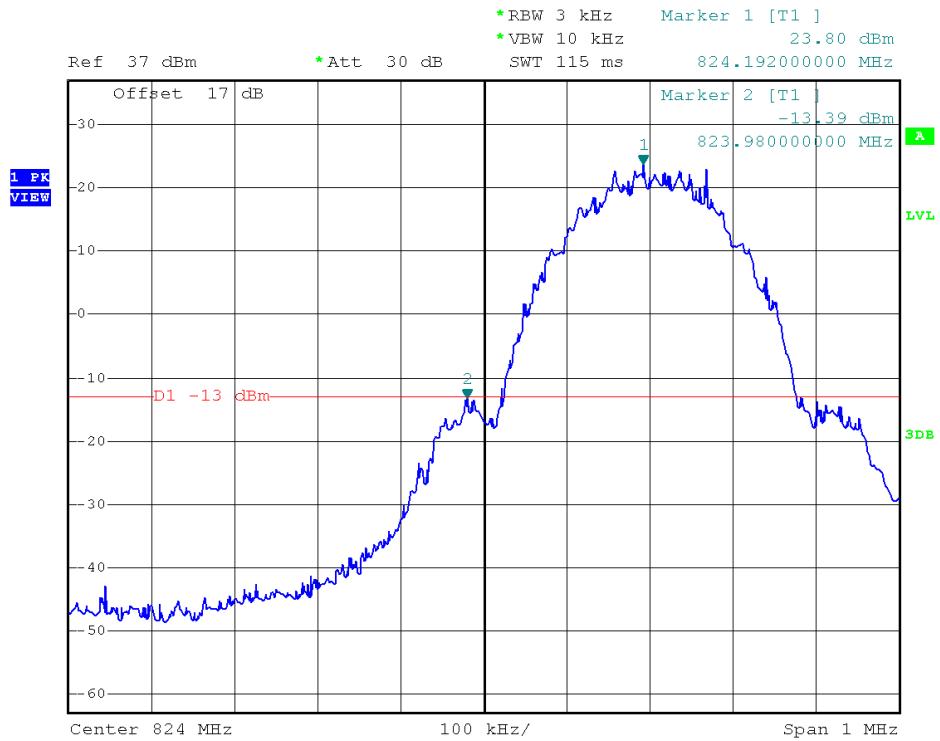



(Plot E: EDGE 850 Channel = 128)


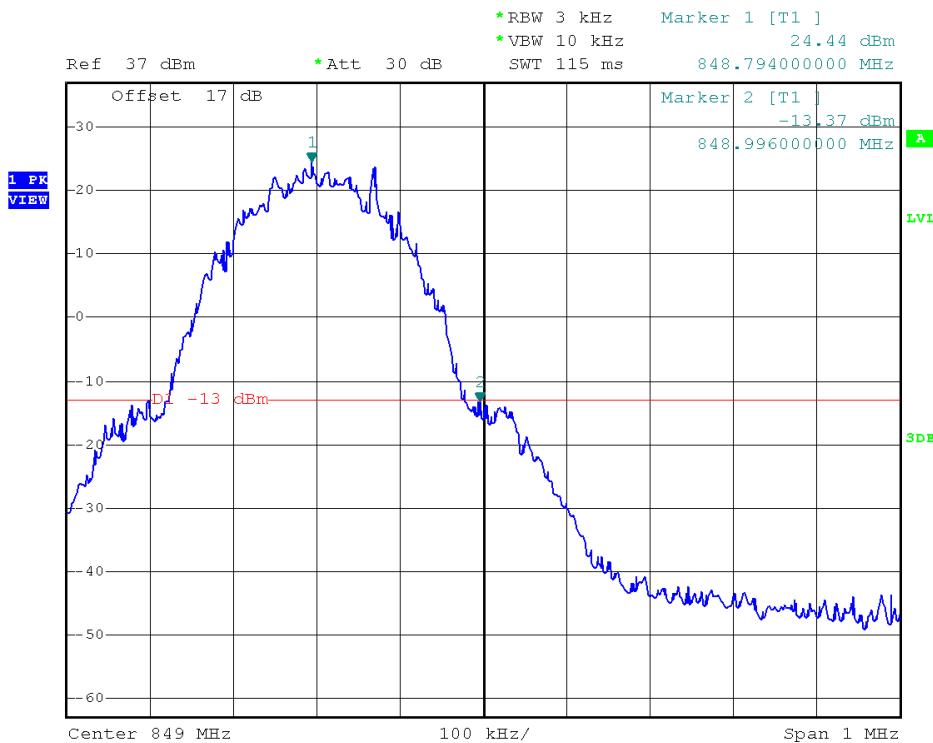



(Plot F: EDGE 850 Channel = 251)

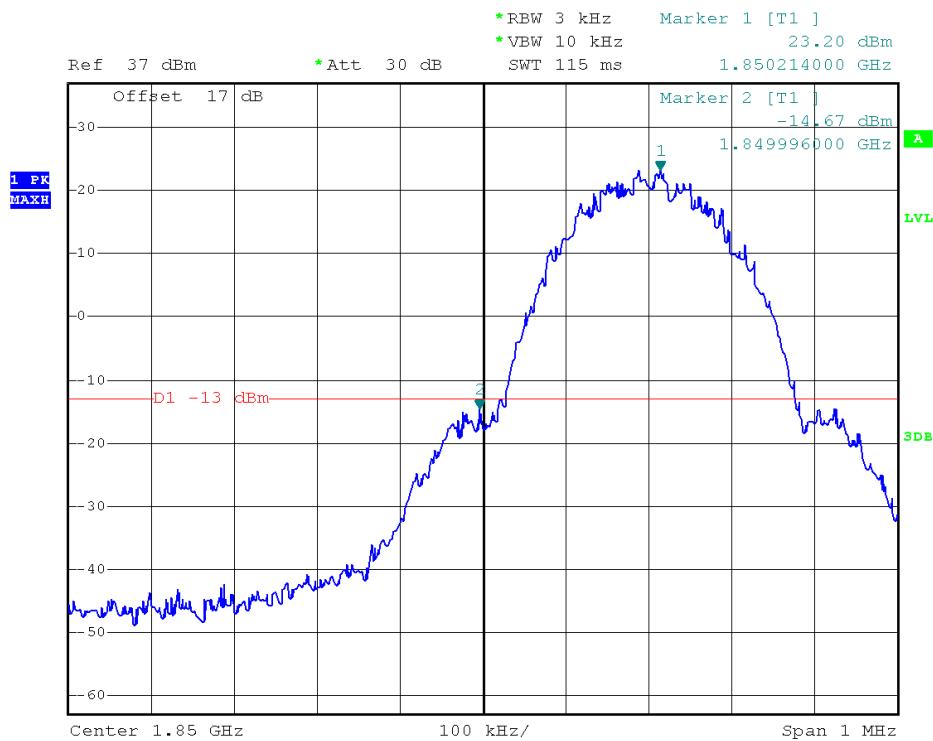

(Plot G: EDGE 1900 Channel = 512)

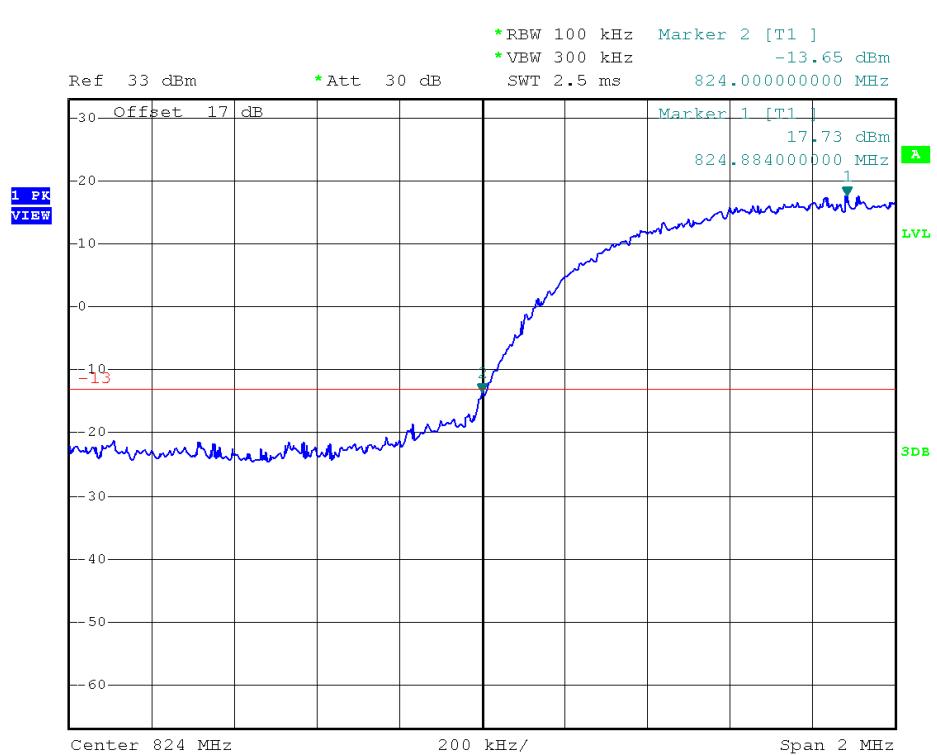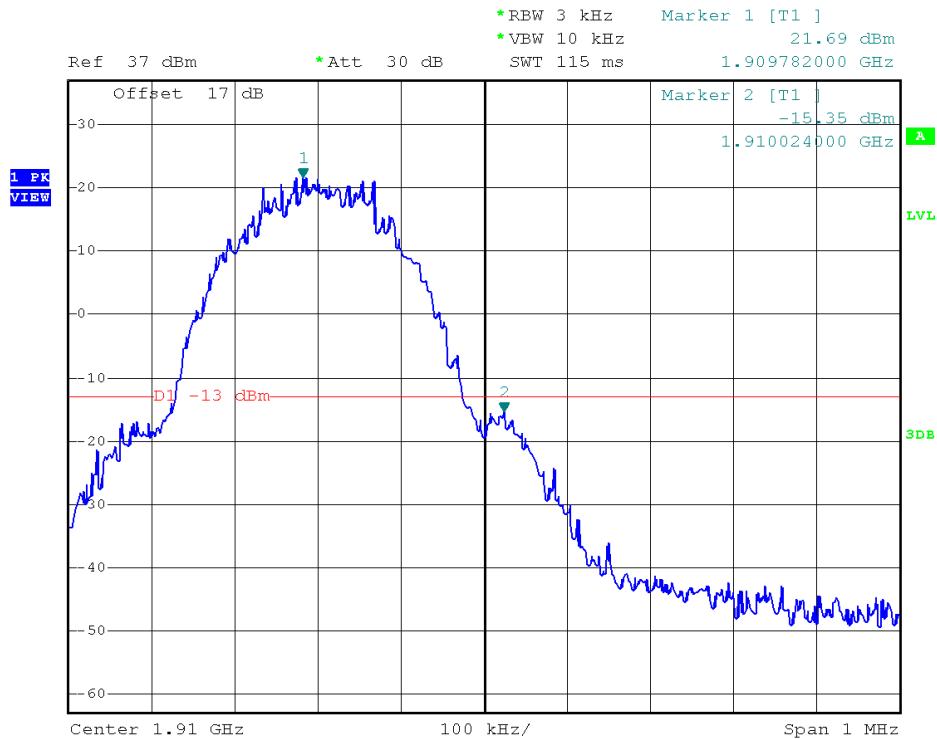

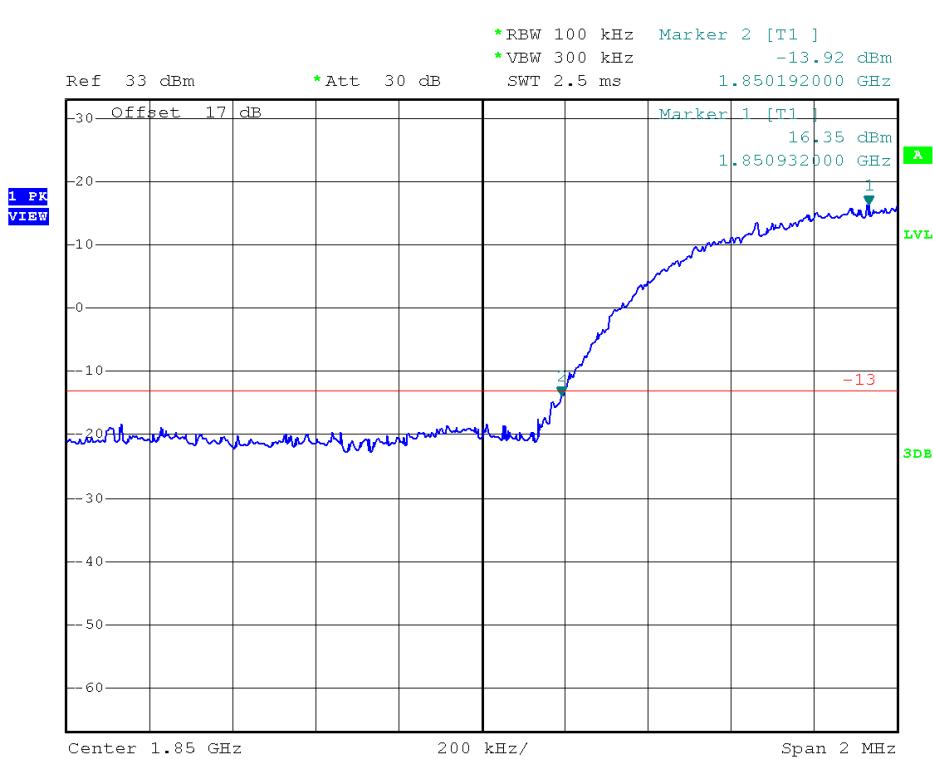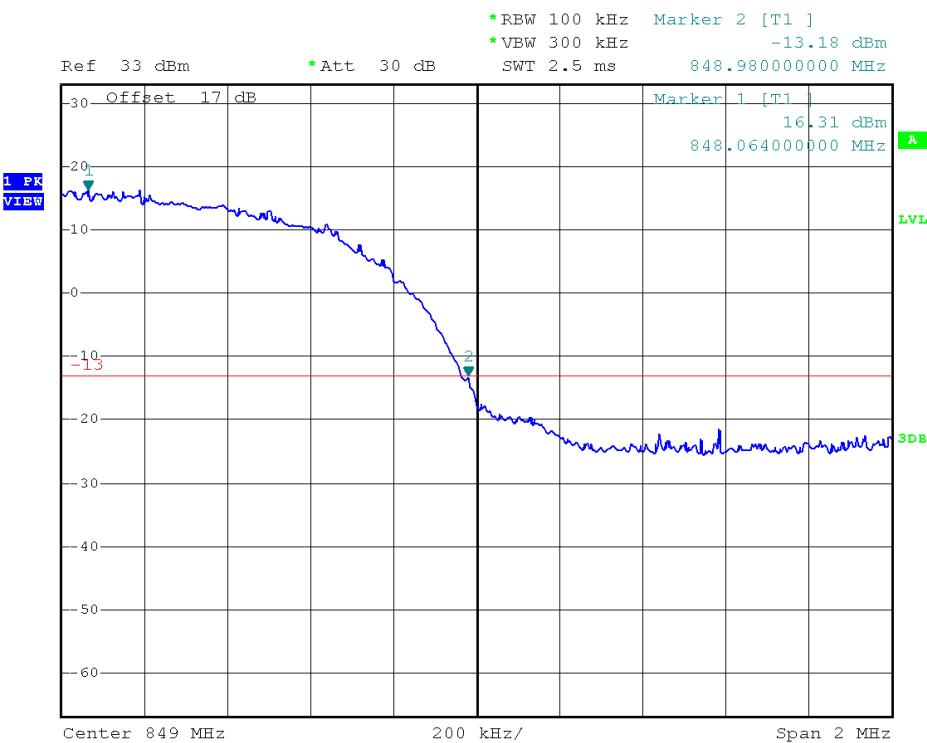

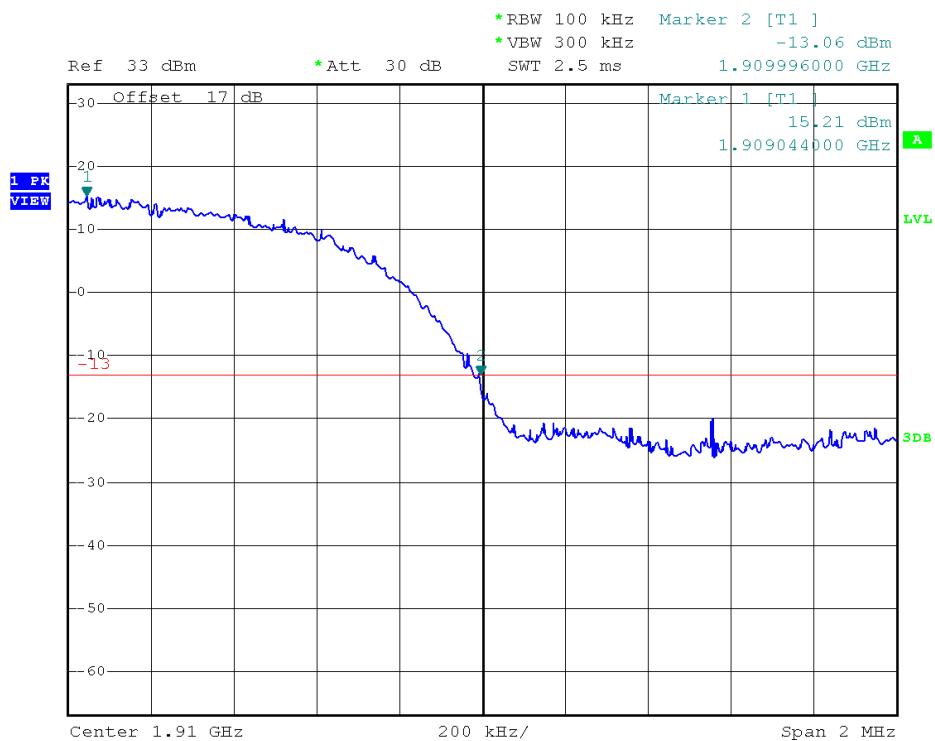

(Plot L: WCDMA 1900 Channel = 9538)


2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

2.7.2 Test Description

1. Test Setup:

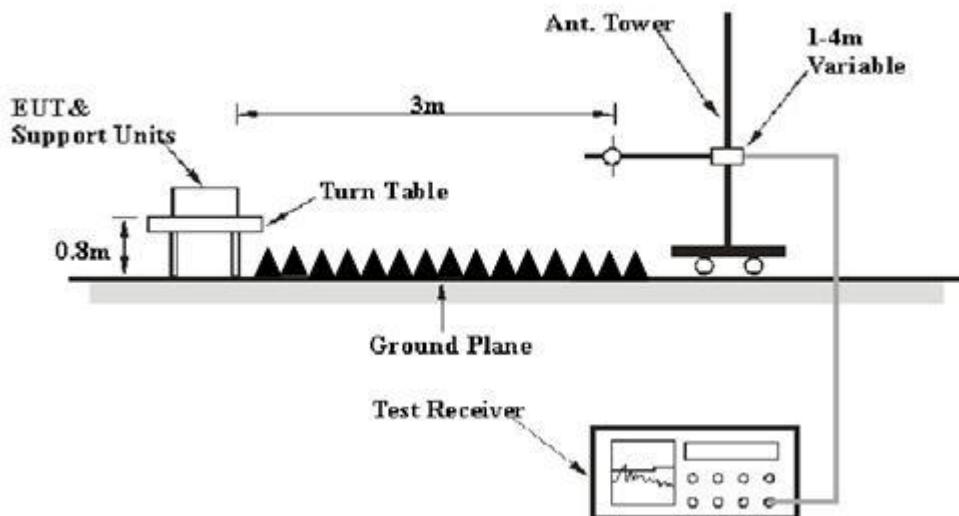

The EUT, which is powered by the DC 3.8V Power Supply directly, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

2. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due Date |
|-----------------------|---------------------|------------------|--------------|------------|---------------|
| Spectrum Analyzer | R&S | FSP40 | 1164.4391.40 | 2014.07.07 | 2015.07.06 |
| EMI Test Receiver | R&S | ESIB26 | 100130 | 2014.07.07 | 2015.07.06 |
| Full-Anechoic Chamber | Albatross~ Projects | 12.8m*6.8m *6.4m | A0412372 | 2015.01.05 | 2016.01.04 |

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due Date |
|---------------------------|--------------|--------------|------------|------------|---------------|
| Double ridge horn antenna | R&S | HF906 | A0304225 | 2014.06.11 | 2015.06.10 |
| Ultra-wideband antenna | R&S | HL562 | A0304224 | 2014.06.11 | 2015.06.10 |
| Loop antenna | R&S | HFH2-Z2 | A0304226 | 2014.06.11 | 2015.06.10 |
| Cable | SUNHNER | SUCOFLEX 100 | / | 2014.06.05 | 2015.06.04 |
| Cable | SUNHNER | SUCOFLEX 104 | / | 2014.06.05 | 2015.06.04 |

2.7.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
3. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
5. The table was rotated 360 degrees to determine the position of the highest radiated power.
6. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
7. Taking the record of maximum ERP/EIRP.
8. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
9. The conducted power at the terminal of the dipole antenna is measured.
10. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
11. $ERP/EIRP = Ps + Et - Es + Gs = Ps + Rt - Rs + Gs$

Ps (dBm): Input power to substitution antenna.

Gs (dBi or dBd): Substitution antenna Gain.

$Et = Rt + AF$ $Es = Rs + AF$

AF (dB/m): Receive antenna factor

Rt: The highest received signal in spectrum analyzer for EUT.

Rs: The highest received signal in spectrum analyzer for substitution antenna.

2.7.4 Test Result

Test Notes:

1. This device employs GMSK technology with GSM and GPRS capabilities. All configurations were investigated and the worst case emissions were found in GSM mode.
2. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA and HSPA+ capabilities. All configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2Kbps.
3. This unit was tested with its standard battery.
4. The worst case test configuration was found in the vertical positioning where the EUT is laying on its side. The data reported in the tables below were measured in this test setup.

| Band | Channel | Frequency (MHz) | PCL | Antenna Pol (H/V) | Measured ERP dBm | Limit dBm | Verdict |
|------------|---------|-----------------|-----|-------------------|------------------|-----------|---------|
| GSM 850MHz | 128 | 824.20 | 5 | V | 33.21 | 38.5 | PASS |
| | | | | H | 33.20 | | |
| | 190 | 836.60 | 5 | V | 33.12 | | PASS |
| | | | | H | 33.18 | | |
| | 251 | 848.80 | 5 | V | 33.25 | | PASS |
| | | | | H | 33.23 | | |

| Band | Channel | Frequency (MHz) | PCL | Antenna Pol (H/V) | Measured EIRP dBm | Limit dBm | Verdict |
|-------------|---------|-----------------|-----|-------------------|-------------------|-----------|---------|
| GSM 1900MHz | 512 | 1850.2 | 0 | V | 29.78 | 33 | PASS |
| | | | | H | 29.82 | | |
| | 661 | 1880.0 | 0 | V | 29.88 | | PASS |
| | | | | H | 29.93 | | |
| | 810 | 1909.8 | 0 | V | 29.90 | | PASS |
| | | | | H | 29.84 | | |

| Band | Channel | Frequency (MHz) | PCL | Antenna Pol (H/V) | Measured ERP dBm | Limit dBm | Verdict |
|----------------|---------|-----------------|-----|-------------------|------------------|-----------|---------|
| EDGE 850MHz | 128 | 824.20 | 5 | V | 32.44 | 38.5 | PASS |
| | | | | H | 32.41 | | PASS |
| | 190 | 836.60 | 5 | V | 32.34 | | PASS |
| | | | | H | 32.47 | | PASS |
| | 251 | 848.80 | 5 | V | 32.40 | | PASS |
| | | | | H | 32.45 | | PASS |

| Band | Channel | Frequency (MHz) | PCL | Antenna Pol (H/V) | Measured EIRP dBm | Limit dBm | Verdict |
|-----------------|---------|-----------------|-----|-------------------|-------------------|-----------|---------|
| EDGE 1900MHz | 512 | 1850.2 | 0 | V | 29.72 | 33 | PASS |
| | | | | H | 29.87 | | PASS |
| | 661 | 1880.0 | 0 | V | 29.71 | | PASS |
| | | | | H | 29.77 | | PASS |
| | 810 | 1909.8 | 0 | V | 29.84 | | PASS |
| | | | | H | 29.79 | | PASS |

| Band | Channel | Frequency (MHz) | Antenna Pol (H/V) | Measured ERP dBm | Limit dBm | Verdict |
|-----------------|---------|-----------------|-------------------|------------------|-----------|---------|
| WCDMA 850MHz | 4132 | 826.4 | V | 25.79 | 38.5 | PASS |
| | | | H | 25.68 | | PASS |
| | 4175 | 835 | V | 25.84 | | PASS |
| | | | H | 25.72 | | PASS |
| | 4233 | 846.6 | V | 25.70 | | PASS |
| | | | H | 25.67 | | PASS |

| Band | Channel | Frequency (MHz) | Antenna Pol (H/V) | Measured EIRP dBm | Limit dBm | Verdict |
|------------------|---------|-----------------|-------------------|-------------------|-----------|---------|
| WCDMA 1900MHz | 9262 | 1852.4 | V | 25.64 | 33 | PASS |
| | | | H | 25.61 | | PASS |
| | 9400 | 1880 | V | 25.71 | | PASS |
| | | | H | 25.68 | | PASS |
| | 9538 | 1907.6 | V | 25.72 | | PASS |
| | | | H | 25.65 | | PASS |

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

2.8.2 Test Description

See section 0 of this report.

Equipment List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal.Due Date |
|---------------------------------------|---------------------|---------------------|------------|------------|--------------|
| System Simulator | R&S | CMW500 | 149333 | 2014.07.21 | 2015.07.20 |
| EMI Test Receiver | R&S | ESIB26 | 100130 | 2014.07.07 | 2015.07.06 |
| Full-Anechoic Chamber | Albatross~ Projects | 12.8m*6.8m *6.4m | A0412372 | 2015.01.05 | 2016.01.04 |
| Double ridge horn antenna(1GHz~18GHz) | R&S | HF906 | 100150 | 2014.06.11 | 2015.06.10 |
| Broadband antenna (30MHz~1GHz) | R&S | HL562 | 101341 | 2014.06.11 | 2015.06.10 |
| Horn antenna (18GHz~26.5GHz) | R&S | HM118 | 101286 | 2014.06.11 | 2015.06.10 |
| Cable | SUNHNER | SUCOFLEX 100 | / | 2014.06.05 | 2015.06.04 |
| Cable | SUNHNER | SUCOFLEX 104 | / | 2014.06.05 | 2015.06.04 |

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3 Test Result

Test Notes:

1. This device employs GMSK technology with GSM and GPRS capabilities. All configurations were investigated and the worst case emissions were found in GSM mode.
2. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA capabilities. All configurations were investigated and the worst case UMTS emissions were found in

RMC WCDMA mode at 12.2Kbps.

3. This unit was tested with its standard battery.
4. The worst case test configuration was found in the vertical positioning where the EUT is laying on its side. The data reported in the tables below were measured in this test setup.
5. The spectrum is measured from 30MHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.


1. Test Verdict:

| Band | Channel | Frequency (MHz) | Measured Max. Spurious Emission (dBm) | | Limit (dBm) | Verdict |
|---------------|---------|-----------------|---------------------------------------|-----------------------|-------------|---------|
| | | | Test Antenna Horizontal | Test Antenna Vertical | | |
| GSM 850MHz | 128 | 824.2 | < -25 | < -25 | -13 | PASS |
| | 190 | 836.6 | < -25 | < -25 | | PASS |
| | 251 | 848.8 | < -25 | < -25 | | PASS |
| GSM 1900MHz | 512 | 1850.2 | < -25 | < -25 | -13 | PASS |
| | 661 | 1880.0 | < -25 | < -25 | | PASS |
| | 810 | 1909.8 | < -25 | < -25 | | PASS |
| EDGE 850MHz | 128 | 824.2 | < -25 | < -25 | -13 | PASS |
| | 190 | 836.6 | < -25 | < -25 | | PASS |
| | 251 | 848.8 | < -25 | < -25 | | PASS |
| EDGE 1900MHz | 512 | 1850.2 | < -25 | < -25 | -13 | PASS |
| | 661 | 1880.0 | < -25 | < -25 | | PASS |
| | 810 | 1909.8 | < -25 | < -25 | | PASS |
| WCDMA 850MHz | 4132 | 826.4 | < -25 | < -25 | -13 | PASS |
| | 4183 | 836.6 | < -25 | < -25 | | PASS |
| | 4233 | 846.6 | < -25 | < -25 | | PASS |
| WCDMA 1900MHz | 9262 | 1852.4 | < -25 | < -25 | -13 | PASS |
| | 9400 | 1880 | < -25 | < -25 | | PASS |
| | 9538 | 1907.6 | < -25 | < -25 | | PASS |


2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.


Note2: All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.

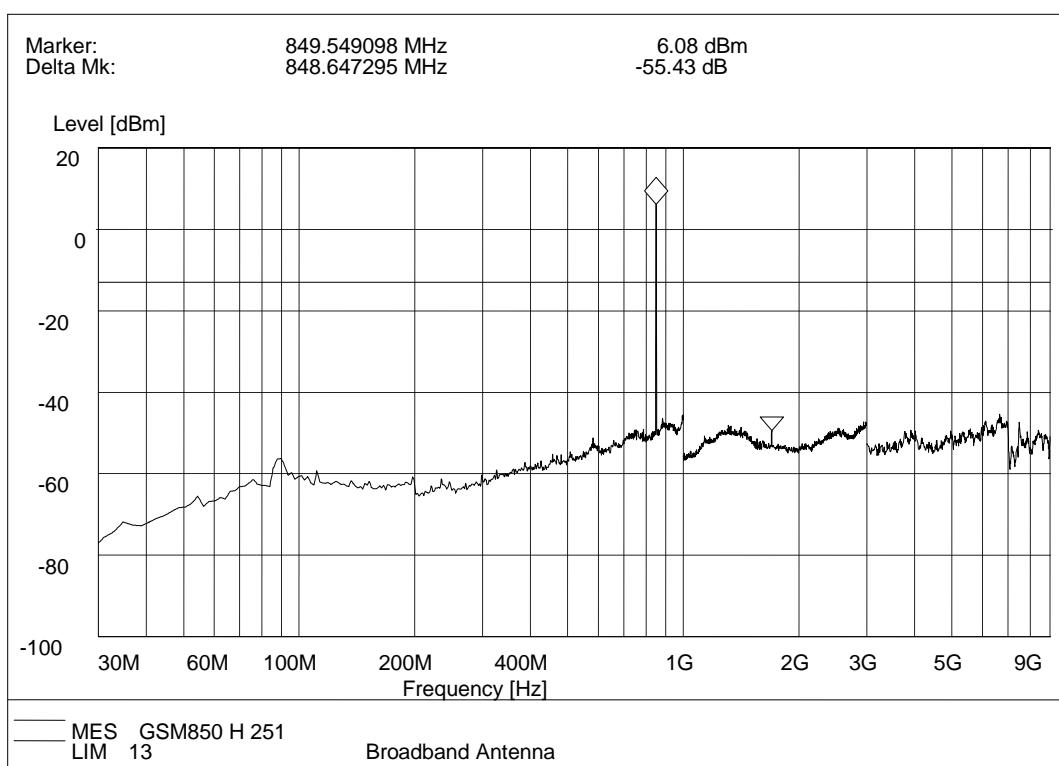


GSM 850MHz , Test Antenna Horizontal

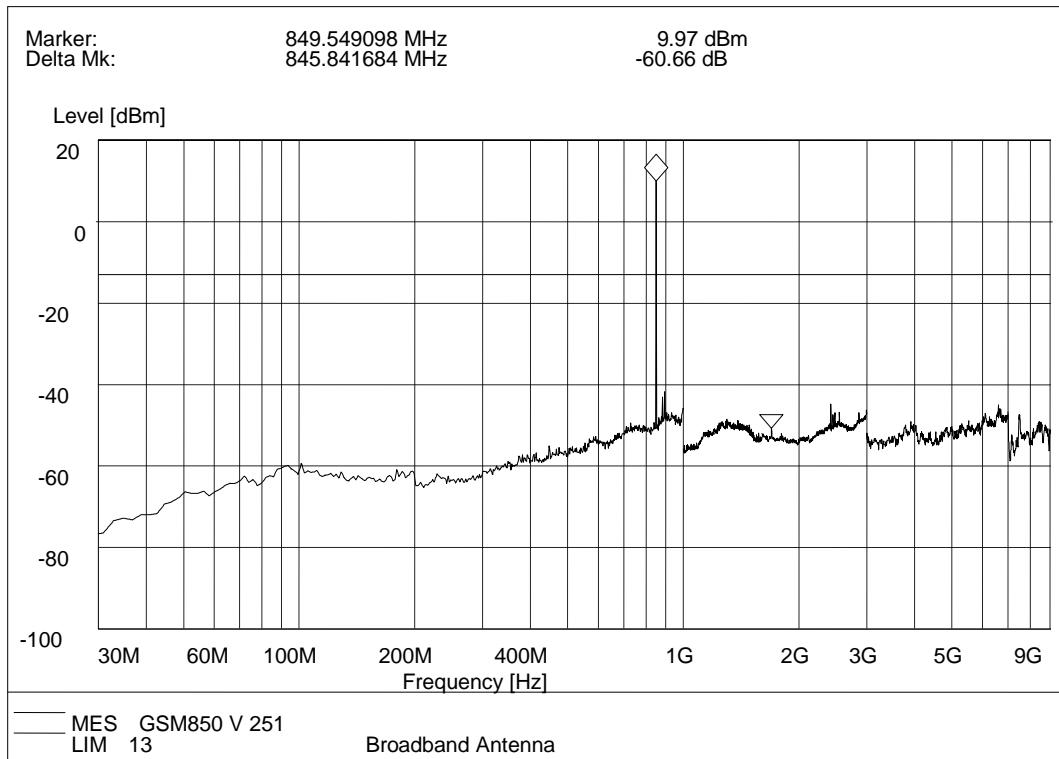


GSM 850MHz , Test Antenna Vertical

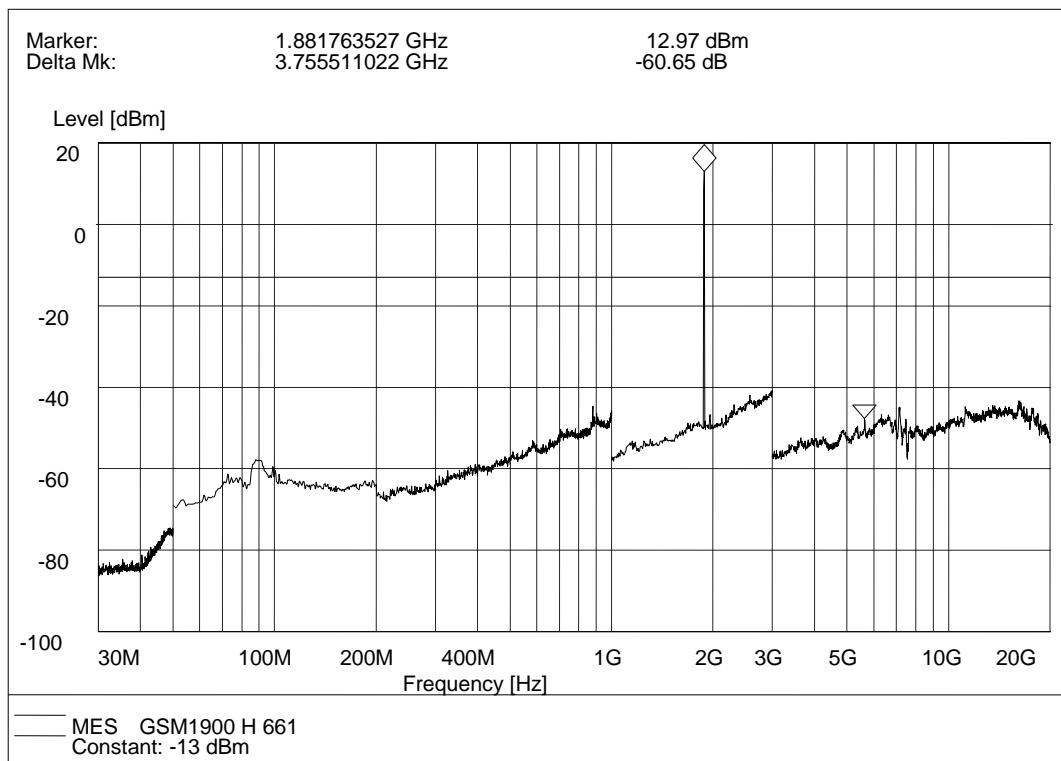


GSM 1900MHz , Test Antenna Horizontal

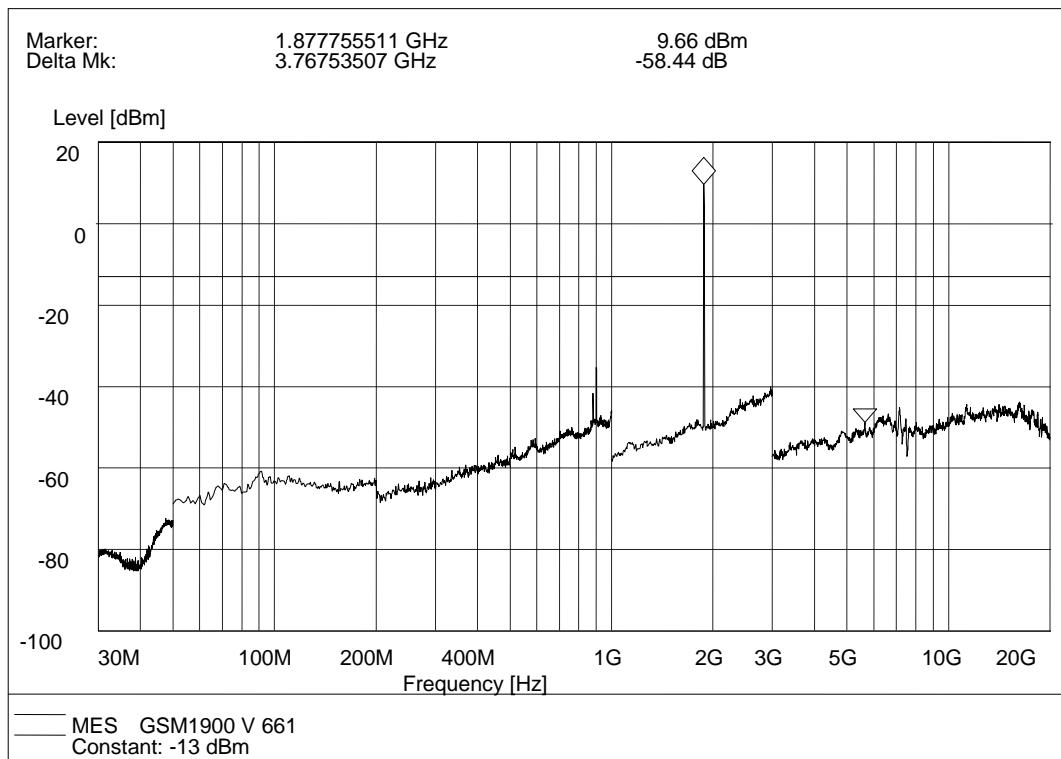


GSM 1900MHz , Test Antenna Vertical

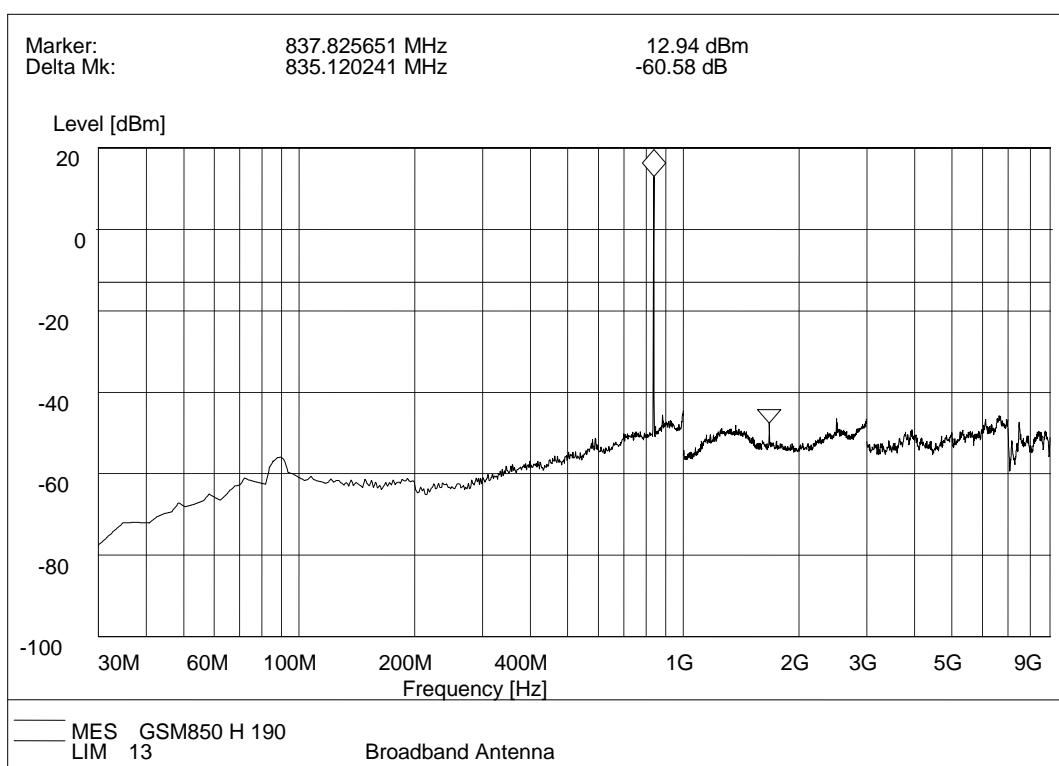


EDGE 850MHz , Test Antenna Horizontal

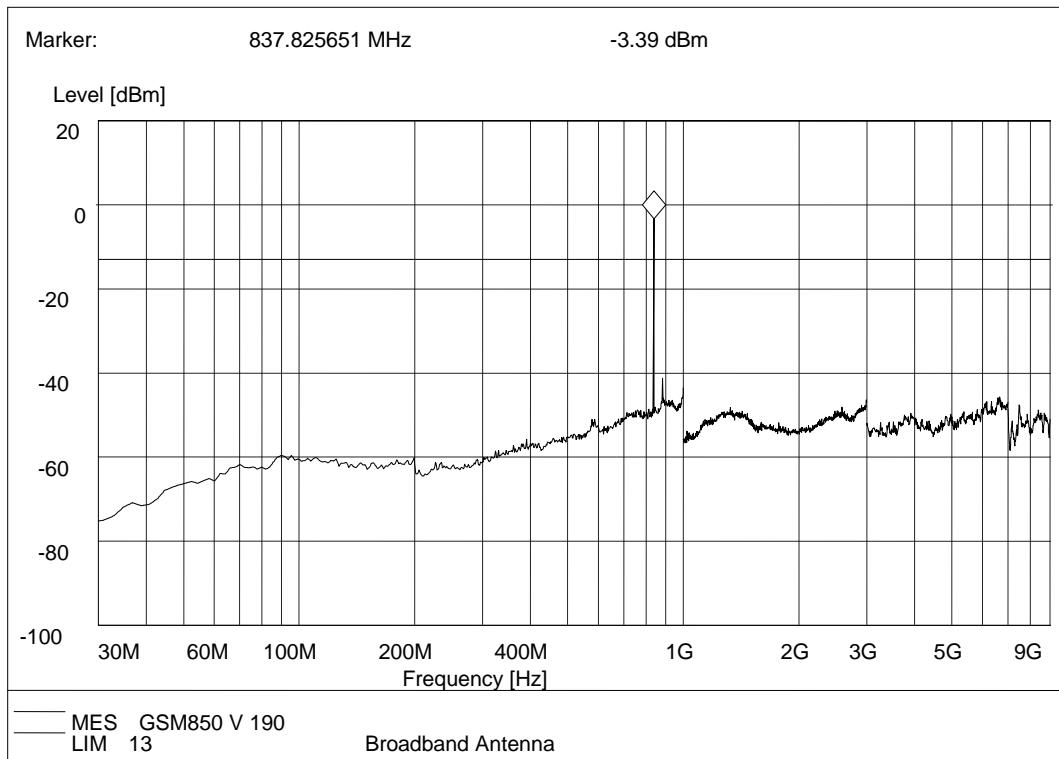


EDGE 850MHz, Test Antenna Vertical

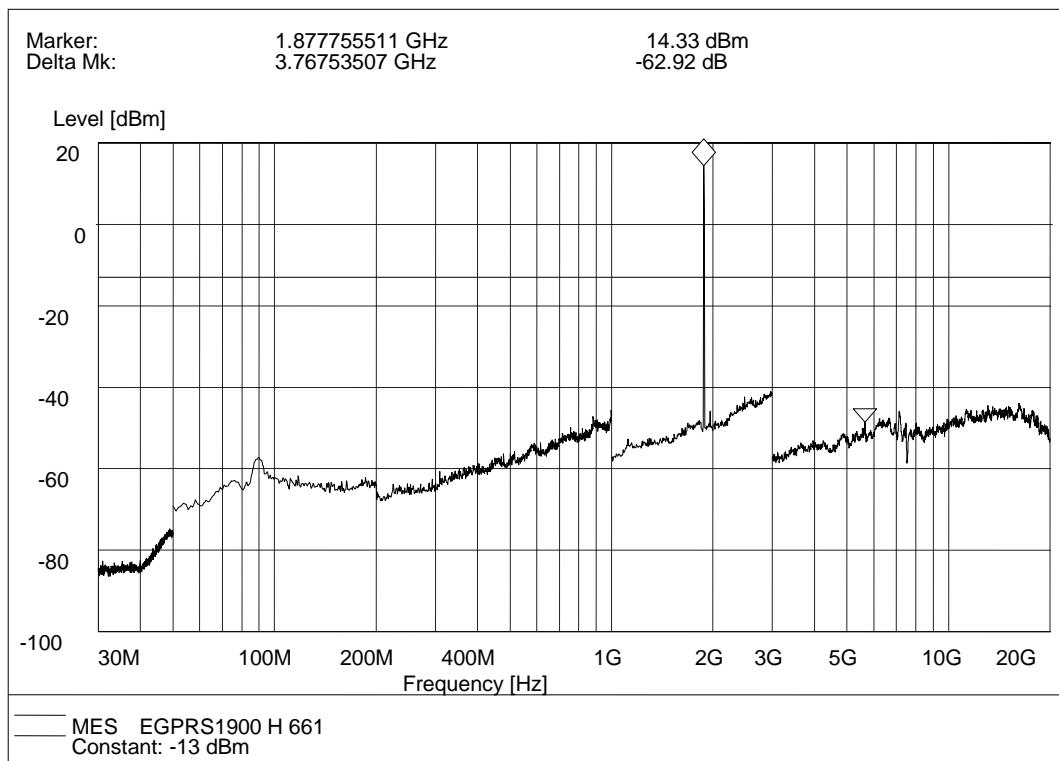


EDGE 1900MHz, Test Antenna Horizontal

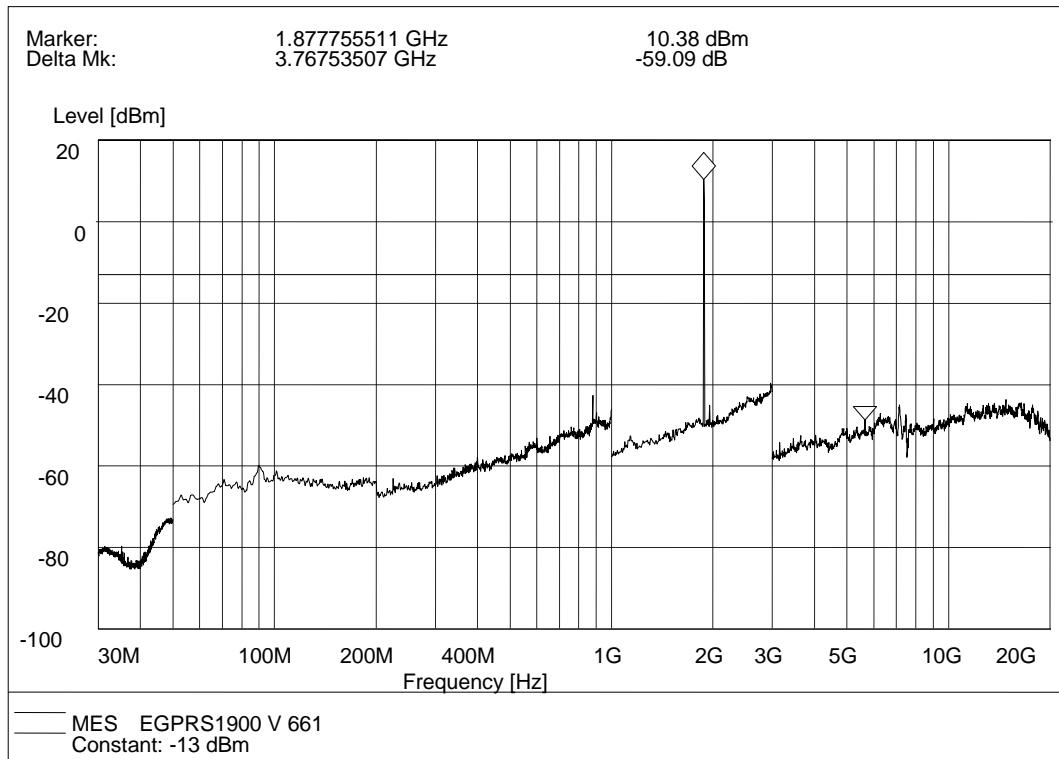


EDGE 1900MHz, Test Antenna Vertical

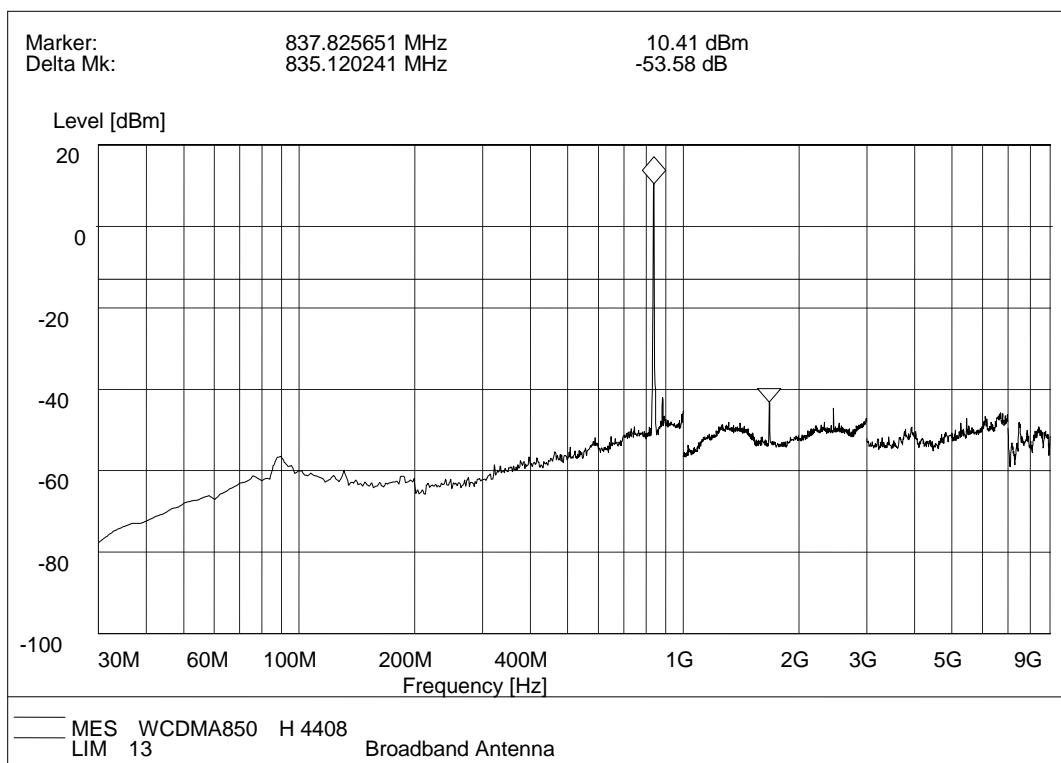


WCDMA 850MHz , Test Antenna Horizontal

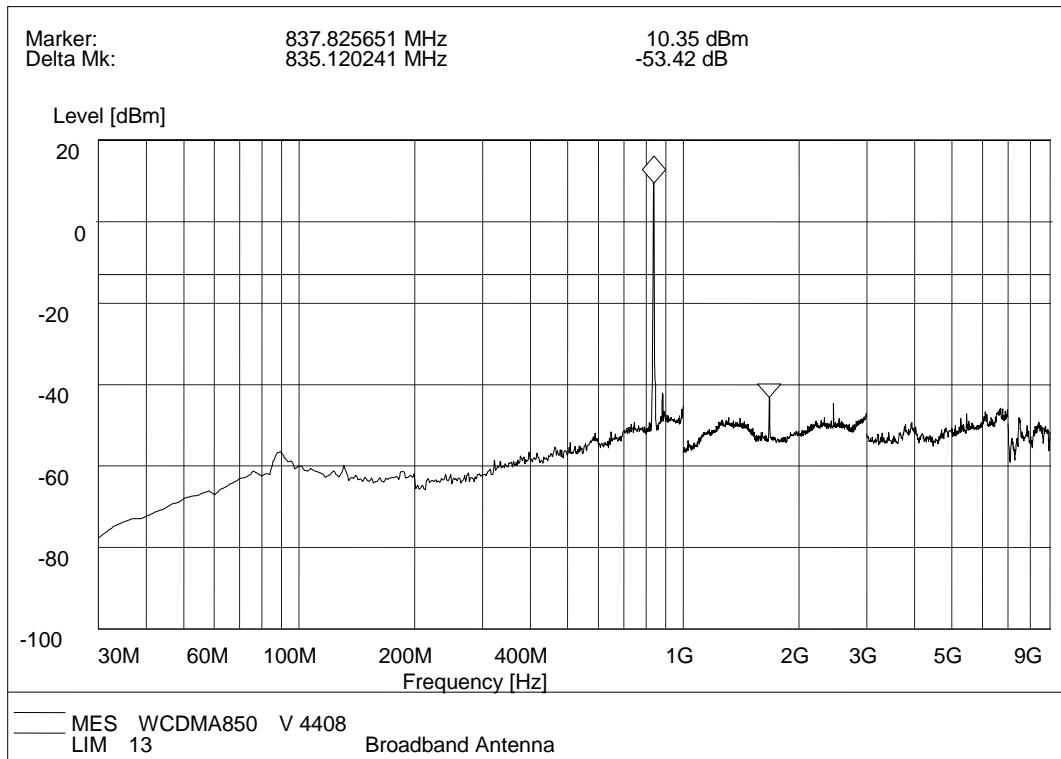

WCDMA 850MHz, Test Antenna Vertical

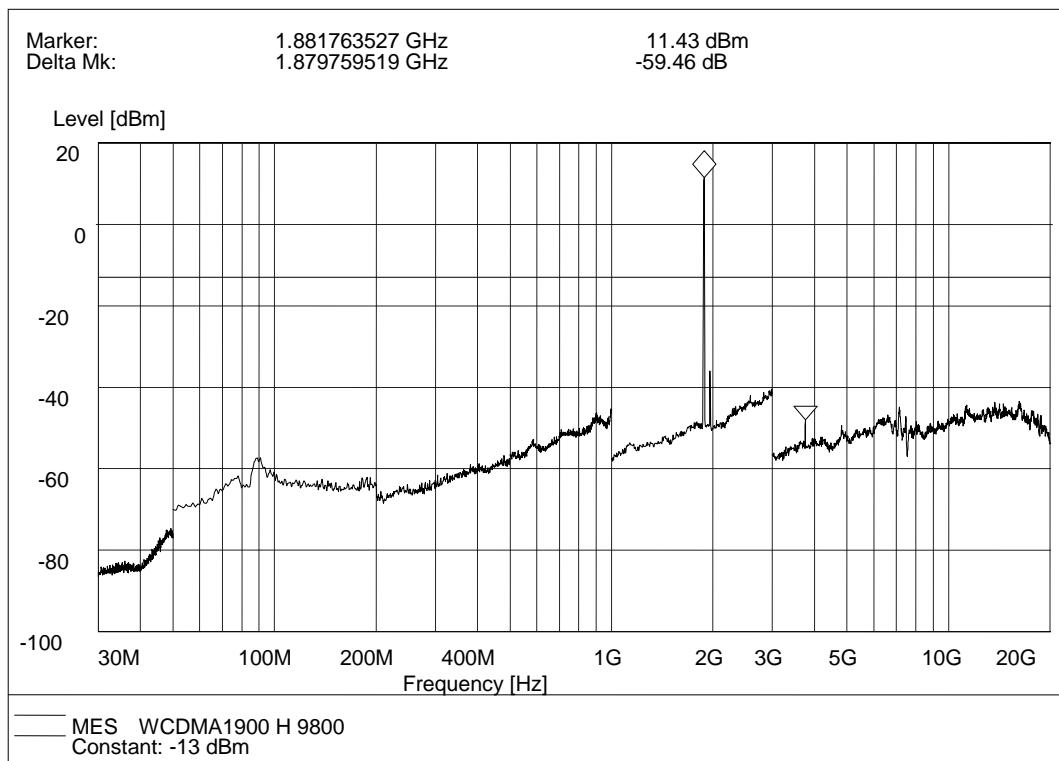

WCDMA 1900MHz, Test Antenna Horizontal

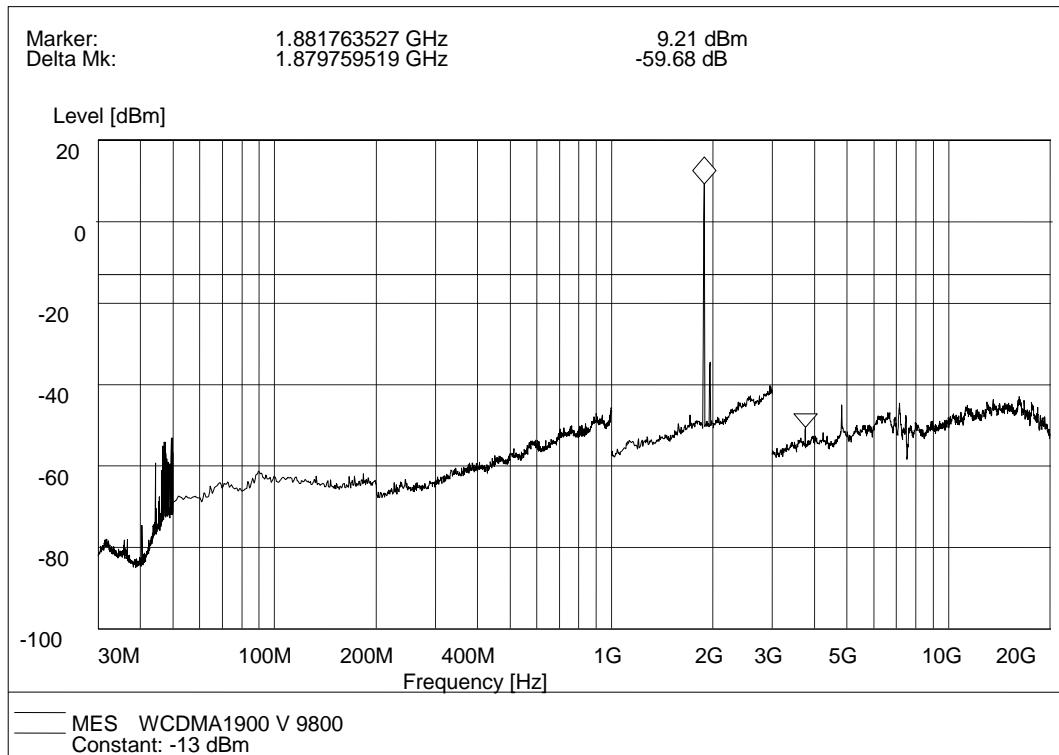

WCDMA 1900MHz, Test Antenna Vertical

** END OF REPORT **