

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of

Zeeva International Limited

BT Earphones  
Model No.: DEEP-0176

FCC ID: 2ADM5-DEEP-0176

Prepared for : Zeeva International Limited  
Address : Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road,  
Kowloon Bay, HongKong, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry  
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290

Fax: (0755) 26503396

Report No. : ATE20180004  
Date of Test : Jan. 4-Jan. 15, 2018  
Date of Report : Jan. 16, 2018

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>TABLE OF CONTENTS</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Accessory and Auxiliary Equipment .....	5
1.3. Description of Test Facility .....	6
1.4. Measurement Uncertainty .....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT</b> .....	<b>7</b>
<b>3. OPERATION OF EUT DURING TESTING</b> .....	<b>8</b>
3.1. Operating Mode .....	8
3.2. Configuration and peripherals .....	8
<b>4. TEST PROCEDURES AND RESULTS</b> .....	<b>9</b>
<b>5. 20DB BANDWIDTH TEST</b> .....	<b>10</b>
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement .....	10
5.4. Operating Condition of EUT .....	10
5.5. Test Procedure .....	10
5.6. Test Result .....	11
<b>6. CARRIER FREQUENCY SEPARATION TEST</b> .....	<b>15</b>
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement .....	15
6.4. Operating Condition of EUT .....	15
6.5. Test Procedure .....	16
6.6. Test Result .....	16
<b>7. NUMBER OF HOPPING FREQUENCY TEST</b> .....	<b>20</b>
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement .....	20
7.4. Operating Condition of EUT .....	20
7.5. Test Procedure .....	20
7.6. Test Result .....	21
<b>8. DWELL TIME TEST</b> .....	<b>23</b>
8.1. Block Diagram of Test Setup.....	23
8.2. The Requirement For Section 15.247(a)(1)(iii).....	23
8.3. EUT Configuration on Measurement .....	23
8.4. Operating Condition of EUT .....	23
8.5. Test Procedure .....	23
8.6. Test Result .....	24
<b>9. MAXIMUM PEAK OUTPUT POWER TEST</b> .....	<b>34</b>
9.1. Block Diagram of Test Setup.....	34

9.2.	The Requirement For Section 15.247(b)(1).....	34
9.3.	EUT Configuration on Measurement .....	34
9.4.	Operating Condition of EUT .....	34
9.5.	Test Procedure .....	34
9.6.	Test Result .....	35
<b>10.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>39</b>
10.1.	Block Diagram of Test Setup.....	39
10.2.	The Limit For Section 15.247(d) .....	40
10.3.	Restricted bands of operation .....	41
10.4.	Configuration of EUT on Measurement .....	41
10.5.	Operating Condition of EUT .....	42
10.6.	Test Procedure .....	42
10.7.	Data Sample.....	43
10.8.	The Field Strength of Radiation Emission Measurement Results .....	43
<b>11.</b>	<b>BAND EDGE COMPLIANCE TEST .....</b>	<b>56</b>
11.1.	Block Diagram of Test Setup.....	56
11.2.	The Requirement For Section 15.247(d) .....	56
11.3.	EUT Configuration on Measurement .....	56
11.4.	Operating Condition of EUT .....	56
11.5.	Test Procedure .....	57
11.6.	Test Result .....	57
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..</b>	<b>73</b>
12.1.	Block Diagram of Test Setup.....	73
12.2.	Power Line Conducted Emission Measurement Limits.....	74
12.3.	Configuration of EUT on Measurement .....	74
12.4.	Operating Condition of EUT .....	74
12.5.	Test Procedure .....	74
12.6.	Data Sample.....	75
12.7.	Power Line Conducted Emission Measurement Results .....	75
<b>13.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>80</b>
13.1.	The Requirement .....	80
13.2.	Antenna Construction .....	80

## Test Report Certification

Applicant : Zeeva International Limited  
Manufacturer : Zeeva International Limited  
EUT Description : BT Earphones  
Model No. : DEEP-0176  
Brand Name : Digital Essentials


Measurement Procedure Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2018**  
**ANSI C63.10: 2013**


The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : Jan. 4-Jan. 15, 2018  
Date of Report : Jan. 16, 2018

Test Engineer :   
(Star Yang, Engineer)

Prepared by :   
(Star Yang, Engineer)

Approved & Authorized Signer :   
(Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Model Number	:	DEEP-0176
Bluetooth version	:	V 4.2
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain(Max)	:	1.2dBi
Antenna type	:	PCB antenna
Adapter Input Voltage	:	DC 3.7V (Powered by Lithium battery) or DC 5V (Powered by USB port)
Modulation mode	:	GFSK, $\pi/4$ DQPSK Because of firmware limitation, this device only supports Bluetooth V4.2(BR+EDR mode) without the BLE mode and EDR 8DPSK mode
Hardware version	:	V1.1
Software version	:	V1.1
Applicant Address	:	Zeeva International Limited Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, HongKong, China
Manufacturer Address	:	Zeeva International Limited Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, HongKong, China

### 1.2. Accessory and Auxiliary Equipment

AC/DC Power Adapter (provided by laboratory)	:	Model: TEKA006-0501000UKU
		Input: 100-240V~50/60Hz 0.3A
		Output: DC 5V/1A

### 1.3. Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 06, 2018	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 06, 2018	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU1183540-01	3791	Jan. 06, 2018	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 06, 2018	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18G-10SS	N/A	Jan. 06, 2018	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2485-2375/2510-60/11SS	N/A	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.3	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.4	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.5	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.6	Jan. 06, 2018	1 Year
Temporary antenna connector	NTGS	14AE	N/A	Jan. 04, 2018	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 3. OPERATION OF EUT DURING TESTING

#### 3.1. Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz


Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

Note: The equipment under test (EUT) was tested under fully-charged battery.  
The Bluetooth has been tested under continuous transmission mode.

#### 3.2. Configuration and peripherals

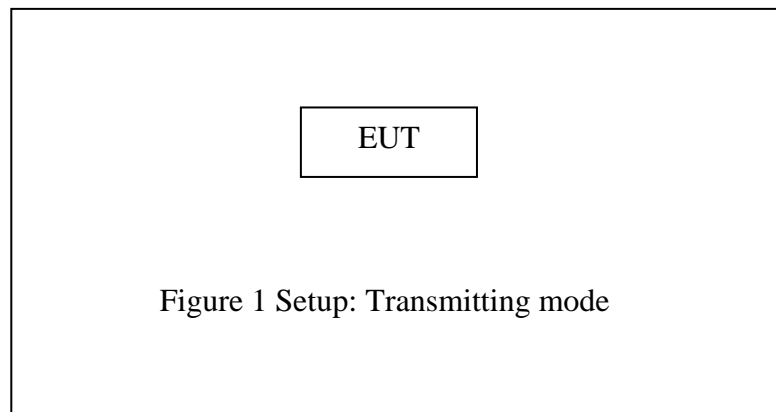




#### 4. TEST PROCEDURES AND RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.207	Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.203	Antenna Requirement	Compliant

## 5. 20DB BANDWIDTH TEST

### 5.1. Block Diagram of Test Setup



(EUT: BT Earphones)

### 5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 5.6. Test Result


Test Lab: Shielding room  
Test Engineer: Star

Channel	Frequency (MHz)	GFSK 20dB Bandwidth (MHz)	$\Pi/4$ -DQPSK 20dB Bandwidth (MHz)	Result
Low	2402	1.086	1.362	Pass
Middle	2441	1.086	1.362	Pass
High	2480	1.086	1.368	Pass

The spectrum analyzer plots are attached as below.


#### GFSK Mode

#### Low channel

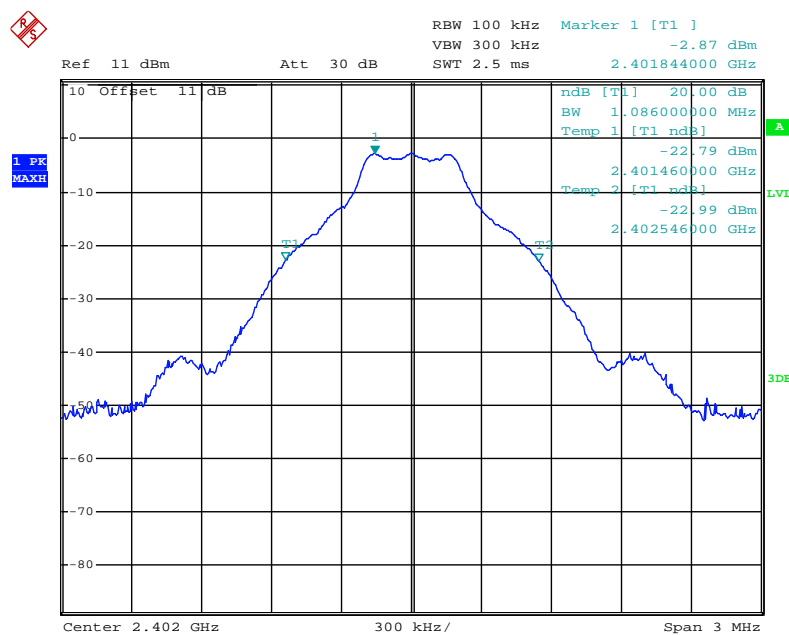


Date: 4.JAN.2018 16:33:14

### Middle channel

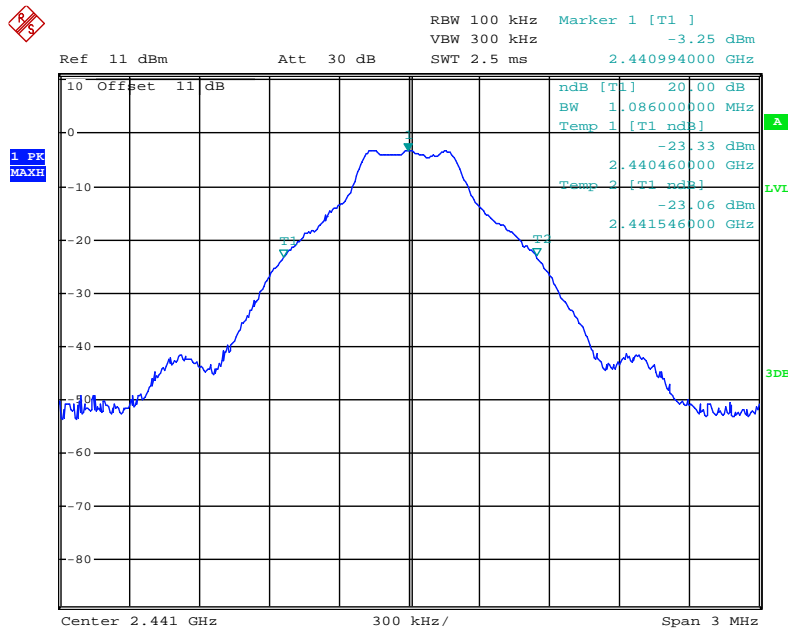

Date: 4.JAN.2018 16:35:23


### High channel

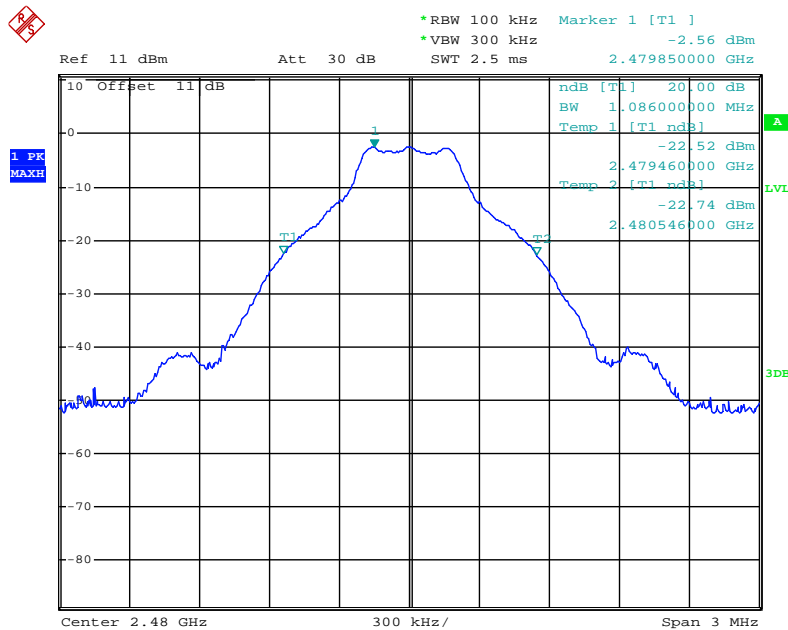

Date: 4.JAN.2018 17:12:00


Π/4-DQPSK Mode

Low channel

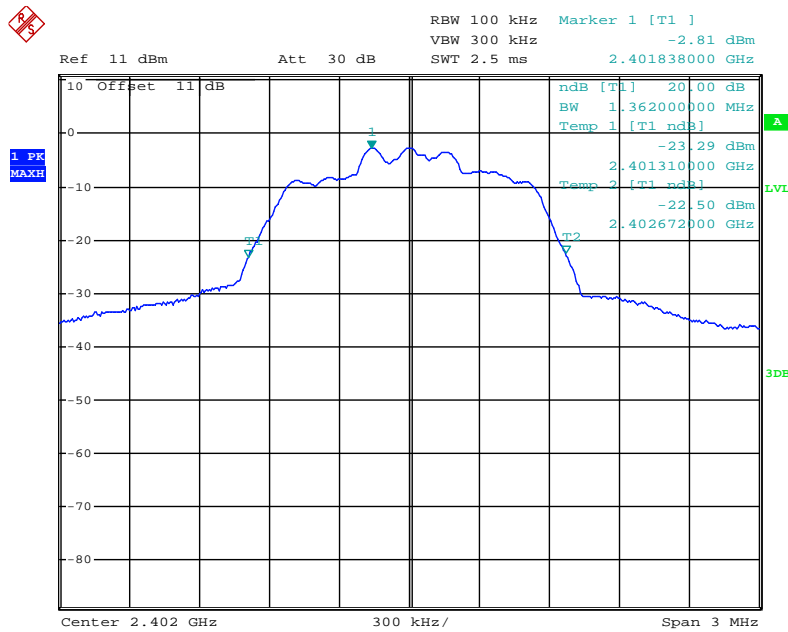


Date: 4.JAN.2018 16:37:57

Middle channel

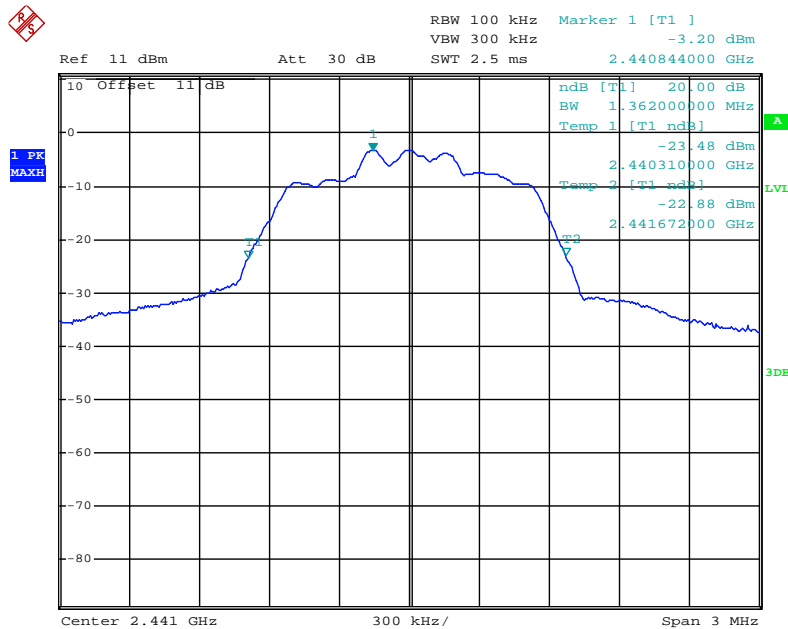

Date: 4.JAN.2018 16:39:00


### High channel

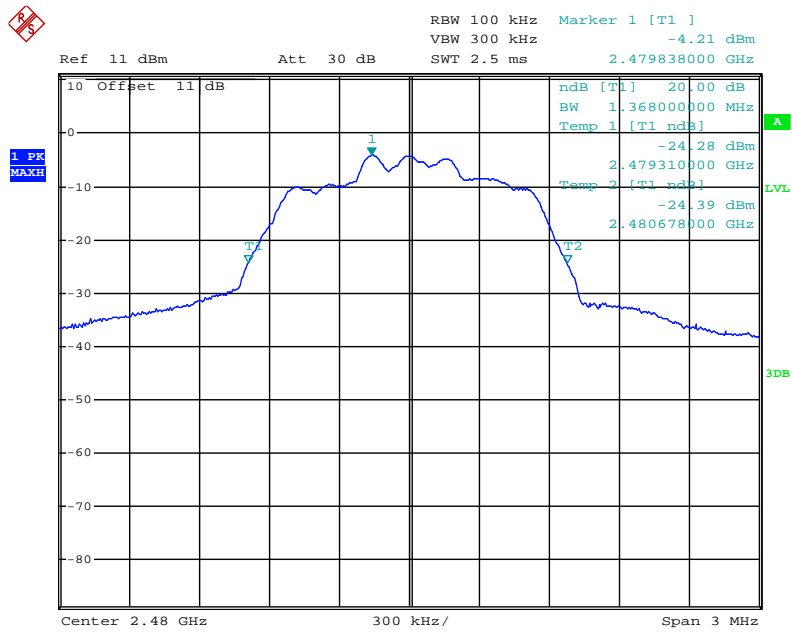

Date: 4.JAN.2018 16:39:51

## 6. CARRIER FREQUENCY SEPARATION TEST

### 6.1. Block Diagram of Test Setup

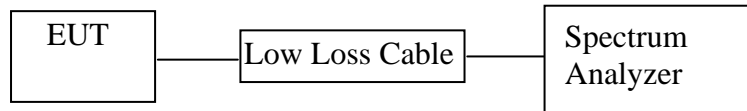

(EUT: BT Earphones)

### 6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz. Adjust Span to 2MHz.

6.5.3. Set the adjacent channel of the EUT Maxhold another trace.

6.5.4. Measurement the channel separation

### 6.6. Test Result

Test Lab: Shielding room

Test Engineer: Star

#### GFSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.008	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			

#### Π/4-DQPSK


Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.008	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			

The spectrum analyzer plots are attached as below.




## GFSK Mode

### Low channel

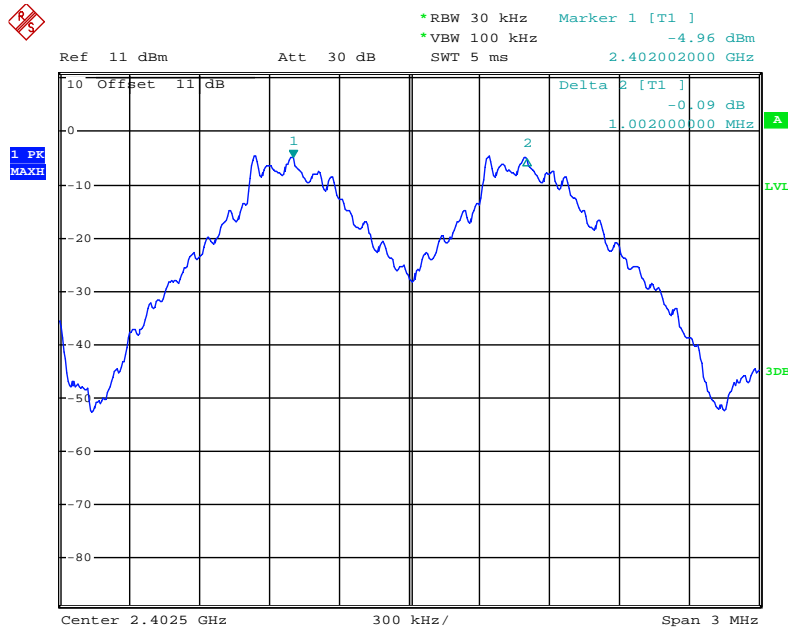


Date: 4.JAN.2018 16:58:26

### Middle channel

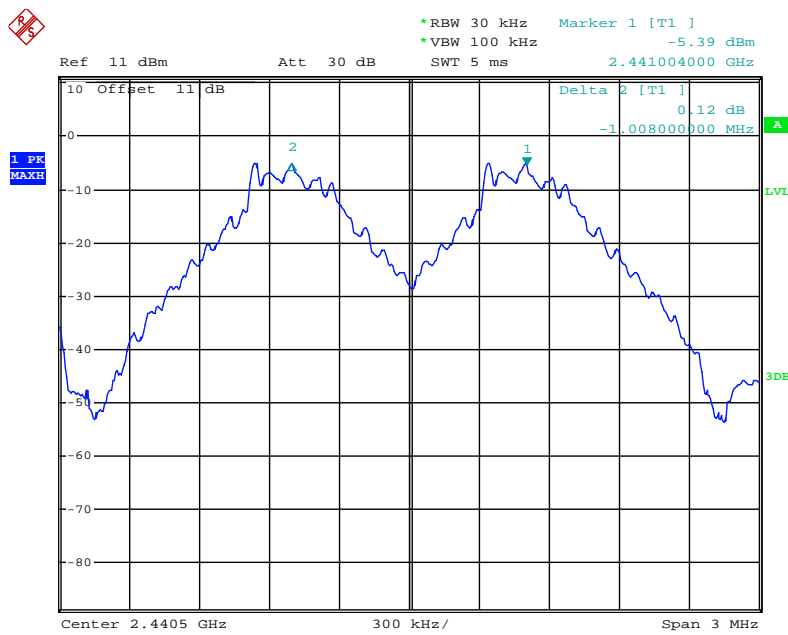

Date: 4.JAN.2018 17:00:00


### High channel

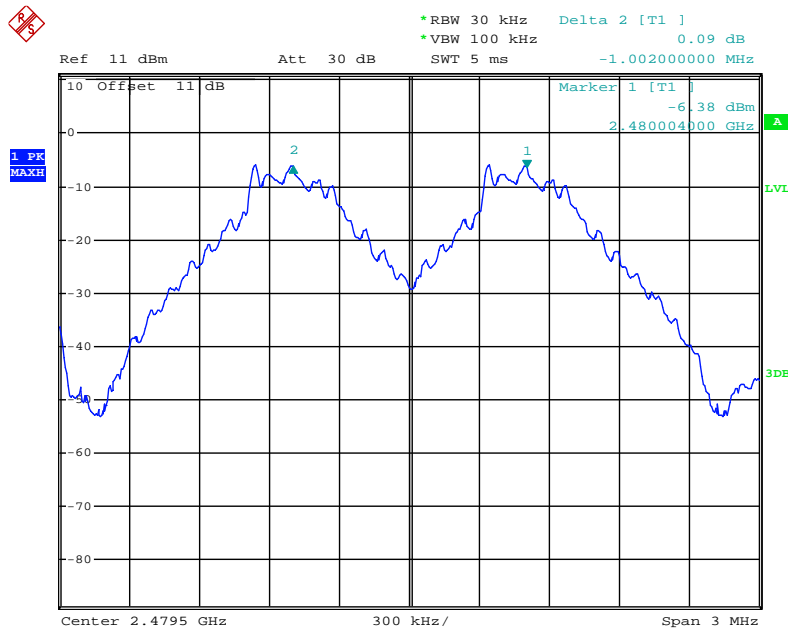

Date: 4.JAN.2018 17:01:13


### Π/4-DQPSK Mode

### Low channel

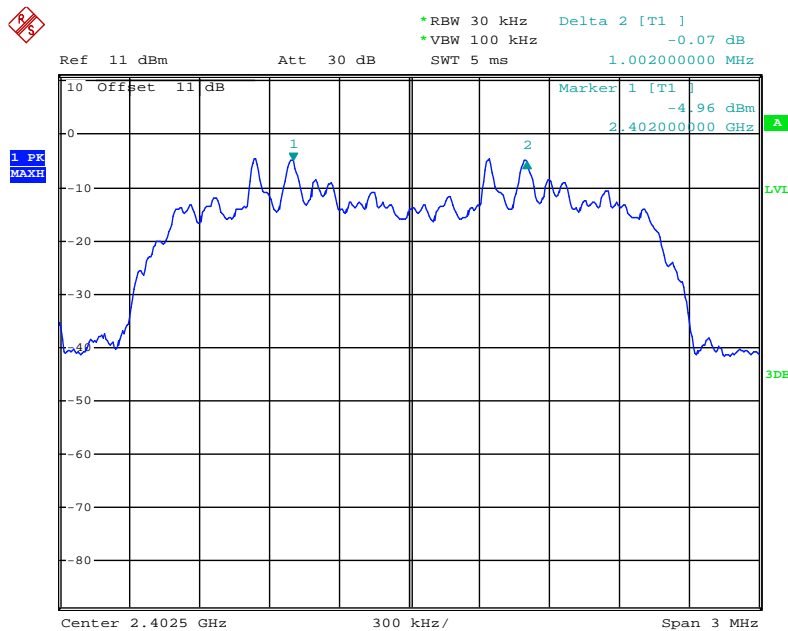


Date: 4.JAN.2018 17:04:53

### Middle channel

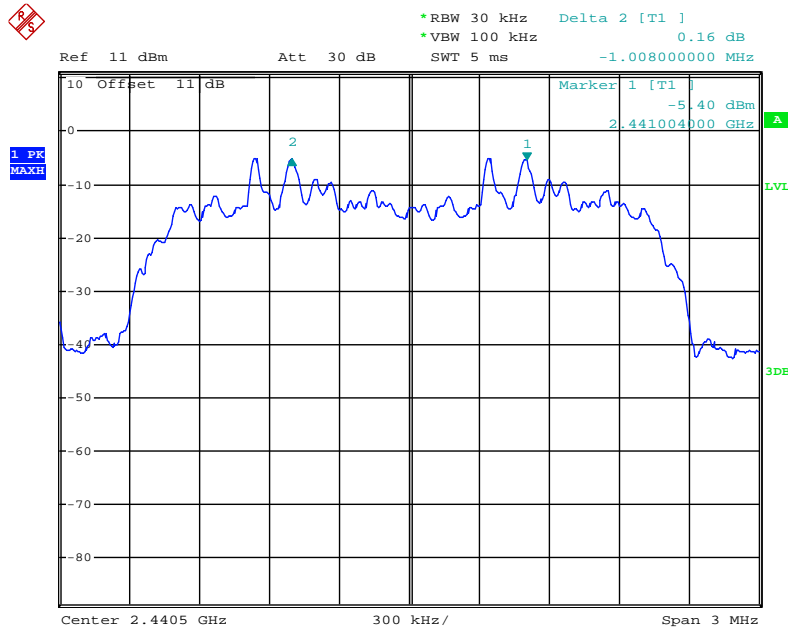

Date: 4.JAN.2018 17:03:13


### High channel

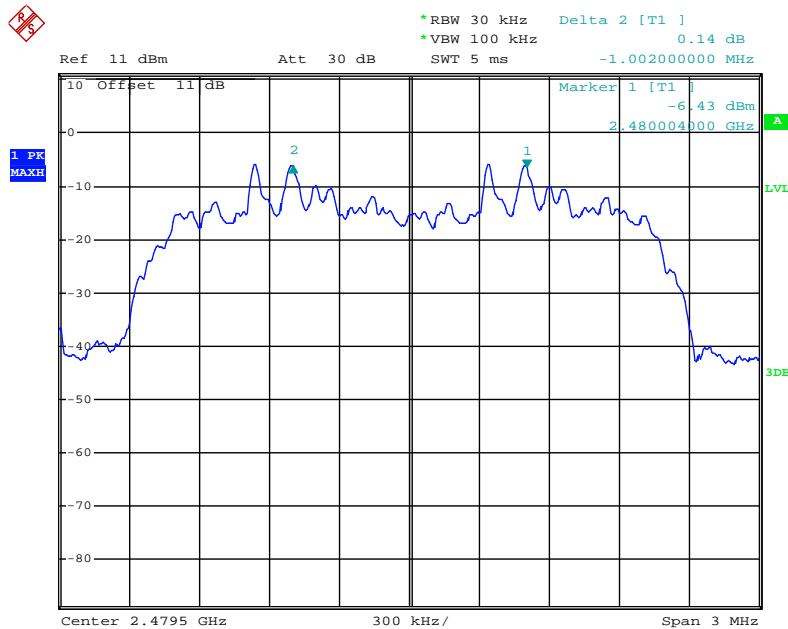

Date: 4.JAN.2018 17:02:11

## 7. NUMBER OF HOPPING FREQUENCY TEST

### 7.1. Block Diagram of Test Setup



(EUT: BT Earphones)

### 7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz.


7.5.3. Max hold, view and count how many channel in the band.

### 7.6. Test Result

Test Lab: Shielding room  
Test Engineer: Star


Total number of hopping channel	Measurement result(CH)	Limit(CH)
	79	$\geq 15$

Number of hopping channels(GFSK)

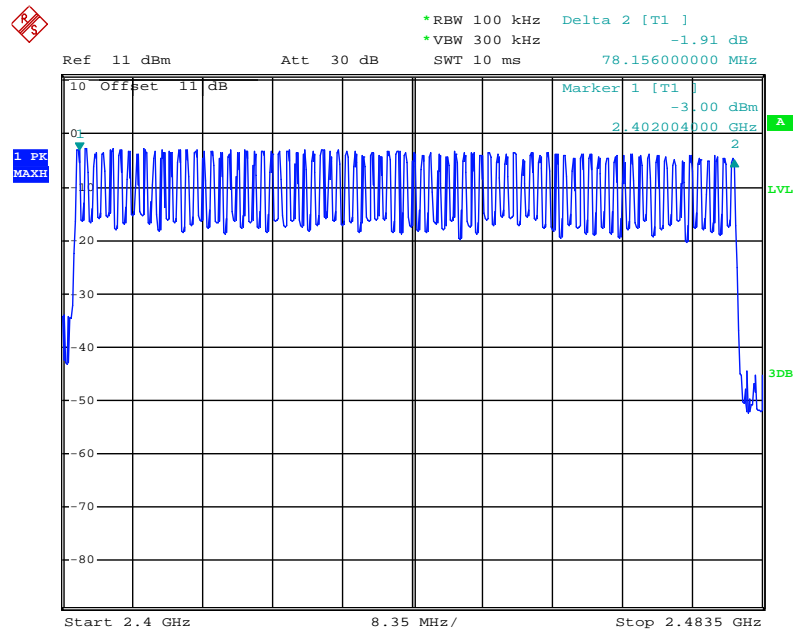

Date: 4.JAN.2018 16:53:08


### Number of hopping channels( $\Pi/4$ -DQPSK)

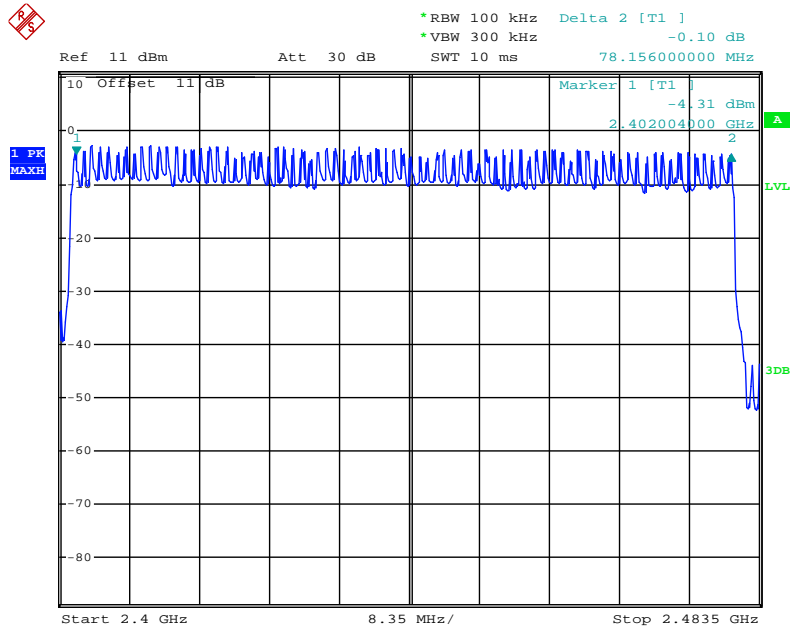

Date: 4.JAN.2018 16:55:58

## 8. DWELL TIME TEST

### 8.1. Block Diagram of Test Setup



(EUT: BT Earphones)

### 8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=5ms, 10ms, 15ms. Get the pulse time.

8.5.4. Repeat above procedures until all frequency measured were complete.

## 8.6. Test Result

Test Lab: Shielding room

Test Engineer: Star

### GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.410	131.20	400
	2441	0.400	128.00	400
	2480	0.410	131.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
DH3	2402	1.710	273.60	400
	2441	1.670	267.20	400
	2480	1.710	273.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
DH5	2402	2.970	316.80	400
	2441	2.940	313.60	400
	2480	2.970	316.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

### Π/4-DQPSK


Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.420	134.40	400
	2441	0.420	134.40	400
	2480	0.410	131.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
DH3	2402	1.690	270.40	400
	2441	1.690	270.40	400
	2480	1.690	270.40	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
DH5	2402	2.980	317.87	400
	2441	2.980	317.87	400
	2480	2.980	317.87	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

The spectrum analyzer plots are attached as below.




## GFSK Mode

### DH1 Low channel

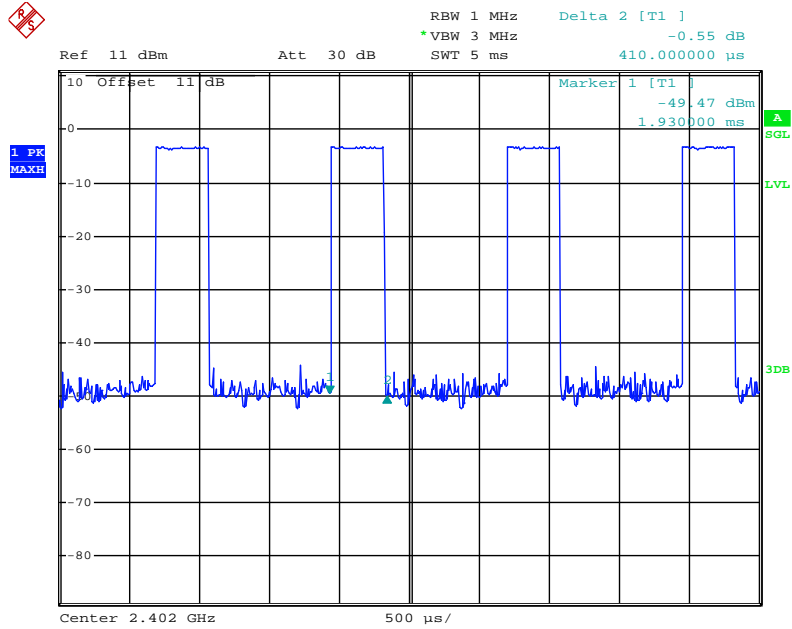


Date: 4.JAN.2018 17:13:56

### DH1 Middle channel

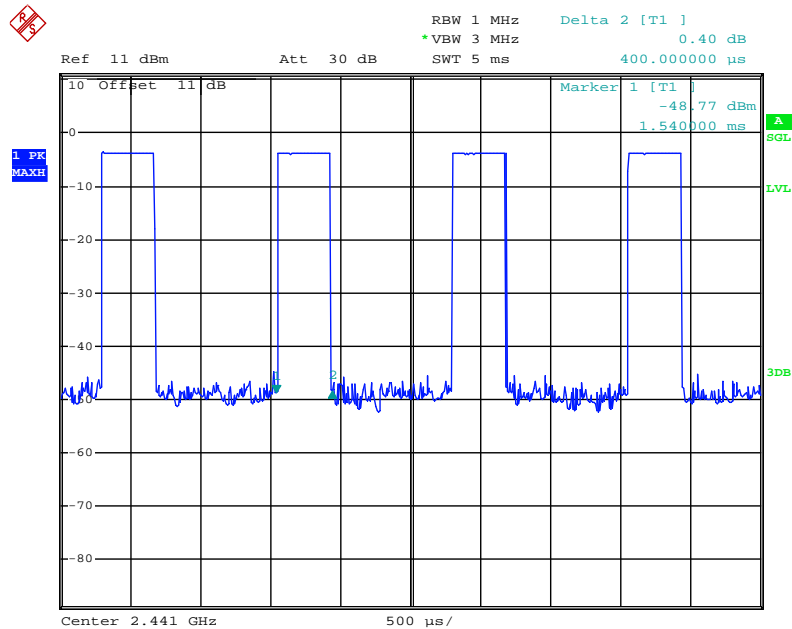


Date: 4.JAN.2018 17:15:08

## DH1 High channel

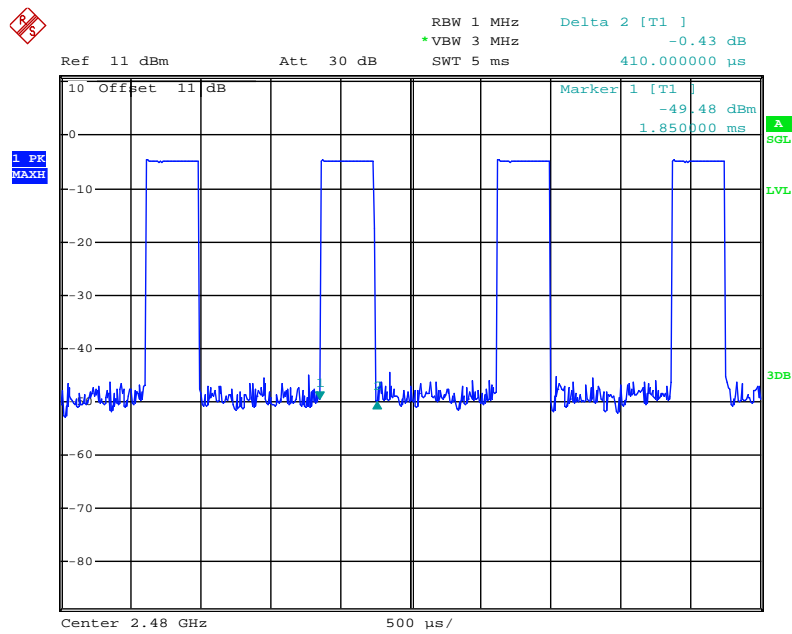


Date: 4.JAN.2018 17:15:43

## DH3 Low channel

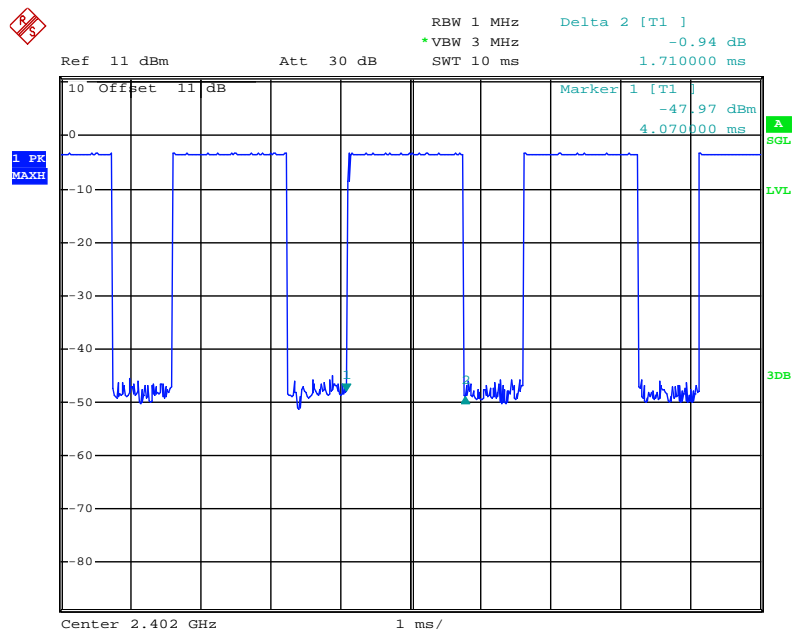


Date: 4.JAN.2018 17:17:22

## DH3 Middle channel

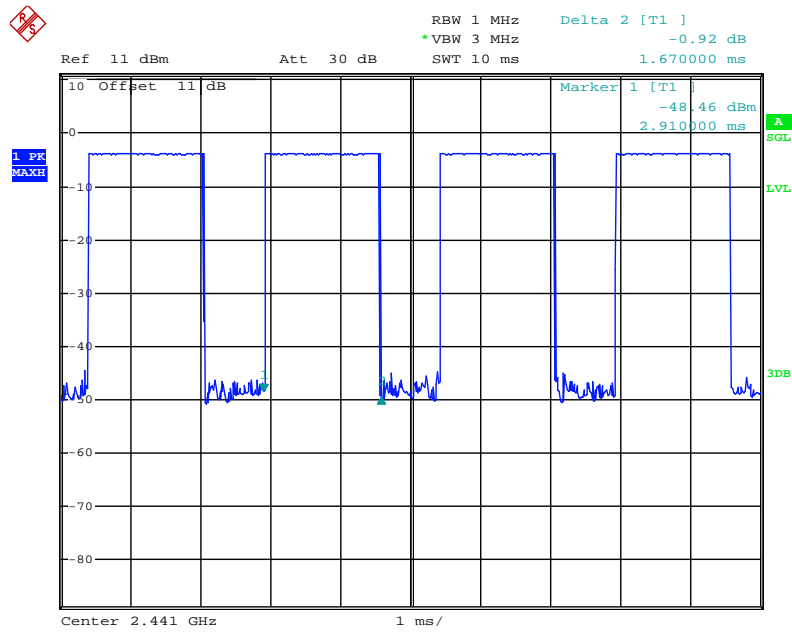


Date: 4.JAN.2018 17:18:58

## DH3 High channel

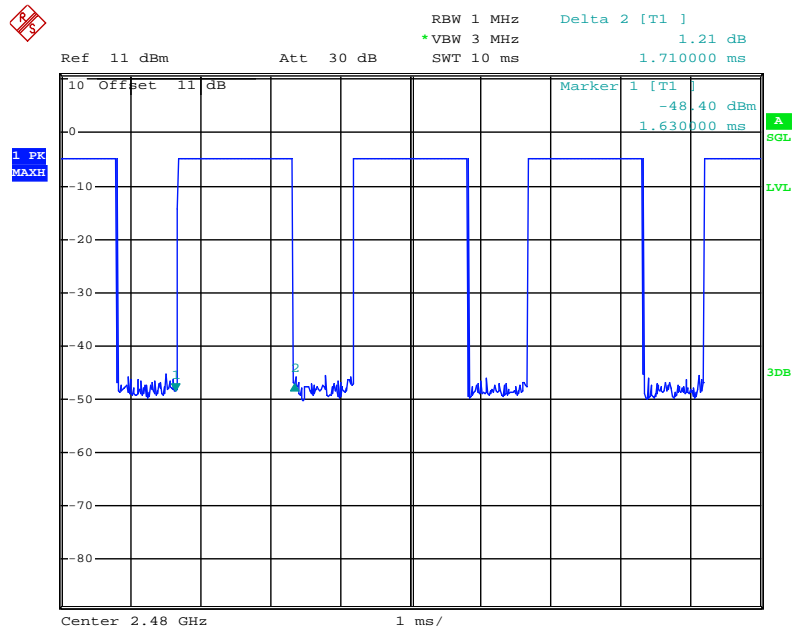


Date: 4.JAN.2018 17:20:02

## DH5 Low channel

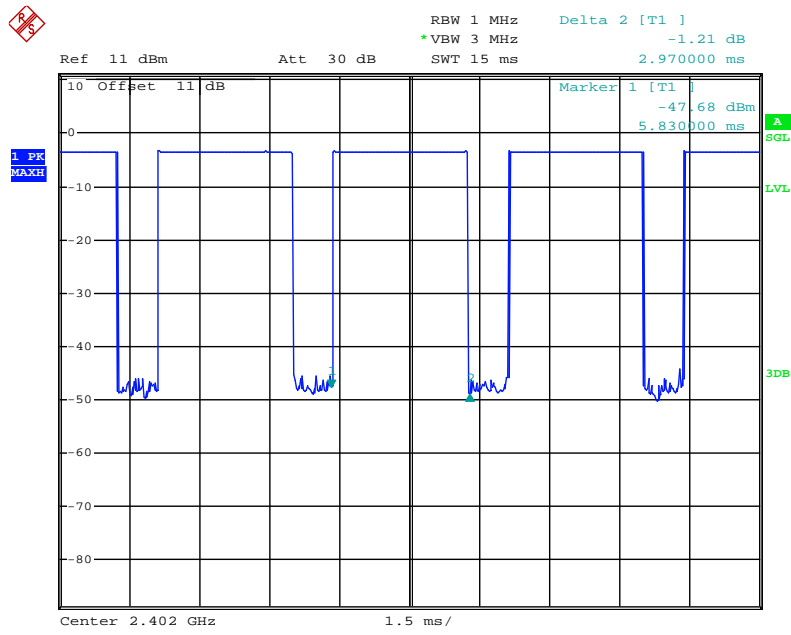


Date: 4.JAN.2018 17:20:56

## DH5 Middle channel

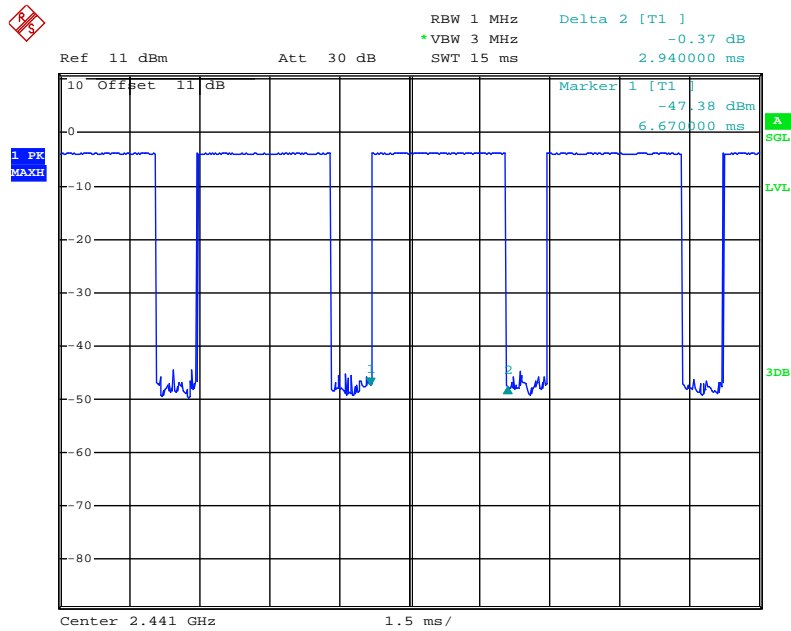

Date: 4.JAN.2018 17:21:42


## DH5 High channel

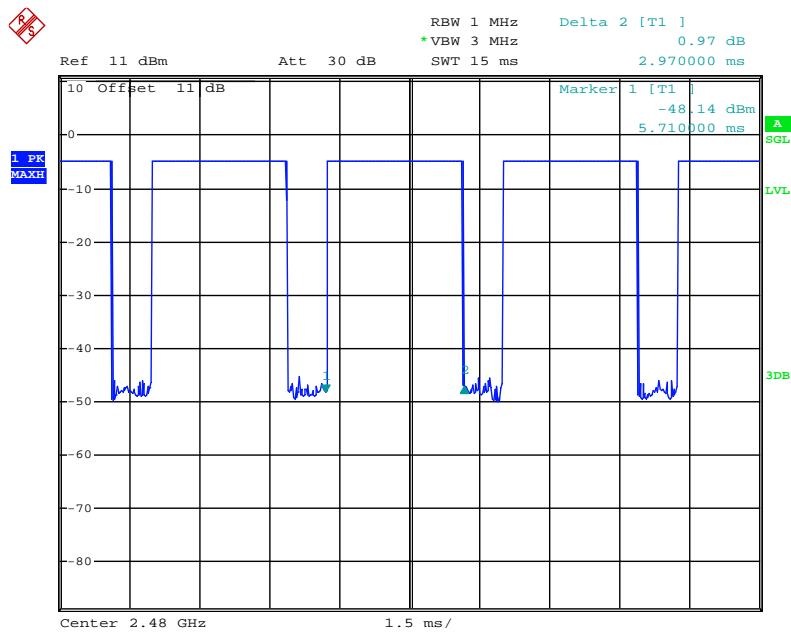

Date: 4.JAN.2018 17:22:24


## Π/4-DQPSK

## 2DH1 Low channel

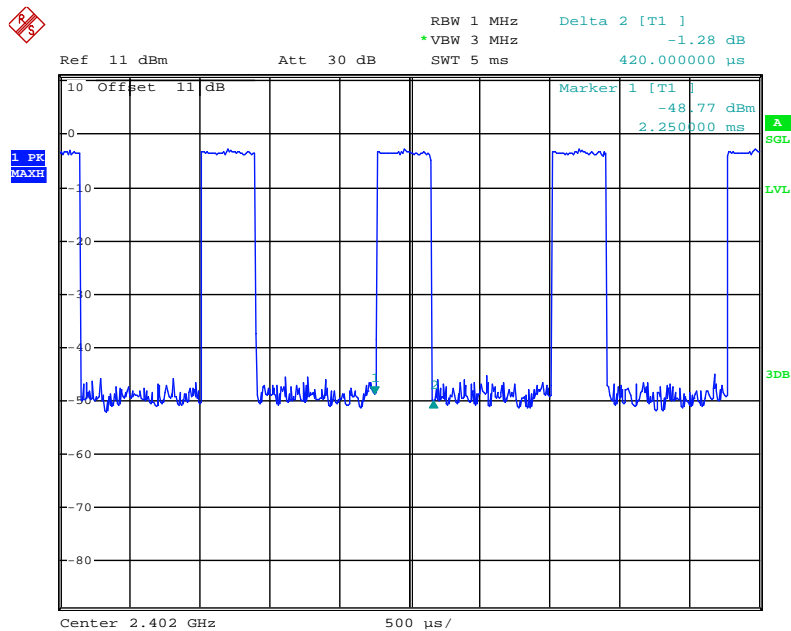


Date: 4.JAN.2018 17:23:50

### 2DH1 Middle channel

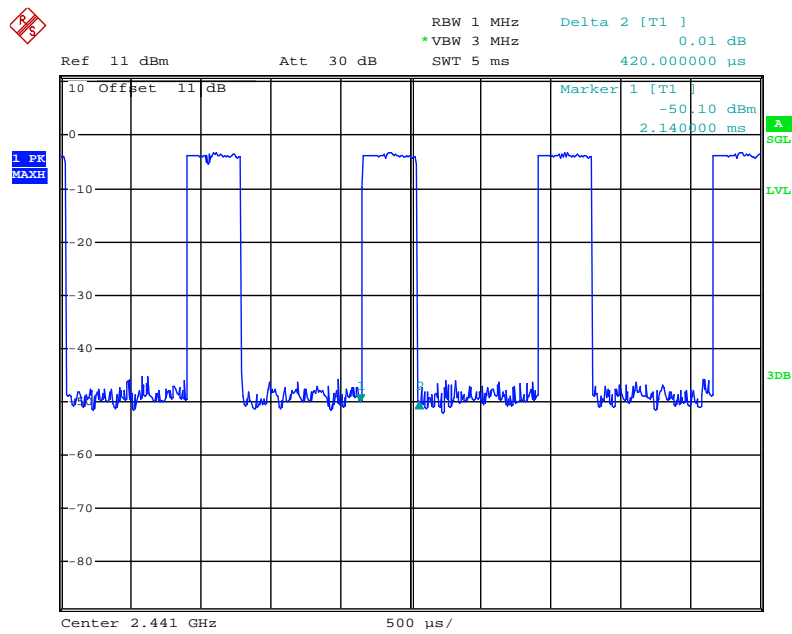


Date: 4.JAN.2018 17:24:33

### 2DH1 High channel

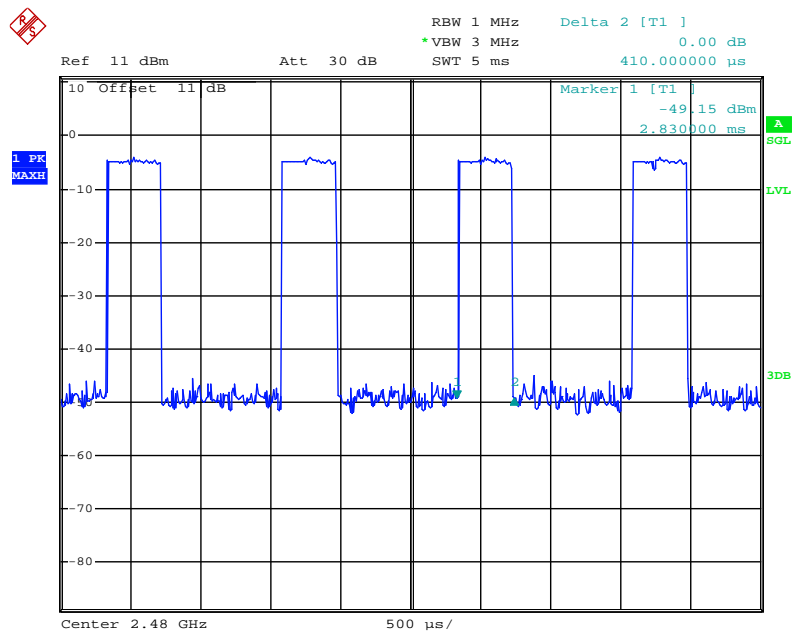


Date: 4.JAN.2018 17:25:06

### 2DH3 Low channel

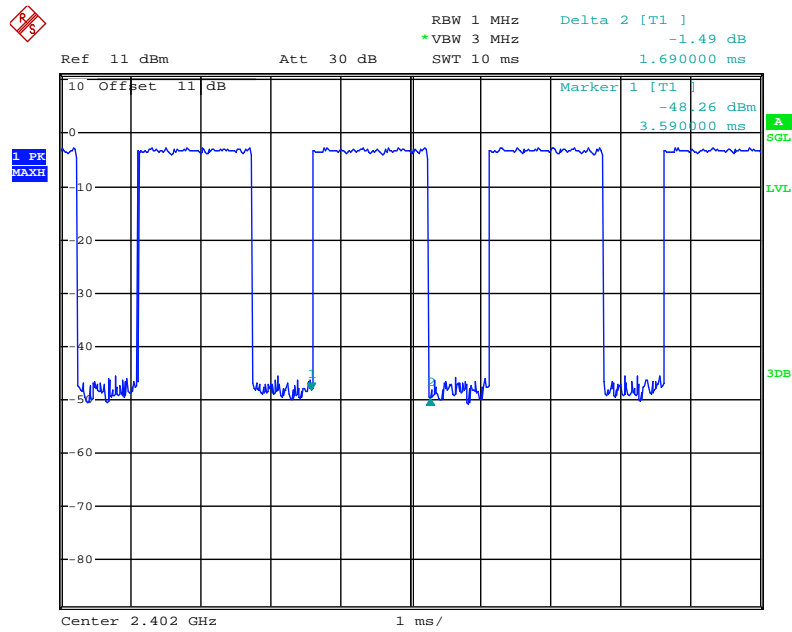


Date: 4.JAN.2018 17:26:05

### 2DH3 Middle channel

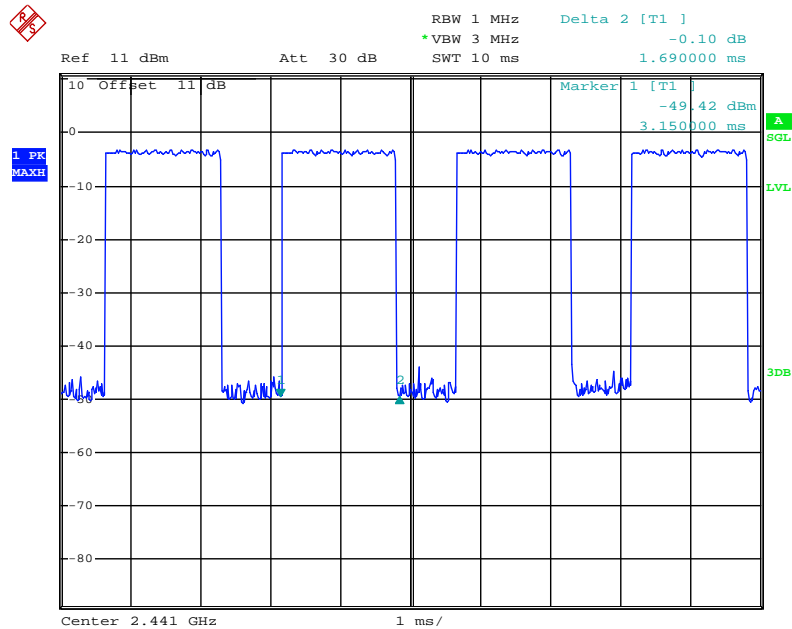


Date: 4.JAN.2018 17:27:09

### 2DH3 High channel

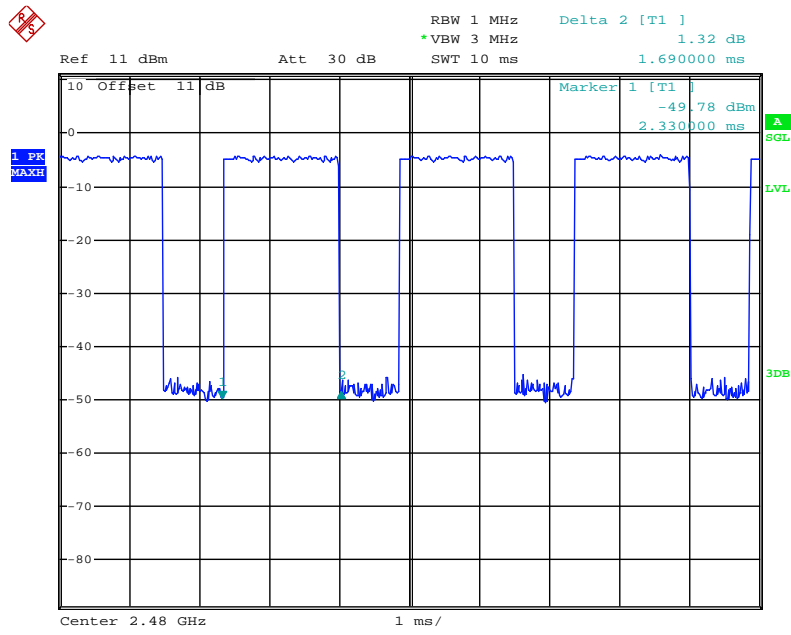

Date: 4.JAN.2018 17:28:17


### 2DH5 Low channel

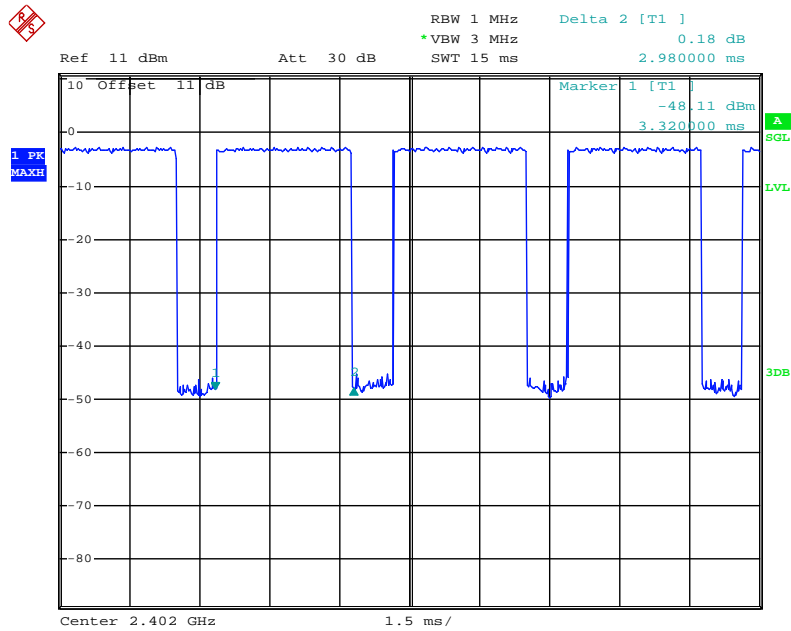

Date: 4.JAN.2018 17:29:12




## 2DH5 Middle channel

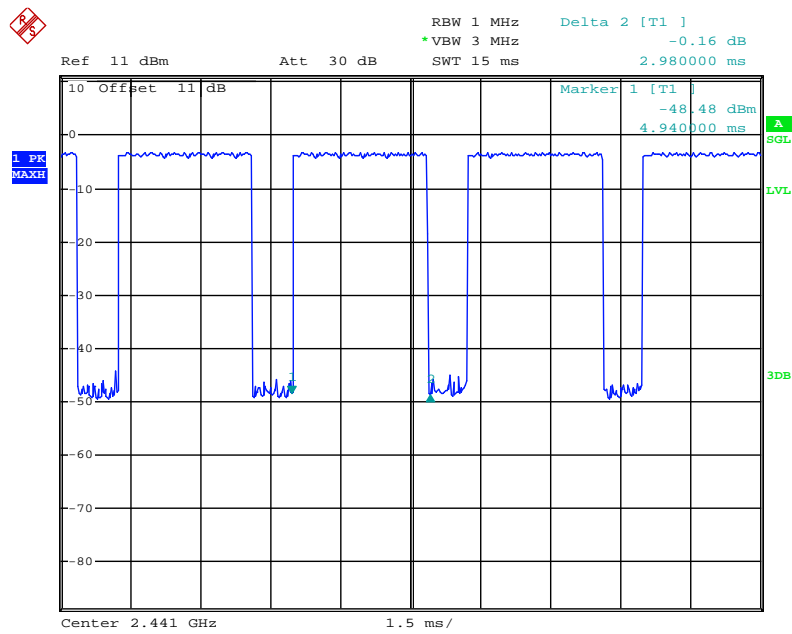

Date: 4.JAN.2018 17:29:49


## 2DH5 High channel

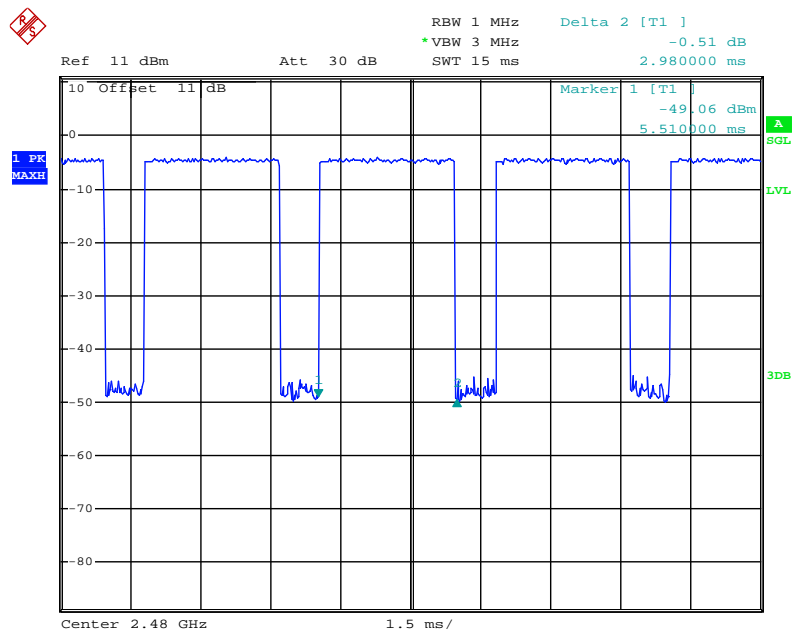

Date: 4.JAN.2018 17:30:28

## 9. MAXIMUM PEAK OUTPUT POWER TEST

### 9.1. Block Diagram of Test Setup

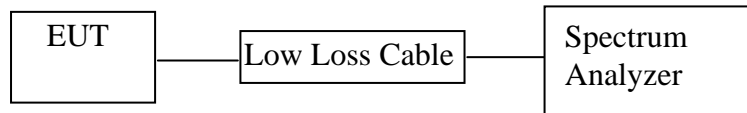

(EUT: BT Earphones)

### 9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 3MHz and VBW to 3MHz.

9.5.3. Measurement the maximum peak output power.

### 9.6. Test Result

Test Lab: Shielding room

Test Engineer: Star

#### GFSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-2.31/0.0006	21 / 0.125
Middle	2441	-2.24/0.0006	21 / 0.125
High	2480	-2.71/0.0005	21 / 0.125


#### Π/4-DQPSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-2.01/0.0006	21 / 0.125
Middle	2441	-2.40/0.0006	21 / 0.125
High	2480	-2.53/0.0006	21 / 0.125

The spectrum analyzer plots are attached as below.


#### GFSK Mode

#### Low channel

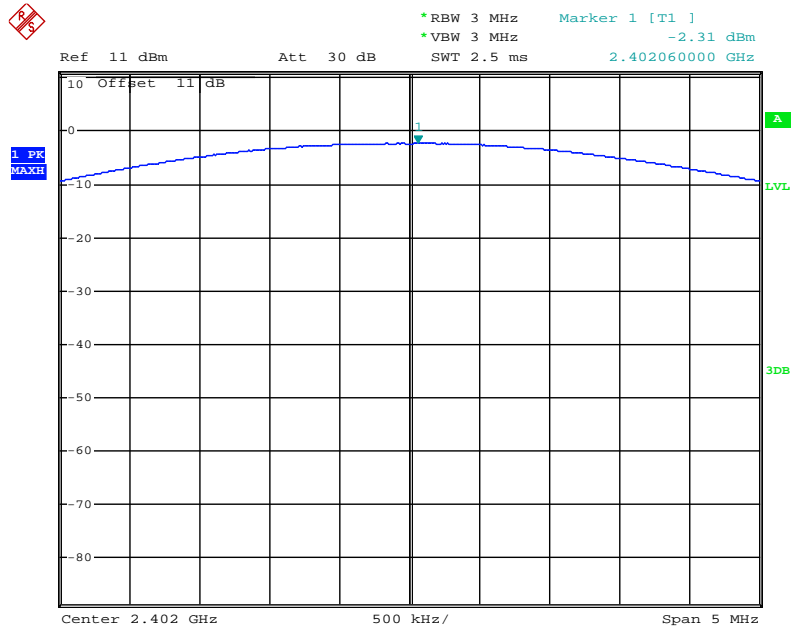


Date: 4.JAN.2018 16:46:49

### Middle channel

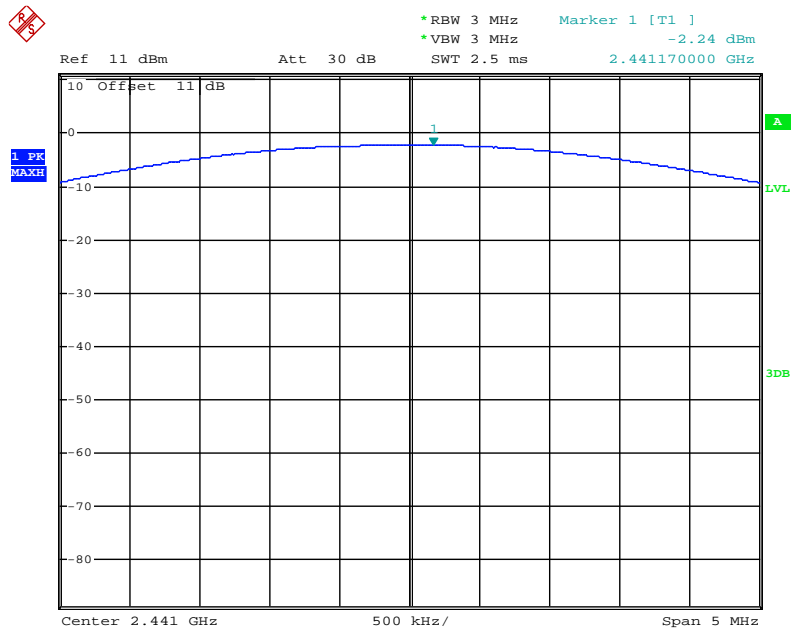

Date: 4.JAN.2018 16:48:15


### High channel

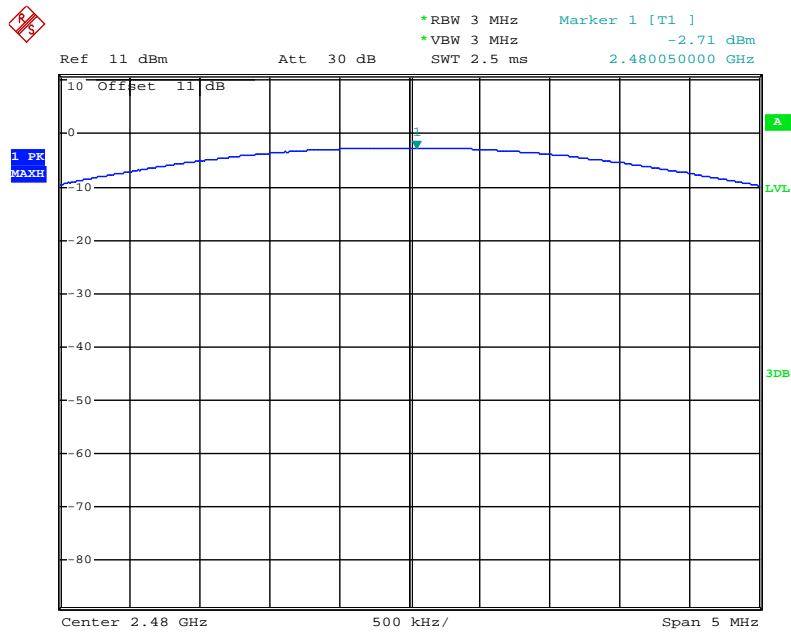

Date: 4.JAN.2018 16:49:58


## Π/4-DQPSK Mode

### Low channel

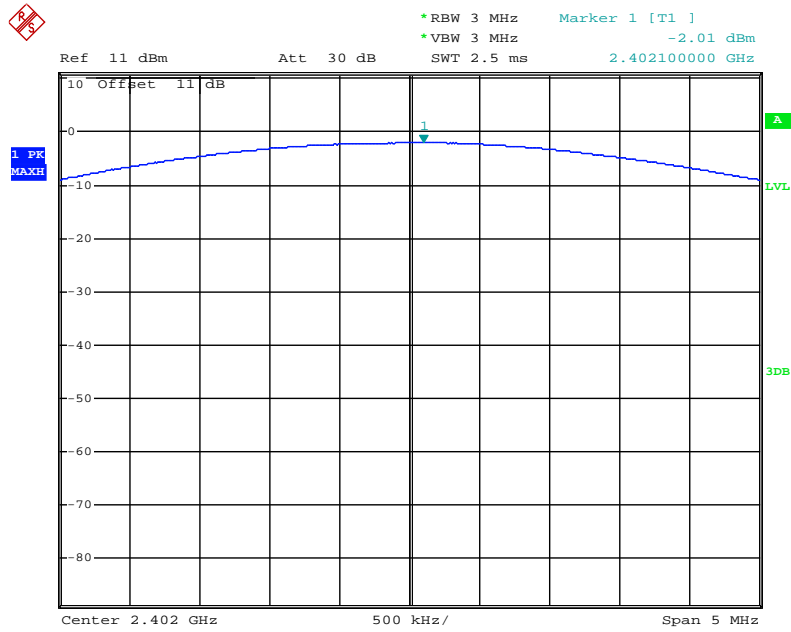


Date: 4.JAN.2018 16:45:47

### Middle channel

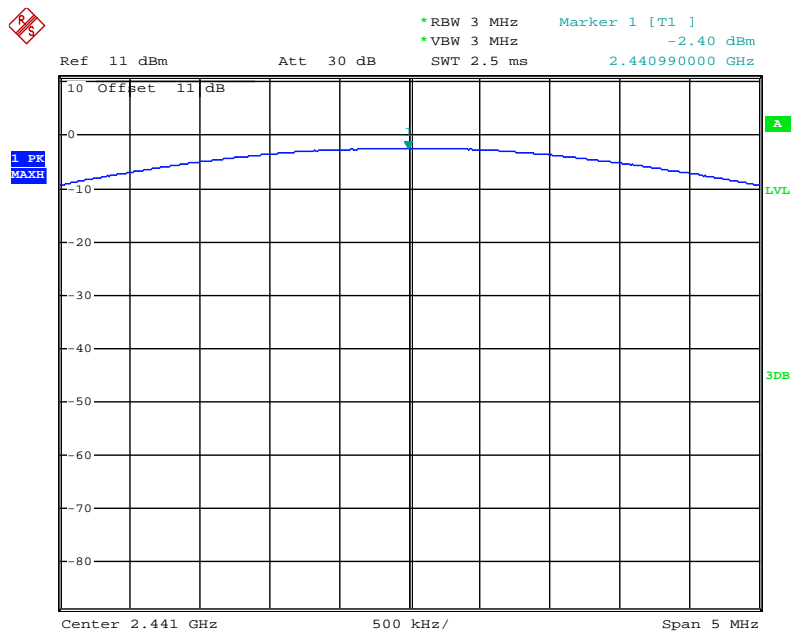

Date: 4.JAN.2018 16:44:02

### High channel

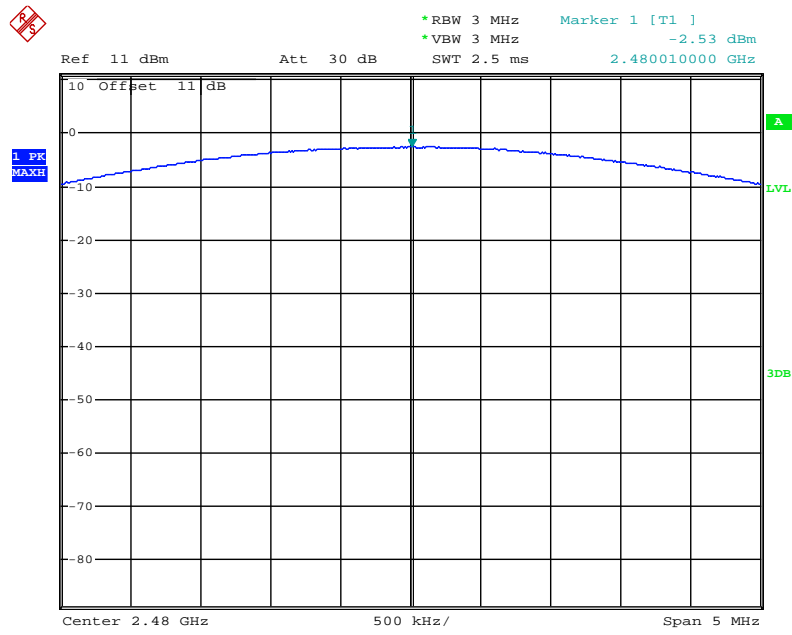


Date: 4.JAN.2018 16:42:31

## 10. RADIATED EMISSION TEST


### 10.1. Block Diagram of Test Setup

#### 10.1.1. Block diagram of connection between the EUT and peripherals

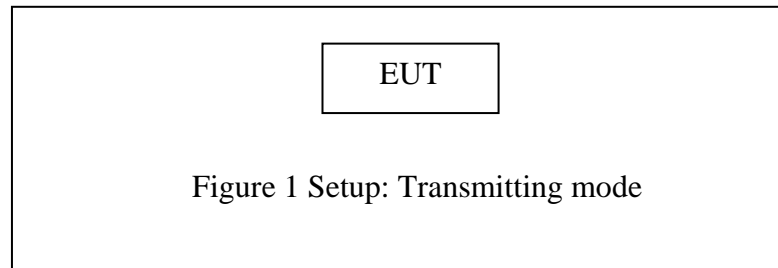


#### 10.1.2. Semi-Anechoic Chamber Test Setup Diagram


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

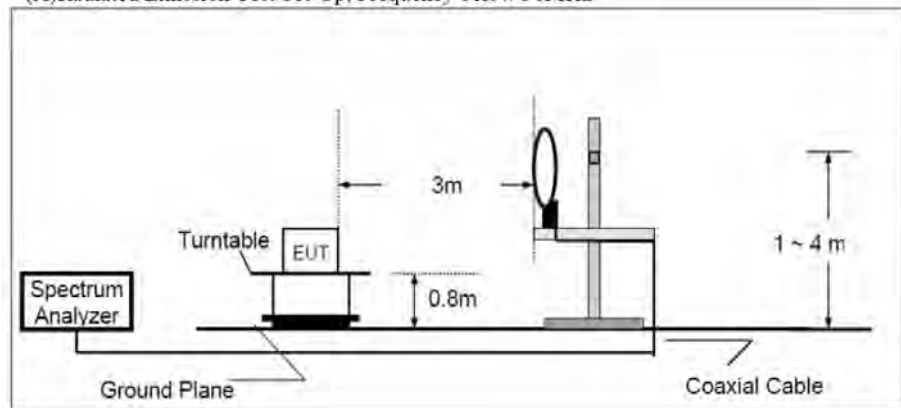

(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

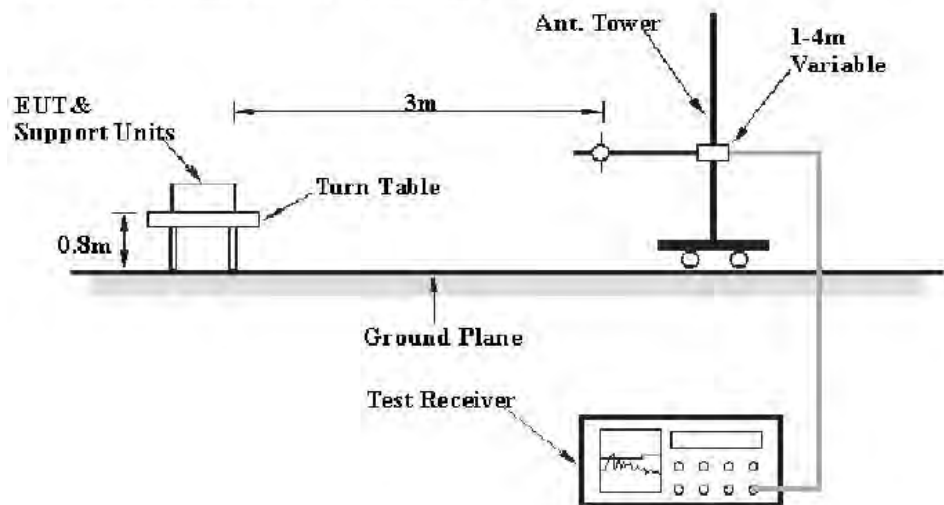

(C) Radiated Emission Test Set-Up. Frequency above 1GHz

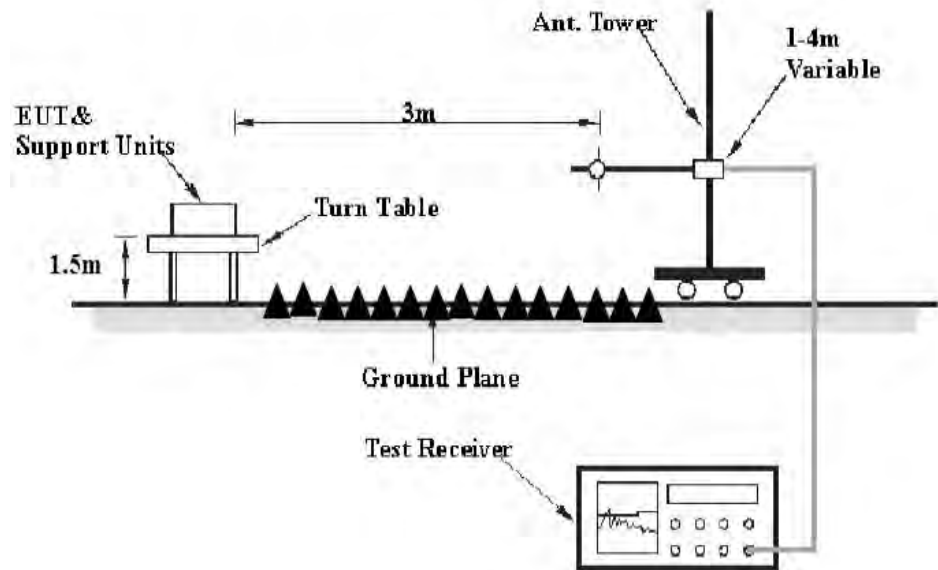

## 10.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).



### 10.3.Restricted bands of operation

#### 10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 10.4.Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

## 10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 10.7.Data Sample

Frequency (MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	48.69	-13.35	35.34	46	-10.66	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading(dB $\mu$ v) + Factor(dB/m)

Limit (dB $\mu$ v/m) = Limit stated in standard

Margin (dB) = Result(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB $\mu$ V/m)–Limit(dB $\mu$ V/m)

Result(dB $\mu$ V/m)= Reading(dB $\mu$ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 10.8.The Field Strength of Radiation Emission Measurement Results

**PASS.**

Test Lab: 3m Anechoic chamber

Test Engineer: Star

Note: 1.We tested GFSK mode,  $\Pi/4$ -DQPSK Mode and recorded the worst case data (GFSK mode) for all test mode.

2. Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz and 18 to 25GHz.

The spectrum analyzer plots are attached as below.

Below 1GHz




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1442	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/41/53
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

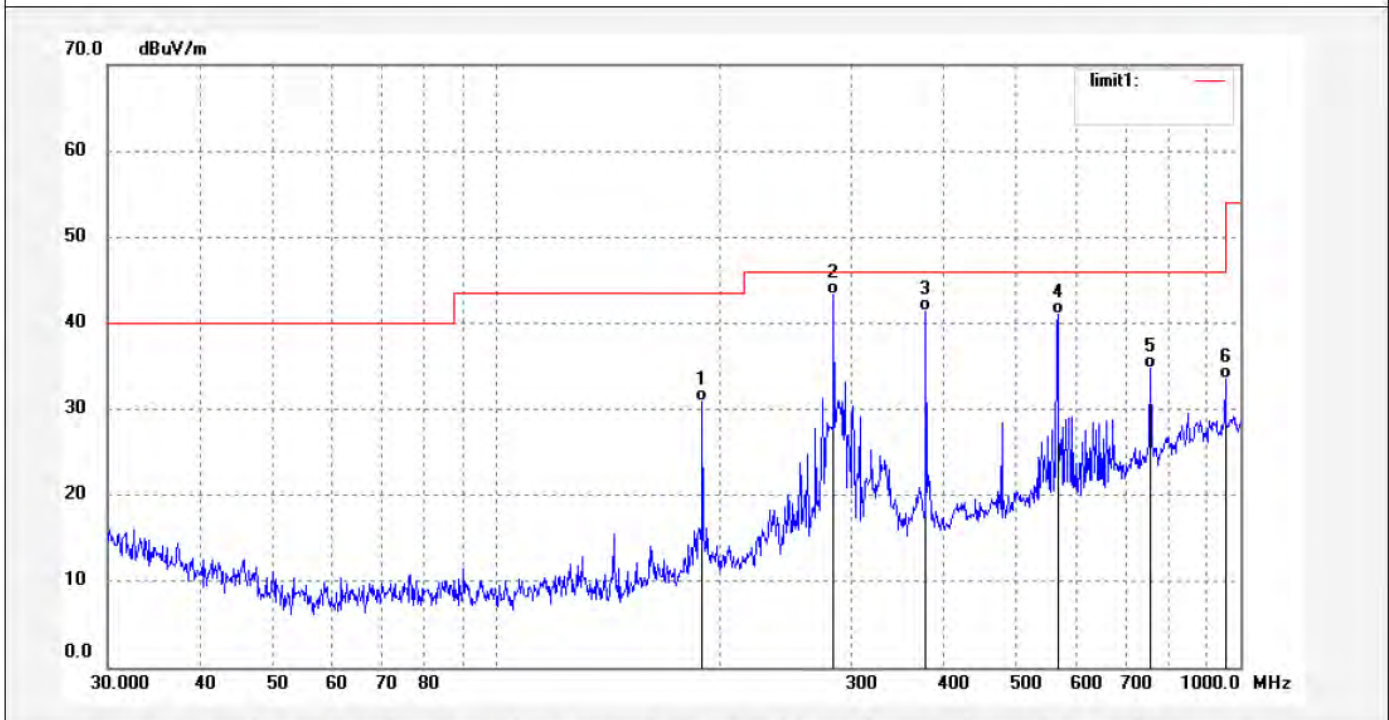

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1075	56.15	-25.19	30.96	43.50	-12.54	QP	200	142	
2	284.2606	65.28	-21.90	43.38	46.00	-2.62	QP	200	193	
3	377.8480	60.02	-18.66	41.36	46.00	-4.64	QP	200	287	
4	567.9696	55.39	-14.38	41.01	46.00	-4.99	QP	200	259	
5	757.6200	44.88	-10.12	34.76	46.00	-11.24	QP	200	117	
6	955.3509	39.70	-6.18	33.52	46.00	-12.48	QP	200	130	



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1441

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/01/05/

Temp.( C)/Hum.(%) 25 C / 55 %

Time: 13/41/15

EUT: BT Earphones

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: DEEP-0176

Manufacturer: Zeeva Internation Limited

Note: Report No.:ATE20180004

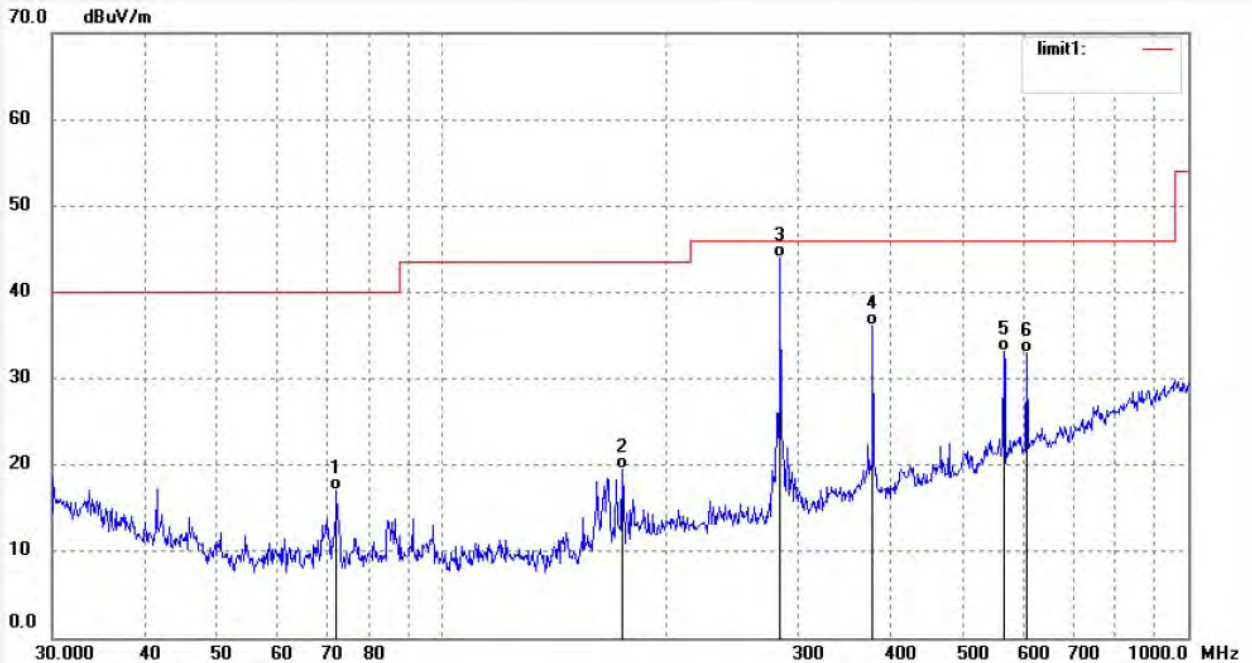

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	72.2111	44.56	-27.58	16.98	40.00	-23.02	QP	100	46	
2	174.4265	45.94	-26.46	19.48	43.50	-24.02	QP	100	107	
3	284.2606	65.83	-21.90	43.93	46.00	-2.07	QP	100	133	
4	377.8480	54.81	-18.66	36.15	46.00	-9.85	QP	100	188	
5	565.9776	47.55	-14.45	33.10	46.00	-12.90	QP	100	209	
6	607.1806	46.55	-13.53	33.02	46.00	-12.98	QP	100	271	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1443	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/44/42
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2441MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

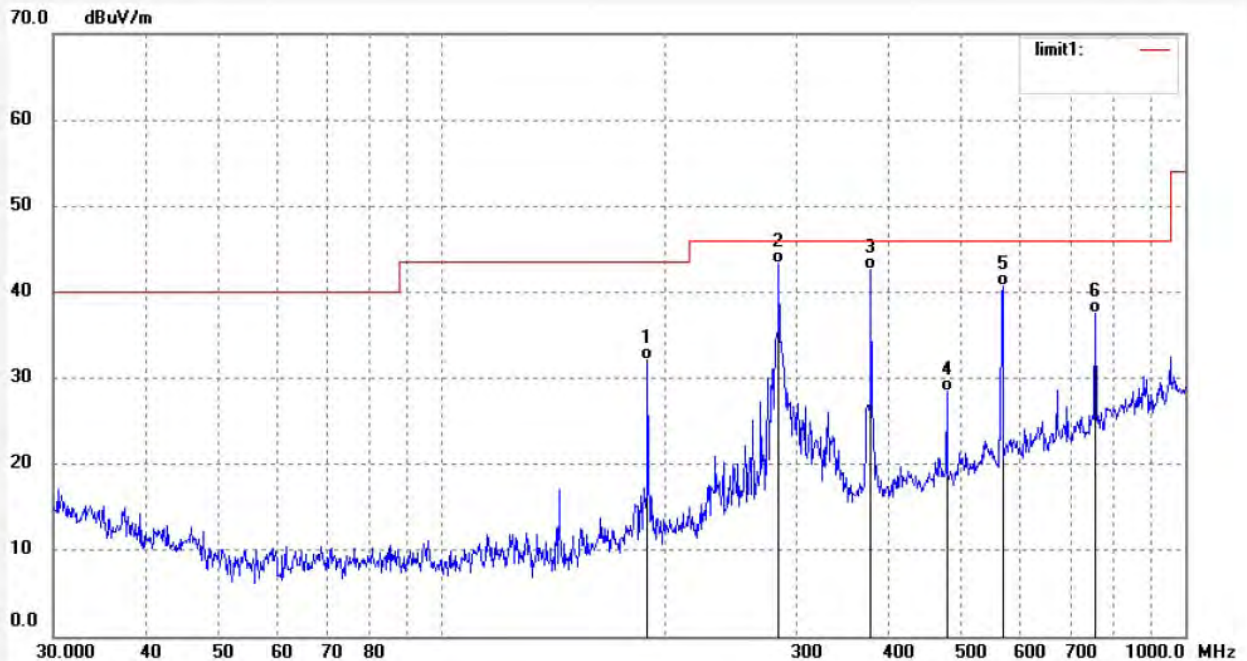

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1075	57.32	-25.19	32.13	43.50	-11.37	QP	200	177	
2	284.2606	65.17	-21.90	43.27	46.00	-2.73	QP	200	209	
3	377.8480	61.27	-18.66	42.61	46.00	-3.39	QP	200	168	
4	478.1394	45.12	-16.65	28.47	46.00	-17.53	QP	200	148	
5	567.9696	55.05	-14.38	40.67	46.00	-5.33	QP	200	103	
6	757.6200	47.70	-10.12	37.58	46.00	-8.42	QP	200	239	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1444	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/45/32
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2441MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

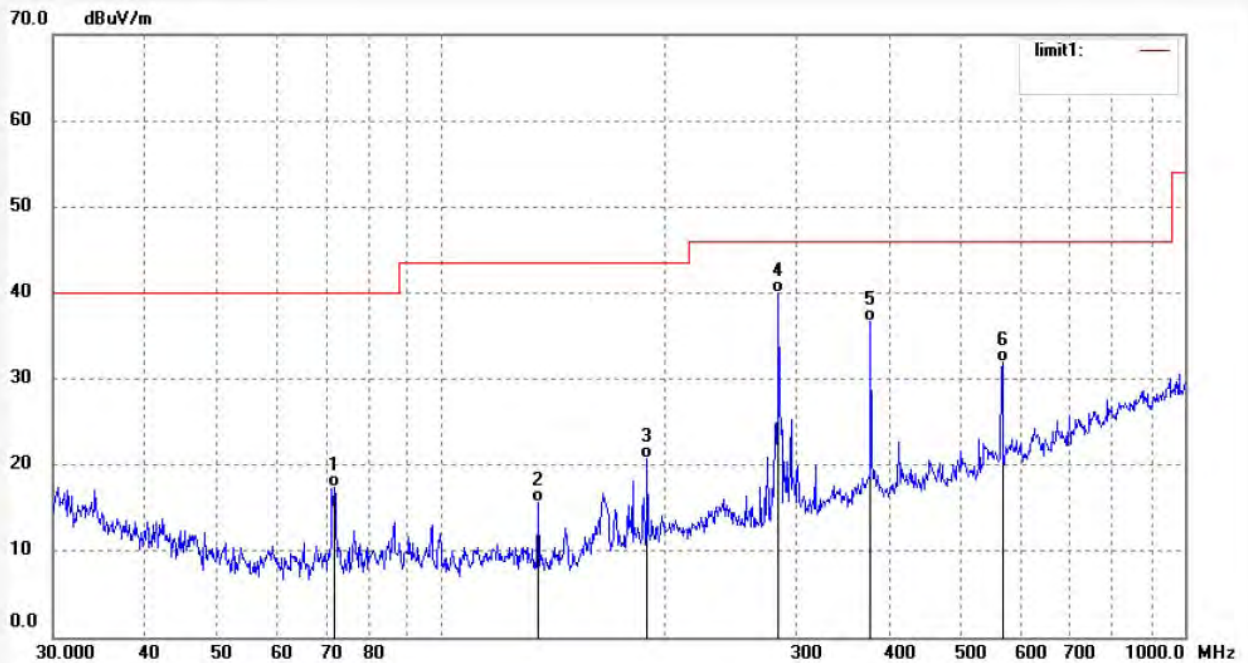

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	71.7053	44.93	-27.56	17.37	40.00	-22.63	QP	100	112	
2	134.9643	43.53	-27.85	15.68	43.50	-27.82	QP	100	172	
3	189.1075	45.90	-25.19	20.71	43.50	-22.79	QP	100	169	
4	284.2606	61.88	-21.90	39.98	46.00	-6.02	QP	100	135	
5	377.8480	55.30	-18.66	36.64	46.00	-9.36	QP	100	108	
6	567.9696	46.28	-14.38	31.90	46.00	-14.10	QP	100	127	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1446	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/46/55
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

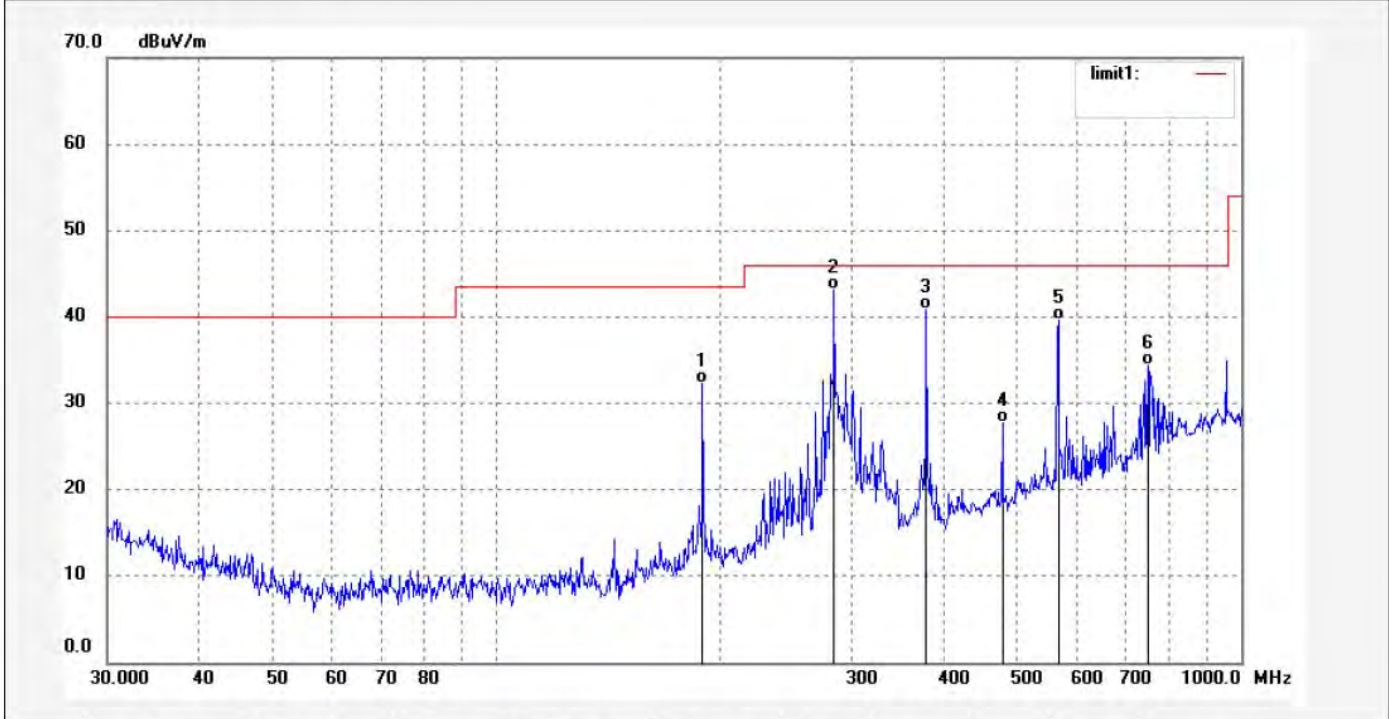

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1076	57.56	-25.19	32.37	43.50	-11.13	QP	200	163	
2	284.2606	65.05	-21.90	43.15	46.00	-2.85	QP	200	281	
3	377.8481	59.47	-18.66	40.81	46.00	-5.19	QP	200	229	
4	478.1394	44.39	-16.65	27.74	46.00	-18.26	QP	200	176	
5	567.9697	53.96	-14.38	39.58	46.00	-6.42	QP	200	142	
6	749.6761	44.77	-10.34	34.43	46.00	-11.57	QP	200	139	






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1445	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/46/10
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

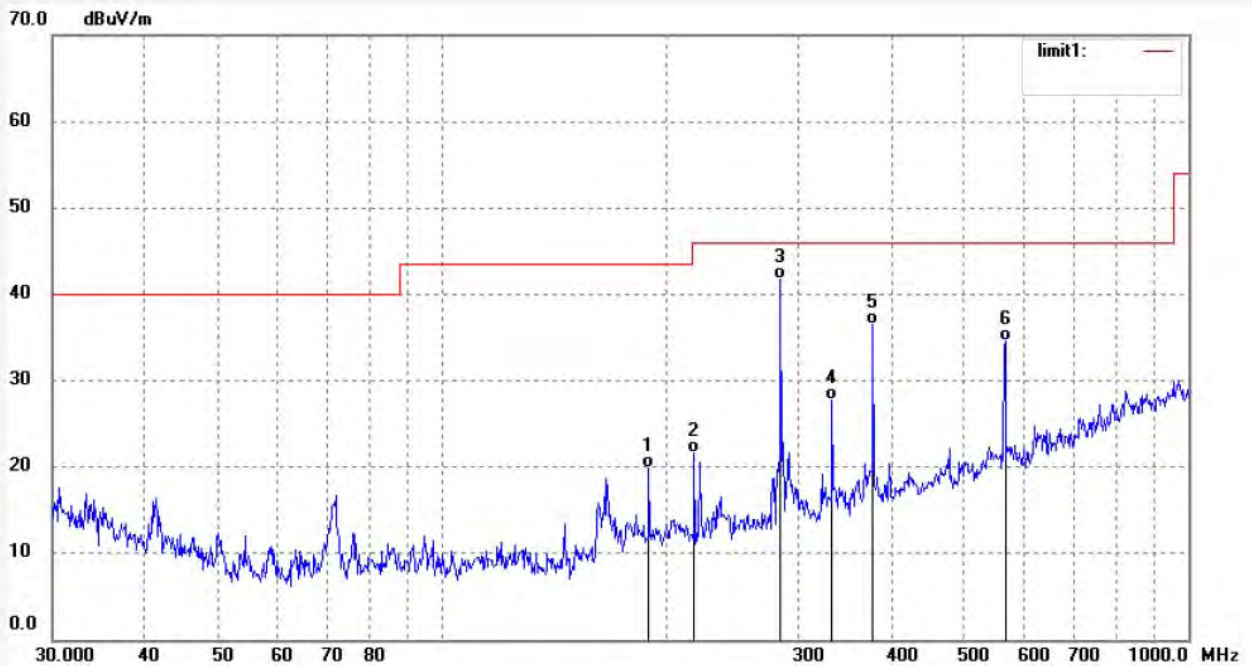

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.1075	45.01	-25.19	19.82	43.50	-23.68	QP	100	140	
2	217.6436	45.62	-24.03	21.59	46.00	-24.41	QP	100	28	
3	284.2606	63.56	-21.90	41.66	46.00	-4.34	QP	100	169	
4	332.9534	47.73	-19.99	27.74	46.00	-18.26	QP	100	46	
5	377.8480	55.17	-18.66	36.51	46.00	-9.49	QP	100	289	
6	567.9696	48.93	-14.38	34.55	46.00	-11.45	QP	100	188	

Above 1GHz




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1448	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/53/37
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

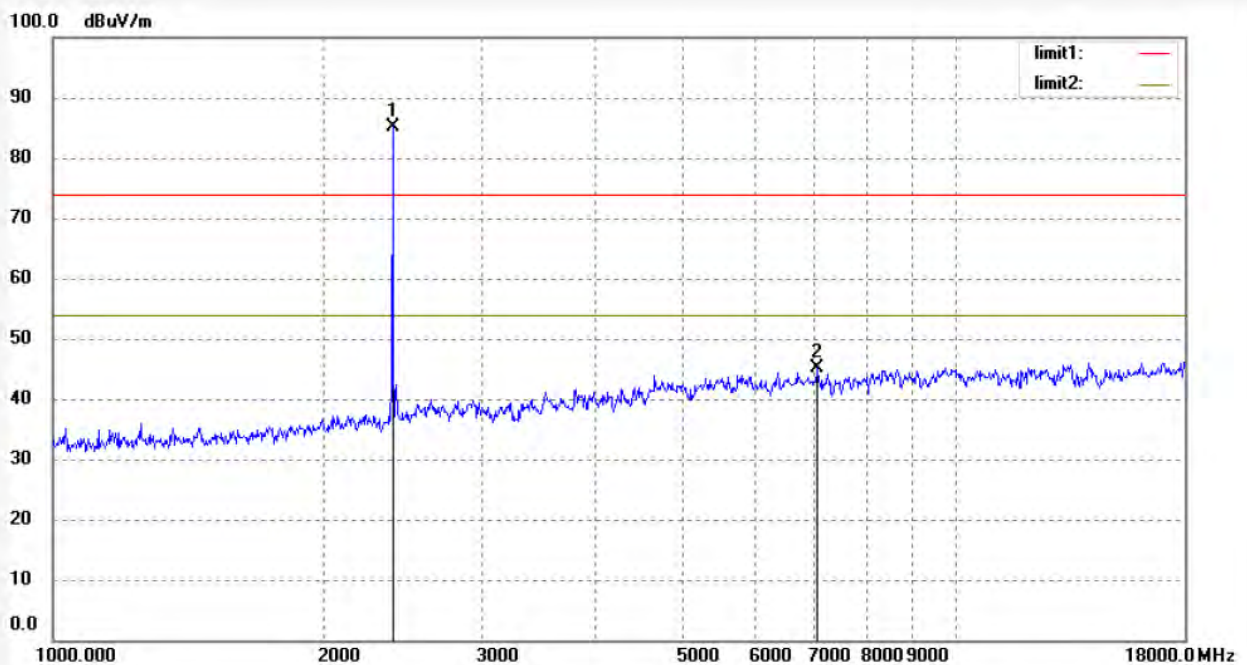

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	89.60	-4.37	85.23			peak	150	208	
2	7050.590	37.50	7.58	45.08	74.00	-28.92	peak	150	193	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1447	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/52/21
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

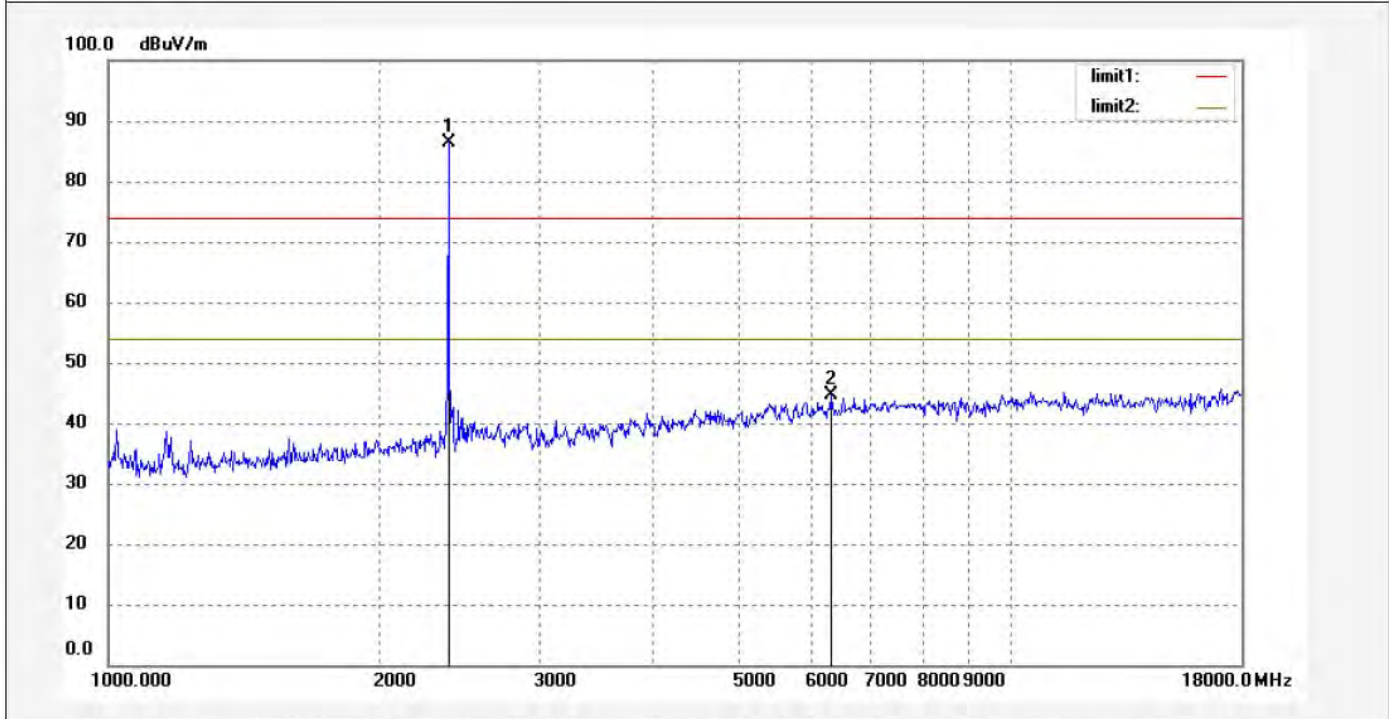

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	90.68	-4.37	86.31	74.00		peak	150	247	
2	6312.317	38.68	5.86	44.54	74.00	-29.46	peak	150	255	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1449	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/55/02
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2441MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

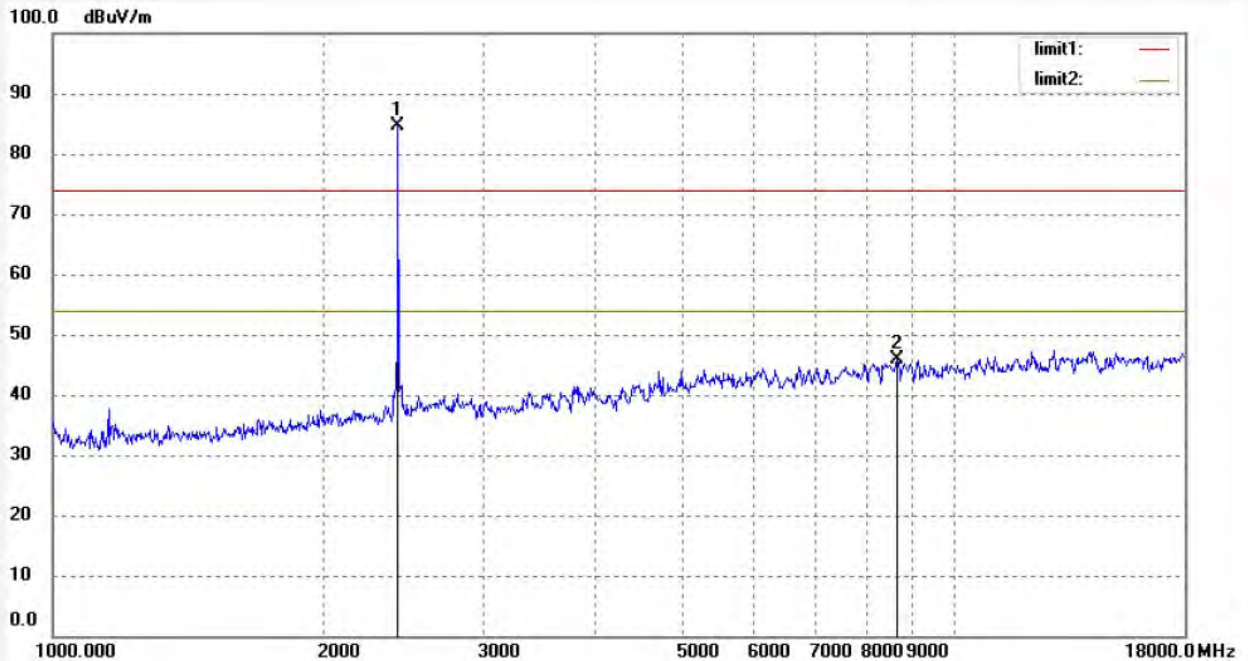

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.021	88.90	-4.20	84.70			peak	200	171	
2	8643.983	36.35	9.45	45.80	74.00	-28.20	peak	200	277	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1450	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/57/03
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2441MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

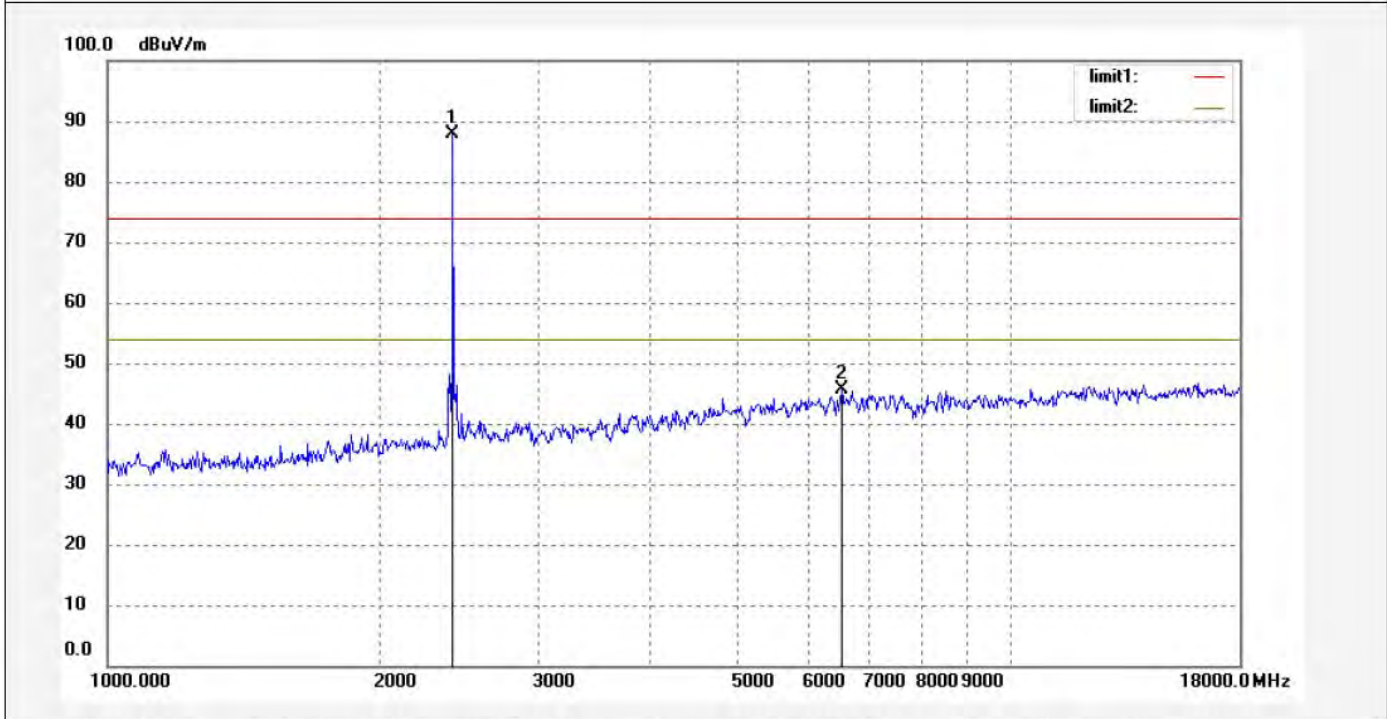

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.021	91.96	-4.20	87.76			peak	150	109	
2	6517.697	39.19	6.35	45.54	74.00	-28.46	peak	150	72	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1452	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/00/02
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

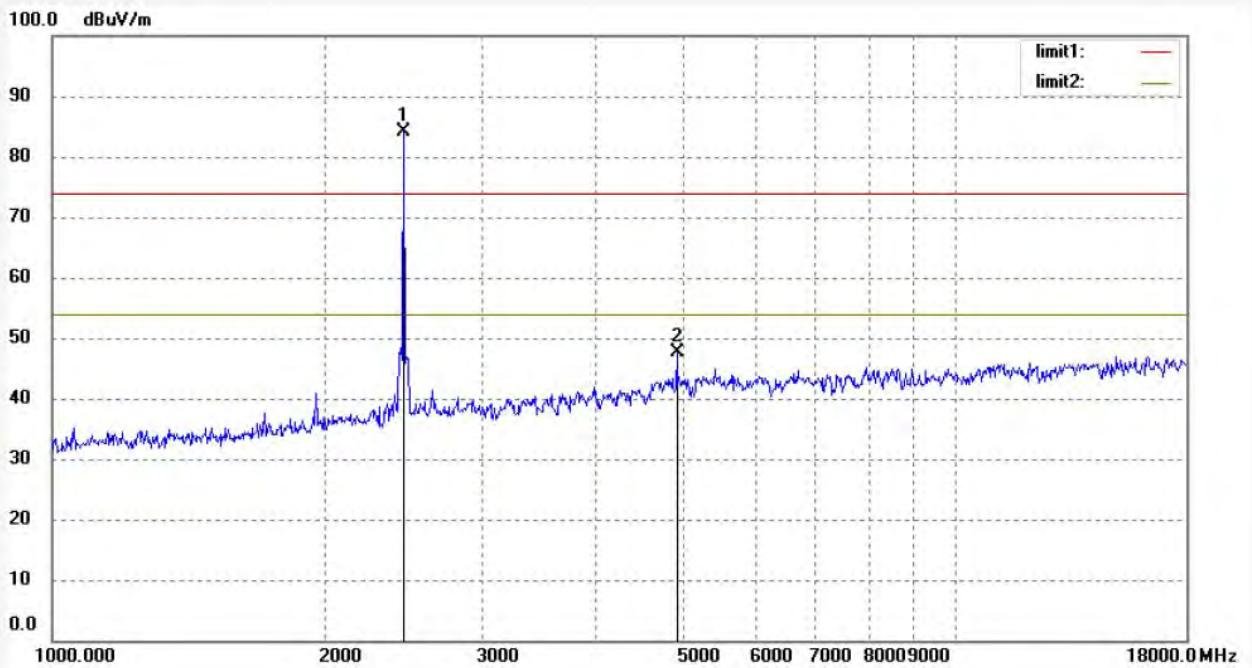

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	88.07	-4.04	84.03			peak	200	100	
2	4960.444	44.18	3.50	47.68	74.00	-26.32	peak	200	152	




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1451	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 13/58/38
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	


Note: Report No.:ATE20180004

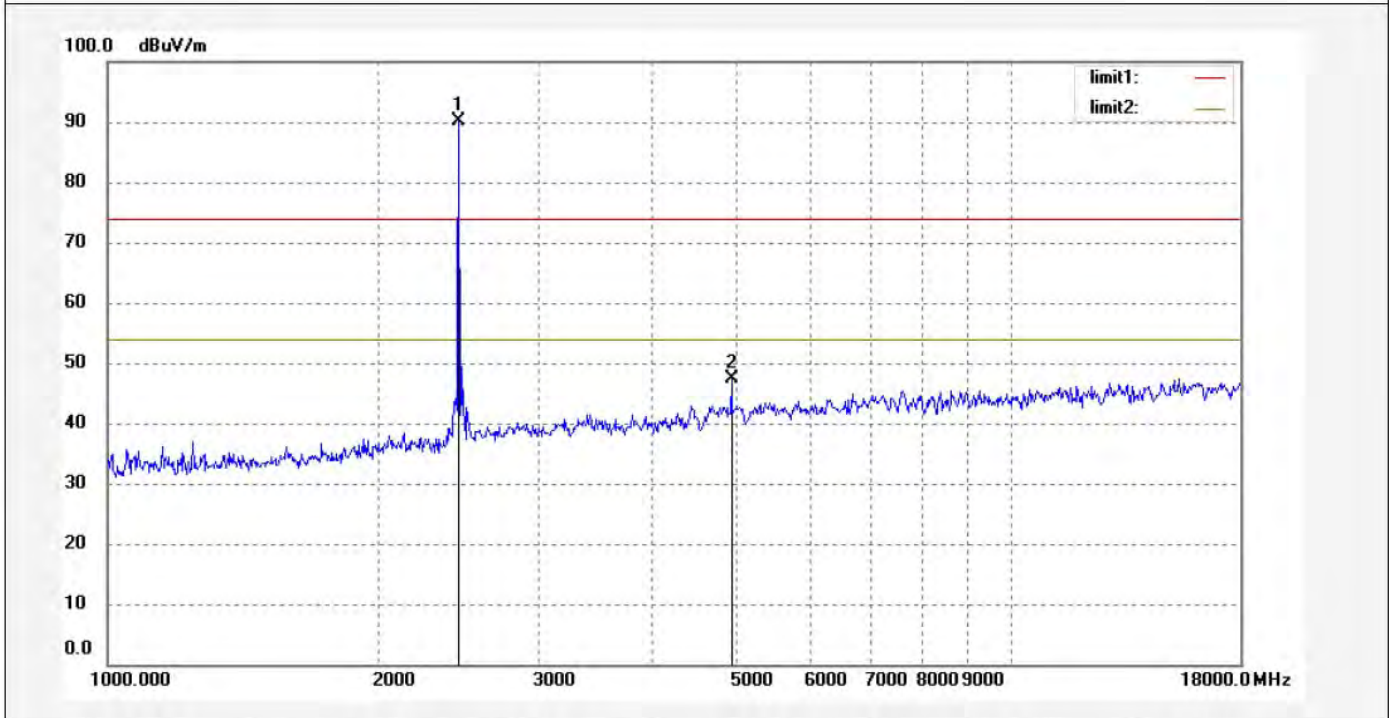

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	94.21	-4.04	90.17			peak	150	147	
2	4960.444	43.97	3.50	47.47	74.00	-26.53	peak	150	23	

## 11. BAND EDGE COMPLIANCE TEST

### 11.1. Block Diagram of Test Setup



(EUT: BT Earphones)

### 11.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 11.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.



## 11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.

11.5.3. The band edges was measured and recorded.

## 11.6. Test Result

Test Lab: Shielding room


Test Engineer: Star

Note: Both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
GFSK Mode		
2400.00	32.38	> 20dBc
2483.50	42.90	> 20dBc
Π/4-DQPSK Mode		
2400.00	30.40	> 20dBc
2483.50	44.03	> 20dBc

The spectrum analyzer plots are attached as below.

### GFSK Mode

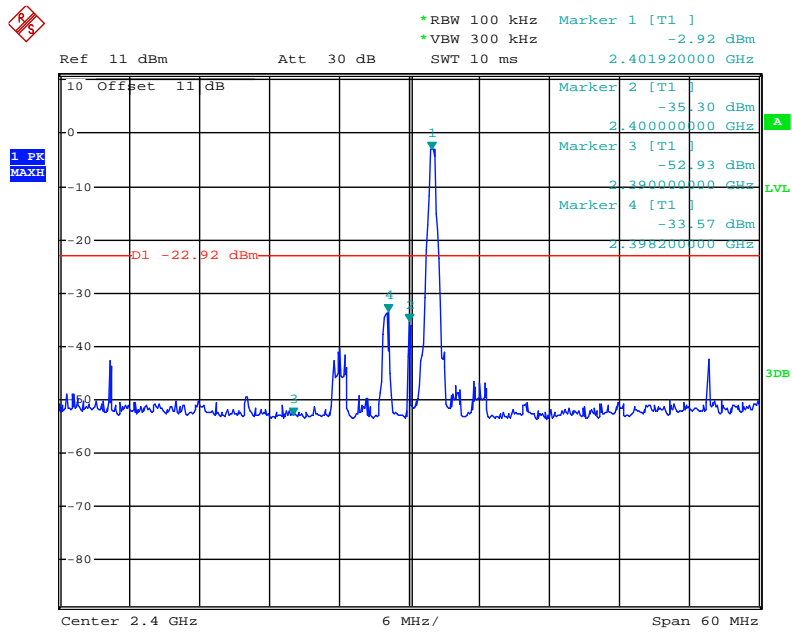


Date: 4.JAN.2018 17:06:29

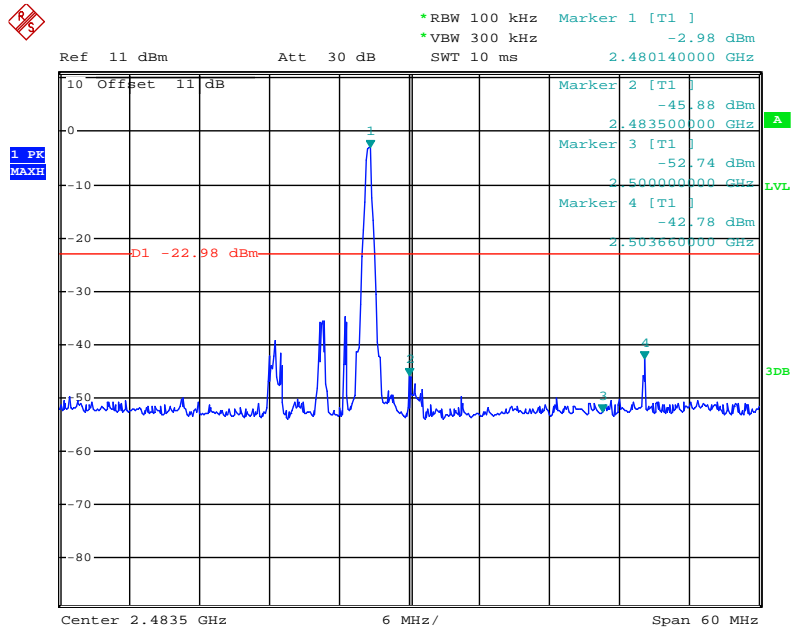


Date: 4.JAN.2018 17:08:00

### Π/4-DQPSK Mode

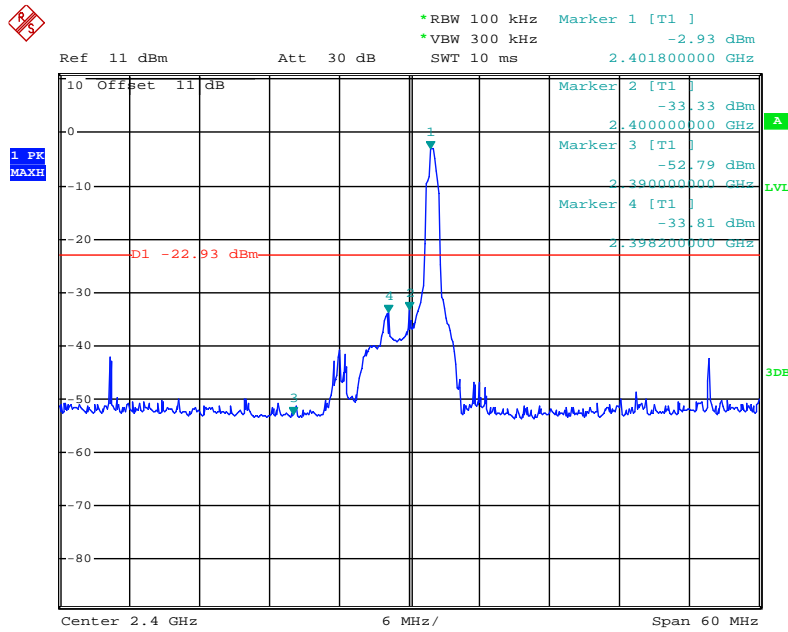

Date: 4.JAN.2018 17:09:58

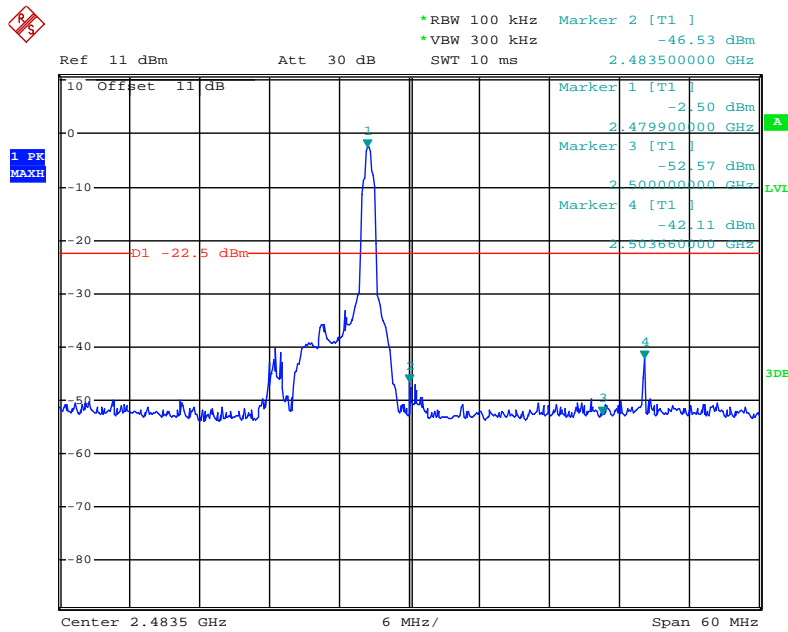

Date: 4.JAN.2018 17:08:50

## Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX (Hopping off, Hopping on) modes measure it.  
We select 2402MHz, 2480MHz TX frequency to transmit(Hopping off mode).  
We select 2402-2480MHz TX frequency to transmit(Hopping on mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Test Lab: 3m Anechoic chamber

Test Engineer: Star

Non-hopping mode




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1454	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/05/20
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

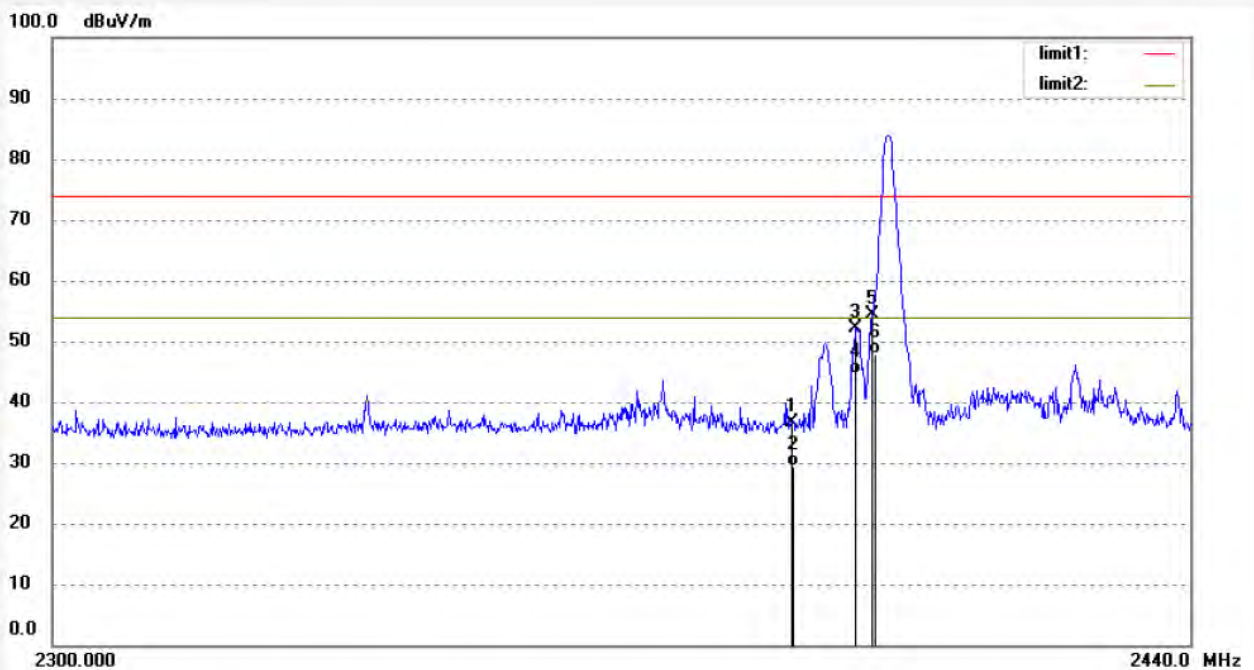

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.95	-4.32	36.63	74.00	-37.37	peak	200	193	
2	2390.000	33.73	-4.32	29.41	54.00	-24.59	AVG	200	280	
3	2398.037	56.48	-4.28	52.20	74.00	-21.80	peak	200	224	
4	2398.037	48.90	-4.28	44.62	54.00	-9.38	AVG	200	132	
5	2400.000	58.57	-4.27	54.30	74.00	-19.70	peak	200	145	
6	2400.000	52.16	-4.27	47.89	54.00	-6.11	AVG	200	168	

Note: Average measurement with peak detection at No.2&4&6.




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1453	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/04/02
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

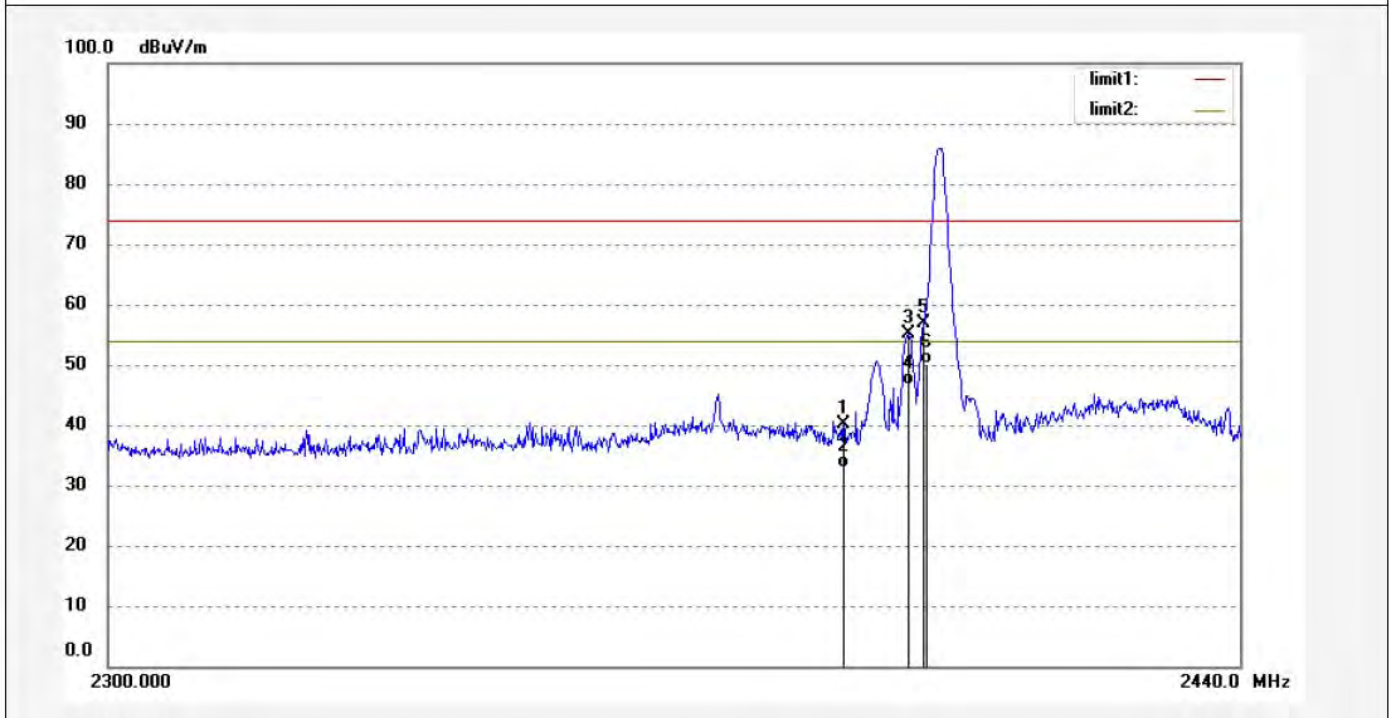

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	44.46	-4.32	40.14	74.00	-33.86	peak	150	254	
2	2390.000	37.20	-4.32	32.88	54.00	-21.12	AVG	150	215	
3	2398.178	59.36	-4.27	55.09	74.00	-18.91	peak	150	82	
4	2398.178	51.00	-4.27	46.73	54.00	-7.27	AVG	150	46	
5	2400.000	61.24	-4.27	56.97	74.00	-17.03	peak	150	116	
6	2400.000	54.44	-4.27	50.17	54.00	-3.83	AVG	150	175	

Note: Average measurement with peak detection at No.2&4&6.




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1455	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/07/38
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

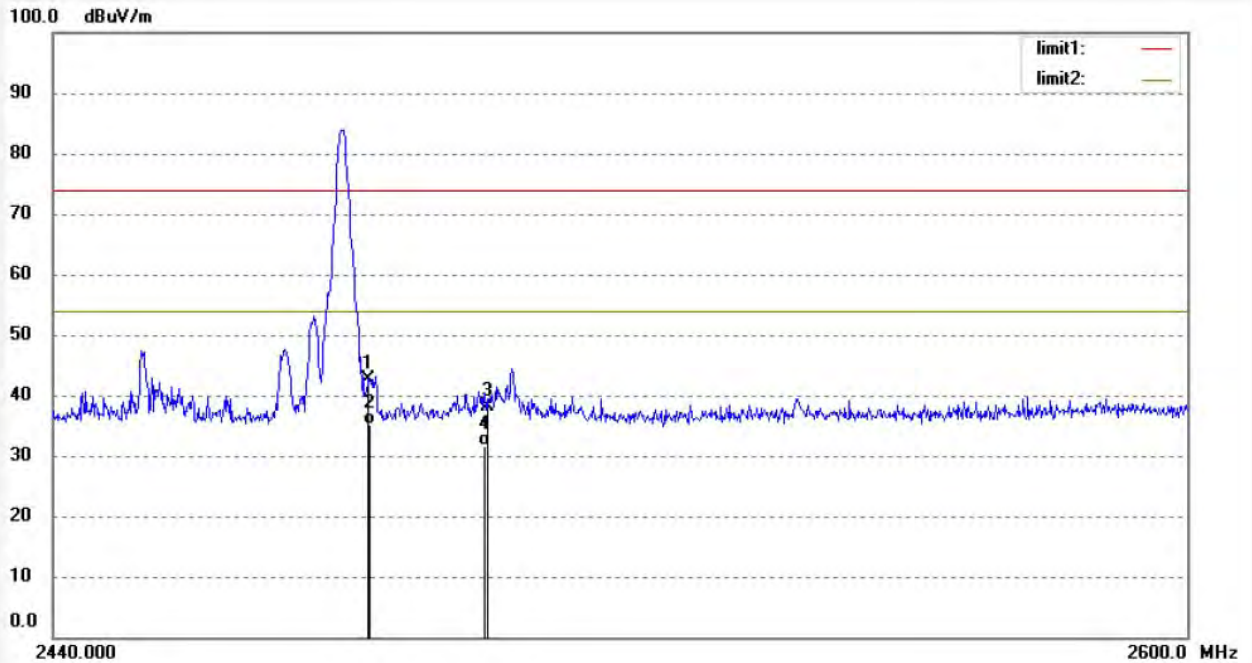

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.50	-3.89	42.61	74.00	-31.39	peak	200	308	
2	2483.500	39.14	-3.89	35.25	54.00	-18.75	AVG	200	322	
3	2500.000	41.92	-3.81	38.11	74.00	-35.89	peak	200	198	
4	2500.000	35.39	-3.81	31.58	54.00	-22.42	AVG	200	284	

Note: Average measurement with peak detection at No.2&4




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1456	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/08/42
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

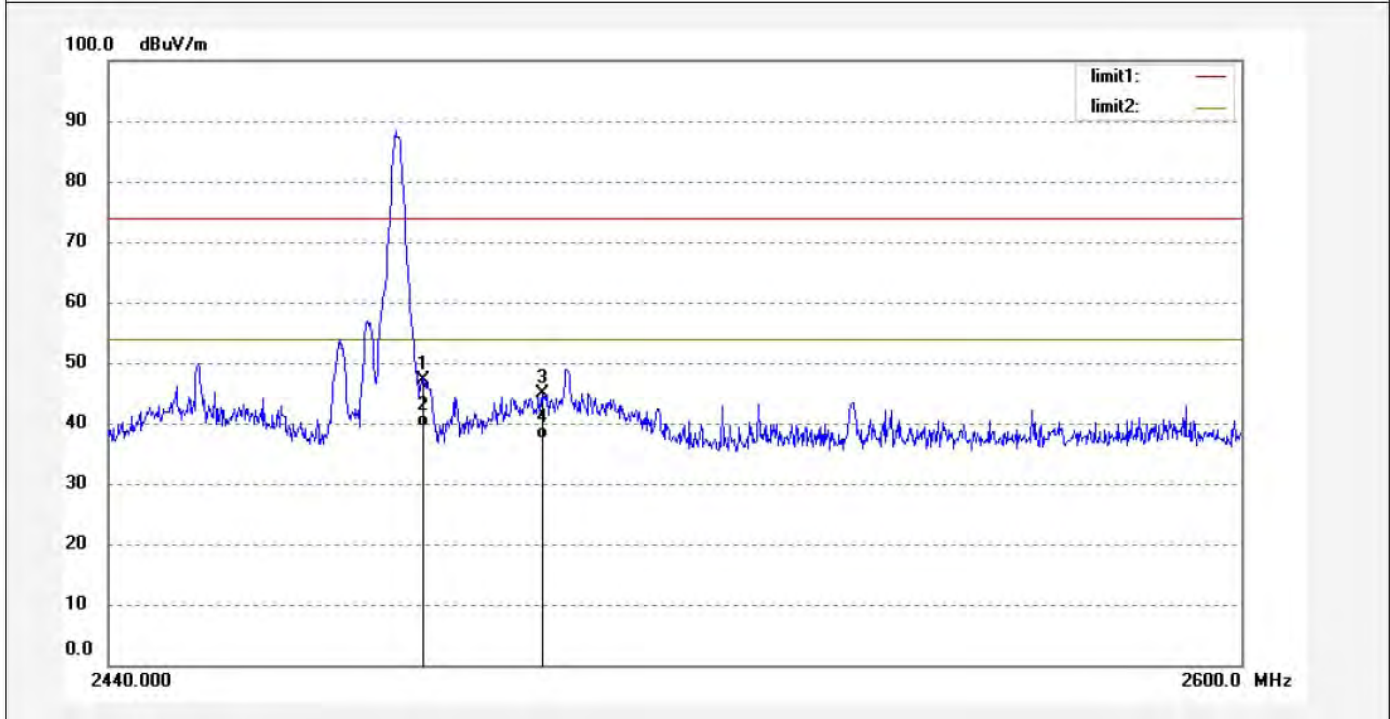

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.93	-3.89	47.04	74.00	-26.96	peak	150	142	
2	2483.500	43.25	-3.89	39.36	54.00	-14.64	AVG	150	163	
3	2500.000	48.74	-3.81	44.93	74.00	-29.07	peak	150	100	
4	2500.000	41.09	-3.81	37.28	54.00	-16.72	AVG	150	251	

Note: Average measurement with peak detection at No.2&4






**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1459	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/12/33
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2402MHz(□/4-DQPSK )	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

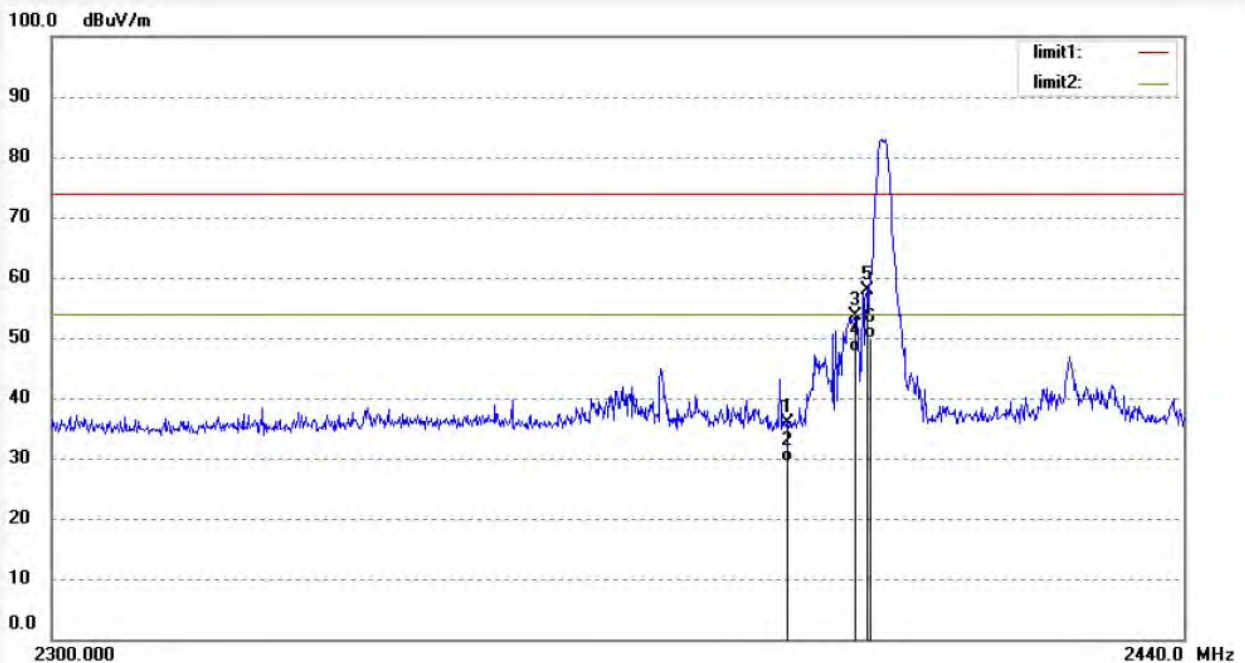

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	40.32	-4.32	36.00	74.00	-38.00	peak	200	320	
2	2390.000	33.59	-4.32	29.27	54.00	-24.73	AVG	200	289	
3	2398.604	57.89	-4.27	53.62	74.00	-20.38	peak	200	188	
4	2398.604	51.82	-4.27	47.55	54.00	-6.45	AVG	200	73	
5	2400.000	62.14	-4.27	57.87	74.00	-16.13	peak	200	106	
6	2400.000	54.27	-4.27	50.00	54.00	-4.00	AVG	200	123	

Note: Average measurement with peak detection at No.2&4&6.



**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1460

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: BT Earphones

Mode: TX 2402MHz(Π/4-DQPSK )

Model: DEEP-0176

Manufacturer: Zeeva Internation Limited

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/01/05/

Time: 14/14/09

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20180004

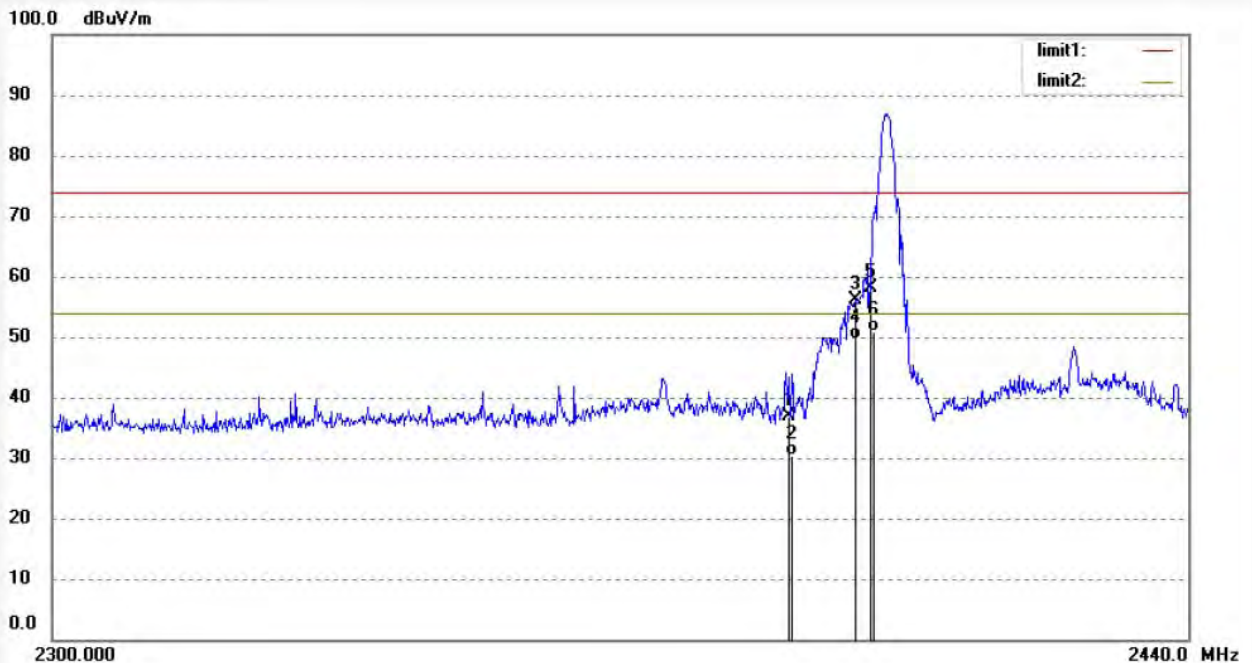

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	41.30	-4.32	36.98	74.00	-37.02	peak	150	172	
2	2390.000	34.69	-4.32	30.37	54.00	-23.63	AVG	150	103	
3	2398.178	60.40	-4.27	56.13	74.00	-17.87	peak	150	52	
4	2398.178	53.81	-4.27	49.54	54.00	-4.46	AVG	150	199	
5	2400.000	62.32	-4.27	58.05	74.00	-15.95	peak	150	268	
6	2400.000	55.24	-4.27	50.97	54.00	-3.03	AVG	150	230	

Note: Average measurement with peak detection at No.2&4&6.




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1458	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/11/09
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(Π/4-DQPSK )	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

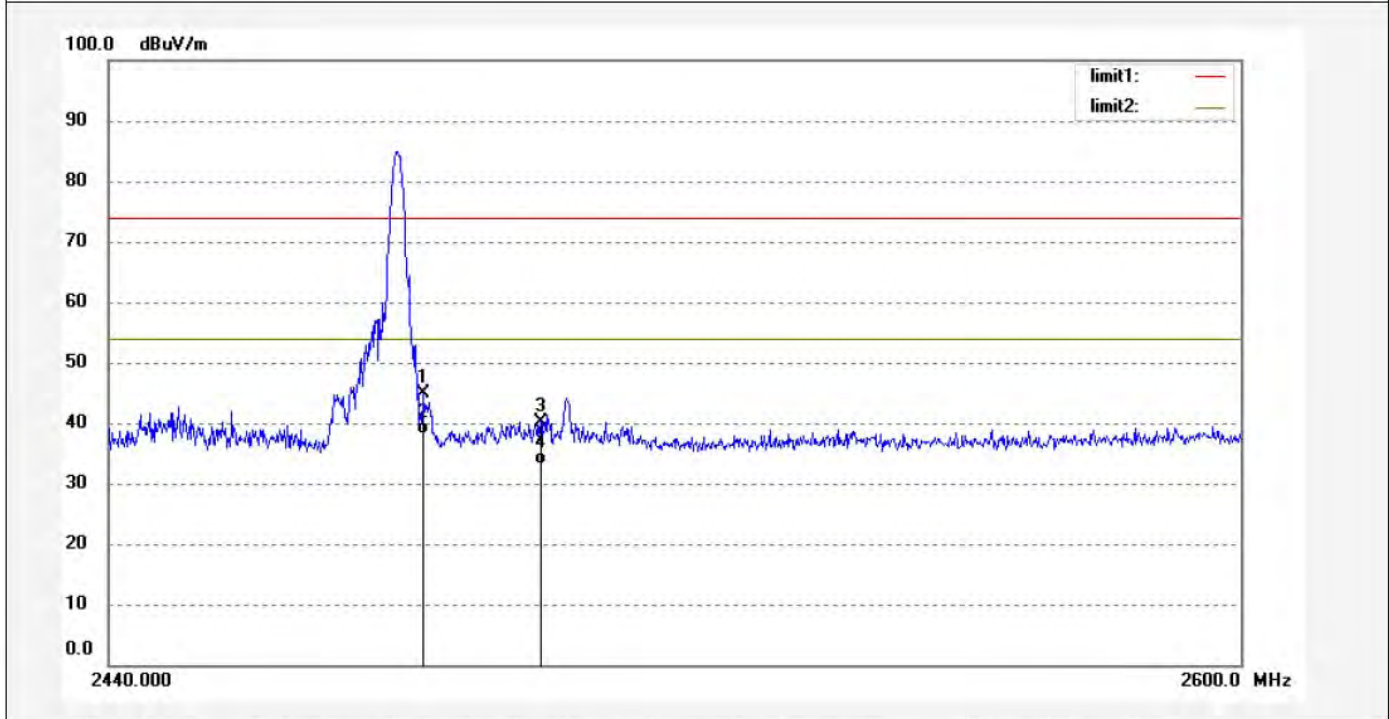

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.82	-3.89	44.93	74.00	-29.07	peak	200	97	
2	2483.500	42.08	-3.89	38.19	54.00	-15.81	AVG	200	54	
3	2500.000	43.87	-3.81	40.06	74.00	-33.94	peak	200	130	
4	2500.000	37.00	-3.81	33.19	54.00	-20.81	AVG	200	164	

Note: Average measurement with peak detection at No.2&4




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1457	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/09/51
EUT: BT Earphones	Engineer Signature: star
Mode: TX 2480MHz(Π/4-DQPSK )	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

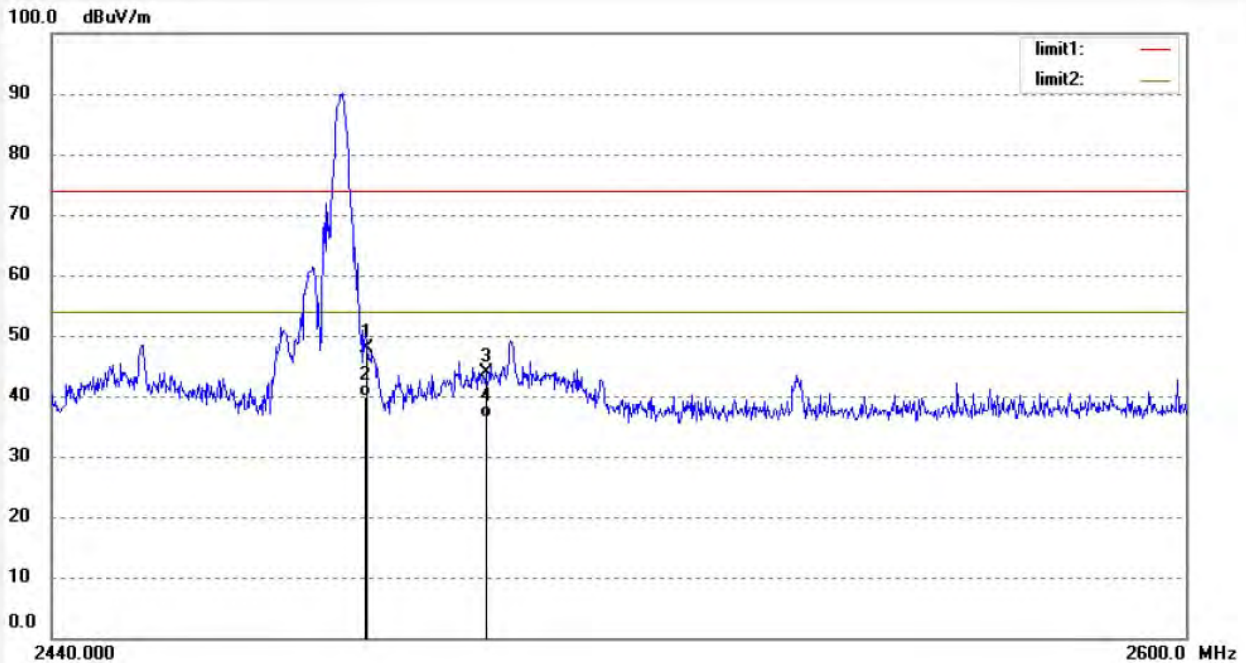

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.85	-3.89	47.96	74.00	-26.04	peak	150	64	
2	2483.500	43.84	-3.89	39.95	54.00	-14.05	AVG	150	283	
3	2500.000	47.59	-3.81	43.78	74.00	-30.22	peak	150	192	
4	2500.000	40.27	-3.81	36.46	54.00	-17.54	AVG	150	206	

Note: Average measurement with peak detection at No.2&4

Hopping mode




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1462	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/31/03
EUT: BT Earphones	Engineer Signature: star
Mode: Hopping (GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

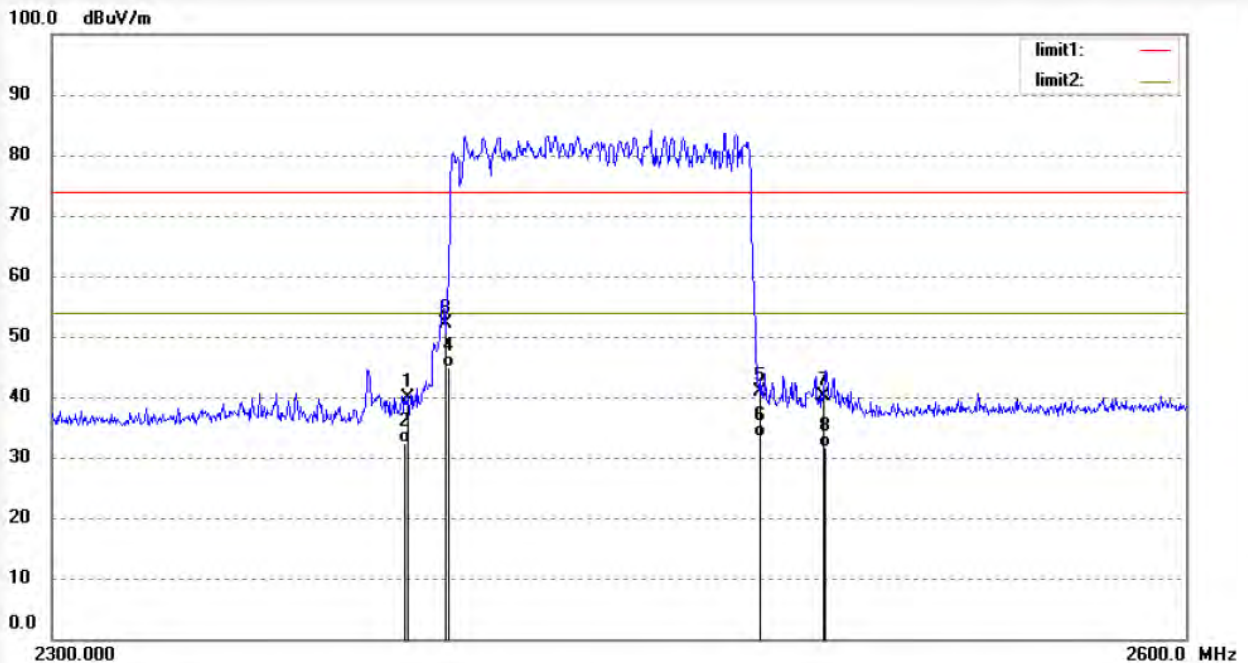

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	44.17	-4.32	39.85	74.00	-34.15	peak	200	71	
2	2390.000	36.72	-4.32	32.40	54.00	-21.60	AVG	200	102	
3	2400.000	56.48	-4.27	52.21	74.00	-21.79	peak	200	123	
4	2400.000	49.25	-4.27	44.98	54.00	-9.02	AVG	200	254	
5	2483.500	44.80	-3.89	40.91	74.00	-33.09	peak	200	209	
6	2483.500	37.16	-3.89	33.27	54.00	-20.73	AVG	200	223	
7	2500.000	43.92	-3.81	40.11	74.00	-33.89	peak	200	239	
8	2500.000	35.33	-3.81	31.52	54.00	-22.48	AVG	200	341	

Note: Average measurement with peak detection at No.2&4&6&8




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1461	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/22/24
EUT: BT Earphones	Engineer Signature: star
Mode: Hopping (GFSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

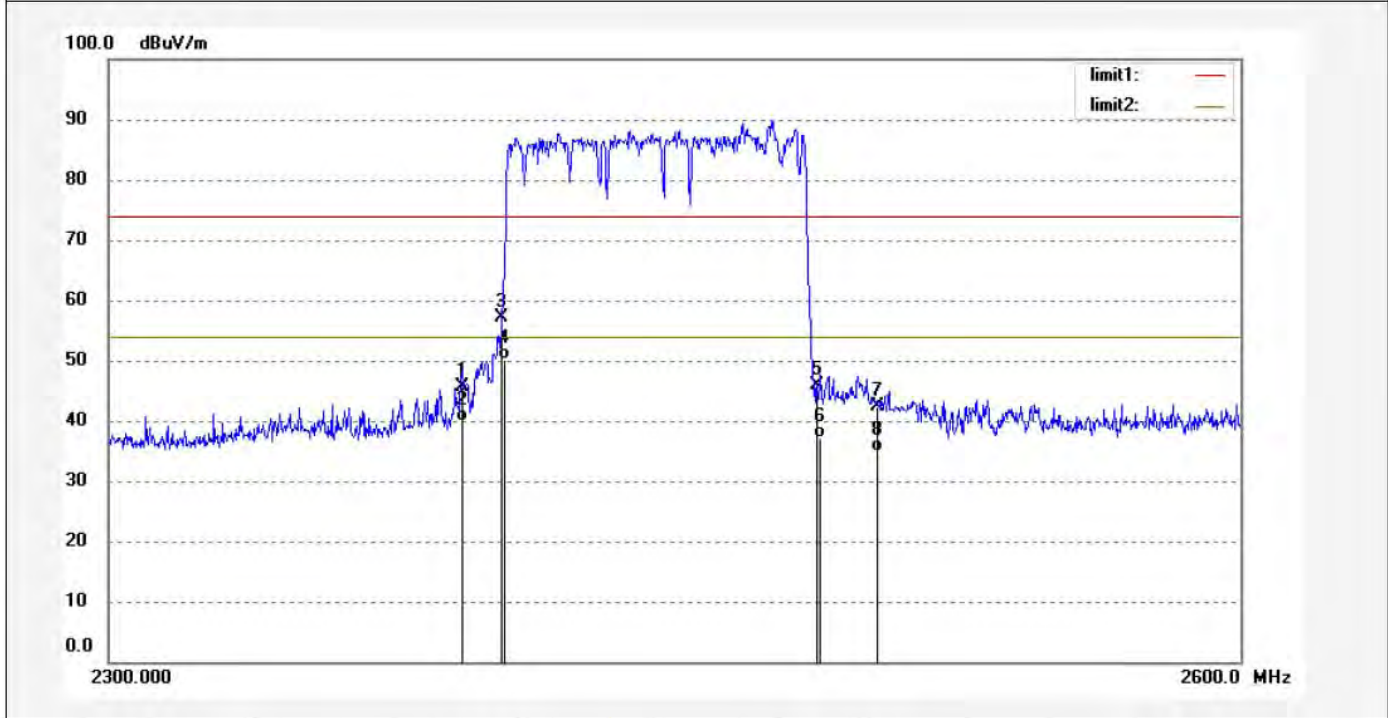

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	50.05	-4.32	45.73	74.00	-28.27	peak	150	110	
2	2390.000	44.28	-4.32	39.96	54.00	-14.04	AVG	150	254	
3	2400.000	61.43	-4.27	57.16	74.00	-16.84	peak	150	139	
4	2400.000	54.39	-4.27	50.12	54.00	-3.88	AVG	150	105	
5	2483.500	49.85	-3.89	45.96	74.00	-28.04	peak	150	220	
6	2483.500	41.07	-3.89	37.18	54.00	-16.82	AVG	150	198	
7	2500.000	46.29	-3.81	42.48	74.00	-31.52	peak	150	314	
8	2500.000	38.66	-3.81	34.85	54.00	-19.15	AVG	150	277	

Note: Average measurement with peak detection at No.2&4&6&8




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1463	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/39/41
EUT: BT Earphones	Engineer Signature: star
Mode: Hopping (Π/4-DQPSK)	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

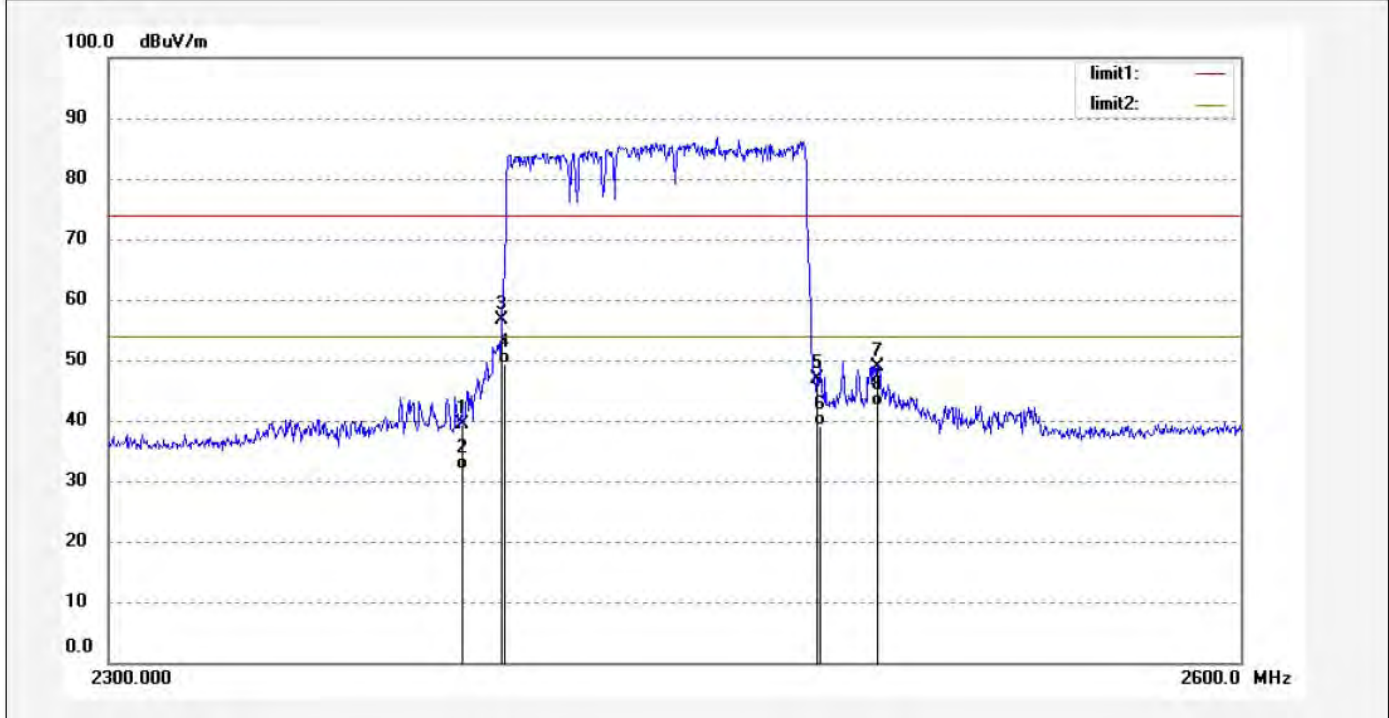

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.61	-4.32	39.29	74.00	-34.71	peak	200	123	
2	2390.000	36.25	-4.32	31.93	54.00	-22.07	AVG	200	245	
3	2400.000	60.80	-4.27	56.53	74.00	-17.47	peak	200	133	
4	2400.000	53.75	-4.27	49.48	54.00	-4.52	AVG	200	29	
5	2483.500	50.88	-3.89	46.99	74.00	-27.01	peak	200	106	
6	2483.500	43.03	-3.89	39.14	54.00	-14.86	AVG	200	258	
7	2500.000	52.61	-3.81	48.80	74.00	-25.20	peak	200	43	
8	2500.000	46.22	-3.81	42.41	54.00	-11.59	AVG	200	98	

Note: Average measurement with peak detection at No.2&4&6&8




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: STAR2017 #1464	Polarization: Vertical
Standard: FCC PK	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/01/05/
Temp.( C)/Hum.(%) 25 C / 55 %	Time: 14/46/21
EUT: BT Earphones	Engineer Signature: star
Mode: Hopping (Π/4-DQPSK )	Distance: 3m
Model: DEEP-0176	
Manufacturer: Zeeva Internation Limited	

Note: Report No.:ATE20180004

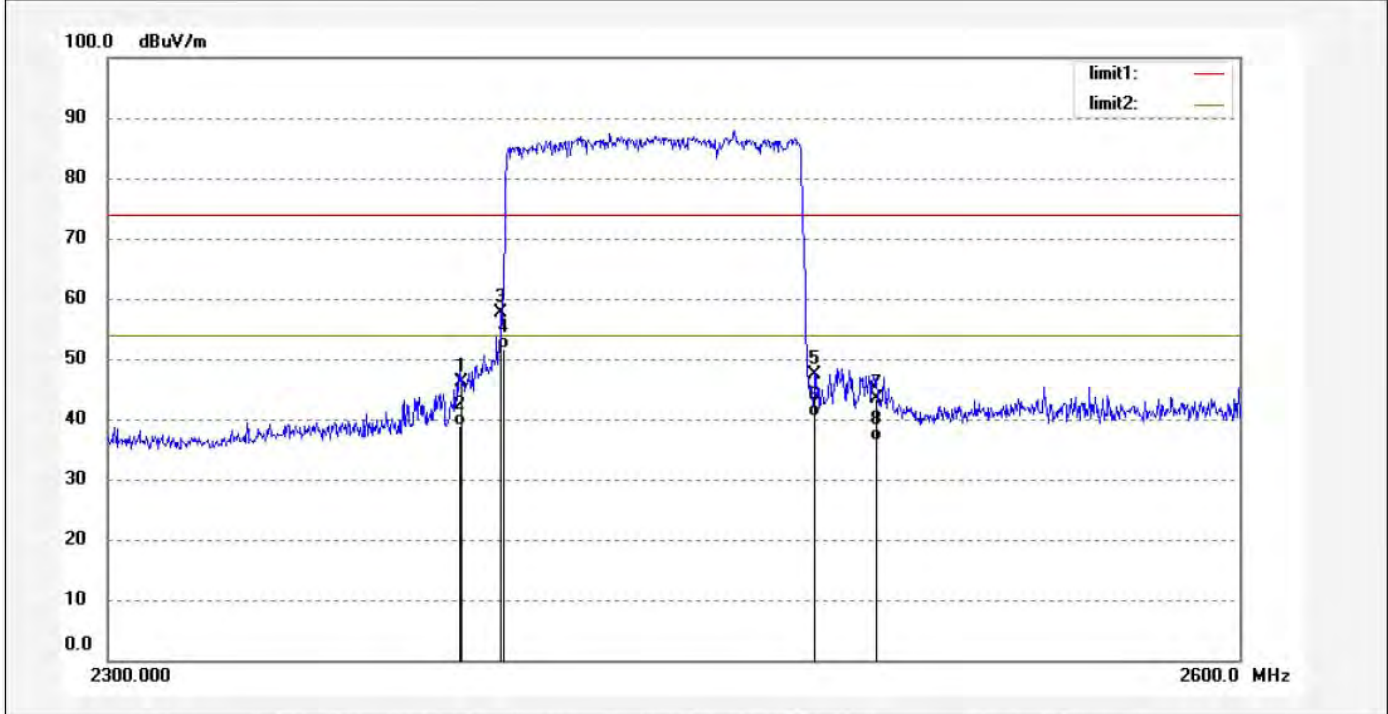

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	50.38	-4.32	46.06	74.00	-27.94	peak	150	199	
2	2390.000	43.25	-4.32	38.93	54.00	-15.07	AVG	150	201	
3	2400.000	62.00	-4.27	57.73	74.00	-16.27	peak	150	136	
4	2400.000	55.81	-4.27	51.54	54.00	-2.46	AVG	150	125	
5	2483.500	51.34	-3.89	47.45	74.00	-26.55	peak	150	46	
6	2483.500	44.16	-3.89	40.27	54.00	-13.73	AVG	150	58	
7	2500.000	47.28	-3.81	43.47	74.00	-30.53	peak	150	110	
8	2500.000	40.28	-3.81	36.47	54.00	-17.53	AVG	150	87	

Note: Average measurement with peak detection at No.2&4&6&8




## 12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

### 15 SECTION 15.207(A)


#### 12.1.Block Diagram of Test Setup

12.1.1.Block diagram of connection between the EUT and simulators

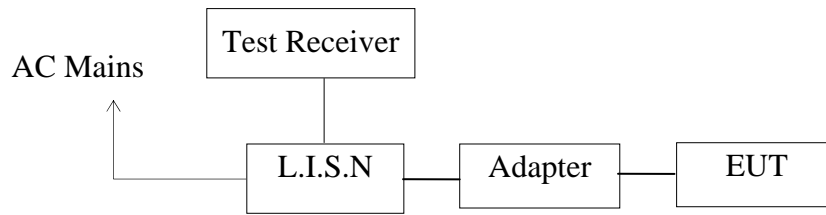

(EUT: BT Earphones)

#### 12.1.2.Test System Setup

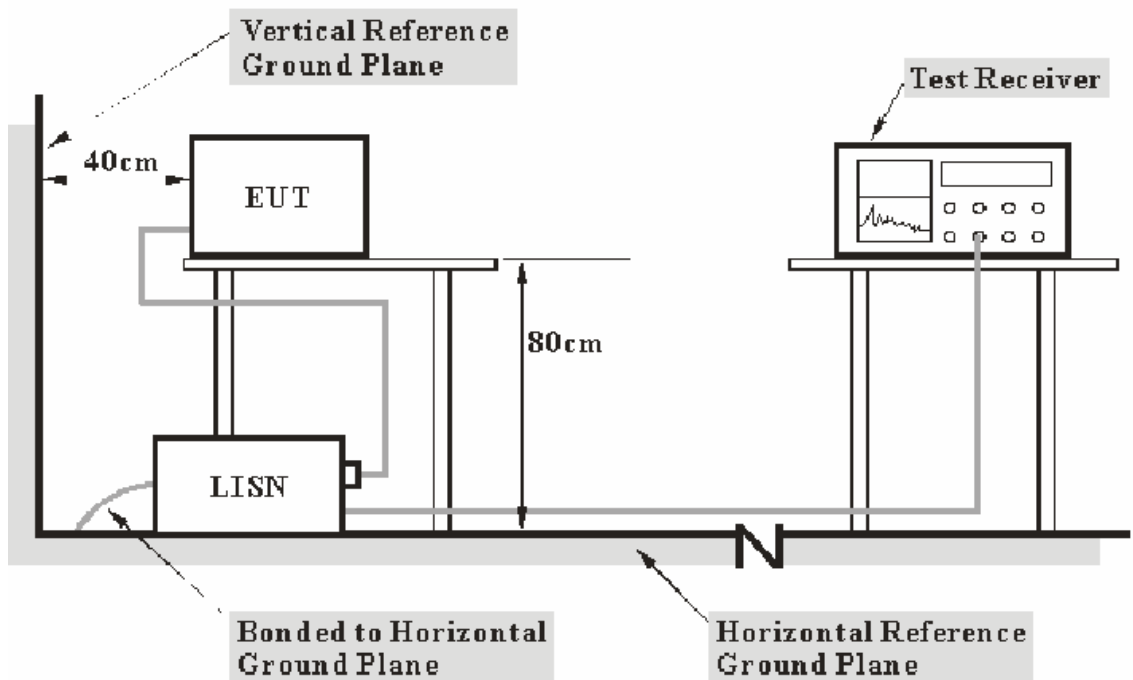

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

## 12.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.  
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

## 12.3. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

## 12.4. Operating Condition of EUT

12.4.1. Setup the EUT and simulator as shown as Section 12.1.

12.4.2. Turn on the power of all equipment.

12.4.3. Let the EUT work in test mode and measure it.

## 12.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement. The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 12.6.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.5	51.1	34.2	56.0	46.0	4.9	11.8	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Margin = Limit (dBμV) - Level (dBμV)

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

### 12.7.Power Line Conducted Emission Measurement Results

**PASS.**

Test Lab: Shielding room

Test Engineer: Star

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15C**

EUT: BT Earphones M/N:DEEP-0176  
 Manufacturer: Zeeva International Limited  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Star  
 Test Specification: L 240V/60Hz  
 Comment: Report No.:ATE20180004  
 Start of Test: 2018-1-15 / 16:32:46

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

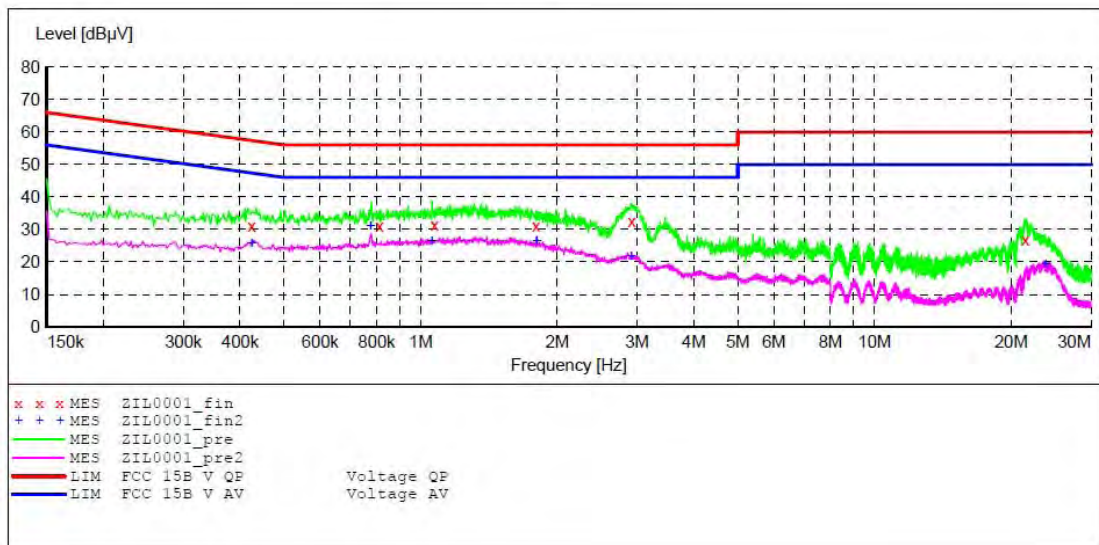

**MEASUREMENT RESULT: "ZIL0001\_fin"**

2018-1-15 16:36

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.424500	31.10	11.0	57	26.3	QP	L1	GND
0.811500	31.00	11.1	56	25.0	QP	L1	GND
1.072500	31.60	11.1	56	24.4	QP	L1	GND
1.797000	30.90	11.2	56	25.1	QP	L1	GND
2.917500	32.60	11.3	56	23.4	QP	L1	GND
21.520500	26.70	11.7	60	33.3	QP	L1	GND

**MEASUREMENT RESULT: "ZIL0001\_fin2"**

2018-1-15 16:36

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.424500	25.80	11.0	47	21.6	AV	L1	GND
0.775500	31.00	11.1	46	15.0	AV	L1	GND
1.059000	26.30	11.1	46	19.7	AV	L1	GND
1.801500	26.60	11.2	46	19.4	AV	L1	GND
2.908500	21.70	11.3	46	24.3	AV	L1	GND
23.833500	19.20	11.7	50	30.8	AV	L1	GND


**ACCURATE TECHNOLOGY CO.,LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15C**

EUT: BT Earphones M/N:DEEP-0176  
 Manufacturer: Zeeva International Limited  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Star  
 Test Specification: N 240V/60Hz  
 Comment: Report No.:ATE20180004  
 Start of Test: 2018-1-15 / 16:37:26

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

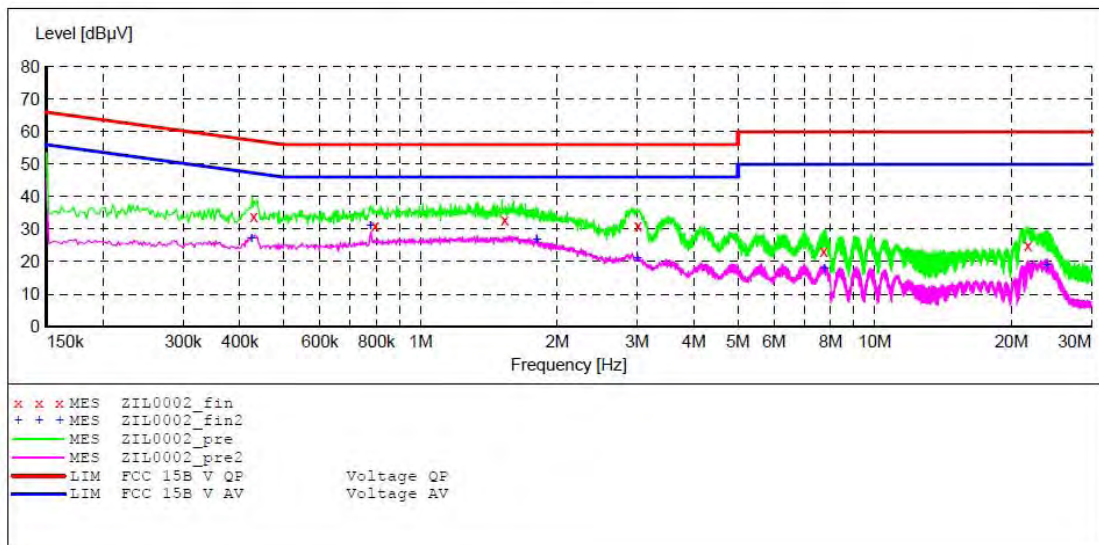

**MEASUREMENT RESULT: "ZIL0002\_fin"**

2018-1-15 16:41

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.429000	34.00	11.0	57	23.3	QP	N	GND
0.793500	31.20	11.1	56	24.8	QP	N	GND
1.531500	32.80	11.2	56	23.2	QP	N	GND
3.012000	31.20	11.3	56	24.8	QP	N	GND
7.723500	23.10	11.5	60	36.9	QP	N	GND
21.741000	25.10	11.7	60	34.9	QP	N	GND

**MEASUREMENT RESULT: "ZIL0002\_fin2"**

2018-1-15 16:41

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.424500	27.30	11.0	47	20.1	AV	N	GND
0.775500	31.10	11.1	46	14.9	AV	N	GND
1.801500	26.90	11.2	46	19.1	AV	N	GND
3.003000	21.00	11.3	46	25.0	AV	N	GND
7.750500	17.90	11.5	50	32.1	AV	N	GND
23.914500	19.10	11.7	50	30.9	AV	N	GND


**ACCURATE TECHNOLOGY CO.,LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15C**

EUT: BT Earphones M/N:DEEP-0176  
 Manufacturer: Zeeva International Limited  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Star  
 Test Specification: N 120V/60Hz  
 Comment: Report No.:ATE20180004  
 Start of Test: 2018-1-15 / 16:41:50

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

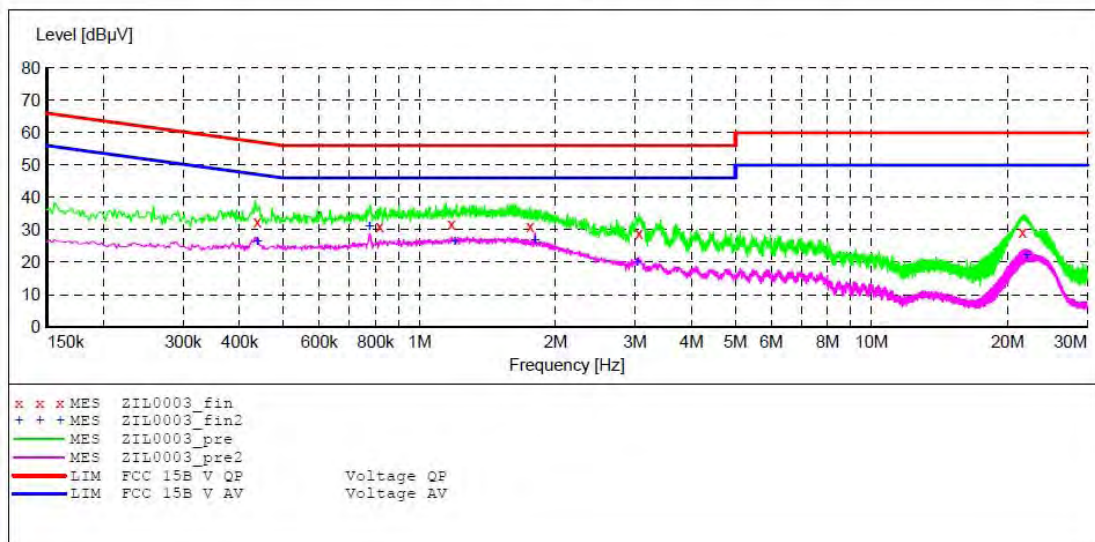

**MEASUREMENT RESULT: "ZIL0003\_fin"**

2018-1-15 16:46

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.438000	32.70	11.0	57	24.4	QP	N	GND
0.816000	31.00	11.1	56	25.0	QP	N	GND
1.176000	32.00	11.2	56	24.0	QP	N	GND
1.756500	31.10	11.2	56	24.9	QP	N	GND
3.061500	28.80	11.3	56	27.2	QP	N	GND
21.592500	29.30	11.7	60	30.7	QP	N	GND

**MEASUREMENT RESULT: "ZIL0003\_fin2"**

2018-1-15 16:46

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.438000	26.60	11.0	47	20.5	AV	N	GND
0.775500	31.10	11.1	46	14.9	AV	N	GND
1.198500	26.60	11.2	46	19.4	AV	N	GND
1.801500	26.70	11.2	46	19.3	AV	N	GND
3.034500	20.10	11.3	46	25.9	AV	N	GND
22.029000	22.20	11.7	50	27.8	AV	N	GND


**ACCURATE TECHNOLOGY CO., LTD**

**CONDUCTED EMISSION STANDARD FCC PART 15C**

EUT: BT Earphones M/N:DEEP-0176  
 Manufacturer: Zeeva International Limited  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Star  
 Test Specification: L 120V/60Hz  
 Comment: Report No.:ATE20180004  
 Start of Test: 2018-1-15 / 16:47:48

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

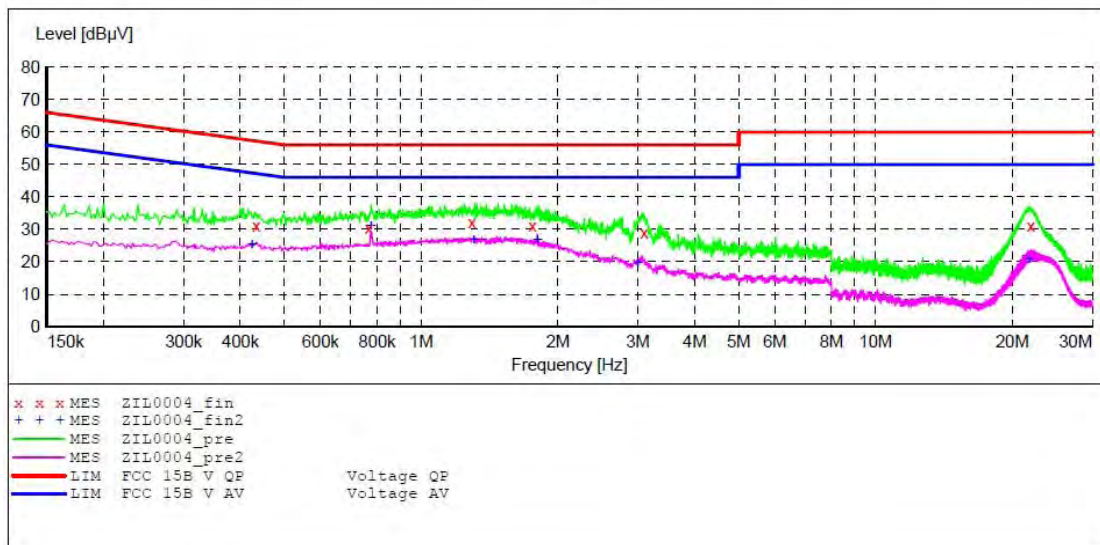

**MEASUREMENT RESULT: "ZIL0004\_fin"**

2018-1-15 16:51

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.433500	30.90	11.0	57	26.3	QP	L1	GND
0.766500	30.40	11.1	56	25.6	QP	L1	GND
1.293000	32.00	11.2	56	24.0	QP	L1	GND
1.756500	31.10	11.2	56	24.9	QP	L1	GND
3.093000	29.00	11.3	56	27.0	QP	L1	GND
21.988500	31.10	11.7	60	28.9	QP	L1	GND

**MEASUREMENT RESULT: "ZIL0004\_fin2"**

2018-1-15 16:51

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.424500	25.40	11.0	47	22.0	AV	L1	GND
0.775500	30.90	11.1	46	15.1	AV	L1	GND
1.306500	26.70	11.2	46	19.3	AV	L1	GND
1.801500	26.80	11.2	46	19.2	AV	L1	GND
2.998500	19.50	11.3	46	26.5	AV	L1	GND
21.754500	20.80	11.7	50	29.2	AV	L1	GND


## 13. ANTENNA REQUIREMENT

### 13.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 13.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Max Antenna gain of EUT is 1.2dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

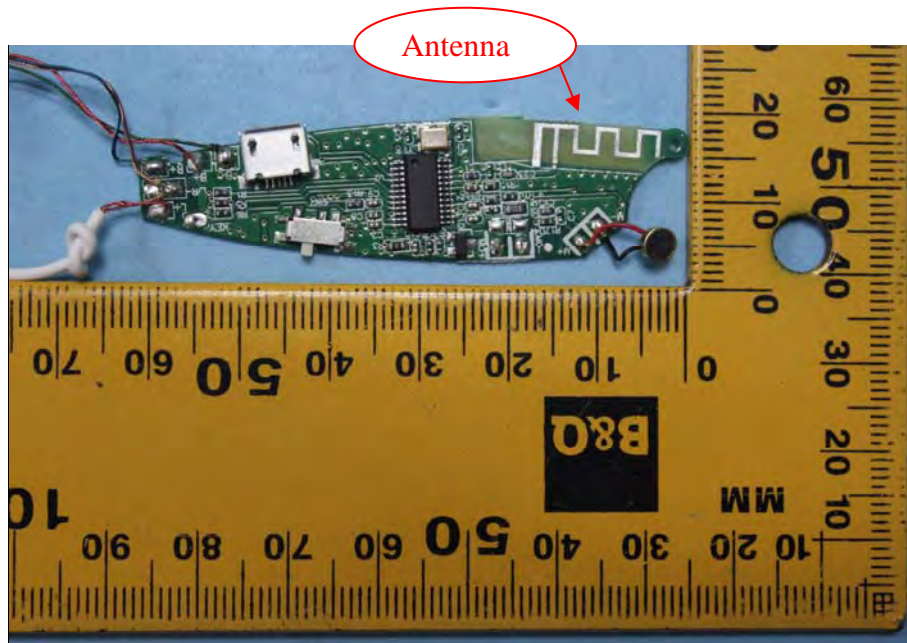

\*\*\*\*\* End of Test Report \*\*\*\*\*