

Application Information	
04Version	5.245.351
TotalTime	4m 17s 934ms
AdditionalInfor	NULL


Manufacture: ZHUHAI JIELI TECHNOLOGY CO.,LTD
C3216

7th floor, Fuhua Science and
Technology Building, North Ring Avenue, Xili
Street, NanshanDistrict, Shenzhen

Passive Test For BT2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	Max (dB)	Min (dB)	irectivity (dBi)	Beamwidth (3dB)
2400	39.04	-4.09	0.52	-1.63	0.52	-15.74	4.09	60
2410	39.11	-4.08	0.73	-1.42	0.73	-16.62	4.08	60
2420	35.33	-4.52	0.47	-1.68	0.47	-17.32	4.52	60
2430	39.98	-3.98	1.14	-1.01	1.14	-17.19	3.98	30
2440	37.5	-4.26	0.98	-1.17	0.98	-17.75	4.26	30
2450	44.14	-3.55	1.69	-0.46	1.69	-17.33	3.55	30
2460	39.63	-4.02	1.17	-0.98	1.17	-18.04	4.02	60
2470	38.25	-4.17	0.95	-1.2	0.95	-18.88	4.17	60
2480	49.71	-3.04	2.06	-0.09	2.06	-18.64	3.04	60
2490	41.14	-3.86	1.2	-0.95	1.2	-19.36	3.86	60
2500	43.15	-3.65	1.32	-0.83	1.32	-19.07	3.65	60




ANT Size:4*2mm

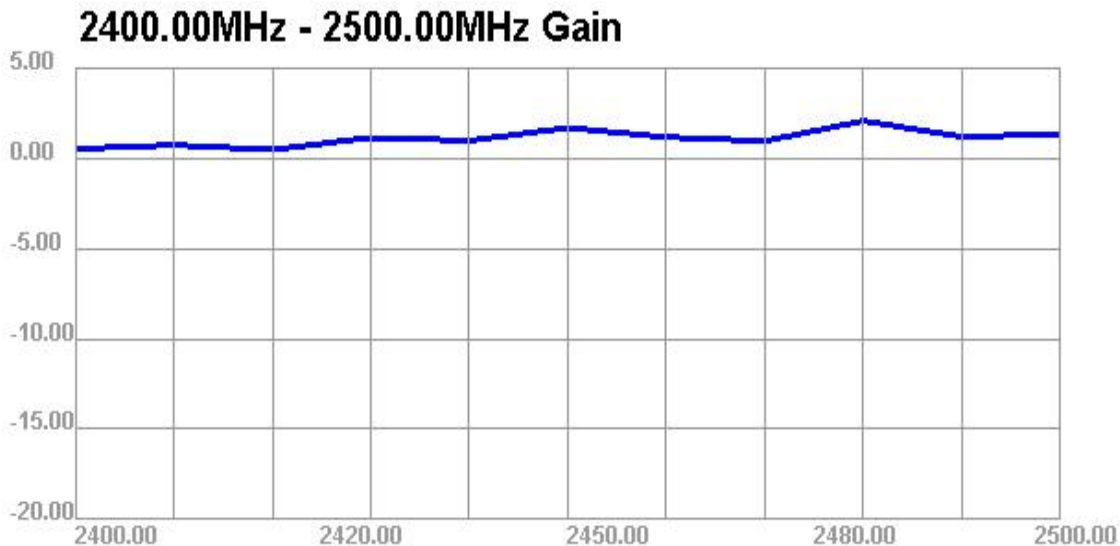


2400.00MHz - 2500.00MHz Efficiency




2400.000MHz

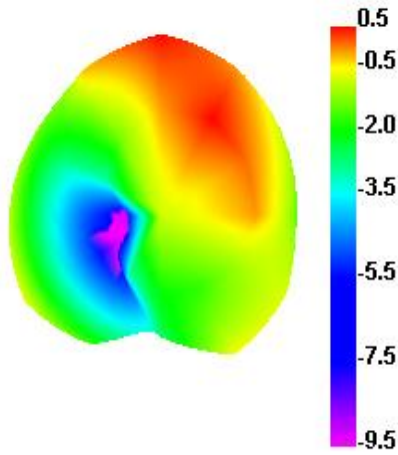


2400.000MHz H

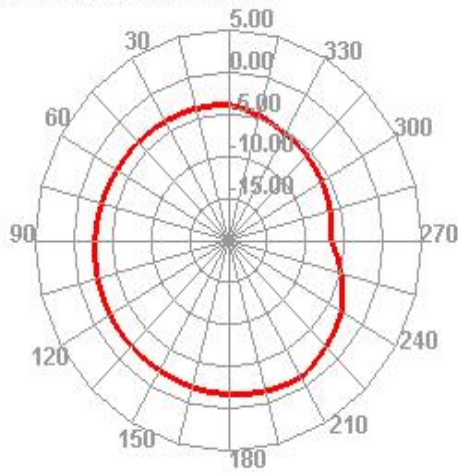


2400.000MHz E1

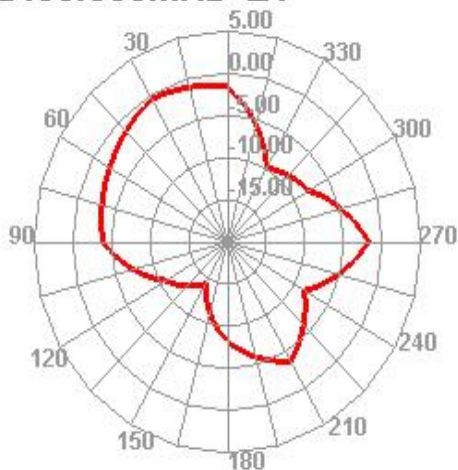


2400.000MHz E2

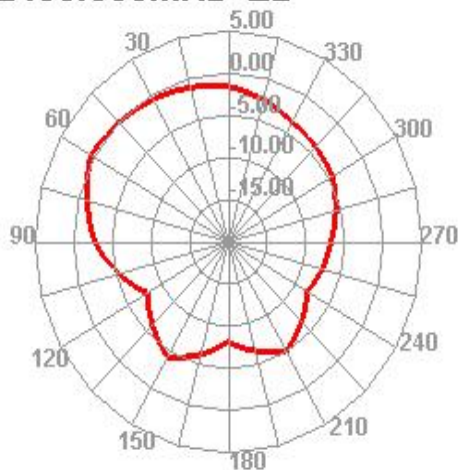


2450.000MHz

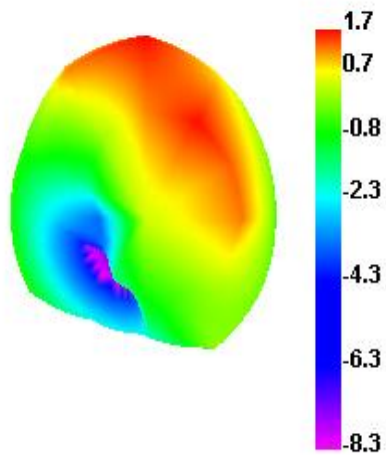


2450.000MHz H

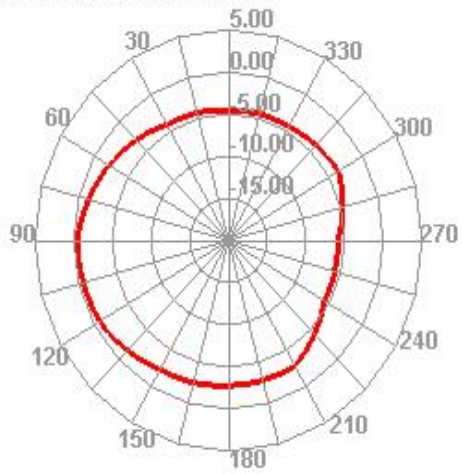


2450.000MHz E1

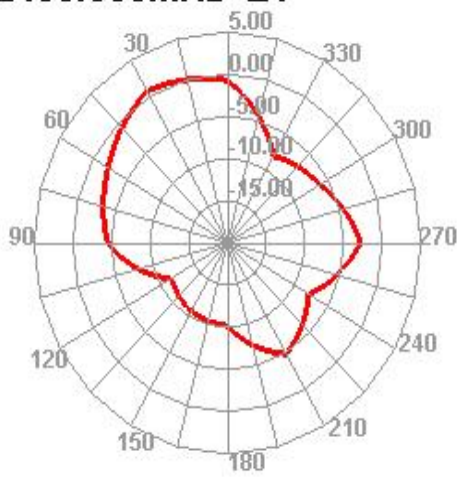


2450.000MHz E2

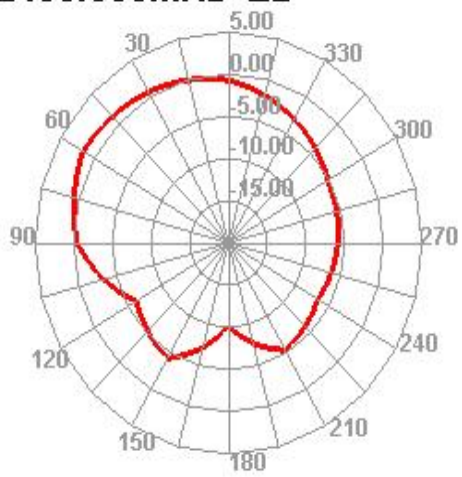


2500.000MHz

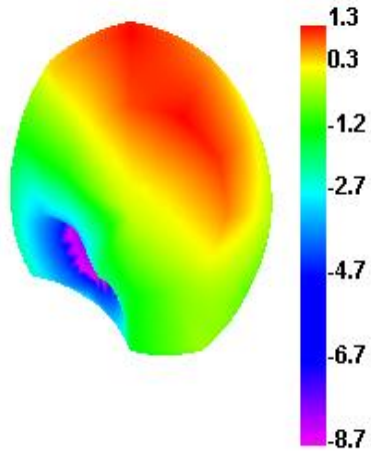

2500.000MHz H

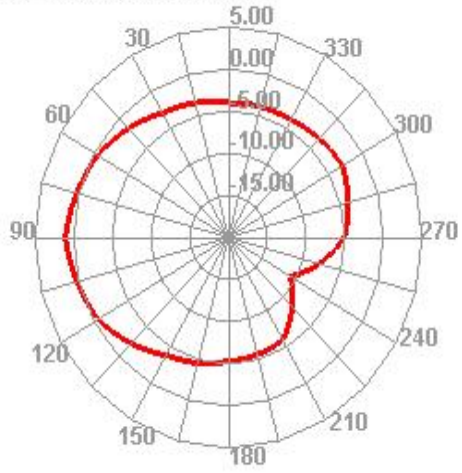

2500.000MHz E1

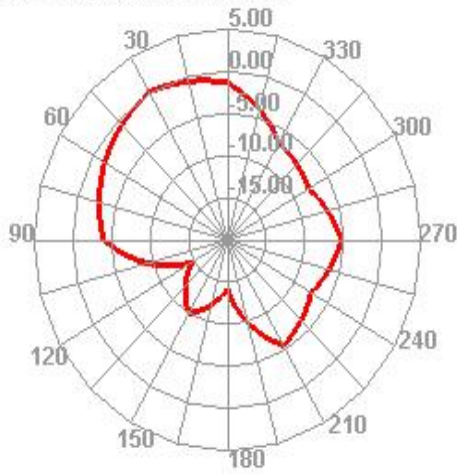

2500.000MHz E2

