

TEST REPORT

Applicant Name: Zeeva International Limited
 Address: Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road,
 Kowloon Bay, Hong Kong
 Report Number: SZ3220715-32244E-RF
 FCC ID: 2ADM5-ET-0358C-49

Test Standard (s)

FCC PART 15.235

Sample Description


Product Type: FIRE BREATHING DRAGON*PPK
 Model No.: ET-0358C
 Trade Mark: N/A
 Date Received: 2022-07-15
 Date of Test: 2022-07-20 to 2022-07-21
 Report Date: 2022-07-30

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:




Audy Yu
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
SPECIAL ACCESSORIES	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
§1.1307 (B) – RF EXPOSURE	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.235(A) & 15.235 (B) & 15.209 - RADIATED EMISSIONS AND BAND EDGES	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	11
TEST DATA	12
FCC §15.215(C) - 20DB EMISSION BANDWIDTH	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST DATA	16

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Product	FIRE BREATHING DRAGON*PPK
Tested Model	ET-0358C
SKU	White Dragon: 6670029
UPC	White Dragon: 1922345200367
Frequency Range	49.86 MHz
Maximum Field Strength@3m	76.31dB μ V/m@3m
Antenna Specification*	0dBi
Voltage Range	DC 1.5V*2 AAA batteries
Sample serial number	SZ3220715-32244E-RF-S1(Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, section 15.203, 15.205, 15.209, 15.215 and 15.235 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Special Accessories

No special accessories was used

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

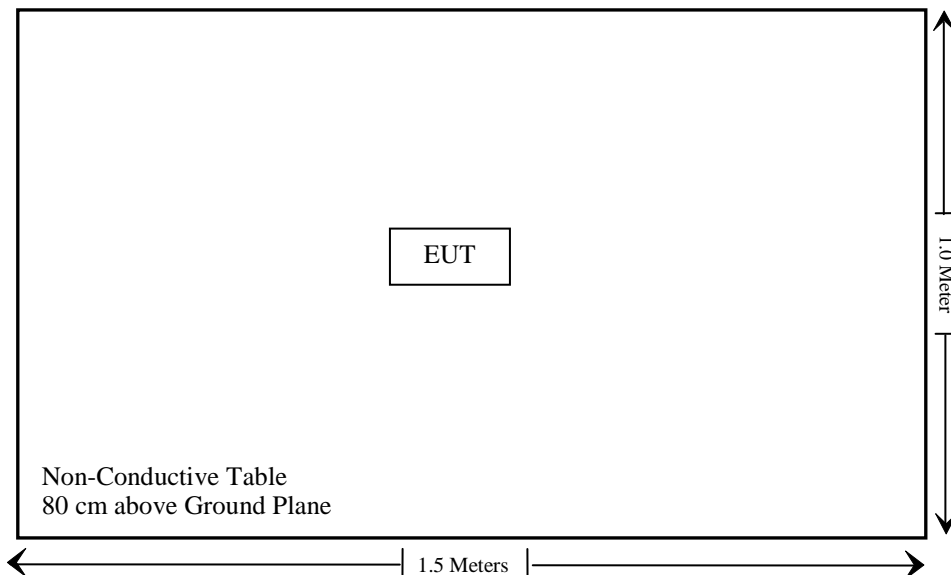

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)	RF Exposure	Compliant
§15.203	Antenna requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.235(a)& 15.235(b)&15.209	Radiated Emissions and Band Edges	Compliant
§15.215	20 dB bandwidth	Compliant

Not Applicable: The EUT is powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 – 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Test Result

For worst case:

Mode	Frequency	Maximum Tune-up Conducted Power		1-mW test Exemption
	(MHz)	(dBm)	(mW)	
SRD	49.86	-18	0.016	Yes

Note: The tune-up power was declared by the applicant.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has an integral antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliance.

FCC §15.235(a) & 15.235 (b) & 15.209 - RADIATED EMISSIONS AND BAND EDGES

Applicable Standard

FCC 15.235(a)

The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.


FCC 15.235(b)

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

EUT Setup

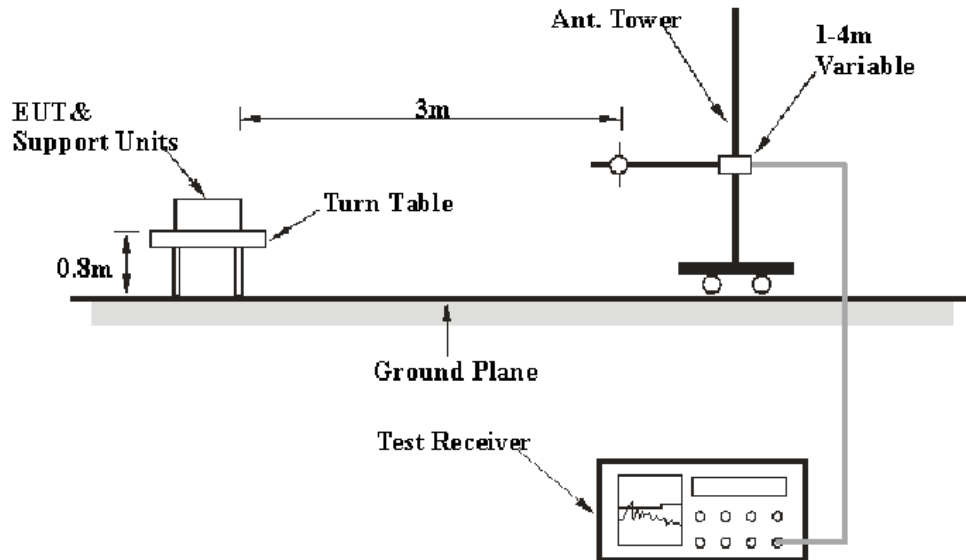

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.235(a) & 15.235 (b) & 15.209 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W
30MHz – 1000 MHz	120 kHz	300 kHz

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All radiated emission data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode for fundamental test.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Corrected Amplitude & Margin Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Level} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin / Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation calculation is as follows:

$$\text{Margin / Over limit} = \text{Level} - \text{Limit}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.235(a) & 15.235 (b) & 15.209.

Test Data**Environmental Conditions**

Temperature:	28 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Level Li from 2022-07-20 to 2022-07-21.


Test mode: Transmitting (Scan with X-AXIS, Y-AXIS, Z-AXIS, the worst case was Y-AXIS which was recorded)

Note: 49.86MHz is the fundamental

Frequency (MHz)	Reading (dB μ V/m)	PK/QP/AV	Turntable Degree	Rx Antenna		Corrected Factor (dB)	Absolute Level (dB μ V/m)	FCC Part 15.235(a)	
				Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)
49.86	66.16	PK	151	1.2	H	-9.92	56.24	100	-43.76
49.86	86.23	PK	67	2.2	V	-9.92	76.31	100	-23.69

30 MHz ~ 1GHz


Horizontal

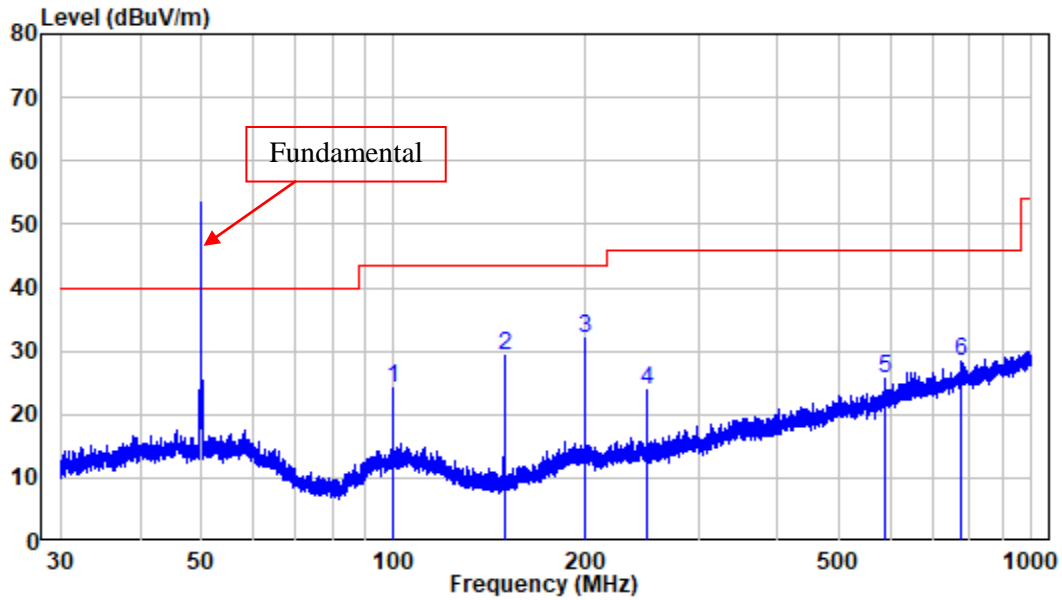

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : SZ3220715-32244E-RF
 Test Mode: TX

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	99.703	-11.86	36.12	24.26	43.50	-19.24	Peak
2	149.551	-15.29	44.62	29.33	43.50	-14.17	Peak
3	199.460	-11.44	43.43	31.99	43.50	-11.51	Peak
4	249.316	-10.72	34.60	23.88	46.00	-22.12	Peak
5	590.456	-2.74	28.45	25.71	46.00	-20.29	Peak
6	774.158	0.01	28.37	28.38	46.00	-17.62	Peak


Vertical

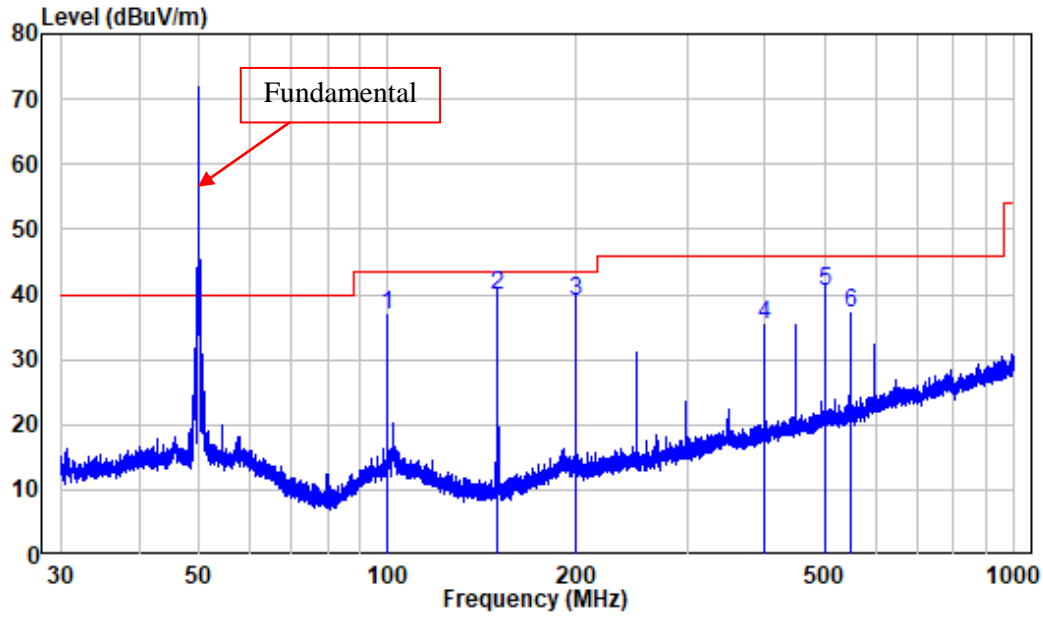

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZ3220715-32244E-RF
 Test Mode: TX


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	99.703	-11.86	48.67	36.81	43.50	-6.69	Peak
2	149.551	-15.29	55.11	39.82	43.50	-3.68	QP
3	199.548	-11.43	50.39	38.96	43.50	-4.54	QP
4	398.855	-6.75	42.00	35.25	46.00	-10.75	Peak
5	498.768	-4.31	44.87	40.56	46.00	-5.44	QP
6	548.538	-4.02	41.06	37.04	46.00	-8.96	Peak

Band Edge: 26 dB Band Edge-Left

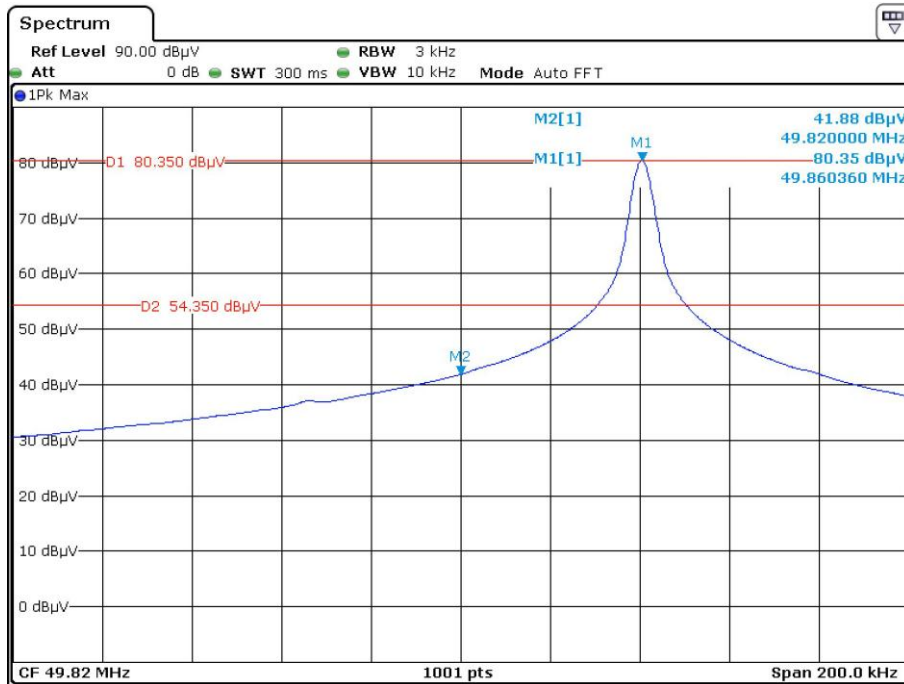

Date: 21.JUL.2022 14:02:44

26 dB Band Edge-Right

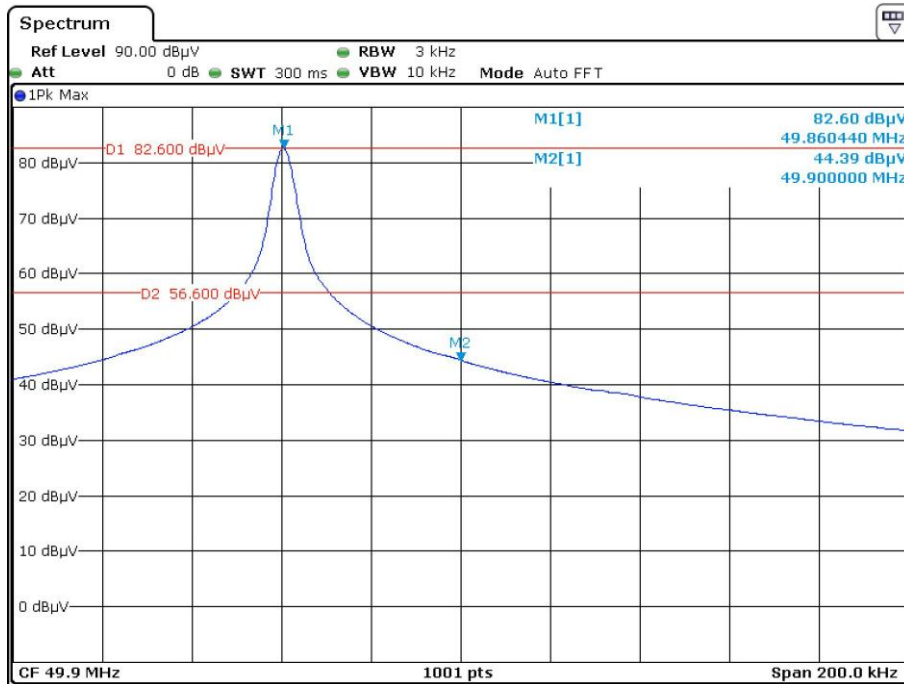

Date: 21.JUL.2022 14:09:14

FCC §15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.1 kPa


The testing was performed by Glenn Jiang on 2022-07-21.

Test Mode: Transmitting

Please refer to the following table and plots.

F_L (MHz)	F_H (MHz)	Permitted frequency range (MHz)	Result
49.8570530	49.8635960	49.82-49.90	Compliant

20 dB Emission Bandwidth

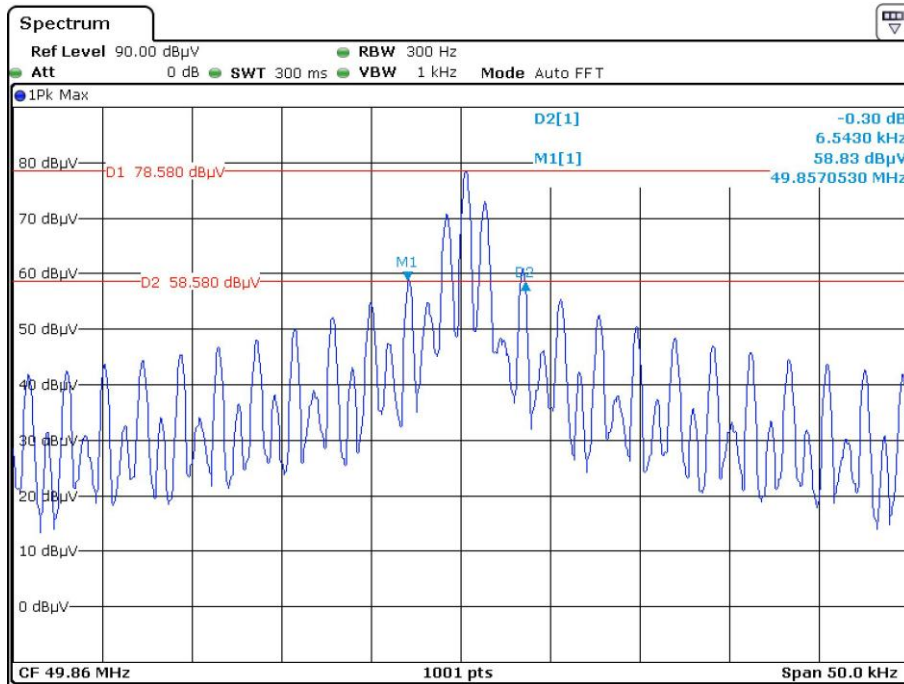

Date: 21.JUL.2022 14:13:51

***** END OF REPORT *****