

天线产品规格书

PRODUCTSPECIFICATION

1、产品技术指标 (PRODUCTTECHNICALSPECIFICATION)

电性能指标 ElectricalSpecifications	
频率范围 FrequencyRange (MHz)	27.000MHz-27.500MHz
频带宽度 Bandwidth (MHz)	50
输入阻抗 InputImpendence (Ω)	50
电压驻波比 V.S.W.R	≤ 2
增益 Gain (dBi)	0 \pm 3dBi
极化形式Polarization Type	垂直Vertical
雷电保护 LightningProtection	交流接地 Ac Ground
功率容量 PowerCapacity (w)	0.5
机械指标 MechanicalSpecifications	
天线长度 AntennaLength (mm)	$\varnothing 4.0 \times 20 \text{CM}$
辐射体 Radiator	钢CS
连接器型号 Connect Type	直接焊接 DirectWelment
工作温度 Working Temp($^{\circ}\text{C}$)	-40~65
储藏温度 StorageTemperature($^{\circ}\text{C}$)	-40~80
颜色 Color	白色WHITE
重量Weight (g)	6.7g(15cm 长 long)
制造商 Maker	Huayu Electronic Factory
地址 Address	2F of Xinnuo Building, Xinculiao, Longhu District, Shantou City, Guangdong

产品简介 (Product introduction)

该天线是专为无线遥控设计生产的，天线具有性价比高，结构小巧，生产方便的优点。


This antenna is designed and produced specifically for wireless remote control, with the advantages of high cost-effectiveness, compact structure, and convenient production

2、产品图片 (PRODUCT PICTURE)



3、产品规格图 (PRODUCT SPECIFICATION CHART)

4、驻波图 (STATIONARY WAVE PATTERN)

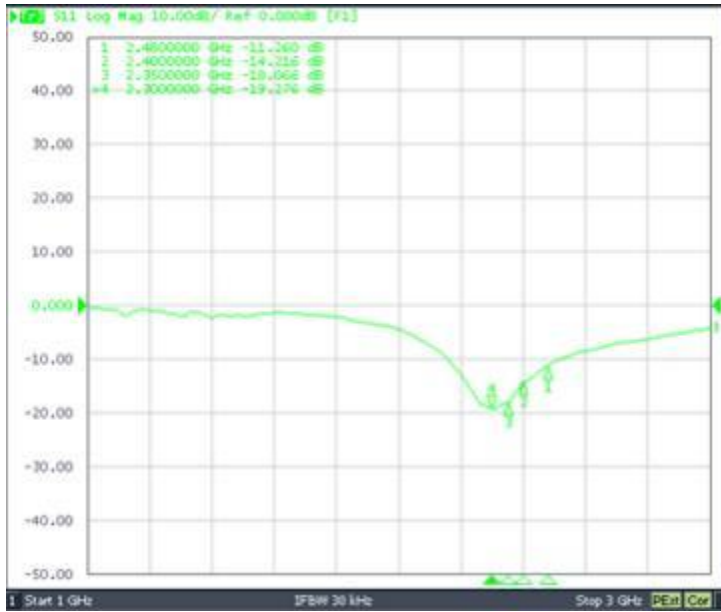

5、增益图 (Gainfigure)

