




TEST REPORT

Applicant Name : Zeeva International Limited
Address : Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Hong Kong
Report Number : RA230110-01704E-RF-00
FCC ID: 2ADM5-SP-0215

Test Standard (s)

FCC PART 15.247

Sample Description


Product Type: BT KARAOKE MACHINE
Model No.: SP-0215
Multiple Model(s) No.: N/A
SKU Number.: 7695026
UPC Number.: 1922347100351
Trade Mark: 
Date Received: 2023/01/10
Report Date: 2023/02/15

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Andy Yu
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

| | |
|---|-----------|
| DOCUMENT REVISION HISTORY | 4 |
| GENERAL INFORMATION..... | 5 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 5 |
| OBJECTIVE | 5 |
| TEST METHODOLOGY | 5 |
| MEASUREMENT UNCERTAINTY | 6 |
| TEST FACILITY | 6 |
| SYSTEM TEST CONFIGURATION..... | 7 |
| DESCRIPTION OF TEST CONFIGURATION | 7 |
| EUT EXERCISE SOFTWARE | 7 |
| SPECIAL ACCESSORIES..... | 7 |
| EQUIPMENT MODIFICATIONS | 7 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 7 |
| EXTERNAL I/O CABLE..... | 7 |
| BLOCK DIAGRAM OF TEST SETUP | 8 |
| SUMMARY OF TEST RESULTS | 10 |
| TEST EQUIPMENT LIST | 11 |
| FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)..... | 13 |
| FCC §15.203 – ANTENNA REQUIREMENT | 15 |
| APPLICABLE STANDARD | 15 |
| ANTENNA CONNECTOR CONSTRUCTION | 15 |
| FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS | 16 |
| APPLICABLE STANDARD | 16 |
| EUT SETUP | 16 |
| EMI TEST RECEIVER SETUP..... | 16 |
| TEST PROCEDURE | 16 |
| TRANSD FACTOR & MARGIN CALCULATION..... | 17 |
| TEST DATA | 17 |
| FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS | 20 |
| APPLICABLE STANDARD | 20 |
| EUT SETUP | 20 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 21 |
| TEST PROCEDURE | 21 |
| FACTOR & MARGIN CALCULATION | 21 |
| TEST DATA | 21 |
| FCC §15.247(A) (1)-CHANNEL SEPARATION TEST | 29 |
| APPLICABLE STANDARD | 29 |
| TEST PROCEDURE | 29 |
| TEST DATA | 29 |
| FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH | 30 |
| APPLICABLE STANDARD | 30 |
| TEST PROCEDURE | 30 |
| TEST DATA | 31 |

FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST.....32
 APPLICABLE STANDARD32
 TEST PROCEDURE32
 TEST DATA32

FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....33
 APPLICABLE STANDARD33
 TEST PROCEDURE33
 TEST DATA33

FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT34
 APPLICABLE STANDARD34
 TEST PROCEDURE34
 TEST DATA34

FCC §15.247(D) - BAND EDGES TESTING.....35
 APPLICABLE STANDARD35
 TEST PROCEDURE35
 TEST DATA35

APPENDIX36
 APPENDIX A: 20dB EMISSION BANDWIDTH.....36
 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH40
 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER44
 APPENDIX D: CARRIER FREQUENCY SEPARATION48
 APPENDIX E: TIME OF OCCUPANCY50
 APPENDIX F: NUMBER OF HOPPING CHANNELS57
 APPENDIX G: BAND EDGE MEASUREMENTS59

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|-----------------------|-------------------------|------------------|
| 0 | RA230110-01704E-RF-00 | Original Report | 2023-02-15 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|---|---|
| SKU Number.* (Barcode of product) | 7695026 (provided by the applicant) |
| UPC Number.* (Product code of applicant's internal system) | 1922347100351 (provided by the applicant) |
| Frequency Range | Bluetooth: 2402~2480MHz |
| Maximum conducted Peak output power | Bluetooth: -0.36dBm |
| Modulation Technique | Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Antenna Specification* | 3.4 dBi (provided by the applicant) |
| Voltage Range | DC3.7V from battery or DC5V from USB Charging Port |
| Sample serial number | 1YSL-1 For Conducted Emissions 1YSN-3 For Radiated Emissions and RF conducted (Assigned by ATC) |
| Sample/EUT Status | Good condition |

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

| Parameter | | Uncertainty |
|------------------------------------|-----------------|-------------|
| Occupied Channel Bandwidth | | 5% |
| RF output power, conducted | | 0.73dB |
| Unwanted Emission, conducted | | 1.6dB |
| AC Power Lines Conducted Emissions | | 2.72dB |
| Emissions,Radiated | 30MHz - 1GHz | 4.28dB |
| | 1GHz - 18GHz | 4.98dB |
| | 18GHz - 26.5GHz | 5.06dB |
| Temperature | | 1 °C |
| Humidity | | 6% |
| Supply voltages | | 0.4% |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“BT_Toolv1.1.2.exe” exercise software was used and the power level is 7*, which provided by applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|-----------------------------|-------------|--------------|---------------|
| Huawei | Adapter | HW-050450C00 | Unknown |
| Bull | Receptacle | 902# | Unknown |
| Zeeva International Limited | Microphone | SP-0215 | Unknown |

External I/O Cable


| Cable Description | Length (m) | From Port | To |
|-----------------------------------|------------|------------|---------------|
| Un-shielding Detachable USB Cable | 0.5 | EUT | Adapter |
| Unshielded Un-detachable Cable | 1.8 | Receptacle | LISN/AC Mains |
| Unshielded Un-detachable Cable | 1.89 | Microphone | EUT |

Block Diagram of Test Setup


For conducted emission

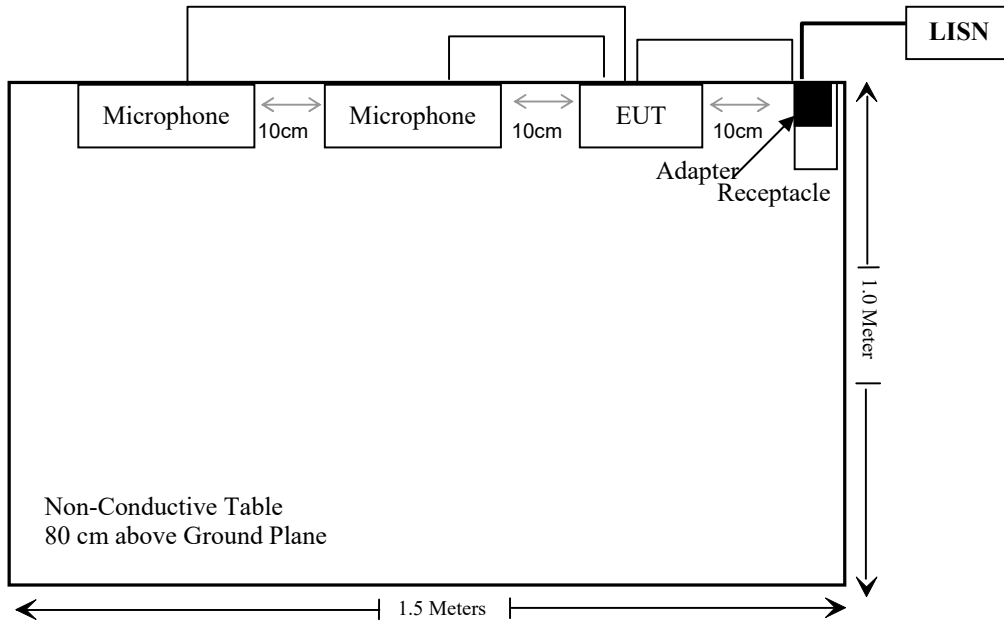

For Radiated Emissions below 1 GHz:

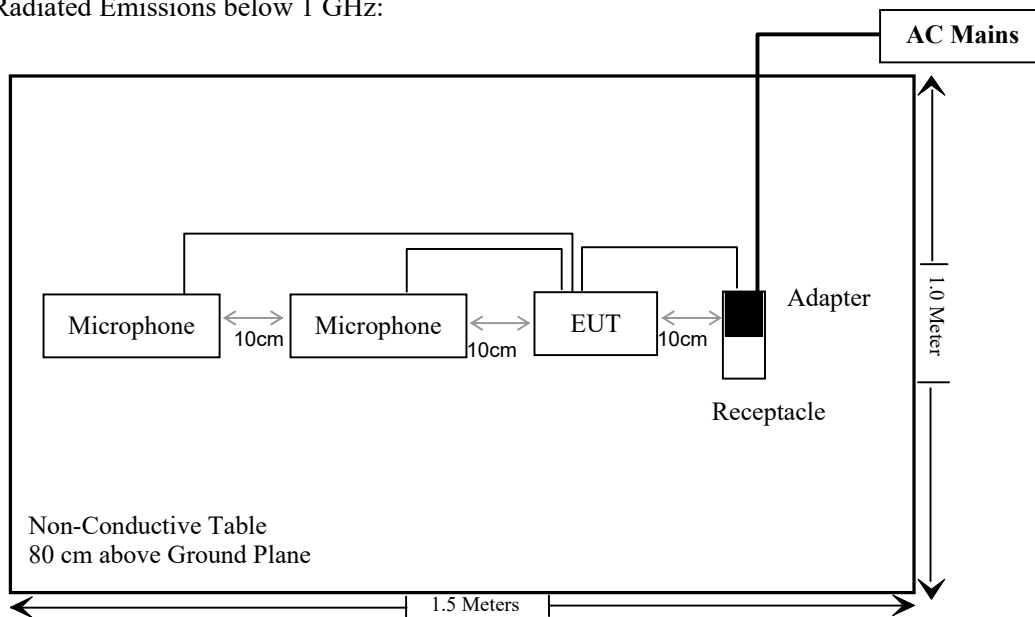

For Radiated Emissions above 1 GHz:

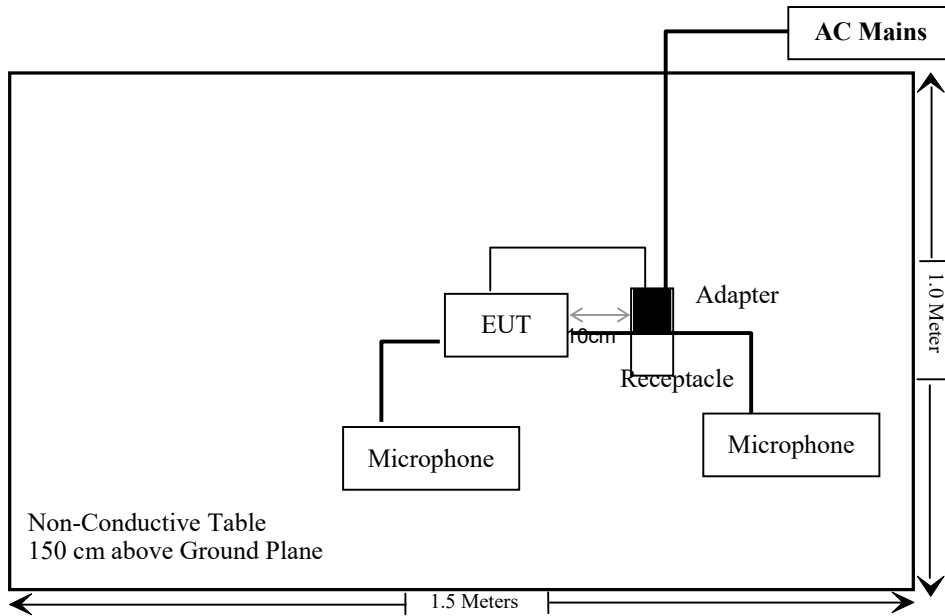

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---|---|---------------|
| §15.247 (i) & §1.1307 (b) (3) & §2.1091 | Maximum Permissible Exposure(MPE) | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §15.207(a) | AC Line Conducted Emissions | Compliant |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions | Compliant |
| §15.247(a)(1) | 20 dB Emission Bandwidth & 99% Occupied Bandwidth | Compliant |
| §15.247(a)(1) | Channel Separation Test | Compliant |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliant |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliant |
| §15.247(b)(1) | Peak Output Power Measurement | Compliant |
| §15.247(d) | Band edges | Compliant |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--|-------------------|-------------------|---------------|------------------|----------------------|
| Conducted Emissions Test | | | | | |
| Rohde& Schwarz | EMI Test Receiver | ESCI | 100784 | 2022/11/25 | 2023/11/24 |
| Rohde & Schwarz | L.I.S.N. | ENV216 | 101314 | 2022/11/25 | 2023/11/24 |
| Anritsu Corp | 50 Coaxial Switch | MP59B | 6100237248 | 2022/12/07 | 2023/12/06 |
| Unknown | RF Coaxial Cable | No.17 | N0350 | 2022/11/25 | 2023/11/24 |
| Conducted Emission Test Software: e3 19821b (V9) | | | | | |
| Radiated Emissions Test | | | | | |
| Rohde& Schwarz | Test Receiver | ESR | 102725 | 2022/11/25 | 2023/11/24 |
| Rohde&Schwarz | Spectrum Analyzer | FSV40 | 101949 | 2022/11/25 | 2023/11/24 |
| SONOMA INSTRUMENT | Amplifier | 310 N | 186131 | 2022/11/08 | 2023/11/07 |
| A.H. Systems, inc. | Preamplifier | PAM-0118P | 135 | 2022/11/08 | 2023/11/07 |
| Quinstar | Amplifier | QLW-18405536-J0 | 15964001002 | 2022/11/08 | 2023/11/07 |
| Schwarzbeck | Bilog Antenna | VULB9163 | 9163-323 | 2021/07/06 | 2024/07/05 |
| Schwarzbeck | Horn Antenna | BBHA9120D | 9120D-1067 | 2022/11/30 | 2025/11/29 |
| Schwarzbeck | HORN ANTENNA | BBHA9170 | 9170-359 | 2022/12/26 | 2025/12/25 |
| Radiated Emission Test Software: e3 19821b (V9) | | | | | |
| Unknown | RF Coaxial Cable | No.10 | N050 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.11 | N1000 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.12 | N040 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.13 | N300 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.14 | N800 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.15 | N600 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Coaxial Cable | No.16 | N650 | 2022/11/25 | 2023/11/24 |
| Wainwright | High Pass Filter | WHKX3.6/18 G-10SS | 5 | 2022/11/25 | 2023/11/24 |

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------|----------|---------------|------------------|----------------------|
| RF conducted test | | | | | |
| Rohde&Schwarz | Spectrum Analyzer | FSV-40 | 101590 | 2022/11/25 | 2023/11/24 |
| Tonscend | RF Control Unit | JS0806-2 | 19G8060182 | 2022/10/24 | 2023/10/23 |
| WEINSCHEL | 10dB Attenuator | 5324 | AU 3842 | 2022/11/25 | 2023/11/24 |
| Unknown | RF Cable | Unknown | 1 | Each time | Unknown |

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

| RF Source frequency (MHz) | Threshold ERP (watts) |
|---------------------------|-----------------------|
| 0.3-1.34 | $1,920 R^2$. |
| 1.34-30 | $3,450 R^2/f^2$. |
| 30-300 | $3.83 R^2$. |
| 300-1,500 | $0.0128 R^2f$. |
| 1,500-100,000 | $19.2R^2$. |

R is the minimum separation distance in meters

f = frequency in MHz

Result

| Mode | Frequency (MHz) | Tune up conducted power | Antenna Gain | | ERP | | Evaluation Distance (m) | ERP Limit (mW) |
|------|-----------------|-------------------------|--------------|-------|-------|-------|-------------------------|----------------|
| | | (dBm) | (dBi) | (dBd) | (dBm) | (mW) | | |
| BT | 2402-2480 | 1 | 3.4 | 1.25 | 2.25 | 1.679 | 0.2 | 768 |

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
 2. 0dBd=2.15dBi.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 3.4dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

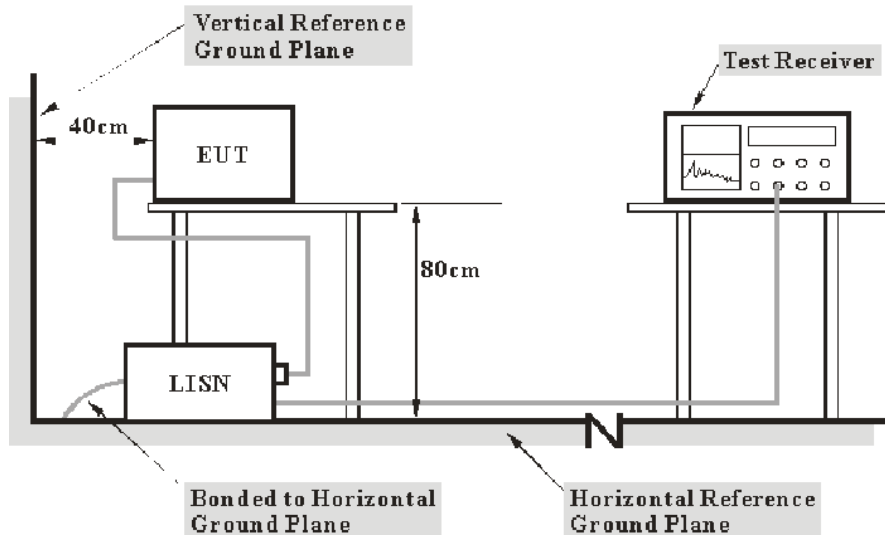

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24 °C |
| Relative Humidity: | 59% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Jason Liu on 2023-01-14.

EUT operation mode: Transmitting (the worst case is 8DPSK Mode, high channel)


AC 120V/60 Hz, Line

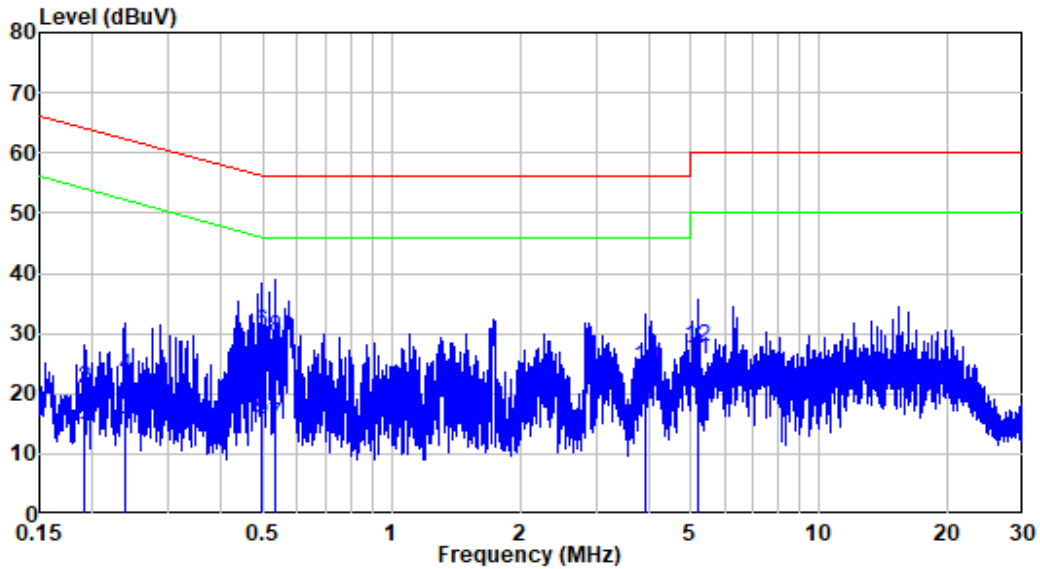

Site : Shielding Room
 Condition: Line
 Job No. : RA230110-01704E-RF
 Mode : Charging+BT Transmitting

| | Freq | Factor | Read Level | Limit Level | Over Line | Over Limit | Remark |
|----|-------|--------|------------|-------------|-----------|------------|---------|
| | MHz | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.192 | 9.90 | 3.20 | 13.10 | 53.95 | -40.85 | Average |
| 2 | 0.192 | 9.90 | 10.85 | 20.75 | 63.95 | -43.20 | QP |
| 3 | 0.237 | 9.88 | 5.94 | 15.82 | 52.20 | -36.38 | Average |
| 4 | 0.237 | 9.88 | 13.07 | 22.95 | 62.20 | -39.25 | QP |
| 5 | 0.494 | 9.80 | 5.77 | 15.57 | 46.09 | -30.52 | Average |
| 6 | 0.494 | 9.80 | 20.53 | 30.33 | 56.09 | -25.76 | QP |
| 7 | 0.536 | 9.83 | 5.08 | 14.91 | 46.00 | -31.09 | Average |
| 8 | 0.536 | 9.83 | 19.59 | 29.42 | 56.00 | -26.58 | QP |
| 9 | 3.930 | 9.94 | 8.02 | 17.96 | 46.00 | -28.04 | Average |
| 10 | 3.930 | 9.94 | 14.66 | 24.60 | 56.00 | -31.40 | QP |
| 11 | 5.177 | 9.95 | 15.73 | 25.68 | 50.00 | -24.32 | Average |
| 12 | 5.177 | 9.95 | 17.68 | 27.63 | 60.00 | -32.37 | QP |

AC 120V/60 Hz, Neutral

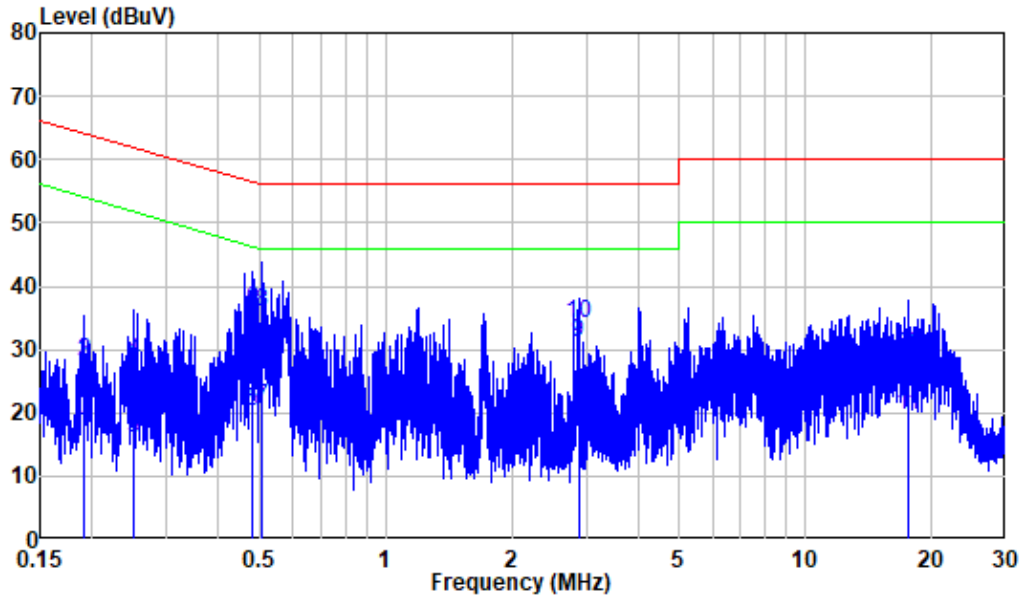

Site : Shielding Room
 Condition: Neutral
 Job No. : RA230110-01704E-RF
 Mode : Charging+BT Transmitting

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|----|--------|--------|------------|-------|------------|------------|---------|
| | MHz | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.191 | 9.80 | 7.19 | 16.99 | 53.98 | -36.99 | Average |
| 2 | 0.191 | 9.80 | 18.36 | 28.16 | 63.98 | -35.82 | QP |
| 3 | 0.252 | 9.83 | 6.24 | 16.07 | 51.70 | -35.63 | Average |
| 4 | 0.252 | 9.83 | 18.21 | 28.04 | 61.70 | -33.66 | QP |
| 5 | 0.481 | 9.90 | 10.22 | 20.12 | 46.32 | -26.20 | Average |
| 6 | 0.481 | 9.90 | 26.23 | 36.13 | 56.32 | -20.19 | QP |
| 7 | 0.507 | 9.90 | 10.97 | 20.87 | 46.00 | -25.13 | Average |
| 8 | 0.507 | 9.90 | 25.97 | 35.87 | 56.00 | -20.13 | QP |
| 9 | 2.877 | 9.83 | 21.32 | 31.15 | 46.00 | -14.85 | Average |
| 10 | 2.877 | 9.83 | 24.18 | 34.01 | 56.00 | -21.99 | QP |
| 11 | 17.568 | 10.13 | 9.46 | 19.59 | 50.00 | -30.41 | Average |
| 12 | 17.568 | 10.13 | 19.00 | 29.13 | 60.00 | -30.87 | QP |


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

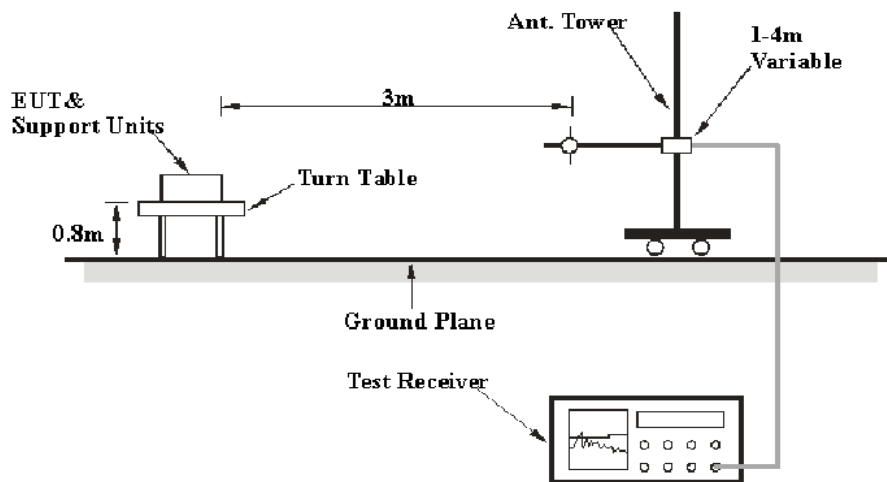

Above 1GHz:

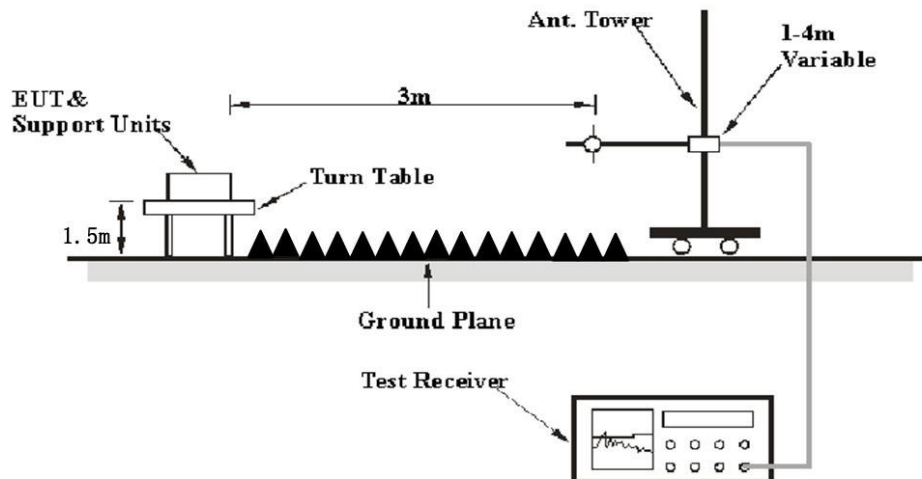

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | PK |
| | 1 MHz | 10 Hz | / | Average |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 24~25.5°C |
| Relative Humidity: | 59~70% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Jaosn Liu on 2023-02-10 for below 1GHz, Andy Yu on 2023-01-14 and 2023-02-15 for above 1GHz


EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded

30MHz-1GHz: (worst case is 8DPSK Mode, high channel)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.


Horizontal:

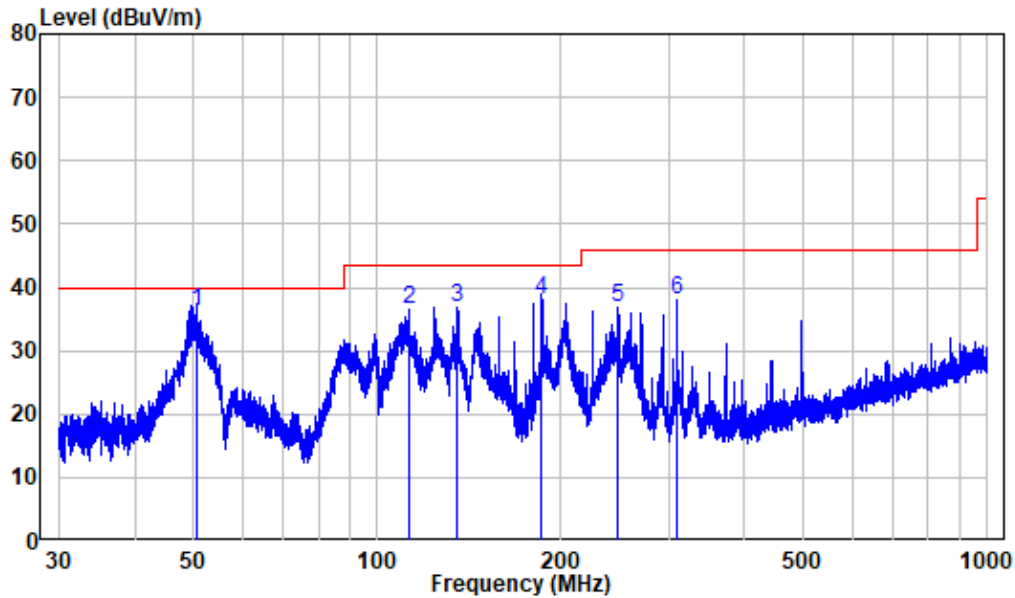

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230110-01704E-RF
 Test Mode: Charging+BT Transmitting

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 50.475 | -9.92 | 46.21 | 36.29 | 40.00 | -3.71 | QP |
| 2 | 112.821 | -12.38 | 48.91 | 36.53 | 43.50 | -6.97 | Peak |
| 3 | 135.447 | -15.04 | 51.88 | 36.84 | 43.50 | -6.66 | Peak |
| 4 | 185.951 | -12.06 | 49.95 | 37.89 | 43.50 | -5.61 | QP |
| 5 | 248.334 | -10.68 | 47.65 | 36.97 | 46.00 | -9.03 | Peak |
| 6 | 310.406 | -8.88 | 46.89 | 38.01 | 46.00 | -7.99 | Peak |

Vertical

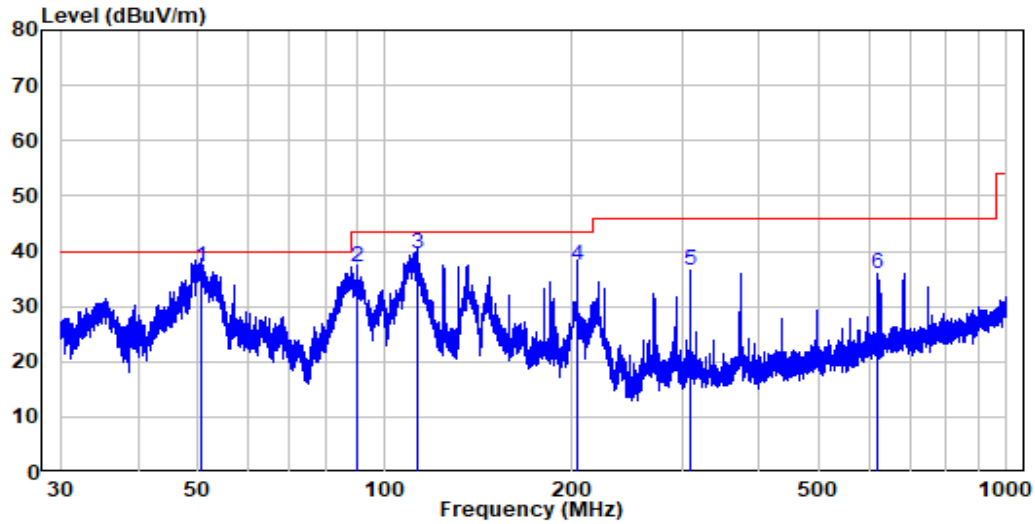

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230110-01704E-RF
 Test Mode: Charging+BT Transmitting

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 50.586 | -9.93 | 47.20 | 37.27 | 40.00 | -2.73 | QP |
| 2 | 90.339 | -13.90 | 51.00 | 37.10 | 43.50 | -6.40 | QP |
| 3 | 112.821 | -12.38 | 52.04 | 39.66 | 43.50 | -3.84 | QP |
| 4 | 203.255 | -11.68 | 49.05 | 37.37 | 43.50 | -6.13 | QP |
| 5 | 310.542 | -8.88 | 45.34 | 36.46 | 46.00 | -9.54 | Peak |
| 6 | 620.982 | -2.50 | 38.48 | 35.98 | 46.00 | -10.02 | Peak |

Above 1GHz: (worst case is 8DPSK Mode)

| Frequency (MHz) | Receiver | | Turntable Angle Degree | Rx Antenna | | Factor (dB/m) | Absolute Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-------------------------|----------------------|--------|------------------------|------------|-------------|---------------|-------------------------------|----------------------|-------------|
| | Reading (dB μ V) | PK/Ave | | Height (m) | Polar (H/V) | | | | |
| Low Channel(2402MHz) | | | | | | | | | |
| 2310 | 61.64 | PK | 358 | 1.2 | H | -7.24 | 54.40 | 74 | -19.60 |
| 2310 | 61.37 | PK | 159 | 2.2 | V | -7.24 | 54.13 | 74 | -19.87 |
| 2390 | 62.96 | PK | 157 | 1.4 | H | -7.22 | 55.74 | 74 | -18.26 |
| 2390 | 63.41 | PK | 240 | 1.7 | V | -7.22 | 56.19 | 74 | -17.81 |
| 4804 | 60.38 | PK | 246 | 1.7 | H | -3.51 | 56.87 | 74 | -17.13 |
| 4804 | 60.86 | PK | 233 | 1.7 | V | -3.51 | 57.35 | 74 | -16.65 |
| Middle Channel(2441MHz) | | | | | | | | | |
| 4882 | 58.09 | PK | 203 | 2 | H | -3.37 | 54.72 | 74 | -19.28 |
| 4882 | 58.44 | PK | 15 | 2 | V | -3.37 | 55.07 | 74 | -18.93 |
| High Channel(2480 MHz) | | | | | | | | | |
| 2483.5 | 66.66 | PK | 79 | 1.7 | H | -7.20 | 59.46 | 74 | -14.54 |
| 2483.5 | 65.82 | PK | 188 | 2.2 | V | -7.20 | 58.62 | 74 | -15.38 |
| 2500 | 63.18 | PK | 279 | 1 | H | -7.18 | 56.00 | 74 | -18.00 |
| 2500 | 63.07 | PK | 149 | 1.6 | V | -7.18 | 55.89 | 74 | -18.11 |
| 4960 | 56.87 | PK | 21 | 1.6 | H | -3.01 | 53.86 | 74 | -20.14 |
| 4960 | 56.83 | PK | 128 | 1.6 | V | -3.01 | 53.82 | 74 | -20.18 |

| Field Strength of Average | | | | | | | |
|---------------------------|-------------------------------------|-------------|-----------------------------------|------------------------------------|----------------------|-------------|----------|
| Frequency (MHz) | Peak Measurement @3m (dB μ V/m) | Polar (H/V) | Duty Cycle Correction Factor (dB) | Corrected Amplitude (dB μ V/m) | FCC Part 15.247 | | |
| | | | | | Limit (dB μ V/m) | Margin (dB) | Comment |
| Low Channel(2402MHz) | | | | | | | |
| 2310 | 54.40 | H | -24.73 | 29.67 | 54 | -24.33 | Bandedge |
| 2310 | 54.13 | V | -24.73 | 29.40 | 54 | -24.60 | Bandedge |
| 2390 | 55.74 | H | -24.73 | 31.01 | 54 | -22.99 | Bandedge |
| 2390 | 56.19 | V | -24.73 | 31.46 | 54 | -22.54 | Bandedge |
| 4804 | 56.87 | H | -24.73 | 32.14 | 54 | -21.86 | Harmonic |
| 4804 | 57.35 | V | -24.73 | 32.62 | 54 | -21.38 | Harmonic |
| Middle Channel(2441MHz) | | | | | | | |
| 4882 | 54.72 | H | -24.73 | 29.99 | 54 | -24.01 | Harmonic |
| 4882 | 55.07 | V | -24.73 | 30.34 | 54 | -23.66 | Harmonic |
| High Channel(2480MHz) | | | | | | | |
| 2483.5 | 59.46 | H | -24.73 | 34.73 | 54 | -19.27 | Bandedge |
| 2483.5 | 58.62 | V | -24.73 | 33.89 | 54 | -20.11 | Bandedge |
| 2500 | 56.00 | H | -24.73 | 31.27 | 54 | -22.73 | Bandedge |
| 2500 | 55.89 | V | -24.73 | 31.16 | 54 | -22.84 | Bandedge |
| 4960 | 53.86 | H | -24.73 | 29.13 | 54 | -24.87 | Harmonic |
| 4960 | 53.82 | V | -24.73 | 29.09 | 54 | -24.91 | Harmonic |

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

For fundamental, the peak value compliance with the limit of Average.


Duty cycle = Ton/100ms = 2.9*2/100=0.058

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.058 = -24.73

Duty cycle

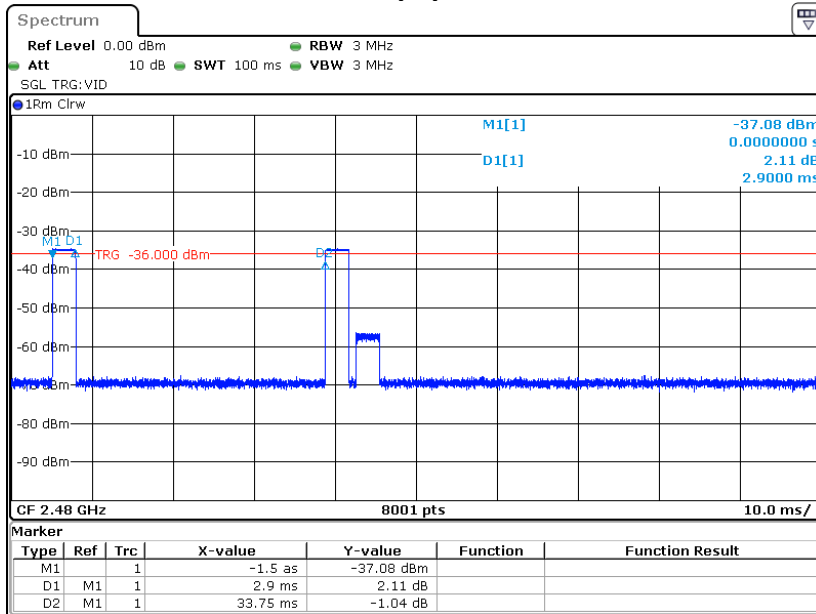

Date: 14.JAN.2023 13:07:45

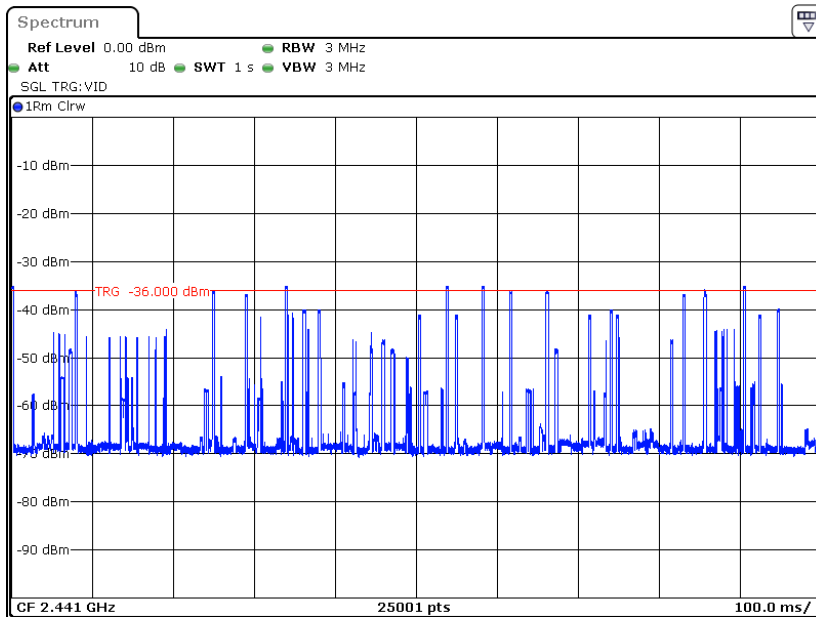


Date: 15.FEB.2023 17:51:17


1-18GHz

Pre-scan for Low Channel

Horizontal:

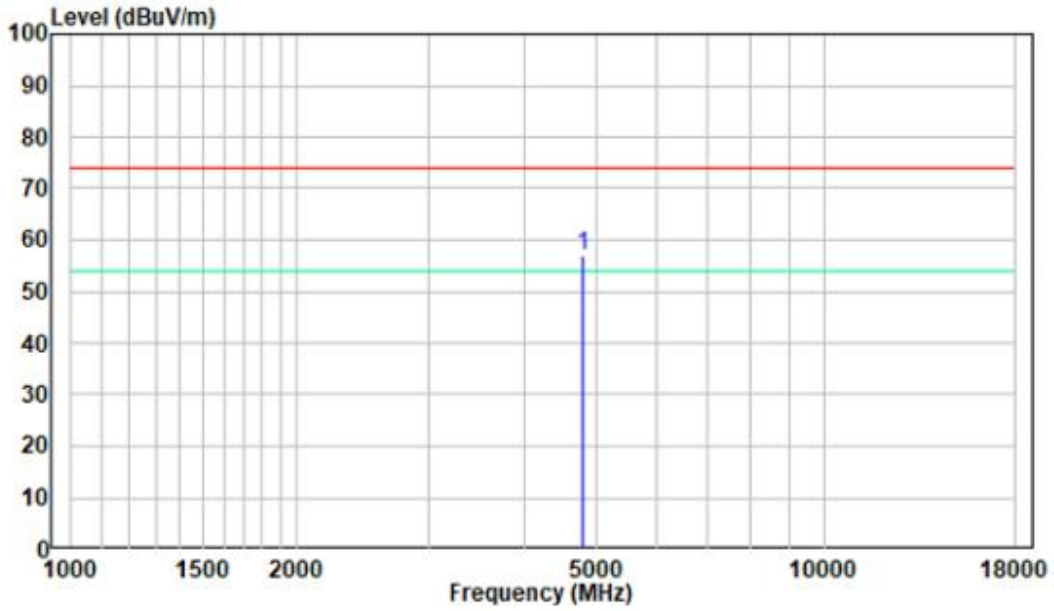


Vertical:

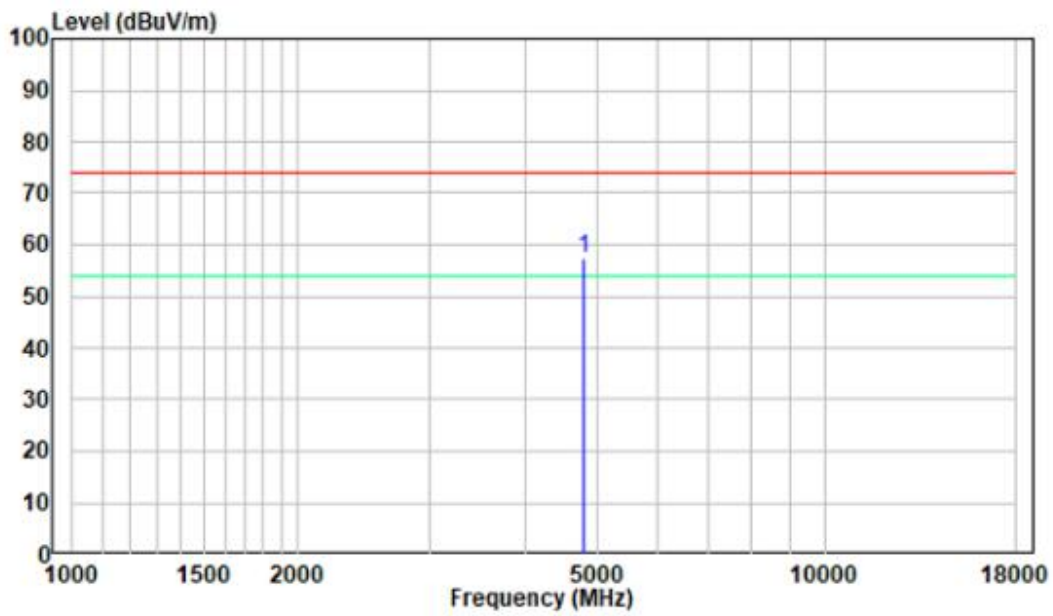


18-25GHz

Pre-scan for High Channel

Horizontal:

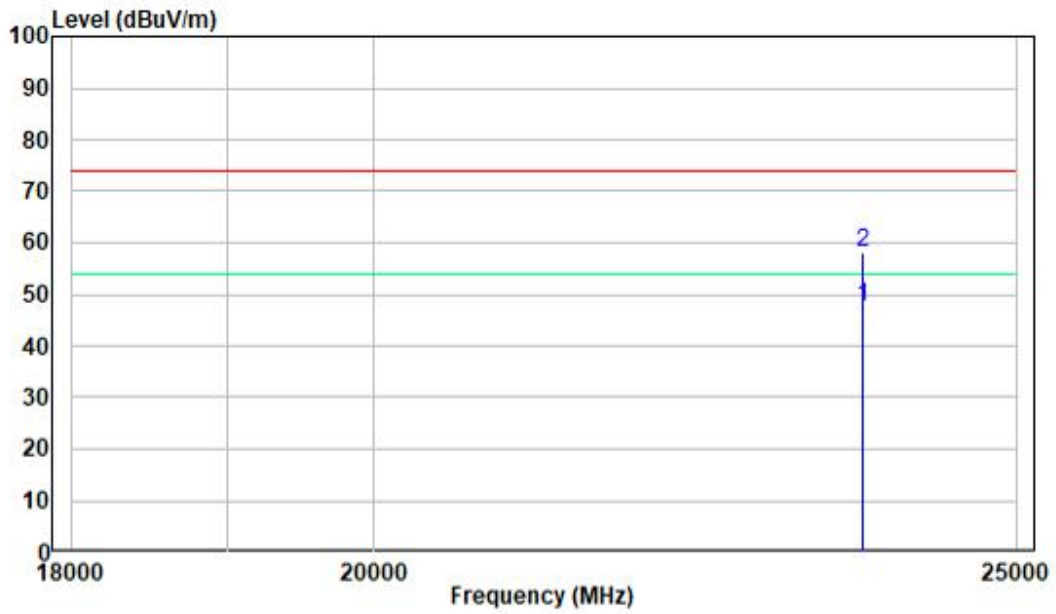

Vertical:

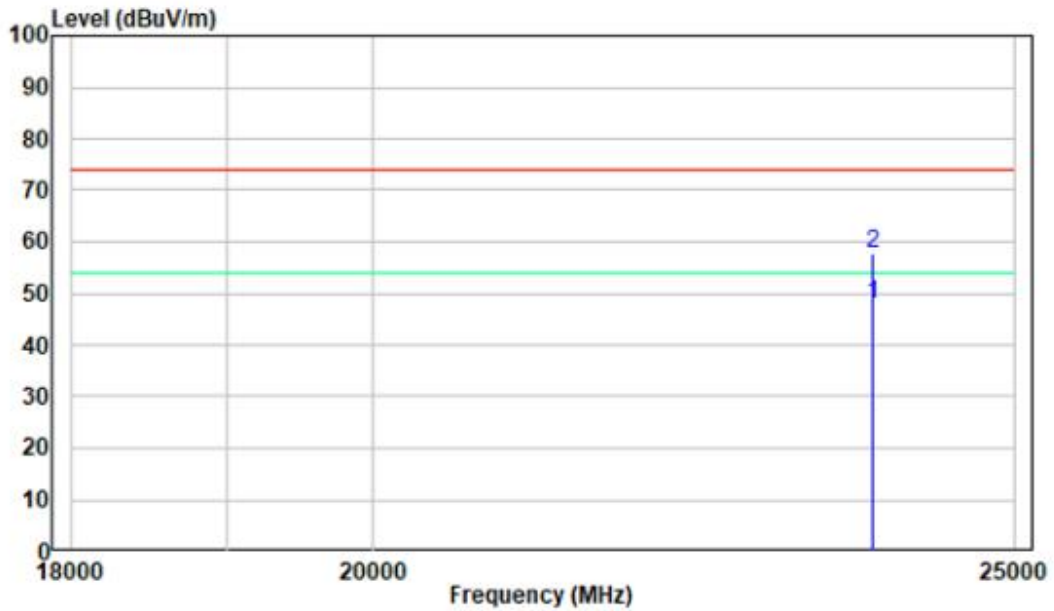

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

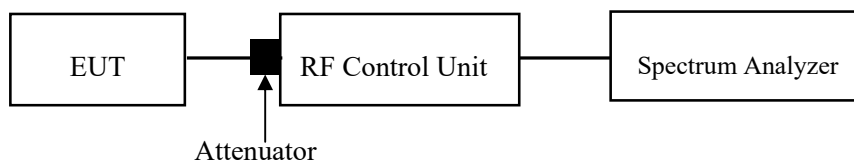

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

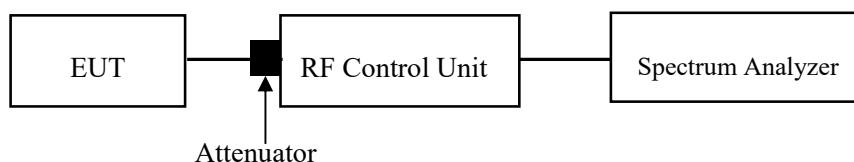

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST


Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

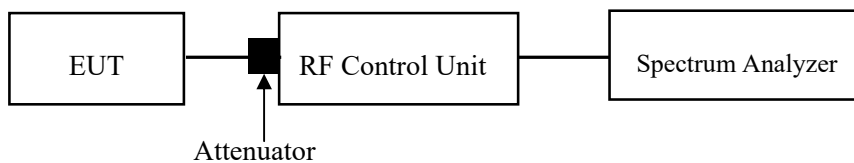

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

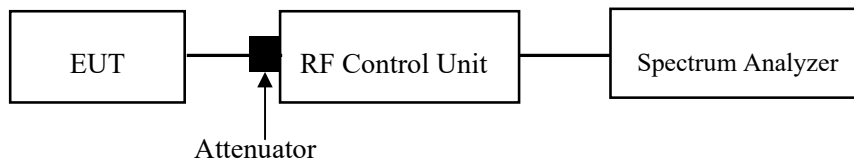

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

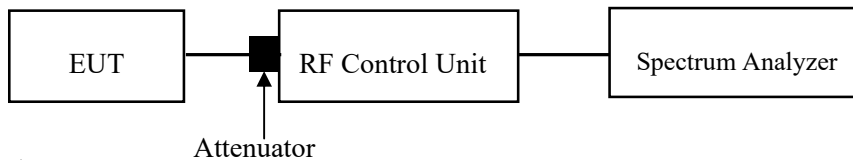

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

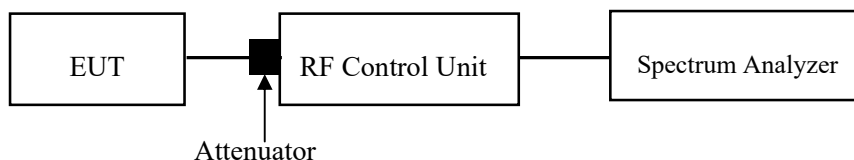

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 45% |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Andu Yu on 2023-01-16.

EUT operation mode: Transmitting




Test Result: Compliant. Please refer to the Appendix.




APPENDIX




Appendix A: 20dB Emission Bandwidth Test Result

| Test Mode | Antenna | Frequency[MHz] | 20dB EBW[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|------------------|---------|---------|------------|---------|
| DH1 | Ant1 | 2402 | 0.78 | 2401.50 | 2402.28 | --- | --- |
| | | 2441 | 0.78 | 2440.49 | 2441.27 | --- | --- |
| | | 2480 | 0.83 | 2479.44 | 2480.27 | --- | --- |
| 2DH1 | Ant1 | 2402 | 1.25 | 2401.26 | 2402.51 | --- | --- |
| | | 2441 | 1.25 | 2440.25 | 2441.50 | --- | --- |
| | | 2480 | 1.25 | 2479.25 | 2480.50 | --- | --- |
| 3DH1 | Ant1 | 2402 | 1.22 | 2401.29 | 2402.51 | --- | --- |
| | | 2441 | 1.22 | 2440.29 | 2441.50 | --- | --- |
| | | 2480 | 1.21 | 2479.28 | 2480.50 | --- | --- |

Test Graphs

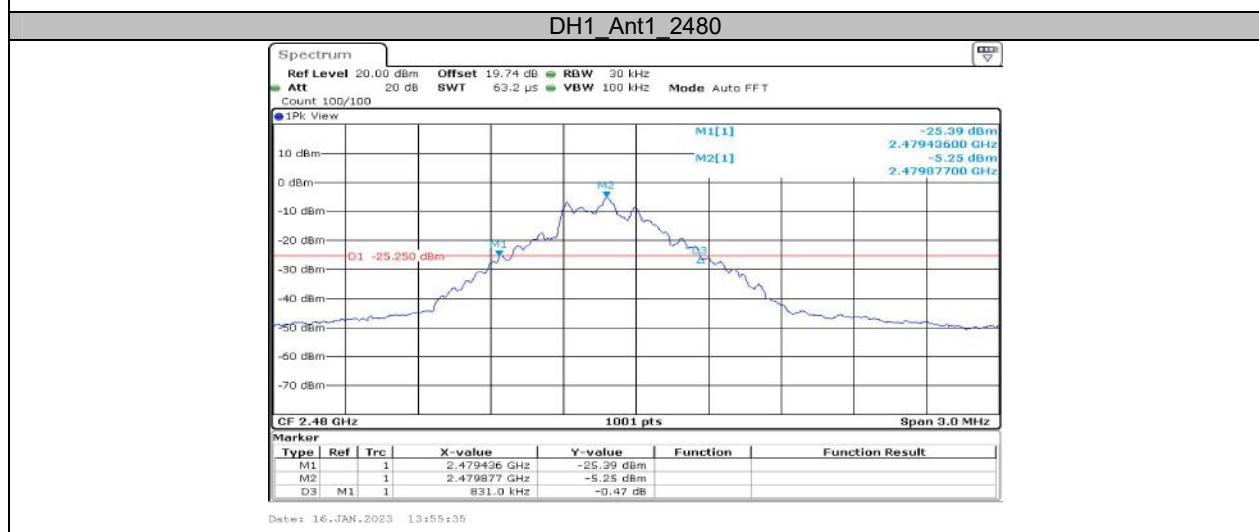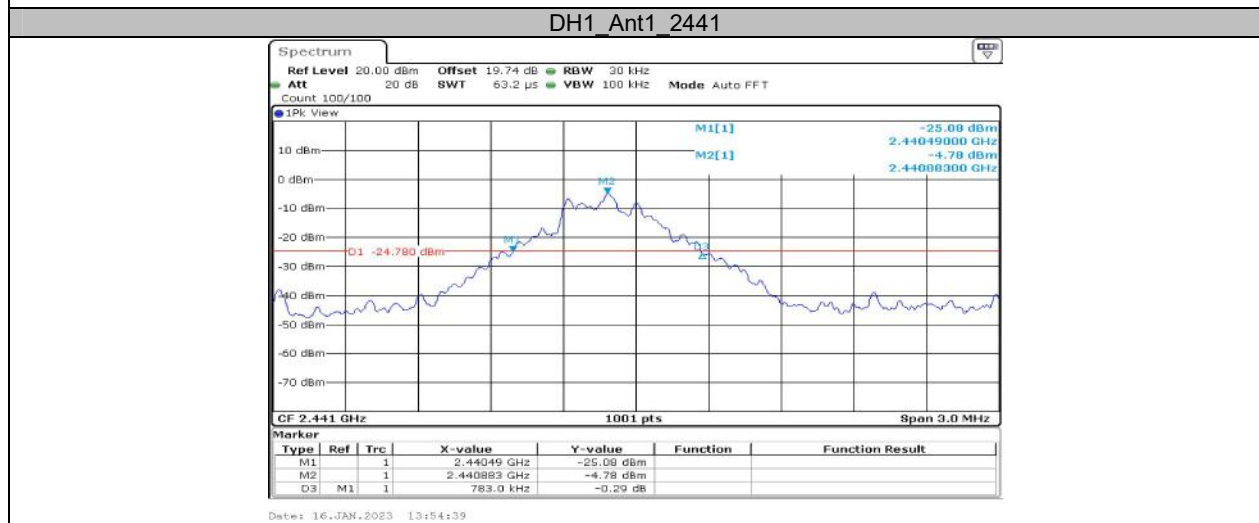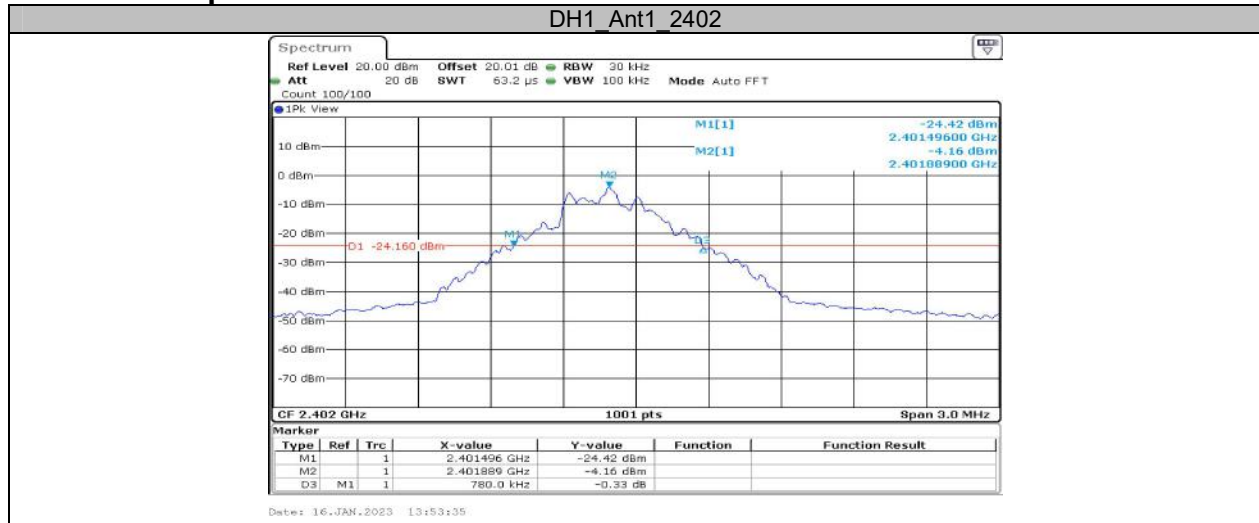

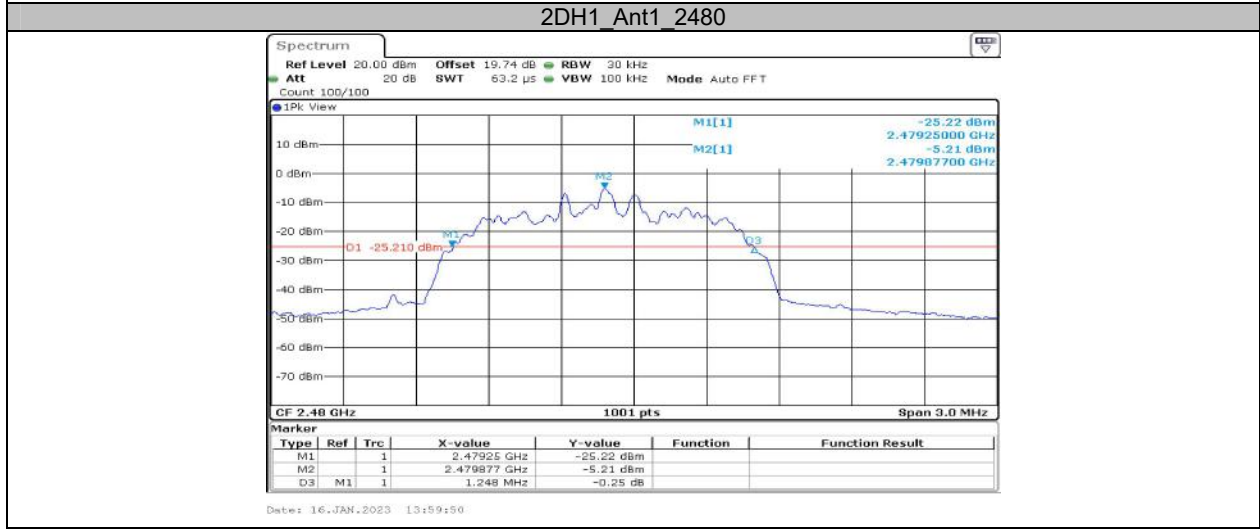
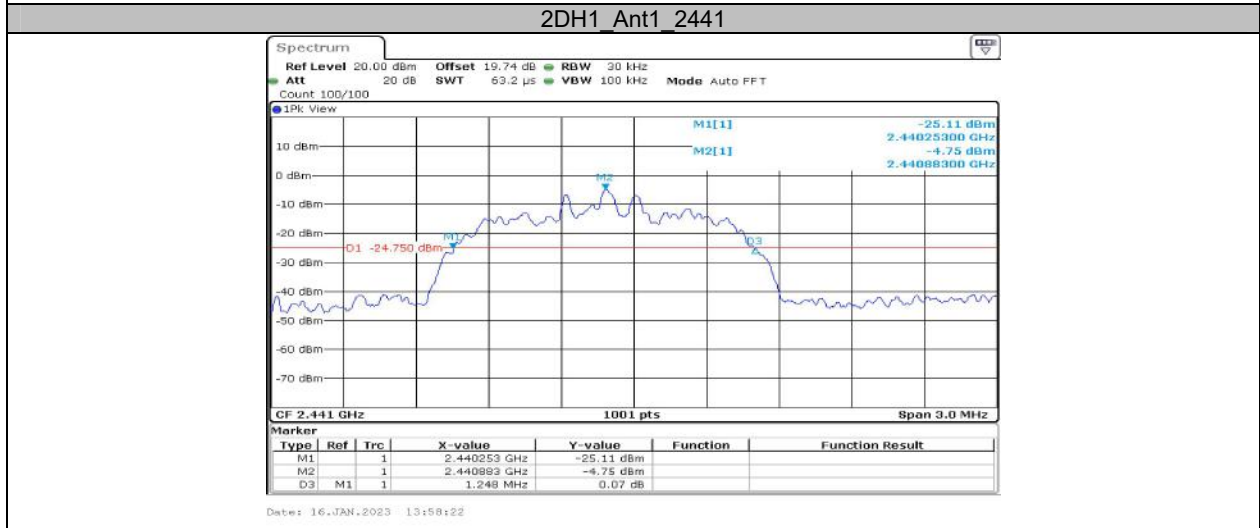
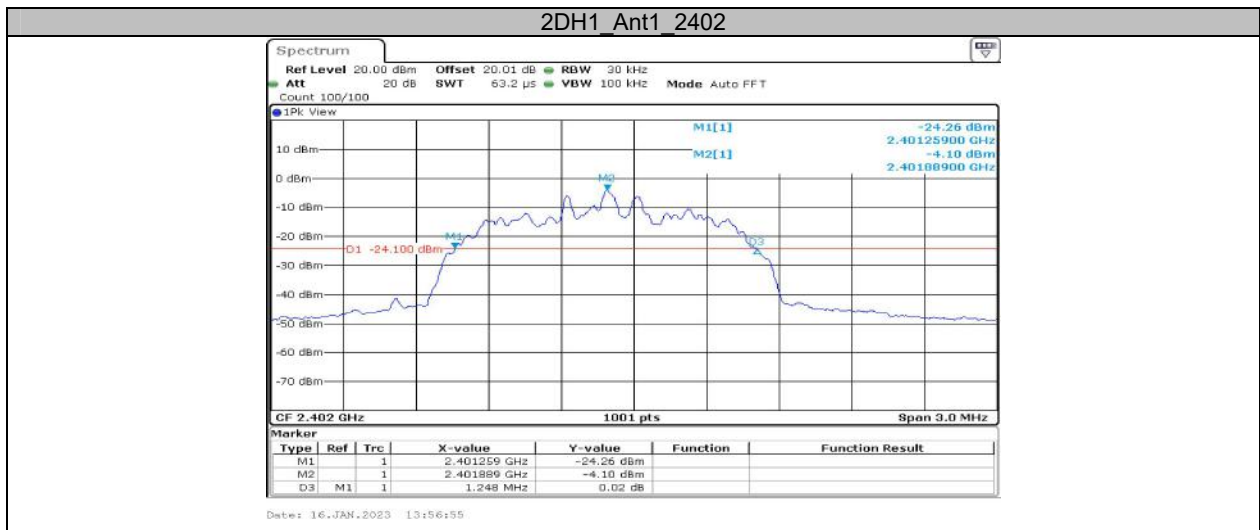


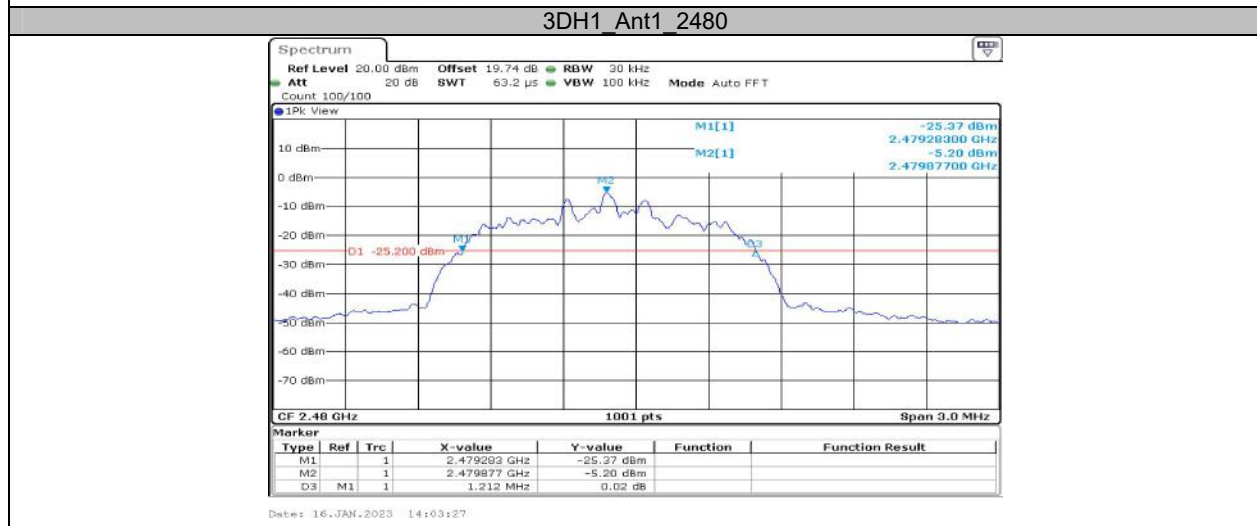
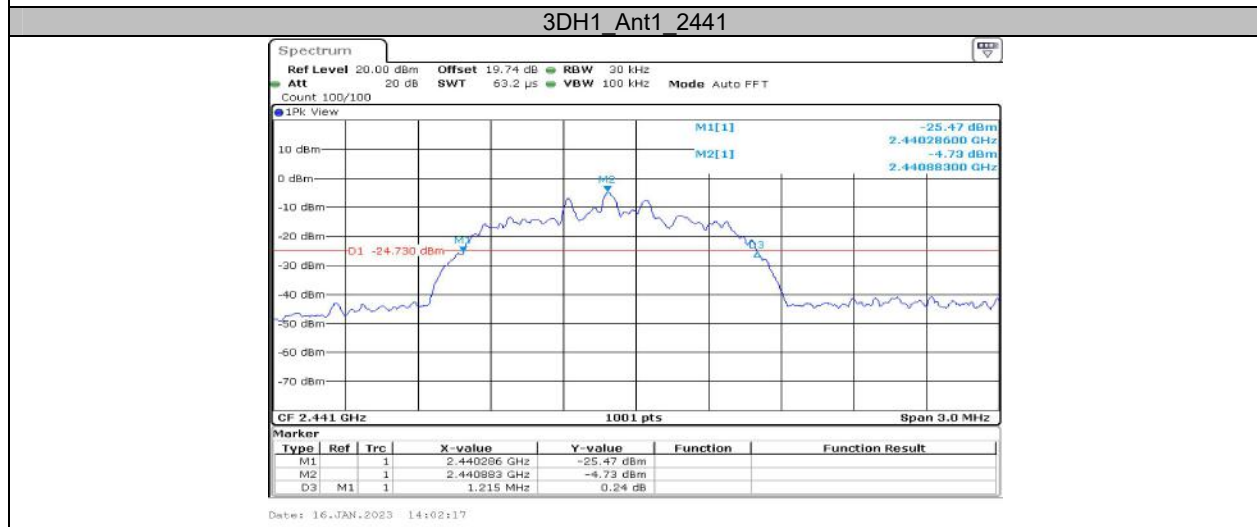
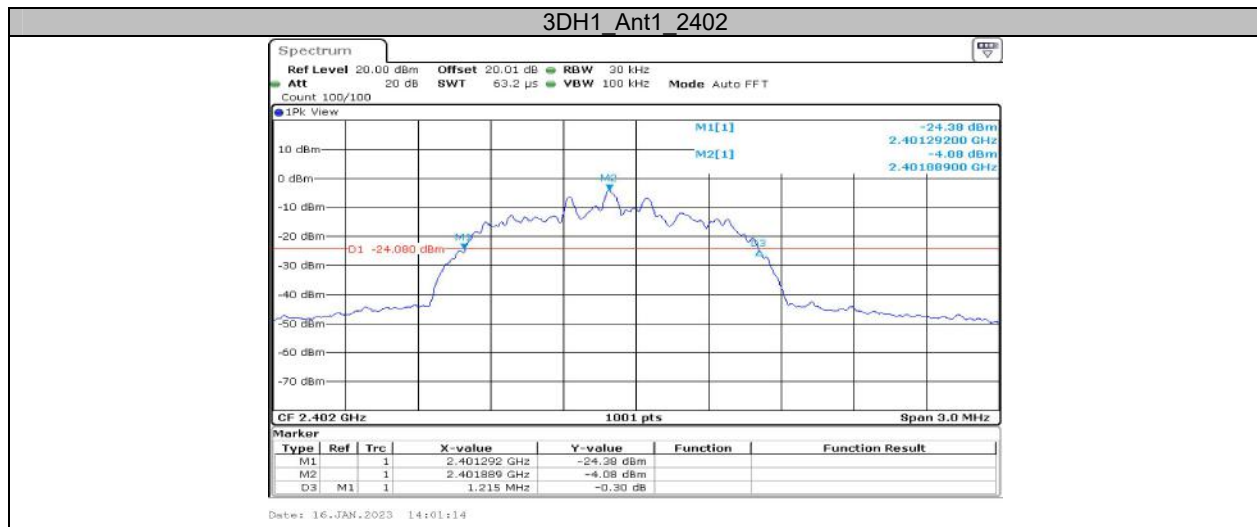





**Appendix B: Occupied Channel Bandwidth
Test Result**

| Test Mode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|----------|----------|------------|---------|
| DH1 | Ant1 | 2402 | 0.824 | 2401.473 | 2402.297 | --- | --- |
| | | 2441 | 0.848 | 2440.464 | 2441.312 | --- | --- |
| | | 2480 | 0.83 | 2479.461 | 2480.291 | --- | --- |
| 2DH1 | Ant1 | 2402 | 1.163 | 2401.299 | 2402.462 | --- | --- |
| | | 2441 | 1.166 | 2440.293 | 2441.459 | --- | --- |
| | | 2480 | 1.163 | 2479.290 | 2480.453 | --- | --- |
| 3DH1 | Ant1 | 2402 | 1.154 | 2401.320 | 2402.474 | --- | --- |
| | | 2441 | 1.157 | 2440.314 | 2441.471 | --- | --- |
| | | 2480 | 1.154 | 2479.308 | 2480.462 | --- | --- |

Test Graphs

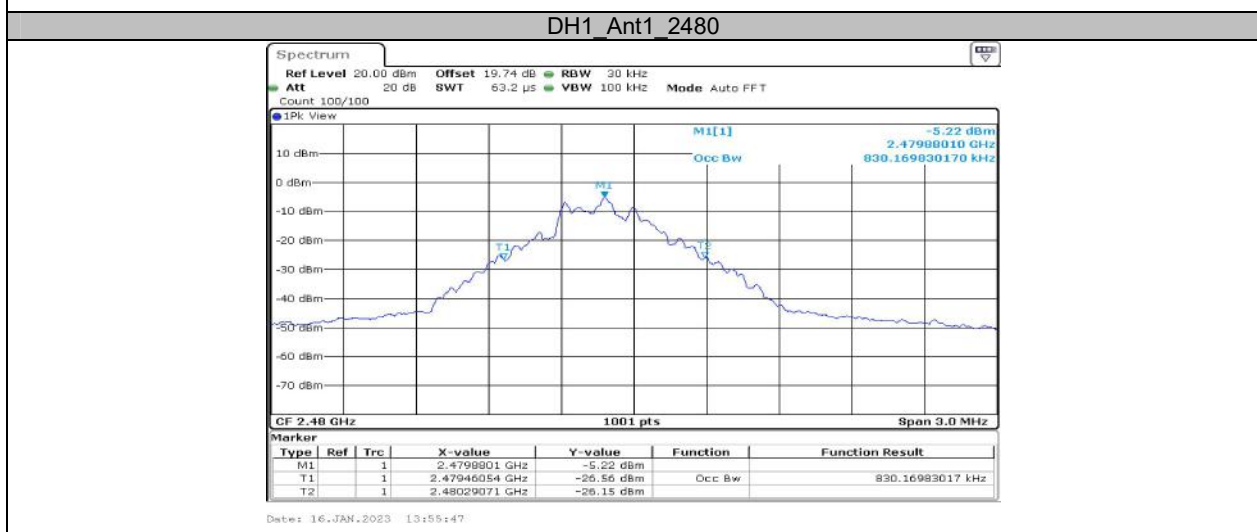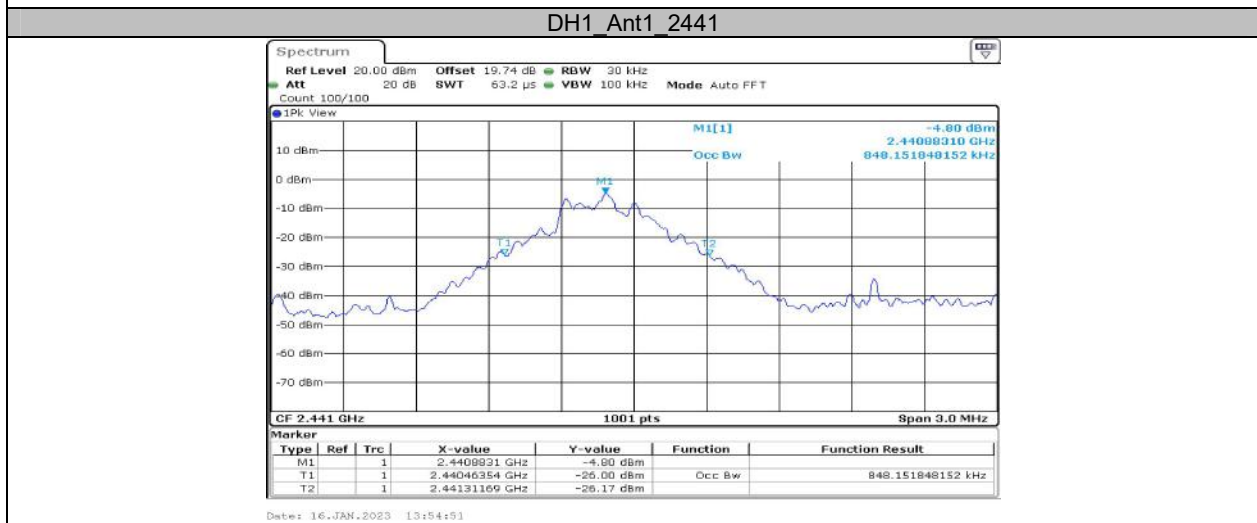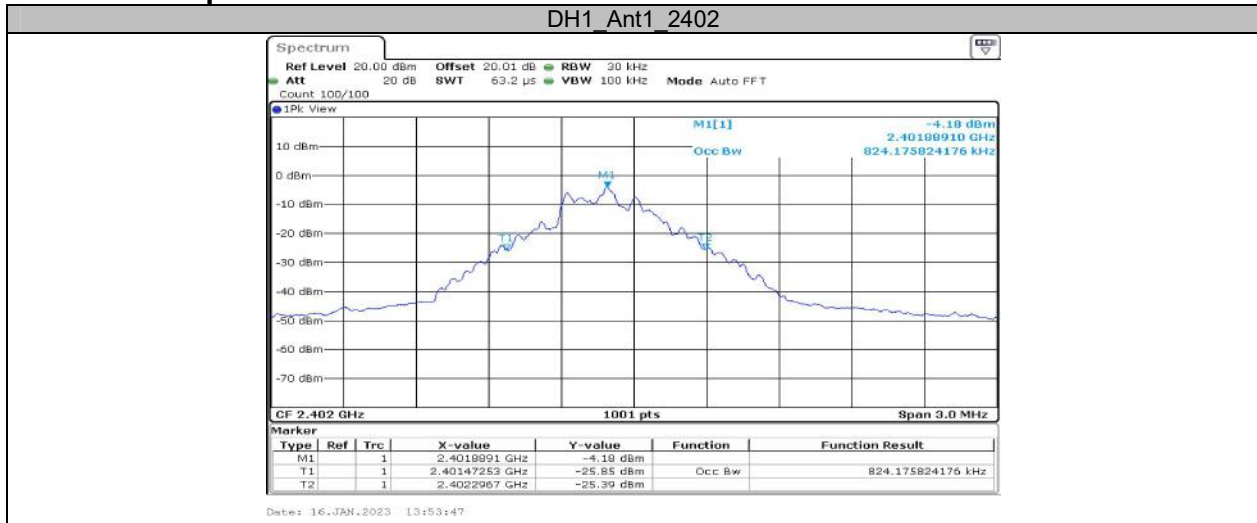

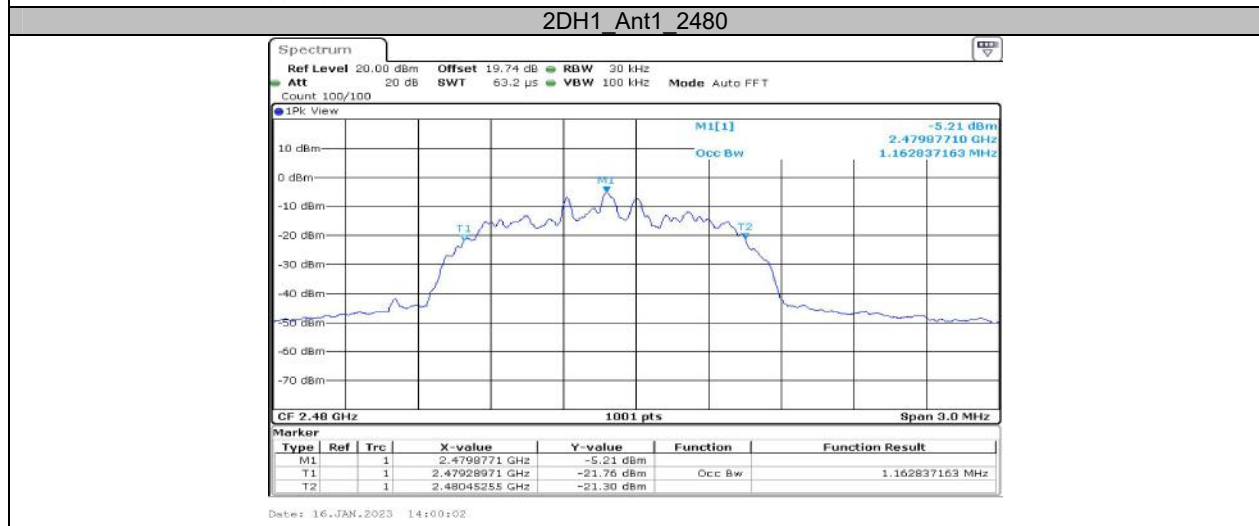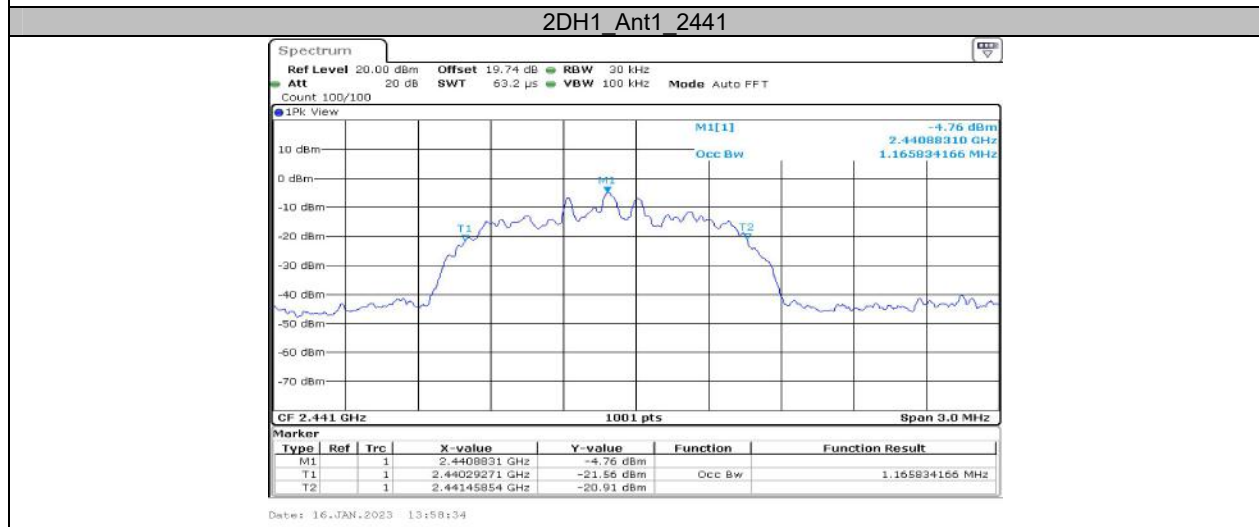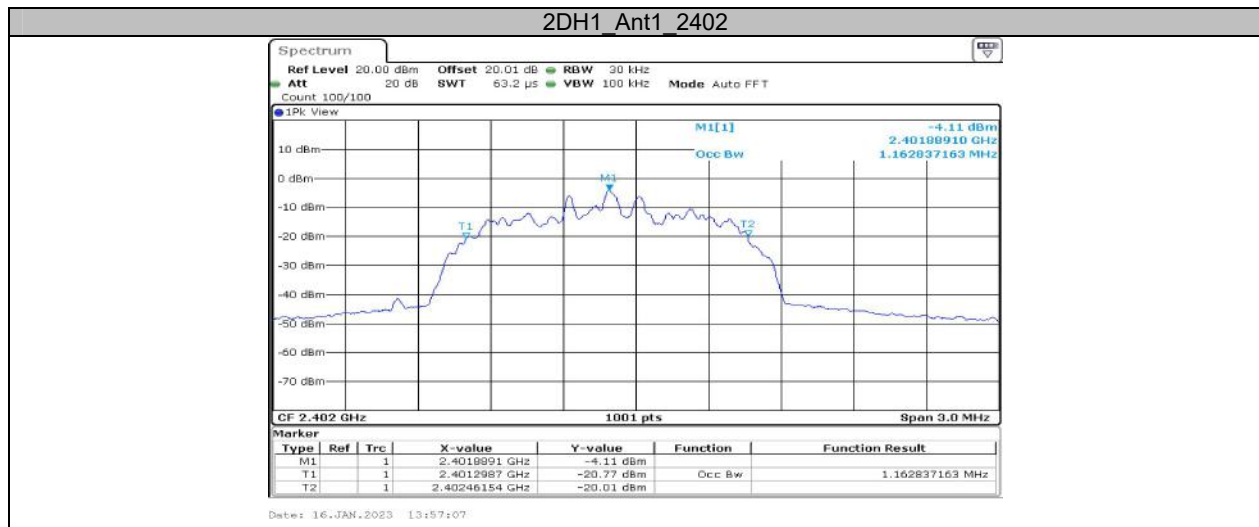


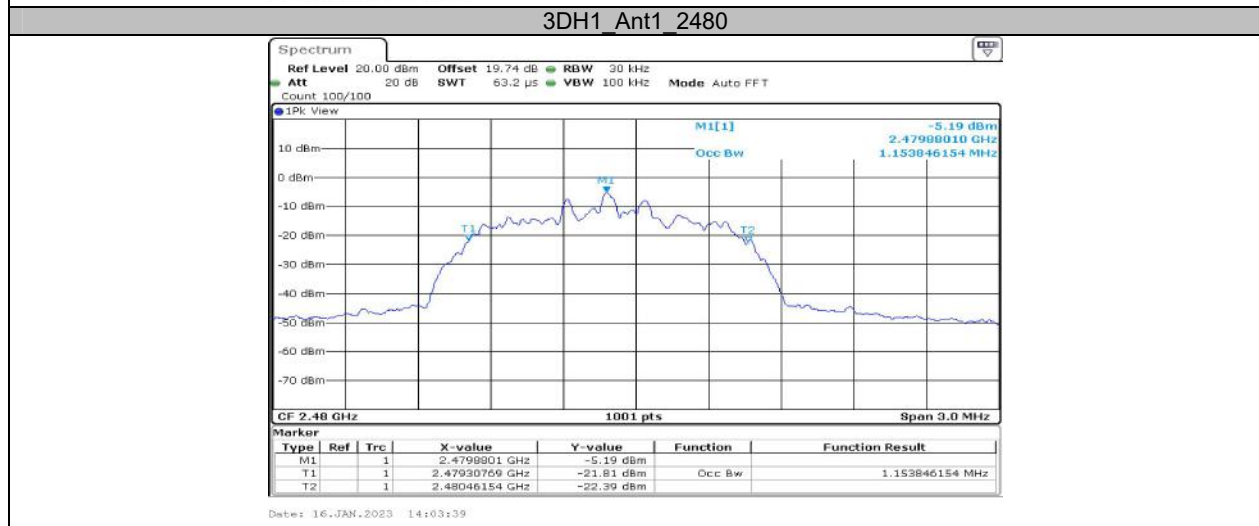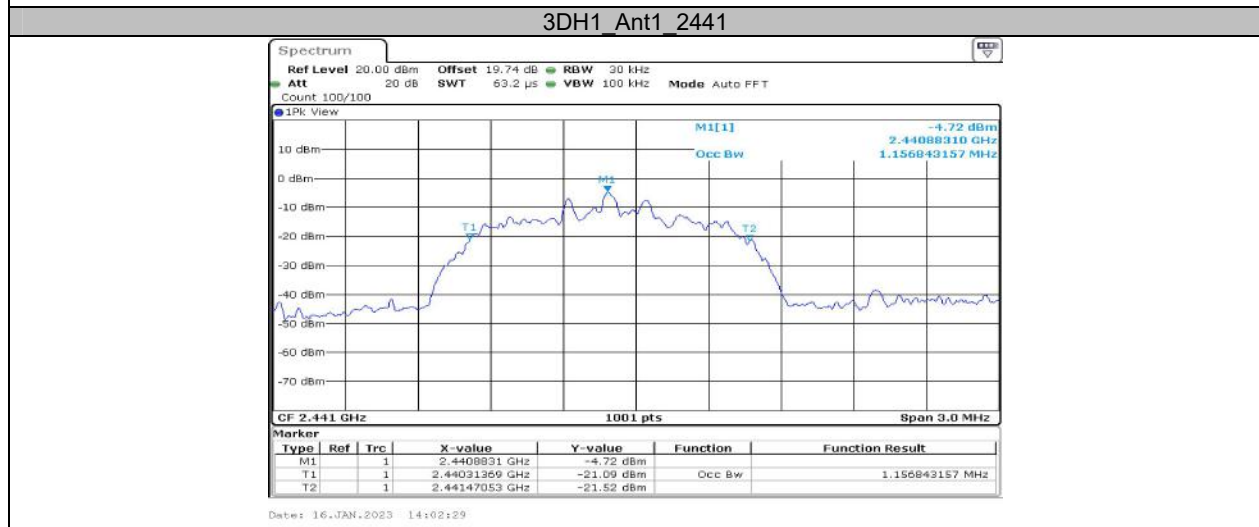
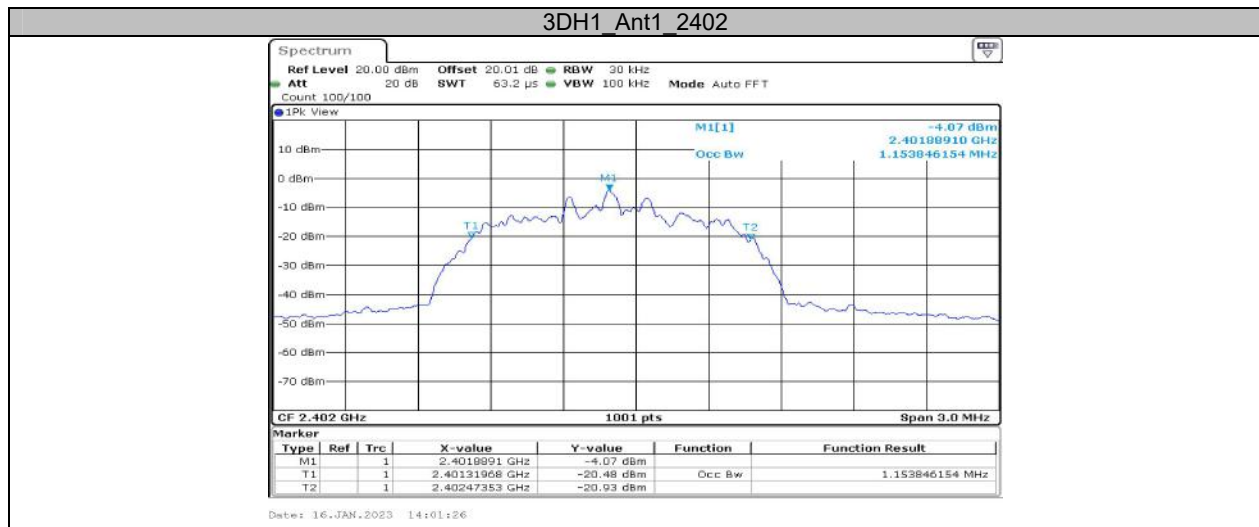




Appendix C: Maximum conducted output power**Test Result Peak**

| Test Mode | Antenna | Frequency[MHz] | Conducted Peak Power[dBm] | Conducted Limit[dBm] | Verdict |
|-----------|---------|----------------|---------------------------|----------------------|---------|
| DH1 | Ant1 | 2402 | -2.81 | ≤20.97 | PASS |
| | | 2441 | -2.94 | ≤20.97 | PASS |
| | | 2480 | -3.5 | ≤20.97 | PASS |
| 2DH1 | Ant1 | 2402 | -0.65 | ≤20.97 | PASS |
| | | 2441 | -1.09 | ≤20.97 | PASS |
| | | 2480 | -1.43 | ≤20.97 | PASS |
| 3DH1 | Ant1 | 2402 | -0.36 | ≤20.97 | PASS |
| | | 2441 | -0.82 | ≤20.97 | PASS |
| | | 2480 | -1.09 | ≤20.97 | PASS |

Test Graphs

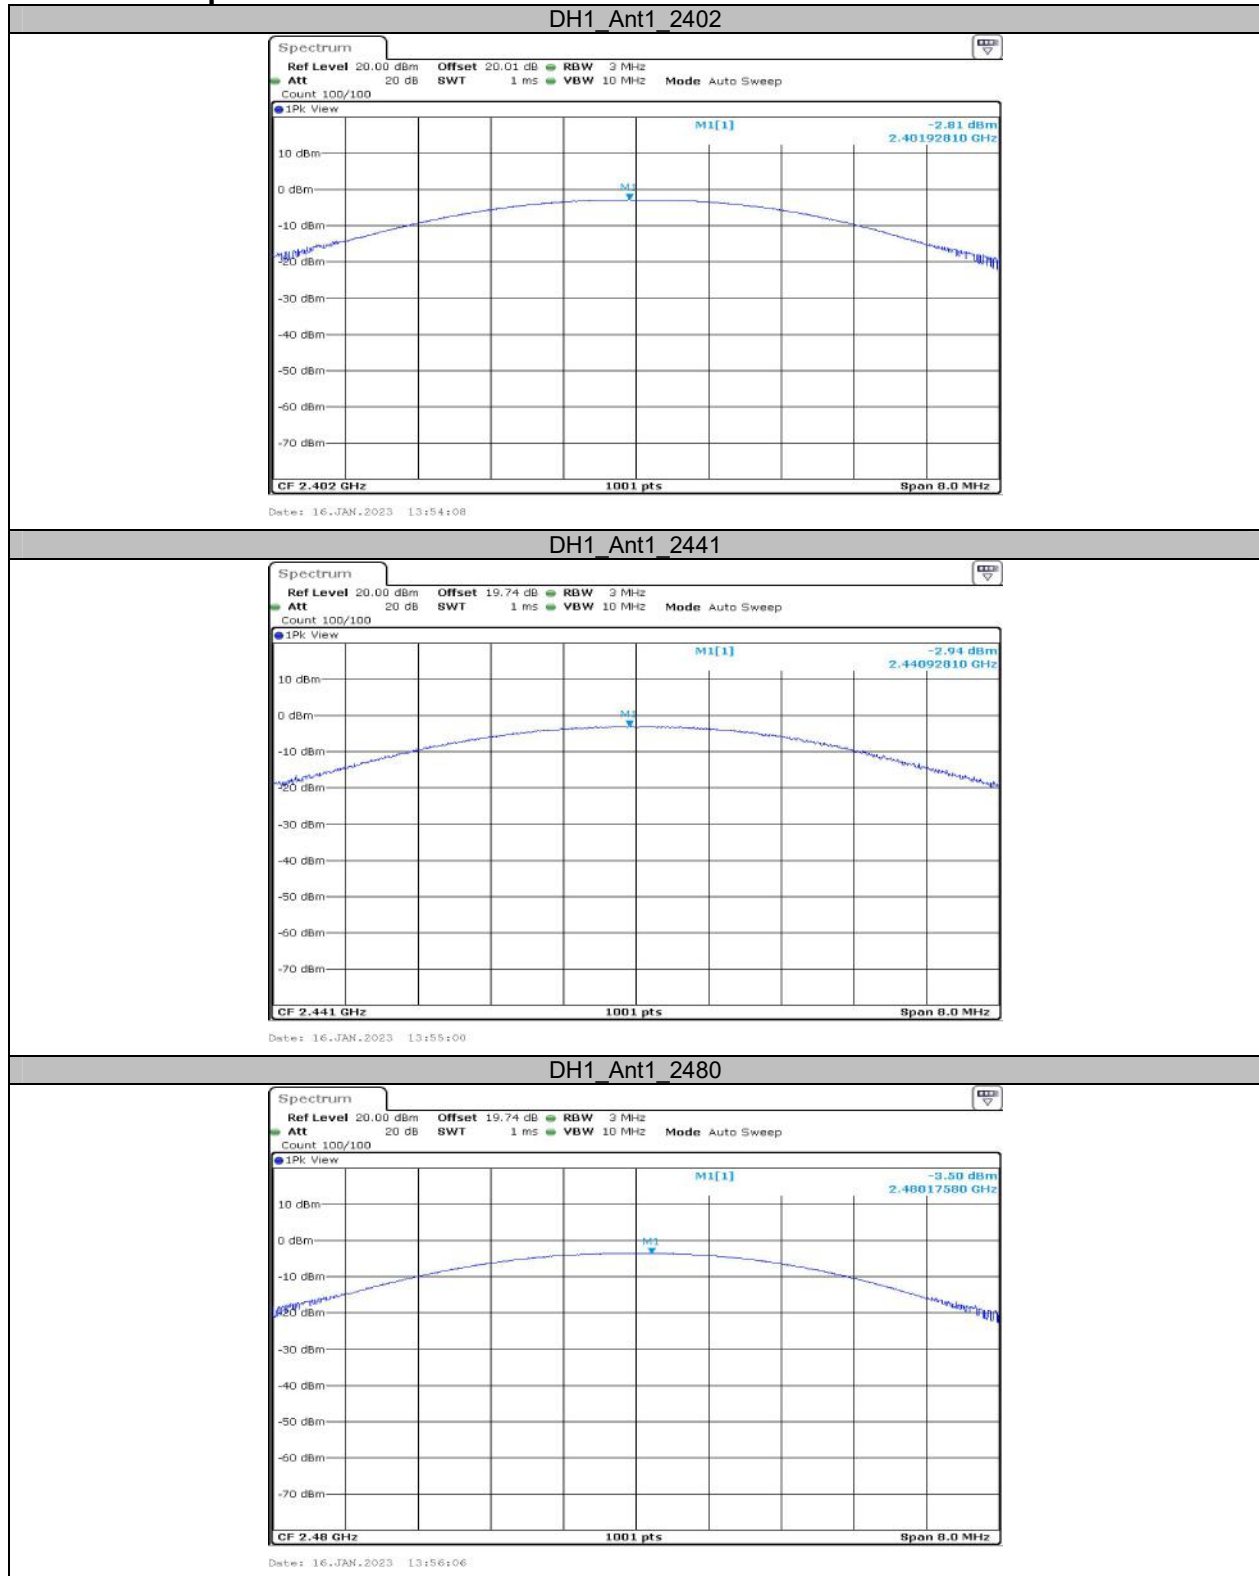


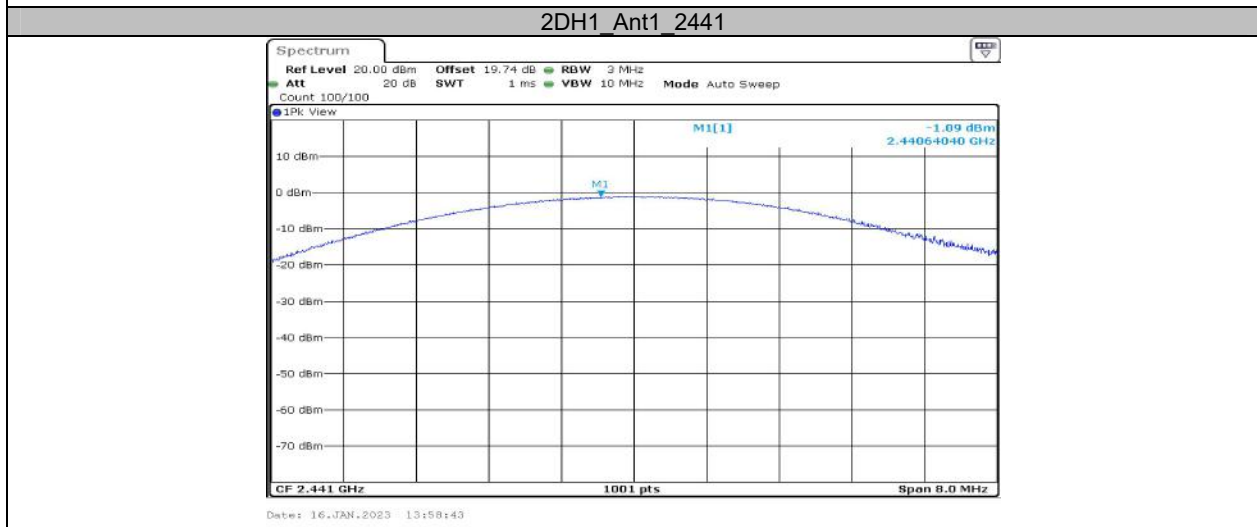
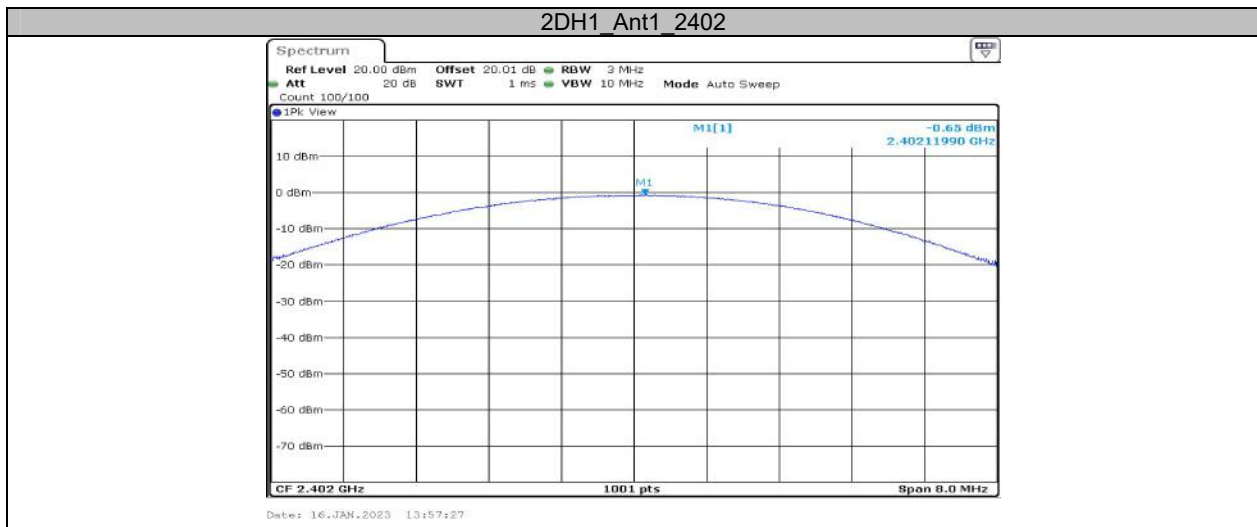


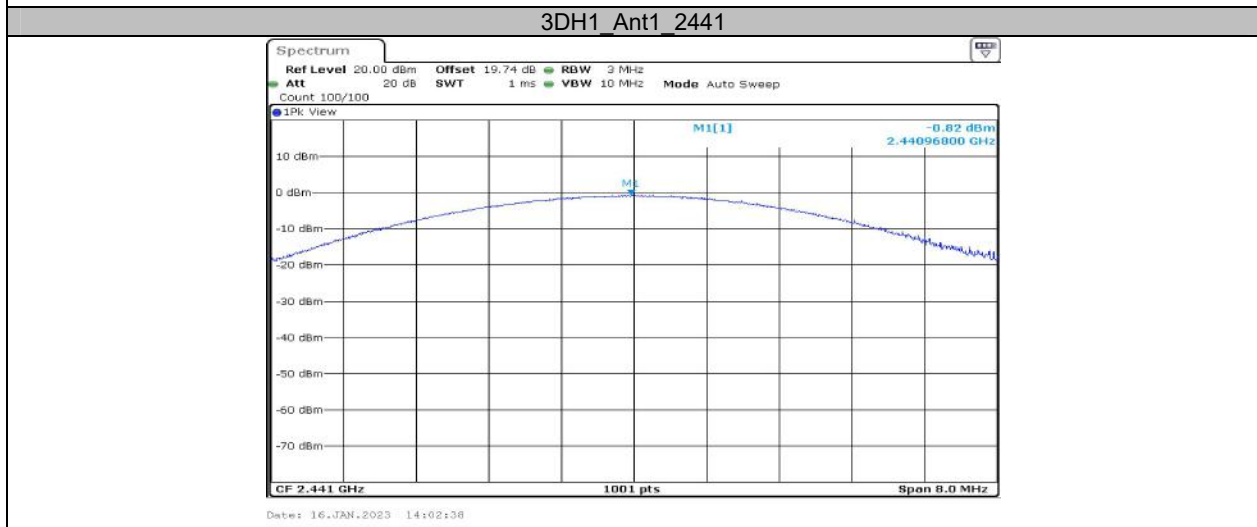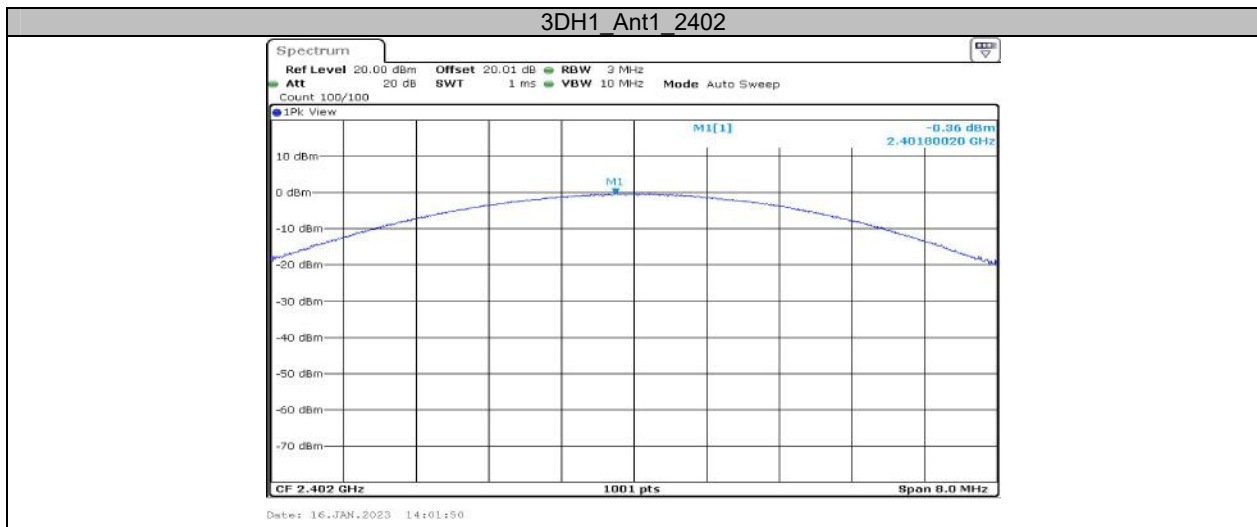

**Appendix D: Carrier frequency separation
Test Result**

| Test Mode | Antenna | Frequency[MHz] | Result[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-------------|--------------|---------|
| DH1 | Ant1 | Hop | 1 | ≥ 0.553 | PASS |
| 2DH1 | Ant1 | Hop | 0.997 | ≥ 0.833 | PASS |
| 3DH1 | Ant1 | Hop | 1 | ≥ 0.813 | PASS |


Test Graphs

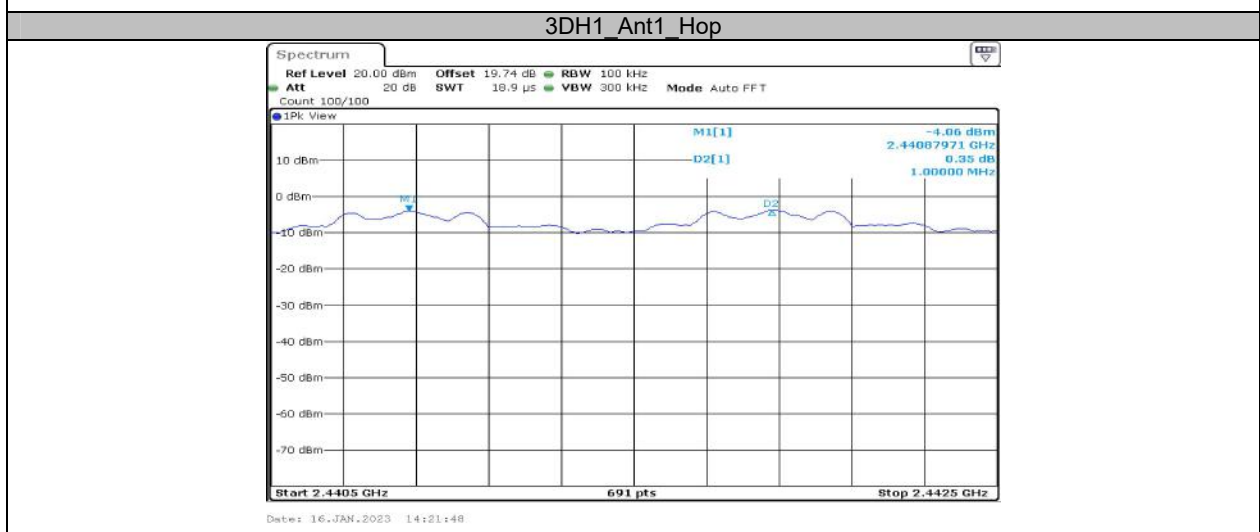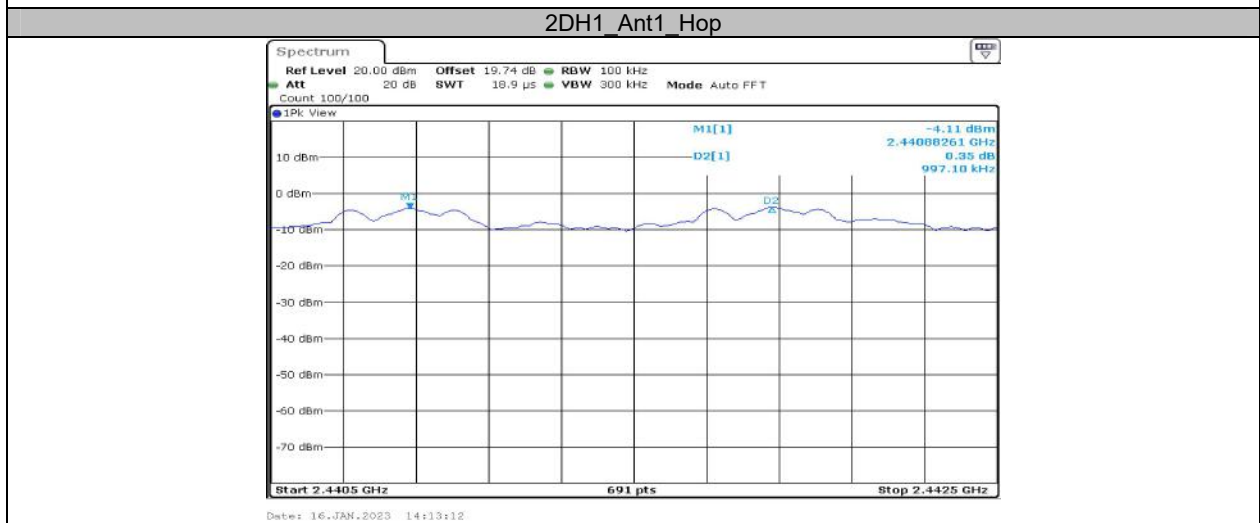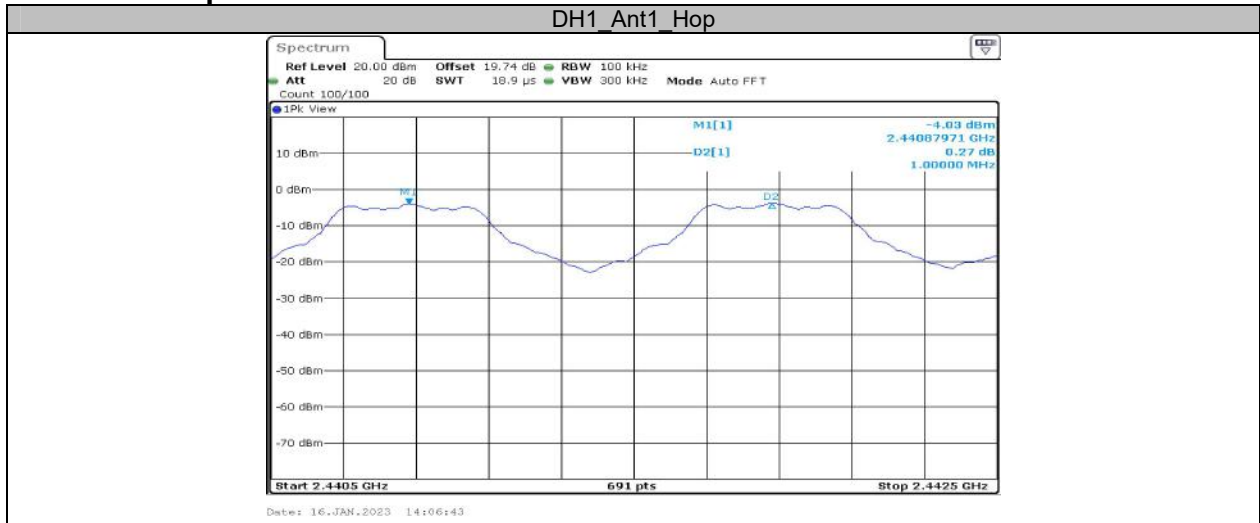


**Appendix E: Time of occupancy
Test Result**



| Test Mode | Antenna | Frequency[MHz] | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|-----------|---------|----------------|-----------------|-----------------|-----------|----------|---------|
| DH1 | Ant1 | Hop | 0.41 | 330 | 0.135 | ≤0.4 | PASS |
| DH3 | Ant1 | Hop | 1.66 | 140 | 0.232 | ≤0.4 | PASS |
| DH5 | Ant1 | Hop | 2.90 | 110 | 0.319 | ≤0.4 | PASS |
| 2DH1 | Ant1 | Hop | 0.42 | 330 | 0.139 | ≤0.4 | PASS |
| 2DH3 | Ant1 | Hop | 1.66 | 170 | 0.282 | ≤0.4 | PASS |
| 2DH5 | Ant1 | Hop | 2.90 | 120 | 0.348 | ≤0.4 | PASS |
| 3DH1 | Ant1 | Hop | 0.42 | 320 | 0.134 | ≤0.4 | PASS |
| 3DH3 | Ant1 | Hop | 1.66 | 180 | 0.299 | ≤0.4 | PASS |
| 3DH5 | Ant1 | Hop | 2.91 | 120 | 0.349 | ≤0.4 | PASS |


Test Graphs

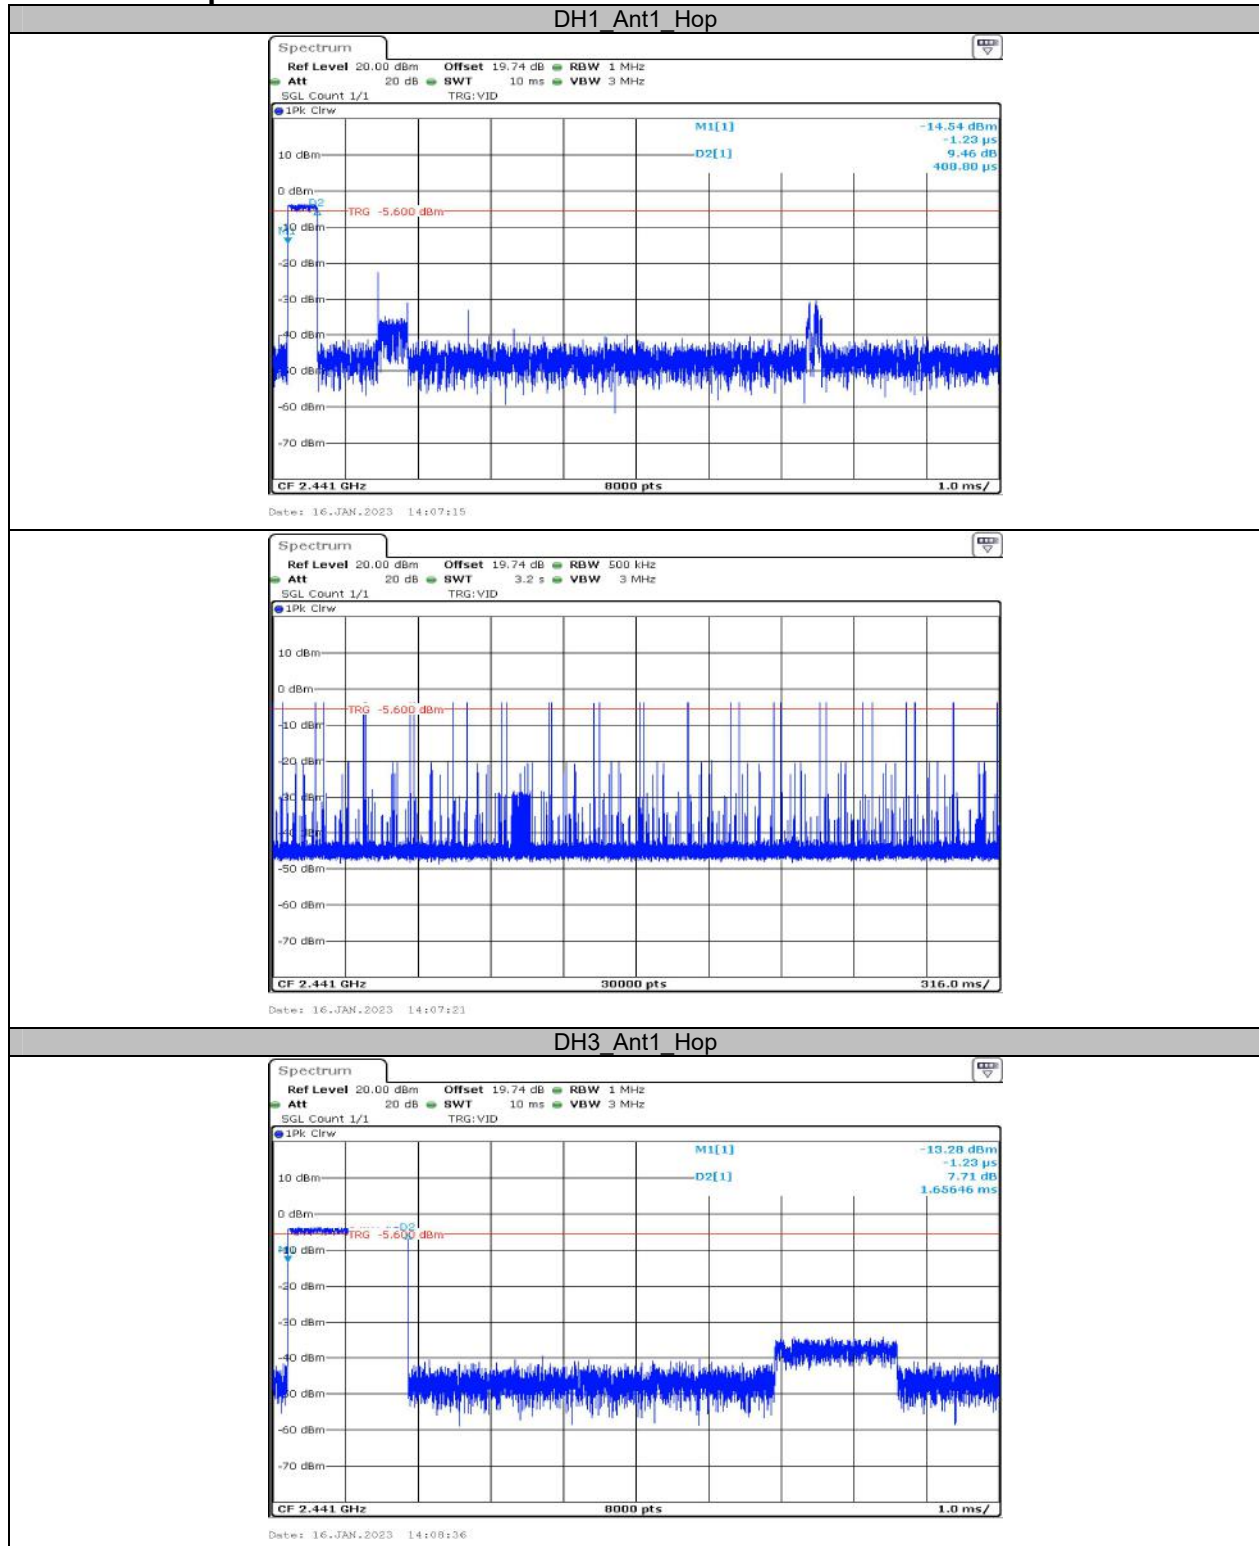


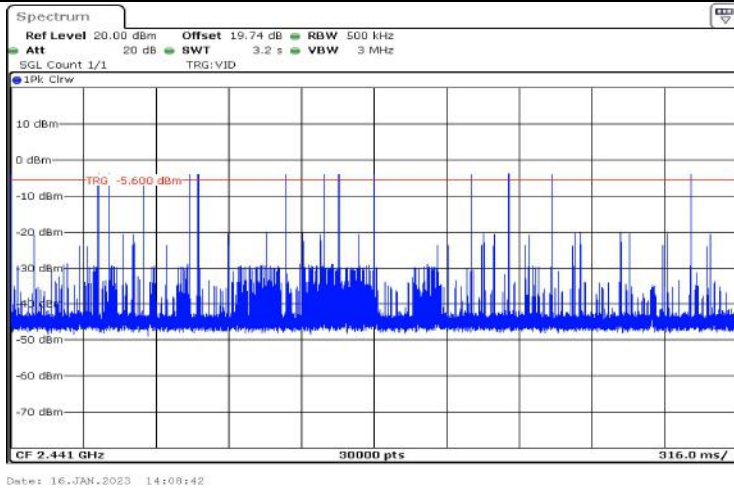

DH5 Ant1 Hop

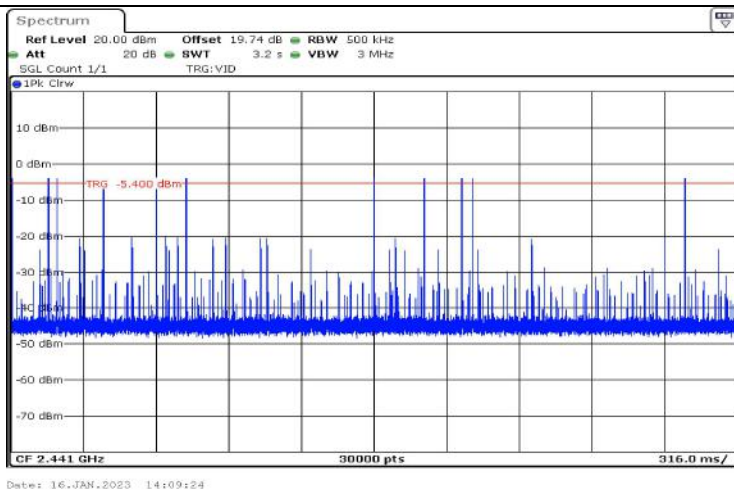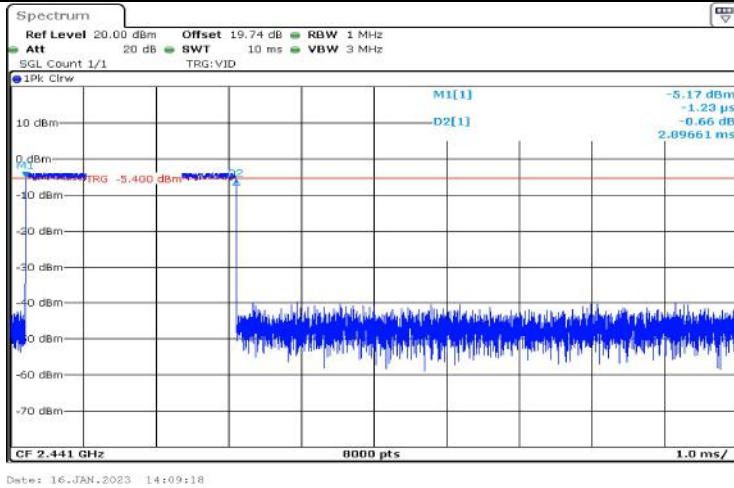


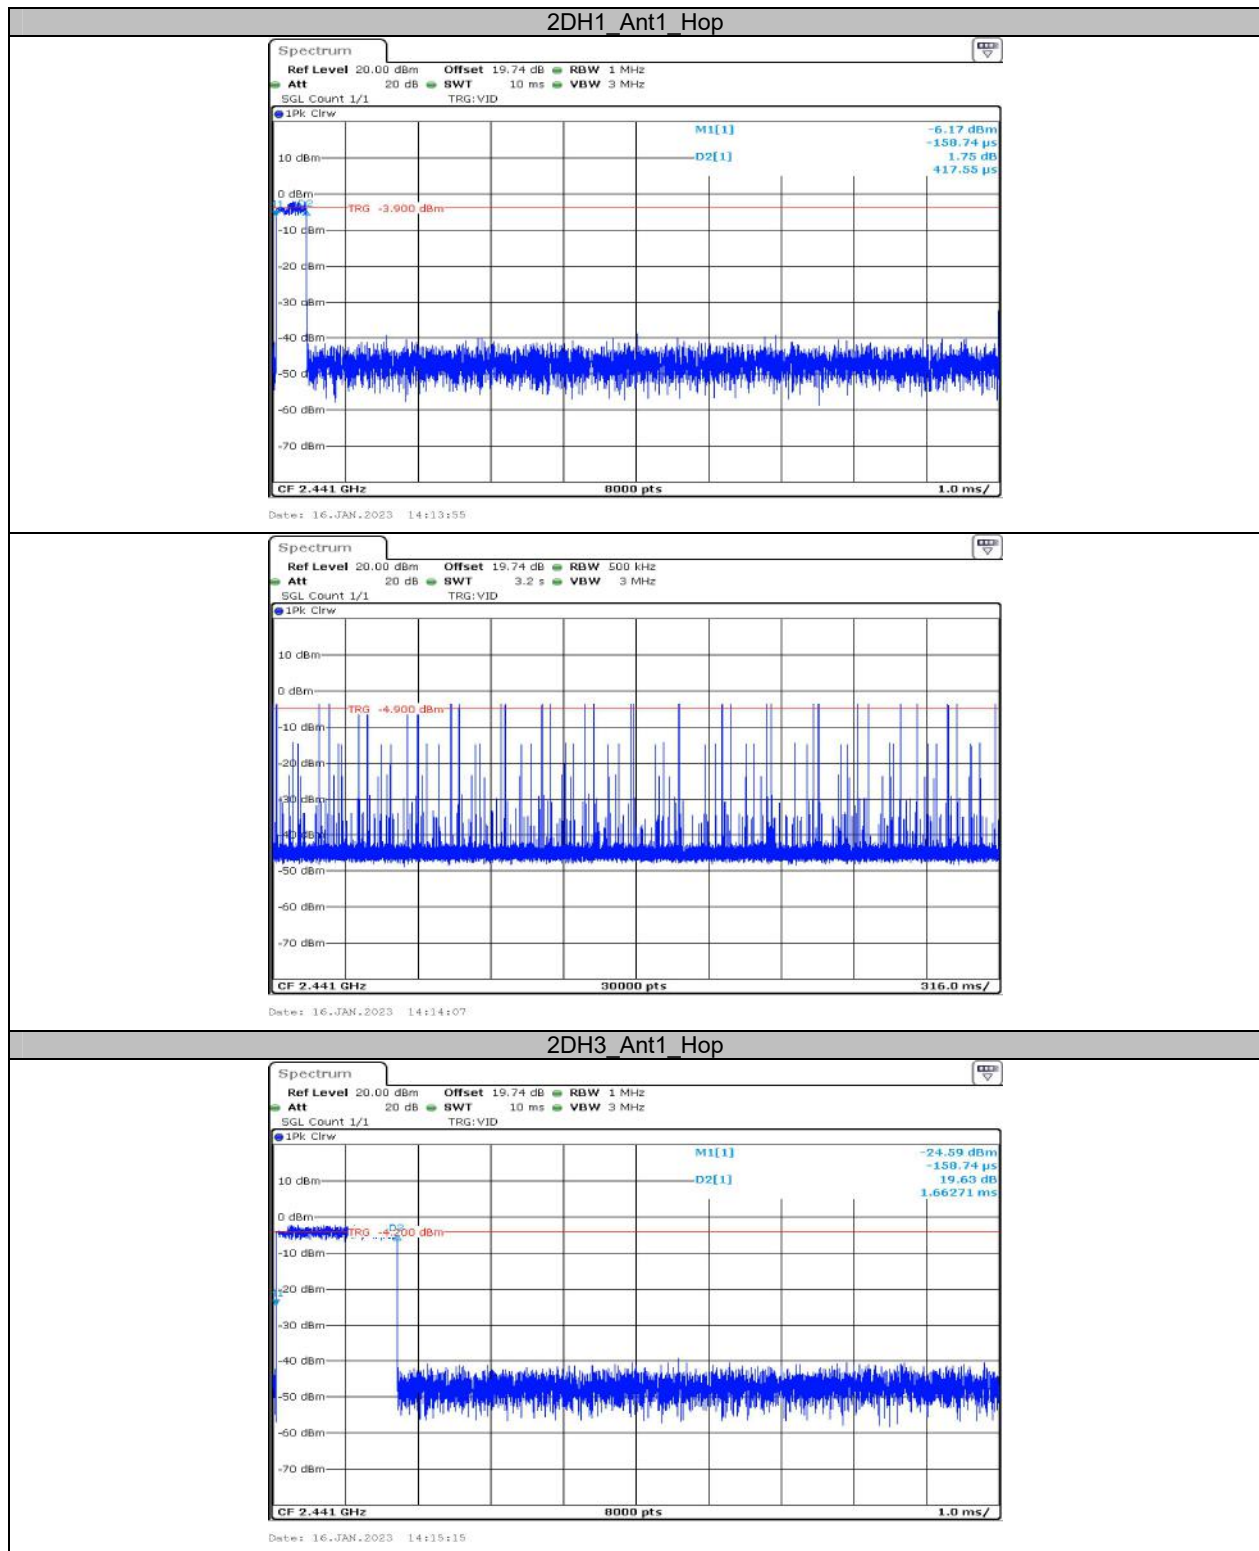

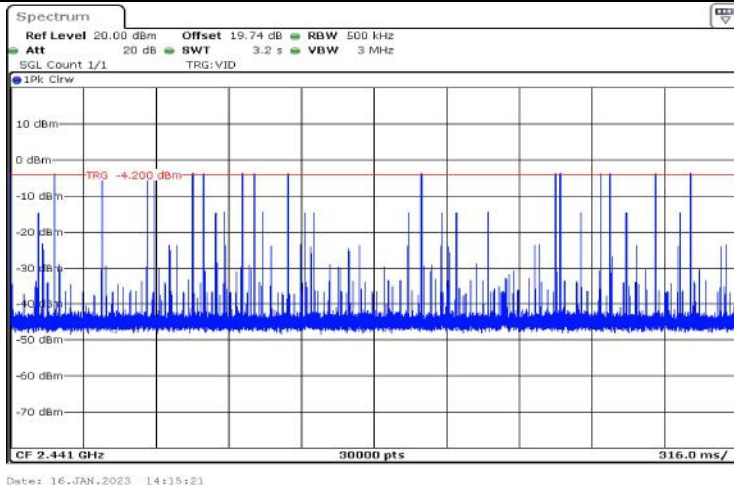


Date: 16.JAN.2023 14:15:21




2DH5 Ant1 Hop

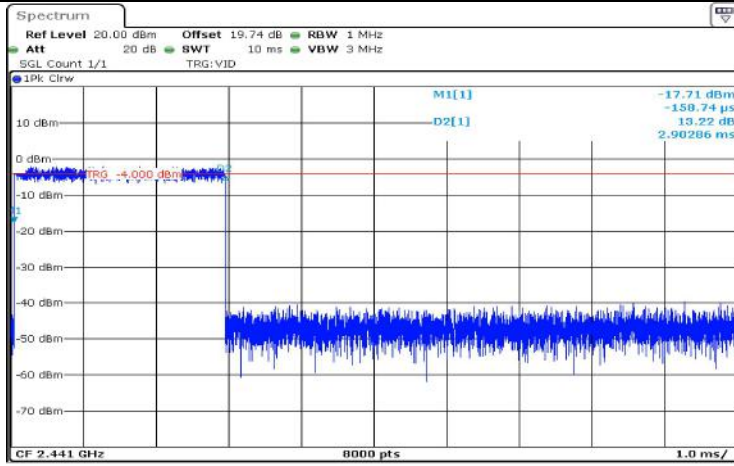


Date: 16.JAN.2023 14:19:27

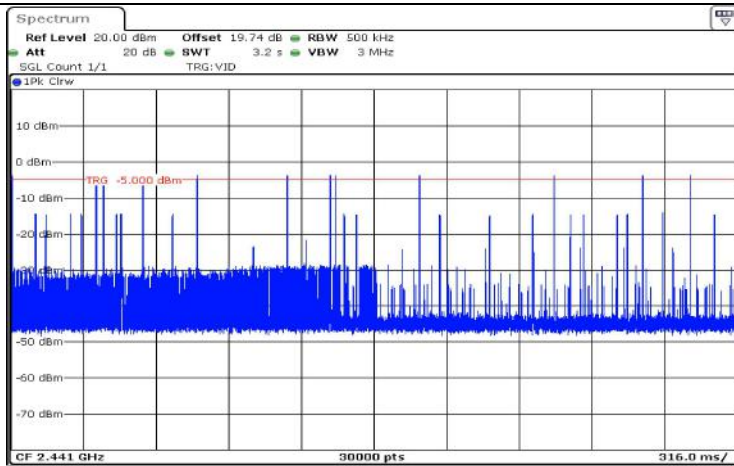


Date: 16.JAN.2023 14:19:38

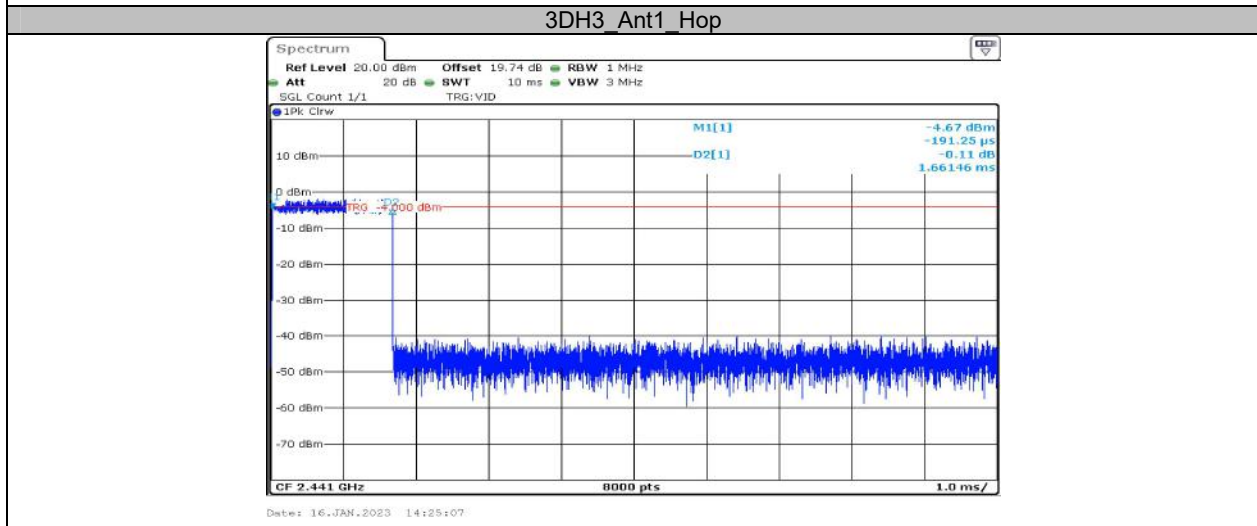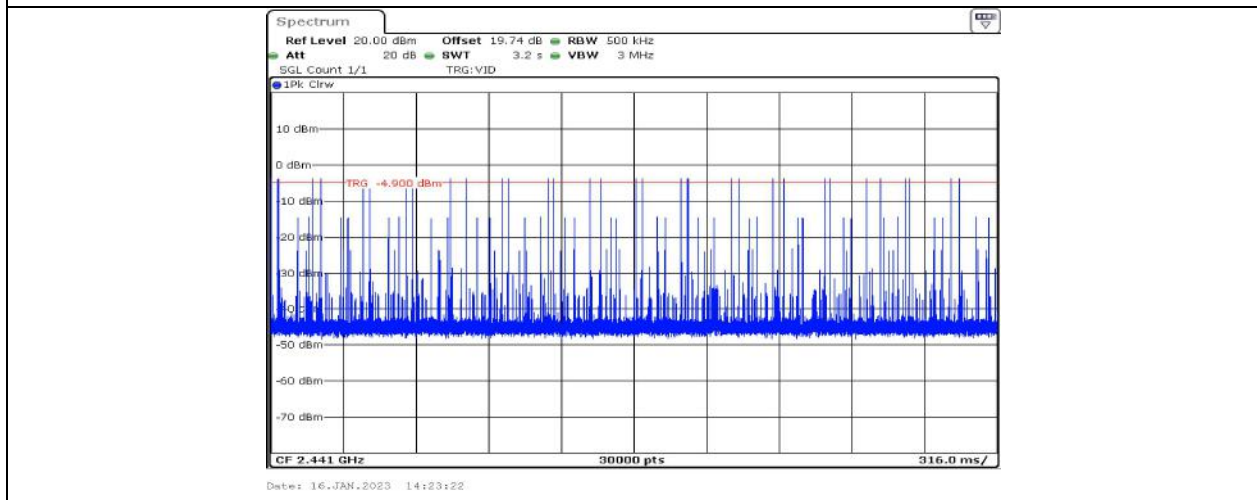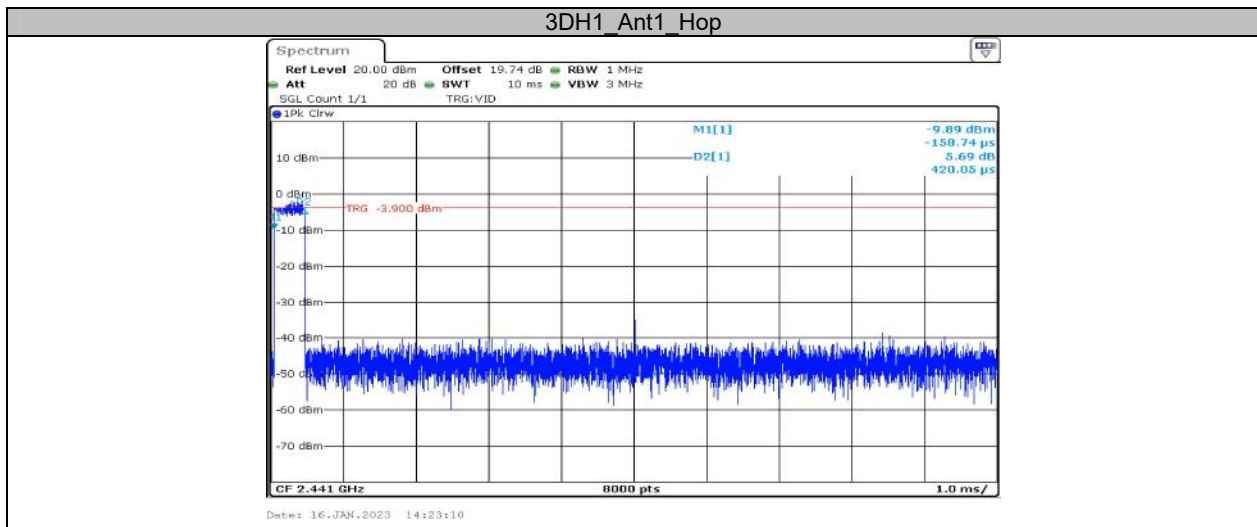

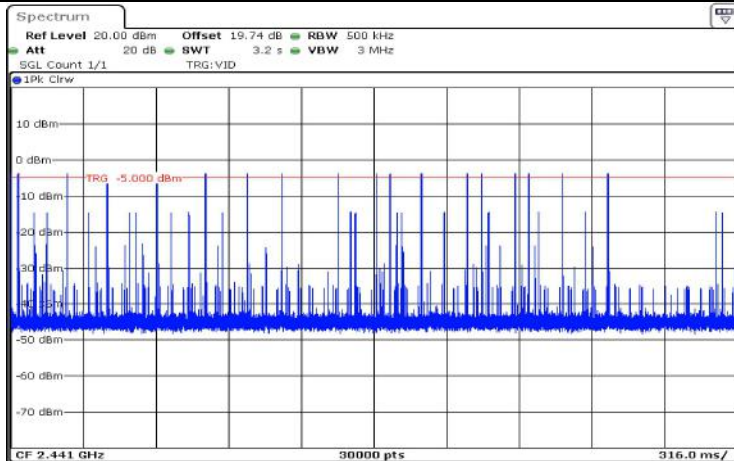


Date: 16.JAN.2023 14:25:19

3DH5_Ant1_Hop

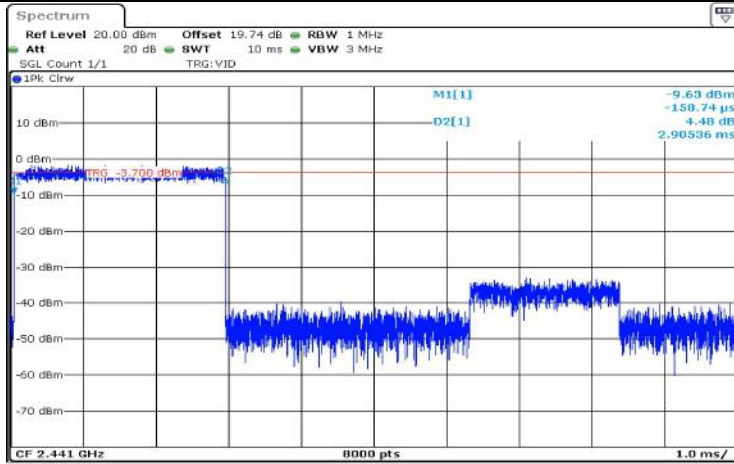

Date: 16.JAN.2023 14:25:49



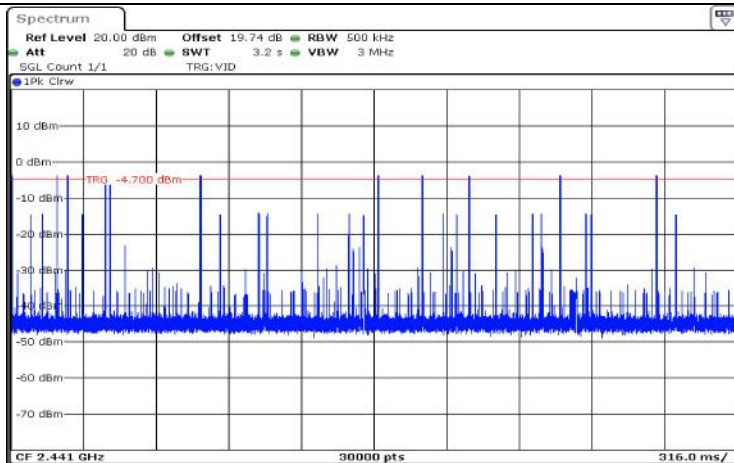


Date: 16.JAN.2023 14:26:01

**Appendix F: Number of hopping channels
Test Result**

| Test Mode | Antenna | Frequency[MHz] | Result[Num] | Limit[Num] | Verdict |
|-----------|---------|----------------|-------------|------------|---------|
| DH1 | Ant1 | Hop | 79 | ≥15 | PASS |
| 2DH1 | Ant1 | Hop | 79 | ≥15 | PASS |
| 3DH1 | Ant1 | Hop | 79 | ≥15 | PASS |




Test Graphs

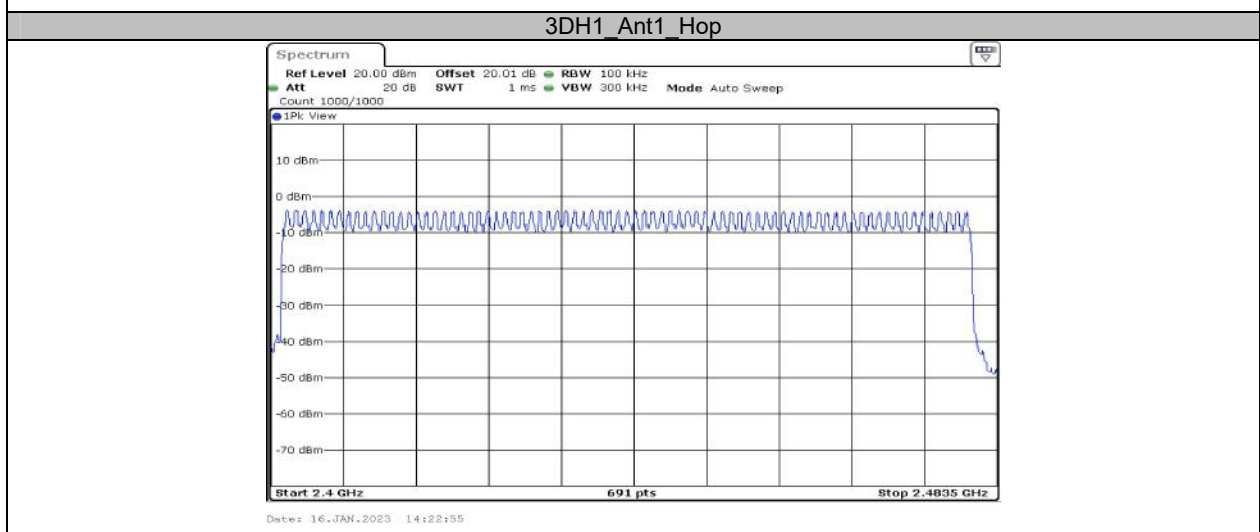
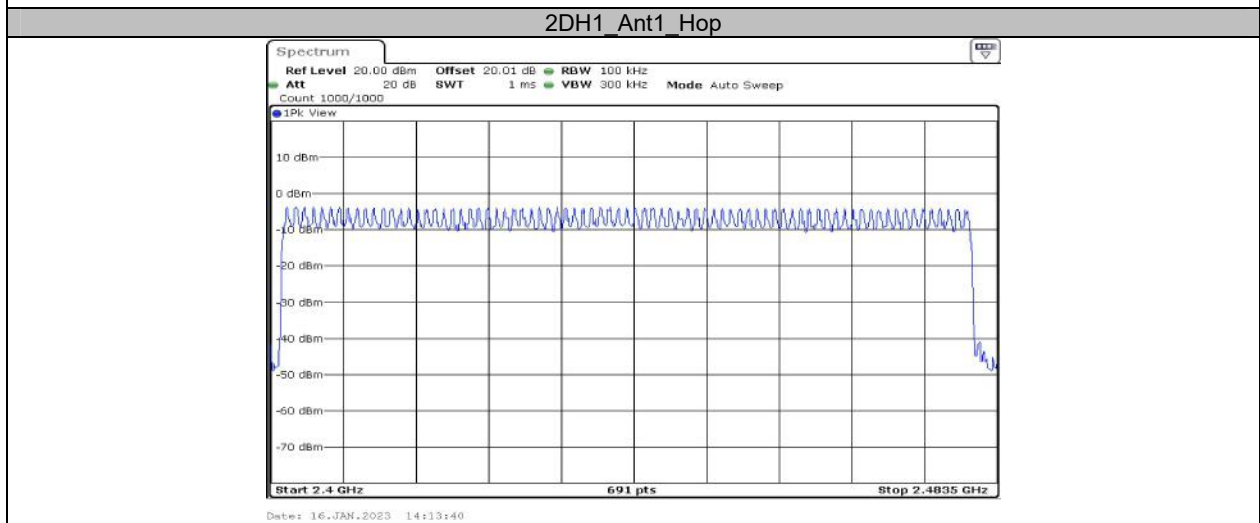
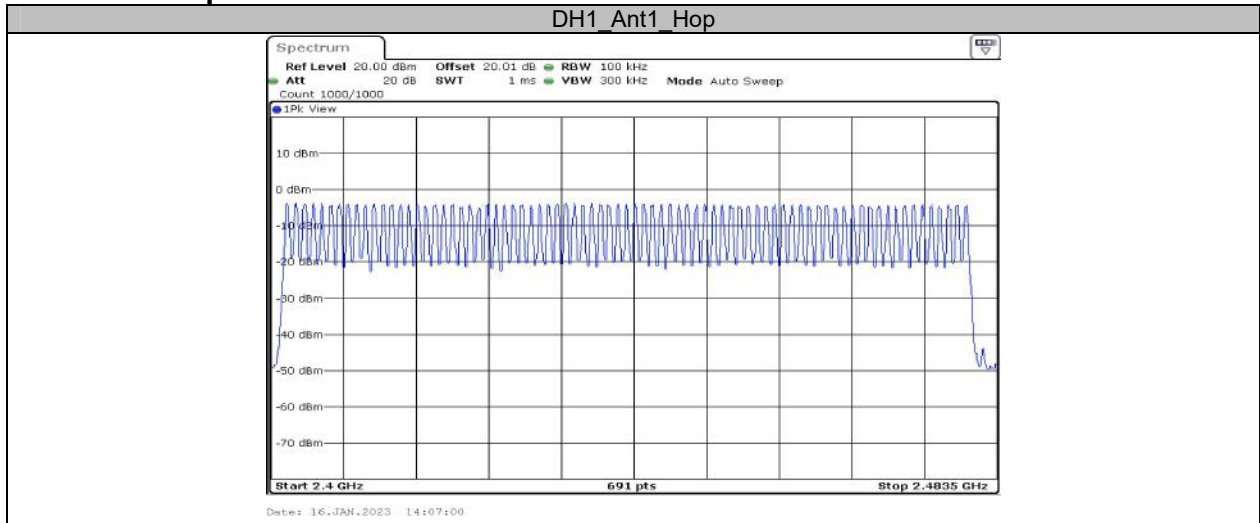





Appendix G: Band edge measurements Test Result




| Test Mode | Antenna | ChName | Frequency[MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|--------|----------------|----------------|--------------|-------------|---------|
| DH1 | Ant1 | Low | 2402 | -3.59 | -42.41 | ≤-23.59 | PASS |
| | | High | 2480 | -4.46 | -47.36 | ≤-24.46 | PASS |
| | | Low | Hop_2402 | -3.13 | -45.09 | ≤-23.13 | PASS |
| | | High | Hop_2480 | -4.41 | -46.73 | ≤-24.41 | PASS |
| 2DH1 | Ant1 | Low | 2402 | -3.53 | -42.27 | ≤-23.53 | PASS |
| | | High | 2480 | -4.43 | -47.25 | ≤-24.43 | PASS |
| | | Low | Hop_2402 | -2.80 | -47.26 | ≤-22.8 | PASS |
| | | High | Hop_2480 | -4.40 | -47.13 | ≤-24.4 | PASS |
| 3DH1 | Ant1 | Low | 2402 | -3.51 | -43.52 | ≤-23.51 | PASS |
| | | High | 2480 | -4.42 | -46.27 | ≤-24.42 | PASS |
| | | Low | Hop_2402 | -2.77 | -47.73 | ≤-22.77 | PASS |
| | | High | Hop_2480 | -4.42 | -47 | ≤-24.42 | PASS |

Test Graphs

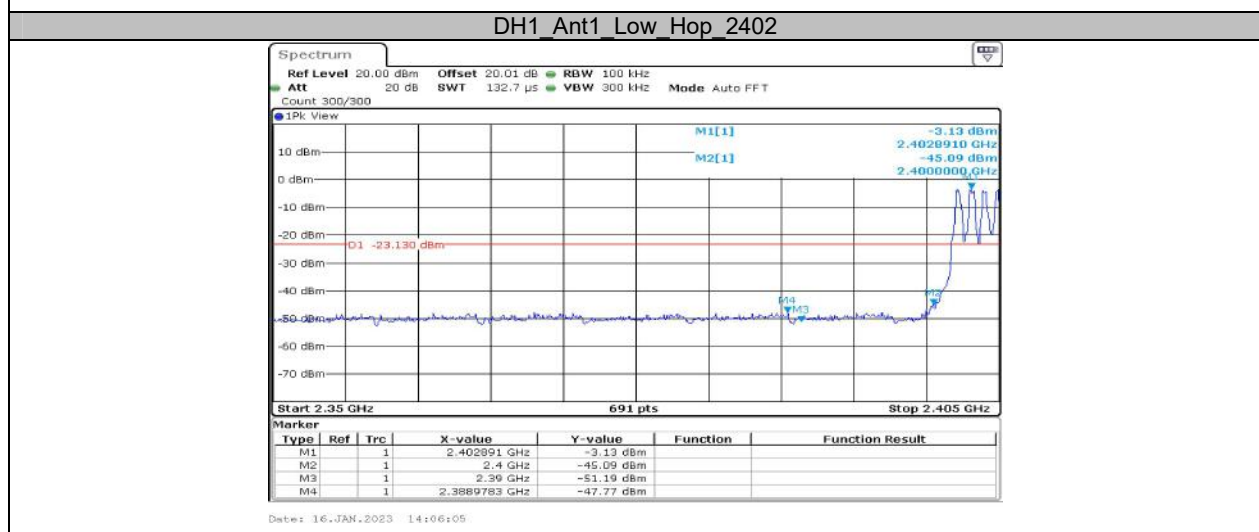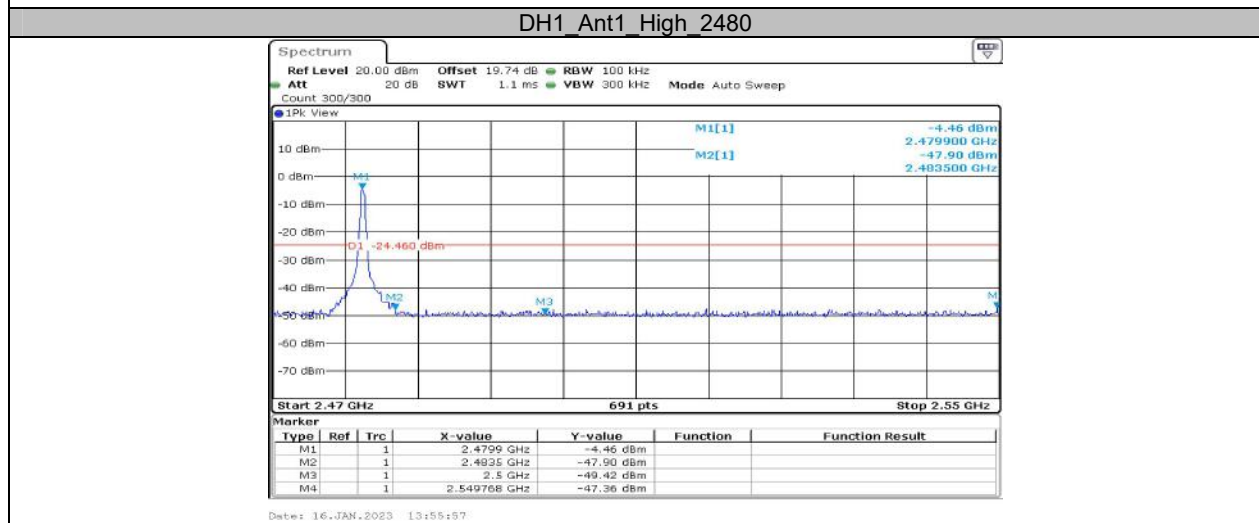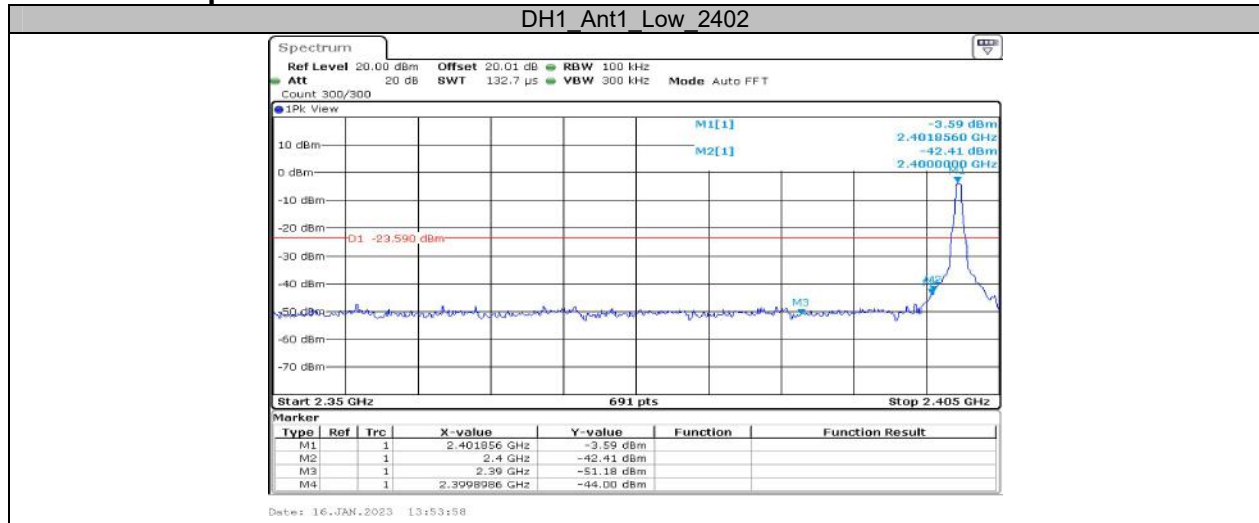

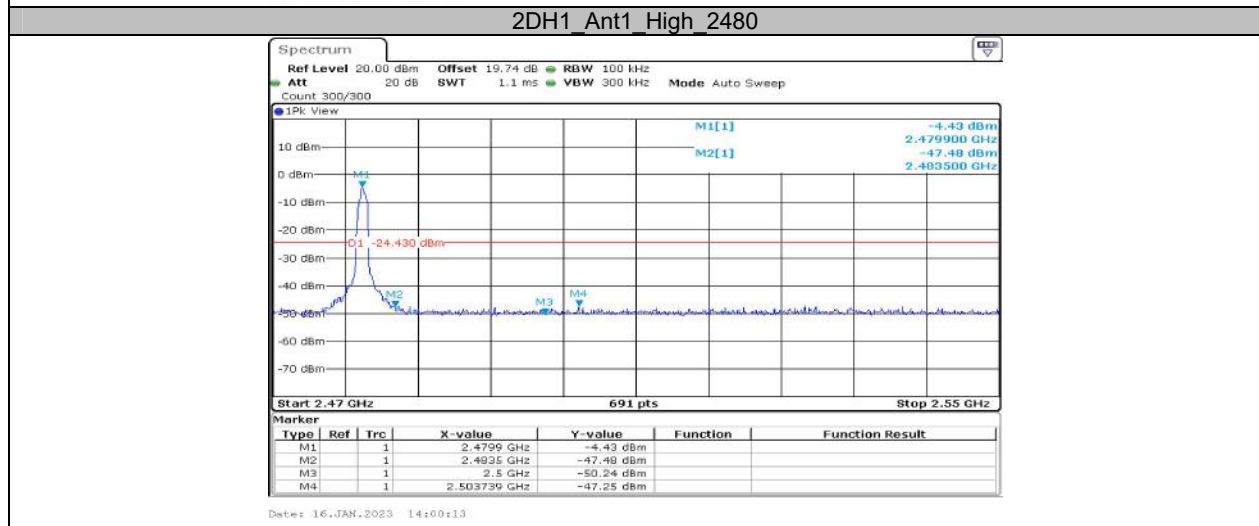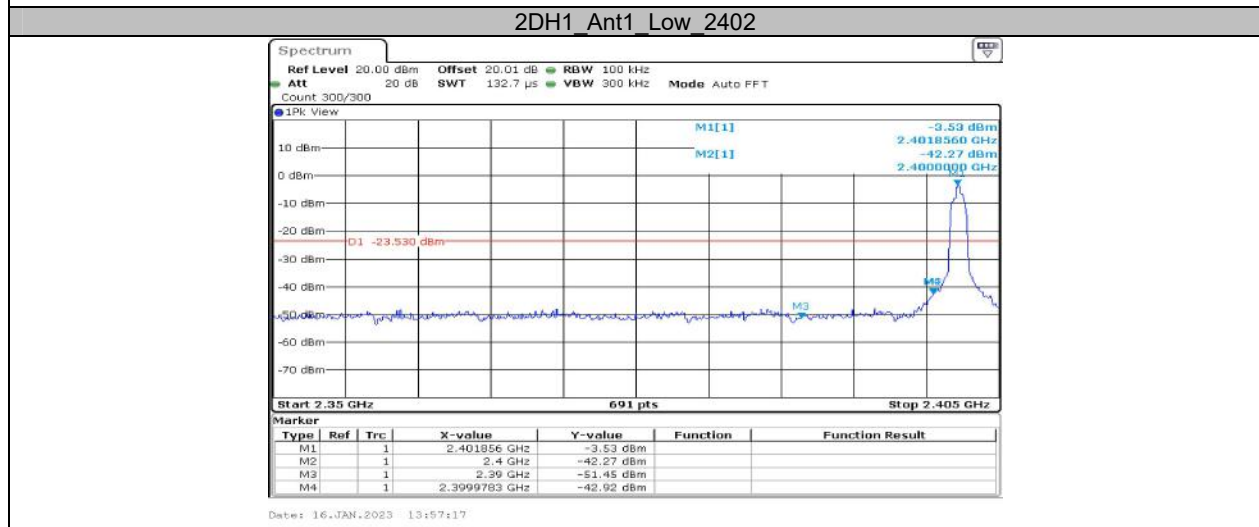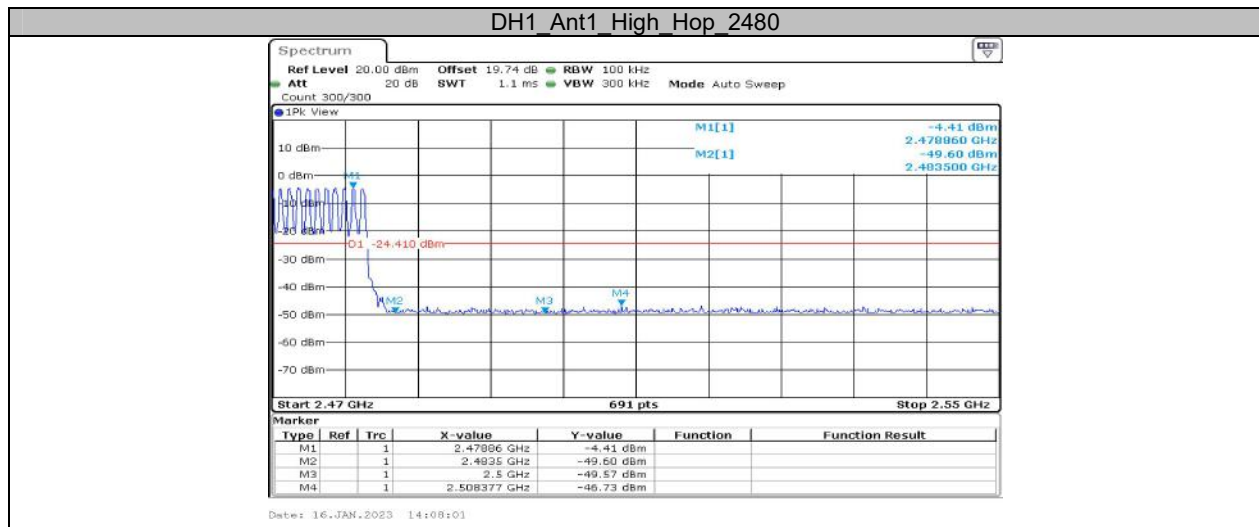

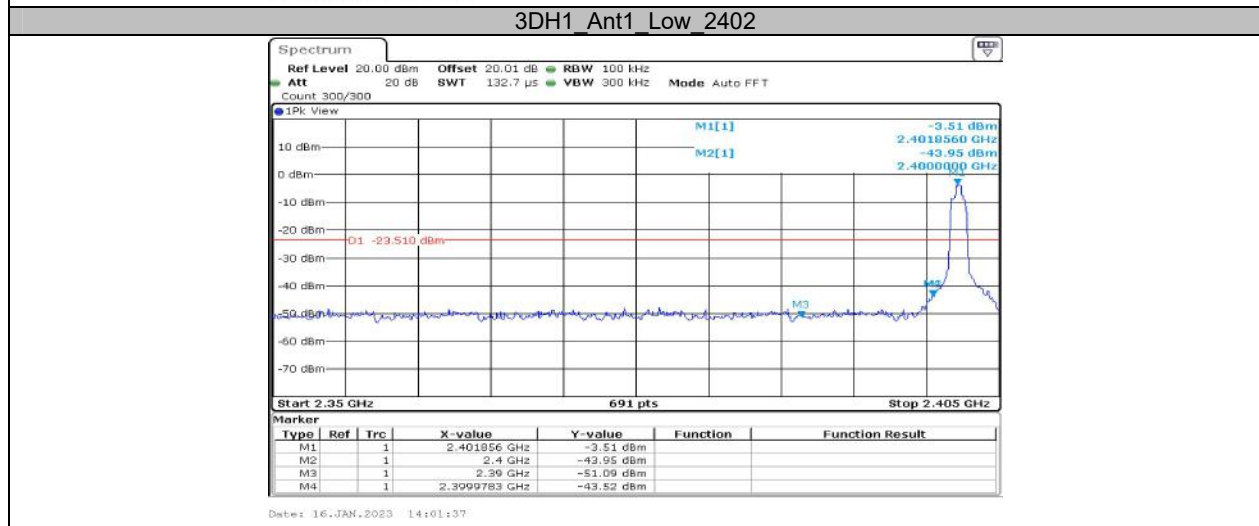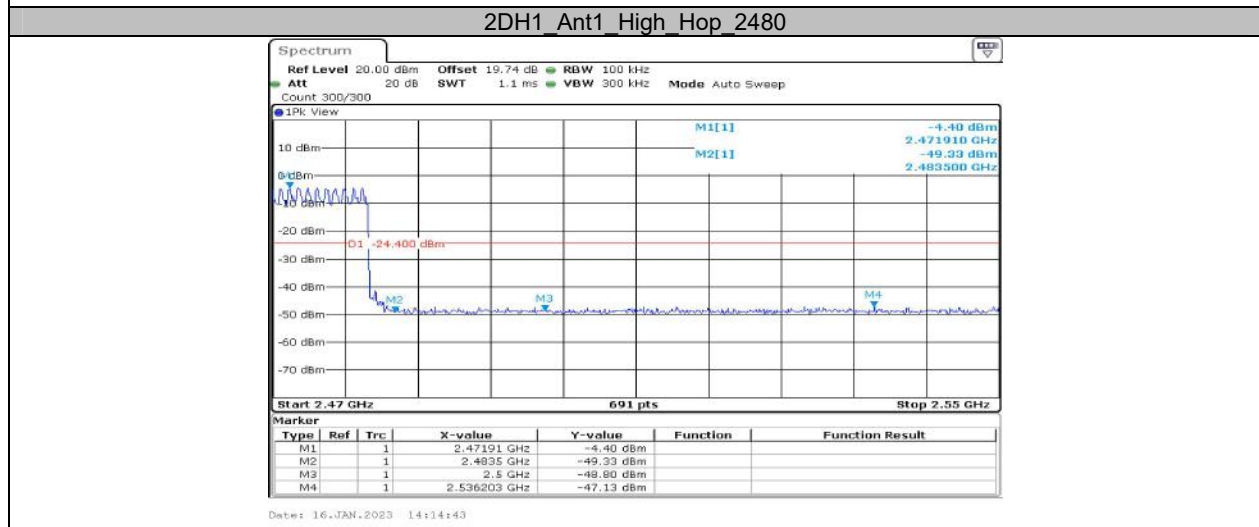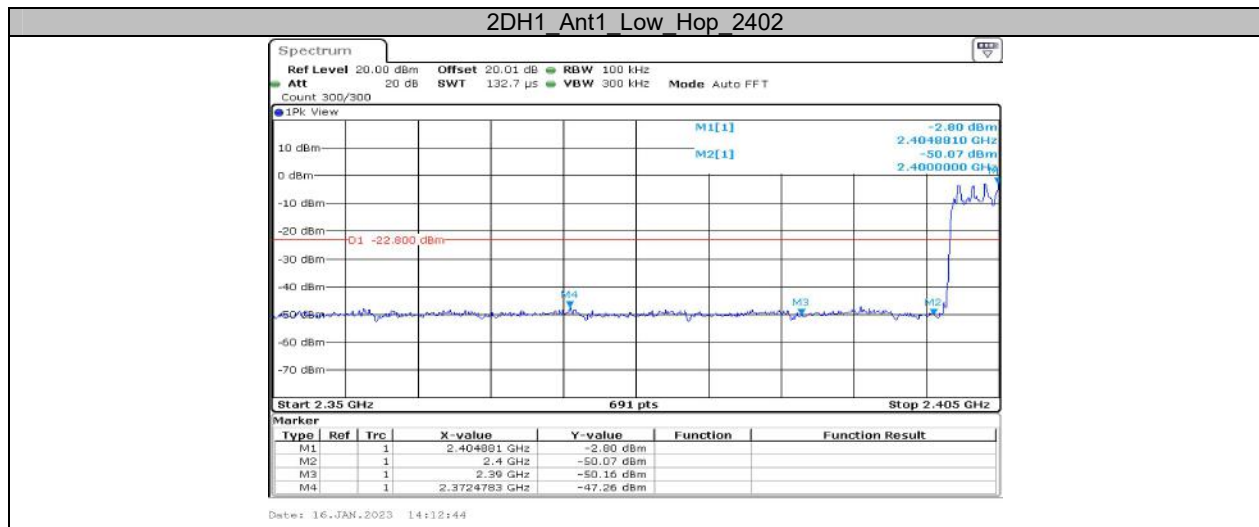

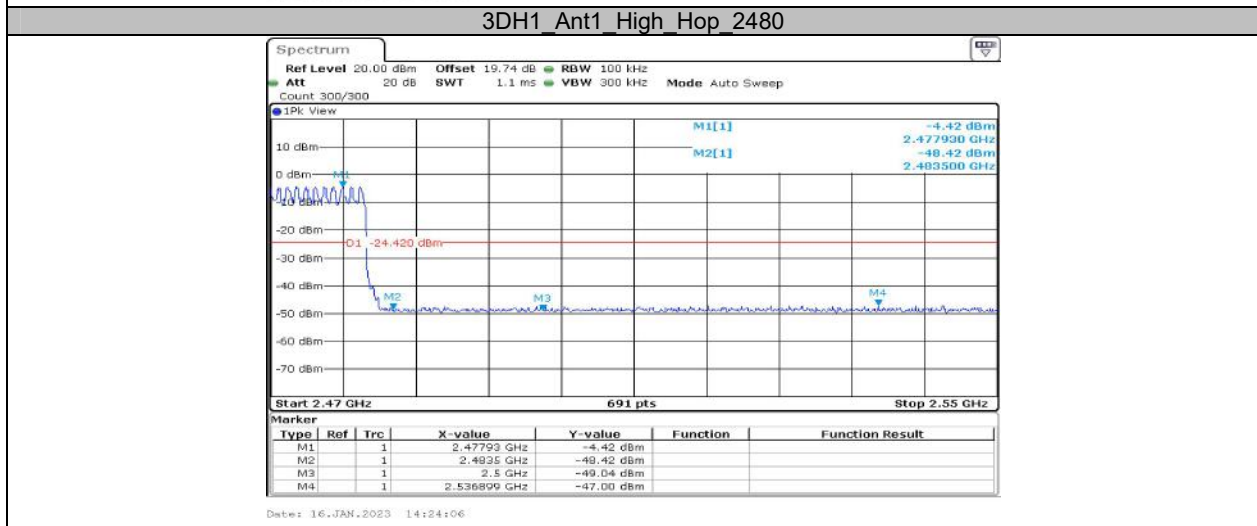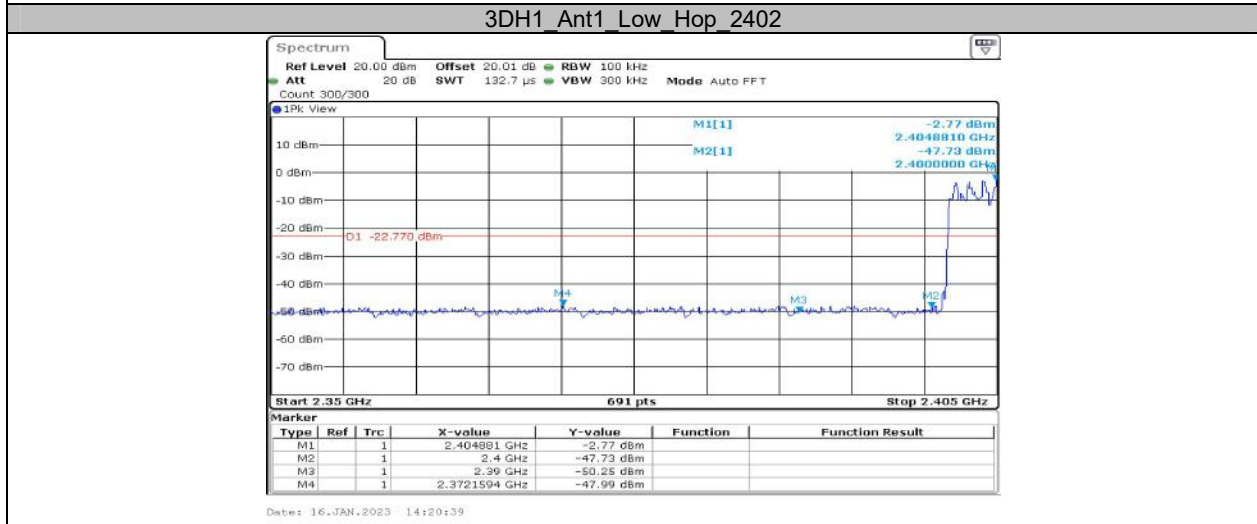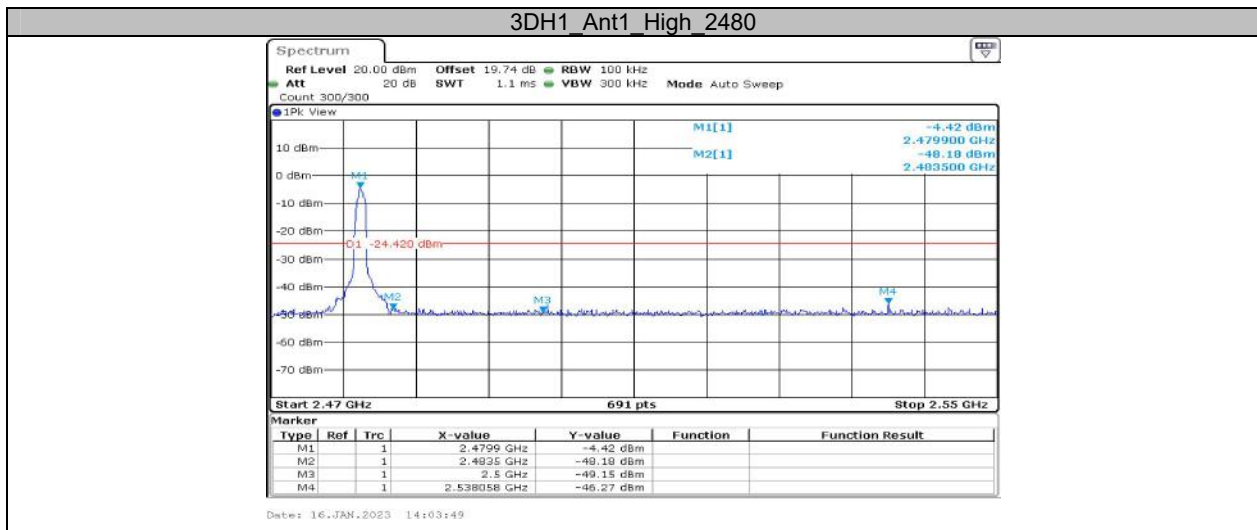

***** END OF REPORT *****