

# TEST REPORT

Applicant Name : Zeeva International Limited  
 Address : Suite 1007B, 10th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Hong Kong  
 Report Number : RA221208-60240E-RF  
 FCC ID: 2ADM5-SP-0205

**Test Standard (s)**  
 FCC PART 15.247

**Sample Description**

Product Type: BT LED EDGE HORT SPKR  
 Test Model: SP-0205, SP-0211  
 Date Received: 2022-12-08  
 Date of Test: 2022-12-19 to 2022-12-26  
 Report Date: 2022-12-28

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

*Roger.Ling*

\_\_\_\_\_  
 Roger.Ling  
 EMC Engineer

**Approved By:**

*Candy Li*

\_\_\_\_\_  
 Candy Li  
 EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “★”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.247 (i), §1.1307 (b) – RF EXPOSURE.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
TEST RESULT .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	13
FACTOR & MARGIN CALCULATION .....	13
TEST DATA .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	19
TEST PROCEDURE .....	19
FACTOR & MARGIN CALCULATION .....	19
TEST DATA .....	19
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH.....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST DATA .....	35
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>45</b>

---

APPLICABLE STANDARD .....	45
TEST PROCEDURE .....	45
TEST DATA .....	45
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>48</b>
APPLICABLE STANDARD .....	48
TEST PROCEDURE .....	48
TEST DATA .....	48
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>58</b>
APPLICABLE STANDARD .....	58
TEST PROCEDURE .....	58
TEST DATA .....	58
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>64</b>
APPLICABLE STANDARD .....	64
TEST PROCEDURE .....	64
TEST DATA .....	64

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	BT LED EDGE HORT SPKR
Tested Model	SP-0205
Multiple Model	SP-0211
SKU	BLACK – 7450039 BLUE – 7450040 RED – 7450041 GREEN - 7450042
UPC	BLACK – 1922344100354 BLUE – 1922344100361 RED – 1922344100378 GREEN - 1922344100385
Model difference	Please refer to DOS Letter
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	1.90dBm
Modulation Technique	BDR(GFSK)/EDR( $\pi/4$ -DQPSK)/EDR(8DPSK)
Antenna Specification*	Internal Antenna: -0.58dBi(provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port.
Sample number	RA221208-60240E-RF-S1 for model SP-0205 RA221208-60240E-RF-S2 for model SP-0211 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition
Note: the model SP-0211 is identical schematic to model SP-0205, except for difference appearance and SP-0205 has one more LED driving circuit than SP-0211, please refer to EUT photo and DOS letter for detail. Both two models were test AC line conducted emission and radiated emission, RF conducted test only test model SP-0205.	

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

---

**SYSTEM TEST CONFIGURATION**

---

**Description of Test Configuration**

The system was configured for testing in an engineering mode.

**EUT Exercise Software**

Software "FCC\_assist\_1.0.2.2"\* was used during testing and the power level was 10\*.

**Special Accessories**

N/A.

**Equipment Modifications**

No modification was made to the EUT tested.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
HUAWEI	Adapter	HW-050100C01	H779K BK6V19398

**External I/O Cable**


Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	0.3	EUT	Adapter

### Block Diagram of Test Setup

For conducted emission:

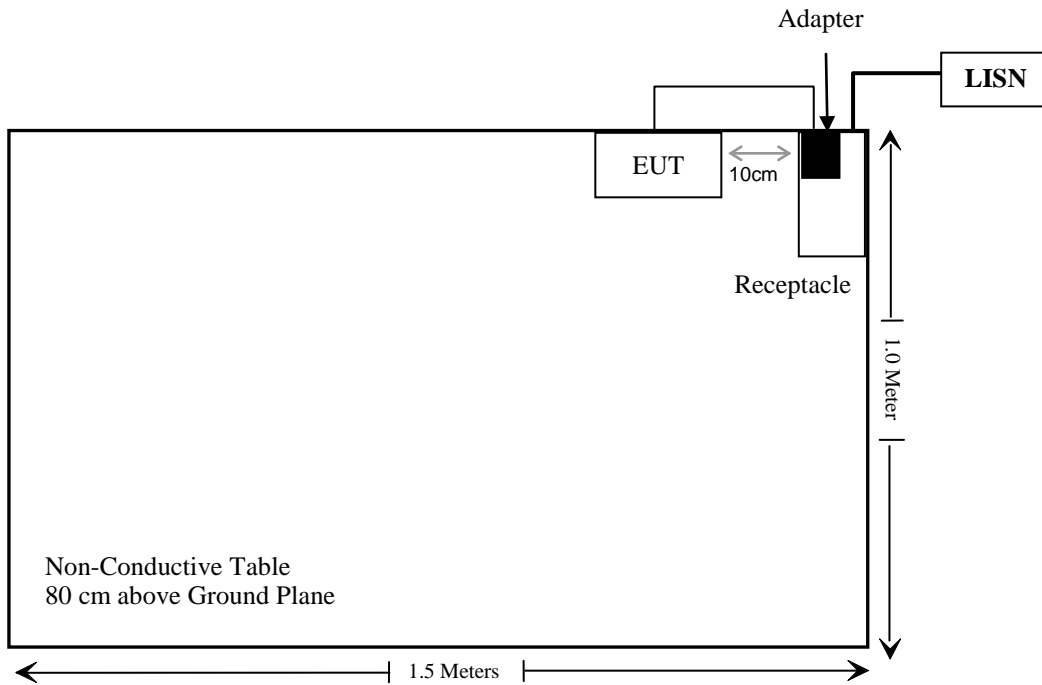

For radiated emission:

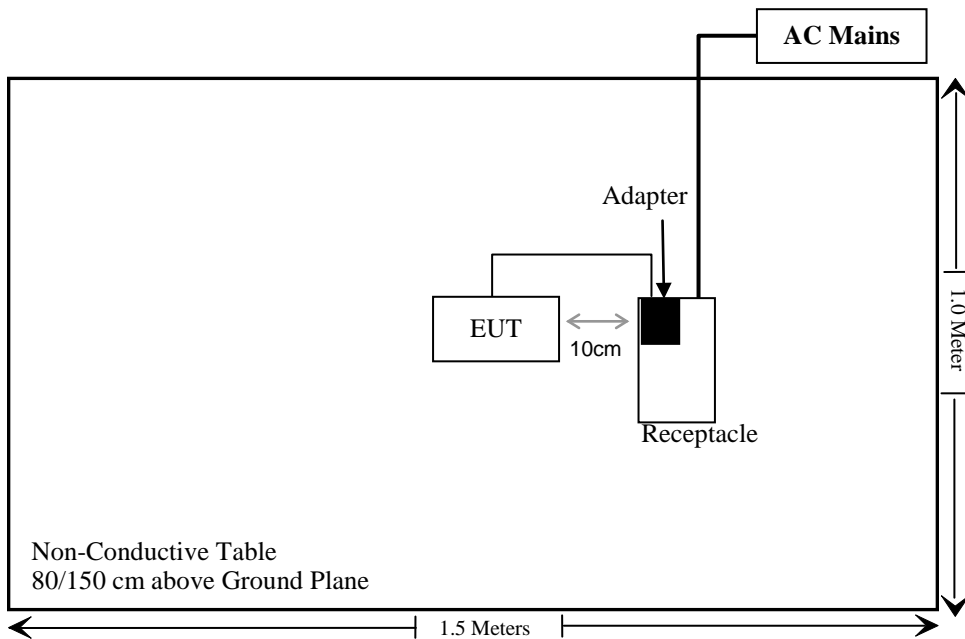

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247(i), §1.1307(b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) – RF EXPOSURE

### Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

### Test Result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (mW)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(mW)		
BDR/EDR	2402-2480	2	1.58	-0.58	-2.73	-0.73	0.85	20	768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result:** Compliant.

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one Internal Antenna arrangement, which was permanently attached and the antenna gain is -0.58dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

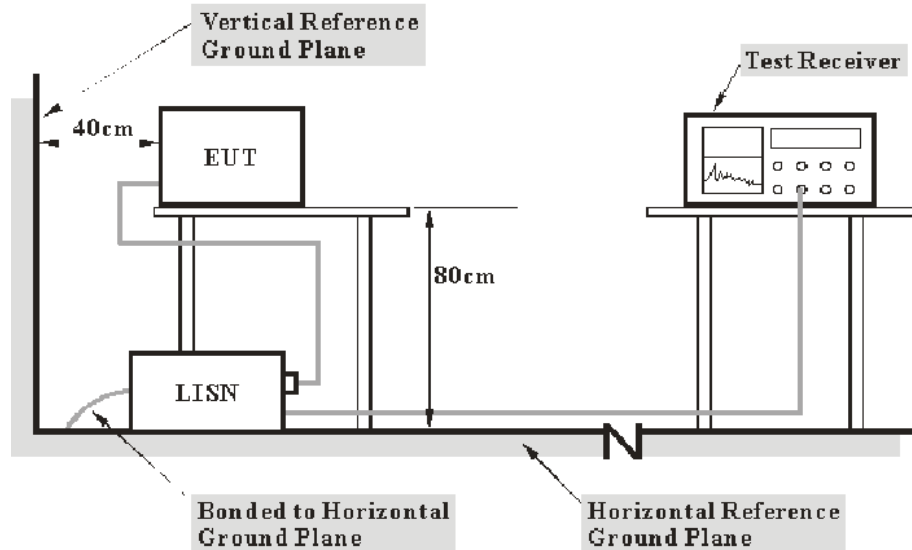

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


<b>Temperature:</b>	18°C
<b>Relative Humidity:</b>	26 %
<b>ATM Pressure:</b>	101.0kPa

*The testing was performed by Chen Jie on 2022-12-19.*

*EUT operation mode: Charging + BT Transmitting*

**For Model SP-0205:**


**AC 120V/60 Hz, Line**

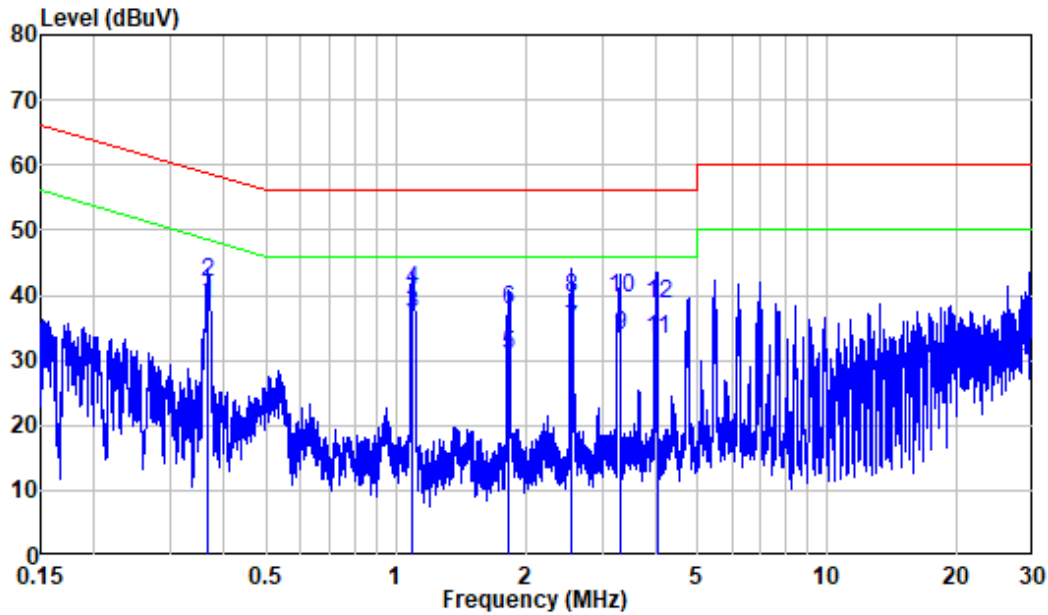

Site : Shielding Room  
 Condition: Line  
 Job No. : RA221208-60240E-RF  
 Mode : BT Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.366	9.80	28.74	38.54	48.58	-10.04	Average
2	0.366	9.80	32.19	41.99	58.58	-16.59	QP
3	1.094	9.81	27.22	37.03	46.00	-8.97	Average
4	1.094	9.81	31.02	40.83	56.00	-15.17	QP
5	1.824	9.82	20.91	30.73	46.00	-15.27	Average
6	1.824	9.82	27.93	37.75	56.00	-18.25	QP
7	2.560	9.83	24.82	34.65	46.00	-11.35	Average
8	2.560	9.83	29.84	39.67	56.00	-16.33	QP
9	3.304	9.83	23.94	33.77	46.00	-12.23	Average
10	3.304	9.83	29.77	39.60	56.00	-16.40	QP
11	4.041	9.84	23.26	33.10	46.00	-12.90	Average
12	4.041	9.84	28.74	38.58	56.00	-17.42	QP
13	29.960	10.10	18.70	28.80	50.00	-21.20	Average
14	29.960	10.10	24.51	34.61	60.00	-25.39	QP

**AC 120V/60 Hz, Neutral**

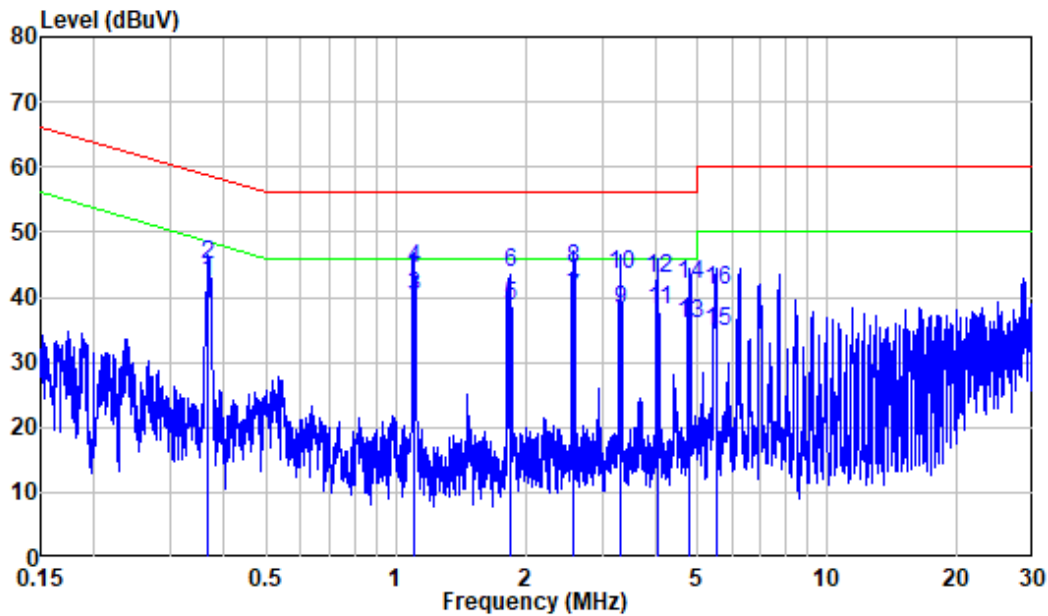


Site : Shielding Room  
 Condition: Neutral  
 Job No. : RA221208-60240E-RF  
 Mode : BT Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.367	9.80	32.39	42.19	48.57	-6.38	Average
2	0.367	9.80	35.10	44.90	58.57	-13.67	QP
3	1.100	9.81	30.29	40.10	46.00	-5.90	Average
4	1.100	9.81	34.63	44.44	56.00	-11.56	QP
5	1.834	9.82	28.67	38.49	46.00	-7.51	Average
6	1.834	9.82	33.93	43.75	56.00	-12.25	QP
7	2.579	9.83	30.02	39.85	46.00	-6.15	Average
8	2.579	9.83	34.43	44.26	56.00	-11.74	QP
9	3.324	9.83	28.35	38.18	46.00	-7.82	Average
10	3.324	9.83	33.75	43.58	56.00	-12.42	QP
11	4.054	9.84	28.18	38.02	46.00	-7.98	Average
12	4.054	9.84	33.16	43.00	56.00	-13.00	QP
13	4.791	9.88	26.07	35.95	46.00	-10.05	Average
14	4.791	9.88	32.14	42.02	56.00	-13.98	QP
15	5.535	9.92	24.95	34.87	50.00	-15.13	Average
16	5.535	9.92	31.19	41.11	60.00	-18.89	QP

**For Model SP-0211:**

**AC 120V/60 Hz, Line**

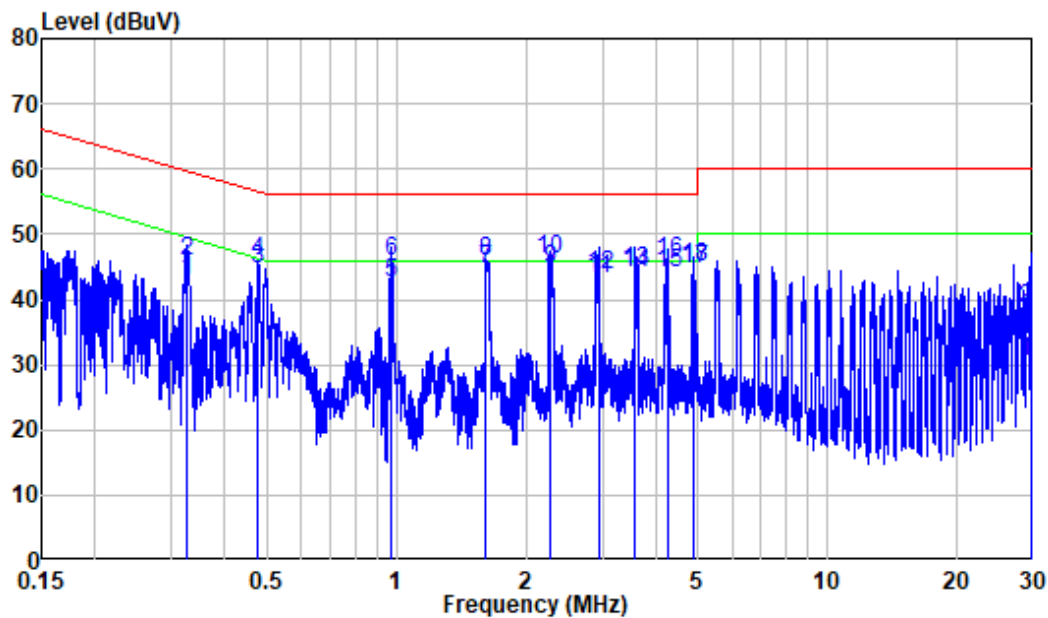


Site : Shielding Room  
 Condition: Line  
 Job No. : RA221208-60240E-RF  
 Mode : Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.326	9.80	32.97	42.77	49.56	-6.79	Average
2	0.326	9.80	36.07	45.87	59.56	-13.69	QP
3	0.477	9.80	34.97	44.77	46.40	-1.63	Average
4	0.477	9.80	36.11	45.91	56.40	-10.49	QP
5	0.974	9.81	32.82	42.63	46.00	-3.37	Average
6	0.974	9.81	35.94	45.75	56.00	-10.25	QP
7	1.613	9.82	34.88	44.70	46.00	-1.30	Average
8	1.613	9.82	35.98	45.80	56.00	-10.20	QP
9	2.261	9.82	34.96	44.78	46.00	-1.22	Average
10	2.261	9.82	36.35	46.17	56.00	-9.83	QP
11	2.940	9.83	33.36	43.19	46.00	-2.81	Average
12	2.940	9.83	33.98	43.81	56.00	-12.19	QP
13	3.568	9.84	34.51	44.35	46.00	-1.65	Average
14	3.568	9.84	34.24	44.08	56.00	-11.92	QP
15	4.264	9.84	34.18	44.02	46.00	-1.98	Average
16	4.264	9.84	36.17	46.01	56.00	-9.99	QP
17	4.900	9.85	34.83	44.68	46.00	-1.32	Average
18	4.900	9.85	35.16	45.01	56.00	-10.99	QP
19	29.586	10.10	20.27	30.37	50.00	-19.63	Average
20	29.586	10.10	28.48	38.58	60.00	-21.42	QP



**AC 120V/60 Hz, Neutral**


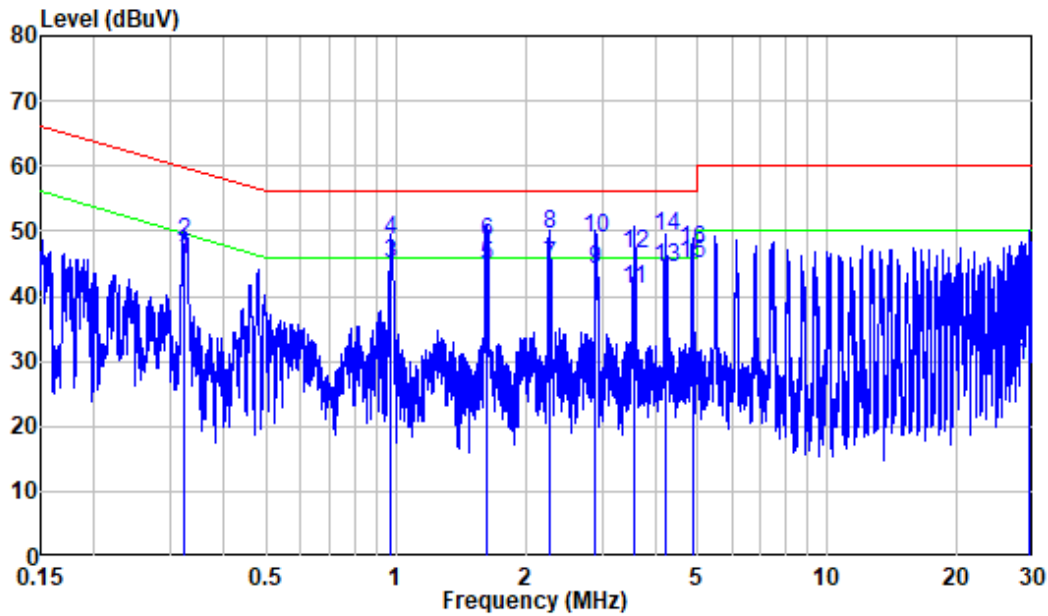


Site : Shielding Room  
 Condition: Neutral  
 Job No. : RA221208-60240E-RF  
 Mode : Transmitting  
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.324	9.80	35.83	45.63	49.60	-3.97	Average
2	0.324	9.80	38.56	48.36	59.60	-11.24	QP
3	0.970	9.81	35.06	44.87	46.00	-1.13	Average
4	0.970	9.81	38.81	48.62	56.00	-7.38	QP
5	1.627	9.82	34.94	44.76	46.00	-1.24	Average
6	1.627	9.82	38.40	48.22	56.00	-7.78	QP
7	2.271	9.82	34.86	44.68	46.00	-1.32	Average
8	2.271	9.82	39.83	49.65	56.00	-6.35	QP
9	2.894	9.83	34.37	44.20	46.00	-1.80	Average
10	2.894	9.83	38.94	48.77	56.00	-7.23	QP
11	3.558	9.84	31.28	41.12	46.00	-4.88	Average
12	3.558	9.84	36.77	46.61	56.00	-9.39	QP
13	4.224	9.85	34.68	44.53	46.00	-1.47	Average
14	4.224	9.85	39.23	49.08	56.00	-6.92	QP
15	4.861	9.88	34.97	44.85	46.00	-1.15	Average
16	4.861	9.88	37.30	47.18	56.00	-8.82	QP
17	29.235	10.19	19.04	29.23	50.00	-20.77	Average
18	29.235	10.19	25.03	35.22	60.00	-24.78	QP

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

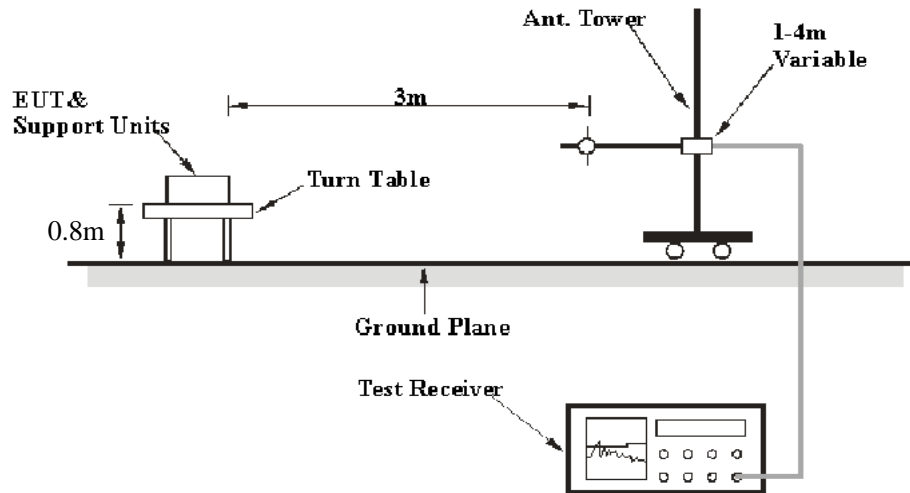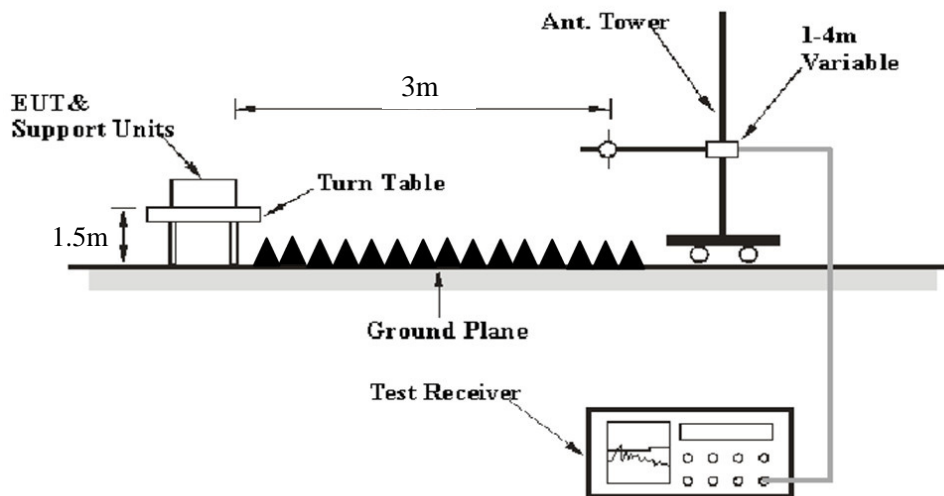**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1*L_1+N_2*L_2+\dots+N_{n-1}*L_{n-1}+N_n*L_n$ ,

Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20\*log(Duty cycle)

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

### Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23~24 °C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Jason Liu from 2022-12-19 to 2022-12-26.


EUT operation mode: Transmitting

(Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK mode at X axis, Y axis, Z axis, the worst case is 8DPSK Mode at Y axis)

**Below 1GHz: 8DPSK, High Channel:**

**For Model SP-0205:**


**Horizontal**

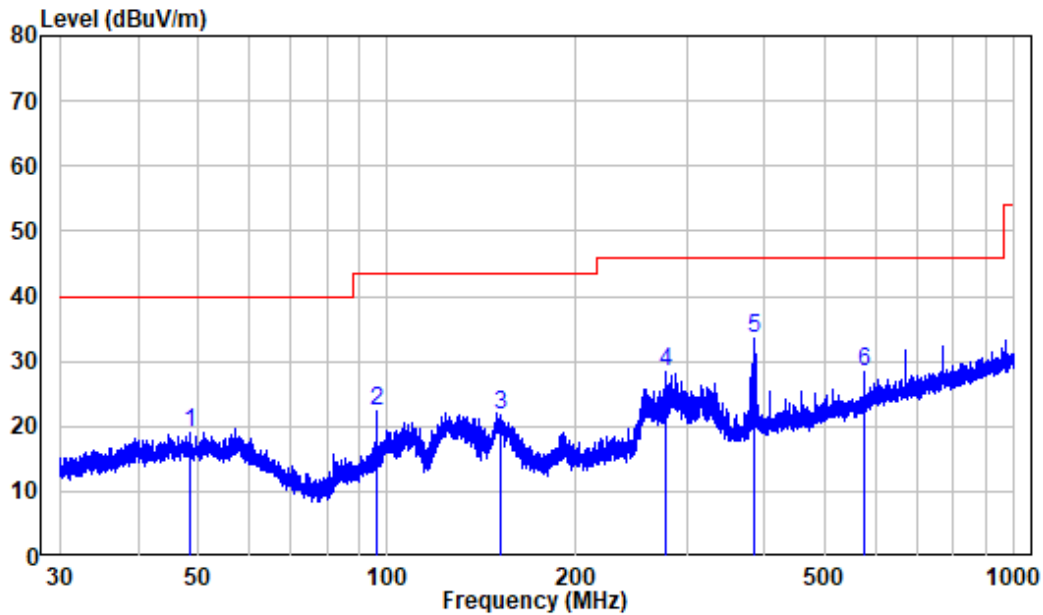

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : RA221208-60240E-RF  
 Test Mode: BT transmitting

	Read	Limit	Over				
Freq	Level	Line	Limit	Remark			
MHz	dB/m	dBuV	dBuV/m	dBuV/m			
1	48.332	-9.98	28.94	18.96	40.00	-21.04	Peak
2	95.972	-12.31	34.54	22.23	43.50	-21.27	Peak
3	151.930	-15.16	36.76	21.60	43.50	-21.90	Peak
4	277.945	-9.71	38.09	28.38	46.00	-17.62	Peak
5	384.100	-7.08	40.52	33.44	46.00	-12.56	Peak
6	576.139	-3.70	31.96	28.26	46.00	-17.74	Peak

**Vertical**

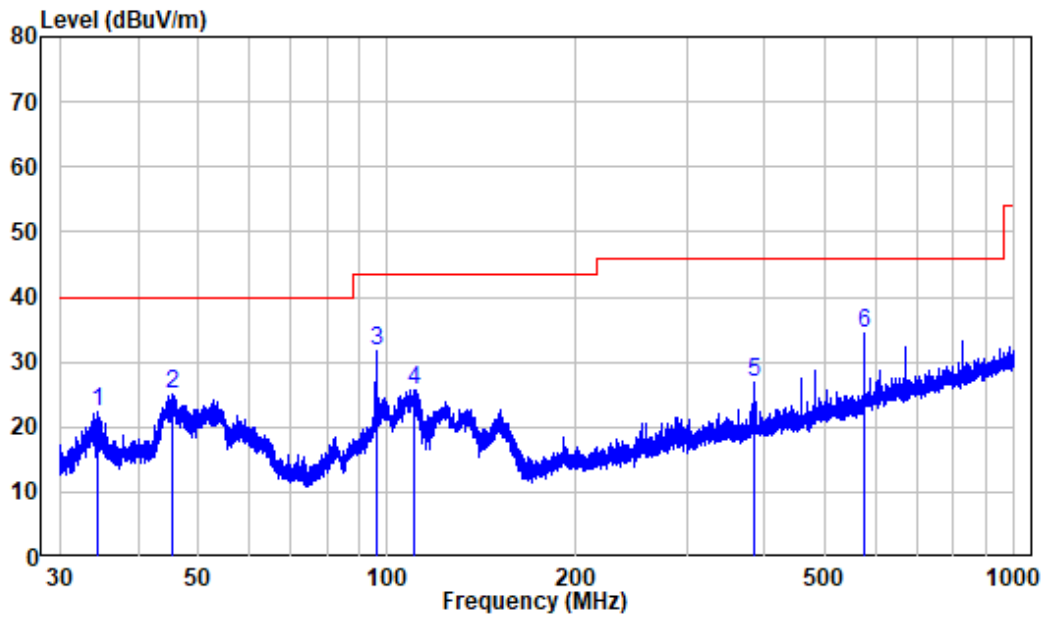


Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : RA221208-60240E-RF  
 Test Mode: BT transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.578	-11.68	34.00	22.32	40.00	-17.68	Peak
2	45.475	-9.96	35.09	25.13	40.00	-14.87	Peak
3	96.014	-12.30	43.88	31.58	43.50	-11.92	Peak
4	110.230	-11.99	37.78	25.79	43.50	-17.71	Peak
5	384.100	-7.08	34.02	26.94	46.00	-19.06	Peak
6	576.139	-3.70	38.03	34.33	46.00	-11.67	Peak

For Model SP-0211:


Horizontal

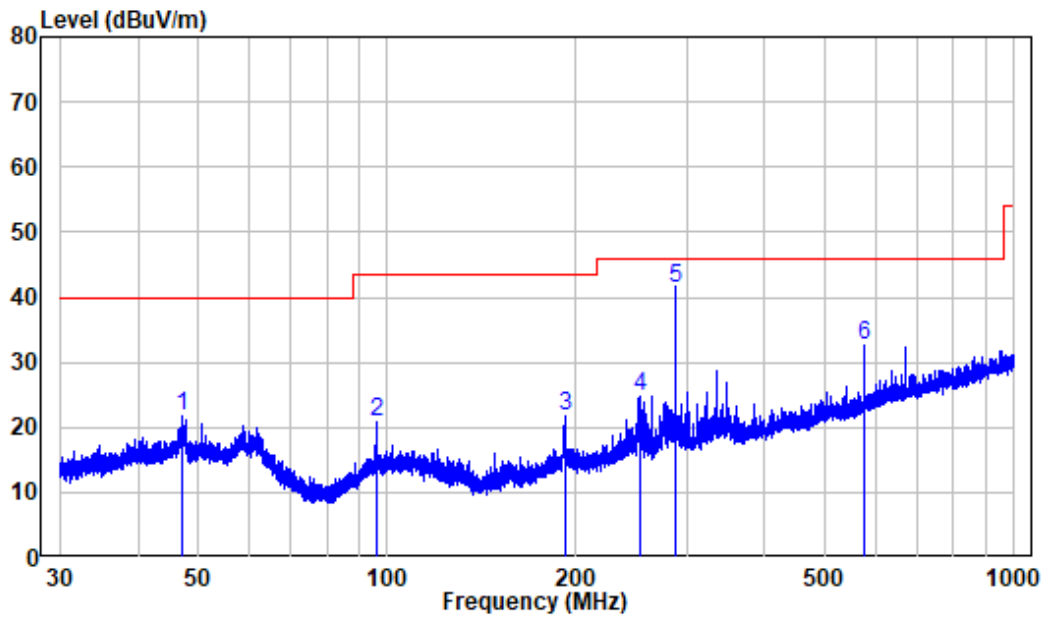

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No. : RA221208-60240E-RF  
 Test Mode: BT transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.057	-10.00	31.72	21.72	40.00	-18.28	Peak
2	95.972	-12.31	33.11	20.80	43.50	-22.70	Peak
3	191.997	-11.25	33.10	21.85	43.50	-21.65	Peak
4	253.614	-10.65	35.52	24.87	46.00	-21.13	Peak
5	287.990	-9.36	50.80	41.44	46.00	-4.56	QP
6	576.139	-3.70	36.37	32.67	46.00	-13.33	Peak

**Vertical**

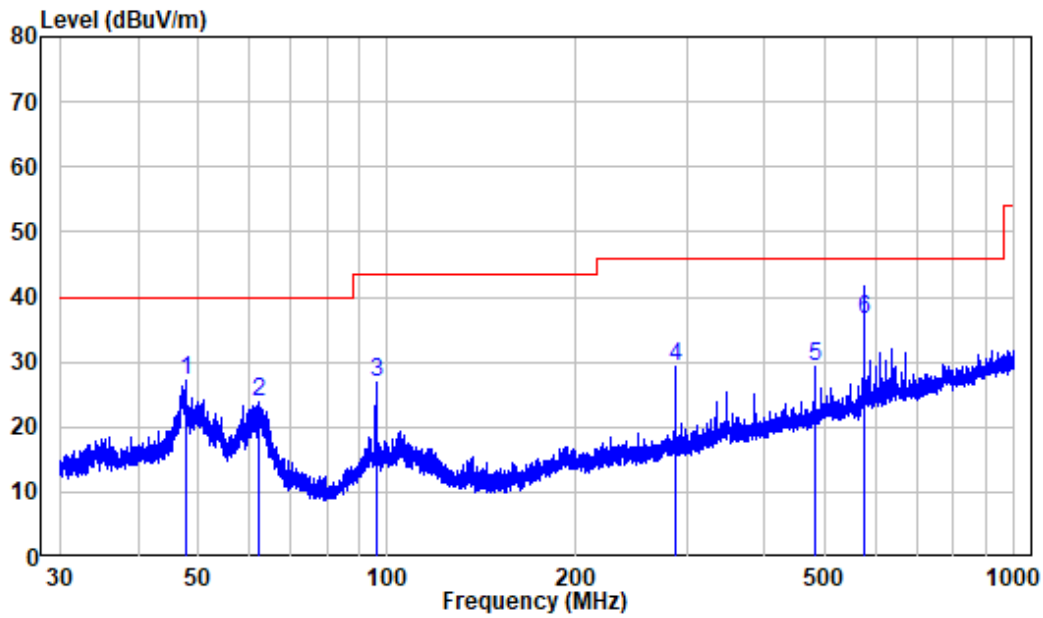

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : RA221208-60240E-RF  
 Test Mode: BT transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.805	-10.00	37.07	27.07	40.00	-12.93	Peak
2	62.186	-11.50	35.42	23.92	40.00	-16.08	Peak
3	95.972	-12.31	39.25	26.94	43.50	-16.56	Peak
4	287.990	-9.36	38.70	29.34	46.00	-16.66	Peak
5	480.107	-5.00	34.39	29.39	46.00	-16.61	Peak
6	576.139	-3.70	40.20	36.50	46.00	-9.50	QP

**Above 1GHz (worst case for 8DPSK):****Model SP-0205**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	46.84	PK	257	1.3	H	-7.23	39.61	74	-34.39
2310	49.61	PK	198	1.4	V	-7.23	42.38	74	-31.62
2390	54.85	PK	34	1.3	H	-7.21	47.64	74	-26.36
2390	51.54	PK	348	2.0	V	-7.21	44.33	74	-29.67
4804	59.66	PK	222	2.0	H	-3.52	56.14	74	-17.86
4804	59.53	PK	145	1.6	V	-3.52	56.01	74	-17.99
Middle Channel									
4882	55.7	PK	154	1.9	H	-3.37	52.33	74	-21.67
4882	55.99	PK	32	1.2	V	-3.37	52.62	74	-21.38
High Channel									
2483.5	61.99	PK	306	1.3	H	-7.2	54.79	74	-19.21
2483.5	52.45	PK	323	1.6	V	-7.2	45.25	74	-28.75
2500	55.36	PK	26	2.2	H	-7.18	48.18	74	-25.82
2500	49.04	PK	199	1.4	V	-7.18	41.86	74	-32.14
4960	59.68	PK	237	1.3	H	-3.01	56.67	74	-17.33
4960	58.34	PK	147	2.2	V	-3.01	55.33	74	-18.67

**Model SP-0211**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	48.39	PK	289	1.5	H	-7.23	41.16	74	-32.84
2310	50.76	PK	180	2.0	V	-7.23	43.53	74	-30.47
2390	54.2	PK	303	1.5	H	-7.21	46.99	74	-27.01
2390	52.72	PK	17	1.4	V	-7.21	45.51	74	-28.49
4804	57.38	PK	4	1.8	H	-3.52	53.86	74	-20.14
4804	57.41	PK	93	2.1	V	-3.52	53.89	74	-20.11
Middle Channel									
4882	55.79	PK	241	2.0	H	-3.37	52.42	74	-21.58
4882	56.03	PK	67	1.2	V	-3.37	52.66	74	-21.34
High Channel									
2483.5	52.03	PK	20	1.9	H	-7.2	44.83	74	-29.17
2483.5	52.74	PK	277	1.9	V	-7.2	45.54	74	-28.46
2500	54.61	PK	44	1.9	H	-7.18	47.43	74	-26.57
2500	55.82	PK	251	1.9	V	-7.18	48.64	74	-25.36
4960	57.17	PK	202	1.9	H	-3.01	54.16	74	-19.84
4960	58.42	PK	97	1.7	V	-3.01	55.41	74	-18.59



**Model SP-0205:**

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Part 15.247		
					Limit (dB $\mu$ V/m)	Margin (dB)	Comment
Low Channel							
2310	39.61	H	-23.91	15.7	54	-38.3	Band edge
2310	42.38	V	-23.91	18.47	54	-35.53	Band edge
2390	47.64	H	-23.91	23.73	54	-30.27	Band edge
2390	44.33	V	-23.91	20.42	54	-33.58	Band edge
4804	56.14	H	-23.91	32.23	54	-21.77	Harmonic
4804	56.01	V	-23.91	32.1	54	-21.9	Harmonic
Middle Channel							
4882	52.33	H	-23.91	28.42	54	-25.58	Harmonic
4882	52.62	V	-23.91	28.71	54	-25.29	Harmonic
High Channel							
2483.5	54.79	H	-23.91	30.88	54	-23.12	Band edge
2483.5	45.25	V	-23.91	21.34	54	-32.66	Band edge
2500	48.18	H	-23.91	24.27	54	-29.73	Band edge
2500	41.86	V	-23.91	17.95	54	-36.05	Band edge
4960	56.67	H	-23.91	32.76	54	-21.24	Harmonic
4960	55.33	V	-23.91	31.42	54	-22.58	Harmonic

**Model SP-0211:**

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dB $\mu$ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Part 15.247		
					Limit (dB $\mu$ V/m)	Margin (dB)	Comment
Low Channel							
2310	41.16	H	-23.91	17.25	54	-36.75	Band edge
2310	43.53	V	-23.91	19.62	54	-34.38	Band edge
2390	46.99	H	-23.91	23.08	54	-30.92	Band edge
2390	45.51	V	-23.91	21.6	54	-32.4	Band edge
4804	53.86	H	-23.91	29.95	54	-24.05	Harmonic
4804	53.89	V	-23.91	29.98	54	-24.02	Harmonic
Middle Channel							
4882	52.42	H	-23.91	28.51	54	-25.49	Harmonic
4882	52.66	V	-23.91	28.75	54	-25.25	Harmonic
High Channel							
2483.5	44.83	H	-23.91	20.92	54	-33.08	Band edge
2483.5	45.54	V	-23.91	21.63	54	-32.37	Band edge
2500	47.43	H	-23.91	23.52	54	-30.48	Band edge
2500	48.64	V	-23.91	24.73	54	-29.27	Band edge
4960	54.16	H	-23.91	30.25	54	-23.75	Harmonic
4960	55.41	V	-23.91	31.5	54	-22.5	Harmonic

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Absolute Level (Corrected Amplitude) = Factor + Reading  
 Margin = Absolute Level (Corrected Amplitude) – Limit  
 The other spurious emission which is in the noise floor level was not recorded.


Average level= Peak level+ Duty Cycle Corrected Factor

The worst case duty cycle as below:

Duty cycle = Ton/100ms = (3.188\*2)/100=0.06376

Duty Cycle Corrected Factor = 20\*log(Duty cycle) = 20\*log(0.06376) = -23.91

**Duty Cycle**

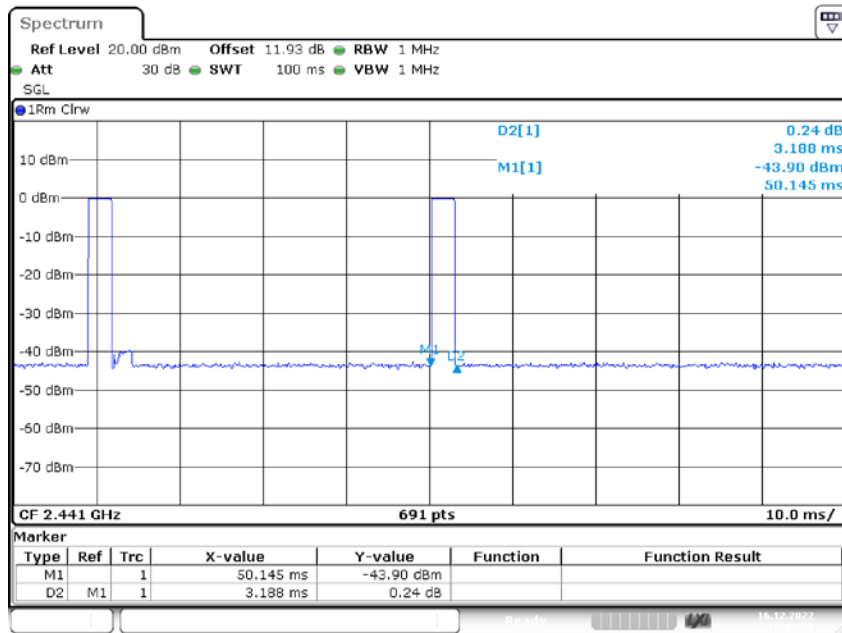


Date: 16.DEC.2022 16:02:38

1 GHz - 18 GHz: (Pre-Scan plots)


Worst case for High Channel:

Horizontal

Model SP-0205

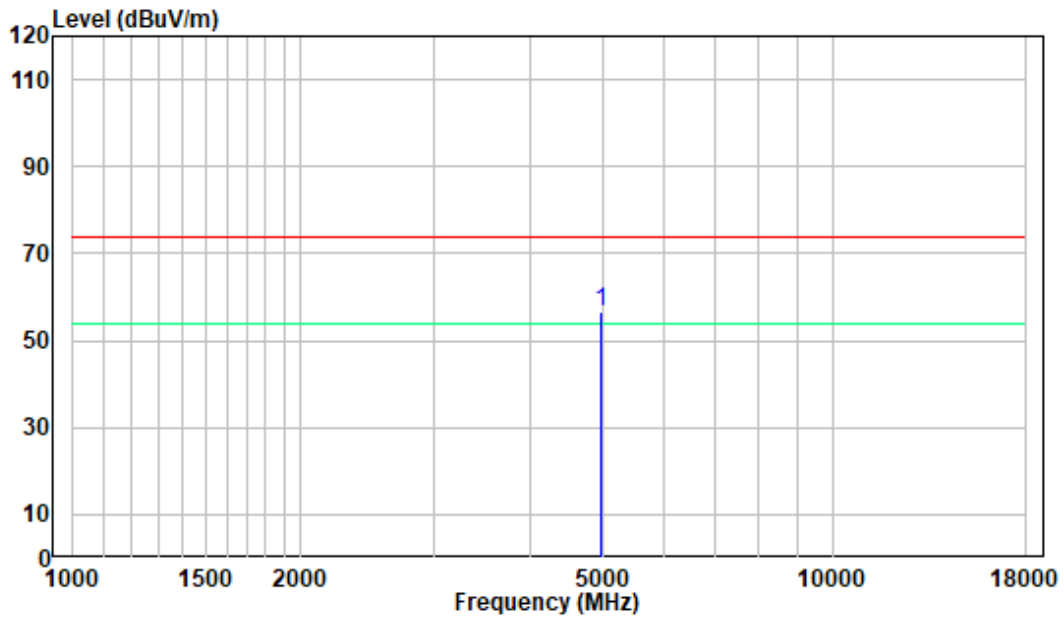


Model SP-0211

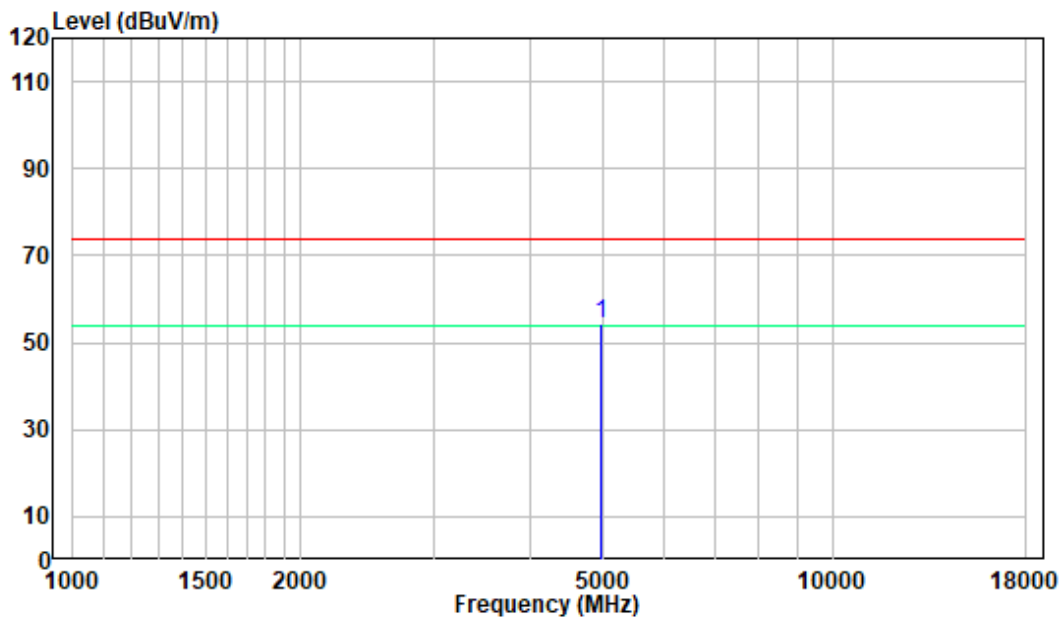


**Vertical**

**Model SP-0205**

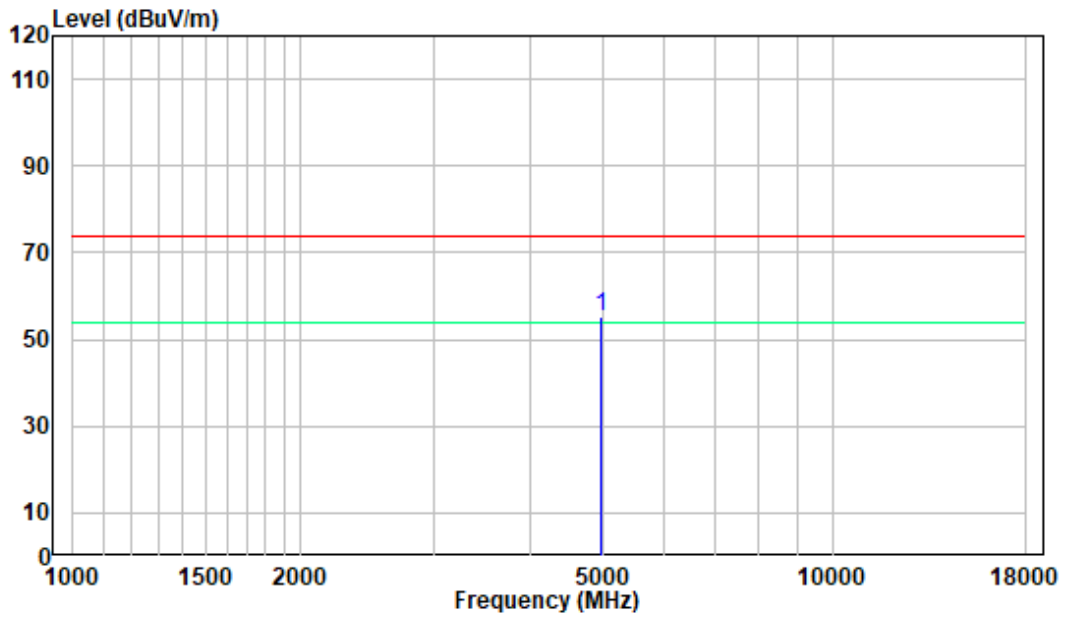

**Model SP-0211**

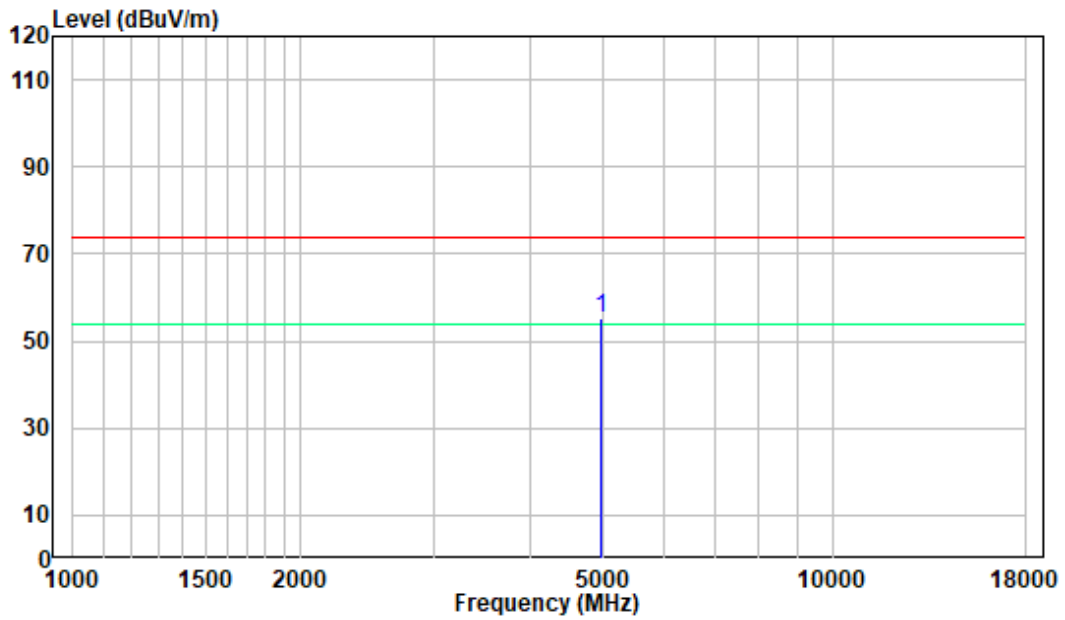


**18-25GHz:** (Pre-Scan plots)


**Worst case for High Channel:**

**Horizontal**

**Model SP-0205**

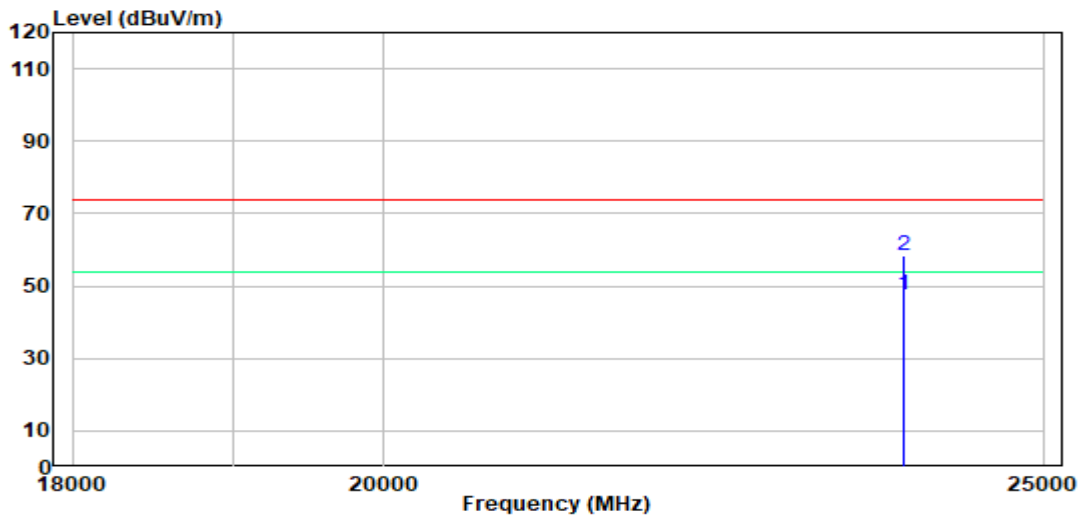


**Model SP-0211**

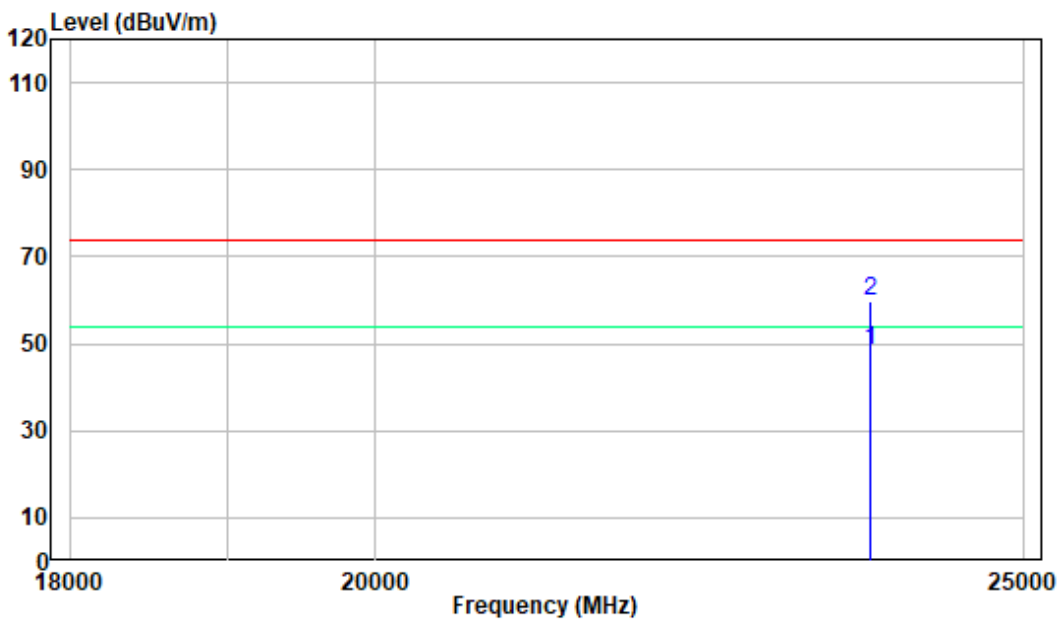


**Vertical**

**Model SP-0205**

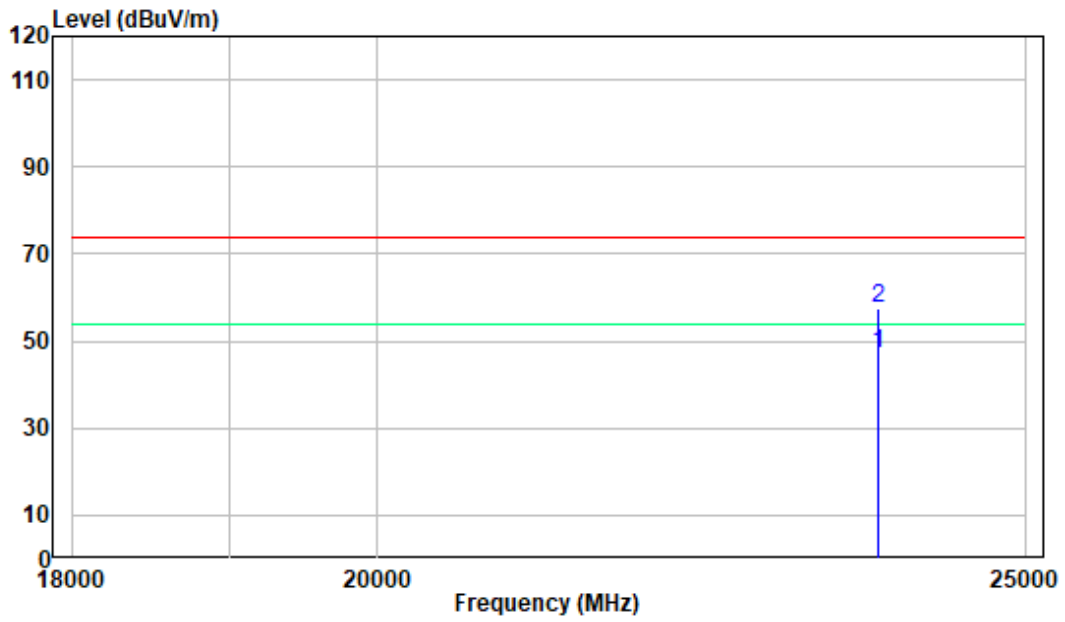

**Model SP-0211**

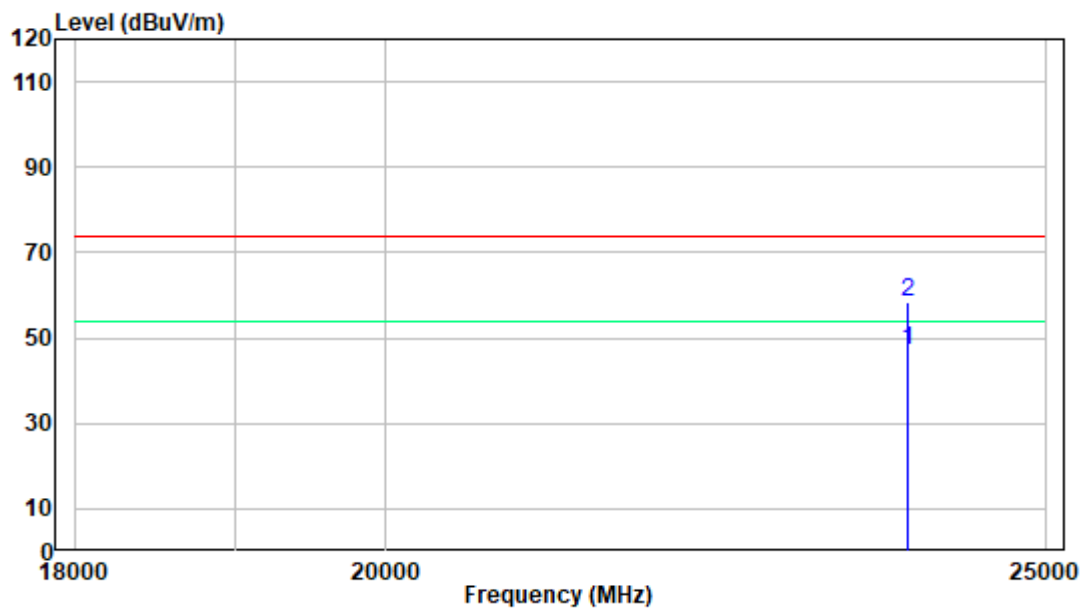


## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in TX mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	$\geq 0.712$	PASS
2DH5	Ant1	Hop	1.003	$\geq 0.900$	PASS
3DH5	Ant1	Hop	1.003	$\geq 0.866$	PASS

Note: The limit =  $(2/3) * 20\text{dB bandwidth}$


Please refer to the below plots:

### DH5\_Ant1\_Hop

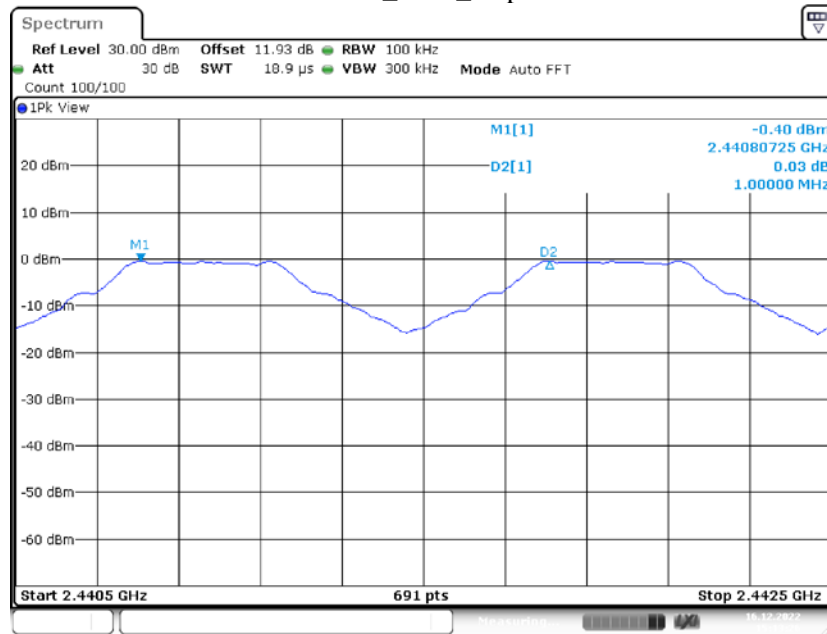

Date: 16.DEC.2022 15:13:27


### 2DH5\_Ant1\_Hop

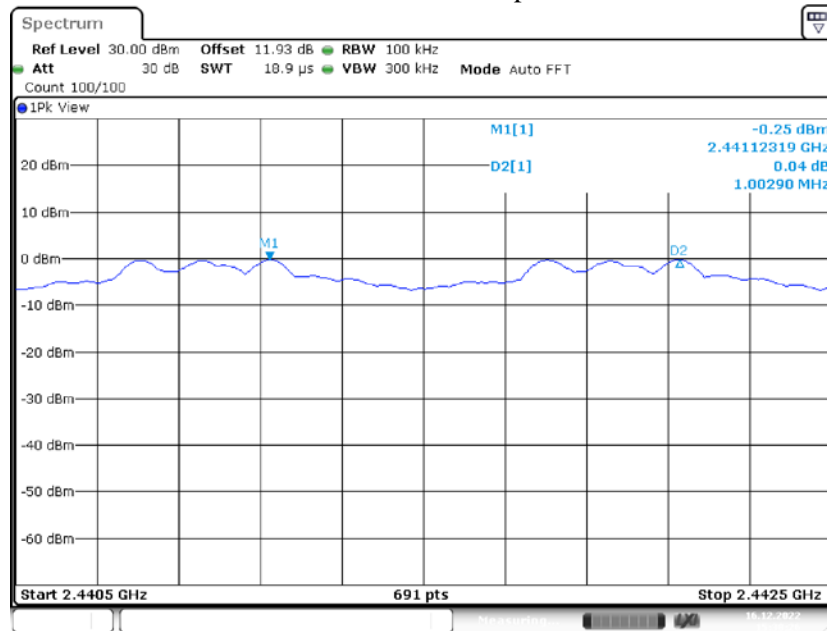

Date: 16.DEC.2022 15:38:27



### 3DH5\_Ant1\_Hop

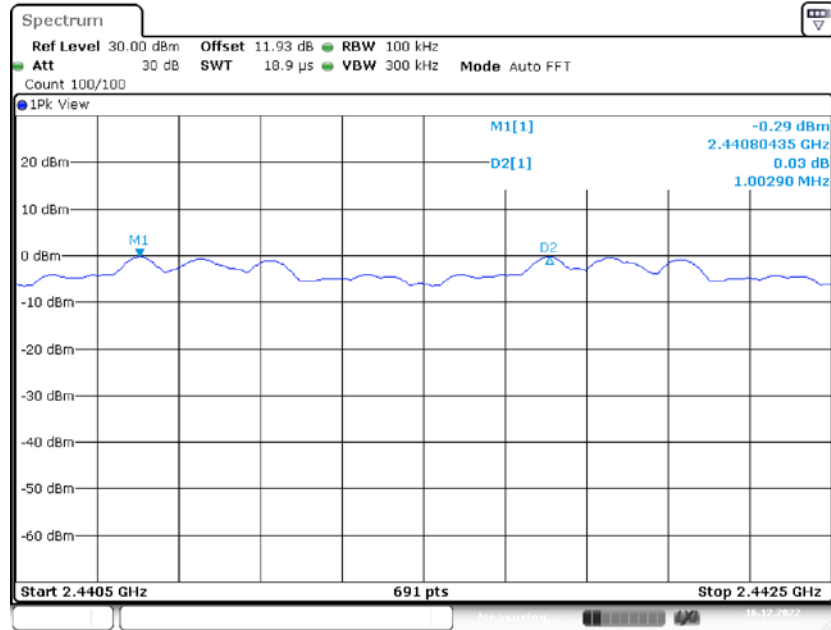

Date: 16.DEC.2022 15:47:46

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not TX continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



**Test Data****Environmental Conditions**

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.


EUT operation mode: Transmitting

Test Result: Compliant.

TestMode	Antenna	Channel	20db EBW[MHz]	99% OCCUPIED BANDWIDTH[MHz]	Verdict
DH5	Ant1	2402	1.068	0.944	PASS
		2441	1.058	0.953	PASS
		2480	1.068	0.968	PASS
2DH5	Ant1	2402	1.335	1.214	PASS
		2441	1.338	1.226	PASS
		2480	1.350	1.241	PASS
3DH5	Ant1	2402	1.299	1.211	PASS
		2441	1.296	1.217	PASS
		2480	1.293	1.22	PASS


Please refer to the below plots:

**20 dB EMISSION BANDWIDTH\_DH5\_Ant1\_2402**

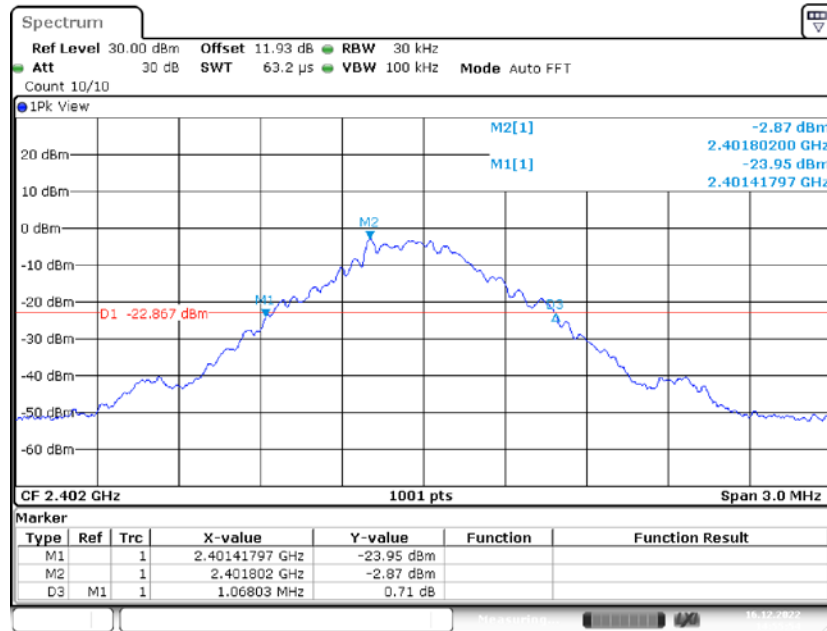


Date: 16.DEC.2022 14:55:54

**99% OCCUPIED BANDWIDTH\_DH5\_Ant1\_2402**

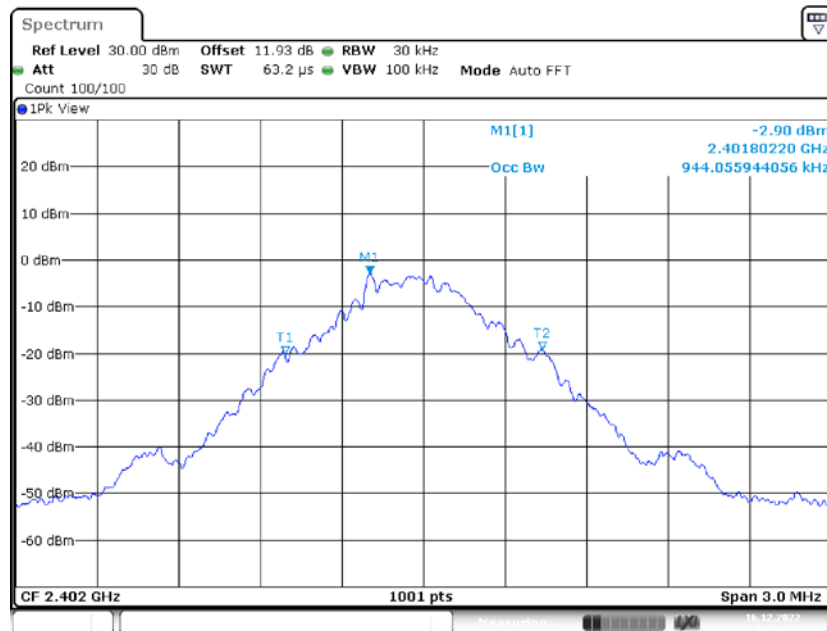


Date: 16.DEC.2022 14:56:11

### 20 dB EMISSION BANDWIDTH\_DH5\_Ant1\_2441

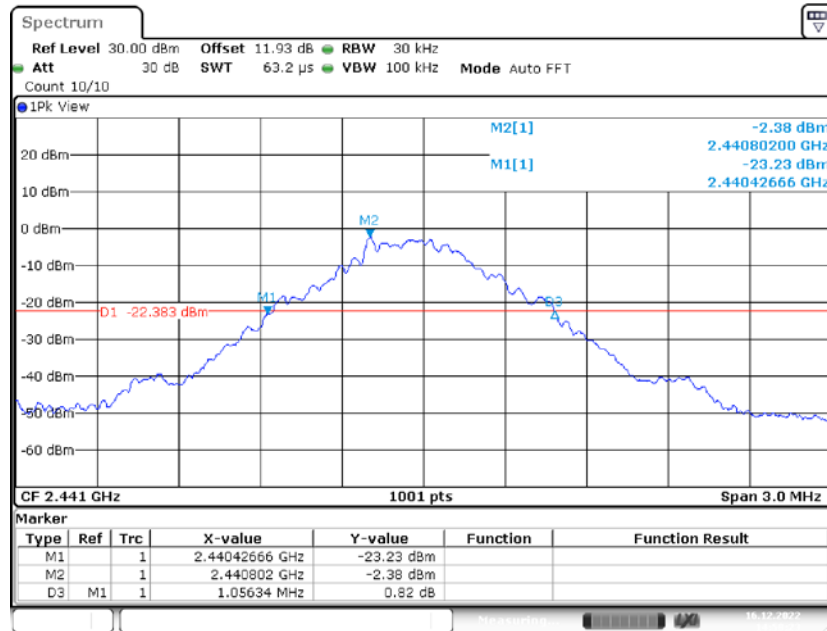


Date: 16.DEC.2022 14:58:24

### 99% OCCUPIED BANDWIDTH\_DH5\_Ant1\_2441

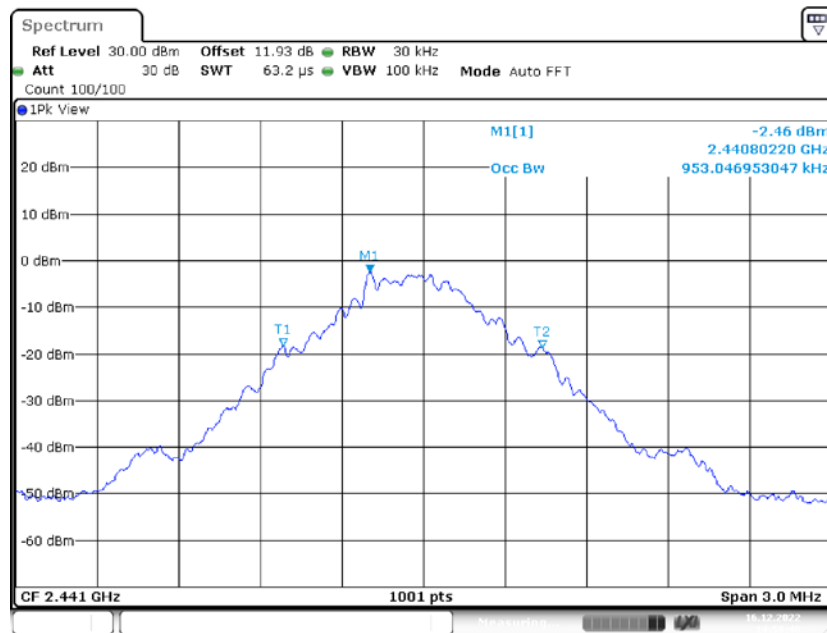


Date: 16.DEC.2022 14:58:40

### 20 dB EMISSION BANDWIDTH\_DH5\_Ant1\_2480

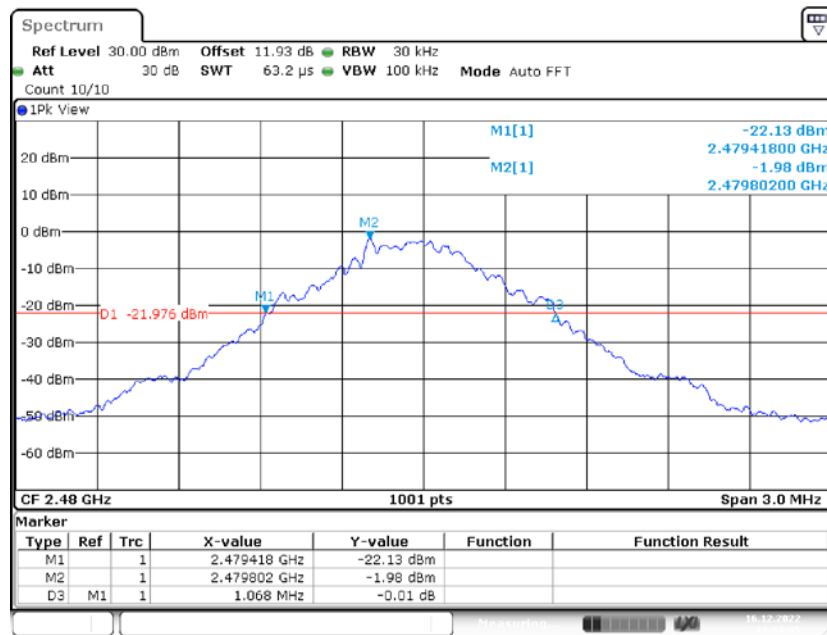

Date: 16.DEC.2022 14:59:36

### 99% OCCUPIED BANDWIDTH\_DH5\_Ant1\_2480

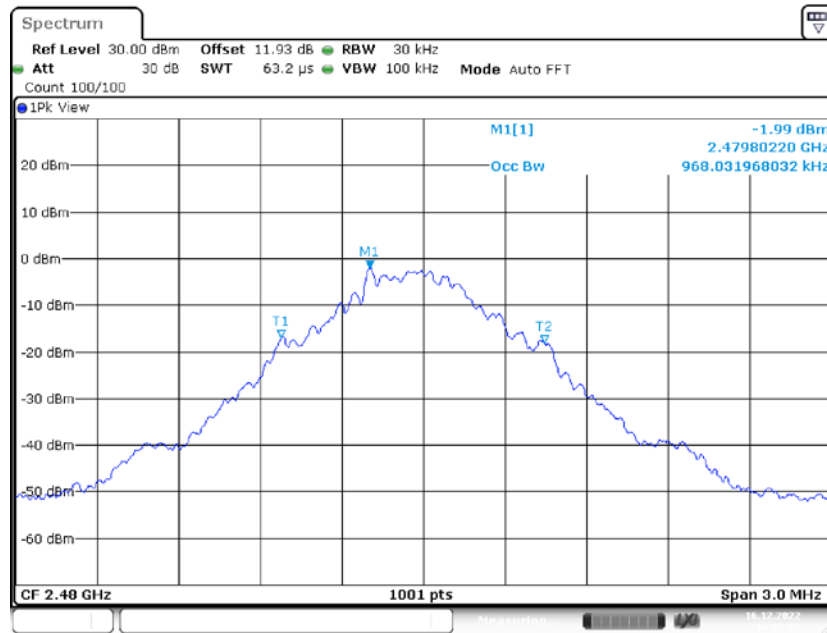


Date: 16.DEC.2022 14:59:53

20 dB EMISSION BANDWIDTH\_2DH5\_Ant1\_2402




Date: 16.DEC.2022 15:01:03

99% OCCUPIED BANDWIDTH\_2DH5\_Ant1\_2402

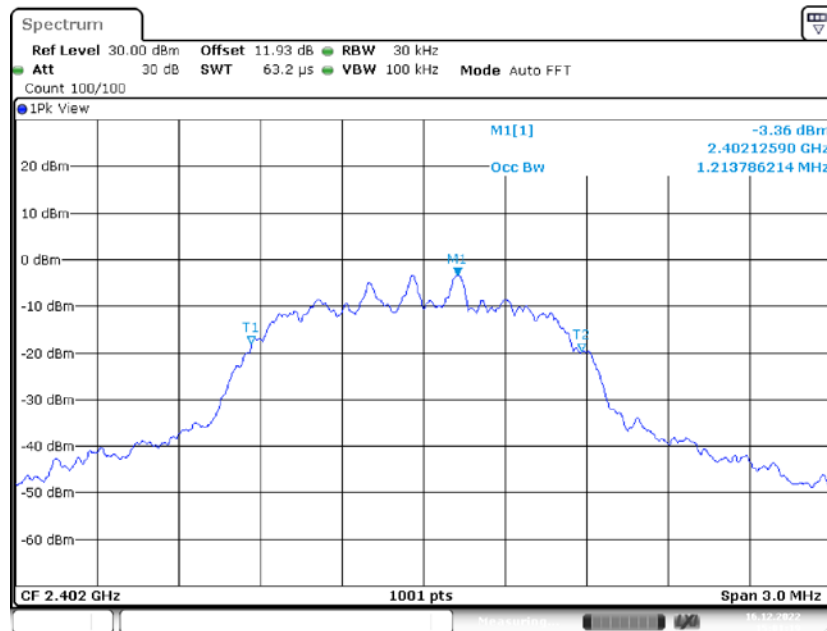


Date: 16.DEC.2022 15:01:20

**20 dB EMISSION BANDWIDTH\_2DH5\_Ant1\_2441**

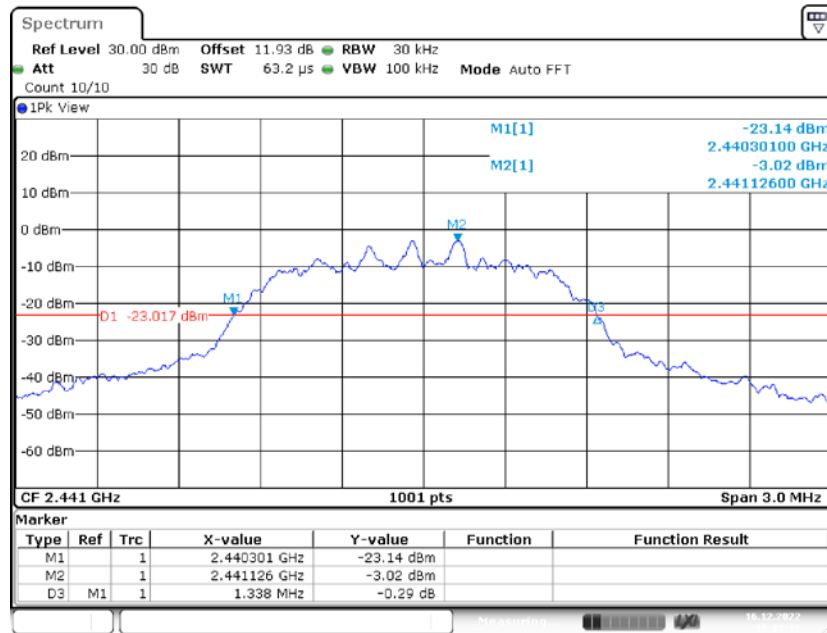


**99% OCCUPIED BANDWIDTH\_2DH5\_Ant1\_2441**

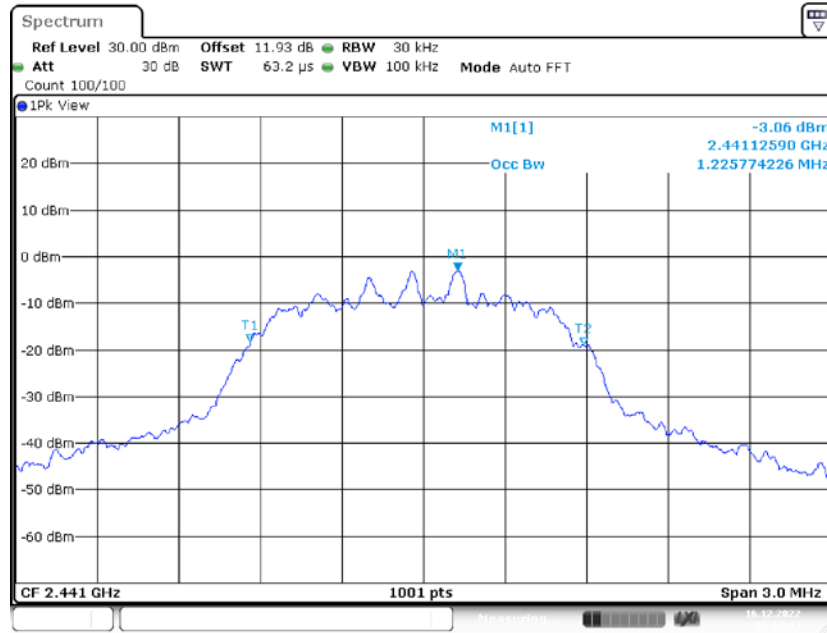




### 20 dB EMISSION BANDWIDTH \_2DH5\_Ant1\_2480

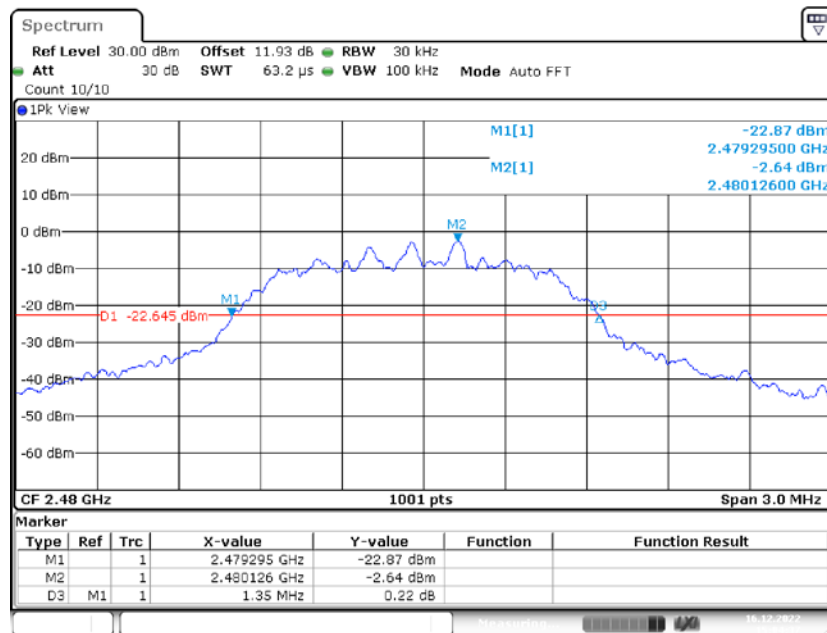


Date: 16.DEC.2022 15:04:38

### 99% OCCUPIED BANDWIDTH \_2DH5\_Ant1\_2480

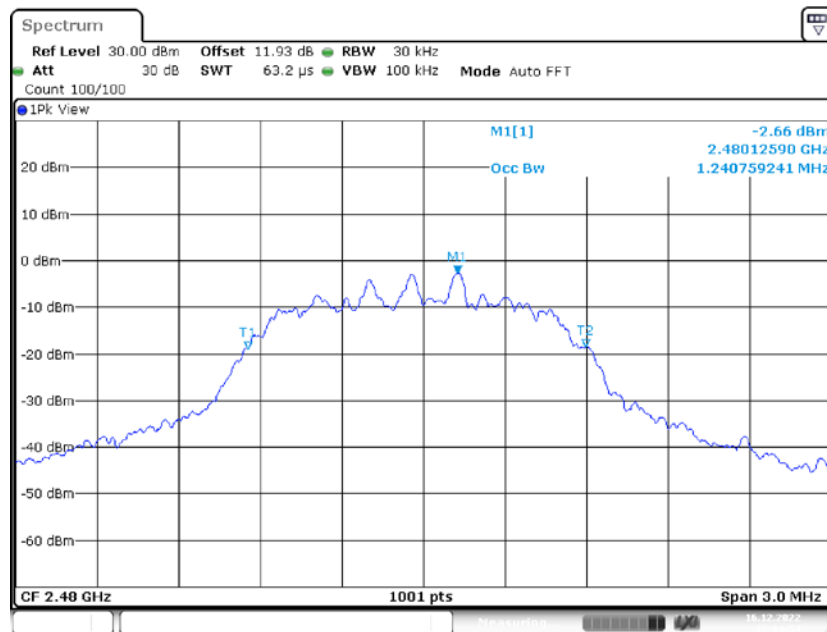


Date: 16.DEC.2022 15:04:55

**20 dB EMISSION BANDWIDTH\_3DH5\_Ant1\_2402**

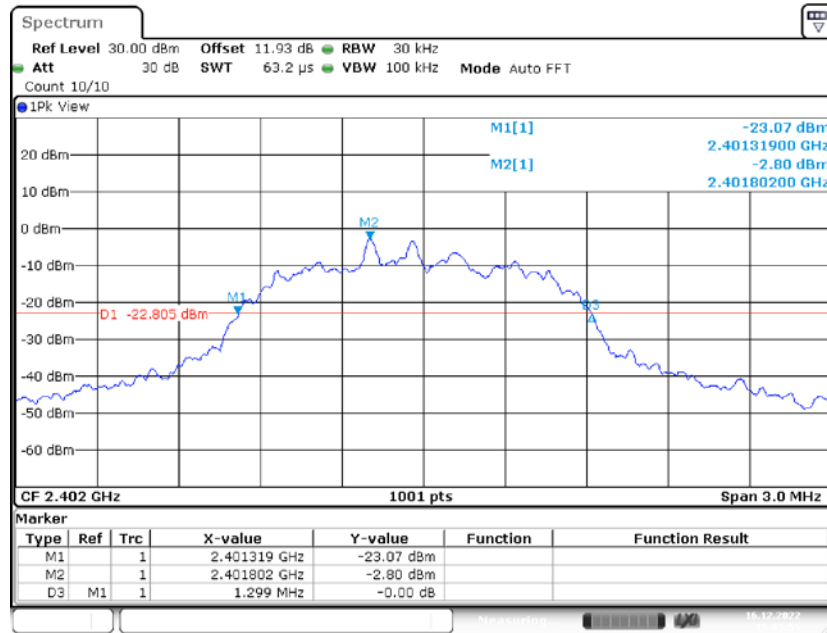

Date: 16.DEC.2022 15:05:56

**99% OCCUPIED BANDWIDTH\_3DH5\_Ant1\_2402**

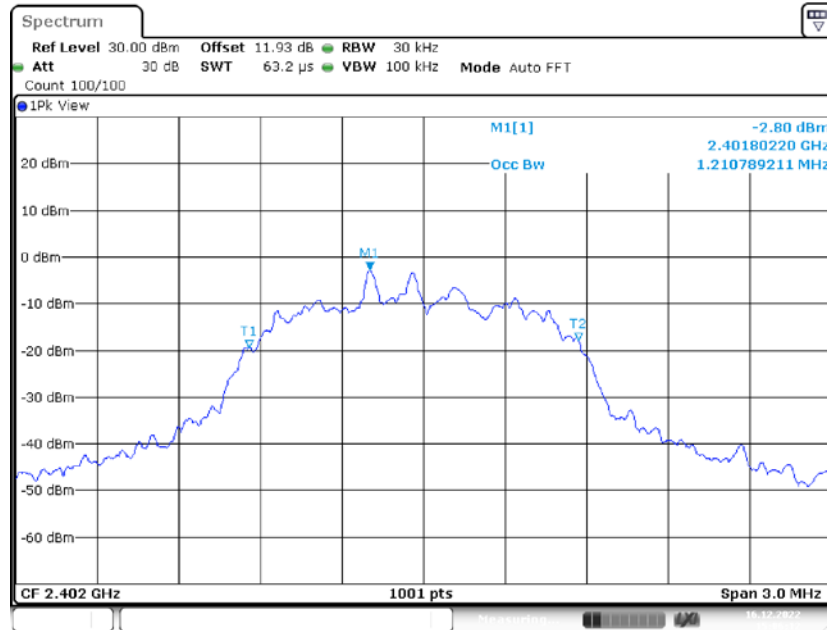


Date: 16.DEC.2022 15:06:12

### 20 dB EMISSION BANDWIDTH\_3DH5\_Ant1\_2441



### 99% OCCUPIED BANDWIDTH\_3DH5\_Ant1\_2441

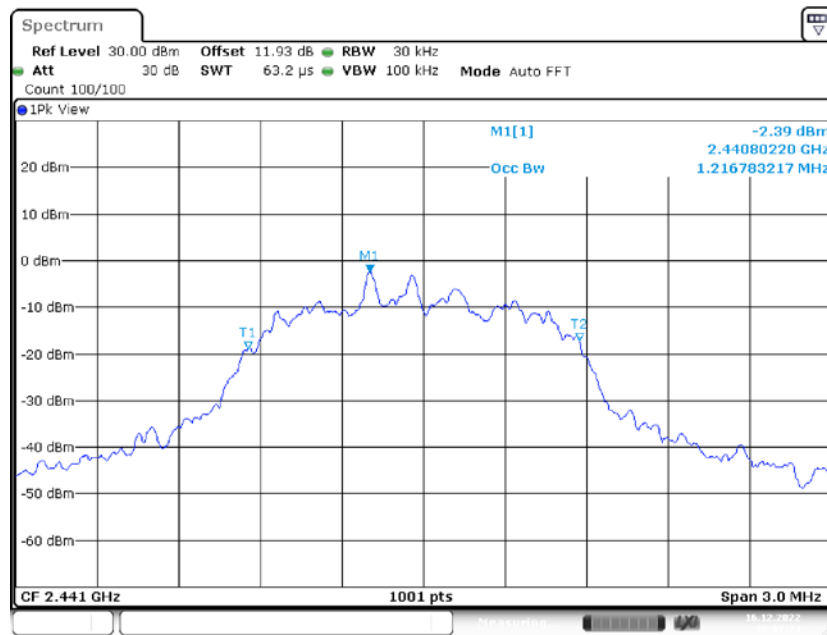


### 20 dB EMISSION BANDWIDTH\_3DH5\_Ant1\_2480



Date: 16.DEC.2022 15:08:04

### 99% OCCUPIED BANDWIDTH\_3DH5\_Ant1\_2480

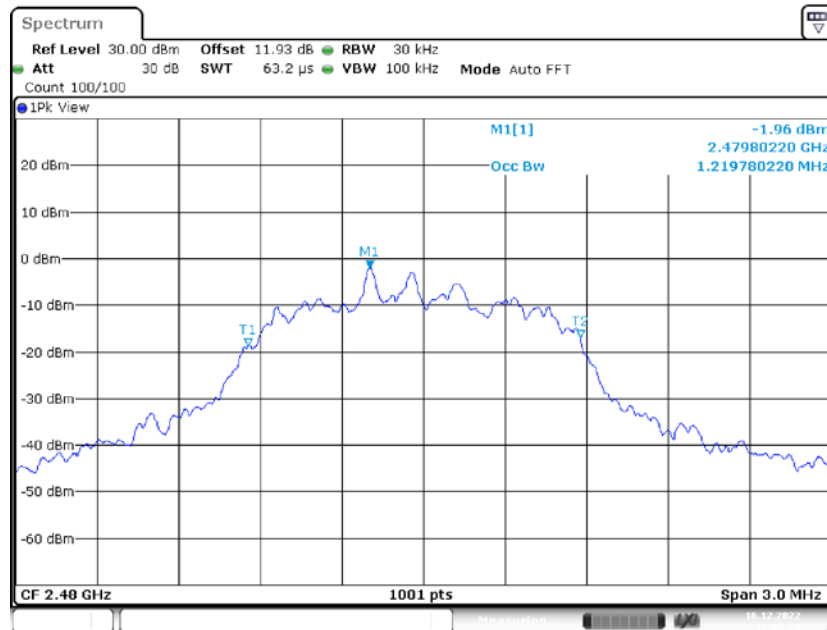

Date: 16.DEC.2022 15:08:21


## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.


EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
2DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS


Please refer to the below plots:

### DH5\_Ant1\_Hop

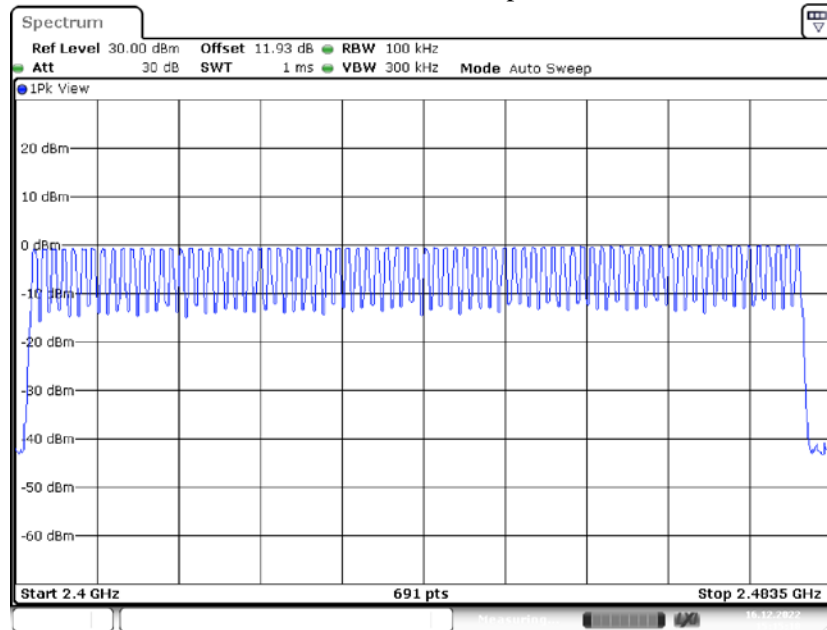


Date: 16.DEC.2022 15:15:19

### 2DH5\_Ant1\_Hop

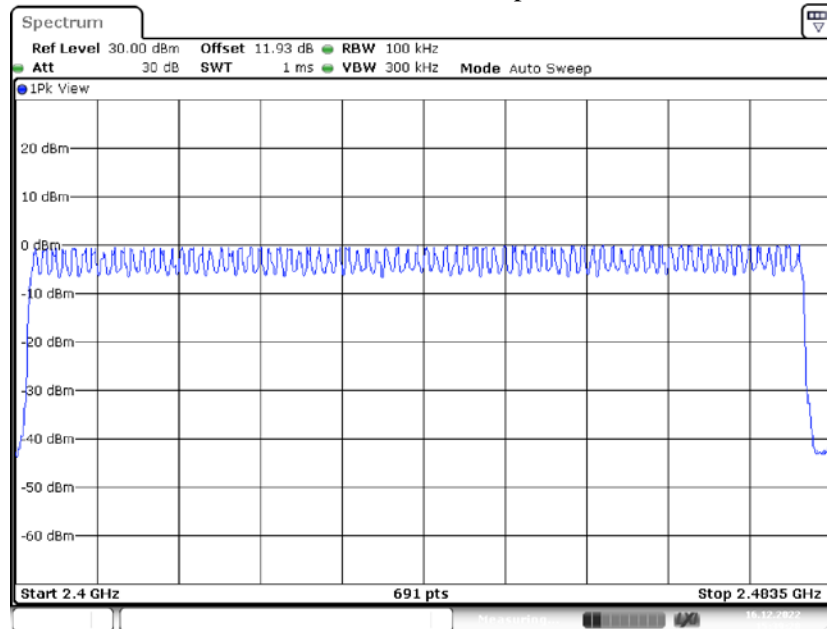

Date: 16.DEC.2022 15:39:29

### 3DH5\_Ant1\_Hop

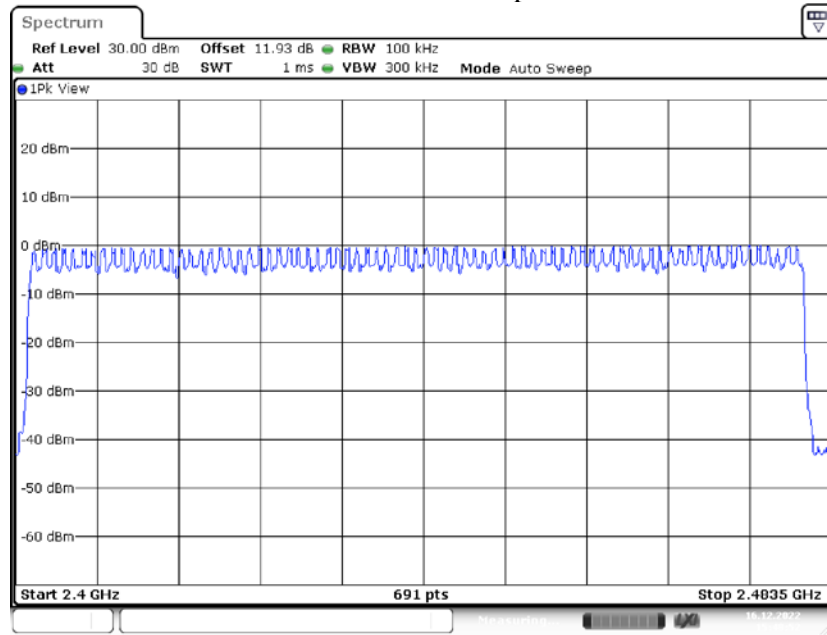


Date: 16.DEC.2022 15:48:53

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	320	0.119	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.62	160	0.259	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.86	120	0.343	$\leq 0.4$	PASS
2DH1	Ant1	Hop	0.38	330	0.126	$\leq 0.4$	PASS
2DH3	Ant1	Hop	1.63	170	0.276	$\leq 0.4$	PASS
2DH5	Ant1	Hop	2.87	110	0.315	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.38	320	0.122	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.63	160	0.26	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.87	130	0.373	$\leq 0.4$	PASS


Note 1: A period time= $0.4 \times 79 = 31.6$ (s), Result=Burst Width\*Total Hops

Note 2: Total Hops =Hopping Number in  $3.16s \times 10$


Note 3: Hopping Number in  $3.16s =$ Total of highest signals in  $3.16s$  (Second high signals were other channel)



### DH1\_Ant1\_Hop

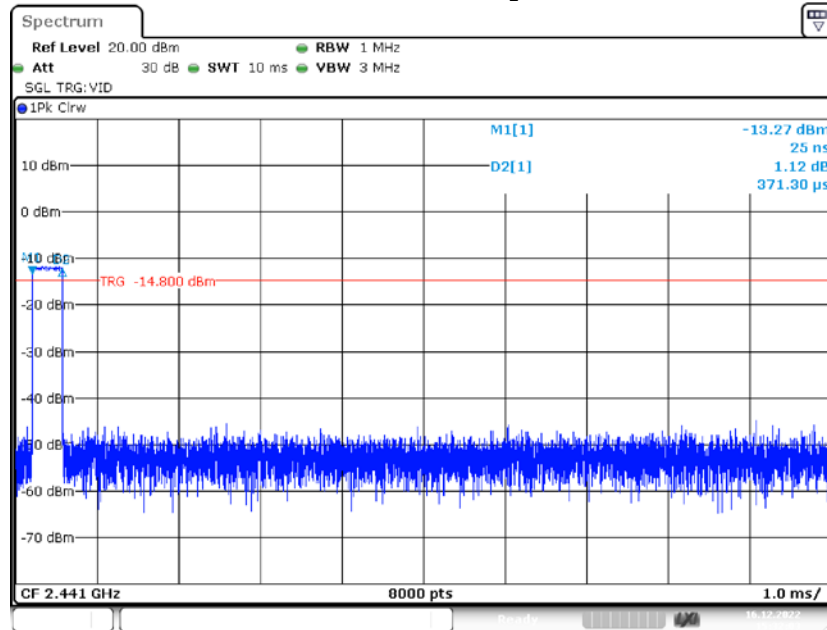


Date: 16.DEC.2022 15:32:04

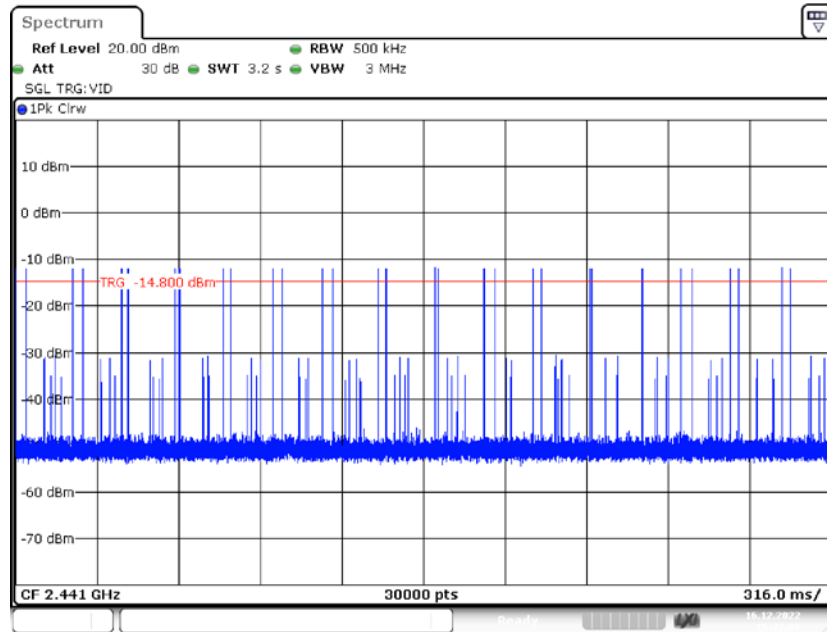


Date: 16.DEC.2022 15:32:09

### DH3\_Ant1\_Hop

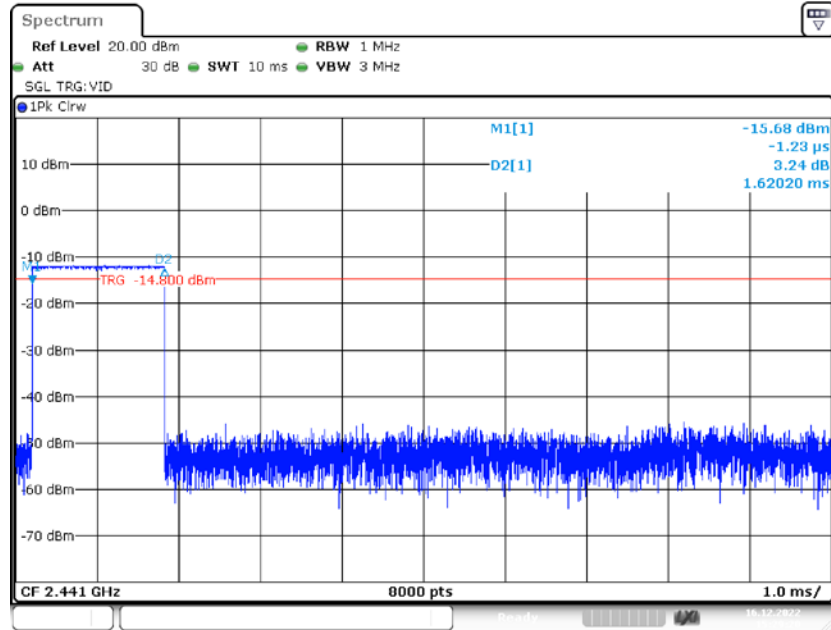


Date: 16.DEC.2022 15:29:21

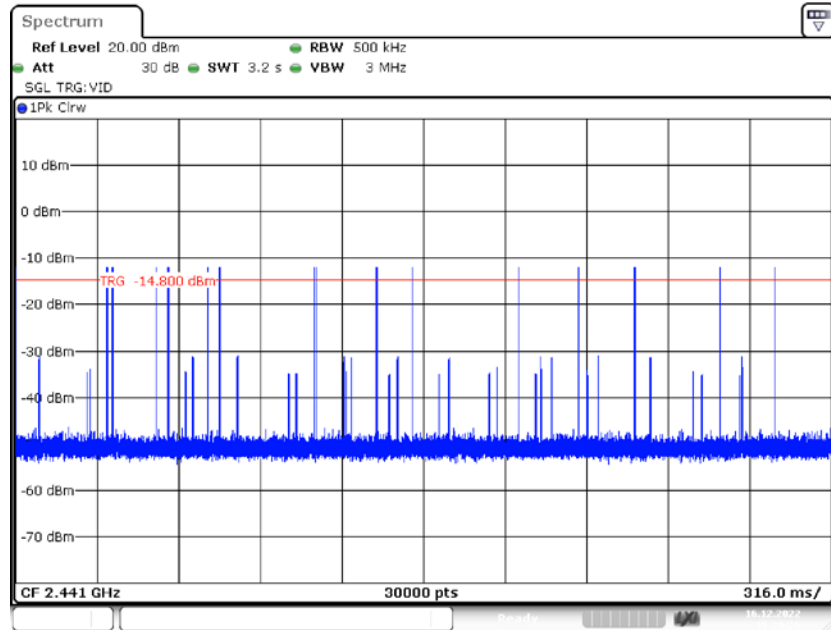


Date: 16.DEC.2022 15:29:27

### DH5\_Ant1\_Hop

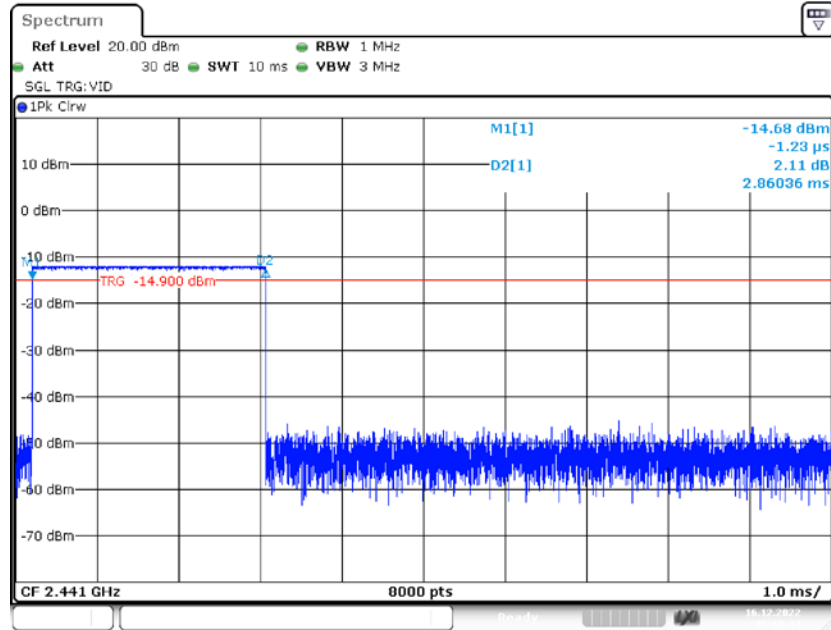


Date: 16.DEC.2022 15:18:34

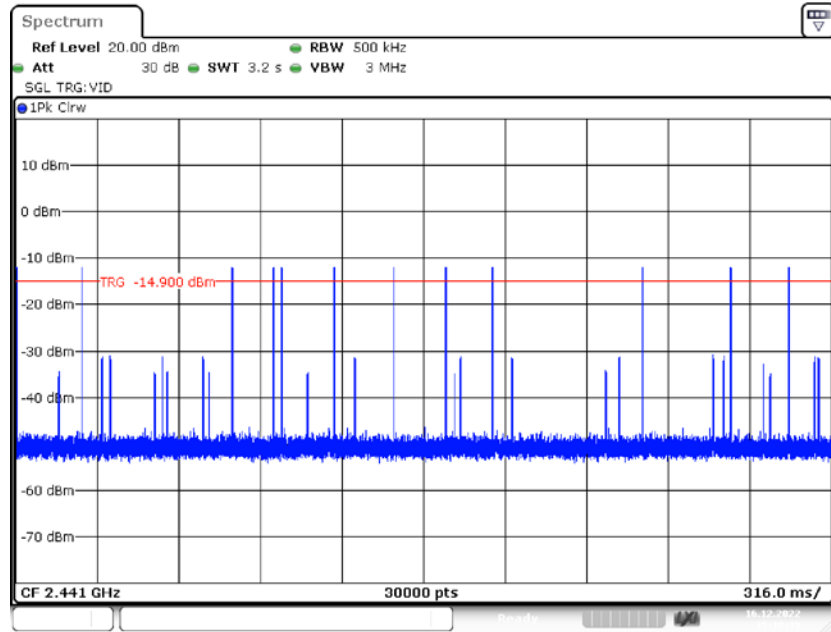


Date: 16.DEC.2022 15:18:40

### 2DH1\_Ant1\_Hop

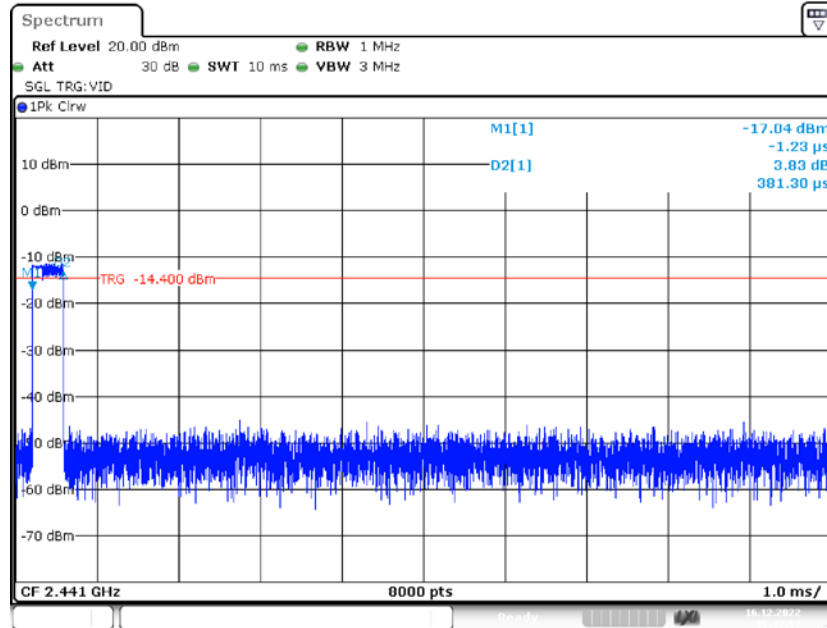


Date: 16.DEC.2022 15:43:54

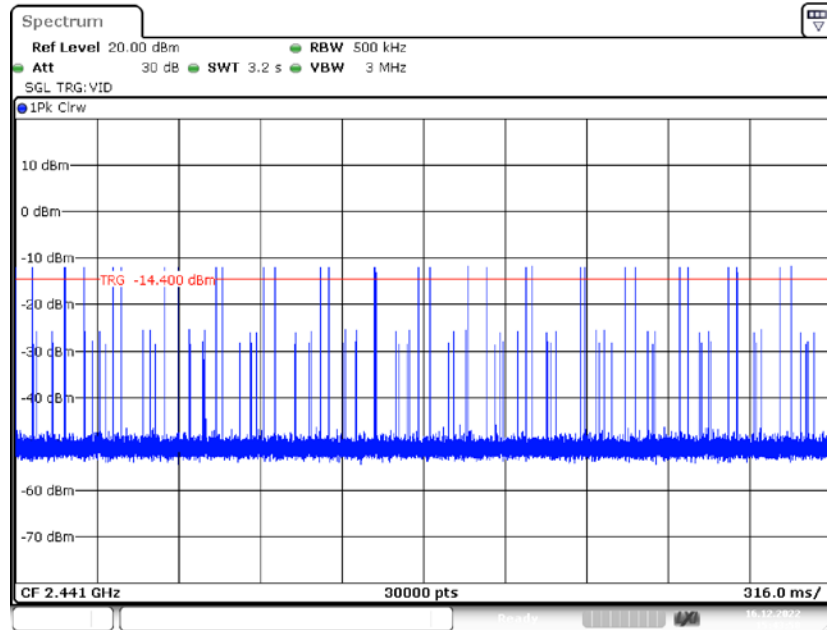


Date: 16.DEC.2022 15:43:59

### 2DH3\_Ant1\_Hop

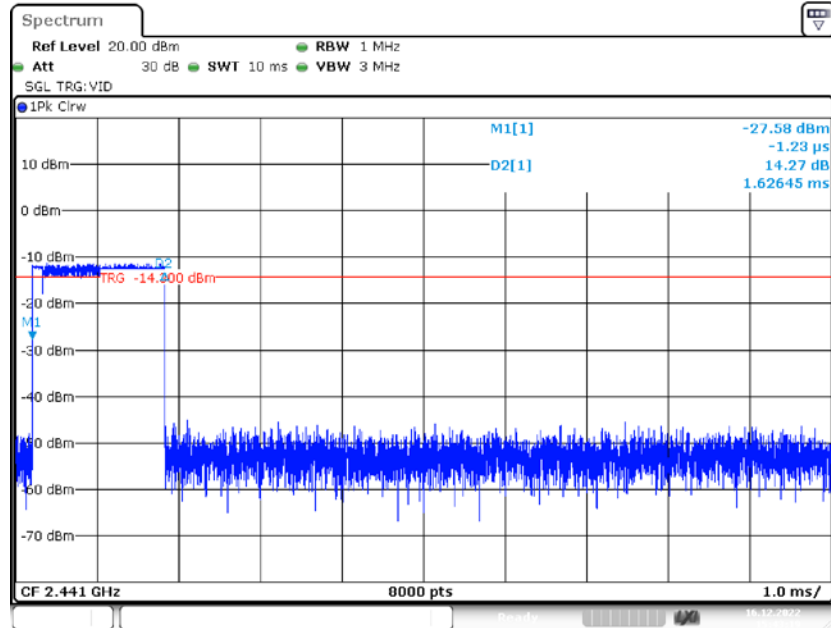


Date: 16.DEC.2022 15:43:19

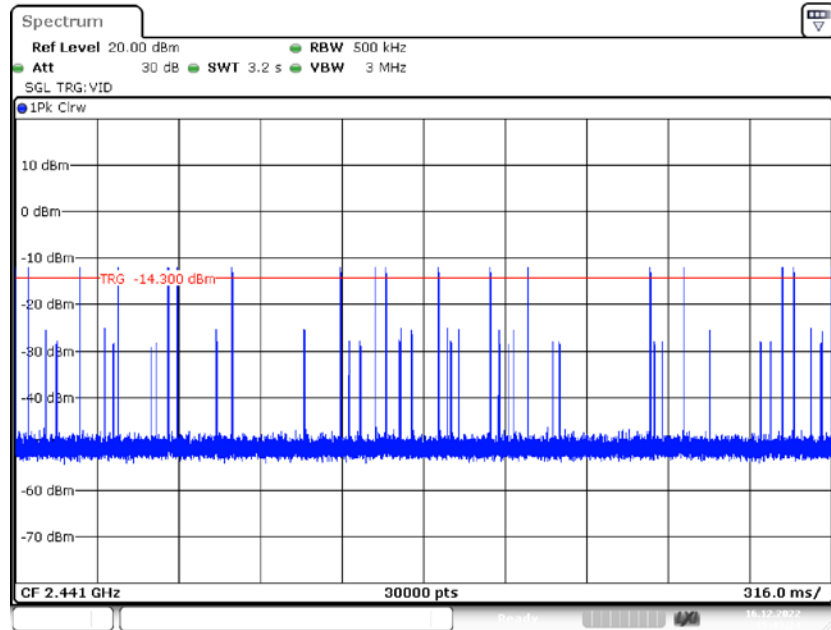


Date: 16.DEC.2022 15:43:25

### 2DH5\_Ant1\_Hop

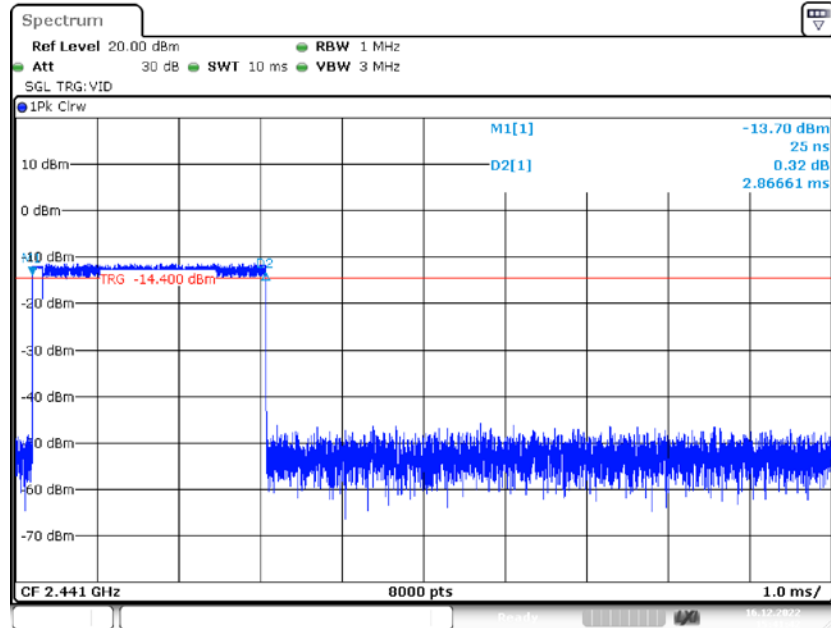


Date: 16.DEC.2022 15:41:42

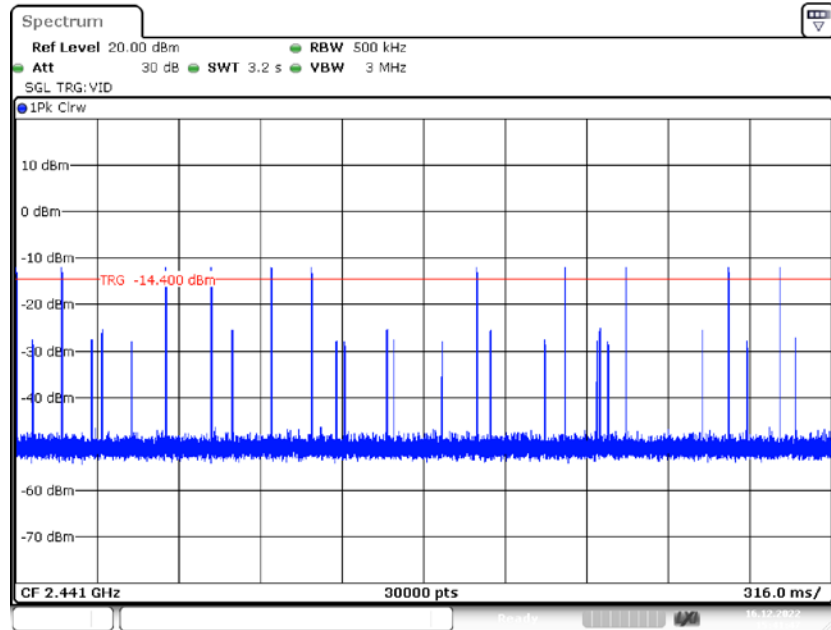


Date: 16.DEC.2022 15:41:47

### 3DH1\_Ant1\_Hop

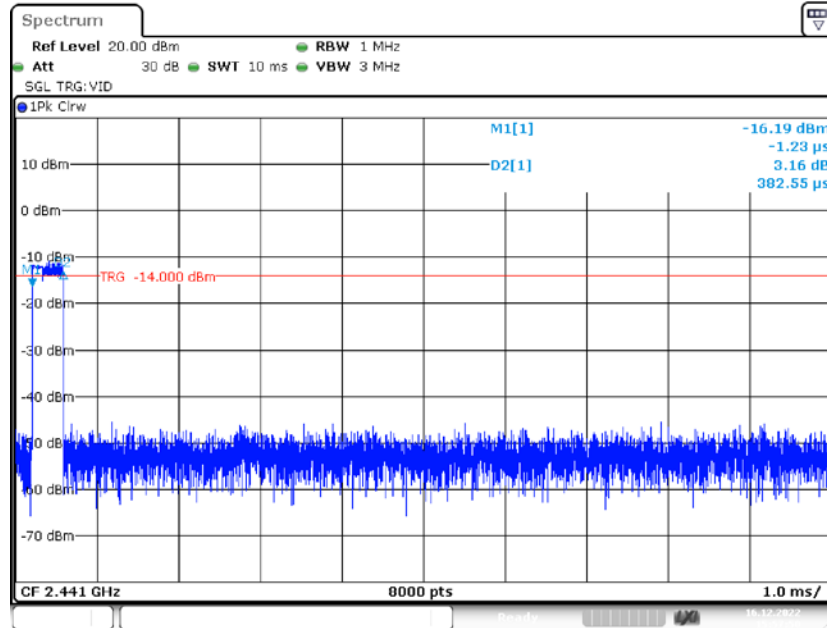


Date: 16.DEC.2022 15:57:50

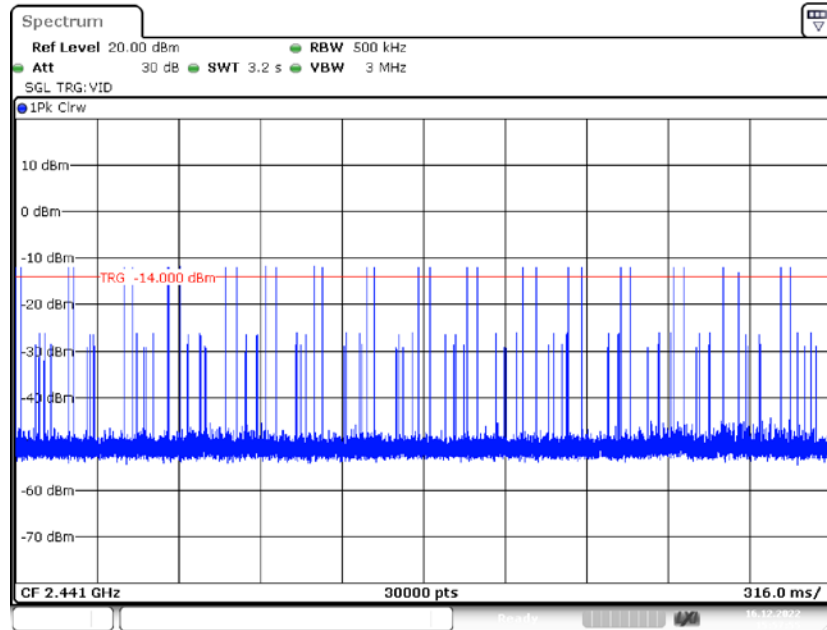


Date: 16.DEC.2022 15:57:56

### 3DH3\_Ant1\_Hop

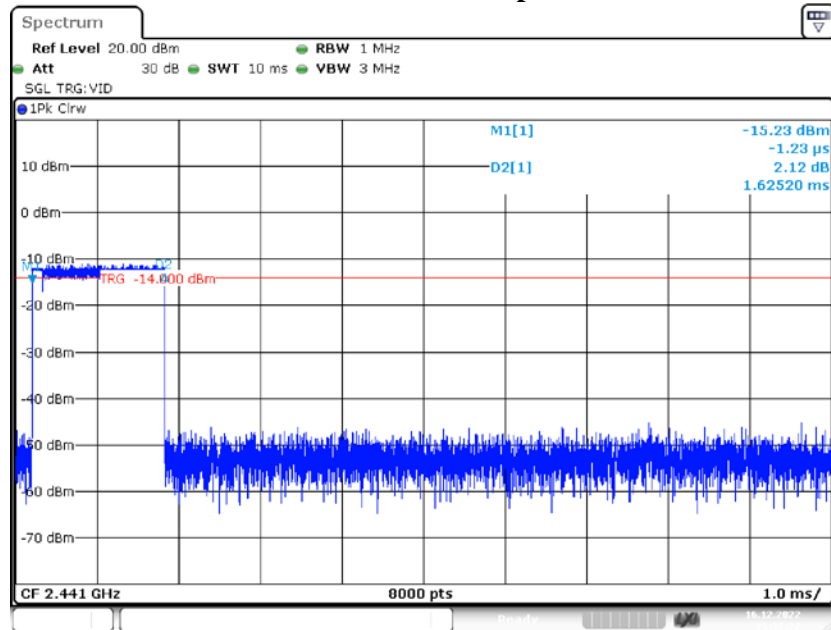


Date: 16.DEC.2022 15:57:23

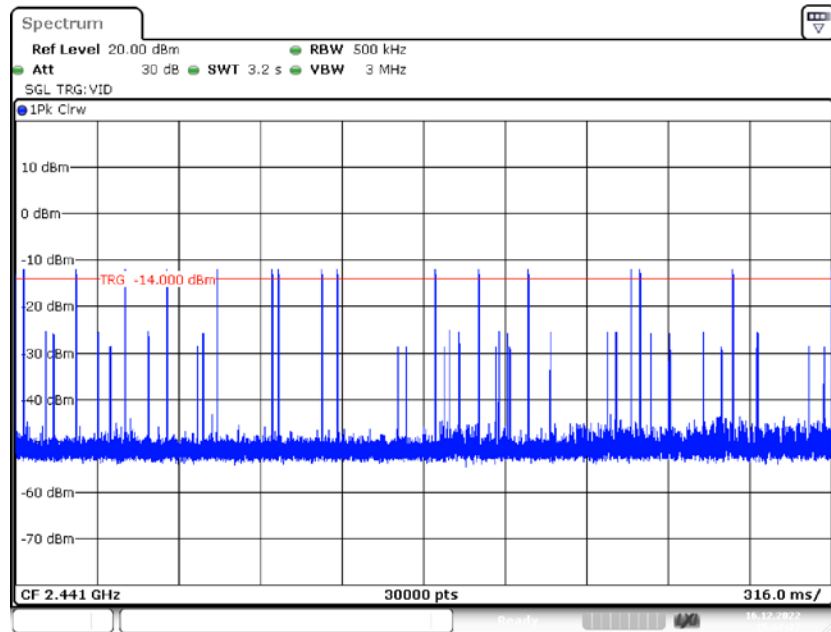


Date: 16.DEC.2022 15:57:28



### 3DH5\_Ant1\_Hop

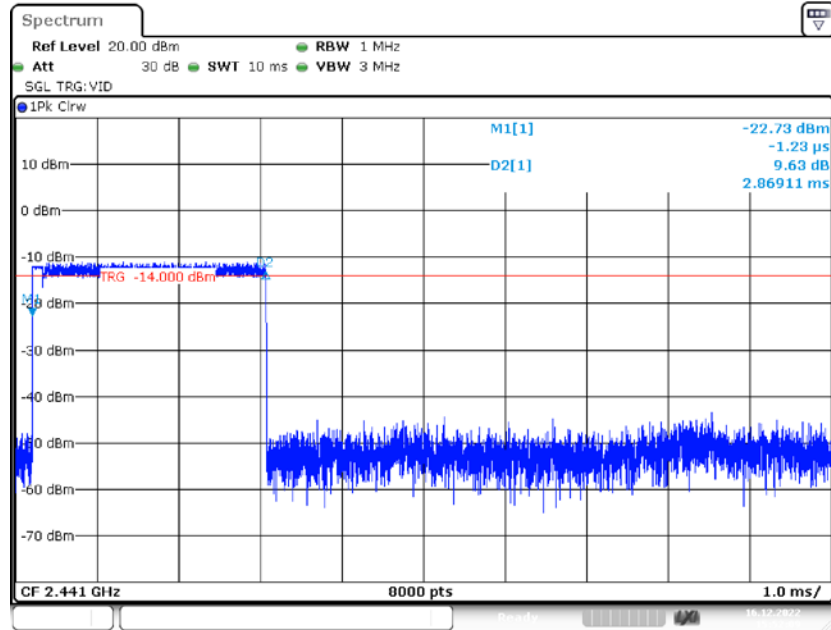

Date: 16.DEC.2022 15:52:09

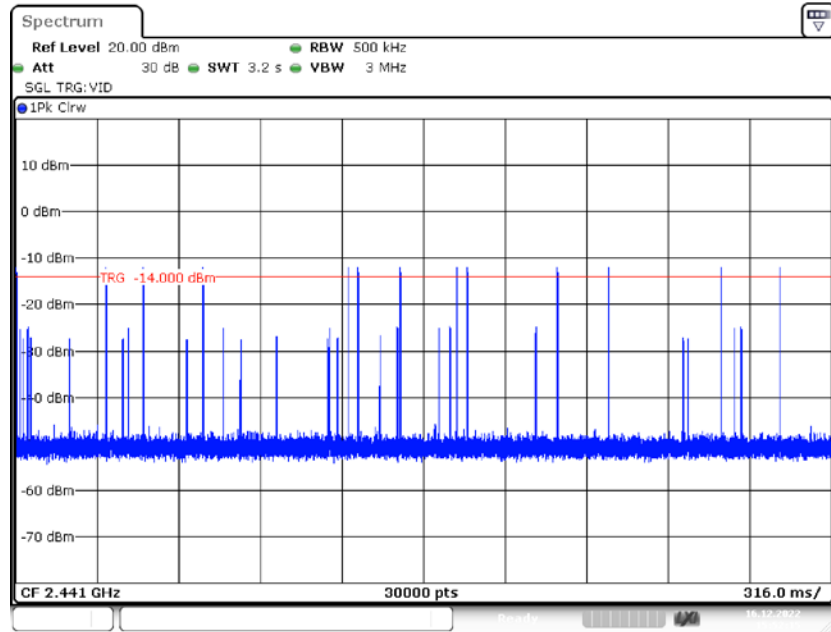

Date: 16.DEC.2022 15:52:15


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in TX mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.


EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Conducted peak output power [dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-0.24	<=<20.97	PASS
		2441	0.28	<=<20.97	PASS
		2480	0.73	<=<20.97	PASS
2DH5	Ant1	2402	0.54	<=<20.97	PASS
		2441	1.04	<=<20.97	PASS
		2480	1.47	<=<20.97	PASS
3DH5	Ant1	2402	0.90	<=<20.97	PASS
		2441	1.42	<=<20.97	PASS
		2480	<b>1.90</b>	<=<20.97	PASS


Please refer to the below plots:

### DH5\_Ant1\_2402

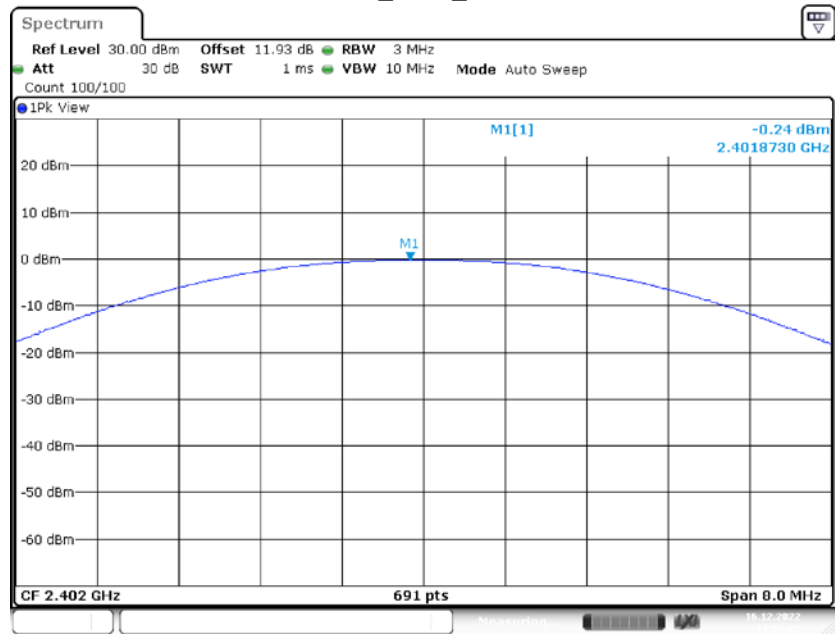


Date: 16.DEC.2022 14:50:22

### DH5\_Ant1\_2441

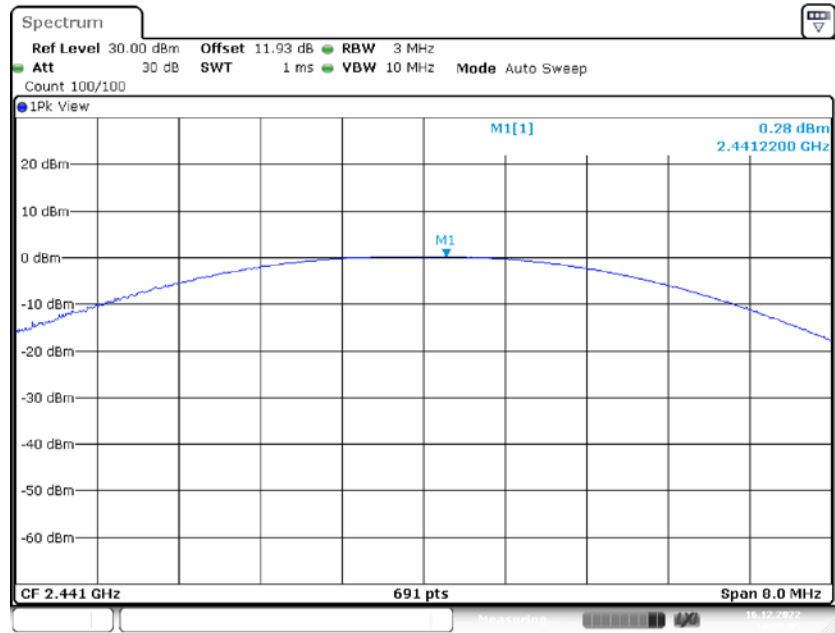


Date: 16.DEC.2022 14:50:45

### DH5\_Ant1\_2480

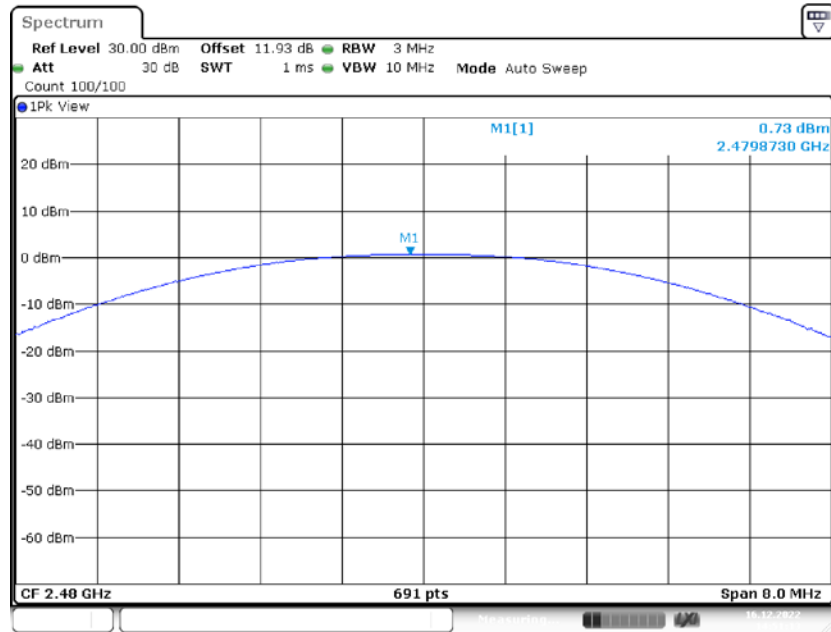


Date: 16.DEC.2022 14:51:13

### 2DH5\_Ant1\_2402

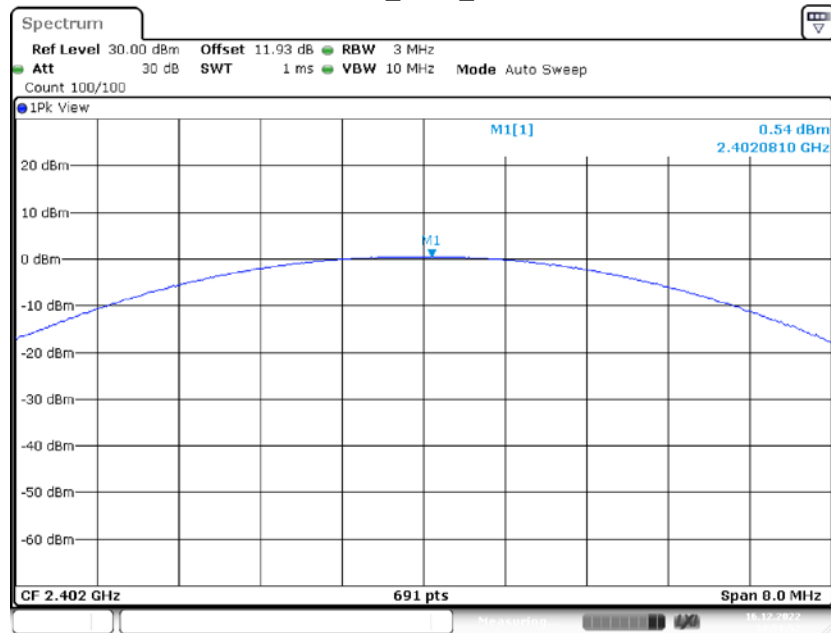


Date: 16.DEC.2022 14:51:52

### 2DH5\_Ant1\_2441

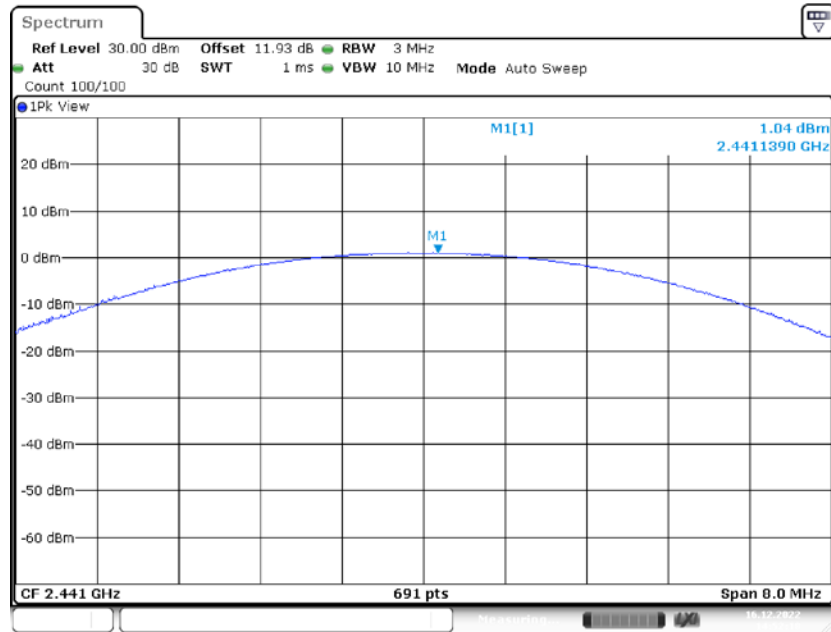


Date: 16.DEC.2022 14:52:19

### 2DH5\_Ant1\_2480

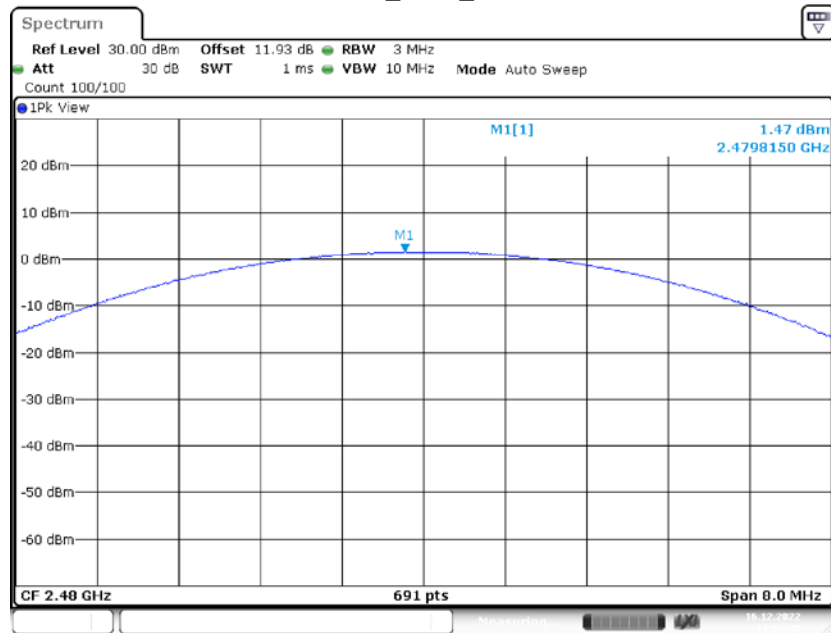


Date: 16.DEC.2022 14:52:59

### 3DH5\_Ant1\_2402

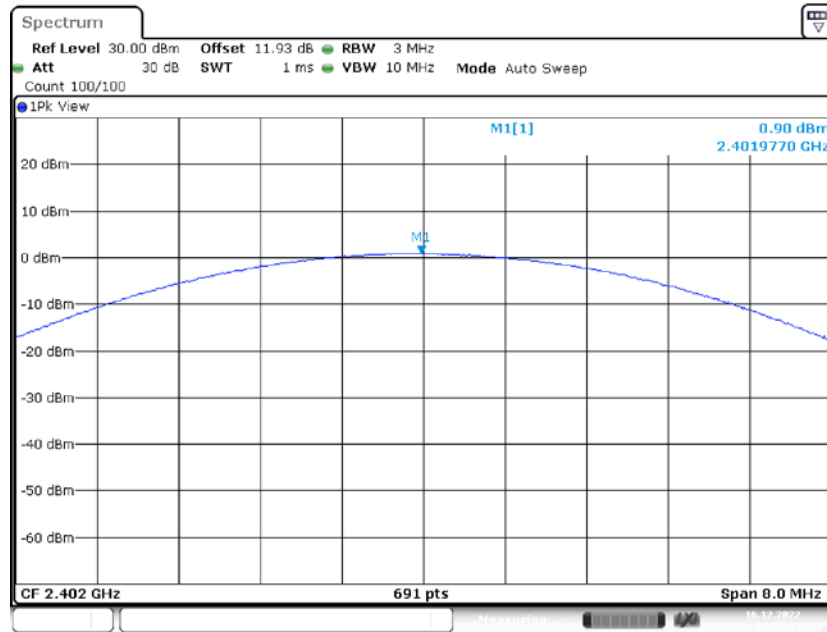


Date: 16.DEC.2022 14:53:34

### 3DH5\_Ant1\_2441

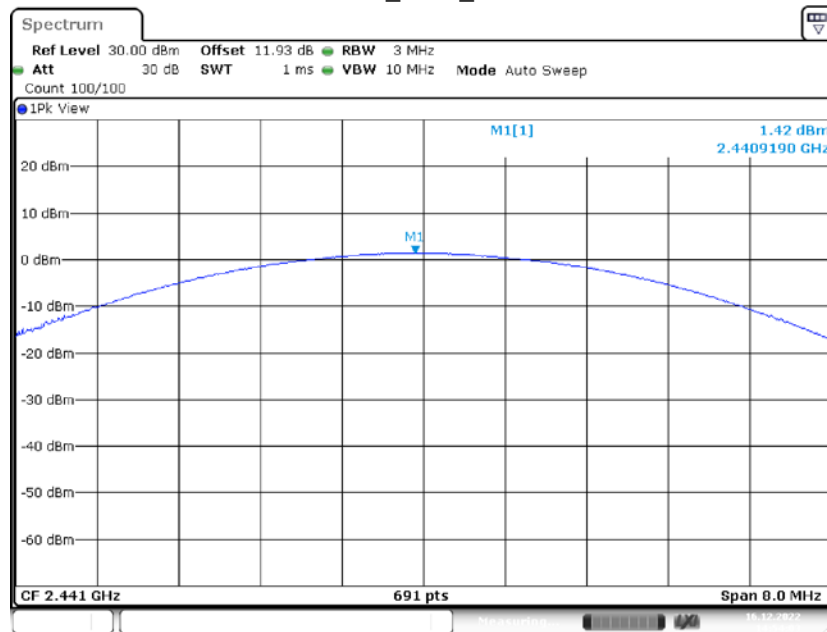

Date: 16.DEC.2022 14:54:04

3DH5\_Ant1\_2480

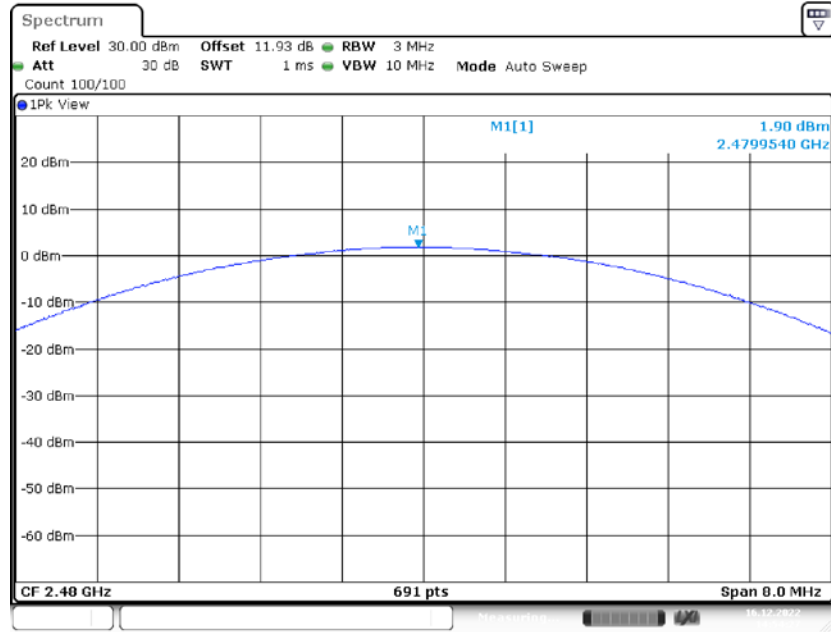

Date: 16.DEC.2022 14:54:28


## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in TX mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22°C
<b>Relative Humidity:</b>	56%
<b>ATM Pressure:</b>	101kPa

The testing was performed by Glenn Jiang on 2022-12-16.


EUT operation mode: Transmitting

Test Result: Compliant

Please refer to the below plots:




### DH5: Band Edge-Left Side Hopping

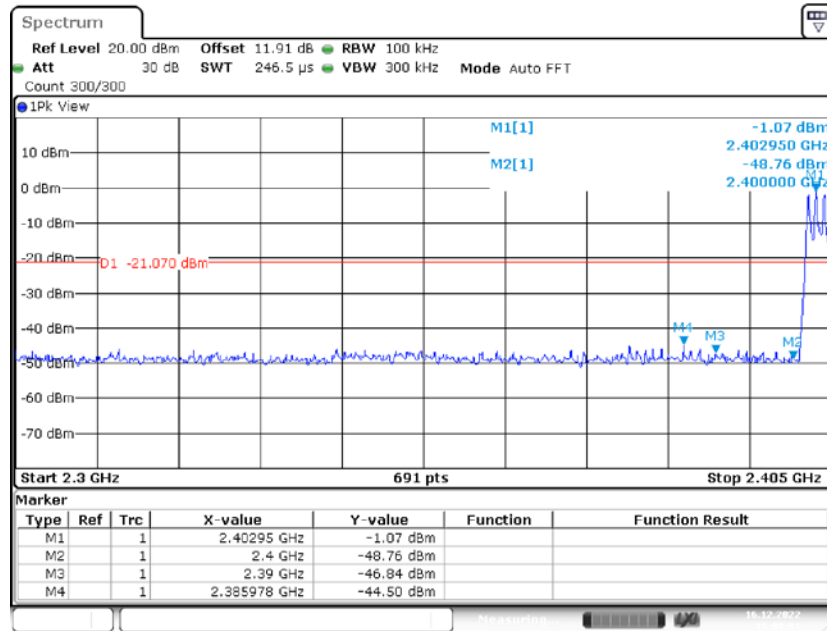


Date: 16.DEC.2022 15:09:52

### Single

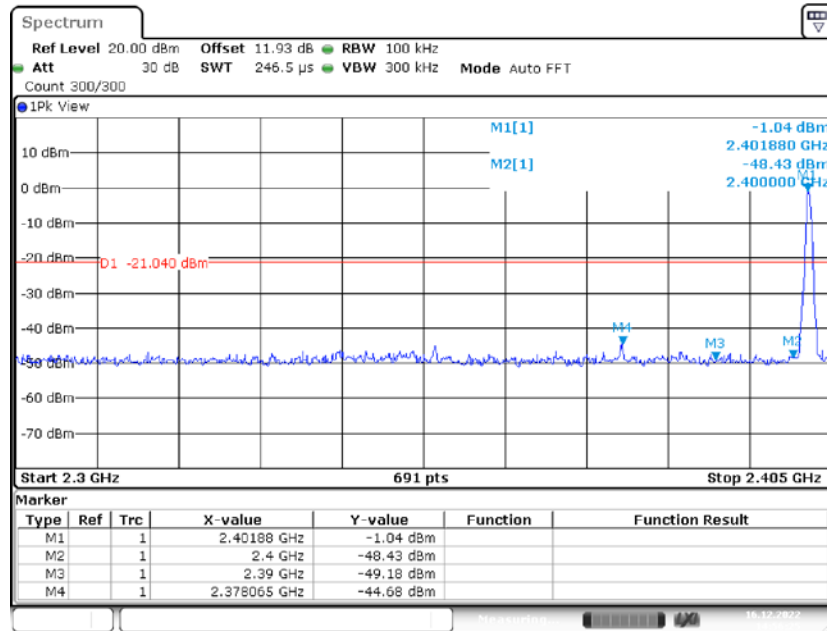


Date: 16.DEC.2022 14:56:26

### DH5: Band Edge- Right Side Hopping

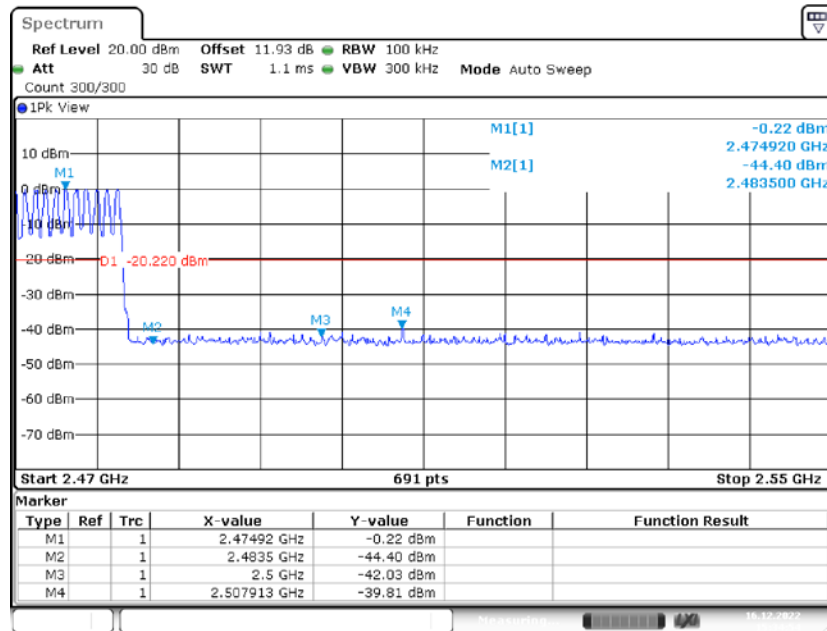


Date: 16.DEC.2022 15:34:55

### Single

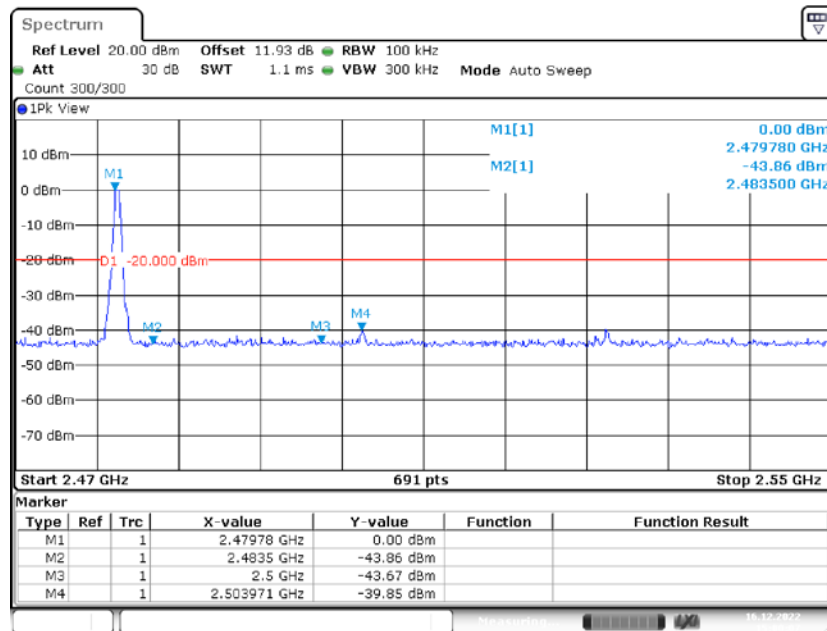


Date: 16.DEC.2022 15:00:08

### 2DH5: Band Edge-Left Side Hopping

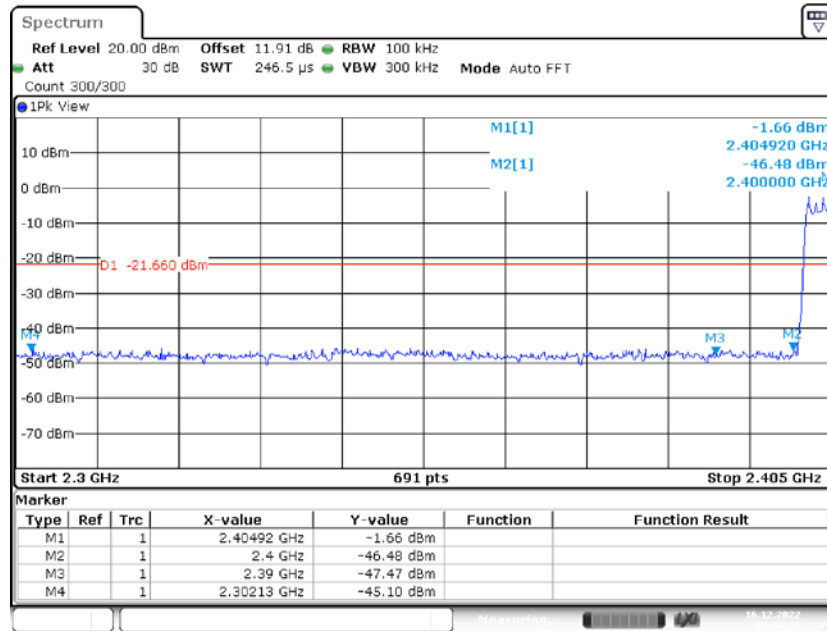


Date: 16.DEC.2022 15:36:23

### Single

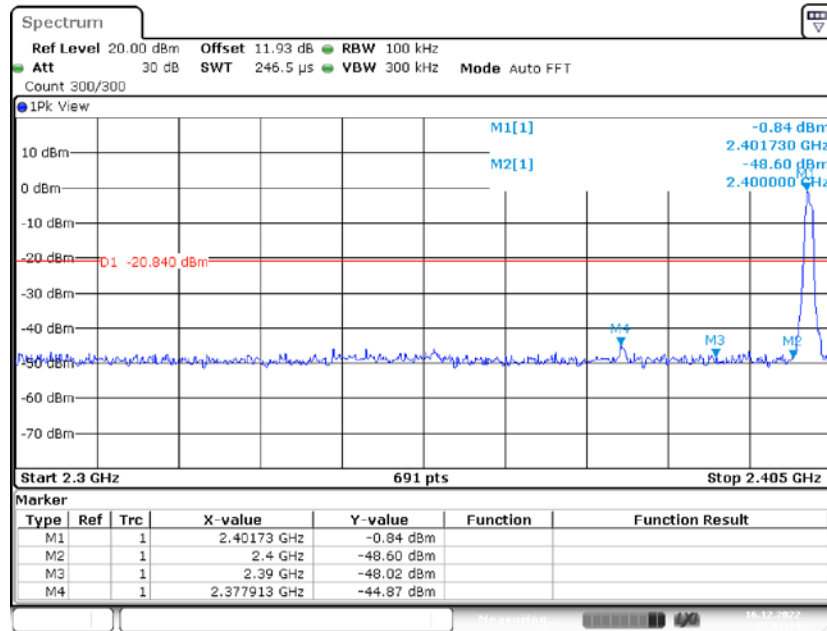


Date: 16.DEC.2022 15:01:35

### 2DH5: Band Edge- Right Side Hopping

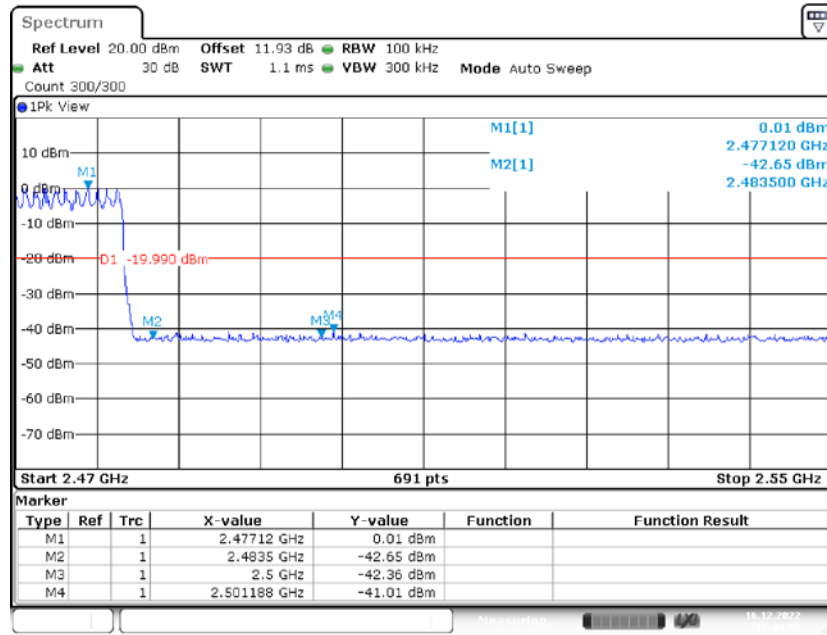


Date: 16.DEC.2022 15:44:59

### Single

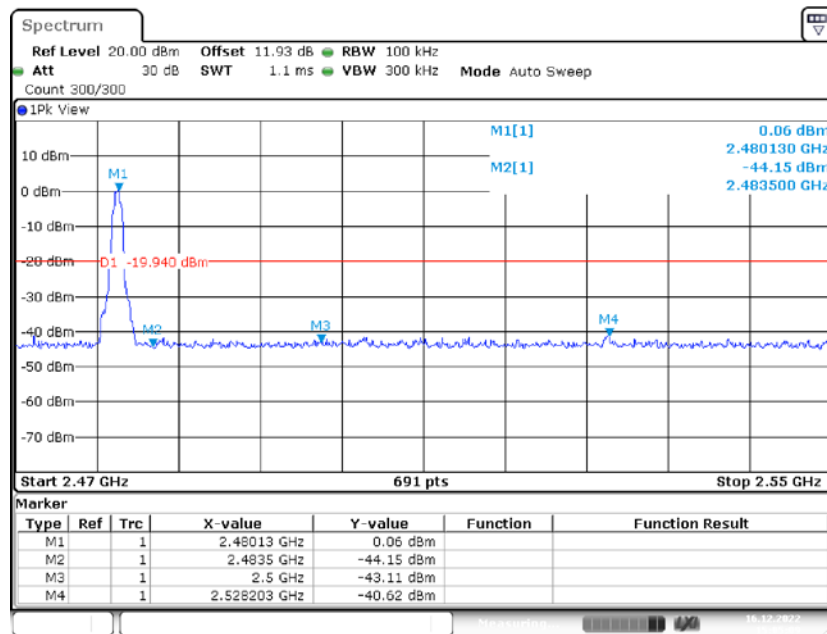


Date: 16.DEC.2022 15:05:10

### 3DH5: Band Edge-Left Side Hopping

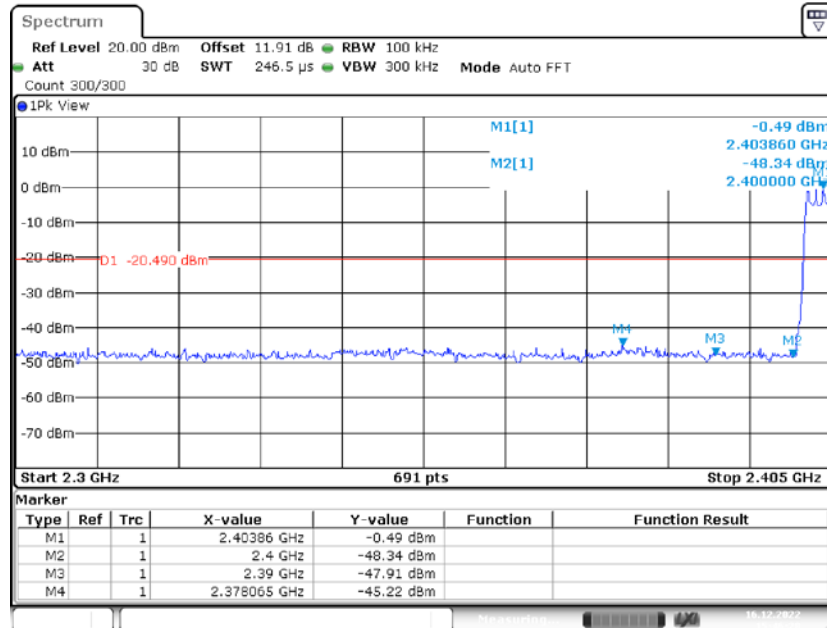


Date: 16.DEC.2022 15:46:28

### Single

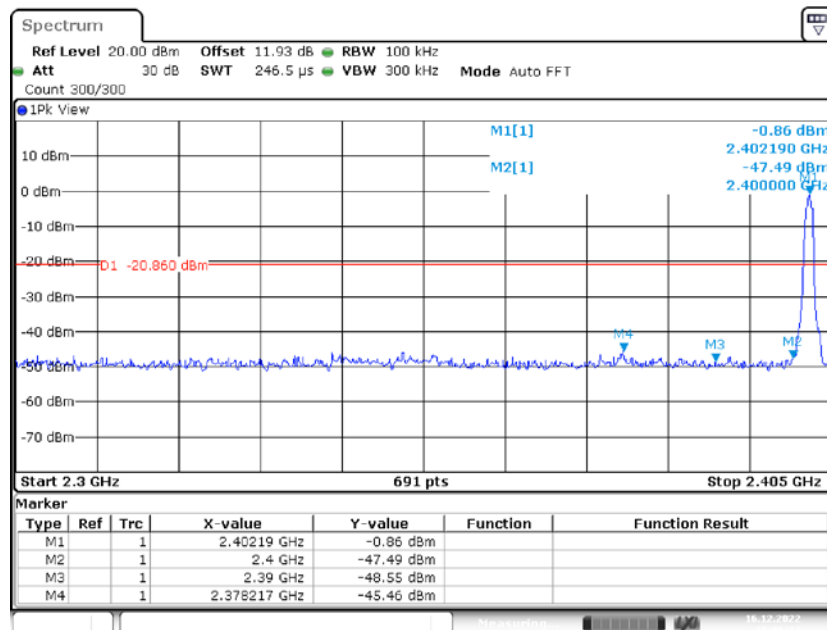


Date: 16.DEC.2022 15:06:27

### 3DH5: Band Edge- Right Side Hopping

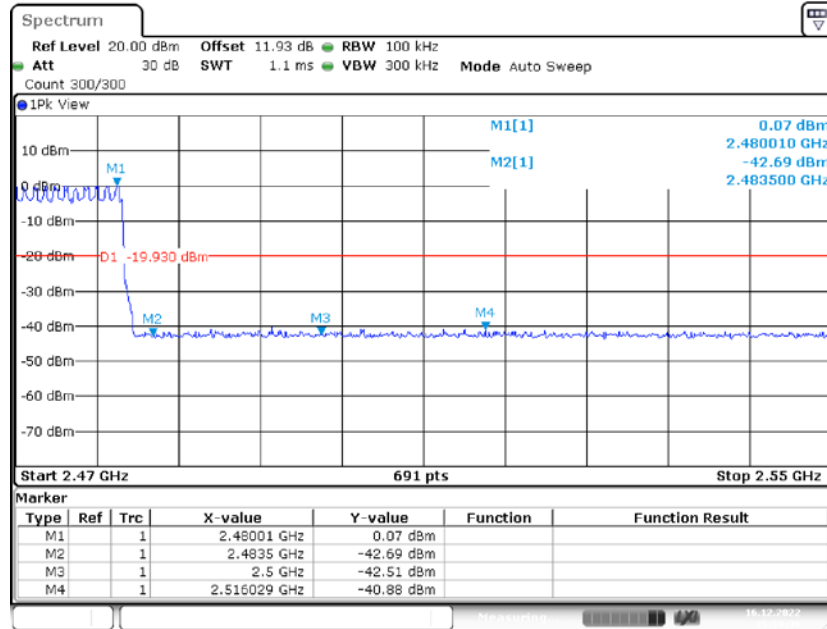

Date: 16.DEC.2022 15:59:37

### Single

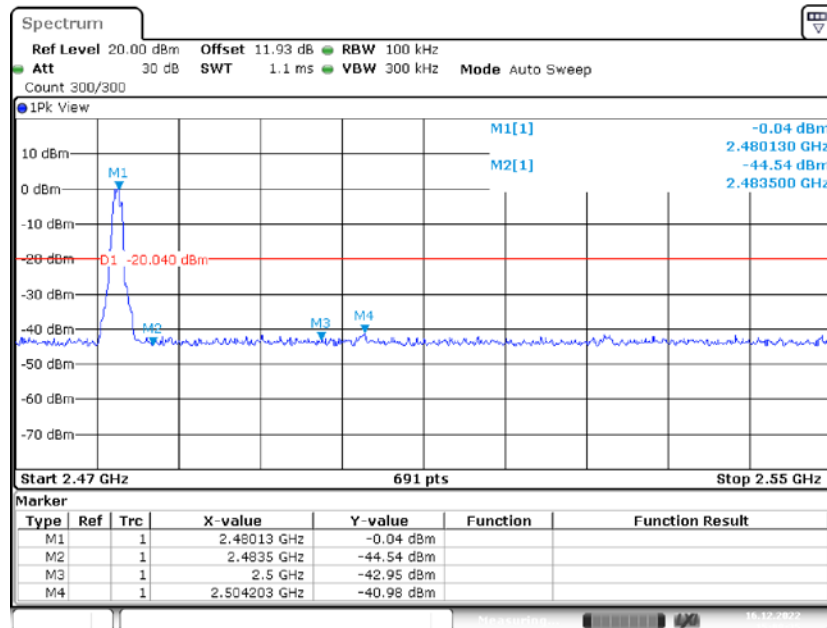

Date: 16.DEC.2022 15:08:36

\*\*\*\*\* END OF REPORT \*\*\*\*\*