

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM141100614003 Page: 1 of 59

# FCC REPORT

Application No:	SZEM1411006140CR
Applicant:	FUDAKANG INDUSTRIAL CO., LTD.
Manufacturer:	FUDAKANG INDUSTRIAL CO., LTD.
Factory:	FUDAKANG INDUSTRIAL CO., LTD.
Product Name:	Arm type Blood pressure monitor
Model No.(EUT):	FT-C11B-BT
	FT-C21Y, FT-C22Y, FT-C23Y, FT-C24Y, FT-C11B,
Add Model No.:	FT-C12B, FT-C21Y-V, FT-C22Y-V, FT-C23Y-V, FT-C24Y-V,
	FT-C11B-V, FT-C12B-V, FT-C11B-UR
FCC ID:	2ADNQFTC11BBT
Standards:	47 CFR Part 15, Subpart C (2013)
Date of Receipt:	2014-11-10
Date of Test:	2014-11-25 to 2014-11-28
Date of Issue:	2014-12-31
Test Result:	PASS *

In the configuration tested, the EUT complied with the standards specified above.

This report supersedes our previous report SZEM141100614001, issued on 2014-12-03, which is hereby deemed null and void.

Authorized Signature:



#### Jack Zhang

#### EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM141100614003 Page: 2 of 59

# 2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2014-12-31		Original		

Authorized for issue by:		
Tested By	Eric Fu	2014-11-28
	(Eric Fu) /Project Engineer	Date
Prepared By	Link Liong	2014-12-31
	(Link Liang) /Clerk	Date
Checked By	Kormfers	2014-12-05
	(Kevin Feng) /Reviewer	Date

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 3 of 59

# 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: FT-C11B-BT, FT-C21Y, FT-C22Y, FT-C23Y, FT-C24Y, FT-C11B, FT-C12B, FT-C21Y-V,

FT-C22Y-V, FT-C23Y-V, FT-C24Y-V, FT-C11B-V, FT-C12B-V, FT-C11B-UR

Only the Model FT-C11B-BT was tested, since the electrical circuit design, layout, components used and

internal wiring were identical for all above models, only different on model number and outlook appearance.



Report No.: SZEM141100614003 Page: 4 of 59

# 4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3	TE	EST SUMMARY	3
4	CC	ONTENTS	4
5			5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT	7
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	8
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
	5.9 5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER EQUIPMENT LIST	8
6	TE	EST RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED PEAK OUTPUT POWER	13
	6.3	6DB OCCUPY BANDWIDTH	16
	6.4	POWER SPECTRAL DENSITY	19
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	22
	6.6	SPURIOUS RF CONDUCTED EMISSIONS	24
	6.7	RADIATED SPURIOUS EMISSION 7.1 Spurious Emissions	32 32
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	32 39
7	PH	HOTOGRAPHS - EUT TEST SETUP	49
	7.1	RADIATED EMISSION	49
	7.2	RADIATED SPURIOUS EMISSION	49
8	PH	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	50-59



Report No.: SZEM141100614003 Page: 5 of 59

# **5** General Information

#### 5.1 Client Information

Applicant:	FUDAKANG INDUSTRIAL CO., LTD.
Address of Applicant:	No. 8 Yinghe Road, Yuanjiangyuan Management Zone, Changping Town, Dongguan, Guangdong, China
Manufacturer:	FUDAKANG INDUSTRIAL CO., LTD.
Address of Manufacturer:	No. 8 Yinghe Road, Yuanjiangyuan Management Zone, Changping Town, Dongguan, Guangdong, China
Factory:	FUDAKANG INDUSTRIAL CO., LTD.
Address of Factory:	No. 8 Yinghe Road, Yuanjiangyuan Management Zone, Changping Town, Dongguan, Guangdong, China

### 5.2 General Description of EUT

Product Name:	Arm type Blood pressure monitor
Model No.:	FT-C11B-BT, FT-C21Y, FT-C22Y, FT-C23Y, FT-C24Y, FT-C11B, FT-C12B, FT-C21Y-V, FT-C22Y-V, FT-C23Y-V, FT-C24Y-V, FT-C11B-V, FT-C12B-V, FT-C11B-UR
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.1
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Power Grade:	Default setting
Test Software of EUT:	Prodtest (manufacturer declare )
Antenna Type:	Integral
Antenna Gain:	2.25dBi
Power Supply:	DC 6V (4*1.5V "AA" batteries)

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 6 of 59

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 7 of 59

### 5.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1020mbar	

### 5.4 Description of Support Units

The EUT has been tested independent unit.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM141100614003 Page: 8 of 59

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141100614003 Page: 9 of 59

### 5.10Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		



Report No.: SZEM141100614003 Page: 10 of 59

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10			
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16			
3	EMI Test software	AUDIX	E3	SEL0050	N/A			
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24			
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24			
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24			
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16			
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24			
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29			
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29			
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29			
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29			
13	Band filter	Amindeon	82346	SEL0094	2015-05-16			
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16			
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24			
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24			
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16			
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24			
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 11 of 59

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Agilent Divider(splitter) Technologies		11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 12 of 59

## 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.25dBi.

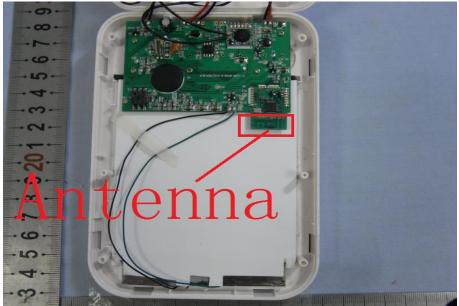





Report No.: SZEM141100614003 Page: 13 of 59

### 6.2 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)				
Test Method:	KDB558074 D01 v03r02				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
	Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	30dBm				
Test Mode:	Transmitting with GFSK modulation				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				


#### **Measurement Data**

GFSK mode						
Test channel Peak Output Power (dBm) Limit (dBm) Result						
Lowest	-0.02	30.00	Pass			
Middle	-0.29	30.00	Pass			
Highest	-0.49	30.00	Pass			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100614003 Page: 14 of 59

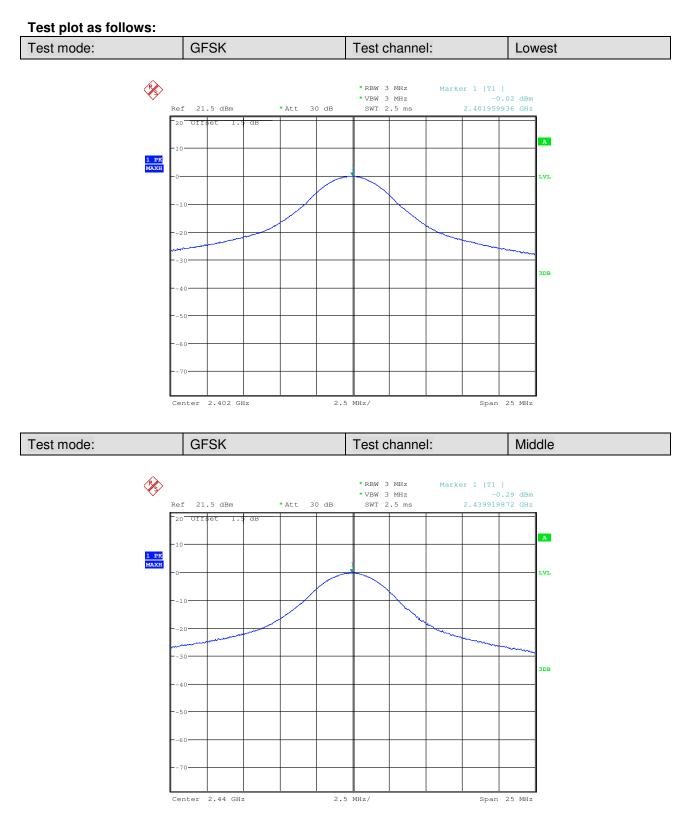



Report No.: SZEM141100614003 Page: 15 of 59

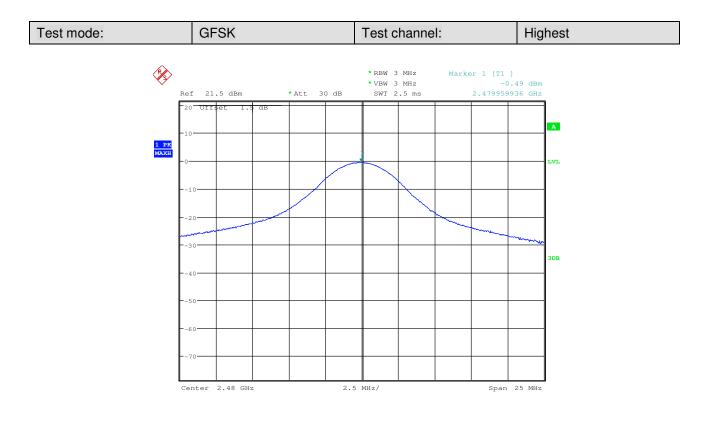



Report No.: SZEM141100614003 Page: 16 of 59

#### Test Requirement: 47 CFR Part 15C Section 15.247 (a)(2) Test Method: KDB558074 D01 v03r02 Test Setup: Spectrum Analyzer E.U.T ( Non-Conducted Table **Ground Reference Plane** Limit: ≥ 500 kHz Test Mode: Transmitting with GFSK modulation Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

#### 6.3 6dB Occupy Bandwidth


#### Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.663461538462	≥500	Pass
Middle	0.682692307693	≥500	Pass
Highest	0.682692307693	≥500	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100614003 Page: 17 of 59

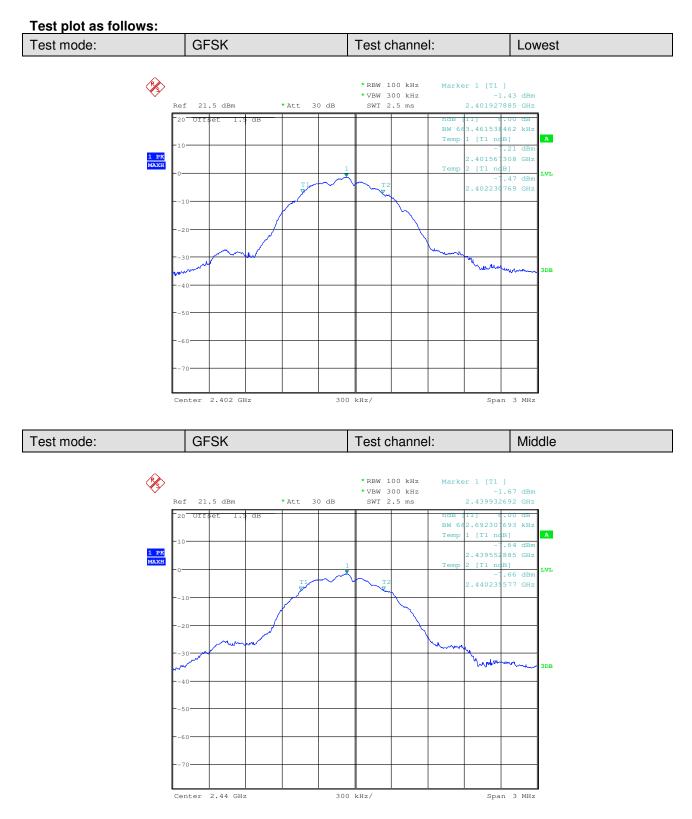



Report No.: SZEM141100614003 Page: 18 of 59

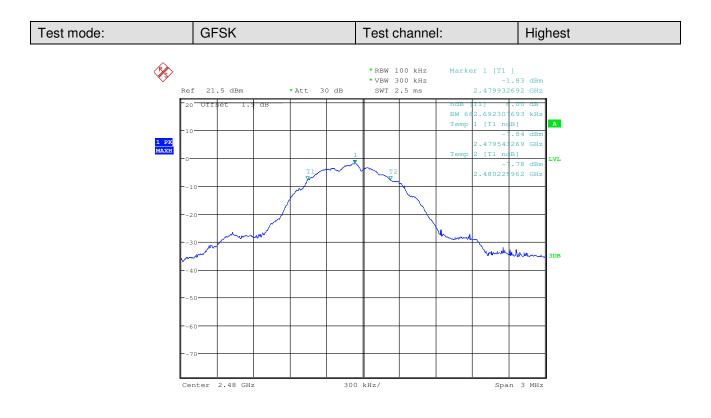



Report No.: SZEM141100614003 Page: 19 of 59

#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (e) **Test Method:** KDB558074 D01 v03r02 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Limit: ≤8.00dBm Exploratory Test Mode: Transmitting with GFSK modulation Refer to section 5.10 for details Instruments Used: Test Results: Pass

### 6.4 Power Spectral Density


#### **Measurement Data**

GFSK mode								
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result					
Lowest	-1.45	≤8.00	Pass					
Middle	-1.74	≤8.00	Pass					
Highest	-1.89	≤8.00	Pass					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100614003 Page: 20 of 59

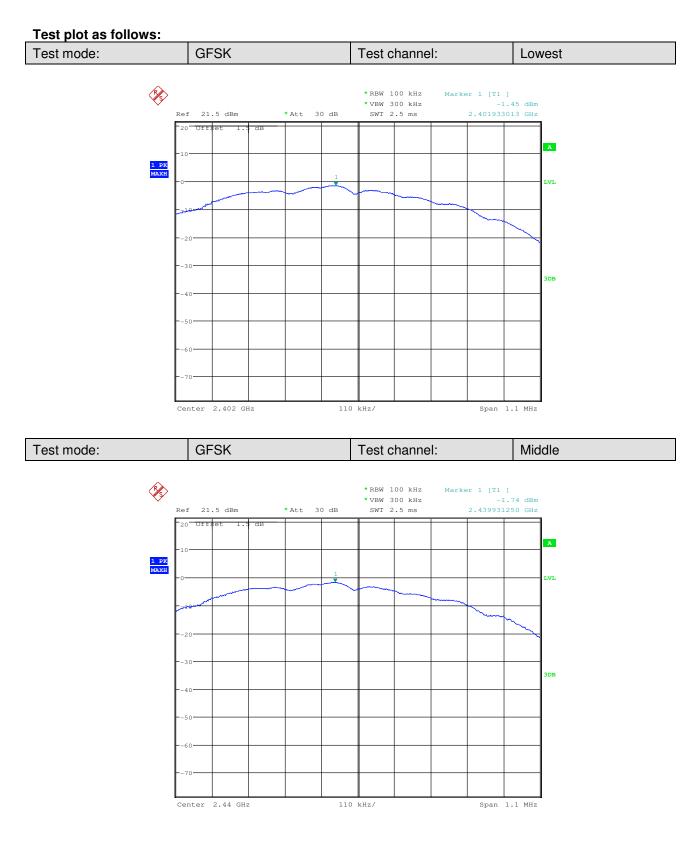



Report No.: SZEM141100614003 Page: 21 of 59

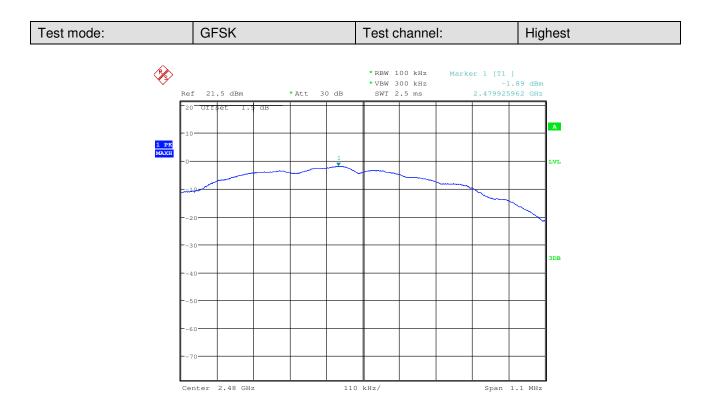



Report No.: SZEM141100614003 Page: 22 of 59


Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	KDB558074 D01 v03r02				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Mode:	Transmitting with GFSK modulation				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				

### 6.5 Band-edge for RF Conducted Emissions





Report No.: SZEM141100614003 Page: 23 of 59

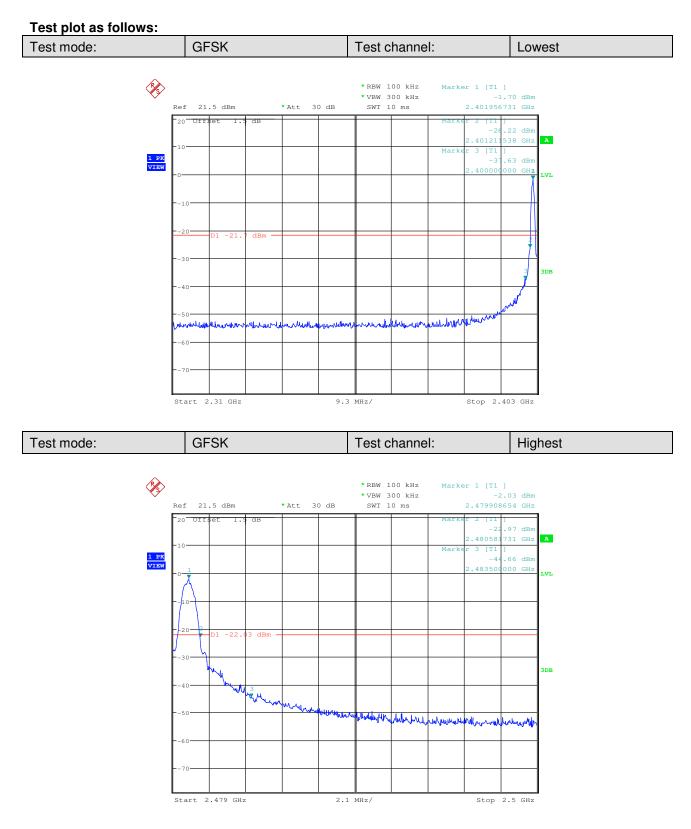




Report No.: SZEM141100614003 Page: 24 of 59

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer E-U.T Non-Conducted Table Ground Reference Plane Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

#### 6.6 Spurious RF Conducted Emissions




Report No.: SZEM141100614003 Page: 25 of 59

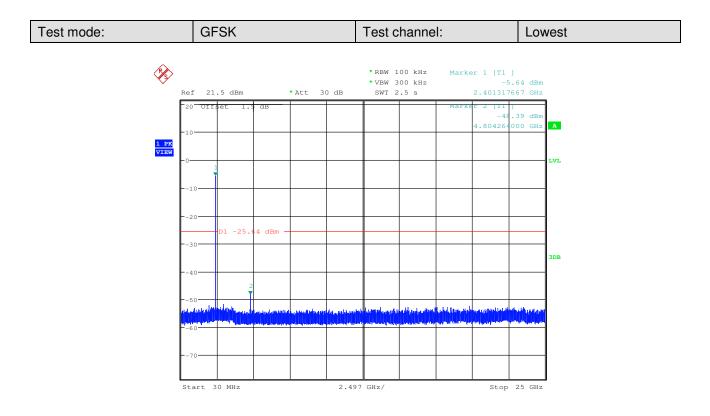



Stop 3 GHz


Report No.: SZEM141100614003 Page: 26 of 59

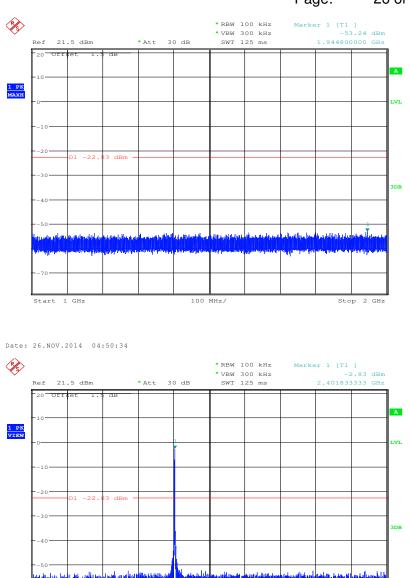


Start 2 GHz 100 MHz/

Date: 26.NOV.2014 04:50:21




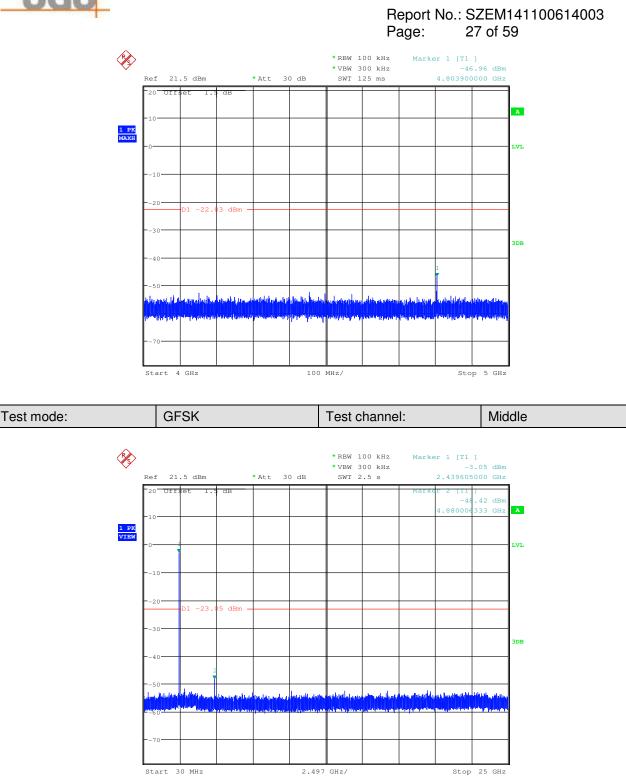




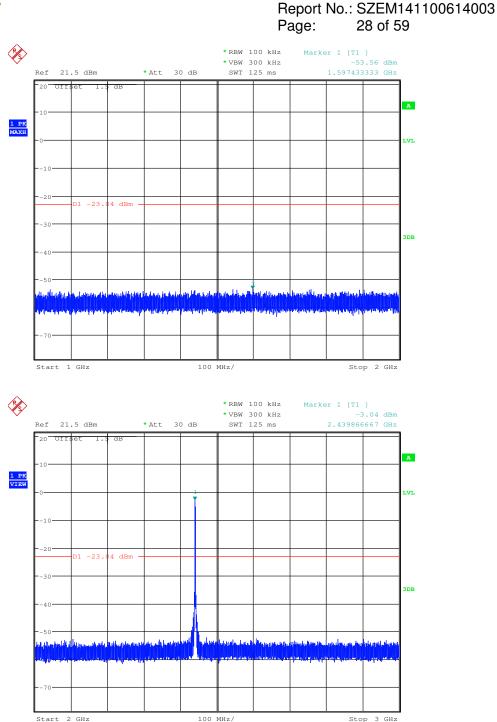




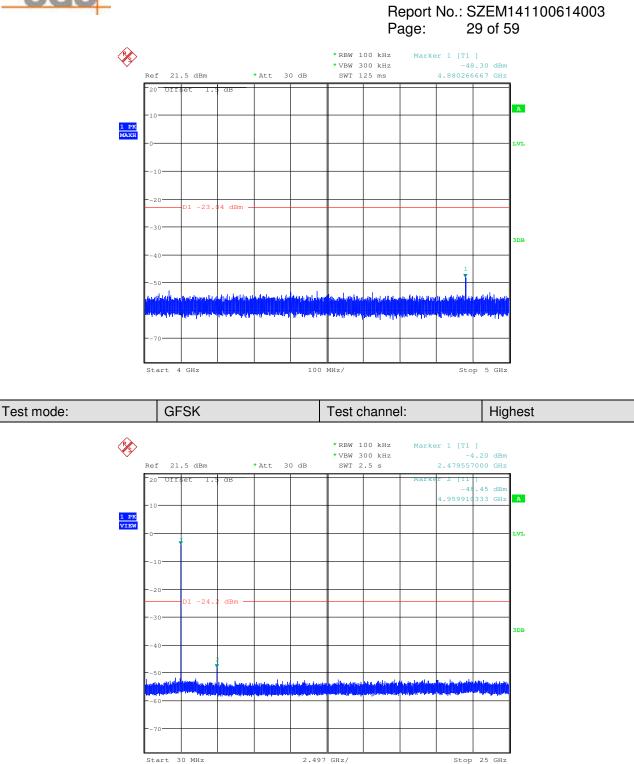



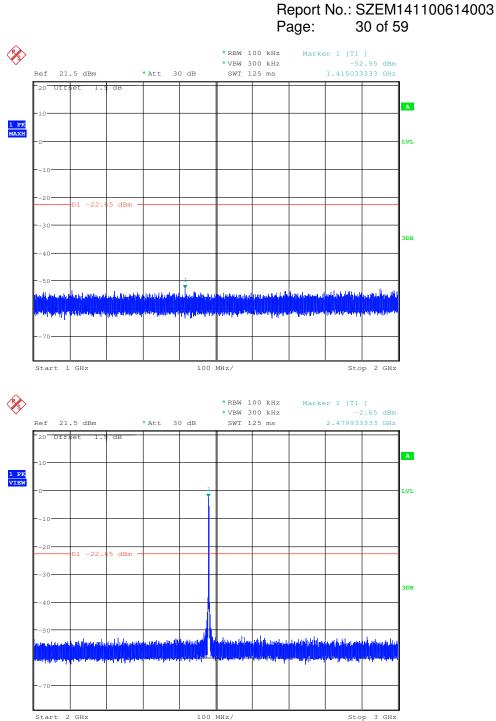



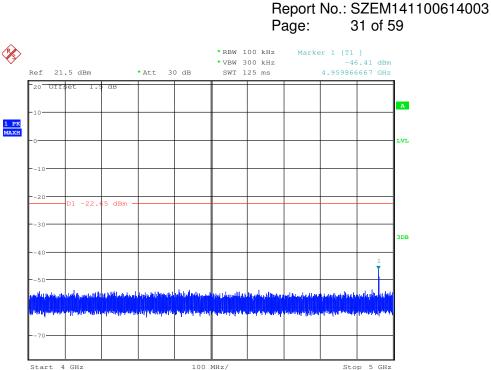

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM141100614003 Page: 32 of 59


### 6.7 Radiated Spurious Emission

6.7.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Section	on 1	5.209 and 15	.205				
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance	: 3m	n (Semi-Anecł	noic Cham	be	r)		
Receiver Setup:	Frequency		Detector	RBW		VBW	Remark	]
	0.009MHz-0.090MHz Peak		Peak	10kHz	z	30kHz	Peak	
	0.009MHz-0.090MH	z	Average	10kHz	Z	30kHz	Average	
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z	30kHz	Quasi-peak	
	0.110MHz-0.490MH	Z	Peak	10kHz	z	30kHz	Peak	
	0.110MHz-0.490MH	z	Average	10kHz	z	30kHz	Average	
	0.490MHz -30MHz	30MHz Quasi-peak		10kHz	z	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kH	lz	300kHz	Quasi-peak	
	Above 1GHz		Peak 1MH		<u>.</u>	3MHz	Peak	
			Peak	1MHz	1MHz		Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (n	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-		300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-		30	
	1.705MHz-30MHz		30	-	-		30	
	30MHz-88MHz		100	40.0	Quasi-peak		3	
	88MHz-216MHz		150	43.5	Quasi-peak		3	
	216MHz-960MHz		200	46.0	Q	uasi-peak	3	
	960MHz-1GHz		500	54.0	Q	uasi-peak	3	
	Above 1GHz	500	54.0		Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						n	
Test Setup:								





Report No.: SZEM141100614003 Page: 33 of 59

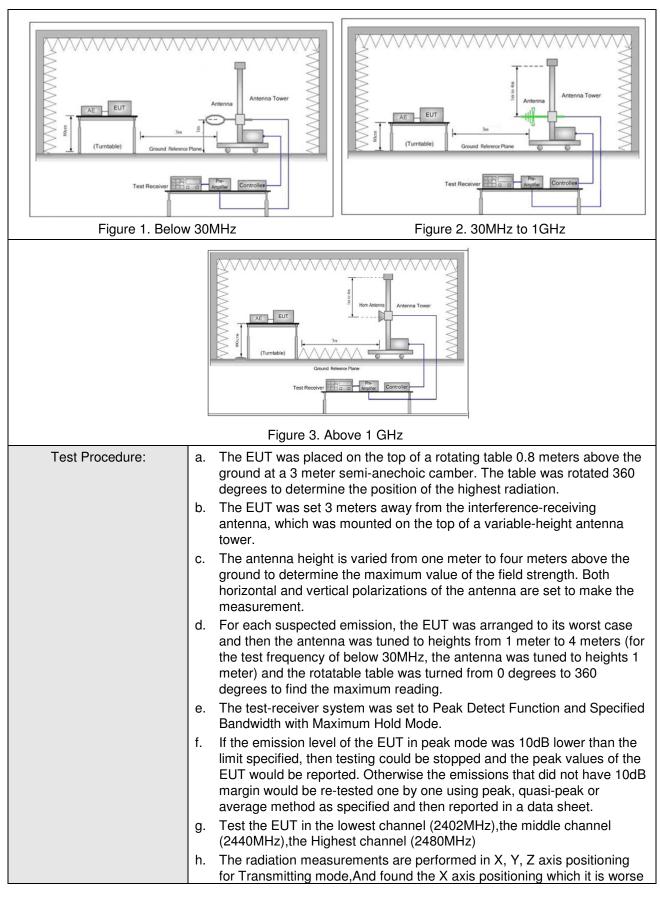

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 34 of 59


	case. i. Repeat above procedures until all frequencies measured was complete.	
Test Mode:	Transmitting with GFSK modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100614003 Page: 35 of 59

Radiated Emission below 1GHz					
30MHz~1GHz (QP)					
Test mode: Transmitting Vertical					

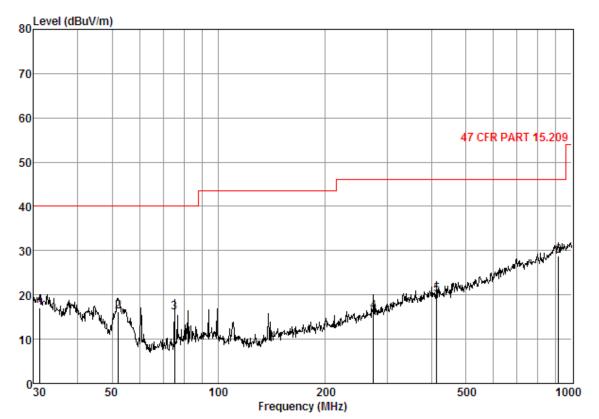


Condition: 47 CFR PART 15.209 3m 3142C VERTICAL Job No. : 6140CR Test Mode: TX mode

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	31.29 52.03 75.18 274.19 414.72 916.07	0.65 0.96 1.22 2.59 3.33 5.53	17.98 8.40 7.37 12.68 16.34 23.33	25.63 25.74 25.45 24.33 26.26 26.17	24.12 32.59 32.91 25.17 26.63 26.15	17.12 16.21 16.05 16.11 20.04 28.84	40.00 40.00 46.00 46.00	-22.88 -23.79 -23.95 -29.89 -25.96 -17.16



Report No.: SZEM141100614003 Page: 36 of 59

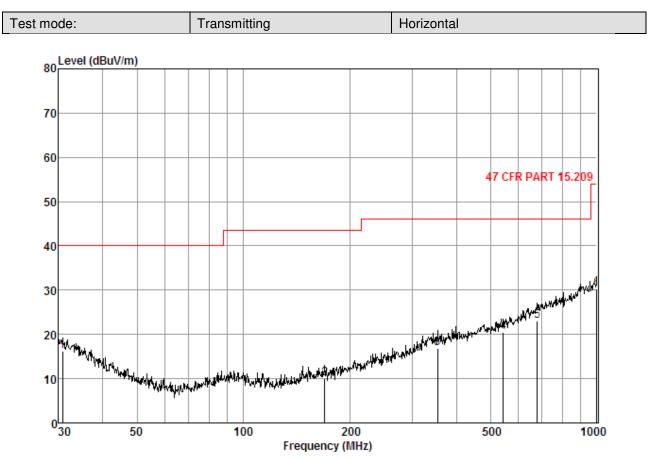

Condition: 47 CFR PART 15.209 3m 3142C HORIZONTAL Job No. : 6140CR Test Mode: TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	30.75 169.60 354.18 543.27 677.58 1000.00	0.65 1.94 3.06 3.96 4.44 5.69	18.28 9.51 15.57 18.84 21.34 24.10	25.63 24.89 25.41 26.94 26.38 26.11	22. 97 23. 41 23. 69 24. 63 23. 71 26. 61	16.27 9.97 16.91 20.49 23.11 30.29	43.50 46.00 46.00 46.00	-23.73 -33.53 -29.09 -25.51 -22.89 -23.71



Report No.: SZEM141100614003 Page: 37 of 59

Transmitte	er Emiss	sion above	e 1GHz						
Test mode:	(	GFSK	Test	channel:	Lowest		Rema	rk: Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	Polarization
3653.574	6.88	33.04	38.81	47.61	48.72	7	4	-25.28	Vertical
4804.000	6.42	34.70	39.24	49.87	51.75	7	4	-22.25	Vertical
6088.229	8.06	36.20	39.17	46.30	51.39	7	4	-22.61	Vertical
7206.000	8.92	35.63	39.07	46.67	52.15	7	4	-21.85	Vertical
9608.000	9.99	37.33	37.93	42.43	51.82	7	4	-22.18	Vertical
11317.000	10.35	38.14	38.38	42.66	52.77	7	4	-21.23	Vertical
3588.694	6.92	32.99	38.78	47.60	48.73	7	4	-25.27	Horizontal
4804.000	6.42	34.70	39.24	49.34	51.22	7	4	-22.78	Horizontal
6044.750	8.07	36.25	39.18	46.71	51.85	7	4	-22.15	Horizontal
7206.000	8.92	35.63	39.07	46.71	52.19	7	4	-21.81	Horizontal
9608.000	9.99	37.33	37.93	43.02	52.41	7	4	-21.59	Horizontal
10840.660	10.19	37.96	38.14	42.47	52.48	7	4	-21.52	Horizontal

Test mode:		GFSK	Те	Test channel: Middle		Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3413.093	7.13	32.79	38.70	48.95	50.17	74	-23.83	Vertical
4880.000	6.58	34.78	39.26	48.15	50.25	74	-23.75	Vertical
5958.723	8.02	36.22	39.19	48.39	53.44	74	-20.56	Vertical
7320.000	9.07	35.51	39.06	48.46	53.98	74	-20.02	Vertical
9760.000	9.90	37.80	37.84	42.47	52.33	74	-21.67	Vertical
11236.180	10.33	38.13	38.34	41.90	52.02	74	-21.98	Vertical
3910.999	6.74	33.35	38.92	47.91	49.08	74	-24.92	Horizontal
4880.000	6.58	34.78	39.26	50.30	52.40	74	-21.60	Horizontal
6001.583	8.08	36.30	39.18	47.97	53.17	74	-20.83	Horizontal
7320.000	9.07	35.51	39.06	47.74	53.26	74	-20.74	Horizontal
9760.000	9.90	37.80	37.84	44.12	53.98	74	-20.02	Horizontal
11155.940	10.31	38.12	38.30	42.02	52.15	74	-21.85	Horizontal



Report No.: SZEM141100614003 Page: 38 of 59

Test mode:		GFSK	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3588.694	6.92	32.99	38.78	47.64	48.77	74	-25.23	Vertical
4960.000	6.76	34.86	39.29	48.10	50.43	74	-23.57	Vertical
6055.591	8.07	36.24	39.18	48.18	53.31	74	-20.69	Vertical
7440.000	9.23	35.43	39.05	46.66	52.27	74	-21.73	Vertical
9920.000	9.81	38.27	37.75	42.11	52.44	74	-21.56	Vertical
11236.180	10.33	38.13	38.34	42.53	52.65	74	-21.35	Vertical
3883.068	6.75	33.30	38.90	48.36	49.51	74	-24.49	Horizontal
4960.000	6.76	34.86	39.29	50.19	52.52	74	-21.48	Horizontal
6088.229	8.06	36.20	39.17	48.12	53.21	74	-20.79	Horizontal
7440.000	9.23	35.43	39.05	47.02	52.63	74	-21.37	Horizontal
9920.000	9.81	38.27	37.75	41.95	52.28	74	-21.72	Horizontal
11236.180	10.33	38.13	38.34	42.34	52.46	74	-21.54	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Report No.: SZEM141100614003 Page: 39 of 59

## 6.8 Restricted bands around fundamental frequency

6.8 Restricted ba	nas arouna tundam						
Test Requirement:	47 CFR Part 15C Section 15	5.209 and 15.205					
Test Method:	ANSI C63.10 2009						
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chamber	r)				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value				
	216MHz-960MHz	46.0	Quasi-peak Value				
	960MHz-1GHz	54.0	Quasi-peak Value				
		54.0	Average Value				
	Above 1GHz	74.0	Peak Value				
Test Setup:							
Figure 1. 30MHz to 1GHz							
Test Procedure:	<ul> <li>a. The EUT was place the ground at a 3 m rotated 360 degrees radiation.</li> <li>b. The EUT was set 3 antenna, which was tower.</li> <li>c. The antenna height the ground to deterr Both horizontal and make the measuren</li> <li>d. For each suspected case and then the a meters and the rotation degrees to find the rest Specified Bandwidth</li> <li>f. Place a marker at th transmit frequency t emissions in the rest</li> </ul>	d on the top of a rotating t eter semi-anechoic cambe is to determine the position meters away from the inter mounted on the top of a v is varied from one meter t nine the maximum value of vertical polarizations of th nent. emission, the EUT was a ntenna was tuned to heigh table table was turned from	able 0.8 meters above er. The table was of the highest erference-receiving variable-height antenna to four meters above of the field strength. e antenna are set to rranged to its worst hts from 1 meter to 4 m 0 degrees to 360 ect Function and le. nd closest to the measure any pectrum analyzer plot.				



Report No.: SZEM141100614003 Page: 40 of 59


	<ul> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Test Mode:	Transmitting with GFSK modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM141100614003 Page: 41 of 59

#### Test plot as follows:

Restricted bands around fundamental frequency							
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical	

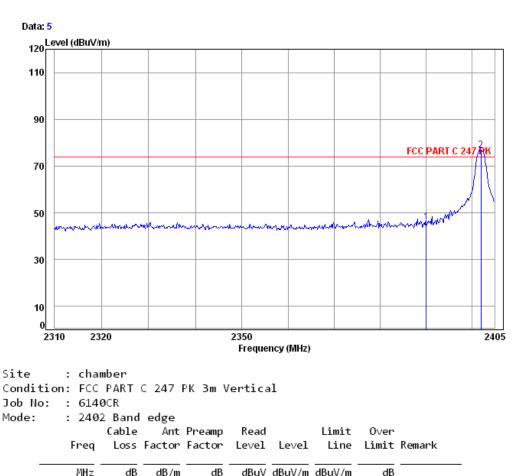


	7112	CLD	GD/ III	00	abav	abav/m	abav/m	ab	
1	2390.00	4.90	32.35	38.46	47.44	46.23	74.00	-27.77	
2 pp	2402.00	4.92	32.41	38.46	77.89	76.76	74.00	2.76	



Report No.: SZEM141100614003 Page: 42 of 59

Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	------	---------------	--------	---------	------	------------

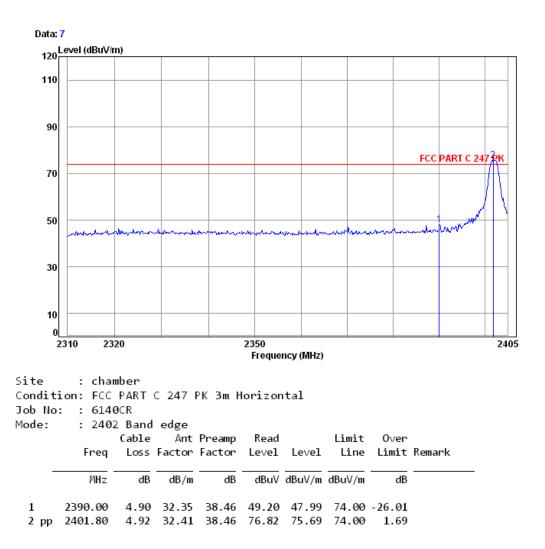






Report No.: SZEM141100614003 Page: 43 of 59


Test mode: 0	GFSK	Test channel:	Lowest	Remark:	Average	Vertical
--------------	------	---------------	--------	---------	---------	----------

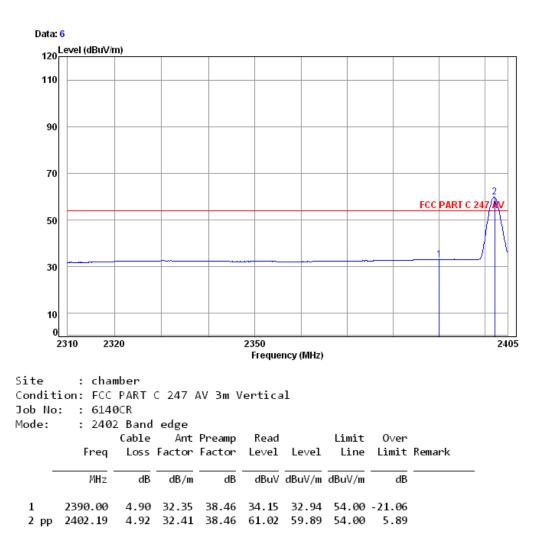



Report No.: SZEM141100614003 Page: 44 of 59


Test mode: GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
-----------------	---------------	--------	---------	---------	------------

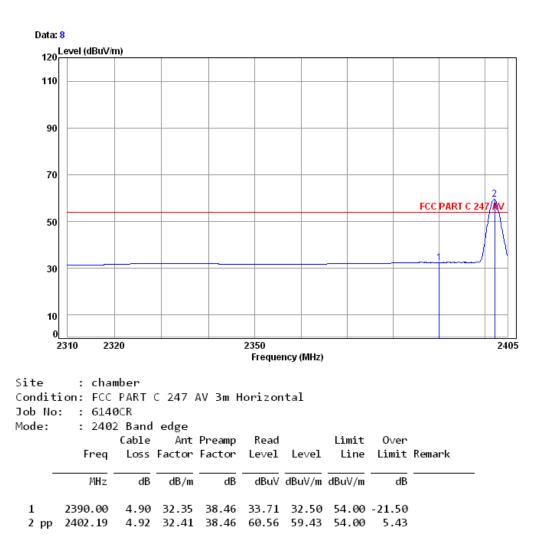



Report No.: SZEM141100614003 Page: 45 of 59


Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Vertical
-----------------	---------------	---------	---------	------	----------

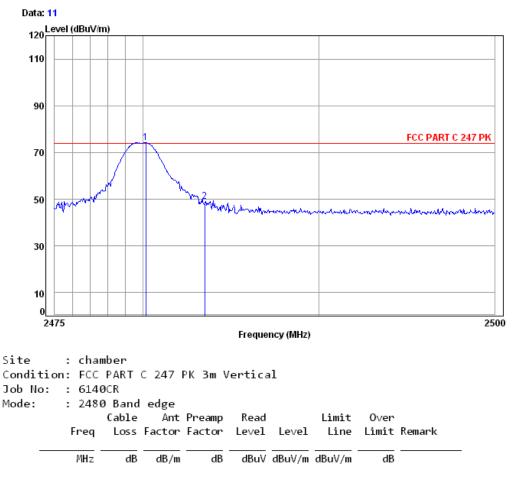


1 pp	2480.15	5.02	32.44	38.47	75.18	74.17	74.00	0.17
2	2483.50	5.03	32.44	38.47	50.06	49.06	74.00	-24.94



Report No.: SZEM141100614003 Page: 46 of 59




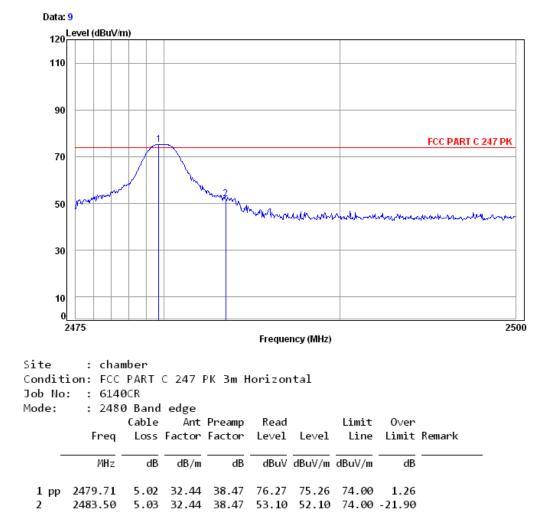



Report No.: SZEM141100614003 Page: 47 of 59

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Vertical
-----------------	---------------	---------	---------	---------	----------

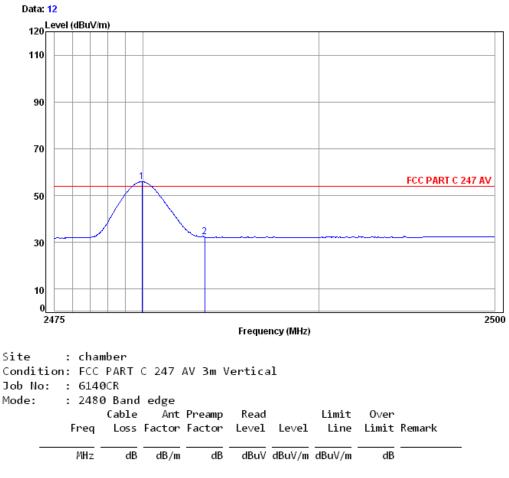


1 pp	2479.96	5.02	32.44	38.47	56.91	55.90	54.00	1.90
2	2483.50	5.03	32.44	38.47	33.29	32.29	54.00	-21.71



Report No.: SZEM141100614003 Page: 48 of 59

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Horizontal
-----------------	---------------	---------	---------	---------	------------

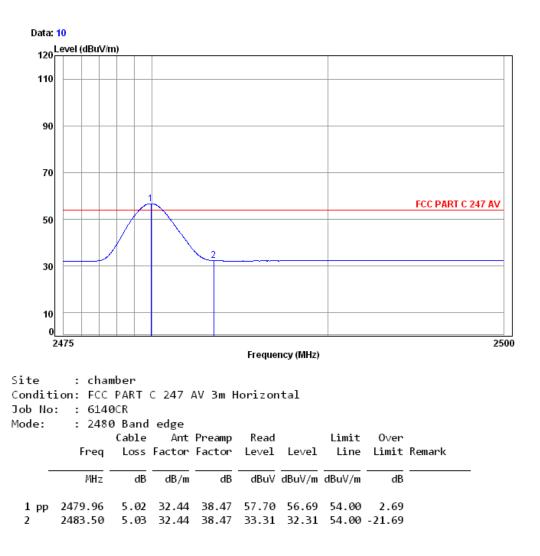

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

# SGS

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100614003 Page: 49 of 59


## 7 Photographs - EUT Test Setup

Test model No.: FT-C11B-BT

#### 7.1 Radiated Emission



## 7.2 Radiated Spurious Emission

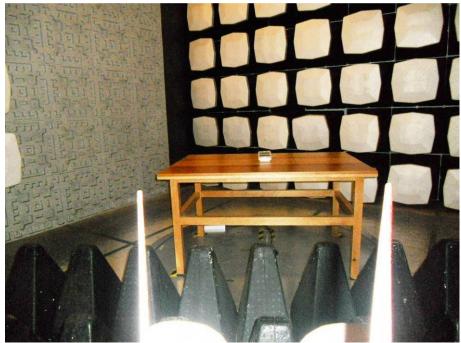




Report No.: SZEM141100614003 Page: 50 of 59

## 8 Photographs - EUT Constructional Details

Test model No.: FT-C11B-BT




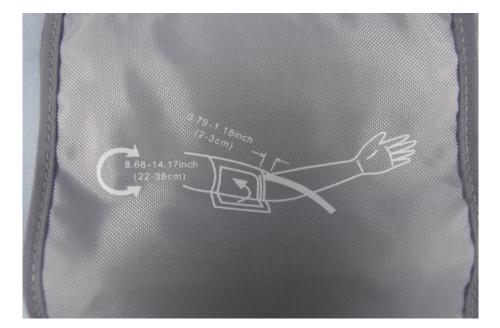




Report No.: SZEM141100614003 Page: 51 of 59



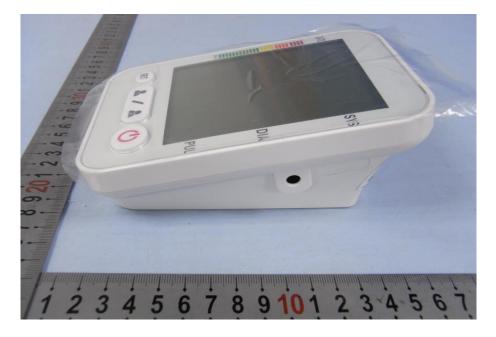



Report No.: SZEM141100614003 Page: 52 of 59

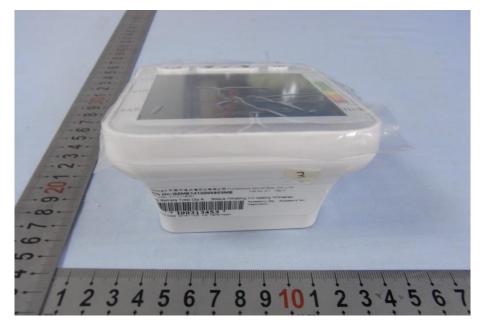








Report No.: SZEM141100614003 Page: 53 of 59



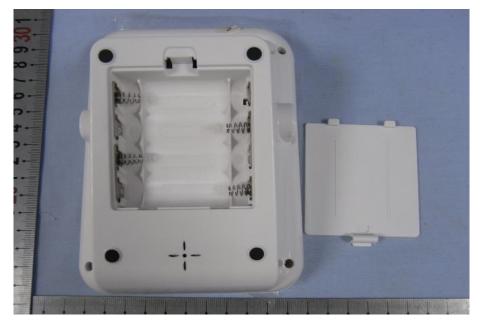



Report No.: SZEM141100614003 Page: 54 of 59








Report No.: SZEM141100614003 Page: 55 of 59










Report No.: SZEM141100614003 Page: 56 of 59

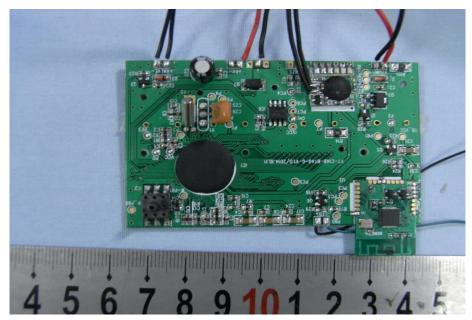


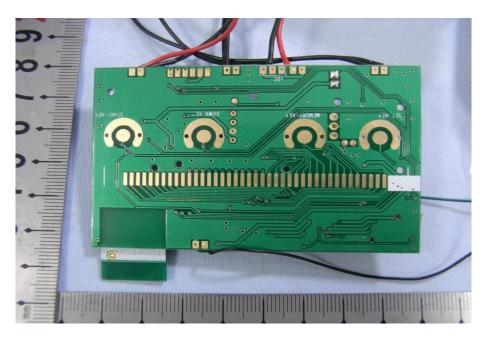





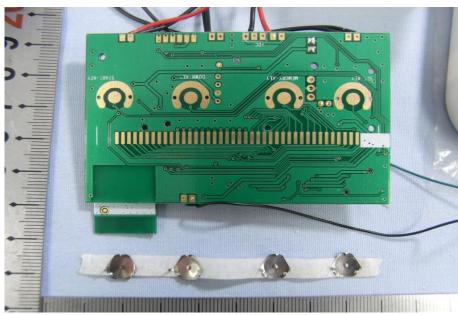

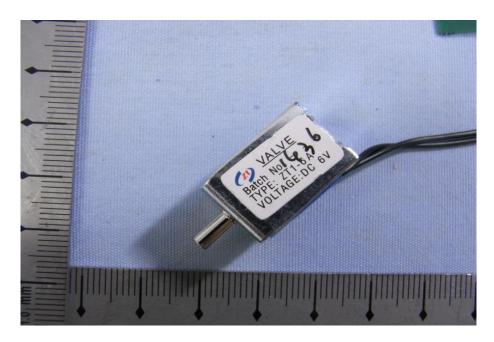



Report No.: SZEM141100614003 Page: 58 of 59







Report No.: SZEM141100614003 Page: 59 of 59

