

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM150600347904 Page: 1 of 60

FCC REPORT

Application No.:	SZEM1506003479CR (GZME1506000492ME)		
Applicant:	FUDAKANG INDUSTRIAL CO.,LTD.		
Manufacturer:	FUDAKANG INDUSTRIAL CO.,LTD.		
Factory:	FUDAKANG INDUSTRIAL CO.,LTD.		
Product Name:	Infrared Thermometer		
Model No.(EUT):	FT-F31-BT		
Add Model No.:	FT-F31;FT-F42-BT;FT-F42		
Trade Mark:	FDK		
FCC ID:	2ADNQFTF31BT		
Standards:	47 CFR Part 15, Subpart C (2014)		
Date of Receipt:	2015-06-26		
Date of Test:	2015-07-03 to 2015-07-13		
Date of Issue:	2015-07-20		
Test Result:	PASS *		

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150600347904 Page: 2 of 60

2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2015-07-20		Original		

Authorized for issue by:		
Tested By	Eric Fu (Eric Fu) /Project Engineer	2015-07-13
Prepared By	Vivi Zhou	2015-07-20
	(Vivi Zhou) /Clerk	Date
Checked By	Oven Zhou	2015-07-20
	(Owen Zhou) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 3 of 60

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2009	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2009	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2009	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

Model No.: FT-F31-BT, FT-F31, FT-F42-BT, FT-F42

Only the model FT-F31-BT was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models, only different on model No. and outlook appearance.



Report No.: SZEM150600347904 Page: 4 of 60

4 Contents

1	cc	DVER PAGE	1
2	VE	ERSION	2
3	TE	ST SUMMARY	
4	СС	ONTENTS	4
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	7
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.2	CONDUCTED PEAK OUTPUT POWER	
	6.3	6DB OCCUPY BANDWIDTH	
	6.4	POWER SPECTRAL DENSITY	
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.6	SPURIOUS RF CONDUCTED EMISSIONS	
	6.7	RADIATED SPURIOUS EMISSION	
	-	7.1 Spurious Emissions	
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	IOTOGRAPHS - EUT TEST SETUP	
	7.1	RADIATED EMISSION	
	7.2	RADIATED SPURIOUS EMISSION	
8	PF	IOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM150600347904 Page: 5 of 60

5 General Information

5.1 Client Information

Applicant:	FUDAKANG INDUSTRIAL CO.,LTD.
Address of Applicant:	No.8 Yinghe Road Yuanjiangyuan Management Zone, Changping Town Dongguan, Guangdong, China
Manufacturer:	FUDAKANG INDUSTRIAL CO.,LTD.
Address of Manufacturer:	No.8 Yinghe Road Yuanjiangyuan Management Zone, Changping Town Dongguan, Guangdong, China
Factory:	FUDAKANG INDUSTRIAL CO.,LTD.
Address of Factory:	No.8 Yinghe Road Yuanjiangyuan Management Zone, Changping Town Dongguan, Guangdong, China

5.2 General Description of EUT

Product Name:	Infrared Thermometer
Model No.:	FT-F31-BT
Trade Mark:	FDK
Frequency Range:	2402MHz to 2480MHz
Bluetooth Version:	V4.1 BLE
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Software of EUT:	Prod.exe (manufacturer declare)
Antenna Type:	Integral
Antenna Gain:	-0.5dBi
Power Supply:	DC 3.0V (2*1.5V "AAA" Size batteries)

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 6 of 60

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: SZEM150600347904 Page: 7 of 60

5.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1005mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM150600347904 Page: 8 of 60

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150600347904 Page: 9 of 60

5.10Equipment List

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 10 of 60

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 11 of 60

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna: FT-F31-BT

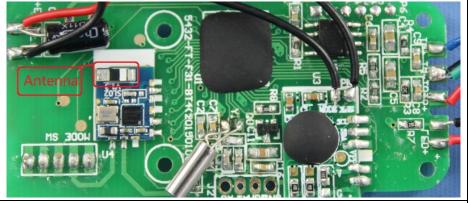

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.5dBi.



Report No.: SZEM150600347904 Page: 12 of 60

6.2 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10 2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	30dBm		
Test Mode:	Transmitting with GFSK modulation		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.044	30.00	Pass
Middle	-1.950	30.00	Pass
Highest	-1.873	30.00	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 13 of 60

Test plot as follows:

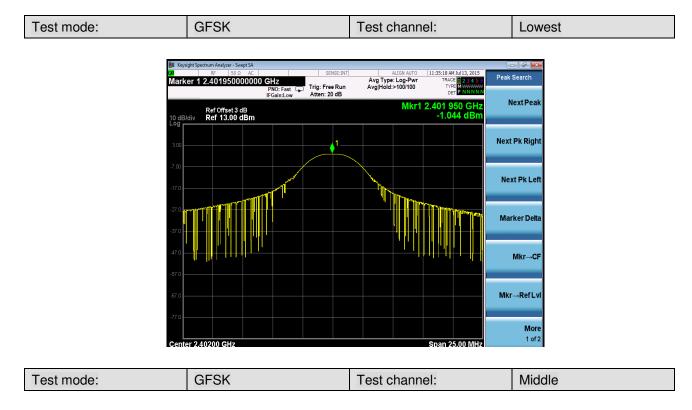





Report No.: SZEM150600347904 Page: 14 of 60

T , ,	OFOK	T	
lest mode:	GESK	l est channel:	Highest

Keysight Spectrum Analyzer - Swept SA	SHOE THE		10.44 00.0 140.0045	
arker 1 2.479750000000	Avg Type ee Run Avg Hold	e: Log-Pwr	1:43:16 AM Jul 13, 2015 TRACE 1 2 3 4 5 6 TYPE MWWWWWW DET P NNNNN	Peak Search
Ref Offset 2 dB		Mkr1 2.4	479 750 GHz -1.873 dBm	Next Pea
00	↓1			Next Pk Rigl
3.0	 - North			Next Pk Le
			- Haral Mar	Marker Del
				Mkr→C
3.0				Mkr→RefL
3.0				Mo



Report No.: SZEM150600347904 Page: 15 of 60

6.3 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)		
Test Method:	ANSI C63.10 2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
Limit:	≥ 500 kHz		
Test Mode:	Transmitting with GFSK modulation		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		


Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.696	≥500	Pass
Middle	0.675	≥500	Pass
Highest	0.726	≥500	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 16 of 60

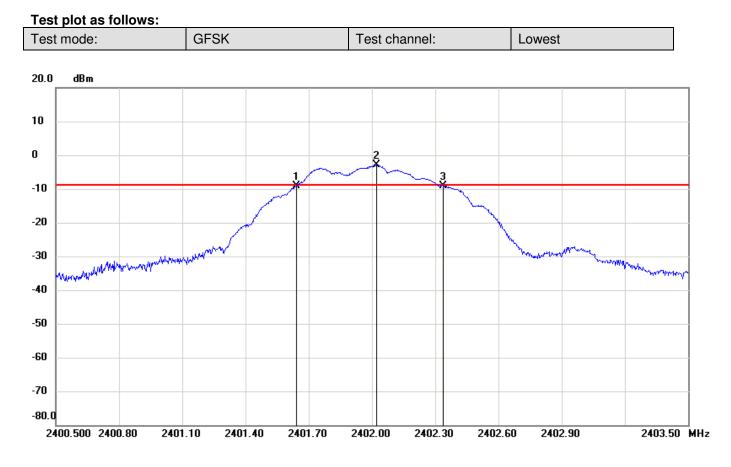


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.6400	-9.12	-8.96	-0.16
2	2402.0210	-2.96	-8.96	6.00
3	2402.3360	-9.24	-8.96	-0.28

No.		> Frequency(MHz)	> Level(dB)
1	mk3-mk1	0.696	-0.12

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 17 of 60

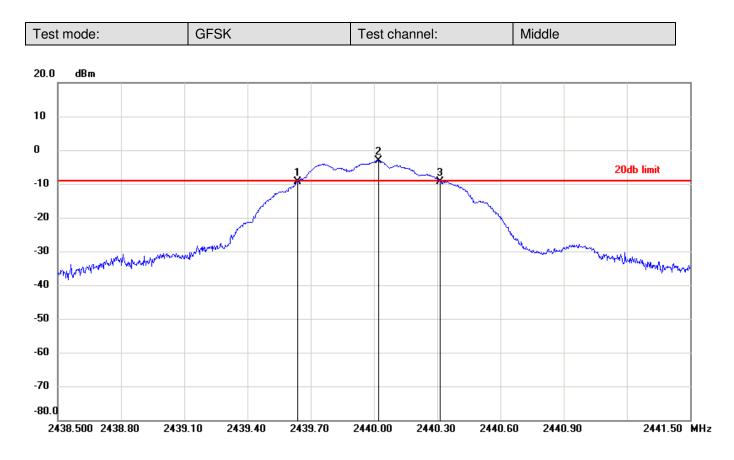


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2439.6370	-9.46	-9.19	-0.27
2	2440.0210	-3.19	-9.19	6.00
3	2440.3120	-9.29	-9.19	-0.10

No.		> Frequency(MHz)	> Level(dB)
1	mk3-mk1	0.675	0.17



Report No.: SZEM150600347904 Page: 18 of 60

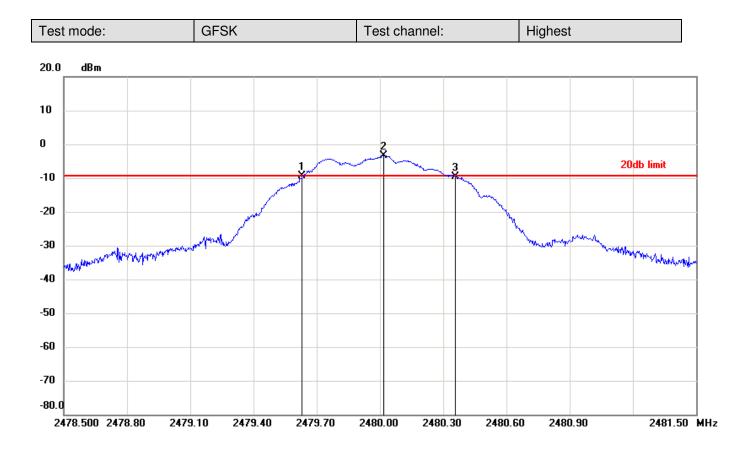

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.6310	-9.42	-9.37	-0.05
2	2480.0180	-3.37	-9.37	6.00
3	2480.3570	-9.67	-9.37	-0.30

No.		> Frequency(MHz)	> Level(dB)
1	mk3-mk1	0.726	-0.25

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 19 of 60

6.4 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)			
Test Method:	ANSI C63.10 2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Limit:	≤8.00dBm/3kHz			
Test Mode:	Transmitting with GFSK modulation			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			


Measurement Data


GFSK mode					
Test channel	Power Spectral Density (dBm/3kHz) Limit (dBm/3kHz) Result				
Lowest	-10.91	≤8.00	Pass		
Middle	-11.25	≤8.00	Pass		
Highest	-11.40	≤8.00	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150600347904 Page: 20 of 60

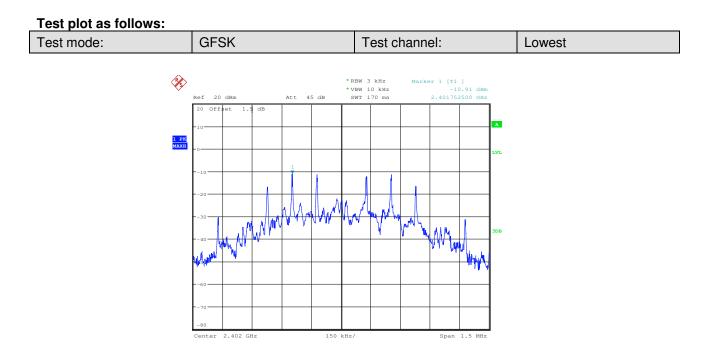

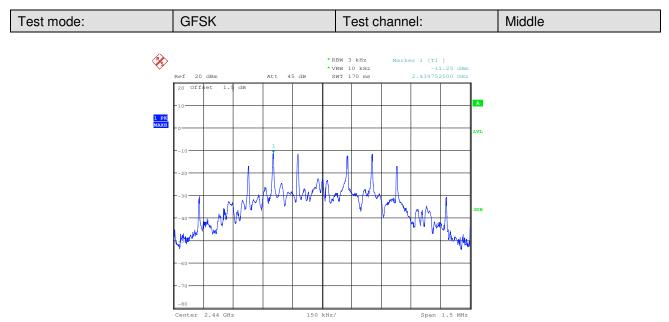



Report No.: SZEM150600347904 Page: 21 of 60

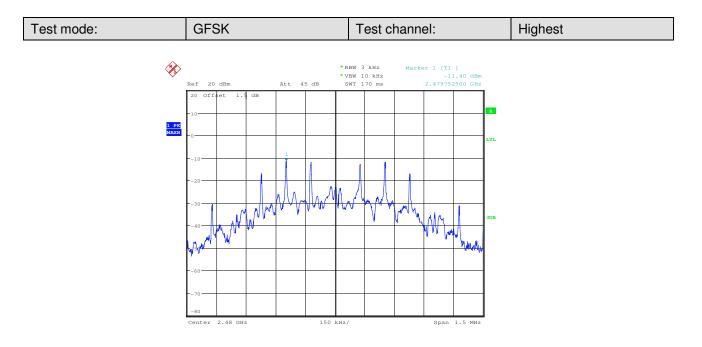



Report No.: SZEM150600347904 Page: 22 of 60

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10 2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			

6.5 Band-edge for RF Conducted Emissions




Report No.: SZEM150600347904 Page: 23 of 60

Test plot as follows: Test mode: GFSK Test channel: Lowest 20.0 dBm 10 0 -10 -20 -30 -40 denter and a second of the second of the second second second second second and the second and more more more thank -50 -60 -70 -80.0 2310.000 2319.40 2328.80 2338.20 2347.60 2357.00 2366.40 2375.80 2385.20 2404.00 MHz

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.0180	-38.47	-22.93	-15.54
2	2402.0260	-2.93	-22.93	20.00



Report No.: SZEM150600347904 Page: 24 of 60

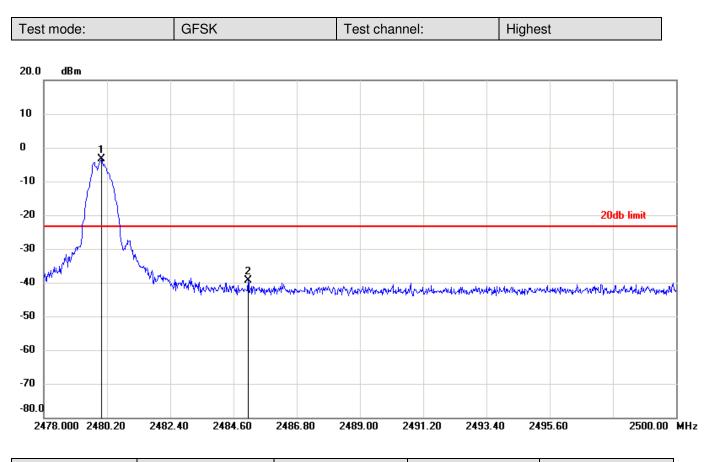

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.0020	-3.44	-23.44	20.00
2	2485.1060	-39.37	-23.44	-15.93

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600347904 Page: 25 of 60


6.6 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10 2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150600347904 Page: 26 of 60

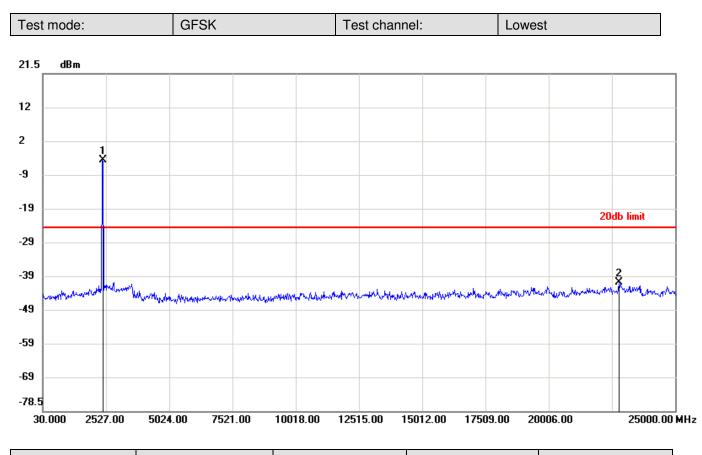

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3177	-4.10	-24.10	20.00
2	22795.1490	-40.26	-24.10	-16.16




Report No.: SZEM150600347904 Page: 27 of 60

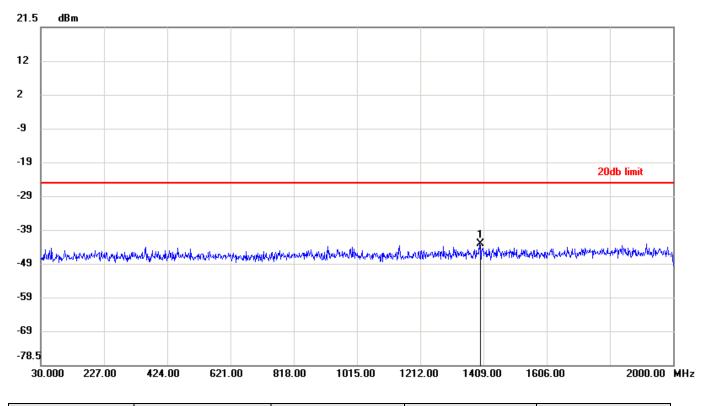

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1397.6397	-42.59	-24.61	-17.98




Report No.: SZEM150600347904 Page: 28 of 60

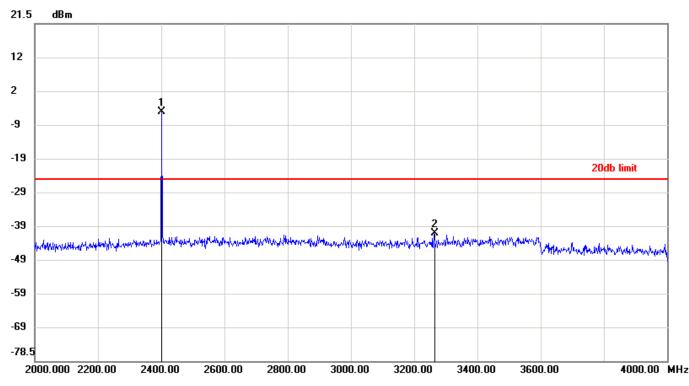

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.8667	-4.61	-24.61	20.00
2	3263.4667	-40.66	-24.61	-16.05




Report No.: SZEM150600347904 Page: 29 of 60

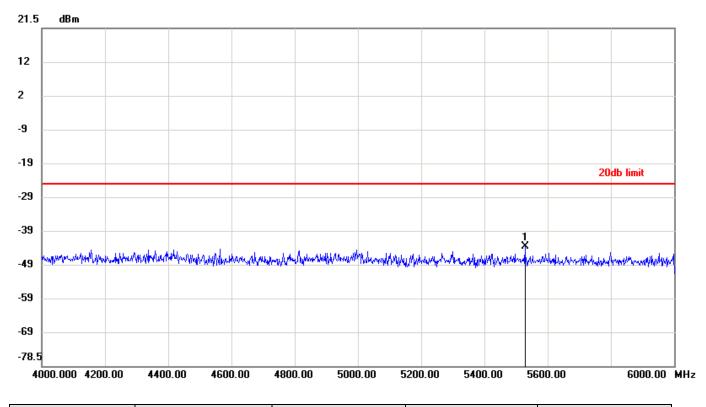

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5528.5333	-43.23	-24.61	-18.62




Report No.: SZEM150600347904 Page: 30 of 60

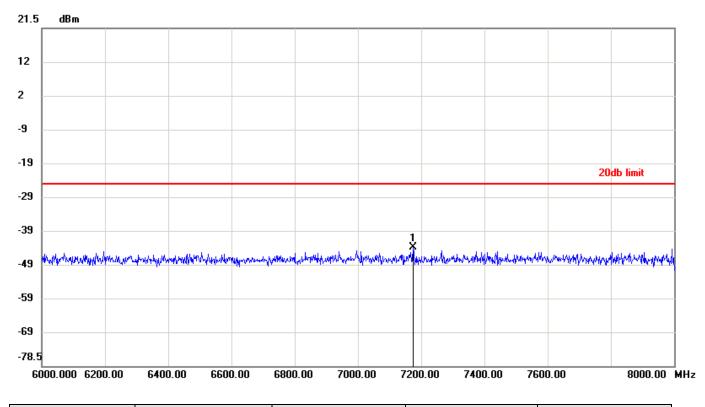

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	7174.7333	-43.43	-24.61	-18.82




Report No.: SZEM150600347904 Page: 31 of 60

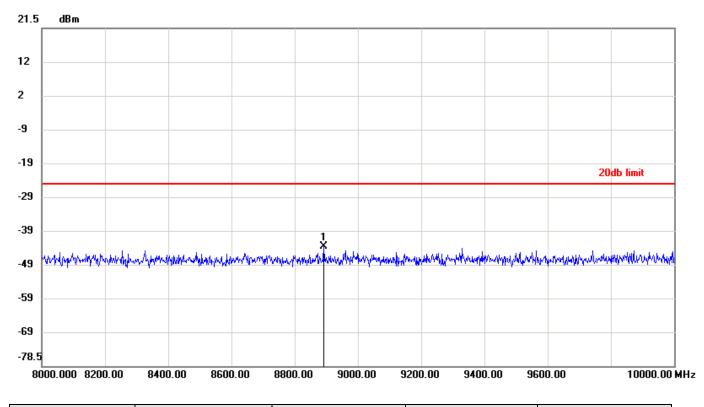

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	8892.8000	-43.21	-24.61	-18.60




Report No.: SZEM150600347904 Page: 32 of 60

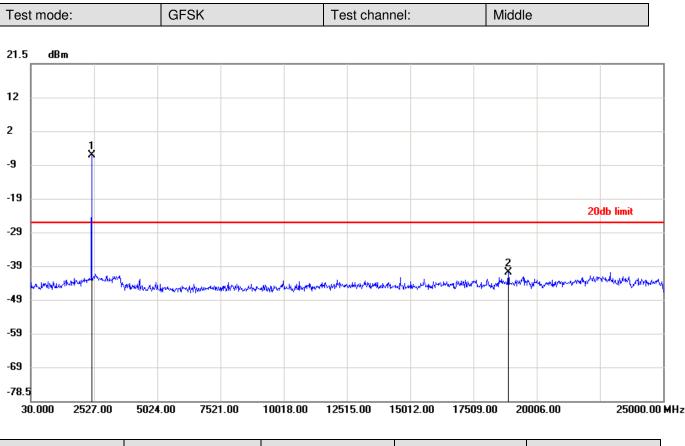

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2439.6050	-5.64	-25.64	20.00
2	18893.1703	-40.40	-25.64	-14.76




Report No.: SZEM150600347904 Page: 33 of 60

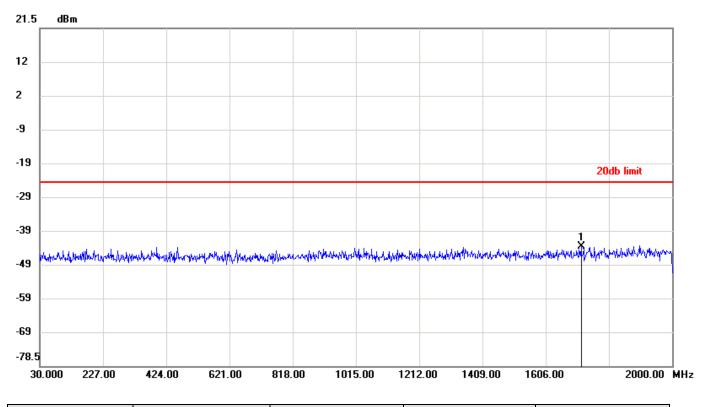

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1717.1080	-43.20	-24.00	-19.20




Report No.: SZEM150600347904 Page: 34 of 60

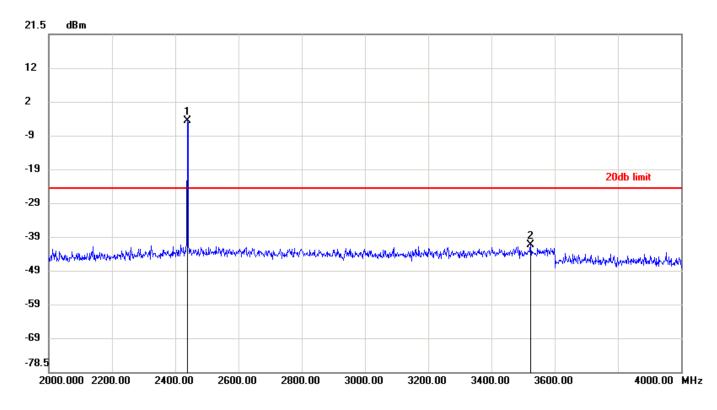

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2439.9333	-4.00	-24.00	20.00
2	3525.7333	-40.87	-24.00	-16.87




Report No.: SZEM150600347904 Page: 35 of 60

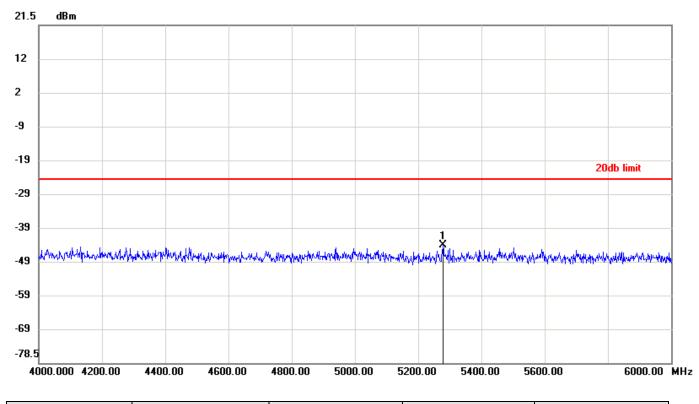

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5278.9333	-43.63	-24.00	-19.63




Report No.: SZEM150600347904 Page: 36 of 60

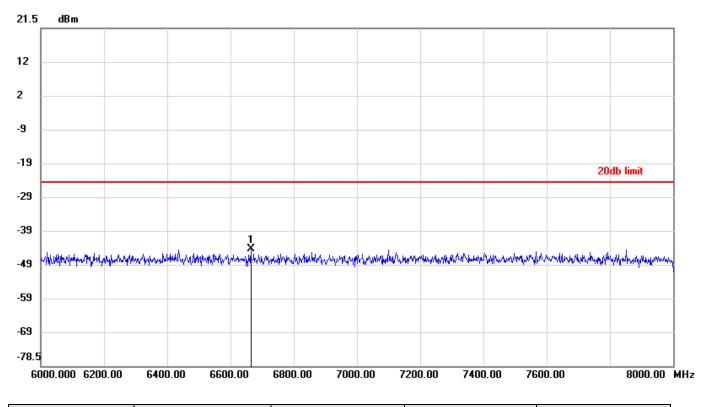

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	6665.7333	-43.86	-24.00	-19.86




Report No.: SZEM150600347904 Page: 37 of 60

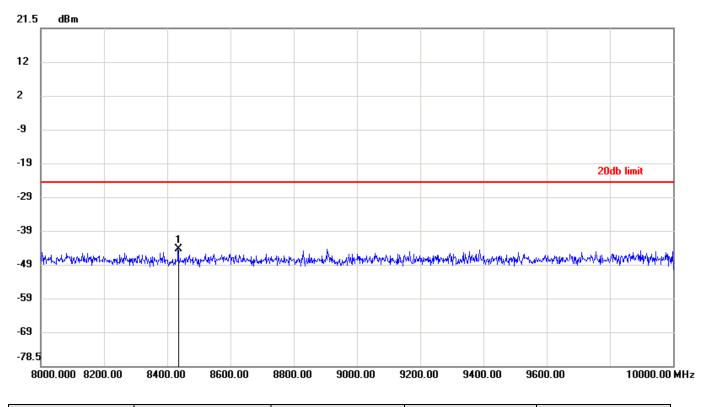

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	8434.2667	-43.78	-24.00	-19.78	




Report No.: SZEM150600347904 Page: 38 of 60

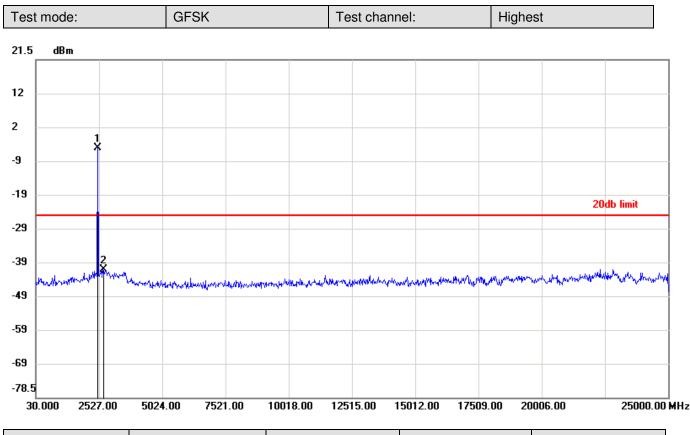

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5570	-4.50	-24.50	20.00
2	2678.4847	-40.68	-24.50	-16.18




Report No.: SZEM150600347904 Page: 39 of 60

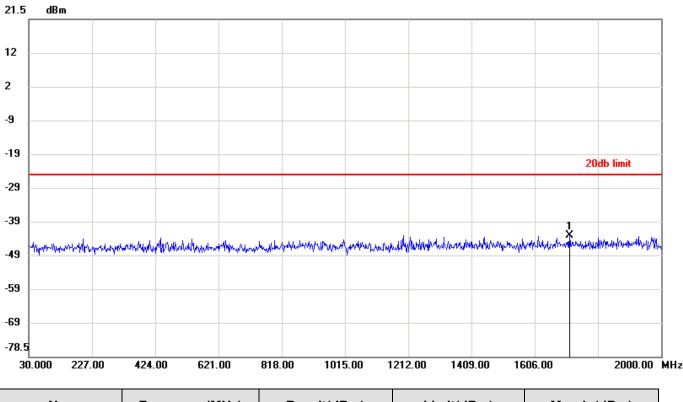

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1715.9260	-42.64	-24.59	-18.05




Report No.: SZEM150600347904 Page: 40 of 60

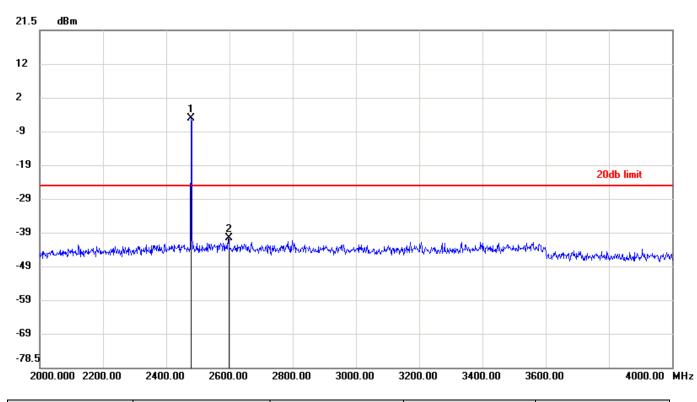

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.9333	-4.59	-24.59	20.00
2	2597.4667	-40.04	-24.59	-15.45




Report No.: SZEM150600347904 Page: 41 of 60

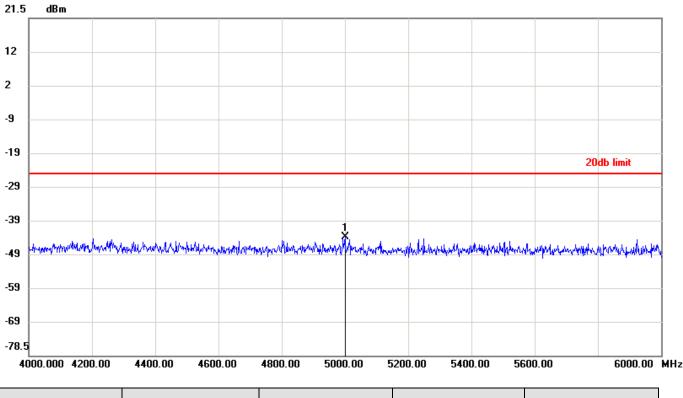

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	5001.1333	-43.39	-24.59	-18.80




Report No.: SZEM150600347904 Page: 42 of 60

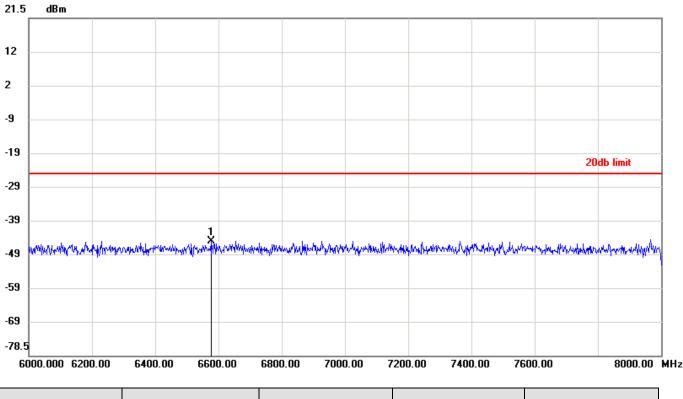

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	6577.2000	-44.53	-24.59	-19.94	



Report No.: SZEM150600347904 Page: 43 of 60

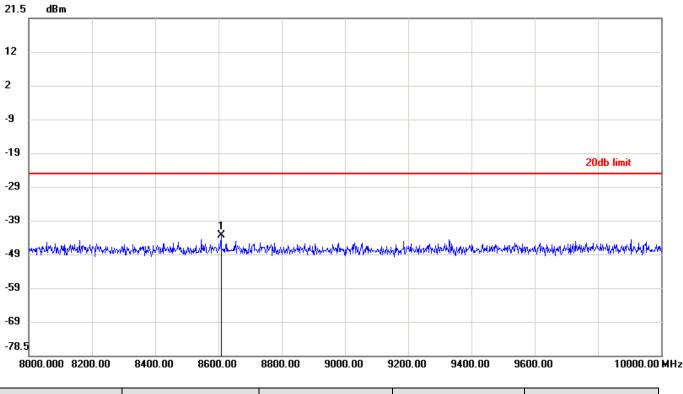

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	8608.4000	-42.84	-24.59	-18.25	

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150600347904 Page: 44 of 60

6.7 Radiated Spurious Emission

6.7.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Section	on 1	5.209 and 15	.205				
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance	: 3m	n (Semi-Anecl	noic Cham	ber)			
Receiver Setup:	Measurement Distance: 3m (Semi-Anechoic Chamber) Frequency Detector RBW VBW Remark							
	O.009MHz-0.090MHzPeak10kHz30kHzPeak							
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	. 100 k⊢	lz 300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	: 3MHz	Peak		
			Peak	1MHz	2 10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	4000/F(kHz)			30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0 Quasi-pea		3		
	Above 1GHz		500	54.0	Average	3		
	Note: 15.35(b), I frequency emissions is limit applicable to the e peak emission level rad	20d quip	IB above the ment under t	maximum est. This p	permitted ave	erage emission		
Test Setup:								
AE EUT Ground Reference Test Receiver	Antenna Tower		AE (Turntab	EUT ie) i and Reference in the second secon		Interna Tower		

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150600347904 45 of 60 Page:

Figure 1. Belov	v 30MHz Figure 2. 30MHz to 1GHz
	Image: Construction of the state of the
Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving
	 antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
Exploratory Test Mode:	i. Repeat above procedures until all frequencies measured was complete. Transmitting with GFSK modulation
Final Test Mode:	Transmitting mode Transmitting with GFSK modulation For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM150600347904 Page: 46 of 60

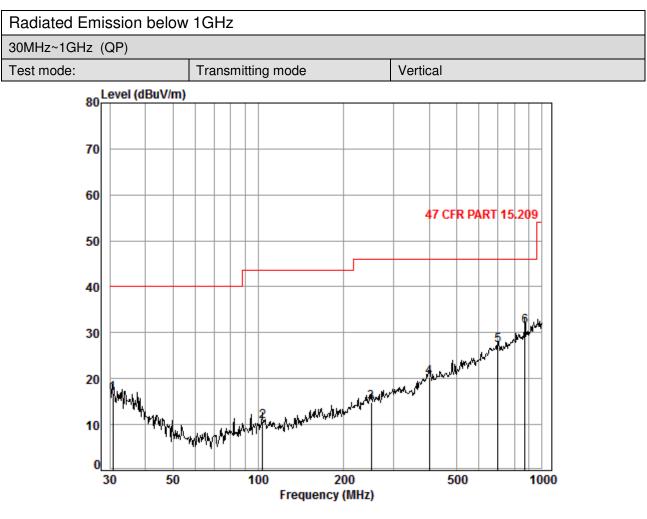



Condition:	47 CFR	PART	15.209	Зm	Vertical
Job No. :	3479CR				

Mode	: Tx							
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.75	0.60	18.28	27.35	25.16	16.69	40.00	-23.31
2	103.44	1.21	8.93	27.18	27.62	10.58	43.50	-32.92
3	250.30	1.68	12.31	26.54	27.37	14.82	46.00	-31.18
4	400.43	2.20	16.30	27.13	28.85	20.22	46.00	-25.78
5	699.30	2.90	21.59	27.41	30.11	27.19	46.00	-18.81
6	869.13	3.48	22.86	26.92	31.91	31.33	46.00	-14.67



Report No.: SZEM150600347904 Page: 47 of 60



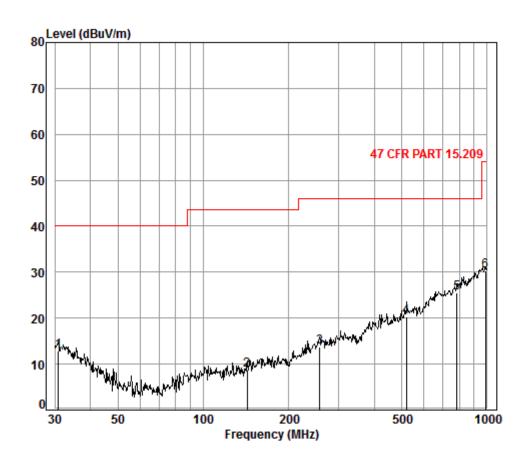

Condition	:	47	CFR	PART	15.	. 209	Зm	Horizontal
Job No.	:	347	9CR					
Mode	:	Tx						

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4	30.85 142.82 257.42 519.06	1.30 1.71	8.35 12.45	27.35 26.94 26.51 27.67	26.08 26.18	8.79 13.83	43.50 46.00	-34.71 -32.17
5 6	782.35 986.07			27.32 26.37				



Report No.: SZEM150600347904 Page: 48 of 60

Transmitte	Transmitter Emission above 1GHz								
Test mode:	C	GFSK	Test channe		Lowest		Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)		Line V/m)	Over Limit (dB)	Polarization
3814.113	4.95	33.18	38.88	48.77	48.02	7	4	-25.98	Vertical
4804.000	5.63	34.70	39.24	50.66	51.75	7	4	-22.25	Vertical
5980.114	6.59	36.26	39.19	48.33	51.99	7	4	-22.01	Vertical
7206.000	6.80	35.63	39.07	49.58	52.94	7	4	-21.06	Vertical
9608.000	8.94	37.33	37.93	44.31	52.65	7	4	-21.35	Vertical
12399.870	8.65	39.20	39.04	44.83	53.64	7	4	-20.36	Vertical
3601.577	5.13	33.00	38.79	47.35	46.69	7	4	-27.31	Horizontal
4804.000	5.63	34.70	39.24	49.61	50.70	7	4	-23.30	Horizontal
5980.114	6.59	36.26	39.19	48.62	52.28	7	4	-21.72	Horizontal
7206.000	6.80	35.63	39.07	49.16	52.52	7	4	-21.48	Horizontal
9608.000	8.94	37.33	37.93	44.37	52.71	7	4	-21.29	Horizontal
12223.390	8.94	38.98	38.89	44.78	53.81	7	4	-20.19	Horizontal

Test mode:		GFSK	Tes	t channel:	Middle	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3869.178	5.03	33.27	38.90	48.04	47.44	74	-26.56	Vertical
4880.000	5.61	34.78	39.26	50.51	51.64	74	-22.36	Vertical
6088.229	6.55	36.20	39.17	48.38	51.96	74	-22.04	Vertical
7320.000	6.73	35.50	39.06	49.37	52.54	74	-21.46	Vertical
9760.000	8.84	37.81	37.84	43.51	52.32	74	-21.68	Vertical
12578.89	8.93	39.25	39.19	44.41	53.40	74	-20.60	Vertical
3601.577	5.13	33.00	38.79	47.48	46.82	74	-27.18	Horizontal
4880.000	5.61	34.78	39.26	49.85	50.98	74	-23.02	Horizontal
6044.750	6.63	36.25	39.18	48.29	51.99	74	-22.01	Horizontal
7320.000	6.73	35.50	39.06	49.17	52.34	74	-21.66	Horizontal
9760.000	8.84	37.81	37.84	43.20	52.01	74	-21.99	Horizontal
12533.890	8.86	39.23	39.15	44.55	53.49	74	-20.51	Horizontal



Report No.: SZEM150600347904 Page: 49 of 60

Test mode:		GFSK	Tes	t channel:	Highest	Rer	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3706.322	5.02	33.08	38.83	47.47	46.74	74	-27.26	Vertical
4960.000	5.60	34.86	39.29	47.98	49.15	74	-24.85	Vertical
6176.127	6.38	36.11	39.17	48.29	51.61	74	-22.39	Vertical
7440.000	6.72	35.43	39.05	49.40	52.50	74	-21.50	Vertical
9920.000	9.19	38.27	37.75	43.09	52.80	74	-21.20	Vertical
12444.380	8.72	39.21	39.07	44.68	53.54	74	-20.46	Vertical
3869.178	5.03	33.27	38.90	47.88	47.28	74	-26.72	Horizontal
4960.000	5.60	34.86	39.29	48.02	49.19	74	-24.81	Horizontal
6001.583	6.71	36.30	39.18	48.01	51.84	74	-22.16	Horizontal
7440.000	6.72	35.43	39.05	49.51	52.61	74	-21.39	Horizontal
9920.000	9.19	38.27	37.75	42.83	52.54	74	-21.46	Horizontal
12399.870	8.65	39.20	39.04	44.80	53.61	74	-20.39	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM150600347904 Page: 50 of 60

6.8 Restricted bands around fundamental frequency

0.0 Restricted ban	us around lundame	intal inequency	
Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205	
Test Method:	ANSI C63.10 2009		
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
	Above TGHZ	74.0	Peak Value
Test Setup:			
Image: state stat	 Iz to 1GHz a. The EUT was place the ground at a 3 m rotated 360 degrees radiation. b. The EUT was set 3 antenna, which was tower. c. The antenna height the ground to determ Both horizontal and make the measurem d. For each suspected case and then the a meters and the rota degrees to find the fe. The test-receiver sy Specified Bandwidth f. Place a marker at the transmit frequency the emissions in the rest of the test of tes	emission, the EUT was a ntenna was tuned to heig table table was turned fro	ve 1 GHz table 0.8 meters above er. The table was n of the highest erference-receiving variable-height antenna to four meters above of the field strength. he antenna are set to urranged to its worst hts from 1 meter to 4 m 0 degrees to 360 tect Function and de. nd closest to the measure any pectrum analyzer plot.



Report No.: SZEM150600347904 Page: 51 of 60


	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with GFSK modulation
	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM150600347904 Page: 52 of 60

Test plot as follows:


Restricted bands around fundamental frequency								
Test mode:	GFSK	Test channel:	Lowest	Remark:	Peak	Vertical		

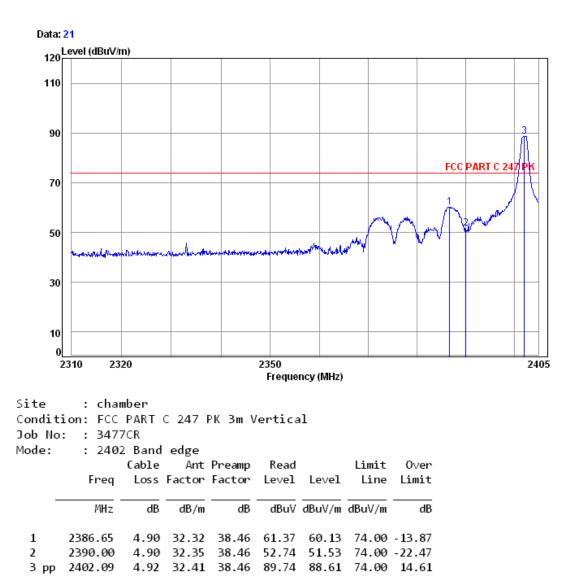



Report No.: SZEM150600347904 Page: 53 of 60

Test mode: GFSI		Lowest	Remark:	Peak	Horizontal
-----------------	--	--------	---------	------	------------

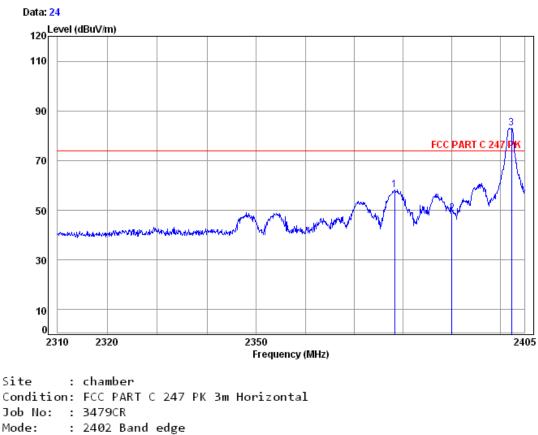


ioue.	Freq	Cable	Ant	Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2378.21	4.88	32.27	38.46	59.63	58.32	74.00	- 15.68
2	2390.00	4.90	32.35	38.46	49.78	48.57	74.00	-25.43
Зрр	2402.38	4.92	32.41	38.46	84.06	82.93	74.00	8.93



Report No.: SZEM150600347904 Page: 54 of 60


Test mode: G	GFSK	Test channel:	Lowest	Remark:	Average	Vertical
--------------	------	---------------	--------	---------	---------	----------

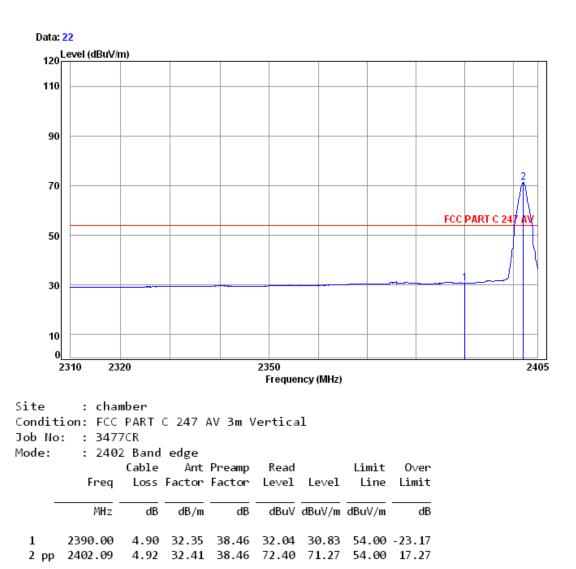



Report No.: SZEM150600347904 Page: 55 of 60


Test mode: G	GFSK Te	est channel:	Lowest	Remark:	Average	Horizontal
--------------	---------	--------------	--------	---------	---------	------------

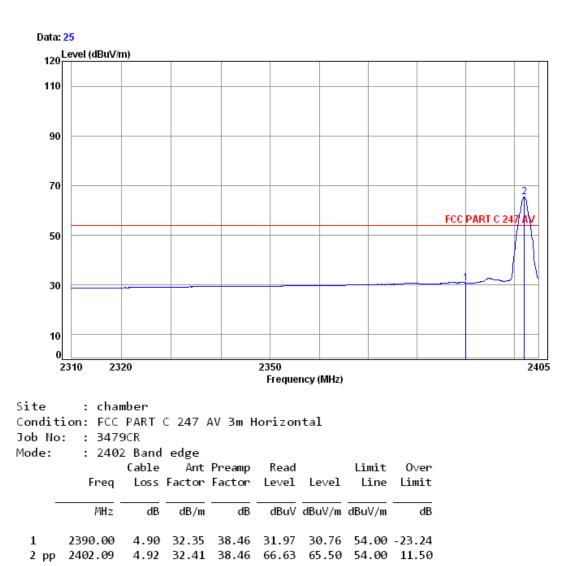



Report No.: SZEM150600347904 Page: 56 of 60

Test mode: GFSK	Test channel:	Highest	Remark:	Peak	Vertical
-----------------	---------------	---------	---------	------	----------

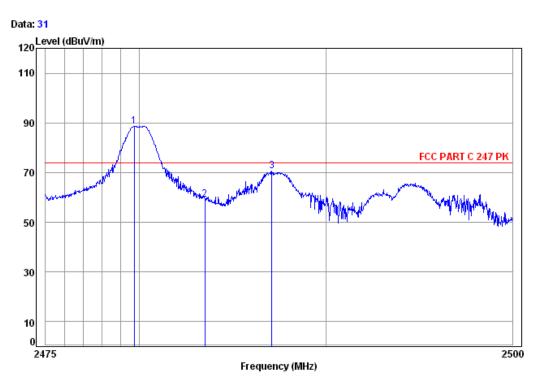

Site	: chai	nber						
Conditi	ion: FCC	PART	C 247	PK 3m V	ertica	1		
Job No:	: : 3479	9CR						
Mode:	: 2480	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.73	5.02	32.44	38.47	89.64	88.63	74.00	14.63
2	2483.50	5.03	32.44	38.47	60.09	59.09	74.00	-14.91
3	2487.09	5.03	32.44	38.47	71.47	70.47	74.00	-3.53




З

2487.07

SGS-CSTC Standards Technical Services Co., Ltd. **Shenzhen Branch**

Report No.: SZEM150600347904 57 of 60 Page:

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
			•			

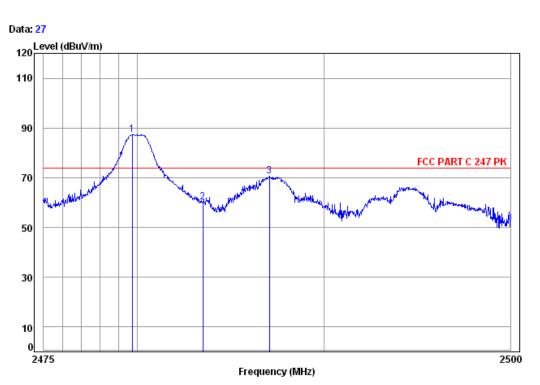


Site : chamber Condition: FCC PART C 247 PK 3m Horizontal Job No: : 3479CR								
100 110	547	SCK						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.73	5.02	32.44	38.47	88.33	87.32	74.00	13.32
2	2483.50	5.03	32.44	38.47	61.19	60.19	74.00	-13.81

5.03 32.44 38.47 71.57 70.57 74.00 -3.43



Report No.: SZEM150600347904 Page: 58 of 60

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Vertical
-----------------	---------------	---------	---------	---------	----------

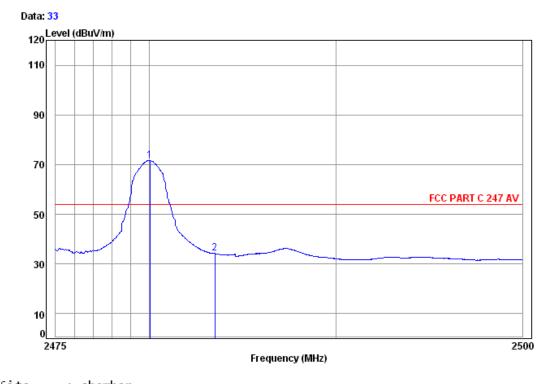


Site	: chan	nber						
Conditio	n: FCC	PART	C 247	AV 3m V	ertica	1		
Job No:	: 3479)CR						
Mode:	: 2480) Band	edge					
		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 2	480.03	5.02	32.44	38.47	72.67	71.66	54.00	17.66
2 2	483.50	5.03	32.44	38.47	35.19	34.19	54.00	-19.81



Report No.: SZEM150600347904 Page: 59 of 60

Test mode: GFSK	Test channel:	Highest	Remark:	Average	Horizontal
-----------------	---------------	---------	---------	---------	------------

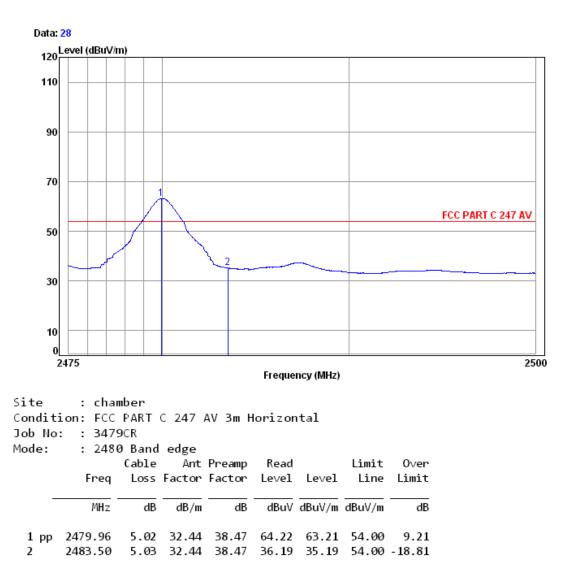

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEM150600347904 Page: 60 of 60

7 Photographs - EUT Test Setup

Test model No.: FT-F31-BT

7.1 Radiated Emission

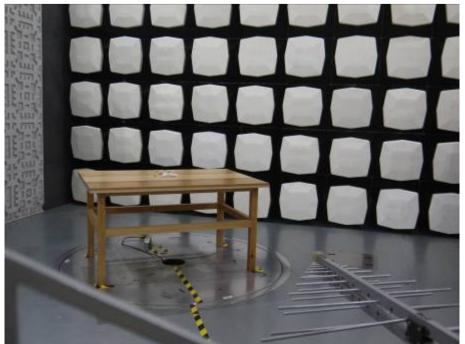

7.2 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1506003479CR.