



Full

TEST REPORT

No. I17D00181-SRD05

For

Client : Hisense International Co., Ltd.

Production : Smartphone

Model Name : Hisense F8 MINI

FCC ID: 2AD0BF8MINI

Hardware Version: V1.00

Software Version: L1431.6.01.09.MX05

Issued date: 2017-07-09

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I17D00181-SRD05	00	2017-07-07	Initial creation of test report
I17D00181-SRD05	01	2017-07-08	Second creation of test report
I17D00181-SRD05	02	2017-07-08	Third creation of test report
I17D00181-SRD05	03	2017-07-09	Fourth creation of test report

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION	5
1.2.	TESTING ENVIRONMENT	5
1.3.	PROJECT DATA.....	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.5.	STATEMENTS.....	8
4.	REFERENCE DOCUMENTS.....	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
5.	SUMMARY OF TEST RESULTS.....	10
6.	TEST EQUIPMENT UTILIZED	11
7.	TEST ENVIRONMENT	13
ANNEX A.	MEASUREMENT RESULTS.....	14
ANNEX A.1.	OUTPUT POWER	14
ANNEX A.2.	PEAK-TO-AVERAGE POWER RATIO	18
ANNEX A.3.	OCCUPIED BANDWIDTH	20
ANNEX A.4.	-26DB EMISSION BANDWIDTH	42
ANNEX A.5.	BAND EDGE AT ANTENNA TERMINALS.....	63

ANNEX A.6. FREQUENCY STABILITY	76
ANNEX A.7. CONDUCTED SPURIOUS EMISSION.....	83
ANNEX A.8. RADIATED.....	102
ANNEX B. DEVIATIONS FROM PRESCRIBED TEST METHODS.....	132

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC Registration NO.:	489729

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	20-75%


1.3. Project data

Project Leader:	Yu Anlu
Testing Start Date:	2017-06-19
Testing End Date:	2017-07-09


1.4. Signature



Yang Dejun
(Prepared this test report)



Ding Li
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Hisense International Co., Ltd.
Address: Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071,
China
Telephone: +86-532-55753242
Contact: Zhang Kelin

2.2. Manufacturer Information

Company Name: Hisense Communications Co., Ltd.
Address: 218 Qianwangang Road, Economic & Technological Development
Zone, Qingdao, Shandong Province, P.R. China
Telephone: +86-532-55755982
Contact: Zhang Ming

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Smartphone
Model name	Hisense F8 MINI
FCC ID	2AD0BF8MINI
Frequency	GSM850/900/1800/1900; WCDMA Band II/IV/V
Extreme Temperature	-10/+55 °C
Nominal Voltage	3.8V
Extreme High Voltage	3.5V
Extreme Low Voltage	4.35V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

First Supply

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N14	865996030000114	V1.00	L1431.6.01.09.MX05	2017-06-16

*EUT ID: is used to identify the test sample in the lab internally.

Second Supply

EUTID*	SN or IMEI	HW Version	SW Version	Date of receipt
N31	865996030000924	V1.00	L1431.6.01.09.MX05	2017-06-16

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. Internal Identification of AE used during the test

Main supply

Part Name	Model Name	supplier	Remark
MAIN PCB	HYT7.820.1213	CHINABUILDER	
SUB PCB	HYT7.820.1215	CHINABUILDER	
MEMORY	KMQE10013M-B 318	SAMSUNG	
LCD	TXDY500DHDP AB-208	TXD	Black

BATTERY	LIW38238	WEIKE	
FINGERPRINT	FS21019BY	Holitech	SUNWARE

Secondary Supply

Part Name	Model Name	supplier	Remark
MAIN PCB	HYT7.820.1213	REDBOARD	
SUB PCB	HYT7.820.1215	REDBOARD	
MEMORY	H9TQ17ABJTBC UR-KUM	Hynix	
LCD	HTT050H750	Holitech	Black
BATTERY	LIW38238	ZHONGSHAN TIANMAO BATTERY CO.,LTD	
FINGERPRINT	FS21042BJ	Holitech	CHIPONE

*AE ID: is used to identify the test sample in the lab internally.

Note: The secondly supply only test the worst case.

3.5. Statements

The product name Hisense F8 MINI, supporting GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/HSPA+/WLAN/BT/BLE/GPS, manufactured by Hisense Communications Co., Ltd., is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2014
FCC Part 22	PUBLIC MOBILE SERVICES	2014
ANSI-TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. SUMMARY OF TEST RESULTS

Item	Test items	FCC rules	result
1	Output Power	2.1046/22.913(a)/24.232(c)	Pass
2	Peak-to-Average Ratio	24.232(d)	Pass
3	99%Occupied Bandwidth	2.1049(h)(i)/ 22.917(b)	Pass
4	-26dB Emission Bandwidth	22.917(b)/§24.238(b)	Pass
5	Band Edge at antenna terminals	22.917(a)/24.238(a)	Pass
6	Frequency stability	2.1055/24.235	Pass
7	Conducted Spurious mission	2.1053/22.917(a)/24.238(a)	Pass
8	Emission Limit	2.1051/22.917/24.238/22.913/24.232	Pass

6. Test Equipment Utilized

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2016-01-06	2 Year

Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2017-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year
6	Substitution Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
7	RF Signal Generator	SMF100A	102314	R&S	2017-05-11	1 Year
8	Substitution Antenna	VUBA9117	9117-266	Schwarzbeck	2014-08-19	3 Year
9	Amplifier	SCU03	10009	R&S	2017-01-05	1 Year

10	Amplifier	NTWPA -008610 F	12023024	Rflight	2017-01-05	1 Year
11	Attenuators	BW-N3 W5+	/	MCL	2017-01-05	1 Year

Conducted test system

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interval
1	Spectrum Analyzer	FSQ26	101096	R&S	2017-05-11	1 Year
2	Universal Radio Communication Tester	CMU200	123102	R&S	2017-05-11	1 Year
3	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2017-05-11	1 Year

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio. Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2. Conducted

A.1.2.1. Method of Measurements

Method of measurements please refer to KDB971168 D01 v02r02 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSQ(peak).

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

A.1.2.2 Test procedures:

1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

A.1.2.3 Limit:

22.913(a) Mobile stations are limited to 7watts.

24.232(c) Mobile and portable stations are limited to 2 watts.

A.1.2.4 Test Procedure:

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the signal analyzer reading.

A.1.2.5 GSM Test Condition:

RBW	VBW	Sweep time	Span
-----	-----	------------	------

1MHz	1MHz	300ms	10MHz
------	------	-------	-------

A.1.2.6 WCDMA Test Condition:

RBW	VBW	Sweep time	Span
10MHz	10MHz	800ms	50MHz

A.1.2.7 Measurement results:

GSM 850 (GMSK)			
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)	
Mid 189/836.4	32.12	32.03	
Low 128/824.2	32.41	32.23	
High 251/848.8	32.19	32.11	
GPRS 850 (GMSK 1 Slot)			
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)	
Mid 189/836.4	32.12	32.02	
Low 128/824.2	32.28	32.18	
High 251/848.8	32.09	31.92	
EDGE 850 (8PSK 1 Slot)			
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)	
Mid 189/836.4	28.31	25.40	
Low 128/824.2	28.18	25.33	
High 251/848.8	28.22	25.21	

GSM 1900(GMSK)			
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)	
Mid 661/1880	29.71	29.53	

Low 512/1850.2	29.82	29.59
High 810/1909.8	29.73	29.48
GPRS 1900 (GMSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)
Mid 661/1880	29.80	29.64
Low 512/1850.2	29.89	29.69
High 810/1909.8	29.84	29.53
EDGE 1900 (8PSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)
Mid 661/1880	27.19	24.11
Low 512/1850.2	27.23	24.34
High 810/1909.8	27.03	24.04

WCDMA II		
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)
Mid 9400 /1880	25.38	22.44
Low 9262/1852.4	25.09	22.32
High 9538/1907.6	25.23	22.42
WCDMA BAND IV		
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)
Mid 1413 /1732.6	25.22	22.08
Low 1312/1712.4	25.15	22.09
High 1513/1752.6	25.07	22.08
WCDMA BAND V		
Channel/fc(MHz)	Peak power (dBm)	Average power(dBm)
Mid 4183/836.6	25.52	22.36

Low 4132/826.4	25.63	22.46
High 4233/846.6	25.55	22.37

Band II		
Channel/fc(MHz)	HSDPA Peak power (dBm)	HSDPA Average power (dBm)
Mid 9400 /1880	24.08	21.12
Low 9262/1852.4	23.79	21.18
High 9538/1907.6	23.93	21.01
Band IV		
Channel/fc(MHz)	HSDPA Peak power (dBm)	HSDPA Average power (dBm)
Mid 1413 /1732.6	24.22	21.01
Low 1312/1712.4	24.13	21.15
High 1513/1752.6	24.05	20.91
Band V		
Channel/fc(MHz)	HSDPA Peak power (dBm)	HSDPA Average power (dBm)
Mid 4183/836.6	24.32	21.12
Low 4132/826.4	24.43	21.21
High 4233/846.6	24.35	21.05

Band II		
Channel/fc(MHz)	HSUPA Peak power (dBm)	HSUPA Average power (dBm)
Mid 9400 /1880	23.68	20.73
Low 9262/1852.4	23.39	20.54
High 9538/1907.6	23.53	20.78

Band IV		
Channel/fc(MHz)	HSUPA Peak power (dBm)	HSUPA Average power (dBm)
Mid 1413 /1732.6	23.72	20.62
Low 1312/1712.4	23.65	20.51
High 1513/1752.6	23.57	20.68
Band V		
Channel/fc(MHz)	HSUPA Peak power (dBm)	HSUPA Average power (dBm)
Mid 4183/836.6	23.92	20.73
Low 4132/826.4	24.03	20.57
High 4233/846.6	23.95	20.82

Conclusion: PASS

ANNEX A.2. Peak-to-Average Power Ratio

Method of test measurements please refer to KDB971168 D01 v02r02 clause 5.7.

A.2.1 PAPR Limit

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13dB

A.2.2 Test procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2.
 - 1) Select the spectrum analyzer CCDF function.
 - 2) Set $RBW \geq$ signal's occupied bandwidth.
 - 3) Set the number of counts to a value that stabilizes the measured CCDF curve;
 - 4) Sweep time \geq 1s.
3. Record the maximum PAPR level associated with a probability of 0.1%.

A.2.3 Test results:

GSM850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8

PAPR(dB)	8.49	8.46	8.4
GPRS850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.44	8.26	8.91
EDGE850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.55	8.71	8.15

GSM1900			
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.6	8.11	8.56
GPRS1900			
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.21	8.67	8.38
EDGE1900			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.24	8.32	8.11

WCDMA Band II			
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
PAPR(dB)	8.33	8.33	8.33

WCDMA Band IV			
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
PAPR(dB)	8.43	8.43	8.43
WCDMA Band V			
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
PAPR(dB)	8.43	8.43	8.43

HSUPA Band II			
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
PAPR(dB)	6.47	7.43	7.84
HSUPA Band IV			
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
PAPR(dB)	8.12	8.34	8.23
HSUPA Band V			
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
PAPR(dB)	8.44	8.24	7.87

Conclusion: PASS

ANNEX A.3. Occupied Bandwidth

Method of test please refer to KDB971168 D01 v02r02 clause 4.0.

A.3.1. Occupied Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and

mid frequencies of GSM850, PCS1900, WCDMA BANDII、WCDMA BANDIV and WCDMA BANDV.

A.3.2 Test Procedure:


1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW \geq 3 times RBW,.
3. 99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.3.3 Test result:


GSM850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	250.000
Low 128	824.2	248.397
High 251	848.8	245.192
GPRS850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	246.794
Low 128	824.2	245.192
High 251	848.8	243.589
EDGE850		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 189	836.4	245.192
Low 128	824.2	243.589
High 251	848.8	248.397

Conclusion: PASS


GSM 850

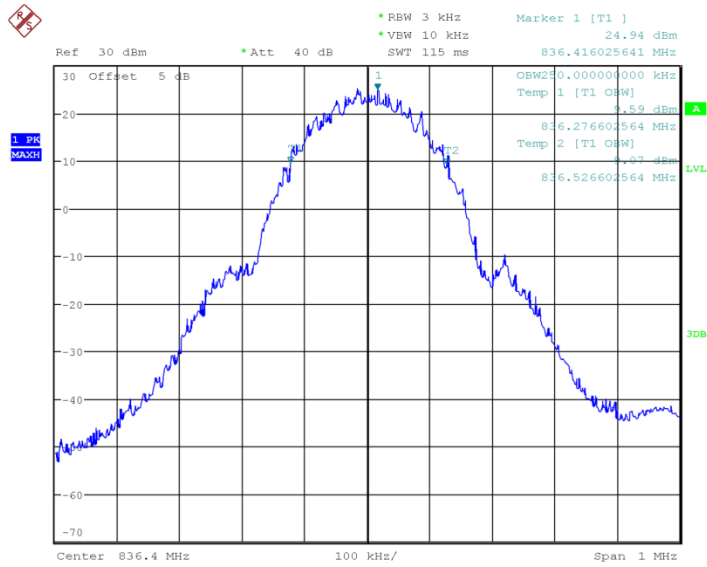

Channel 189-Occupied Bandwidth (99%)

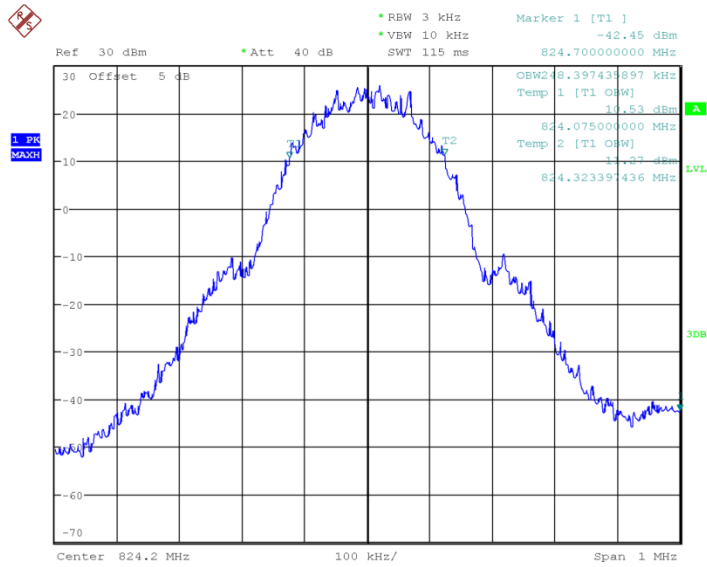


Channel 128-Occupied Bandwidth (99%)

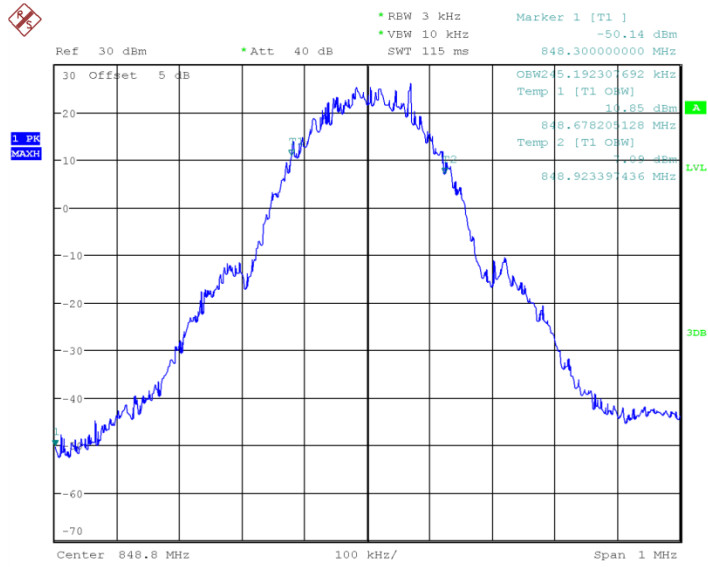


Channel 251-Occupied Bandwidth (99%)


GPRS 850

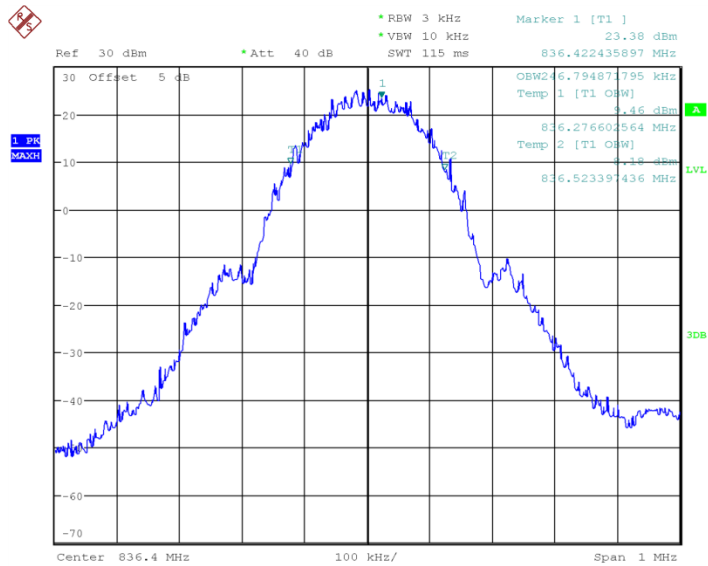

Channel 189-Occupied Bandwidth (99%)

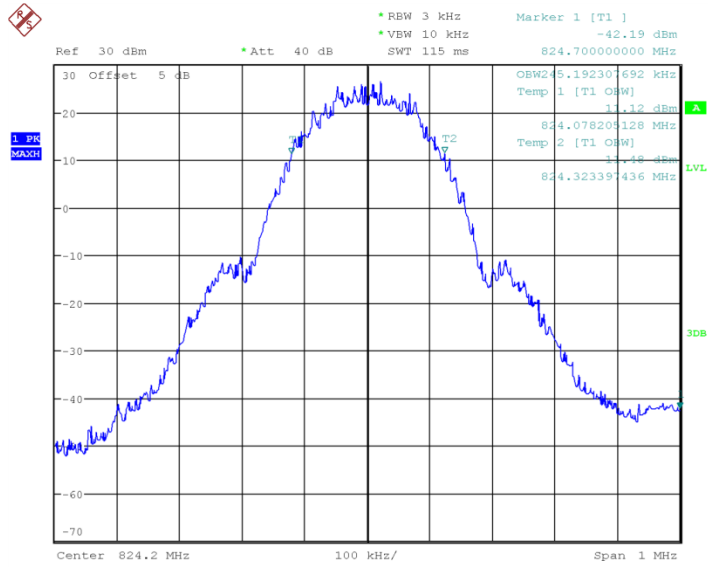


Channel 128-Occupied Bandwidth (99%)

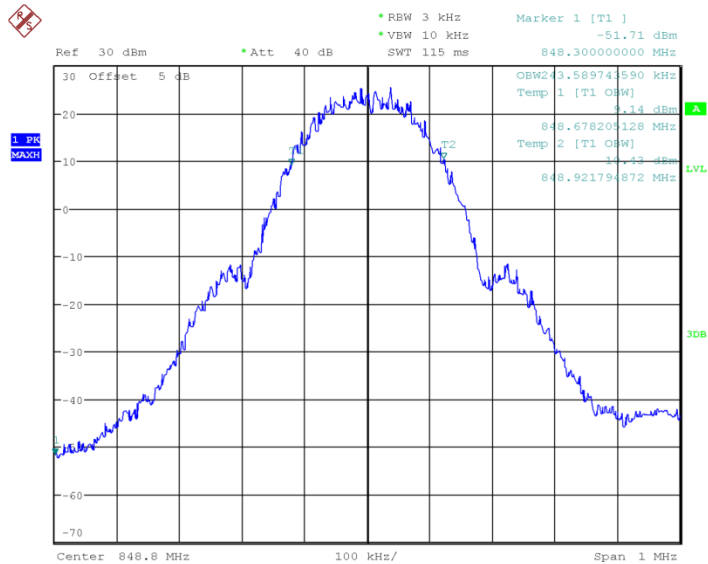


Channel 251-Occupied Bandwidth (99%)


EDGE 850

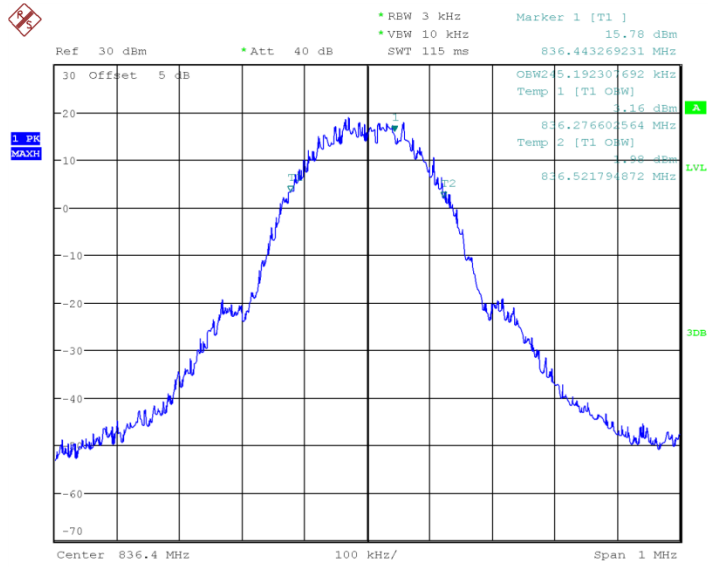

Channel 189-Occupied Bandwidth (99%)

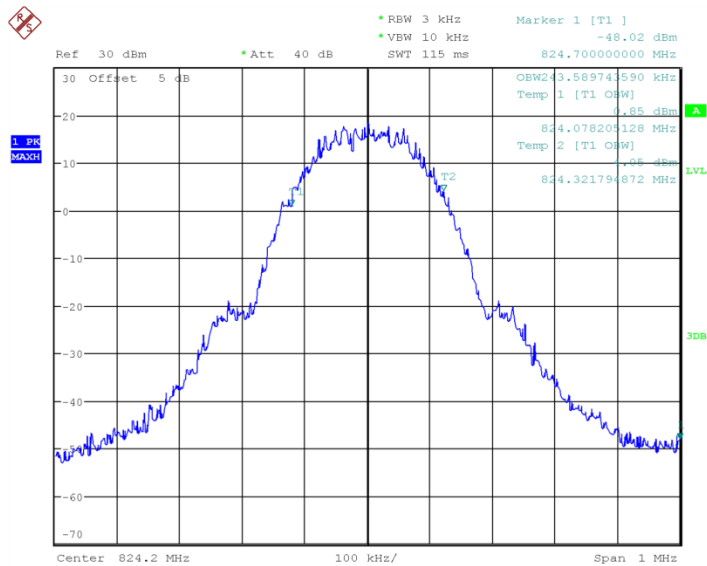


Channel 128-Occupied Bandwidth (99%)

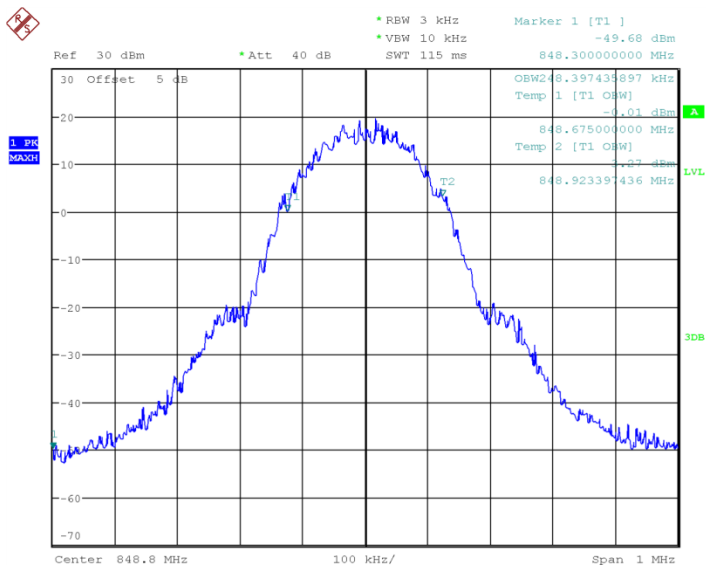


Channel 251-Occupied Bandwidth (99%)

GSM1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	241.987
Low 512	1850.2	243.584
High 810	1909.8	251.602
GPRS1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	240.384
Low 512	1850.2	240.384
High 810	1909.8	241.987
EDGE1900		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(KHz)
Mid 661	1880	238.782
Low 512	1850.2	251.602
High 810	1909.8	250.000


Conclusion: PASS
GSM 1900

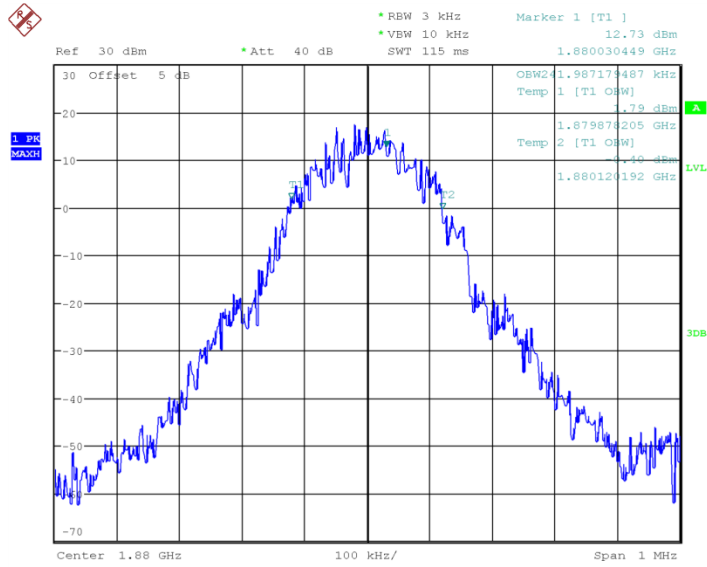

Channel 661-Occupied Bandwidth

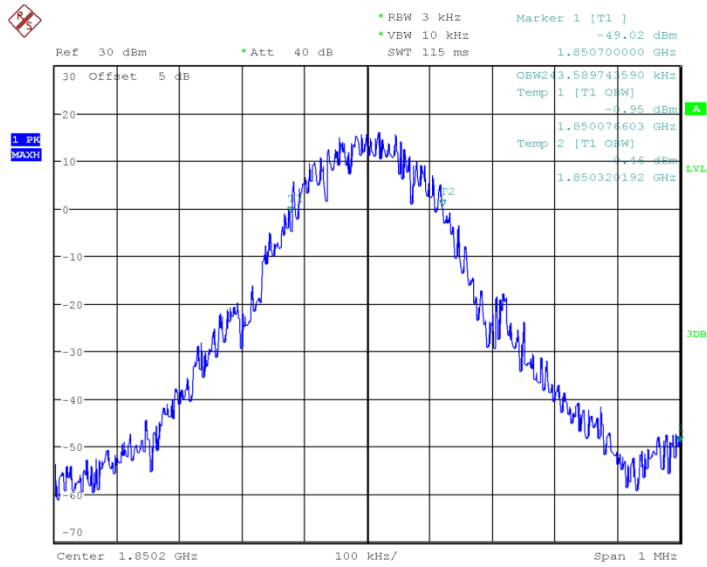


Channel 512-Occupied Bandwidth

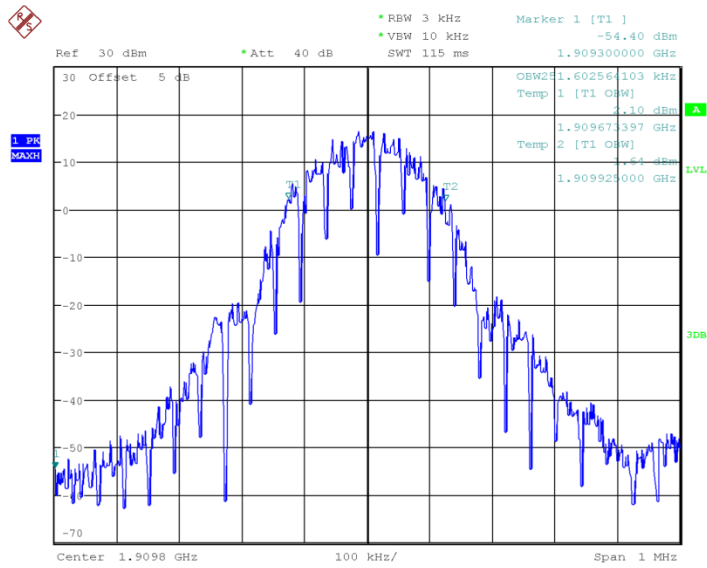


Channel 810-Occupied Bandwidth


EGPRS 1900

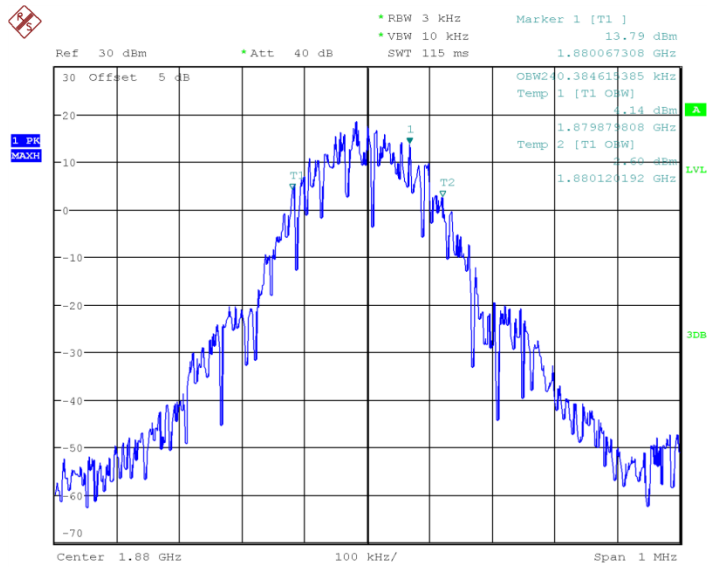

Channel 661-Occupied Bandwidth

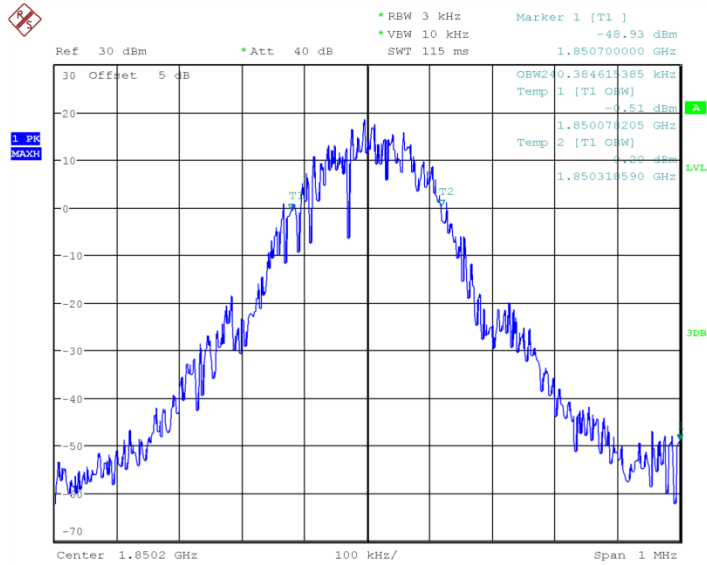


Channel 512-Occupied Bandwidth

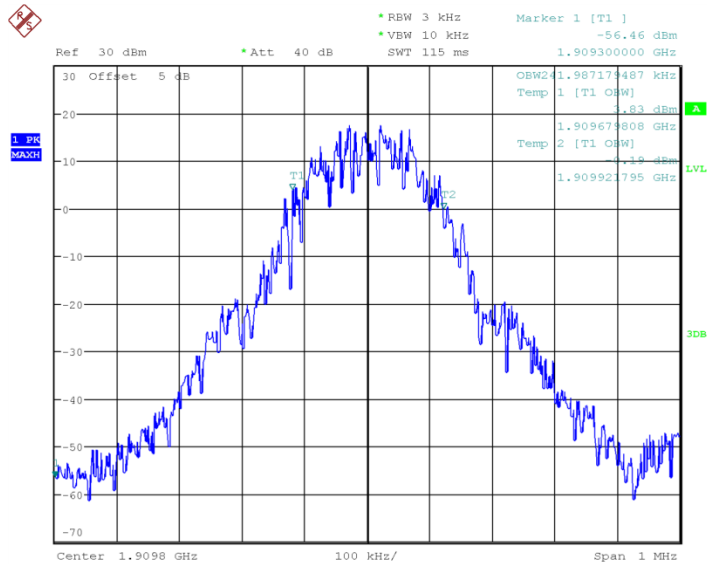


Channel 810-Occupied Bandwidth


EDGE 1900

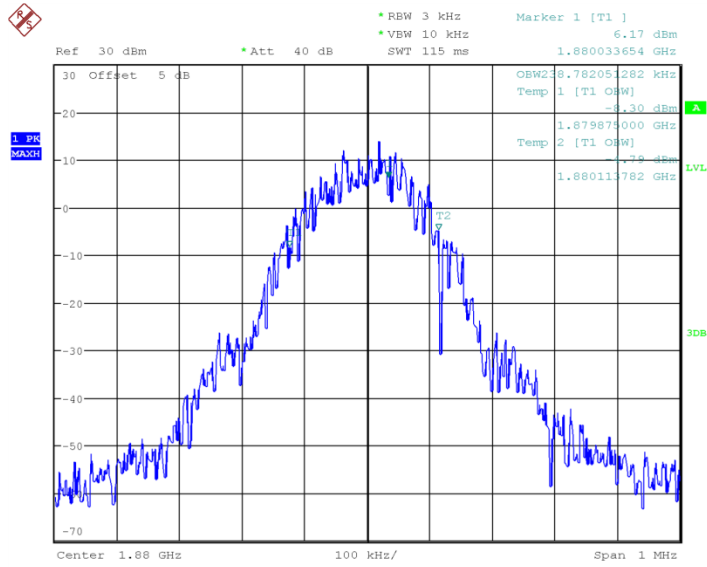

Channel 661-Occupied Bandwidth

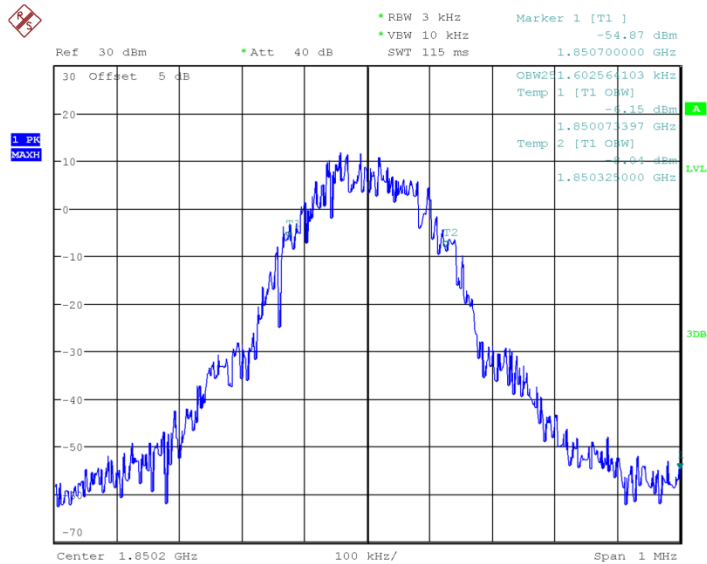

Channel 512-Occupied Bandwidth

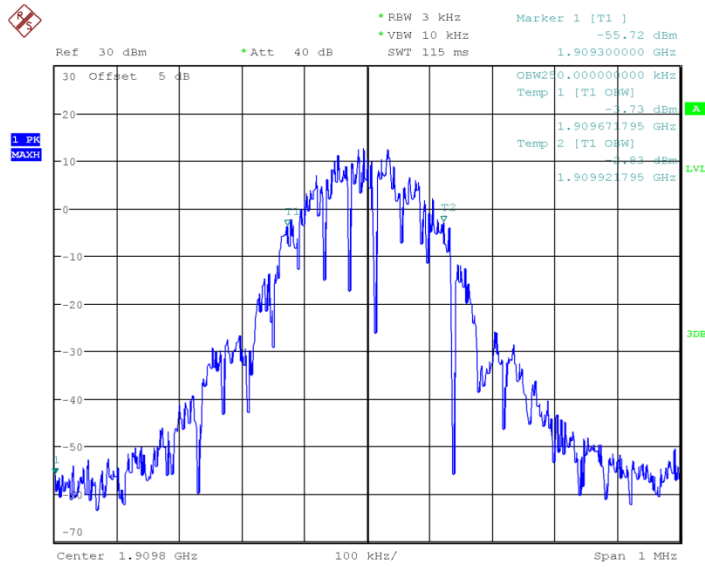


Channel 810-Occupied Bandwidth


WCDMA BAND II		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 9400	1880	4.17
Low 9262	1852.4	4.17
High 9538	1907.6	4.17

Conclusion: PASS


WCDMA BAND II

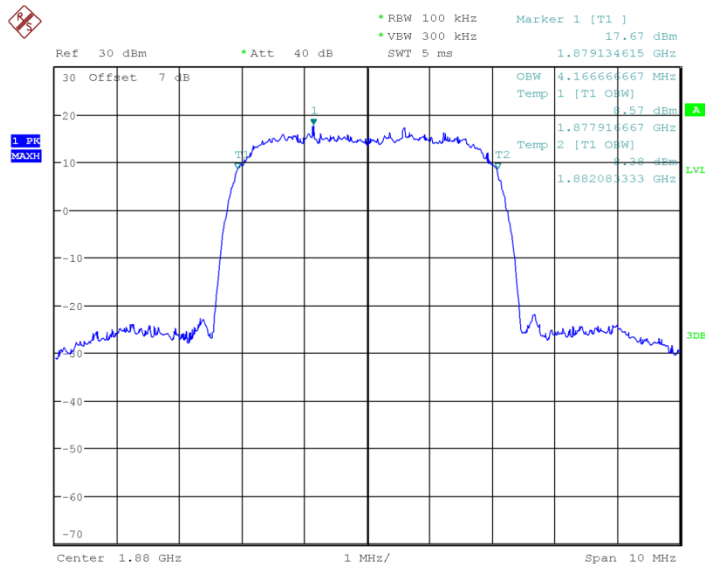

Channel 9400-Occupied Bandwidth

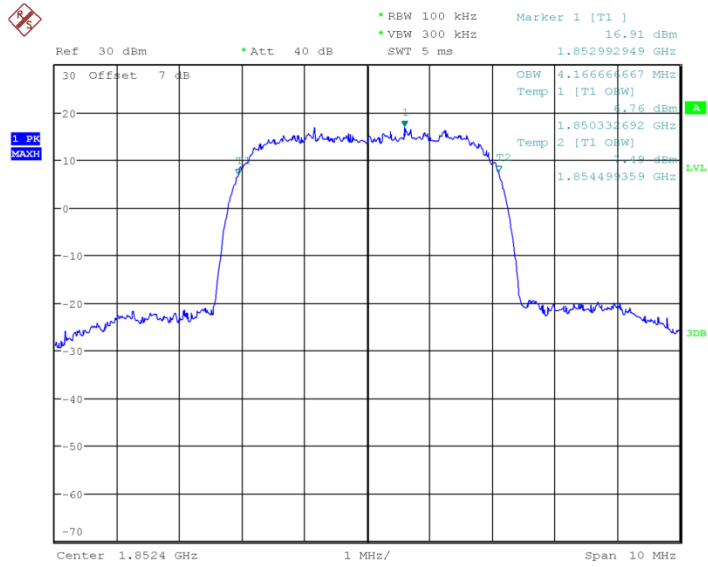


Channel 9262-Occupied Bandwidth

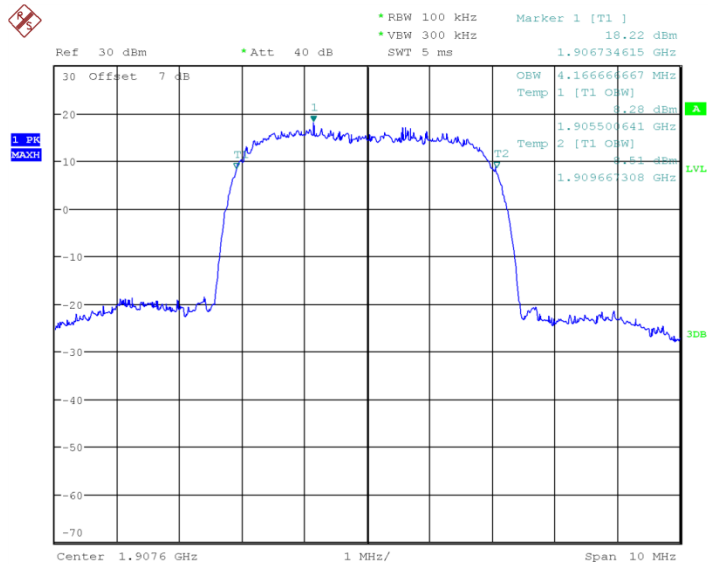


Channel 9538-Occupied Bandwidth


WCDMA BAND IV		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 1413	1732.4	4.17
Low 1312	1712.4	4.15
High 1513	1752.6	4.15

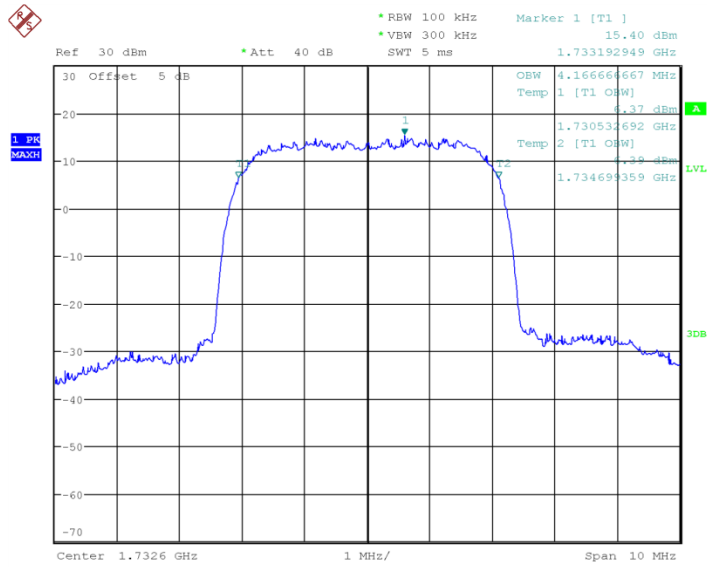

Channel 1413-Occupied Bandwidth

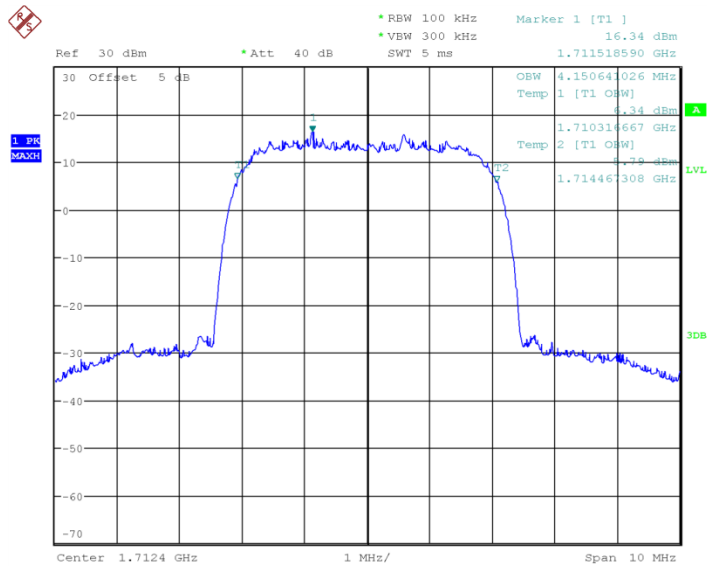


Channel 1312-Occupied Bandwidth

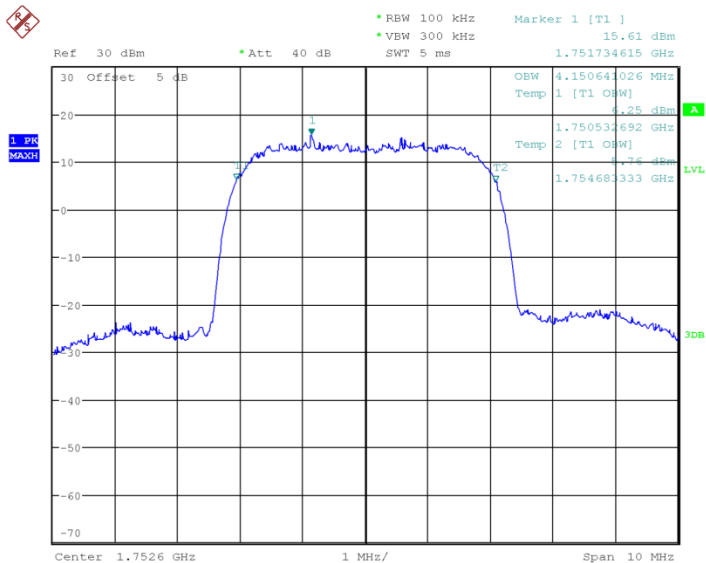


Channel 1513-Occupied Bandwidth

WCDMA BAND V		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 4183	836.6	4.15
Low 4132	826.4	4.15
High 4233	846.6	4.17


Conclusion: PASS
WCDMA BAND V

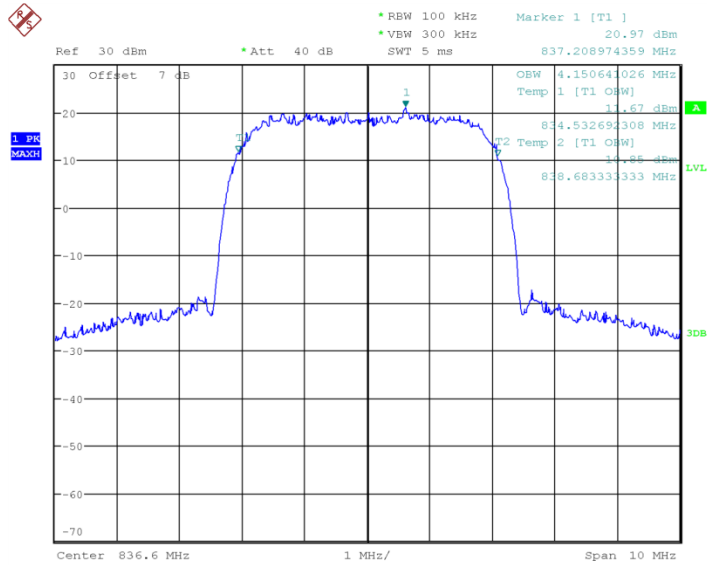

Channel 4183-Occupied Bandwidth

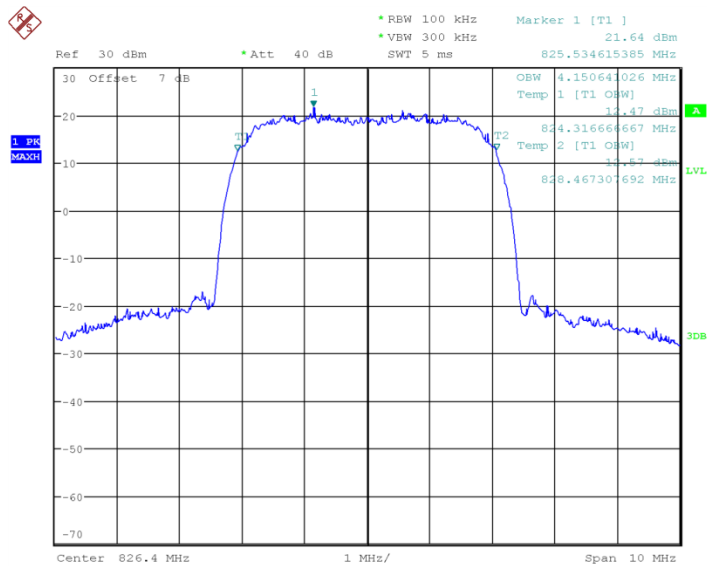

Channel 4132-Occupied Bandwidth

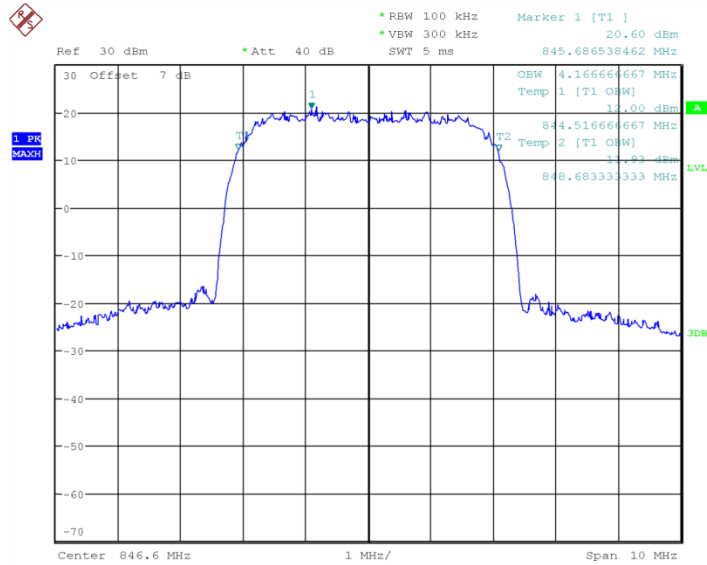


Channel 4233-Occupied Bandwidth


16QAM BAND II		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 9400	1880	4.16
Low 9262	1852.4	4.18
High 9538	1907.6	4.16

Conclusion: PASS


16QAM BAND II

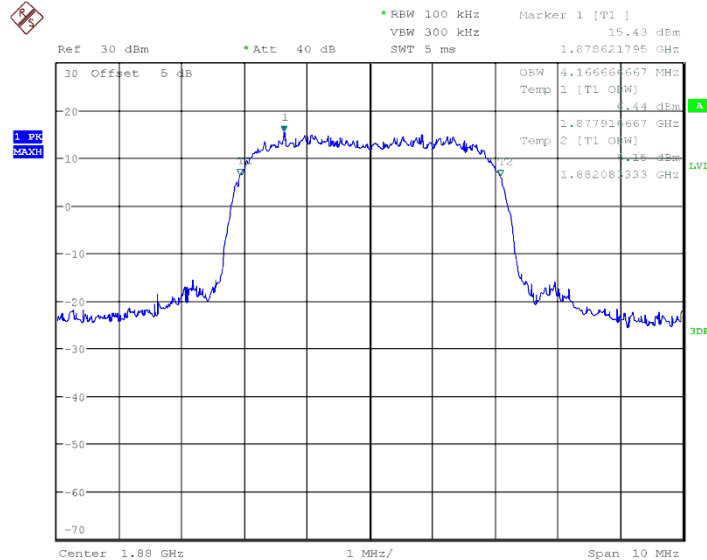

Channel 9400-Occupied Bandwidth

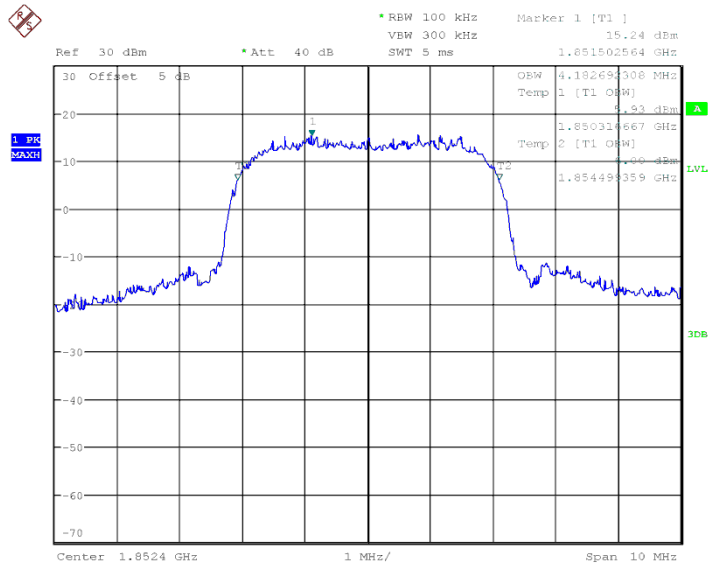


Channel9262-Occupied Bandwidth

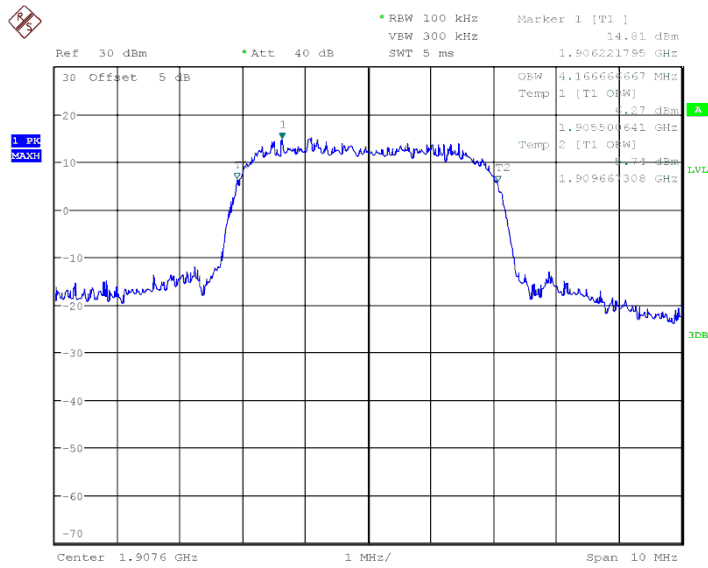


Channel9538-Occupied Bandwidth

16QAM BAND IV		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 1413	1732.4	4.15
Low 1312	1712.4	4.15
High 1513	1752.6	4.16


Conclusion: PASS
16QAM BAND IV

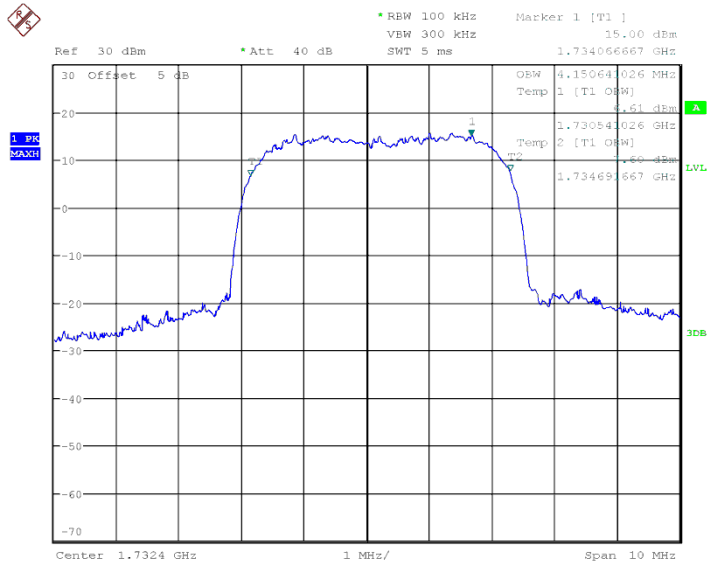

Channel1413-Occupied Bandwidth

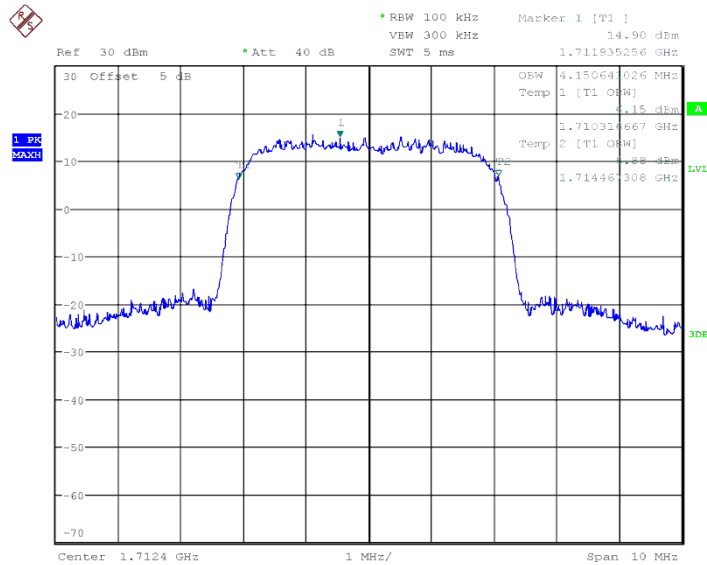

Channel1312-Occupied Bandwidth

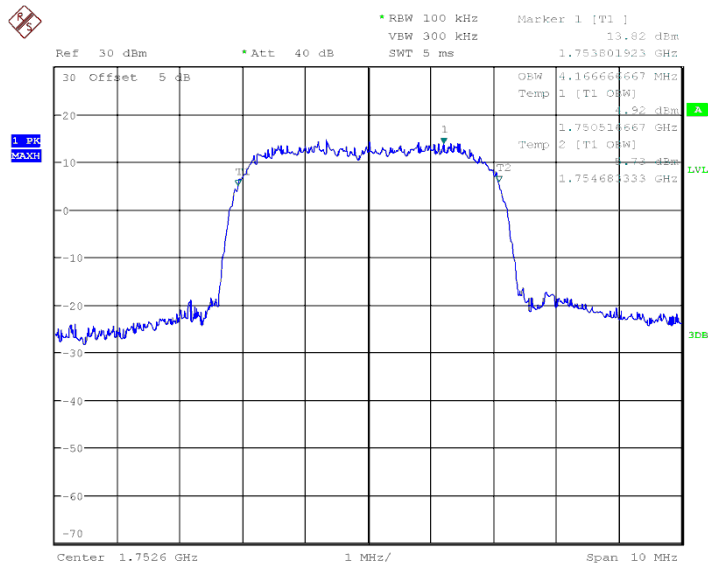


Channel1513-Occupied Bandwidth


16QAM BAND V		
Test channel	Frequency (MHz)	99% Occupied Bandwidth(MHz)
Mid 4183	836.6	4.15
Low 4132	826.4	4.15
High 4233	846.6	4.15

Conclusion: PASS


16QAM BAND V

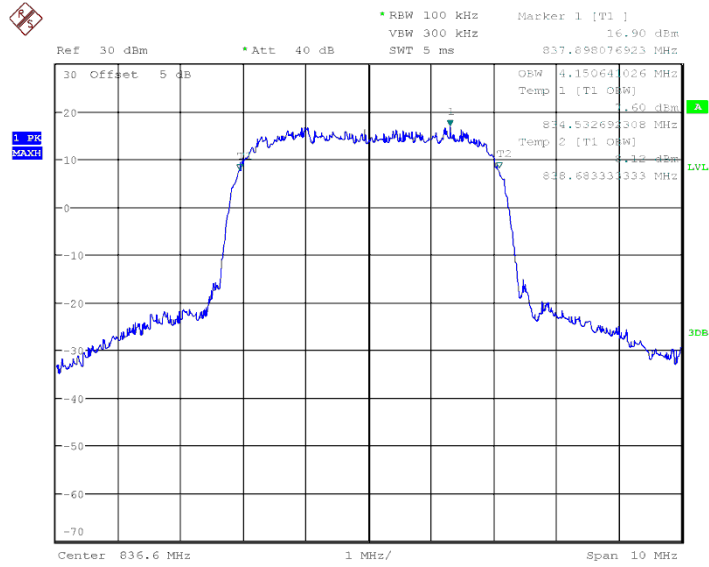

Channel4183-Occupied Bandwidth

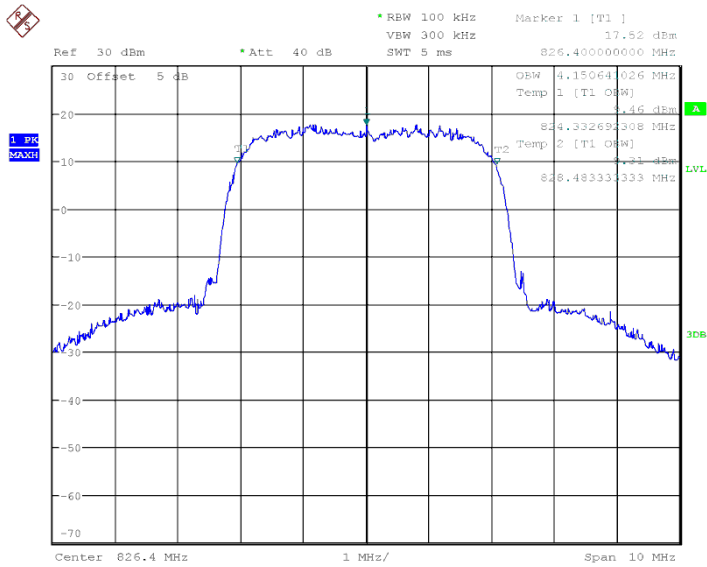

Channel4132-Occupied Bandwidth

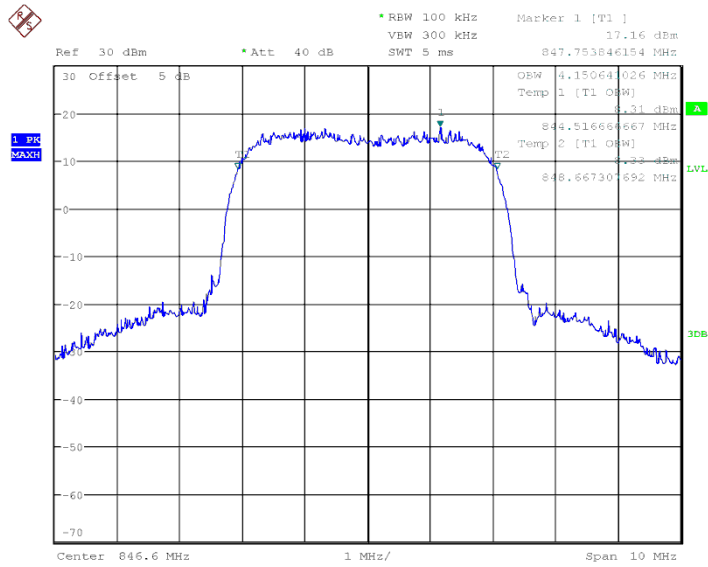

Channel4233-Occupied Bandwidth

ANNEX A.4. -26dB Emission Bandwidth

Method of test please refer to KDB971168 D01 v02r02 clause 4.0.

A.4.1. -26dB Emission Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII and WCDMA BANDV.

A.4.2 Test Procedure:

1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW \geq 3 times RBW,.
3. 26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.4.3 Measurement methods:

For GSM: signal analyzer setting as: RBW=3KHz;VBW=10KHz;Span=1MHz.

For WCDMA: signal analyzer setting as: RBW=50KHz;VBW=20KHz;Span=10MHz.


A.4.4 Test results:

GSM 850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 189	836.4	317.308
Low 128	824.2	312.5
High 251	848.8	310.897
GPRS 850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 189	836.4	317.308
Low 128	824.2	312.5
High 251	848.8	320.513
EDGE 850		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 189	836.4	309.295


Low 128	824.2	312.5
High 251	848.8	302.885

Conclusion: PASS


GSM 850

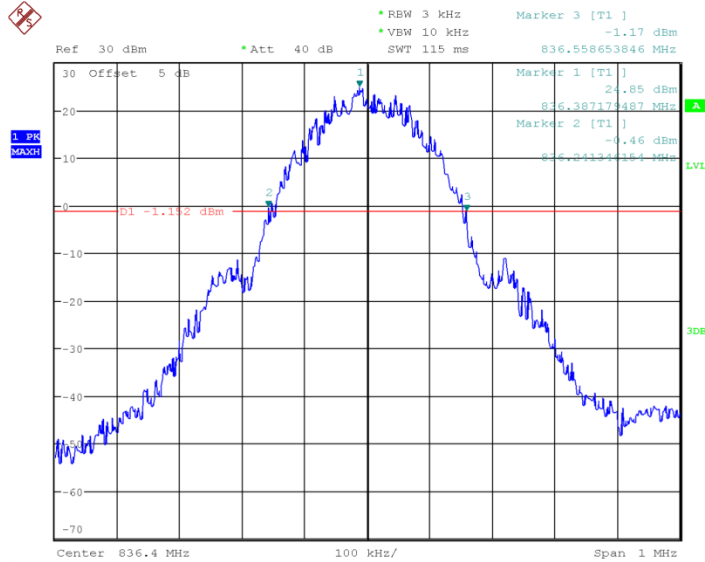

Channel 189- Emission Bandwidth (-26dBc BW)

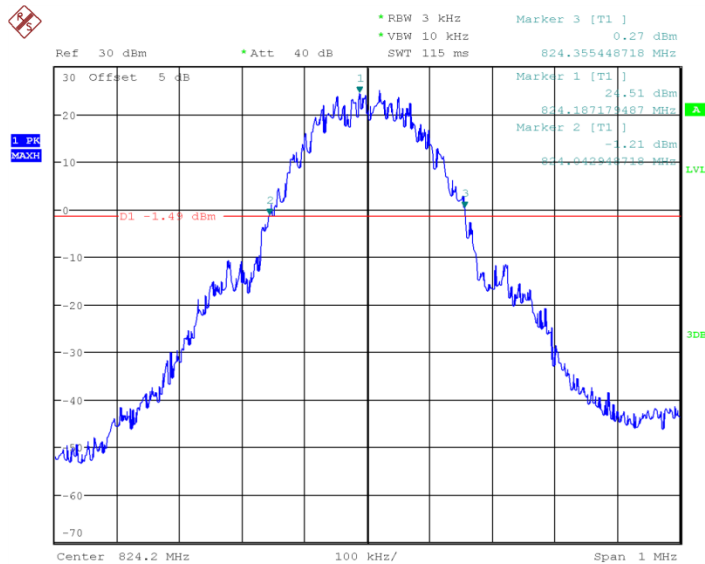


Channel 128- Emission Bandwidth (-26dBc BW)

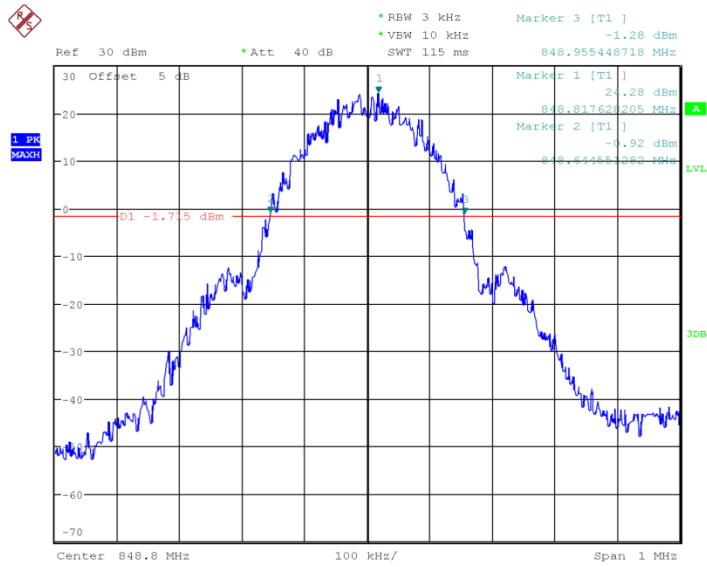


Channel 251- Emission Bandwidth (-26dBc BW)


GPRS 850

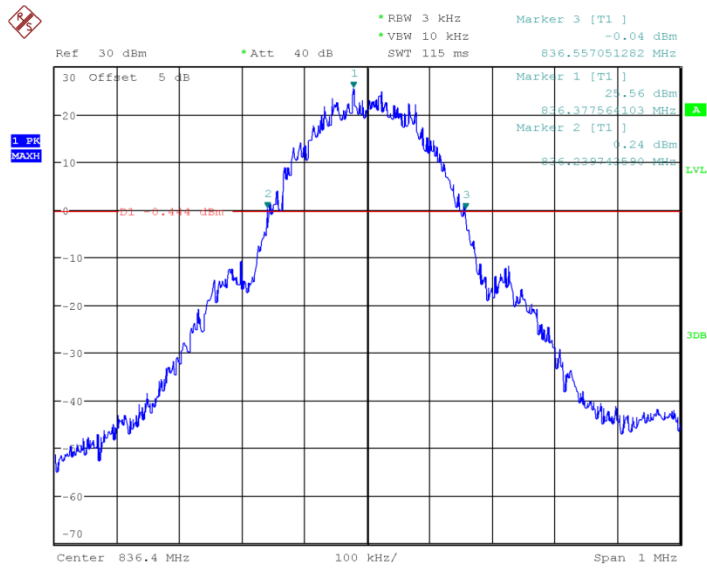

Channel 189- Emission Bandwidth (-26dBc BW)

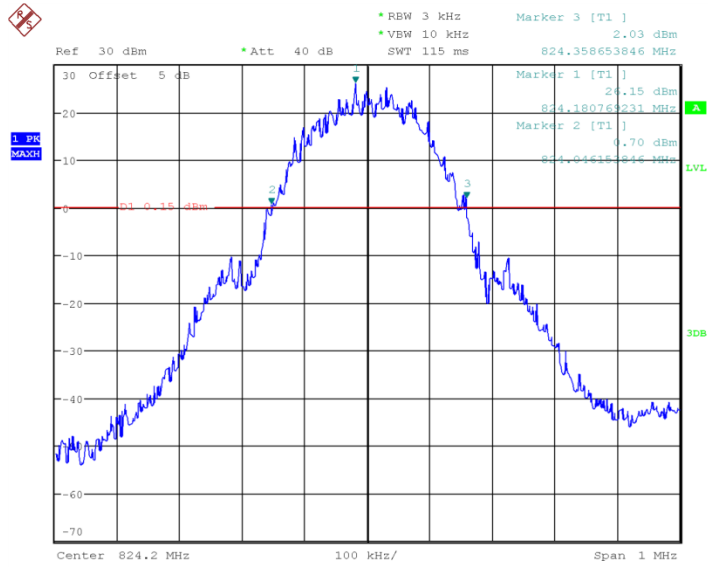


Channel 128- Emission Bandwidth (-26dBc BW)

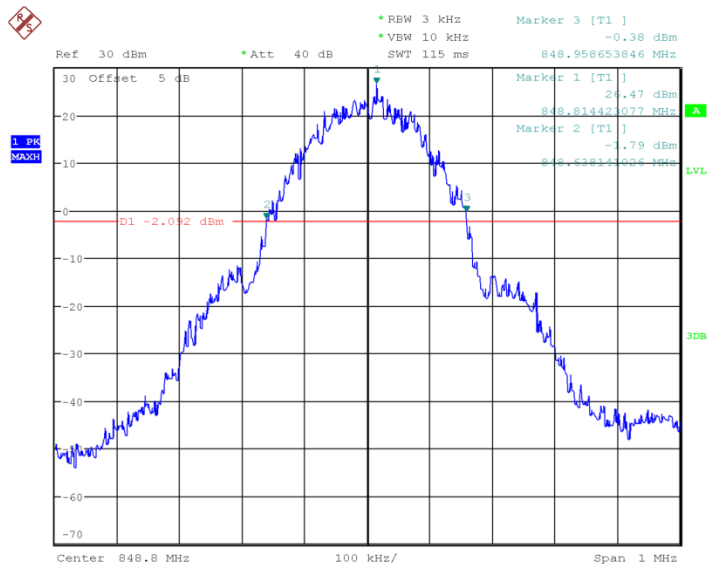


Channel 251- Emission Bandwidth (-26dBc BW)


EDGE 850

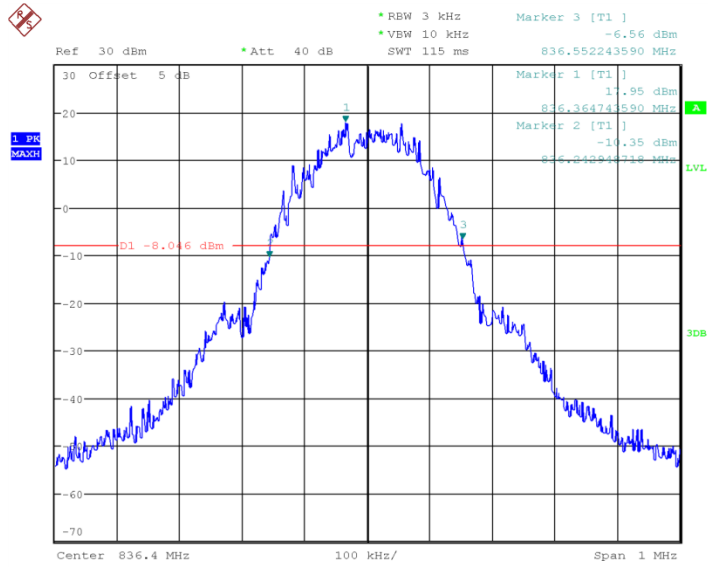

Channel 189- Emission Bandwidth (-26dBc BW)

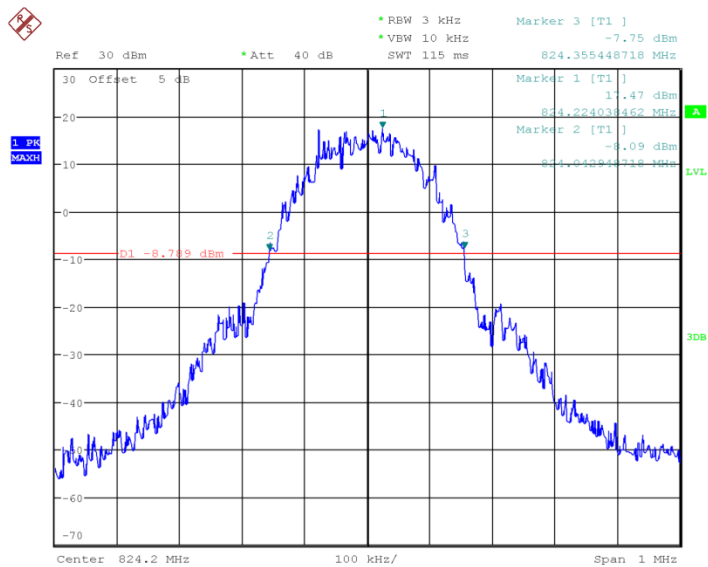

Channel 128- Emission Bandwidth (-26dBc BW)

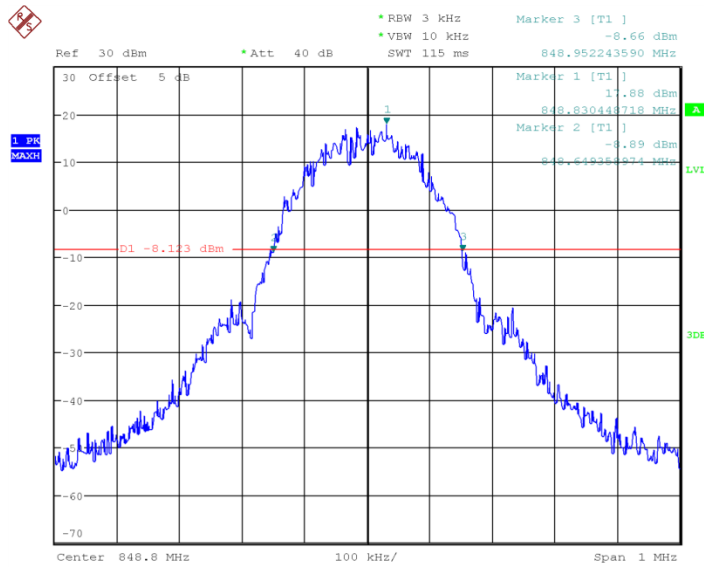


Channel 251- Emission Bandwidth (-26dBc BW)


GSM1900		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 661	1880	306.09
Low 512	1850.2	307.692
High 810	1909.8	317.308
GPRS1900		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 661	1880	315.705
Low 512	1850.2	302.885
High 810	1909.8	320.513
EDGE1900		
Test channel	Frequency (MHz)	-26dBc Emission Bandwidth(KHz)
Mid 661	1880	309.295
Low 512	1850.2	299.679
High 810	1909.8	318.91

Conclusion: PASS


GSM 1900

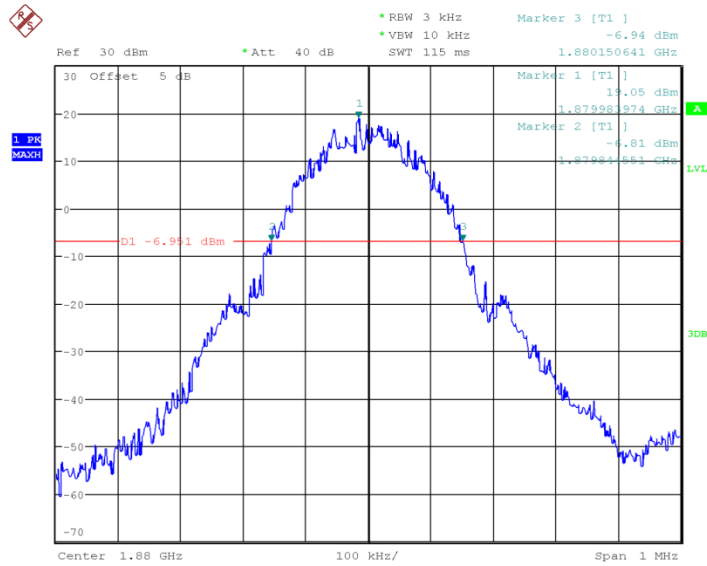

Channel 661- Emission Bandwidth (-26dBc BW)

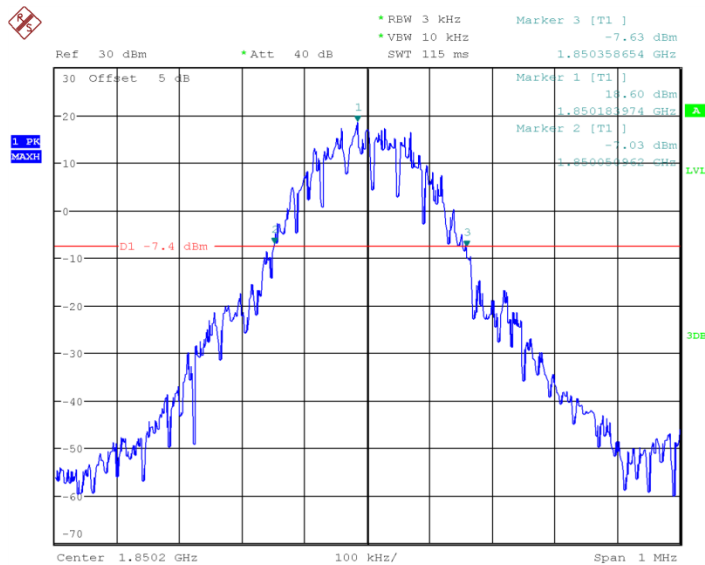


Channel 512- Emission Bandwidth (-26dBc BW)

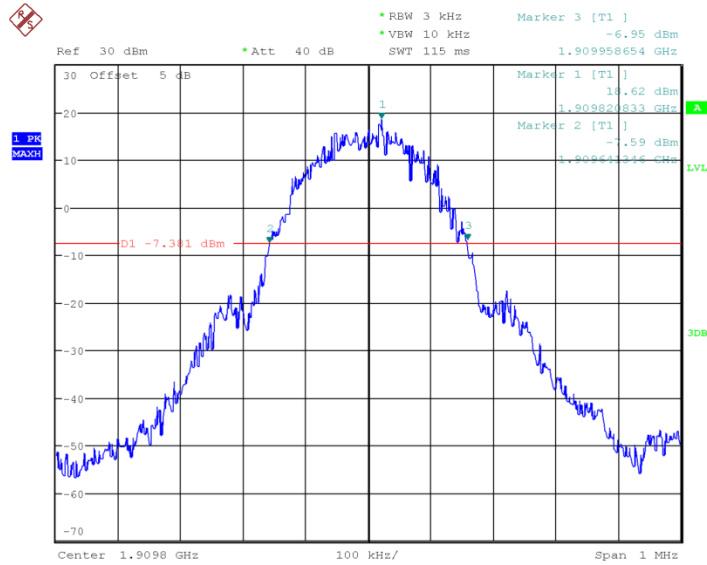


Channel 810- Emission Bandwidth (-26dBc BW)


GPRS 1900

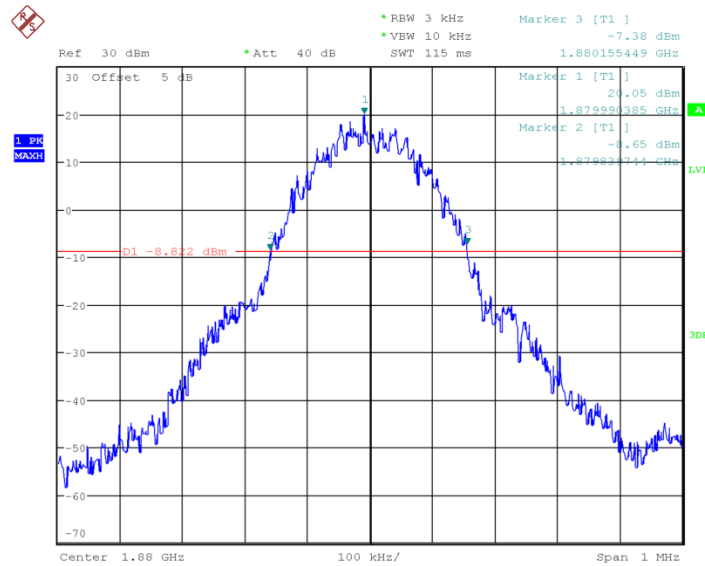

Channel 661- Emission Bandwidth (-26dBc BW)

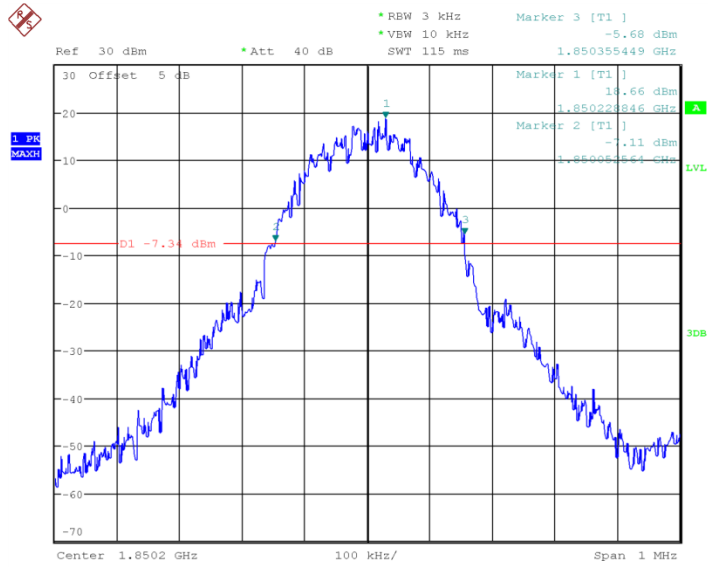

Channel 512- Emission Bandwidth (-26dBc BW)

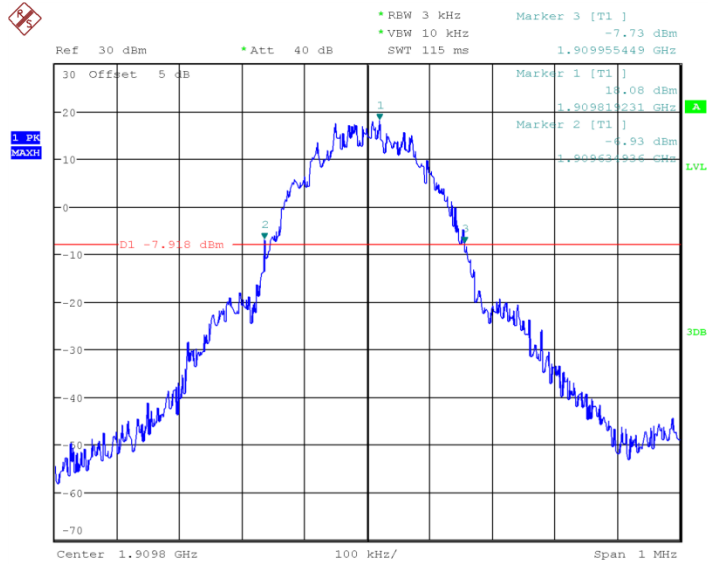

Channel 810- Emission Bandwidth (-26dBc BW)

EDGE 1900