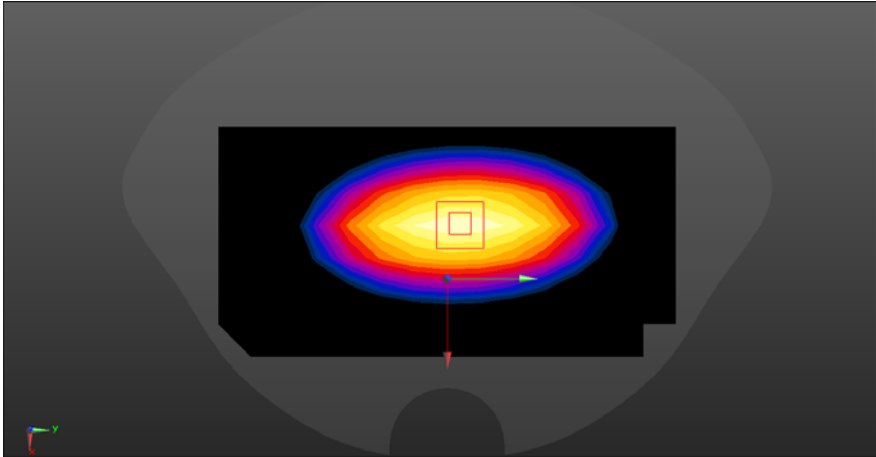
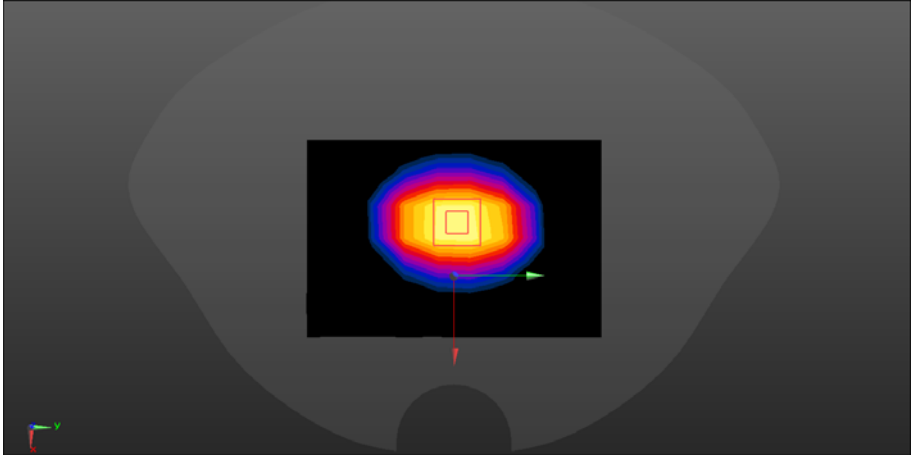
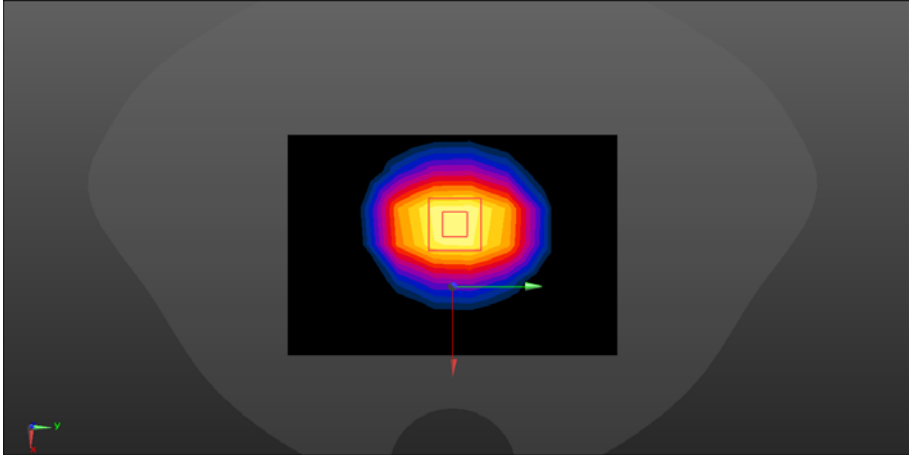


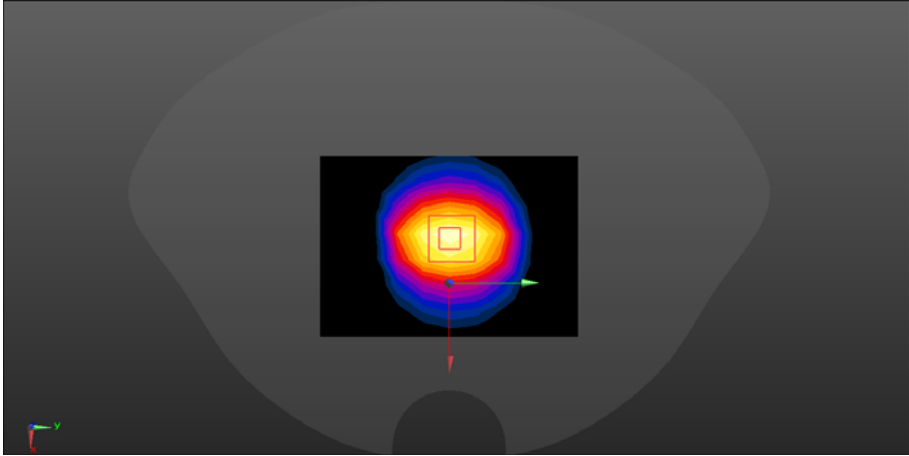
ANNEX A – TEST PLOTS

System check	750MHz
<p>Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 41.143$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30 Sensor-Surface: 1.4mm (Mechanical Surface Detection), Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.16 W/kg</p> <p>System Performance Check at Frequencies 750MHz/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.00 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 3.23 W/kg SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.44 W/kg Maximum value of SAR (measured) = 2.48 W/kg</p> <div data-bbox="379 1267 1219 1798" data-label="Figure"> </div>	

System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz Duty cycle:1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 40.297$ $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30 Sensor-Surface: 1.4mm (Mechanical Surface Detection), Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.72 W/kg</p> <p>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.67 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.56 W/kg SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 2.76 W/kg</p> 	

System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.694$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30 Sensor-Surface: 1.4mm (Mechanical Surface Detection), Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 8.31 W/kg</p> <p>Configuration 1800/1800/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 76.76 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.78 W/kg; SAR(10 g) = 4.97 W/kg Maximum value of SAR (measured) = 12.1 W/kg</p> 	

System check	2000MHz
<p>Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.844$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94); Calibrated: 2020/10/30 Sensor-Surface: 1.4mm (Mechanical Surface Detection), Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 8.40 W/kg</p> <p>Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 76.22 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 9.75 W/kg; SAR(10 g) = 4.96 W/kg Maximum value of SAR (measured) = 12.9 W/kg</p> 	

System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 38.433$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30 Sensor-Surface: 1.4mm (Mechanical Surface Detection), Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.2 W/kg</p> <p>System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.3 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 28.2 W/kg SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.14 W/kg Maximum value of SAR (measured) = 22.6 W/kg</p> 	

System check	2600MHz
--------------	---------

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 39.854$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn720; Calibrated: 2020/9/30
- Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 22.7 W/kg

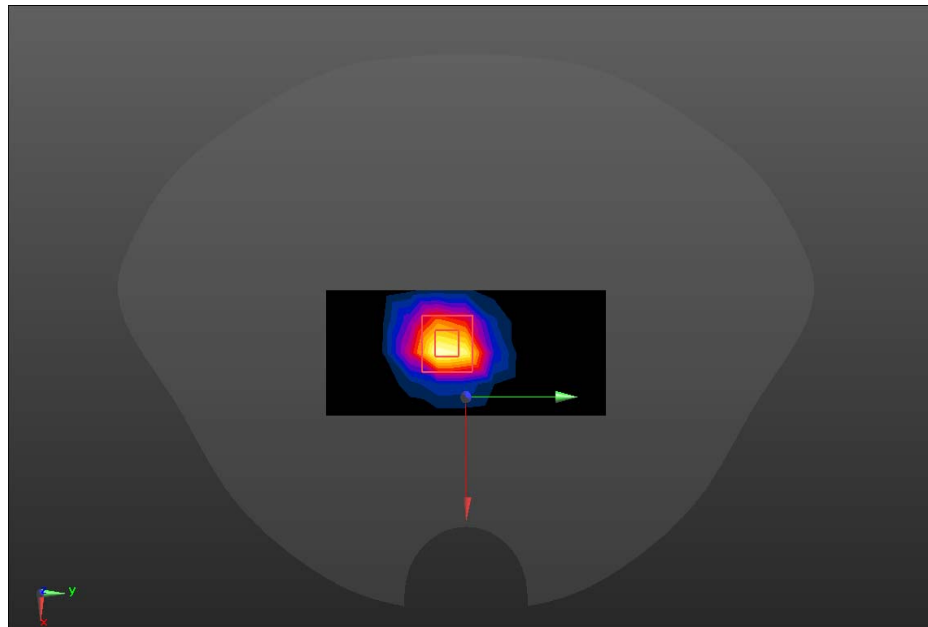
SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.2 V/m; Power Drift = 0.11 dB

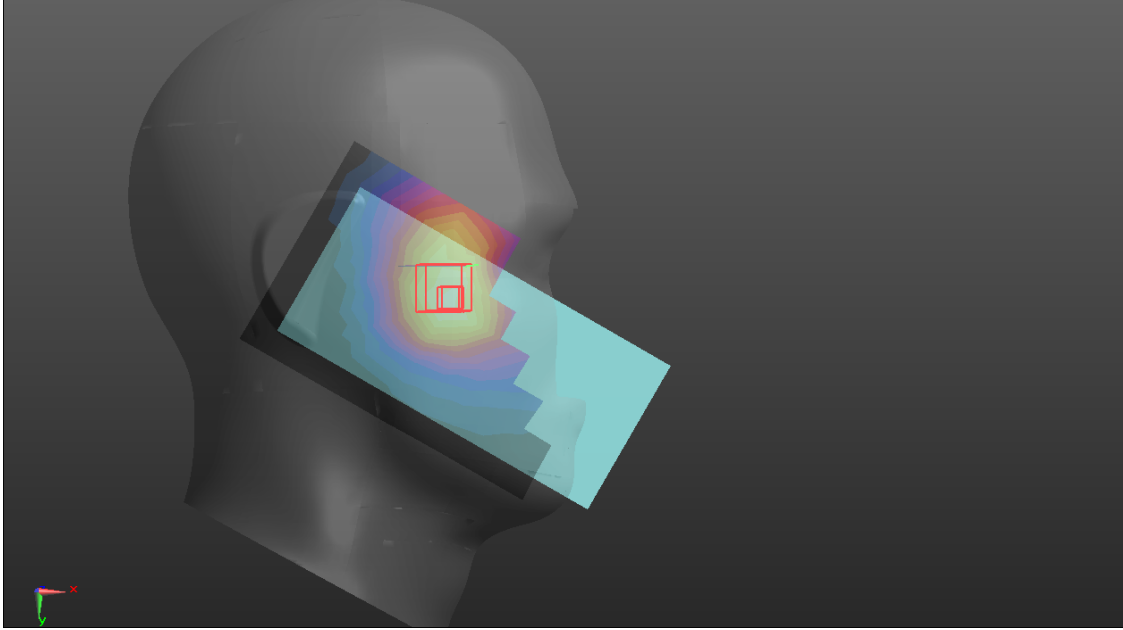
Peak SAR (extrapolated) = 33.6 W/kg

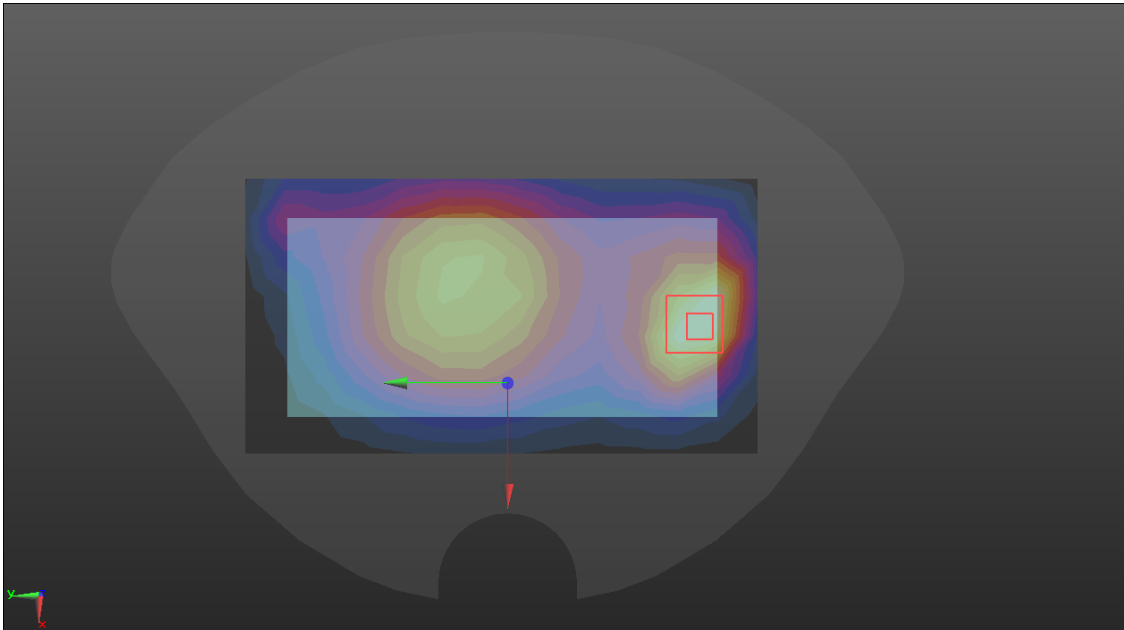
SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.52 W/kg

Maximum value of SAR (measured) = 26.6 W/kg

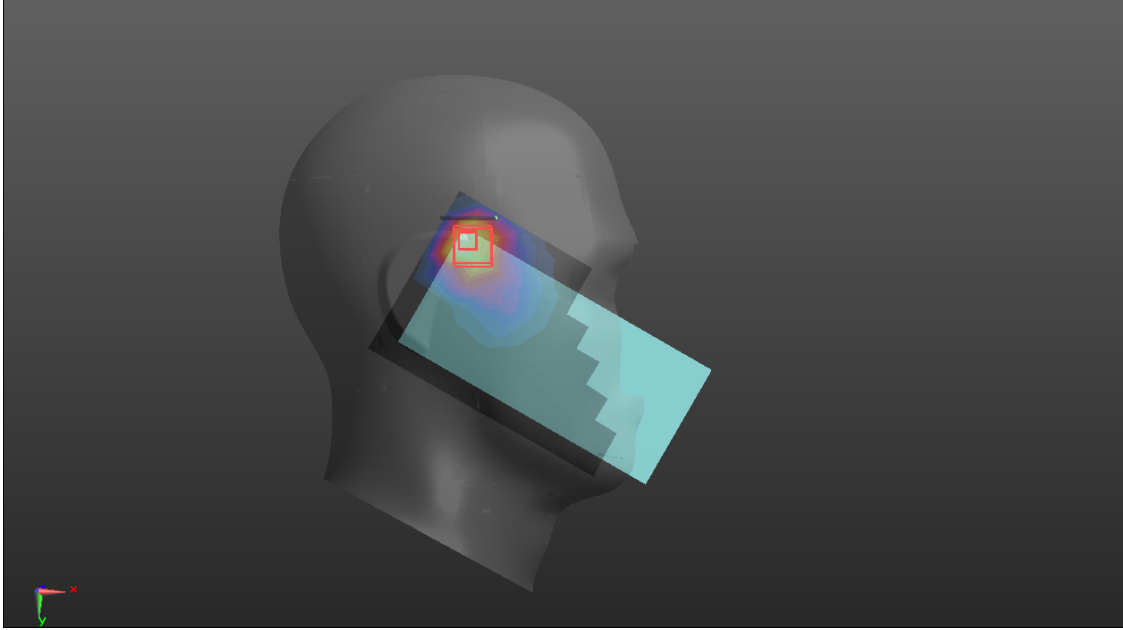


GSM850

Head	Right cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042</p> <p>Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/GSM850/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0965 W/kg</p> <p>RC/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.298 V/m; Power Drift = 0.72 dB Peak SAR (extrapolated) = 0.113 W/kg SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.066 W/kg Maximum value of SAR (measured) = 0.0954 W/kg</p> 	

Body-worn	BACK
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>BACK/GSM 850/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.186 W/kg</p> <p>BACK/GSM 850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.53 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.304 W/kg SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.101 W/kg Maximum value of SAR (measured) = 0.210 W/kg</p> 	

GSM1900

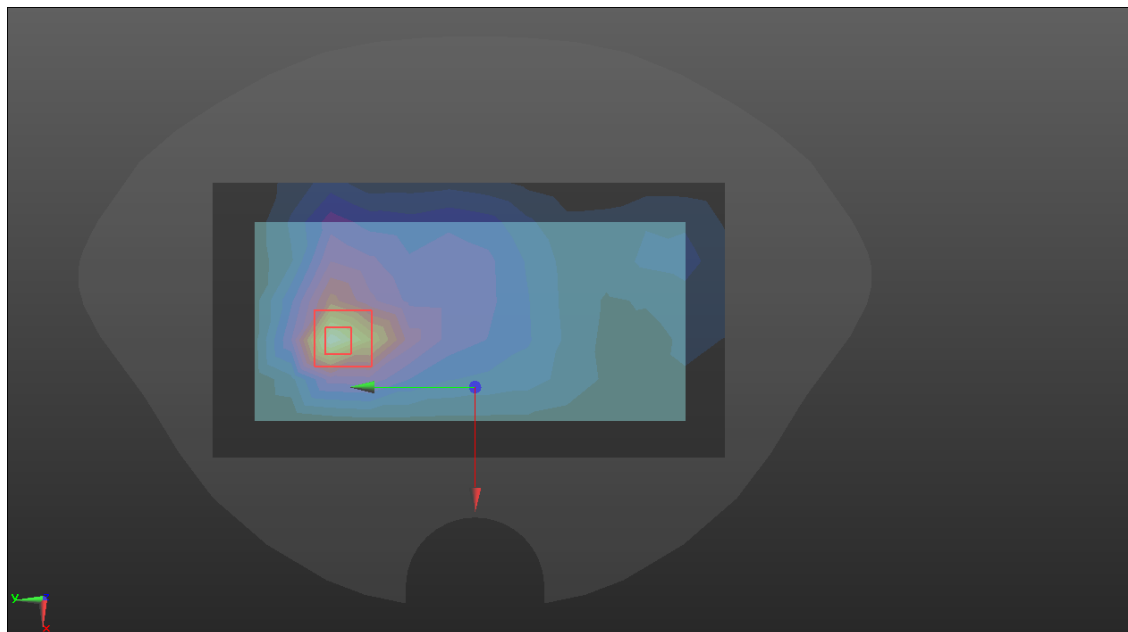
Head	Right cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042</p> <p>Medium parameters used (interpolated): f = 1880 MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/PCS1900/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.944 W/kg</p> <p>RC/PCS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.789 V/m; Power Drift = -0.96 dB Peak SAR (extrapolated) = 1.98 W/kg SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.478 W/kg Maximum value of SAR (measured) = 1.20 W/kg</p> 	

Body-worn	BACK
-----------	------

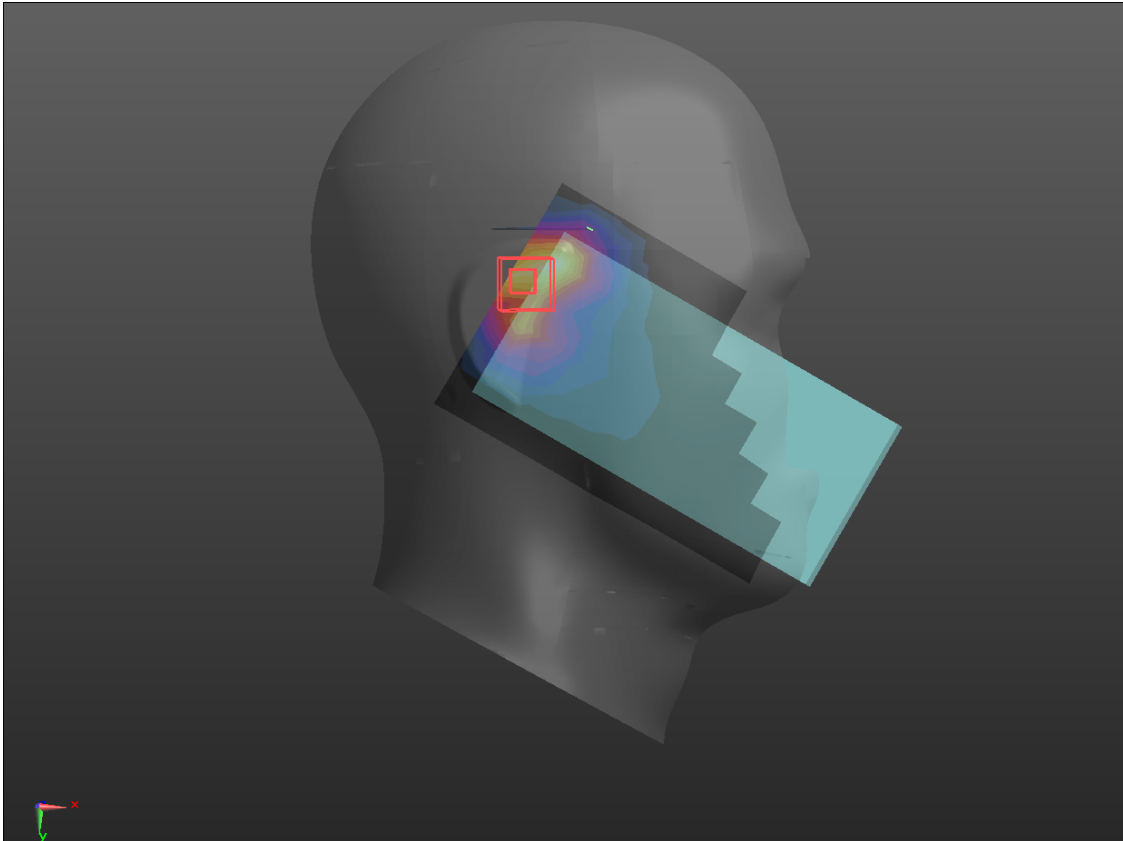
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
Medium parameters used (interpolated): f = 1880 MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

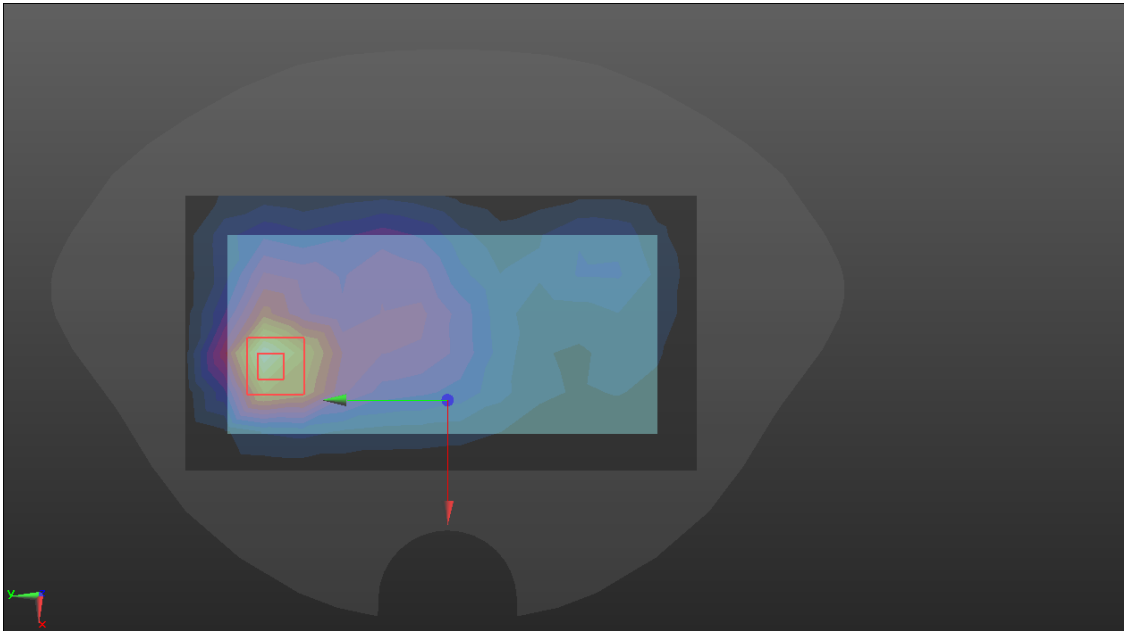
DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- BACK/PCS 1900/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.828 W/kg
- BACK/PCS 1900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.60 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.341 W/kg
Maximum value of SAR (measured) = 0.803 W/kg

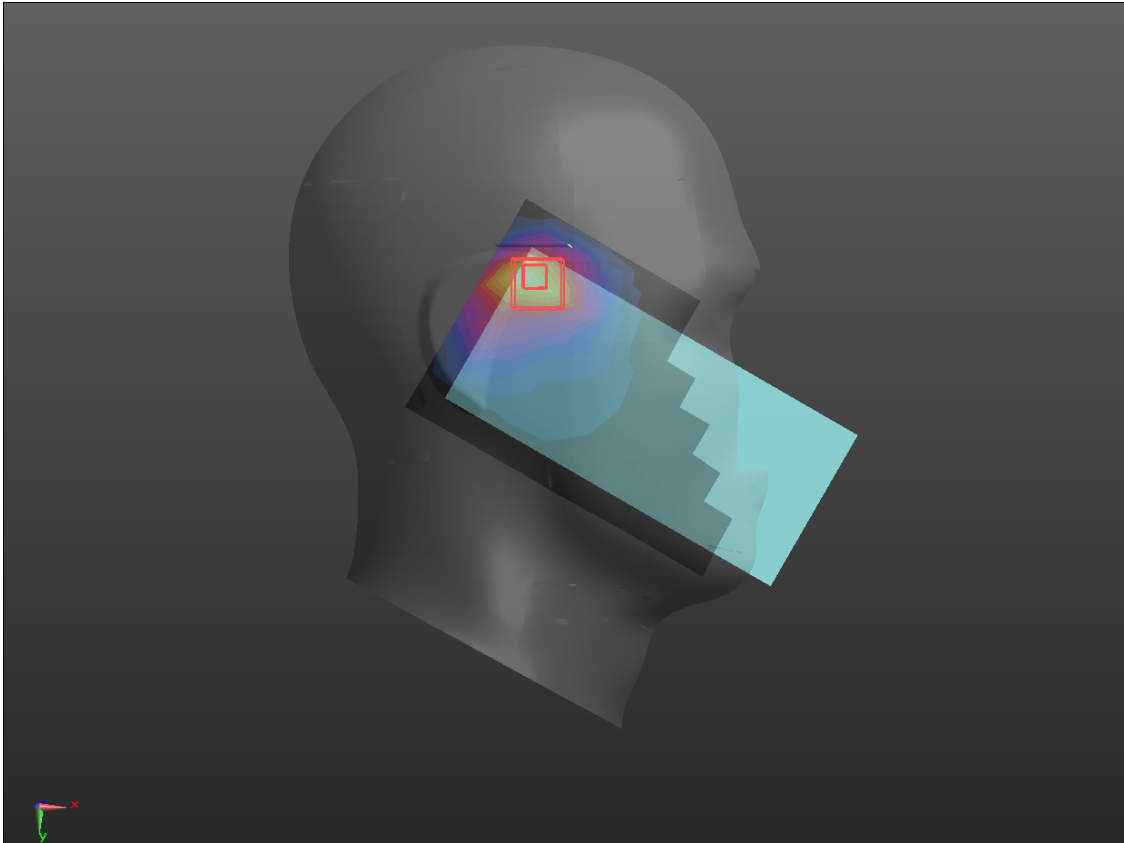


WCDMA Band II

Head	Right tilt
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RT/WCDMA B2 2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.501 W/kg</p> <p>RT/WCDMA B2 2/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 17.54 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.931 W/kg SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.238 W/kg Maximum value of SAR (measured) = 0.592 W/kg</p> 	

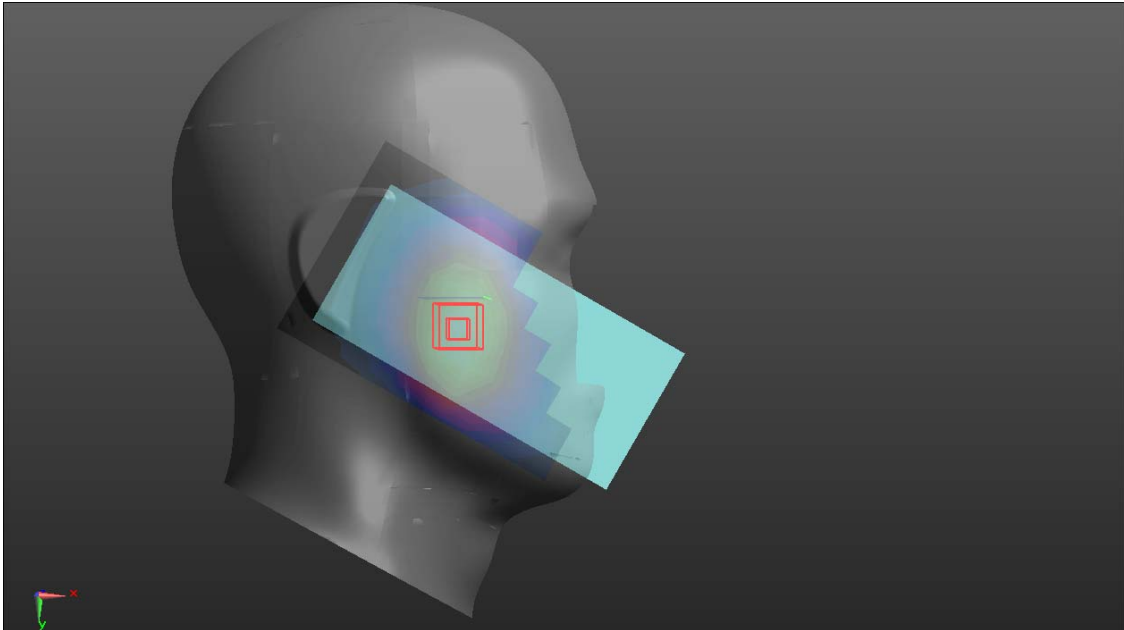
Body-worn	BACK
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>BACK/WCDMA B2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.823 W/kg</p> <p>BACK/WCDMA B2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 15.27 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 1.33 W/kg SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.395 W/kg Maximum value of SAR (measured) = 0.904 W/kg</p>  <p>The image shows a 3D visualization of a SAR measurement on a phantom section. It features a central rectangular area with a color gradient from blue (low SAR) to red (high SAR). A red square highlights a specific measurement area within this region. A green arrow points from a blue dot to the red square, and a red arrow points from the red square to a blue dot below it. A 3D coordinate system is visible in the bottom left corner.</p>	

WCDMA Band IV

Head	Right cheek
<p>Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/WCDMA B4 Max/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.832 W/kg</p> <p>RC/WCDMA B4 Max/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 17.76 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.31 W/kg SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.374 W/kg Maximum value of SAR (measured) = 0.812 W/kg</p> 	

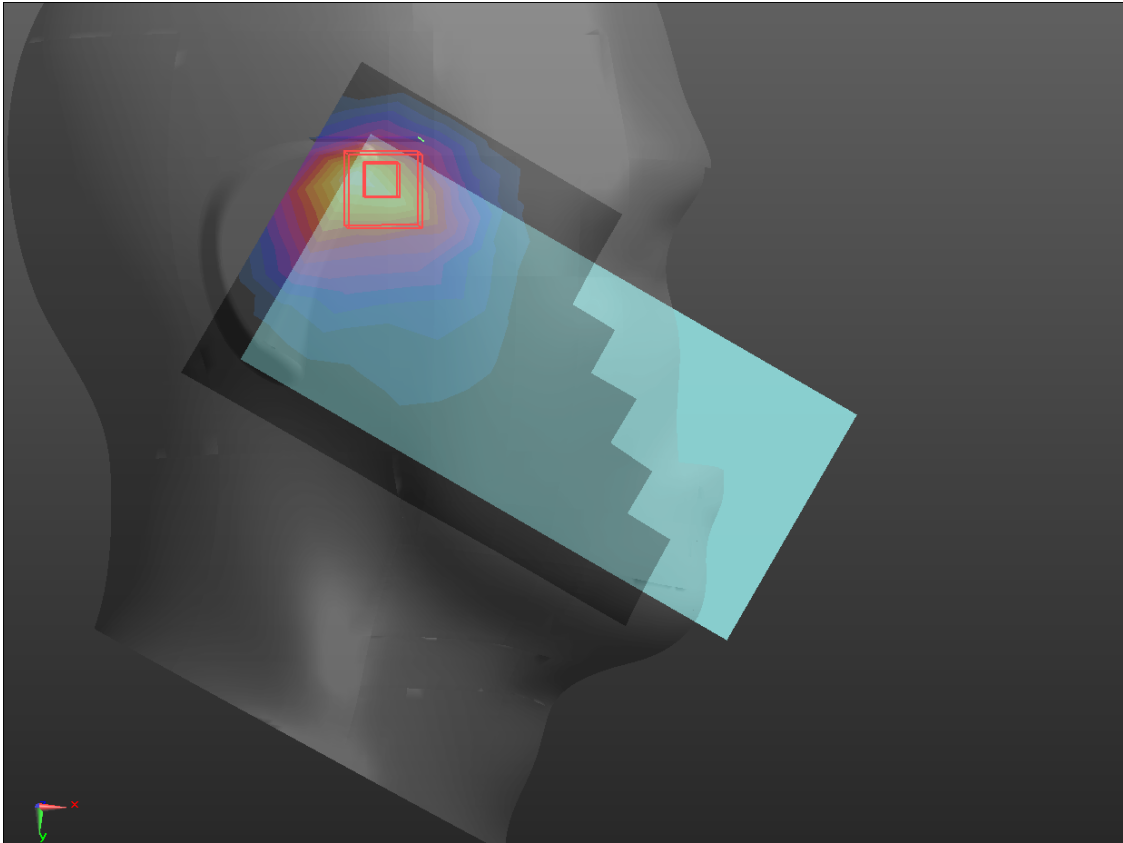
Body-worn	BACK
<p>Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>BACK/WCDMA B4/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.847 W/kg</p> <p>BACK/WCDMA B4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 15.92 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.25 W/kg SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.405 W/kg Maximum value of SAR (measured) = 0.861 W/kg</p> 	

WCDMA Band V

Head	Right cheek
<p>Communication System: UID 0, WCDMA BAND4 (0), Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 1752.6 MHz, Frequency: 836.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.036$; $\rho = 1000$ kg/m³ , Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1, ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/WCDMA B5 RC/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.116 W/kg</p> <p>RC/WCDMA B5 RC/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.379 V/m; Power Drift = 0.43 dB Peak SAR (extrapolated) = 0.135 W/kg SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.081 W/kg Maximum value of SAR (measured) = 0.118 W/kg</p> 	

Body-worn	BACK
<p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>BACK/WCDMA B5/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.211 W/kg</p> <p>BACK/WCDMA B5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.38 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.315 W/kg SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.109 W/kg Maximum value of SAR (measured) = 0.221 W/kg</p> 	

LTE Band 2

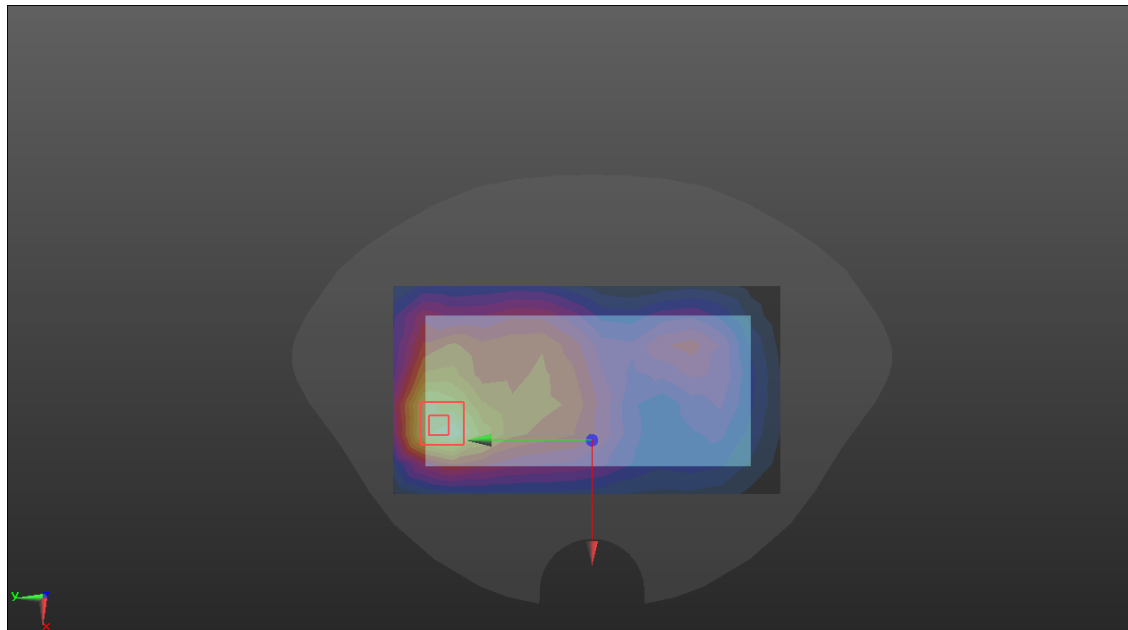
Head	Right cheek
<p>Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/LTE B2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.611 W/kg</p> <p>RC/LTE B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.71 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.07 W/kg SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.270 W/kg Maximum value of SAR (measured) = 0.623 W/kg</p>  <p>The image shows a 3D rendering of a human head phantom. A semi-transparent, light blue rectangular plane is positioned on the right side of the head, representing the measurement area. A color-coded heatmap is overlaid on this plane, showing the distribution of Specific Absorption Rate (SAR). The highest intensity is shown in red and yellow, concentrated in a small area on the right cheek. A red square highlights the peak measurement area. A small 3D coordinate system (x, y, z) is visible in the bottom left corner of the image.</p>	

Body-worn	BACK
-----------	------

Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³ , Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

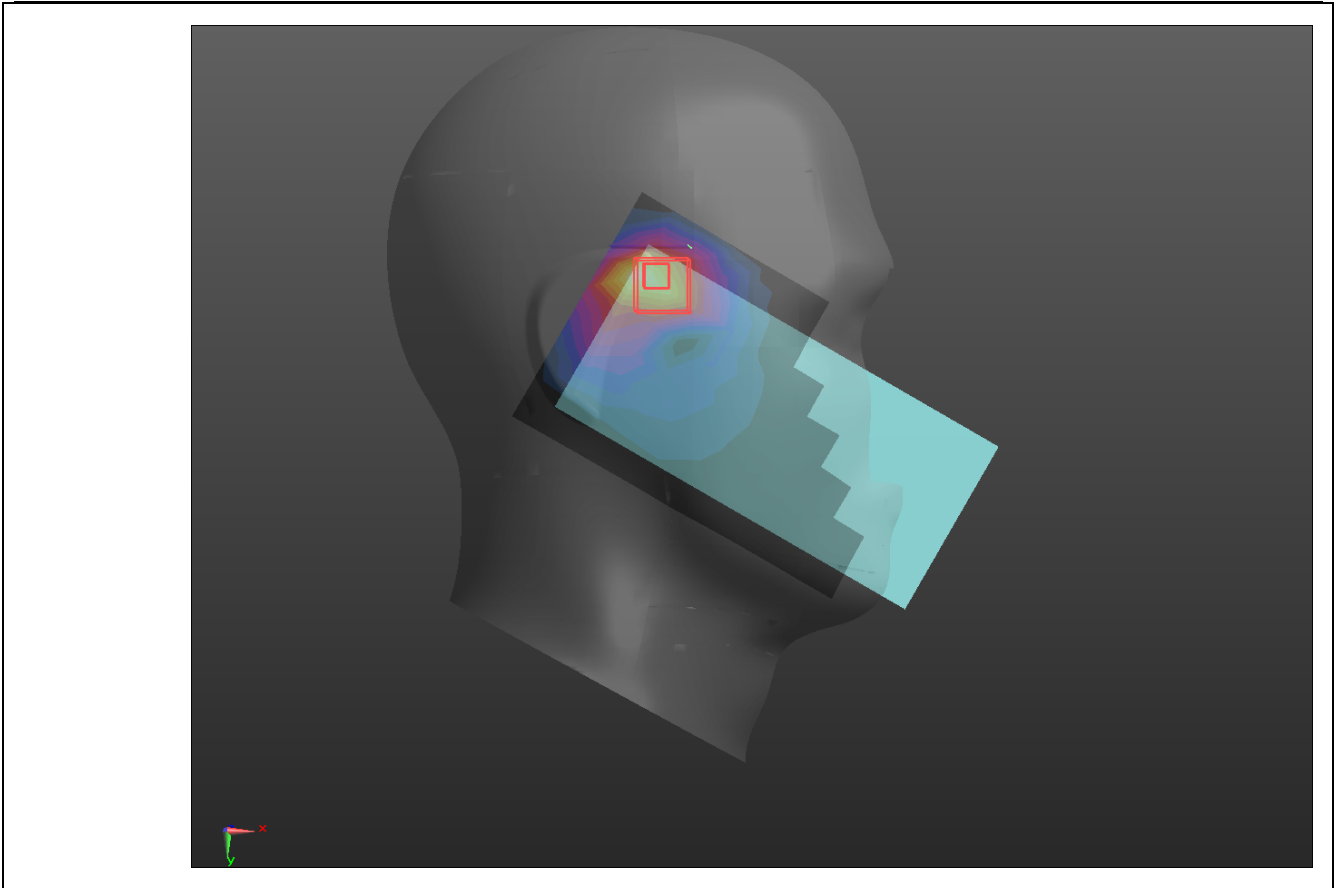
DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- BACK/LTE B2/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm
 Maximum value of Total (measured) = 24.32 V/m
- BACK/LTE B2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.89 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.392 W/kg
 Maximum value of SAR (measured) = 0.899 W/kg



LTE Band 4

Head	Right cheek
<p>Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/LTE B4 MID/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.910 W/kg</p> <p>RC/LTE B4 MID/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.12 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 1.42 W/kg SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.423 W/kg Maximum value of SAR (measured) = 0.899 W/kg</p>	



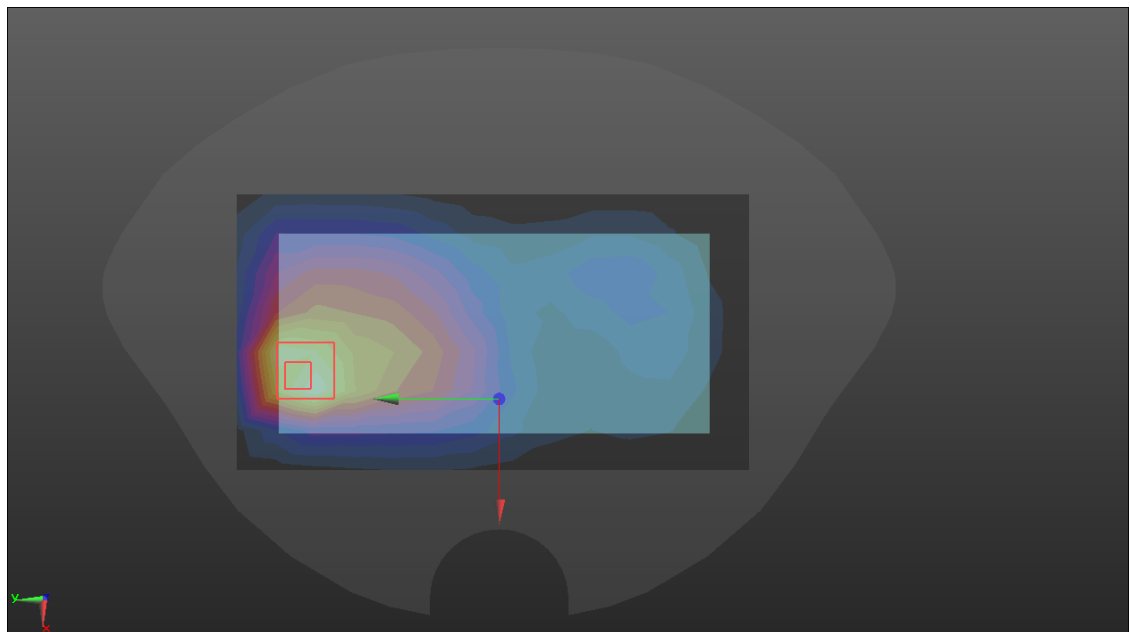
Body-worn	BACK
-----------	------

Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$

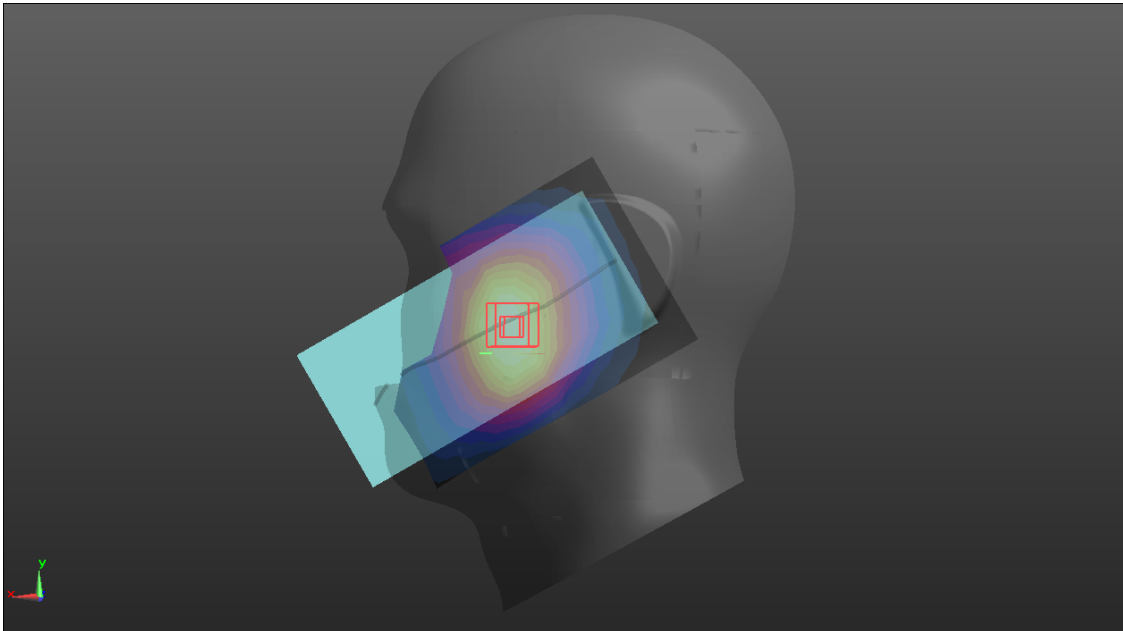
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- BACK/LTE B4/Area Scan (8x14x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.832 W/kg
- BACK/LTE B4/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.43 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.453 W/kg
Maximum value of SAR (measured) = 0.971 W/kg



LTE Band 5

Head	Left cheek
<p>Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <p>Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1;</p> <ul style="list-style-type: none"> • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LC/LTE B5/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0987 W/kg</p> <p>LC/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.918 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.114 W/kg SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.069 W/kg Maximum value of SAR (measured) = 0.0988 W/kg</p> 	

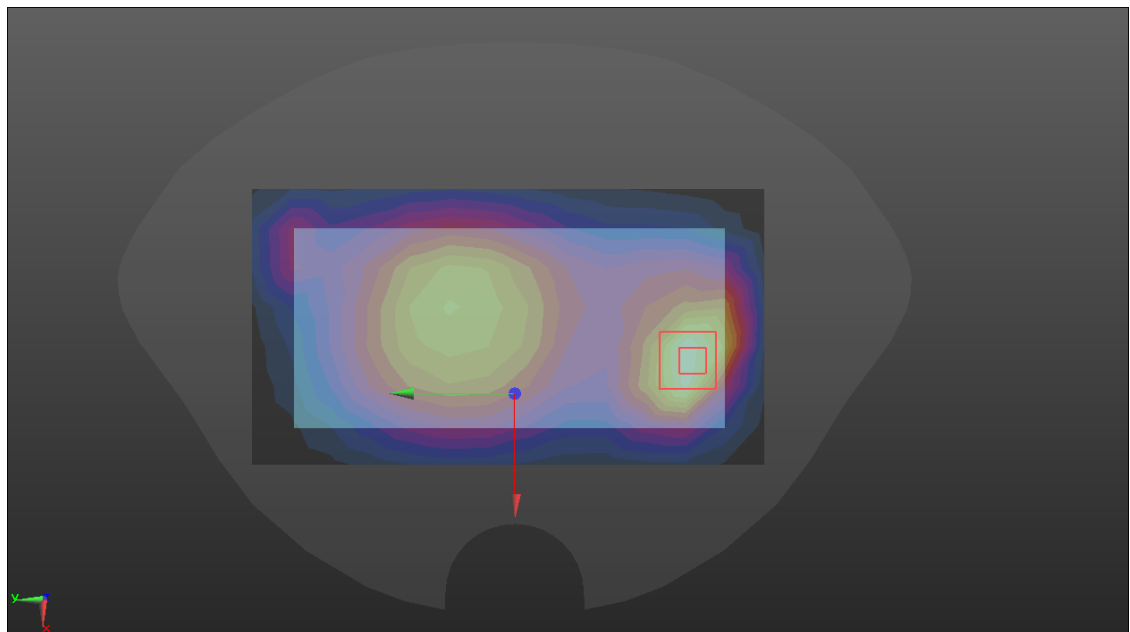
Body-worn	BACK
-----------	------

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 41.528$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

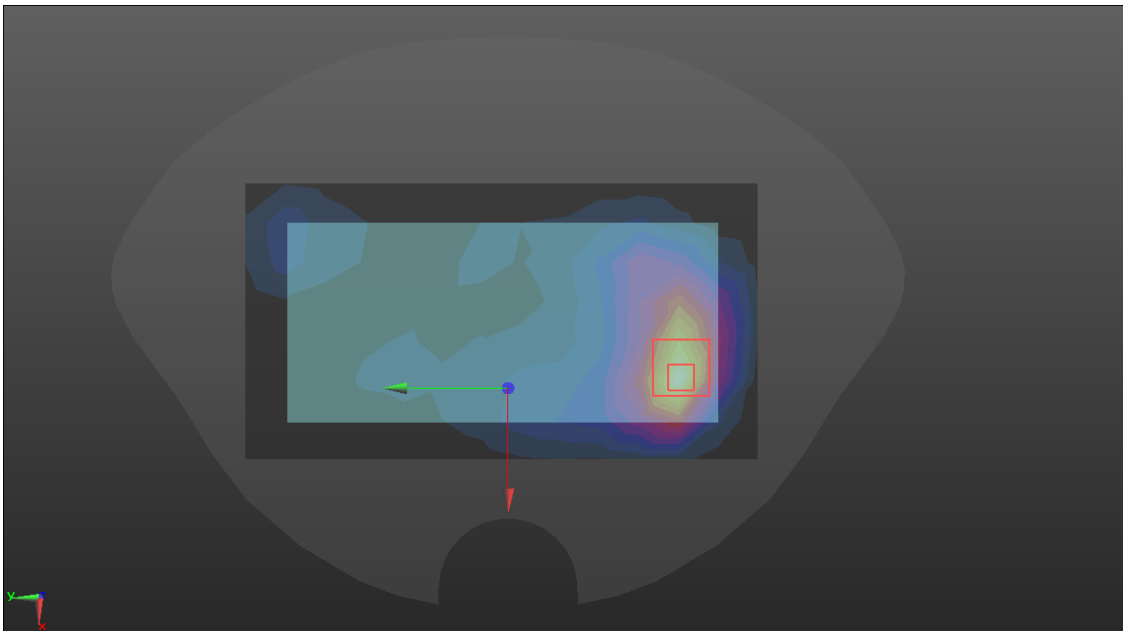
DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- BACK/LTE B5/Area Scan (8x14x1):** Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.191 W/kg
- BACK/LTE B5/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.86 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.298 W/kg
SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.103 W/kg
Maximum value of SAR (measured) = 0.207 W/kg

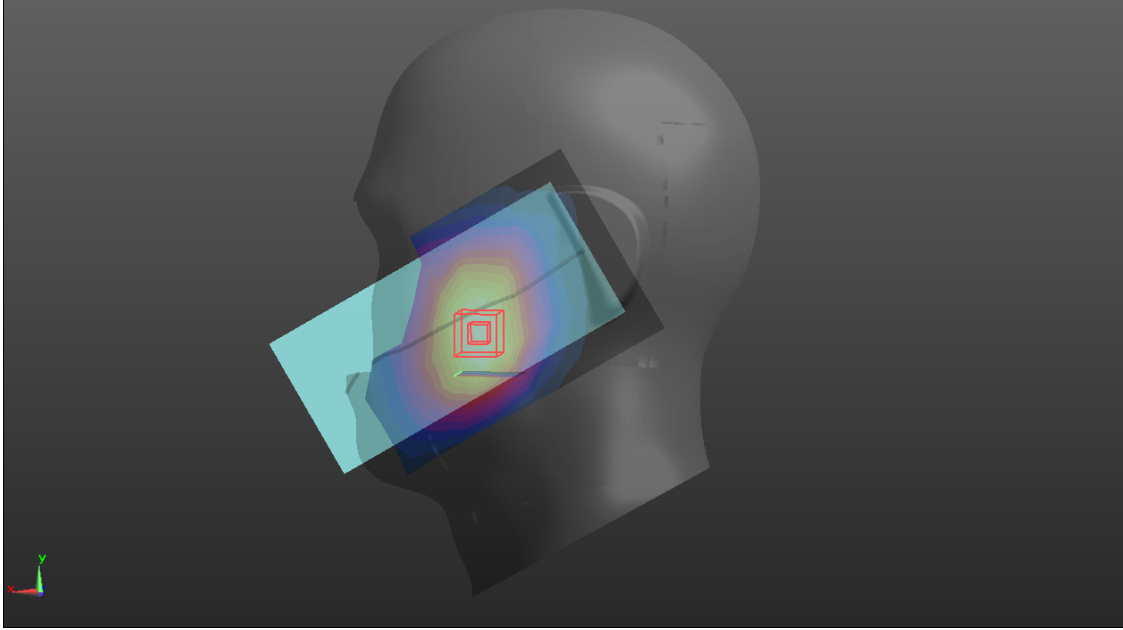


LTE Band 7

Head	Left cheek
<p>Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LC/LTE B7/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.291 W/kg</p> <p>LC/LTE B7/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.134 V/m; Power Drift = 0.43 dB Peak SAR (extrapolated) = 0.473 W/kg SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.139 W/kg Maximum value of SAR (measured) = 0.320 W/kg</p> 	

Body-worn	BACK
<p>Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1; Sensor-Surface: 3mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>BACK/LTE B7/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.16 W/kg</p> <p>BACK/LTE B7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.206 V/m; Power Drift = 0.30 dB Peak SAR (extrapolated) = 1.93 W/kg SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.467 W/kg Maximum value of SAR (measured) = 1.15 W/kg</p> 	

LTE Band 12

Head	Left cheek
<p>Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.115$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(6.32, 6.32, 6.32); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LC/LTE B12/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0311 W/kg</p> <p>LC/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.699 V/m; Power Drift = 1.12 dB Peak SAR (extrapolated) = 0.0370 W/kg SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg Maximum value of SAR (measured) = 0.0304 W/kg</p> 	

Body-worn	BACK
-----------	------

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(6.32, 6.32, 6.32); Calibrated: 2020/9/1;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 2020/9/30
- Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

BACK/LTE B12/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0665 W/kg

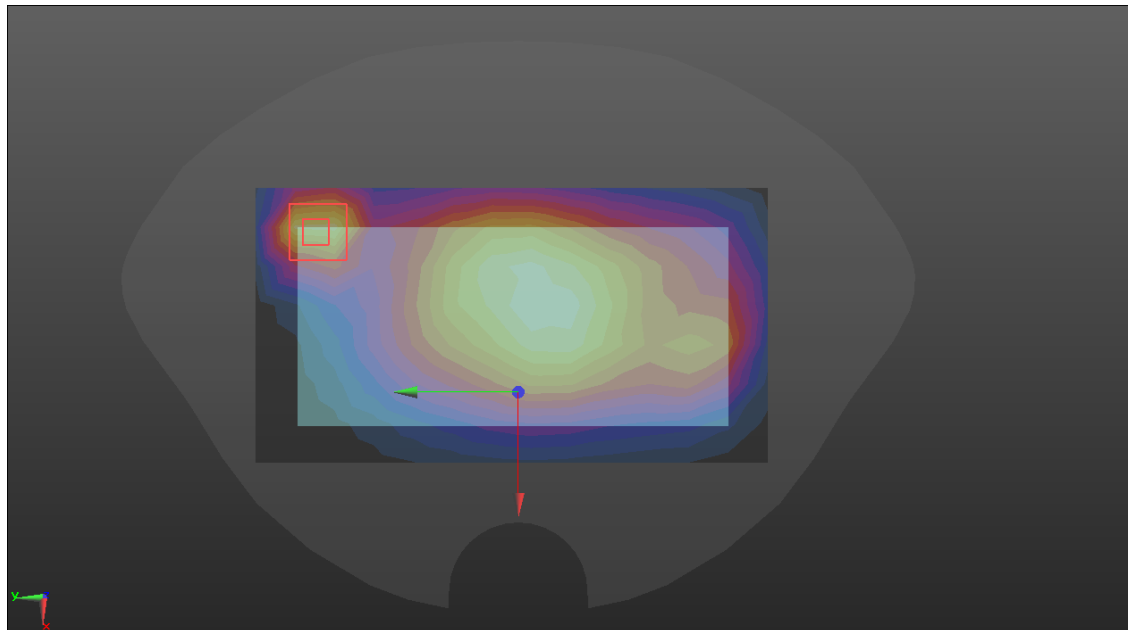
BACK/LTE B12/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.706 V/m; Power Drift = -0.06 dB

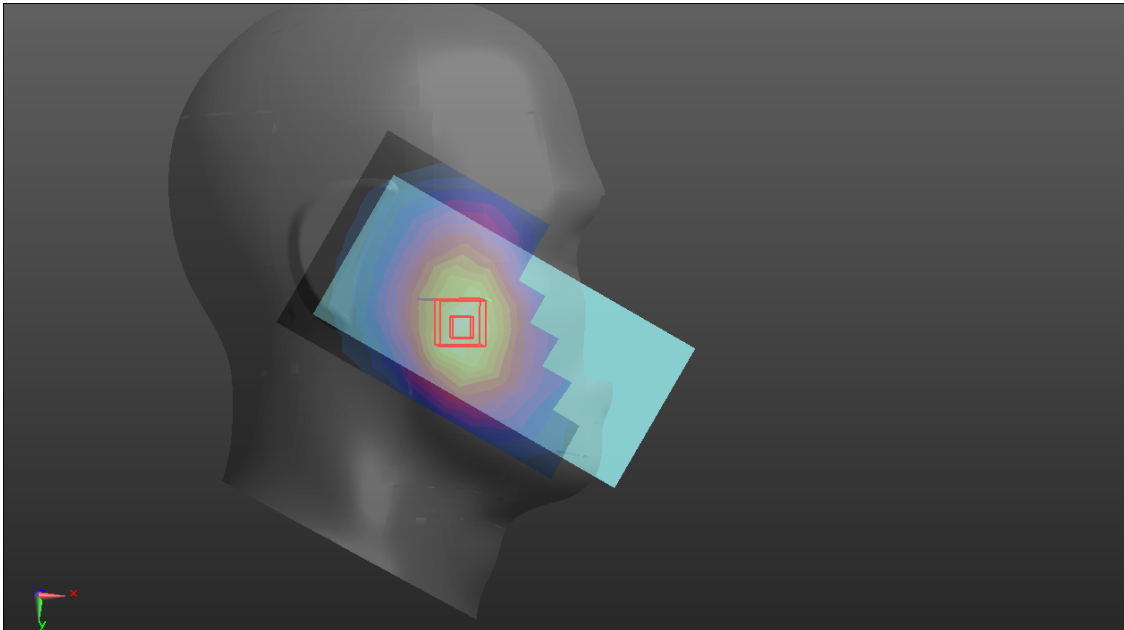
Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0759 W/kg



LTE Band 26

Head	Right cheek
<p>Communication System: UID 0, LTE Band 26(0); Frequency: 831.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.539$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>RC/LTE B26/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0948 W/kg</p> <p>RC/LTE B26/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.485 V/m; Power Drift = 0.60 dB Peak SAR (extrapolated) = 0.113 W/kg SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.065 W/kg Maximum value of SAR (measured) = 0.0965 W/kg</p> 	

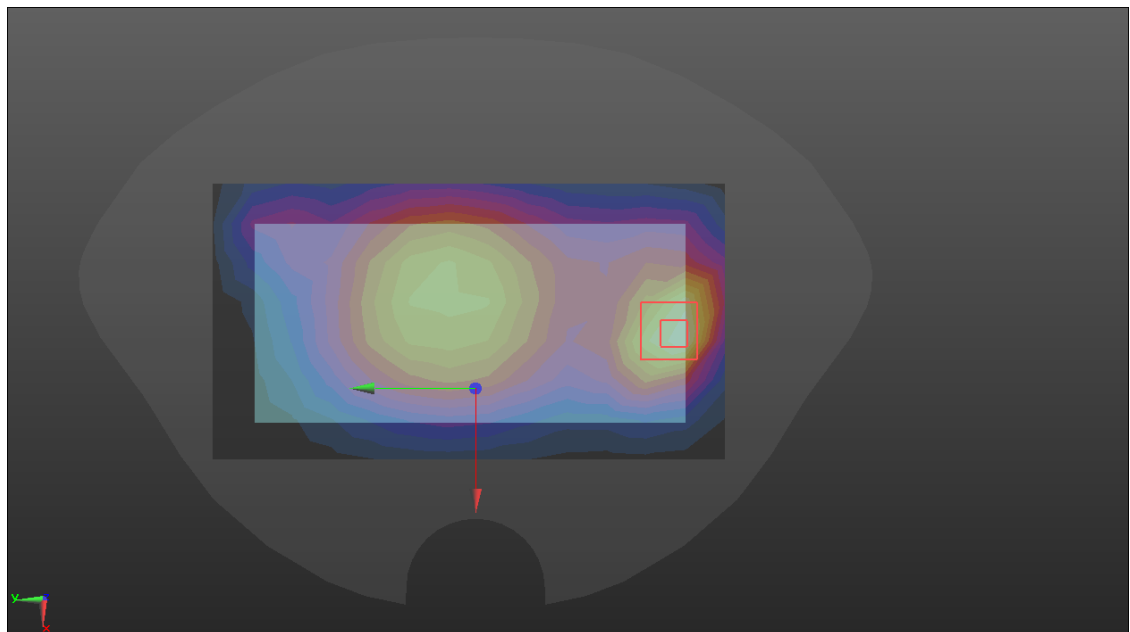
Body-worn	BACK
-----------	------

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.539$; $\rho = 1000 \text{ kg/m}^3$

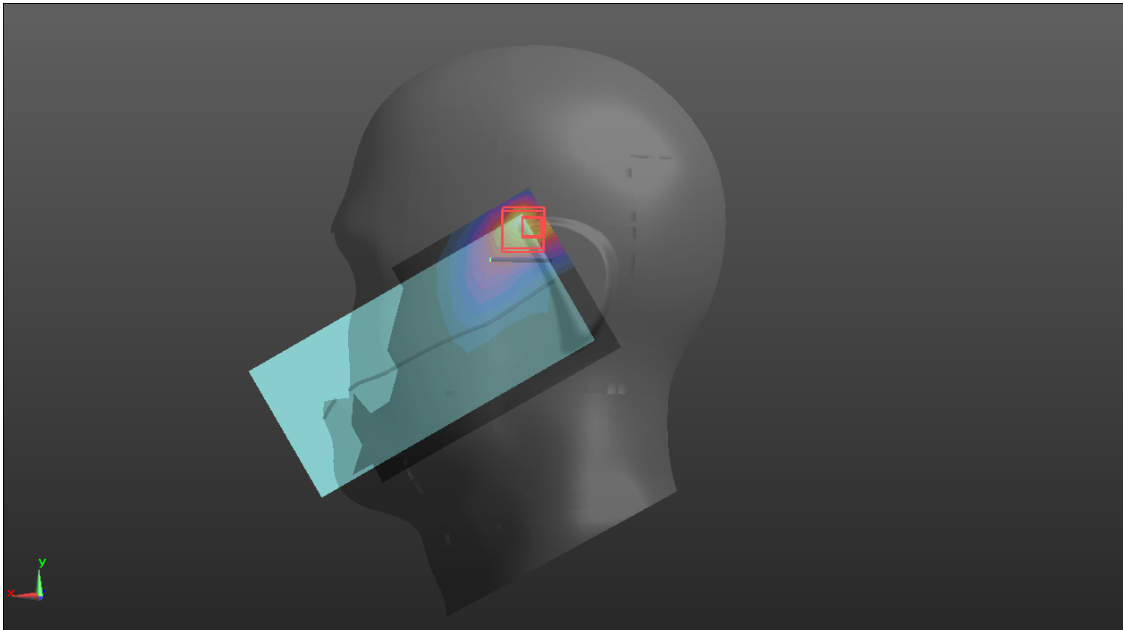
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- BACK/LTE B26/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.179 W/kg
- BACK/LTE B26/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.95 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.094 W/kg
Maximum value of SAR (measured) = 0.192 W/kg



WIFI 2.4GHz

Head	Left cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1; • Sensor-Surface: 3mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LC/WIFI 2.4G LT/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.493 W/kg</p> <p>LC/WIFI 2.4G LT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.244 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.930 W/kg SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.195 W/kg Maximum value of SAR (measured) = 0.552 W/kg</p> 	

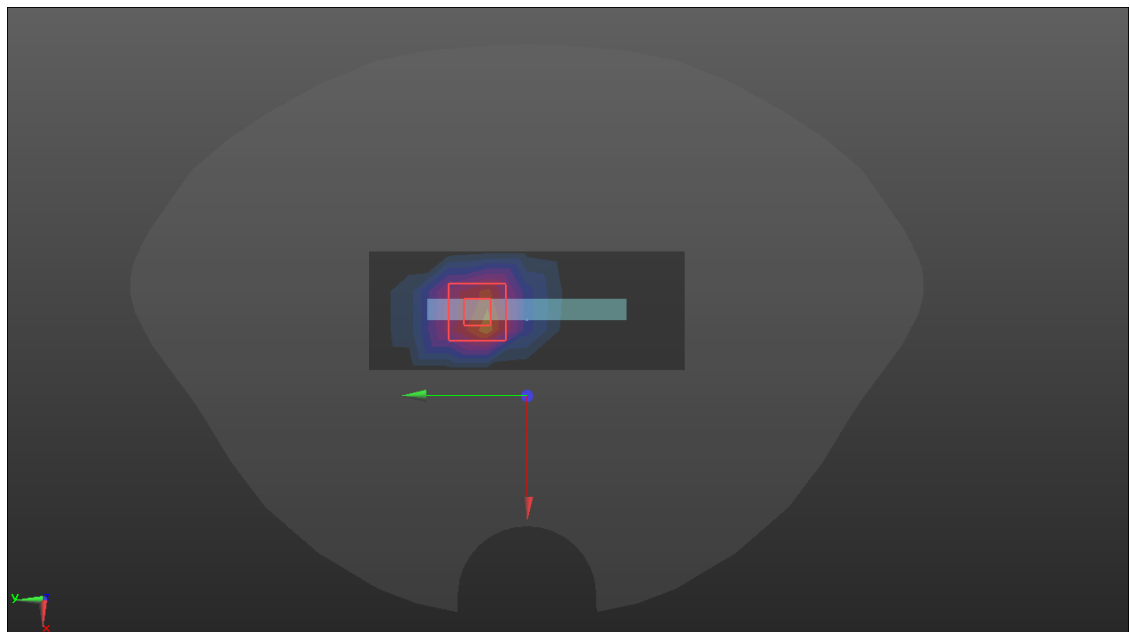
Body-worn	TOP
-----------	-----

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2442 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2442 \text{ MHz}$; $\sigma = 1.793 \text{ S/m}$; $\epsilon_r = 39.212$; $\rho = 1000 \text{ kg/m}^3$

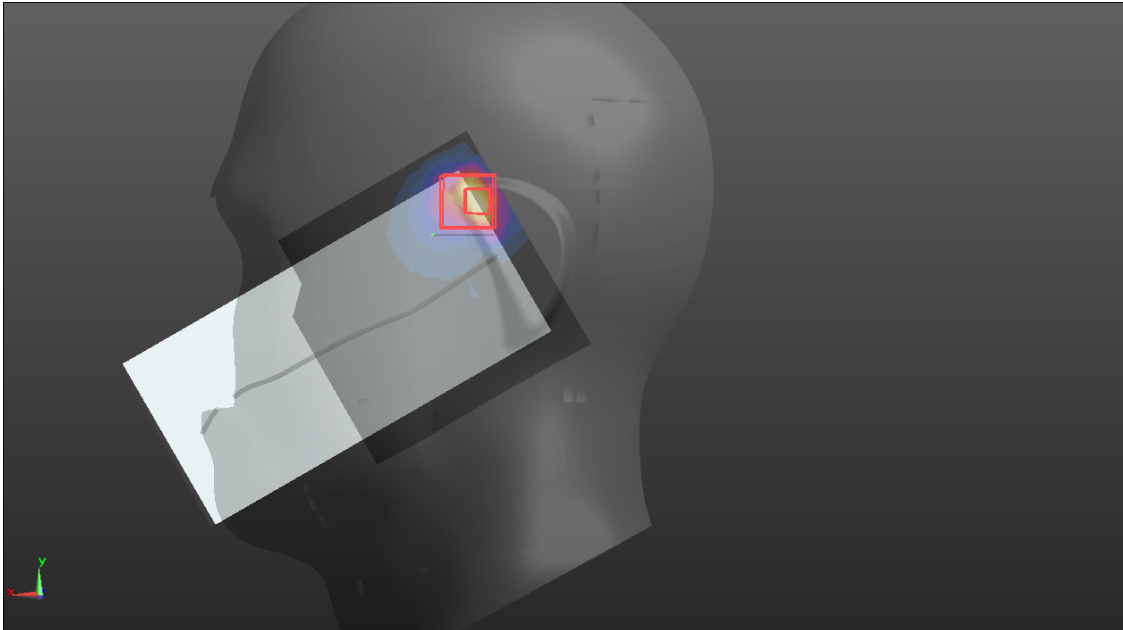
Phantom section: Flat Section

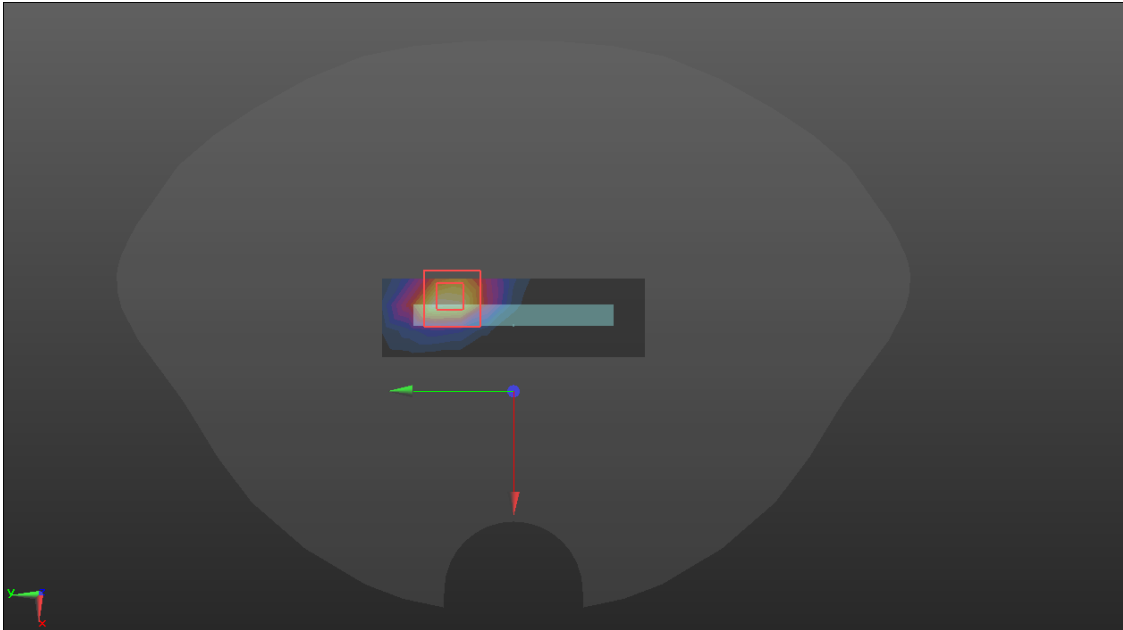
DASY5 Configuration:

- Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/9/1;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn720; Calibrated: 2020/9/30
 - Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- TOP/WIFI 2.4G/Area Scan (4x9x1):** Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.149 W/kg
- TOP/WIFI 2.4G/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.634 V/m; Power Drift = 0.38 dB
 Peak SAR (extrapolated) = 0.372 W/kg
SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.076 W/kg
 Maximum value of SAR (measured) = 0.229 W/kg

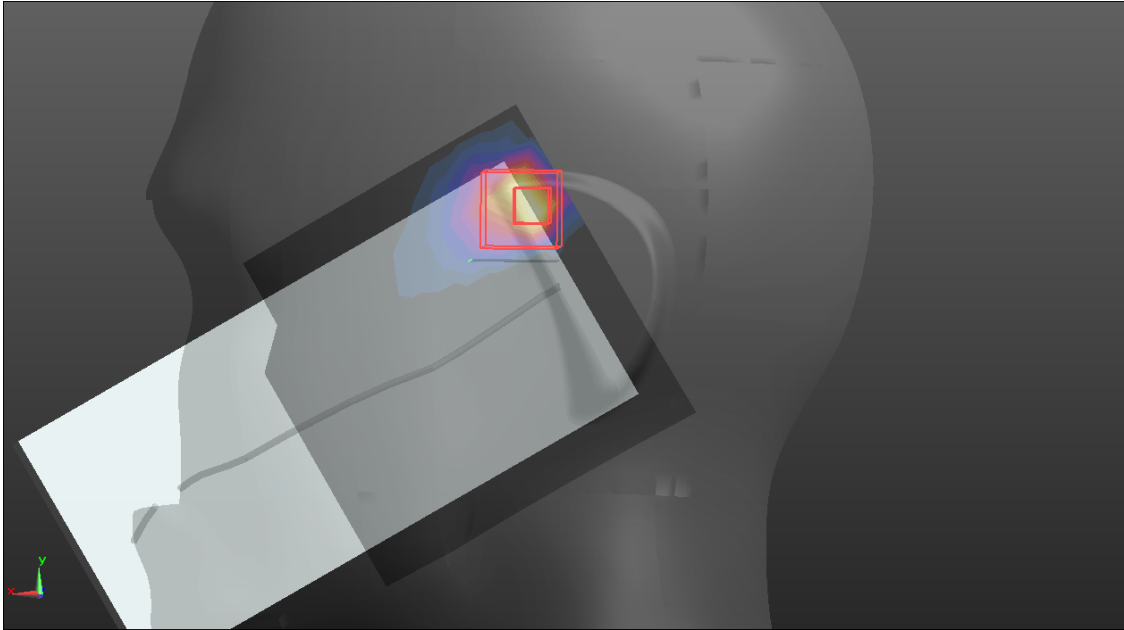


WIFI 5GHz UNII-1

Head	Left tilt
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5220 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): f = 5220 MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.98$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LT/WIFI 5.2G/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.18 W/kg</p> <p>LT/WIFI 5.2G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 0 V/m; Power Drift = 999.00 dB Peak SAR (extrapolated) = 1.52 W/kg SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.316 W/kg Maximum value of SAR (measured) = 1.25 W/kg</p> 	

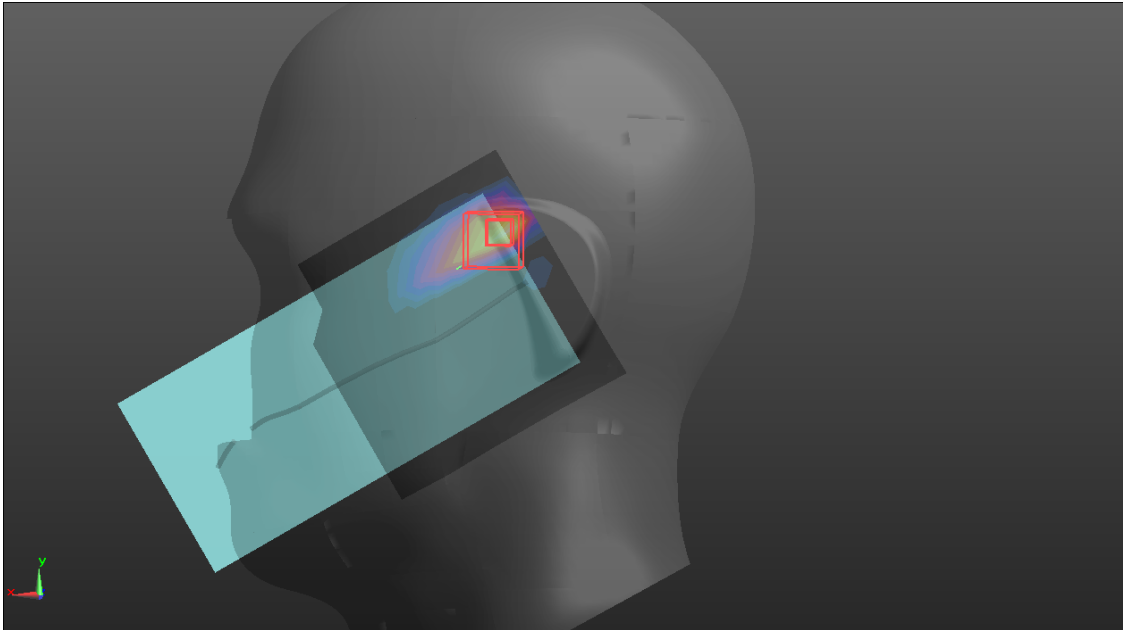
Body-worn	TOP
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5220 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.98$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>TOP/WIFI 5.2G/Area Scan (4x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.667 W/kg</p> <p>TOP/WIFI 5.2G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 1.554 V/m; Power Drift = -1.02 dB Peak SAR (extrapolated) = 0.914 W/kg SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.206 W/kg Maximum value of SAR (measured) = 0.761 W/kg</p> 	

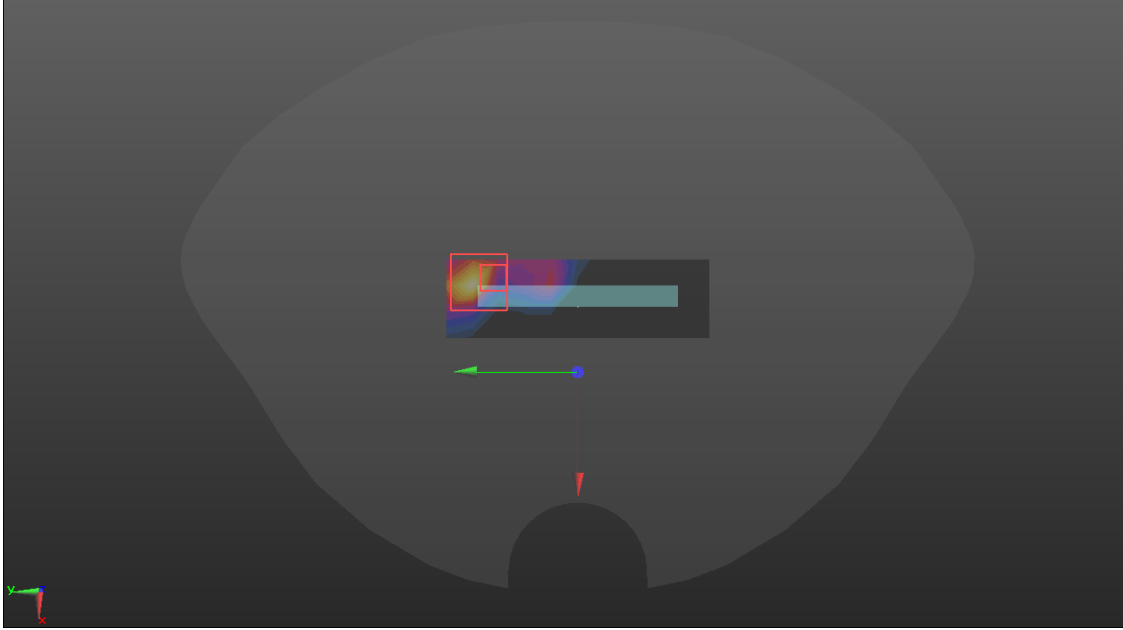
WIFI 5GHz UNII-2A

Head	Left cheek
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5280 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LT/WIFI 5.3G/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.12 W/kg LT/WIFI 5.3G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 1.487 V/m; Power Drift = 10.33 dB Peak SAR (extrapolated) = 1.58 W/kg SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.325 W/kg Maximum value of SAR (measured) = 1.31 W/kg</p> 	

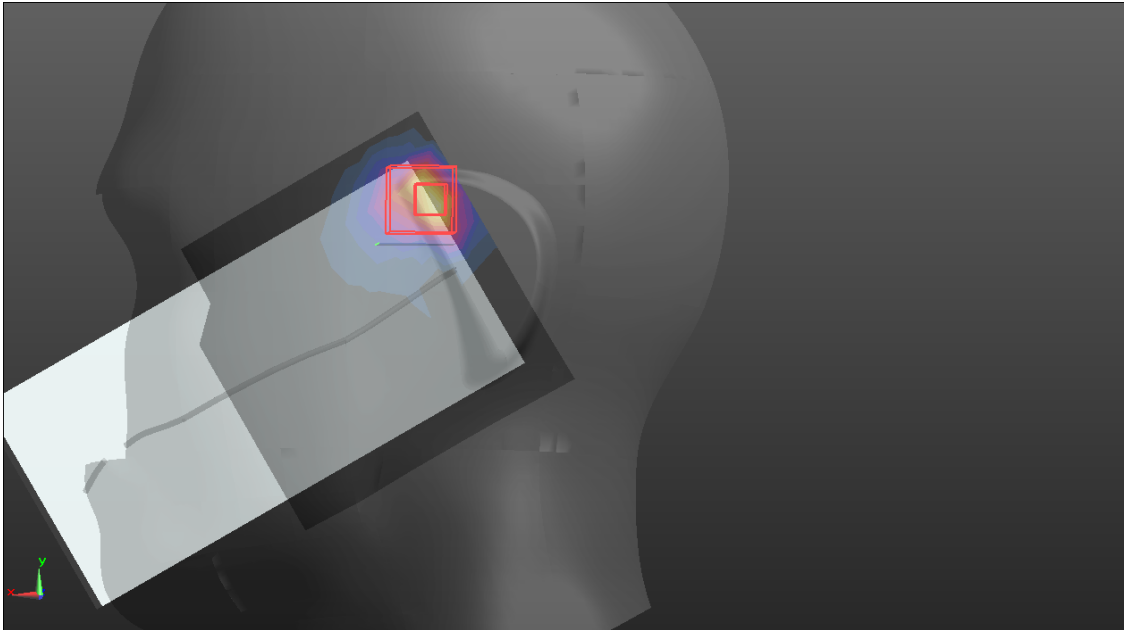
Body-worn	TOP
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5280 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>TOP/WIFI 5.3G/Area Scan (4x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.148 W/kg</p> <p>TOP/WIFI 5.3G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 0 V/m; Power Drift = 999.00 dB Peak SAR (extrapolated) = 0.882 W/kg SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.146 W/kg Maximum value of SAR (measured) = 0.772 W/kg</p> 	

WIFI 5GHz UNII-2C

Head	Left cheek
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5580 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.526$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2020/11/11 Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LC/WIFI 5.5G/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.27 W/kg</p> <p>LC/WIFI 5.5G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 5.551 V/m; Power Drift = 2.87 dB Peak SAR (extrapolated) = 1.61 W/kg SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.391 W/kg Maximum value of SAR (measured) = 1.32 W/kg</p> 	

Body-worn	TOP
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5580 MHz; Duty Cycle: 1:6.85962 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.526$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>TOP/WIFI 5.5G/Area Scan (4x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.267 W/kg TOP/WIFI 5.5G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 0 V/m; Power Drift = 999.00 dB Peak SAR (extrapolated) = 1.03 W/kg SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.158 W/kg Maximum value of SAR (measured) = 0.884 W/kg</p> 	

WIFI 5GHz UNII-3

Head	Left tilt
<p>Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.255 \text{ S/m}$; $\epsilon_r = 35.315$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>LT/WIFI 5.8G/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.43 W/kg</p> <p>LT/WIFI 5.8G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 3.599 V/m; Power Drift = 2.78 dB Peak SAR (extrapolated) = 1.84 W/kg SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.379 W/kg Maximum value of SAR (measured) = 1.50 W/kg</p> 	

Body-worn	TOP
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz;Duty Cycle: 1:6.85962 Medium parameters used (interpolated): f = 5785 MHz; $\sigma = 5.255$ S/m; $\epsilon_r = 35.315$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2020/11/11 • Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>TOP/WIFI 5.8G/Area Scan (6x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.348 W/kg</p> <p>TOP/WIFI 5.8G/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 0.6320 V/m; Power Drift = 4.61 dB Peak SAR (extrapolated) = 1.11 W/kg SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.242 W/kg Maximum value of SAR (measured) = 0.882 W/kg</p> 	