
TEST REPORT FOR BLUETOOTH TESTING

Report No.: SRTC2021-9004(F)-21110103(D)

Product Name: Mobile Phone

Product Model: HLTE235E

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense Communications Co., Ltd.

Specification: FCC Part 15 Subpart C (2020)

FCC ID: 2ADOBHLTE235E

The State Radio_monitoring_center Testing Center (SRTC)
15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

<u>1. GENERAL INFORMATION</u>	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant’s details	2
1.4 Manufacturer’s details.....	2
1.5 Test Environment.....	3
<u>2 DESCRIPTION OF THE DEVICE UNDER TEST</u>	4
2.1 Final Equipment Build Status.....	4
2.2 Description of Test Modes.....	7
2.2.1 Test Mode Applicability and Tested Channel Detail	7
2.3 Duty Cycle of Test Signal.....	9
2.4 EUT operating conditions.....	9
2.5 Support Equipment	9
<u>3 REFERENCE SPECIFICATION</u>	10
<u>4 KEY TO NOTES AND RESULT CODES</u>	10
<u>5 RESULT SUMMARY</u>	11
<u>6 TEST RESULT</u>	12
6.1 20dB Bandwidth.....	12
6.2 Channel Separation	13
6.3 Peak Transmitter Output Power	14
6.4 Dwell Time	15
6.5 Number of Hopping Frequencies.....	16
6.6 Conducted out of band emission measurement.....	17
6.7 Band-edge measurement	18
6.8 Spurious Radiated Emissions.....	19
6.9 AC Power line Conducted Emission	24
<u>7 MEASUREMENT UNCERTAINTIES</u>	25
<u>8 TEST EQUIPMENTS</u>	26
<u>APPENDIX A – TEST DATA OF CONDUCTED EMISSION</u>	27
<u>APPENDIX B – TEST DATA OF RADIATED EMISSION</u>	50

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Qingdao Economic& Technological Development Zone, Qingdao, China

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-11-01
Testing Start Date:	2021-11-03
Testing End Date:	2021-11-18

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	32

Normal Supply Voltage (V d.c.):	3.80
---------------------------------	------

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Duplex Mode:	TDD
Channel Spacing:	1MHz
Data Rate:	1Mbps, 2 Mbps, 3 Mbps
Power Supply:	Charger
Software Revision:	Hisense_HLTE235E_S03_01_01_MX05
Hardware Revision:	A563-MB-V1.2A
IMEI:	866850050002311
Antenna type:	Refer to Note1
Antenna connector:	Refer to Note1

Note: The equipments have two supplies, are different on the supplier of memory / battery / Camera. These differences don't affect RF performance

Main Supply

Part Name	Model	Supplier(Brand)	Description
FLASH	E64GDSAA2ABE00	SCY	Separate memory
FLASH	KM110SA1064GxA-AAA00WT	Kimtigo	
FLASH	E32GCYNB1ABE00	SCY	Separate memory
FLASH	RS512M32LZ4D4ANP-75BT	RAYSON	
Battery	LPN385450	Shenzhen Aerospace Electronic Co., Ltd.	
Front camera	LH-CFKS235-5MFF-V1	Union Image	GC5035
The rear main camera	H9B13-KS230BA	Hunan Kingcome Optoelectronic Co., Ltd	HI1336
Rear Camera2	LH-CFKS235-5MBF-V1	Union Image	GC5035
Rear Camera3	LH-CFKS235-2MBF-V2	Union Image	GC02M1

Secondary Supply

Part Name	Model Name	supplier	Remark
FLASH	RS512M32LZ4D4ANP-75BT	RAYSON	Separate memory
FLASH	D4A16G32D2V-DC	SCY	
FLASH	KM110SA1032GXA-AAA00WT	Kimtigo	Separate memory
FLASH	D4A16G32D2V-DC	SCY	
Battery	LPN385450	Shenzhen Powercome Electronics Co., Ltd.	
Front camera	BM15640 V0	Luzhou Imaging Technology Co., Ltd	GC5035
The rear main camera	BM1A365 V4	Luzhou Imaging Technology Co., Ltd	GC13053
Rear Camera2	BM15634 V2	Luzhou Imaging Technology Co., Ltd	GC5035
Rear Camera3	BC12635 V0	Luzhou Imaging Technology Co., Ltd	GC02M1

Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note1: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connecter Type
N/A	N/A	-0.32dBi	2.402GHz~2.480GHz	PIFA (FPC)	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

2.2 Description of Test Modes

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	16	2418	32	2434	48	2450	64	2466
1	2403	17	2419	33	2435	49	2451	65	2467
2	2404	18	2420	34	2436	50	2452	66	2468
3	2405	19	2421	35	2437	51	2453	67	2469
4	2406	20	2422	36	2438	52	2454	68	2470
5	2407	21	2423	37	2439	53	2455	69	2471
6	2408	22	2424	38	2440	54	2456	70	2472
7	2409	23	2425	39	2441	55	2457	71	2473
8	2410	24	2426	40	2442	56	2458	72	2474
9	2411	25	2427	41	2443	57	2459	73	2475
10	2412	26	2428	42	2444	58	2460	74	2476
11	2413	27	2429	43	2445	59	2461	75	2477
12	2414	28	2430	44	2446	60	2462	76	2478
13	2415	29	2431	45	2447	61	2463	77	2479
14	2416	30	2432	46	2448	62	2464	78	2480
15	2417	31	2433	47	2449	63	2465		

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
GFSK, π/4DQPSK, 8DPSK	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, π/4DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	0, 39, 78	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

2.3 Duty Cycle of Test Signal

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK(DH5)	92.30%	0.35
$\pi/4$ DQPSK(DH5)	91.90%	0.37
8DPSK(DH5)	91.70%	0.38

2.4 EUT operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:
N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules




4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	20dB Bandwidth	15.247(a)(1)(iii)	Pass
2	Channel Separation	15.247(a)(1)	Pass
3	Peak Transmitter Output Power	15.247(b)(1)	Pass
4	Dwell Time	15.247(a)(1)(iii)	Pass
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
6	Conducted out of band emission measurement	15.247(d)	Pass
7	Band-edge	15.247(d)	Pass
8	Spurious Radiated Emissions	15.205/15.209	Pass
9	AC Power line Conducted Emission	15.207	Pass
10	Antenna requirement	15.203	Pass(refer to section 2.1)

Note: The device is designed according to specifications of SIG, So it has a full support to Medium access protocol and fully compliant with the KDB558074 standard. The device is compliant Pseudorandom hopping, Equal hopping frequency, receiver bandwidth synchronize and have same bandwidth with transmitted signal. And the ability to have adaptive hopping when encountering other signals.

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Wang Hao 	Issued date: 20211119

6 TEST RESULT

6.1 20dB Bandwidth

6.1.1 Test limit

FCC Part15.247 (a.1.iii)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.


6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

6.1.3 Test settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

6.1.4 Test Setup

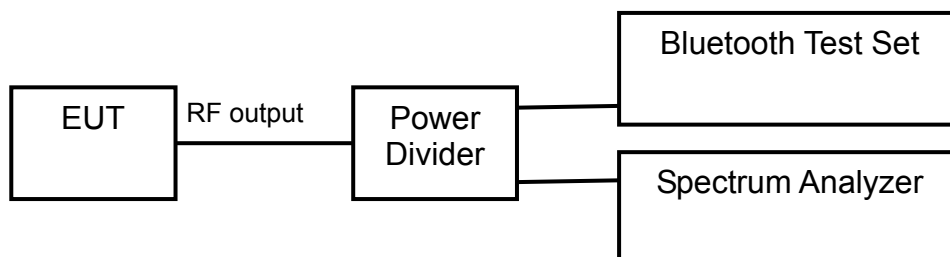

6.1.5 Test result

The test results are shown in Appendix A.

6.2 Channel Separation

6.2.1 Test limit

FCC Part15.247 (a) (1)

Measurement is made with EUT operating in hopping mode. The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

6.2.3 Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW \geq RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

6.2.4 Test Setup

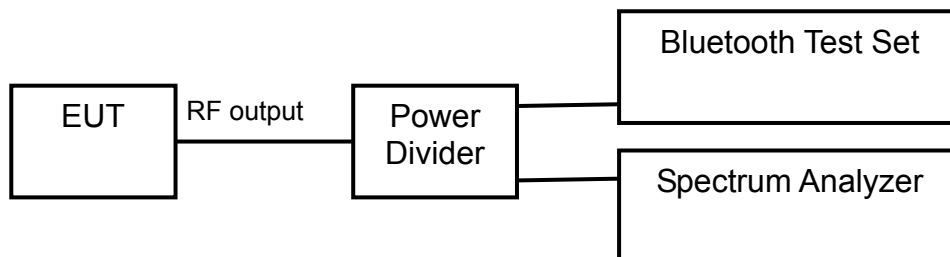

6.2.5 Test result

The test results are shown in Appendix A.

6.3 Peak Transmitter Output Power

6.3.1 Test limit

FCC Part 15.247(b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band:1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30.0dBm	30.0dBm	30.0dBm

For all other frequency hopping systems in the 2400-2483.5 MHz band:0.125 watts.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	21.0dBm	21.0dBm	21.0dBm

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

6.3.3 Test Settings


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.3.4 Test Setup

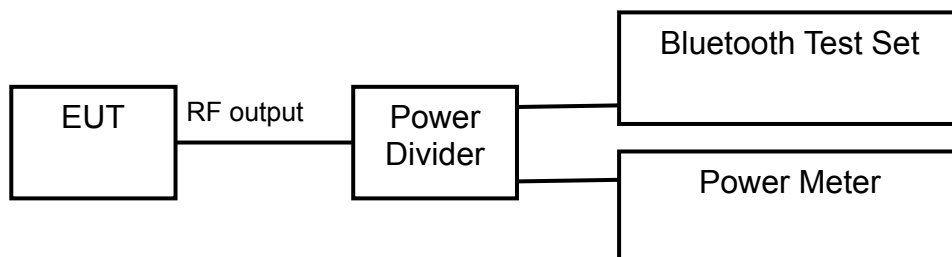

6.3.5 Test result

The test results are shown in Appendix A.

6.4 Dwell Time

6.4.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels with:

- hop rate=1600/2 * 1/s for DH1 packets =800
- hop rate=1600/4 * 1/s for DH3 packets =400
- hop rate=1600/6 * 1/s for DH5 packets =266.67
- Number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s * 79

6.4.2 Test limit

FCC Part 15.247(a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.4.3 Test Settings

ANSI C63.10-2013 Section 7.8.4

1. Span = zero span, centered on a hopping channel
2. RBW \leq channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

6.4.4 Test Setup

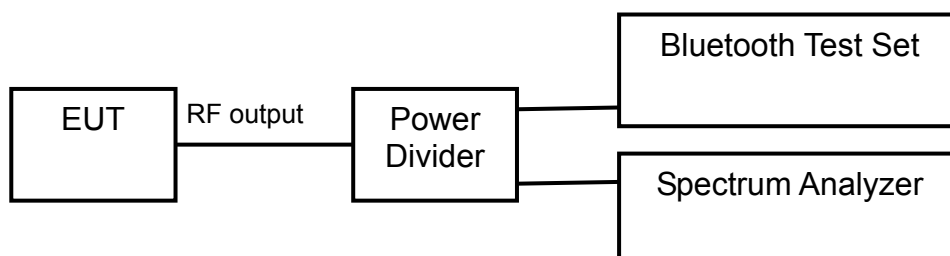

6.4.5 Test result

The test results are shown in Appendix A.

6.5 Number of Hopping Frequencies

6.5.1 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

6.5.2 Test limit

FCC Part15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.5.3 Test Settings

ANSI C63.10-2013 Section 7.8.3

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW \geq RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.5.4 Test Setup

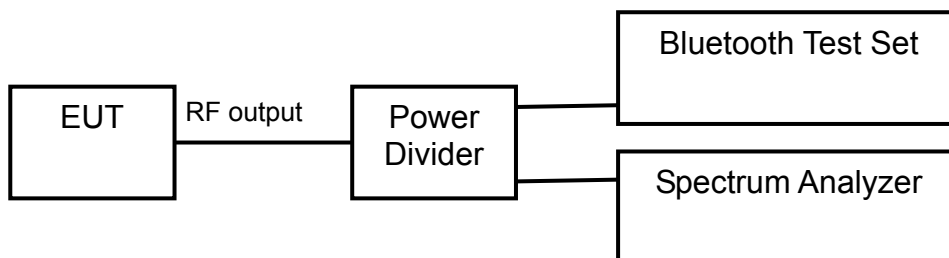

6.5.5 Test result

The test results are shown in Appendix A.

6.6 Conducted out of band emission measurement

6.6.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.6.2 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

6.6.3 Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 26GHz
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.6.4 Test Setup

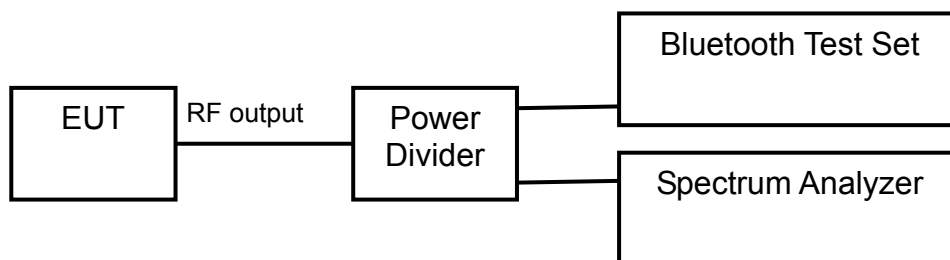

6.6.5 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.7 Band-edge measurement

6.7.1 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.7.2 Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

6.7.3 Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100 kHz
4. VBW = 300 kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

6.7.4 Test Setup

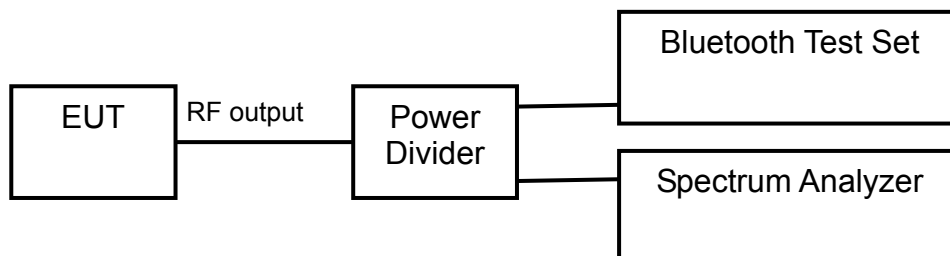

6.7.6 Test result

The test results are shown in Appendix A.

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.8 Spurious Radiated Emissions

6.8.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.8.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device.

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.8.3 Test Procedure Used

KDB 558074 D01 v05r02 – Section 12.2.7

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.8.4 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
< 1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.5 Test Setup


For Radiated emission below 30MHz

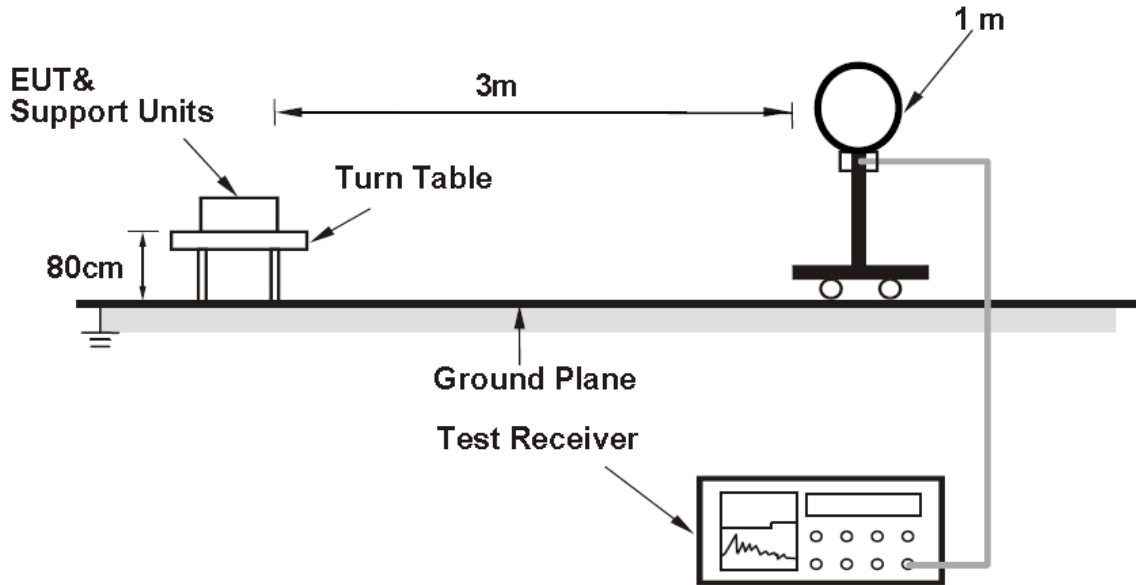

For Radiated emission 30MHz to 1GHz

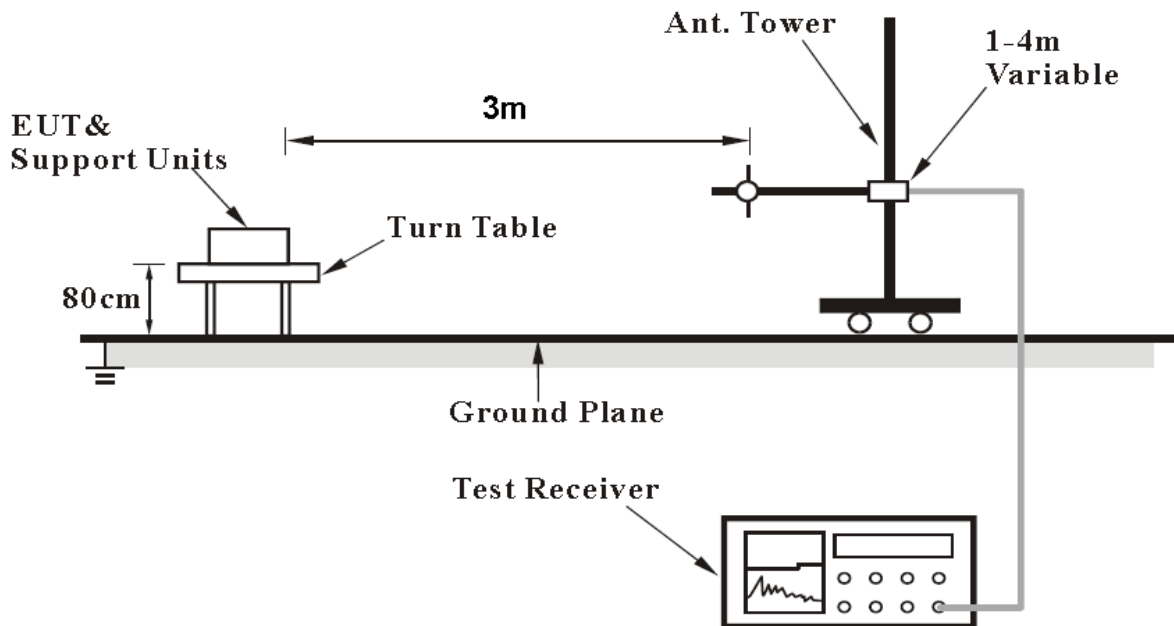

For Radiated emission above 1GHz

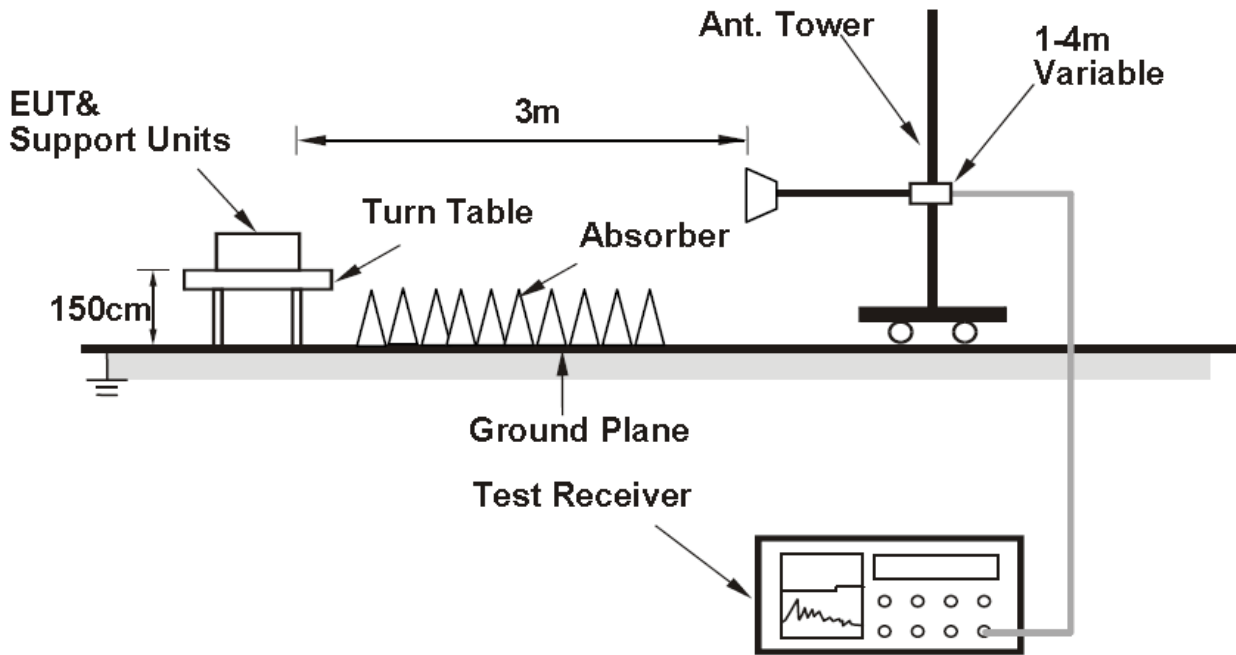

6.8.6 Test result

The test results are shown in Appendix B.

6.9 AC Power line Conducted Emission

6.9.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.9.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.9.3 Test Setup

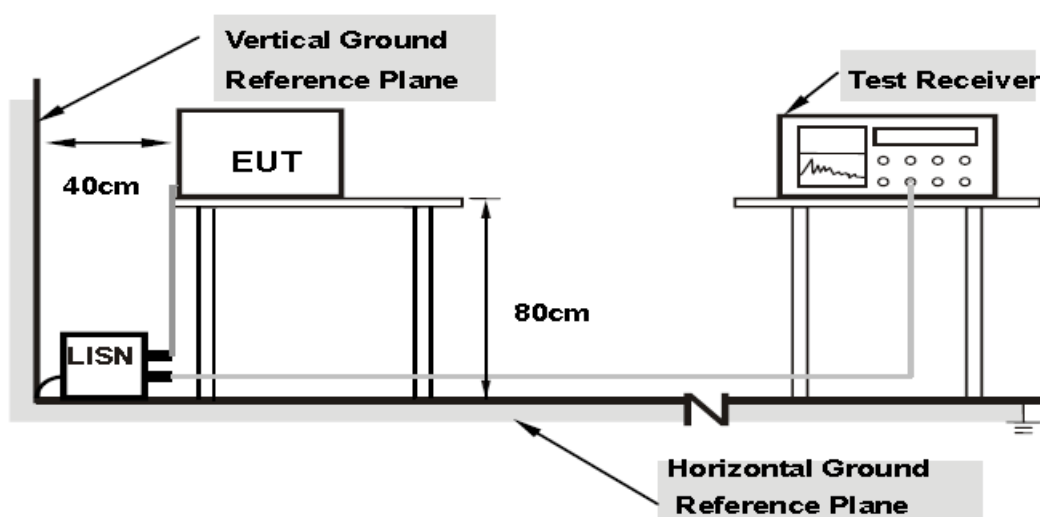

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.4 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2021.06.21	2022.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2021.06.21	2022.06.20
4.	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
5.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
6.	Power Sensor E9323A	Agilent	MY52150008	2021.04.13	2022.04.12
7.	Signal Generator / SMBV100A	R&S	260910	2021.06.21	2022.06.20
8.	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
18.	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2021.06.21	2022.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2021.06.21	2022.06.20
22.	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2021.06.21	2022.06.20
24.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 1.2dB = Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

BT

1 Duty Cycle and Antenna Gain

Modulation Type	Frequency (MHz)	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK(DH5)	2402	92.30%	0.35	-0.32
$\pi/4$ DQPSK(2DH5)	2402	91.90%	0.37	-0.32
8DPSK(3DH5)	2402	91.70%	0.38	-0.32

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK	6.94	6.87	5.72
$\pi/4$ DQPSK	7.70	7.69	7.04
8DPSK	7.96	7.98	7.16

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK	5.58	5.53	4.42
$\pi/4$ DQPSK	4.04	3.91	3.61
8DPSK	3.98	3.88	3.57

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK	6.62	6.55	5.40
$\pi/4$ DQPSK	7.38	7.37	6.72
8DPSK	7.64	7.66	6.84

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK	5.26	5.21	4.10
$\pi/4$ DQPSK	3.72	3.59	3.29
8DPSK	3.66	3.56	3.25


EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)

3 Occupied Bandwidth
20dB Bandwidth
Modulation type:GFSK

Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	950.2
2441	941.6
2480	950.5



Modulation: GFSK 2402MHz

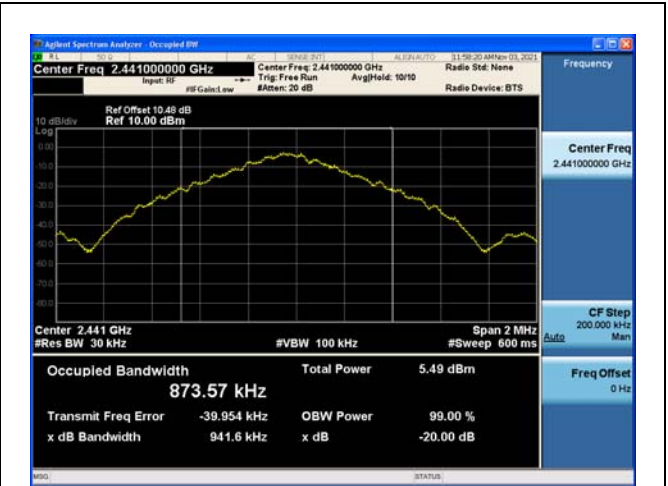

Modulation: GFSK 2441MHz




Modulation: GFSK 2480MHz

Modulation type: $\pi/4$ DQPSK


Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1346.6
2441	1344.3
2480	1347.0



Modulation: $\pi/4$ DQPSK 2402MHz

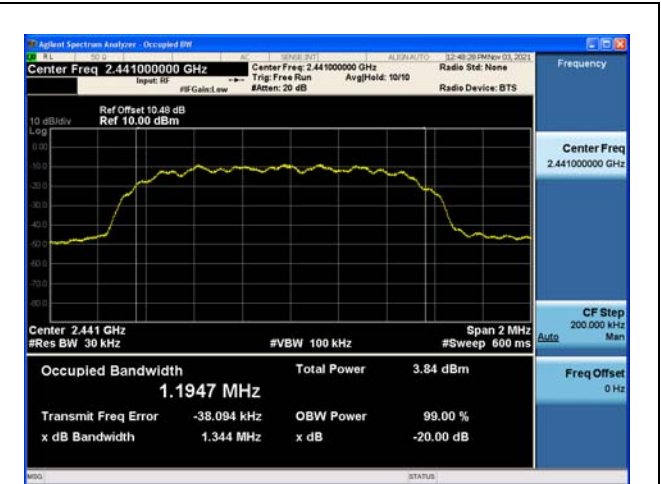


Modulation: $\pi/4$ DQPSK 2441MHz

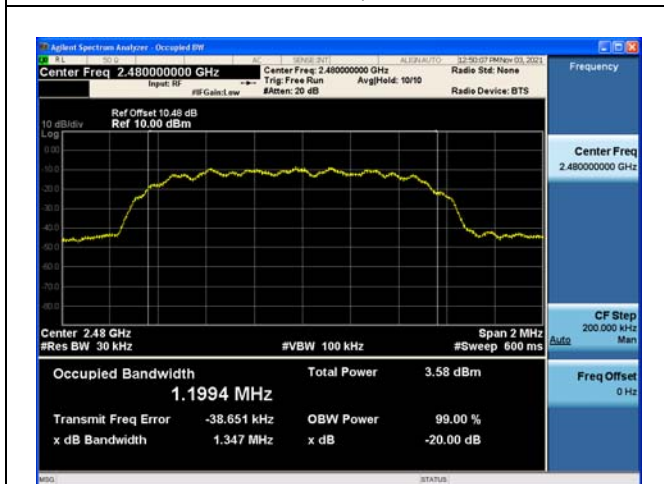

Modulation: $\pi/4$ DQPSK 2480MHz

Modulation type: 8DPSK


Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1352.1
2441	1335.4
2480	1344.1

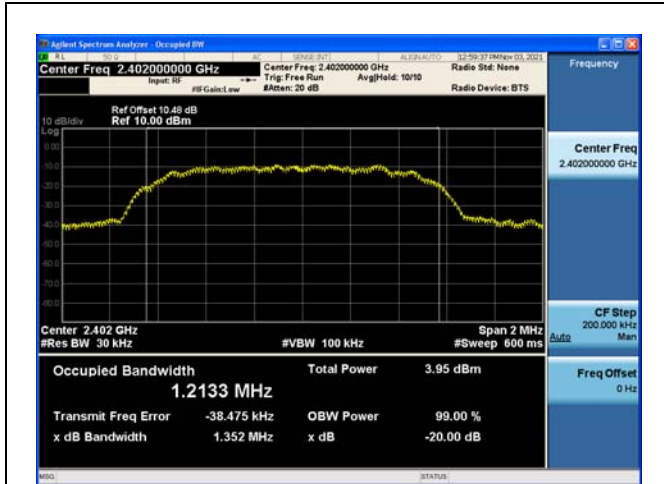

Modulation: 8DPSK 2402MHz



Modulation: 8DPSK 2441MHz

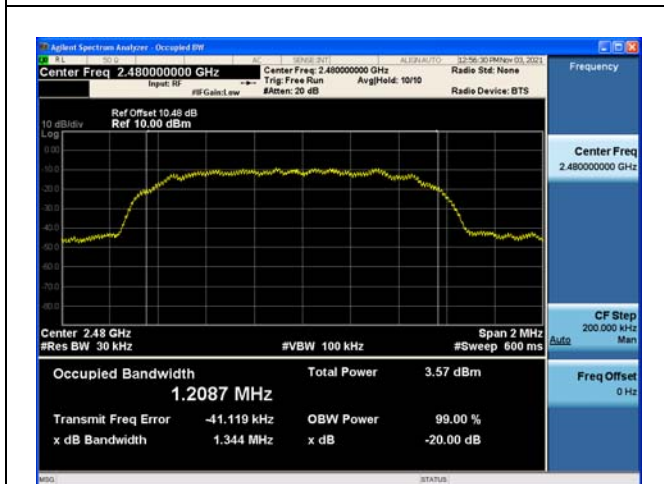


Modulation: 8DPSK 2480MHz

99% Bandwidth
Modulation type:GFSK

Carrier frequency (MHz)	99% Bandwidth(kHz)
2402	874.3
2441	873.6
2480	873.2



Modulation: GFSK 2402MHz

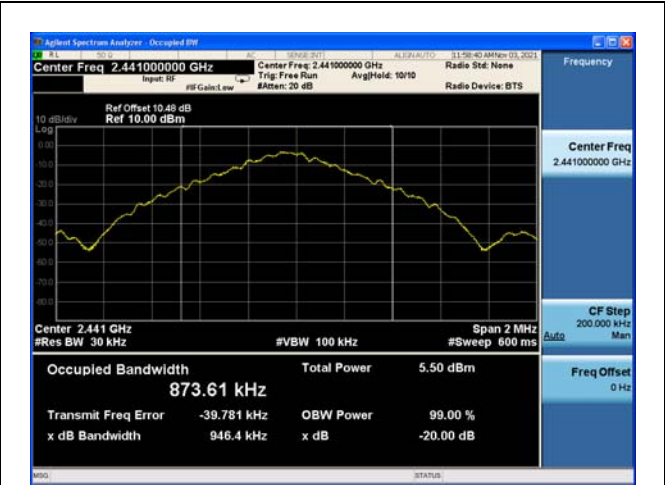

Modulation: GFSK 2441MHz




Modulation: GFSK 2480MHz

Modulation type: $\pi/4$ DQPSK


Carrier frequency (MHz)	99% Bandwidth(kHz)
2402	1207.9
2441	1195.1
2480	1199.2



Modulation: $\pi/4$ DQPSK 2402MHz

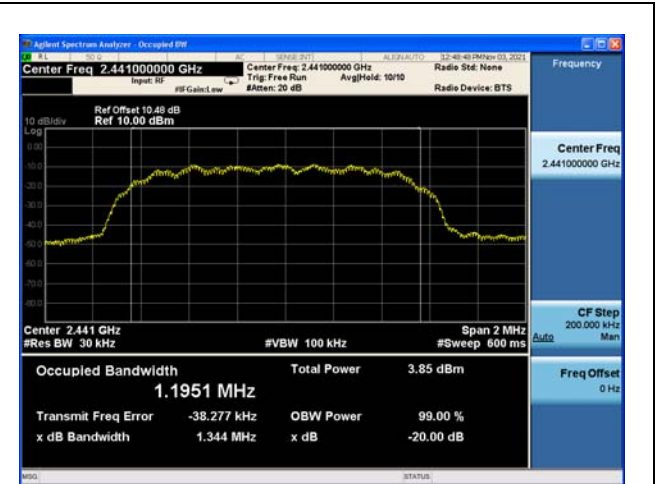

Modulation: $\pi/4$ DQPSK 2441MHz

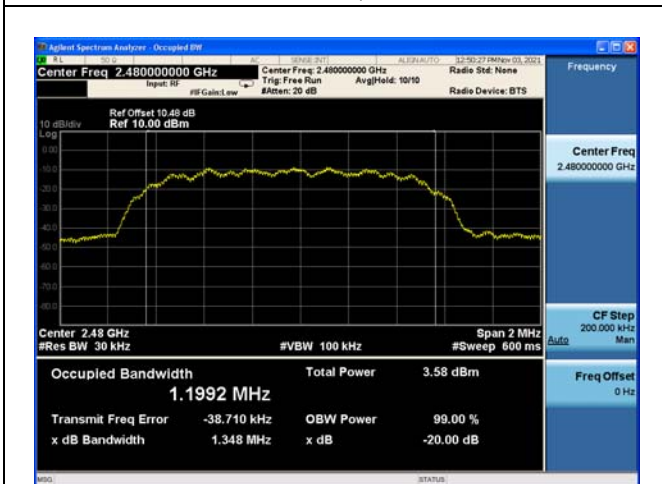

Modulation: $\pi/4$ DQPSK 2480MHz

Modulation type: 8DPSK


Carrier frequency (MHz)	99% Bandwidth(kHz)
2402	1213.1
2441	1203.2
2480	1208.4



Modulation: 8DPSK 2402MHz



Modulation: 8DPSK 2441MHz

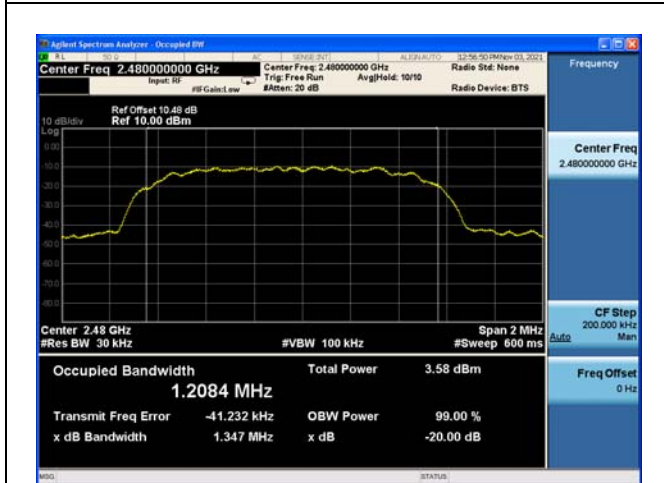

Modulation: 8DPSK 2480MHz


4 Hopping Frequency Separation
Modulation type:GFSK
Channel separation

Op-mode	Channel separation (MHz)																																																																																																								
Hopping mode	1																																																																																																								
<table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 000 GHz</td> <td></td> <td></td> <td>6.406 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 000 GHz</td> <td></td> <td></td> <td>6.403 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.442 000 GHz</td> <td></td> <td></td> <td>6.996 dBm</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>12</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		MARK	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 000 GHz			6.406 dBm	2	N	1	f	2.441 000 GHz			6.403 dBm	3	N	1	f	2.442 000 GHz			6.996 dBm	4								5								6								7								8								9								10								11								12							
MARK	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																		
1	N	1	f	2.440 000 GHz			6.406 dBm																																																																																																		
2	N	1	f	2.441 000 GHz			6.403 dBm																																																																																																		
3	N	1	f	2.442 000 GHz			6.996 dBm																																																																																																		
4																																																																																																									
5																																																																																																									
6																																																																																																									
7																																																																																																									
8																																																																																																									
9																																																																																																									
10																																																																																																									
11																																																																																																									
12																																																																																																									


Number of Hopping Frequencies

Op-mode	Result
Hopping mode	79


Modulation type: $\pi/4$ DQPSK
Channel separation

Op-mode	Channel separation (MHz)																																				
Hopping mode	1																																				
 <table border="1" data-bbox="502 712 1002 851"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION VALUE</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 000 GHz</td> <td>5.401 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 000 GHz</td> <td>4.298 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.442 000 GHz</td> <td>5.371 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION VALUE	FUNCTION VALUE	1	N	1	f	2.440 000 GHz	5.401 dBm				2	N	1	f	2.441 000 GHz	4.298 dBm				3	N	1	f	2.442 000 GHz	5.371 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION VALUE	FUNCTION VALUE																													
1	N	1	f	2.440 000 GHz	5.401 dBm																																
2	N	1	f	2.441 000 GHz	4.298 dBm																																
3	N	1	f	2.442 000 GHz	5.371 dBm																																

Number of Hopping Frequencies

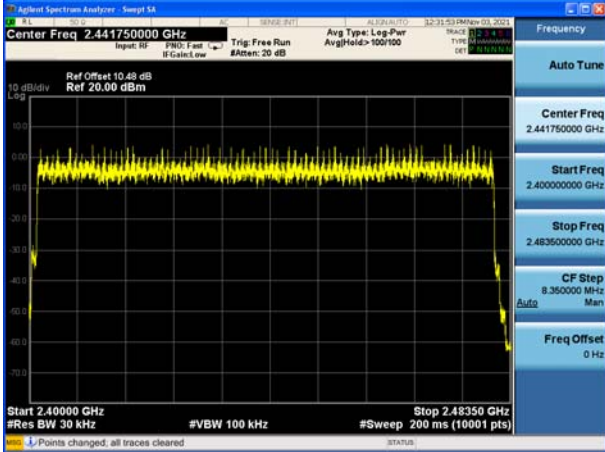Op-mode	Result
Hopping mode	79
	

Modulation type: 8DPSK
Channel separation


Op-mode	Channel separation (MHz)
Hopping mode	1
	

Number of Hopping Frequencies


Op-mode	Result
Hopping mode	79
<p>The screenshot displays the Agilent Spectrum Analyzer interface. The main plot shows a signal hopping between approximately 2.44 GHz and 2.48 GHz. The interface includes the following parameters:</p> <ul style="list-style-type: none"> Center Freq: 2.441750000 GHz Start Freq: 2.400000000 GHz Stop Freq: 2.483500000 GHz CF Step: 9.350000 MHz Ref Offset: 10.48 dB Ref: 20.00 dBm Start: 2.40000 GHz Stop: 2.48350 GHz #Res BW: 30 kHz #VBW: 100 kHz #Sweep: 200 ms (10001 pts) 	

5 Dwell Time
Modulation type:GFSK


Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
DH1	388	Time slot length *31.6*16000/2/79	124.2
DH3	1600	Time slot length *31.6*16000/4/79	256.0
DH5	2860	Time slot length *31.6*16000/6/79	305.1

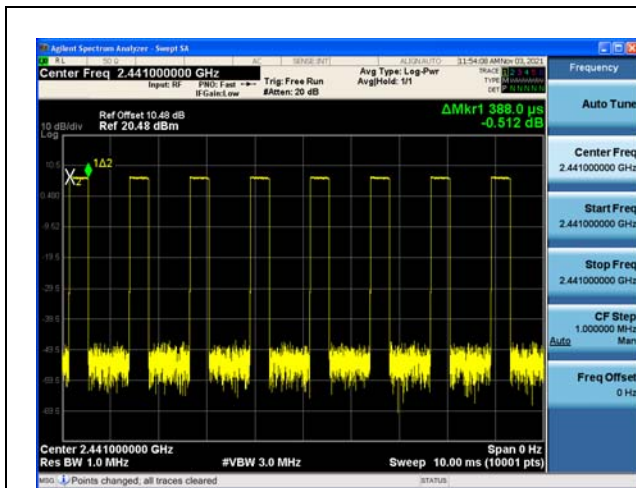

Modulation: GFSK DH1 2441MHz

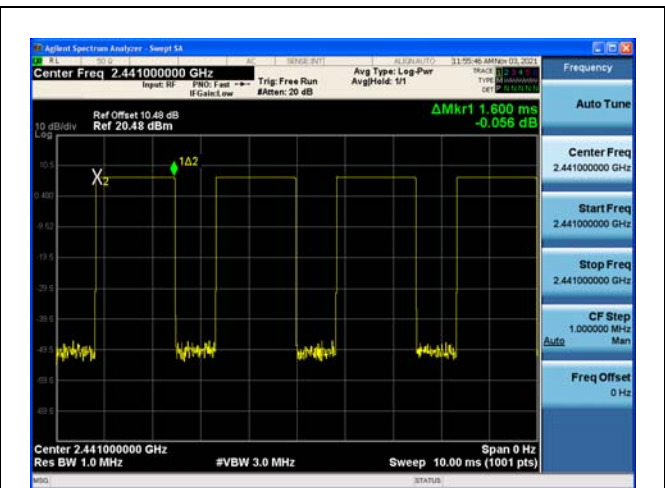


Modulation: GFSK DH3 2441MHz

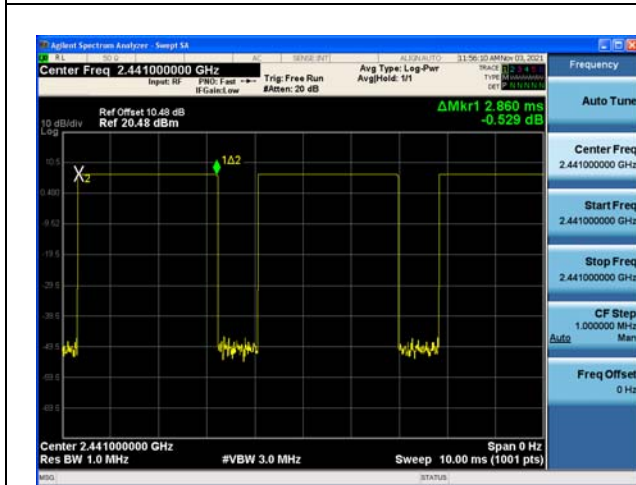


Modulation: GFSK DH5 2441MHz

Modulation type: $\pi/4$ DQPSK

Packet type	Time slot length(μ s)	Dwell time	Dwell time(ms)
2DH1	381	Time slot length $*31.6*16000/2/79$	121.9
2DH3	1590	Time slot length $*31.6*16000/4/79$	254.4
2DH5	2840	Time slot length $*31.6*16000/6/79$	302.9

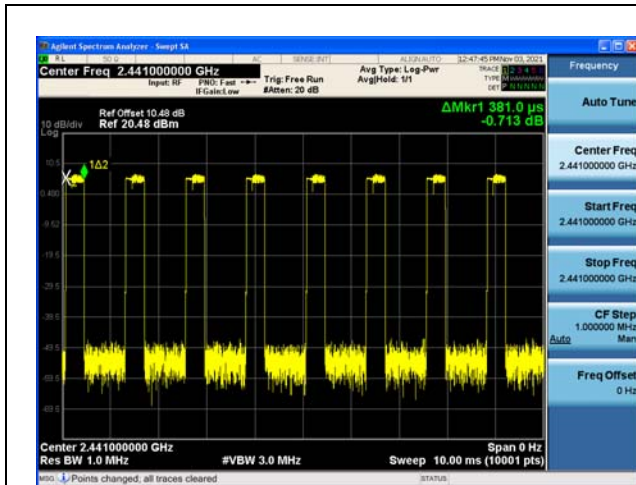

Modulation: $\pi/4$ DQPSK 2DH1 2441MHz

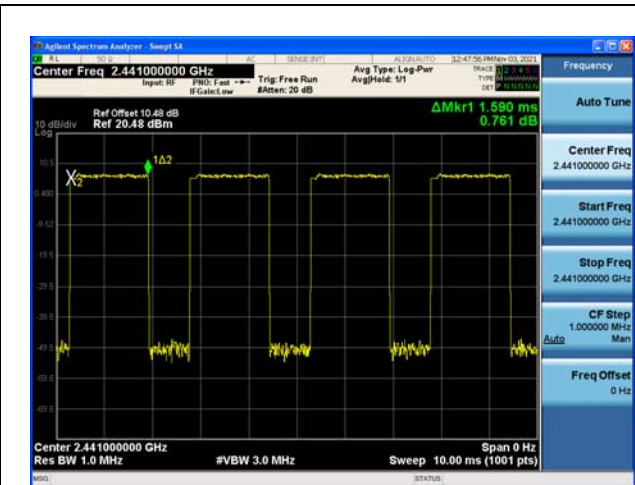


Modulation: $\pi/4$ DQPSK 2DH3 2441MHz




Modulation: $\pi/4$ DQPSK 2DH5 2441MHz

Modulation type: 8DPSK


Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
3DH1	350	Time slot length *31.6*16000/2/79	112.0
3DH3	1590	Time slot length *31.6*16000/4/79	254.4
3DH5	2850	Time slot length *31.6*16000/6/79	304.0

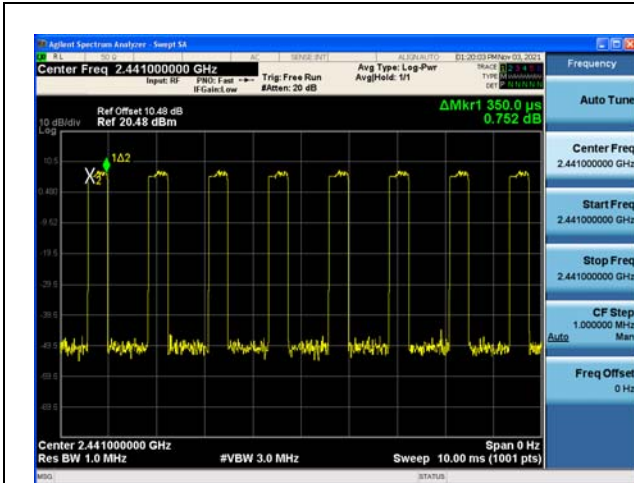

Modulation: 8DPSK 3DH1 2441MHz

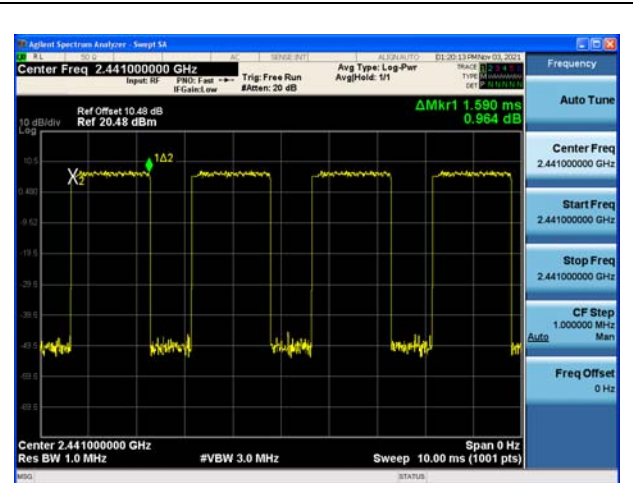


Modulation: 8DPSK 3DH3 2441MHz

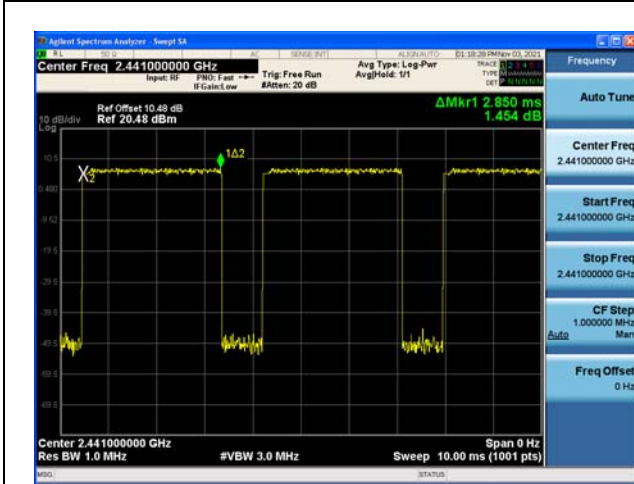


Modulation: 8DPSK 3DH5 2441MHz


6 Conducted Out of band emission measurement
Modulation type:GFSK

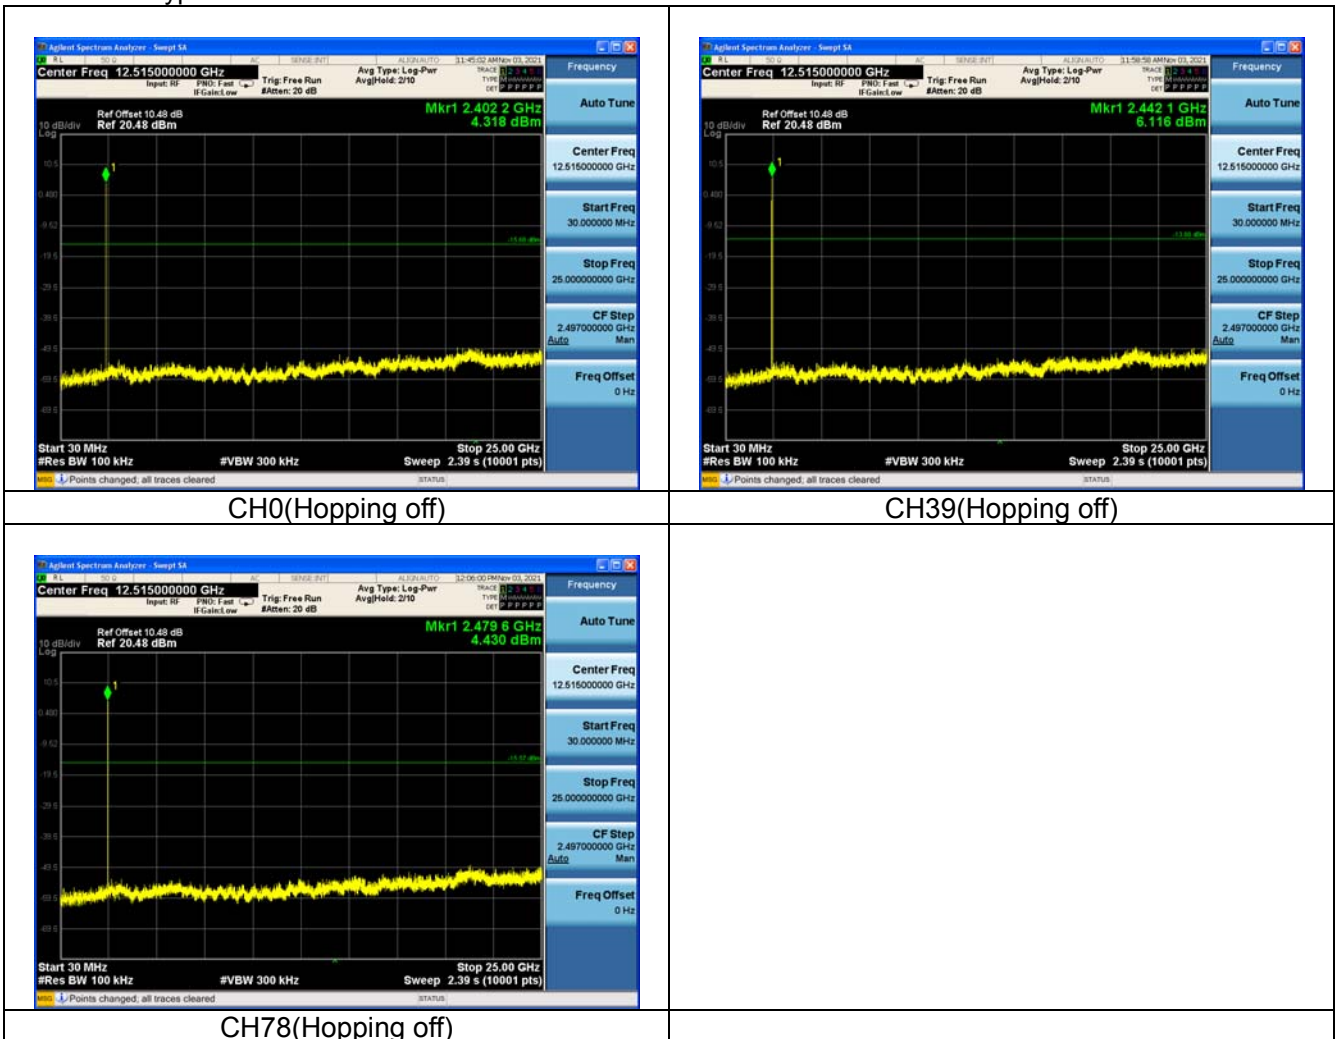

Modulation type: $\pi/4$ DQPSK

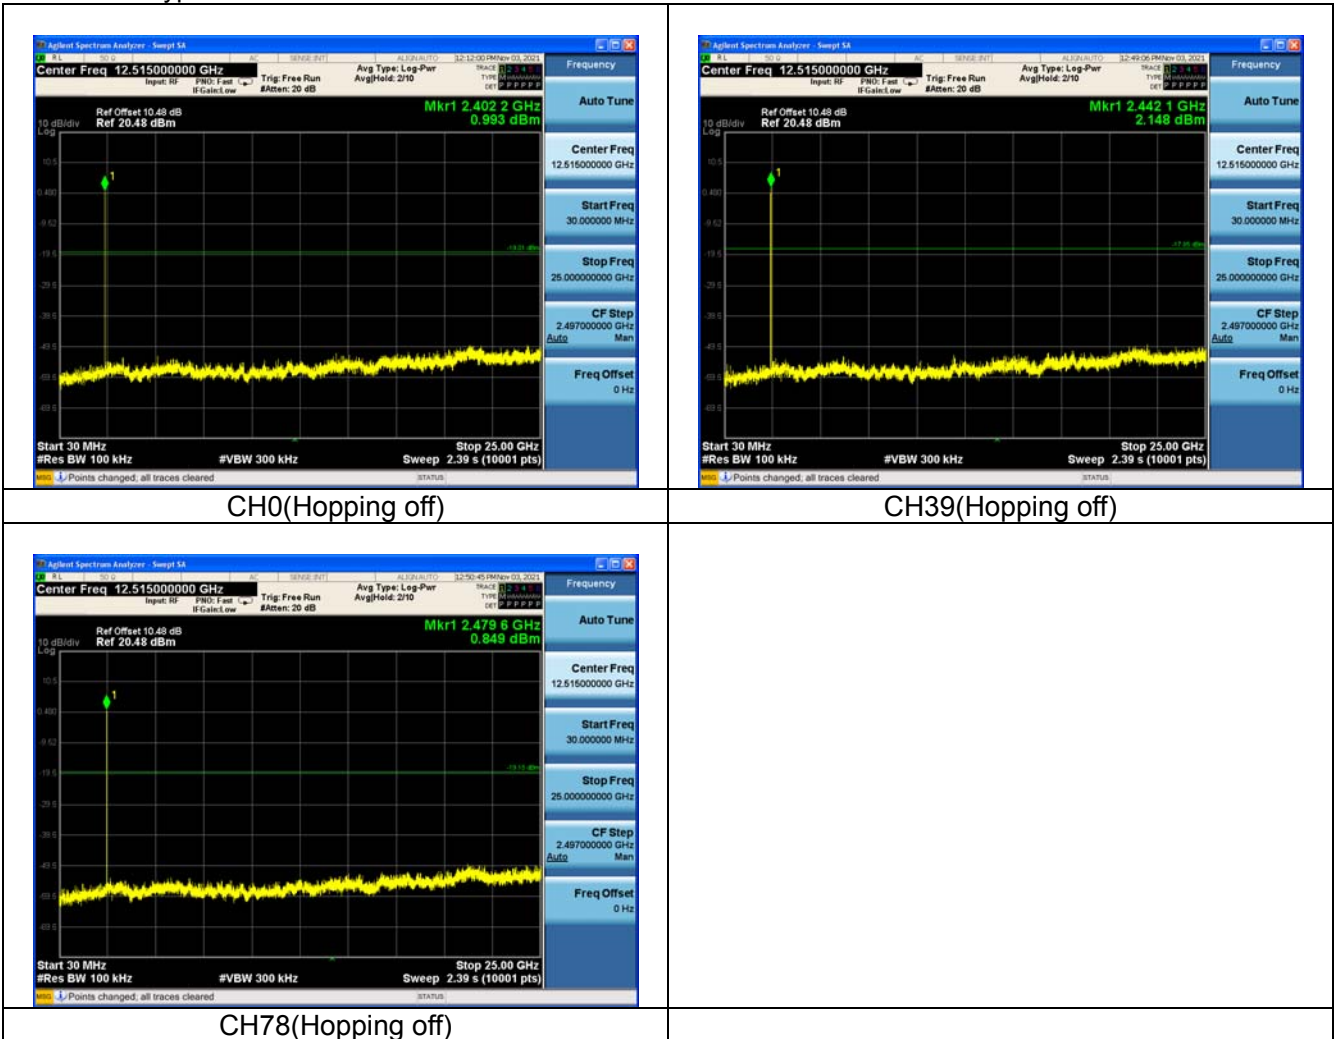


Modulation type: 8DPSK

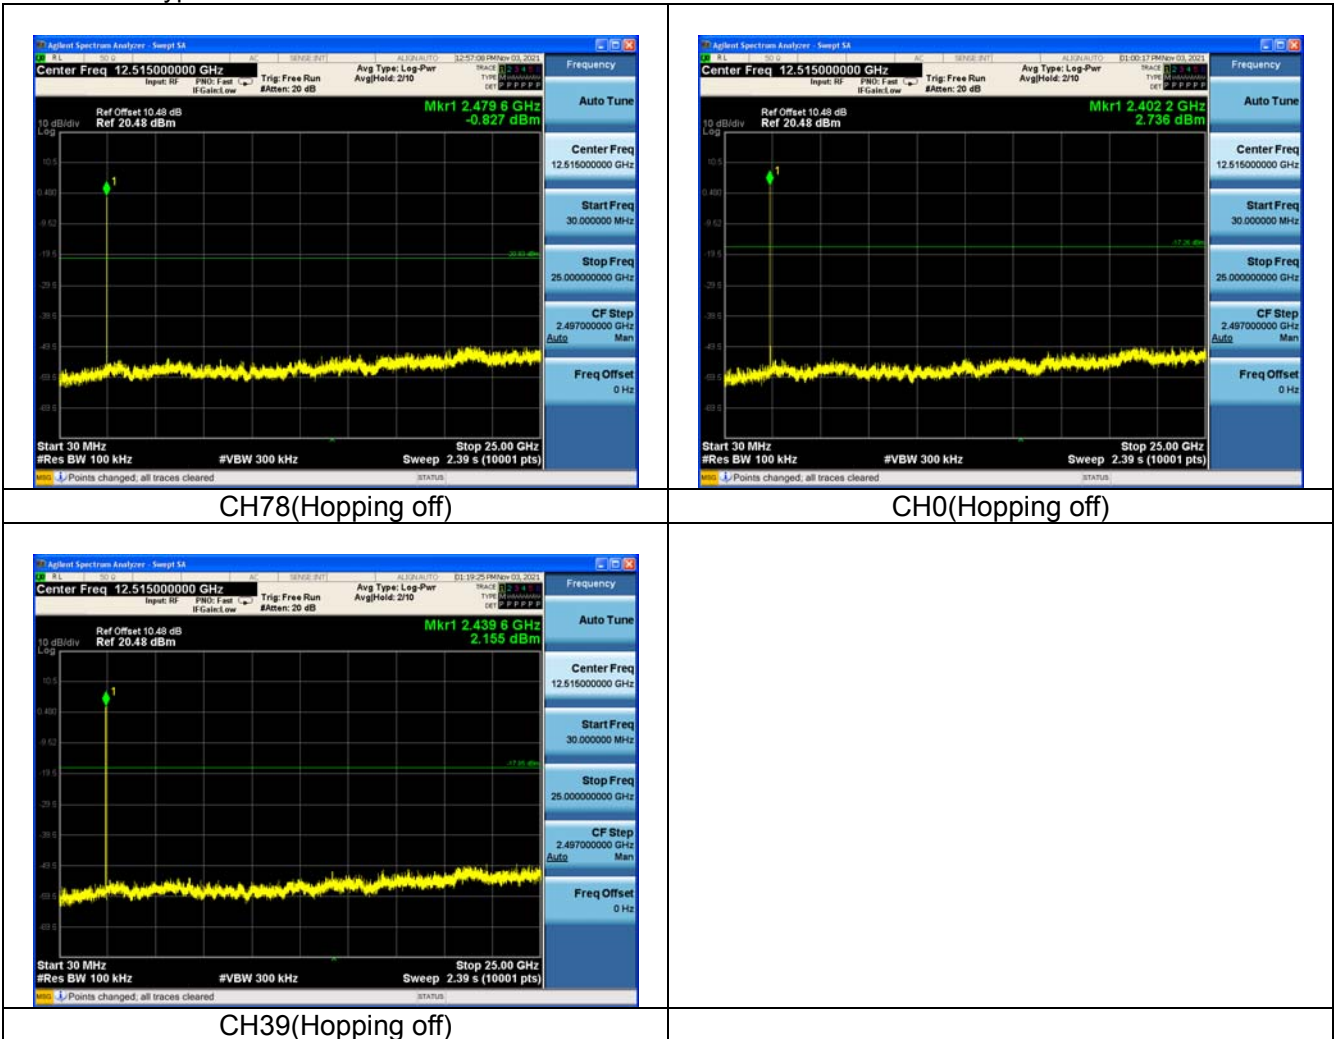


7 Band Edge measurement
Modulation type:GFSK



Modulation type: $\pi/4$ DQPSK

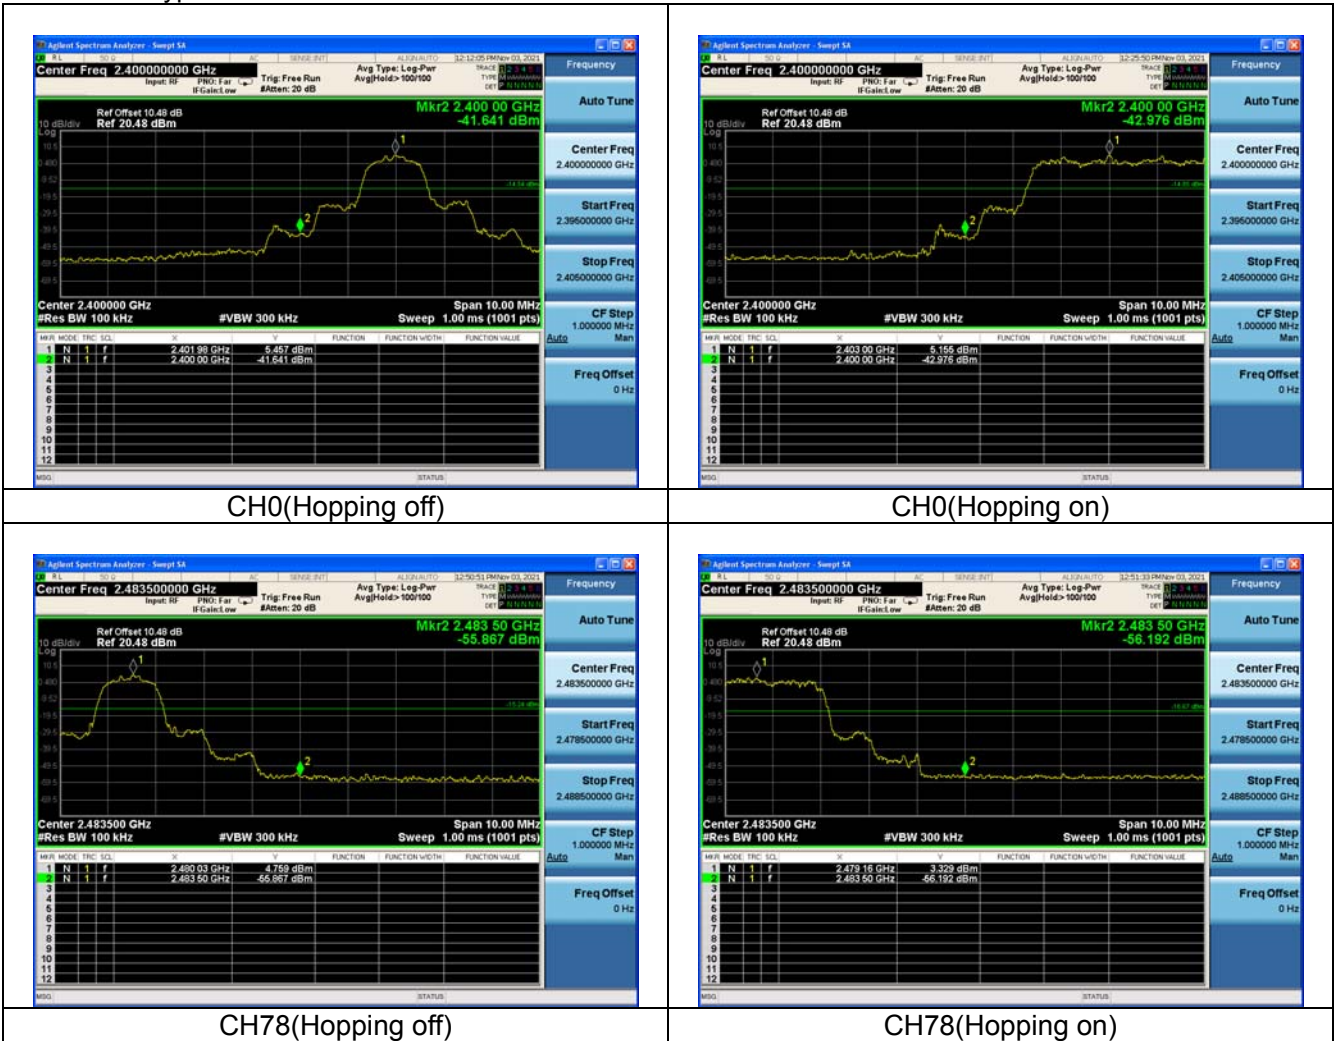

Modulation type: 8DPSK

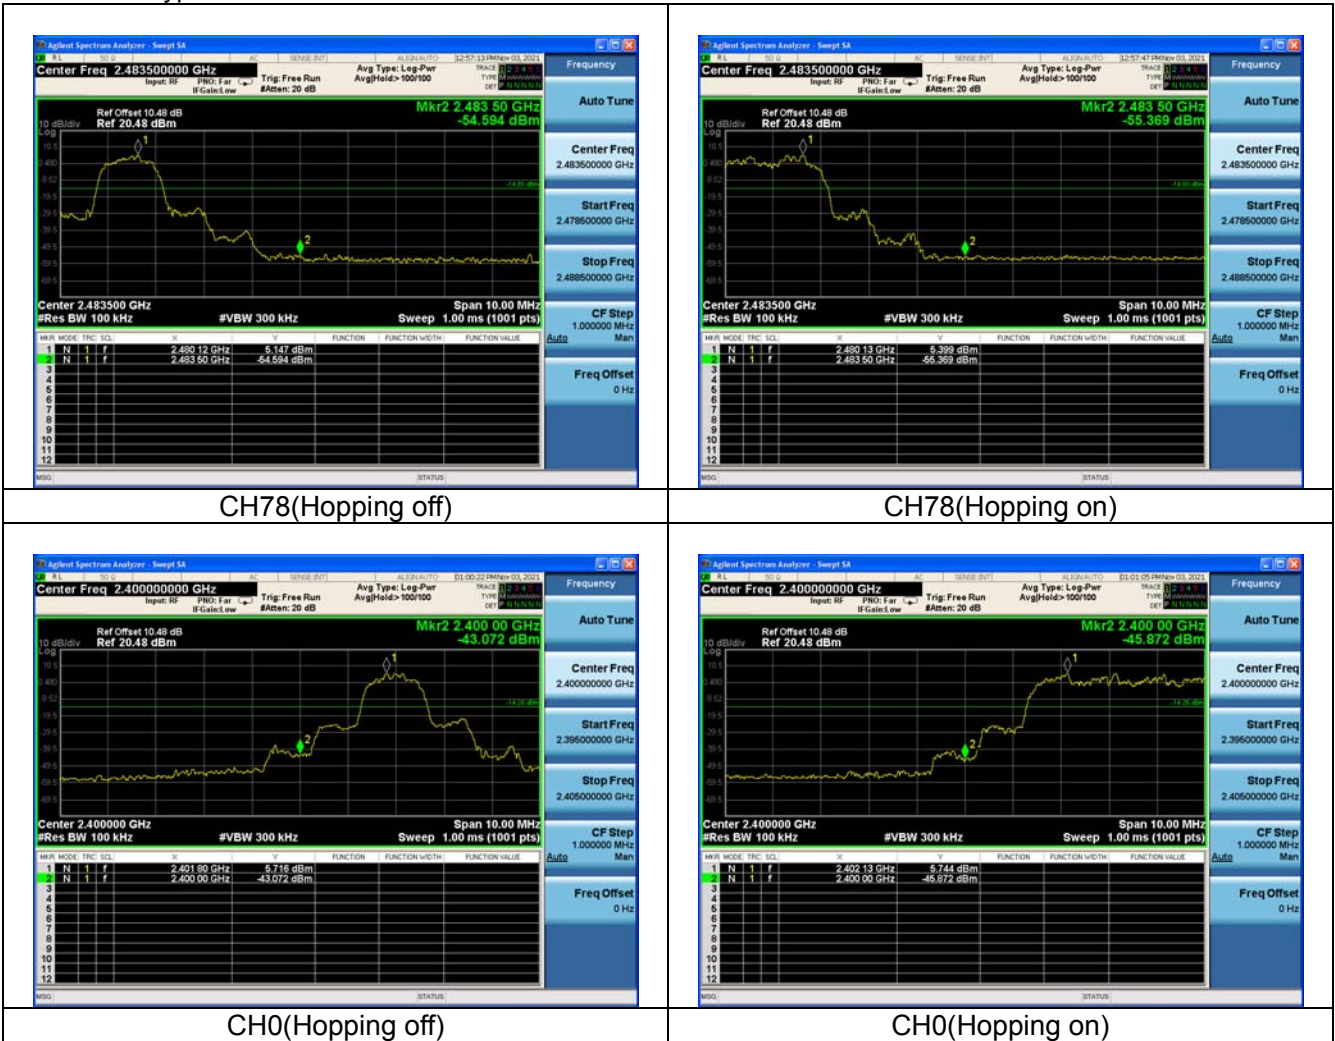

Secondary Supply

1 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)	
	2440MHz	
8DPSK	7.36	

Modulation type	Conducted Average Power(dBm)	
	2440MHz	
8DPSK	3.12	

EIRP

Modulation type	Peak EIRP(dBm)	
	2440MHz	
8DPSK	7.04	

Modulation type	Average EIRP(dBm)	
	2440MHz	
8DPSK	2.80	

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The worst case attitude: The mobile lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (70.54 dBuV/m) = (36.54 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2402MHz.

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	70.54	36.54	N/A	N/A	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	83.73	49.73	N/A	N/A	8.90	25.10
2	2390	29.24	-4.76	-44.76	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	81.62	47.62	N/A	N/A	8.90	25.10
2	2390	29.44	-4.56	-44.56	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	81.97	47.97	N/A	N/A	8.90	25.10
2	2390	23.73	-10.27	-30.27	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	79.31	45.31	N/A	N/A	8.90	25.10
2	2390	24.02	-9.98	-29.98	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.62	61.62	N/A	N/A	8.90	25.10
2	2483.5	30.30	-3.70	-43.70	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.46	59.46	N/A	N/A	8.90	25.10
2	2483.5	30.58	-3.42	-43.42	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.87	57.87	N/A	N/A	8.90	25.10
2	2483.5	22.52	-11.48	-31.48	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.73	55.73	N/A	N/A	8.90	25.10
2	2483.5	22.35	-11.65	-31.65	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	84.19	50.19	N/A	N/A	8.90	25.10
2	2390	29.69	-4.31	-44.31	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	81.62	47.62	N/A	N/A	8.90	25.10
2	2390	30.32	-3.68	-43.68	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	82.27	48.27	N/A	N/A	8.90	25.10
2	2390	23.61	-10.39	-30.39	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	79.44	45.44	N/A	N/A	8.90	25.10
2	2390	23.00	-11.00	-31.00	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.51	60.51	N/A	N/A	8.90	25.10
2	2483.5	29.36	-4.64	-44.64	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.39	58.39	N/A	N/A	8.90	25.10
2	2483.5	29.67	-4.33	-44.33	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	91.76	57.76	N/A	N/A	8.90	25.10
2	2483.5	22.74	-11.26	-31.26	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.04	55.04	N/A	N/A	8.90	25.10
2	2483.5	23.73	-10.27	-30.27	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	83.88	49.88	N/A	N/A	8.90	25.10
2	2390	30.54	-3.46	-43.46	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	80.94	46.94	N/A	N/A	8.90	25.10
2	2390	30.58	-3.42	-43.42	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	82.15	48.15	N/A	N/A	8.90	25.10
2	2390	22.88	-11.12	-31.12	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	79.50	45.50	N/A	N/A	8.90	25.10
2	2390	23.60	-10.40	-30.40	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.60	61.60	N/A	N/A	8.90	25.10
2	2483.5	29.14	-4.86	-44.86	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.91	58.91	N/A	N/A	8.90	25.10
2	2483.5	29.13	-4.87	-44.87	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK


Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.58	58.58	N/A	N/A	8.90	25.10
2	2483.5	23.25	-10.75	-30.75	54.00	8.90	25.10

Carrier frequency (MHz): 2480
Channel No.:78
Test Mode: 8DPSK
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	89.96	55.96	N/A	N/A	8.90	25.10
2	2483.5	23.90	-10.10	-30.10	54.00	8.90	25.10

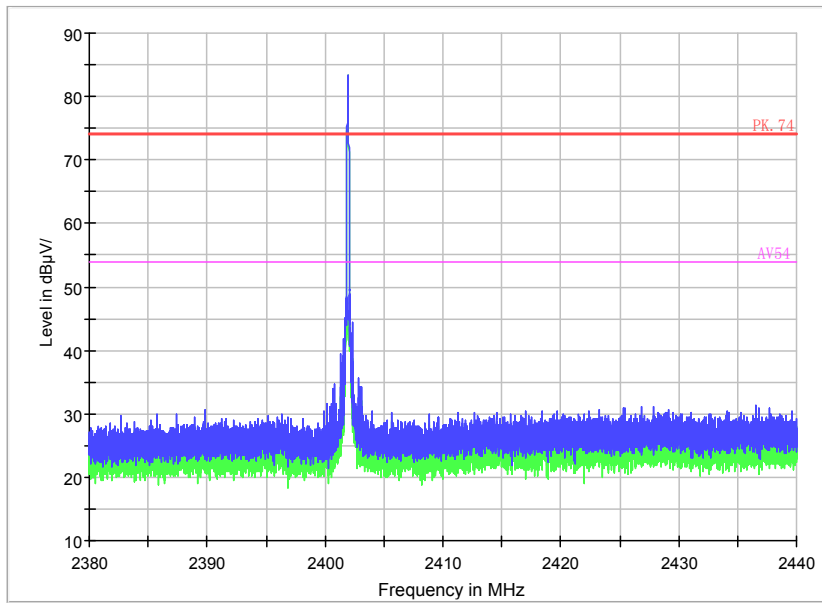

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(20.81 \text{ dB}\mu\text{V/m}) = (41.51 \text{ dB}\mu\text{V}) + (-20.7 \text{ dB/m})$, the corresponding frequency is 32.037MHz.

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.037	20.81	-20.7	41.51	Vertical	40
53.377	21.4	-18	39.4	Vertical	40
59.003	24.93	-18.7	43.63	Vertical	40
108.57	23.02	-19.6	42.62	Vertical	43.5
129.522	16.67	-22.3	38.97	Vertical	43.5
932.1485	19.04	-2.9	21.94	Vertical	46

For $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.194	24.43	-21.2	45.63	Vertical	40
53.3285	20.9	-18	38.9	Vertical	40
59.391	25.34	-18.8	44.14	Vertical	40
107.4545	23.02	-19.5	42.52	Vertical	43.5
132.238	16.76	-22.4	39.16	Vertical	43.5
952.664	18.94	-2.7	21.64	Vertical	46

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.582	23.6	-21.1	44.7	Vertical	40
53.571	20.98	-18	38.98	Vertical	40
59.2455	25.33	-18.7	44.03	Vertical	40
107.4545	23.07	-19.5	42.57	Vertical	43.5
133.0625	16.55	-22.5	39.05	Vertical	43.5
955.8165	19	-2.6	21.6	Vertical	46

For GFSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30	24.72	-21.3	46.02	Vertical	40
53.28	21.17	-18	39.17	Vertical	40
59.1	25.33	-18.7	44.03	Vertical	40
87.521	11.84	-22.1	33.94	Vertical	40
108.085	23.25	-19.6	42.85	Vertical	43.5
925.407	18.98	-3	21.98	Vertical	46

For $\pi/4$ DQPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30	24.76	-21.3	46.06	Vertical	40
53.474	21.02	-18	39.02	Vertical	40
59.391	25.48	-18.8	44.28	Vertical	40
87.424	11.76	-22.1	33.86	Vertical	40
108.1335	23.2	-19.6	42.8	Vertical	43.5
862.7935	17.5	-3.9	21.4	Vertical	46

For 8DPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.0485	24.71	-21.3	46.01	Vertical	40
53.183	21.23	-17.9	39.13	Vertical	40
59.197	25.47	-18.7	44.17	Vertical	40
108.0365	23.27	-19.6	42.87	Vertical	43.5
132.335	16.38	-22.5	38.88	Vertical	43.5
942.673	19.12	-2.8	21.92	Vertical	46

For GFSK
Channel No.:78


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30	24.6	-21.3	45.9	Vertical	40
52.892	21.36	-17.9	39.26	Vertical	40
59.294	25.56	-18.7	44.26	Vertical	40
87.5695	11.81	-22.1	33.91	Vertical	40
107.406	23.19	-19.5	42.69	Vertical	43.5
928.317	18.99	-2.9	21.89	Vertical	46

For $\pi/4$ DQPSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.0485	24.53	-21.3	45.83	Vertical	40
53.668	20.99	-18	38.99	Vertical	40
59.4395	25.64	-18.8	44.44	Vertical	40
107.8425	23.3	-19.6	42.9	Vertical	43.5
129.7645	16.37	-22.3	38.67	Vertical	43.5
901.5935	18.35	-3.2	21.55	Vertical	46

For 8DPSK
Channel No.:78


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.7275	23.31	-21.1	44.41	Vertical	40
53.086	21.21	-17.9	39.11	Vertical	40
58.712	25.13	-18.7	43.83	Vertical	40
107.3575	23.22	-19.5	42.72	Vertical	43.5
131.656	16.27	-22.4	38.67	Vertical	43.5
955.7195	19.01	-2.6	21.61	Vertical	46

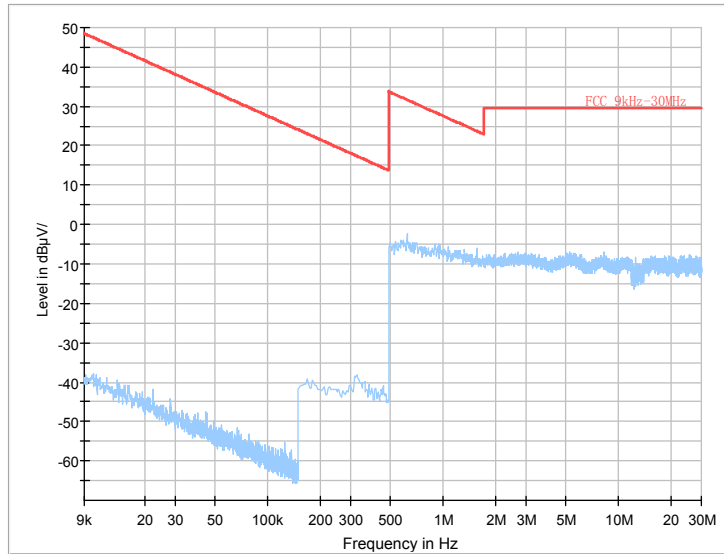

Frequency Range: 9KHz-30MHz

Carrier frequency (MHz): 2402
Channel No.:0


Full Spectrum

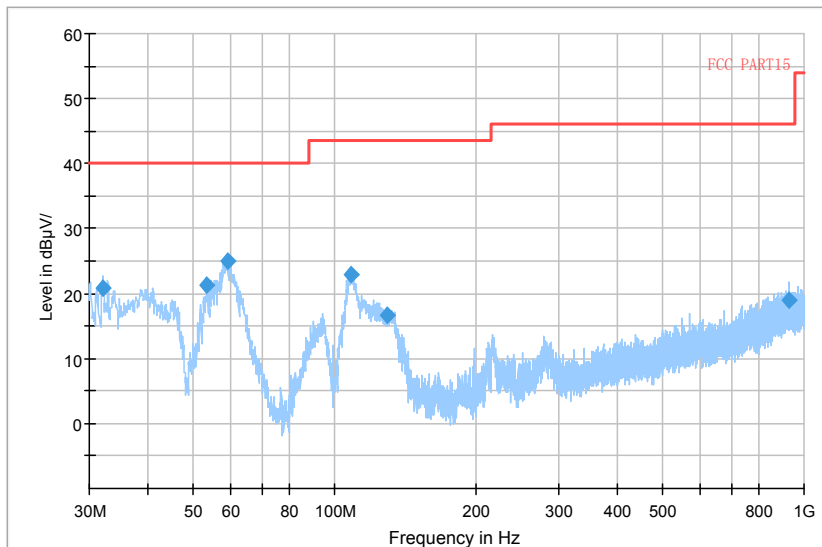

— Preview Result 1-PK+ — FCC PART15 ◆ Final_Result QPK

Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK


Full Spectrum

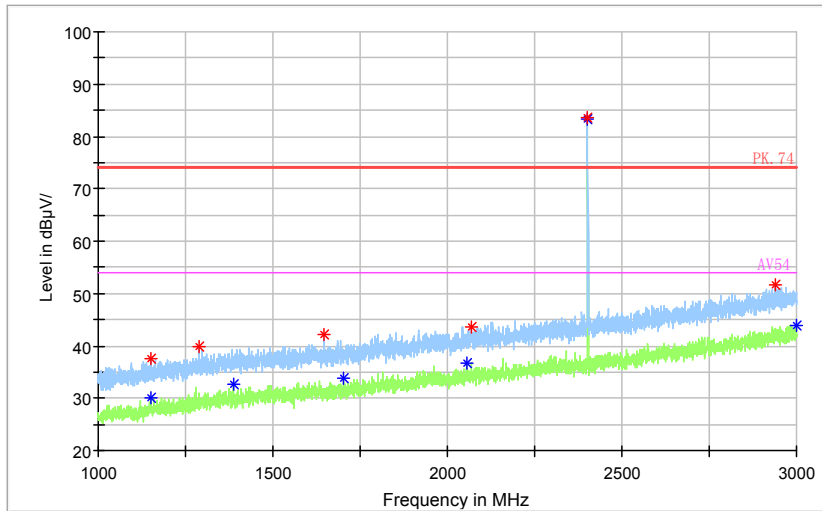

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

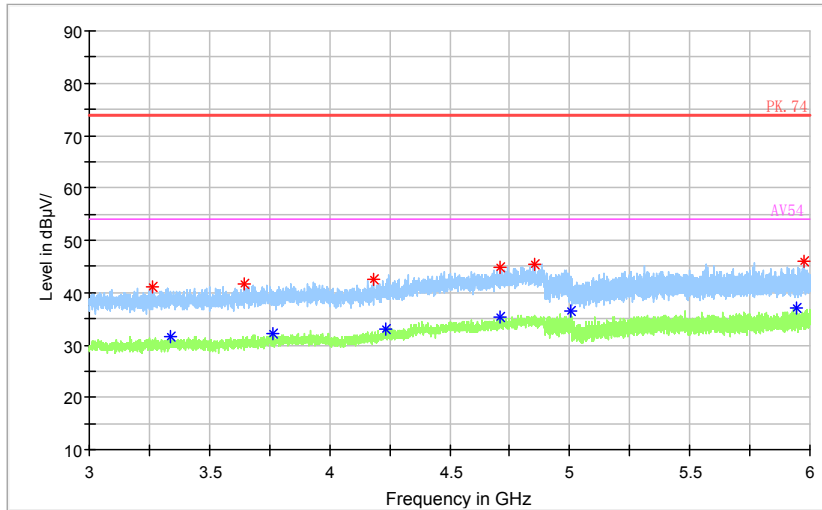

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

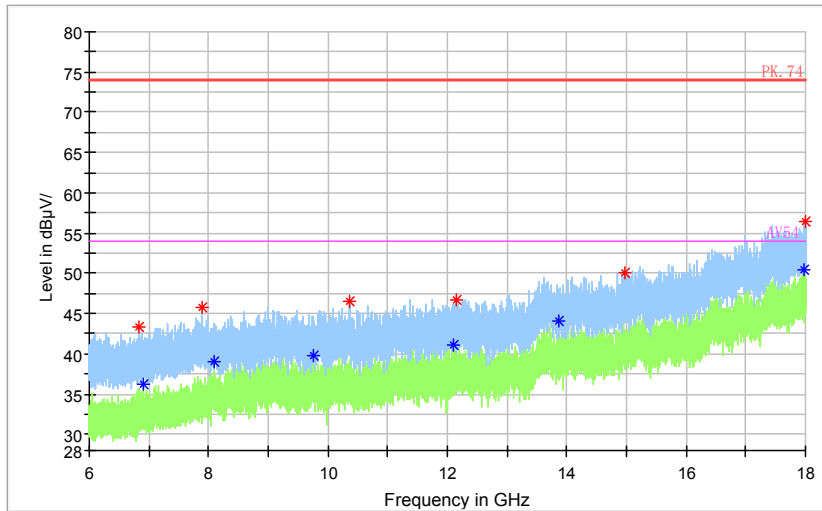

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

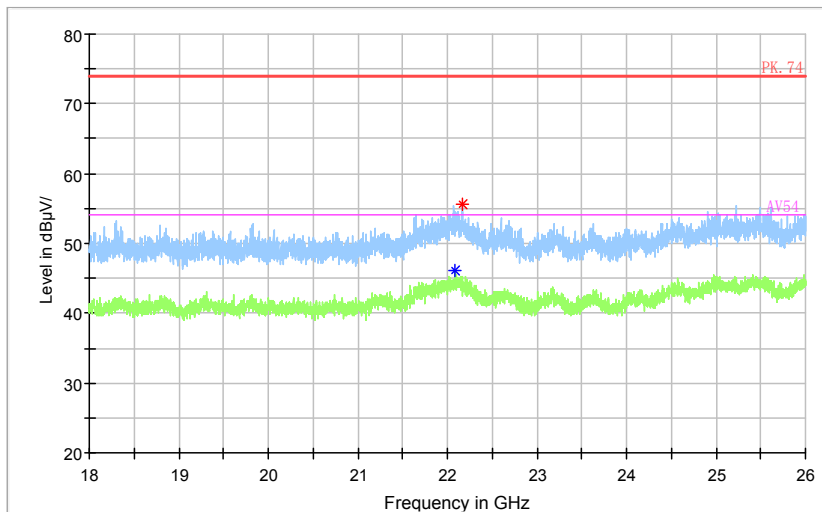

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

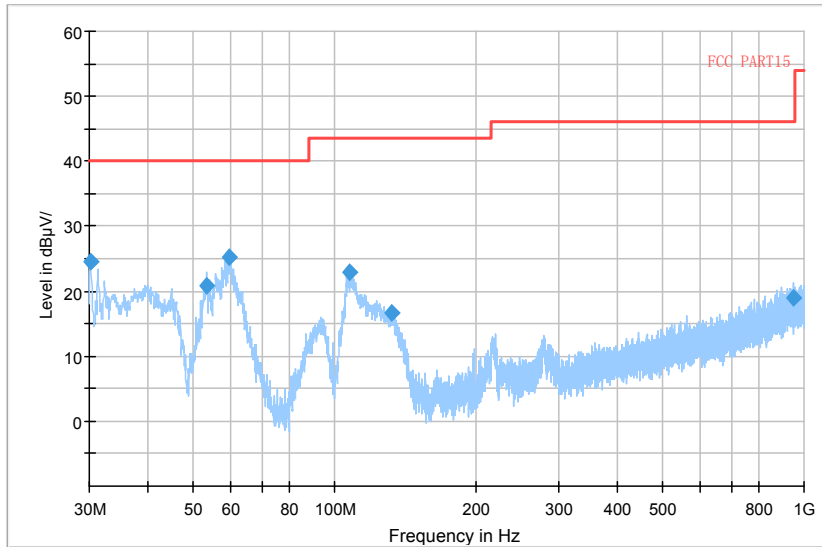

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

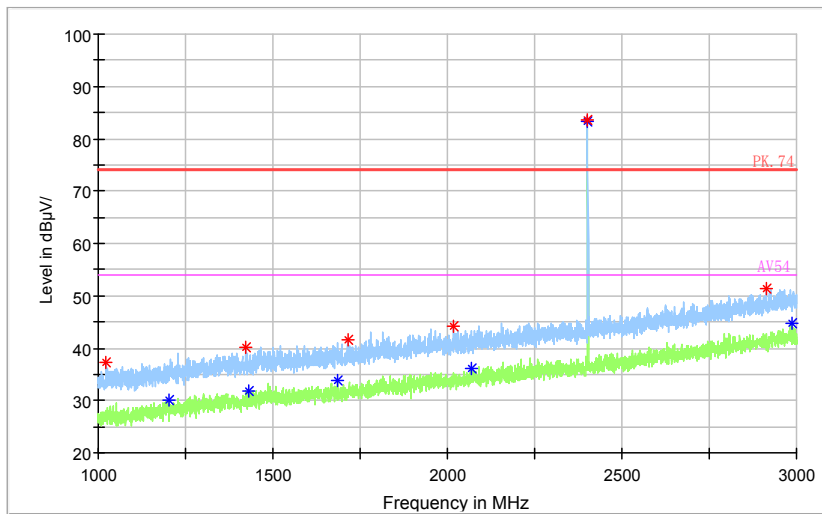

Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+ Preview Result 1-PK+ PK.74 Final_Result AVG Critical_Freqs AVG AV54

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

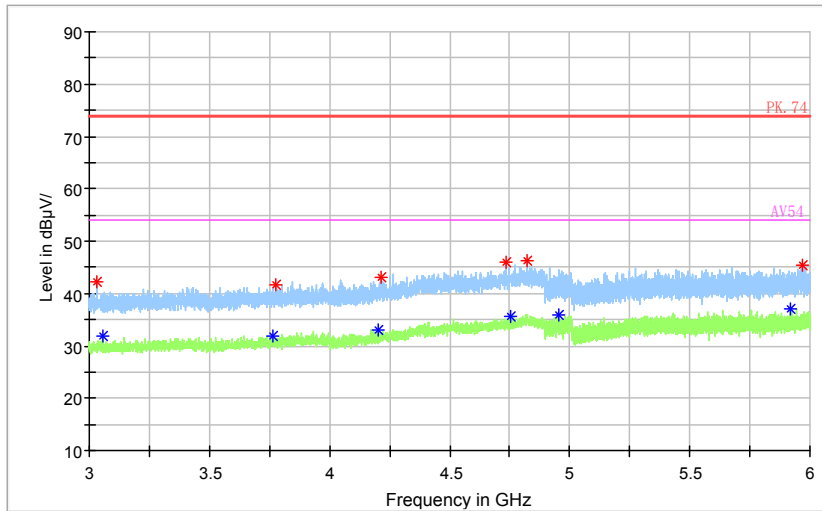

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

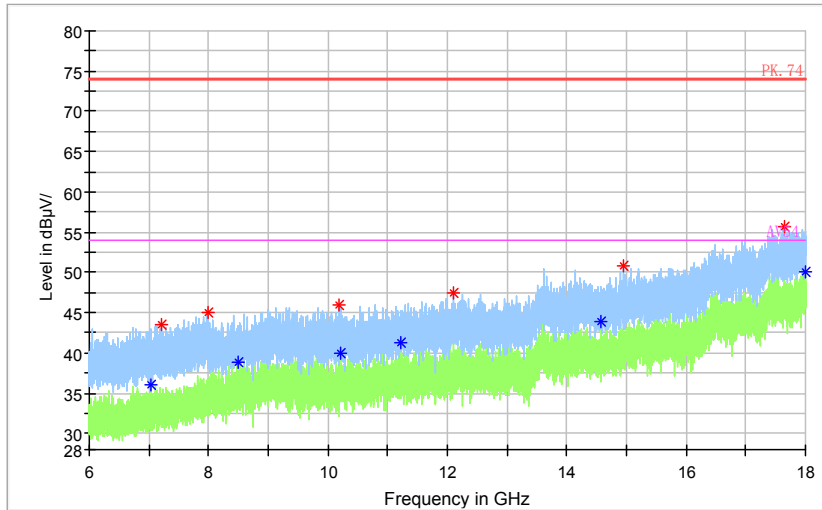

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

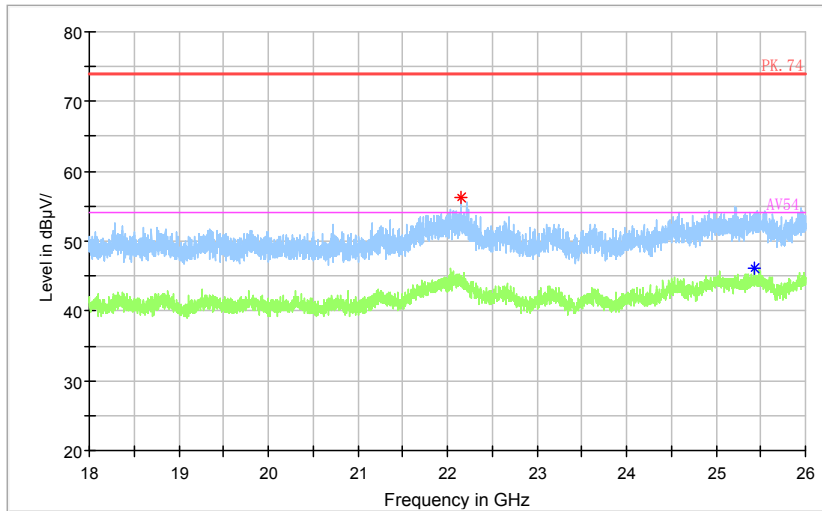

—	Preview Result 2-AVG	—	Preview Result 1-PK+	*	Critical_Freqs AVG
*	Critical_Freqs PK+	—	PK.74	*	AV54
◆	Final_Result PK+	◆	Final_Result AVG		

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

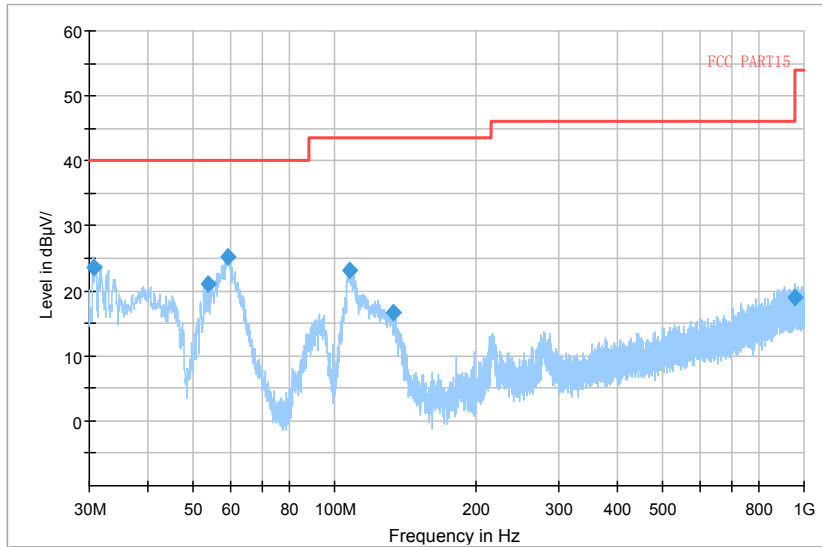

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK


Full Spectrum

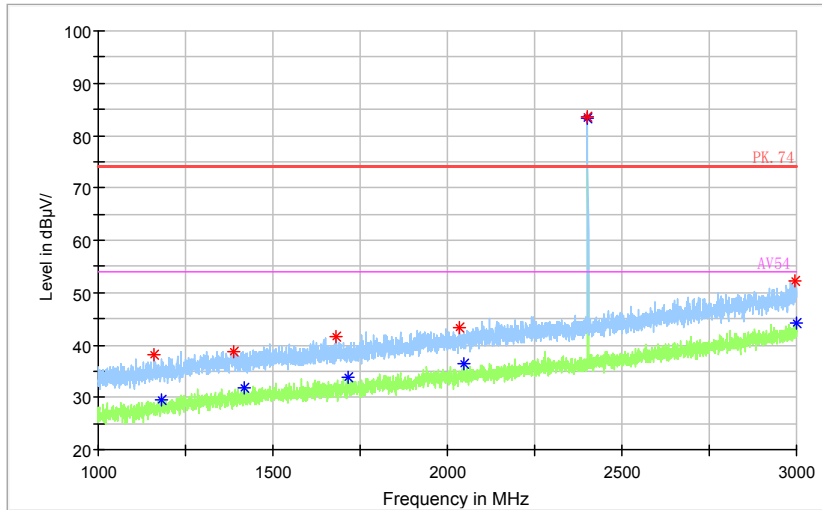

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Full Spectrum

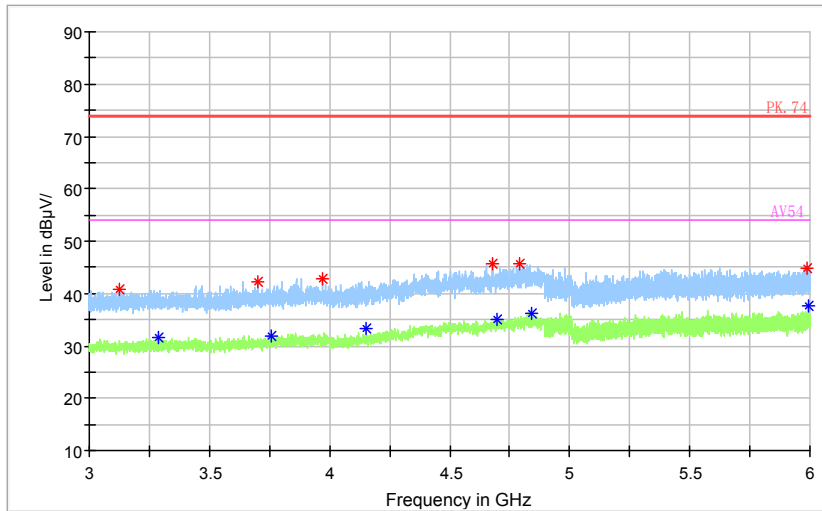

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Full Spectrum

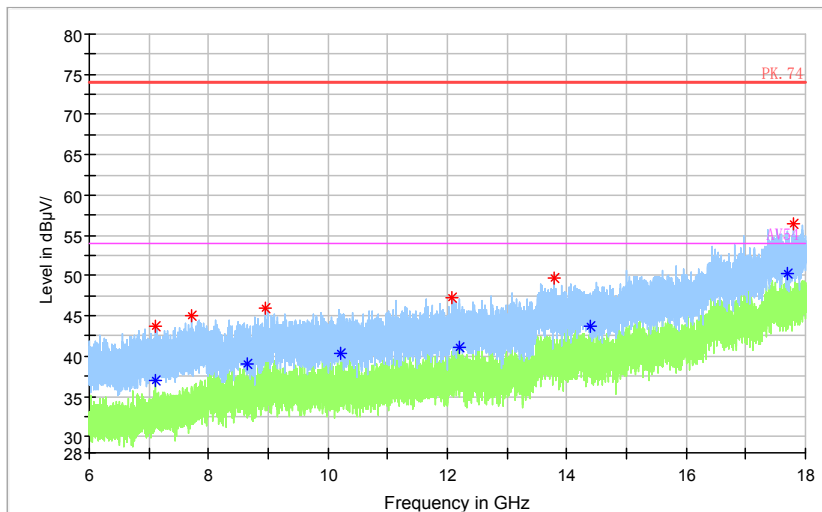

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

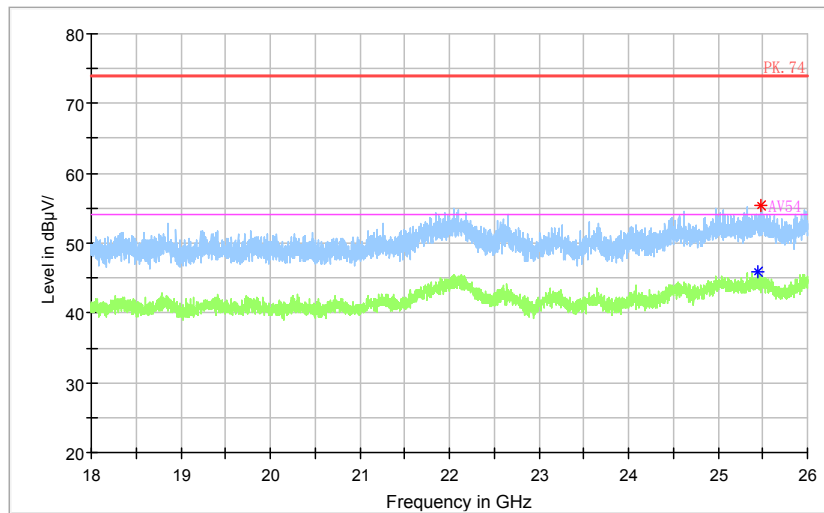


—	Preview Result 2-AVG	—	Preview Result 1-PK+	*	Critical_Freqs AVG
*	Critical_Freqs PK+	—	PK.74	*	AV54
◆	Final_Result PK+	◆	Final_Result AVG		

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Carrier frequency (MHz): 2441
Channel No.:39

Full Spectrum

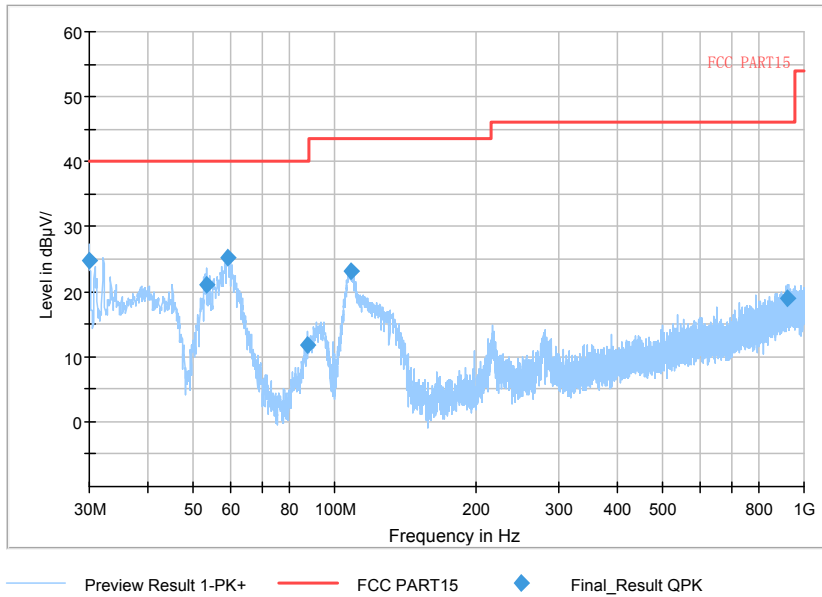


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

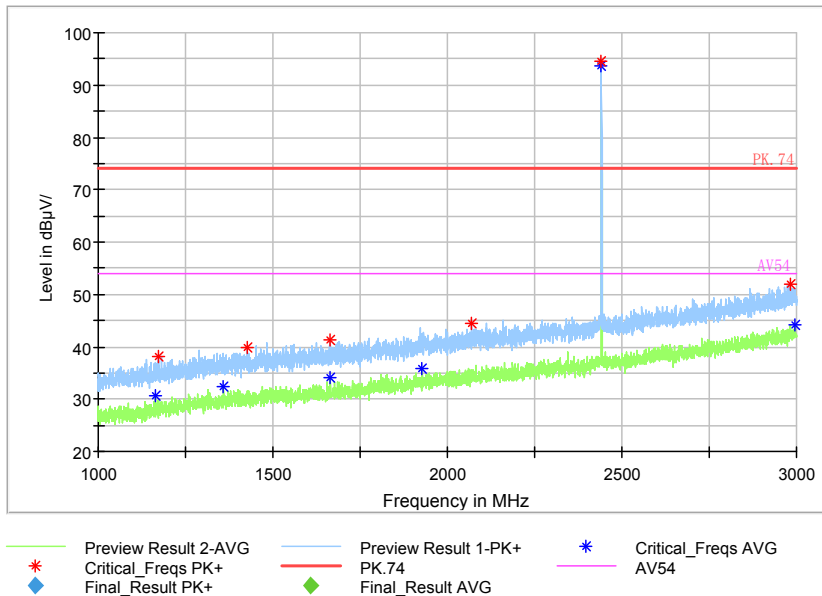

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

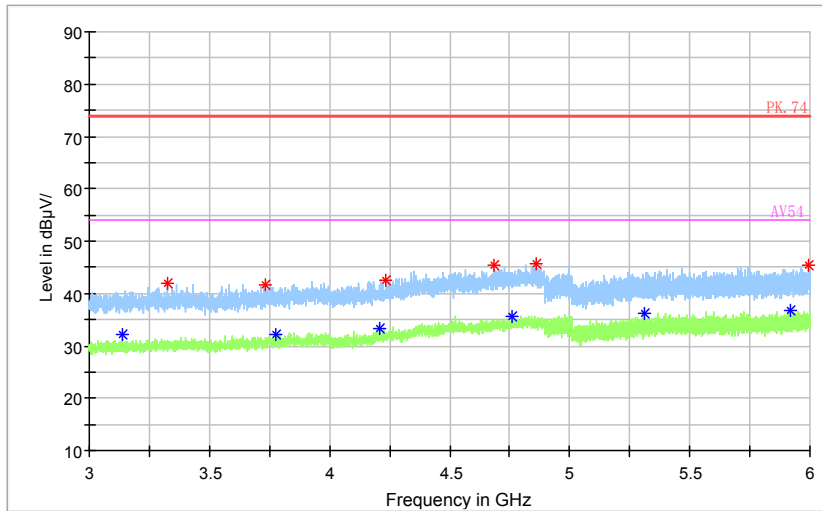

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

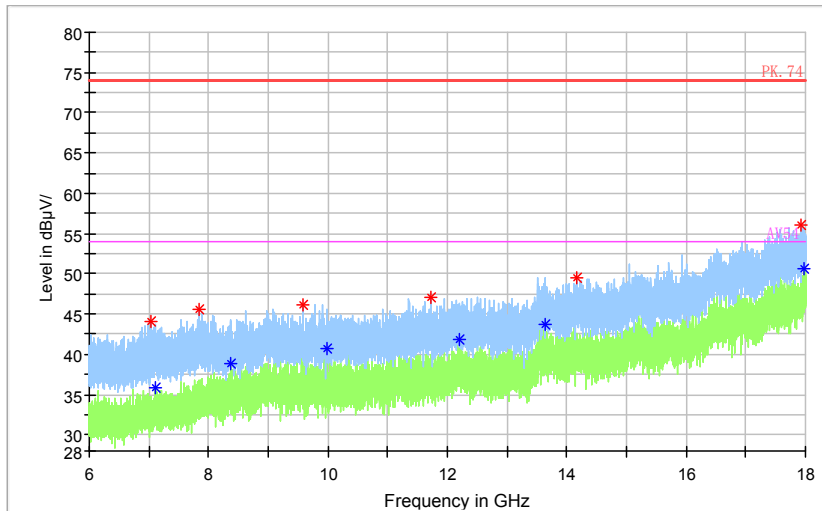

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

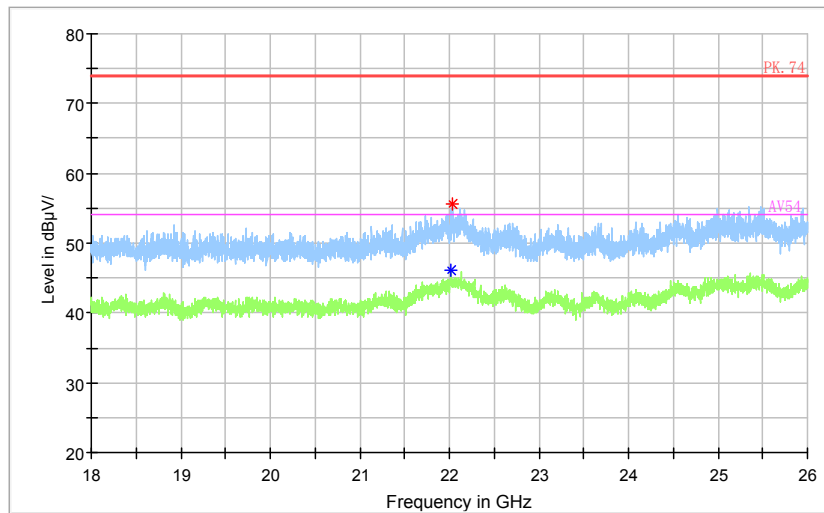

—	Preview Result 2-AVG	—	Preview Result 1-PK+	*	Critical_Freqs AVG
*	Critical_Freqs PK+	—	PK.74	*	AV54
◆	Final_Result PK+	◆	Final_Result AVG		

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

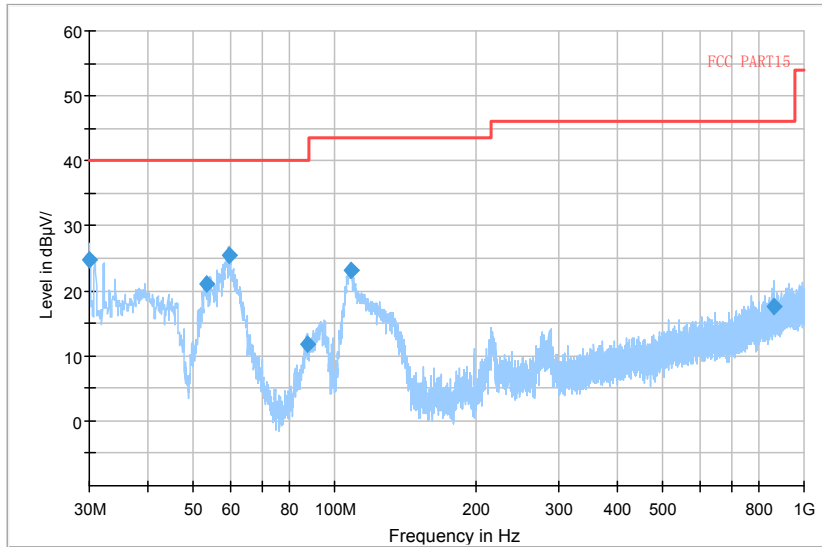

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

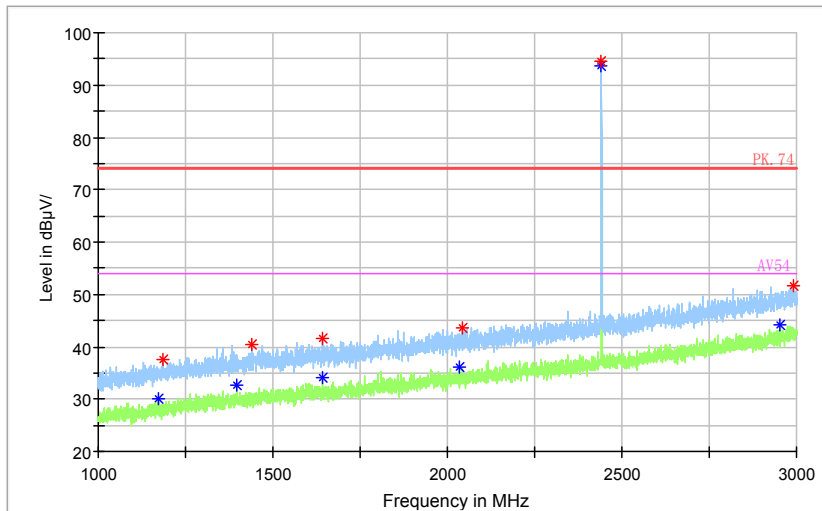

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

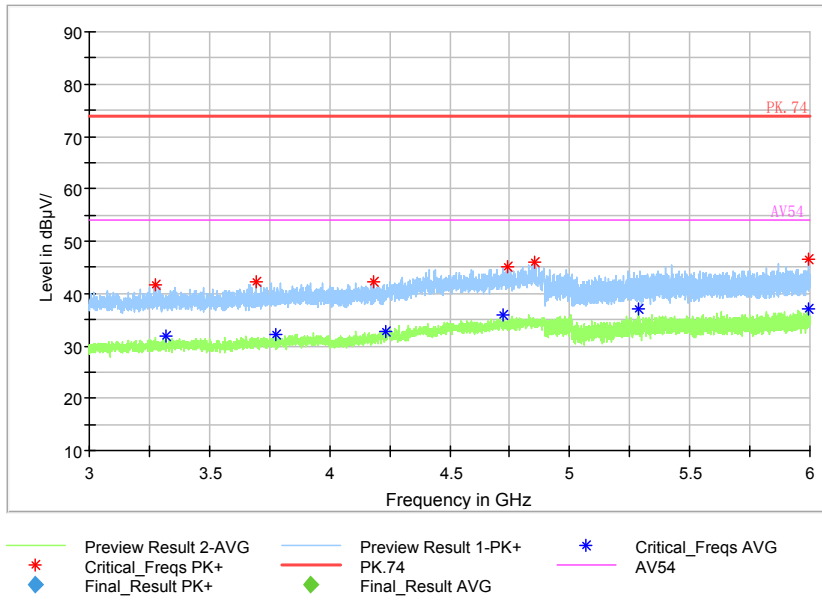


Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

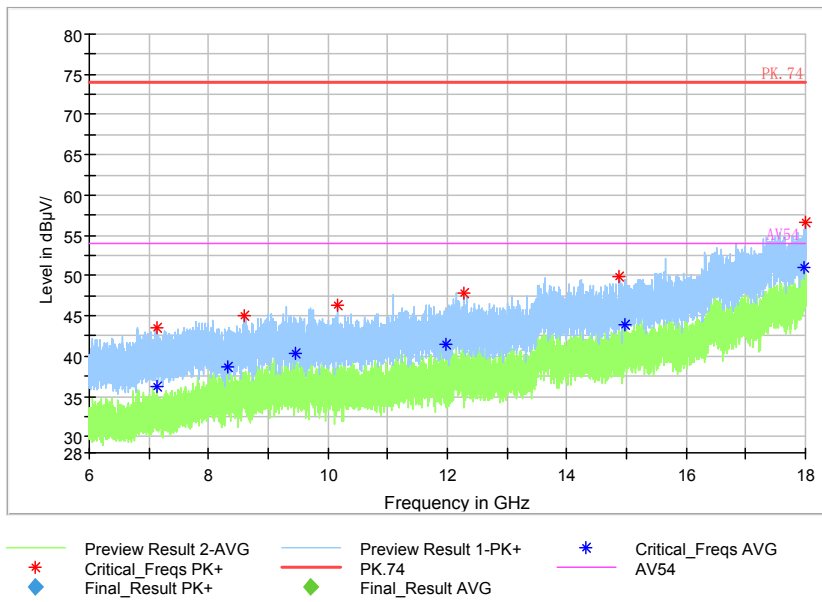

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

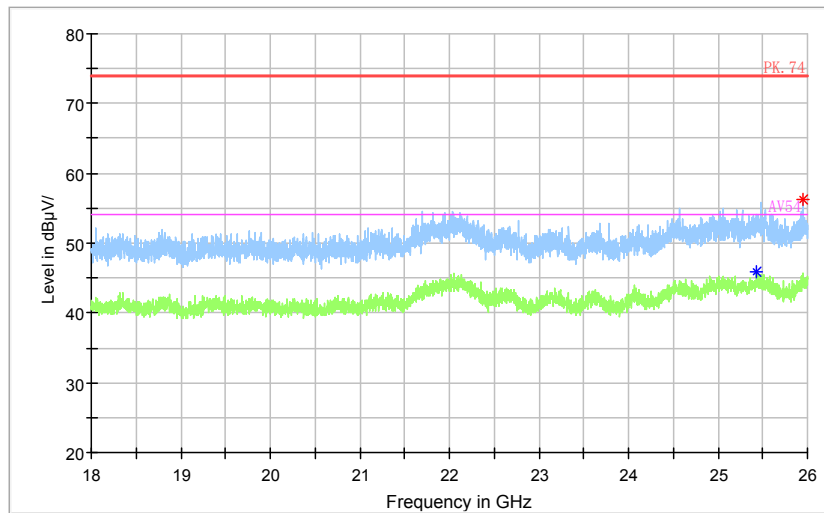

◆ Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: $\pi/4$ DQPSK


Full Spectrum

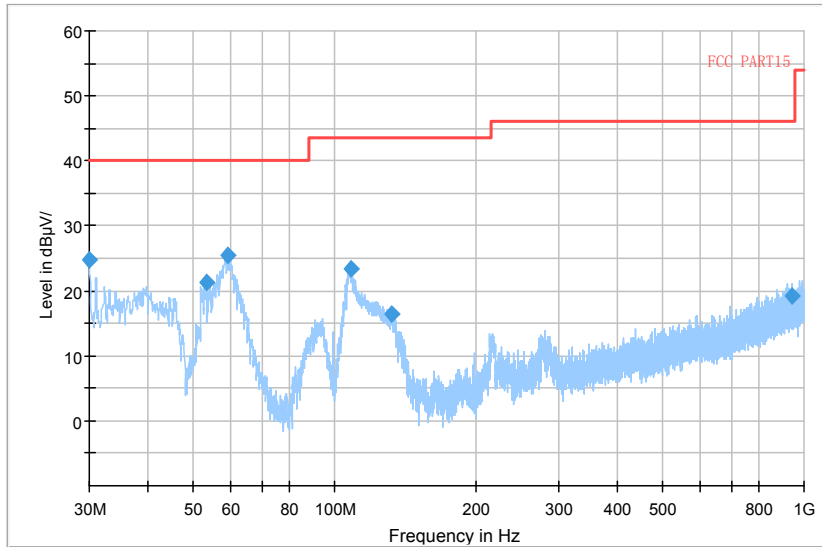

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK


Full Spectrum

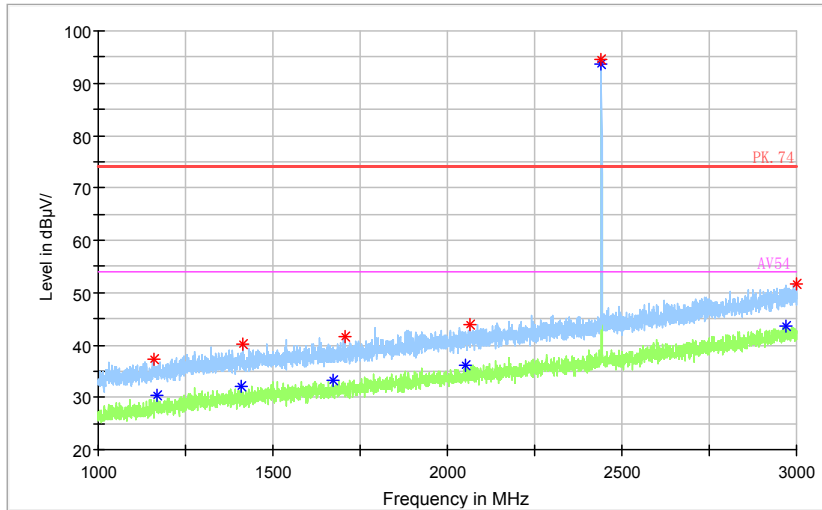

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

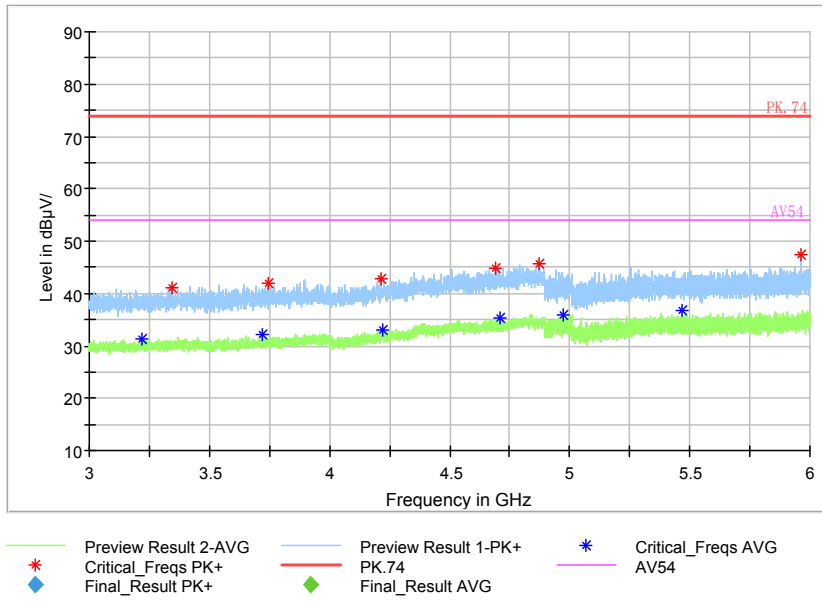


Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

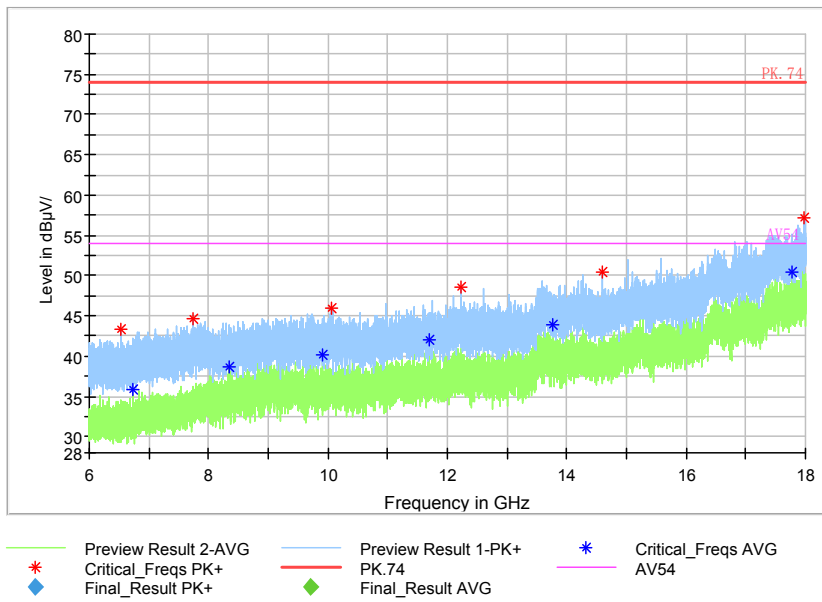

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

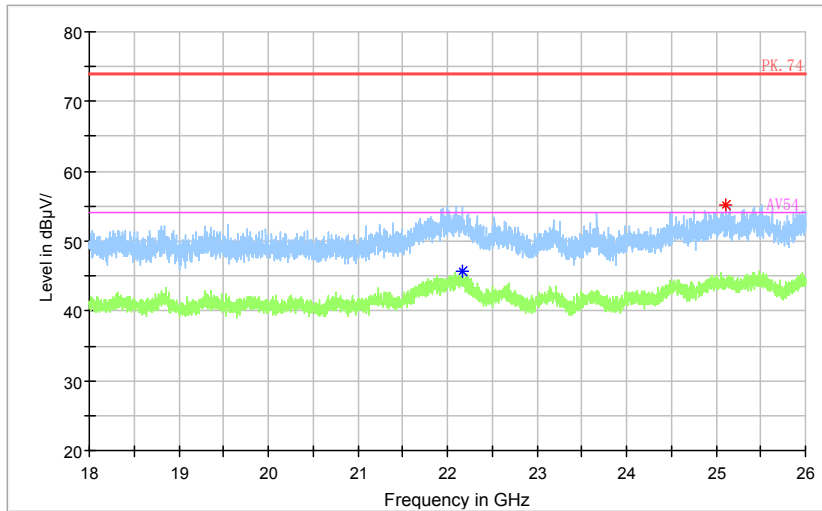


— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 8DPSK


Carrier frequency (MHz): 2480
Channel No.:78

Full Spectrum

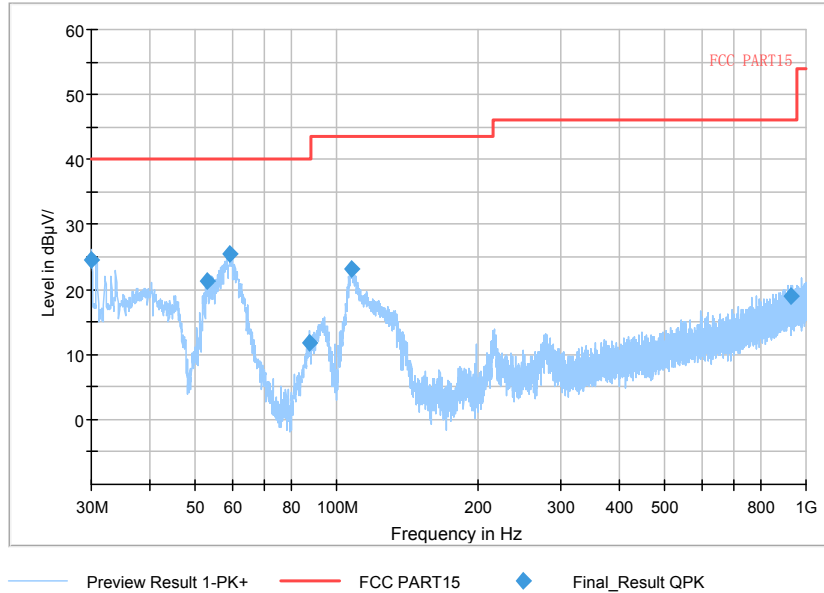


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

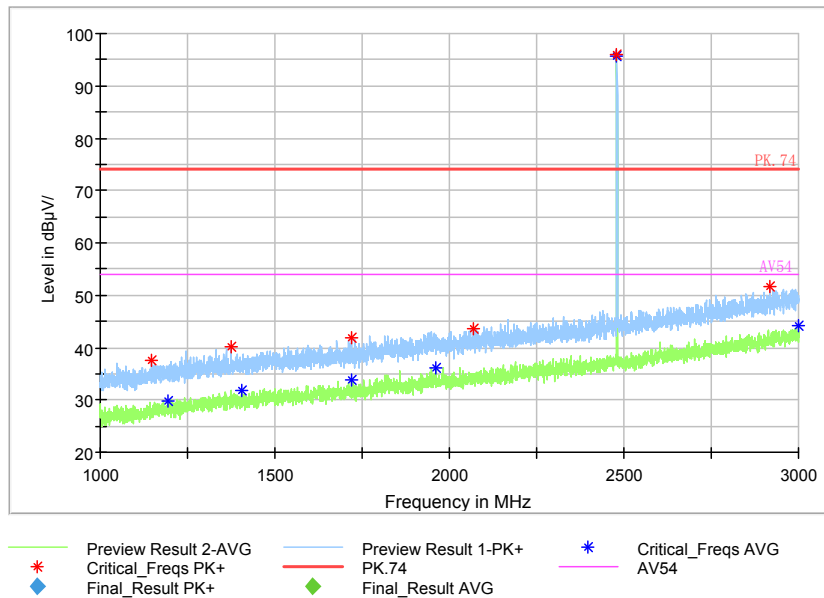


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

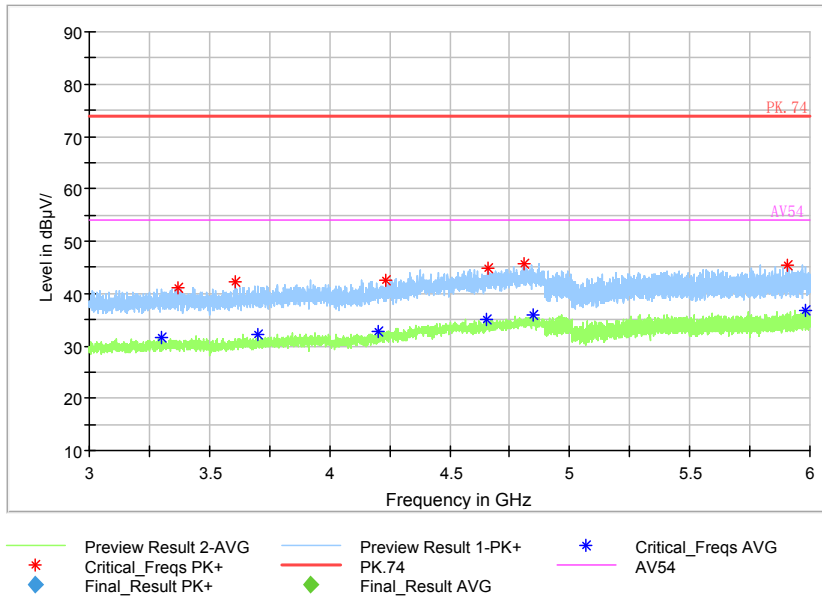


Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

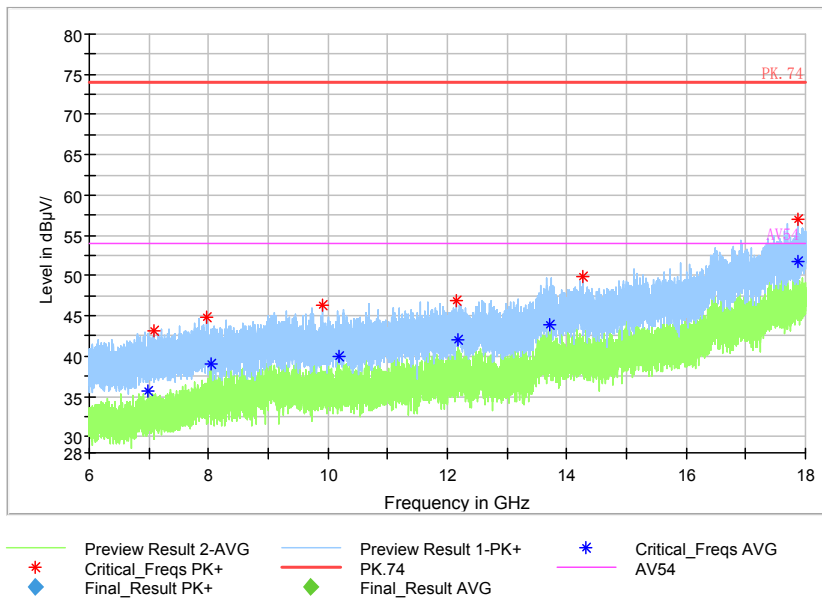

Frequency Range: 6GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

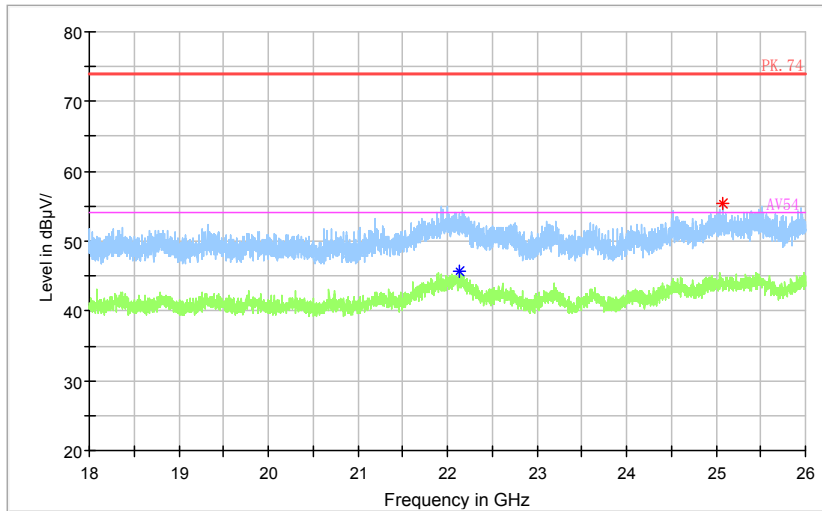

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK


Full Spectrum

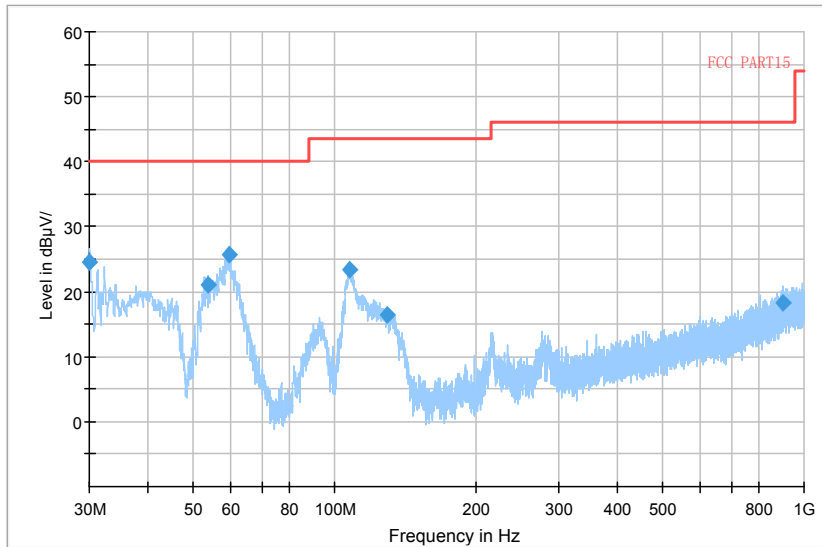

— Preview Result 1-PK+ — FCC PART15 ◆ Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

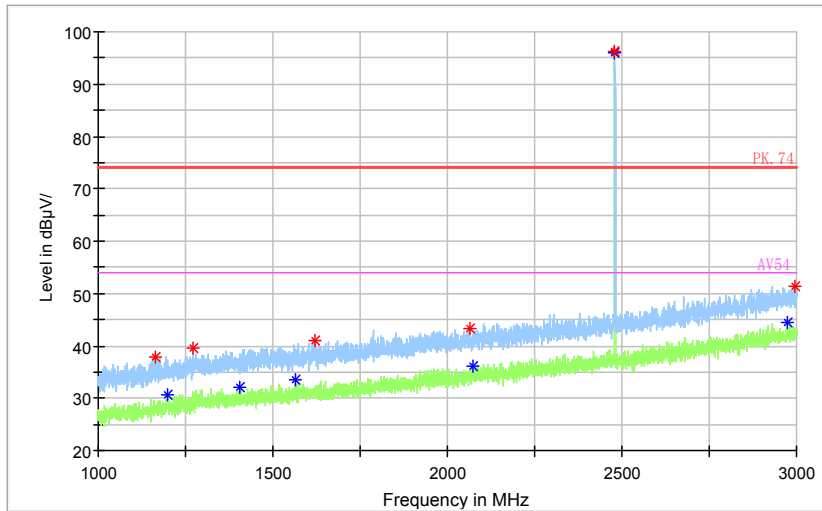

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

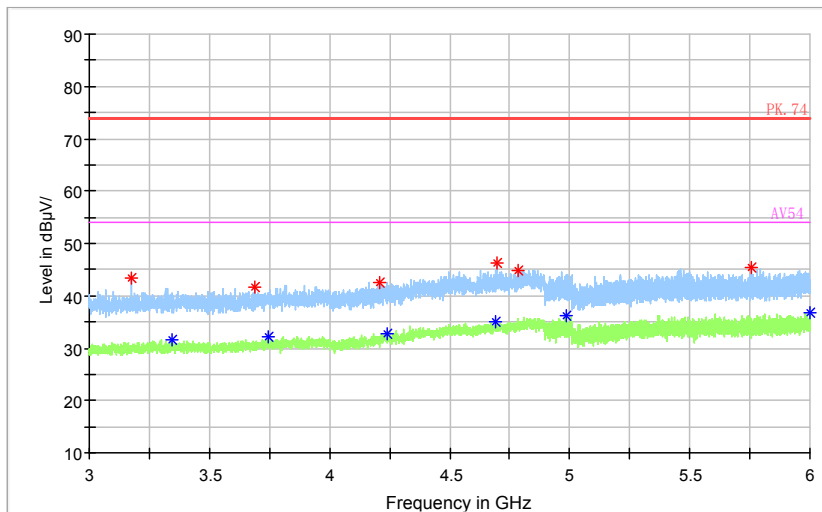

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

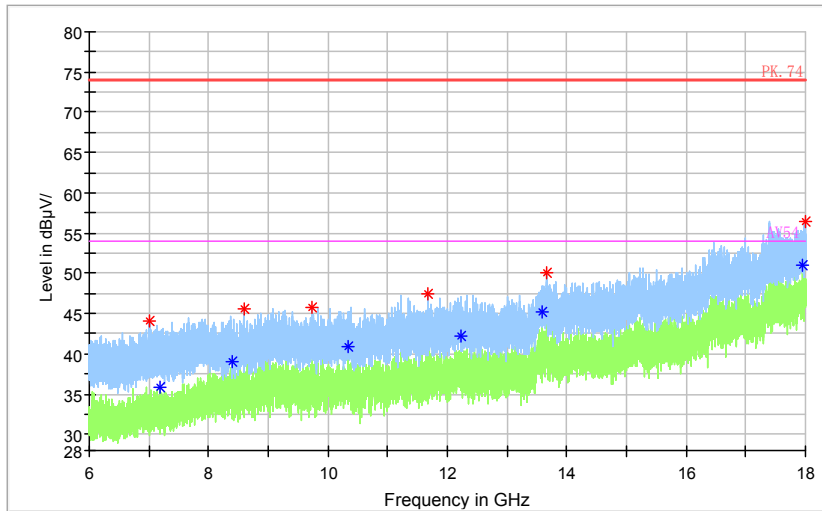

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

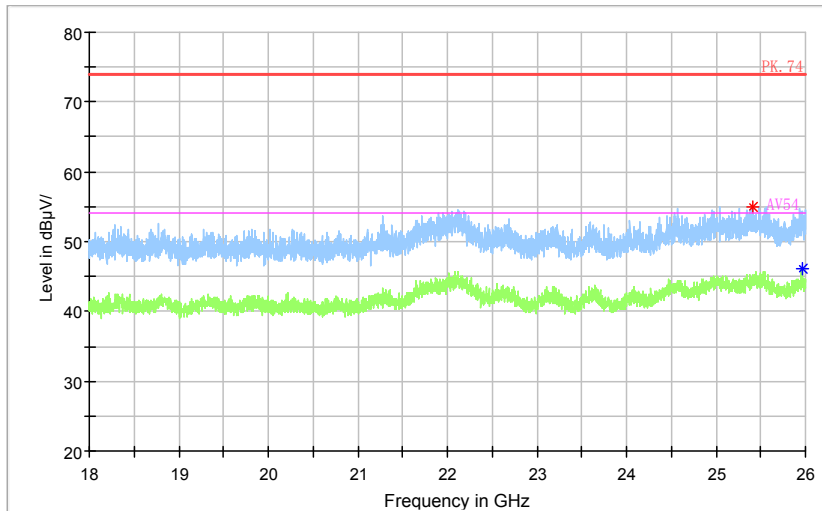

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

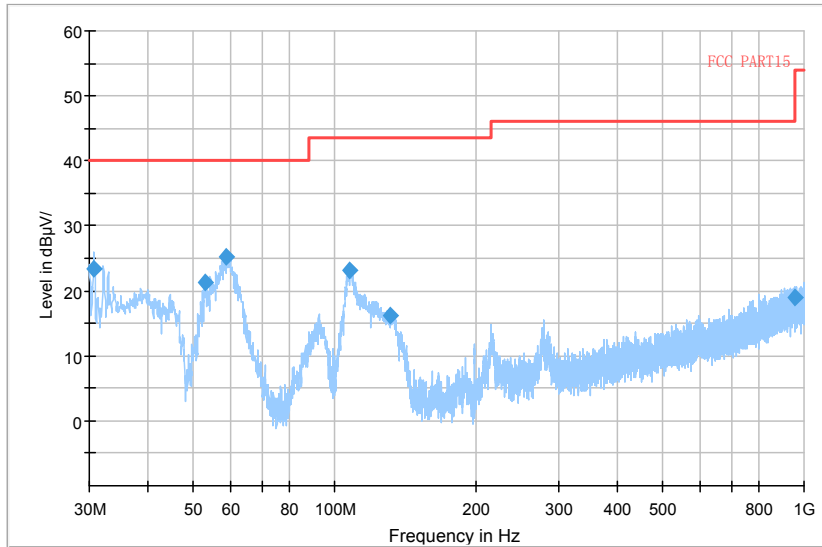

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK


Full Spectrum

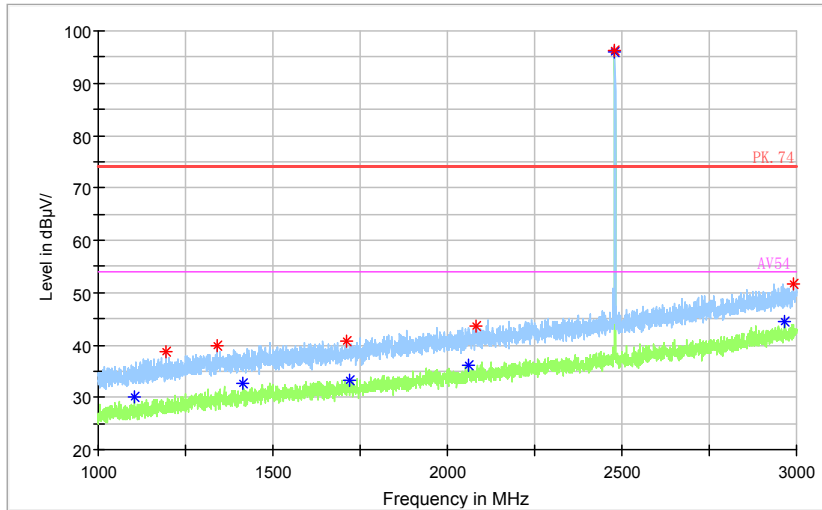

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

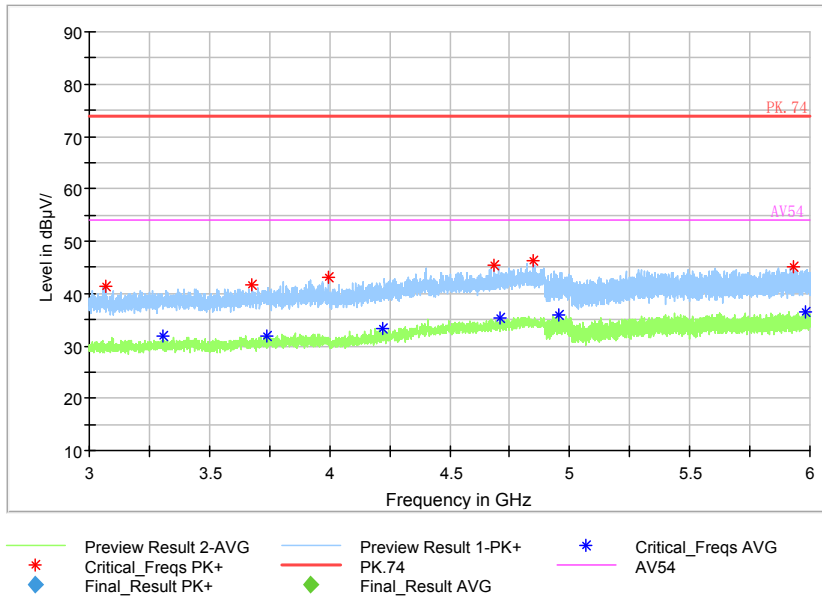


Frequency Range: 3GHz-6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

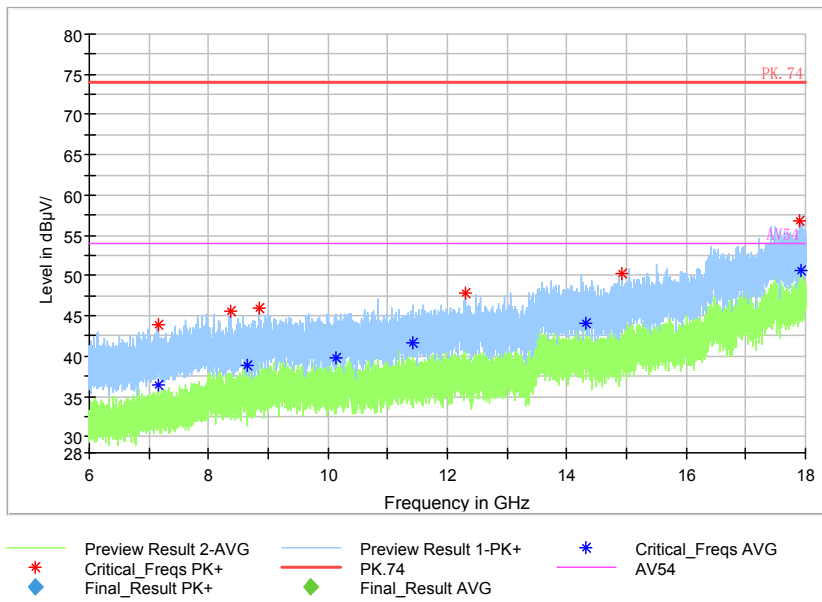

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

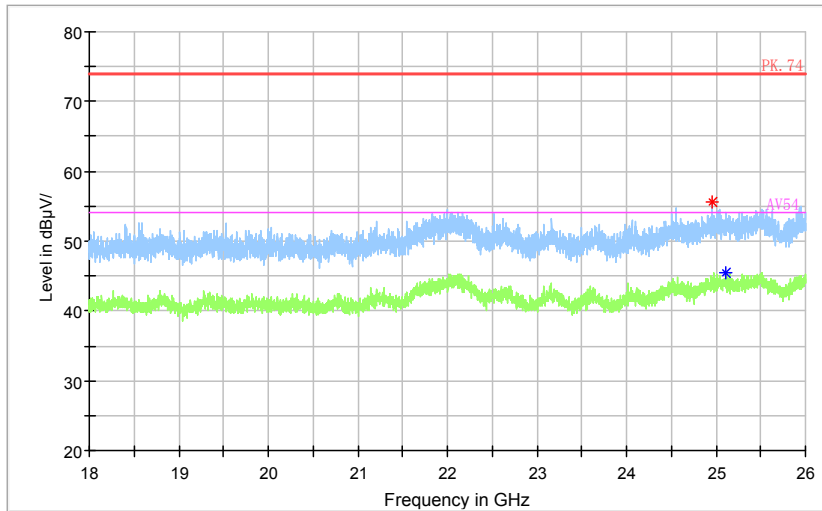

- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result PK+
- Final_Result AVG
- Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


AC Power line Conducted Emission

A “reference path loss” Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result}=P_{mea}+ Corr.(dB)$$

Sample calculation: $(32.86 \text{ dB}\mu\text{V}) = (3.26 \text{ dB}\mu\text{V}) + (29.6 \text{ dB})$, the corresponding frequency is 0.158529MHz.

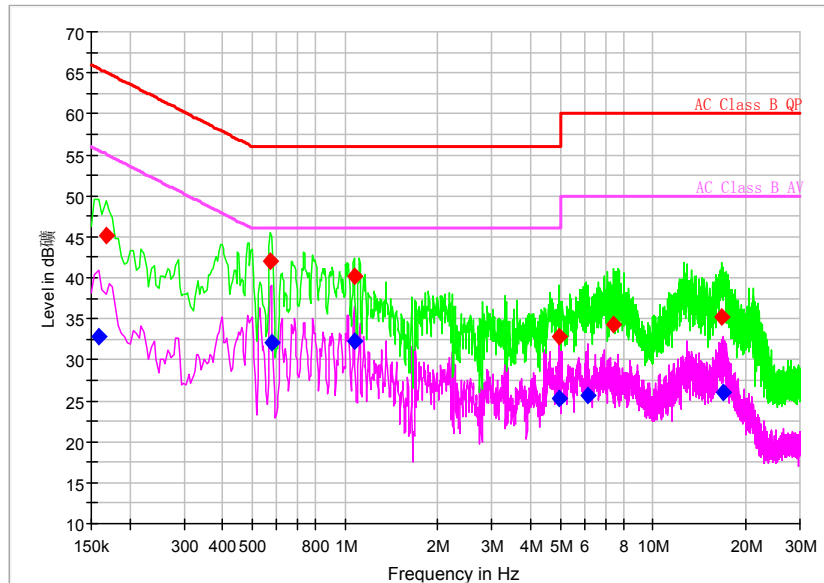

— Preview Result 2-AVG — Preview Result 1-PK+ — AC Class B QP
— AC Class B AV ◆ Final_Result QPK ◆ Final_Result AVG

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pme a QuasiPeak (dBμV)	Pme a Average (dBμV)
0.158529	---	32.86	55.54	22.68	N	29.6	---	3.26
0.167057	45.16	---	65.11	19.94	L1	29.6	15.5	---
0.572164	41.94	---	56	14.06	N	29.6	12.3	---
0.576429	---	32.05	46	13.95	N	29.6	---	2.45
1.071086	---	32.25	46	13.75	N	29.7	---	2.55
1.071086	40.16	---	56	15.84	N	29.7	10.4	---
4.977171	---	25.28	46	20.72	N	29.7	---	-4.42
4.981436	32.89	---	56	23.11	N	29.7	3.19	---
6.128529	---	25.68	50	24.32	N	29.7	---	-4.02
7.458986	34.27	---	60	25.73	L1	29.7	4.57	---
16.70396	35.15	---	60	24.85	N	29.8	5.35	---
16.95555	---	26.04	50	23.96	L1	29.8	---	-3.76

---End of Test Report---