



TEST REPORT

No.I22N01654-WLAN 2.4GHz

for

Hisense International Co., Ltd.

Mobile phone

Model Name: HLTE239E

with

Hardware Version: FS301-MB-V1.0

Software Version: Hisense_HLTE239E_01_S01_01_05_MX05

FCC ID: 2ADOBHLTE239E

Issued Date: 2022-09-22

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn www.saict.ac.cn

©Copyright. All rights reserved by SAICT.



CONTENTS

CONTENTS 2

1. SUMMARY OF TEST REPORT 3

1.1. TEST ITEMS 3

1.2. TEST STANDARDS 3

1.3. TEST RESULT 3

1.4. TESTING LOCATION 3

1.5. PROJECT DATA 3

1.6. SIGNATURE 3

2. CLIENT INFORMATION 4

2.1. APPLICANT INFORMATION 4

2.2. MANUFACTURER INFORMATION 4

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 5

3.1. ABOUT EUT 5

3.2. INTERNAL IDENTIFICATION OF EUT 5

3.3. INTERNAL IDENTIFICATION OF AE 5

3.4. GENERAL DESCRIPTION 6

4. REFERENCE DOCUMENTS 7

4.1. DOCUMENTS SUPPLIED BY APPLICANT 7

4.2. REFERENCE DOCUMENTS FOR TESTING 7

5. TEST RESULTS 8

5.1. TESTING ENVIRONMENT 8

5.2. TEST RESULTS 8

5.3. STATEMENTS 8

6. TEST EQUIPMENTS UTILIZED 9

7. LABORATORY ENVIRONMENT 10

8. MEASUREMENT UNCERTAINTY 11

ANNEX A: DETAILED TEST RESULTS 12

TEST CONFIGURATION 12

A.0 ANTENNA REQUIREMENT 15

A.1 MAXIMUM OUTPUT POWER 16

A.2 PEAK POWER SPECTRAL DENSITY 17

A.3 6dB BANDWIDTH 24

A.4 BAND EDGES COMPLIANCE 31

A.5 CONDUCTED EMISSION 36

A.6 RADIATED EMISSION 55

A.7 AC POWER LINE CONDUCTED EMISSION 71



1. Summary of Test Report

1.1. Test Items

Product Name	Mobile phone
Model Name	HLTE239E
Applicant's name	Hisense International Co., Ltd.
Manufacturer's Name	Hisense Communications Co., Ltd.

1.2. Test Standards

FCC Part15-2019; ANSI C63.10-2013.

1.3. Test Result

Pass

Please refer to "5.2. Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date:	2022-08-12
Testing End Date:	2022-09-21

1.6. Signature

Lin Zechuang
(Prepared this test report)

An Ran
(Reviewed this test report)

Zhang Bojun
(Approved this test report)



No.I22N01654-WLAN 2.4GHz

2. Client Information

2.1. Applicant Information

Company Name: Hisense International Co., Ltd.
Address: Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
Contact Person Yu Jingchao
E-Mail yujingchao@hisense.com
Telephone: 15311226475
Fax: /

2.2. Manufacturer Information

Company Name: Hisense Communications Co., Ltd.
Address: No.218,Qianwangang Road,Economic and Technological Development Zone, Qingdao, Shandong Province,China
Contact Person Yu Jingchao
E-Mail yujingchao@hisense.com
Telephone: 15311226475
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Mobile phone
Model Name	HLTE239E
RF Protocol	IEEE 802.11b/g/n-HT20/n-HT40
Operating Frequency	2412MHz~2462MHz
Type of Modulation	DSSS/CCK/OFDM
Antenna Type	Integrated antenna
Antenna Gain	-0.32dBi
Power Supply	3.85V DC by Battery
FCC ID	2ADOBHLTE239E
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
UT07aa	868551060006114	FS301-MB-V1.0	Hisense_HLTE239E_0 1_S01_01_05_MX05	2022-08-04
UT12aa	865269060000358	FS301-MB-V1.0	Hisense_HLTE239E_0 1_S01_01_05_MX05	2022-08-04

*EUT ID: is used to identify the test sample in the lab internally.

UT07aa is used for conduction test, UT12aa is used for radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE

AE ID*	Description	AE ID*
AE1	Battery	/
AE2	Charger	/
AE3	USB Cable	/
AE4	Headset	/

AE1

Model	LPN385400B
Manufacturer	Shenzhen Aerospac Electronic CO.,Ltd.
Capacity	4000mAh
Nominal Voltage	3.85V

AE2

Model	PA-46050200UU
Manufacturer	SHENZHEN TIANYIN ELECTRONICS CO.,LTD

AE3



No.I22N01654-WLAN 2.4GHz

Model	KS228D
Manufacturer	Dongguan Keling Electronic Technology Co., Ltd.
AE4	
Model	KS232D
Manufacturer	Dongguan Keling Electronic Technology Co., Ltd.

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Mobile phone with integrated antenna and battery. It consists of normal options: Lithium Battery and Charger, USB Cable and Headset. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Conducted Emission	15.247 (d)	P
6	Radiated Emission	15.247, 15.205, 15.209	P
7	AC Power line Conducted	15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

Disclaimer:

A. After confirmation with the customer, the sample information provided by the customer may affect the validity of the measurement results in this report, and the impact and consequences arising therefrom shall be borne by the customer.

B. The samples in this report are provided by the customer, and the test results are only applicable to the samples received.

**6. Test Equipments Utilized****Conducted test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2022-12-29	1 year
2	Power Sensor	U2021XA	MY55430013	Keysight	2022-12-29	1 year
3	Data Acquisiton	U2531A	TW55443507	Keysight	/	/
4	RF Control Unit	JS0806-2	21C8060398	Tonscend	2023-05-08	1 year
5	Test Receiver	ESCI	100701	Rohde & Schwarz	2023-08-07	1 year
6	LISN	ENV216	102067	Rohde & Schwarz	2023-07-14	1 year

Radiated test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2024-03-24	3 years
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2025-03-25	3 years
4	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2023-01-06	3 years
5	Horn Antenna	QSH-SL-8-26-40-K-20	17014	Q-par	2023-01-06	3 years
6	Test Receiver	ESR7	101676	Rohde & Schwarz	2022-11-24	1 year
7	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2023-01-12	1 year
8	Fully Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years

Test software

No.	Equipment	Manufacturer	Version
1	JS1120-3	Tonscend	3.2
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

Anechoic Chamber

Fully anechoic Chamber by ETS-Lindgren.



7. Laboratory Environment

Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< \pm 4 dB, 3 m distance, from 30 to 1000 MHz

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω

Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	\leq 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**8. Measurement Uncertainty**

Test Name	Uncertainty ($k=2$)	
1. Maximum Peak Output Power	1.32dB	
2. Peak Power Spectral Density	1.32dB	
3. 6dB Bandwidth	4.56kHz	
4. Band Edges Compliance	1.92dB	
5. Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f < 1\text{GHz}$	1.41dB
	$1\text{GHz} \leq f < 7\text{GHz}$	1.92dB
	$7\text{GHz} \leq f < 13\text{GHz}$	2.31dB
	$13\text{GHz} \leq f \leq 26\text{GHz}$	2.61dB
6. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f < 30\text{MHz}$	1.79dB
	$30\text{MHz} \leq f < 1\text{GHz}$	4.86dB
	$1\text{GHz} \leq f < 18\text{GHz}$	4.50dB
	$18\text{GHz} \leq f \leq 40\text{GHz}$	2.90dB
7. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	2.62dB


ANNEX A: Detailed Test Results

Test Configuration

The measurement is made according to ANSI C63.10.

1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the spectrum analyzer to start measurement.
5. Record the values.

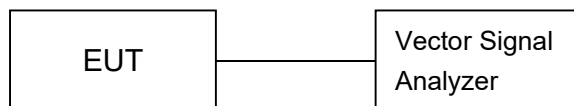


2) Radiated Measurements

Test setup:


9kHz-30MHz:

The EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

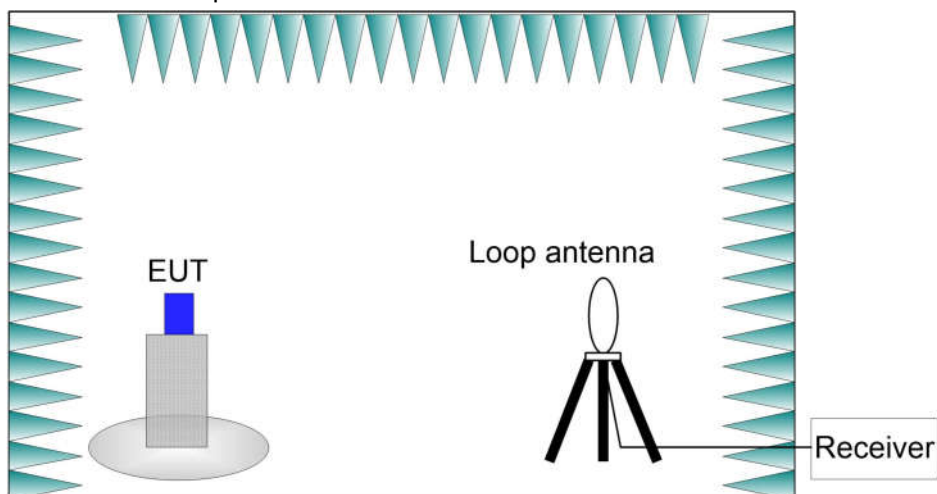

30MHz-1GHz:


The EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving antenna is 1.0 meter to 4.0 meter above the ground. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiver antenna polarization.

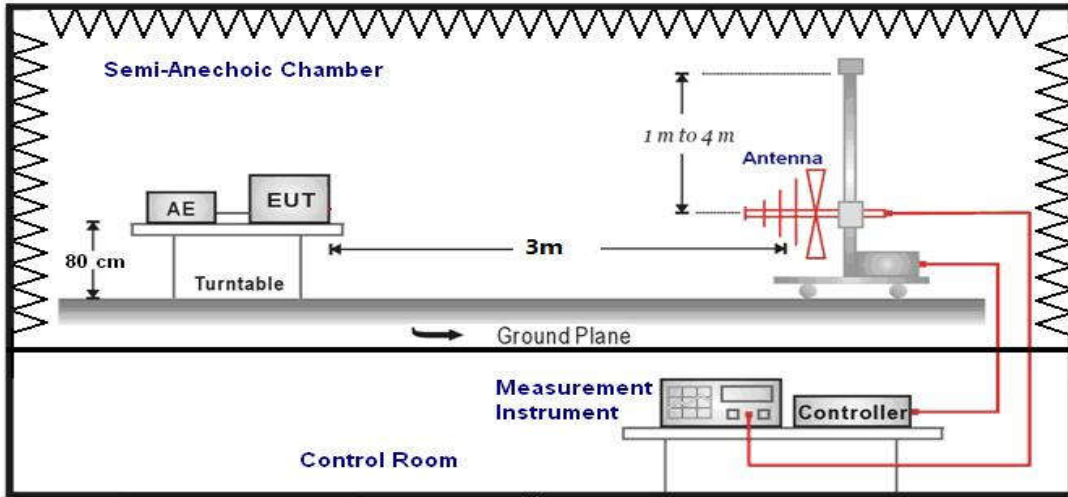


Above 1GHz:

EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the receive antenna. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiving antenna polarization.

1GHz-3GHz:

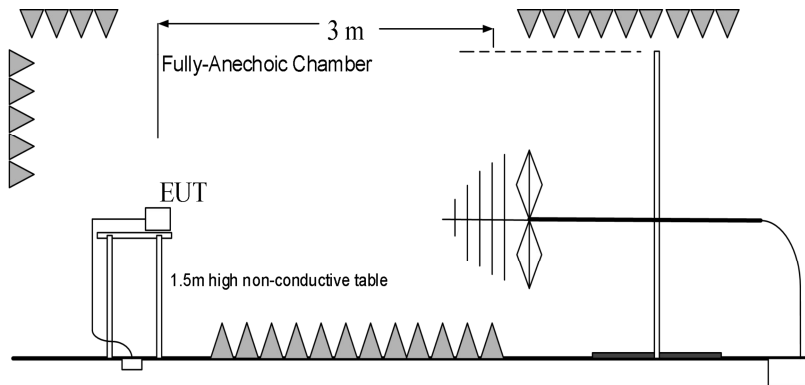


3GHz-40GHz:

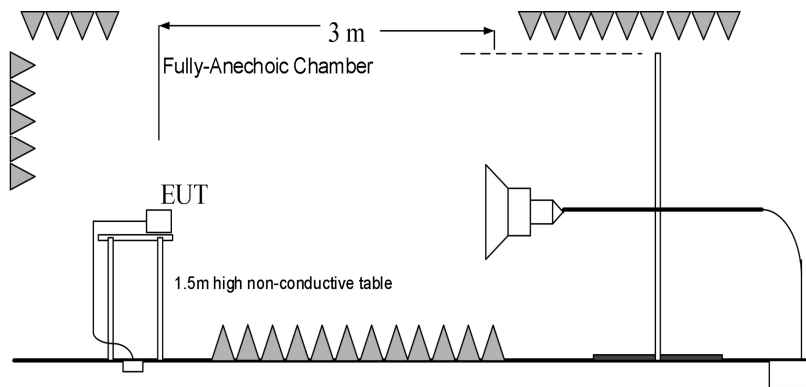

3) AC Power line Conducted Emission Measurement

For WLAN, the EUT is working under test mode. The EUT is commanded to operate at maximum transmitting power.

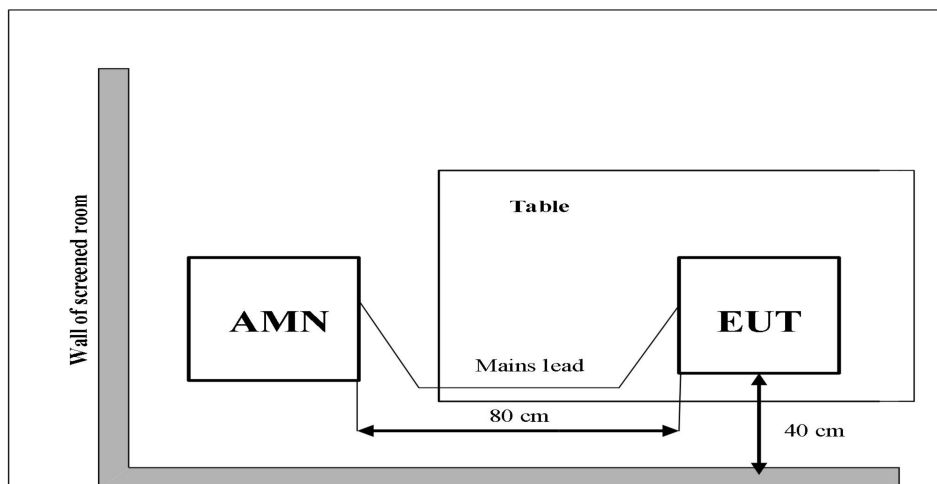



A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -0.32dBi.
The RF transmitter uses an integrate antenna without connector.**



A.1 Maximum Output Power

Measurement of method: See ANSI C63.10-2013-Clause 11.9.2.3.2.

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30


Measurement Results:

Mode	RF output power (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	15.85	16.06	15.53
802.11g	15.21	15.39	15.16
802.11n-HT20	14.27	14.51	14.17
/	2422MHz (Ch3)	2437MHz (Ch6)	2452MHz (Ch9)
802.11n-HT40	13.68	13.95	14.23

Note:

The data rate 1Mbps (11b mode), 6Mbps (11g mode) and MCS0 (11n mode) are selected as the Worst-Case. The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

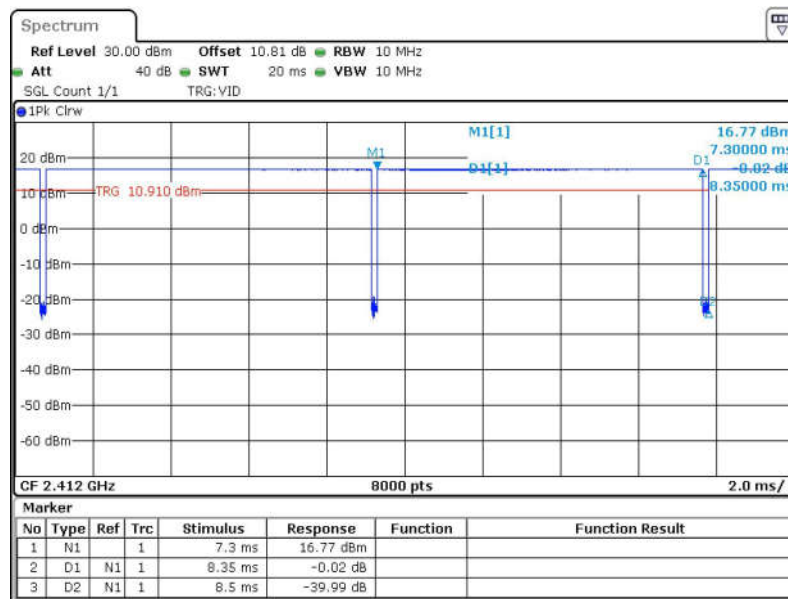

Conclusion: PASS



A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2.

Measurement Limit:

Standard	Limit (dBm/10 kHz)
FCC CRF Part 15.247(e)	< 8 dBm/10 kHz

Measurement Results:

Mode	Channel	Frequency (MHz)	Test Results(dBm/10 kHz)		Conclusion
			Fig.	Value	
802.11b	CH 1	2412	Fig.1	-3.40	P
	CH 6	2437	Fig.2	-2.90	P
	CH 11	2462	Fig.3	-3.09	P
802.11g	CH 1	2412	Fig.4	-6.44	P
	CH 6	2437	Fig.5	-6.05	P
	CH 11	2462	Fig.6	-6.60	P
802.11n- HT20	CH 1	2412	Fig.7	-6.21	P
	CH 6	2437	Fig.8	-6.49	P
	CH 11	2462	Fig.9	-6.69	P
802.11n- HT40	CH 3	2422	Fig.10	-8.71	P
	CH 6	2437	Fig.11	-9.27	P
	CH 9	2452	Fig.12	-7.69	P

See below for test graphs.

Conclusion: PASS

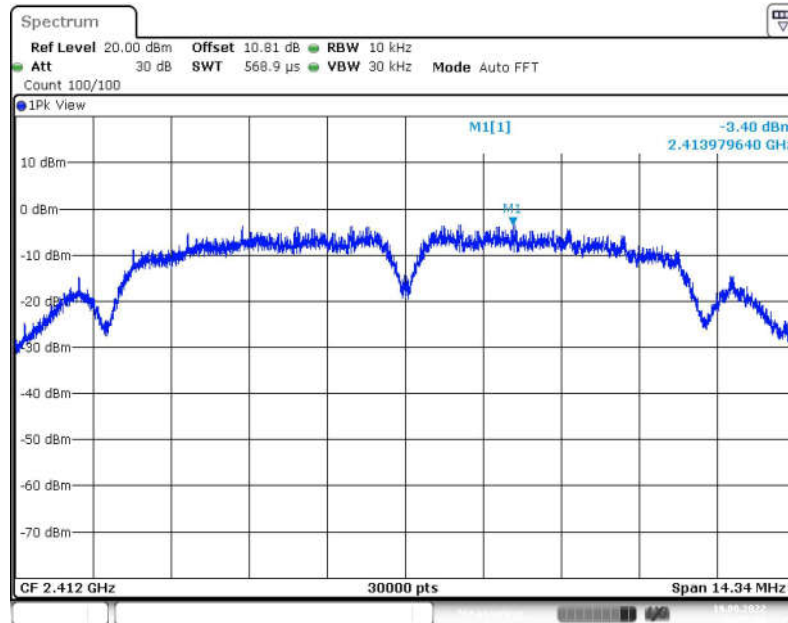


Fig.1 Power Spectral Density (802.11b, CH 1)

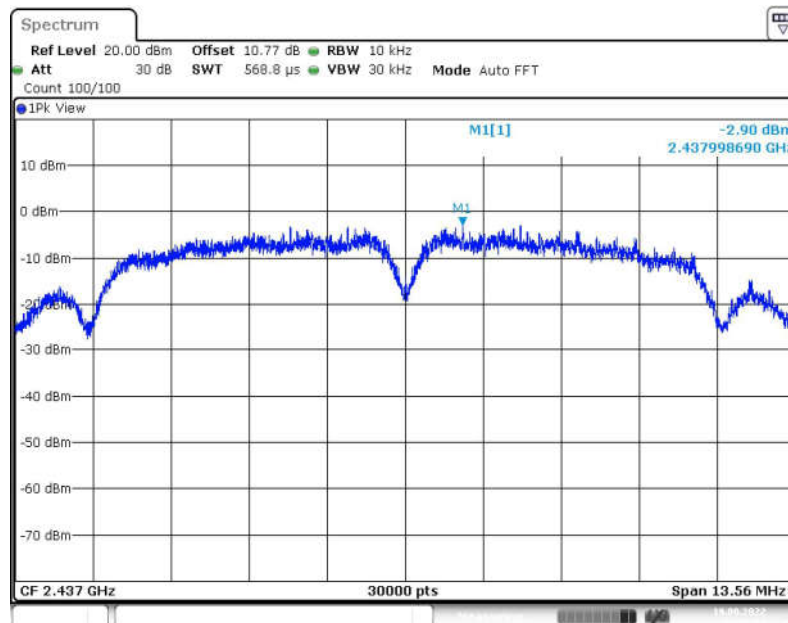


Fig.2 Power Spectral Density (802.11b, CH 6)

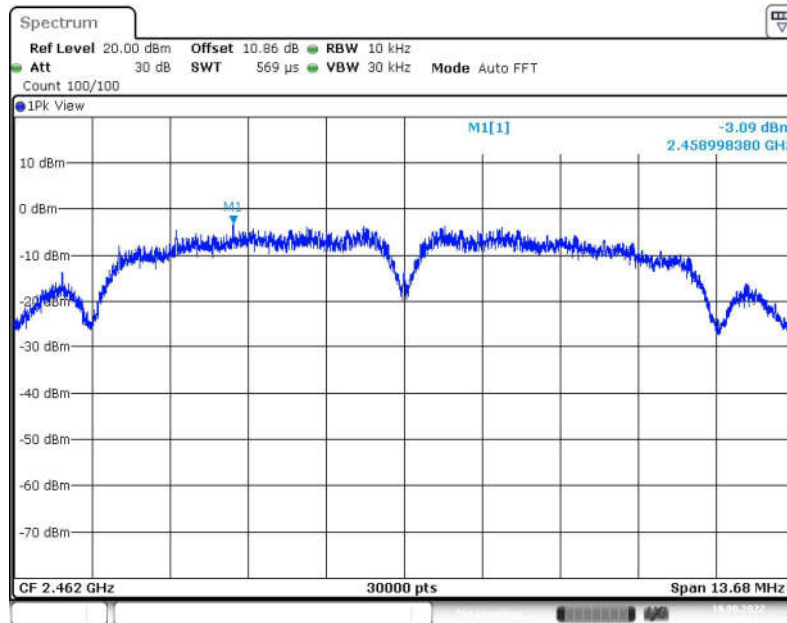


Fig.3 Power Spectral Density (802.11b, CH 11)

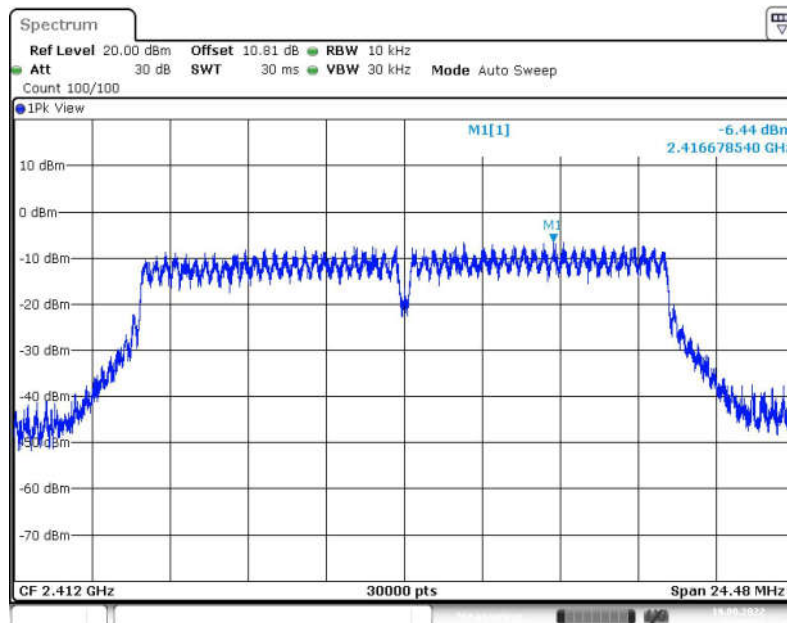


Fig.4 Power Spectral Density (802.11g, CH 1)

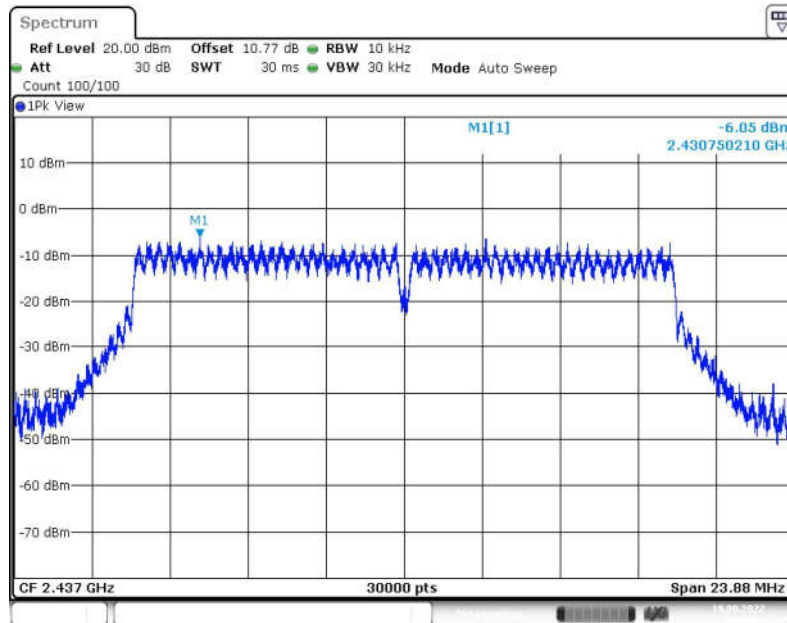


Fig.5 Power Spectral Density (802.11g, CH 6)

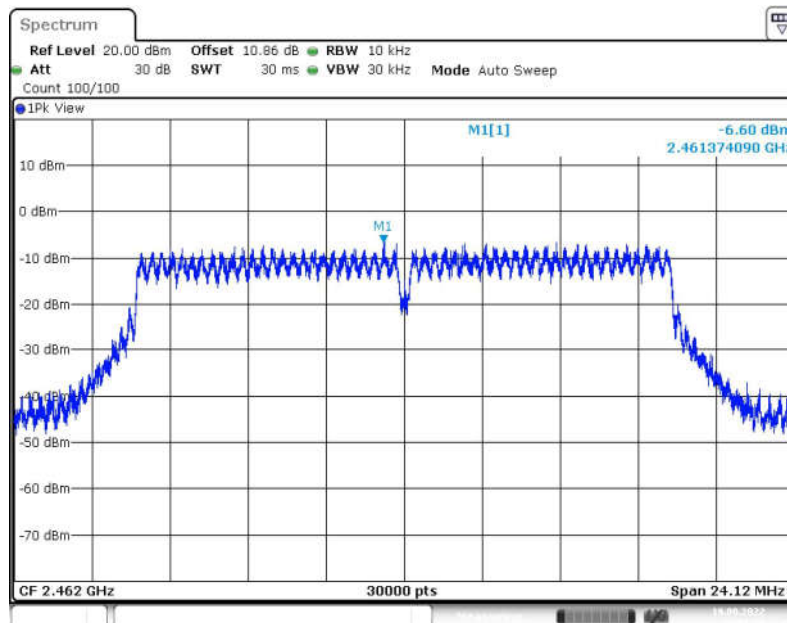


Fig.6 Power Spectral Density (802.11g, CH 11)

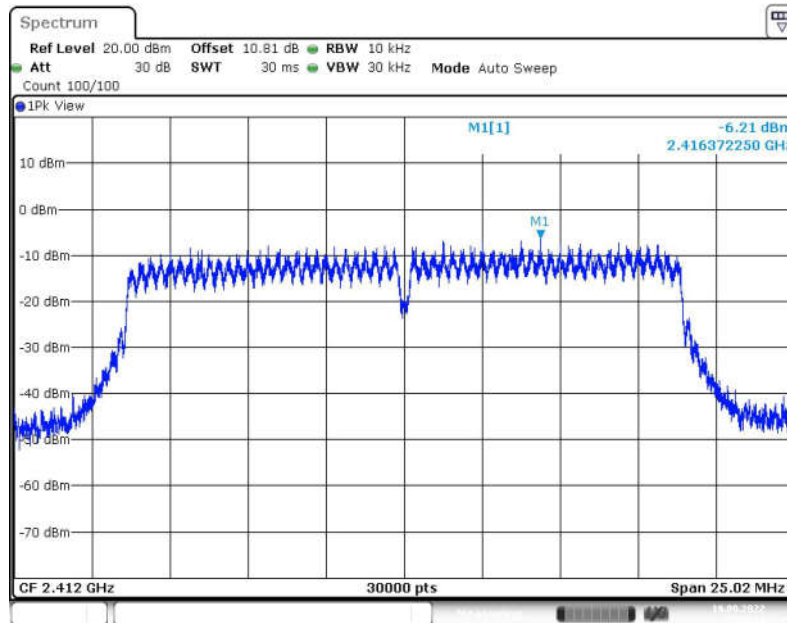


Fig.7 Power Spectral Density (802.11n-HT20, CH 1)

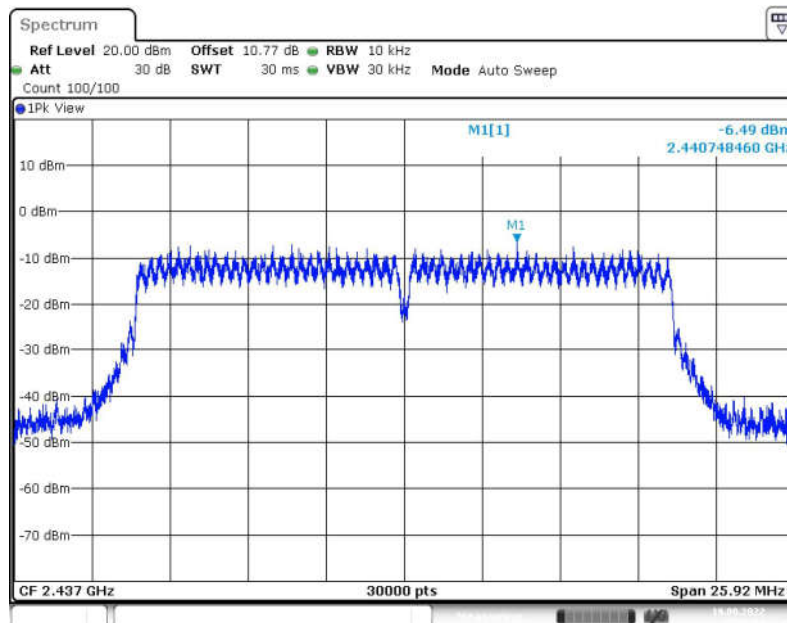


Fig.8 Power Spectral Density (802.11n-HT20, CH 6)

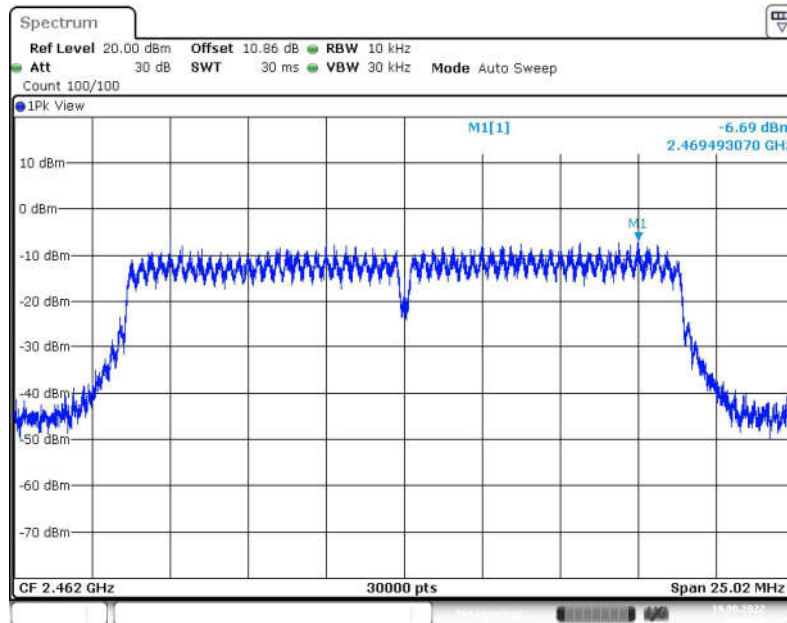


Fig.9 Power Spectral Density (802.11n-HT20, CH 11)

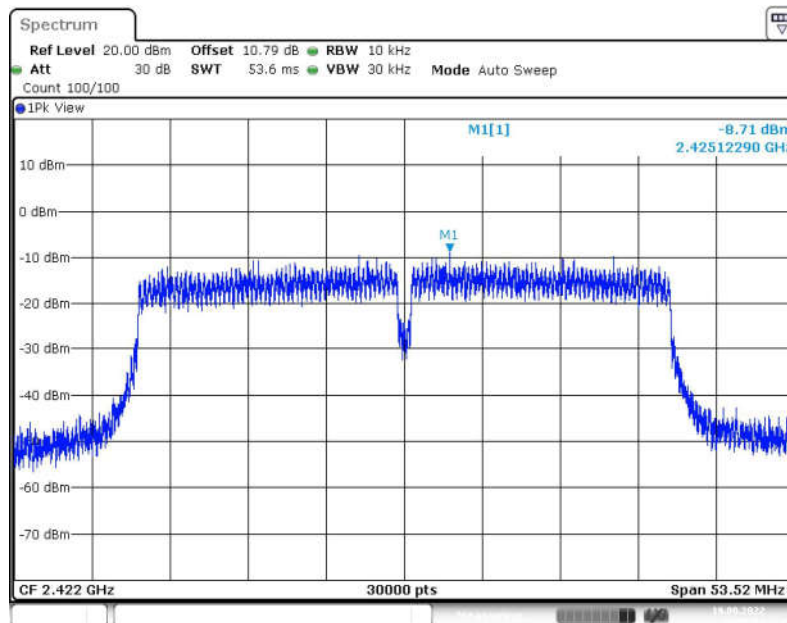


Fig.10 Power Spectral Density (802.11n-HT40, CH 3)

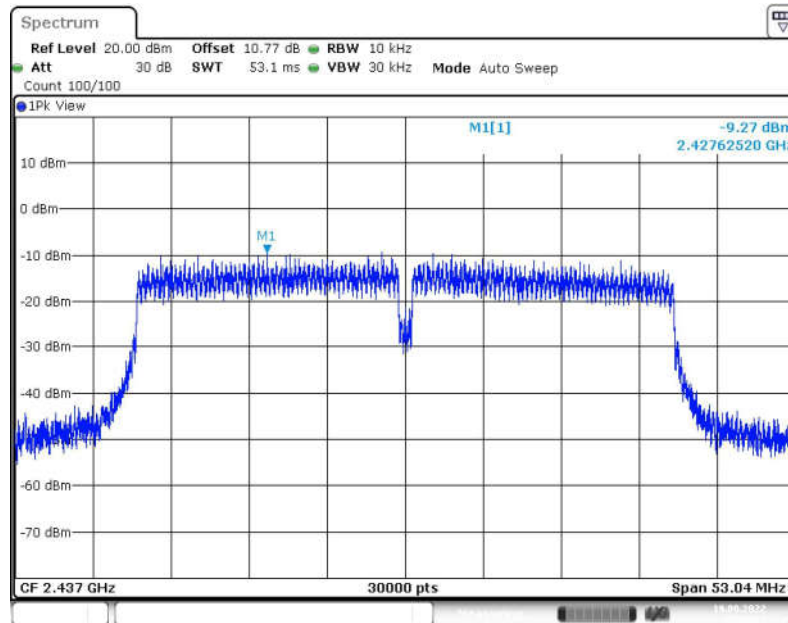


Fig.11 Power Spectral Density (802.11n-HT40, CH 6)

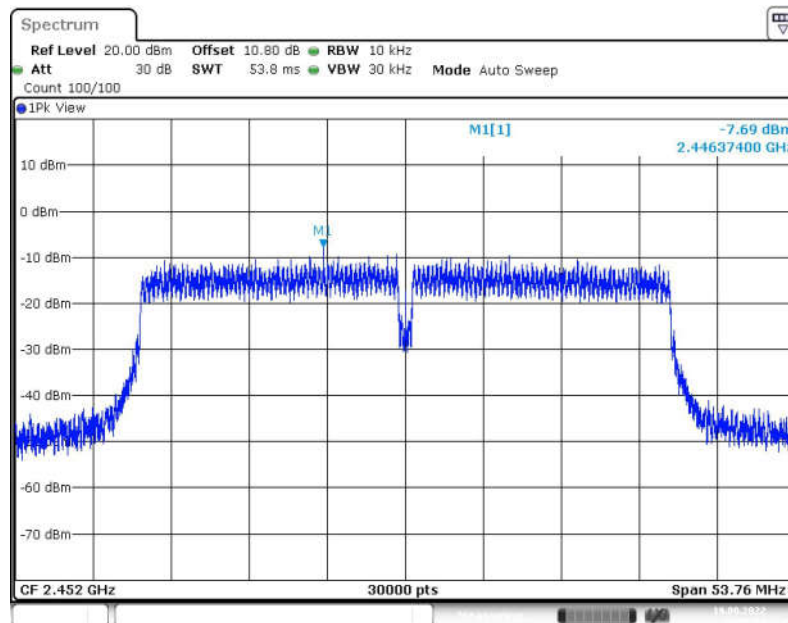


Fig.12 Power Spectral Density (802.11n-HT40, CH 9)



A.3 6dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 11.8.2.

Measurement Limit:

Standard	Limit (MHz)
FCC 47 CFR Part 15.247 (a)	≥ 0.5

Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (MHz)		Conclusion
802.11b	CH 1	2412	Fig.13	9.56	P
	CH 6	2437	Fig.14	9.04	P
	CH 11	2462	Fig.15	9.12	P
802.11g	CH 1	2412	Fig.16	16.32	P
	CH 6	2437	Fig.17	15.92	P
	CH 11	2462	Fig.18	16.08	P
802.11n- HT20	CH 1	2412	Fig.19	16.68	P
	CH 6	2437	Fig.20	17.28	P
	CH 11	2462	Fig.21	16.68	P
802.11n- HT40	CH 3	2422	Fig.22	35.68	P
	CH 6	2437	Fig.23	35.36	P
	CH 9	2452	Fig.24	35.84	P

See below for test graphs.

Conclusion: **PASS**

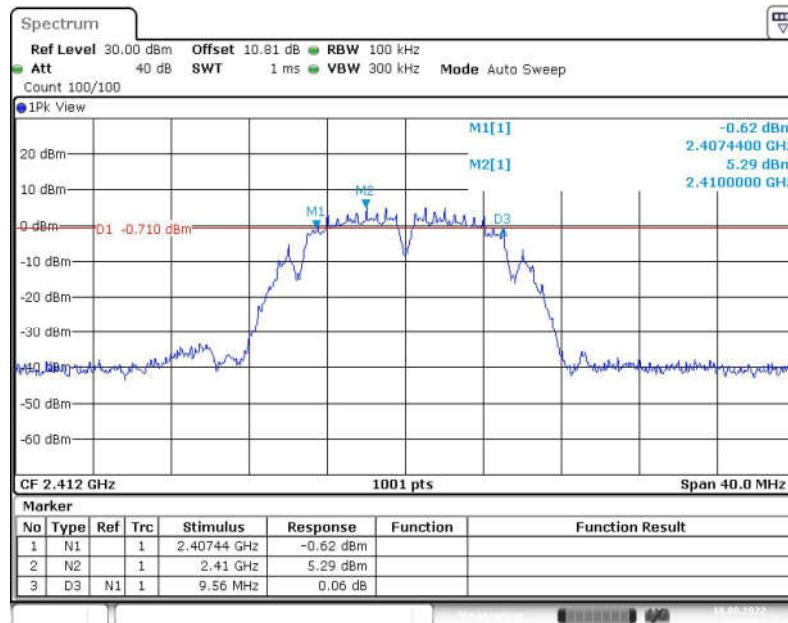


Fig.13 6dB Bandwidth (802.11b, CH 1)



Fig.14 6dB Bandwidth (802.11b, CH 6)

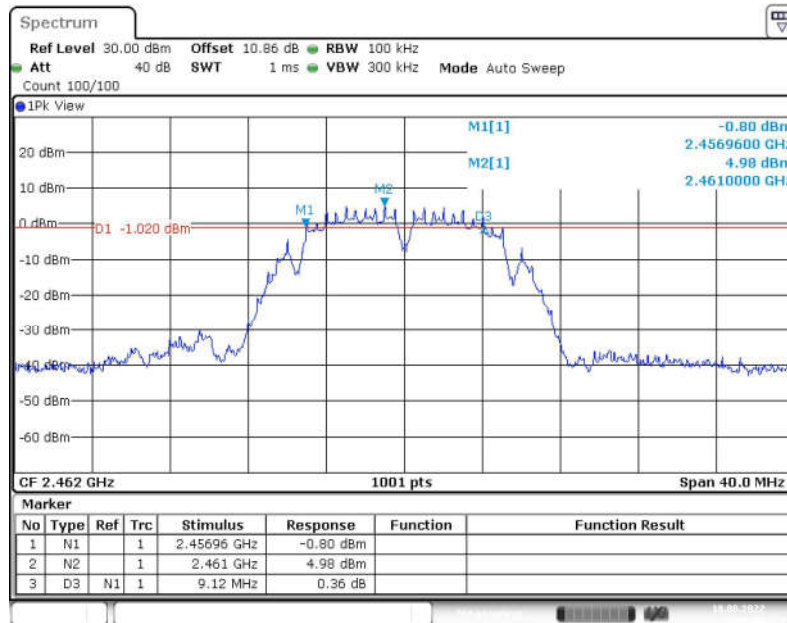


Fig.15 6dB Bandwidth (802.11b, CH 11)

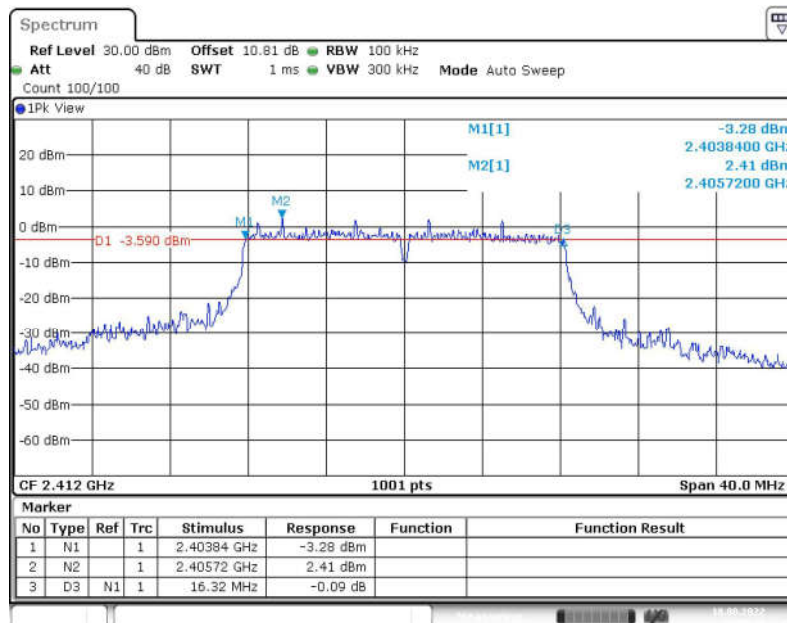


Fig.16 6dB Bandwidth (802.11g, CH 1)

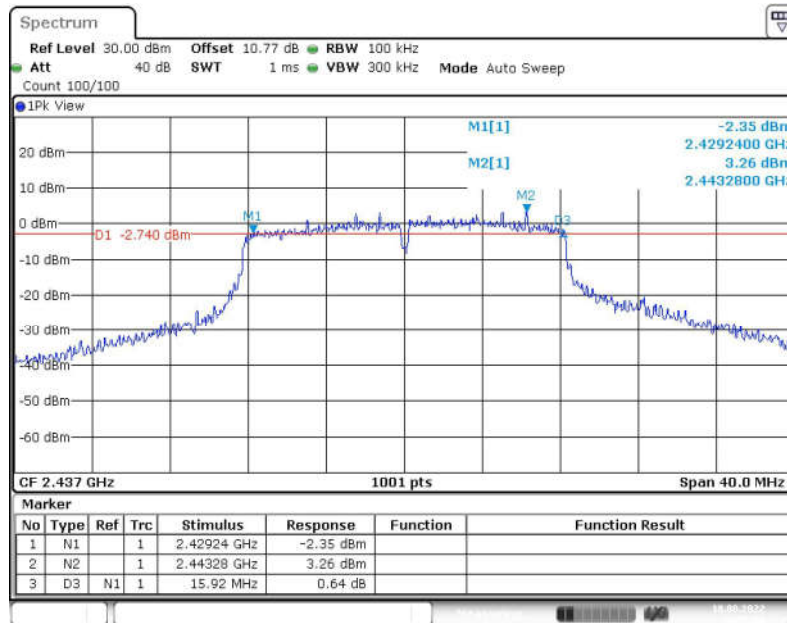


Fig.17 6dB Bandwidth (802.11g, CH 6)

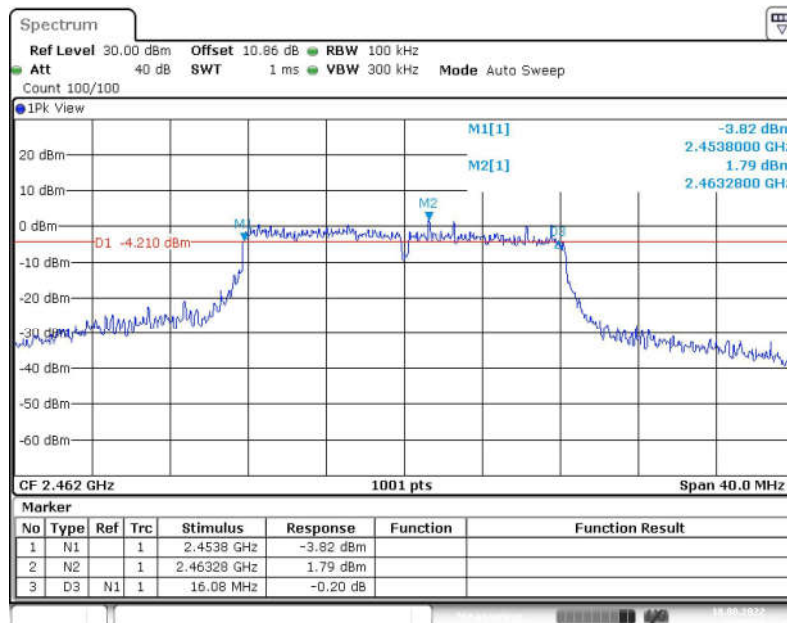


Fig.18 6dB Bandwidth (802.11g, CH 11)

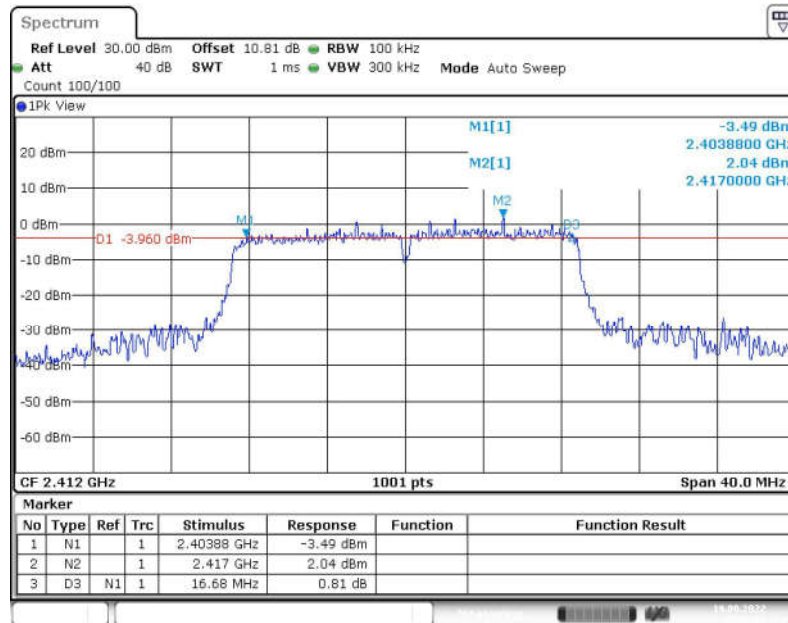


Fig.19 6dB Bandwidth (802.11n-HT20, CH 1)

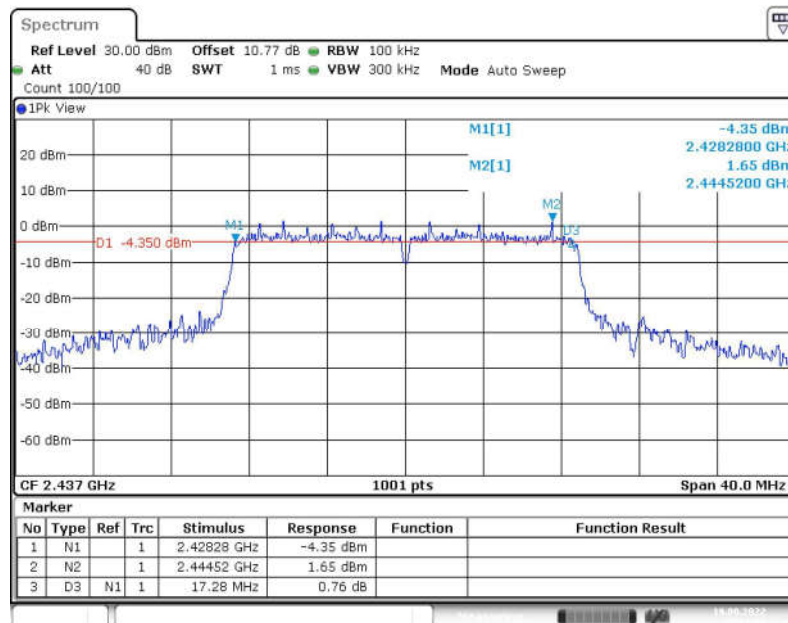


Fig.20 6dB Bandwidth (802.11n-HT20, CH 6)

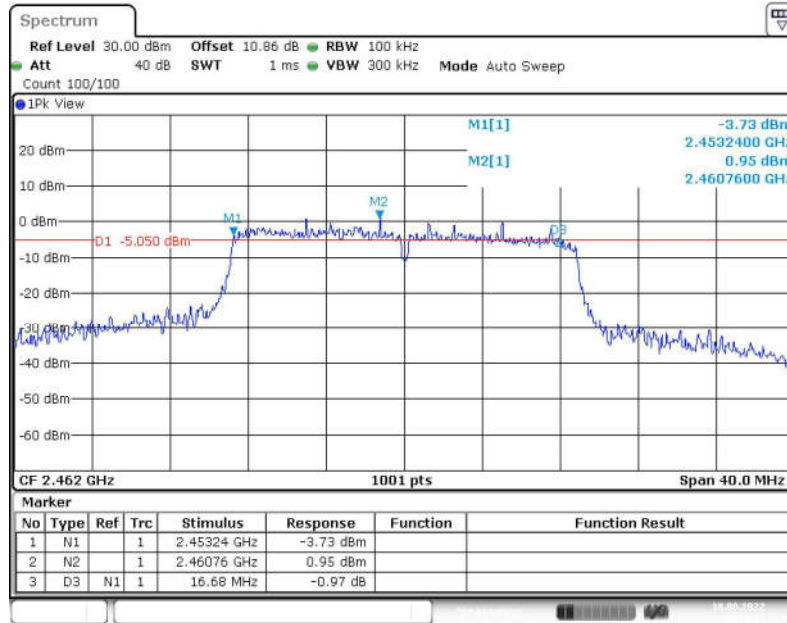


Fig.21 6dB Bandwidth (802.11n-HT20, CH 11)

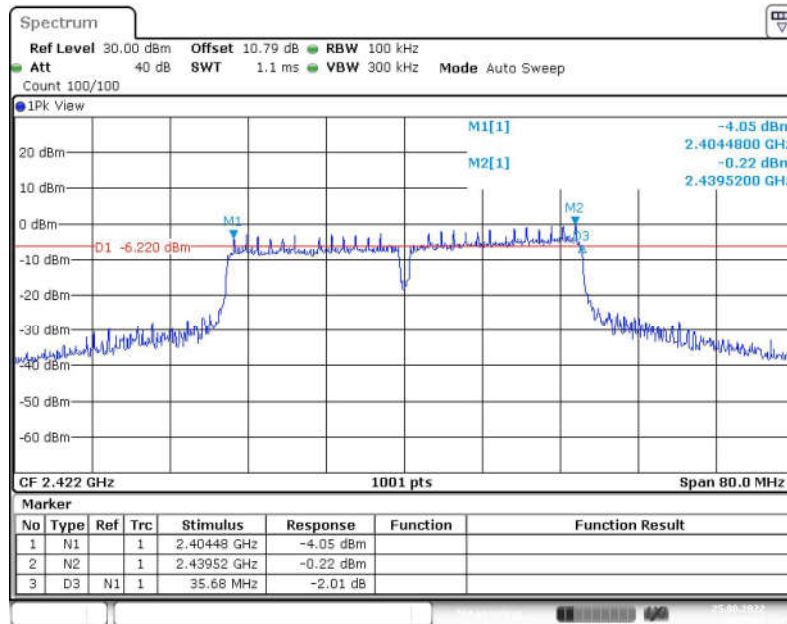


Fig.22 6dB Bandwidth (802.11n-HT40, CH 3)

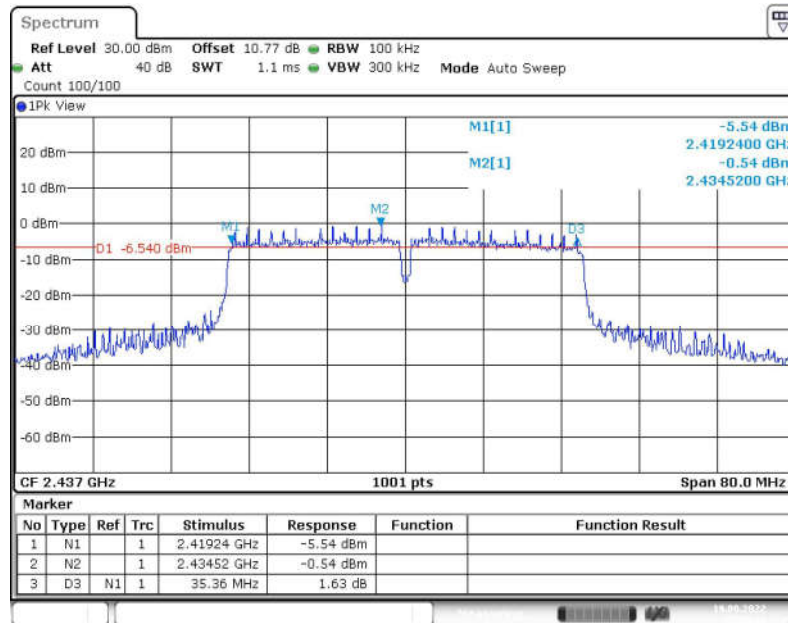


Fig.23 6dB Bandwidth (802.11n-HT40, CH 6)

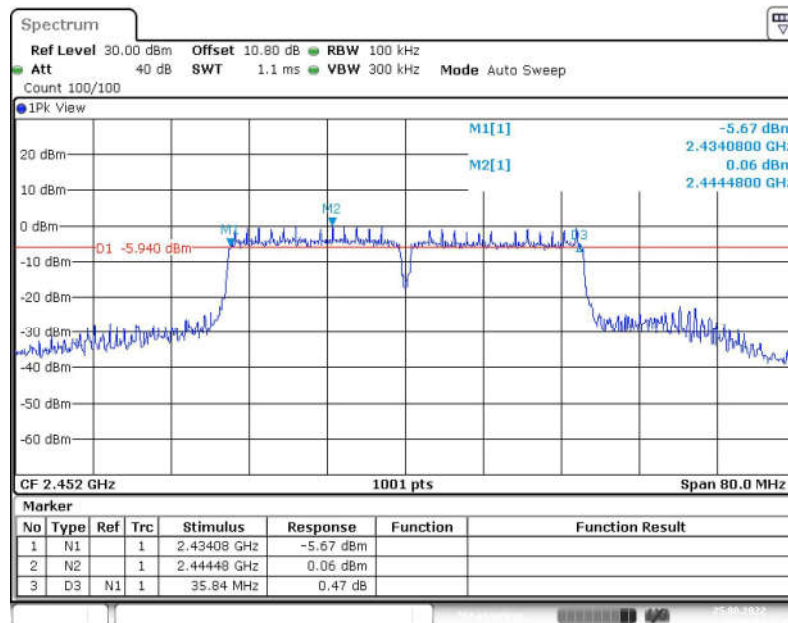


Fig.24 6dB Bandwidth (802.11n-HT40, CH 9)



A.4 Band Edges Compliance

Method of Measurement: See ANSI C63.10-clause 11.13.3.

Measurement Limit:

Standard	Limit (dB)
FCC 47 CFR Part 15.247 (d)	> 30

Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (dB)		Conclusion
802.11b	CH1	2412	Fig.25	49.15	P
	CH11	2462	Fig.26	53.76	P
802.11g	CH1	2412	Fig.27	38.38	P
	CH11	2462	Fig.28	43.56	P
802.11n- HT20	CH1	2412	Fig.29	38.25	P
	CH11	2462	Fig.30	42.67	P
802.11n- HT40	CH3	2422	Fig.31	35.50	P
	CH9	2452	Fig.32	38.97	P

See below for test graphs.

Conclusion: **PASS**

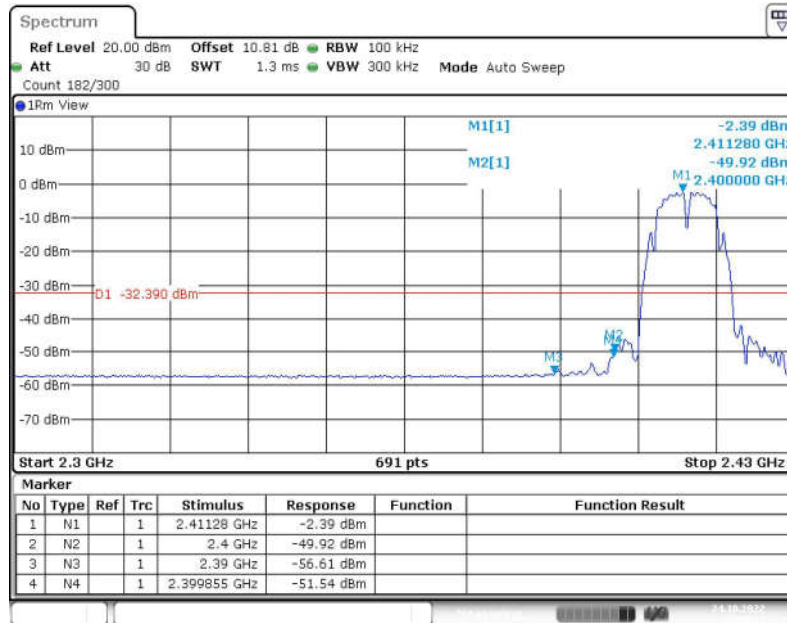


Fig.25 Band Edges (802.11b, CH 1)

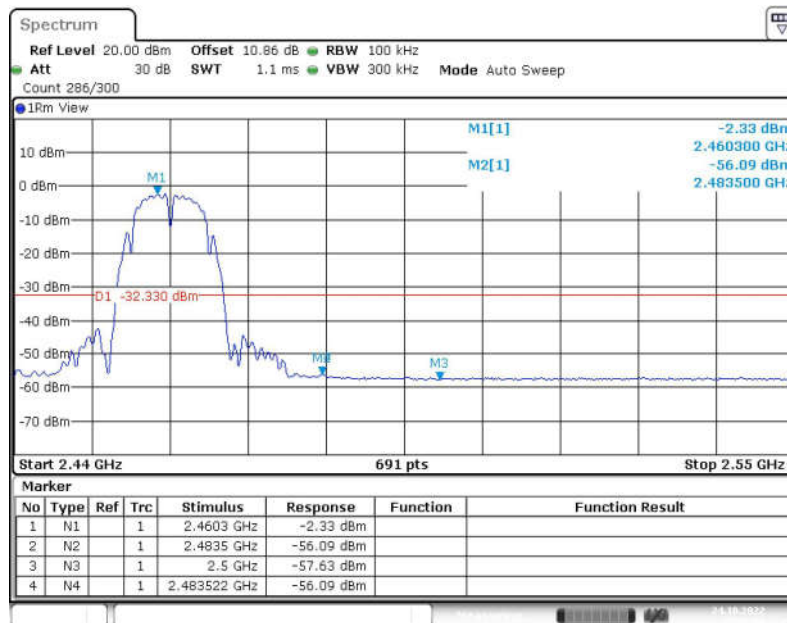


Fig.26 Band Edges (802.11b, CH 11)

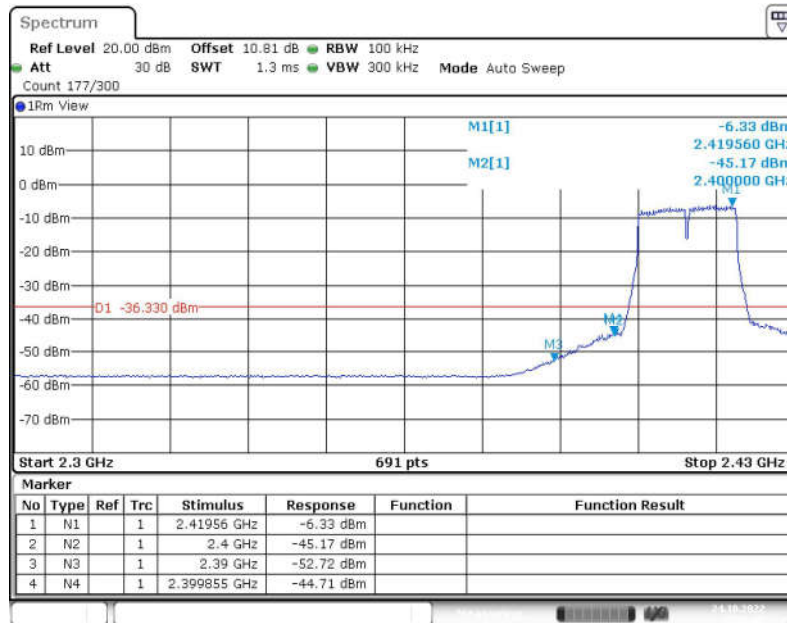


Fig.27 Band Edges (802.11g, CH 1)

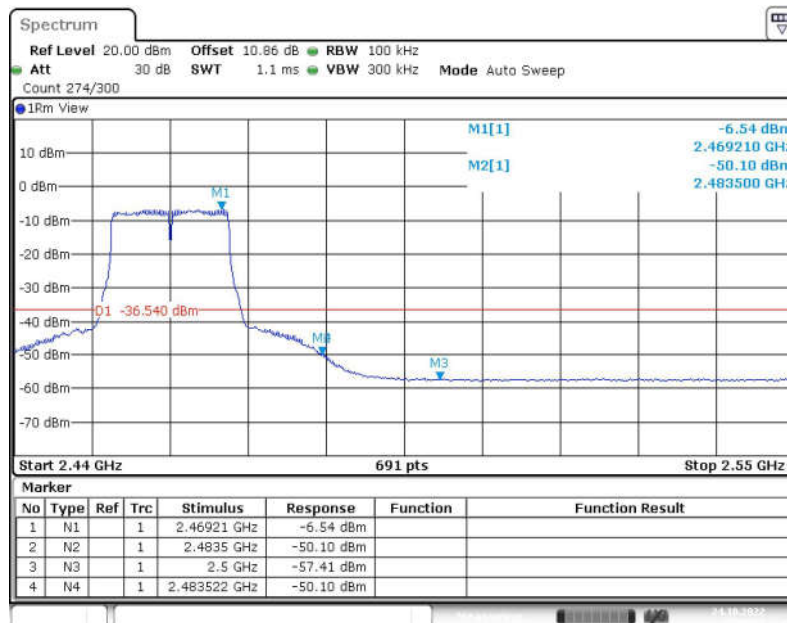


Fig.28 Band Edges (802.11g, CH 11)

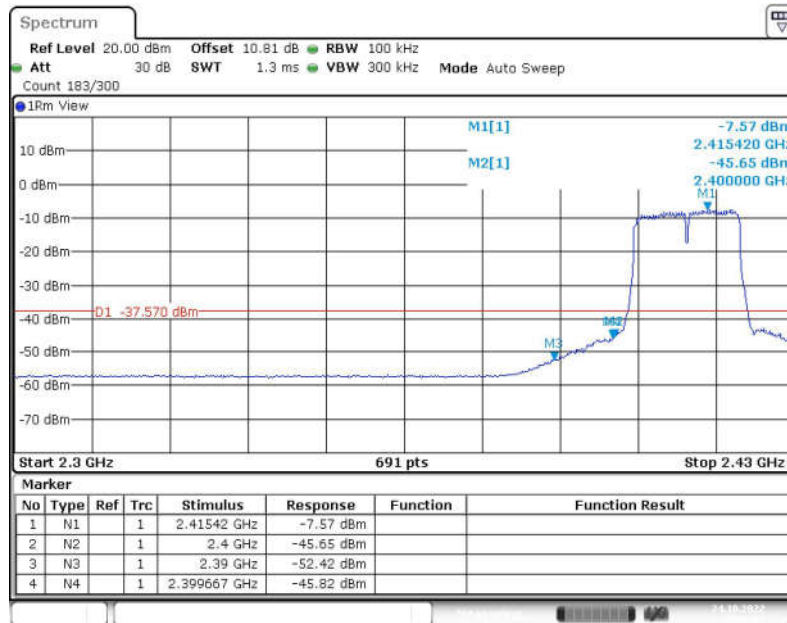


Fig.29 Band Edges (802.11n-HT20, CH 1)

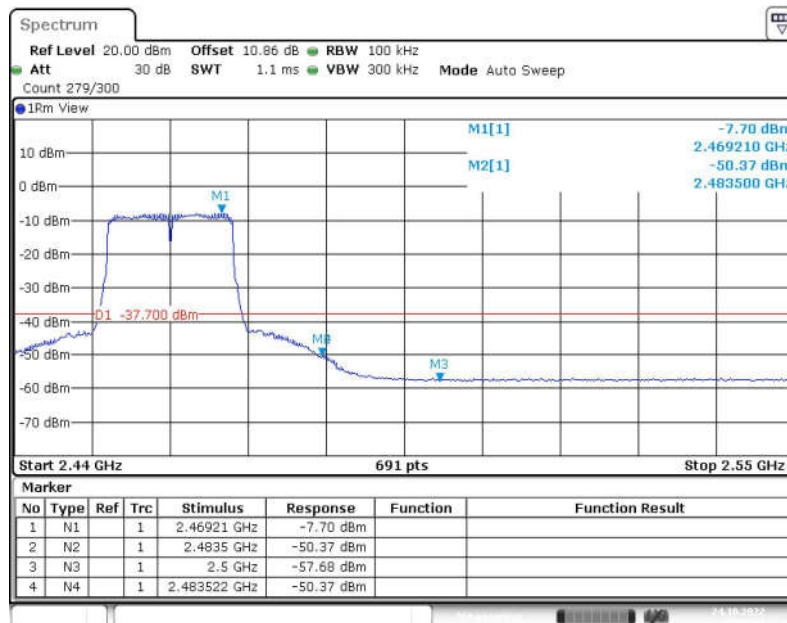


Fig.30 Band Edges (802.11n-HT20, CH 11)

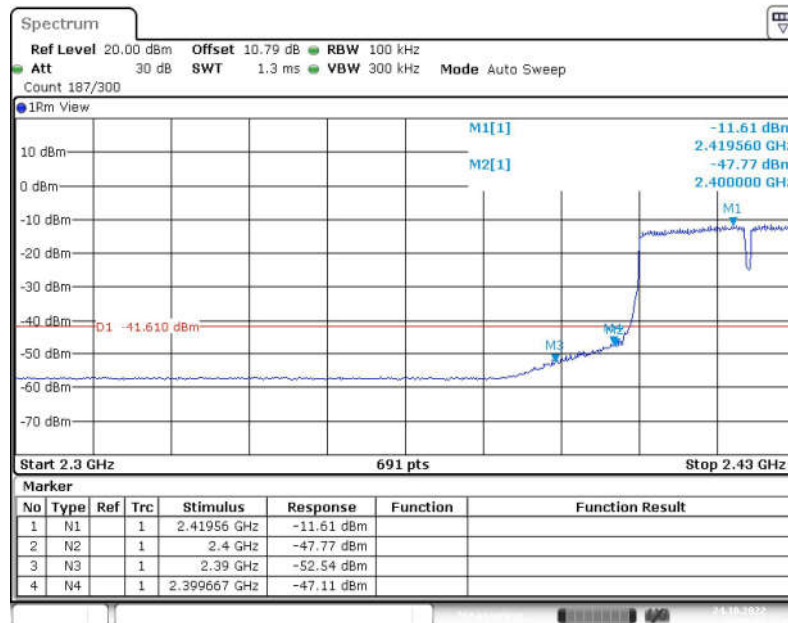


Fig.31 Band Edges (802.11n-HT40, CH 3)

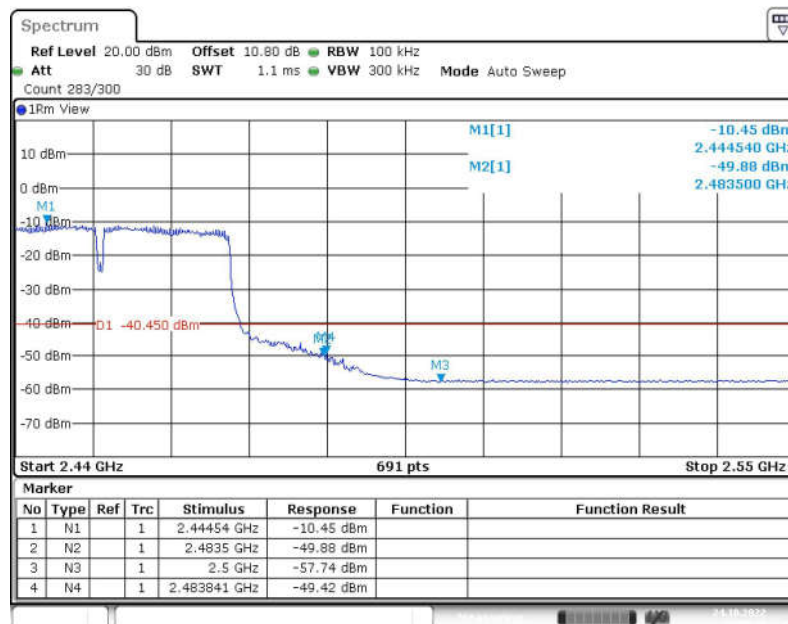


Fig.32 Band Edges (802.11n-HT40, CH 9)



A.5 Conducted Emission

Method of Measurement: See ANSI C63.10-clause 11.11.2&11.11.3.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	30dBm below peak output power in 100kHz bandwidth

Measurement Results:

Mode	Channel	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	CH 1	2412	2.412 GHz	Fig.33	P
			30MHz -1GHz	Fig.34	P
			1GHz-26.5GHz	Fig.35	P
	CH 6	2437	2.437 GHz	Fig.36	P
			30MHz -1GHz	Fig.37	P
			1GHz-26.5GHz	Fig.38	P
	CH 11	2462	2.462 GHz	Fig.39	P
			30MHz -1GHz	Fig.40	P
			1GHz-26.5GHz	Fig.41	P
802.11g	CH 1	2412	2.412 GHz	Fig.42	P
			30MHz -1GHz	Fig.43	P
			1GHz-26.5GHz	Fig.44	P
	CH 6	2437	2.437 GHz	Fig.45	P
			30MHz -1GHz	Fig.46	P
			1GHz-26.5GHz	Fig.47	P
	CH 11	2462	2.462 GHz	Fig.48	P
			30MHz -1GHz	Fig.49	P
			1GHz-26.5GHz	Fig.50	P
802.11n- HT20	CH 1	2412	2.412 GHz	Fig.51	P
			30MHz -1GHz	Fig.52	P
			1GHz-26.5GHz	Fig.53	P
	CH 6	2437	2.437 GHz	Fig.54	P
			30MHz -1GHz	Fig.55	P
			1GHz-26.5GHz	Fig.56	P
	CH 11	2462	2.462 GHz	Fig.57	P
			30MHz -1GHz	Fig.58	P
			1GHz-26.5GHz	Fig.59	P
802.11n- HT40	CH 3	2422	2.422 GHz	Fig.60	P
			30MHz -1GHz	Fig.61	P
			1GHz-26.5GHz	Fig.62	P
	CH 6	2437	2.437 GHz	Fig.63	P
			30MHz -1GHz	Fig.64	P



			1GHz-26.5GHz	Fig.65	P
	CH 9	2452	2.452 GHz	Fig.66	P
			30MHz -1GHz	Fig.67	P
			1GHz-26.5GHz	Fig.68	P

See below for test graphs.

Conclusion: PASS



Fig.33 Conducted Spurious Emission (Center Frequency, 802.11b, CH1)

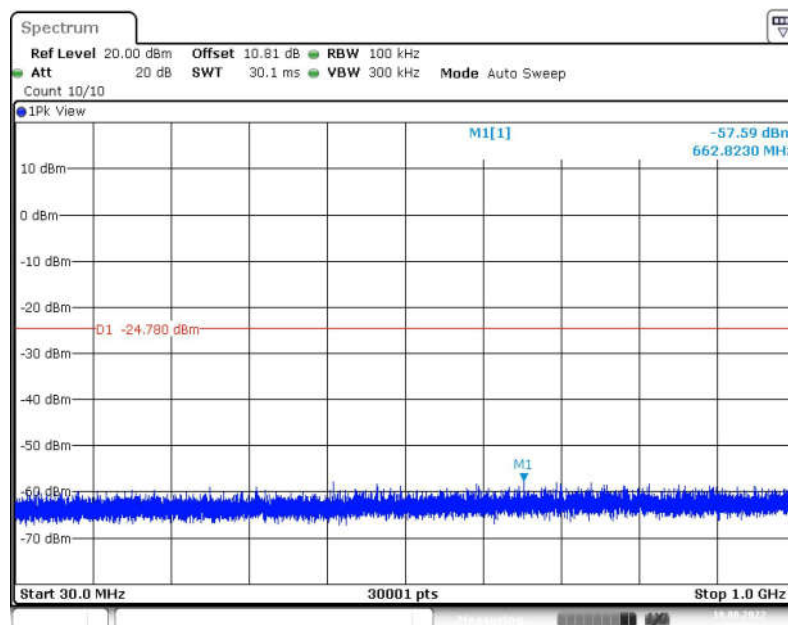


Fig.34 Conducted Spurious Emission (30MHz -1GHz, 802.11b, CH1)

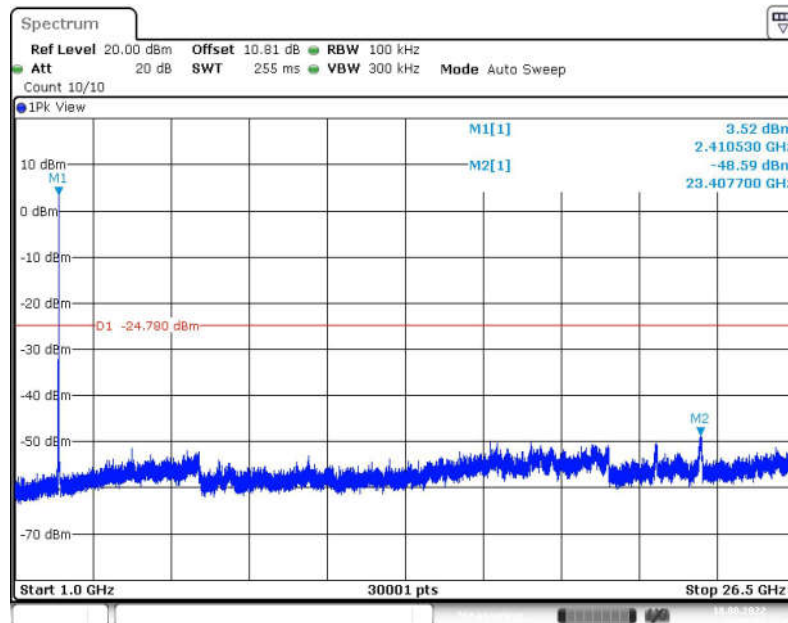


Fig.35 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH1)



Fig.36 Conducted Spurious Emission (Center Frequency, 802.11b, CH6)

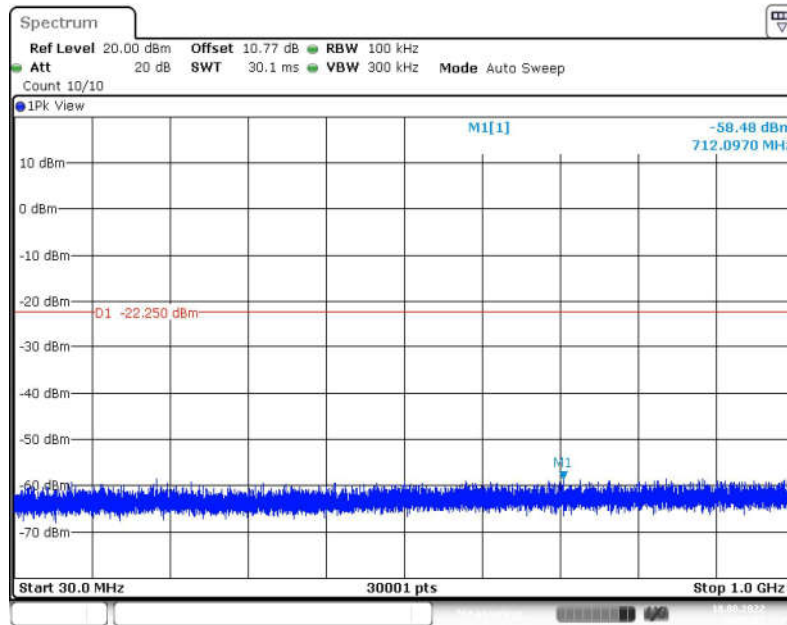


Fig.37 Conducted Spurious Emission (30MHz -1GHz, 802.11b, CH6)

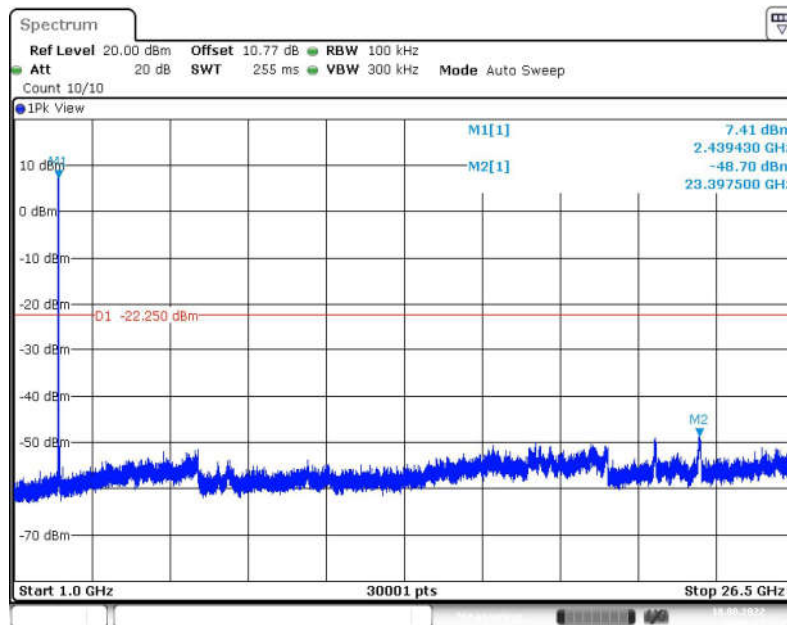


Fig.38 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH6)

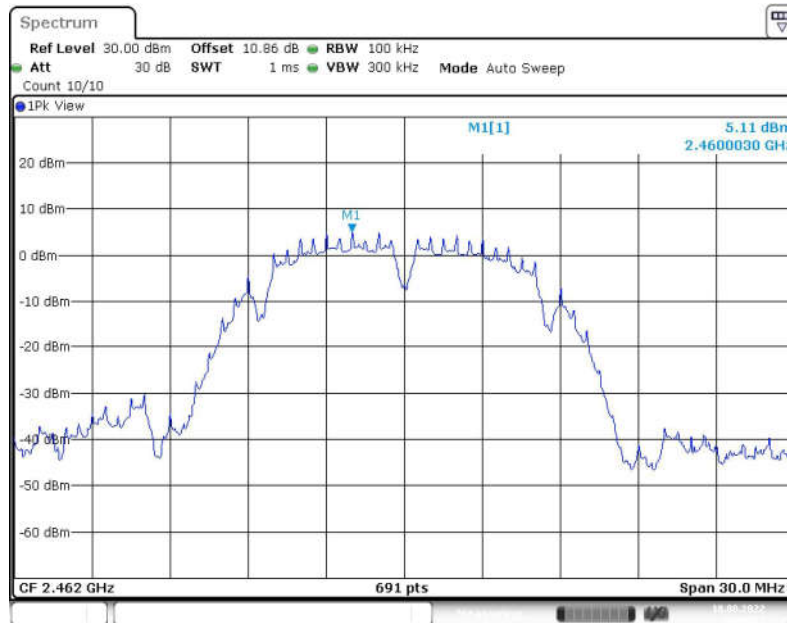


Fig.39 Conducted Spurious Emission (Center Frequency, 802.11b, CH11)

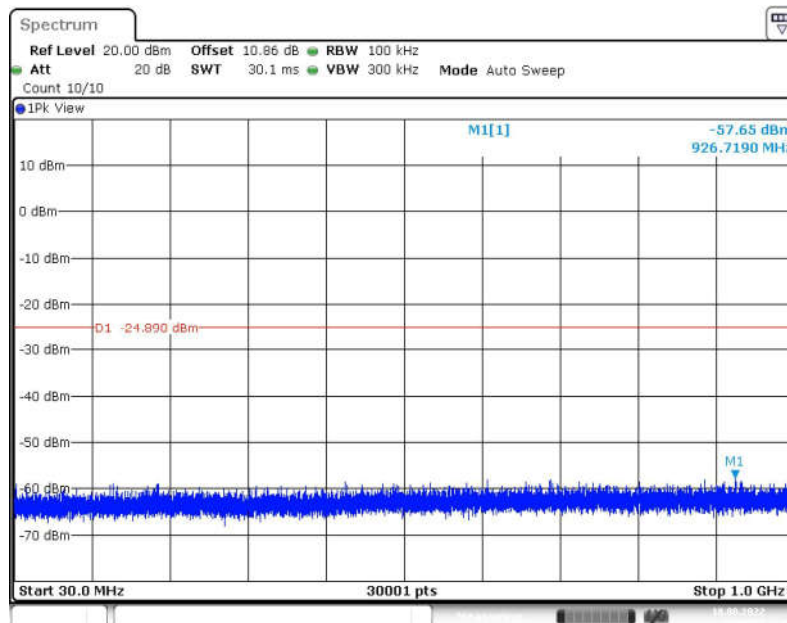


Fig.40 Conducted Spurious Emission (30MHz -1GHz, 802.11b, CH11)

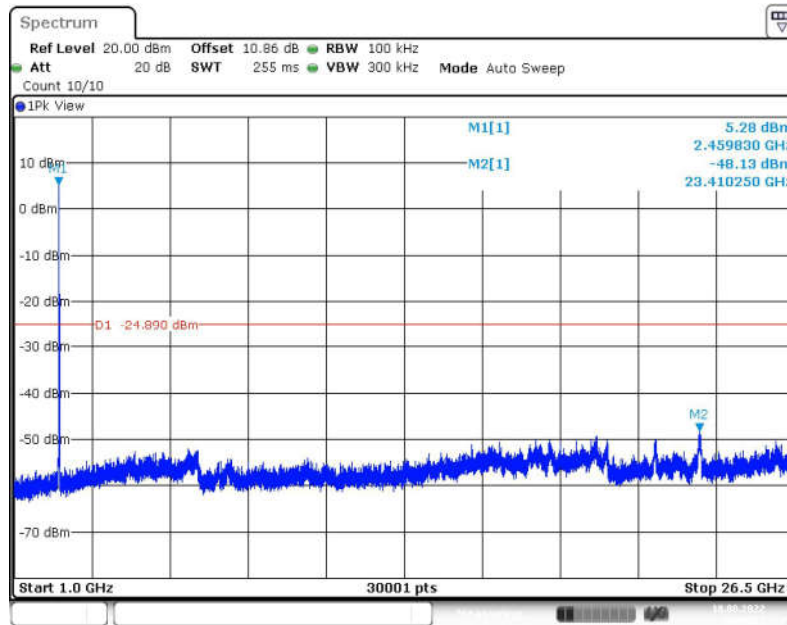


Fig.41 Conducted Spurious Emission (1GHz-26.5GHz, 802.11b, CH11)

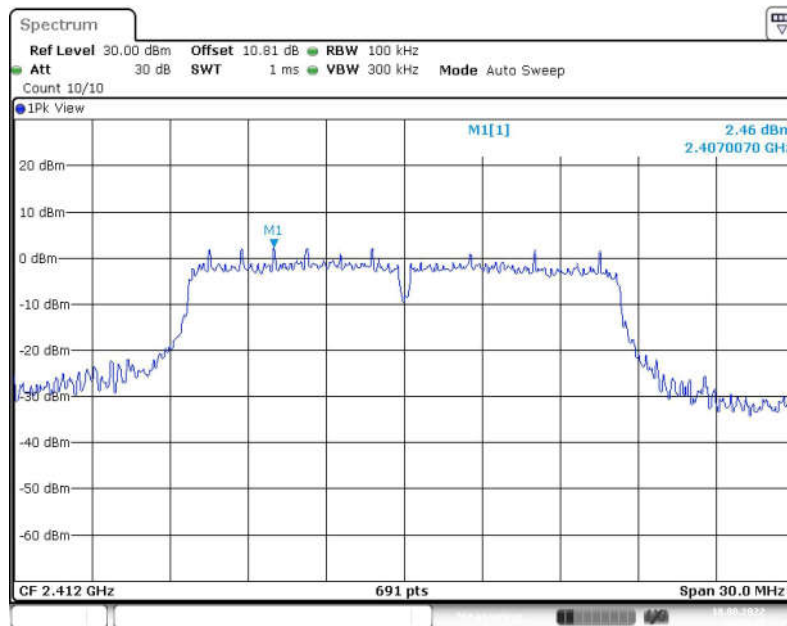


Fig.42 Conducted Spurious Emission (Center Frequency, 802.11g, CH1)

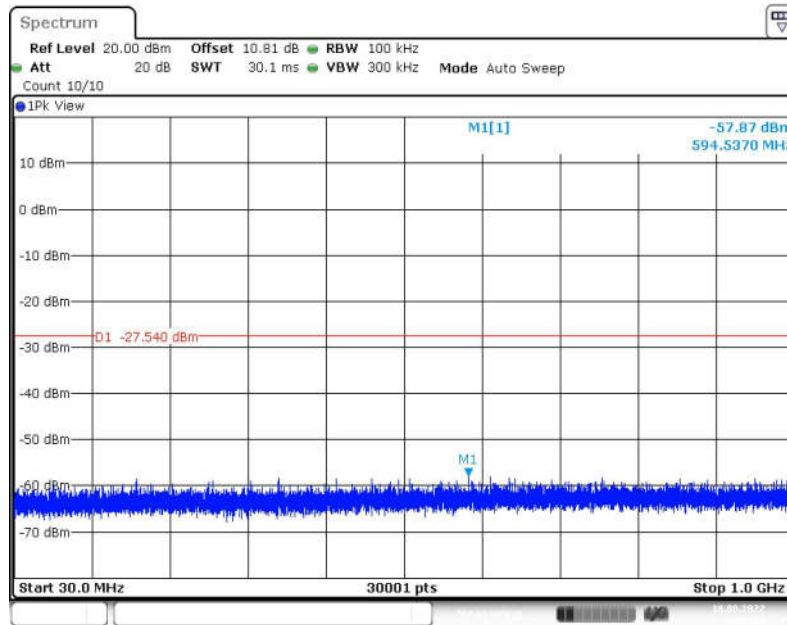


Fig.43 Conducted Spurious Emission (30MHz -1GHz, 802.11g, CH1)

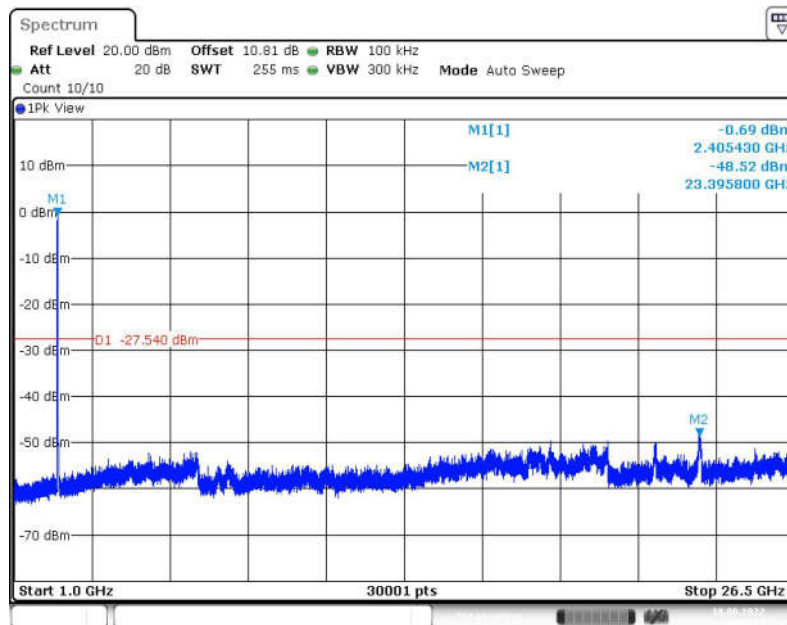


Fig.44 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH1)

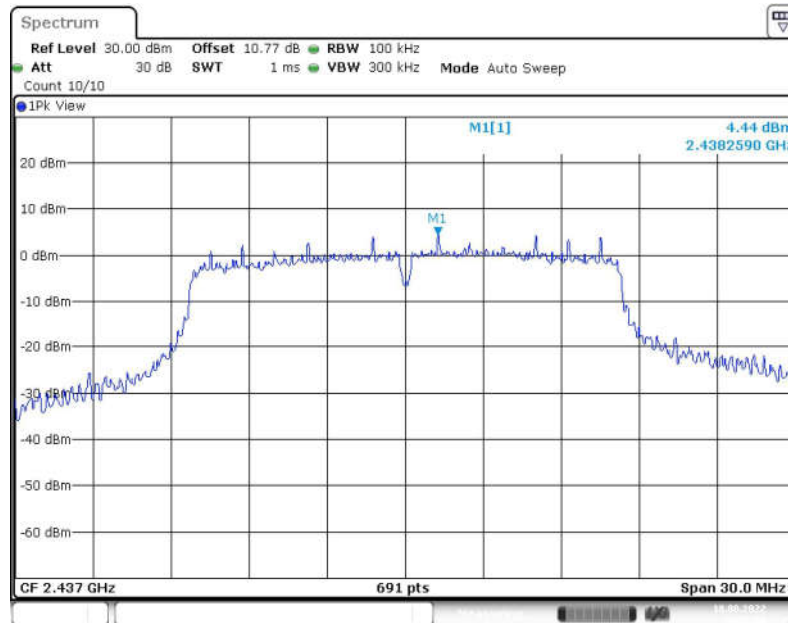


Fig.45 Conducted Spurious Emission (Center Frequency, 802.11g, CH6)

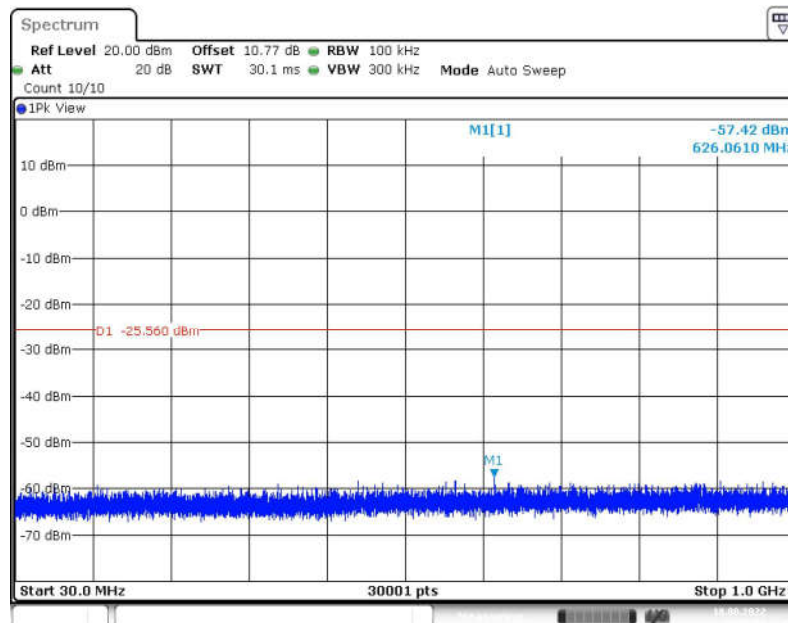


Fig.46 Conducted Spurious Emission (30MHz -1GHz, 802.11g, CH6)

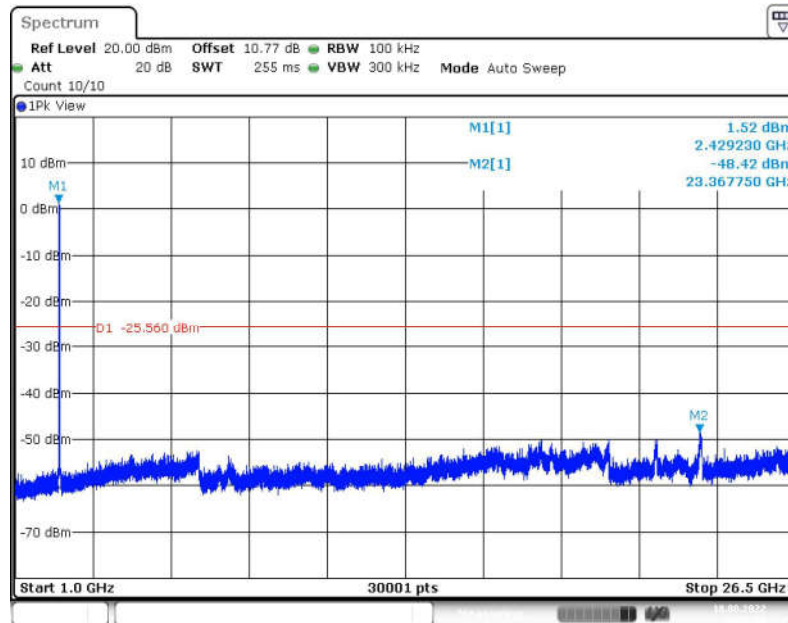


Fig.47 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH6)

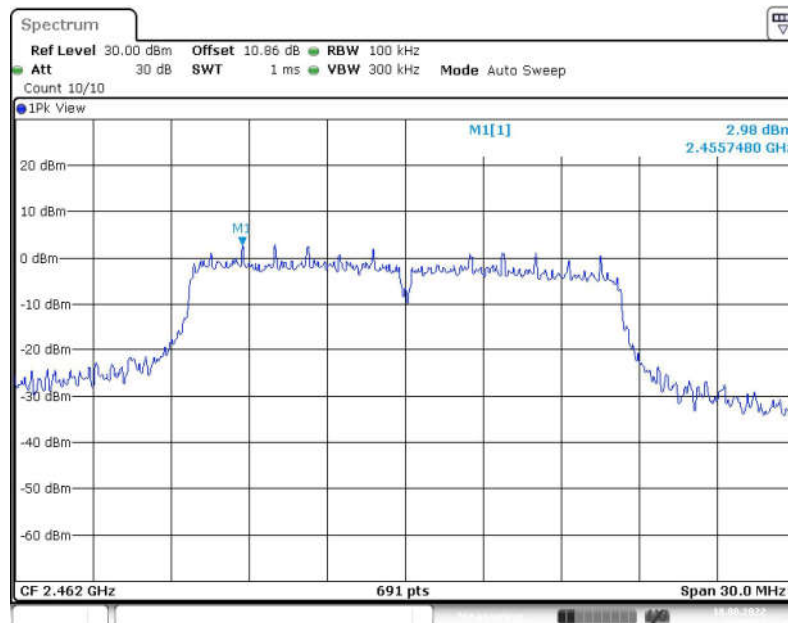


Fig.48 Conducted Spurious Emission (Center Frequency, 802.11g, CH11)

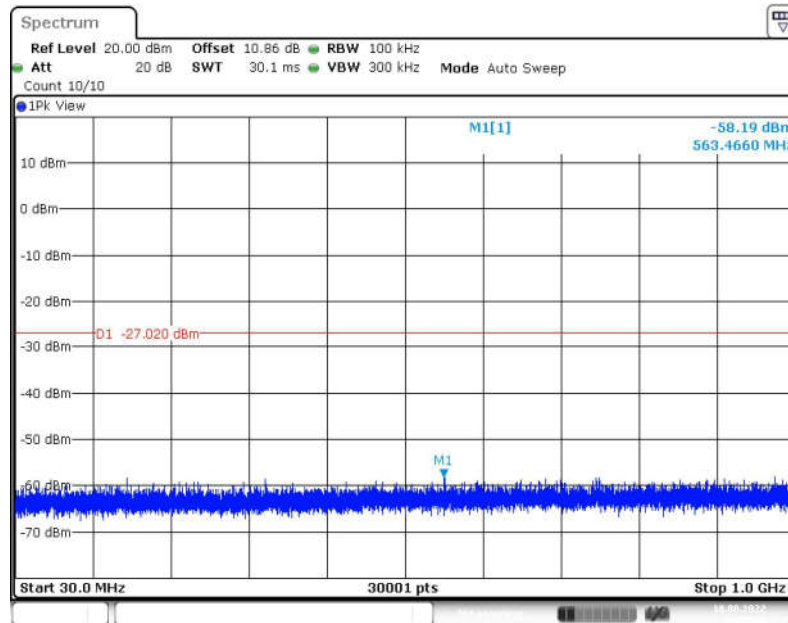


Fig.49 Conducted Spurious Emission (30MHz -1GHz, 802.11g, CH11)

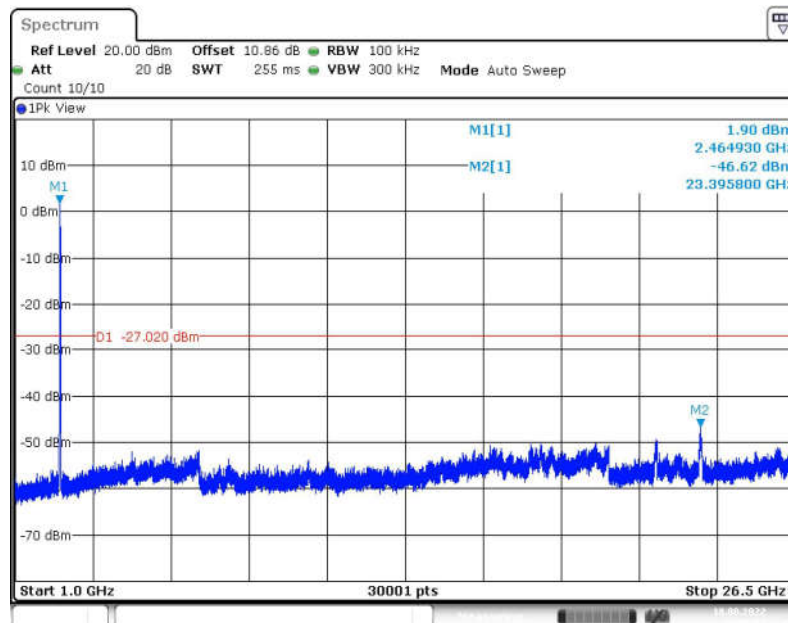


Fig.50 Conducted Spurious Emission (1GHz-26.5GHz, 802.11g, CH11)

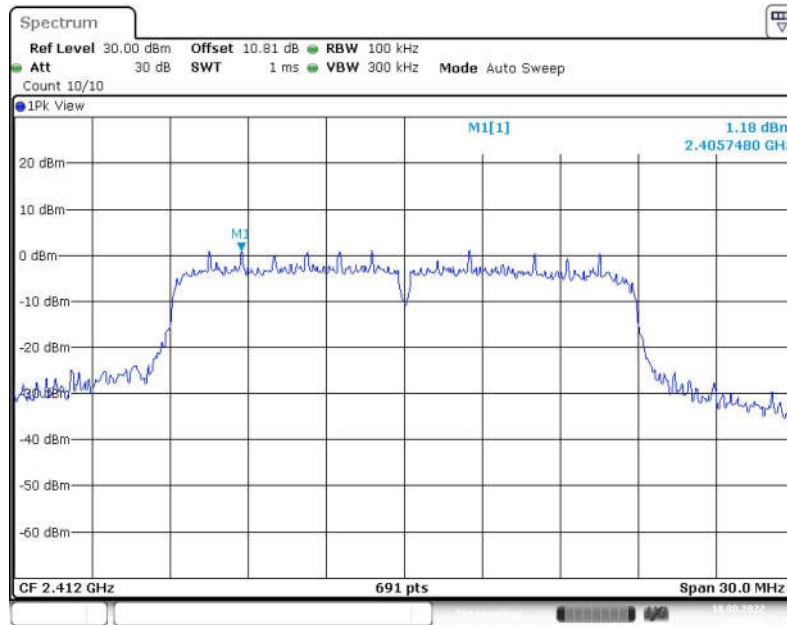


Fig.51 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH1)

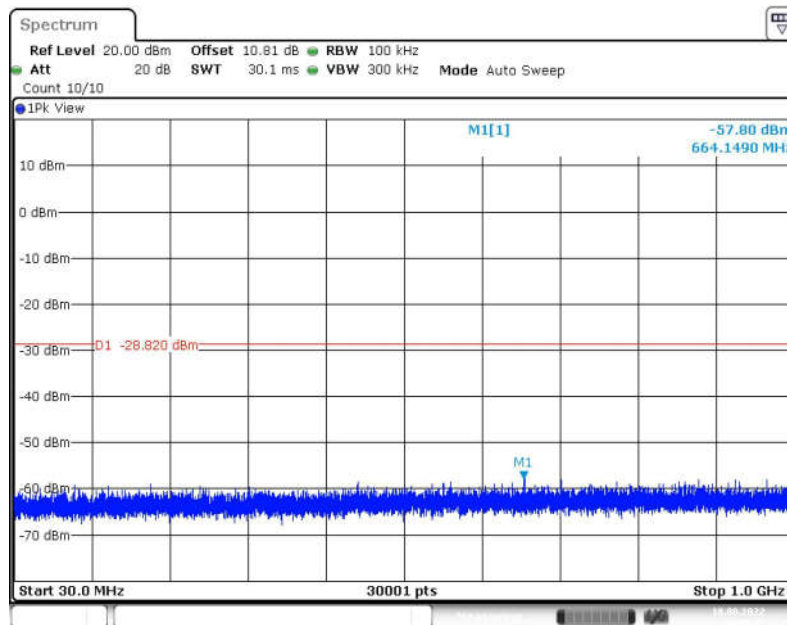


Fig.52 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT20, CH1)

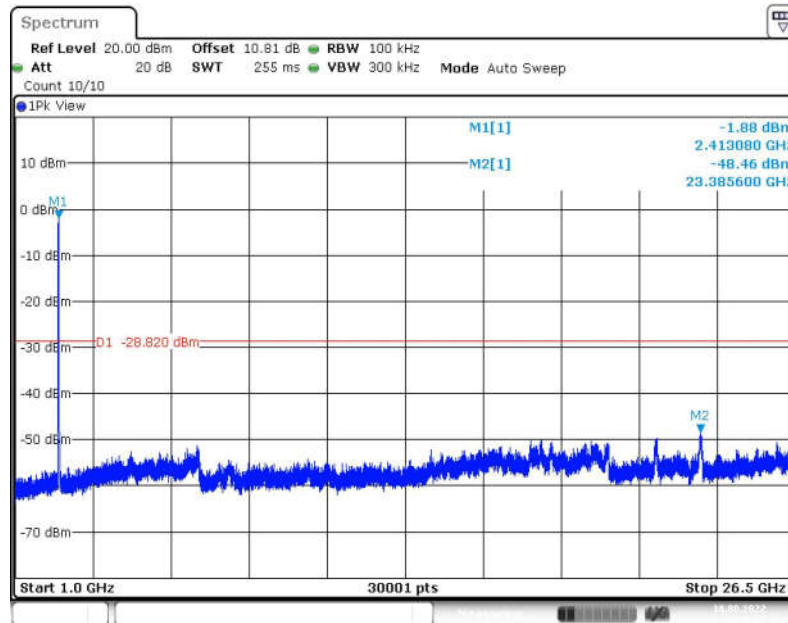


Fig.53 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH1)

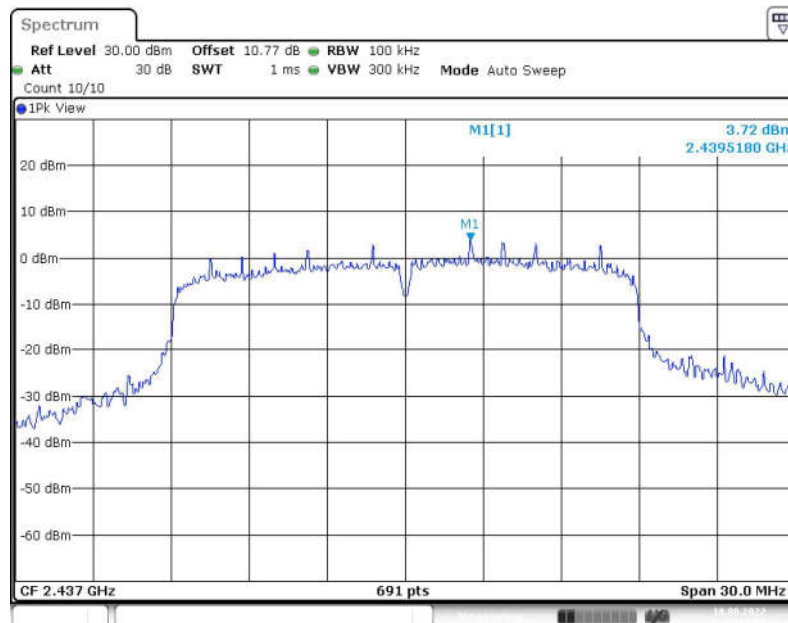


Fig.54 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH6)

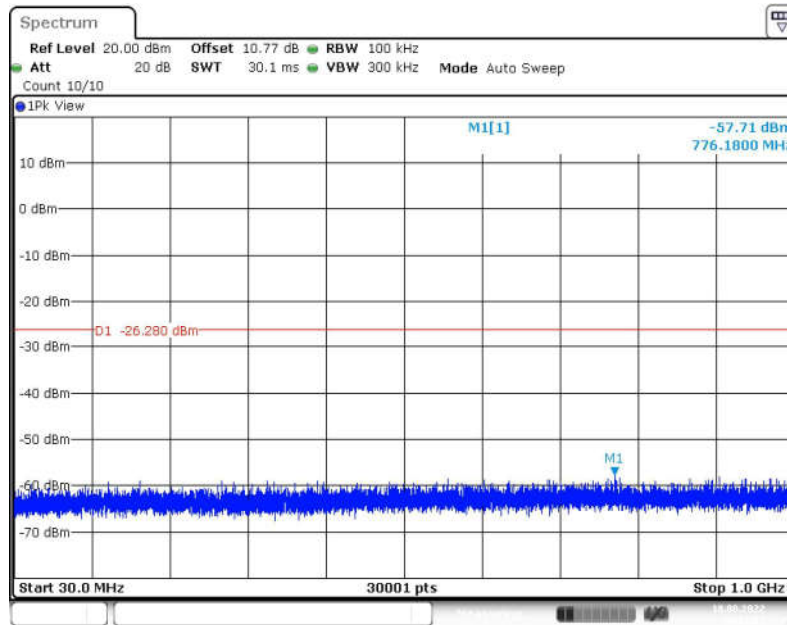


Fig.55 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT20, CH6)

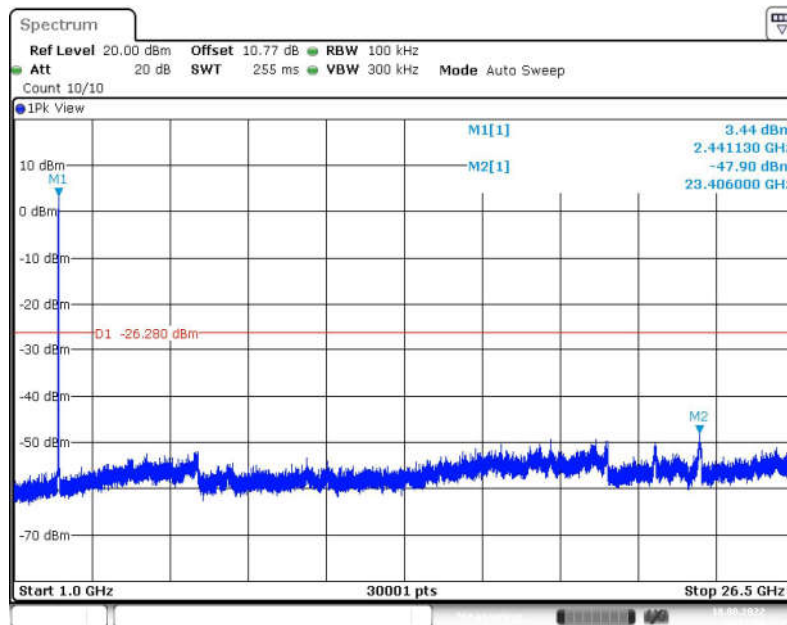


Fig.56 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH6)

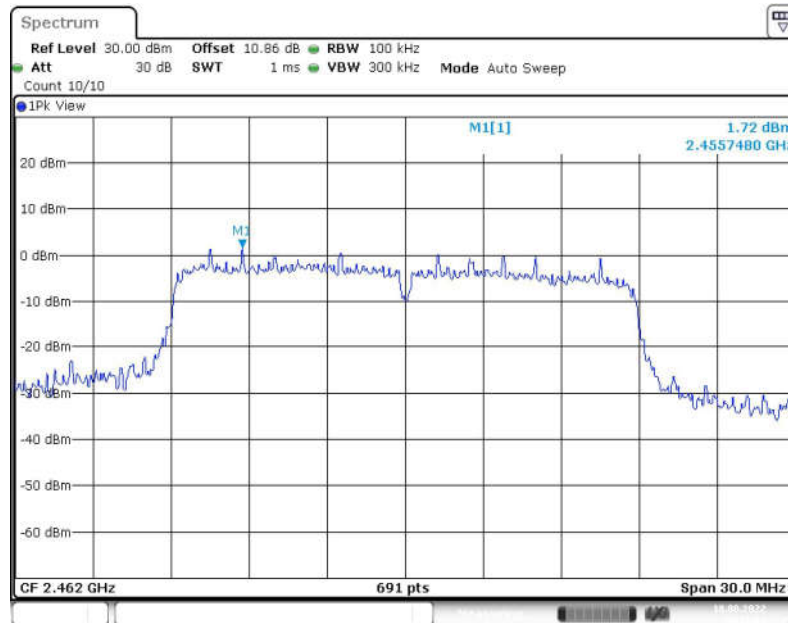


Fig.57 Conducted Spurious Emission (Center Frequency, 802.11n-HT20, CH11)

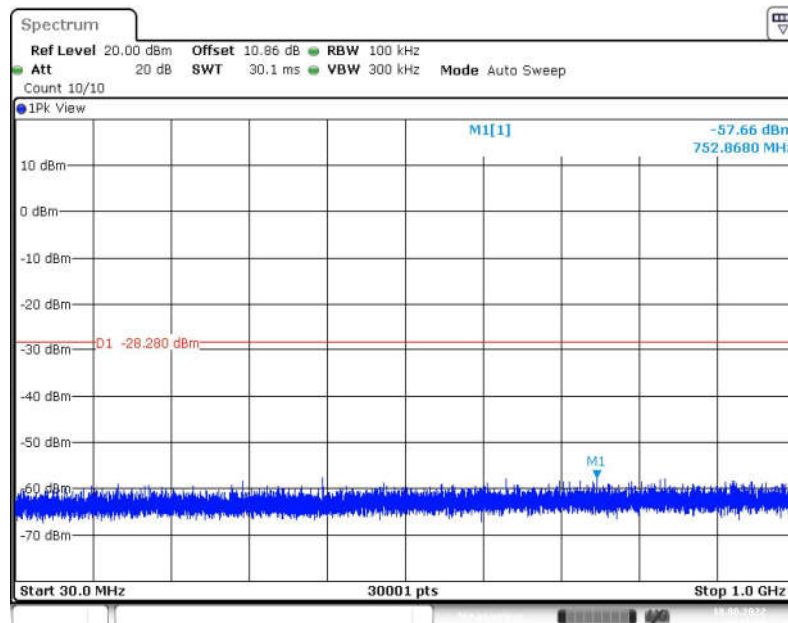


Fig.58 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT20, CH11)

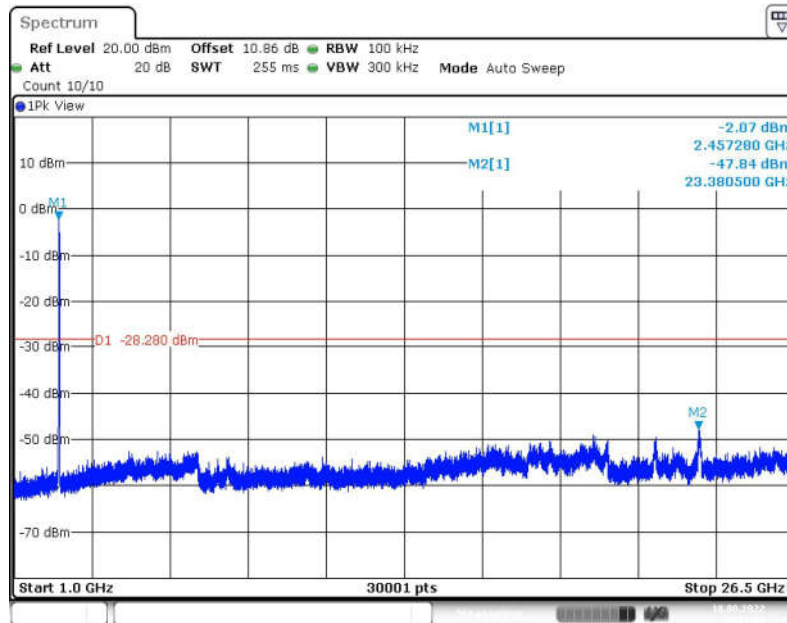


Fig.59 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT20, CH11)

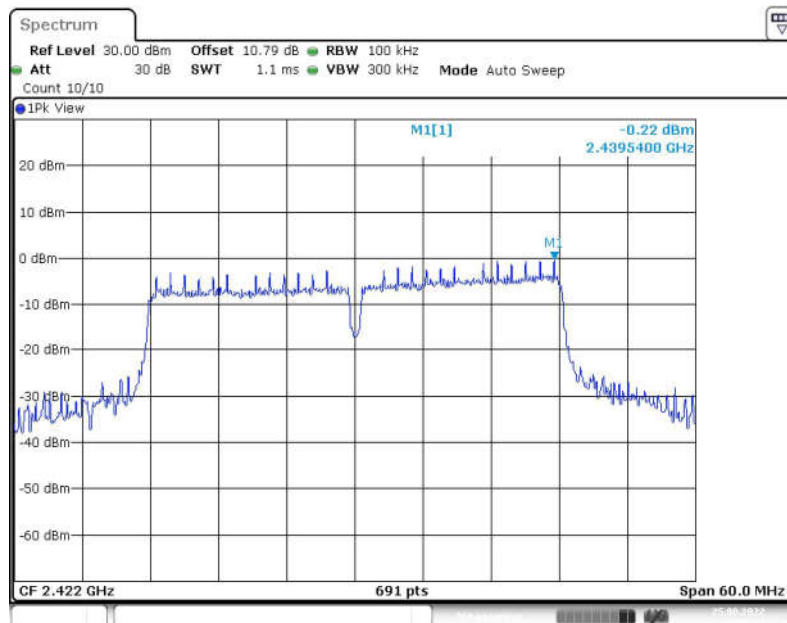


Fig.60 Conducted Spurious Emission (Center Frequency, 802.11n-HT40, CH3)

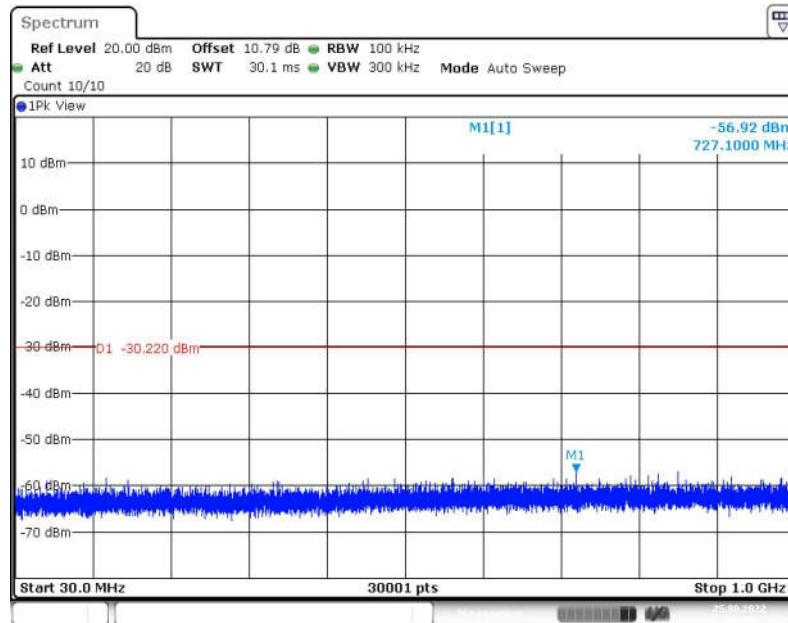


Fig.61 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT40, CH3)

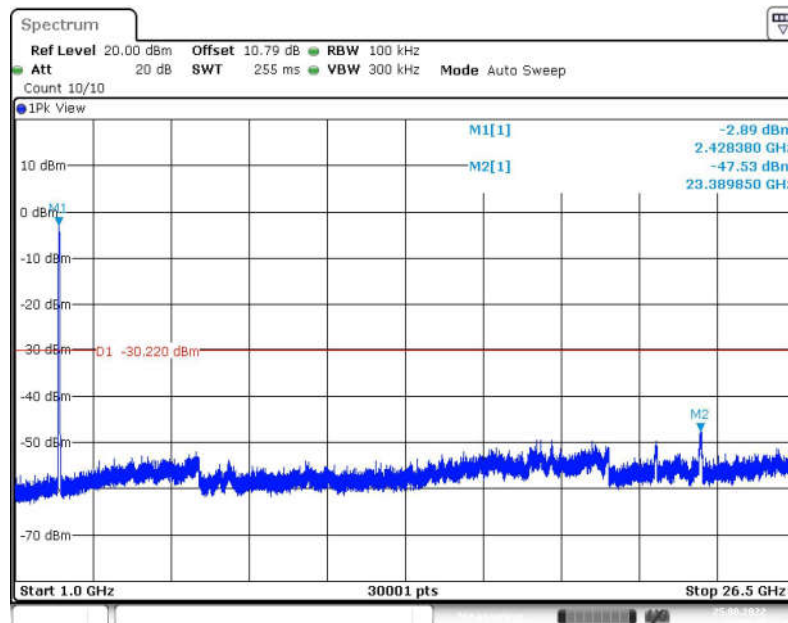


Fig.62 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH3)

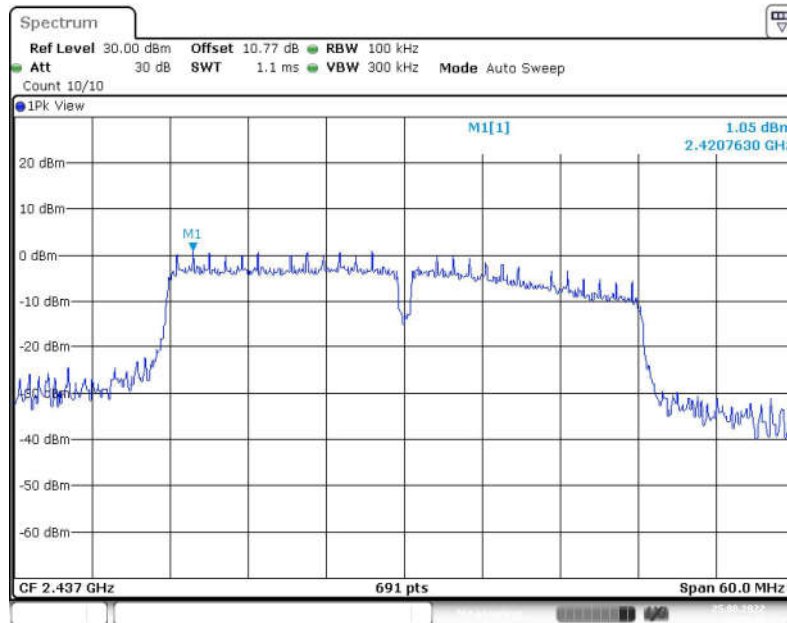


Fig.63 Conducted Spurious Emission (Center Frequency, 802.11n-HT40, CH6)

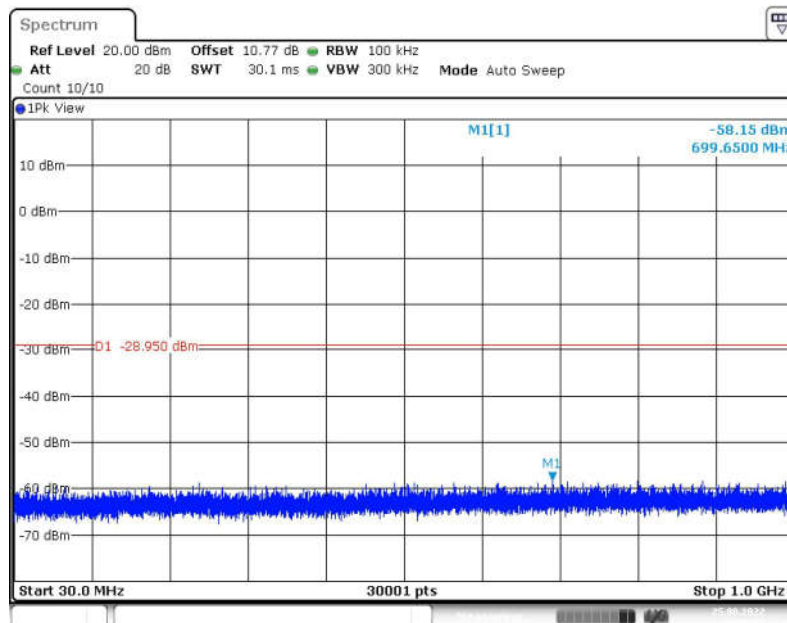


Fig.64 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT40, CH6)

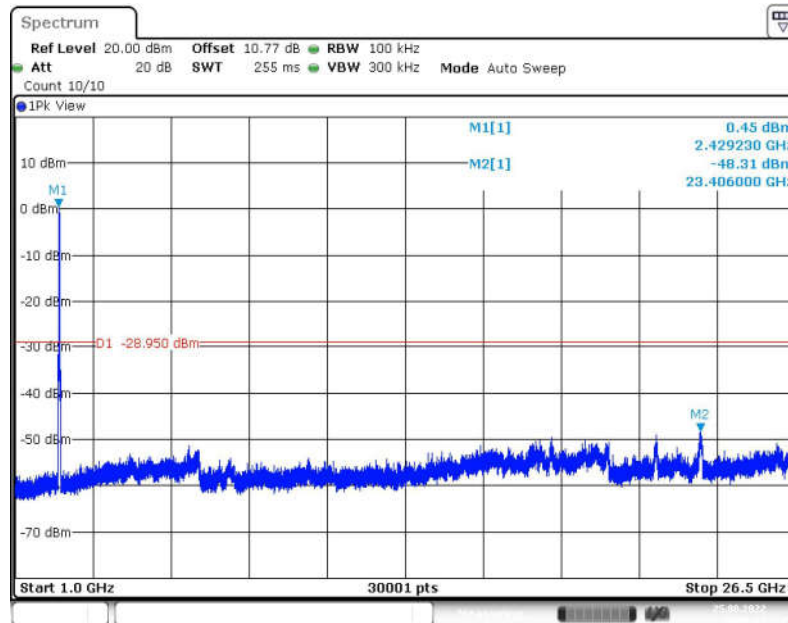


Fig.65 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH6)

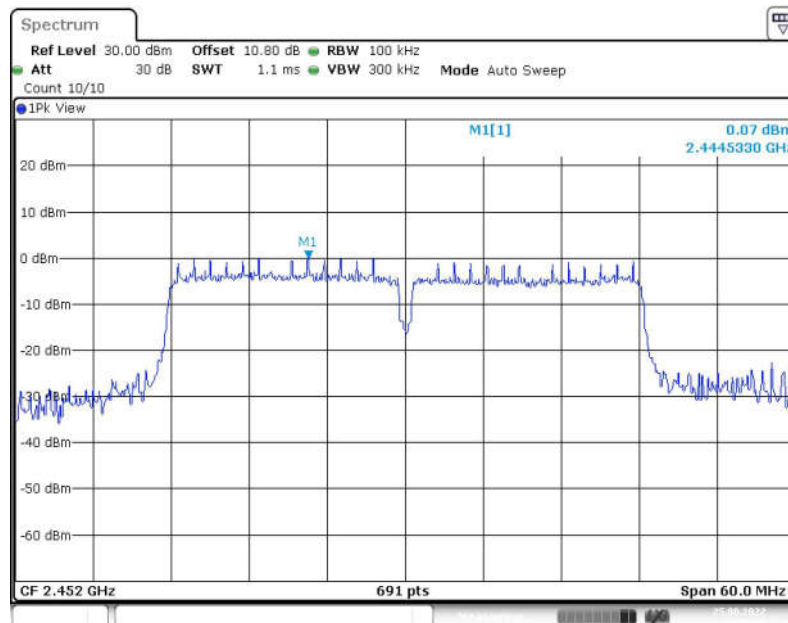


Fig.66 Conducted Spurious Emission (Center Frequency, 802.11n-HT40, CH9)

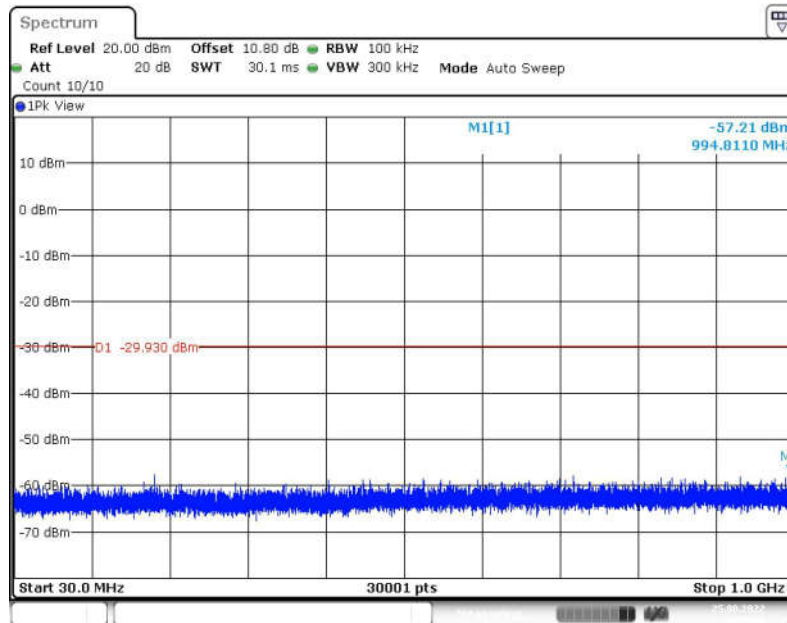


Fig.67 Conducted Spurious Emission (30MHz -1GHz, 802.11n-HT40, CH9)

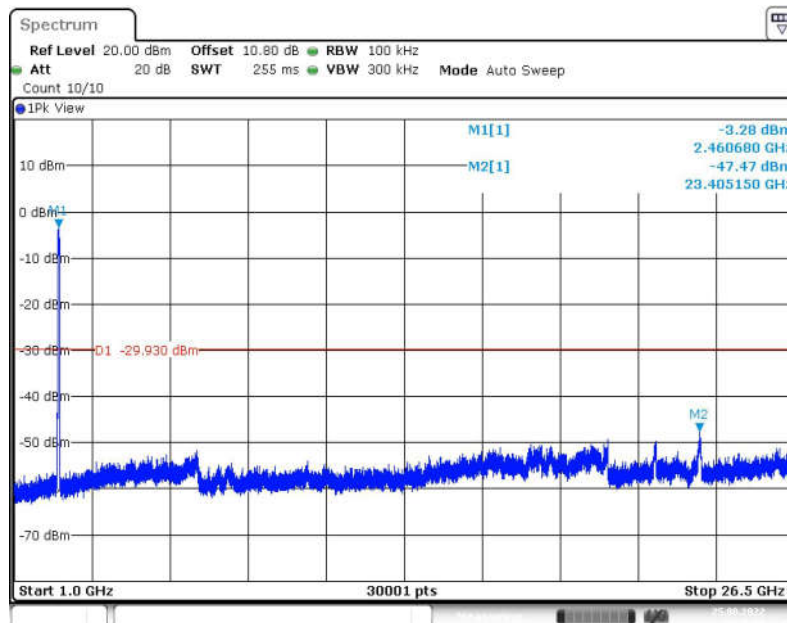


Fig.68 Conducted Spurious Emission (1GHz-26.5GHz, 802.11n-HT40, CH9)



A.6 Radiated Emission

Method of Measurement: See ANSI C63.10-clause 11.11&11.12.

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(µV/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.



Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	CH 1	1 GHz ~18 GHz	Fig.69	P
	CH 6	1 GHz ~18 GHz	Fig.70	P
	CH 11	1 GHz ~18 GHz	Fig.71	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.72	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.73	P
802.11g	CH 1	1 GHz ~18 GHz	Fig.74	P
	CH 6	1 GHz ~18 GHz	Fig.75	P
	CH 11	1 GHz ~18 GHz	Fig.76	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.77	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.78	P
802.11n- HT20	CH 1	1 GHz ~18 GHz	Fig.79	P
	CH 6	1 GHz ~18 GHz	Fig.80	P
	CH 11	1 GHz ~18 GHz	Fig.81	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.82	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.83	P
802.11n- HT40	CH 3	1 GHz ~18 GHz	Fig.84	P
	CH 6	1 GHz ~18 GHz	Fig.85	P
	CH 9	1 GHz ~18 GHz	Fig.86	P
	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.87	P
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.88	P
/	All Channels	9 kHz ~30 MHz	Fig.89	P
		30 MHz ~1 GHz	Fig.90	P
		18 GHz ~26.5 GHz	Fig.91	P

Worst-Case Result:

802.11b CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2965.357143	51.66	74.00	22.34	V	6.7
5965.200000	48.29	74.00	25.71	H	4.8
7543.285714	44.51	74.00	29.49	H	5.6
10398.857143	47.03	74.00	25.97	V	9.1
16996.714286	54.18	74.00	19.82	H	18.4
17971.714286	54.89	74.00	19.11	H	19.1



Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2965.357143	39.27	54.00	14.73	V	6.7
5965.200000	35.71	54.00	18.29	H	4.8
7543.285714	32.15	54.00	21.85	H	5.6
10398.857143	35.20	54.00	18.80	V	9.1
16996.714286	42.10	54.00	11.90	H	18.4
17971.714286	42.75	54.00	11.25	H	19.1

802.11g CH6 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2990.714286	51.86	74.00	22.14	H	6.7
5917.800000	48.20	74.00	25.80	H	4.6
9492.857143	46.11	74.00	27.89	H	7.0
12472.285714	48.68	74.00	25.32	H	11.3
17084.571429	54.66	74.00	19.34	H	18.5
17932.714286	54.94	74.00	19.06	H	19.0

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
2990.714286	41.68	54.00	14.32	H	6.7
5917.800000	37.78	54.00	18.22	H	4.6
9492.857143	35.68	54.00	20.32	H	7.0
12472.285714	37.99	54.00	18.01	H	11.3
17084.571429	44.32	54.00	11.68	H	18.5
17932.714286	44.62	54.00	11.38	H	19.0

802.11n-HT20 CH6 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7926.000000	45.83	74.00	28.17	V	6.0
9491.142857	46.78	74.00	27.22	V	7.0
10404.857143	48.22	74.00	25.78	V	9.1
12450.000000	49.32	74.00	24.68	V	11.4
14913.857143	51.58	74.00	22.42	V	13.0
16938.857143	54.88	74.00	19.12	V	18.2



Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
7926.000000	33.27	54.00	20.73	V	6.0
9491.142857	34.33	54.00	19.67	V	7.0
10404.857143	35.73	54.00	18.27	V	9.1
12450.000000	37.14	54.00	16.86	V	11.4
14913.857143	38.89	54.00	15.11	V	13.0
16938.857143	42.37	54.00	11.63	V	18.2

802.11-HT40 CH9 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
9626.142857	46.44	74.00	27.56	H	7.4
10440.000000	47.75	74.00	26.25	V	9.0
11932.285714	48.26	74.00	25.74	V	10.2
13251.857143	49.83	74.00	24.17	V	11.1
14785.285714	50.89	74.00	23.11	V	12.7
16952.142857	54.57	74.00	19.43	H	18.2

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
9626.142857	33.91	54.00	20.09	H	7.4
10440.000000	35.73	54.00	18.27	V	9.0
11932.285714	35.69	54.00	18.31	V	10.2
13251.857143	36.97	54.00	17.03	V	11.1
14785.285714	38.52	54.00	15.48	V	12.7
16952.142857	42.51	54.00	11.49	H	18.2

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument. The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor} - \text{Gain of the preamplifier.}$$

See below for test graphs.

Conclusion: PASS

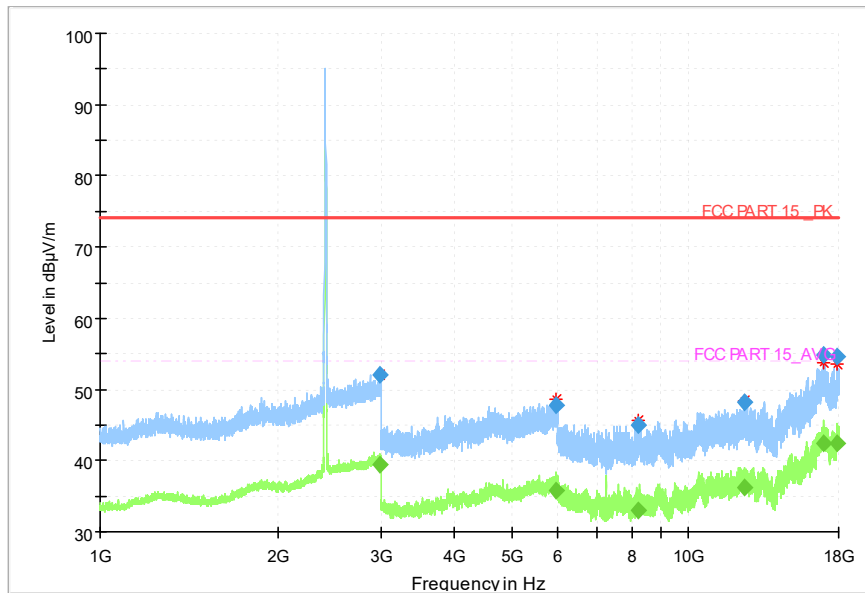


Fig.69 Radiated Spurious Emission (802.11b, CH1, 1GHz-18GHz)

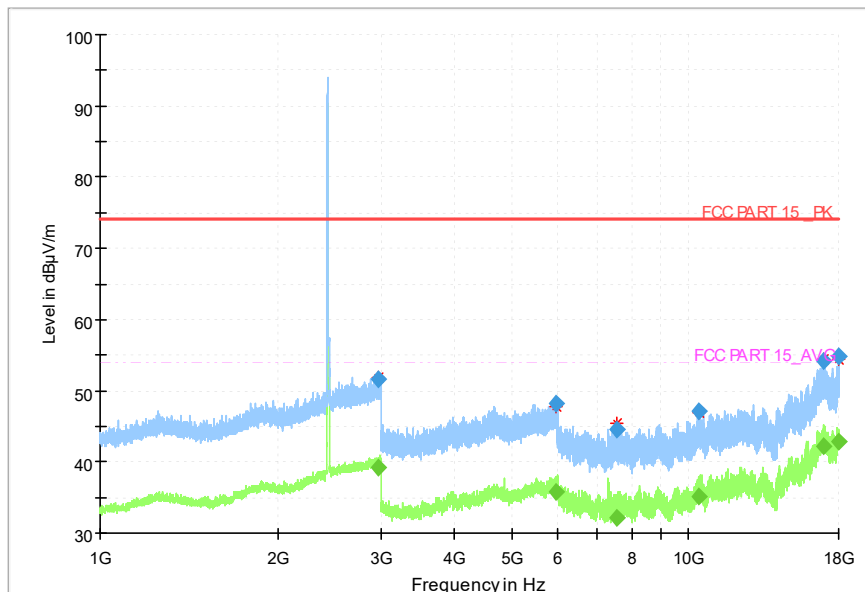


Fig.70 Radiated Spurious Emission (802.11b, CH6, 1GHz-18GHz)

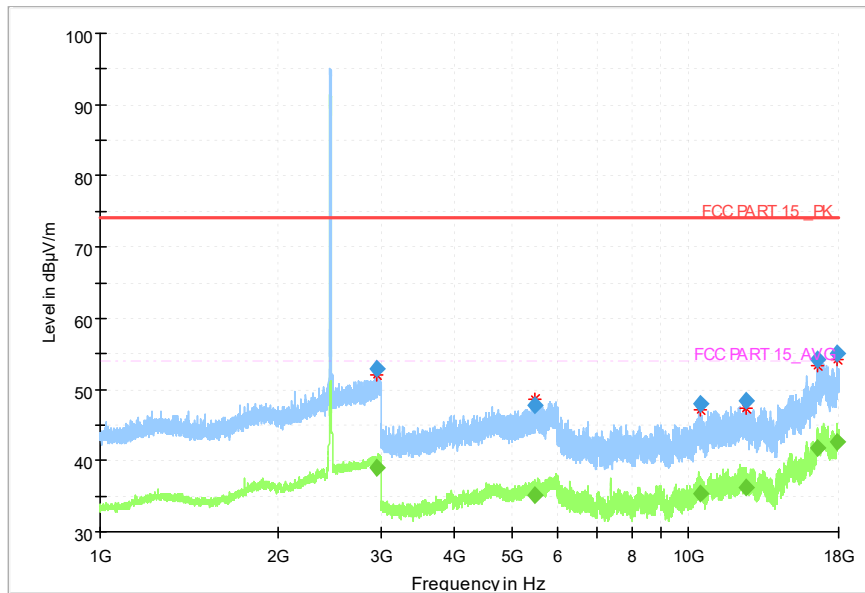


Fig.71 Radiated Spurious Emission (802.11b, CH1, 1GHz-18GHz)

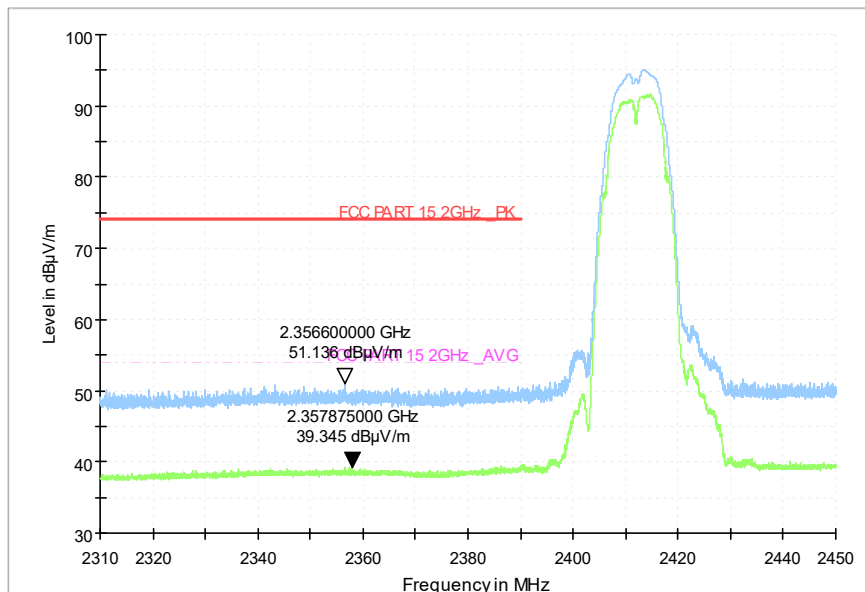


Fig.72 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)

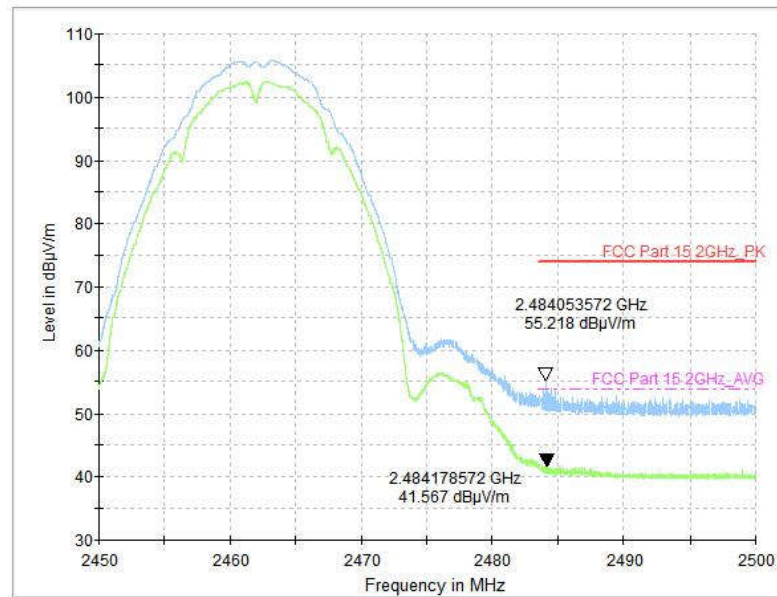


Fig.73 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)

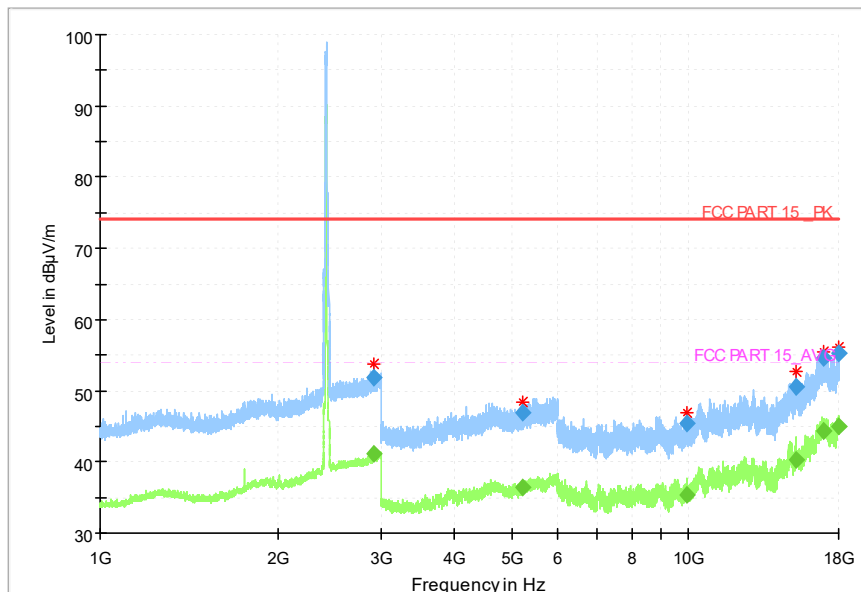


Fig.74 Radiated Spurious Emission (802.11g, CH1, 1GHz-18GHz)

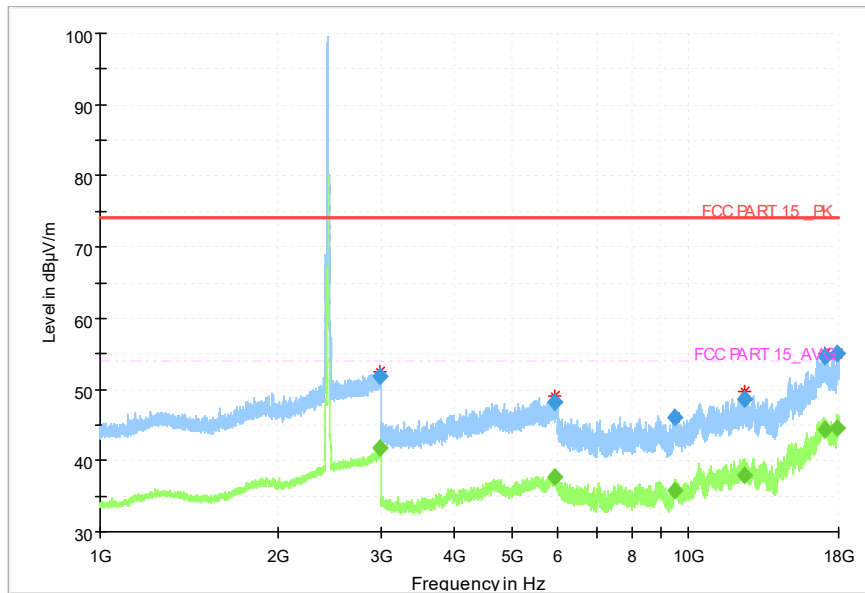


Fig.75 Radiated Spurious Emission (802.11g, CH6, 1GHz-18GHz)

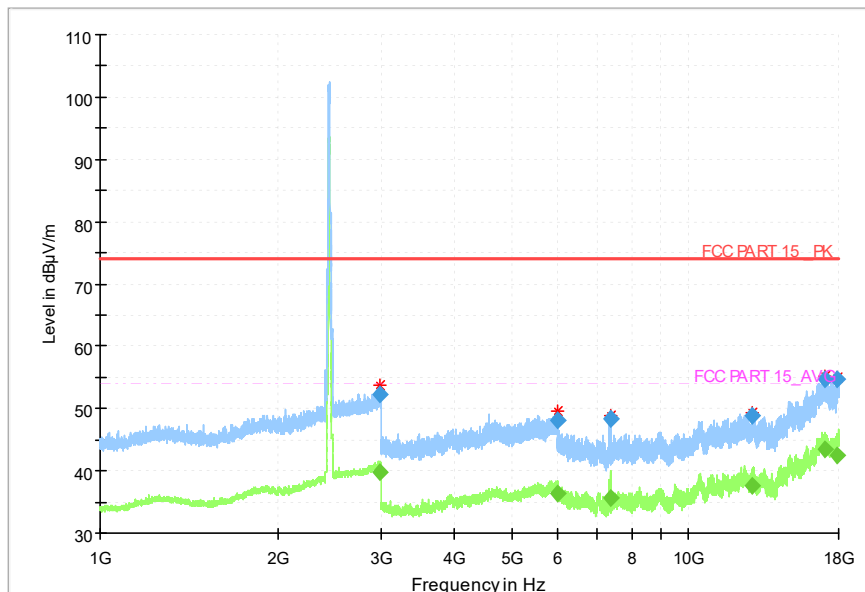


Fig.76 Radiated Spurious Emission (802.11g, CH11, 1GHz-18GHz)

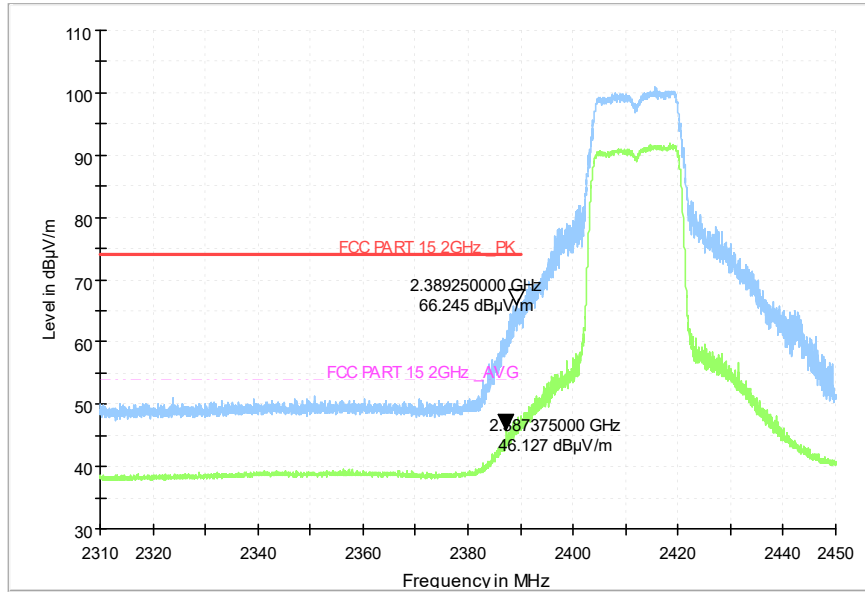


Fig.77 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)

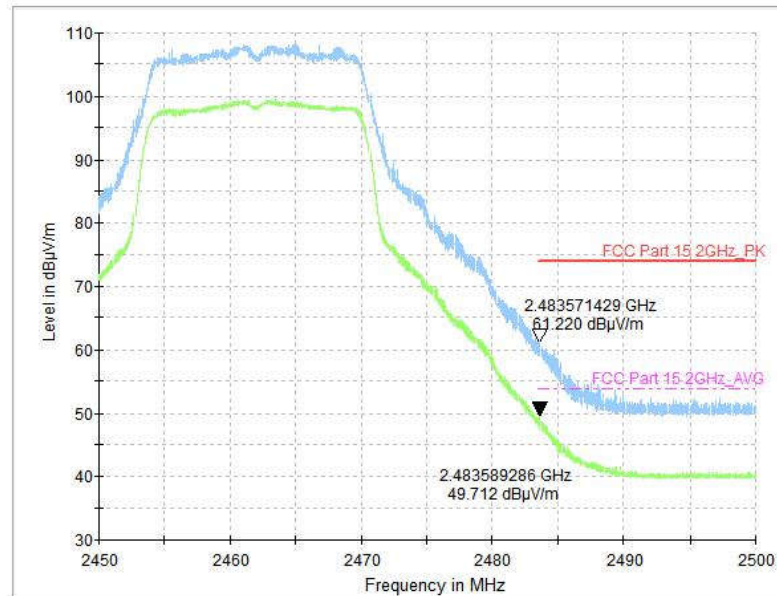


Fig.78 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.5GHz)

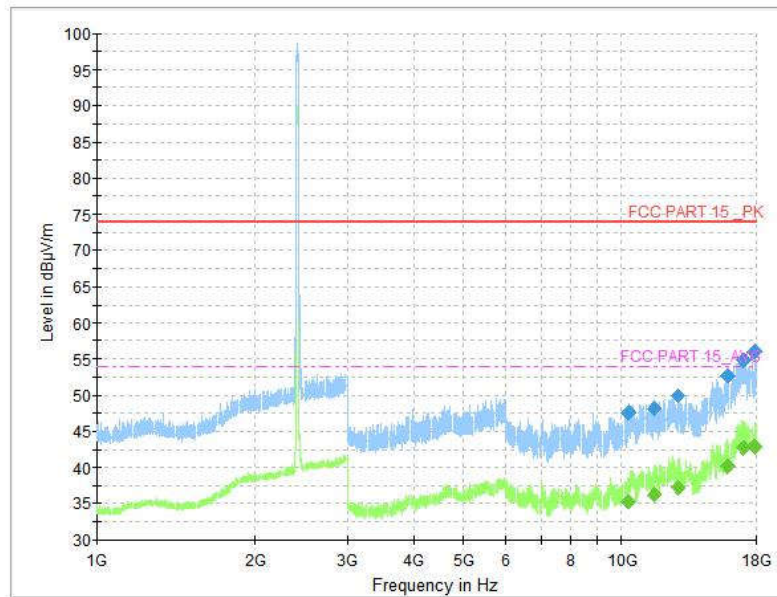


Fig.79 Radiated Spurious Emission (802.11n-HT20, CH1, 1GHz-18GHz)

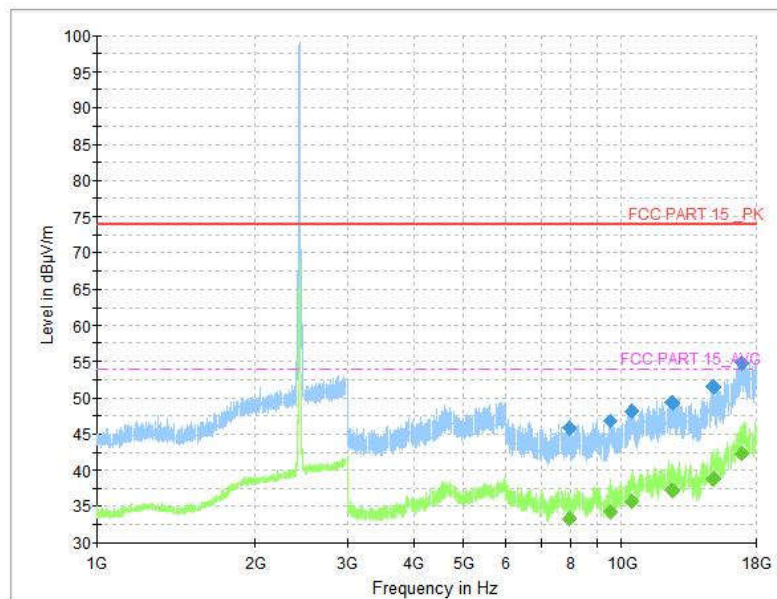


Fig.80 Radiated Spurious Emission (802.11n-HT20, CH6, 1GHz-18GHz)

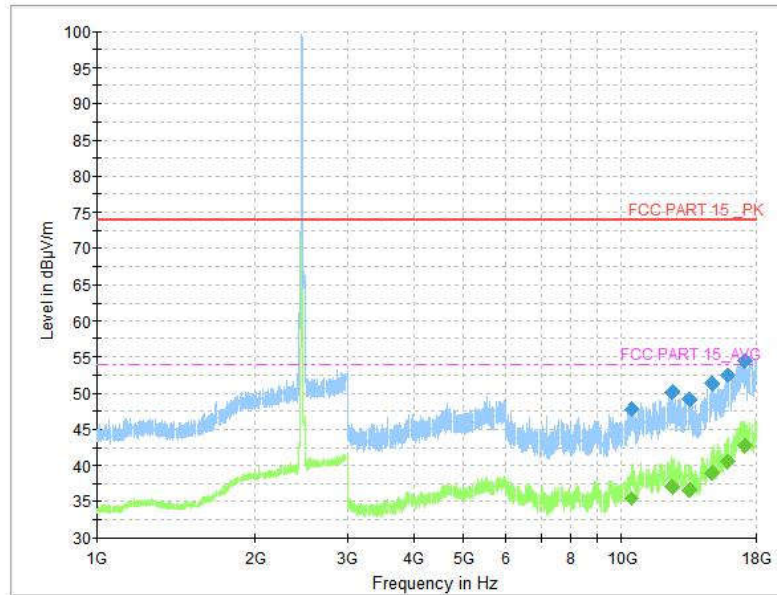


Fig.81 Radiated Spurious Emission (802.11n-HT20, CH11, 1GHz-18GHz)

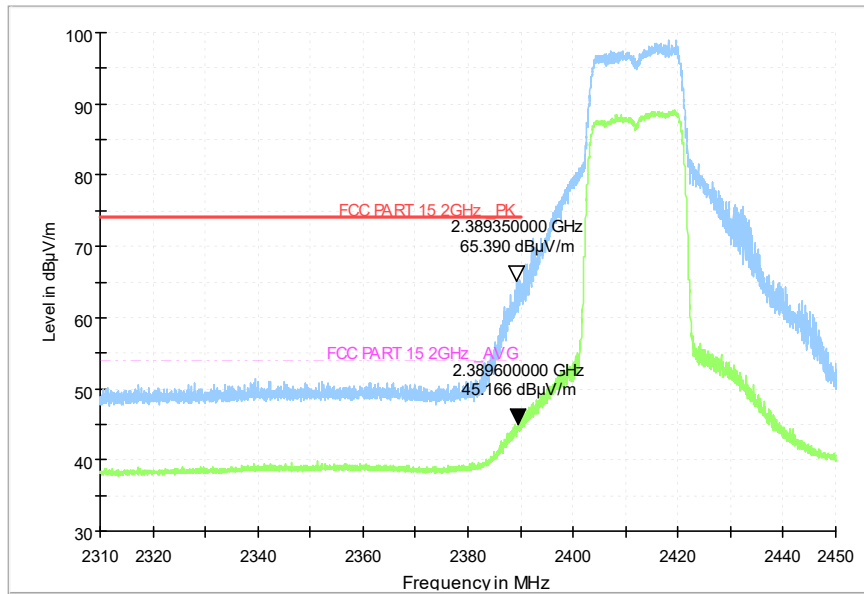


Fig.82 Radiated Restricted Band (802.11n-HT20, CH1, 2.38GHz~2.45GHz)

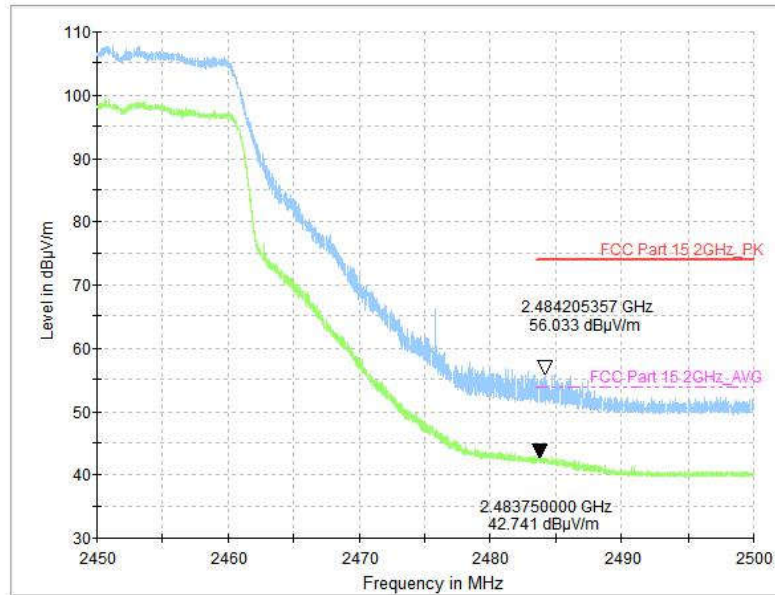


Fig.83 Radiated Restricted Band (802.11n-HT20, CH11, 2.45GHz~2.5GHz)

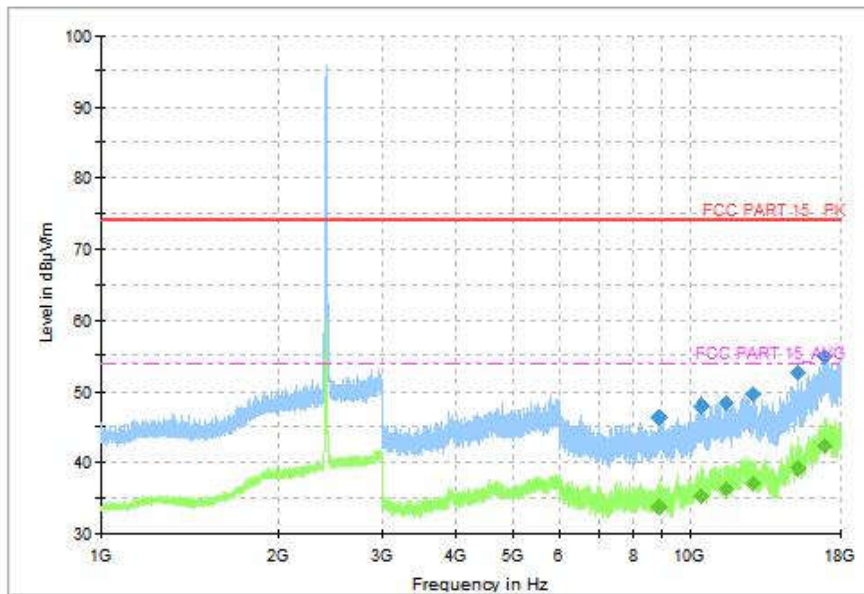


Fig.84 Radiated Spurious Emission (802.11n-HT40, CH3, 1GHz-18GHz)

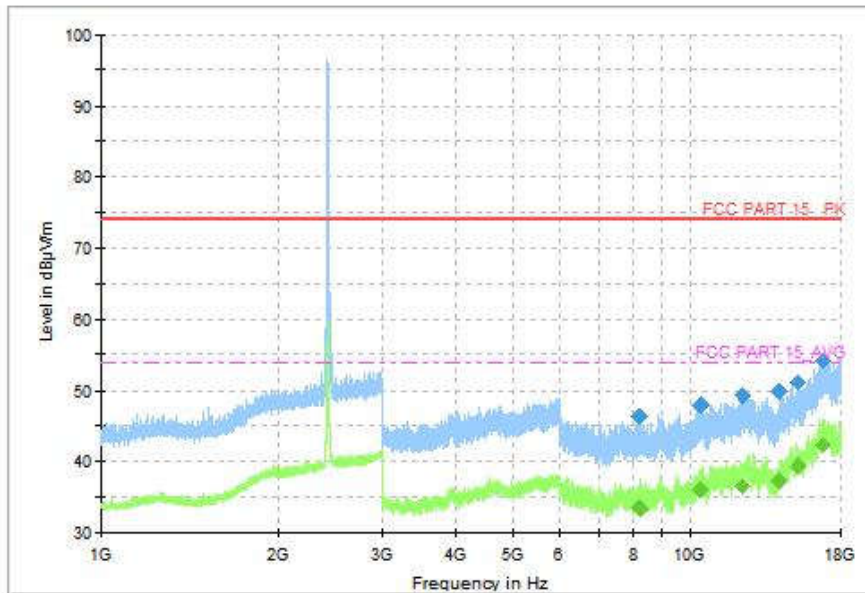


Fig.85 Radiated Spurious Emission (802.11n-HT40, CH6, 1GHz-18GHz)

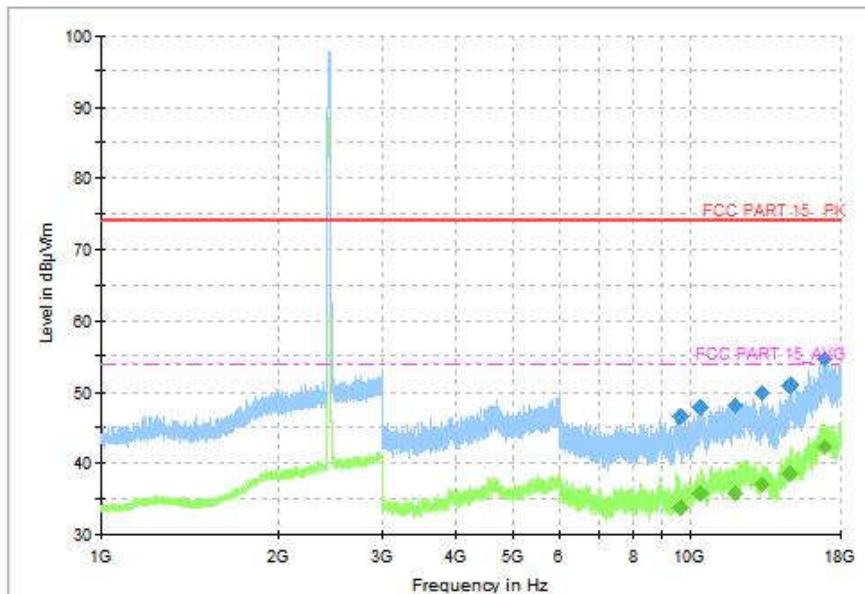


Fig.86 Radiated Spurious Emission (802.11n-HT40, CH9, 1GHz-18GHz)

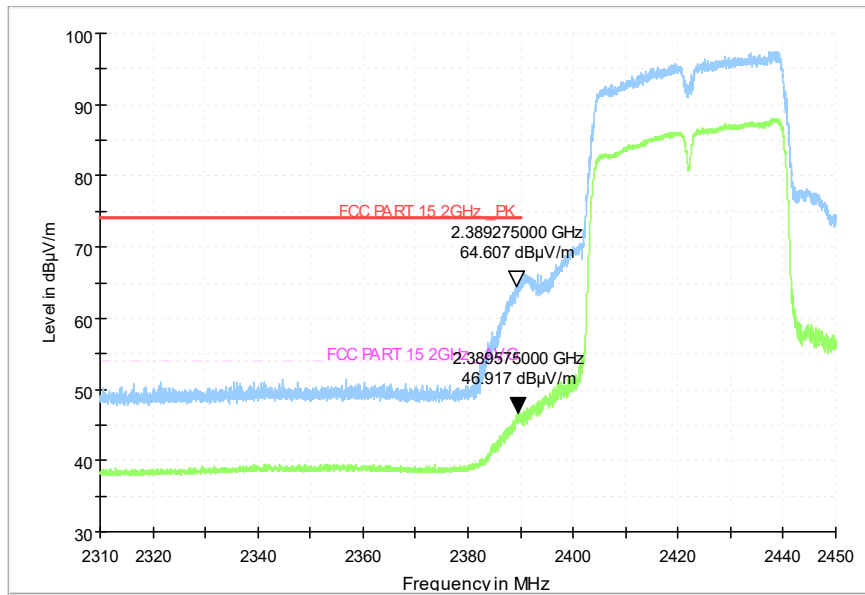


Fig.87 Radiated Restricted Band (802.11n-HT40, CH3, 2.38GHz~2.45GHz)

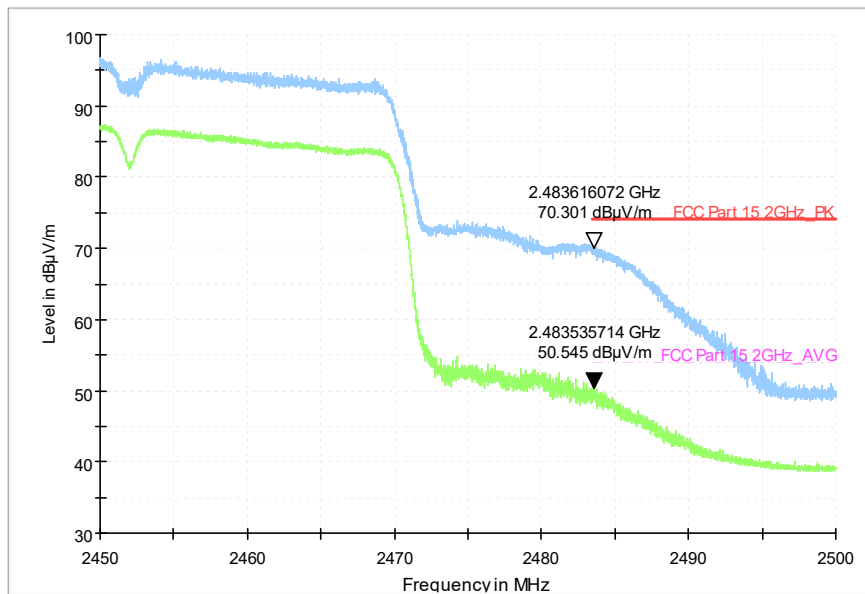


Fig.88 Radiated Restricted Band (802.11n-HT40, CH9, 2.45GHz~2.5GHz)

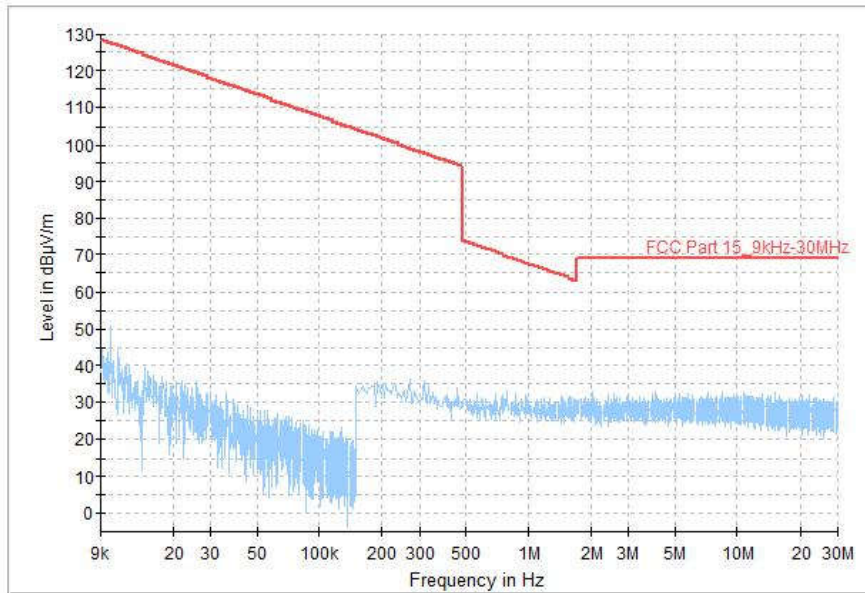


Fig.89 Radiated Spurious Emission (All Channels, 9kHz-30MHz)

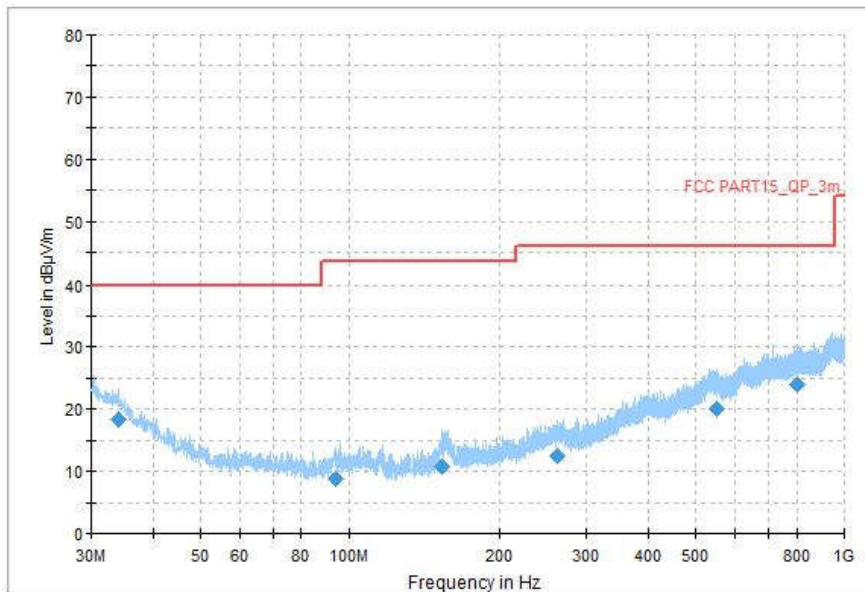


Fig.90 Radiated Spurious Emission (All Channels, 30MHz-1GHz)

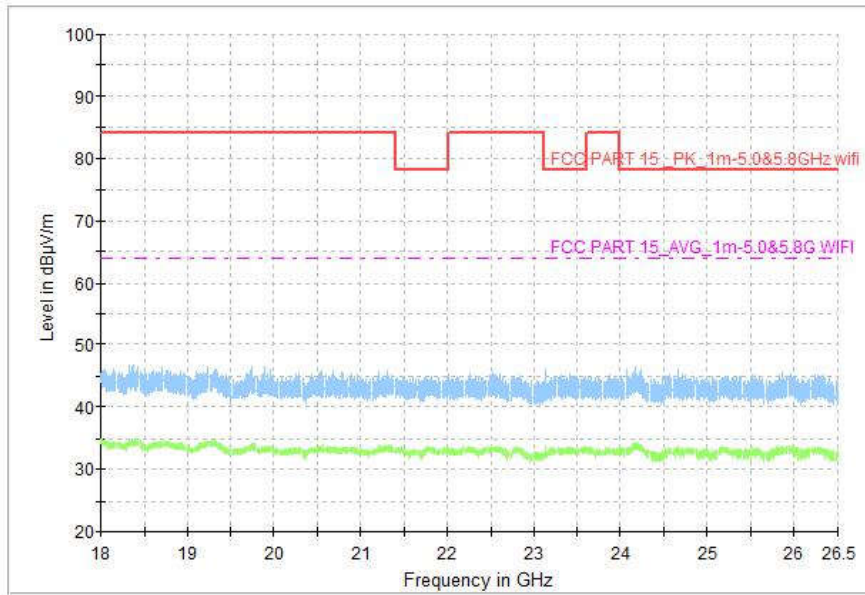


Fig.91 Radiated Spurious Emission (All Channels, 18GHz-26.5GHz)



A.7 AC Power line Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN-AE2, AE3, AE4

Frequency range (MHz)	Quasi-peak Limit (dBµV)	Average-peak Limit (dBµV)	Result (dBµV)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.92	Fig.93	P
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: PASS

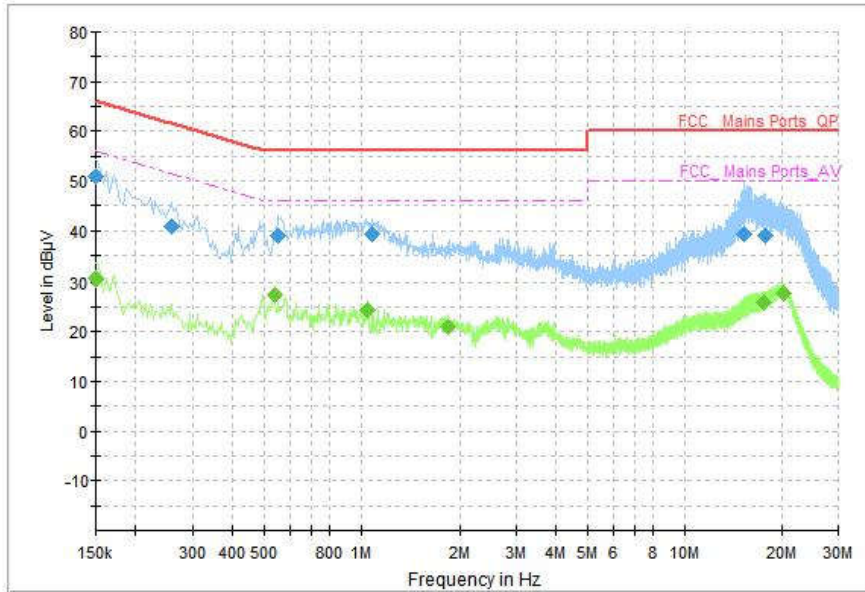


Fig.92 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	50.93	66.00	15.07	N	ON	10
0.258000	40.73	61.50	20.76	N	ON	10
0.554000	39.09	56.00	16.91	L1	ON	10
1.086000	39.32	56.00	16.68	L1	ON	10
15.350000	39.18	60.00	20.82	N	ON	11
17.730000	39.14	60.00	20.86	N	ON	11

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	30.53	56.00	25.47	N	ON	10
0.538000	27.34	46.00	18.66	L1	ON	10
1.042000	24.45	46.00	21.55	L1	ON	10
1.846000	20.98	46.00	25.02	N	ON	10
17.530000	25.94	50.00	24.06	N	ON	11
20.198000	27.61	50.00	22.39	N	ON	10

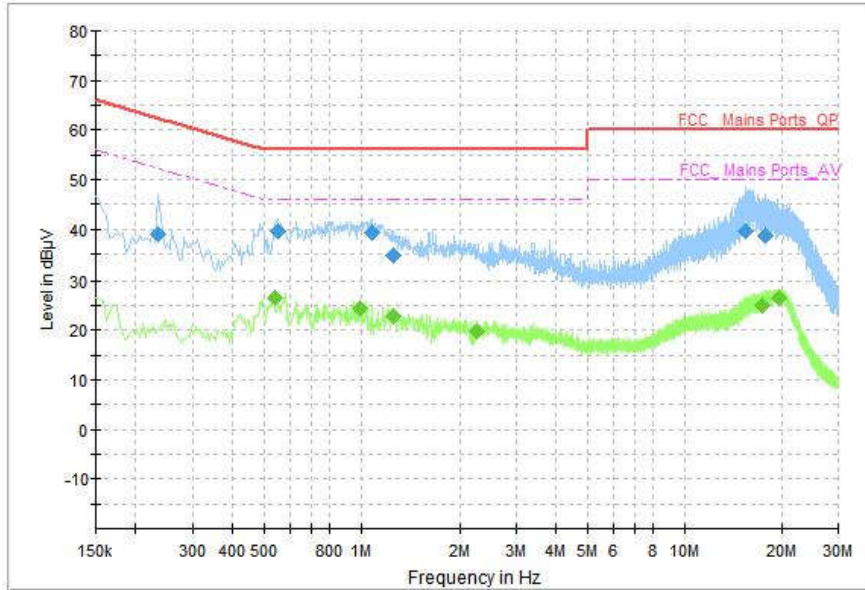


Fig.93 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.234000	38.93	62.31	23.37	L1	ON	10
0.550000	39.56	56.00	16.44	L1	ON	10
1.082000	39.22	56.00	16.78	L1	ON	10
1.266000	34.68	56.00	21.32	L1	ON	10
15.422000	39.51	60.00	20.49	N	ON	11
17.750000	38.65	60.00	21.35	N	ON	11

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.538000	26.53	46.00	19.47	L1	ON	10
0.994000	24.38	46.00	21.62	L1	ON	10
1.258000	22.74	46.00	23.26	N	ON	10
2.254000	19.81	46.00	26.19	N	ON	10
17.350000	25.05	50.00	24.95	N	ON	11
19.670000	26.34	50.00	23.66	N	ON	10

END OF REPORT