



Registration  
No.788871

---

# TEST REPORT FOR SAR TESTING

---

Report No.: SRTC2018-9004(F)-18072401(H)

Product Name: Mobile Phone

Product Model: Hisense U965

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense Communications Co., Ltd.

Specification: FCC Part 2.1093

IEEE Std 1528-2013

FCC RF Exposure KDB Procedures

FCC ID: 2AD0BU965

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

---

## Contents

<b>1 GENERAL INFORMATION</b> .....	<b>2</b>
<b>1.1 NOTES OF THE TEST REPORT</b> .....	<b>2</b>
<b>1.2 INFORMATION ABOUT THE TESTING LABORATORY</b> .....	<b>2</b>
<b>1.3 APPLICANT’S DETAILS</b> .....	<b>2</b>
<b>1.4 MANUFACTURER’S DETAILS</b> .....	<b>2</b>
<b>1.5 TEST ENVIRONMENT</b> .....	<b>3</b>
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST</b> .....	<b>4</b>
<b>2.1 FINAL EQUIPMENT BUILD STATUS</b> .....	<b>4</b>
<b>2.2 SUPPORT EQUIPMENT</b> .....	<b>5</b>
<b>3 REFERENCE SPECIFICATION</b> .....	<b>5</b>
<b>4 TEST CONDITIONS</b> .....	<b>6</b>
<b>4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH</b> .....	<b>6</b>
<b>4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER</b> .....	<b>6</b>
<b>4.3 SAR MEASUREMENT SET-UP</b> .....	<b>6</b>
<b>4.4 PHANTOMS</b> .....	<b>7</b>
<b>4.5 TISSUE SIMULANTS</b> .....	<b>7</b>
<b>4.6 DESCRIPTION OF THE TEST PROCEDURE</b> .....	<b>8</b>
<b>5 RESULT SUMMARY</b> .....	<b>10</b>
<b>6 TEST RESULT</b> .....	<b>11</b>
<b>6.1 MANUFACTURING TOLERANCE</b> .....	<b>11</b>
<b>6.2 GSM MEASUREMENT RESULT</b> .....	<b>15</b>
<b>6.3 WCDMA MEASUREMENT RESULT</b> .....	<b>17</b>
<b>6.4 BLUETOOTH MEASUREMENT RESULT</b> .....	<b>19</b>
<b>6.5 WI-FI MEASUREMENT RESULT</b> .....	<b>19</b>
<b>6.6 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS</b> .....	<b>20</b>
<b>6.7 RF EXPOSURE CONDITIONS</b> .....	<b>22</b>
<b>6.8 SYSTEM CHECKING</b> .....	<b>24</b>
<b>6.9 SAR TEST RESULT</b> .....	<b>26</b>
<b>6.10 SAR MEASUREMENT VARIABILITY</b> .....	<b>37</b>
<b>6.11 SIMULTANEOUS TRANSMISSION SAR ANALYSIS</b> .....	<b>38</b>
<b>7 MEASUREMENT UNCERTAINTY</b> .....	<b>40</b>
<b>8 TEST EQUIPMENTS</b> .....	<b>42</b>
<b>ANNEX A – TEST PLOTS</b> .....	<b>44</b>
<b>ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS</b> .....	<b>146</b>

## **1 GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

### **1.3 Applicant's details**

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
City:	Qingdao
Country or Region:	China
Contacted person:	Geng Ruifeng
Tel:	+86-532-80877742
Fax:	---
Email:	gengruifeng@hisense.com

### **1.4 Manufacturer's details**

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Qingdao Economic & Technological Development Zone, Qingdao, China
City:	Qingdao
Country or Region:	China
Contacted person:	Dai Qingtao
Tel:	+86-532-55753749
Fax:	---
Email:	daiqingtao@hisense.com

## 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2018.04.23
Testing Start Date:	2018.04.24
Testing End Date:	2018.08.01

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	21.0-23.5	35.0-45.0

Normal Supply Voltage (V d.c.):	3.8
---------------------------------	-----

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	<input checked="" type="checkbox"/> GSM Band: GSM850/PCS1900 <input checked="" type="checkbox"/> WCDMA Band: FDD2/5 <input type="checkbox"/> LTE Band <input checked="" type="checkbox"/> Bluetooth Band: 2.4GHz <input checked="" type="checkbox"/> Wi-Fi Band: 2.4GHz
Mode	GSM <input checked="" type="checkbox"/> Voice (GMSK) <input checked="" type="checkbox"/> GPRS (GMSK) <input checked="" type="checkbox"/> EGPRS (GMSK) WCDMA <input checked="" type="checkbox"/> UMTS Rel. 99 (Voice & Data) <input checked="" type="checkbox"/> HSDPA (Rel. 5) <input checked="" type="checkbox"/> HSUPA (Rel. 6) <input checked="" type="checkbox"/> HSPA+ (Rel. ) <input checked="" type="checkbox"/> DC-HSDPA (Rel. ) Wi-Fi (802.11a/b/g/n) <input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n (20MHz) <input type="checkbox"/> 802.11n (40MHz) <input type="checkbox"/> 802.11ac (20MHz) <input type="checkbox"/> 802.11ac (40MHz) <input type="checkbox"/> 802.11ac (80MHz) Bluetooth <input checked="" type="checkbox"/> BR(GFSK) <input checked="" type="checkbox"/> EDR( $\pi/4$ DQPSK , 8-DPSK) <input type="checkbox"/> BLE(GFSK) LTE <input type="checkbox"/> QPSK <input type="checkbox"/> 16QAM <input type="checkbox"/> 64QAM
Duty Cycle	GSM Voice: 12.5%; GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% Wi-Fi 802.11b/g/n: 100% Bluetooth: 32.25% (DH1), 66.68% (DH3), 77.52% (DH5)
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input checked="" type="checkbox"/> Class 12 - Four Up
Mobile Phone Capability	<input type="checkbox"/> Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM (Dual Transfer Mode)	Not Supported

## 2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing for **main supply**:

State of sample	Normal
Headset	B1G513A07/Shenzhen Jinchuangju Electronic Technology Co.,Ltd.
Batteries	LIW38210A/Guangdong Teamgiant New Energy Tech Co.,LTD
H/W Version	YK737_V3.0
S/W Version	Hisense U965 10 S03 20180602
IMEI	86769031290622
Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features.

The following support equipment was used to exercise the DUT during testing for **second supply**:

State of sample	Normal
Headset	B1G513A07/Shenzhen Jinchuangju Electronic Technology Co.,Ltd.
Batteries	LIW38210A/Guangdong Teamgiant New Energy Tech Co.,LTD
H/W Version	YK737_V3.0
S/W Version	Hisense U965 10 S03 20180602
IMEI	867694031288402
Notes	Compare with mian supply, Second supply is different on the supplier of LCD/TP/Camera/Flash.

## 3 REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2018	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a	2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 941225 D06	v02r01	Hotspot Mode
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

---

## **4 TEST CONDITIONS**

### **4.1 Picture to demonstrate the required liquid depth**

The liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

### **4.2 Test Signal, Frequencies and Output Power**

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

### **4.3 SAR Measurement Set-up**

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than  $\pm 0.02\text{mm}$ . Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

---

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

#### **4.4 Phantoms**

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2013.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

#### **4.5 Tissue Simulants**

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2013 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within  $\pm 5\%$  of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was  $15.0 \pm 0.5$  cm measured from the ear reference point during system checking and device measurements.



### 4.5.1 Tissue Stimulant Recipes

The following tissue stimulants were used for Head and Body test:

Name	Broadband tissue-equivalent liquid
Type for Head	HBBL600-6000V6 Head Simulating Liquid
Type for Body	MBBL600-6000V6 Body Simulating Liquid

## 4.6 DESCRIPTION OF THE TEST PROCEDURE

### 4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy5 system.



**Device holder supplied by SPEAG**

---

## 4.6.2 Test positions

### 4.6.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

### 4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is 10mm. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

## 4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~3GHz) and 10mm x 10mm (above 5GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location. Next, a zoom scan, a minimum of 7 x 7x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

## 4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics. In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 5 RESULT SUMMARY




The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

**Note: The test result of second supply is better than the test data of main supply except WIFI 2.4GHz. So the original test data retain and adopted as the final test result except WIFI 2.4GHz use new test data**

Exposure Position	Frequency Band	1g-SAR Reported Result (W/kg)	Highest 1g-SAR Reported Result (W/kg)		Limit (W/kg)/1g	Result
Head	GSM 850	0.278	0.940	0.940	1.60	pass
	GSM 1900	0.151				
	WCDMA Band 2	0.235				
	WCDMA Band 5	0.188				
	WLAN 2.4GHz Band	0.940				
Body (10mm Gap)	GSM 850	0.744	0.744			
	GSM 1900	0.576				
	WCDMA Band 2	0.449				
	WCDMA Band 5	0.461				
	WLAN 2.4GHz Band	0.173				

### Simultaneous Transmission Summary

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit (W/kg) /1g	Result
Head	GSM & Wi-Fi	1.214	1.214	1.214	1.60	pass
	WCDMA & Wi-Fi	1.175				
	GSM & Bluetooth	0.344				
	WCDMA & Bluetooth	0.301				
Body (10mm Gap)	GSM & Wi-Fi	0.889	0.889			
	WCDMA & Wi-Fi	0.606				
	GSM & Bluetooth	0.777				
	WCDMA & Bluetooth	0.494				

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Chang Tianyu 	Issued date: 20180808

## 6 TEST RESULT

### 6.1 Manufacturing Tolerance

#### GSM

GSM 850			
Channel	Channel 128	Channel 189	Channel 251
Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0
GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0

GSM 850 GPRS				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0
2 Txslot	Tolerance (dBm)	<b>28.0~32.0</b>	<b>28.0~32.0</b>	<b>28.0~32.0</b>
3 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
4 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
GSM 850 EGPRS (GMSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	29.0~33.0	29.0~33.0	29.0~33.0
2 Txslot	Tolerance (dBm)	28.5~32.5	28.5~32.5	28.5~32.5
3 Txslot	Tolerance (dBm)	<b>27.0~31.0</b>	<b>27.0~31.0</b>	<b>27.0~31.0</b>
4 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	<b>25.0~29.0</b>	<b>25.0~29.0</b>	<b>25.0~29.0</b>
3 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
4 Txslot	Tolerance (dBm)	23.0~27.0	23.0~27.0	23.0~27.0
GSM 1900 EGPRS (GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
2 Txslot	Tolerance (dBm)	25.5~29.5	25.5~29.5	25.5~29.5
3 Txslot	Tolerance (dBm)	<b>24.0~28.0</b>	<b>24.0~28.0</b>	<b>24.0~28.0</b>
4 Txslot	Tolerance (dBm)	23.0~27.0	23.0~27.0	23.0~27.0

**WCDMA**

WCDMA Band2			
Channel	9262	9400	9538
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
WCDMA Band5			
Channel	4132	4183	4233
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSDPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
HSDPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0

HSUPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 5	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0

HSUPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 5	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0

**Bluetooth**

GFSK			
Channel	0	39	78
Tolerance (dBm)	-2.0~2.0	-2.0~2.0	-2.0~2.0
π/4DQPSK			
Channel	0	39	78
Tolerance (dBm)	-4.5~-0.5	-4.5~-0.5	-4.5~-0.5
8DPSK			
Channel	0	39	78
Tolerance (dBm)	-4.5~-0.5	-4.5~-0.5	-4.5~-0.5

**Wi-Fi (2.4GHz)**

802.11b			
Channel	1	6	11
Tolerance (dBm)	12.5~16.5	12.5~16.5	12.5~16.5
802.11g			
Channel	1	6	11
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0
802.11n HT20			
Channel	1	6	11
Tolerance (dBm)	11.0~15.0	11.0~15.0	11.0~15.0

## 6.2 GSM Measurement result

### GSM Measured Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Measured Power(dBm)	32.77	32.86	32.78	29.74	29.82	29.73

### GPRS Measured Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.75	32.88	32.77	29.84	29.88	29.83
3Downlink2uplinkPower(dBm)	<b>31.72</b>	<b>31.84</b>	<b>31.73</b>	<b>28.67</b>	<b>28.69</b>	<b>28.75</b>
2Downlink3uplinkPower(dBm)	29.79	29.75	29.54	26.68	26.73	26.57
1Downlink4uplinkPower(dBm)	28.48	28.57	28.36	25.32	25.56	25.36

### GPRS Averaged Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.72	23.85	23.74	20.81	20.85	20.80
3Downlink2uplinkPower(dBm)	<b>25.70</b>	<b>25.82</b>	<b>25.71</b>	<b>22.65</b>	<b>22.67</b>	<b>22.73</b>
2Downlink3uplinkPower(dBm)	25.53	25.49	25.28	22.42	22.47	22.31
1Downlink4uplinkPower(dBm)	25.47	25.56	25.35	22.31	22.55	22.35

### Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink)= 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink)= 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with **2Txslots** (3Downlink2uplink) for GPRS.



### EGPRS Measured Power

Mode	EGPRS850 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.86	32.87	32.92	29.78	29.80	29.76
	---	---	---	---	---	---
3Downlink2uplinkPower(dBm)	32.00	31.87	31.74	29.08	28.68	28.75
	---	---	---	---	---	---
2Downlink3uplinkPower(dBm)	<b>30.55</b>	<b>30.49</b>	<b>30.43</b>	<b>27.69</b>	<b>27.54</b>	<b>27.58</b>
	---	---	---	---	---	---
1Downlink4uplinkPower(dBm)	29.36	29.20	29.13	26.32	26.21	26.36
	---	---	---	---	---	---

### EGPRS Averaged Power

Mode	EGPRS850 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.83	23.84	23.89	20.75	20.77	20.73
	---	---	---	---	---	---
3Downlink2uplinkPower(dBm)	25.98	25.85	25.72	23.06	22.66	22.73
	---	---	---	---	---	---
2Downlink3uplinkPower(dBm)	<b>26.29</b>	<b>26.23</b>	<b>26.17</b>	<b>23.43</b>	<b>23.28</b>	<b>23.32</b>
	---	---	---	---	---	---
1Downlink4uplinkPower(dBm)	26.35	26.19	26.12	23.31	23.20	23.35
	---	---	---	---	---	---

### Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with **3Txslots** (2Downlink3uplink) for EGPRS (GMSK).

### 6.3 WCDMA Measurement result

The following procedures are according to FCC KDB Publication 941225 D01. Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

#### Measured Results

Mode	Band2			Band5		
Channel	9262	9400	9538	4132	4183	4233
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
RB test mode1+64kRMC(dBm)	22.62	22.72	22.66	22.72	22.73	22.72
RB test mode1+12.2kRMC(dBm)	<b>22.68</b>	<b>22.74</b>	<b>22.69</b>	<b>22.78</b>	<b>22.83</b>	<b>22.79</b>
RB test mode1+144kRMC(dBm)	22.62	22.69	22.65	22.75	22.82	22.80
RB test mode1+384kRMC(dBm)	22.58	22.64	22.59	22.79	22.82	22.73
AMR Voice test mode+ 12.2kRMC	22.62	22.73	22.62	22.74	22.83	22.75

#### HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM(dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .

Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

#### Measured Results

Mode	HSDPA Band 2			HSDPA Band 5		
Channel	9262	9400	9538	4132	4183	4233
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
sub-test1(dBm)	21.30	21.40	21.30	21.70	21.70	21.70
sub-test2(dBm)	21.20	21.20	21.30	21.70	21.80	21.80
sub-test3(dBm)	21.40	21.30	21.20	21.10	21.30	21.30
sub-test4(dBm)	21.40	21.30	21.40	21.30	21.30	21.30

### HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (S F)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (S F)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MP R (dB)	AG <sup>(4)</sup> Index	E-TF CI
1	11/15 (3)	15/15 (3)	64	11/15 (3)	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (4)	15/15 (4)	64	15/15 (4)	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note2: CM=1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

### Measured Results

Mode	HSUPA Band 2			HSUPA Band 5		
	Channel	9262	9400	9538	4132	4183
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.4	846.6
sub-test1 (dBm)	19.90	20.00	19.50	20.20	20.30	20.30
sub-test2 (dBm)	19.90	20.00	19.40	20.30	20.30	20.50
sub-test3 (dBm)	19.80	20.00	19.70	20.00	20.10	20.10
sub-test4 (dBm)	19.40	19.40	19.00	20.10	20.10	20.20
sub-test5 (dBm)	20.80	20.80	20.80	20.60	20.70	20.70

Note: UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01. HSPA SAR was not required output power was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

## 6.4 Bluetooth Measurement result

Modulation type	Test Result (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	1.82	1.58	0.73
$\pi/4$ DQPSK	-0.76	-1.01	-1.88
8DPSK	-0.78	-1.03	-1.89

## 6.5 Wi-Fi Measurement result

### WIFI 2.4G

Modulation type		Average power output (dBm)		
		2412MHz	2437MHz	2462MHz
11b	1 Mbps	15.74	16.09	16.17
	2 Mbps	15.81	16.07	16.16
	5.5 Mbps	15.85	16.05	16.16
	11 Mbps	15.94	16.02	16.15
11g	6 Mbps	14.64	14.89	14.88
	9 Mbps	14.29	14.54	14.54
	12 Mbps	13.94	14.18	14.21
	18 Mbps	13.59	13.83	13.87
	24 Mbps	13.24	13.48	13.54
	36 Mbps	12.89	13.13	13.20
	48 Mbps	12.54	12.77	12.87
	54 Mbps	12.19	12.42	12.53
11n HT20	6.5 Mbps	14.72	14.88	15.06
	13 Mbps	14.22	14.38	14.55
	19.5 Mbps	13.71	13.87	14.05
	26 Mbps	13.21	13.37	13.54
	39 Mbps	12.70	12.87	13.03
	52 Mbps	12.20	12.37	12.52
	58.5 Mbps	11.69	11.86	12.02
	65 Mbps	11.19	11.36	11.51

## 6.6 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

### SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and $\leq 50$ mm

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz})] \leq 3.0$  for 1-g SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to  $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f} (\text{GHz}) \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$  for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	<i>SAR Test Exclusion Threshold (mW)</i>
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

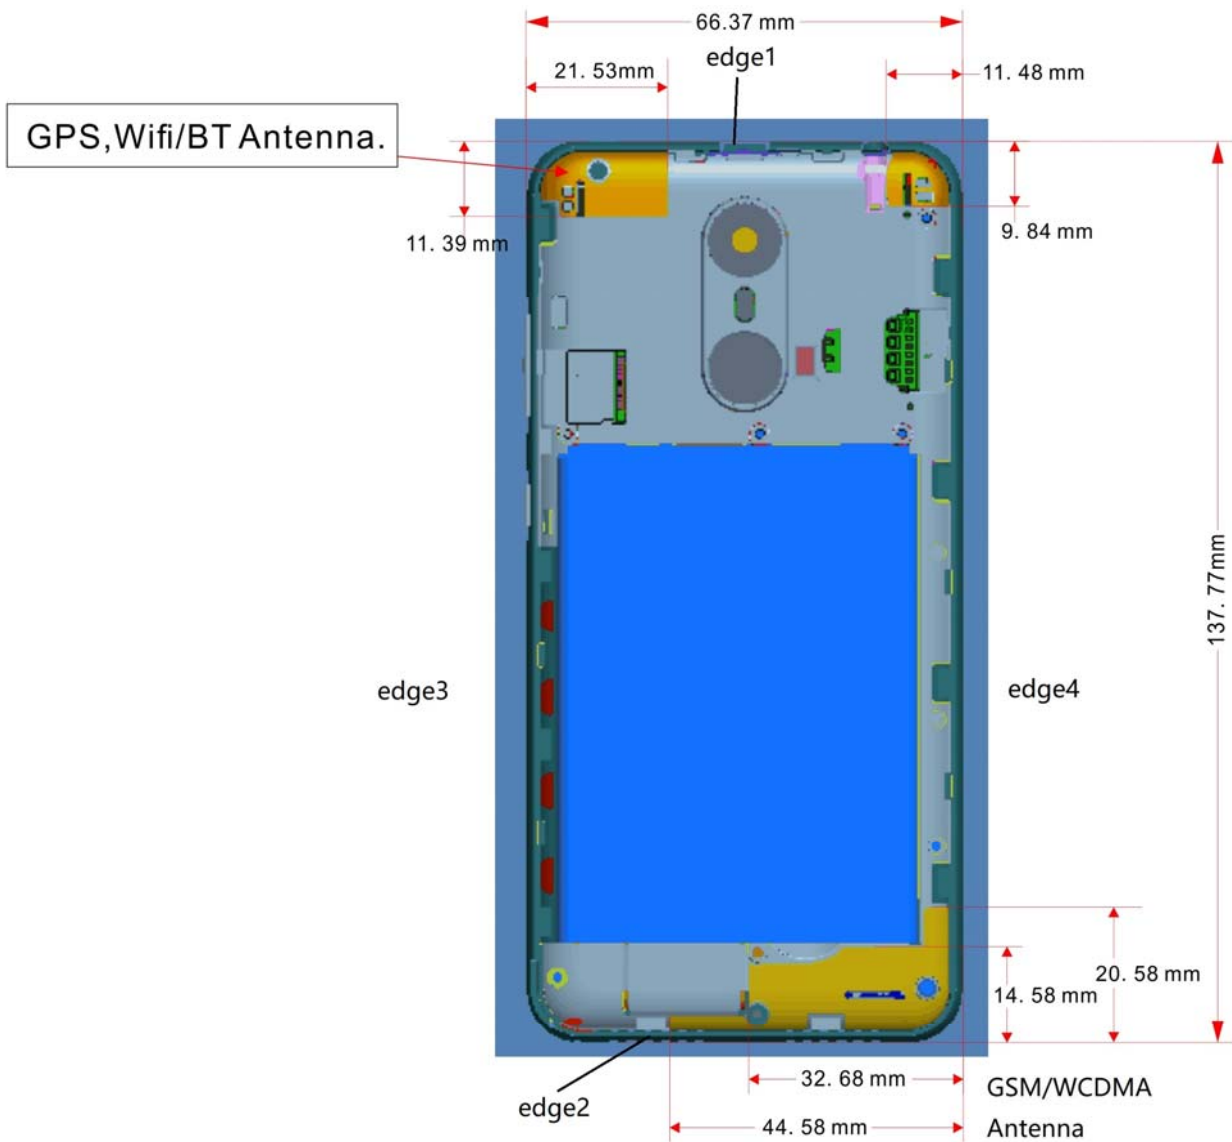
### Summary of Transmitters

Band/Mode	Position	Max.RF output power (mW)	SAR test exclusion Threshold (mW)	SAR Required
(2.4~2.4835)GHz Bluetooth	Head	1.82	10	No
	Body	1.82	19	No
(2.4~2.4835)GHz Wifi	Head	16.17	10	Yes
	Body	16.17	19	No*

**Note\*:** For WIFI 2.4GHz, the body SAR satisfy the exclusion criteria, but we also test Body SAR in order the result could be reasonable and reliable other than evaluated SAR just in body position.

## 6.7 RF exposure conditions

Refer to the follow picture “Antenna Locations & Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



### 6.7.1 Head Exposure Conditions For WWAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

#### For WLAN

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

### 6.7.2 Body Exposure conditions For WWAN

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

#### For WLAN

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

### 6.7.3 Hotspot Exposure Conditions For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1	>25 mm	No
Edge 2	>25 mm	Yes
Edge 3	>25 mm	Yes
Edge 4	>25 mm	Yes

#### For WLAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1	<25 mm	Yes
Edge 2	>25 mm	No
Edge 3	<25 mm	Yes
Edge 4	>25 mm	No

**Note: For hotspot mode, it's not necessary test Rear and Front position cause we already test the these position without hotspot mode in Body Exposure conditions ,Normally if the hotspot mode opened, the technology“ power reduction” used for mobile, so we consider the worst condition.**



## 6.8 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

### Main supply

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
			1g				
2018/4/24	D835V2	Head	1g	9.16	9.37	-2.24	±10
2018/4/26	D1800V2	Head	1g	37.84	38.90	-2.72	±10
2018/4/28	D2450V2	Head	1g	51.20	52.40	-2.29	±10

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
			1g				
2018/5/02	D835V2	Body	1g	9.12	9.47	-2.67	±10
2018/5/04	D1800V2	Body	1g	38.68	39.00	-0.82	±10
2018/5/08	D2450V2	Body	1g	53.20	52.30	1.72	±10

### Second supply

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
			1g				
2018/7/25	D835V2	Head	1g	9.44	9.37	0.75	±10
2018/7/27	D1800V2	Head	1g	38.28	38.90	-1.59	±10
2018/7/30	D2450V2	Head	1g	54.40	52.40	3.82	±10

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
			1g				
2018/7/24	D835V2	Body	1g	9.28	9.47	-2.01	±10
2018/7/26	D1800V2	Body	1g	39.52	39.00	1.33	±10
2018/7/28	D2450V2	Body	1g	51.60	52.30	-1.34	±10
2018/8/01	D2450V2	Body	1g	53.20	52.30	1.72	±10

Plots of the system checking scans are given in Appendix A.

Tissue Simulants used in the Measurements

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

### Main supply

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2018/4/24	Head 835	$\epsilon_r$	41.114	41.50	-0.93	$\pm 5$
		$\sigma$ [S/m]	0.915	0.90	1.67	$\pm 5$
2018/4/26	Head 1800	$\epsilon_r$	40.607	40.00	1.52	$\pm 5$
		$\sigma$ [S/m]	1.411	1.40	0.79	$\pm 5$
2018/4/28	Head 2450	$\epsilon_r$	39.583	39.20	0.98	$\pm 5$
		$\sigma$ [S/m]	1.833	1.80	1.83	$\pm 5$

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2018/5/02	Body 835	$\epsilon_r$	56.196	55.20	1.80	$\pm 5$
		$\sigma$ [S/m]	0.966	0.97	-0.41	$\pm 5$
2018/5/04	Body 1800	$\epsilon_r$	51.717	53.30	-2.97	$\pm 5$
		$\sigma$ [S/m]	1.542	1.52	1.45	$\pm 5$
2018/5/08	Body 2450	$\epsilon_r$	51.046	52.70	-3.14	$\pm 5$
		$\sigma$ [S/m]	2.027	1.95	3.95	$\pm 5$

### Second supply

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2018/7/25	Head 835	$\epsilon_r$	42.529	41.50	2.48	$\pm 5$
		$\sigma$ [S/m]	0.912	0.90	1.33	$\pm 5$
2018/7/27	Head 1800	$\epsilon_r$	38.905	40.00	-2.74	$\pm 5$
		$\sigma$ [S/m]	1.409	1.40	0.62	$\pm 5$
2018/7/30	Head 2450	$\epsilon_r$	38.145	39.20	-2.69	$\pm 5$
		$\sigma$ [S/m]	1.873	1.80	4.06	$\pm 5$

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2018/7/24	Body 835	$\epsilon_r$	55.832	55.20	1.14	$\pm 5$
		$\sigma$ [S/m]	0.982	0.97	1.24	$\pm 5$
2018/7/26	Body 1800	$\epsilon_r$	52.933	53.30	-0.69	$\pm 5$
		$\sigma$ [S/m]	1.515	1.52	-0.33	$\pm 5$
2018/7/28	Body 2450	$\epsilon_r$	52.618	52.70	-0.16	$\pm 5$
		$\sigma$ [S/m]	1.936	1.95	-0.72	$\pm 5$
2018/8/01	Body 2450	$\epsilon_r$	53.2	52.70	0.95	$\pm 5$
		$\sigma$ [S/m]	1.97	1.95	1.03	$\pm 5$

---

## 6.9 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),  
b) All configurations for each device position in a), e.g., antenna extended and retracted, and  
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Measured SAR (W/kg)\* Scaling Factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR  $\leq 0.8$ W/kg, other channels SAR testing are not necessary.

3. In the report the test position "Mobile phone screen Towards Ground" abbreviated as "TG", and "Mobile phone screen Towards Phantom" abbreviated as "TP".

4. The distance between the EUT and the phantom bottom is 10mm.

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: **GSM 850**

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

SAR Values(Head, 850MHz Band)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
position	mode					1g Average	1g Average
Left cheek	GSM	L	32.77	33.00	1.05	---	---
		M(main supply)	32.86	33.00	1.03	0.266	0.274
		<b>M(second supply)</b>	<b>32.86</b>	<b>33.00</b>	<b>1.03</b>	<b>0.185</b>	<b>0.191</b>
		H	32.78	33.00	1.05	---	---
Left Tilted	GSM	L	32.77	33.00	1.05	---	---
		M	32.86	33.00	1.03	0.142	0.146
		H	32.78	33.00	1.05	---	---
Right cheek	GSM	L	32.77	33.00	1.05	0.247	0.259
		M(main supply)	32.86	33.00	1.03	0.270	0.278
		<b>M(second supply)</b>	<b>32.86</b>	<b>33.00</b>	<b>1.03</b>	<b>0.193</b>	<b>0.199</b>
		H	32.78	33.00	1.05	0.244	0.256
Right Tilted	GSM	L	32.77	33.00	1.05	---	---
		M	32.86	33.00	1.03	0.153	0.158
		H	32.78	33.00	1.05	---	---

**Note: we check the Left cheek of 2nd source, the value is less than right cheek, and the variation tendency is the same, so we assume that the worst thermal spot not changed compare with 1st source.**

**Mode: GSM850 (GSM/GPRS)**

fL (MHz)=824.2MHz      fM (MHz)=836.5MHz      fH (MHz)= 848.8MHz

SAR Values(Body, 850MHz Band)

**Limit of SAR (W/kg) : <1.6W/kg (1g Average)**

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
position	mode					1g Average	1g Average
TG	GSM With headset	L	32.77	33.00	1.05	---	---
		M	32.86	33.00	1.03	0.209	0.215
		H	32.78	33.00	1.05	---	---
	GPRS	L	31.72	32.00	1.07	0.551	0.590
		M	31.84	32.00	1.04	0.677	0.704
		H	31.73	32.00	1.06	0.605	0.641
	EGPRS	L	30.55	31.00	1.11	---	---
		M(main supply)	30.49	31.00	1.12	0.664	0.744
		<b>M(second supply)</b>	<b>30.49</b>	<b>31.00</b>	<b>1.12</b>	<b>0.643</b>	<b>0.720</b>
		H	30.43	31.00	1.14	---	---
TP	GSM With headset	L	32.77	33.00	1.05	---	---
		M	32.86	33.00	1.03	0.143	0.147
		H	32.78	33.00	1.05	---	---
	GPRS	L	31.72	32.00	1.07	---	---
		M	31.84	32.00	1.04	0.410	0.426
		H	31.73	32.00	1.06	---	---
	EGPRS	L	30.55	31.00	1.11	---	---
		M	30.49	31.00	1.12	0.410	0.459
		H	30.43	31.00	1.14	---	---
	Hotspot EDGE 2	GPRS	L	31.72	32.00	1.07	---
	M		31.84	32.00	1.04	0.149	0.155
	H		31.73	32.00	1.06	---	---
Hotspot EDGE 3	L		31.72	32.00	1.07	---	---
	M		31.84	32.00	1.04	0.388	0.404
	H		31.73	32.00	1.06	---	---
Hotspot EDGE 4	L		31.72	32.00	1.07	---	---
	M		31.84	32.00	1.04	0.437	0.454
	H		31.73	32.00	1.06	---	---

**Mode: GSM1900**

fL (MHz)=1850.2MHz      fM (MHz)=1880.0MHz      fH (MHz)=1909.8MHz

SAR Values (Head, 1900MHz Band)

**Limit of SAR (W/kg) : <1.6W/kg (1g Average)**

Test Case		CH	Measure re Condu cted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
position	mode					1g Average	1g Average
Left cheek	GSM	L	29.74	30.00	1.06	---	---
		M(main supply)	29.82	30.00	1.04	0.145	0.151
		<b>M(second supply)</b>	<b>29.82</b>	<b>30.00</b>	<b>1.04</b>	<b>0.139</b>	<b>0.145</b>
H		29.73	30.00	1.06	---	---	
Left Tilted		L	29.74	30.00	1.06	---	---
		M	29.82	30.00	1.04	0.048	0.050
		H	29.73	30.00	1.06	---	---
Right cheek		L	29.74	30.00	1.06	---	---
		M	29.82	30.00	1.04	0.087	0.090
		H	29.73	30.00	1.06	---	---
Right Tilted	L	29.74	30.00	1.06	---	---	
	M	29.82	30.00	1.04	0.062	0.064	
	H	29.73	30.00	1.06	---	---	

**Mode: GSM1900 (GSM/GPRS/EGPRS)**

fL (MHz)=1850.2MHz      fM (MHz)=1880.0MHz      fH (MHz)=1909.8MHz

SAR Values (body, 1900MHz Band)

**Limit of SAR (W/kg) :< 1.6W/kg (1g Average)**

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
position	mode					1g Average	1g Average
TG	GSM With head set	L	29.74	30.00	1.06	---	---
		M	29.82	30.00	1.04	0.175	0.182
		H	29.73	30.00	1.06	---	---
	GPRS	L	28.67	29.00	1.08	---	---
		M	28.69	29.00	1.07	0.220	0.235
		H	28.75	29.00	1.06	---	---
	EGPRS	L	27.69	28.00	1.07	---	---
		M	27.54	28.00	1.11	0.282	0.313
		H	27.58	28.00	1.10	---	---
TP	GSM With head set	L	29.74	30.00	1.06	---	---
		M	29.82	30.00	1.04	0.157	0.163
		H	29.73	30.00	1.06	---	---
	GPRS	L	28.67	29.00	1.08	---	---
		M	28.69	29.00	1.07	0.221	0.236
		H	28.75	29.00	1.06	---	---
	EGPRS	L	27.69	28.00	1.07	---	---
		M(main supply)	27.54	28.00	1.11	0.287	0.319
		<b>M(second supply)</b>	<b>27.54</b>	<b>28.00</b>	<b>1.11</b>	<b>0.192</b>	<b>0.213</b>
H		27.58	28.00	1.10	---	---	
Hotspot EDGE 2	EGPRS	L	27.69	28.00	1.07	---	---
		M(main supply)	27.54	28.00	1.11	0.519	0.576
		<b>M(second supply)</b>	<b>27.54</b>	<b>28.00</b>	<b>1.11</b>	<b>0.276</b>	<b>0.306</b>
Hotspot EDGE 3	EGPRS	H	27.58	28.00	1.10	---	---
		L	27.69	28.00	1.07	---	---
		M	27.54	28.00	1.11	0.076	0.085
Hotspot EDGE 4	EGPRS	H	27.58	28.00	1.10	---	---
		L	27.69	28.00	1.07	---	---
		M	27.54	28.00	1.11	0.122	0.135
		H	27.58	28.00	1.10	---	---

**Note: we check the TP of 2nd source, the value is less than EDGE2, and the variation tendency is the same, so we assume that the worst thermal spot not changed compare with 1nd source.**

**Mode: WCDMA BAND2**

fL (MHz)=1852.4MHz      fM (MHz)=1880MHz      fH (MHz)= 1907.6MHz

SAR Values (Head, WCDMA BAND2)

**Limit of SAR (W/kg) :< 1.6W/kg (1g Average)**

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
position	mode					1g Average	1g Average
Left cheek	VOICE	L	22.68	23.00	1.08	---	---
		M(main supply)	22.74	23.00	1.06	0.222	0.235
		<b>M(second supply)</b>	<b>22.74</b>	<b>23.00</b>	<b>1.06</b>	<b>0.193</b>	<b>0.205</b>
		H	22.69	23.00	1.07	---	---
Left Tilted		L	22.68	23.00	1.08	---	---
		M	22.74	23.00	1.06	0.065	0.069
		H	22.69	23.00	1.07	---	---
Right cheek		L	22.68	23.00	1.08	---	---
		M	22.74	23.00	1.06	0.125	0.133
		H	22.69	23.00	1.07	---	---
Right Tilted		L	22.68	23.00	1.08	---	---
		M	22.74	23.00	1.06	0.077	0.082
	H	22.69	23.00	1.07	---	---	



**Mode: WCDMA BAND2**

fL (MHz)=1852.4MHz      fM (MHz)=1880MHz      fH (MHz)= 1907.6MHz

SAR Values (Body, WCDMA BAND2)

**Limit of SAR (W/kg) :< 1.6W/kg (1g Average)**

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
TG	VOICE	L	22.68	23.00	1.08	---	---
		M(main supply)	22.74	23.00	1.06	0.243	0.258
		<b>M(second supply)</b>	<b>22.74</b>	<b>23.00</b>	<b>1.06</b>	<b>0.166</b>	<b>0.176</b>
	DATA	H	22.69	23.00	1.07	---	---
		L	22.68	23.00	1.08	---	---
		M	22.74	23.00	1.06	0.233	0.247
TP	VOICE	H	22.69	23.00	1.07	---	---
		M	22.74	23.00	1.06	0.112	0.119
		L	22.68	23.00	1.08	---	---
	DATA	L	22.68	23.00	1.08	---	---
		M	22.74	23.00	1.06	0.113	0.120
		H	22.69	23.00	1.07	---	---
Hotspot EDGE2	VOICE	L	22.68	23.00	1.08	---	---
		M(main supply)	22.74	23.00	1.06	0.424	0.449
		<b>M(second supply)</b>	<b>22.74</b>	<b>23.00</b>	<b>1.06</b>	<b>0.261</b>	<b>0.277</b>
Hotspot EDGE3		L	22.69	23.00	1.07	---	---
		M	22.68	23.00	1.08	---	---
		H	22.74	23.00	1.06	0.137	0.145
Hotspot EDGE4	L	22.69	23.00	1.07	---	---	
	M	22.68	23.00	1.08	---	---	
	H	22.74	23.00	1.06	0.218	0.231	
		L	22.69	23.00	1.07	---	---

**Note: we check the TG of 2nd source, the value is less than EDGE2, and the variation tendency is the same, so we assume that the worst thermal spot not changed compare with 1nd source.**

**Mode: WCDMA BAND5**

fL (MHz)=826.4MHz      fM (MHz)=836.4MHz      fH (MHz)= 846.6MHz

SAR Values(Head, WCDMA BAND5)

**Limit of SAR (W/kg) : <1.6W/kg (1g Average)**

Test Case		CH	Measure re Condu cted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
Position	mode					1g Average	1g Average
Left cheek	VOICE	L	22.78	23.00	1.05	---	---
		M(main supply)	22.83	23.00	1.04	0.181	0.188
		<b>M(second supply)</b>	<b>22.83</b>	<b>23.00</b>	<b>1.04</b>	<b>0.146</b>	<b>0.152</b>
		H	22.79	23.00	1.05	---	---
Left Tilted		L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.078	0.081
		H	22.79	23.00	1.05	---	---
Right cheek		L	22.78	23.00	1.05	---	---
		M(main supply)	22.83	23.00	1.04	0.174	0.181
		<b>M(second supply)</b>	<b>22.83</b>	<b>23.00</b>	<b>1.04</b>	<b>0.133</b>	<b>0.138</b>
		H	22.79	23.00	1.05	---	---
Right Tilted		L	22.78	23.00	1.05	---	---
	M	22.83	23.00	1.04	0.072	0.075	
	H	22.79	23.00	1.05	---	---	

**Note: we check the Right cheek of 2nd source, the value is less than Left cheek, and the variation tendency is the same, so we assume that the worst thermal spot not changed compare with 1nd source.**

**Mode: WCDMA BAND5**

fL (MHz)=826.4MHz      fM (MHz)=836.4MHz      fH (MHz)= 846.6MHz

SAR Values(body, WCDMA BAND5)

**Limit of SAR (W/kg) : <1.6W/kg (1g Average)**

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
TG	VOICE	L	22.78	23.00	1.05	---	---
		M(main supply)	22.83	23.00	1.04	0.430	0.447
		<b>M(second supply)</b>	<b>22.83</b>	<b>23.00</b>	<b>1.04</b>	<b>0.302</b>	<b>0.314</b>
		H	22.79	23.00	1.05	---	---
	DATA	L	22.78	23.00	1.05	---	---
		M(main supply)	22.83	23.00	1.04	0.443	0.461
		<b>M(second supply)</b>	<b>22.83</b>	<b>23.00</b>	<b>1.04</b>	<b>0.310</b>	<b>0.322</b>
		H	22.79	23.00	1.05	---	---
TP	VOICE	L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.312	0.324
		H	22.79	23.00	1.05	---	---
	DATA	L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.311	0.323
		H	22.79	23.00	1.05	---	---
Hotspot EDGE2	DATA	L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.147	0.153
		H	22.79	23.00	1.05	---	---
Hotspot EDGE3		L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.103	0.107
		H	22.79	23.00	1.05	---	---
Hotspot EDGE4		L	22.78	23.00	1.05	---	---
		M	22.83	23.00	1.04	0.103	0.107
		H	22.79	23.00	1.05	---	---

**Note: we check the TG(VOICE) of 2nd source, the value is less than TG(DATA), and the variation tendency is the same, so we assume that the worst thermal spot not changed compare with 1nd source.**

**Mode: Wi-Fi 2.4GHz**

fL (MHz)=2412MHz      fM (MHz)=2437MHz      fH (MHz)= 2462MHz

SAR Values (Wi-Fi 802.11b)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
Position	mode					1g Average	1g Average
Left cheek	802.11b	L	15.74	16.50	1.19	---	---
		M(main supply)	16.09	16.50	1.10	0.045	0.049
		<b>M(second supply)</b>	<b>16.09</b>	<b>16.50</b>	<b>1.10</b>	<b>0.701</b>	<b>0.771</b>
		H	16.17	16.50	1.08	---	---
Left Tilted		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.023	0.025
		H	16.17	16.50	1.08	---	---
Right cheek		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.023	0.025
		H	16.17	16.50	1.08	---	---
Right Tilted		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.028	0.031
	H	16.17	16.50	1.08	---	---	

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
TG	802.11b	L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.121	0.133
		H	16.17	16.50	1.08	---	---
TP		L	15.74	16.50	1.19	---	---
		M(main supply)	16.09	16.50	1.10	0.123	0.135
		<b>M(second supply)</b>	<b>16.09</b>	<b>16.50</b>	<b>1.10</b>	<b>0.142</b>	<b>0.156</b>
		H	16.17	16.50	1.08	---	---
Hotspot EDGE1		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.006	0.006
		H	16.17	16.50	1.08	---	---
Hotspot EDGE4		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.008	0.009
	H	16.17	16.50	1.08	---	---	

**Note: we notice that on left head position, the result of second supply is much worse than the main supply, we retest the conducted power of the second supply, and there is no difference. And we retest the main supply which the IMEI is 86769031290622, the SAR value is still very small and close to 0.045, so we retest the SAR value of second supply adopted as final result for all the position of WIFI 2.4GHz.(test result showing below)**

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results ( W/kg)	Reported Results ( W/kg)
Position	mode					1g Average	1g Average
Left cheek	802.11b	L1	15.74	16.50	1.19	0.790	0.940
		M1	16.09	16.50	1.10	0.787	0.866
		H1	16.17	16.50	1.08	0.672	0.726
		L2	15.74	16.50	1.19	0.780	0.929
		M2	16.09	16.50	1.10	0.792	0.870
		H2	16.17	16.50	1.08	0.670	0.723
Left Tilted		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.556	0.612
		H	16.17	16.50	1.08	---	---
Right cheek		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.473	0.520
		H	16.17	16.50	1.08	---	---
Right Tilted	L	15.74	16.50	1.19	---	---	
	M	16.09	16.50	1.10	0.400	0.440	
	H	16.17	16.50	1.08	---	---	

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1g Average	1g Average
TG	802.11b	L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.132	0.145
		H	16.17	16.50	1.08	---	---
TP		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.157	0.173
		H	16.17	16.50	1.08	---	---
Hotspot EDGE1		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.145	0.160
		H	16.17	16.50	1.08	---	---
Hotspot EDGE4		L	15.74	16.50	1.19	---	---
		M	16.09	16.50	1.10	0.091	0.100
		H	16.17	16.50	1.08	---	---

## 6.10 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

### The Highest Reported SAR configuration in Each Frequency Band

Frequency band	Air interface	Head(w/kg)	Body(w/kg)
850 MHz	GSM850 WCDMA band5	<0.8	<0.8
1800/1900 MHz	GSM1900 WCDMA band2	<0.8	<0.8
2.4 GHz	WIFI 2.4G	>0.8	<0.8

## 6.11 Simultaneous Transmission SAR Analysis

### The sum of SAR values for GSM & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
<b>GSM</b>	0.274	0.744
<b>WiFi</b>	0.940	0.145
<b>Sum</b>	1.214	0.889
<b>Note</b>	GSM850+WIFI 2.4G Left cheek	GSM 850+WIFI 2.4G TG

According to the above tables, the sum of SAR values for GSM and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

### The sum of SAR values for WCDMA & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
<b>WCDMA</b>	0.235	0.461
<b>WiFi</b>	0.940	0.145
<b>Sum</b>	1.175	0.606
<b>Note</b>	WCDMA BAND2+WIFI 2.4G Left cheek	WCDMA BAND5+WIFI TG

According to the above tables, the sum of SAR values for WCDMA and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

According to the formula (KDB447498 4.3.2) the Bluetooth SAR as follow:  

$$\left[ \frac{\text{max.power of channel, including tune-up tolerance,mw}}{(\text{min.test separation distance,mm})} \right]$$

$$[\sqrt{f(\text{GHz})/x}] \text{ W/kg for test separation distances} \leq 50\text{mm.}$$

Head:

min. test separation distance = 5mm

Body:

min. test separation distance = 10mm

Where  $x=7.5$  for 1-g SAR, and  $x=18.75$  for 10-g SAR.

#### Estimated SAR Bluetooth

Mode	Position	F(GHz)	Distance(mm)	Estimated
Bluetooth	Head	2.402	5	0.066
	Body	2.402	10	0.033

#### The sum of SAR values for GSM & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
<b>GSM</b>	0.278	0.744
<b>Bluetooth</b>	0.066	0.033
<b>Sum</b>	0.344	0.777
<b>Note</b>	GSM850+BT Right cheek	GSM 850+BT TG

According to the above tables, the sum of SAR values for GSM and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

#### The sum of SAR values for WCDMA & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
<b>WCDMA</b>	0.235	0.461
<b>Bluetooth</b>	0.066	0.033
<b>Sum</b>	0.301	0.494
<b>Note</b>	WCDMA BAND2+BT Left cheek	WCDMA BAND5+BT TG

According to the above tables, the sum of SAR values for WCDMA and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.



## 7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response <sup>m</sup>	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling <sup>P</sup>	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity <sup>BB</sup>	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity <sup>BB</sup>	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c <sub>i</sub> ) 1g	(c <sub>i</sub> ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v <sub>i</sub> ) v <sub>eff</sub>
<b>Measurement System</b>								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response <sup>m</sup>	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling <sup>P</sup>	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.6 %	R	√3	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity <sup>BB</sup>	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity <sup>BB</sup>	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

## **8 TEST EQUIPMENTS**

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components for **main supply**:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	546	2017.09.15	2018.09.14
Dosimetric E-field Probe	ES3DV3	3127	2017.10.11	2018.10.10
Dipole Validation Kit	D835V2	4d023	2017.09.13	2018.09.12
Dipole Validation Kit	D1800V2	2d084	2017.09.15	2018.09.14
Dipole Validation Kit	D2450V2	738	2017.09.18	2018.09.17

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2017.08.20	2018.08.19
Signal Generator	SML 03	103514	2017.08.20	2018.08.19
Power meter	E4417A	MY45101182	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502214	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502130	2017.08.20	2018.08.19
Power meter	E4417A	MY45101004	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496001	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496003	2017.08.20	2018.08.19
Communication Tester	8960	GB43194054	2017.08.20	2018.08.19
Vector Network Analyzer	VNA R140	0011213	2017.10.17	2018.10.16
Dielectric Parameter Probe	DAKS-3.5	1042	2017.10.17	2018.10.16

The following table lists calibration dates of SPEAG components for **second supply**:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2017.10.24	2018.10.23
DAE	DAE4	546	2017.09.15	2018.09.14
Dosimetric E-field Probe	ES3DV3	3127	2017.10.11	2018.10.10
Dosimetric E-field Probe	EX3DV4	3708	2017.11.07	2018.11.06
Dipole Validation Kit	D835V2	4d023	2017.09.13	2018.09.12
Dipole Validation Kit	D1800V2	2d084	2017.09.15	2018.09.14
Dipole Validation Kit	D2450V2	738	2017.09.18	2018.09.17

Additional test equipment used in testing for **variant product**:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2017.08.20	2018.08.19
Signal Generator	SML 03	103514	2017.08.20	2018.08.19
Power meter	E4417A	MY45101182	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502214	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502130	2017.08.20	2018.08.19
Power meter	E4417A	MY45101004	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496001	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496003	2017.08.20	2018.08.19
Communication Tester	8960	GB43194054	2017.08.20	2018.08.19
Vector Network Analyzer	VNA R140	0011213	2017.10.17	2018.10.16
Dielectric Parameter Probe	DAKS-3.5	1042	2017.10.17	2018.10.16

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Optical Surface Detection	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 $\mu$ W/g to > 100 W/kg; Linearity: $\pm 0.2$ dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Optical Surface Detection	$\pm 0.3$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 $\mu$ W/g to > 100 W/kg Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

**ANNEX A – TEST PLOTS**

Please refer to the attachment.

**ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS**

Please refer to the attachment.

**ANNEX A – TEST PLOTS**

**First supply**

**Head liquid**


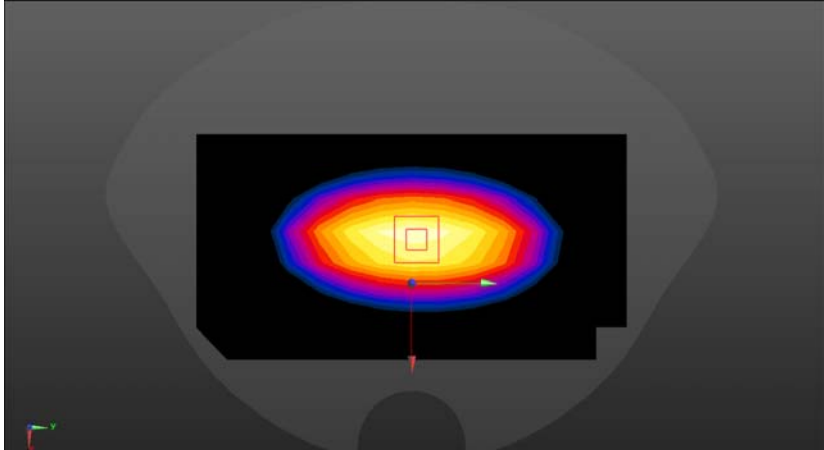
System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.915 \text{ S/m}</math>; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> </ul> <ul style="list-style-type: none"> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)  <b>Configuration 835/835/Area Scan (8x15x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.87 W/kg  <b>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 52.13 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 3.66 W/kg  <b>SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.55 W/kg</b>            Maximum value of SAR (measured) = 2.67 W/kg</li> </ul> <div data-bbox="295 1429 1292 1881"> <p>The figure consists of a vertical color scale on the left and a heatmap on the right. The color scale ranges from 0 dB (yellow) at the top to -10.86 dB (black) at the bottom, with intermediate values at -2.17, -4.34, -6.52, and -8.69 dB. The heatmap shows a central region of high SAR (yellow/red) surrounded by concentric rings of decreasing SAR (orange, red, blue, purple, black). A small white square highlights a specific area within the central region, with a red arrow pointing to it.</p> </div> <p style="text-align: center;"><math>0 \text{ dB} = 2.67 \text{ W/kg} = 4.27 \text{ dBW/kg}</math></p>	

System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.411 \text{ S/m}</math>; <math>\epsilon_r = 40.607</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> </ul> <ul style="list-style-type: none"> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)  <b>Configuration 1800/1800/Area Scan (7x10x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 8.31 W/kg  <b>Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 76.60 V/m; Power Drift = 0.01 dB            Peak SAR (extrapolated) = 17.5 W/kg  <b>SAR(1 g) = 9.46 W/kg; SAR(10 g) = 4.96 W/kg</b>            Maximum value of SAR (measured) = 12.1 W/kg</li> </ul> <div data-bbox="268 1294 1321 1747"> </div> <p>0 dB = 12.1 W/kg = 10.83 dBW/kg</p>	

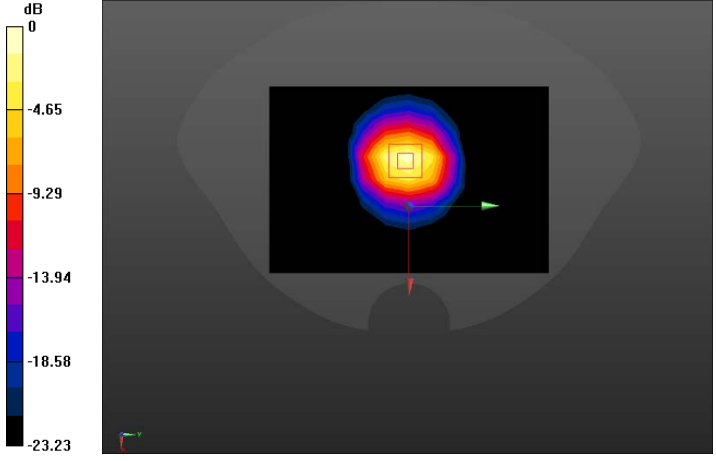
System check	2450MHz
<p>Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.833</math> S/m; <math>\epsilon_r = 39.583</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>System Performance Check at Frequencies 2450MHz Area Scan (9x13x1):</b> Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm Maximum value of SAR (measured) = 21.87 W/kg</p> <p><b>System Performance Check at Frequencies 2450MHz Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 98.95 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 27.9 W/kg <b>SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.96 W/kg</b> Maximum value of SAR (measured) = 12.56 W/kg</p> <div data-bbox="343 1339 1246 1792"> </div> <p>0 dB = 12.56 W/kg = 10.99 dBW/kg</p>	

**Body liquid**

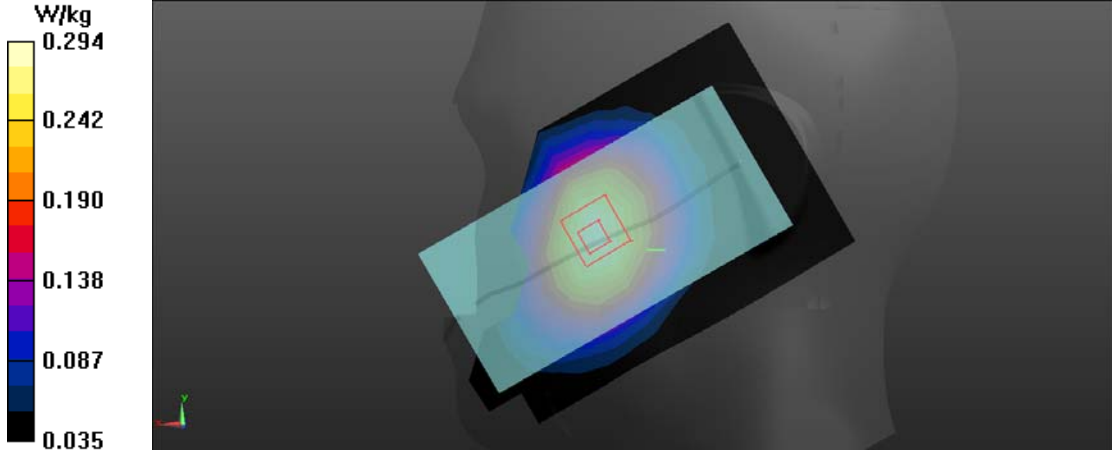


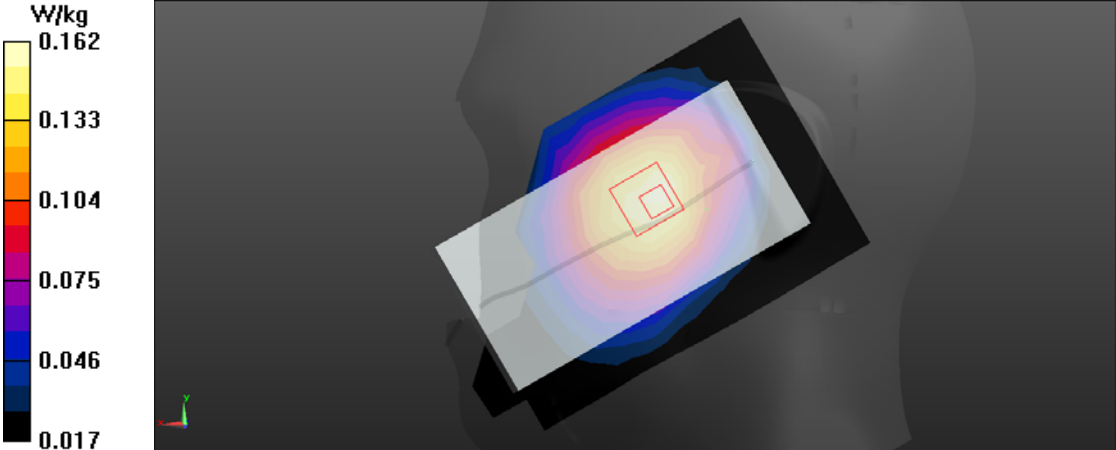
System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.966 \text{ S/m}</math>; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560</li> </ul> <p>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)  <b>Configuration 835/835/Area Scan (8x15x1)</b>: Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.57 W/kg  <b>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0</b>: Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 51.34 V/m; Power Drift = 0.12 dB            Peak SAR (extrapolated) = 3.26 W/kg  <b>SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.49 W/kg</b>            Maximum value of SAR (measured) = 2.58 W/kg</p> <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;">  <p>dB 0 -2.13 -4.26 -6.40 -8.53 -10.66</p> </div> <div>  </div> </div> <p style="text-align: center;">0 dB = 2.58 W/kg = 4.11 dBW/kg</p>	

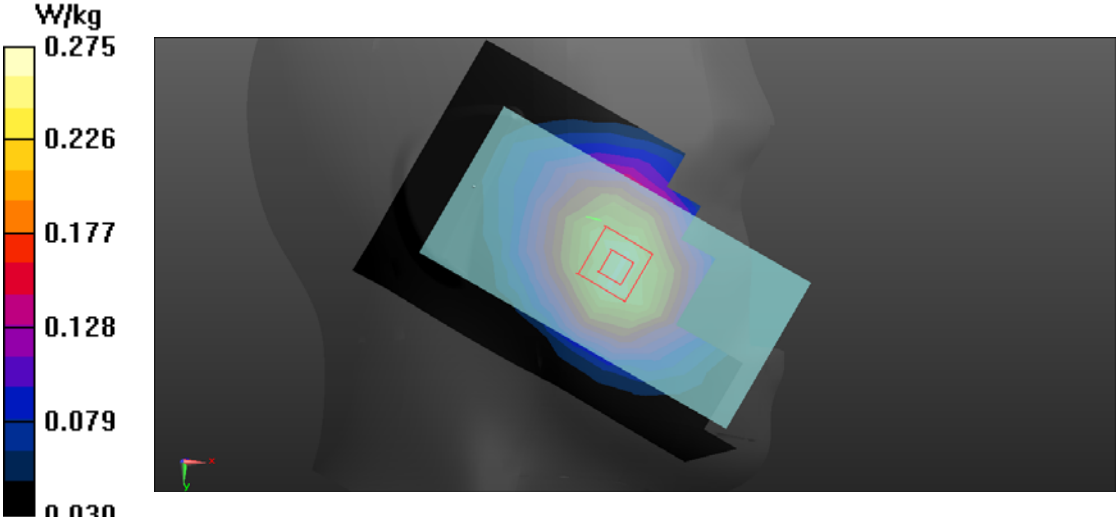
System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1            Medium parameters used: <math>f = 1800</math> MHz; <math>\sigma = 1.542</math> S/m; <math>\epsilon_r = 51.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> </ul> <ul style="list-style-type: none"> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)  <b>Configuration 1800/1800/Area Scan (8x10x1)</b>: Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 11.5 W/kg  <b>Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0</b>: Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 80.17 V/m; Power Drift = 0.15 dB            Peak SAR (extrapolated) = 17.8 W/kg  <b>SAR(1 g) = 9.67 W/kg; SAR(10 g) = 5.03 W/kg</b>            Maximum value of SAR (measured) = 12.4 W/kg</li> </ul> <div style="display: flex; align-items: center;"> <div data-bbox="295 1332 391 1780" style="margin-right: 10px;"> <p>dB</p> <p>0 -3.38 -6.75 -10.13 -13.50 -16.88</p> </div> <div data-bbox="427 1332 1295 1787"> </div> </div> <p style="text-align: center;">0 dB = 12.4 W/kg = 10.93 dBW/kg</p>	

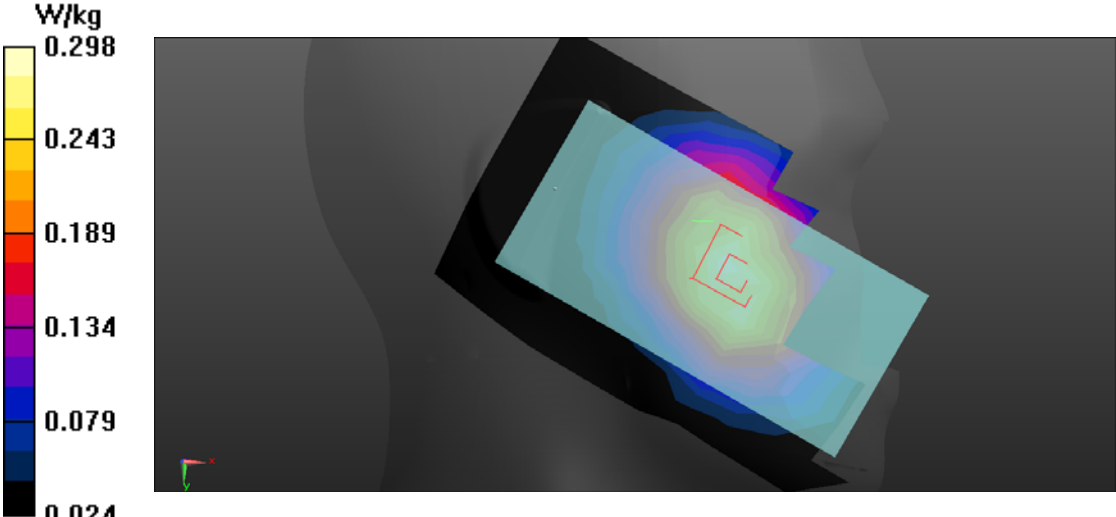
System check	2450MHz
<p>Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 2.027</math> S/m; <math>\epsilon_r = 51.046</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (9x13x1):</b> Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 13.4 W/kg</p> <p><b>System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 62.29 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 29.3 W/kg <b>SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.13 W/kg</b> Maximum value of SAR (measured) = 18.9 W/kg</p>	
 <p>0 dB = 18.9 W/kg = 12.76 dBW/kg</p>	

**GSM (850MHz/Head)**

Left Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Left HSL 850/850GSM HSL touch M/Area Scan (8x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.295 W/kg</p> <p><b>Head-Section Left HSL 850/850GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 4.846 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 0.333 W/kg  <b>SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.200 W/kg</b>            Maximum value of SAR (measured) = 0.294 W/kg</p> 	

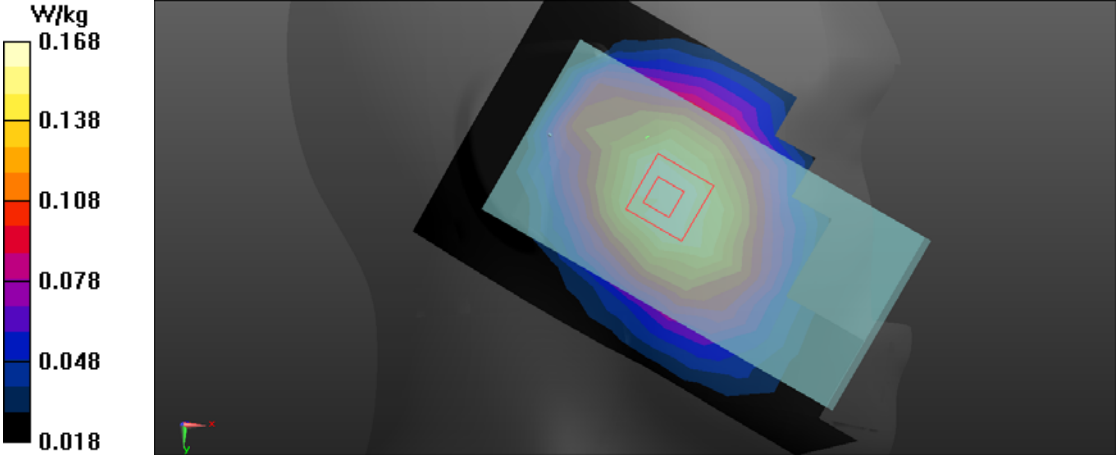
Left Side	Tilt
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042</p> <p>Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Left HSL 850/850GSM HSL tilt M/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.159 W/kg</p> <p><b>Head-Section Left HSL 850/850GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.423 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.187 W/kg <b>SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.107 W/kg</b> Maximum value of SAR (measured) = 0.162 W/kg</p> 	

Right Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 824.2 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): <math>f = 824.2</math> MHz; <math>\sigma = 0.909</math> S/m; <math>\epsilon_r = 42.593</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Right HSL 850/850GSM HSL touch L/Area Scan (8x13x1):</b>                      Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.263 W/kg</p> <p><b>Head-Section Right HSL 850/850GSM HSL touch L/Zoom Scan (7x7x7)/Cube 0:</b>                      Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 6.718 V/m; Power Drift = 0.05 dB                      Peak SAR (extrapolated) = 0.321 W/kg  <b>SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.180 W/kg</b>                      Maximum value of SAR (measured) = 0.275 W/kg</p> 	

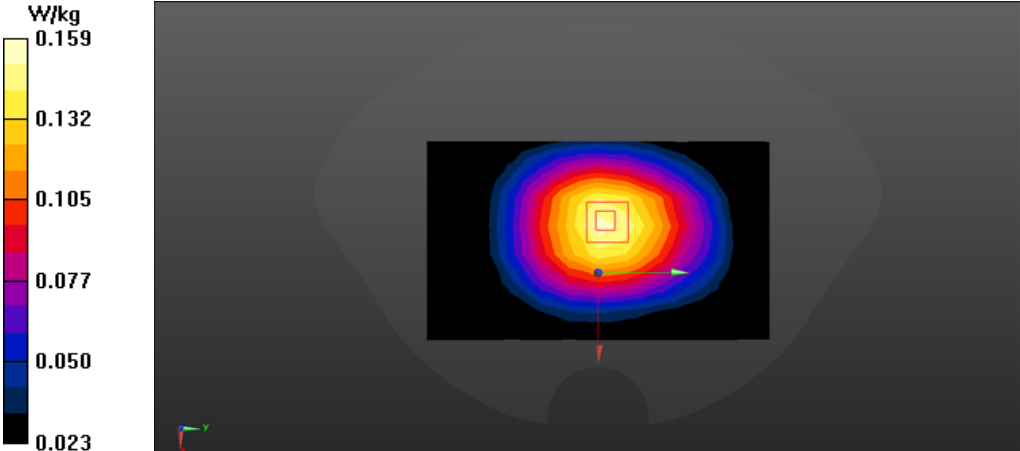
Right Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Right HSL 850/850GSM HSL touch M/Area Scan (8x13x1):</b>                      Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.292 W/kg</p> <p><b>Head-Section Right HSL 850/850GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>                      Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 3.837 V/m; Power Drift = 0.09 dB                      Peak SAR (extrapolated) = 0.338 W/kg  <b>SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.204 W/kg</b>                      Maximum value of SAR (measured) = 0.298 W/kg</p> 	

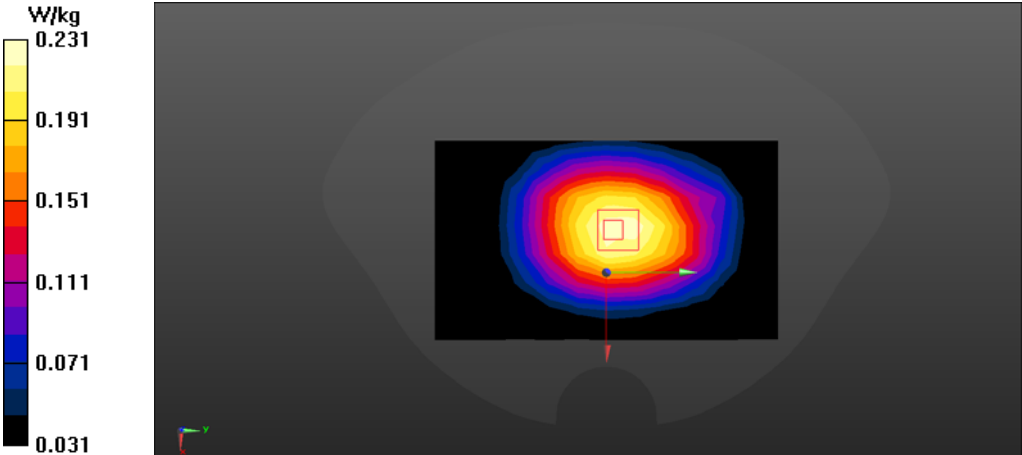
Right Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 848.6 MHz;Duty Cycle: 1:8.30042</p>	
<p>Medium parameters used (interpolated): f = 848.6 MHz; <math>\sigma = 0.916</math> S/m; <math>\epsilon_r = 42.449</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Right Section</p>	
<p>DASY5 Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul>	
<p><b>Head-Section Right HSL 850/850GSM HSL touch H/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm</p>	
<p>Maximum value of SAR (measured) = 0.260 W/kg</p>	
<p><b>Head-Section Right HSL 850/850GSM HSL touch H/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm</p>	
<p>Reference Value = 6.300 V/m; Power Drift = -0.07 dB</p>	
<p>Peak SAR (extrapolated) = 0.316 W/kg</p>	
<p><b>SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.178 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.272 W/kg</p>	



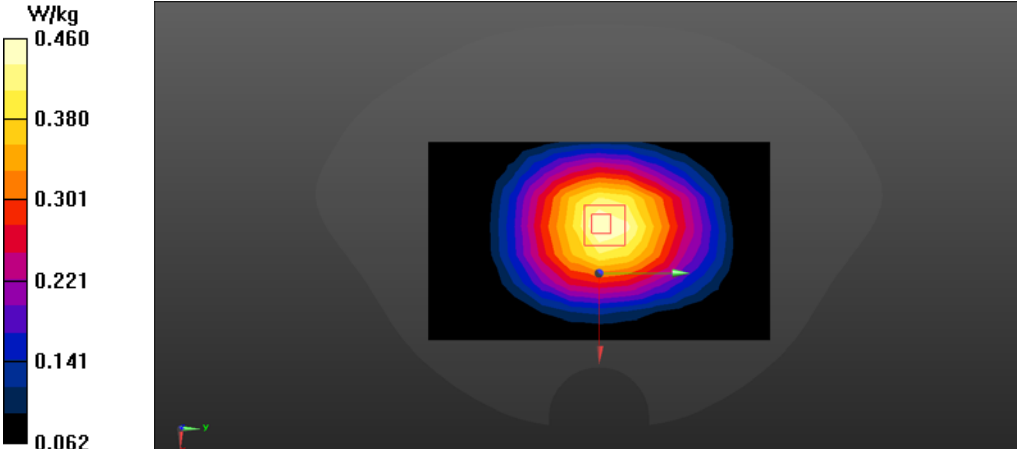
Right Side	Tilt
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Right HSL 850/850GSM HSL tilt M/Area Scan (8x13x1):</b>                      Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.167 W/kg</p> <p><b>Head-Section Right HSL 850/850GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>                      Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 8.010 V/m; Power Drift = -0.12 dB                      Peak SAR (extrapolated) = 0.195 W/kg  <b>SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.115 W/kg</b>                      Maximum value of SAR (measured) = 0.168 W/kg</p> 	

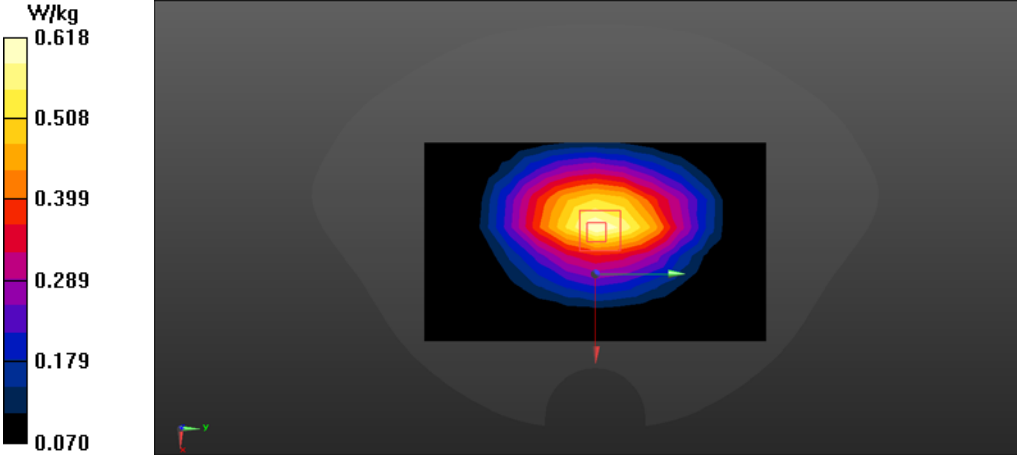
**GSM with headset (850MHz/Flat)**

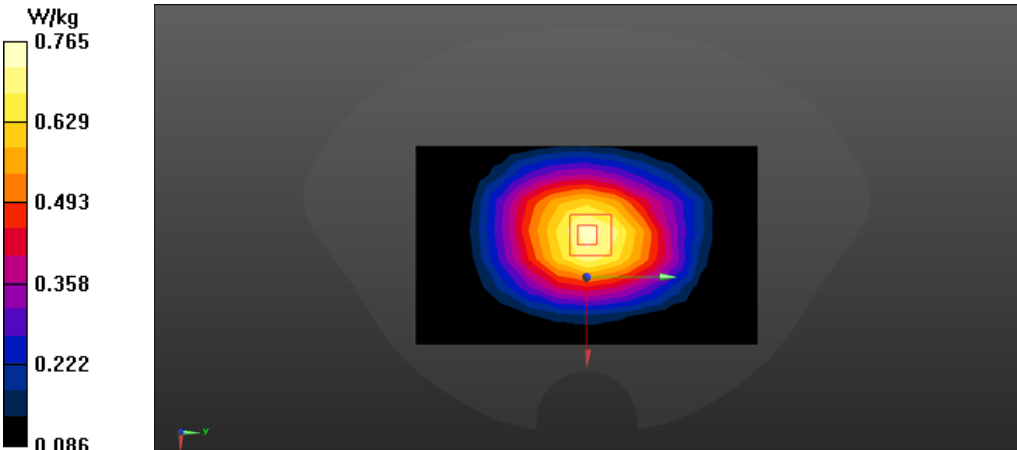
FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/GSM850 TP M 10mm M 2 2 2/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.155 W/kg</p> <p><b>Configuration/GSM850 TP M 10mm M 2 2 2/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 12.63 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 0.187 W/kg  <b>SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.105 W/kg</b>            Maximum value of SAR (measured) = 0.159 W/kg</p> 	

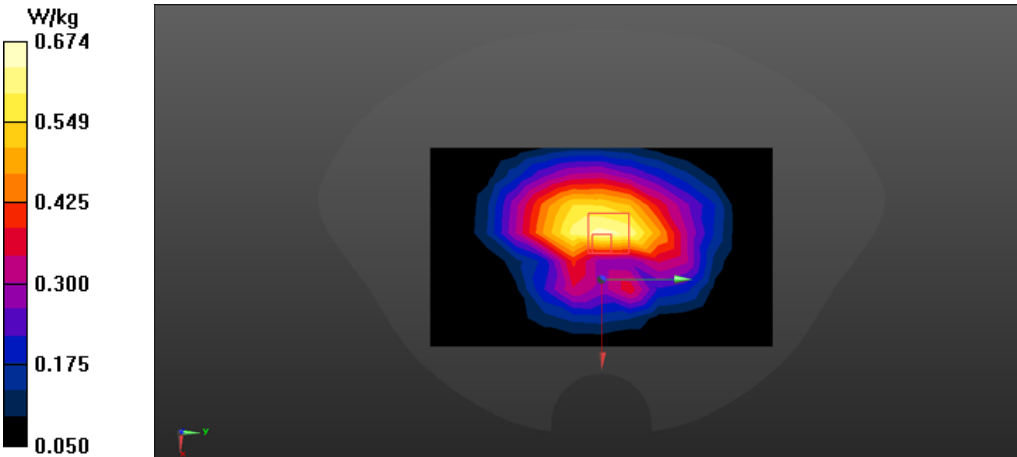
FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/GSM850 TG M 10mm M 2 2/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.228 W/kg</p> <p><b>Configuration/GSM850 TG M 10mm M 2 2/Zoom Scan (7x7x7)/Cube 0:</b>                      Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 15.53 V/m; Power Drift = 0.05 dB                      Peak SAR (extrapolated) = 0.270 W/kg  <b>SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.157 W/kg</b>                      Maximum value of SAR (measured) = 0.231 W/kg</p> 	

**GSM (850MHz with GPRS/Flat)**

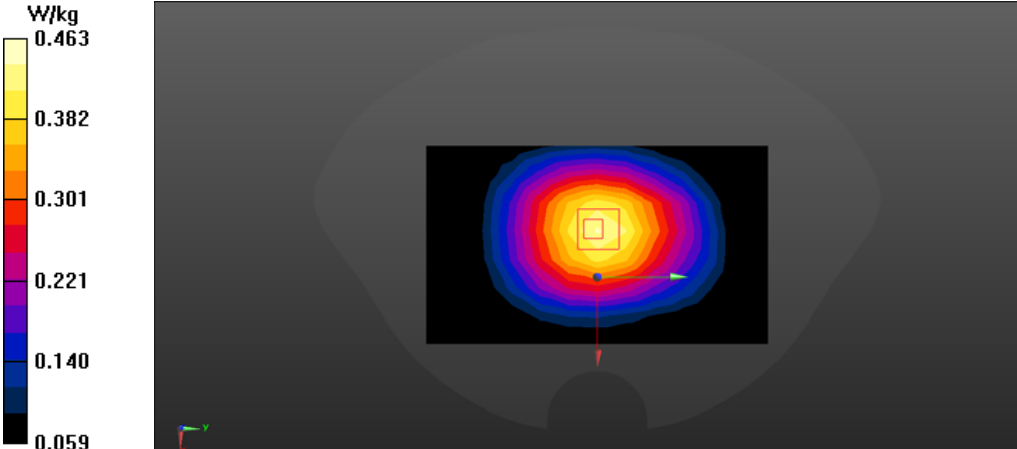
FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/GPRS850 TP M 10mm M 2/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.469 W/kg</p> <p><b>Configuration/GPRS850 TP M 10mm M 2/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 21.99 V/m; Power Drift = -0.11 dB            Peak SAR (extrapolated) = 0.536 W/kg  <b>SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.301 W/kg</b>            Maximum value of SAR (measured) = 0.460 W/kg</p> 	

FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 824.2 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 824.2 MHz; <math>\sigma = 0.969</math> S/m; <math>\epsilon_r = 54.581</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/GPRS850 TG M 10mm L/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.622 W/kg</p> <p><b>Configuration/GPRS850 TG M 10mm L/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 20.46 V/m; Power Drift = 0.03 dB            Peak SAR (extrapolated) = 0.744 W/kg  <b>SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.400 W/kg</b>            Maximum value of SAR (measured) = 0.618 W/kg</p> 	

FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p>	
<ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul>	
<p><b>Configuration/GPRS850 TG M 10mm M/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm</p>	
<p>Maximum value of SAR (measured) = 0.750 W/kg</p>	
<p><b>Configuration/GPRS850 TG M 10mm M/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: dx=5mm, dy=5mm, dz=5mm</p>	
<p>Reference Value = 28.46 V/m; Power Drift = 0.07 dB</p>	
<p>Peak SAR (extrapolated) = 0.915 W/kg</p>	
<p><b>SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.491 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.765 W/kg</p>	
	

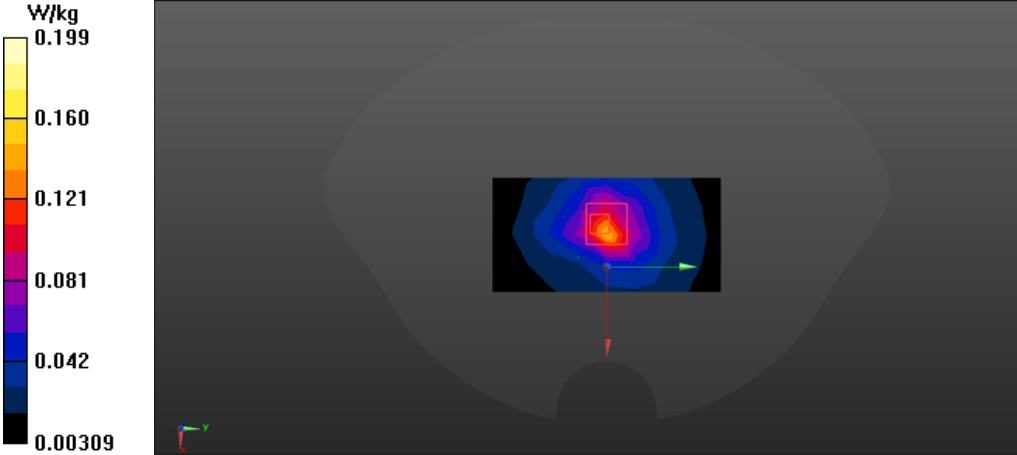
FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 848.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 848.6</math> MHz; <math>\sigma = 0.982</math> S/m; <math>\epsilon_r = 54.49</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/GPRS850 TG M 10mm H/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.649 W/kg</p> <p><b>Configuration/GPRS850 TG M 10mm H/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 17.79 V/m; Power Drift = 0.10 dB            Peak SAR (extrapolated) = 1.31 W/kg  <b>SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.432 W/kg</b>            Maximum value of SAR (measured) = 0.674 W/kg</p> 	

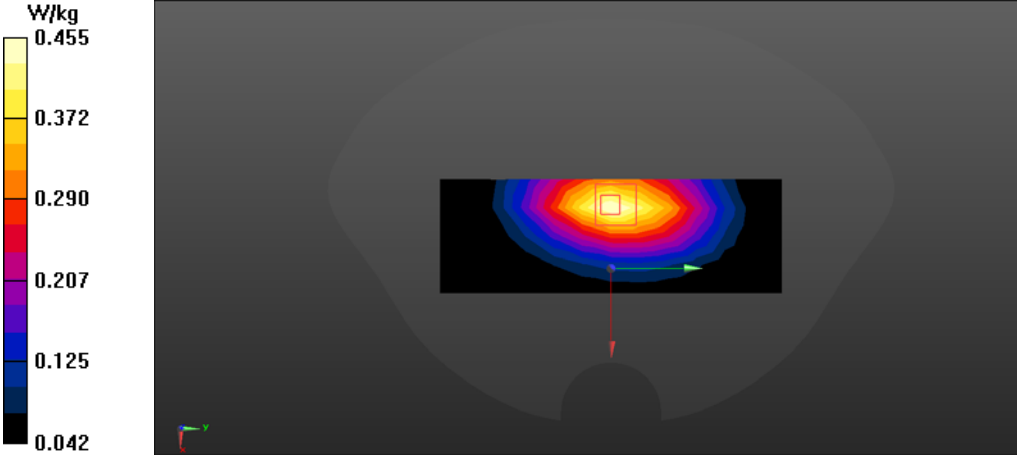
**GSM (850MHz with EGPRS/Flat)**

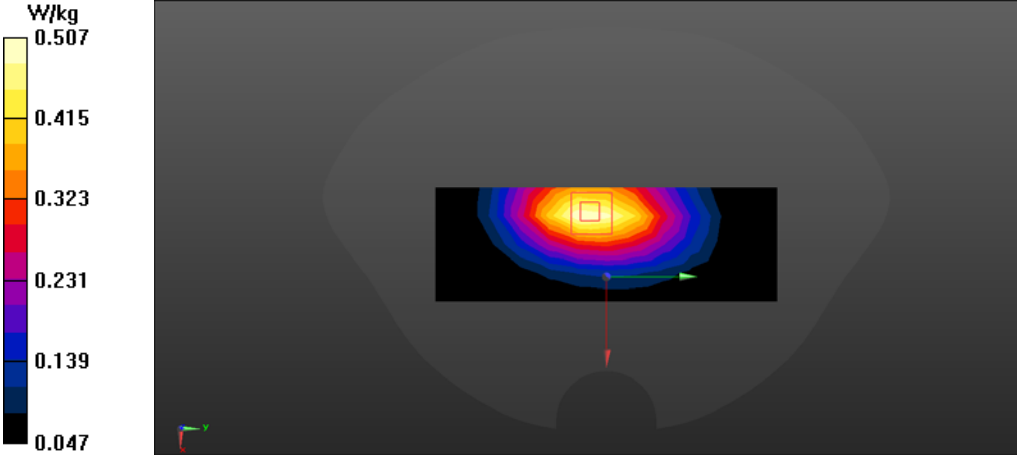
FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration/EGPRS850 TP M 10mm M 2 2/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.441 W/kg</p> <p><b>Configuration/EGPRS850 TP M 10mm M 2 2/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 21.80 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 0.550 W/kg  <b>SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.301 W/kg</b>            Maximum value of SAR (measured) = 0.463 W/kg</p> 	



FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042</p>	
<p>Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul>	
<p><b>Configuration/EGPRS850 TG M 10mm M 2/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm</p>	
<p>Maximum value of SAR (measured) = 0.739 W/kg</p>	
<p><b>Configuration/EGPRS850 TG M 10mm M 2/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: dx=5mm, dy=5mm, dz=5mm</p>	
<p>Reference Value = 27.94 V/m; Power Drift = 0.02 dB</p>	
<p>Peak SAR (extrapolated) = 0.905 W/kg</p>	
<p><b>SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.482 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.742 W/kg</p>	

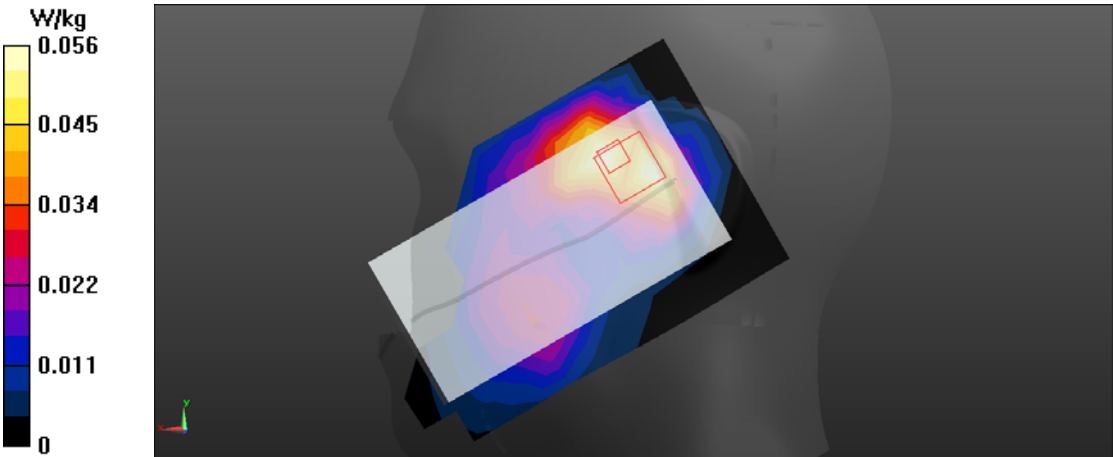
FLAT	EDGE2
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>HOT/GPRS850 M edge 2/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.150 W/kg</p> <p><b>HOT/GPRS850 M edge 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 12.87 V/m; Power Drift = -0.08 dB            Peak SAR (extrapolated) = 0.495 W/kg  <b>SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.064 W/kg</b>            Maximum value of SAR (measured) = 0.199 W/kg</p> 	

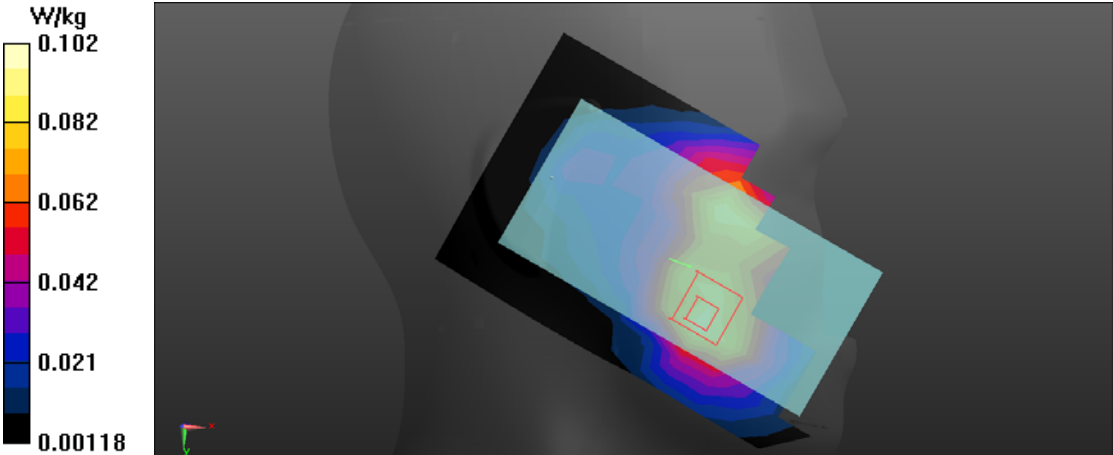
FLAT	EDGE3
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>HOT/GPRS850 M edge 3 M/Area Scan (5x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.468 W/kg</p> <p><b>HOT/GPRS850 M edge 3 M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 17.23 V/m; Power Drift = 0.09 dB            Peak SAR (extrapolated) = 0.605 W/kg  <b>SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.255 W/kg</b>            Maximum value of SAR (measured) = 0.455 W/kg</p> 	

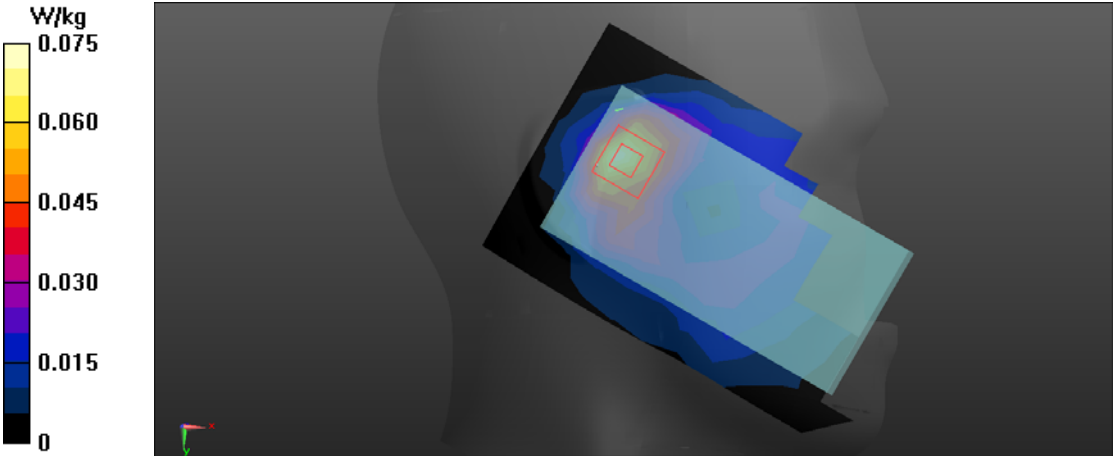
FLAT	EDGE4
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 10/11/2017;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 10/23/2017</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>HOT/GPRS850 M edge 4 M 2/Area Scan (5x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.508 W/kg</p> <p><b>HOT/GPRS850 M edge 4 M 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 18.44 V/m; Power Drift = -0.13 dB            Peak SAR (extrapolated) = 0.640 W/kg  <b>SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.294 W/kg</b>            Maximum value of SAR (measured) = 0.507 W/kg</p> 	

**GSM (1900MHz/Head)**

Left Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Left HSL 1900/1900GSM HSL touch M/Area Scan (8x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.156 W/kg</p> <p><b>Head-Section Left HSL 1900/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 3.908 V/m; Power Drift = 0.00 dB            Peak SAR (extrapolated) = 0.230 W/kg  <b>SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.088 W/kg</b>            Maximum value of SAR (measured) = 0.173 W/kg</p> <div data-bbox="220 1406 1337 1863"> </div>	

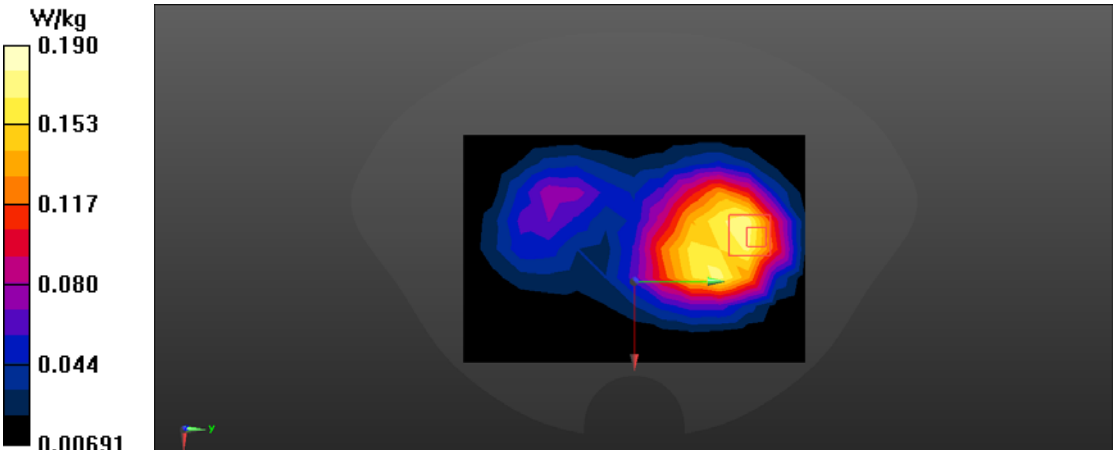
Left Side	Tilt
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Left HSL 1900/1900GSM HSL tilt M/Area Scan (8x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.0571 W/kg</p> <p><b>Head-Section Left HSL 1900/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 5.634 V/m; Power Drift = 0.10 dB            Peak SAR (extrapolated) = 0.120 W/kg  <b>SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.028 W/kg</b>            Maximum value of SAR (measured) = 0.0561 W/kg</p> 	

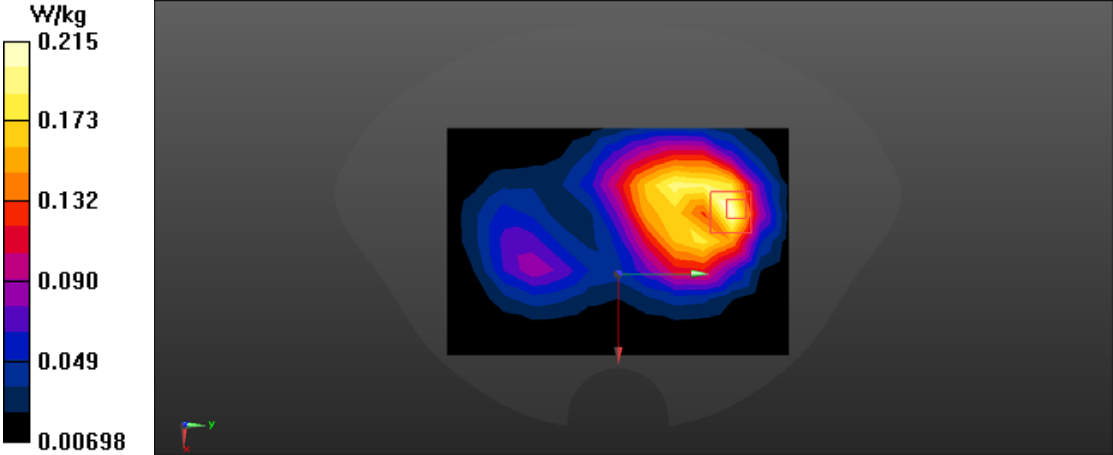
Right Side	Cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Right HSL 1900/1900GSM HSL touch M/Area Scan (8x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.0945 W/kg</p> <p><b>Head-Section Right HSL 1900/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 3.880 V/m; Power Drift = 0.14 dB            Peak SAR (extrapolated) = 0.131 W/kg  <b>SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.055 W/kg</b>            Maximum value of SAR (measured) = 0.102 W/kg</p> 	

Right Side	Tilt
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Head-Section Right HSL 1900/1900GSM HSL tilt M/Area Scan (8x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.0747 W/kg</p> <p><b>Head-Section Right HSL 1900/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 5.946 V/m; Power Drift = -0.06 dB            Peak SAR (extrapolated) = 0.107 W/kg  <b>SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.034 W/kg</b>            Maximum value of SAR (measured) = 0.0765 W/kg</p> 	



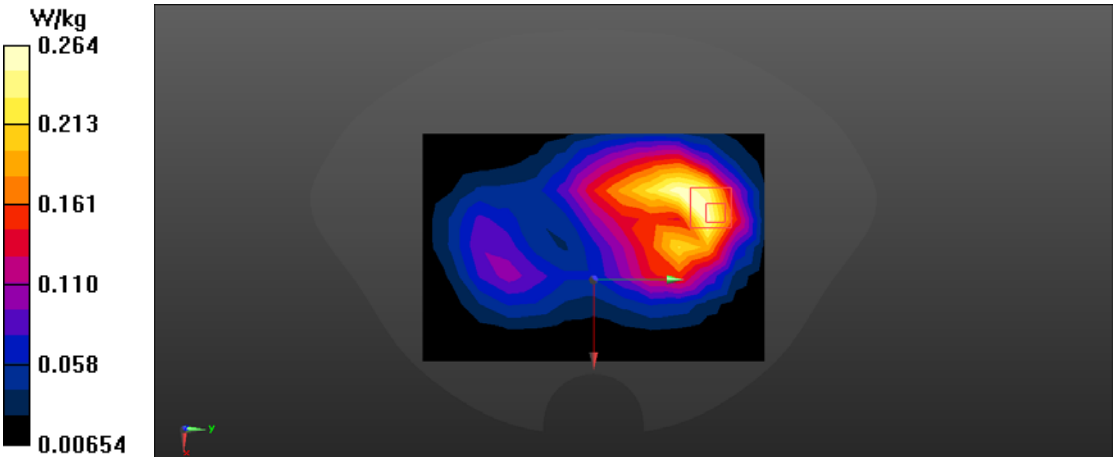
**GSM with headset (1900MHz/Flat)**

FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TP/GSM1900 TP M 10mm/Area Scan (9x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.173 W/kg</p> <p><b>Flat-Section MSL GSM1900 TP/GSM1900 TP M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 6.267 V/m; Power Drift = -0.01 dB            Peak SAR (extrapolated) = 0.263 W/kg  <b>SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.092 W/kg.</b>            Maximum value of SAR (measured) = 0.190 W/kg</p> 	

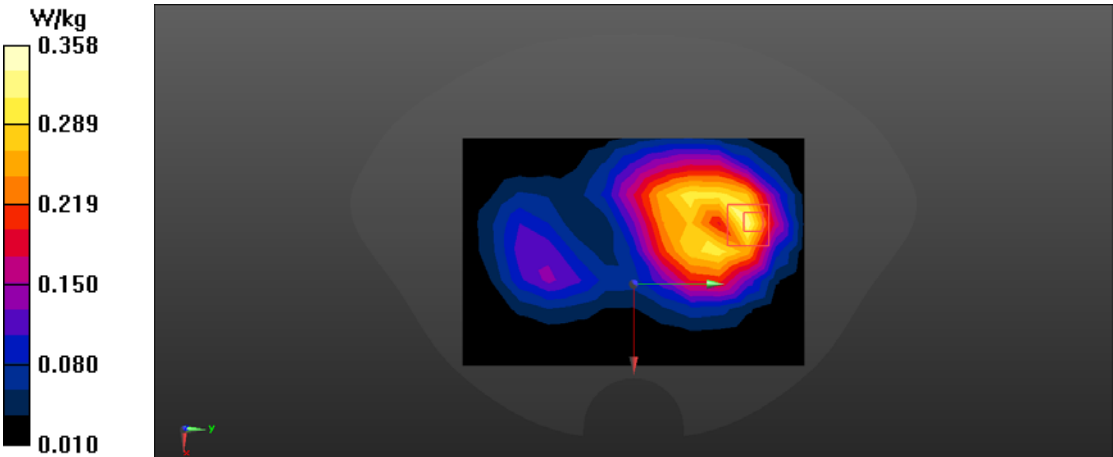
FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TG/GSM1900 TG M 10mm/Area Scan (9x13x1):</b>                      Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.214 W/kg</p> <p><b>Flat-Section MSL GSM1900 TG/GSM1900 TG M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 6.289 V/m; Power Drift = -0.07 dB                      Peak SAR (extrapolated) = 0.301 W/kg  <b>SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.100 W/kg</b>                      Maximum value of SAR (measured) = 0.215 W/kg</p> 	

**GSM (1900MHz with GPRS/Flat)**

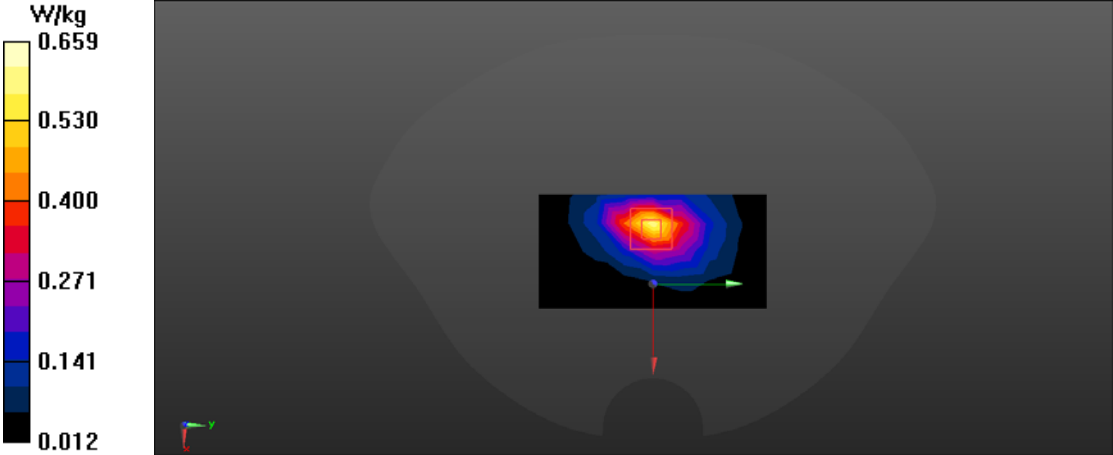
FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042                      Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TP/GPRS1900 TP M 10mm/Area Scan (9x13x1):</b>                      Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.248 W/kg</p> <p><b>Flat-Section MSL GSM1900 TP/GPRS1900 TP M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 7.804 V/m; Power Drift = 0.17 dB                      Peak SAR (extrapolated) = 0.373 W/kg  <b>SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.129 W/kg</b>                      Maximum value of SAR (measured) = 0.272 W/kg</p>	

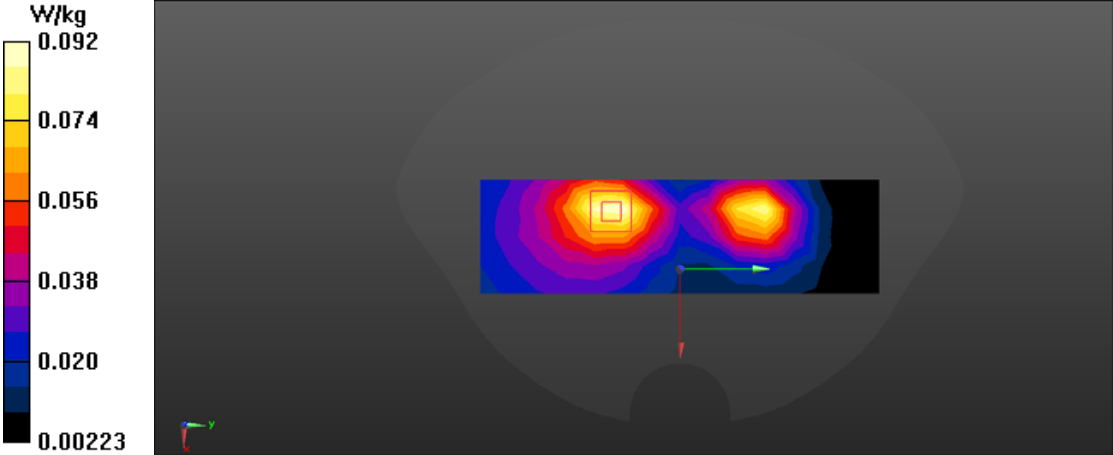
FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TG/GPRS1900 TG M 10mm/Area Scan (9x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.261 W/kg</p> <p><b>Flat-Section MSL GSM1900 TG/GPRS1900 TG M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 7.061 V/m; Power Drift = -0.01 dB            Peak SAR (extrapolated) = 0.389 W/kg  <b>SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.120 W/kg</b>            Maximum value of SAR (measured) = 0.264 W/kg</p> 	

**GSM (1900MHz with EGPRS/Flat)**

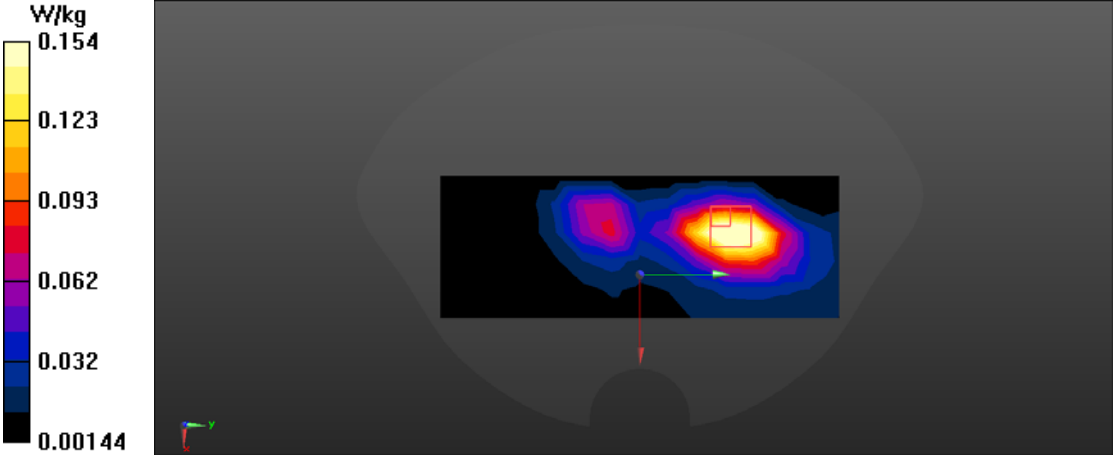
FLAT	Towards phantom
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TP/EGPRS1900 TP M 10mm/Area Scan (9x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.331 W/kg</p> <p><b>Flat-Section MSL GSM1900 TP/EGPRS1900 TP M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 7.733 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 0.506 W/kg  <b>SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.161 W/kg</b>            Maximum value of SAR (measured) = 0.358 W/kg</p> 	

FLAT	Towards ground
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 TG/EGPRS1900 TG M 10mm/Area Scan (9x13x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.312 W/kg</p> <p><b>Flat-Section MSL GSM1900 TG/EGPRS1900 TG M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 6.581 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 0.483 W/kg  <b>SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.162 W/kg</b>            Maximum value of SAR (measured) = 0.351 W/kg</p> <div data-bbox="220 1377 1337 1832"> <p>The figure is a SAR heatmap. On the left, there is a vertical color scale legend labeled 'W/kg' with values: 0.351 (yellow), 0.282 (orange), 0.214 (red), 0.145 (purple), 0.076 (blue), and 0.00763 (black). The main heatmap shows a central area of high SAR intensity (yellow/red) with a maximum value of 0.351 W/kg, surrounded by lower intensity regions (blue/purple). A small red arrow points to the peak of the heatmap.</p> </div>	

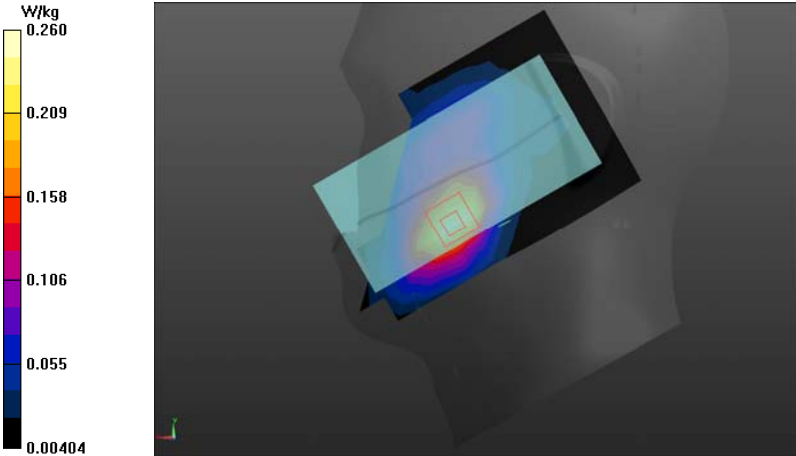
FLAT	EDGE2
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 2/Area Scan (5x9x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.615 W/kg</p> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 14.02 V/m; Power Drift = 0.07 dB            Peak SAR (extrapolated) = 0.916 W/kg  <b>SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.269 W/kg</b>            Maximum value of SAR (measured) = 0.659 W/kg</p> 	

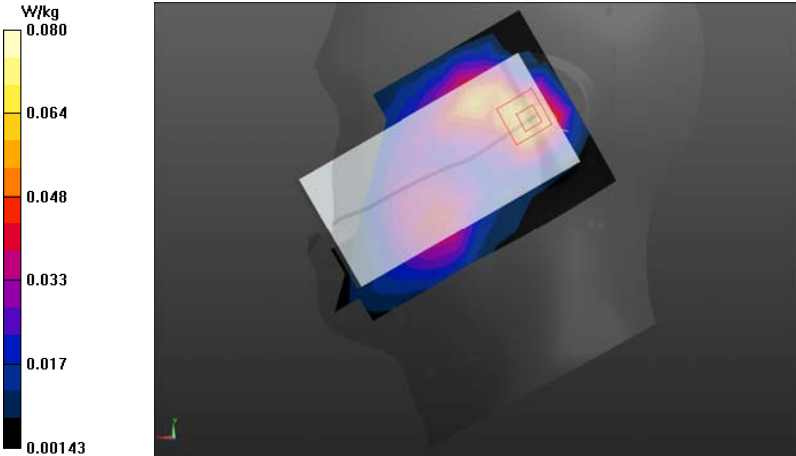
FLAT	EDGE3
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 3/Area Scan (5x15x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.0926 W/kg</p> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 3/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 4.251 V/m; Power Drift = -0.11 dB            Peak SAR (extrapolated) = 0.126 W/kg  <b>SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.045 W/kg</b>            Maximum value of SAR (measured) = 0.0924 W/kg</p> 	

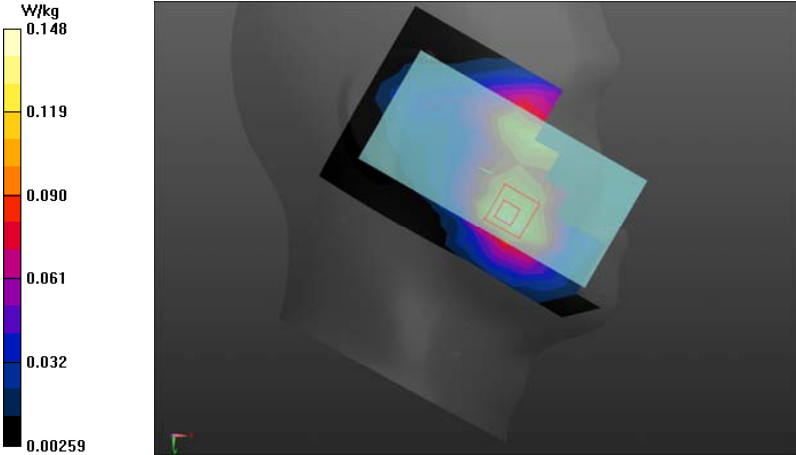


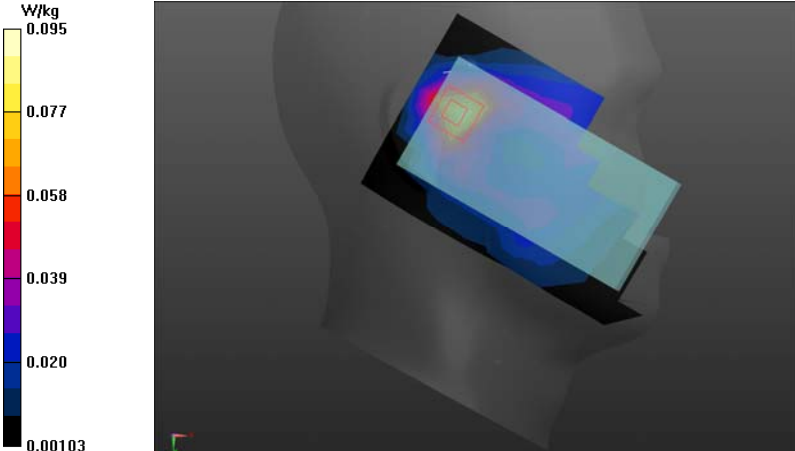
FLAT	EDGE4
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042            Medium parameters used (interpolated): f = 1880 MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 4/Area Scan (6x15x1):</b>            Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.190 W/kg</p> <p><b>Flat-Section MSL GSM1900 HOT/GSM1900 M edge 4/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 5.457 V/m; Power Drift = -0.18 dB            Peak SAR (extrapolated) = 0.222 W/kg  <b>SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.056 W/kg</b>            Maximum value of SAR (measured) = 0.154 W/kg</p> 	

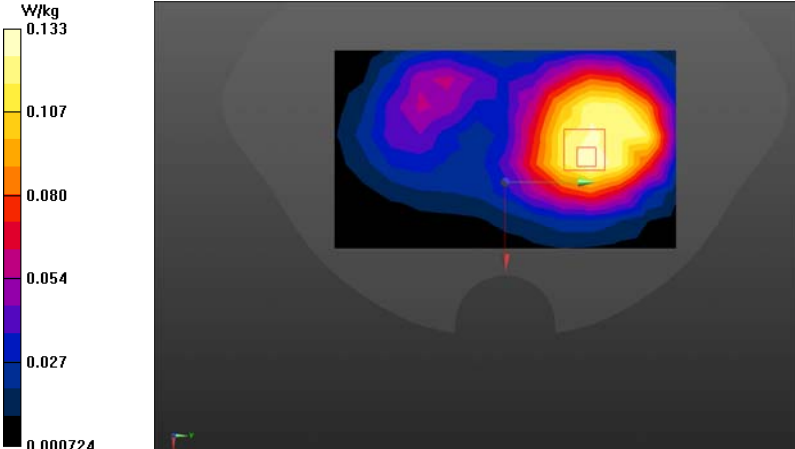
**WCDMA Band 2**

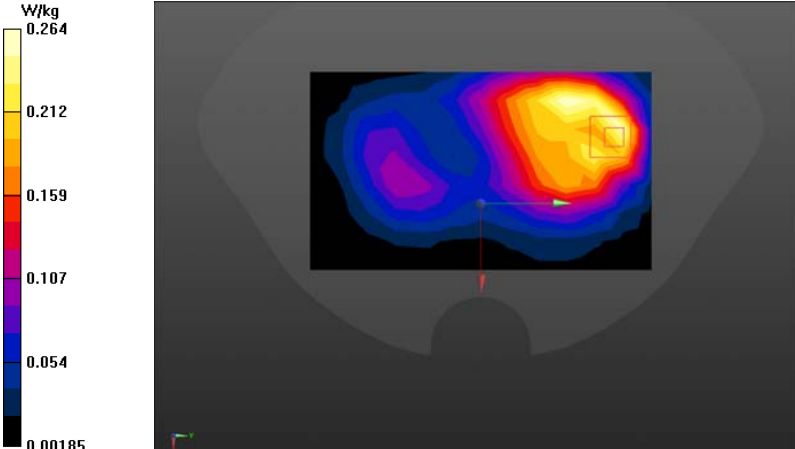
Left Side	Cheek
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BNAD2 Left Head/WCDMA BAND2 HSL touch M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.253 W/kg</p> <p><b>Head-Section HSL WCDMA BNAD2 Left Head/WCDMA BAND2 HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 4.419 V/m; Power Drift = 0.10 dB            Peak SAR (extrapolated) = 0.358 W/kg  <b>SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.134 W/kg</b>            Maximum value of SAR (measured) = 0.260 W/kg</p> 	

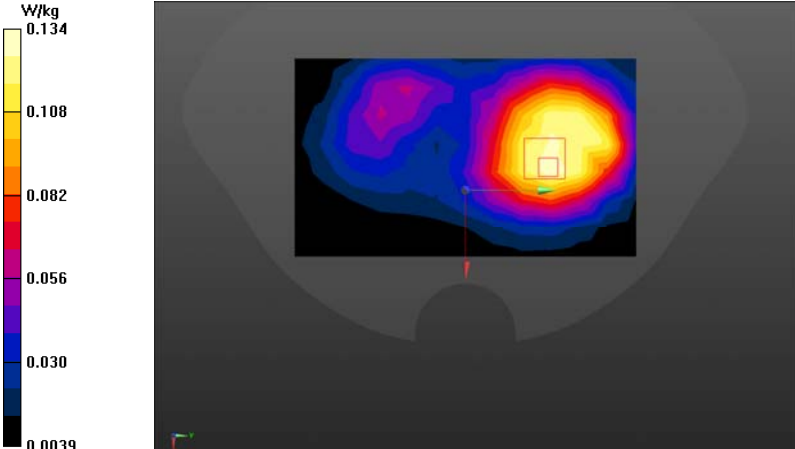
Left Side	Tilt
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BNAD2 Left Head/WCDMA BAND2 HSL tilt M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.0672 W/kg</p> <p><b>Head-Section HSL WCDMA BNAD2 Left Head/WCDMA BAND2 HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 6.825 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.109 W/kg <b>SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.037 W/kg</b> Maximum value of SAR (measured) = 0.0798 W/kg</p> 	

Right Side	Cheek
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BAND2 Right Head/WCDMA BAND2 HSL touch M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.134 W/kg</p> <p><b>Head-Section HSL WCDMA BAND2 Right Head/WCDMA BAND2 HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 4.860 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.194 W/kg <b>SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.078 W/kg</b> Maximum value of SAR (measured) = 0.148 W/kg</p> 	

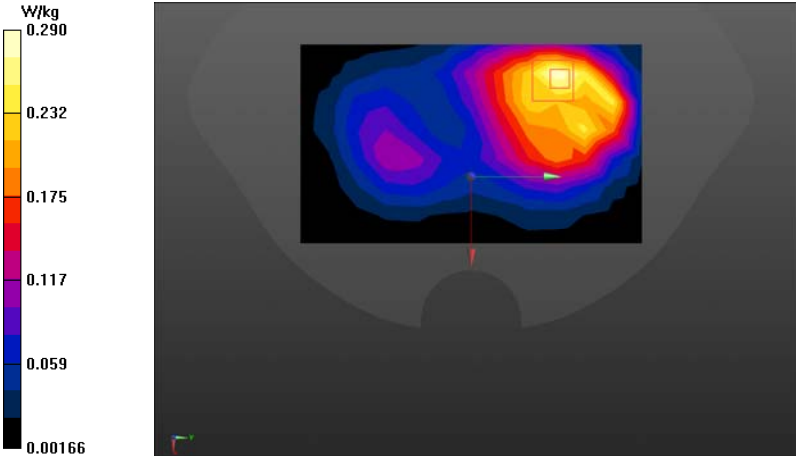
Right Side	Tilt
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.465</math> S/m; <math>\epsilon_r = 40.422</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.06, 5.06, 5.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BAND2 Right Head/WCDMA BNAD2 HSL tilt M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.0858 W/kg</p> <p><b>Head-Section HSL WCDMA BAND2 Right Head/WCDMA BNAD2 HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 7.046 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.133 W/kg <b>SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.042 W/kg</b> Maximum value of SAR (measured) = 0.0954 W/kg</p> 	

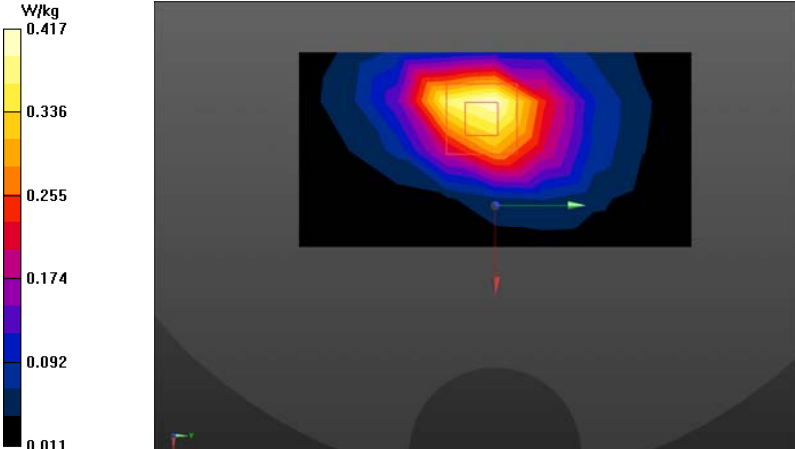
FLAT(VIOCE)	Towards phantom
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band2 TP/wcdma band2 TP M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.133 W/kg</p> <p><b>Flat-Section MSL wcdma band2 TP/wcdma band2 TP M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 5.013 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.183 W/kg <b>SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.070 W/kg</b> Maximum value of SAR (measured) = 0.132 W/kg</p>	
	

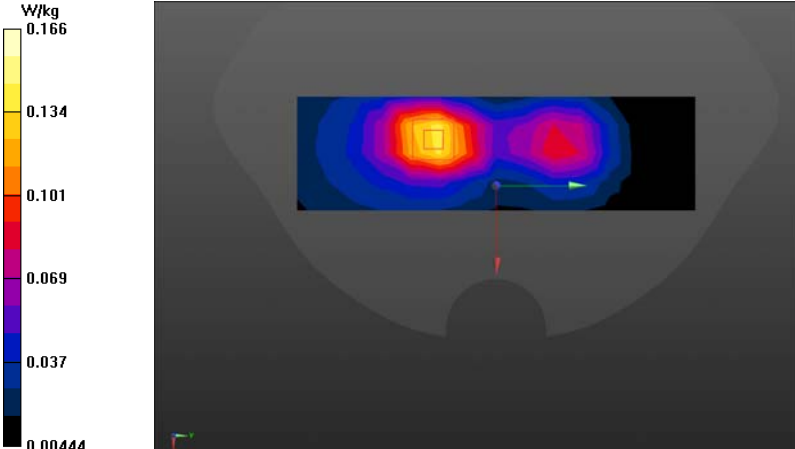
FLAT(VIOCE)	Towards ground
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.264 W/kg</p> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 6.473 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.403 W/kg <b>SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.132 W/kg</b> Maximum value of SAR (measured) = 0.286 W/kg</p> 	

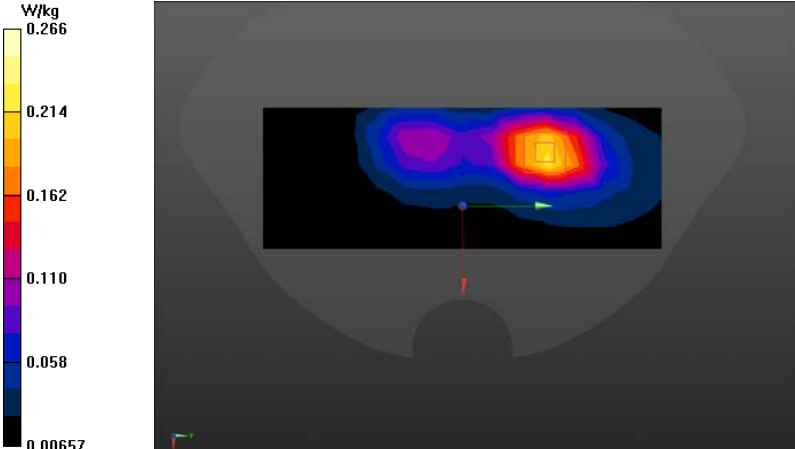
FLAT(DATA)	Towards phantom
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band2 TP/wcdma band2 TP M 10mm data/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.132 W/kg</p> <p><b>Flat-Section MSL wcdma band2 TP/wcdma band2 TP M 10mm data/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 4.996 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.186 W/kg <b>SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.071 W/kg</b> Maximum value of SAR (measured) = 0.134 W/kg</p>	
	



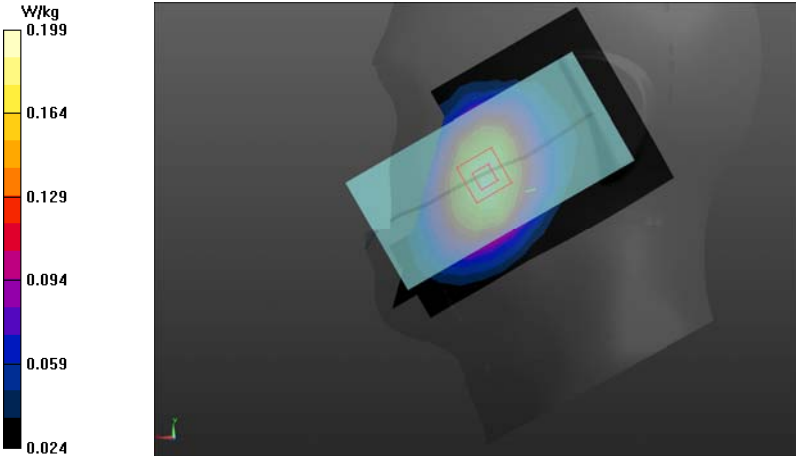
FLAT(DATA)	Towards ground
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm data/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.290 W/kg</p> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm data/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 6.564 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.426 W/kg <b>SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.139 W/kg</b> Maximum value of SAR (measured) = 0.298 W/kg</p> 	

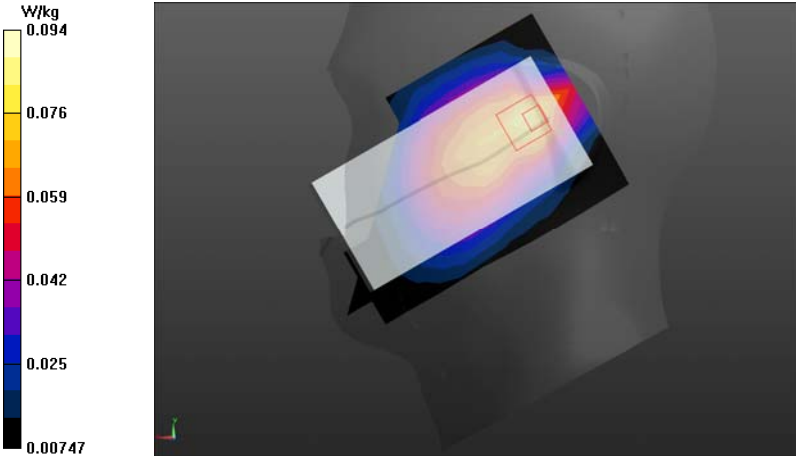
FLAT	EDGE2
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 2/Area Scan (5x9x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.417 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 14.47 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.733 W/kg <b>SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.222 W/kg</b> Maximum value of SAR (measured) = 0.530 W/kg</p> 	

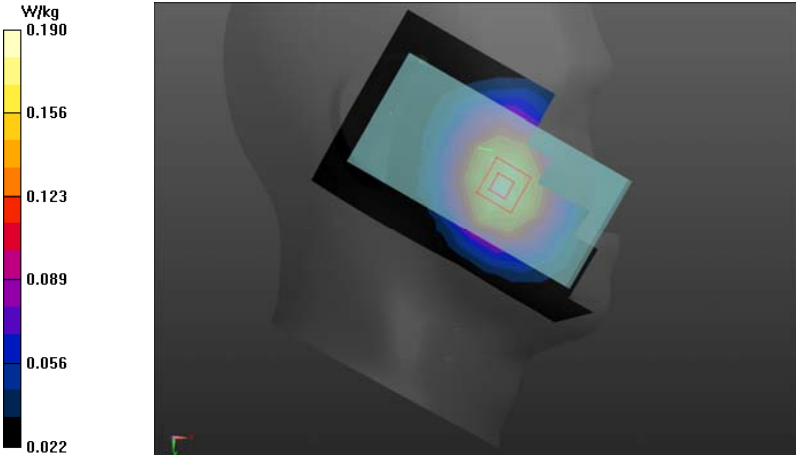
FLAT	EDGE3
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 3/Area Scan (5x15x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.139 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 3/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 6.058 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.228 W/kg <b>SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.080 W/kg</b> Maximum value of SAR (measured) = 0.166 W/kg</p> 	

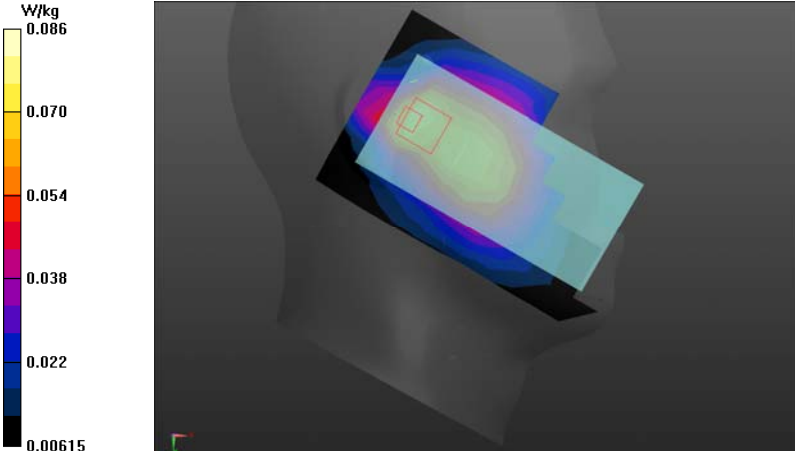
FLAT	EDGE4
<p>Communication System: UID 0, WCDMA BAND2 (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.538</math> S/m; <math>\epsilon_r = 52.717</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.83, 4.83, 4.83); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 4/Area Scan (6x15x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.221 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND2 HOT/WCDMA BAND2 M edge 4/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 6.175 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.369 W/kg <b>SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.124 W/kg</b> Maximum value of SAR (measured) = 0.266 W/kg</p>	
	

**WCDMA Band 5**

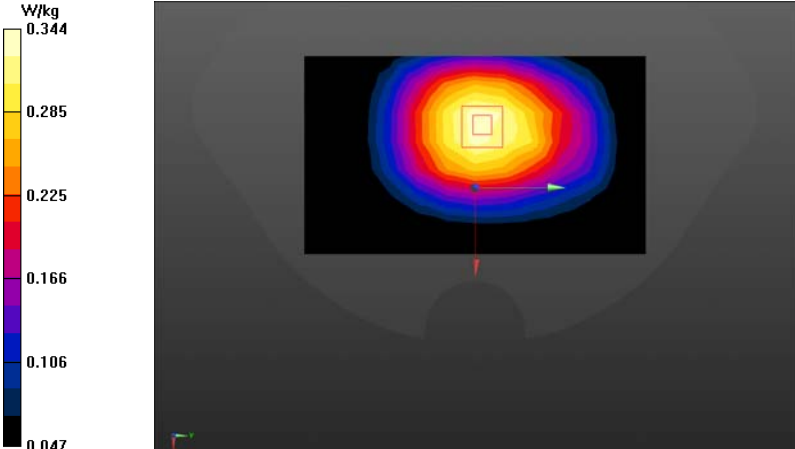
Left Side	Cheek
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): f = 836.6 MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0, 32.0</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BNAD5 Left Head/WCDMA BAND5 HSL touch M/Area Scan (8x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.193 W/kg</p> <p><b>Head-Section HSL WCDMA BNAD5 Left Head/WCDMA BAND5 HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.234 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.227 W/kg <b>SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.136 W/kg</b> Maximum value of SAR (measured) = 0.199 W/kg</p> 	

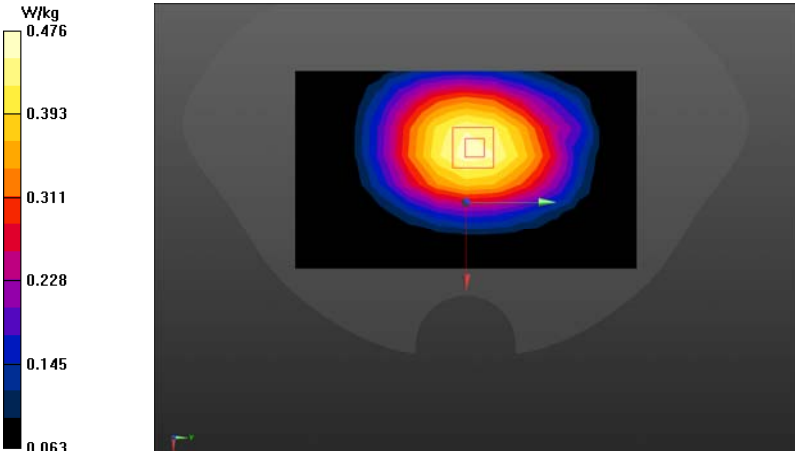
Left Side	Tilt
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BNAD5 Left Head/WCDMA BAND5 HSL tilt M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.0842 W/kg</p> <p><b>Head-Section HSL WCDMA BNAD5 Left Head/WCDMA BAND5 HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 9.071 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.129 W/kg <b>SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.051 W/kg</b> Maximum value of SAR (measured) = 0.0935 W/kg</p> 	

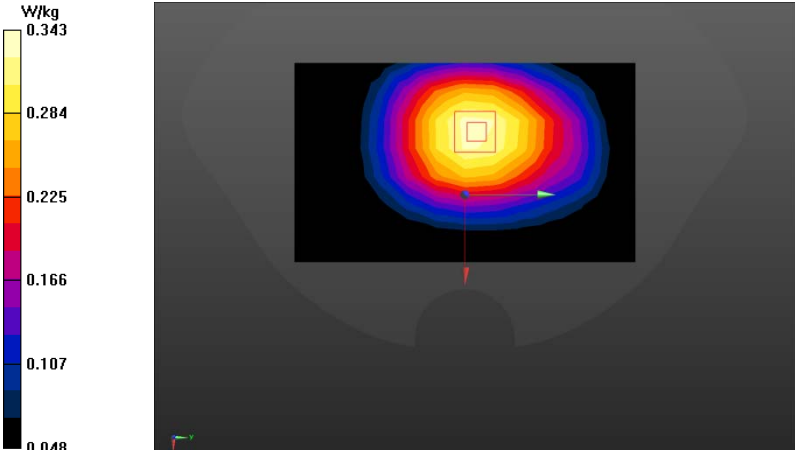
Right Side	Cheek
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BNAD5 HSL touch M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.190 W/kg</p> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BNAD5 HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 3.840 V/m; Power Drift = 0.03 dB            Peak SAR (extrapolated) = 0.219 W/kg  <b>SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.130 W/kg</b></p> 	

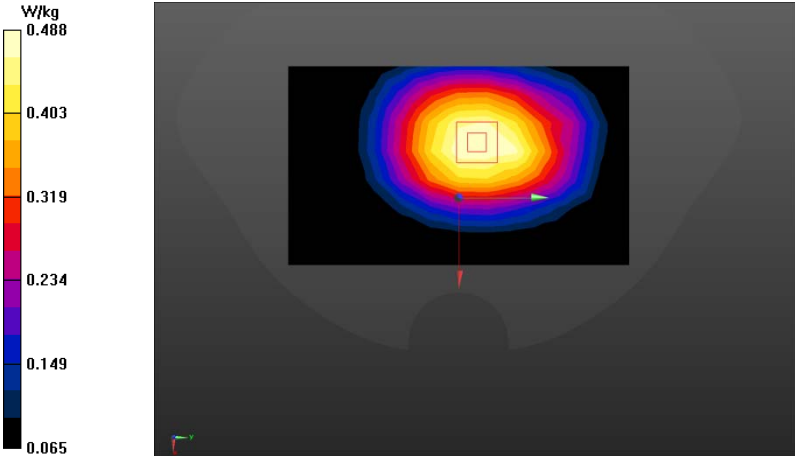
Right Side	Tilt
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.915</math> S/m; <math>\epsilon_r = 41.114</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.15, 6.15, 6.15); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BAND5 HSL tilt M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.0764 W/kg</p> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BAND5 HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 8.507 V/m; Power Drift = 0.14 dB            Peak SAR (extrapolated) = 0.119 W/kg  <b>SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.048 W/kg</b>            Maximum value of SAR (measured) = 0.0857 W/kg</p> 	

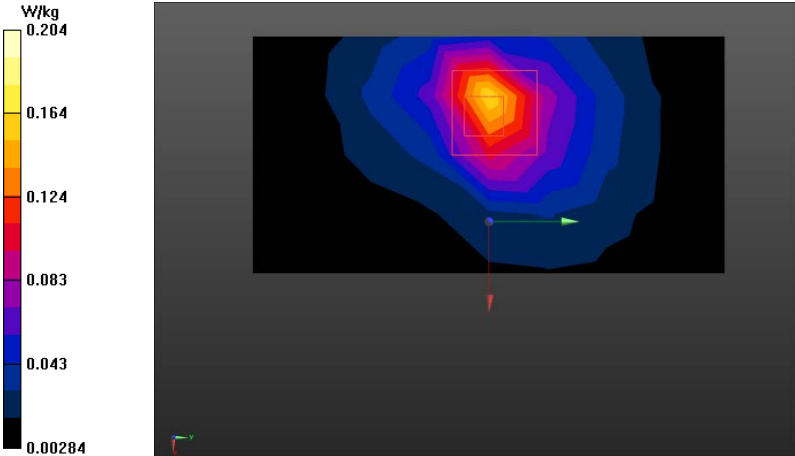


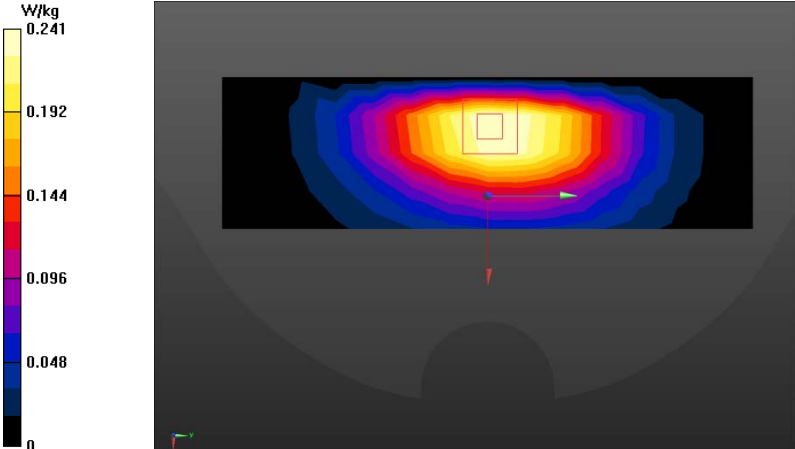
FLAT(VIOCE)	Towards phantom
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band5 TP/wcdma band5 TP M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.336 W/kg</p> <p><b>Flat-Section MSL wcdma band5 TP/wcdma band5 TP M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 18.38 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 0.400 W/kg  <b>SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.233 W/kg</b>            Maximum value of SAR (measured) = 0.344 W/kg</p>	
	

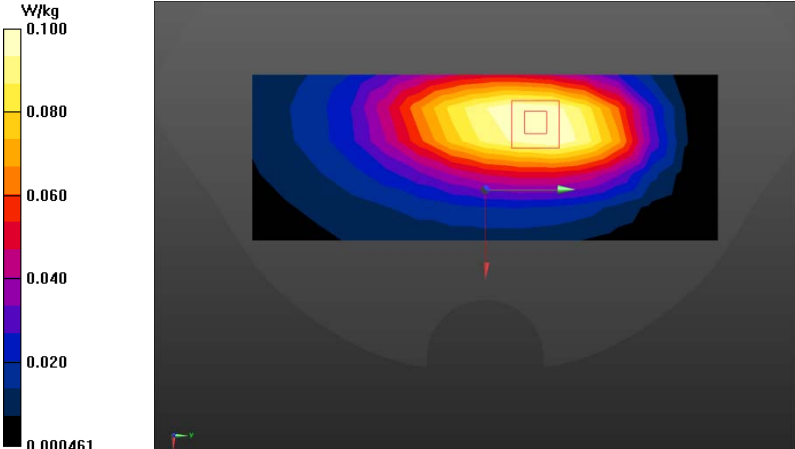
FLAT(VIOCE )	Towards ground
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.466 W/kg</p> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 22.02 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 0.554 W/kg  <b>SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.319 W/kg</b>            Maximum value of SAR (measured) = 0.476 W/kg</p>	
	

FLAT(DATA)	Towards phantom
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band5 TP/wcdma band5 TP M 10mm data/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.331 W/kg  <b>Flat-Section MSL wcdma band5 TP/wcdma band5 TP M 10mm data/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 18.24 V/m; Power Drift = 0.08 dB            Peak SAR (extrapolated) = 0.398 W/kg  <b>SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.233 W/kg</b>            Maximum value of SAR (measured) = 0.343 W/kg</p>	
	

FLAT(DATA)	Towards ground
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm data/Area Scan (8x13x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.483 W/kg</p> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm data/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 21.98 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.565 W/kg <b>SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.331 W/kg</b> Maximum value of SAR (measured) = 0.488 W/kg</p> 	

FLAT	EDGE2
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 2/Area Scan (5x9x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.166 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 9.653 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.514 W/kg <b>SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.061 W/kg</b> Maximum value of SAR (measured) = 0.204 W/kg</p> 	

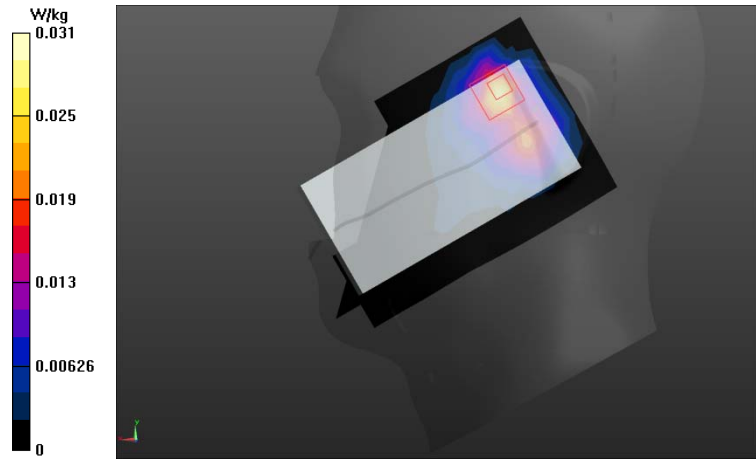
FLAT	EDGE3
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 3/Area Scan (5x15x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.241 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 3/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 15.83 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.148 W/kg <b>SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.070 W/kg</b> Maximum value of SAR (measured) = 0.119 W/kg</p> 	

FLAT	EDGE4
<p>Communication System: UID 0, WCDMA BAND 5 (0); Communication System Band: WCDMA Band 5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005</p> <p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.966</math> S/m; <math>\epsilon_r = 56.196</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.06, 6.06, 6.06); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 4/Area Scan (6x15x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm Maximum value of SAR (measured) = 0.0998 W/kg</p> <p><b>Flat-Section MSL WCDMA BAND5 HOT/WCDMA BAND5 M edge 4/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm Reference Value = 9.075 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.166 W/kg <b>SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.066 W/kg</b> Maximum value of SAR (measured) = 0.122 W/kg</p> 	

**WLAN 2.4GHz**

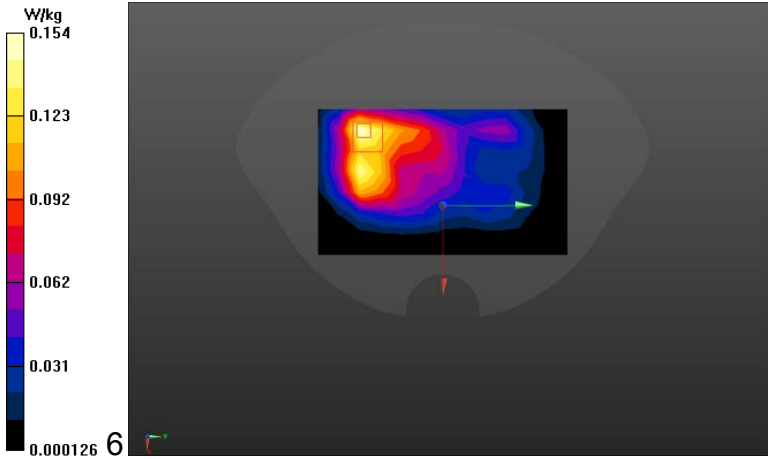
Left Side	Cheek
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.871</math> S/m; <math>\epsilon_r = 39.57</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M/Area Scan (8x12x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.0531 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 2.388 V/m; Power Drift = 0.13 dB            Peak SAR (extrapolated) = 0.111 W/kg  <b>SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.020 W/kg</b>            Maximum value of SAR (measured) = 0.0607 W/kg</p> <div data-bbox="422 1460 1173 1915"> </div>	



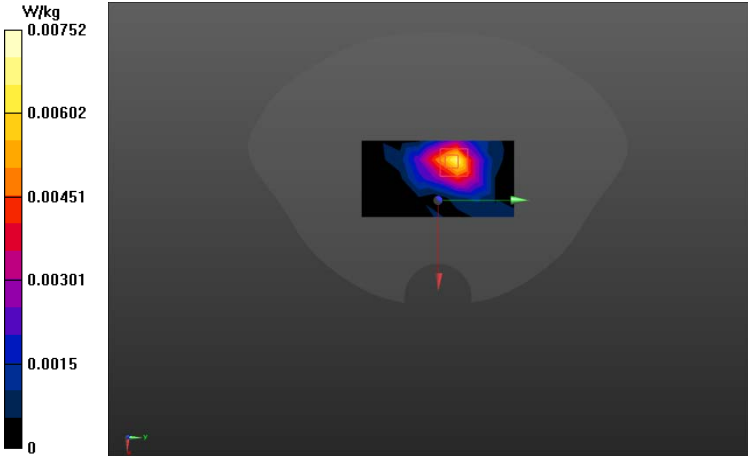
Left Side	Tilt
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.871</math> S/m; <math>\epsilon_r = 39.57</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/10/11;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = 2.0, 32.0</math></li> <li>• Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL tilt M/Area Scan (8x12x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 0.0292 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 2.631 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 0.0550 W/kg  <b>SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00921 W/kg</b>            Maximum value of SAR (measured) = 0.0313 W/kg</p> 	

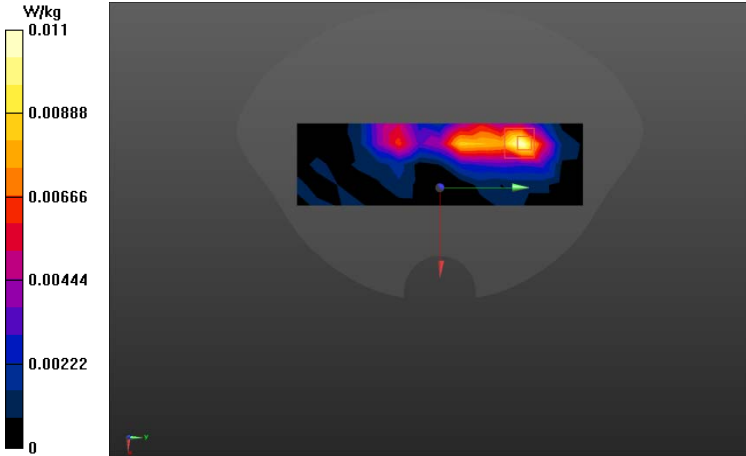
Right Side	Cheek
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.871</math> S/m; <math>\epsilon_r = 39.57</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Right Head/wifi HSL touch M/Area Scan (8x12x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.0259 W/kg</p> <p><b>Head-Section HSL wifi Right Head/wifi HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 2.982 V/m; Power Drift = 0.17 dB            Peak SAR (extrapolated) = 0.0460 W/kg  <b>SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.012 W/kg</b>            Maximum value of SAR (measured) = 0.0296 W/kg</p> <div data-bbox="422 1422 1173 1870"> </div>	

Right Side	Tilt
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.871</math> S/m; <math>\epsilon_r = 39.57</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Right Head/wifi HSL tilt M/Area Scan (8x12x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.0269 W/kg</p> <p><b>Head-Section HSL wifi Right Head/wifi HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 3.003 V/m; Power Drift = 0.07 dB            Peak SAR (extrapolated) = 0.0570 W/kg  <b>SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.014 W/kg</b>            Maximum value of SAR (measured) = 0.0362 W/kg</p> <div data-bbox="422 1462 1174 1915"> </div>	

FLAT	Towards phantom
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 2.053</math> S/m; <math>\epsilon_r = 51.97</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WIFI2.4G TG&amp;TP/WIFI TP M 10mm/Area Scan (8x13x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.154 W/kg</p> <p><b>Flat-Section MSL WIFI2.4G TG&amp;TP/WIFI TP M 10mm/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 5.529 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 0.245 W/kg  <b>SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.067 W/kg</b></p> 	

FLAT	Towards ground
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 2.053</math> S/m; <math>\epsilon_r = 51.97</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WIFI2.4G TG&amp;TP/WIFI TG M 10mm/Area Scan (8x13x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.139 W/kg</p> <p><b>Flat-Section MSL WIFI2.4G TG&amp;TP/WIFI TG M 10mm/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 5.963 V/m; Power Drift = -0.19 dB            Peak SAR (extrapolated) = 0.217 W/kg  <b>SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.068 W/kg</b>            Maximum value of SAR (measured) = 0.147 W/kg</p> <div data-bbox="422 1460 1173 1915"> <p>The figure is a heatmap representing the Specific Absorption Rate (SAR) distribution. On the left, there is a vertical color scale legend labeled 'W/kg' with values: 0.00142 (black), 0.031 (blue), 0.060 (purple), 0.089 (red), 0.118 (orange), and 0.147 (yellow). The main image shows a dark grey background with a central, irregularly shaped region of high SAR intensity, colored in red, orange, and yellow. This high-intensity region is surrounded by a larger area of lower intensity, colored in purple and blue. A small white square is visible within the high-intensity region, and a red arrow points to a specific location on the heatmap.</p> </div>	

FLAT	EDGE1
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 2.053</math> S/m; <math>\epsilon_r = 51.97</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WIFI HOT/WIFI M edge 1/Area Scan (5x9x1):</b> Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.00684 W/kg</p> <p><b>Flat-Section MSL WIFI HOT/WIFI M edge 1/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 1.175 V/m; Power Drift = 0.09 dB            Peak SAR (extrapolated) = 0.0110 W/kg  <b>SAR(1 g) = 0.00559 W/kg; SAR(10 g) = 0.00241 W/kg</b>            Maximum value of SAR (measured) = 0.00752 W/kg</p> 	

FLAT	EDGE3
<p>Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);            Communication System Band: WLAN 2.4GHz (2412.0 - 2484.0 MHz); Frequency: 2437 MHz;            Communication System PAR: 1.87 dB; PMF: 1.04833            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 2.053</math> S/m; <math>\epsilon_r = 51.97</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017/10/11;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection), <math>z = -3.0, 32.0</math></li> <li>Electronics: DAE4 Sn546; Calibrated: 2017/9/15</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL WIFI HOT/WIFI M edge 3/Area Scan (5x15x1):</b> Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.0112 W/kg</p> <p><b>Flat-Section MSL WIFI HOT/WIFI M edge 3/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 0.8120 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 0.0160 W/kg  <b>SAR(1 g) = 0.00844 W/kg; SAR(10 g) = 0.00395 W/kg</b>            Maximum value of SAR (measured) = 0.0111 W/kg</p> 	

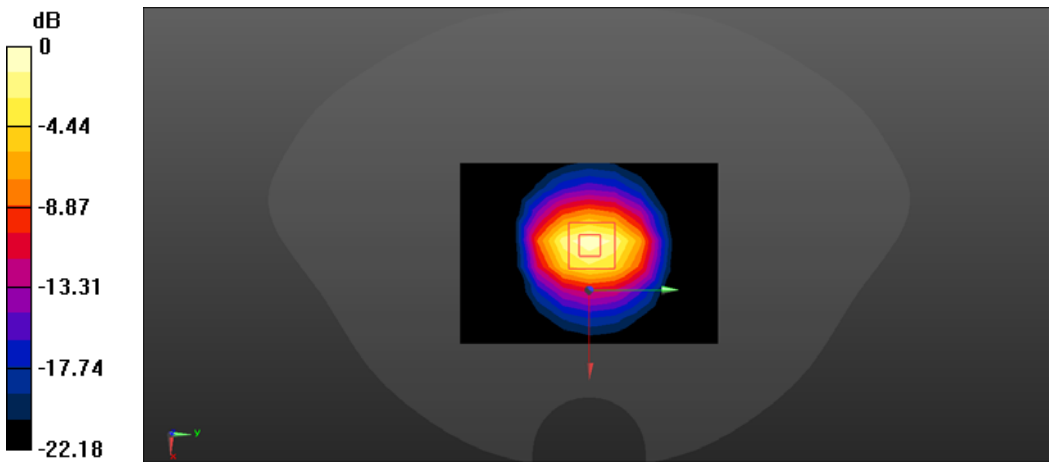
**Second supply**

**System check**  
**Head liquid**

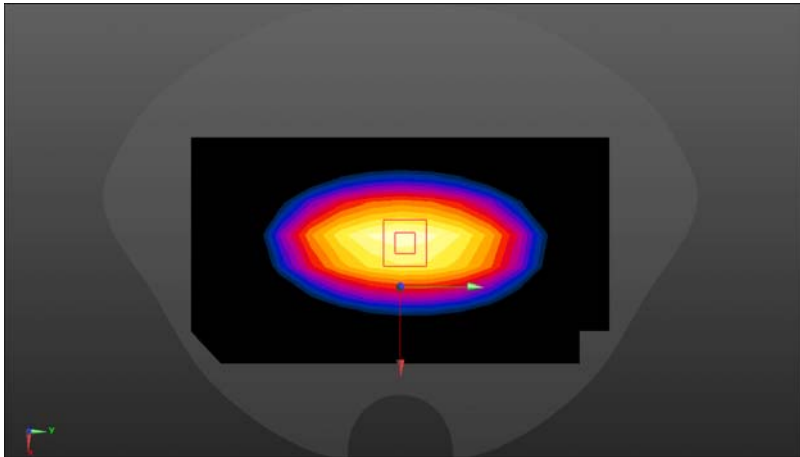
System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.912 \text{ S/m}</math>; <math>\epsilon_r = 42.529</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.07, 9.07, 9.07); Calibrated: 11/7/2017;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/23/2017</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 835/835/Area Scan (8x15x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.75 W/kg</p> <p><b>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 51.68 V/m; Power Drift = -0.05 dB            Peak SAR (extrapolated) = 3.58 W/kg  <b>SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.53 W/kg</b>            Maximum value of SAR (measured) = 2.78 W/kg</p> <div data-bbox="268 1377 1321 1832"> </div> <p>0 dB = 2.78 W/kg = 4.44 dBW/kg</p>	

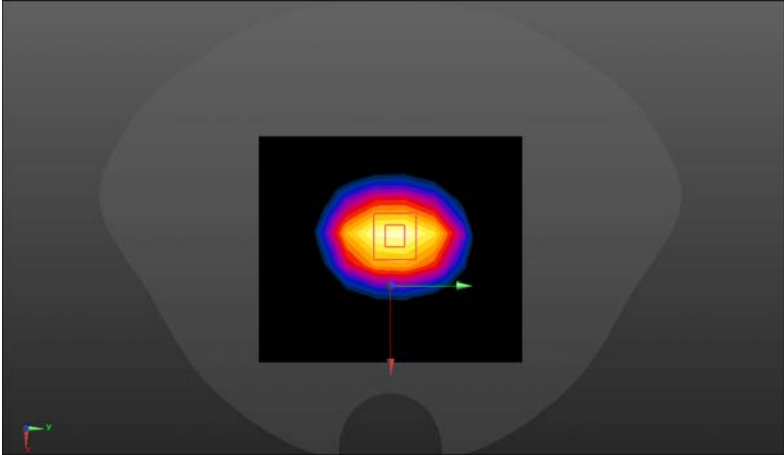


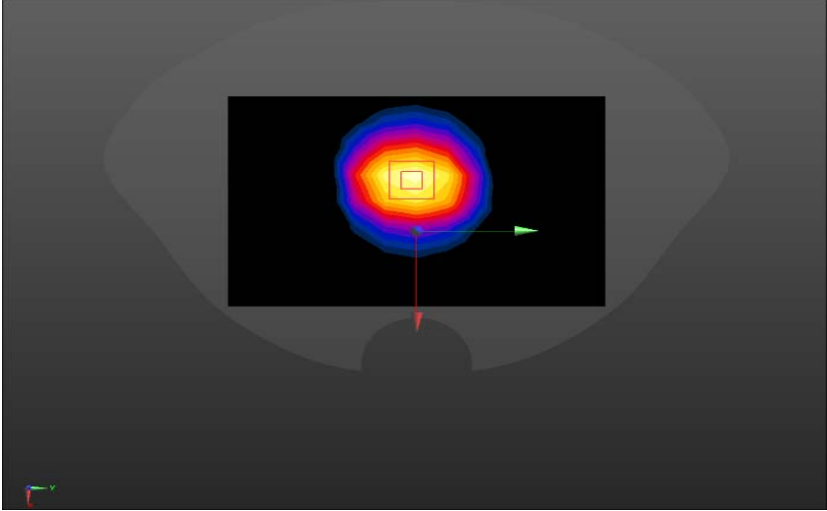
System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.409 \text{ S/m}</math>; <math>\epsilon_r = 38.905</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.77, 7.77, 7.77); Calibrated: 11/7/2017;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/23/2017</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 1800/1800/Area Scan (7x10x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 8.57 W/kg</p> <p><b>Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 80.04 V/m; Power Drift = 0.11 dB            Peak SAR (extrapolated) = 17.7 W/kg  <b>SAR(1 g) = 9.57 W/kg; SAR(10 g) = 5.02 W/kg</b>            Maximum value of SAR (measured) = 12.2 W/kg</p> <div data-bbox="284 1249 1302 1709"> <p>0 dB = 12.2 W/kg = 10.86 dBW/kg</p> </div>	

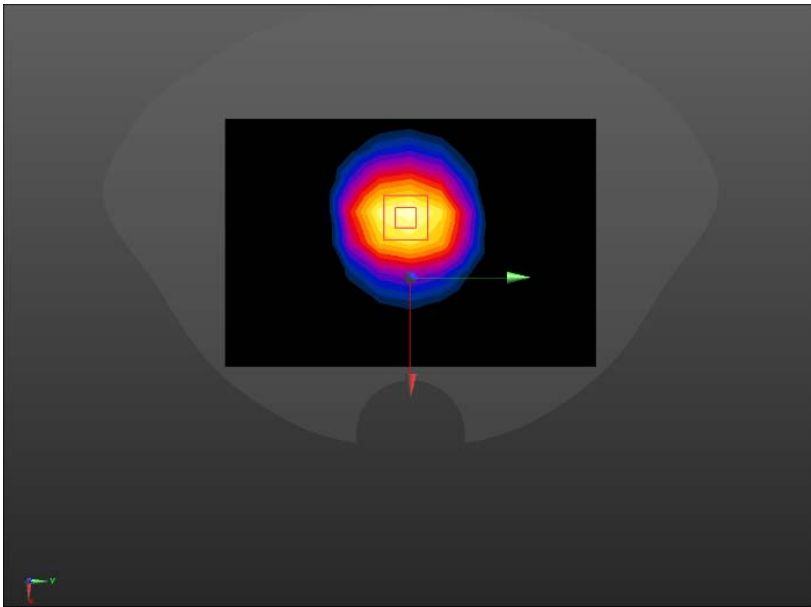
System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.873</math> S/m; <math>\epsilon_r = 38.145</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 11/7/2017;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/23/2017</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul>	
<p><b>System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1):</b>            Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 21.2 W/kg</p>	
<p><b>System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 109.3 V/m; Power Drift = 0.14 dB            Peak SAR (extrapolated) = 28.2 W/kg</p>	
<p><b>SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.34 W/kg</b>            Maximum value of SAR (measured) = 23.0 W/kg</p>	
 <p>0 dB = 23.0 W/kg = 13.62 dBW/kg</p>	

**Body liquid**

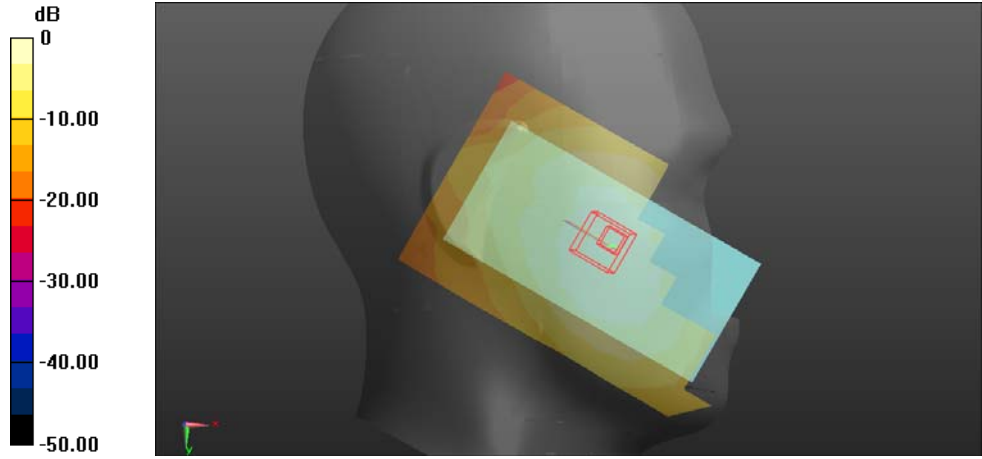
System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz                      Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.982 \text{ S/m}</math>; <math>\epsilon_r = 55.832</math>; <math>\rho = 1000 \text{ kg/m}^3</math>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 835/835/Area Scan (8x15x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>                      Maximum value of SAR (measured) = 2.61 W/kg</p> <p><b>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>                      Reference Value = 55.11 V/m; Power Drift = 0.02 dB                      Peak SAR (extrapolated) = 3.25 W/kg  <b>SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.53 W/kg</b>                      Maximum value of SAR (measured) = 2.68 W/kg</p>	
	

System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.515 \text{ S/m}</math>; <math>\epsilon_r = 52.933</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.7, 7.7, 7.7); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 1800/1800/Area Scan (8x10x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 13.0 W/kg</p> <p><b>Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 85.33 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 18.4 W/kg  <b>SAR(1 g) = 9.88 W/kg; SAR(10 g) = 5.11 W/kg</b>            Maximum value of SAR (measured) = 13.2 W/kg</p> 	

System check	2450MHz
<p>Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.936</math> S/m; <math>\epsilon_r = 52.618</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.3, 7.3, 7.3); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>System Performance Check at Frequencies 2450MHz (EX-Probe)/Area Scan (9x13x1):</b> Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 13.9 W/kg</p> <p><b>System Performance Check at Frequencies 2450MHz (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 65.11 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 32.6 W/kg <b>SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.10 W/kg</b> Maximum value of SAR (measured) = 18.2 W/kg</p>	
	

System check	2450MHz
<p>Communication System: WLAN 2.4GHz; Frequency: 2450.0                      Medium: . Medium parameters used: f= 2437.0 MHz; <math>\sigma</math>= 1.97 S/m; <math>\epsilon_r</math> = 53.2                      Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C</p> <p>DASY6 Configuration:                      - Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017-10-11                      - Sensor-Surface: 3.0 mm                      - Electronics: DAE4 Sn546; Calibrated: 2017-09-15                      - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1560; Section: Flat                      - Measurement Software: cDASY6 V6.6.0.13926                      - UID: WLAN, 10012-CAB</p> <p><b>Area Scan (48.0 mm x 168.0 mm):</b> Measurement Grid: 12.0 mm x 12.0 mm                      SAR (1g) = 12.92 W/kg; SAR (10g) = 6.05 W/kg;  <b>Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):</b> Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm                      Power Drift = -0.01 dB                      SAR (1g) = 13.3 W/kg; SAR (10g) = 6.13 W/kg;</p> 	

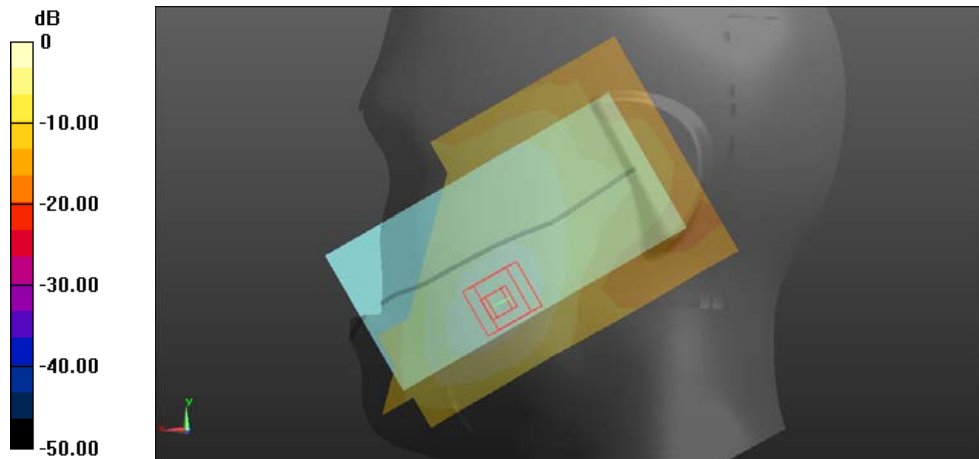
**GSM 850MHz**

HEAD	Right cheek
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz</p>	
<p>Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.905</math> S/m; <math>\epsilon_r = 41.528</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Right Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.07, 9.07, 9.07); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = -4.0, 31.0</math></li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul>	
<p><b>Head-Section HSL wifi Right Head/GSM850/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm</p>	
<p>Maximum value of SAR (measured) = 0.309 W/kg</p>	
<p><b>Head-Section HSL wifi Right Head/GSM850/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm</p>	
<p>Reference Value = 5.905 V/m; Power Drift = -0.04 dB</p>	
<p>Peak SAR (extrapolated) = 0.272 W/kg</p>	
<p><b>SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.136 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.247 W/kg</p>	
	
<p>0 dB = 0.309 W/kg = -5.10 dBW/kg</p>	

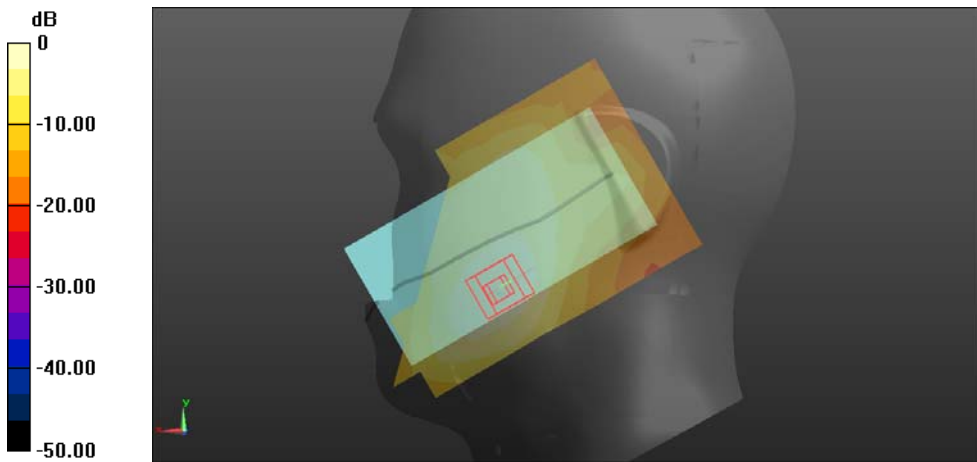
HEAD	Left cheek
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.905</math> S/m; <math>\epsilon_r = 41.528</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.07, 9.07, 9.07); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = -4.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section Left HSL 850/850GSM HSL touch M/Area Scan (8x13x1):</b>            Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.218 W/kg</p> <p><b>Head-Section Left HSL 850/850GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 4.582 V/m; Power Drift = 0.01 dB            Peak SAR (extrapolated) = 0.255 W/kg  <b>SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.122 W/kg</b>            Maximum value of SAR (measured) = 0.218 W/kg</p> <div data-bbox="215 1422 1005 1870"> </div> <p>0 dB = 0.218 W/kg = -6.62 dBW/kg</p>	



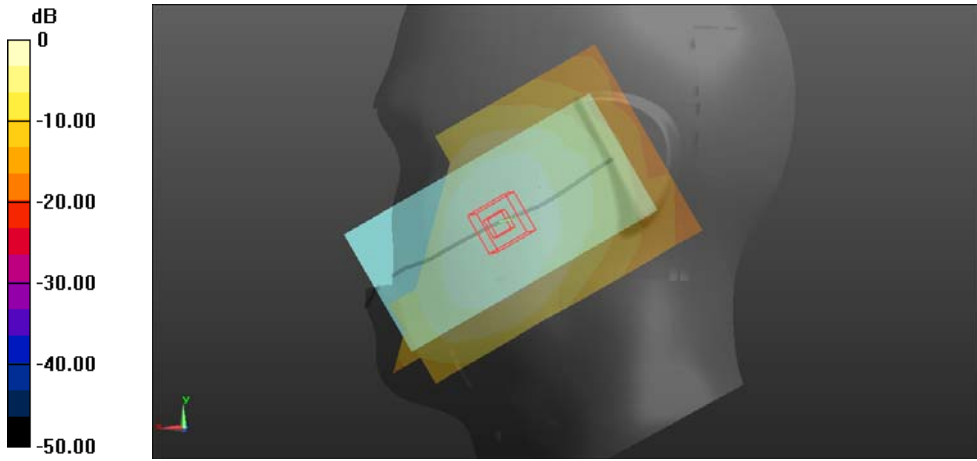
**GSM 1900MHz**

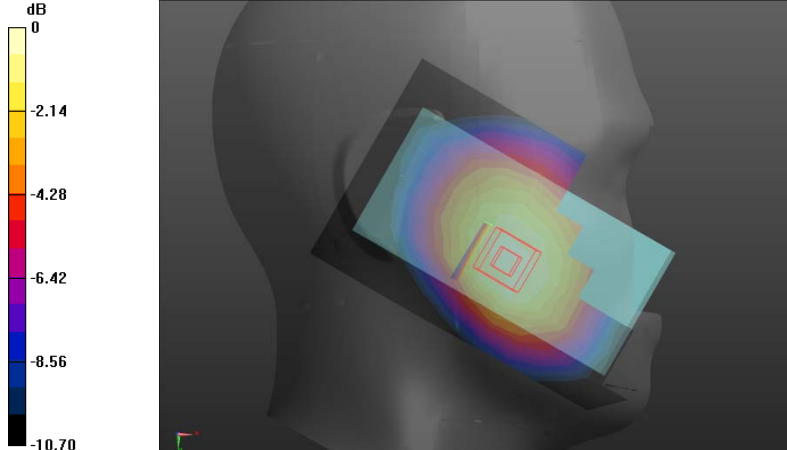
HEAD	Left cheek
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz</p>	
<p>Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 40</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Left Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.77, 7.77, 7.77); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul>	
<p><b>Head-Section HSL wifi Left Head/GSM1900/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm</p>	
<p>Maximum value of SAR (measured) = 0.387 W/kg</p>	
<p><b>Head-Section HSL wifi Left Head/GSM1900/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm</p>	
<p>Reference Value = 3.707 V/m; Power Drift = 0.11 dB</p>	
<p>Peak SAR (extrapolated) = 0.350 W/kg</p>	
<p><b>SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.061 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.383 W/kg</p>	
	
<p>0 dB = 0.387 W/kg = -4.12 dBW/kg</p>	

**WCDMA BAND2**

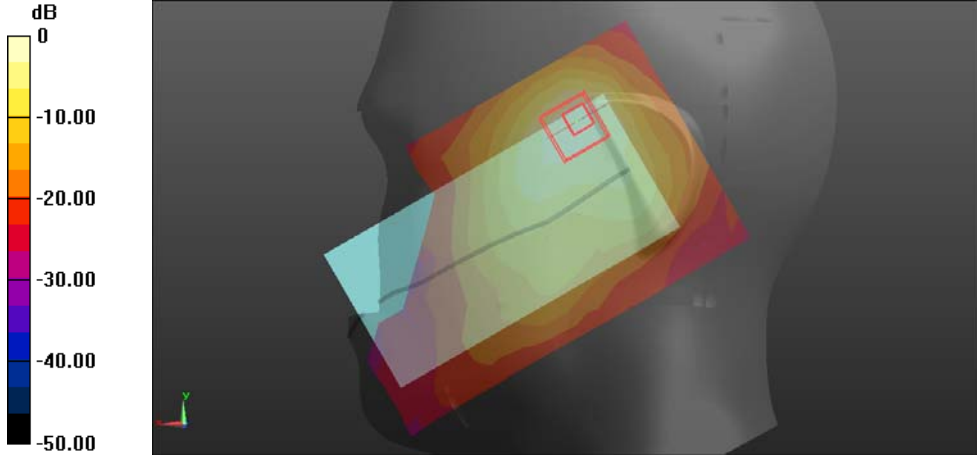
HEAD	Left cheek
<p>Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 40</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.77, 7.77, 7.77); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul>	
<p><b>Head-Section HSL wifi Left Head/wcdma band2/Area Scan (8x12x1):</b></p>	
<p>Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm</p>	
<p>Maximum value of SAR (measured) = 0.386 W/kg</p>	
<p><b>Head-Section HSL wifi Left Head/wcdma band2/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm</p>	
<p>Reference Value = 3.861 V/m; Power Drift = -0.10 dB</p>	
<p>Peak SAR (extrapolated) = 0.491 W/kg</p>	
<p><b>SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.106 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.409 W/kg</p>	
	
<p>0 dB = 0.386 W/kg = -4.13 dBW/kg</p>	

**WCDMA BAND5**

HEAD	Left cheek
<p>Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.905</math> S/m; <math>\epsilon_r = 41.528</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.07, 9.07, 9.07); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul>	
<p><b>Head-Section HSL wifi Left Head/wcdma band5/Area Scan (8x12x1):</b></p>	
<p>Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm</p>	
<p>Maximum value of SAR (measured) = 0.178 W/kg</p>	
<p><b>Head-Section HSL wifi Left Head/wcdma band5/Zoom Scan (7x7x7)/Cube 0:</b></p>	
<p>Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm</p>	
<p>Reference Value = 4.728 V/m; Power Drift = 0.15 dB</p>	
<p>Peak SAR (extrapolated) = 0.198 W/kg</p>	
<p><b>SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.108 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.180 W/kg</p>	
	
<p>0 dB = 0.178 W/kg = -7.50 dBW/kg</p>	

HEAD	Right cheek
<p>Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.905</math> S/m; <math>\epsilon_r = 41.528</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.07, 9.07, 9.07); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BNAD5 HSL touch M/Area Scan (8x12x1):</b> Measurement grid: <math>dx=15</math>mm, <math>dy=15</math>mm            Maximum value of SAR (measured) = 0.170 W/kg</p> <p><b>Head-Section HSL WCDMA BAND5 Right Head/WCDMA BNAD5 HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 5.037 V/m; Power Drift = 0.08 dB            Peak SAR (extrapolated) = 0.167 W/kg  <b>SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.075 W/kg</b>            Maximum value of SAR (measured) = 0.196 W/kg</p>	
 <p>0 dB = 0.196 W/kg = -7.08 dBW/kg</p>	

**WIFI 2.4GHz**

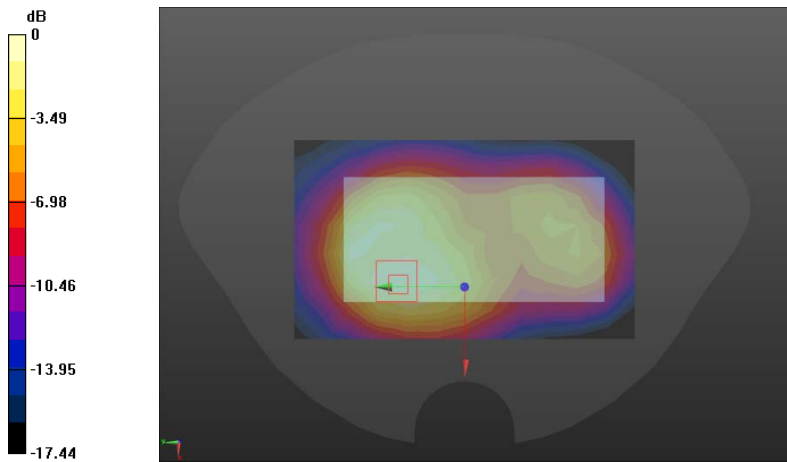
HEAD	Left cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi/Area Scan (10x15x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 1.26 W/kg  <b>Head-Section HSL wifi Left Head/wifi/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 14.50 V/m; Power Drift = -0.04 dB            Peak SAR (extrapolated) = 1.78 W/kg  <b>SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.367 W/kg</b>            Maximum value of SAR (measured) = 1.37 W/kg</p>	
 <p>0 dB = 1.26 W/kg = 1.00 dBW/kg</p>	

**GSM (850MHz with EGPRS)**

FLAT	Towards Ground
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.982</math> S/m; <math>\epsilon_r = 55.032</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>850/EGPRS850 TG M 10mm M/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.865 W/kg</p> <p><b>850/EGPRS850 TG M 10mm M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 29.20 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 1.04 W/kg  <b>SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.569 W/kg</b>            Maximum value of SAR (measured) = 0.875 W/kg</p> <div data-bbox="215 1332 1204 1792"> </div> <p>0 dB = 0.865 W/kg = -0.63 dBW/kg</p>	

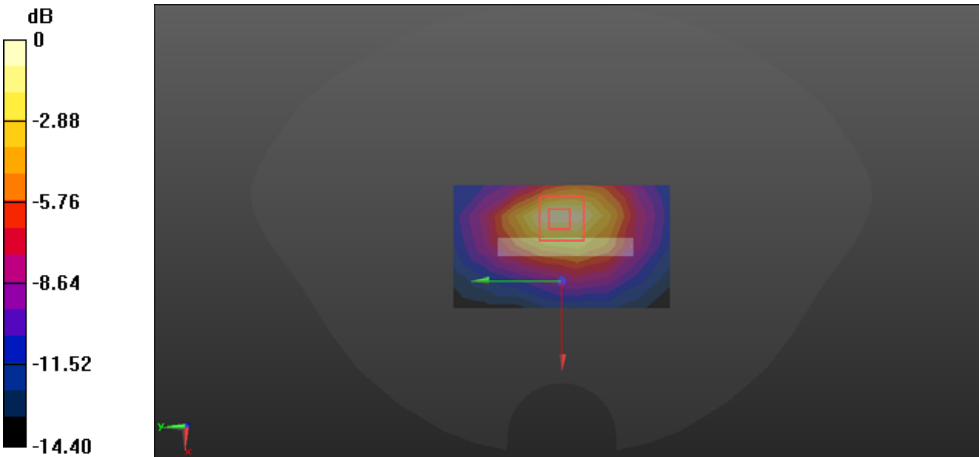
**GSM (1900MHz with EGPRS)**

FLAT	EDGE2
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.546</math> S/m; <math>\epsilon_r = 53.141</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.7, 7.7, 7.7); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Configuration/EGPRS1900 edge2 10mm M/Area Scan (5x8x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.302 W/kg</p> <p><b>Configuration/EGPRS1900 edge2 10mm M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 10.42 V/m; Power Drift = 0.04 dB            Peak SAR (extrapolated) = 0.480 W/kg  <b>SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.147 W/kg</b>            Maximum value of SAR (measured) = 0.344 W/kg</p> <div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;"> <p>dB</p> <p>0 -2.93 -5.86 -8.79 -11.72 -14.65</p> </div> <div> </div> </div> <p style="text-align: center;">0 dB = 0.302 W/kg = -5.20 dBW/kg</p>	

FLAT	Towards Phantom(EGPRS)
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz</p>	
<p>Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.546</math> S/m; <math>\epsilon_r = 53.141</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Flat Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.7, 7.7, 7.7); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul>	
<p><b>Flat-Section MSL GSM1900 TP/EGPRS1900 TP M 10mm/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm</p>	
<p>Maximum value of SAR (measured) = 0.331 W/kg</p>	
<p><b>Flat-Section MSL GSM1900 TP/EGPRS1900 TP M 10mm/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm</p>	
<p>Reference Value = 9.170 V/m; Power Drift = 0.04 dB</p>	
<p>Peak SAR (extrapolated) = 0.300 W/kg</p>	
<p><b>SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.101 W/kg</b></p>	
<p>Maximum value of SAR (measured) = 0.343 W/kg</p>	
	
<p>0 dB = 0.343 W/kg = -4.65 dBW/kg</p>	



**WCDMA BAND2**

FLAT	EDGE2
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.546</math> S/m; <math>\epsilon_r = 53.141</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.7, 7.7, 7.7); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Configuration/wcdma band2 edge2 10mm M/Area Scan (5x8x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.293 W/kg</p> <p><b>Configuration/wcdma band2 edge2 10mm M/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 9.392 V/m; Power Drift = 0.11 dB            Peak SAR (extrapolated) = 0.453 W/kg  <b>SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.137 W/kg</b>            Maximum value of SAR (measured) = 0.327 W/kg</p>  <p>0 dB = 0.293 W/kg = -5.33 dBW/kg</p>	

FLAT	Towards ground(vocie)
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.546</math> S/m; <math>\epsilon_r = 53.141</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.7, 7.7, 7.7); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.210 W/kg</p> <p><b>Flat-Section MSL wcdma band2 TG/wcdma band2 TG M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm</p> <p>Reference Value = 5.435 V/m; Power Drift = -0.09 dB            Peak SAR (extrapolated) = 0.221 W/kg  <b>SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.095 W/kg</b>            Maximum value of SAR (measured) = 0.227 W/kg</p> <div data-bbox="215 1339 1007 1794"> </div> <p>0 dB = 0.227 W/kg = -6.44 dBW/kg</p>	

**WCDMA BAND5**

FLAT	Towards Ground(data)
------	----------------------

Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.982$  S/m;  $\epsilon_r = 55.032$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 2017/11/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 2017/10/23
- Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration 3/wcdma band5 TG 10mm M/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.303 W/kg

**Configuration 3/wcdma band5 TG 10mm M/Zoom Scan (7x7x7)/Cube 0:**

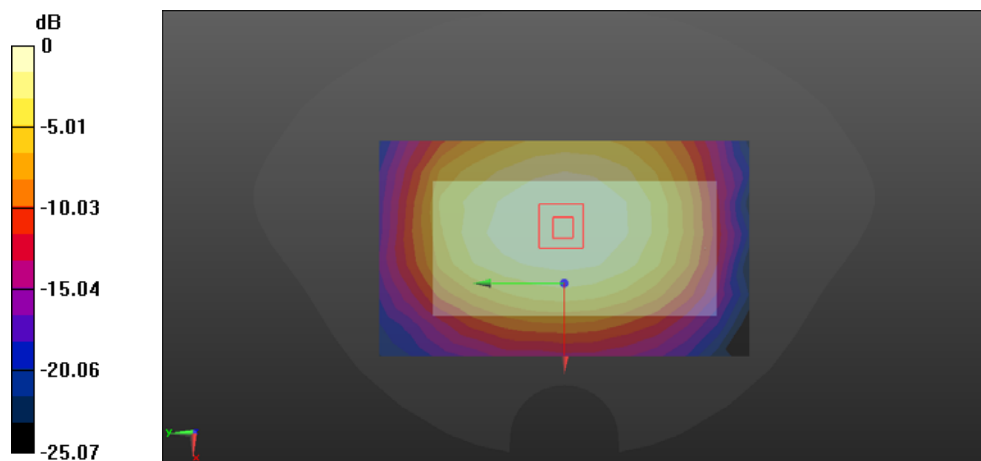
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.38 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.404 W/kg

**SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.227 W/kg**

Maximum value of SAR (measured) = 0.345 W/kg



0 dB = 0.303 W/kg = -5.19 dBW/kg

FLAT	Towards Ground(Voice)
<p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.982</math> S/m; <math>\epsilon_r = 55.032</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.16, 9.16, 9.16); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm voice/Area Scan (8x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.349 W/kg</p> <p><b>Flat-Section MSL wcdma band5 TG/wcdma band5 TG M 10mm voice/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm</p> <p>Reference Value = 12.17 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 0.372 W/kg  <b>SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.170 W/kg</b>            Maximum value of SAR (measured) = 0.356 W/kg</p> <div data-bbox="215 1339 1007 1794"> </div>	

**WIFI 2.4GHz**

FLAT	Towards phantom
------	-----------------

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.965$  S/m;  $\epsilon_r = 52.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.3, 7.3, 7.3); Calibrated: 2017/11/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 2017/10/23
- Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration 3/WIFI TP 10mm M/Area Scan (10x14x1):** Measurement grid:  
 $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.168 W/kg

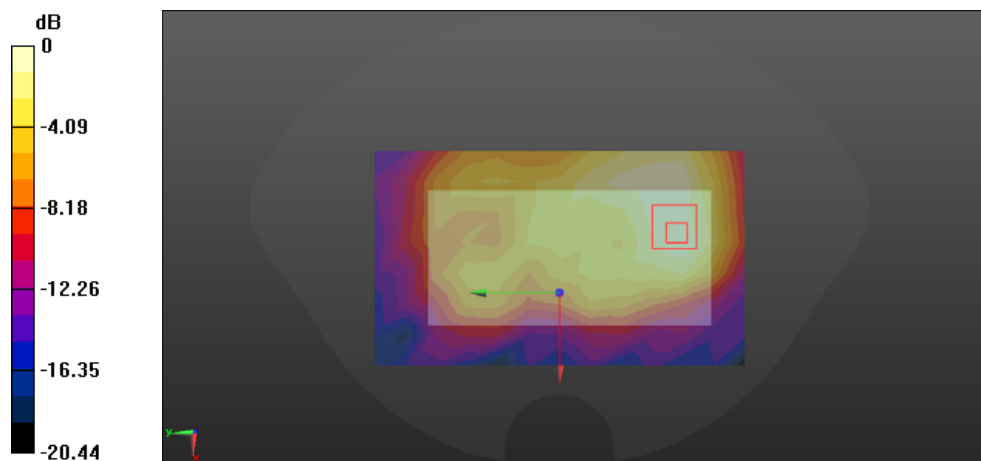
**Configuration 3/WIFI TP 10mm M/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.958 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg


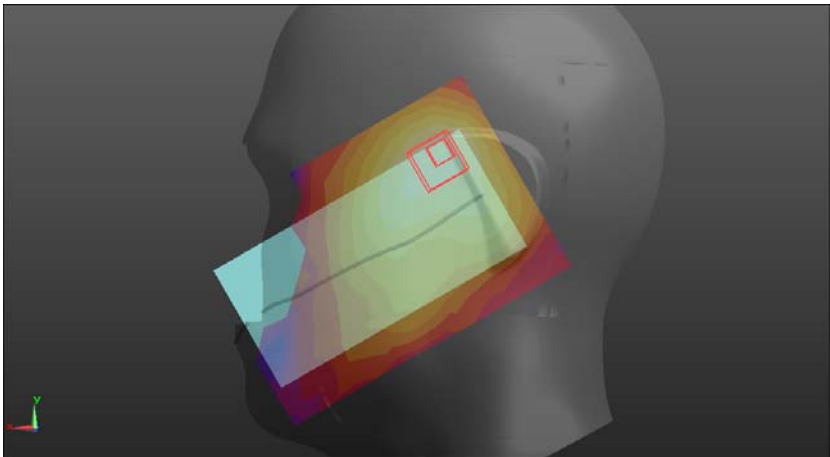


0 dB = 0.168 W/kg = -7.75 dBW/kg

**WLAN 2.4GHz (retest for second supply)**

Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 1.07 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 13.45 V/m; Power Drift = -0.06 dB            Peak SAR (extrapolated) = 1.71 W/kg  <b>SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.369 W/kg</b>            Maximum value of SAR (measured) = 1.36 W/kg</p> <div data-bbox="316 1422 1279 1877"> </div> <p>0 dB = 1.36 W/kg = 1.34 dBW/kg</p>	

Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M 2/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 1.08 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch M 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 13.43 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 1.71 W/kg  <b>SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.370 W/kg</b>            Maximum value of SAR (measured) = 1.36 W/kg</p> <div data-bbox="316 1377 1279 1832"> </div> <p>0 dB = 1.36 W/kg = 1.34 dBW/kg</p>	

Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz            Medium parameters used (interpolated): <math>f = 2412</math> MHz; <math>\sigma = 1.765</math> S/m; <math>\epsilon_r = 39.257</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch L1/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 1.25 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch L1/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 14.72 V/m; Power Drift = -0.12 dB            Peak SAR (extrapolated) = 1.73 W/kg  <b>SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.372 W/kg</b>            Maximum value of SAR (measured) = 1.34 W/kg</p> <div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <p>dB</p>  </div> <div>  </div> </div> <p style="text-align: center;">0 dB = 1.25 W/kg = 0.97 dBW/kg</p>	


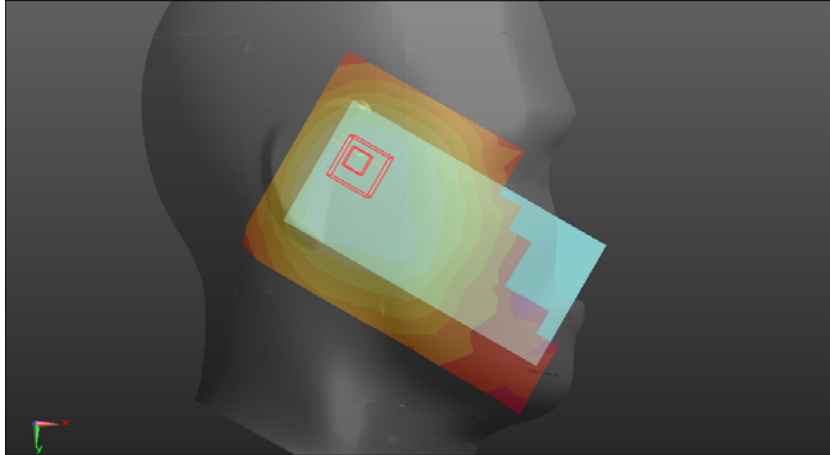


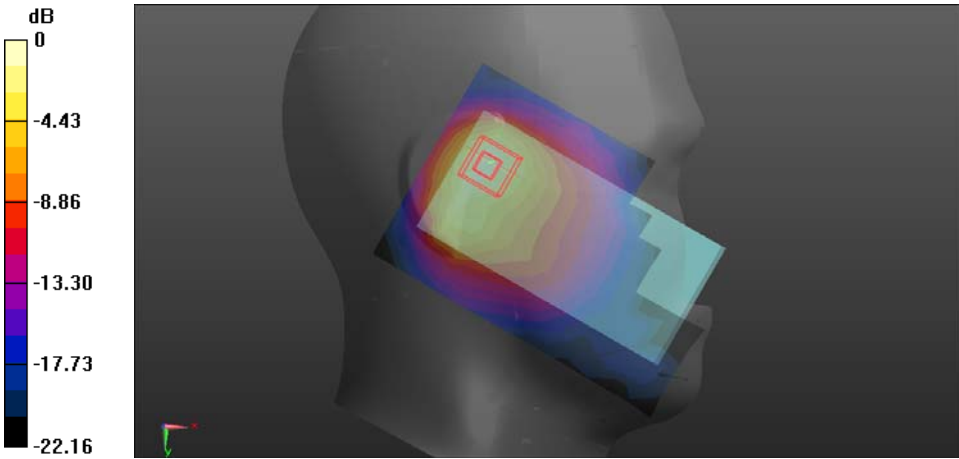
Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz            Medium parameters used (interpolated): <math>f = 2412</math> MHz; <math>\sigma = 1.765</math> S/m; <math>\epsilon_r = 39.257</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch L1 2/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 1.26 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch L1 2/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 14.50 V/m; Power Drift = -0.07 dB            Peak SAR (extrapolated) = 1.71 W/kg  <b>SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.367 W/kg</b>            Maximum value of SAR (measured) = 1.32 W/kg</p> <div data-bbox="316 1422 1279 1877"> </div> <p>0 dB = 1.26 W/kg = 1.00 dBW/kg</p>	

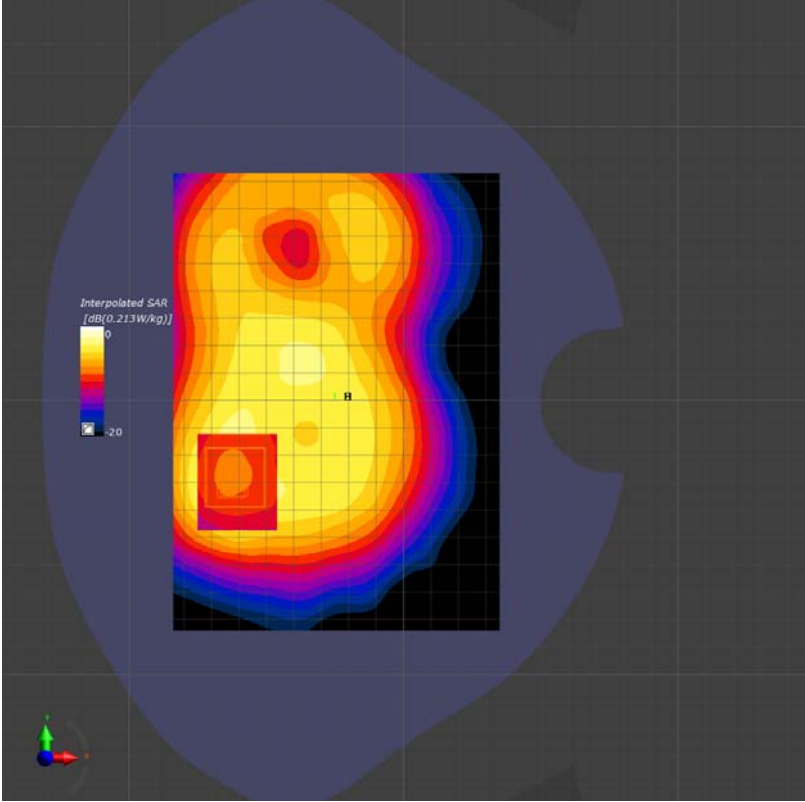
Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz            Medium parameters used (interpolated): <math>f = 2462</math> MHz; <math>\sigma = 1.812</math> S/m; <math>\epsilon_r = 39.183</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch H/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.992 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch H/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 12.75 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 1.49 W/kg  <b>SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.311 W/kg</b>            Maximum value of SAR (measured) = 1.17 W/kg</p> <div data-bbox="316 1339 1279 1796"> </div>	

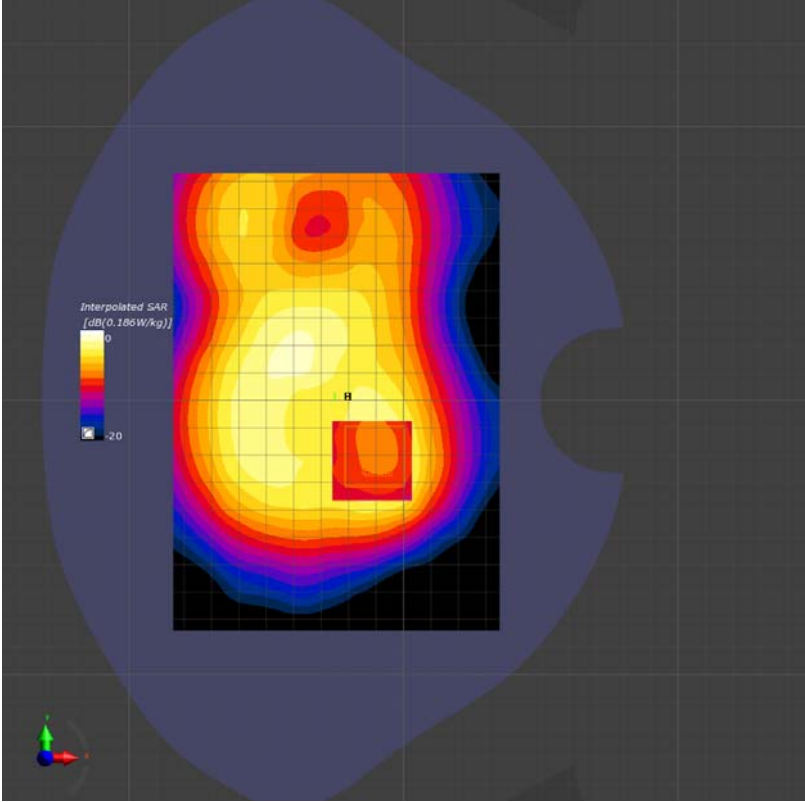
Left Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz            Medium parameters used (interpolated): <math>f = 2462</math> MHz; <math>\sigma = 1.812</math> S/m; <math>\epsilon_r = 39.183</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch H 2/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.995 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL touch H 2/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 12.85 V/m; Power Drift = -0.06 dB            Peak SAR (extrapolated) = 1.49 W/kg  <b>SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.310 W/kg</b>            Maximum value of SAR (measured) = 1.17 W/kg</p> <div data-bbox="316 1377 1279 1832"> </div> <p>0 dB = 0.995 W/kg = -0.02 dBW/kg</p>	

Left Side	Tilt
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Left Head/wifi HSL tilt M/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.936 W/kg</p> <p><b>Head-Section HSL wifi Left Head/wifi HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 16.66 V/m; Power Drift = -0.06 dB            Peak SAR (extrapolated) = 1.30 W/kg  <b>SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.244 W/kg</b>            Maximum value of SAR (measured) = 0.966 W/kg</p> <div data-bbox="316 1377 1279 1832"> </div> <p>0 dB = 0.936 W/kg = -0.29 dBW/kg</p>	

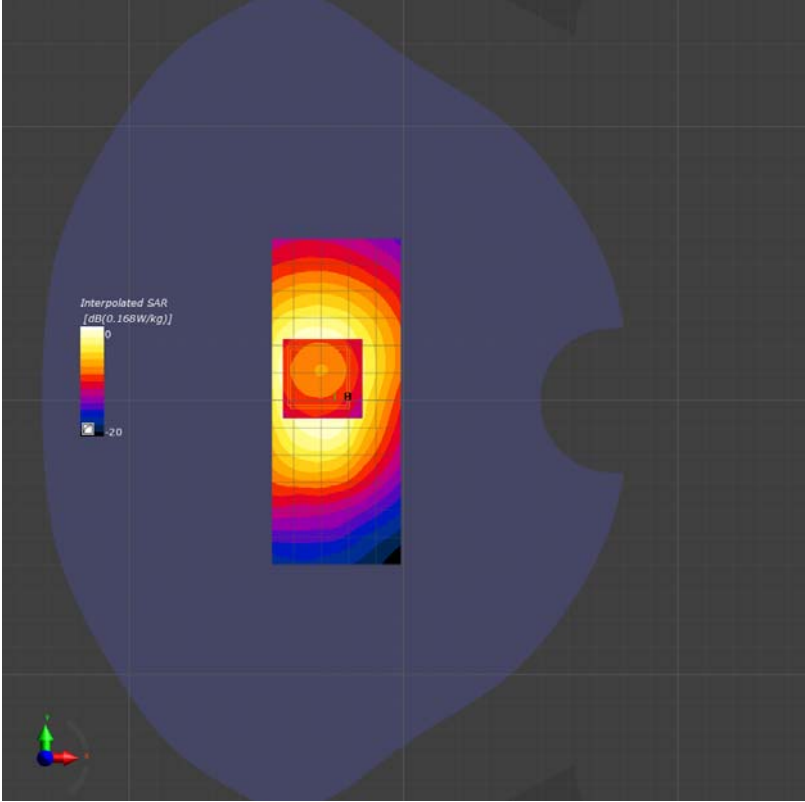
Right Side	Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p>	
<p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection), <math>z = -4.0, 31.0</math></li> <li>Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Right Head/wifi HSL touch M/Area Scan (10x15x1):</b>            Measurement grid: <math>dx=12</math>mm, <math>dy=12</math>mm            Maximum value of SAR (measured) = 0.532 W/kg</p> <p><b>Head-Section HSL wifi Right Head/wifi HSL touch M/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm            Reference Value = 16.20 V/m; Power Drift = 0.07 dB            Peak SAR (extrapolated) = 0.708 W/kg  <b>SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.241 W/kg</b>            Maximum value of SAR (measured) = 0.592 W/kg</p>	
<div style="display: flex; align-items: center;"> <div style="margin-right: 20px;"> <p>dB</p>  <p>0 -10.00 -20.00 -30.00 -40.00 -50.00</p> </div> <div style="flex-grow: 1;">  <p>0 dB = 0.532 W/kg = -2.74 dBW/kg</p> </div> </div>	

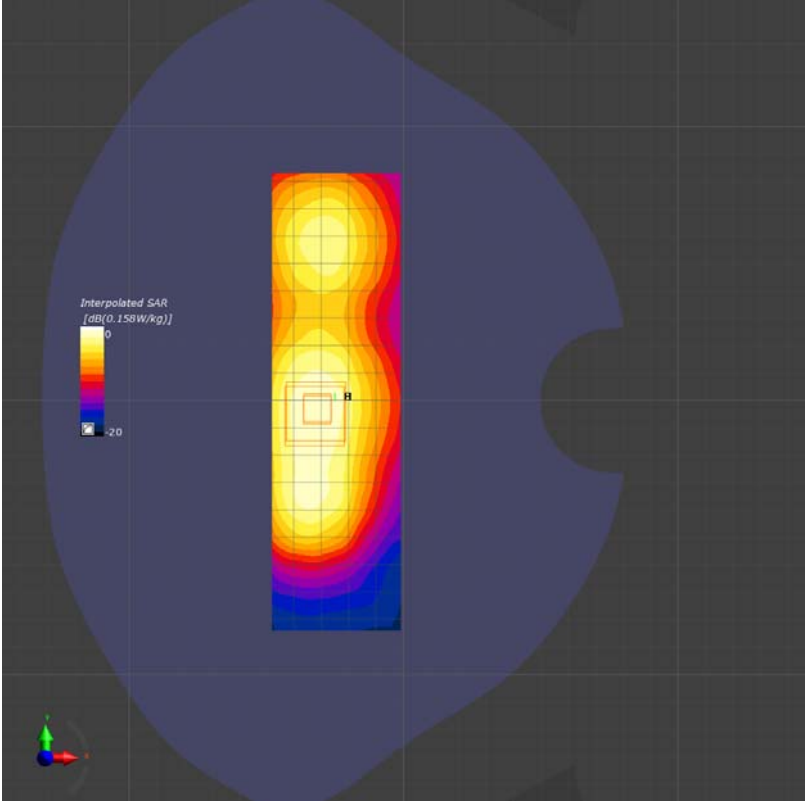
Right Side	Tilt
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz                      Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.19, 7.19, 7.19); Calibrated: 2017/11/7;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = -4.0, 31.0</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2017/10/23</li> <li>• Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)</li> </ul> <p><b>Head-Section HSL wifi Right Head/wifi HSL tilt M/Area Scan (10x15x1):</b>                      Measurement grid: dx=12mm, dy=12mm                      Maximum value of SAR (measured) = 0.639 W/kg</p> <p><b>Head-Section HSL wifi Right Head/wifi HSL tilt M/Zoom Scan (7x7x7)/Cube 0:</b>                      Measurement grid: dx=5mm, dy=5mm, dz=5mm                      Reference Value = 17.81 V/m; Power Drift = -0.02 dB                      Peak SAR (extrapolated) = 0.478 W/kg  <b>SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.221 W/kg</b>                      Maximum value of SAR (measured) = 0.529 W/kg</p> <div style="display: flex; align-items: center;">  </div> <p style="text-align: center;">0 dB = 0.529 W/kg = -2.77 dBW/kg</p>	

FLAT	Towards phantom
<p>Communication System: WLAN 2.4GHz; Frequency: 2437.0            Medium: . Medium parameters used: f= 2437.0 MHz; <math>\sigma = 1.93</math> S/m; <math>\epsilon_r = 52.7</math>            Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C</p> <p>DASY6 Configuration:            - Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017-10-11            - Sensor-Surface: 3.0 mm            - Electronics: DAE4 Sn546; Calibrated: 2017-09-15            - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1560; Section: Flat            - Measurement Software: cDASY6 V6.6.0.13926            - UID: WLAN, 10012-CAB</p> <p><b>Area Scan (120.0 mm x 168.0 mm):</b> Measurement Grid: 12.0 mm x 12.0 mm            SAR (1g) = 0.112 W/kg; SAR (10g) = 0.061 W/kg;  <b>Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):</b> Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm            Power Drift = 0.02 dB            SAR (1g) = 0.157 W/kg; SAR (10g) = 0.062 W/kg;</p> 	

FLAT	Towards ground
<p>Communication System: WLAN 2.4GHz; Frequency: 2437.0            Medium: . Medium parameters used: f= 2437.0 MHz; <math>\sigma= 1.93</math> S/m; <math>\epsilon_r = 52.7</math>            Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C</p> <p>DASY6 Configuration:            - Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017-10-11            - Sensor-Surface: 3.0 mm            - Electronics: DAE4 Sn546; Calibrated: 2017-09-15            - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1560; Section: Flat            - Measurement Software: cDASY6 V6.6.0.13926            - UID: WLAN, 10012-CAB</p> <p><b>Area Scan (120.0 mm x 168.0 mm):</b> Measurement Grid: 12.0 mm x 12.0 mm            SAR (1g) = 0.104 W/kg; SAR (10g) = 0.056 W/kg;  <b>Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):</b> Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm</p> <p>Power Drift = -0.07 dB            SAR (1g) = 0.132 W/kg; SAR (10g) = 0.055 W/kg;</p> 	









FLAT	EDGE1
<p>Communication System: WLAN 2.4GHz; Frequency: 2437.0            Medium: . Medium parameters used: f= 2437.0 MHz; <math>\sigma</math>= 1.93 S/m; <math>\epsilon_r</math> = 52.7            Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C</p> <p>DASY6 Configuration:            - Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017-10-11            - Sensor-Surface: 3.0 mm            - Electronics: DAE4 Sn546; Calibrated: 2017-09-15            - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1560; Section: Flat            - Measurement Software: cDASY6 V6.6.0.13926            - UID: WLAN, 10012-CAB</p> <p><b>Area Scan (48.0 mm x 120.0 mm):</b> Measurement Grid: 12.0 mm x 12.0 mm            SAR (1g) = 0.137 W/kg; SAR (10g) = 0.074 W/kg;  <b>Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):</b> Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm            Power Drift = -0.04 dB            SAR (1g) = 0.145 W/kg; SAR (10g) = 0.076 W/kg;</p> 	

FLAT	EDGE3
<p>Communication System: WLAN 2.4GHz; Frequency: 2437.0            Medium: . Medium parameters used: f= 2437.0 MHz; <math>\sigma</math>= 1.93 S/m; <math>\epsilon_r</math> = 52.7            Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C</p> <p>DASY6 Configuration:            - Probe: ES3DV3 - SN3127; ConvF(4.28, 4.28, 4.28); Calibrated: 2017-10-11            - Sensor-Surface: 3.0 mm            - Electronics: DAE4 Sn546; Calibrated: 2017-09-15            - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1560; Section: Flat            - Measurement Software: cDASY6 V6.6.0.13926            - UID: WLAN, 10012-CAB</p> <p><b>Area Scan (48.0 mm x 168.0 mm):</b> Measurement Grid: 12.0 mm x 12.0 mm            SAR (1g) = 0.092 W/kg; SAR (10g) = 0.051 W/kg;  <b>Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):</b> Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm            Power Drift = -0.01 dB            SAR (1g) = 0.091 W/kg; SAR (10g) = 0.050 W/kg;</p> 	

## ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

DAE4 Sn:546

<div style="text-align: center;">  <p><b>TTL Speaq</b> CALIBRATION LABORATORY</p> <p>Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209 E-mail: cti@chinaatl.com Http://www.chinaatl.cn</p> </div> <p style="text-align: center;">Client: <b>SRTC</b> Certificate No: <b>Z17-97141</b></p> <div style="border: 1px solid black; padding: 5px;"> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: DAE4 - SN: 546</p> <p>Calibration Procedure(s): FF-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)</p> <p>Calibration date: September 15, 2017</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature(22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date/(Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Process Calibrator 753</td> <td>1971018</td> <td>27-Jun-17 (CTTL No.J17X05859)</td> <td>June-18</td> </tr> </tbody> </table> <p>Calibrated by: Yu Zongying SAR Test Engineer </p> <p>Reviewed by: Lin Hao SAR Test Engineer </p> <p>Approved by: Qi Dianyuan SAR Project Leader </p> <p style="text-align: right;">Issued: September 18, 2017</p> <p style="font-size: small;">This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> </div> <p style="font-size: x-small;">Certificate No: Z17-97141 Page 1 of 3</p>	Primary Standards	ID #	Cal Date/(Calibrated by, Certificate No.)	Scheduled Calibration	Process Calibrator 753	1971018	27-Jun-17 (CTTL No.J17X05859)	June-18	<div style="text-align: center;">  <p><b>TTL Speaq</b> CALIBRATION LABORATORY</p> <p>Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209 E-mail: cti@chinaatl.com Http://www.chinaatl.cn</p> </div> <p><b>Glossary:</b></p> <p>DAE: data acquisition electronics</p> <p>Connector angle: information used in DASy system to align probe sensor X to the robot coordinate system.</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li><b>DC Voltage Measurement:</b> Calibration Factor assessed for use in DASy system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.</li> <li><b>Connector angle:</b> The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.</li> <li>The report provide only calibration results for DAE, it does not contain other performance test results.</li> </ul> <p style="font-size: x-small;">Certificate No: Z17-97141 Page 2 of 3</p>
Primary Standards	ID #	Cal Date/(Calibrated by, Certificate No.)	Scheduled Calibration						
Process Calibrator 753	1971018	27-Jun-17 (CTTL No.J17X05859)	June-18						



**TTL Speaq**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cti@chinaatl.com Http://www.chinaatl.cn

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV, full range = -100...+300 mV

Low Range: 1LSB = 81µV, full range = -1...+3mV

DASy measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.337 ± 0.15% (k=2)	404.085 ± 0.15% (k=2)	404.215 ± 0.15% (k=2)
Low Range	3.98726 ± 0.7% (k=2)	3.95731 ± 0.7% (k=2)	3.97839 ± 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASy system	236.5° ± 1°
---	-------------

Certificate No: Z17-97141 Page 3 of 3

ES3DV3 Sn:3127



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62334633-2218 Fax: +86-10-62334633-2209  
E-mail: cti@chinaamti.com http://www.chinaamti.cn

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3127

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] <sup>①</sup>	Relative Permittivity <sup>②</sup>	Conductivity (S/m) <sup>③</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>④</sup>	Depth <sup>⑤</sup> (mm)	Unc. (k=2)
750	41.9	0.89	6.26	6.26	6.26	0.60	1.20	±12.1%
900	41.5	0.97	6.15	6.15	6.15	0.37	1.62	±12.1%
1810	40.0	1.40	5.06	5.06	5.06	0.67	1.23	±12.1%
2000	40.0	1.40	4.88	4.88	4.88	0.67	1.23	±12.1%
2300	39.5	1.67	4.71	4.71	4.71	0.90	1.06	±12.1%
2450	39.2	1.80	4.58	4.58	4.58	0.90	1.10	±12.1%
2600	39.0	1.96	4.32	4.32	4.32	0.90	1.09	±12.1%

<sup>①</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ±110 MHz.  
<sup>②</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.  
<sup>③</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62334633-2218 Fax: +86-10-62334633-2209  
E-mail: cti@chinaamti.com http://www.chinaamti.cn

DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3127

Calibration Parameter Determined in Body Tissue Simulating Media

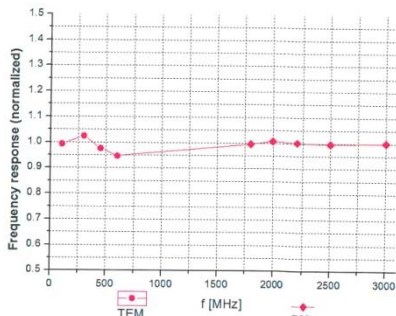
f [MHz] <sup>①</sup>	Relative Permittivity <sup>②</sup>	Conductivity (S/m) <sup>③</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>④</sup>	Depth <sup>⑤</sup> (mm)	Unc. (k=2)
750	55.5	0.96	6.18	6.18	6.18	0.45	1.45	±12.1%
900	55.0	1.05	6.06	6.06	6.06	0.46	1.48	±12.1%
1810	53.3	1.52	4.83	4.83	4.83	0.65	1.29	±12.1%
2000	53.3	1.52	4.69	4.69	4.69	0.44	1.69	±12.1%
2300	52.9	1.81	4.43	4.43	4.43	0.90	1.15	±12.1%
2450	52.7	1.95	4.28	4.28	4.28	0.72	1.34	±12.1%
2600	52.5	2.16	4.07	4.07	4.07	0.90	1.16	±12.1%

<sup>①</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ±110 MHz.  
<sup>②</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.  
<sup>③</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62334633-2218 Fax: +86-10-62334633-2209  
E-mail: cti@chinaamti.com http://www.chinaamti.cn

Frequency Response of E-Field  
(TEM-Cell: ifi110 EXX, Waveguide: R22)

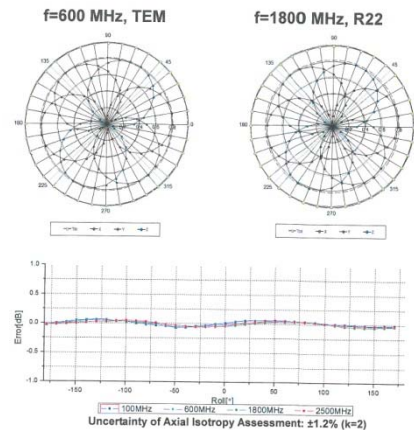


Uncertainty of Frequency Response of E-field: ±7.4% (k=2)

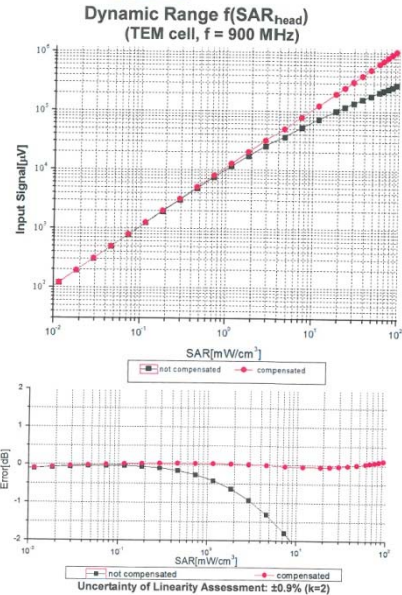


In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62334633-2218 Fax: +86-10-62334633-2209  
E-mail: cti@chinaamti.com http://www.chinaamti.cn

Receiving Pattern (Φ), θ=0°

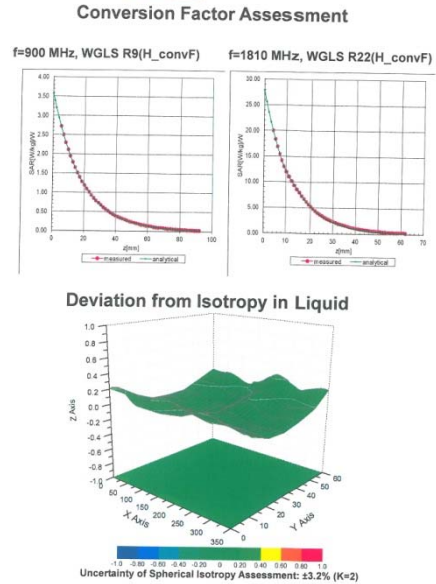


ES3DV3 Sn:3127



Certificate No: Z17-97142

Page 9 of 12



Certificate No: Z17-97142

Page 10 of 12



**DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3127**

Other Probe Parameters	
Sensor Arrangement	Triangular
Connector Angle (°)	165.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	4mm
Probe Tip to Sensor X Calibration Point	2mm
Probe Tip to Sensor Y Calibration Point	2mm
Probe Tip to Sensor Z Calibration Point	2mm
Recommended Measurement Distance from Surface	3mm

Certificate No: Z17-97142

Page 11 of 12



**Appendix: Modulation Calibration Parameters**

UID	Communication System Name	PAR	A dB	B dB-µV	C	VR mV	Unc <sup>1</sup> (k=2)
0	CW	0.00	X	0.0	0.0	1.0	282.3 ±2.5%
			Y	0.0	0.0	1.0	280.9
			Z	0.0	0.0	1.0	275.1
10012	IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps)	1.87	X	2.77	68.02	18.46	143.0 ±1.8%
			Y	2.75	68.05	18.52	145.0
			Z	2.71	67.79	18.25	142.3
10100	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	5.67	X	6.13	66.4	18.97	141.9 ±1.9%
			Y	6.15	66.49	19.06	144.2
			Z	6.09	66.32	18.90	140.9
10108	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	5.80	X	6.09	66.24	19.07	139.5 ±1.9%
			Y	6.10	66.33	19.15	141.5
			Z	6.05	66.19	19.05	138.0
10154	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	5.75	X	5.81	65.85	18.93	136.1 ±1.9%
			Y	5.82	65.92	19.01	137.8
			Z	5.79	65.89	18.97	134.7
10169	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	5.73	X	4.84	65.92	19.20	130.8 ±1.9%
			Y	4.82	65.98	19.27	131.3
			Z	4.80	66.00	19.29	129.1
10175	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	5.72	X	4.88	66.14	19.40	131.6 ±1.9%
			Y	4.83	66.08	19.33	130.9
			Z	4.79	66.02	19.29	129.3
10297	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	5.81	X	6.19	66.61	19.42	141.9 ±1.9%
			Y	6.13	66.43	19.26	140.7
			Z	6.14	66.52	19.33	139.6

Certificate No: Z17-97142

Page 12 of 12

D835V2 Sn:4d023



Client: SRTC Certificate No: Z17-97135

**CALIBRATION CERTIFICATE**

Object: D835V2 - SN: 4d023

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: September 13, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(2±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRV-D	102196	02-Mar-17 (CTTL No.J17X01254)	Mar-18
Power sensor NRV-Z5	100590	02-Mar-17 (CTTL No.J17X01254)	Mar-18
Reference Probe EX3DV4	SN 7433	26-Sep-16(SPEAG, No. EX3-7433_Sep16)	Sep-17
DAE4	SN 1331	19-Jan-17(CTTL-SPEAG, No.Z17-97015)	Jan-18

Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-17 (CTTL No.J17X00286)	Jan-18
Network Analyzer E5071C	MY46110673	13-Jan-17 (CTTL No.J17X00285)	Jan-18

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Yu Zongying	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: Z17-97135 Page 1 of 8



Glossary:  
TSL: tissue simulating liquid  
Cov/F: sensitivity in TSL / NORMx, y, z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013  
b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016  
c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010  
d) KDB85664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**  
a) DAS4/S System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement, multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z17-97135 Page 2 of 8



**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.0.1446
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.3 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.37 mW / g ± 18.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.52 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.06 mW / g ± 18.7 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.7 ± 6 %	0.96 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	---	---

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.34 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.47 mW / g ± 18.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.53 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.17 mW / g ± 18.7 % (k=2)

Certificate No: Z17-97135 Page 3 of 8



**Appendix (Additional assessments outside the scope of CNAS L0570)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.0Ω - 2.79jΩ
Return Loss	- 30.7dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	46.6Ω - 3.61jΩ
Return Loss	- 25.8dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.495 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
-----------------	-------

Certificate No: Z17-97135 Page 4 of 8

D835V2 Sn:4d023

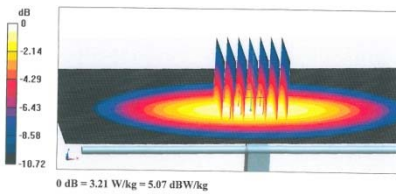
In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504  
E-mail: cti@china.ttl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL** Date: 09.13.2017  
Test Laboratory: CTTL, Beijing, China  
DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d023  
Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 41.34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.82, 9.82, 9.82); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

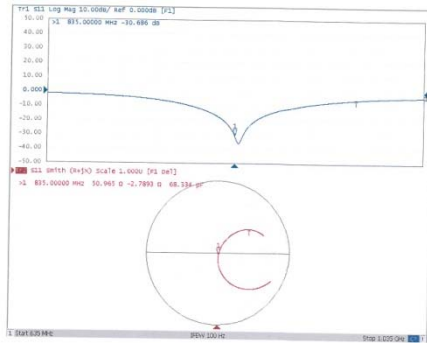
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 56.28V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 3.66 W/kg  
SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.52 W/kg  
Maximum value of SAR (measured) = 3.21 W/kg



In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504  
E-mail: cti@china.ttl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL



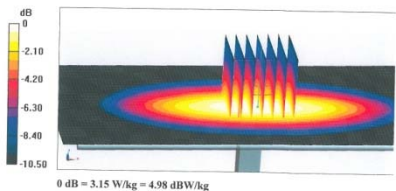
In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504  
E-mail: cti@china.ttl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL** Date: 09.13.2017  
Test Laboratory: CTTL, Beijing, China  
DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d023  
Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 55.68$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(9.5, 9.5, 9.5); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

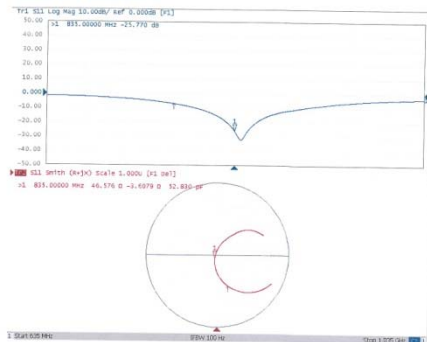
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 56.17 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.57 W/kg  
SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.53 W/kg  
Maximum value of SAR (measured) = 3.15 W/kg



In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504  
E-mail: cti@china.ttl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL



D1800V2 Sn:2d084



In Collaboration with  
TTT SPEAG CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cti@china.tti.com http://www.china.tti.cn



Client: SRTC Certificate No: Z17-97138

**CALIBRATION CERTIFICATE**

Object: D1800V2 - SN: 2d084

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: September 15, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(2±3)°C and humidity<70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	102196	02-Mar-17 (CTTL, No.J17X01254)	Mar-18
Power sensor NRP-Z91	100596	02-Mar-17 (CTTL, No.J17X01254)	Mar-18
Reference Probe EX3DV4	SN 7433	26-Sep-16(SPEAG.No EX3-7433_Sep16)	Sep-17
DAE4	SN 1331	19-Jan-17(CTTL-SPEAG.No Z17-97015)	Jan-18

Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-17 (CTTL, No.J17X00286)	Jan-18
Network Analyzer E5071C	MY46110673	13-Jan-17 (CTTL, No.J17X00286)	Jan-18

Calibrated by: Zhao Jing (Name), SAR Test Engineer (Function), [Signature] (Signature)

Reviewed by: Yu Zongying (Name), SAR Test Engineer (Function), [Signature] (Signature)

Approved by: Qi Dianyuan (Name), SAR Project Leader (Function), [Signature] (Signature)

Issued: September 18, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97138 Page 1 of 8



In Collaboration with  
TTT SPEAG CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cti@china.tti.com http://www.china.tti.cn

Glossary:  
TSL: tissue simulating liquid  
CovMf: sensitivity in TSL / NORMx,y,z  
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:  
a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013  
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005  
c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010  
d) KDB855664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:  
e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:  
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.  
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.  
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.  
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.  
• SAR measured: SAR measured at the stated antenna input power.  
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.  
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: Z17-97138 Page 2 of 8



In Collaboration with  
TTT SPEAG CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cti@china.tti.com http://www.china.tti.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.0.1446
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom S 1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1800 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.4 ± 6 %	1.42 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.79 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	38.9 mW / g ± 18.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.12 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.4 mW / g ± 18.7 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.8 ± 6 %	1.50 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.84 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.7 mW / g ± 18.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.18 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.8 mW / g ± 18.7 % (k=2)

Certificate No: Z17-97138 Page 3 of 8



In Collaboration with  
TTT SPEAG CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cti@china.tti.com http://www.china.tti.cn

**Appendix (Additional assessments outside the scope of CNAS L0570)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	49.3Ω - 1.5jΩ
Return Loss	- 35.4dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	46.0Ω - 1.32jΩ
Return Loss	- 27.1dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.318 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
-----------------	-------

Certificate No: Z17-97138 Page 4 of 8



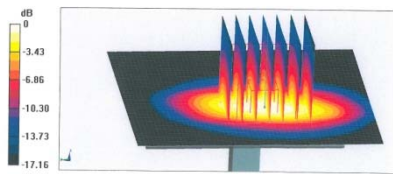
D1800V2 Sn:2d084

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@china.ttl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL Date: 09.15.2017  
Test Laboratory: C:TTL, Beijing, China  
DUT: Dipole 1800 MHz Type: D1800V2; Serial: D1800V2 - SN: 2d084  
Communication System: UID 0, CW; Frequency: 1800 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1800$  MHz,  $\sigma = 1.423$  S/m,  $\epsilon_r = 40.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.97, 7.97, 7.97); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

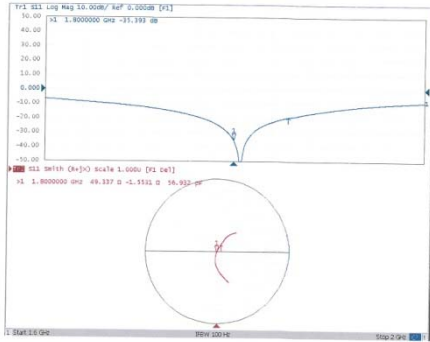
System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube  $\theta$ : Measurement grid:  
 $d_x=5$ mm,  $d_y=5$ mm,  $d_z=5$ mm  
Reference Value = 93.90 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 18.7 W/kg  
SAR(1 g) = 9.79 W/kg; SAR(10 g) = 5.12 W/kg  
Maximum value of SAR (measured) = 15.5 W/kg



Certificate No: Z17-97138 Page 5 of 8

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@china.ttl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL



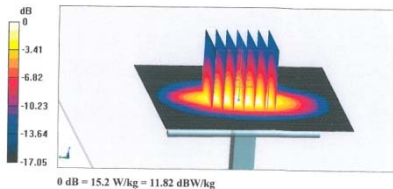
Certificate No: Z17-97138 Page 6 of 8

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@china.ttl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL Date: 09.14.2017  
Test Laboratory: C:TTL, Beijing, China  
DUT: Dipole 1800 MHz Type: D1800V2; Serial: D1800V2 - SN: 2d084  
Communication System: UID 0, CW; Frequency: 1800 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1800$  MHz,  $\sigma = 1.503$  S/m,  $\epsilon_r = 53.79$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.75, 7.75, 7.75); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7413)

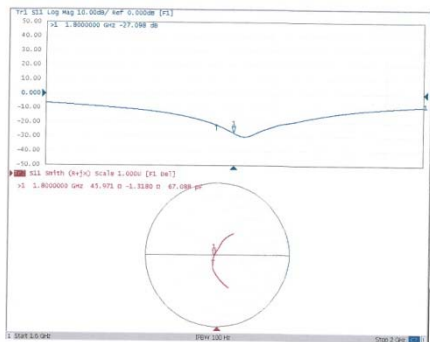
System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube  $\theta$ : Measurement grid:  
 $d_x=5$ mm,  $d_y=5$ mm,  $d_z=5$ mm  
Reference Value = 97.57 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 18.0 W/kg  
SAR(1 g) = 9.84 W/kg; SAR(10 g) = 5.18 W/kg  
Maximum value of SAR (measured) = 15.2 W/kg



Certificate No: Z17-97138 Page 7 of 8

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY  
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@china.ttl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL



Certificate No: Z17-97138 Page 8 of 8

D2450V2 Sn:738



Client: SRTC Certificate No: Z17-97140

### CALIBRATION CERTIFICATE

Object: D2450V2 - SN: 738

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: September 18, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(2±0.3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	102198	02-Mar-17 (CTTL No.J17X01254)	Mar-18
Power sensor NR.V.Z5	100598	02-Mar-17 (CTTL No.J17X01254)	Mar-18
Reference Probe EX3DV4	SN 7433	26-Sep-16(SPEAG.No.EX3-7433_Sep16)	Sep-17
DAE4	SN 1331	19-Jan-17(CTTL-SPEAG.No.Z17-97015)	Jan-18

Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-17 (CTTL No.J17X00286)	Jan-18
Network Analyzer E5071C	MY46110673	13-Jan-17 (CTTL No.J17X00285)	Jan-18

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	[Signature]
Reviewed by:	Yu Zongying	SAR Test Engineer	[Signature]
Approved by:	Qi Dianyuan	SAR Project Leader	[Signature]

Issued: September 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97140 Page 1 of 8



**Glossary:**  
TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORMx,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**  
a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013  
b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016  
c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010  
d) KDB85664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**  
e) DASy4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z17-97140 Page 2 of 8



**Measurement Conditions**  
DASy system configuration, as far as not given on page 1.

DASy Version	DASy52	52.10.0.1448
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

**Head TSL parameters**  
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 %	1.79 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.4 mW / g ± 18.8 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.10 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.4 mW / g ± 18.7 % (k=2)

**Body TSL parameters**  
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	1.98 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	---	---

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>2</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	52.3 mW / g ± 18.8 % (k=2)

SAR averaged over 10 cm <sup>2</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.10 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.3 mW / g ± 18.7 % (k=2)

Certificate No: Z17-97140 Page 3 of 8



**Appendix (Additional assessments outside the scope of CNAS L0570)**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.3Ω ± 5.92jΩ
Return Loss	- 24.5dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	47.6Ω ± 6.39jΩ
Return Loss	- 23.1dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.268 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
-----------------	-------

Certificate No: Z17-97140 Page 4 of 8

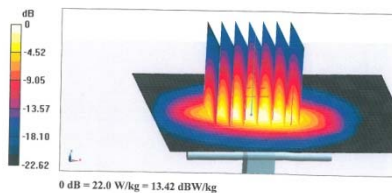
D2450V2 Sn:738



**DASY5 Validation Report for Head TSL** Date: 09.18.2017  
Test Laboratory: C-TTL, Beijing, China  
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 738  
Communication System: UID 0, CW, Frequency: 2450 MHz, Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 38.67$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.45, 7.45, 7.45); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 102.1 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 27.8 W/kg  
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.1 W/kg  
Maximum value of SAR (measured) = 22.0 W/kg

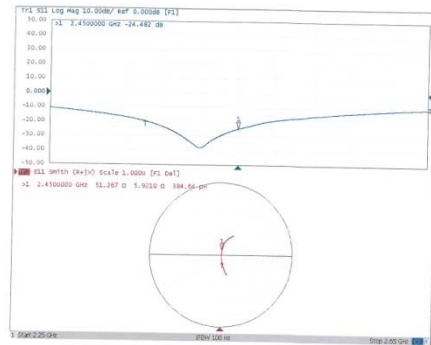


Certificate No: Z17-97140

Page 5 of 8



**Impedance Measurement Plot for Head TSL**



Certificate No: Z17-97140

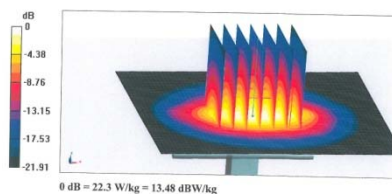
Page 6 of 8



**DASY5 Validation Report for Body TSL** Date: 09.18.2017  
Test Laboratory: C-TTL, Beijing, China  
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 738  
Communication System: UID 0, CW, Frequency: 2450 MHz, Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.983$  S/m;  $\epsilon_r = 52.51$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:

- Probe: EX3DV4 - SN7433; ConvF(7.46, 7.46, 7.46); Calibrated: 9/26/2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 1/19/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 96.41 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 27.8 W/kg  
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.1 W/kg  
Maximum value of SAR (measured) = 22.3 W/kg

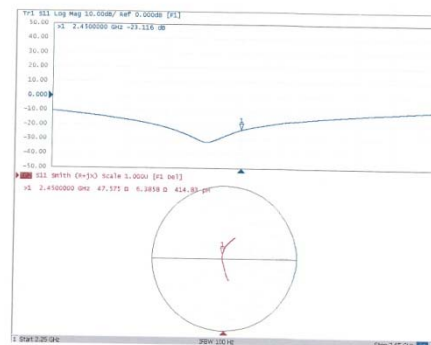


Certificate No: Z17-97140

Page 7 of 8



**Impedance Measurement Plot for Body TSL**



Certificate No: Z17-97140

Page 8 of 8

DAE4 Sn:720

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

中国认可  
国际互认  
校准  
CNAS  
CALIBRATION  
CNAS 15076

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42394633-2218 Fax: +86-10-42394633-2209  
E-mail: csl@tsaee.com.cn http://www.tsaee.com.cn

Client: **SRTC** Certificate No: **Z17-97215**

**CALIBRATION CERTIFICATE**

Object: DAE4 - SN: 720

Calibration Procedure(s): FF-Z11-002-01  
Calibration Procedure for the Data Acquisition Electronics (DAE)

Calibration date: October 24, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(23±2)°C and humidity<70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	19710-8	27-Jun-17 (CTTL, No.J17X05665)	June-18

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Itao	SAR Test Engineer	
Approved by:	Qi Danyuan	SAR Project Leader	

Issued: October 26, 2017  
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97215 Page 1 of 3

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42394633-2218 Fax: +86-10-42394633-2209  
E-mail: csl@tsaee.com.cn http://www.tsaee.com.cn

**Glossary:**  
DAE: data acquisition electronics  
Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.

- Methods Applied and Interpretation of Parameters:**
- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
  - Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
  - The report provide only calibration results for DAE, it does not contain other performance test results.

Certificate No: Z17-97215 Page 2 of 3

In Collaboration with  
**TTL** **s p e a g**  
CALIBRATION LABORATORY

Address: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42394633-2218 Fax: +86-10-42394633-2209  
E-mail: csl@tsaee.com.cn http://www.tsaee.com.cn

**DC Voltage Measurement**  
A/D - Converter Resistor nominal  
High Range: 1LSB = 6.1μV, full range = -100...+300 mV  
Low Range: 1LSB = 61mV, full range = -1...+30mV  
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.303 ± 0.15% (k=2)	404.822 ± 0.15% (k=2)	403.251 ± 0.15% (k=2)
Low Range	3.95425 ± 0.7% (k=2)	3.96301 ± 0.7% (k=2)	3.95640 ± 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	34.5° ± 1°
---	------------

Certificate No: Z17-97215 Page 3 of 3

EX3DV4 Sn:3708



Client: SRTC Certificate No: Z17-97214

### CALIBRATION CERTIFICATE

Object: EX3DV4 - SN:3708

Calibration Procedure(s): FF-Z11-004-01  
Calibration Procedures for Dosimetric E-field Probe

Calibration date: November 07, 2017

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(23±3)°C and humidity<70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	27-Jun-17 (CTTL No.J17X05857)	Jun-18
Power sensor NRP-Z81	101547	27-Jun-17 (CTTL No.J17X05857)	Jun-18
Power sensor NRP-Z91	101548	27-Jun-17 (CTTL No.J17X05857)	Jun-18
Reference 10dB Attenuator	18N58W-10dB	13-Mar-16(CTTL No.J16X01547)	Mar-18
Reference 20dB Attenuator	18N58W-20dB	13-Mar-16(CTTL No.J16X01548)	Mar-18
Reference Probe EX3DV4	SN 3617	23-Jan-17(SPEAQ No EX3-3617_Jan17)	Jan-18
DAE4	SN 549	13-Dec-16(SPEAQ No DAE4-549_Dec16)	Dec-17
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	620102805	27-Jun-17 (CTTL No.J17X05858)	Jun-18
Network Analyzer E5071C	MY48110673	13-Jan-17 (CTTL No.J17X00288)	Jan-18

Calibrated by: Yu Zongying SAR Test Engineer

Reviewed by: Lin Haa SAR Test Engineer

Approved by: Qi Chanyuan SAR Project Leader

Issued: November 09, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z17-97214 Page 1 of 12



Glossary:

TSL: tissue simulating liquid  
 NORM<sub>x,y,z</sub>: sensitivity in free space  
 ConvF: sensitivity in TSL / NORM<sub>x,y,z</sub>  
 DCP: diode compression point  
 CF: crest factor (10 duty cycle) of the RF signal  
 A,B,C,D: modulation dependent linearization parameters  
 Polarization Φ: rotation around probe axis  
 Polarization θ: rotation around an axis that is in the plane normal to probe axis (at measurement center, i θ=0 is normal to probe axis)  
 Connector Angle: information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013  
 b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016  
 c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010  
 d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization (φ) (500MHz in TEM-cell, >1800MHz: waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup> field uncertainty inside TSL (see below ConvF)
- NORM<sub>(x,y,z) = NORM<sub>(x,y,z)</sub> frequency\_response</sub>
- ConvF: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>, B<sub>x,y,z</sub>, C<sub>x,y,z</sub>, V<sub>R</sub>, j, z, A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for 1025MHz) and inside waveguide using analytical field distributions based on power measurements for f>600MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty value is given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> ConvF whereas the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from 50MHz to 100MHz.
- Spherical isotropy (3D deviation from isotropy): In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe lip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x,y,z</sub> (no uncertainty required).

Certificate No: Z17-97214 Page 2 of 12



Probe EX3DV4

SN: 3708

Calibrated: November 07, 2017  
 Calibrated for DASY/EASY Systems  
 (Note: non-compatible with DASY2 system)

Certificate No: Z17-97214 Page 3 of 12



DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3708

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm <sub>(V/ V<sub>ref</sub> )<sup>2</sup></sub>	0.19	0.36	0.44	±10.0%
DCP(mV) <sup>2</sup>	95.1	102.7	105.5	

Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB/μV	C	D dB	VR μV	Unc <sup>1</sup> (k=2)
0	CW	0.0	0.0	1.0	0.00	95.9	±3.1%
		0.0	0.0	1.0		149.0	
		0.0	0.0	1.0		169.4	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>1</sup> The uncertainties of Norm<sub>x,y,z</sub> do not affect the E<sup>2</sup> field uncertainty inside TSL (see Page 6 and Page 8).  
<sup>2</sup> Numerical linearization parameter: uncertainty not required.  
<sup>3</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: Z17-97214 Page 4 of 12

EX3DV4 Sn:3708



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Taifan District, Beijing, 100191, China  
Tel: +86-10-62104633-2218 Fax: +86-10-62104633-2209  
Email: csl@ttest.com.cn http://www.ttest.com.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3708

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Relative Permittivity <sup>1</sup>	Conductivity [S/m] <sup>2</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>3</sup>	Depth <sup>4</sup> (mm)	Unc. (k=2)
900	41.5	0.97	9.07	9.07	9.07	0.15	1.37	±12.1%
1810	40.0	1.40	7.77	7.77	7.77	0.24	1.04	±12.1%
2000	40.0	1.40	7.80	7.80	7.80	0.28	0.86	±12.1%
2450	39.2	1.80	7.19	7.19	7.19	0.34	1.03	±12.1%
5200	36.0	4.66	5.64	5.64	5.64	0.40	1.35	±13.3%
5300	35.9	4.78	5.43	5.43	5.43	0.40	1.35	±13.3%
5500	35.6	4.96	5.03	5.03	5.03	0.40	1.50	±13.3%
5600	35.5	5.07	4.89	4.89	4.89	0.40	1.80	±13.3%
5800	35.3	5.27	5.03	5.03	5.03	0.45	1.45	±13.3%

<sup>1</sup> Frequency validity above 300 MHz of a 100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 60 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ±110 MHz.  
<sup>2</sup> At frequency below 3 GHz, the validity of tissue parameters (x and y) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (x and y) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.  
<sup>3</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Taifan District, Beijing, 100191, China  
Tel: +86-10-62104633-2218 Fax: +86-10-62104633-2209  
Email: csl@ttest.com.cn http://www.ttest.com.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3708

Calibration Parameter Determined in Body Tissue Simulating Media

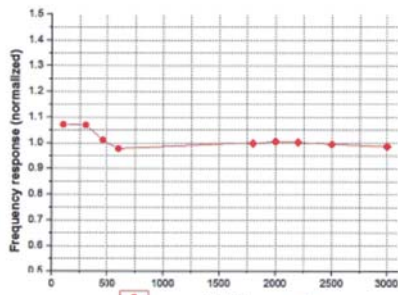
f [MHz]	Relative Permittivity <sup>1</sup>	Conductivity [S/m] <sup>2</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>3</sup>	Depth <sup>4</sup> (mm)	Unc. (k=2)
900	56.0	1.05	9.16	9.16	9.16	0.17	1.40	±12.1%
1810	53.3	1.52	7.70	7.70	7.70	0.20	1.13	±12.1%
2000	53.3	1.52	7.76	7.76	7.76	0.14	1.60	±12.1%
2450	52.7	1.98	7.30	7.30	7.30	0.68	0.70	±12.1%
5200	49.0	5.30	4.79	4.79	4.79	0.45	1.60	±13.3%
5300	48.9	5.42	4.56	4.56	4.56	0.45	1.80	±13.3%
5500	48.6	5.65	4.17	4.17	4.17	0.50	1.75	±13.3%
5600	48.5	5.77	4.10	4.10	4.10	0.50	1.60	±13.3%
5800	48.2	6.00	4.19	4.19	4.19	0.55	1.85	±13.3%

<sup>1</sup> Frequency validity above 300 MHz of a 100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±100MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 60 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ±110 MHz.  
<sup>2</sup> At frequency below 3 GHz, the validity of tissue parameters (x and y) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (x and y) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.  
<sup>3</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Taifan District, Beijing, 100191, China  
Tel: +86-10-62104633-2218 Fax: +86-10-62104633-2209  
Email: csl@ttest.com.cn http://www.ttest.com.cn

Frequency Response of E-Field  
(TEM-Cell: if110 EXX, Waveguide: R22)



Uncertainty of Frequency Response of E-field: ±7.4% (k=2)

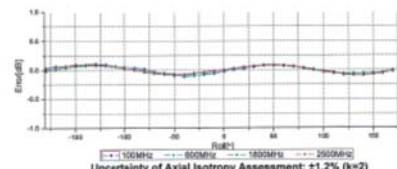
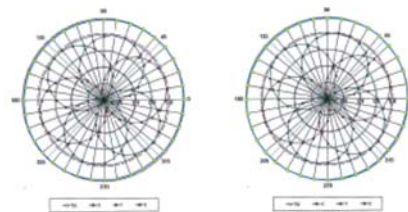


In Collaboration with  
TTL Calibration Laboratory  
Add: No.51 Xuyuan Road, Taifan District, Beijing, 100191, China  
Tel: +86-10-62104633-2218 Fax: +86-10-62104633-2209  
Email: csl@ttest.com.cn http://www.ttest.com.cn

Receiving Pattern (Φ, θ=0°)

f=600 MHz, TEM

f=1800 MHz, R22

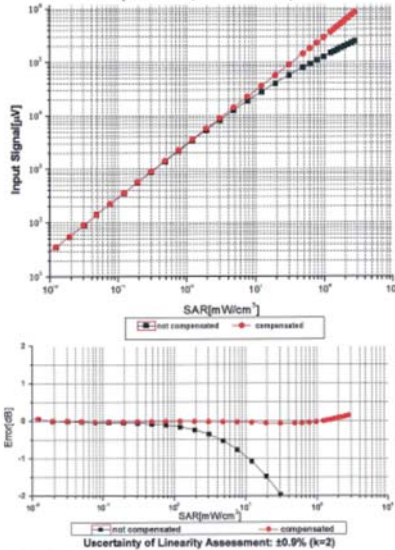


Uncertainty of Axial Isotropy Assessment: ±1.2% (k=2)

EX3DV4 Sn:3708



**Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell, f = 900 MHz)**

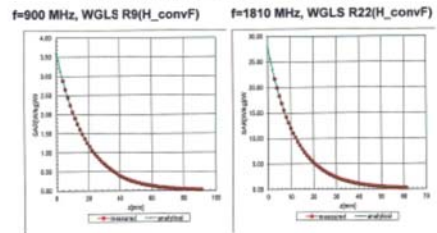


Certificate No: Z17-97214


Page 9 of 12



**Conversion Factor Assessment**



**Deviation from Isotropy in Liquid**



Certificate No: Z17-97214

Page 10 of 12



**DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3708**

**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	177.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

Certificate No: Z17-97214

Page 11 of 12



**Appendix (Additional assessments outside the scope of FCC approved dual-logo scope)**

**Modulation Calibration Parameters**

UID	Communication System Name	PAR	A dB	B dB-μV	C	VR mV	Unc <sup>1</sup> (k=2)
0	CW	0.00	X	0.0	0.0	1.0	95.9 ±3.1%
			Y	0.0	0.0	1.0	149.0
			Z	0.0	0.0	1.0	169.4
10011	UMTS-FDD (WCDMA)	2.91	X	2.97	64.29	16.82	147.4 ±1.8%
			Y	3.15	66.44	17.98	144.1
			Z	3.21	67.23	18.44	141.7
10021	GSM-FDD (TDMA GMSK)	9.59	X	0.95	57.62	9.60	48.2 ±2.4%
			Y	1.22	59.57	9.93	44.1
			Z	1.13	59.66	9.94	43.4
10062	IEEE 802.11a/b WiFi 5 GHz (OFDM 6 Mbps)	8.68	X	9.01	65.22	19.38	92.1 ±2.1%
			Y	8.26	63.95	18.73	71.9
			Z	8.53	64.77	19.13	85.3

Certificate No: Z17-97214

Page 12 of 12

-----End of the test report-----