

# Hearing Aid Compatibility (HAC)

## TEST REPORT

### <For RF-Emission Measurement>

|                      |  |
|----------------------|--|
| Applicant Name       | Hisense International Co.,Ltd                        |
| Address of Applicant | Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao |
| EUT Name             | mobile phone   |
| Brand Name           | Hisense  |
| Model No.            | VH777  |
| FCC ID               | 2ADOBVH777   |
| Date of receive      | Jan. 05, 2015  |
| Date of Test(s)      | Jan. 09, 2015  |
| Date of Issue        | Jan. 30, 2015  |

Standards:

### ANSI C63.19-2011

**FCC RULE PART(S): 47 CFR PART 20.19(B)**
**HAC CATEGORY: M3 (M Category)**


In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronics & Communication Laboratory or testing done by SGS Taiwan Electronics & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronics & Communication Laboratory in writing.

**Signed on behalf of SGS**
**Engineer**
**Sam Kuo**
**Date: Jan. 30, 2015**

**Sr. Engineer**
**John Yeh**
**Date: Jan. 30, 2015**


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### Revision Version

| Report Number | Revision | Description     | Issue Date    |
|---------------|----------|-----------------|---------------|
| E5/2015/10001 | 00       | Initial Version | Jan. 30, 2015 |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |
|               |          |                 |               |

**This test report contains a reference to the previous version test report that it replaces.**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Table of Contents

|  |    |
|--|----|
| 1. Introduction .....  | 4  |
| 2. Testing Laboratory .....                                  | 5  |
| 3. Details of Applicant .....                                | 5  |
| 4. Description of EUT .....                                  | 5  |
| 5. Air Interfaces and Bands .....                            | 7  |
| 6. Test Environment .....                                    | 7  |
| 7. Description of test system .....                          | 8  |
| 8. Test Procedure .....                                      | 11 |
| 9. System Verification .....                                 | 13 |
| 10. Modulation Interference Factor .....                     | 14 |
| 11. Measured conducted output power .....                    | 15 |
| 12. Justification of held to ear modes tested .....          | 16 |
| 13. ANSI C63.19-2011 performance and categories .....        | 17 |
| 14. Instruments List .....                                   | 18 |
| 15. Summary of Results .....                                 | 19 |
| 16. Measurement Data .....                                   | 20 |
| 17. System Verification .....                                | 30 |
| 18. DAE & Probe Calibration Certificate .....                | 33 |
| 19. Uncertainty Budget .....                                 | 49 |
| 20. System Validation from Original Equipment Supplier ..... | 50 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1. Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

- a) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD:

RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indicating compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 2. Testing Laboratory

|                 |  |
|-----------------|--|
| Company Name    | SGS Taiwan Ltd. Electronics & Communication Laboratory                                   |
| Company address | No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan |
| Telephone       | +886-2-2299-3279   |
| Fax             | +886-2-2298-0488   |
| Website         | http://www.tw.sgs.com/   |

## 3. Details of Applicant

|                   |  |
|-------------------|--|
| Applicant Name    | Hisense International Co.,Ltd                        |
| Applicant Address | Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao |

## 4. Description of EUT

|                   |   |   |  |
|-------------------|---|---|--|
| EUT Name          | mobile phone  |   |  |
| Brand Name        | Hisense   |   |  |
| Model No.         | VH777   |   |  |
| FCC ID            | 2ADOBVH777  |   |  |
| MEID              | 99000553000232  |   |  |
| IMEI              | 990005530002329   |   |  |
| Mode of Operation | <input checked="" type="checkbox"/> LTE FDD   | <input checked="" type="checkbox"/> LTE TDD | <input checked="" type="checkbox"/> CDMA 1xRTT<br><input checked="" type="checkbox"/> WLAN802.11 b/g/n (20M) |
|                   | <input checked="" type="checkbox"/> CDMA EVDO Rev.0/ Rev.A<br><input checked="" type="checkbox"/> Bluetooth |   |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

|                             |                                    |         |   |         |
|-----------------------------|------------------------------------|---------|---|---------|
| Duty Cycle                  | LTE FDD                            | 1       |   |         |
|                             | LTE TDD                            | 0.633   |   |         |
|                             | CDMA 1xRTT /<br>EVDO Rev.0/ Rev. A | 1       |   |         |
|                             | WLAN 802.11 b/g/n(20M)             | 1       |   |         |
|                             | Bluetooth                          | 1       |   |         |
| TX Frequency Range<br>(MHz) | LTE FDD Band XXV                   | 1850    | — | 1915    |
|                             | LTE FDD Band XXVI                  | 814     | — | 849     |
|                             | LTE TDD Band XLI                   | 2496    | — | 2690    |
|                             | CDMA (BC0)                         | 824.7   | — | 848.31  |
|                             | CDMA (BC1)                         | 1851.25 | — | 1908.75 |
|                             | CDMA (BC10)                        | 817.9   | — | 823.1   |
|                             | WLAN 802.11 b/g/n(20M)             | 2412    | — | 2462    |
|                             | Bluetooth                          | 2402    | — | 2480    |
| Channel Number<br>(ARFCN)   | LTE FDD Band XXV                   | 26140   | — | 26590   |
|                             | LTE FDD Band XXVI                  | 26740   | — | 26990   |
|                             | LTE TDD Band XLI                   | 39675   | — | 41490   |
|                             | CDMA (BC0)                         | 1013    | — | 777     |
|                             | CDMA (BC1)                         | 25      | — | 1175    |
|                             | CDMA (BC10)                        | 476     | — | 684     |
|                             | WLAN 802.11 b/g/n(20M)             | 1       | — | 11      |
|                             | Bluetooth                          | 0       | — | 78      |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 5. Air Interfaces and Bands

| Air- Interface          | Band (MHZ) | Type Transport | C63.19 tested | Simultaneous Transmitter but not tested | Voice Over Digital Transport OTT capability |
|-------------------------|------------|----------------|---------------|---|---|
| CDMA 1xRTT              | CDMA(BC0)  | VO             | Yes           | Yes, WiFi or Bluetooth                  | No  |
|                         | CDM (BC1)  |                |               |   | No  |
|                         | CDMA(BC10) |                |               |   | No  |
| CDMA EVDO Rev.0/ Rev. A | CDMA(BC0)  | DT             | NA            | Yes, WiFi or Bluetooth                  | Yes   |
|                         | CDM (BC1)  |                |               |   | Yes   |
|                         | CDMA(BC10) |                |               |   | Yes   |
| LTE                     | Band 25    | DT             | NA            | Yes, WiFi or Bluetooth                  | Yes   |
|                         | Band 26    |                |               |   | Yes   |
|                         | Band 41    |                |               |   | Yes   |
| WiFi                    | 2450       | DT             | NA            | Yes, CDMA/LTE                           | Yes   |
| Bluetooth               | 2450       | DT             | NA            | Yes, CDMA/LTE                           | No  |

VO= CMRS Voice Service  
DT= Digital Transport

## 6. Test Environment

|                     |         |
|---------------------|---------|
| Ambient Temperature | 21.7° C |
| Relative Humidity   | <80 %   |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 7. Description of test system

### 7.1 Measurement system Diagram for SPEAG Robotic

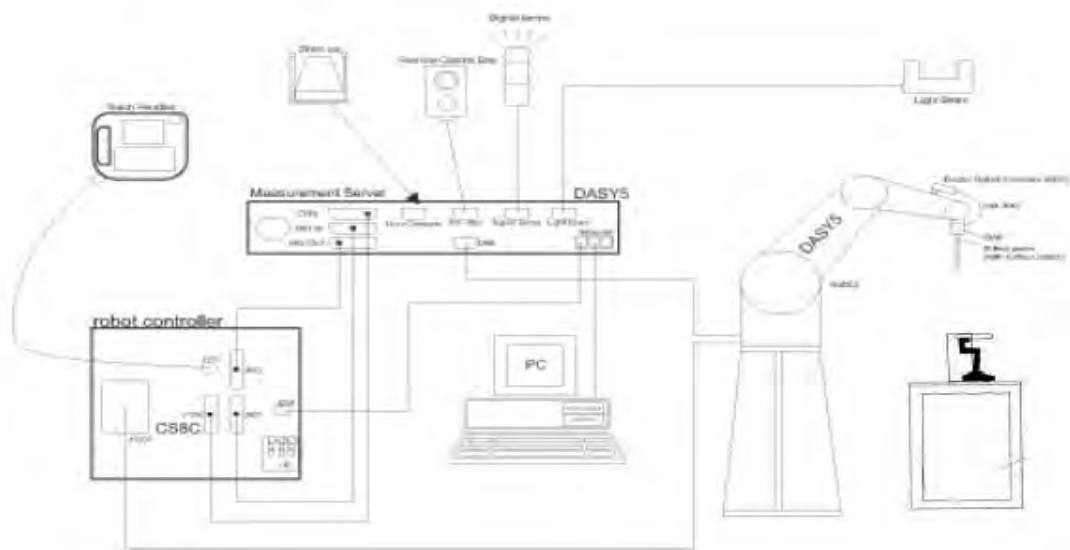


Fig.1 The SPEAG Robotic Diagram

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- E Field probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch phantom.
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 7.2 E Field Probe
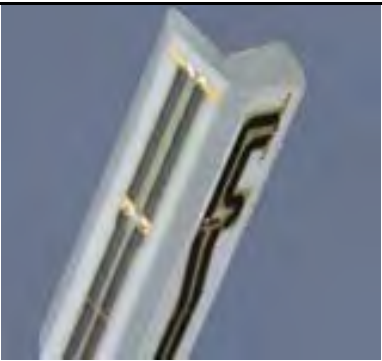
|               |   |   |
|---------------|---|---|
| Construction  | One dipole parallel, two dipoles normal to probe axis<br>Built-in shielding against static charges<br>PEEK enclosure material | <br>ER3DV6 E-Field Probe |
| Calibration   | In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )   |   |
| Frequency     | (extended to 20 MHz for MRI), Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)  |   |
| Directivity   | $\pm 0.2$ dB in air (rotation around probe axis)<br>$\pm 0.4$ dB in air (rotation normal to probe axis)                       |   |
| Dynamic Range | 2 V/m to > 1000 V/m; Linearity: $\pm 0.2$ dB  |   |
| Dimensions    | Tip diameter: 8 mm<br>Distance from probe tip to dipole centers: 2.5 mm   |   |

## 7.3 Test Arch

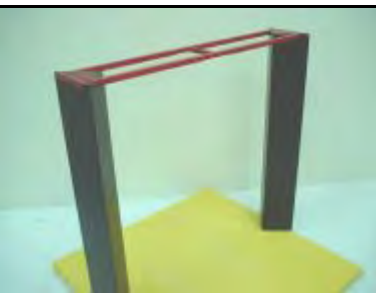
|             |  |  |
|-------------|--|--|
| Description | Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot. | <br>Test Arch |
| Dimensions  | length: 370 mm<br>width: 370 mm<br>height: 370 mm  |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 7.4 Phone Holder

|                    |   |   |
|--------------------|---|---|
| <p>Description</p> | <p>Supports accurate and reliable positioning of any phone Effect on near field &lt; +/- 0.5 dB</p> |  <p>Phone Holder</p> |
|--------------------|---|---|

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 8. Test Procedure

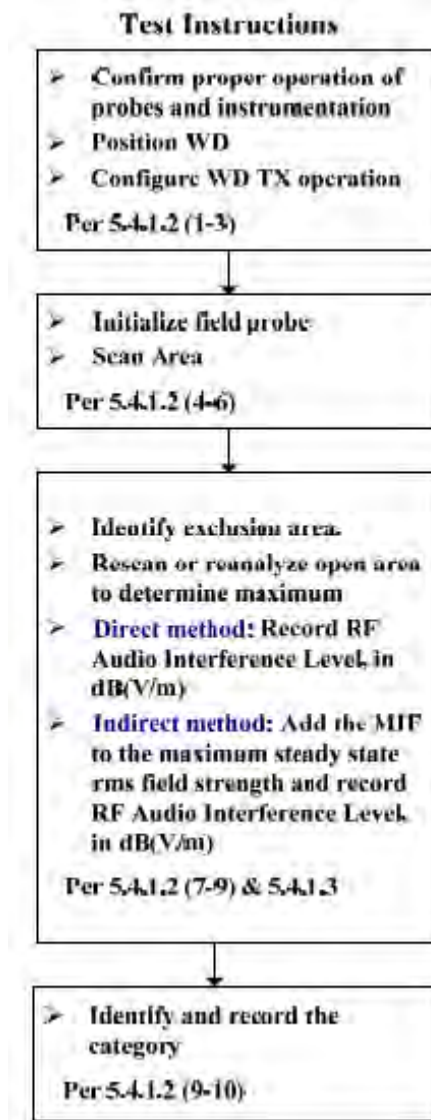


Fig.2 RF emission flow chart

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The following illustrate a typical RF emissions test scan over a wireless communications device (Indirect method):

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 5mm increments in the 5 × 5 cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.

**Note.**

#. Per KDB 285076 D01 v04 item 10)a, handsets that have the ability to support “concurrent connections” using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2011 separately.

At the present time the ANSI C63.19 standard does not provide simultaneous transmission test procedures.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 9. System Verification

A dipole antenna meeting the requirements given in ANSI C63.19-2011 was placed in the position normally occupied by the WD.

The length of the dipole was scanned by E-field probes and the maximum values for each were recorded.

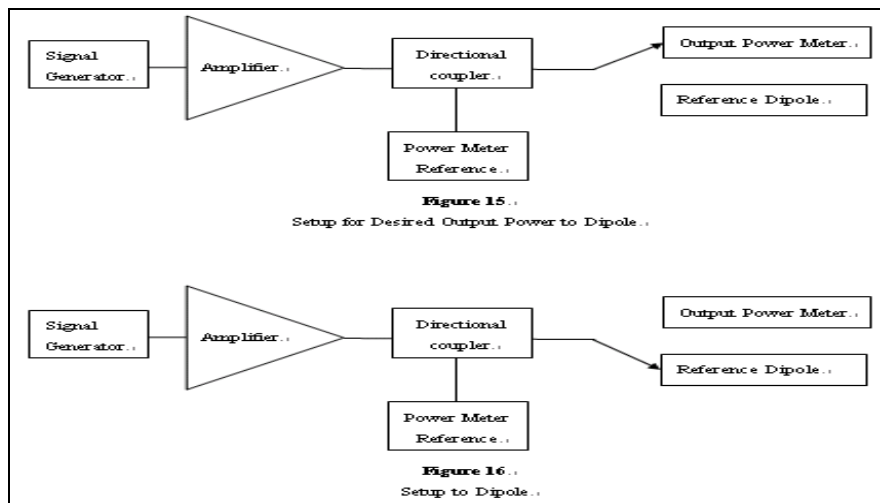


Fig.3 System verification

For E-Field Scan

| Mode | Frequency (MHz) | Input Power(dBm) | Measured Value(V/m) | Target Value(V/m) | Measured Date |
|------|-----------------|------------------|---------------------|-------------------|---------------|
| CW   | 835             | 20               | 114.3               | 111.7             | Jan. 09, 2015 |
| CW   | 1880            | 20               | 91.95               | 92.96             | Jan. 09, 2015 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 10. Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The MIF may be determined using a radiated RF field or a conducted RF signal,

- b) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
- c) Measure the steady-state rms level at the output of the fast probe or sensor.
- d) Measure the steady-state average level at the weighting output.
- e) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.
- f) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.
- g) The MIF for the specific modulation characteristic is provided by the ratio of the step f) measurement to the step c) measurement, expressed in dB ( $20 \times \log(\text{step f})/\text{step c}$ )).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Based on the KDB285076 D01, the handset can also use the MIF values predetermined by the test equipment manufacturer, and the following table lists the MIF values evaluated by DASY manufacturer (SPEAG), and the test result will be calculated with the MIF parameter automatically.

| SPEAG UID | UID version      | Communication system              | MIF(dB) |
|-----------|------------------|-----------------------------------|---------|
| 10081     | CAB (16.01.2014) | CDMA(SO3; RC3; full frame rate)   | -19.71  |
| 10295     | AAB (16.01.2014) | CDMA(SO3; RC1; 1/8 th frame rate) | 3.26    |

## 11. Measured conducted output power

| Band                                      | Channel | Average power(dBm) |
|---|---------|--------------------|
| CDMA<br>1xRTT<br>cellular(BC0)<br>SO3;RC3 | 1013    | 23.84              |
|   | 384     | 23.92              |
|   | 777     | 23.79              |
| CDMA<br>1xRTT<br>cellular(BC0)<br>SO3;RC1 | 1013    | 23.71              |
|   | 384     | 23.82              |
|   | 777     | 23.69              |
| CDMA<br>1xRTT<br>PCS(BC1)<br>SO3;RC3      | 25      | 23.91              |
|   | 600     | 23.99              |
|   | 1175    | 23.98              |
| CDMA<br>1xRTT<br>PCS(BC1)<br>SO3;RC1      | 25      | 23.82              |
|   | 600     | 23.91              |
|   | 1175    | 23.92              |
| CDMA<br>1xRTT BC10<br>SO3;RC3             | 476     | 23.86              |
|   | 560     | 23.84              |
|   | 684     | 23.62              |
| CDMA<br>1xRTT BC10<br>SO3;RC1             | 476     | 23.82              |
|   | 560     | 23.79              |
|   | 684     | 23.65              |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 12. Justification of held to ear modes tested

### I. Analysis of RF air interface technologies

- a. LTE, WiFi and other OTT data services are outside the current definition of a managed CMRS service and are currently not required to be evaluated.
- b. Based on ANSI. C63.19-2011. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is  $\leq 17$  dBm for any of its operating modes. If a device supports multiple RF air interfaces, each RF air interface shall be evaluated individually.

The MIF plus the worst case average power for all modes are investigated below to determine the testing requirements for this device.

### II. Low power exemption

| Air interference         | Maximum average power (dB) | MIF (dB) | Power+MIF (dB) | ANSI C63.19 2011 test required |
|--------------------------|----------------------------|----------|----------------|--------------------------------|
| CDMA<br>1xRTT<br>SO3;RC3 | 23.99                      | -19.71   | 4.28           | No                             |
| CDMA<br>1xRTT<br>SO3;RC1 | 23.92                      | 3.26     | 27.18          | Yes                            |

# We used the predetermined MIF to evaluate the low power exemption.

# Based on ANSI. C63.19 2011, RF emission testing for CDMA 1xRTT SO3;RC3 is exempted.

# Based on ANSI. C63.19 2011, CDMA 1xRTT SO3;RC3 that is exempted from testing shall be rated as M4.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 13. ANSI C63.19-2011 performance and categories

The measurements were performed to ensure compliance to the ANSI C63.19-2011 standard,

| Category | E-Field Emissions dB(V/m) < 960MHz |
|----------|------------------------------------|
| M1       | 50-55                              |
| M2       | 45-50                              |
| M3       | 40-45                              |
| M4       | <40                                |

| Category | E-Field Emissions dB(V/m) > 960MHz |
|----------|------------------------------------|
| M1       | 40-45                              |
| M2       | 35-40                              |
| M3       | 30-35                              |
| M4       | <30                                |

WD RF audio interference level categories in logarithmic units

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 14. Instruments List

| Manufacturer                    | Device                                | Type             | Serial number | Date of last calibration | Date of next calibration |
|---------------------------------|---------------------------------------|------------------|---------------|--------------------------|--------------------------|
| Schmid & Partner Engineering AG | E-Field Probe                         | ER3DV6           | 2302          | Jun.18,2014              | Jun.17,2015              |
| Schmid & Partner Engineering AG | 835/1880 MHz System Validation Dipole | CD835V3          | 1052          | Mar.25,2014              | Mar.24,2015              |
|                                 |                                       | CD1880V3         | 1044          | Mar.25,2014              | Mar.24,2015              |
| Schmid & Partner Engineering AG | Data acquisition Electronics          | DAE4             | 1374          | Nov.18,2014              | Nov.17,2015              |
| Schmid & Partner Engineering AG | Software                              | DASY52<br>52.8.8 | N/A           | Calibration not required | Calibration not required |
| Agilent                         | Dielectric Probe Kit                  | 85070D           | US01440168    | Calibration not required | Calibration not required |
| Agilent                         | Dual-directional coupler              | 778D             | MY48220468    | Apr.01,2014              | Mar.31,2015              |
| Agilent                         | RF Signal Generator                   | N5181A           | MY50141235    | Dec.24,2013              | Dec.23,2016              |
| R&S                             | Radio Communication Test              | CMU200           | 113505        | May.08,2014              | May.07,2015              |
| Schmid & Partner Engineering AG | Test Arch SD HAC                      | P01              | 1047          | Calibration not required | Calibration not required |
| Agilent                         | Power Meter                           | E4417A           | MY51410006    | Oct.25,2013              | Oct.24,2015              |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 15. Summary of Results

### E-Field

| E-Field Emission | Channel | Modulation Interference Factor | Conducted Power (dBm) | Power Drift(dB) | Audio Interference Level dB(V/m) | RESULT | Excl Blocks per 4.3.1.2.2 |
|------------------|---------|--------------------------------|-----------------------|-----------------|----------------------------------|--------|---------------------------|
| CDMA (BC0)       | 1013    | 3.26                           | 23.71                 | 0.04            | 38.42                            | M4     | 698                       |
|                  | 384     | 3.26                           | 23.82                 | -0.07           | 38.57                            | M4     | 698                       |
|                  | 777     | 3.26                           | 23.69                 | 0.01            | 40.47                            | M3     | 698                       |
| E-Field Emission | Channel | Modulation Interference Factor | Conducted Power (dBm) | Power Drift(dB) | Audio Interference Level dB(V/m) | RESULT | Excl Blocks per 4.3.1.2.2 |
| CDMA (BC1)       | 25      | 3.26                           | 23.82                 | 0.04            | 33.51                            | M3     | 698                       |
|                  | 600     | 3.26                           | 23.91                 | 0               | 34.52                            | M3     | 698                       |
|                  | 1175    | 3.26                           | 23.92                 | -0.01           | 34.81                            | M3     | 789                       |
| E-Field Emission | Channel | Modulation Interference Factor | Conducted Power (dBm) | Power Drift(dB) | Audio Interference Level dB(V/m) | RESULT | Excl Blocks per 4.3.1.2.2 |
| CDMA (BC10)      | 476     | 3.26                           | 23.82                 | -0.04           | 38.15                            | M4     | 698                       |
|                  | 560     | 3.26                           | 23.79                 | 0.06            | 38.32                            | M4     | 698                       |
|                  | 684     | 3.26                           | 23.65                 | 0.07            | 38.33                            | M4     | 698                       |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 16. Measurement Data

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC0)\_CH1013

Communication System: CDMA; Frequency: 824.7 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.58 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 38.42 dBV/m

**Emission category: M4**

MIF scaled E-field

|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>36.03 dBV/m</b> | Grid 2 <b>M4</b><br><b>37.7 dBV/m</b>  | Grid 3 <b>M4</b><br><b>37.7 dBV/m</b>  |
| Grid 4 <b>M4</b><br><b>36.5 dBV/m</b>  | Grid 5 <b>M4</b><br><b>38.42 dBV/m</b> | Grid 6 <b>M4</b><br><b>38.45 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>36.64 dBV/m</b> | Grid 8 <b>M4</b><br><b>38.18 dBV/m</b> | Grid 9 <b>M4</b><br><b>38.2 dBV/m</b>  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Cursor:**

Total = 38.45 dBV/m

E Category: M4

Location: -10, 1, 8.7 mm

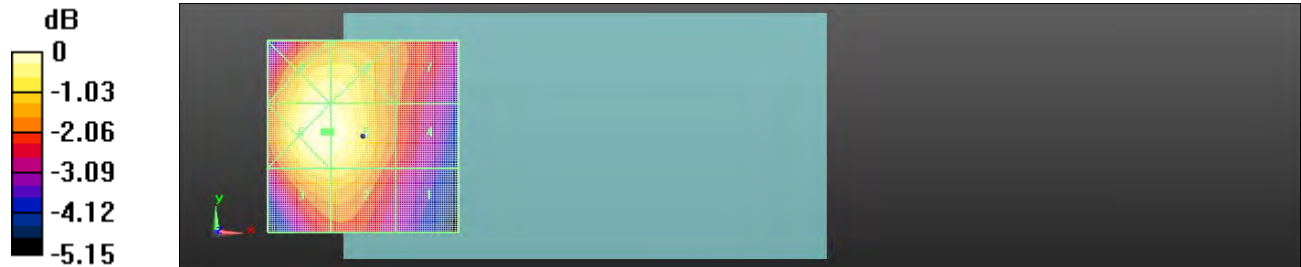

0 dB = 83.69 V/m = 38.45 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC0)\_CH384

Communication System: CDMA; Frequency: 836.52 MHz  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: RF Section  
 DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 79.03 V/m; Power Drift = -0.07 dB  
 Applied MIF = 3.26 dB  
 RF audio interference level = 38.57 dBV/m


### Emission category: M4

MIF scaled E-field

|                                 |                                 |                                 |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4<br><b>37.4 dBV/m</b>  | Grid 2 M4<br><b>38.29 dBV/m</b> | Grid 3 M4<br><b>38.25 dBV/m</b> |
| Grid 4 M4<br><b>37.78 dBV/m</b> | Grid 5 M4<br><b>38.57 dBV/m</b> | Grid 6 M4<br><b>38.52 dBV/m</b> |
| Grid 7 M4<br><b>37.76 dBV/m</b> | Grid 8 M4<br><b>38.35 dBV/m</b> | Grid 9 M4<br><b>38.24 dBV/m</b> |

### Cursor:

Total = 38.57 dBV/m  
 E Category: M4  
 Location: -4.5, -0.5, 8.7 mm

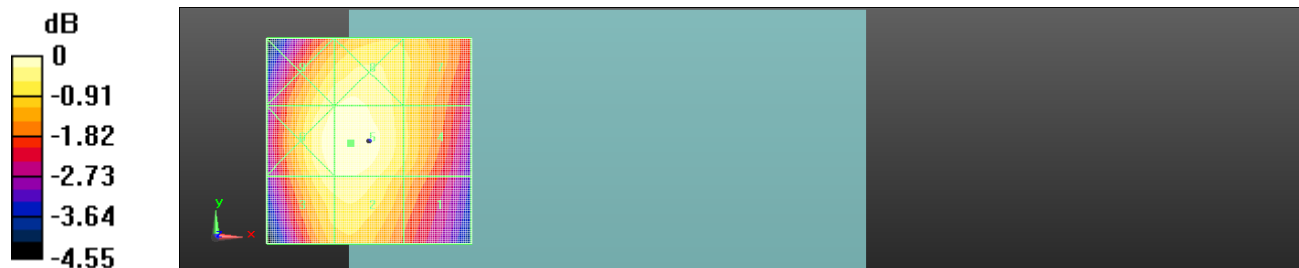

0 dB = 84.84 V/m = 38.57 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC0)\_CH777

Communication System: CDMA; Frequency: 848.31 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 98.38 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 40.47 dBV/m

**Emission category: M3**

MIF scaled E-field



|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>39.24 dBV/m</b> | Grid 2 <b>M3</b><br><b>40.15 dBV/m</b> | Grid 3 <b>M4</b><br><b>40 dBV/m</b>    |
| Grid 4 <b>M4</b><br><b>39.76 dBV/m</b> | Grid 5 <b>M3</b><br><b>40.47 dBV/m</b> | Grid 6 <b>M3</b><br><b>40.31 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>39.82 dBV/m</b> | Grid 8 <b>M3</b><br><b>40.25 dBV/m</b> | Grid 9 <b>M3</b><br><b>40.01 dBV/m</b> |

**Cursor:**

Total = 40.47 dBV/m

E Category: M3

Location: -2.5, 0.5, 8.7 mm

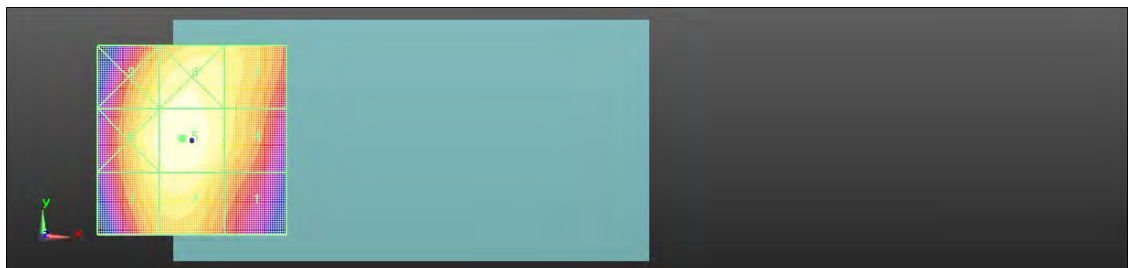

0 dB = 105.5 V/m = 40.47 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA PCS(BC1)\_CH25

Communication System: CDMA; Frequency: 1851.25 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.65 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 33.51 dBV/m

**Emission category: M3**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M3</b><br><b>33.37 dBV/m</b> | Grid 2 <b>M3</b><br><b>33.51 dBV/m</b> | Grid 3 <b>M3</b><br><b>32.2 dBV/m</b>  |
| Grid 4 <b>M3</b><br><b>30.23 dBV/m</b> | Grid 5 <b>M3</b><br><b>33.31 dBV/m</b> | Grid 6 <b>M3</b><br><b>33.29 dBV/m</b> |
| Grid 7 <b>M3</b><br><b>33 dBV/m</b>    | Grid 8 <b>M3</b><br><b>34.82 dBV/m</b> | Grid 9 <b>M3</b><br><b>34.66 dBV/m</b> |

**Cursor:**

Total = 34.82 dBV/m

E Category: M3

Location: -4.5, 23.5, 8.7 mm

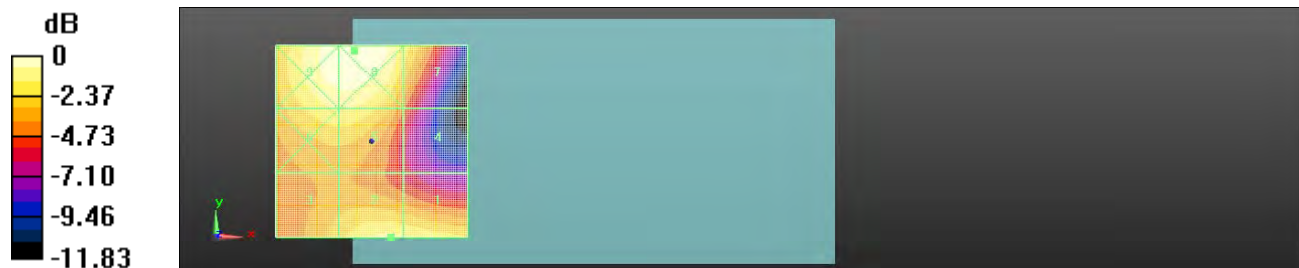

0 dB = 55.07 V/m = 34.82 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Date: 2015/1/9

### HAC-E\_CDMA PCS(BC1)\_CH600

Communication System: CDMA; Frequency: 1880 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.23 V/m; Power Drift = 0.00 dB

Applied MIF = 3.26 dB

RF audio interference level = 34.52 dBV/m

**Emission category: M3**

MIF scaled E-field



|  |  |  |
|--|--|--|
| Grid 1 <b>M3</b><br><b>34.32 dBV/m</b> | Grid 2 <b>M3</b><br><b>34.52 dBV/m</b> | Grid 3 <b>M3</b><br><b>33.36 dBV/m</b> |
| Grid 4 <b>M3</b><br><b>30.11 dBV/m</b> | Grid 5 <b>M3</b><br><b>33.46 dBV/m</b> | Grid 6 <b>M3</b><br><b>33.45 dBV/m</b> |
| Grid 7 <b>M3</b><br><b>33.23 dBV/m</b> | Grid 8 <b>M2</b><br><b>35.23 dBV/m</b> | Grid 9 <b>M2</b><br><b>35.15 dBV/m</b> |

**Cursor:**

Total = 35.23 dBV/m

E Category: M2

Location: -5.5, 23.5, 8.7 mm

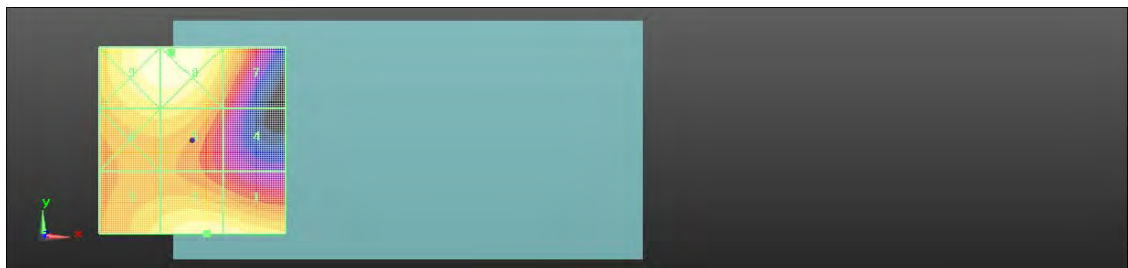

0 dB = 57.77 V/m = 35.23 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/09

### HAC-E\_CDMA PCS(BC1)\_CH1175

Communication System: CDMA2000: Frequency: 1902.75 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.30 V/m; Power Drift = -0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 34.81 dBV/m

**Emission category: M3**

MIF scaled E-field



|  |  |  |
|--|--|--|
| Grid 1 <b>M3</b><br><b>34.79 dBV/m</b> | Grid 2 <b>M3</b><br><b>34.81 dBV/m</b> | Grid 3 <b>M3</b><br><b>33.75 dBV/m</b> |
| Grid 4 <b>M3</b><br><b>31.75 dBV/m</b> | Grid 5 <b>M3</b><br><b>33.82 dBV/m</b> | Grid 6 <b>M3</b><br><b>33.68 dBV/m</b> |
| Grid 7 <b>M3</b><br><b>34.39 dBV/m</b> | Grid 8 <b>M2</b><br><b>35.99 dBV/m</b> | Grid 9 <b>M2</b><br><b>35.54 dBV/m</b> |

**Cursor:**

Total = 35.99 dBV/m

E Category: M2

Location: -1.5, 25, 8.7 mm

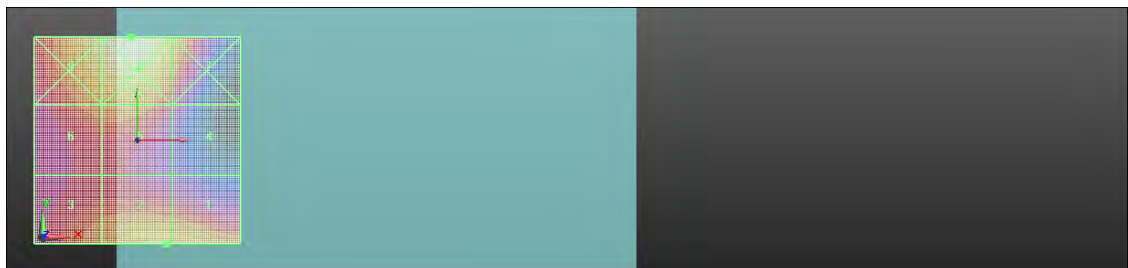

0 dB = 63.03 V/m = 35.99 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC10)\_CH476

Communication System: CDMA; Frequency: 817.9 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 65.41 V/m; Power Drift = -0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 38.15 dBV/m

**Emission category: M4**

MIF scaled E-field



|                                 |                                 |                                 |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 M4<br><b>35.42 dBV/m</b> | Grid 2 M4<br><b>37.38 dBV/m</b> | Grid 3 M4<br><b>37.39 dBV/m</b> |
| Grid 4 M4<br><b>35.99 dBV/m</b> | Grid 5 M4<br><b>38.15 dBV/m</b> | Grid 6 M4<br><b>38.19 dBV/m</b> |
| Grid 7 M4<br><b>36.15 dBV/m</b> | Grid 8 M4<br><b>37.96 dBV/m</b> | Grid 9 M4<br><b>37.99 dBV/m</b> |

**Cursor:**

Total = 38.19 dBV/m

E Category: M4

Location: -10.5, 1.5, 8.7 mm

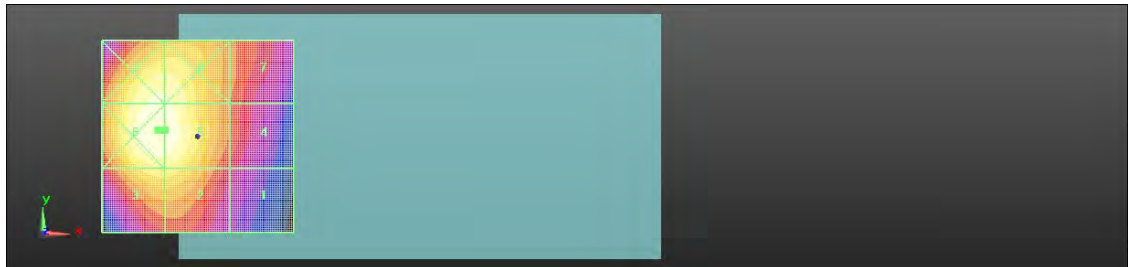

0 dB = 81.15 V/m = 38.19 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC10)\_CH560

Communication System: CDMA; Frequency: 820 MHz

 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 66.74 V/m; Power Drift = 0.06 dB

Applied MIF = 3.26 dB

RF audio interference level = 38.32 dBV/m

**Emission category: M4**

MIF scaled E-field



|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>35.55 dBV/m | Grid 2 M4<br>37.56 dBV/m | Grid 3 M4<br>37.56 dBV/m |
| Grid 4 M4<br>36.1 dBV/m  | Grid 5 M4<br>38.32 dBV/m | Grid 6 M4<br>38.37 dBV/m |
| Grid 7 M4<br>36.35 dBV/m | Grid 8 M4<br>38.12 dBV/m | Grid 9 M4<br>38.15 dBV/m |

**Cursor:**

Total = 38.37 dBV/m

E Category: M4

Location: -10, 1, 8.7 mm

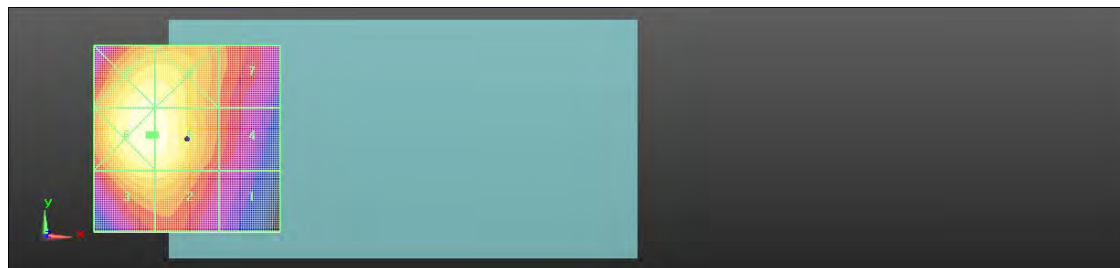

0 dB = 82.92 V/m = 38.37 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/9

### HAC-E\_CDMA Cellular(BC10)\_CH684

Communication System: CDMA; Frequency: 823.1 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 68.43 V/m; Power Drift = 0.07 dB

Applied MIF = 3.26 dB

RF audio interference level = 38.33 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>35.87 dBV/m</b> | Grid 2 <b>M4</b><br><b>37.61 dBV/m</b> | Grid 3 <b>M4</b><br><b>37.61 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>36.32 dBV/m</b> | Grid 5 <b>M4</b><br><b>38.33 dBV/m</b> | Grid 6 <b>M4</b><br><b>38.37 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>36.5 dBV/m</b>  | Grid 8 <b>M4</b><br><b>38.1 dBV/m</b>  | Grid 9 <b>M4</b><br><b>38.12 dBV/m</b> |

**Cursor:**

Total = 38.37 dBV/m

E Category: M4

Location: -10.5, 1.5, 8.7 mm

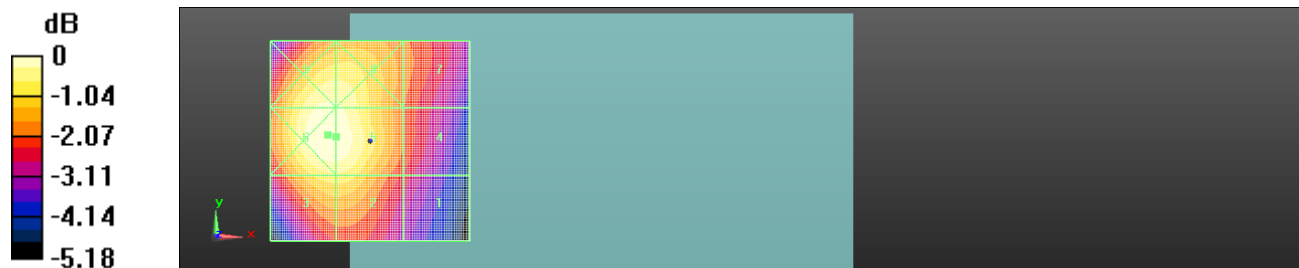

0 dB = 82.93 V/m = 38.37 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 17. System Verification

Date: 2015/1/09

### Dipole CD835\_SN:1052

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole E-Field measurement:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 129.2 V/m; Power Drift = -0.03 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 114.3 V/m

**Near-field category: M4 (AWF 0 dB)**

PMF scaled E-field

|                               |                               |                               |
|-------------------------------|-------------------------------|-------------------------------|
| Grid 1 M4<br><b>115.5 V/m</b> | Grid 2 M4<br><b>122.8 V/m</b> | Grid 3 M4<br><b>122.7 V/m</b> |
| Grid 4 M4<br><b>65.86 V/m</b> | Grid 5 M4<br><b>67.30 V/m</b> | Grid 6 M4<br><b>66.54 V/m</b> |
| Grid 7 M4<br><b>113.6 V/m</b> | Grid 8 M4<br><b>114.3 V/m</b> | Grid 9 M4<br><b>112.2 V/m</b> |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Cursor:**

Total = 122.8 V/m

E Category: M4

Location: -2.5, -77.5, 9.7 mm

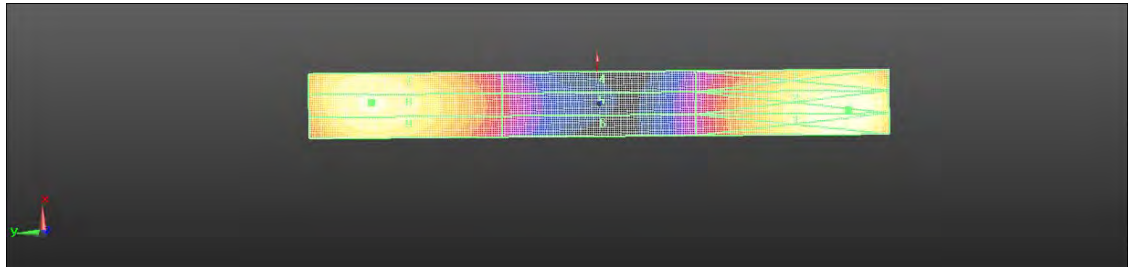

$0 \text{ dB} = 122.8 \text{ V/m} = 41.78 \text{ dBV/m}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2015/1/09

**Dipole CD1880\_SN:1044**

Communication System: CW; Frequency: 1880 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2014/6/18;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2014/11/18
- Phantom: HAC Test Arch
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole E-Field measurement:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 136.3 V/m; Power Drift = -0.01 dB  
PMR not calibrated. PMF = 1.000 is applied.  
E-field emissions = 91.95 V/m


**Near-field category: M3 (AWF 0 dB)**

PMF scaled E-field

|                               |                               |                               |
|-------------------------------|-------------------------------|-------------------------------|
| Grid 1 M3<br><b>90.44 V/m</b> | Grid 2 M3<br><b>91.95 V/m</b> | Grid 3 M3<br><b>90.63 V/m</b> |
| Grid 4 M3<br><b>73.20 V/m</b> | Grid 5 M3<br><b>74.52 V/m</b> | Grid 6 M3<br><b>74.02 V/m</b> |
| Grid 7 M3<br><b>90.79 V/m</b> | Grid 8 M3<br><b>92.49 V/m</b> | Grid 9 M3<br><b>91.20 V/m</b> |

**Cursor:**

Total = 92.49 V/m  
E Category: M3  
Location: 0, 30.5, 9.7 mm

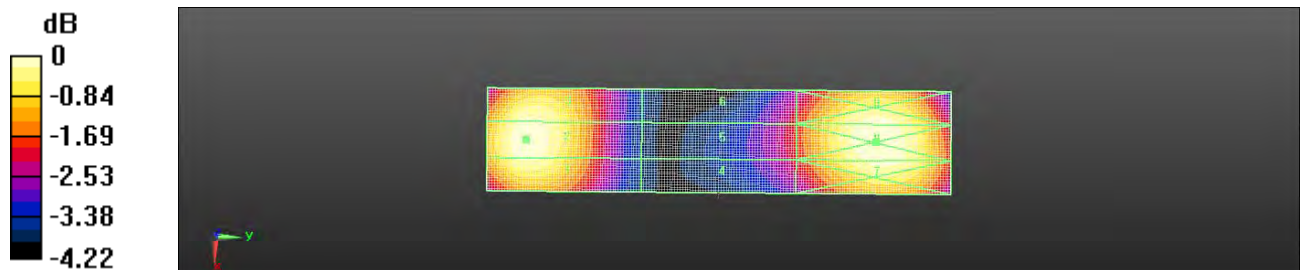

0 dB = 92.49 V/m = 39.32 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 18. DAE & Probe Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **DAE4-1374\_Nov14**

| CALIBRATION CERTIFICATE   |   |                            |                           |
|---|---|----------------------------|---------------------------|
| Object  | DAE4 - SD 000 D04 BM - SN: 1374   |                            |                           |
| Calibration procedure(s)  | QA CAL-06.v28<br>Calibration procedure for the data acquisition electronics (DAE) |                            |                           |
| Calibration date:   | November 18, 2014   |                            |                           |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties, with confidence probability are given on the following pages and are part of the certificate. |   |                            |                           |
| All calibrations have been conducted in the dried laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.   |   |                            |                           |
| Calibration Equipment used (M&PE critical for calibration)  |   |                            |                           |
| Primary Standards   | ID #  | Cal Date (Certificate No.) | Scheduled Calibration     |
| Kethley Multimeter Type 2001  | BN: 0810278   | 03-Oct-14 (No:15573)       | Oct-15                    |
| Secondary Standards   | ID #  | Check Date (in house)      | Scheduled Check           |
| Auto DAE Calibration Unit   | SE UWS 063 AA 1001  | 07-Jan-14 (in house check) | In house check: Jan-15    |
| Calibrator Box V2.1   | SE UMS 008 AA 1002  | 07-Jan-14 (in house check) | In house check: Jan-15    |
| Continued by:   | Name: Dominique Staffen   | Function: Technician       | Signature:                |
| Approved by:  | Fin Böhrlind  | Deputy Technical Manager   | Signature:                |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.   |   |                            | Issued: November 18, 2014 |

Certificate No: DAE4-1374\_Nov14

Page 1 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerische Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information: Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1574\_15q1A

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.tw.sgs.com](http://www.tw.sgs.com)

Member of SGS Group

**DC Voltage Measurement**

AD - Converter Resolution nominal

High Range: 1LSB = 6.1µV , full range = -100...+300 mV  
 Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                     | Y                     | Z                     |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range          | 405.035 ± 0.02% (k=2) | 405.315 ± 0.02% (k=2) | 404.974 ± 0.02% (k=2) |
| Low Range           | 3.99839 ± 1.50% (k=2) | 4.01042 ± 1.50% (k=2) | 3.94307 ± 1.50% (k=2) |

**Connector Angle**

|   |               |
|---|---------------|
| Connector Angle to be used in DASY system | 245.5 ° ± 1 ° |
|---|---------------|

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Appendix (Additional assessments outside the scope of SCS108)**
**1. DC Voltage Linearity**

| High Range        | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 200030.74                 | -5.53                        | -0.00     |
| Channel X + Input | 20004.82                  | 1.02                         | 0.01      |
| Channel X - Input | -20002.76                 | 2.80                         | -0.01     |
| Channel Y + Input | 200031.50                 | -4.36                        | -0.00     |
| Channel Y + Input | 20003.22                  | -0.50                        | -0.00     |
| Channel Y - Input | -20005.15                 | 0.53                         | -0.00     |
| Channel Z + Input | 200033.38                 | -2.72                        | -0.00     |
| Channel Z + Input | 20001.36                  | -2.46                        | -0.01     |
| Channel Z - Input | -20005.91                 | -0.24                        | 0.00      |

| Low Range         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.14                   | -0.27                        | -0.01     |
| Channel X + Input | 201.07                    | 0.50                         | 0.25      |
| Channel X - Input | -199.21                   | 0.28                         | -0.14     |
| Channel Y + Input | 1999.83                   | -0.48                        | -0.02     |
| Channel Y + Input | 199.82                    | -0.73                        | -0.36     |
| Channel Y - Input | -200.80                   | -1.02                        | 0.51      |
| Channel Z + Input | 2001.36                   | 1.13                         | 0.66      |
| Channel Z + Input | 199.82                    | -0.58                        | -0.29     |
| Channel Z - Input | -201.43                   | -1.84                        | 0.92      |

**2. Common mode sensitivity**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|--|---|
| Channel X | 200                            | 18.42  | 15.65                                       |
|           | -200                           | -15.63                                       | -17.40                                      |
| Channel Y | 200                            | -5.00  | -5.33                                       |
|           | -200                           | 4.04   | 3.44  |
| Channel Z | 200                            | -0.12  | -0.30                                       |
|           | -200                           | -3.07  | -3.01                                       |

**3. Channel separation**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 6.09                        | -1.89                       |
| Channel Y | 200                | 10.04                       | -                           | 8.03                        |
| Channel Z | 200                | 8.45                        | 7.00                        | -                           |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**4. AD-Converter Values with inputs shorted**

DASy measurement parameters: Auto Zero Time: 3 sec, Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15851            | 16263           |
| Channel Y | 15925            | 16668           |
| Channel Z | 15301            | 15198           |

**5. Input Offset Measurement**

DASy measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec;

Input: 10MΩ

|           | Average (μV) | min. Offset (μV) | max. Offset (μV) | Std. Deviation (μV) |
|-----------|--------------|------------------|------------------|---------------------|
| Channel X | -0.50        | -1.55            | 0.57             | 0.45                |
| Channel Y | 0.21         | -1.30            | -1.15            | 0.48                |
| Channel Z | -1.60        | -2.65            | 0.25             | 0.57                |

**6. Input Offset Current**

Nominal input circuitry offset current on all channels: &lt;math&gt;\pm 25\text{ nA}&lt;/math&gt;

**7. Input Resistance** (Typical values for information)

|           | Zeroing (kΩ) | Measuring (MΩ) |
|-----------|--------------|----------------|
| Channel X | 200          | 200            |
| Channel Y | 200          | 200            |
| Channel Z | 200          | 200            |

**8. Low Battery Alarm Voltage** (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.5              |
| Supply (- Vcc) | -7.5              |

**9. Power Consumption** (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +5            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -8                |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zaugfluhstrasse 43, 8064 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No : **SCS 108**

Client **Auden**

Certificate No: **ER3-2302\_Jun14**

## CALIBRATION CERTIFICATE

Object: **ER3DV6 - SN:2302**

Calibration procedure(s): **QA CAL-02.v8, QA CAL-25.v8**  
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **June 18, 2014**

The calibration certificate documents the traceability to national standards, which realize the physical units of measurement (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&PE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01011)         | Apr-15                 |
| Power sensor E4412A        | MY41498067      | 03-Apr-14 (No. 217-01011)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20a) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ER3DV6     | SN: 2328        | 10-Oct-13 (No. ER3-2328, Oct13)   | Oct-14                 |
| DAE4                       | SN: 789         | 30-Apr-14 (No. DAE4-789, Apr14)   | Apr-15                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-08 (in house check Apr-15)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390695      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                | Name          | Function              | Signature |
|----------------|---------------|-----------------------|-----------|
| Calibrated by: | Jeton Kasrib  | Laboratory Technician |           |
| Approved by:   | Kelja Pekovic | Technical Manager     |           |

Issued: June 18, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

|                        |   |
|------------------------|---|
| NORM <sub>x,y,z</sub>  | sensitivity in free space   |
| DCP                    | diode compression point   |
| CF                     | crest factor (1/duty_cycle) of the RF signal  |
| A, B, C, D             | modulation dependent linearization parameters   |
| Polarization $\varphi$ | $\varphi$ rotation around probe axis  |
| Polarization $\theta$  | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle        | information used in DASY system to align probe sensor X to the robot coordinate system  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- b) CTIA Test Plan for Hearing Aid Compatibility, April 2010.

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta = 0$  for XY sensors and  $\theta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy): In a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DV6 – SN-2302

June 18, 2014

# Probe ER3DV6

## SN:2302

Manufactured: November 6, 2002  
Calibrated: June 18, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

Certificate No: ER3-2302\_Jun14

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.tw.sgs.com](http://www.tw.sgs.com)

Member of SGS Group



ER3DV6-SN:2302

June 18, 2014

**DASY/EASY - Parameters of Probe: ER3DV6 - SN:2302**
**Basic Calibration Parameters**

|  | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|--|----------|----------|----------|--------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | 1.46     | 1.33     | 1.42     | $\pm 10.1\%$ |
| DCP (mV) <sup>3</sup>                        | 103.0    | 100.6    | 108.0    |              |

**Modulation Calibration Parameters**

| UID       | Communication System Name                |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>c</sup><br>(k=2) |
|-----------|--|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0         | CW                                       | X | 0.0     | 0.0                          | 1.0  | 0.00    | 155.6    | $\pm 1.1\%$               |
|           |  | Y | 0.0     | 0.0                          | 1.0  |         | 139.3    |                           |
|           |  | Z | 0.0     | 0.0                          | 1.0  |         | 134.1    |                           |
| 10011-CAB | UMTS-FDD (WCDMA)                         | X | 3.20    | 67.2                         | 19.2 | 2.91    | 124.8    | $\pm 0.7\%$               |
|           |  | Y | 3.02    | 65.4                         | 17.8 |         | 110.4    |                           |
|           |  | Z | 3.91    | 72.1                         | 21.6 |         | 144.9    |                           |
| 10012-CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 2.68    | 68.3                         | 19.3 | 1.87    | 126.7    | $\pm 0.9\%$               |
|           |  | Y | 2.70    | 67.5                         | 18.3 |         | 111.4    |                           |
|           |  | Z | 3.86    | 76.3                         | 23.0 |         | 145.8    |                           |
| 10021-DAB | GSM-FDD (TDMA, GMSK)                     | X | 8.99    | 88.6                         | 24.0 | 9.39    | 112.8    | $\pm 1.7\%$               |
|           |  | Y | 12.90   | 95.7                         | 26.8 |         | 139.7    |                           |
|           |  | Z | 8.28    | 85.2                         | 22.2 |         | 131.5    |                           |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                    | X | 4.63    | 66.7                         | 19.4 | 4.57    | 124.1    | $\pm 1.2\%$               |
|           |  | Y | 4.81    | 67.3                         | 19.4 |         | 146.6    |                           |
|           |  | Z | 4.67    | 67.7                         | 19.8 |         | 134.5    |                           |
| 10081-CAB | CDMA2000 (1xRTT, RC3)                    | X | 3.77    | 65.9                         | 18.9 | 3.97    | 120.9    | $\pm 0.7\%$               |
|           |  | Y | 3.97    | 66.7                         | 19.0 |         | 142.9    |                           |
|           |  | Z | 3.97    | 67.7                         | 19.7 |         | 132.3    |                           |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.54    | 68.6                         | 20.7 | 5.67    | 138.1    | $\pm 1.7\%$               |
|           |  | Y | 6.28    | 67.1                         | 19.7 |         | 116.6    |                           |
|           |  | Z | 6.06    | 66.9                         | 19.6 |         | 107.4    |                           |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.41    | 68.1                         | 20.6 | 5.80    | 135.7    | $\pm 1.7\%$               |
|           |  | Y | 6.16    | 66.7                         | 19.6 |         | 115.3    |                           |
|           |  | Z | 5.92    | 66.4                         | 19.5 |         | 106.2    |                           |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 6.10    | 67.6                         | 20.4 | 5.75    | 132.3    | $\pm 1.7\%$               |
|           |  | Y | 5.85    | 66.2                         | 19.4 |         | 113.2    |                           |
|           |  | Z | 6.03    | 67.7                         | 20.2 |         | 145.8    |                           |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 4.88    | 66.6                         | 20.1 | 5.73    | 116.0    | $\pm 1.7\%$               |
|           |  | Y | 5.08    | 67.3                         | 20.3 |         | 138.2    |                           |
|           |  | Z | 4.93    | 67.5                         | 20.4 |         | 127.9    |                           |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 4.86    | 66.5                         | 19.9 | 5.72    | 119.2    | $\pm 1.4\%$               |
|           |  | Y | 5.06    | 67.3                         | 20.2 |         | 137.8    |                           |
|           |  | Z | 4.98    | 67.7                         | 20.5 |         | 132.8    |                           |

Certificate No: ER3-2302\_Jun14

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DV6-SN-2302

June 18, 2014

|               |   |   |      |      |      |       |       |        |
|---------------|---|---|------|------|------|-------|-------|--------|
| 10295-<br>AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.   | X | 9.64 | 86.3 | 35.6 | 12.49 | 100.5 | ±4.1 % |
|               |   | Y | 8.36 | 80.4 | 32.3 |       | 83.8  |        |
|               |   | Z | 8.10 | 79.2 | 30.7 |       | 82.4  |        |
| 10297-<br>AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.37 | 67.8 | 20.4 | 5.81  | 139.1 | ±1.7 % |
|               |   | Y | 6.23 | 67.0 | 19.8 |       | 119.1 |        |
|               |   | Z | 5.94 | 66.5 | 19.5 |       | 111.2 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>1</sup> Numerical linearization parameter: uncertainty not required.

<sup>2</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DV6-SN-2302

June 16, 2014

### Frequency Response of E-Field (TEM-Cell: if110 EXX, Waveguide: R22)

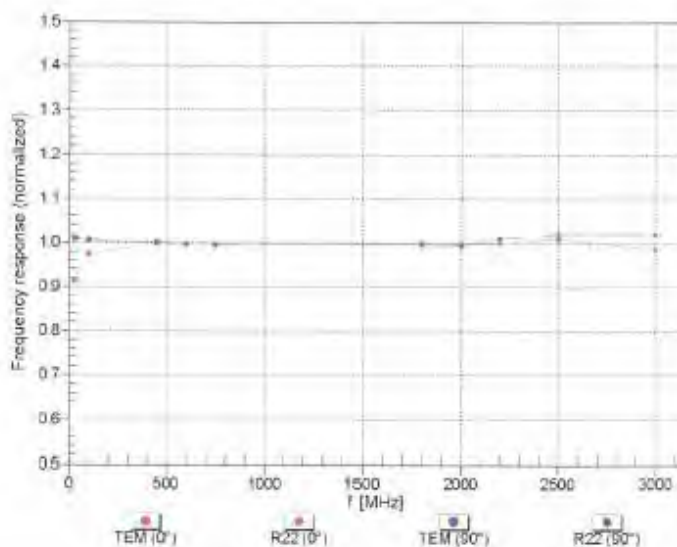

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

Certificate No: ER3-2302\_Jun14

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

[www.tw.sgs.com](http://www.tw.sgs.com)

Member of SGS Group

ER3DV6-SN-2302

June 16, 2014

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM,  $0^\circ$




f=2500 MHz, R22,  $0^\circ$




### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

f=600 MHz, TEM,  $90^\circ$



f=2500 MHz, R22,  $90^\circ$



Certificate No. ER3-2302\_Jun14

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488


[www.tw.sgs.com](http://www.tw.sgs.com)

Member of SGS Group

ER3DV6- SN-2302


June 18, 2014

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

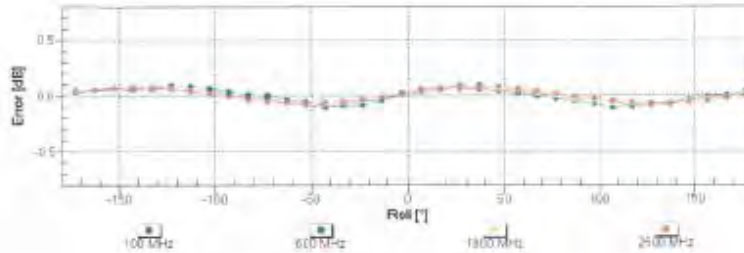

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

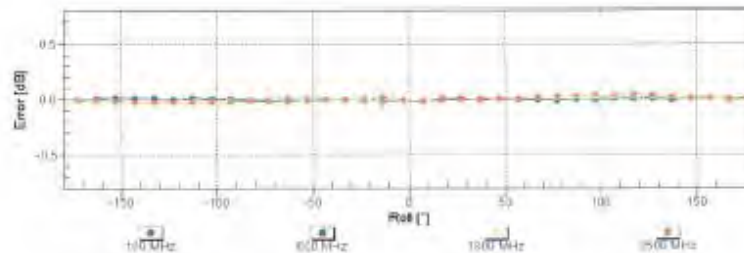

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DVE-SN-2302

June 18, 2014

## Dynamic Range f(E-field) (TEM cell, f = 900 MHz)

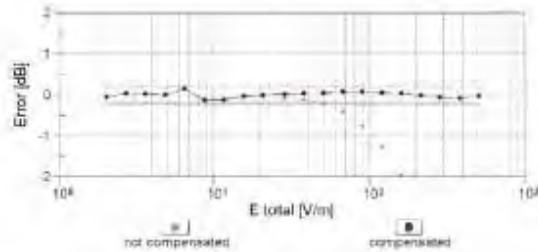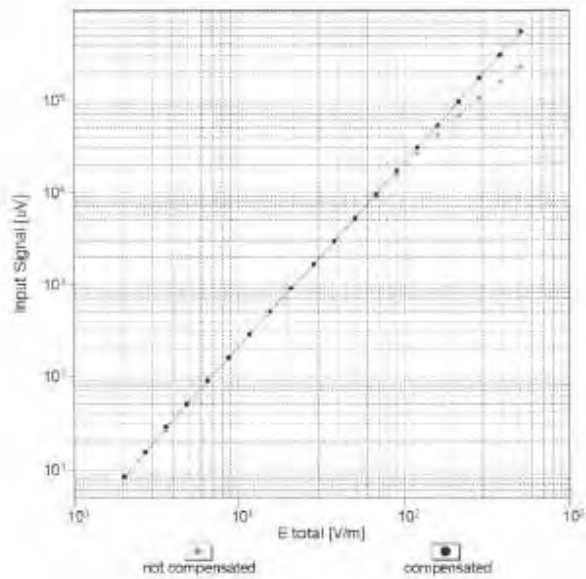

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

Certificate No: ER3-2302\_Jun14

Page 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DV8-SN.2302

June 16, 2014

## Deviation from Isotropy in Air Error ( $\phi$ , $\theta$ ), $f = 900$ MHz

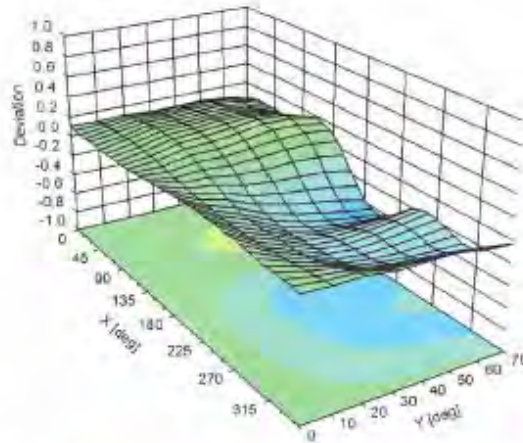

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)

Certificate No: ER3-2302\_Jun14

Page 10 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ER3DV6- SN.2302

June 18, 2014

### DASY/EASY - Parameters of Probe: ER3DV6 - SN:2302

#### Other Probe Parameters

|   |             |
|---|-------------|
| Sensor Arrangement                      | Rectangular |
| Connector Angle (°)                     | -2.9        |
| Mechanical Surface Detection Mode       | enabled     |
| Optical Surface Detection Mode          | disabled    |
| Probe Overall Length                    | 337 mm      |
| Probe Body Diameter                     | 10 mm       |
| Tip Length                              | 10 mm       |
| Tip Diameter                            | 8 mm        |
| Probe Tip to Sensor X Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Y Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Z Calibration Point | 2.5 mm      |

Certificate No: ER3-2302\_Jun14

Page 11 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 19. Uncertainty Budget

| HAC Uncertainty Budget<br>According to ANSI C63.19 [1], [2] |               |             |      |                     |                     |             |             |
|---|---------------|-------------|------|---------------------|---------------------|-------------|-------------|
| Error Description   | Uncert. value | Prob. Dist. | Div. | (c <sub>i</sub> ) E | (c <sub>i</sub> ) H | Std. Unc. E | Std. Unc. H |
| <b>Measurement System</b>                                   |               |             |      |                     |                     |             |             |
| Probe Calibration   | ±5.1%         | N           | 1    | 1                   | 1                   | ±5.1%       | ±5.1%       |
| Axial Isotropy  | ±4.7%         | R           | √3   | 1                   | 1                   | ±2.7%       | ±2.7%       |
| Sensor Displacement   | ±16.5%        | R           | √3   | 1                   | 0.145               | ±9.5%       | ±1.4%       |
| Boundary Effects  | ±2.4%         | R           | √3   | 1                   | 1                   | ±1.4%       | ±1.4%       |
| Phantom Boundary Effect                                     | ±7.2%         | R           | √3   | 1                   | 0                   | ±4.1%       | ±0.0%       |
| Linearity   | ±4.7%         | R           | √3   | 1                   | 1                   | ±2.7%       | ±2.7%       |
| Scaling with PMR calibration                                | ±10.0%        | R           | √3   | 1                   | 1                   | ±5.8%       | ±5.8%       |
| System Detection Limit                                      | ±1.0%         | R           | √3   | 1                   | 1                   | ±0.6%       | ±0.6%       |
| Readout Electronics   | ±0.3%         | N           | 1    | 1                   | 1                   | ±0.3%       | ±0.3%       |
| Response Time   | ±0.8%         | R           | √3   | 1                   | 1                   | ±0.5%       | ±0.5%       |
| Integration Time  | ±2.6%         | R           | √3   | 1                   | 1                   | ±1.5%       | ±1.5%       |
| RF Ambient Conditions                                       | ±3.0%         | R           | √3   | 1                   | 1                   | ±1.7%       | ±1.7%       |
| RF Reflections  | ±12.0%        | R           | √3   | 1                   | 1                   | ±6.9%       | ±6.9%       |
| Probe Positioner  | ±1.2%         | R           | √3   | 1                   | 0.67                | ±0.7%       | ±0.5%       |
| Probe Positioning   | ±4.7%         | R           | √3   | 1                   | 0.67                | ±2.7%       | ±1.8%       |
| Extrap. and Interpolation                                   | ±1.0%         | R           | √3   | 1                   | 1                   | ±0.6%       | ±0.6%       |
| <b>Test Sample Related</b>                                  |               |             |      |                     |                     |             |             |
| Device Positioning Vertical                                 | ±4.7%         | R           | √3   | 1                   | 0.67                | ±2.7%       | ±1.8%       |
| Device Positioning Lateral                                  | ±1.0%         | R           | √3   | 1                   | 1                   | ±0.6%       | ±0.6%       |
| Device Holder and Phantom                                   | ±2.4%         | R           | √3   | 1                   | 1                   | ±1.4%       | ±1.4%       |
| Power Drift   | ±5.0%         | R           | √3   | 1                   | 1                   | ±2.9%       | ±2.9%       |
| <b>Phantom and Setup Related</b>                            |               |             |      |                     |                     |             |             |
| Phantom Thickness   | ±2.4%         | R           | √3   | 1                   | 0.67                | ±1.4%       | ±0.9%       |
| <b>Combined Std. Uncertainty</b>                            |               |             |      |                     |                     | ±16.3%      | ±12.3%      |
| <b>Expanded Std. Uncertainty on Power</b>                   |               |             |      |                     |                     | ±32.6%      | ±24.6%      |
| <b>Expanded Std. Uncertainty on Field</b>                   |               |             |      |                     |                     | ±16.3%      | ±12.3%      |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 20. System Validation from Original Equipment Supplier

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **CD835V3-1052\_Mar14**

| CALIBRATION CERTIFICATE   |  |                                      |                        |
|---|--|--------------------------------------|------------------------|
| Object  | CD835V3 - SN: 1052                                       |                                      |                        |
| Calibration procedure(s)  | QA CAL-20.v6<br>Calibration procedure for dipoles in air |                                      |                        |
| Calibration date  | March 25, 2014   |                                      |                        |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |  |                                      |                        |
| All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.  |  |                                      |                        |
| Calibration Equipment used (MPE critical for calibration)   |  |                                      |                        |
| Primary Standards   | ID #   | Cal Date (Certificate No.)           | Scheduled Calibration  |
| Power meter EPM-442A  | GB37480704   | 09-Oct-13 (No. 217-01827)            | Oct-14                 |
| Power sensor HP 8481A   | US37252783   | 08-Oct-13 (No. 217-01827)            | Oct-14                 |
| Power sensor HP 8481A   | MY41092317   | 09-Oct-13 (No. 217-01828)            | Oct-14                 |
| Reference 10 dB Attenuator  | SN: 5047-2 (100)   | 04-Apr-13 (No. 217-01731)            | Apr-14                 |
| Probe ER3DV6  | SN: 2336   | 30-Dec-13 (No. EH3-2336_Dec13)       | Dec-14                 |
| Probe H3DVB   | SN: 6065   | 30-Dec-13 (No. H3-6065_Dec13)        | Dec-14                 |
| DAE4  | SN: 701  | 13-Sep-13 (No. DAEL-701_Sep13)       | Sep-14                 |
| Secondary Standards   | ID #   | Check Date (in house)                | Scheduled Check        |
| Power meter Agilent 4419B   | SN: GB42420191   | 09-Oct-09 (in house check Oct-13)    | in house check: Oct-15 |
| Power sensor HP E4412A  | SN: MY41405277   | 01-Apr-08 (in house check Oct-13)    | in house check: Oct-15 |
| Power sensor HP 3482A   | SN: US37195567   | 09-Oct-09 (in house check Oct-13)    | in house check: Oct-15 |
| Network Analyzer HP 8753E   | US37390585   | 18-Oct-01 (in house check Oct-13)    | in house check: Oct-14 |
| RF generator P&S SMT-06   | SN: 832253/011   | 27-Aug-12 (in house check Oct-13)    | in house check: Oct-15 |
| Calibrated by:  | Name<br>Farah El-Naouq                                   | Function<br>Laboratory Technician    | Signature<br>          |
| Approved by:  | Name<br>Fin Bonhoff                                      | Function<br>Deputy Technical Manager | Signature<br>          |
|   |  |                                      | Issued: March 25, 2014 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.   |  |                                      |                        |

Certificate No: CD835V3-1052\_Mar14

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**References**

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm (15 mm for [2]) above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1] and [2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (15 mm for [2]) (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                    |                     |         |
|------------------------------------|---------------------|---------|
| DASY Version                       | DASY5               | V52.8.7 |
| Phantom                            | HAC Test Arch       |         |
| Distance Dipole Top - Probe Center | 10mm, 15mm          |         |
| Scan resolution                    | dx, dy = 5 mm       |         |
| Frequency                          | 835 MHz $\pm$ 1 MHz |         |
| Input power drift                  | < 0.05 dB           |         |

**Maximum Field values at 835 MHz**

| H-field 10 mm above dipole surface | condition          | interpolated maximum          |
|------------------------------------|--------------------|-------------------------------|
| Maximum measured                   | 100 mW input power | 0.469 A / m $\pm$ 8.2 % (k=2) |

| E-field 10 mm above dipole surface | condition          | interpolated maximum           |
|------------------------------------|--------------------|--------------------------------|
| Maximum measured above high end    | 100 mW input power | 173.2 V / m                    |
| Maximum measured above low end     | 100 mW input power | 155.4 V / m                    |
| Averaged maximum above arm         | 100 mW input power | 164.3 V / m $\pm$ 12.8 % (k=2) |

| E-field 15 mm above dipole surface | condition          | interpolated maximum           |
|------------------------------------|--------------------|--------------------------------|
| Maximum measured above high end    | 100 mW input power | 111.7 V / m                    |
| Maximum measured above low end     | 100 mW input power | 102.5 V / m                    |
| Averaged maximum above arm         | 100 mW input power | 107.1 V / m $\pm$ 12.8 % (k=2) |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Appendix**

**Antenna Parameters**

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 800 MHz   | 16.1 dB     | 44.4 $\Omega$ - 13.9 j $\Omega$ |
| 835 MHz   | 31.1 dB     | 49.9 $\Omega$ + 2.8 j $\Omega$  |
| 900 MHz   | 17.0 dB     | 56.9 $\Omega$ - 13.7 j $\Omega$ |
| 950 MHz   | 19.8 dB     | 45.7 $\Omega$ + 8.9 j $\Omega$  |
| 960 MHz   | 14.9 dB     | 53.3 $\Omega$ + 18.5 j $\Omega$ |

**3.2 Antenna Design and Handling**

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot

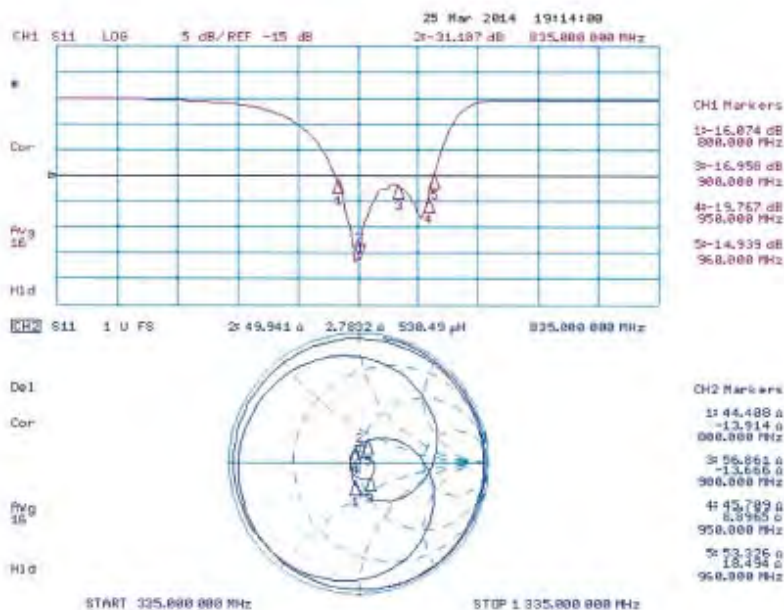

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**DASY5 H-field Result**

Date: 25.03.2014

Test Laboratory: SPEAG LabZ

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1052

Communication System: UTD 0 - CW; Frequency: 835 MHz  
Medium parameters used:  $\epsilon = 0.5/m$ ,  $\mu = 1$ ;  $\rho = 1 \text{ kg/m}^3$   
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY52 Configuration:**


- Probe: H3DV6 - 5N6065; , Calibrated: 30.12.2013
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: 5D HAC R03 BA; Serial: 1070
- DASY52 52-B.7(1137); SEMCAD X 14.6.10(7164)

**Dipole H-Field measurement @ 835MHz/H-Scan - 835MHz, d=10mm/Hearing Aid Compatibility Test (41x361x11)**

Interpolated grid:  $dx=0.5000 \text{ mm}$ ,  $dy=0.5000 \text{ mm}$   
Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 0.4970 A/m; Power Drift = 0.00 dB  
PMR not calibrated; PMF = 1.000 is applied.  
H-field emissions = 0.4688 A/m  
Near-field category: M4 (AWF 0 dB)

PMF scaled H-field

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| Grid 1 M4<br>0.381 A/m | Grid 2 M4<br>0.407 A/m | Grid 3 M4<br>0.392 A/m |
| Grid 4 M4<br>0.432 A/m | Grid 5 M4<br>0.469 A/m | Grid 6 M4<br>0.455 A/m |
| Grid 7 M4<br>0.381 A/m | Grid 8 M4<br>0.421 A/m | Grid 9 M4<br>0.410 A/m |

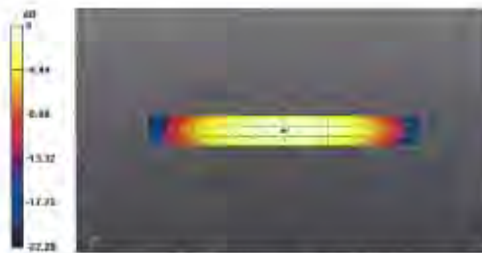

0 dB = 0.4688 A/m = 6.58 dBA/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**DASY5 E-field Result**

Time: 21.03.2014

Test Laboratory: SFEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1052

Communication System: UTD 0 - CW; Frequency: 835 MHz  
Medium parameters used:  $\sigma = 0 \text{ S/m}$ ,  $\epsilon_r = 1$ ,  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY52 Configurations:**

- Probe: ER3DVG - SN2336; ConvF(1, 1, 1); Calibrated: 30.12.2013;
- Sensor-Surface: Fix Surface
- Electronics: DAE4 5n781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: 5D HAC PQ1 BA; Serial: 1070;
- DASY52 52-B-7(1137); SEMCAD-X 14.6.10(7164)

**Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=10mm/Hearing Aid Compatibility Test (4x36x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 126.3 V/m; Power Dref = 0.03 dB  
PMR not calculated; PMF = 1.000 is applied.  
E-field emission = 173.2 V/m  
Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| Grid 1 M4<br>144.2 V/m | Grid 2 M4<br>155.4 V/m | Grid 3 M4<br>153.6 V/m |
| Grid 4 M4<br>84.83 V/m | Grid 5 M4<br>91.98 V/m | Grid 6 M4<br>91.36 V/m |
| Grid 7 M4<br>159.7 V/m | Grid 8 M4<br>171.2 V/m | Grid 9 M4<br>172.1 V/m |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1): Interpolated  
 grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 126.7 V/m; Power Drift = 0.01 dB  
 PMR not calibrated, PMF = 1.000 is applied.  
 E-field emissions = 111.7 V/m  
 Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

|           |           |           |
|-----------|-----------|-----------|
| Grid 1 M4 | Grid 2 M4 | Grid 3 M4 |
| 98.07 V/m | 102.5 V/m | 102.0 V/m |
| Grid 4 M4 | Grid 5 M4 | Grid 6 M4 |
| 63.14 V/m | 65.98 V/m | 65.91 V/m |
| Grid 7 M4 | Grid 8 M4 | Grid 9 M4 |
| 106.8 V/m | 111.7 V/m | 111.4 V/m |

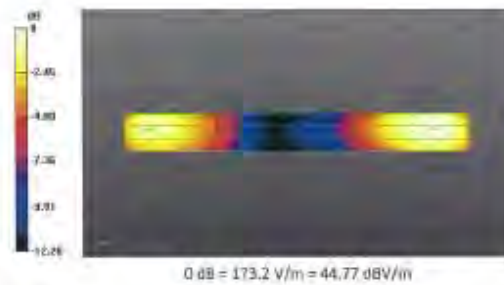

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **CD1880V3-1044\_Mar14**

## CALIBRATION CERTIFICATE

|   |  |                                      |                                   |
|---|--|--------------------------------------|-----------------------------------|
| Object  | CD1880V3 - SN: 1044                                      |                                      |                                   |
| Calibration procedure(s)  | QA CAL-20.v6<br>Calibration procedure for dipoles in air |                                      |                                   |
| Calibration date  | March 25, 2014   |                                      |                                   |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closest laboratory facility, environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> |  |                                      |                                   |
| Calibration Equipment used (M&E critical for calibration)   |  |                                      |                                   |
| Primary Standards   | ID #   | Cal Date (Certificate No.)           | Scheduled Calibration             |
| Power meter EPM-442A  | GB37480704   | 09-Oct-13 (No. 217-01827)            | Oct-14                            |
| Power sensor HP 8481A   | US37292780   | 09-Oct-13 (No. 217-01827)            | Oct-14                            |
| Power sensor HP 8481A   | MY41032317   | 09-Oct-13 (No. 217-01828)            | Oct-14                            |
| Reference 10 dB Attenuator  | SN: 5047.2 (10a)   | 04-Apr-13 (No. 217-01731)            | Apr-14                            |
| Probe ER3DV6  | SN: 2336   | 30-Dec-13 (No. ER3-2336_Dec13)       | Dec-14                            |
| Probe H3DV6   | SN: 6065   | 30-Dec-13 (No. H3-6065_Dec13)        | Dec-14                            |
| DAE4  | SN: 781  | 12-Sep-13 (No. DAE4-781_Sep13)       | Sep-14                            |
| Secondary Standards   | ID #   | Check Date (in house)                | Scheduled Check                   |
| Power meter Agilent 44110B  | SN: GB42420191   | 09-Oct-09 (in house check Oct-13)    | In house check: Oct-15            |
| Power sensor HP E4412A  | SN: MY41425277   | 01-Apr-08 (in house check Oct-13)    | In house check: Oct-15            |
| Power sensor HP 3482A   | SN: US37285587   | 09-Oct-09 (in house check Oct-13)    | In house check: Oct-15            |
| Network Analyzer HP 8753E   | US37390585   | 18-Oct-01 (in house check Oct-13)    | In house check: Oct-14            |
| RF generator R&S SMF-05   | SN: 832253/011   | 27-Aug-12 (in house check Oct-13)    | In house check: Oct-16            |
| Calibrated by:  | Name<br>Issa El-Naouq                                    | Function<br>Laboratory Technician    | Signature<br><i>Issa El-Naouq</i> |
| Approved by:  | Name<br>Fin Bosholt                                      | Function<br>Deputy Technical Manager | Signature<br><i>F. Bosholt</i>    |
|   |  |                                      | Issued: March 25, 2014            |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.   |  |                                      |                                   |

Certificate No: CD1880V3-1044\_Mar14

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**References**

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

**Methods Applied and Interpretation of Parameters:**

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm (15 mm for [2]) above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1] and [2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (15 mm for [2]) (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                    |                      |         |
|------------------------------------|----------------------|---------|
| DASY Version                       | DASY5                | V52.8.7 |
| Phantom                            | HAC Test Arch        |         |
| Distance Dipole Top - Probe Center | 10mm,15mm            |         |
| Scan resolution                    | dx, dy = 5 mm        |         |
| Frequency                          | 1880 MHz $\pm$ 1 MHz |         |
| Input power drift                  | < 0.05 dB            |         |

**Maximum Field values at 1880 MHz**

| H-field 10 mm above dipole surface | condition          | interpolated maximum          |
|------------------------------------|--------------------|-------------------------------|
| Maximum measured                   | 100 mW input power | 0.474 A / m $\pm$ 8.2 % (k=2) |

| E-field 10 mm above dipole surface | condition          | Interpolated maximum           |
|------------------------------------|--------------------|--------------------------------|
| Maximum measured above high end    | 100 mW input power | 146.9 V / m                    |
| Maximum measured above low end     | 100 mW input power | 141.1 V / m                    |
| Averaged maximum above arm         | 100 mW input power | 144.0 V / m $\pm$ 12.8 % (k=2) |

| E-field 15 mm above dipole surface | condition          | Interpolated maximum          |
|------------------------------------|--------------------|-------------------------------|
| Maximum measured above high end    | 100 mW input power | 93.0 V / m                    |
| Maximum measured above low end     | 100 mW input power | 91.3 V / m                    |
| Averaged maximum above arm         | 100 mW input power | 92.2 V / m $\pm$ 12.8 % (k=2) |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Appendix

### Antenna Parameters

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 1730 MHz  | 23.9 dB     | 48.9 $\Omega$ + 6.4 j $\Omega$  |
| 1880 MHz  | 19.4 dB     | 51.5 $\Omega$ + 10.8 j $\Omega$ |
| 1900 MHz  | 19.6 dB     | 55.1 $\Omega$ + 9.8 j $\Omega$  |
| 1950 MHz  | 26.4 dB     | 55.0 $\Omega$ + 0.1 j $\Omega$  |
| 2000 MHz  | 21.7 dB     | 42.5 $\Omega$ + 1.4 j $\Omega$  |

### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.


After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot

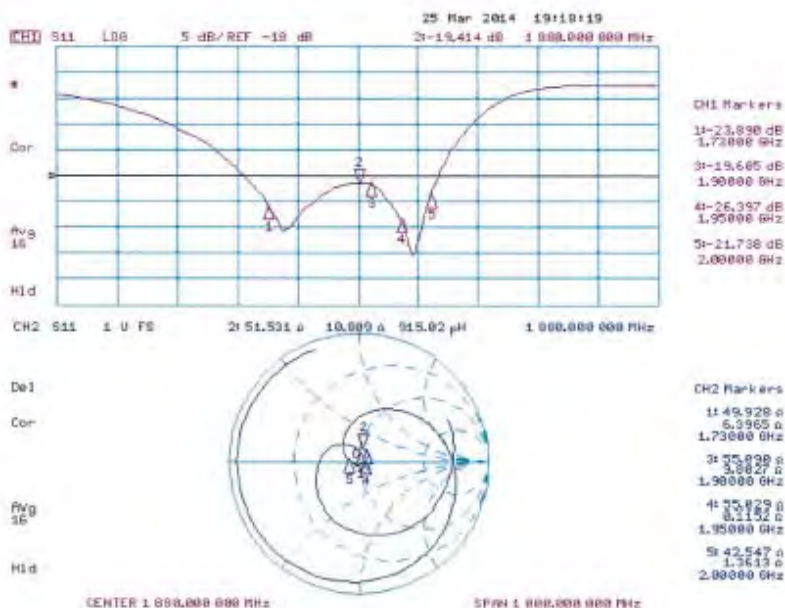

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**DASY5 H-field Result**

Date: 25.03.2014

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1044**

Communication System: UID 0 - CW; Frequency: 1880 MHz  
Medium parameters used:  $\sigma = 0.5/m, \epsilon = 1, \rho = 1 \text{ kg/m}^3$   
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY52 Configuration:**


- Probe: H3DV5 - SM6065; ; Calibrated: 30.12.2013
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: 5D HAC P01 BA; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole H-Field measurement @ 1880MHz/H-Scan - 1880MHz; d=10mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 0.5010 A/m; Power Drill = 0.00 dB  
PMR not calibrated. PMF = 1.000 is applied.  
H-Field emissions = 0.4737 A/m  
**Near-field category: M2 (AWF 0 dB)**

PMF scaled H-field

|           |           |           |
|-----------|-----------|-----------|
| Grid 1 M2 | Grid 2 M2 | Grid 3 M2 |
| 0.412 A/m | 0.432 A/m | 0.412 A/m |
| Grid 4 M2 | Grid 5 M2 | Grid 6 M2 |
| 0.452 A/m | 0.474 A/m | 0.450 A/m |
| Grid 7 M2 | Grid 8 M2 | Grid 9 M2 |
| 0.417 A/m | 0.439 A/m | 0.413 A/m |

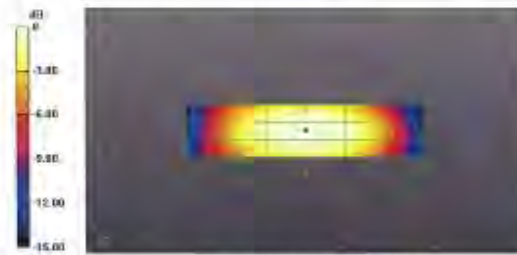

$\bar{H} \text{ dB} = 0.4737 \text{ A/m} = -6.49 \text{ dB(A/m)}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**DASY5 E-field Result**

Date: 21.03.2014

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1044

Communication System: UTD 0 - CW; Frequency: 1880 MHz  
Medium parameters used:  $\epsilon = 0$  S/m,  $\mu = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEE/IEC/ANSI C65.19-2007)

**DASY5 Configuration:**

- Probe: ER30V6 - SN2336; Const{1, 1, 1}; Calibrated: 30.12.2013
- Sensor-Surface: (Fix Surface)
- Electronics: DAB4 Sn781; Calibrated: 13.09.2013
- Phantom: HAC Test Arch with AMCC; Type: 5D HAC F01 6A; Serial: 1070
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=10mm/Hearing Aid Compatibility Test (41x18x1)**  
Interpolated grid: dx=0.5000 mm; dy=0.5000 mm  
Device Reference Point: 0, 0, -5.3 mm  
Reference Value = 145.1 V/m; Power Drift = -0.04 dB  
PMF not calibrated; PMF = 1.000 is applied  
E-field emissions = 145.9 V/m  
**Near-field category: M2 (AWF 0 dB)**

PMF scaled E-field

|           |           |           |
|-----------|-----------|-----------|
| Grid 1 M2 | Grid 2 M2 | Grid 3 M2 |
| 135.8 V/m | 146.9 V/m | 142.3 V/m |
| Grid 4 M3 | Grid 5 M3 | Grid 6 M3 |
| 86.33 V/m | 93.55 V/m | 92.92 V/m |
| Grid 7 M2 | Grid 8 M2 | Grid 9 M2 |
| 132.6 V/m | 141.1 V/m | 139.1 V/m |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated  
 grid: dx=0.5000 mm, dy=0.5000 mm  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 145.0 V/m; Power Drift = 0.04 dB  
 PMR not calibrated, PMF = 1.000 is applied.  
 E-field emissions = 92.96 V/m  
 Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| Grid 1 M3<br>88.13 V/m | Grid 2 M3<br>91.27 V/m | Grid 3 M3<br>90.28 V/m |
| Grid 4 M3<br>69.22 V/m | Grid 5 M3<br>71.51 V/m | Grid 6 M3<br>71.24 V/m |
| Grid 7 M3<br>89.64 V/m | Grid 8 M3<br>92.96 V/m | Grid 9 M3<br>91.99 V/m |

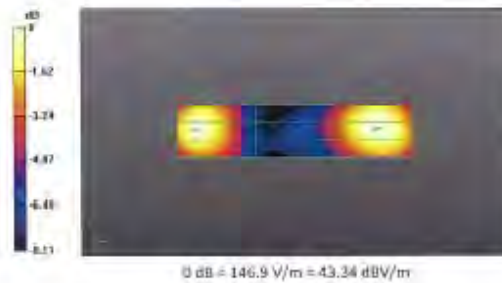

## End of 1<sup>st</sup> part of report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.