

# FCC Test Report

Report No.: AGC02320190301FE03

**FCC ID** : 2ADOMC6  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Bluetooth speaker  
**BRAND NAME** : N/A  
**MODEL NAME** : C6  
**CLIENT** : Shenzhen Kingstar Industrial Co.Ltd.  
**DATE OF ISSUE** : Mar. 15, 2019  
**STANDARD(S)** : FCC Part 15 Subpart C Section 15.249  
**TEST PROCEDURE(S)**  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**Report Revise Record**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Mar. 15, 2019 | Valid         | Initial release |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**TABLE OF CONTENTS**

**1. VERIFICATION OF CONFORMITY ..... 5**

**2. GENERAL INFORMATION ..... 6**

2.1. PRODUCT DESCRIPTION ..... 6

2.2. TABLE OF CARRIER FREQUENCIES ..... 6

**3. MEASUREMENT UNCERTAINTY ..... 7**

**4. DESCRIPTION OF TEST MODES ..... 8**

**5. SYSTEM TEST CONFIGURATION ..... 9**

5.1. CONFIGURATION OF EUT SYSTEM ..... 9

5.2. EQUIPMENT USED IN EUT SYSTEM ..... 9

5.3. SUMMARY OF TEST RESULTS ..... 10

**6. TEST FACILITY ..... 11**

**7. TEST EQUIPMENT LIST ..... 12**

**8. RADIATED EMISSION ..... 13**

8.1 TEST LIMIT ..... 13

8.2. MEASUREMENT PROCEDURE ..... 14

8.3. TEST SETUP ..... 16

8.4. TEST RESULT ..... 18

**9. BAND EDGE EMISSION ..... 25**

9.1. MEASUREMENT PROCEDURE ..... 25

9.2 TEST SETUP ..... 25

9.3 RADIATED TEST RESULT ..... 26

**10. 20DB BANDWIDTH ..... 30**

10.1. MEASUREMENT PROCEDURE ..... 30

10.2. TEST SET-UP ..... 30

10.3. LIMITS AND MEASUREMENT RESULTS ..... 30

**11. FCC LINE CONDUCTED EMISSION TEST ..... 35**

11.1. LIMITS OF LINE CONDUCTED EMISSION TEST ..... 35

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST ..... 35

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... 36

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... 36

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST ..... 37

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP ..... 39**

**APPENDIX B: PHOTOGRAPHS OF EUT ..... 42**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


**1. VERIFICATION OF CONFORMITY**

|                                 |  |
|---------------------------------|--|
| <b>Applicant</b>                | Shenzhen Kingstar Industrial Co.Ltd.   |
| <b>Address</b>                  | #1 Floor, Building A, ZaiFeng Industrial Park, Shajing Town, Bao'an District, Shenzhen, Guangdong, China |
| <b>Manufacturer</b>             | Shenzhen Kingstar Industrial Co.Ltd.   |
| <b>Address</b>                  | #1 Floor, Building A, ZaiFeng Industrial Park, Shajing Town, Bao'an District, Shenzhen, Guangdong, China |
| <b>Factory</b>                  | Shenzhen Kingstar Industrial Co.Ltd.   |
| <b>Address</b>                  | #1 Floor, Building A, ZaiFeng Industrial Park, Shajing Town, Bao'an District, Shenzhen, Guangdong, China |
| <b>Product Designation</b>      | Bluetooth speaker  |
| <b>Brand Name</b>               | N/A  |
| <b>Test Model</b>               | C6   |
| <b>Date of test</b>             | Mar. 06, 2019 to Mar. 12, 2019   |
| <b>Deviation</b>                | None   |
| <b>Condition of Test Sample</b> | Normal   |
| <b>Test Result</b>              | Pass   |
| <b>Report Template</b>          | AGCRT-US-BR/RF   |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By



Erik Yang(Yang Jianmin)

Mar. 12, 2019

Reviewed By



Bart Xie(Xie Xiaobin)

Mar. 15, 2019

Approved By



Forrest Lei(Lei Yonggang)

Authorized Officer

Mar. 15, 2019

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

|   |  |
|---|--|
| <b>Operation Frequency</b>  | 2.402 GHz to 2.480GHz  |
| <b>Bluetooth Version</b>  | V5.0   |
| <b>Maximum field strength</b>   | 97.56dBuV/m(peak)@3m   |
| <b>Modulation</b>   | BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi$ /4-DQPSK, <input type="checkbox"/> 8DPSK<br>BLE <input type="checkbox"/> GFSK |
| <b>Number of channels</b>   | 79 for BR/EDR  |
| <b>Hardware Version</b>   | 1.0  |
| <b>Software Version</b>   | 1.0  |
| <b>Antenna Designation</b>  | PCB Antenna  |
| <b>Antenna Gain</b>   | 0dBi   |
| <b>Power Supply</b>   | DC 3.7V by battery   |
| Note:1. The USB port only used for charging and can't be used to transfer data with PC.<br>2. The EUT doesn't support 8DPSK and BLE |  |

### 2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2400~2483.5MHz | 00             | 2402MHz   |
|                | 01             | 2403MHz   |
|                | :              | :         |
|                | 38             | 2440 MHz  |
|                | 39             | 2441 MHz  |
|                | 40             | 2442 MHz  |
|                | :              | :         |
|                | 77             | 2479 MHz  |
|                | 78             | 2480 MHz  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission,  $U_c = \pm 3.2$  dB
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.9$  dB
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.8$  dB

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

#### 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION         |
|-----|-------------------------------|
| 1   | Low channel GFSK              |
| 2   | Middle channel GFSK           |
| 3   | High channel GFSK             |
| 4   | Low channel $\pi/4$ -DQPSK    |
| 5   | Middle channel $\pi/4$ -DQPSK |
| 6   | High channel $\pi/4$ -DQPSK   |
| 7   | BT Link with charging         |

Note: 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.  
 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.  
 3. The EUT used fully-charged battery when tested.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



### 5.2. EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment         | Mfr/Brand | Model/Type No. | Remark    |
|------|-------------------|-----------|----------------|-----------|
| 1    | Bluetooth speaker | N/A       | C6             | EUT       |
| 2    | Battery           | WLY       | 503040         | Accessory |
| 3    | Ipod              | APPLE     | A1367          | A.E       |
| 4    | Control box       | GZUT      | N/A            | A.E       |
| 5    | USB Cable         | N/A       | N/A            | A.E       |
| 6    | TF Card           | Kingston  | SDA10/16GB     | A.E       |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**5.3. SUMMARY OF TEST RESULTS**

| FCC RULES             | DESCRIPTION OF TEST | RESULT    |
|-----------------------|---------------------|-----------|
| §15.249(a)<br>§15.209 | Radiated Emission   | Compliant |
| §15.249(d)            | Band Edges          | Compliant |
| §15.207               | Conduction Emission | Compliant |
| §15.215               | Band Width          | Compliant |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**6. TEST FACILITY**

|  |  |
|--|--|
| <b>Test Site</b>                         | Attestation of Global Compliance (Shenzhen) Co., Ltd   |
| <b>Location</b>                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| <b>Designation Number</b>                | CN1259   |
| <b>FCC Test Firm Registration Number</b> | 975832   |
| <b>A2LA Cert. No.</b>                    | 5054.02  |
| <b>Description</b>                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



## 7. TEST EQUIPMENT LIST

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment     | Manufacturer | Model   | S/N    | Cal. Date     | Cal. Due      |
|---------------|--------------|---------|--------|---------------|---------------|
| TEST RECEIVER | R&S          | ESPI    | 101206 | Jun. 12, 2018 | Jun. 11, 2019 |
| LISN          | R&S          | ESH2-Z5 | 100086 | Aug. 28, 2018 | Aug. 27, 2019 |

### TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment                      | Manufacturer   | Model     | S/N        | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|-----------|------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI      | 10096      | Jun. 12, 2018 | Jun. 11, 2019 |
| EXA Signal Analyzer            | Aglient        | N9010A    | MY53470504 | Dec. 20, 2018 | Dec. 19, 2019 |
| 2.4GHz Fliter                  | Micro-tronics  | 087       | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Attenuator                     | Weinachel Corp | 58-30-33  | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170 | #768       | Sep. 21, 2017 | Sep. 20, 2020 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C  | 18051      | Jun. 14, 2018 | Jun. 13, 2020 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117      | 00034609   | May. 26, 2018 | May. 25, 2020 |
| Broadband Preamplifier         | ETS LINDGREN   | 3117PA    | 00225134   | Oct. 25, 2018 | Oct. 24, 2019 |
| ANTENNA                        | SCHWARZBECK    | VULB9168  | D69250     | Sep. 28, 2017 | Sep. 27, 2019 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 8. RADIATED EMISSION

### 8.1 TEST LIMIT

#### Standard FCC15.249

| Fundamental Frequency | Field Strength of Fundamental (millivolts/meter) | Field Strength of Harmonics (microvolts/meter) |
|-----------------------|--|--|
| 900-928MHz            | 50   | 500  |
| 2400-2483.5MHz        | 50   | 500  |
| 5725-5875MHz          | 50   | 500  |
| 24.0-24.25GHz         | 250  | 2500   |

#### Standard FCC 15.209

| Frequency (MHz) | Distance Meters | Field Strengths Limit  |                |
|-----------------|-----------------|--|----------------|
|                 |                 | $\mu$ V/m  | dB( $\mu$ V)/m |
| 0.009 ~ 0.490   | 300             | 2400/F(kHz)  | ---            |
| 0.490 ~ 1.705   | 30              | 24000/F(kHz)   | ---            |
| 1.705 ~ 30      | 30              | 30   | ---            |
| 30 ~ 88         | 3               | 100  | 40.0           |
| 88 ~ 216        | 3               | 150  | 43.5           |
| 216 ~ 960       | 3               | 200  | 46.0           |
| 960 ~ 1000      | 3               | 500  | 54.0           |
| Above 1000      | 3               | Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average) |                |

Remark: (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



## 8.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.




The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter    | Setting  |
|-----------------------|--|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP  |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP  |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP   |
| Start ~Stop Frequency | Fundamental: 2.4~2.483GHz<br>RBW 2MHz/ VBW 6MHz for Peak,<br>RBW 2MHz/ VBW 10Hz for Average<br>Harmonics: 1GHz~25GHz<br>RBW 1MHz/ VBW 3MHz for Peak,<br>RBW 1MHz/ VBW 10Hz for Average |
| Receiver Parameter    | Setting  |
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP  |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP  |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP   |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**8.3. TEST SETUP**

**Radiated Emission Test-Setup Frequency Below 30MHz**

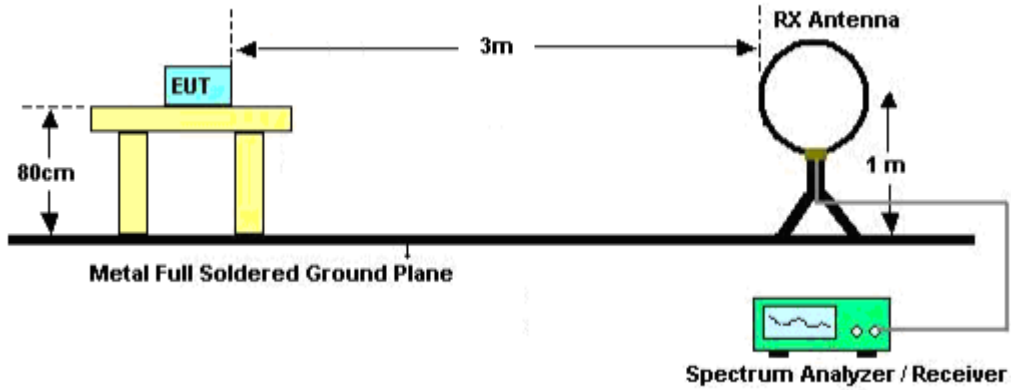


**RADIATED EMISSION TEST SETUP 30MHz-1000MHz**

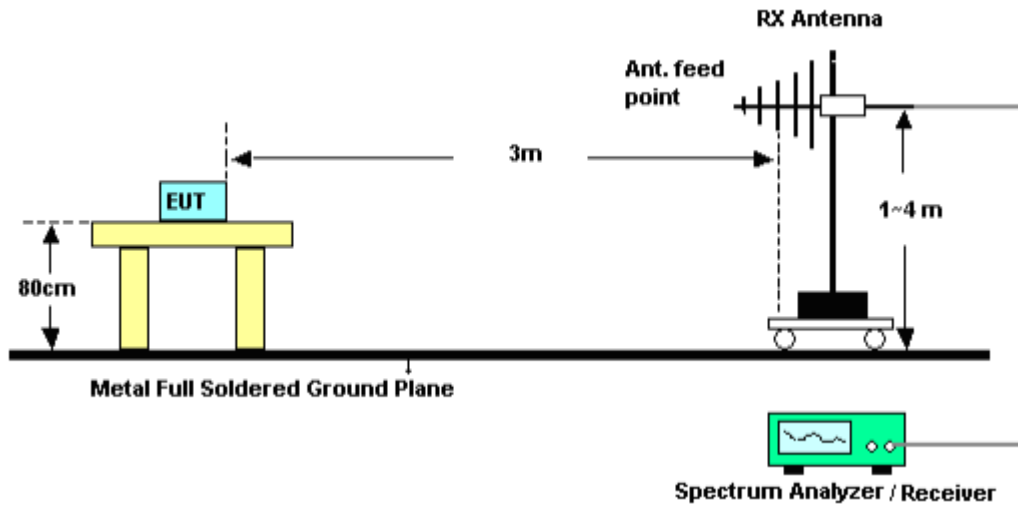

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

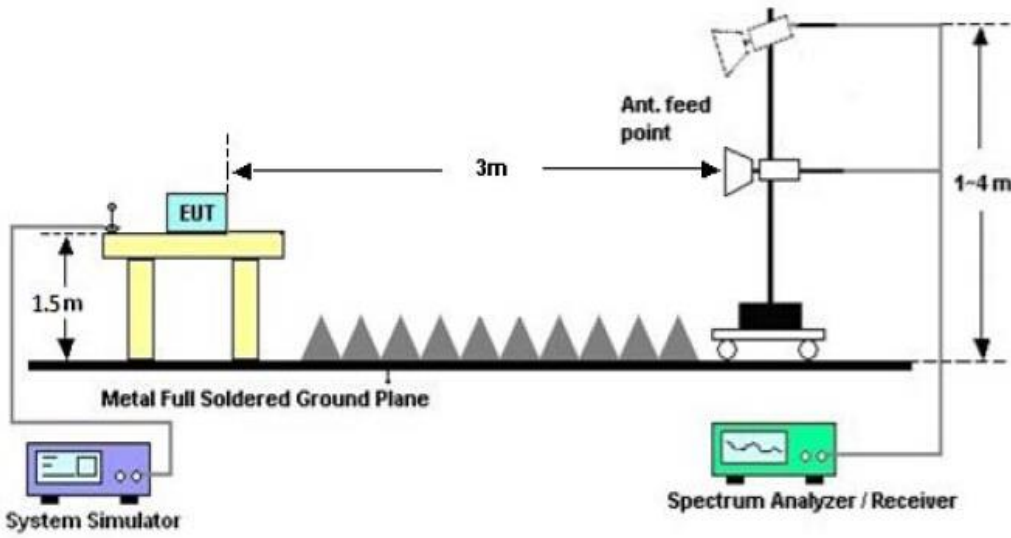

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



**8.4. TEST RESULT**


**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION 30MHz- 1GHz FOR BR/EDR**

|               |                   |                     |          |
|---------------|-------------------|---------------------|----------|
| EUT :         | Bluetooth speaker | Model Name :        | C6       |
| Temperature : | 20 °C             | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Mode :   | Mode 7            | Polarization :      | Vertical |

66.9 dBuV/m

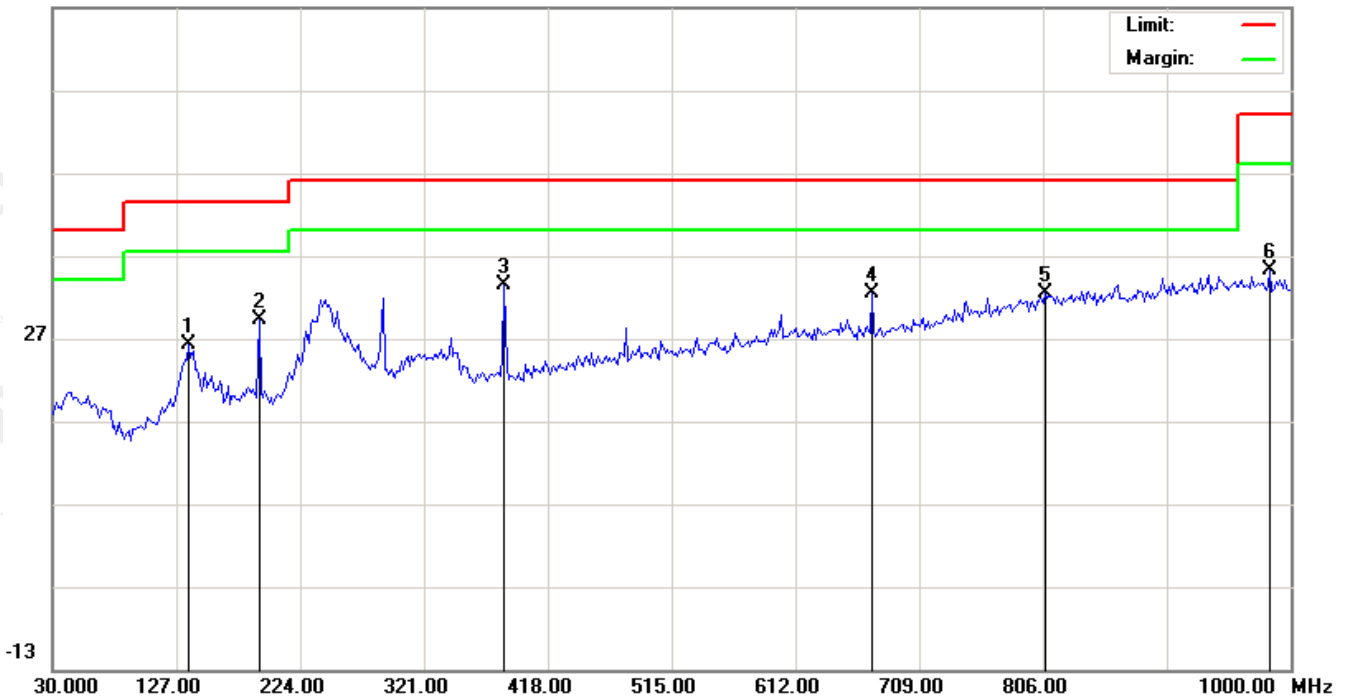


| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna | Table  | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|---------|--------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | Height  | Degree |         |
| 1   |    | 136.7000 | 7.11    | 19.02  | 26.13       | 43.50  | -17.37 | peak     |         |        |         |
| 2   |    | 191.6667 | 12.78   | 16.51  | 29.29       | 43.50  | -14.21 | peak     |         |        |         |
| 3   | *  | 384.0500 | 11.04   | 22.42  | 33.46       | 46.00  | -12.54 | peak     |         |        |         |
| 4   |    | 671.8167 | 4.59    | 27.81  | 32.40       | 46.00  | -13.60 | peak     |         |        |         |
| 5   |    | 807.6167 | 1.98    | 30.51  | 32.49       | 46.00  | -13.51 | peak     |         |        |         |
| 6   |    | 983.8333 | 2.74    | 32.42  | 35.16       | 54.00  | -18.84 | peak     |         |        |         |

**RESULT: PASS**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|               |                   |                     |            |
|---------------|-------------------|---------------------|------------|
| EUT :         | Bluetooth speaker | Model Name :        | C6         |
| Temperature : | 20 °C             | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Mode :   | Mode 7            | Polarization :      | Horizontal |

66.9 dBuV/m

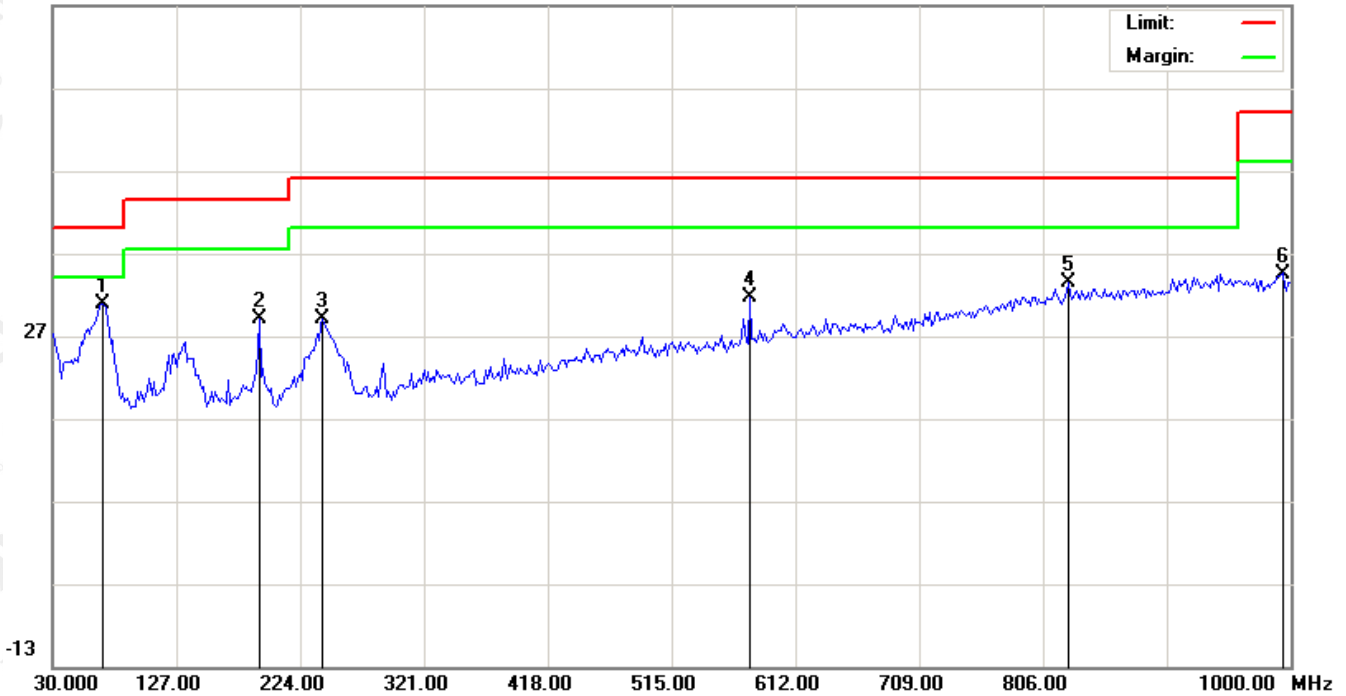

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   | *  | 68.8000  | 13.42   | 17.32  | 30.74       | 40.00  | -9.26  | peak     |                |              |         |
| 2   |    | 191.6667 | 12.48   | 16.51  | 28.99       | 43.50  | -14.51 | peak     |                |              |         |
| 3   |    | 241.7833 | 10.39   | 18.63  | 29.02       | 46.00  | -16.98 | peak     |                |              |         |
| 4   |    | 576.4333 | 5.05    | 26.49  | 31.54       | 46.00  | -14.46 | peak     |                |              |         |
| 5   |    | 825.4000 | 2.69    | 30.74  | 33.43       | 46.00  | -12.57 | peak     |                |              |         |
| 6   |    | 993.5333 | 2.00    | 32.50  | 34.50       | 54.00  | -19.50 | peak     |                |              |         |

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Over= Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.
3. The mode 7 is the worst case, and only the data of the worst case recorded in this test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**FIELD STRENGTH OF FUNDAMENTAL FOR BR/EDR**

|                   |                   |                     |            |
|-------------------|-------------------|---------------------|------------|
| EUT :             | Bluetooth speaker | Model Name :        | C6         |
| Temperature :     | 20 °C             | Relative Humidity : | 48%        |
| Pressure :        | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Modulation : | GFSK              | Polarization :      | Horizontal |

| Frequency<br>(MHz)   | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 2402.021   | 82.51                   | 13.46          | 95.97                      | 114.00             | -18.03         | peak       |
| 2402.021   | 74.49                   | 13.46          | 87.95                      | 94.00              | -6.05          | AVG        |
| 2441.021   | 82.71                   | 13.88          | 96.59                      | 114.00             | -17.41         | peak       |
| 2441.021   | 74.74                   | 13.88          | 88.62                      | 94.00              | -5.38          | AVG        |
| 2480.021   | 82.49                   | 14.11          | 96.60                      | 114.00             | -17.40         | peak       |
| 2480.021   | 74.45                   | 14.11          | 88.56                      | 94.00              | -5.44          | AVG        |
| Remark:<br>Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

|                   |                   |                     |          |
|-------------------|-------------------|---------------------|----------|
| EUT :             | Bluetooth speaker | Model Name :        | C6       |
| Temperature :     | 20 °C             | Relative Humidity : | 48%      |
| Pressure :        | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Modulation : | GFSK              | Polarization :      | Vertical |

| Frequency<br>(MHz)   | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 2402.021   | 82.03                   | 13.46          | 95.49                      | 114.00             | -18.51         | peak       |
| 2402.021   | 74.01                   | 13.46          | 87.47                      | 94.00              | -6.53          | AVG        |
| 2441.021   | 82.23                   | 13.88          | 96.11                      | 114.00             | -17.89         | peak       |
| 2441.021   | 74.21                   | 13.88          | 88.09                      | 94.00              | -5.91          | AVG        |
| 2480.021   | 81.98                   | 14.11          | 96.09                      | 114.00             | -17.91         | peak       |
| 2480.021   | 74.02                   | 14.11          | 88.13                      | 94.00              | -5.87          | AVG        |
| Remark:<br>Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                         |                |                            |                    |                |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



|                   |                   |                     |            |
|-------------------|-------------------|---------------------|------------|
| EUT :             | Bluetooth speaker | Model Name :        | C6         |
| Temperature :     | 20 °C             | Relative Humidity : | 48%        |
| Pressure :        | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Modulation : | $\pi/4$ -DQPSK    | Polarization :      | Horizontal |

| Frequency<br>(MHz)   | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Value Type |
|--|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 2402.021   | 83.43                         | 13.46          | 96.89                            | 114.00                   | -17.11         | peak       |
| 2402.021   | 75.53                         | 13.46          | 88.99                            | 94.00                    | -5.01          | AVG        |
| 2441.021   | 83.67                         | 13.88          | 97.55                            | 114.00                   | -16.45         | peak       |
| 2441.021   | 75.74                         | 13.88          | 89.62                            | 94.00                    | -4.38          | AVG        |
| 2480.021   | 83.45                         | 14.11          | 97.56                            | 114.00                   | -16.44         | peak       |
| 2480.021   | 75.51                         | 14.11          | 89.62                            | 94.00                    | -4.38          | AVG        |
| Remark:<br>Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                               |                |                                  |                          |                |            |

|                   |                   |                     |          |
|-------------------|-------------------|---------------------|----------|
| EUT :             | Bluetooth speaker | Model Name :        | C6       |
| Temperature :     | 20 °C             | Relative Humidity : | 48%      |
| Pressure :        | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Modulation : | $\pi/4$ -DQPSK    | Polarization :      | Vertical |

| Frequency<br>(MHz)   | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Value Type |
|--|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 2402.021   | 82.97                         | 13.46          | 96.43                            | 114.00                   | -17.57         | peak       |
| 2402.021   | 75.02                         | 13.46          | 88.48                            | 94.00                    | -5.52          | AVG        |
| 2441.021   | 83.23                         | 13.88          | 97.11                            | 114.00                   | -16.89         | peak       |
| 2441.021   | 75.26                         | 13.88          | 89.14                            | 94.00                    | -4.86          | AVG        |
| 2480.021   | 83.00                         | 14.11          | 97.11                            | 114.00                   | -16.89         | peak       |
| 2480.021   | 74.99                         | 14.11          | 89.10                            | 94.00                    | -4.90          | AVG        |
| Remark:<br>Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                               |                |                                  |                          |                |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR**

|               |                   |                     |            |
|---------------|-------------------|---------------------|------------|
| EUT :         | Bluetooth speaker | Model Name :        | C6         |
| Temperature : | 20 °C             | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Mode :   | Mode 4            | Polarization :      | Horizontal |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Value Type |
|---|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 4804.026  | 43.32                         | 7.12           | 50.44                            | 74                       | -23.56         | peak       |
| 4804.026  | 40.35                         | 7.12           | 47.47                            | 54                       | -6.53          | AVG        |
| 7206.039  | 36.45                         | 9.84           | 46.29                            | 74                       | -27.71         | peak       |
| 7206.039  | 34.28                         | 9.84           | 44.12                            | 54                       | -9.88          | AVG        |
| Remark:   |                               |                |                                  |                          |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                               |                |                                  |                          |                |            |

|               |                   |                     |          |
|---------------|-------------------|---------------------|----------|
| EUT :         | Bluetooth speaker | Model Name :        | C6       |
| Temperature : | 20 °C             | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Mode :   | Mode 4            | Polarization :      | Vertical |

| Frequency<br>(MHz)                                    | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Value Type |
|---|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------|
| 4804.026  | 42.53                         | 7.12           | 49.65                            | 74                       | -24.35         | peak       |
| 4804.026  | 40.24                         | 7.12           | 47.36                            | 54                       | -6.64          | AVG        |
| 7206.039  | 35.86                         | 9.84           | 45.70                            | 74                       | -28.30         | peak       |
| 7206.039  | 33.25                         | 9.84           | 43.09                            | 54                       | -10.91         | AVG        |
| Remark:   |                               |                |                                  |                          |                |            |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                               |                |                                  |                          |                |            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



|               |                   |                     |            |
|---------------|-------------------|---------------------|------------|
| EUT :         | Bluetooth speaker | Model Name :        | C6         |
| Temperature : | 20 °C             | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Mode :   | Mode 5            | Polarization :      | Horizontal |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.032           | 41.65                   | 7.12           | 48.77                      | 74                 | -25.23         | peak       |
| 4882.032           | 38.32                   | 7.12           | 45.44                      | 54                 | -8.56          | AVG        |
| 7323.048           | 37.24                   | 9.84           | 47.08                      | 74                 | -26.92         | peak       |
| 7323.048           | 34.48                   | 9.84           | 44.32                      | 54                 | -9.68          | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|               |                   |                     |          |
|---------------|-------------------|---------------------|----------|
| EUT :         | Bluetooth speaker | Model Name :        | C6       |
| Temperature : | 20 °C             | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Mode :   | Mode 5            | Polarization :      | Vertical |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882.032           | 42.53                   | 7.12           | 49.65                      | 74                 | -24.35         | peak       |
| 4882.032           | 38.32                   | 7.12           | 45.44                      | 54                 | -8.56          | AVG        |
| 7323.048           | 36.49                   | 9.84           | 46.33                      | 74                 | -27.67         | peak       |
| 7323.048           | 34.15                   | 9.84           | 43.99                      | 54                 | -10.01         | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



|               |                   |                     |            |
|---------------|-------------------|---------------------|------------|
| EUT :         | Bluetooth speaker | Model Name :        | C6         |
| Temperature : | 20 °C             | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V    |
| Test Mode :   | Mode 6            | Polarization :      | Horizontal |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.042           | 40.98                   | 7.12           | 48.1                       | 74                 | -25.9          | peak       |
| 4960.042           | 38.12                   | 7.12           | 45.24                      | 54                 | -8.76          | AVG        |
| 7440.063           | 36.85                   | 9.84           | 46.69                      | 74                 | -27.31         | peak       |
| 7440.063           | 34.81                   | 9.84           | 44.65                      | 54                 | -9.35          | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|               |                   |                     |          |
|---------------|-------------------|---------------------|----------|
| EUT :         | Bluetooth speaker | Model Name :        | C6       |
| Temperature : | 20 °C             | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa          | Test Voltage :      | DC 3.7V  |
| Test Mode :   | Mode 6            | Polarization :      | Vertical |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960.042           | 41.56                   | 7.12           | 48.68                      | 74                 | -25.32         | peak       |
| 4960.042           | 38.34                   | 7.12           | 45.46                      | 54                 | -8.54          | AVG        |
| 7440.063           | 36.05                   | 9.84           | 45.89                      | 74                 | -28.11         | peak       |
| 7440.063           | 34.26                   | 9.84           | 44.1                       | 54                 | -9.9           | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Note:** Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.  
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.  
 The "Factor" value can be calculated automatically by software of measurement system.  
 The π /4-DQPSK modulation was the worst case and only the data of worst recorded in this report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 9. BAND EDGE EMISSION


### 9.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

| Start frequency(MHz) | Stop frequency(MHz) |
|----------------------|---------------------|
| 2200                 | 2405                |
| 2478                 | 2500                |

### 9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

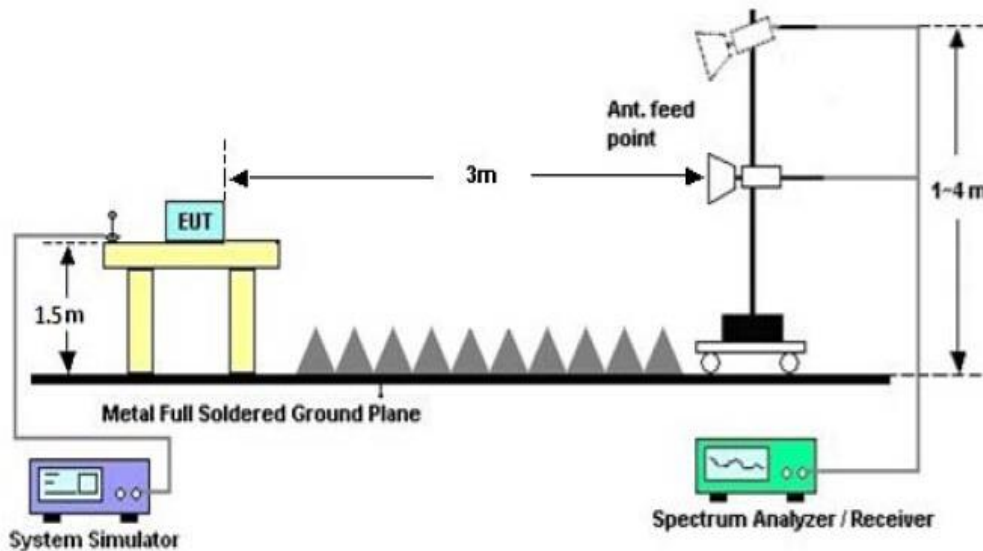

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


**9.3 RADIATED TEST RESULT**

**FOR BR/EDR**

**(Worst modulation:  $\pi/4$ -DQPSK)**

**TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal**

106.0 dBuV/m

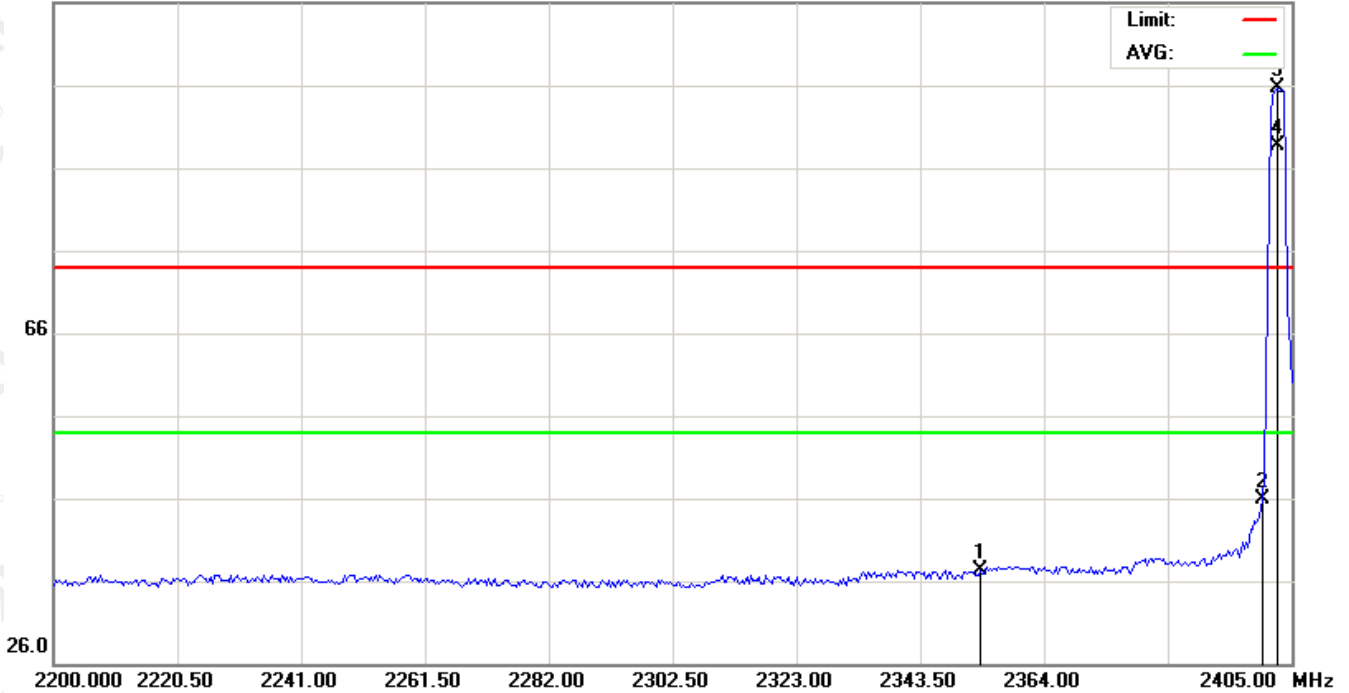


| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 2353.408 | 23.83   | 13.46  | 37.29       | 74.00  | -36.71 | peak     |                |              |         |
| 2   |    | 2400.217 | 32.44   | 13.46  | 45.90       | 74.00  | -28.10 | peak     |                |              |         |
| 3   | X  | 2402.608 | 82.20   | 13.46  | 95.66       | 114.00 | -18.34 | peak     |                |              |         |
| 4   | *  | 2402.608 | 75.29   | 13.46  | 88.75       | 94.00  | -5.25  | AVG      | 100            | 163          |         |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.




TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

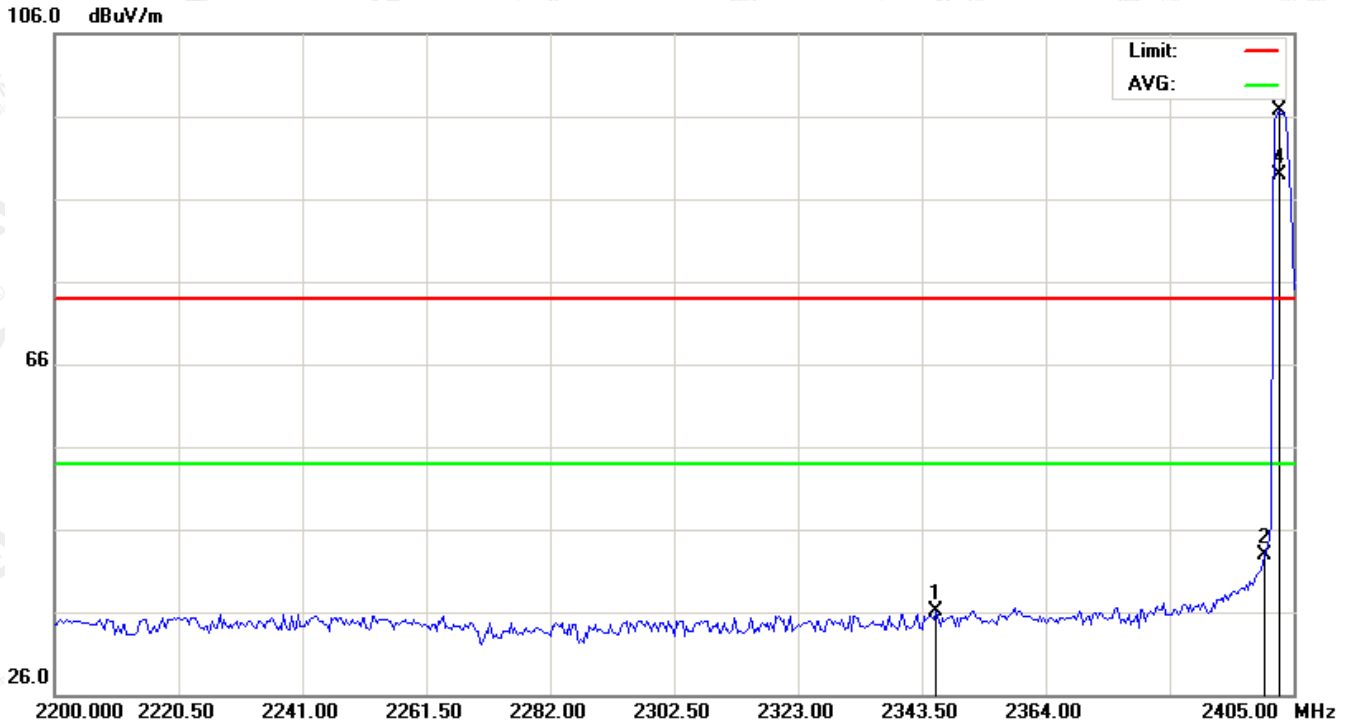

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 2345.892 | 22.74   | 13.46  | 36.20       | 74.00  | -37.80 | peak     |                |              |         |
| 2   |    | 2400.217 | 29.44   | 13.46  | 42.90       | 74.00  | -31.10 | peak     |                |              |         |
| 3   | X  | 2402.608 | 83.20   | 13.46  | 96.66       | 114.00 | -17.34 | peak     |                |              |         |
| 4   | *  | 2402.608 | 75.35   | 13.46  | 88.81       | 94.00  | -5.19  | AVG      | 100            | 251          |         |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

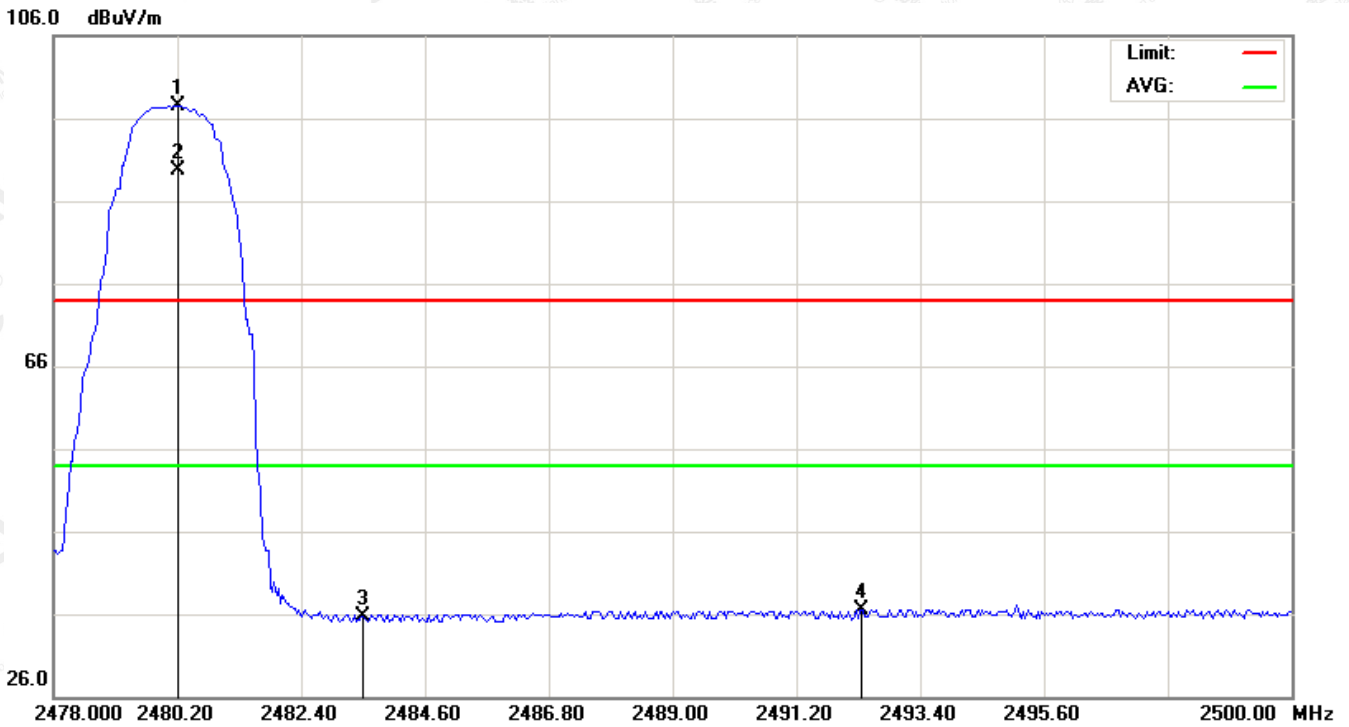

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna | Table  | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|---------|--------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | Height  | Degree |         |
| 1   | X  | 2480.200 | 83.33   | 14.11  | 97.44       | 114.00 | -16.56 | peak     |         |        |         |
| 2   | *  | 2480.200 | 75.51   | 14.11  | 89.62       | 94.00  | -4.38  | AVG      | 100     | 325    |         |
| 3   |    | 2483.500 | 21.66   | 14.13  | 35.79       | 74.00  | -38.21 | peak     |         |        |         |
| 4   |    | 2492.373 | 22.42   | 14.18  | 36.60       | 74.00  | -37.40 | peak     |         |        |         |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

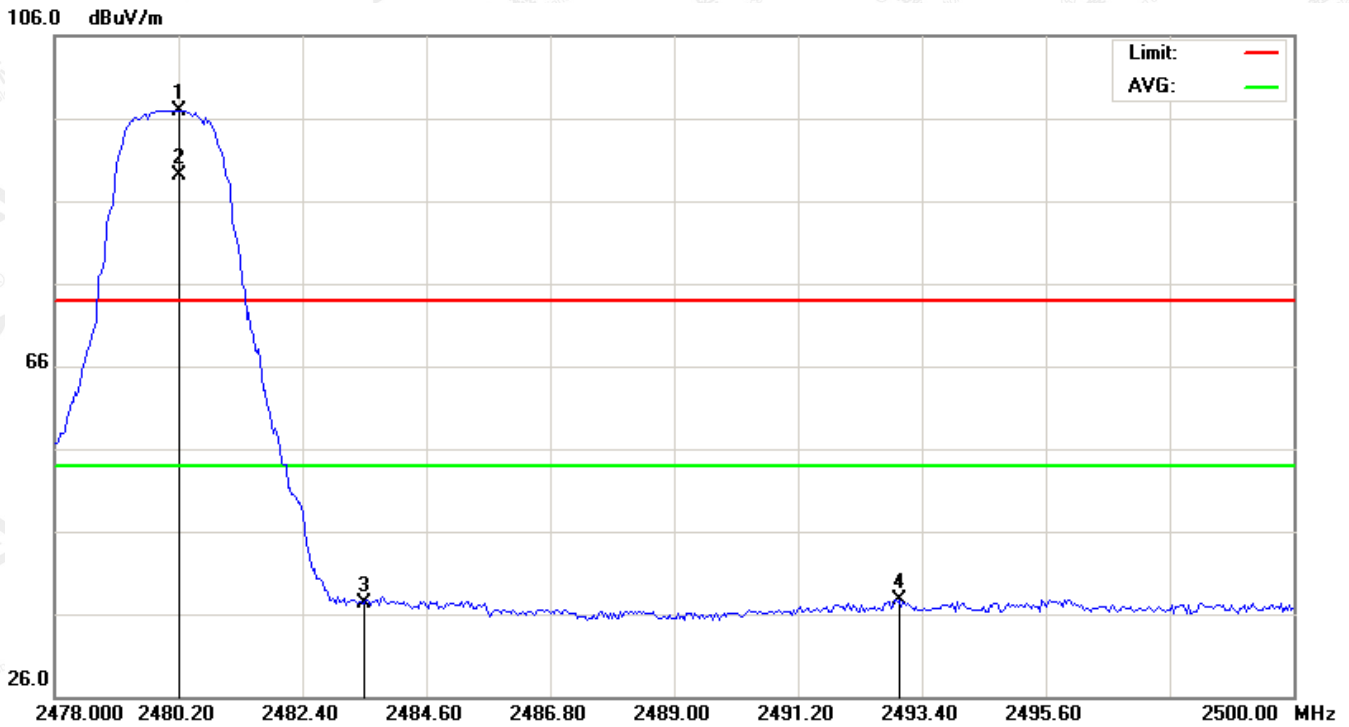

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   | X  | 2480.200 | 82.83   | 14.11  | 96.94       | 114.00 | -17.06 | peak     |                |              |         |
| 2   | *  | 2480.200 | 74.96   | 14.11  | 89.07       | 94.00  | -4.93  | AVG      | 150            | 148          |         |
| 3   |    | 2483.500 | 23.22   | 14.13  | 37.35       | 74.00  | -36.65 | peak     |                |              |         |
| 4   |    | 2492.997 | 23.52   | 14.19  | 37.71       | 74.00  | -36.29 | peak     |                |              |         |

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.




## 10. 20DB BANDWIDTH

### 10.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  3RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 10.2. TEST SET-UP

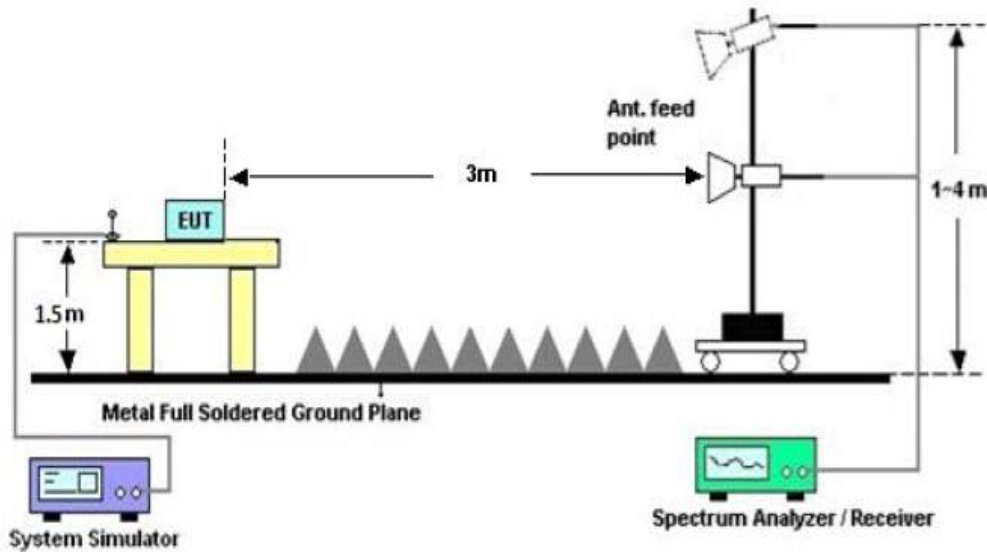


### 10.3. LIMITS AND MEASUREMENT RESULTS

|                 |                 |
|-----------------|-----------------|
| TEST ITEM       | 20DB BANDWIDTH  |
| TEST MODULATION | GFSK for BR/EDR |


| Test Data (MHz) |       | Criteria |
|-----------------|-------|----------|
| Low Channel     | 0.875 | PASS     |
| Middle Channel  | 0.871 | PASS     |
| High Channel    | 0.875 | PASS     |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

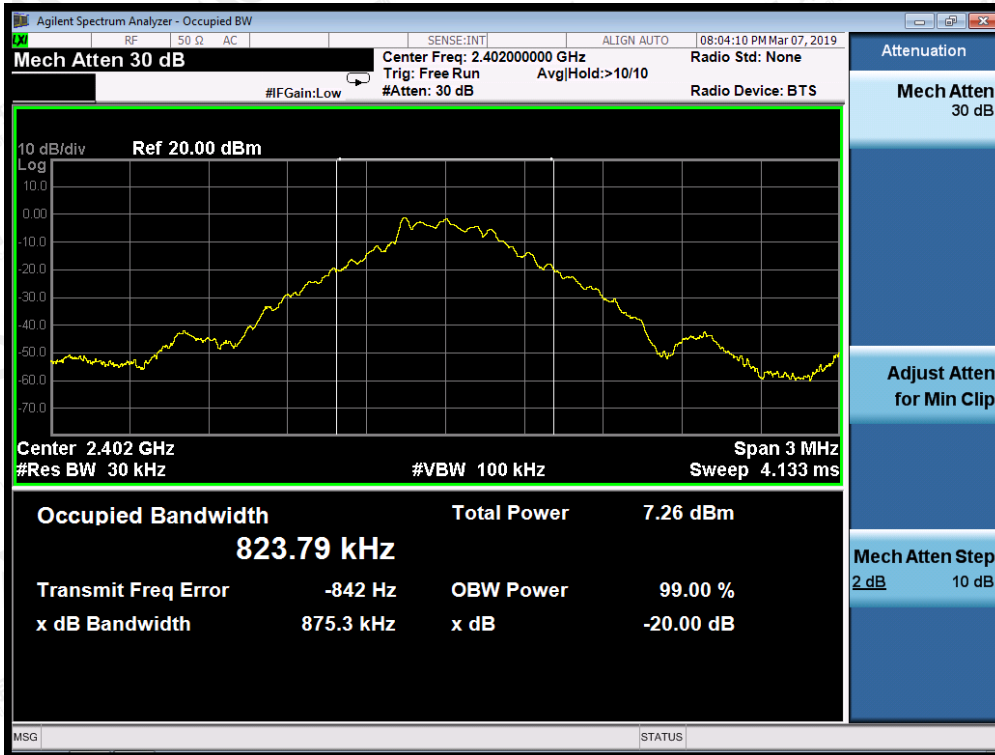


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

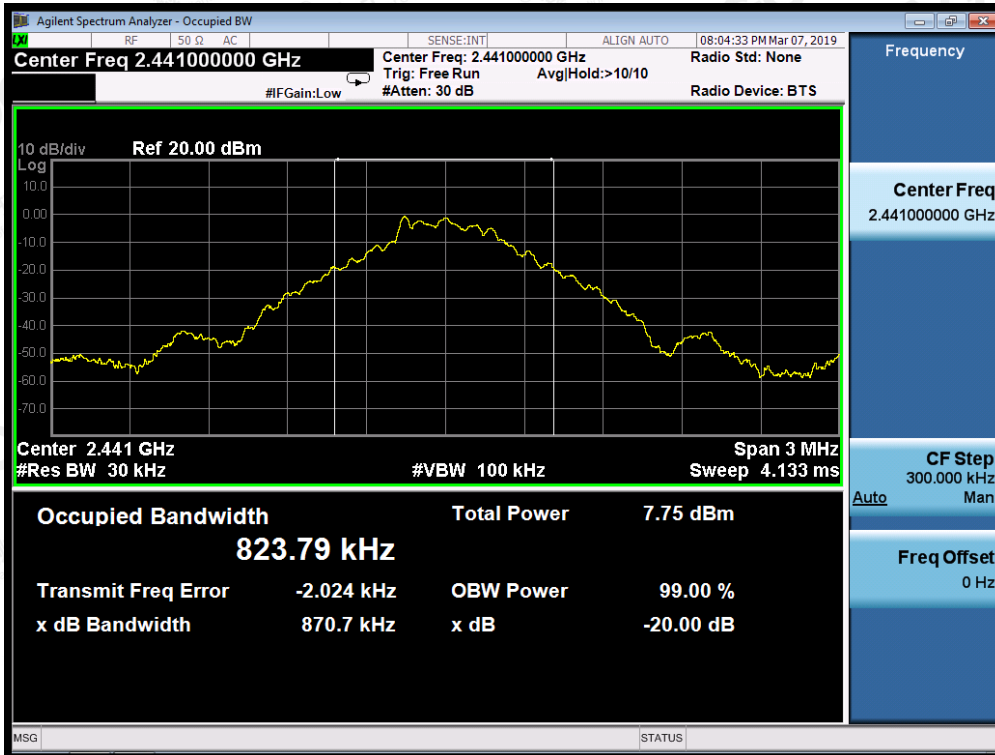

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

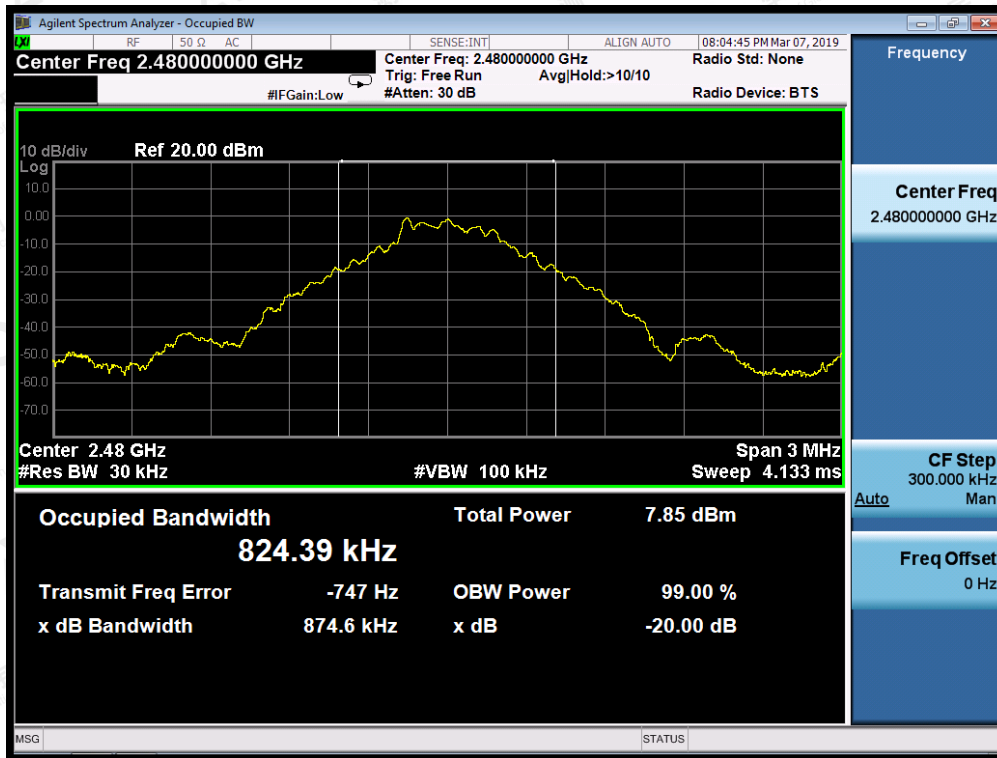


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



|                        |                           |
|------------------------|---------------------------|
| <b>TEST ITEM</b>       | 20DB BANDWIDTH            |
| <b>TEST MODULATION</b> | $\pi$ /4-DQPSK for BR/EDR |


| Test Data (MHz) |       | Criteria |
|-----------------|-------|----------|
| Low Channel     | 1.266 | PASS     |
| Middle Channel  | 1.266 | PASS     |
| High Channel    | 1.255 | PASS     |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

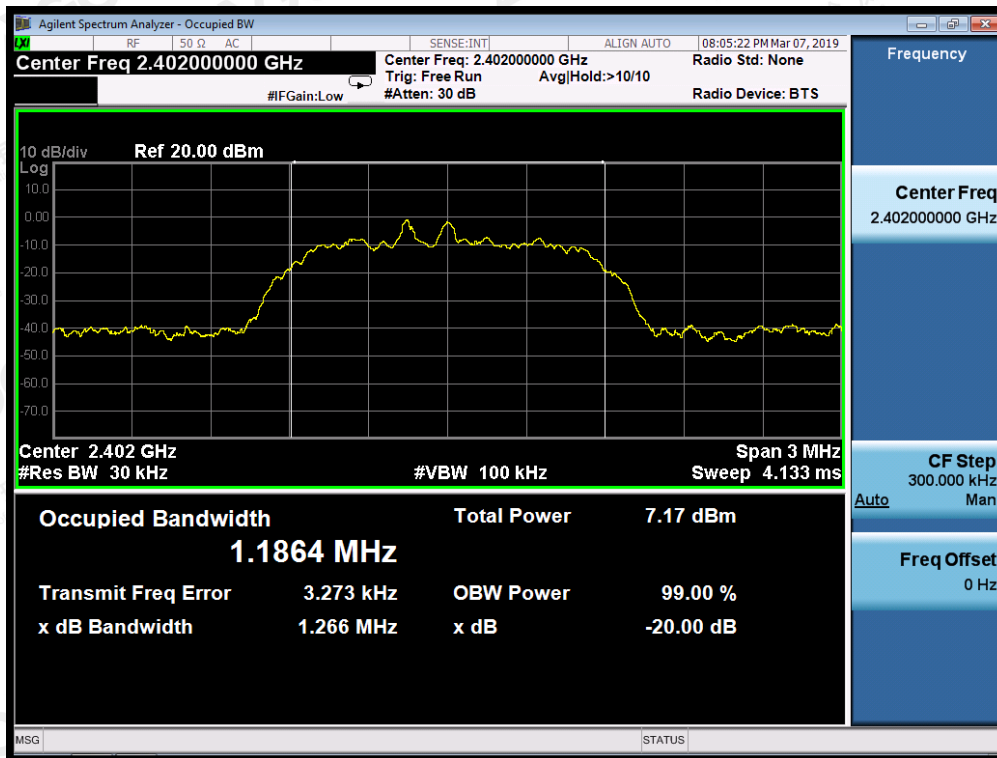


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

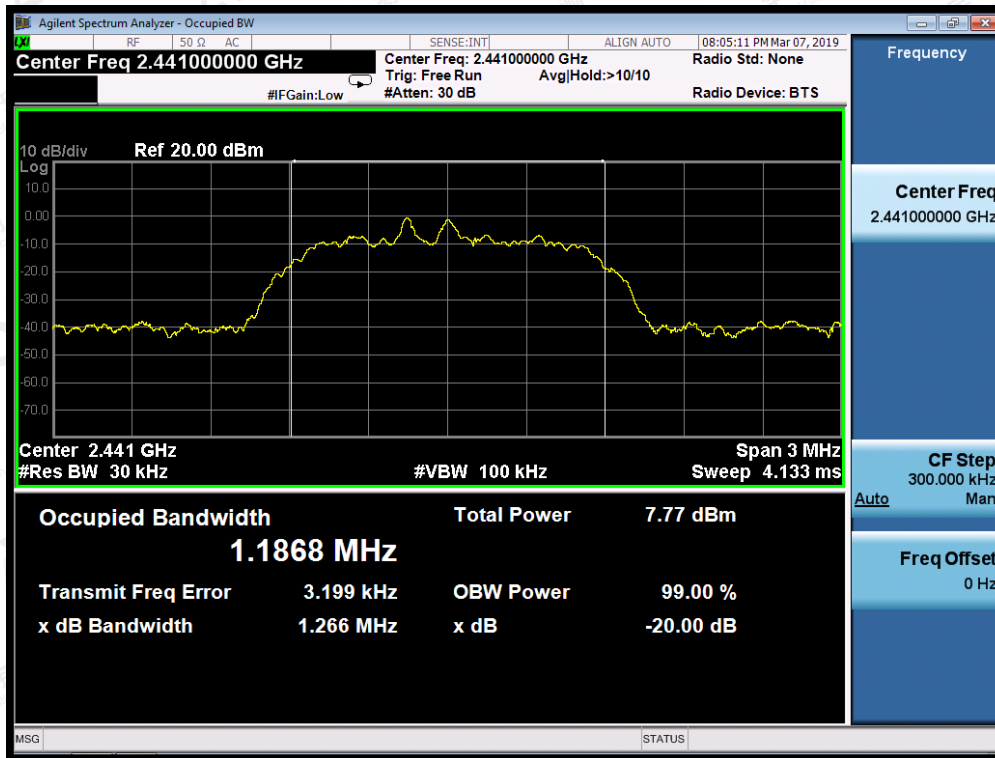

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

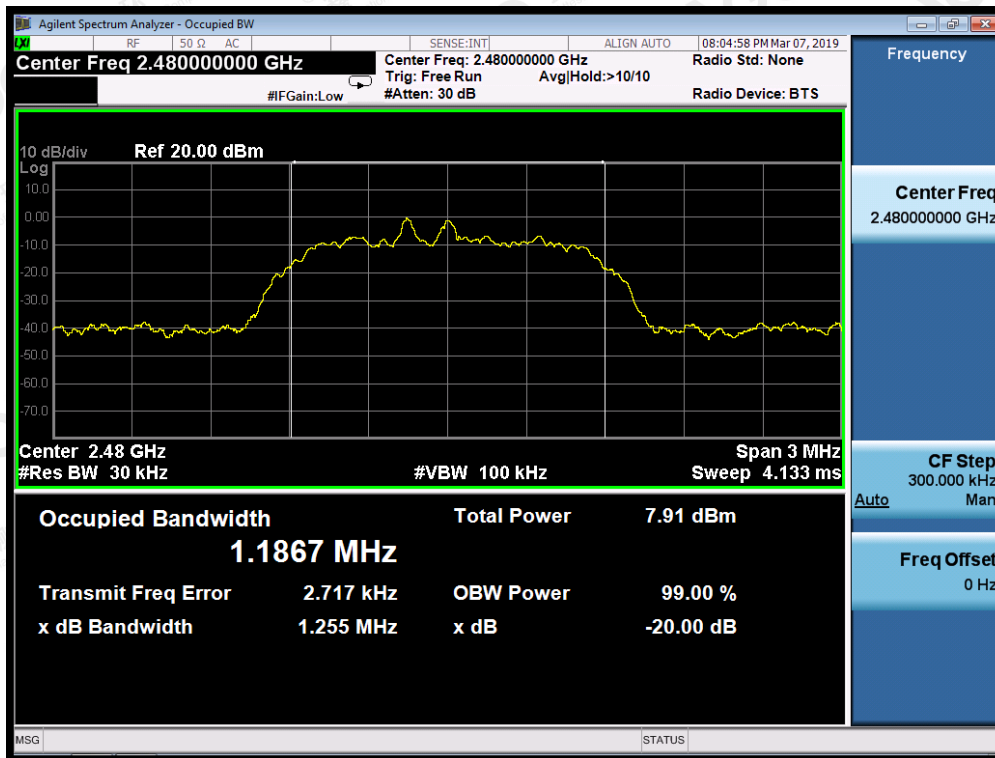

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 11. FCC LINE CONDUCTED EMISSION TEST


### 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency     | Maximum RF Line Voltage |                |
|---------------|-------------------------|----------------|
|               | Q.P.( dBuV)             | Average( dBuV) |
| 150kHz~500kHz | 66-56                   | 56-46          |
| 500kHz~5MHz   | 56                      | 46             |
| 5MHz~30MHz    | 60                      | 50             |

**Note:** 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

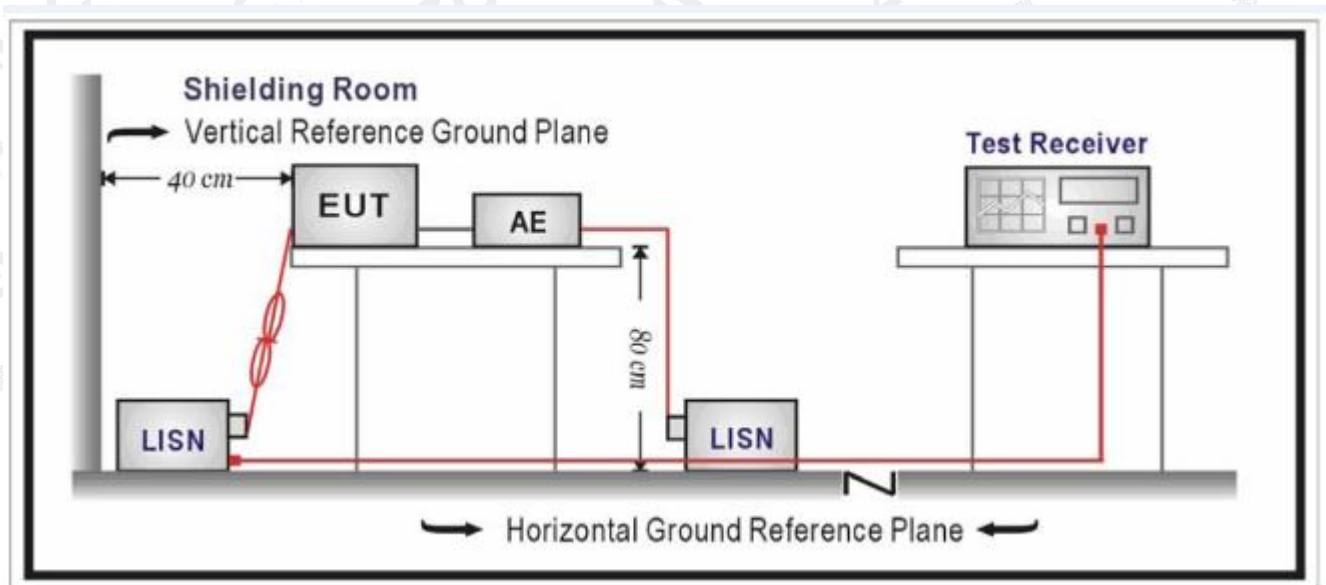

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power by adapter which received AC120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST**

**By adapter(worst case)**

**FOR BR/EDR**

Line Conducted Emission Test Line 1-L

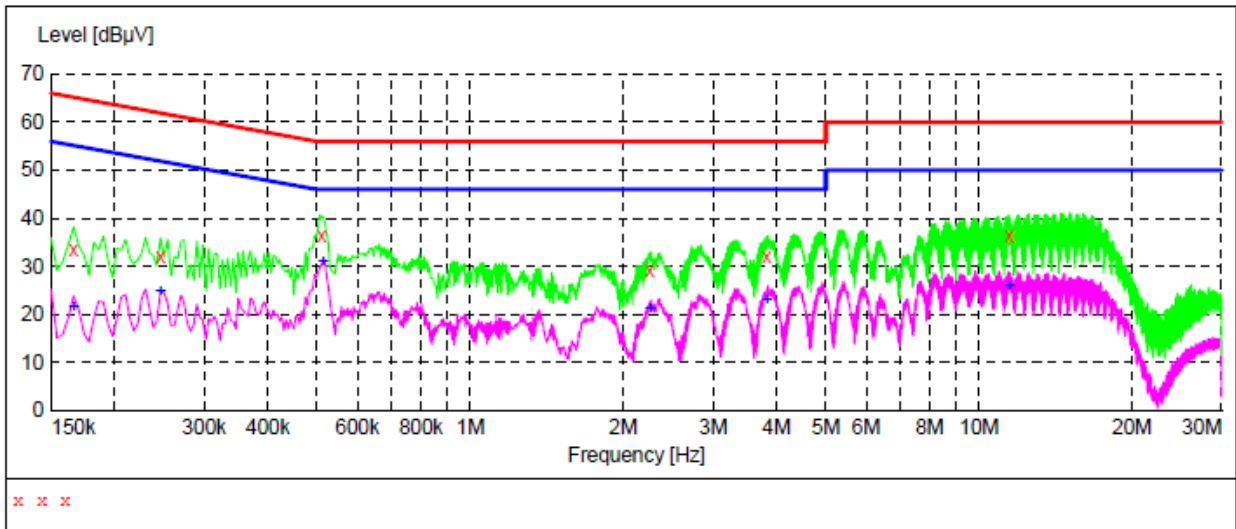

**MEASUREMENT RESULT**

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line |
|---------------|------------|-----------|------------|-----------|----------|------|
| 0.166000      | 33.50      | 10.3      | 65         | 31.7      | QP       | L1   |
| 0.246000      | 32.00      | 10.3      | 62         | 29.9      | QP       | L1   |
| 0.510000      | 36.20      | 10.3      | 56         | 19.8      | QP       | L1   |
| 2.254000      | 29.20      | 10.4      | 56         | 26.8      | QP       | L1   |
| 3.826000      | 31.90      | 10.4      | 56         | 24.1      | QP       | L1   |
| 11.478000     | 36.50      | 10.8      | 60         | 23.5      | QP       | L1   |


**MEASUREMENT RESULT**

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line |
|---------------|------------|-----------|------------|-----------|----------|------|
| 0.166000      | 21.60      | 10.3      | 55         | 33.6      | AV       | L1   |
| 0.246000      | 24.60      | 10.3      | 52         | 27.3      | AV       | L1   |
| 0.514000      | 31.10      | 10.3      | 46         | 14.9      | AV       | L1   |
| 2.254000      | 21.10      | 10.4      | 46         | 24.9      | AV       | L1   |
| 3.826000      | 23.10      | 10.4      | 46         | 22.9      | AV       | L1   |
| 11.478000     | 25.80      | 10.8      | 50         | 24.2      | AV       | L1   |

**RESULT: PASS**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Line Conducted Emission Test Line 2-N

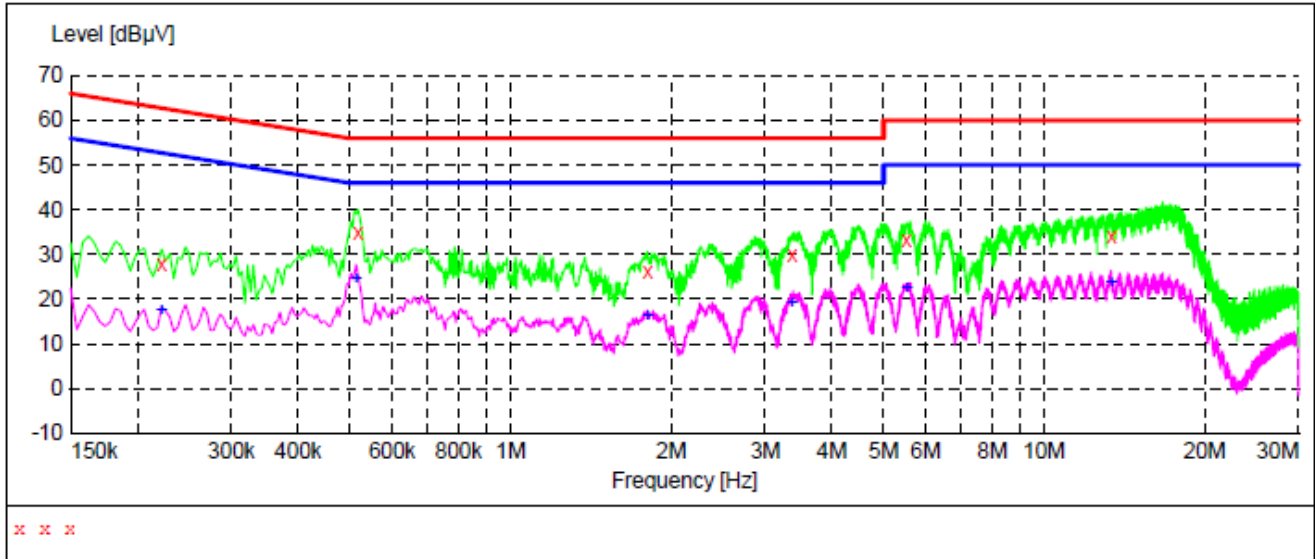

**MEASUREMENT RESULT**

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line |
|------------------|---------------|--------------|---------------|--------------|----------|------|
| 0.222000         | 27.90         | 10.3         | 63            | 34.8         | QP       | N    |
| 0.518000         | 34.80         | 10.3         | 56            | 21.2         | QP       | N    |
| 1.806000         | 26.30         | 10.4         | 56            | 29.7         | QP       | N    |
| 3.370000         | 29.90         | 10.4         | 56            | 26.1         | QP       | N    |
| 5.526000         | 33.10         | 10.4         | 60            | 26.9         | QP       | N    |
| 13.346000        | 34.10         | 10.8         | 60            | 25.9         | QP       | N    |

**MEASUREMENT RESULT**

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line |
|------------------|---------------|--------------|---------------|--------------|----------|------|
| 0.222000         | 17.30         | 10.3         | 53            | 35.4         | AV       | N    |
| 0.514000         | 24.40         | 10.3         | 46            | 21.6         | AV       | N    |
| 1.806000         | 16.20         | 10.4         | 46            | 29.8         | AV       | N    |
| 3.370000         | 19.30         | 10.4         | 46            | 26.7         | AV       | N    |
| 5.526000         | 22.40         | 10.4         | 50            | 27.6         | AV       | N    |
| 13.346000        | 23.60         | 10.8         | 50            | 26.4         | AV       | N    |

**RESULT: PASS**


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
**FCC LINE CONDUCTED EMISSION TEST SETUP**





**FCC RADIATED EMISSION TEST SETUP**

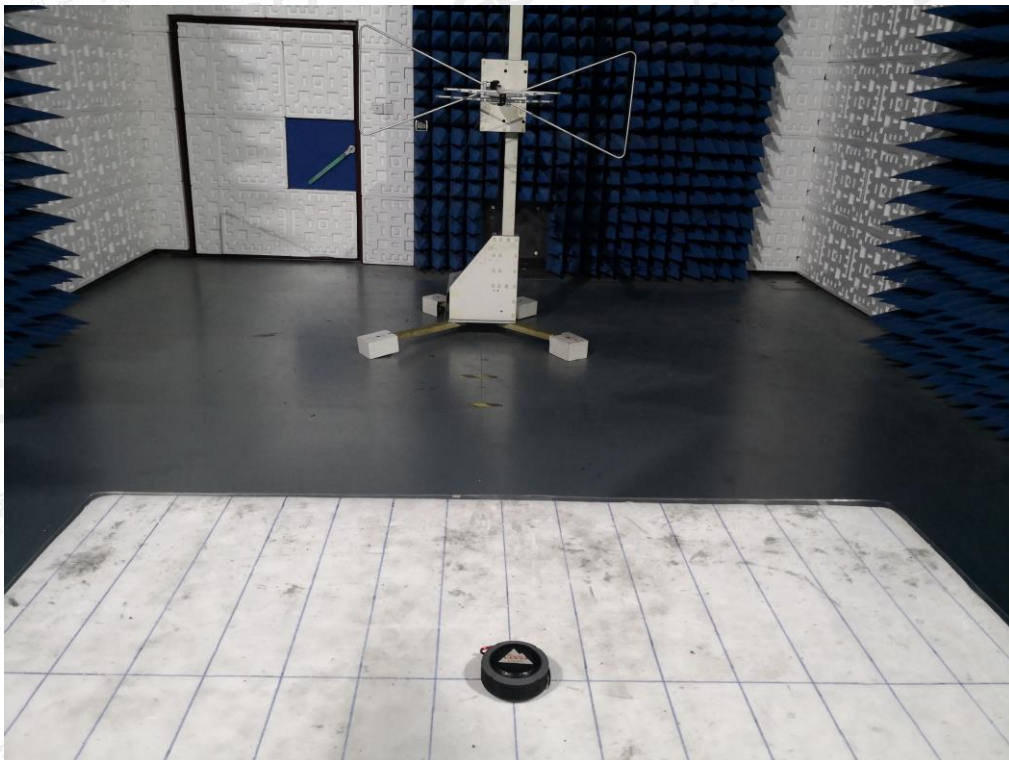


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



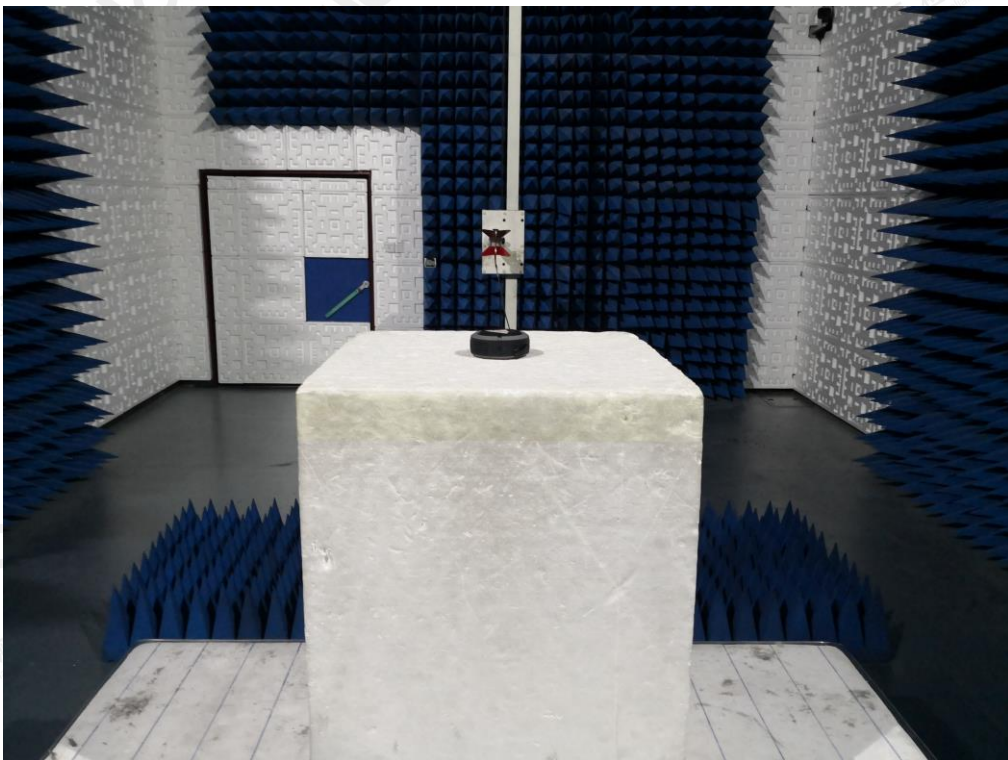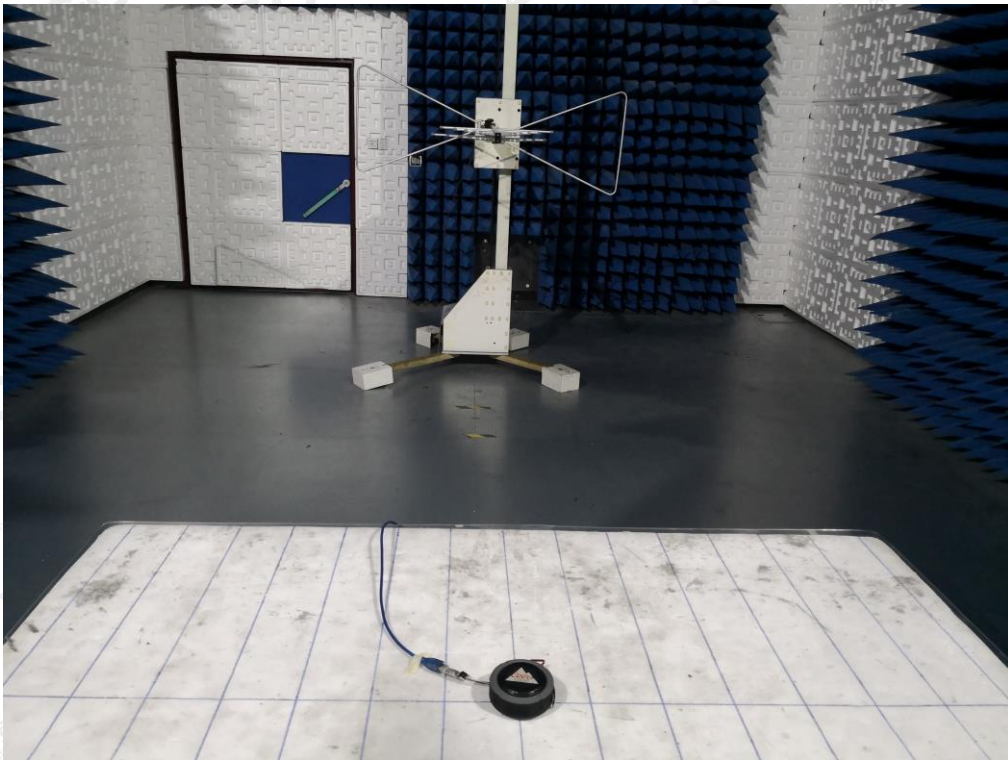


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

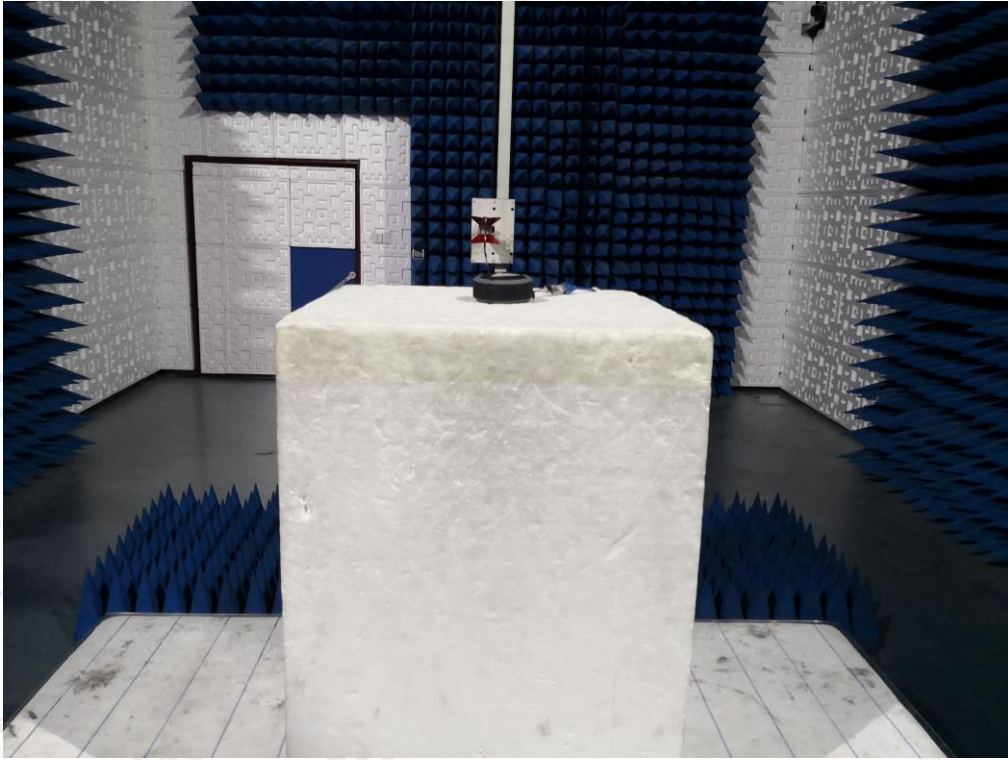


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



**APPENDIX B: PHOTOGRAPHS OF EUT**  
TOP VIEW OF EUT

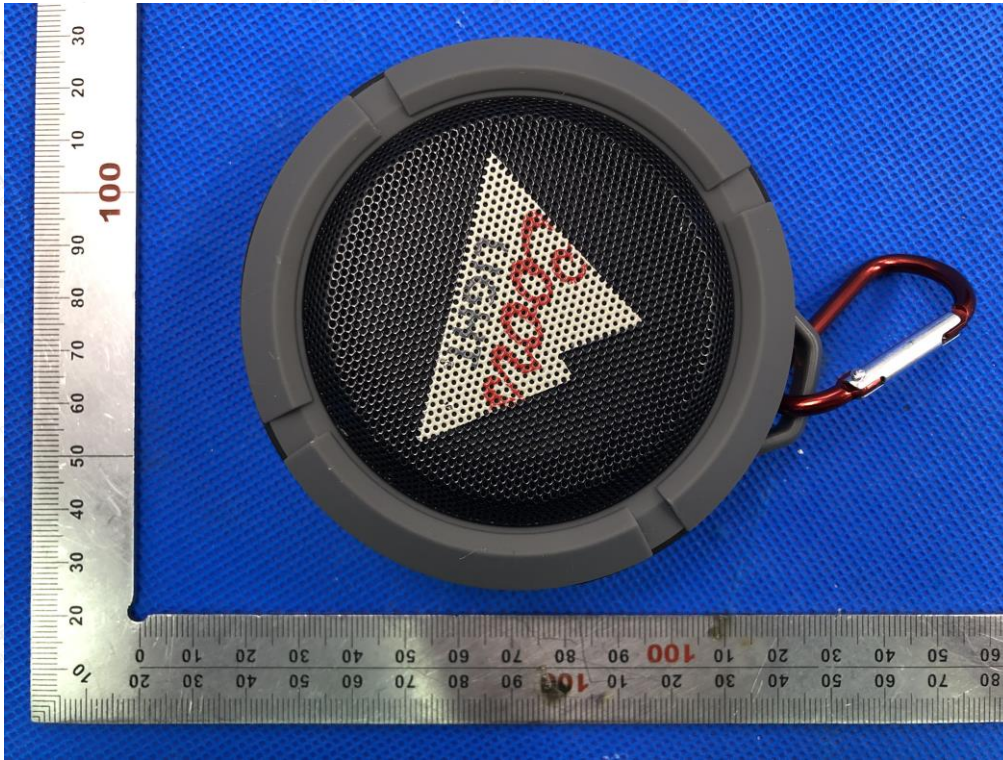


**BOTTOM VIEW OF EUT**

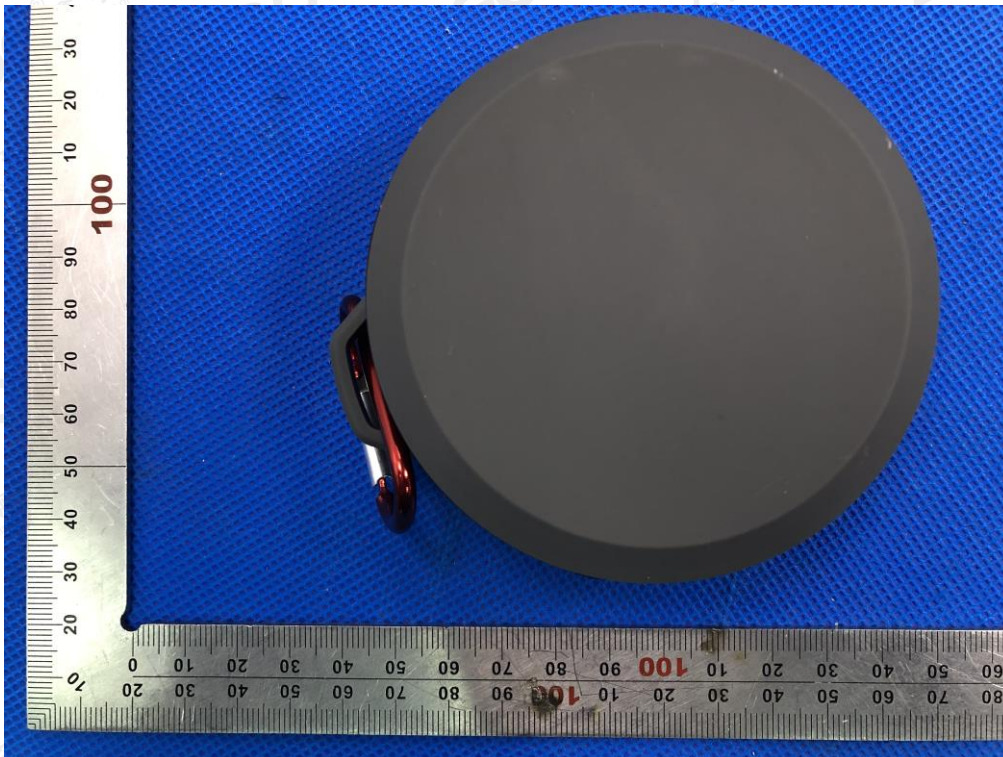


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



FRONT VIEW OF EUT

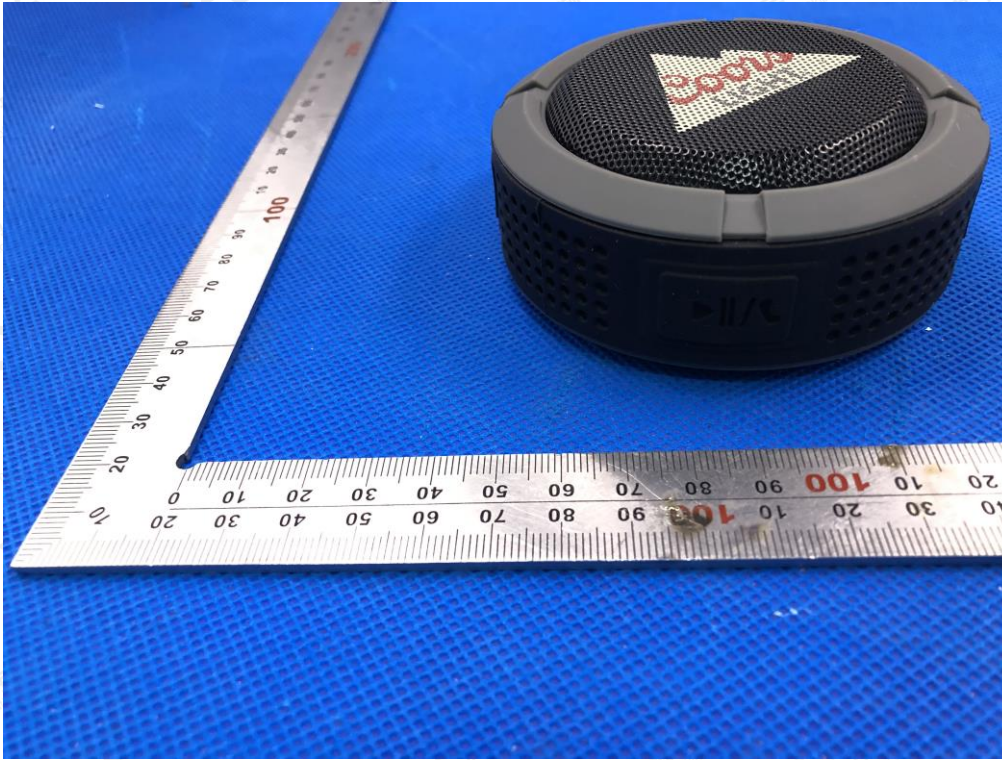


BACK VIEW OF EUT

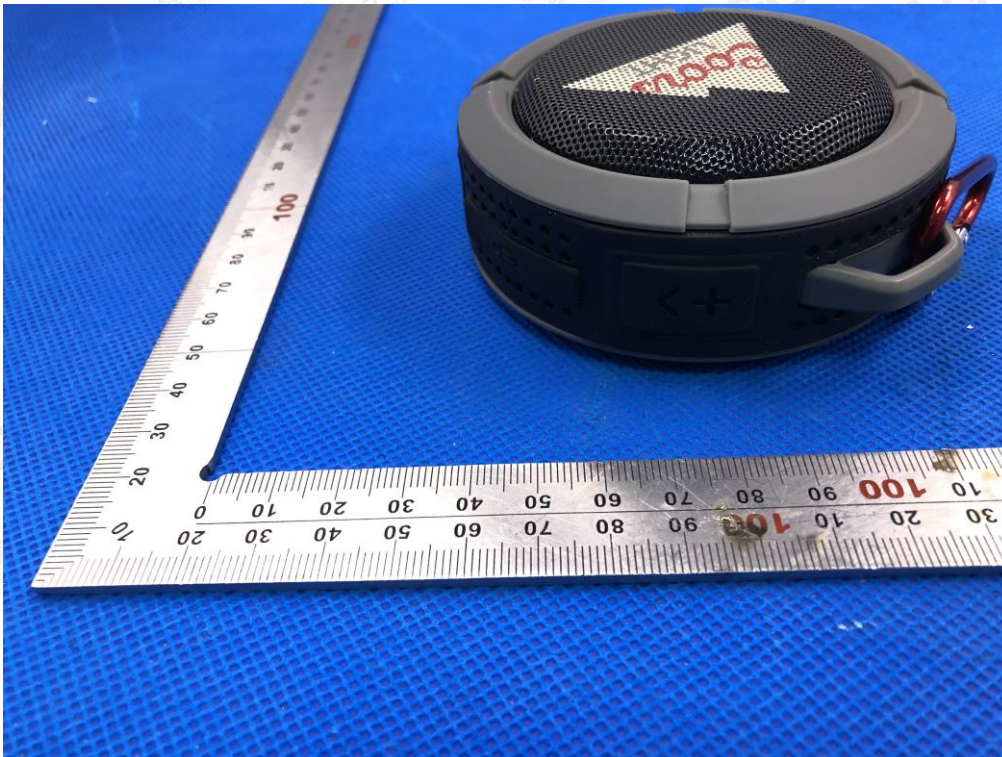


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



LEFT VIEW OF EUT

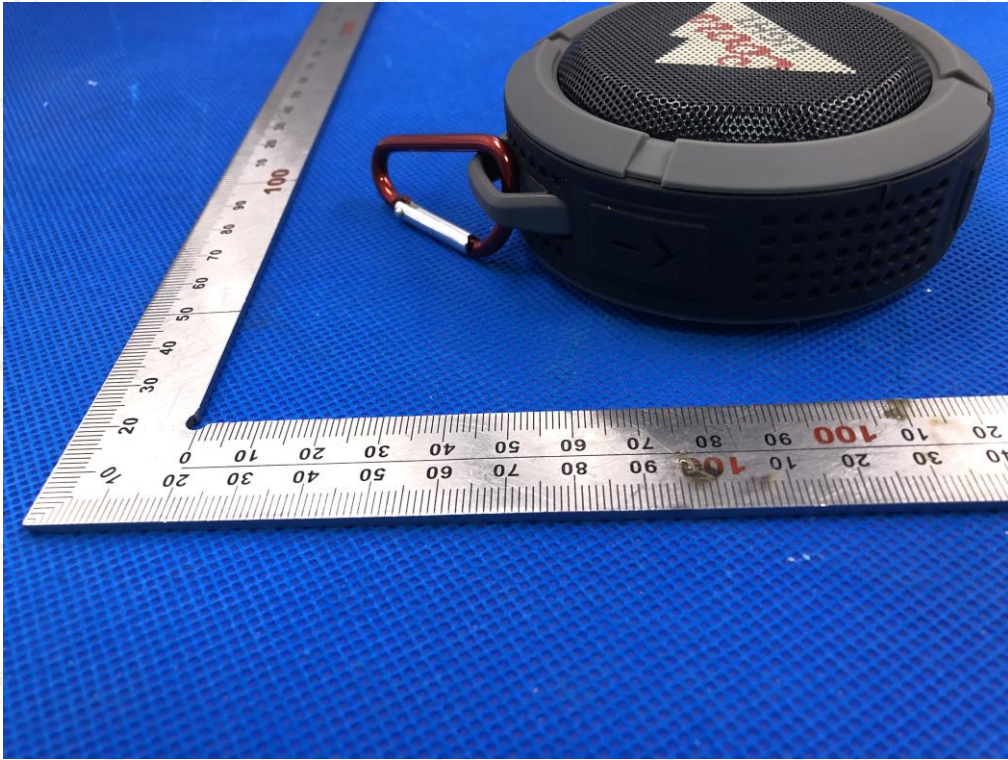


RIGHT VIEW OF EUT

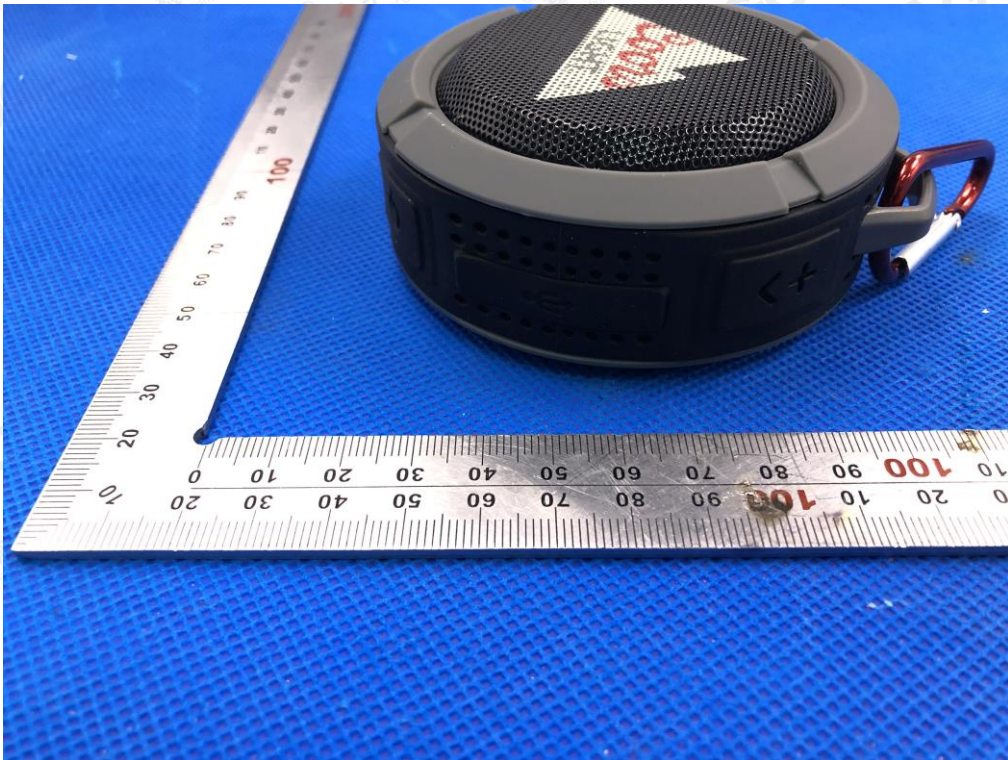

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



OPEN VIEW OF EUT

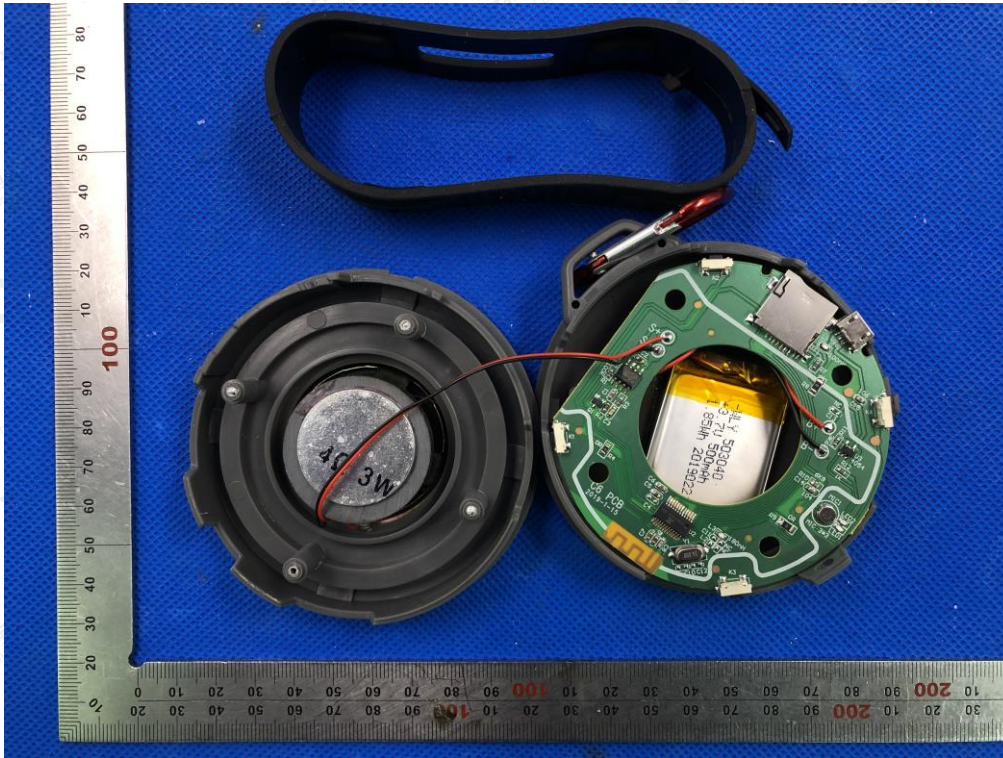


VIEW OF BATTERY




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



INTERNAL VIEW OF EUT-1

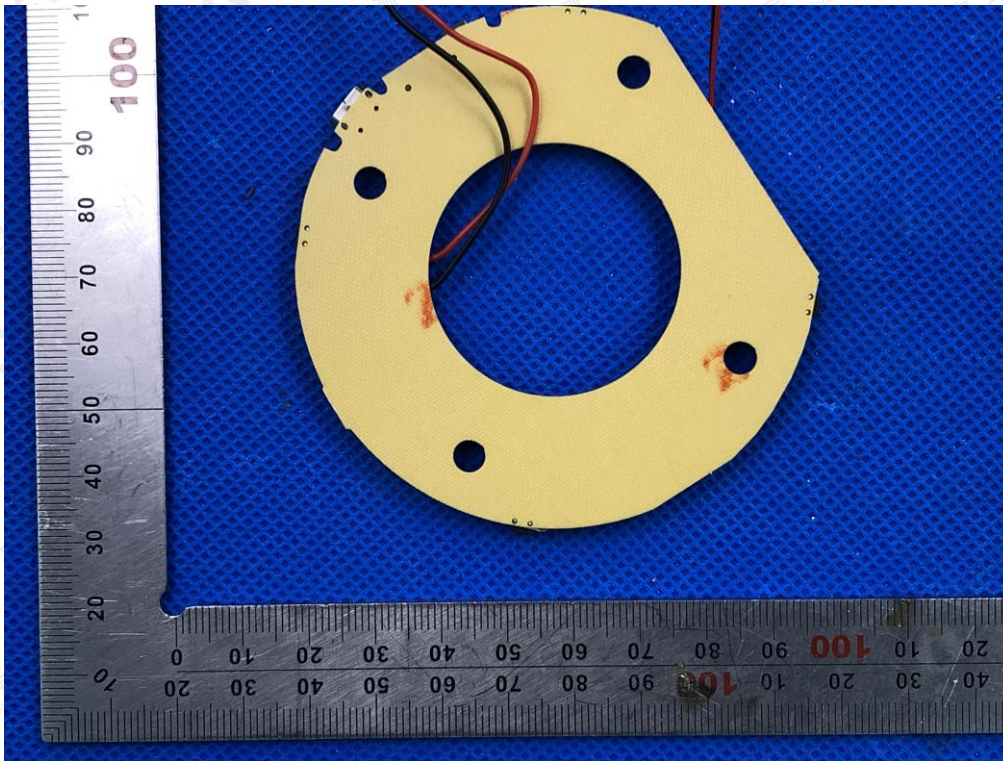


INTERNAL VIEW OF EUT-2

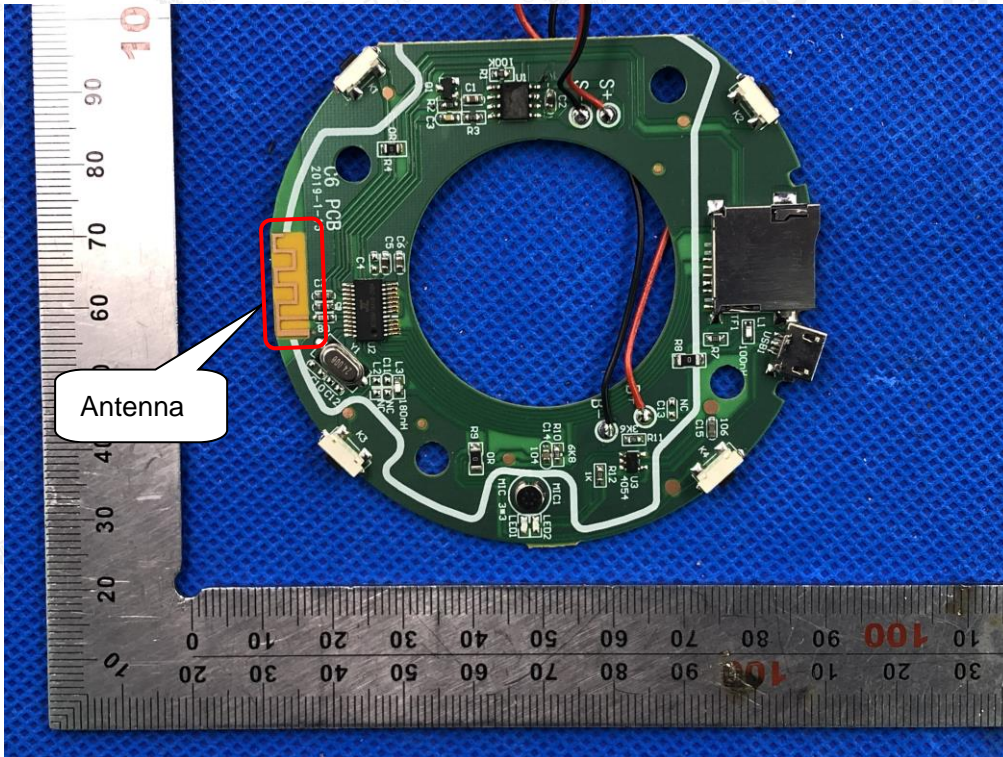

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



INTERNAL VIEW OF EUT-3

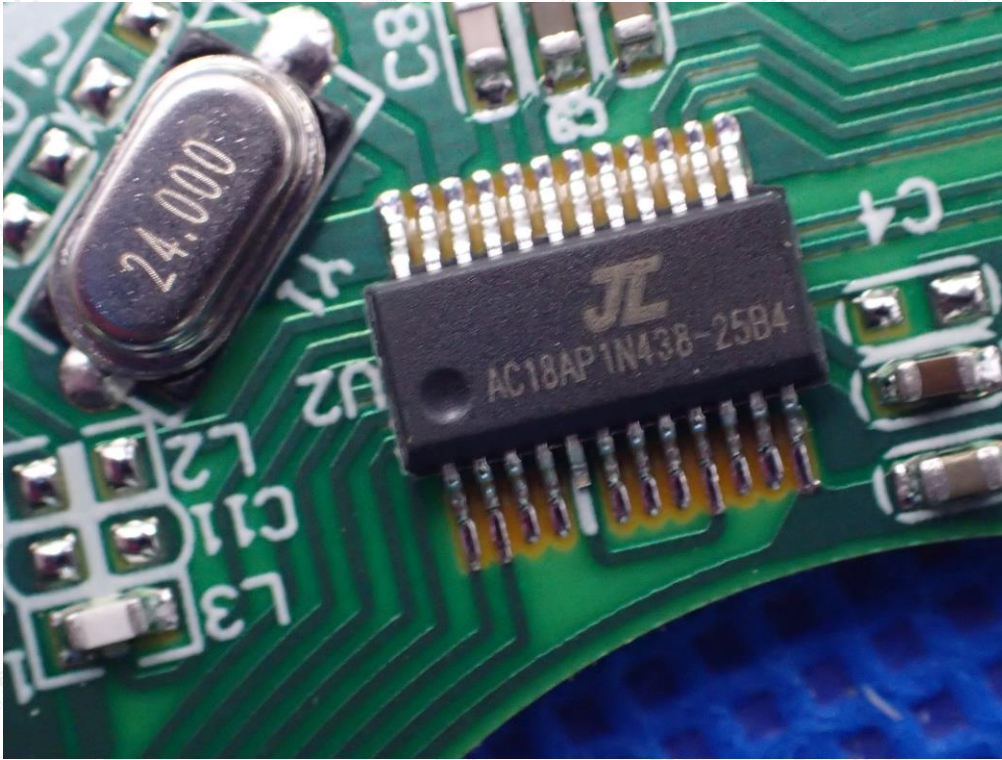

----END OF REPORT----

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.