

## E) FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


## F) Attention



1. Make sure the power is off after use.
2. Since there can be high voltage inside the unit, Do NOT open or repair the unit yourself. If there is any defect, please contact an experienced technician.
3. Keep the environment dry and ventilated when using the product. Do not leave or use the flash in humid or dusty environment.
4. Do NOT apply pressure to the product.
5. Read this manual carefully before using the product.



## RC-3T Instruction Manual

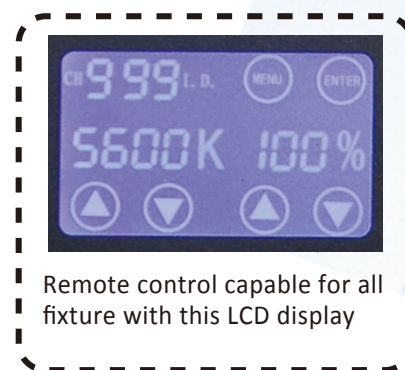

**Thank you for purchasing FalconEyes' products.**

**For further details of our related products, please contact your local distributor or visit our webpage at [www.falconeyes.com.hk](http://www.falconeyes.com.hk)**

**Thank you.**

**Please read this manual carefully before using this product.**

E-mail: [info@falconeyes.com.hk](mailto:info@falconeyes.com.hk)

Website: [www.falconeyes.com.hk](http://www.falconeyes.com.hk)





## A) Product Overview

RC-3T remote is equipped with a touch screen LCD display, and equipped with a internal 2.4G anti-jamming transmitter which able to control single or multiple fixtures at a same time. By setting the ID channels, user can set channels from 0-999.

User can adjust the channels on the fixtures to match with the remote channels in order to remote control single or multiple units. Users can also preset different groups of fixtures in different channels and adjust the remote channels to control corresponding group of fixtures. User will no longer need to adjust lighting one by one and this improved the efficiency on different projects.

## B) Panel Diagram

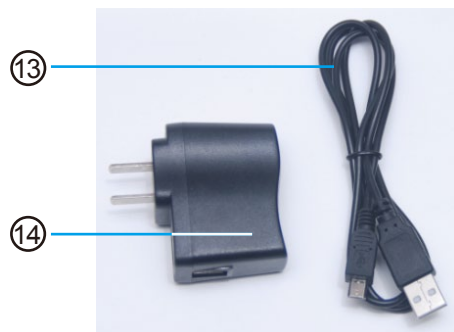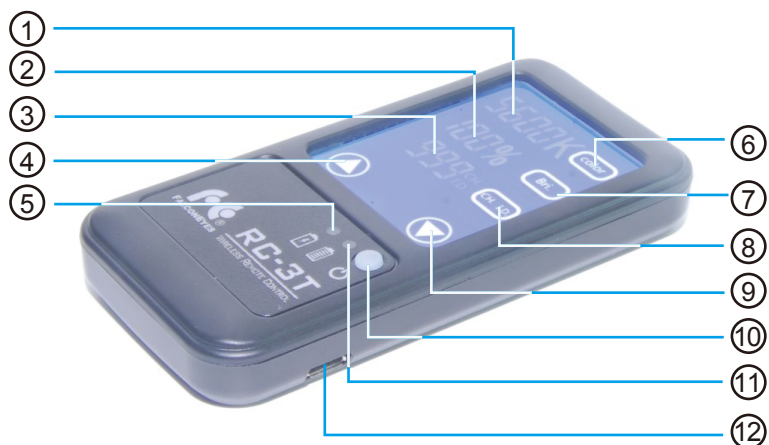

1. Color temperature display
2. Output Display
3. Channels and ID (supporting DMX 512)
4. Increase
5. Battery indicator
6. Color Temperature adjustment
7. Brightness adjustment
8. Channels and ID (supporting DMX 512) adjustment
9. Decrease
10. Power switch
11. Charging indicator
12. Charging port
13. USB charging wire
14. Charger

## C) Operating Instructions

To start using, please switch on the power switch on the remote. User can use the remote to adjust color temperature and output of the light. The ID display on the remote must be same as the fixture you'd like to control. Below is further steps for reference:

### 1, Adjusting ID

- ① Please push the **CH. ID.** displayed on the remote screen and you'll find the first left digit blinking. At this moment you can push **▲** and **▼** to adjust the first digit.
- ② When pushing **CH. ID.** 2 times you'll find the 2nd digit blinking. At this moment you can push **▲** and **▼** to adjust the first digit.
- ③ When pushing **CH. ID.** 3 times you'll find the 3rd digit blinking. At this moment you can push **▲** and **▼** to adjust the first digit.

### 2, Adjusting Brightness

- ①. Push the **Bri.** displayed on the remote screen and you can see the % row is blinking. At this moment you can push **▲** to increase the brightness and **▼** to decrease the brightness.

### 3, Adjusting Color Temperature

- ①. Push the **color** displayed on the remote screen and you can see the K row is blinking. At this moment you can push **▲** to increase the color temperature (Cold side) and **▼** to decrease the color temperature (Warm side).

## D) Specifications:

Model no. :	RC-3T
Frequency	2.4GHz
Remote distance	20 M
Battery Capacity	390mAh / 3.7V
LCD Display	Touch Screen
Size (LxWxH)	108 x 54 x 16 mm
Weight	76 g
Accessories	Charger