

TEST REPORT

Reference No..... : WTS14S1120215E
FCC ID : 2ADP5-MASTER
Applicant..... : Illumicare Group Limited
Address..... : 200Pony Drive, Newmarket, ON L3Y7B6 Canada
Manufacturer : KOJ ELECTRONIC CO. LTD
Address..... : TECHNOLOGY BUILDING, TIANAN CYBER PARK, NANHAI,
FOSHAN CITY, CHINA
Product Name..... : MERRLIN PROGRAM MERER
Model No..... : Master
Standards : FCC CFR47 Part 15 Section 15.249: 2014
Date of Receipt sample : Nov. 21,2014
Date of Test : Nov. 29~Dec. 27,2014
Date of Issue..... : Dec. 29,2014
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Emission	15.249(a) 15.209 15.205(a)	PASS
Periodic Operation	15.35(c)	PASS
Outside of Band Emission	15.249 15.205 15.209	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 TEST FACILITY	4
5 EQUIPMENT USED DURING TEST	5
5.1 EQUIPMENTS LIST	5
5.2 MEASUREMENT UNCERTAINTY.....	6
5.3 TEST EQUIPMENT CALIBRATION.....	6
6 RADIATION EMISSION TEST	7
6.1 EUT OPERATION.....	7
6.2 TEST SETUP	8
6.3 SPECTRUM ANALYZER SETUP.....	9
6.4 TEST PROCEDURE.....	10
6.5 TEST RESULT	11
7 PERIODIC OPERATION	14
8 OUTSIDE OF BAND EMISSION.....	16
8.1 TEST PROCEDURE.....	16
8.2 TEST RESULT	16
9 20 DB BANDWIDTH MEASUREMENT	18
9.1 TEST PROCEDURE.....	18
9.2 TEST RESULT	18
10 ANTENNA REQUIREMENT	20
11 PHOTOGRAPHS- MODEL MASTER TEST SETUP.....	21
11.1 RADIATION EMISSION	21
12 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	23
12.1 MASTER - EXTERNAL VIEW	23
12.2 MASTER - INTERNAL VIEW.....	27

4 General Information

4.1 General Description of E.U.T.

Product Name	:MERRLIN PROGRAM MERER
Model No.	:Master
Model Differences	: N/A
Type of Modulation	: ASK
Frequency Range	: 2432MHz, 2464MHz
The Lowest Oscillator	: 32.768kHz
Antenna installation	: External antenna with RP-SMA connector

4.2 Details of E.U.T.

Technical Data	: DC 4.5V by batteries(1.5V*3 Size"AAA")
----------------	--

4.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- IC – Registration No.: 7760A**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, July 12, 2012.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

4.3.1 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Lower channel	Middle channel	Upper channel
Transmitting	2432MHz	/	2464MHz

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2014	Apr.18,2015
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2014	Sep.14,2015

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Radiation Emission Test

Test Requirement: FCC Part15 Paragraph 15.249

Test Method: ANSI 63.4: 2003

Measurement Distance: 3m

Test Result: PASS

15.249(a)Limit:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

15.209 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note: RF Voltage(dBuV)= $20 \log_{10}$ RF Voltage(uV)

6.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

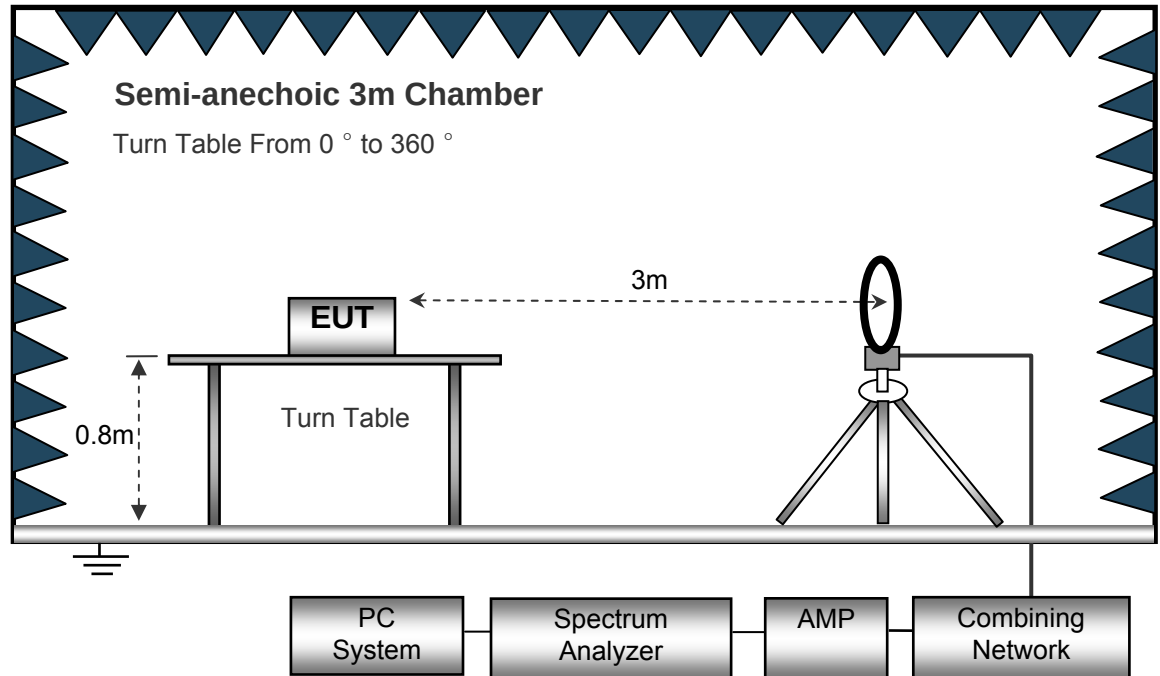

The test setup for emission measurement from 30MHz to 1GHz.

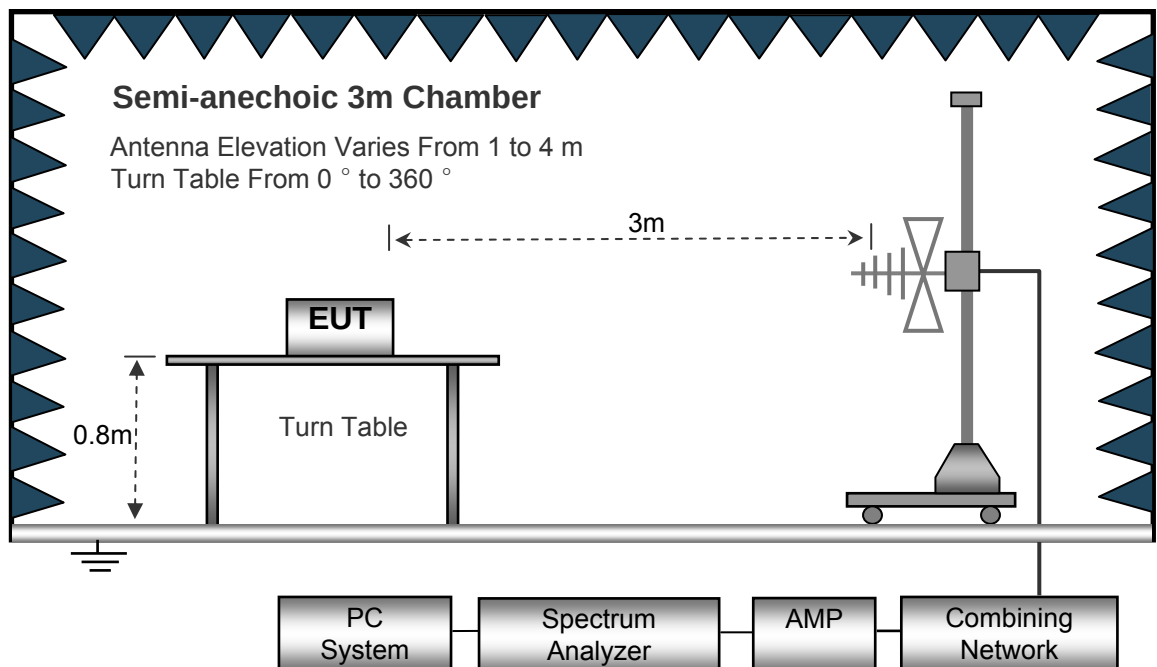

The test setup for emission measurement above 1 GHz.

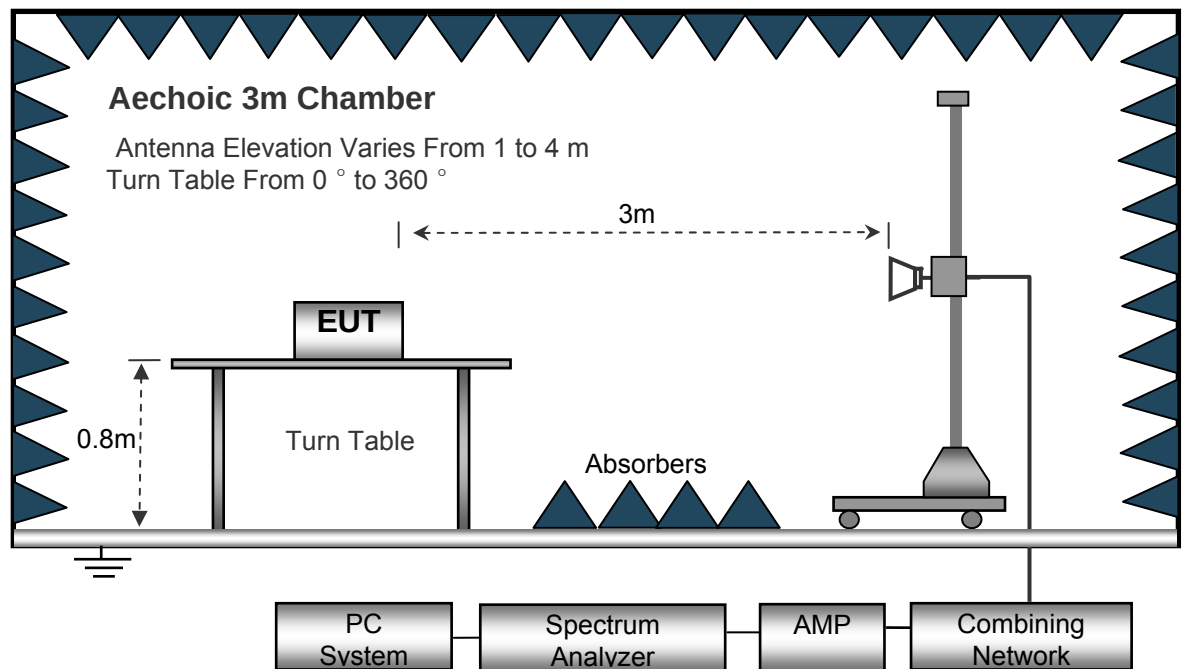

6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth.....10kHz
 Video Bandwidth10kHz
 Resolution Bandwidth10kHz

30MHz ~ 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth300kHz

Above 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth3MHz
 DetectorAve.
 Resolution Bandwidth.....1MHz
 Video Bandwidth10Hz

6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Test Result

$AV = \text{Peak} + 20\log_{10}(\text{duty cycle}) = PK + (-16.23)$ [refer to section 7 for more detail]

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Test Mode: Transmitting 2432MHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Test Result	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
31.17	15.22	QP	49	1.1	V	15.14	30.36	40.00	-9.64
172.59	22.18	QP	206	1.5	V	10.53	32.71	46.00	-13.29
2432.00	80.22	PK	249	1.1	H	27.26	107.48	114.00	-6.52
2432.00	81.56	PK	211	1.9	V	27.26	108.82	114.00	-5.18
4864.00	79.24	PK	275	1.5	H	-13.21	66.03	74.00	-7.97
4864.00	80.18	PK	76	1.8	V	-13.21	66.97	74.00	-7.03
7296.00	78.85	PK	163	1.7	H	-13.08	65.77	74.00	-8.23
7296.00	77.32	PK	281	1.6	V	-13.08	64.24	74.00	-9.76
9728.00	76.53	PK	23	1.2	H	-9.08	67.45	74.00	-6.55
9728.00	75.68	PK	296	1.1	V	-9.08	66.60	74.00	-7.40
2357.23	42.51	PK	341	1.6	H	-13.14	29.37	74.00	-44.63
2357.23	37.18	PK	341	1.6	V	-13.14	24.04	54.00	-29.96
2489.77	42.80	PK	16	1.3	H	-13.08	29.72	74.00	-44.28
2489.77	36.71	PK	16	1.3	V	-13.08	23.63	54.00	-30.37

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	Test Result	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2432.00	107.48	249	1.1	H	-16.23	91.25	94.00	-2.75
2432.00	108.82	211	1.9	V	-16.23	92.59	94.00	-1.41
4864.00	66.03	275	1.5	H	-16.23	49.80	54.00	-4.20
4864.00	66.97	76	1.8	V	-16.23	50.74	54.00	-3.26
7296.00	65.77	163	1.7	H	-16.23	49.54	54.00	-4.46

7296.00	64.24	281	1.6	V	-16.23	48.01	54.00	-5.99
9728.00	67.45	23	1.2	H	-16.23	51.22	54.00	-2.78
9728.00	66.60	296	1.1	V	-16.23	50.37	54.00	-3.63

Test Mode: Transmitting 2464MHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Test Result	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
31.66	15.86	QP	164	1.7	V	15.14	31.00	40.00	-9.00
172.71	23.98	QP	171	1.5	V	10.53	34.51	46.00	-11.49
2464.00	80.11	PK	140	1.5	H	27.26	107.37	114.00	-6.63
2464.00	81.09	PK	57	1.7	V	27.26	108.35	114.00	-5.65
4928.00	79.44	PK	264	1.7	H	-13.21	66.23	74.00	-7.77
4928.00	79.68	PK	147	1.3	V	-13.21	66.47	74.00	-7.53
7392.00	78.41	PK	306	1.7	H	-13.08	65.33	74.00	-8.67
7392.00	76.15	PK	270	1.5	V	-13.08	63.07	74.00	-10.93
9856.00	76.33	PK	271	1.3	H	-9.08	67.25	74.00	-6.75
9856.00	74.12	PK	58	1.4	V	-9.08	65.04	74.00	-8.96
2384.26	42.19	PK	344	1.1	H	-13.14	29.05	74.00	-44.95
2384.26	37.07	PK	344	1.1	V	-13.14	23.93	54.00	-30.07
2493.31	43.61	PK	259	1.1	H	-13.08	30.53	74.00	-43.47
2493.31	38.94	PK	259	1.1	V	-13.08	25.86	54.00	-28.14

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	Test Result	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2464.00	107.37	140	1.5	H	-16.23	91.14	94.00	-2.86
2464.00	108.35	57	1.7	V	-16.23	92.12	94.00	-1.88
4928.00	66.23	264	1.7	H	-16.23	50.00	54.00	-4.00
4928.00	66.47	147	1.3	V	-16.23	50.24	54.00	-3.76
7392.00	65.33	306	1.7	H	-16.23	49.10	54.00	-4.90

7392.00	63.07	270	1.5	V	-16.23	46.84	54.00	-7.16
9856.00	67.25	271	1.3	H	-16.23	51.02	54.00	-2.98
9856.00	65.04	58	1.4	V	-16.23	48.81	54.00	-5.19

Test Frequency: Above 18GHz

The measurements were more than 20 dB below the limit and not reported.

7 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train * %


Duty Cycle Correction Factor(dB)=20 * Log₁₀(Duty Cycle(%))



Total transmission time(ms)	0.54*6
Length of a complete transmission period(ms)	21
Duty Cycle(%)	15.43
Duty Cycle Correction Factor(dB)	-16.23

Refer to the duty cycle plot (as below), This device meets the FCC requirement.

Length of a complete pulse train:

Remark: FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

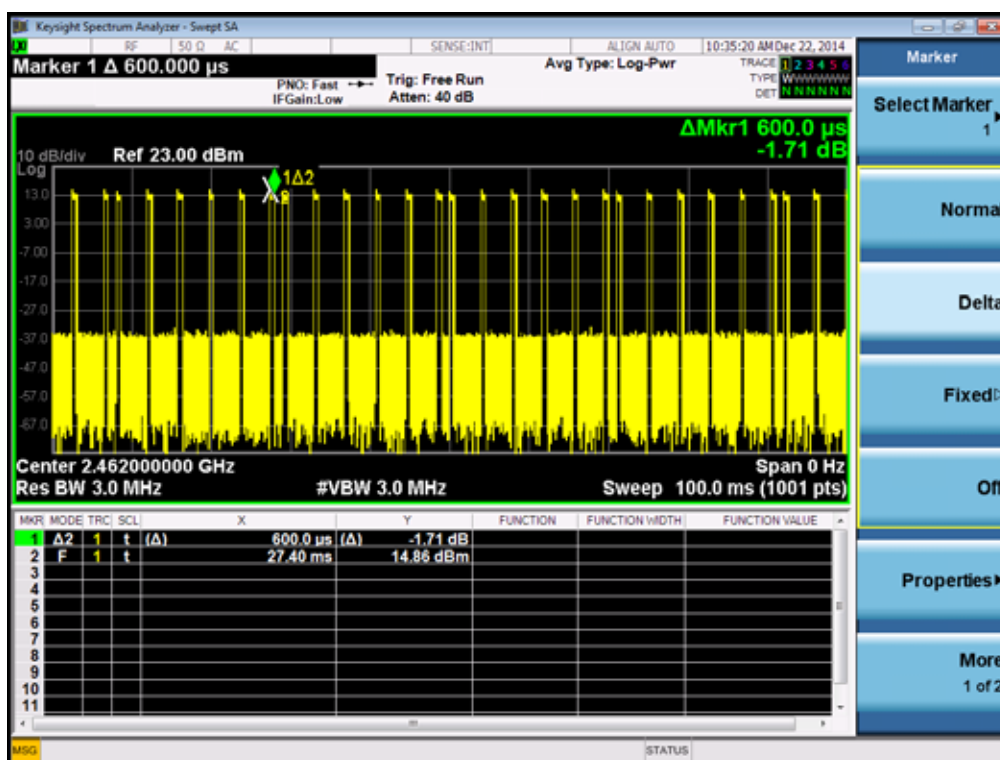

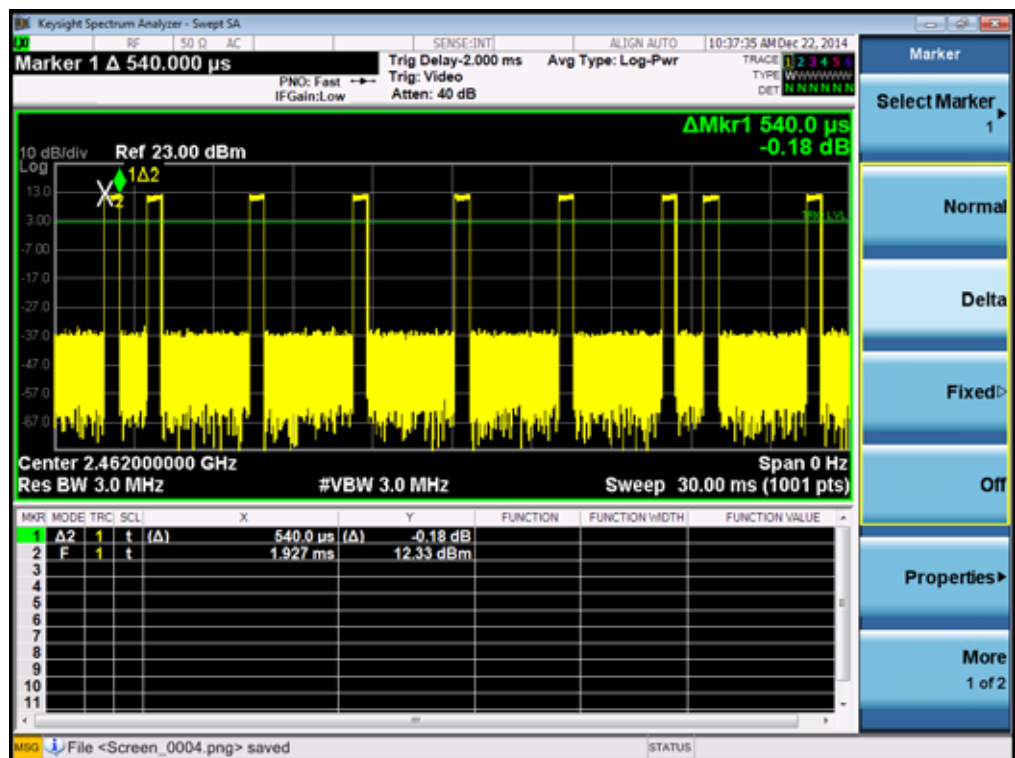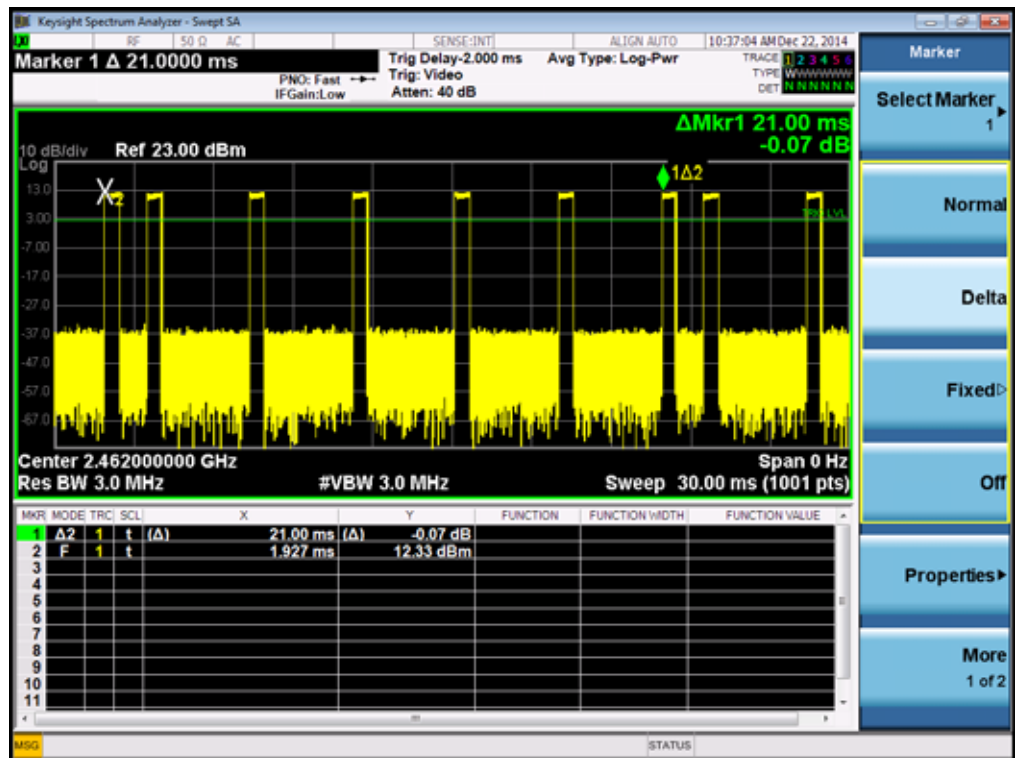

8 Outside of Band Emission


Test Requirement:	15.249(d):Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
Test Method:	ANSI C63.4:2003
Test Mode:	Transmitting


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Result

Test plots

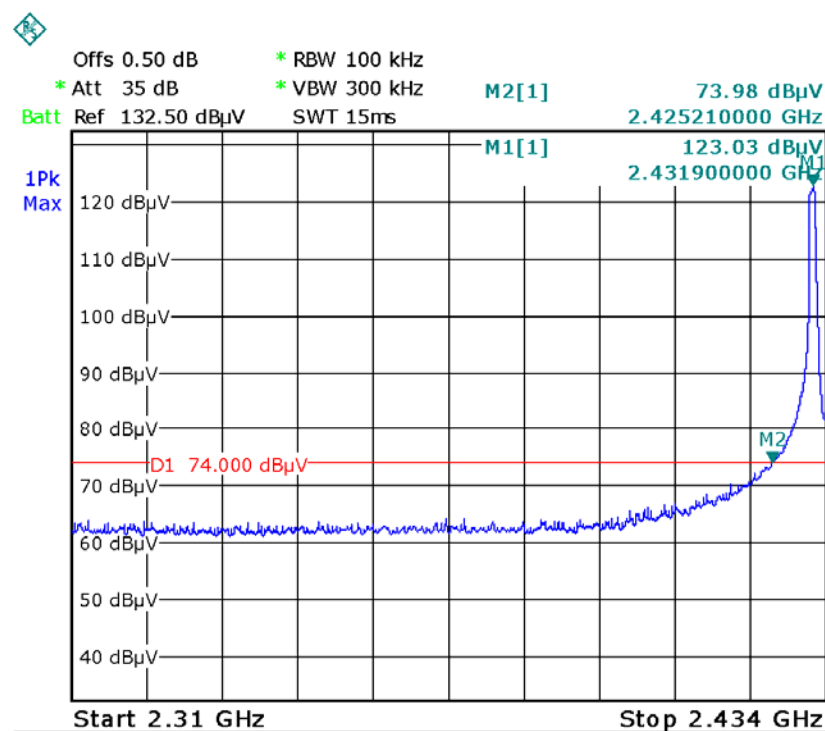

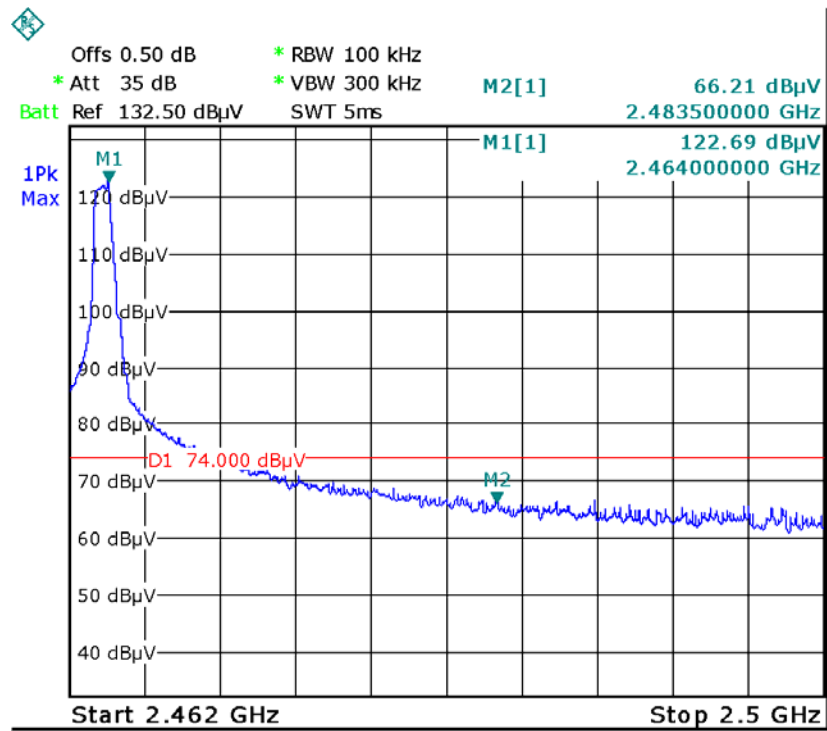

9 20 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.215(c)

Test Method:

ANSI C63.4:2003

Test Mode:

Transmitting


9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 10kHz, VBW = 30kHz

9.2 Test Result

Test Frequency	Bandwidth
2432MHz	968kHz
2464MHz	848kHz

Test plots

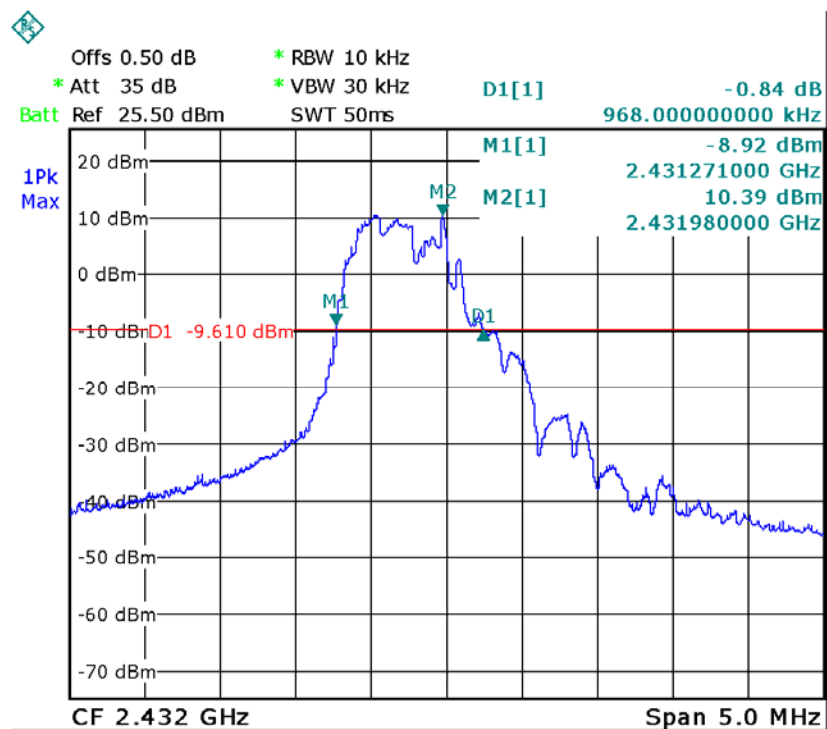

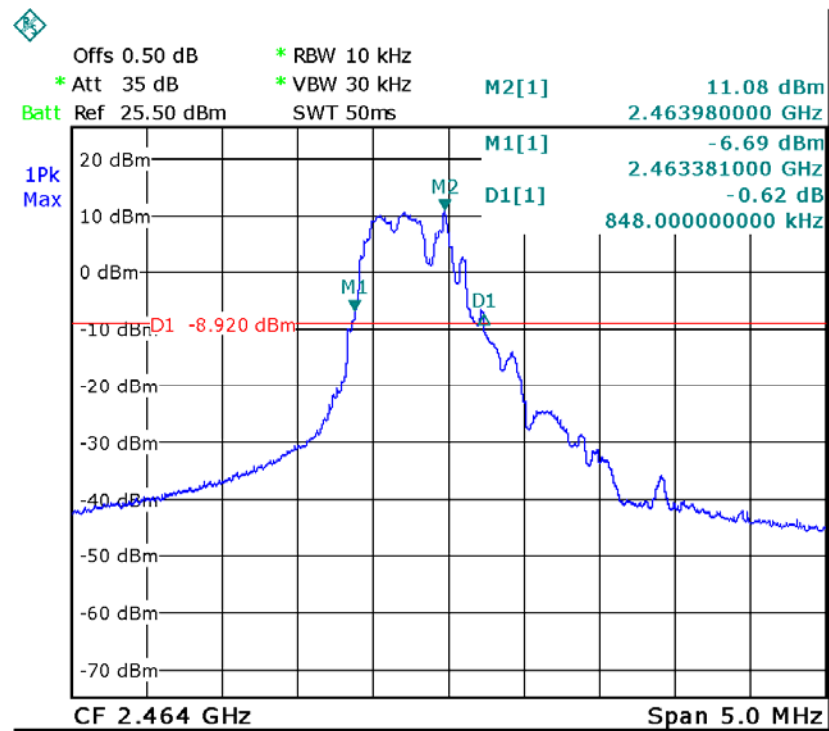

10 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an External antenna with RP-SMA connector ,fulfil the requirement of this section.


11 Photographs- Model Master Test Setup

11.1 Radiation Emission


Below 30MHz at Test Site 2#



30~1000MHz at Test Site 2#

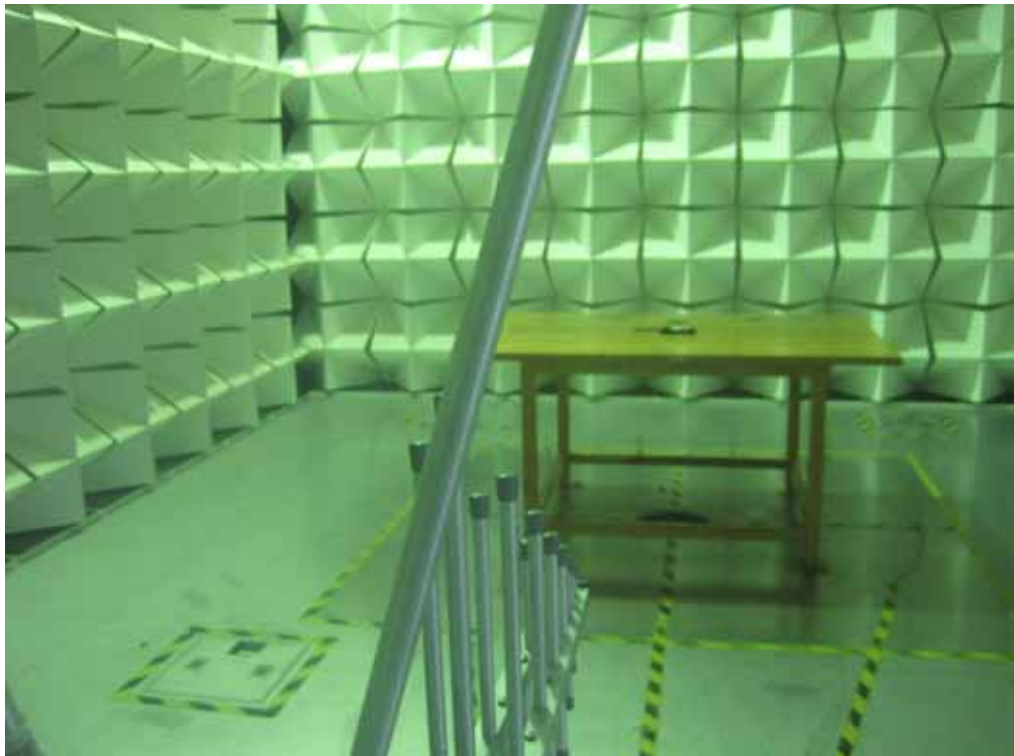


Above 1GHz at Test Site 2#

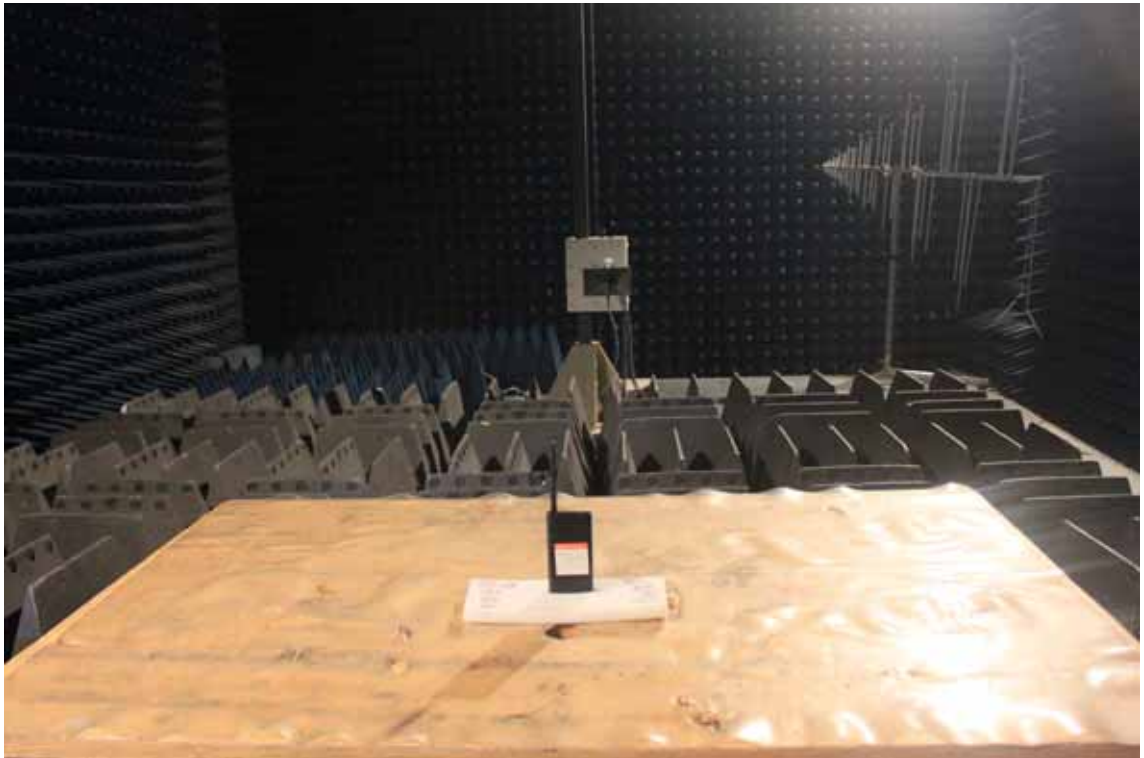


12 Photographs - Constructional Details

12.1 Master - External View



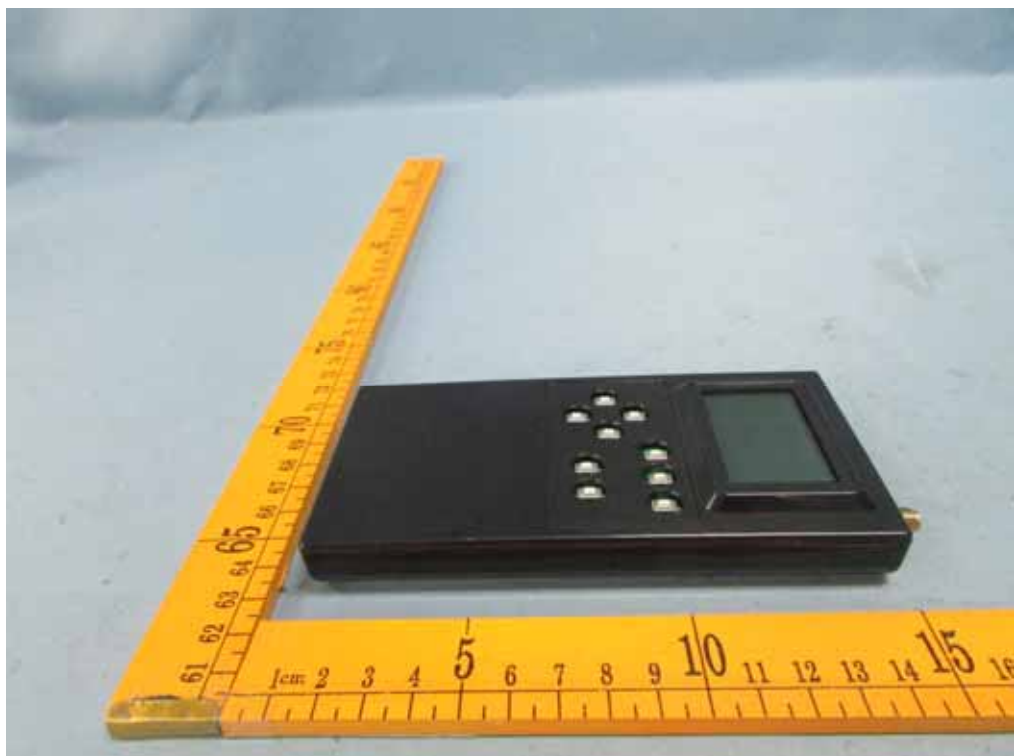

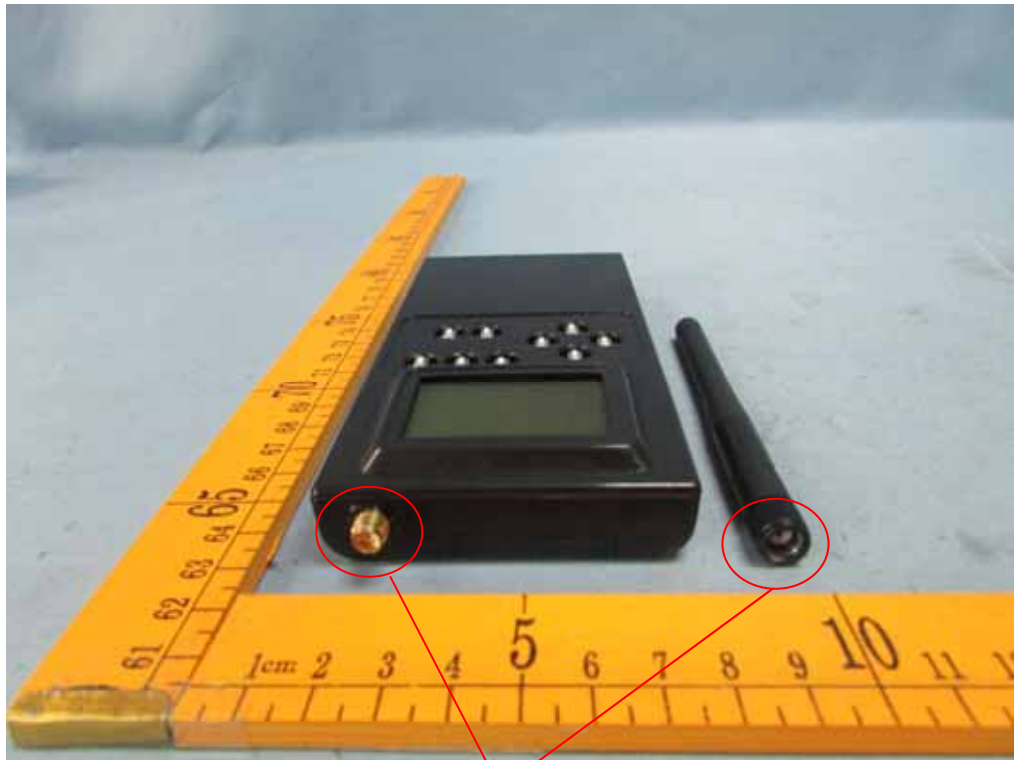


External antenna with RP-SMA connector




Battery Placement




12.2 Master - Internal View

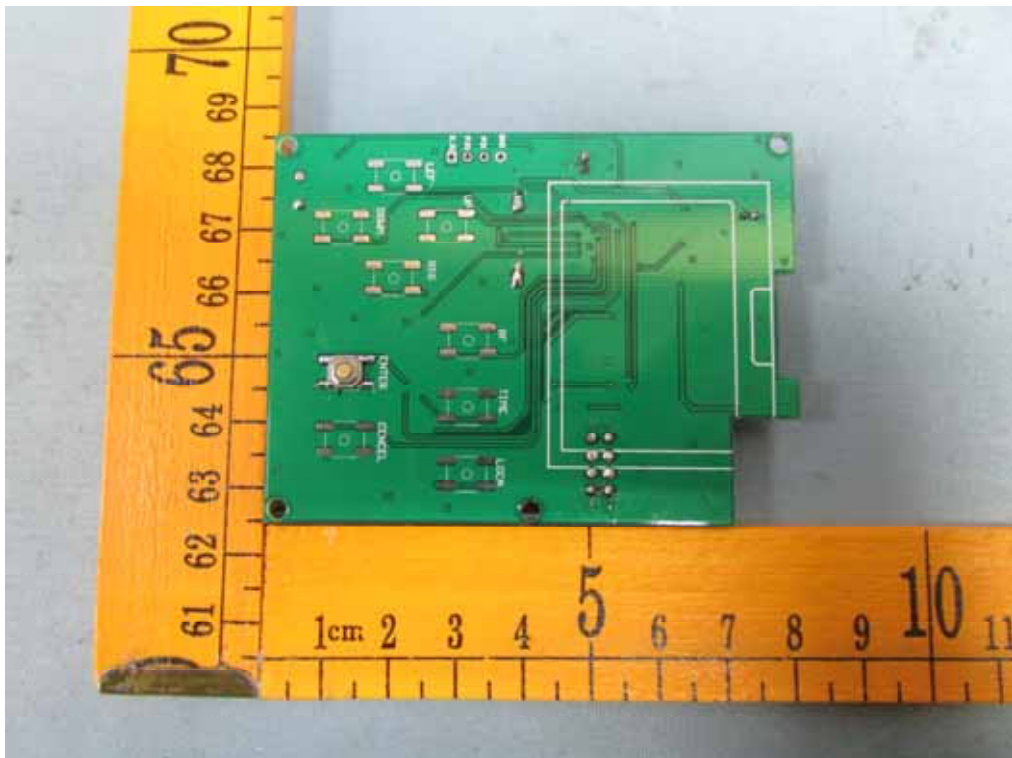

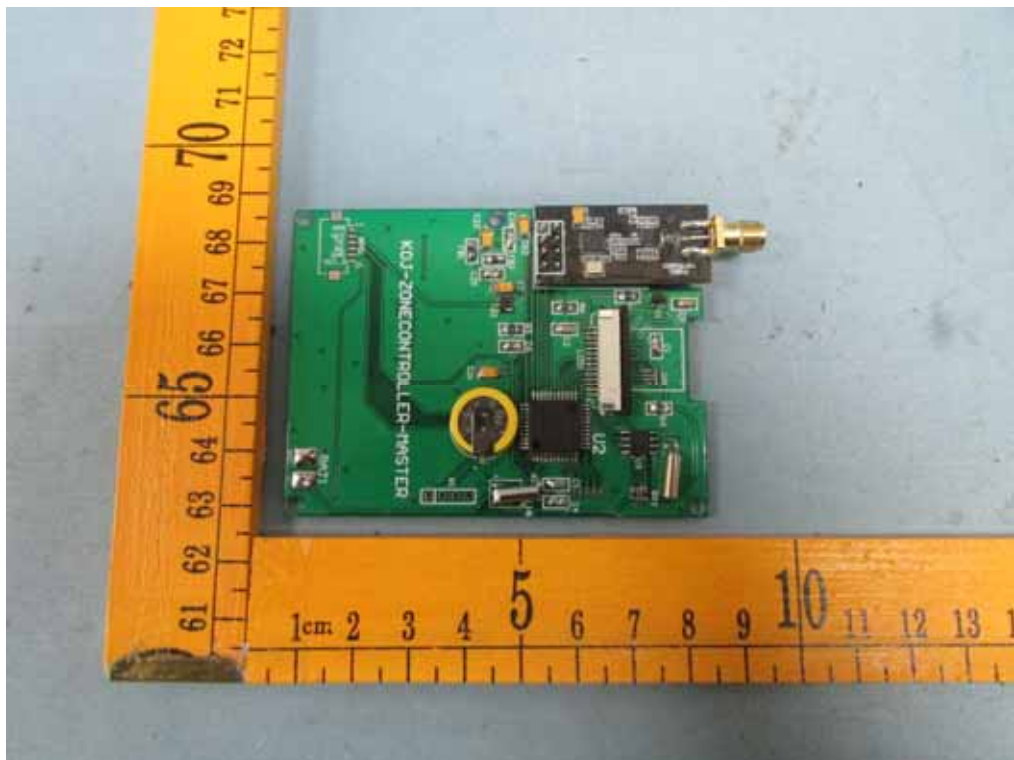

RF Module

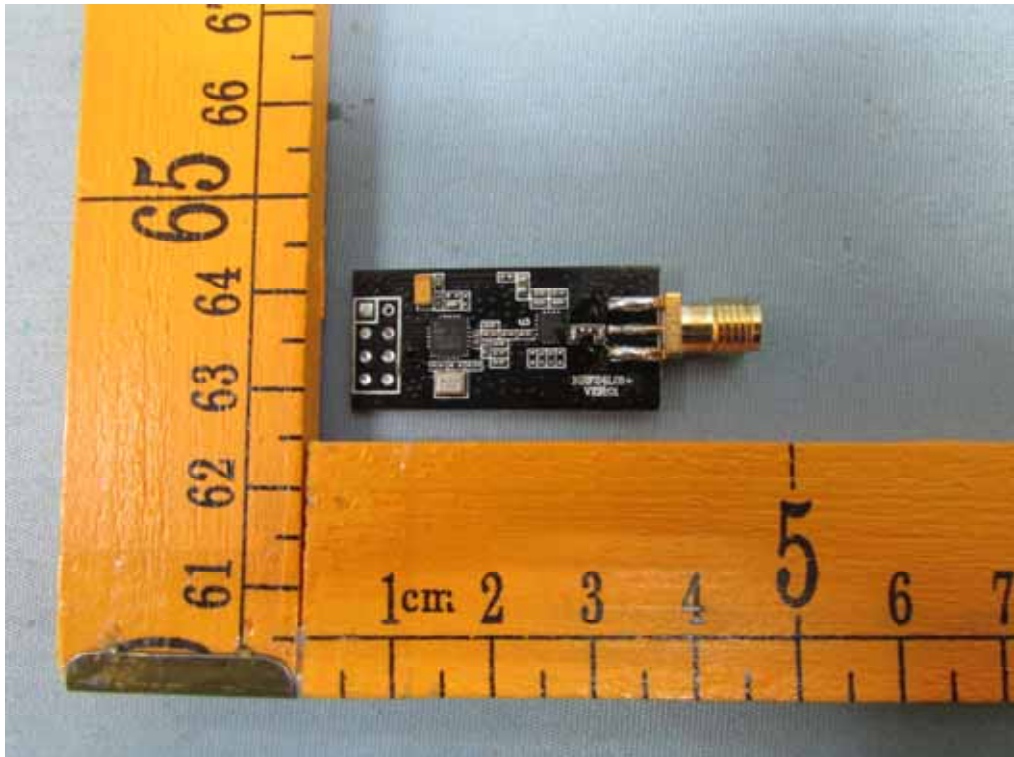

=====End of Report=====