

TEST REPORT

Product : Media Center
Trade mark : **KICKER**
Model/Type reference : KMC100, KMC5
Serial Number : N/A
Report Number : EED32L00202001
FCC ID : 2ADQMKMC1001
Date of Issue : Aug.23, 2019
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

CPS Distributors, Inc.
6024 Parretta Drive, Kansas City, MO. 64120,USA

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Jay Zheng

Jay Zheng

Compiled by:

Alex Wu

Alex Wu

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Kevin Yang

Kevin Yang

Date:

Aug.23, 2019



Check No.: 3096311576

2 Version

Version No.	Date	Description
00	Aug.23, 2019	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: KMC100, KMC5

Only the model KMC100 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference model name.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	14
Appendix A): 20dB Occupied Bandwidth.....	15
Appendix B): Carrier Frequency Separation.....	19
Appendix C): Dwell Time.....	23
Appendix D): Hopping Channel Number.....	27
Appendix E): Conducted Peak Output Power.....	29
Appendix F): Band-edge for RF Conducted Emissions.....	33
Appendix G): RF Conducted Spurious Emissions.....	38
Appendix H): Pseudorandom Frequency Hopping Sequence.....	48
Appendix I): Antenna Requirement.....	49
Appendix J): Restricted bands around fundamental frequency (Radiated).....	50
Appendix K): Radiated Spurious Emissions.....	75
PHOTOGRAPHS OF TEST SETUP.....	86
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	88

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

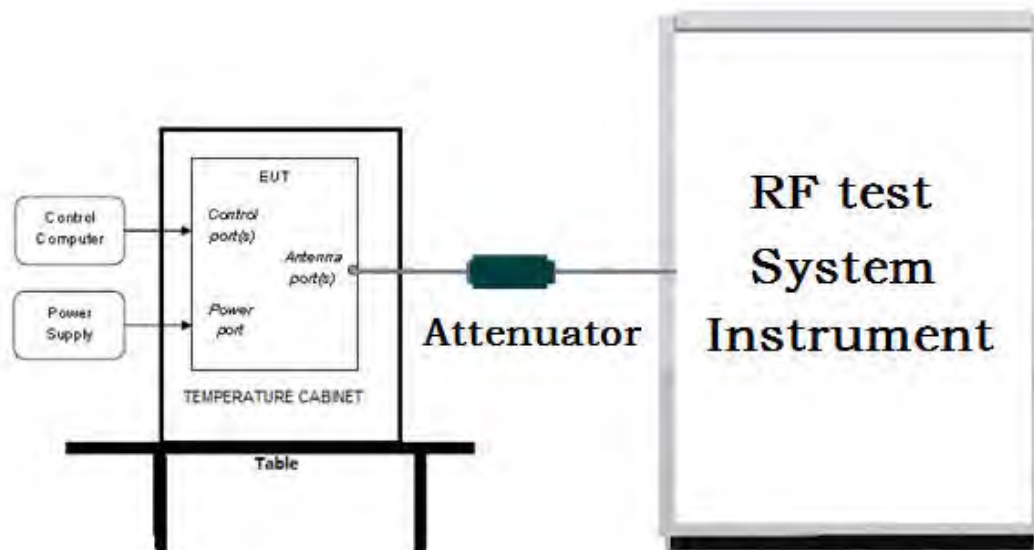

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

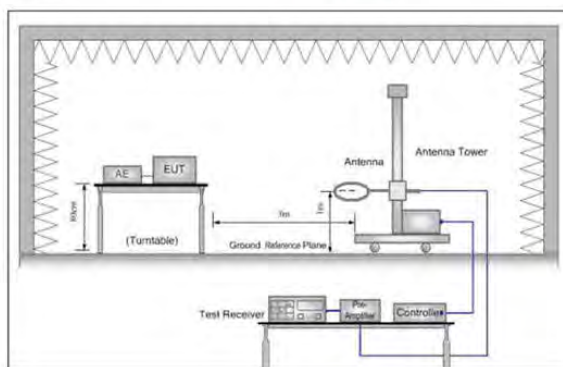


Figure 1. Below 30MHz

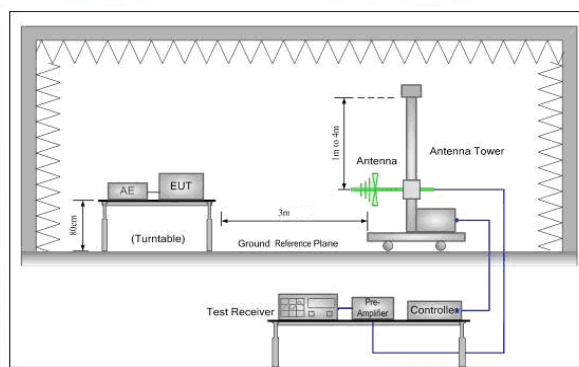


Figure 2. 30MHz to 1GHz


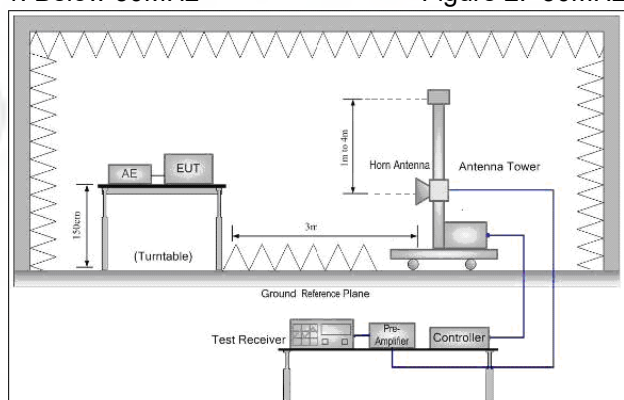


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

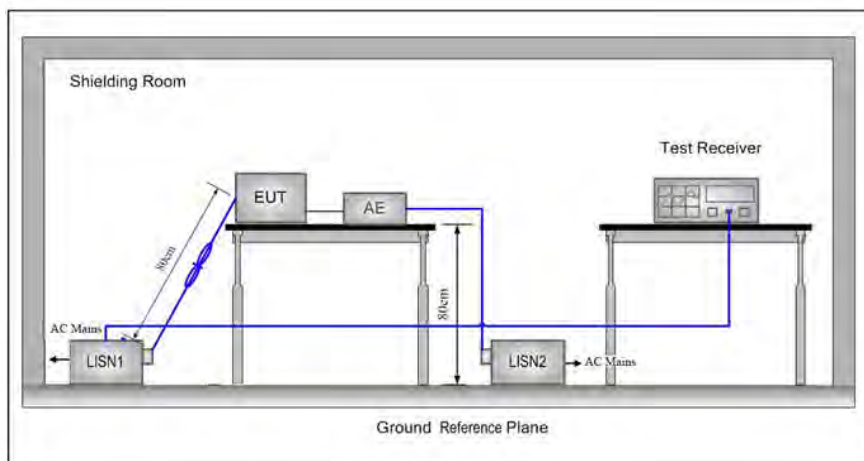

5.2 Test Environment

Operating Environment:	
Temperature:	24°C
Humidity:	58 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	CPS Distributors, Inc.
Address of Applicant:	6024 Parretta Drive, Kansas City, MO. 64120,USA
Manufacturer:	CPS Distributors, Inc.
Address of Manufacturer:	A1,A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City,Guangdong Province,China
Factory:	SKYPINE ELECTRONICS (SHEN ZHEN) CO.,LTD.
Address of Factory:	A1,A5 Building, No.6, Xinxing Industrial Park, Xinhe Village, Fuyong Town, Bao'an District, Shenzhen City,Guangdong Province,China

6.2 General Description of EUT

Product Name:	Media Center
Model No.(EUT):	KMC100, KMC5
Test Model No.:	KMC100
Trade mark:	
EUT Supports Radios application:	BT 2.1+EDR , 2402-2480MHz
Power Supply:	DC 12V
Sample Received Date:	Jul. 26, 2019
Sample tested Date:	Jul. 26, 2019 to Aug. 21, 2019

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Hardware Version:	N/A
Software Version:	N/A
Test Power Grade:	DH5:40/40/35 2DH5:40 3DH5:40
Test Software of EUT:	BlueTest 3 (manufacturer declare)
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Test Voltage:	DC 12V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-28-2020
Attenuator	HuaXiang	SHX370	15040701	03-01-2019	02-28-2020
Signal Generator	Keysight	N5181A	MY46240094	03-01-2019	02-28-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	107929	04-28-2019	04-27-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-28-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-28-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-28-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-28-2020
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	03-01-2019	02-28-2020
high-low temperature test chamber	DongGuangQinZhuo	LK-80GA	QZ20150611 879	03-01-2019	02-28-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-07-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-12-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-19-2020
ISN	TESEQ	ISN T800	30297	01-06-2019	01-05-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Microwave Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057410	06-05-2018	06-04-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-27-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Receiver	R&S	ESCI7	100938-003	11-23-2018	11-22-2019
Multi device Controller	maturo	NCD/070/10711112	---	01-09-2019	01-08-2020
Signal Generator	Agilent	E4438C	MY45095744	03-01-2019	02-28-2020
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-28-2020
Temperature/Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-24-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-24-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	05-01-2019	04-30-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-28-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-15-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	N/A	
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix K)




Appendix A): 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9574	0.87106	PASS
GFSK	MCH	0.9572	0.86091	PASS
GFSK	HCH	1.019	0.86410	PASS
$\pi/4$ DQPSK	LCH	1.279	1.1688	PASS
$\pi/4$ DQPSK	MCH	1.271	1.1661	PASS
$\pi/4$ DQPSK	HCH	1.274	1.1710	PASS
8DPSK	LCH	1.276	1.1560	PASS
8DPSK	MCH	1.276	1.1534	PASS
8DPSK	HCH	1.276	1.1571	PASS

Test Graph

Graphs	
GFSK/LCH	Keynote Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms Occupied Bandwidth 871.06 kHz Total Power 8.68 dBm Transmit Freq Error 76.561 kHz OBW Power 99.00 % x dB Bandwidth 957.4 kHz x dB -20.00 dB
GFSK/MCH	Keynote Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms Occupied Bandwidth 860.91 kHz Total Power 10.7 dBm Transmit Freq Error 59.958 kHz OBW Power 99.00 % x dB Bandwidth 957.2 kHz x dB -20.00 dB
GFSK/HCH	Keynote Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None Ref Offset 20.97 dB Ref 20.97 dBm Center 2.48 GHz Span 3 MHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms Occupied Bandwidth 864.10 kHz Total Power 10.7 dBm Transmit Freq Error 57.146 kHz OBW Power 99.00 % x dB Bandwidth 1.019 MHz x dB -20.00 dB

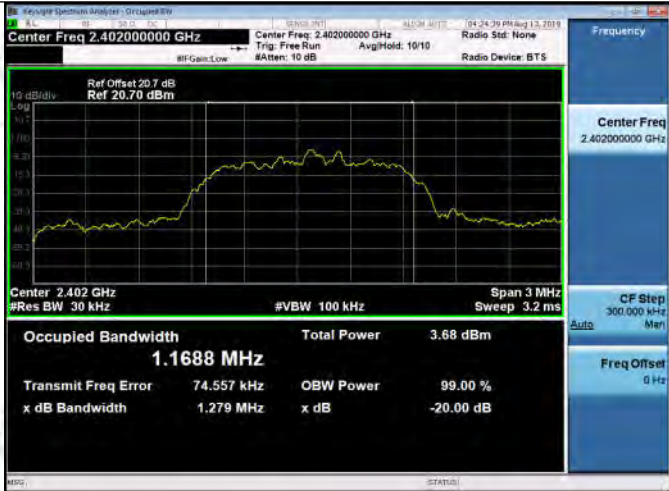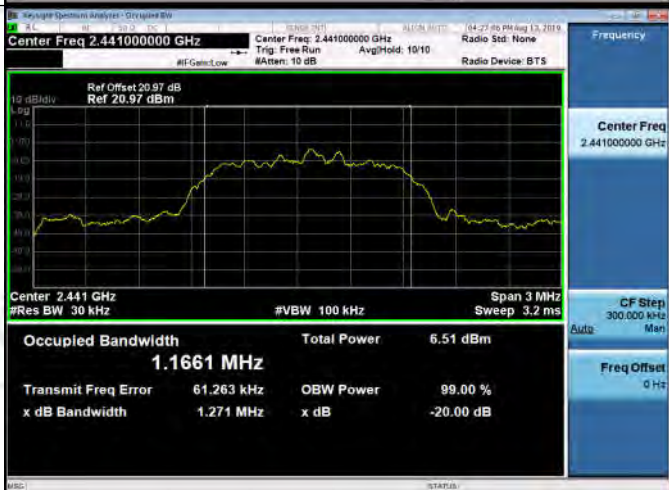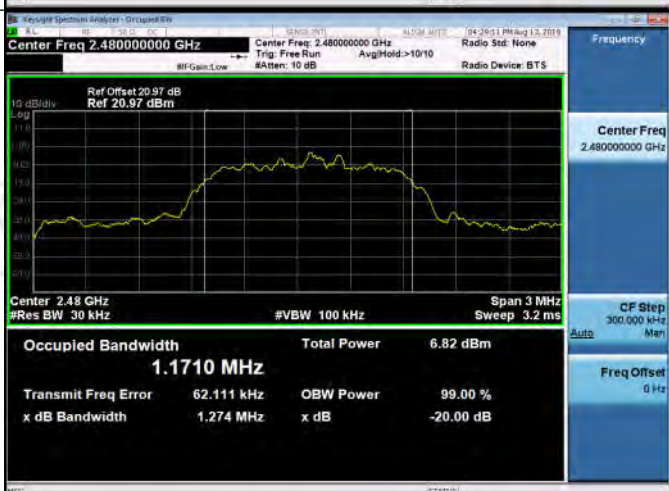$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

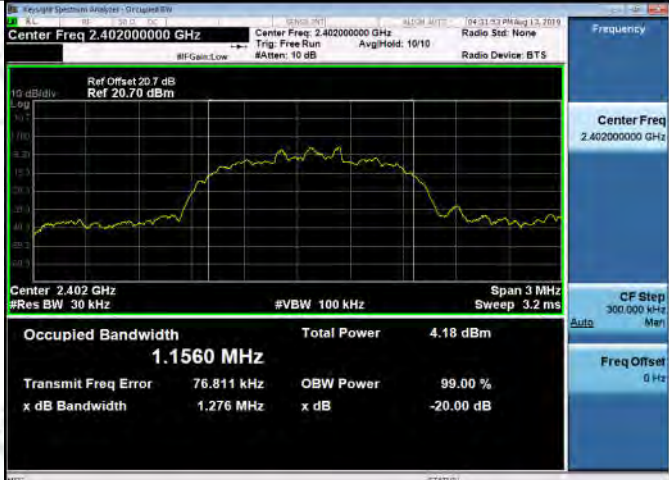8DPSK/LCH	 Center Freq: 2.402000000 GHz Occupied Bandwidth: 1.1560 MHz Total Power: 4.18 dBm Transmit Freq Error: 76.811 kHz OBW Power: 99.00 %
8DPSK/MCH	 Center Freq: 2.441000000 GHz Occupied Bandwidth: 1.1534 MHz Total Power: 7.17 dBm Transmit Freq Error: 63.919 kHz OBW Power: 99.00 %
8DPSK/HCH	 Center Freq: 2.480000000 GHz Occupied Bandwidth: 1.1571 MHz Total Power: 7.54 dBm Transmit Freq Error: 65.795 kHz OBW Power: 99.00 %



Appendix B): Carrier Frequency Separation

Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.900	PASS
GFSK	MCH	0.974	PASS
GFSK	HCH	0.946	PASS
$\pi/4$ DQPSK	LCH	0.728	PASS
$\pi/4$ DQPSK	MCH	1.242	PASS
$\pi/4$ DQPSK	HCH	0.828	PASS
8DPSK	LCH	0.834	PASS
8DPSK	MCH	1.282	PASS
8DPSK	HCH	1.006	PASS

Test Graph

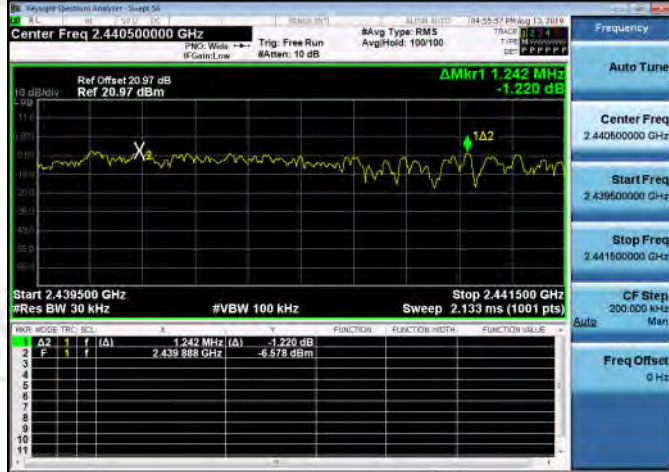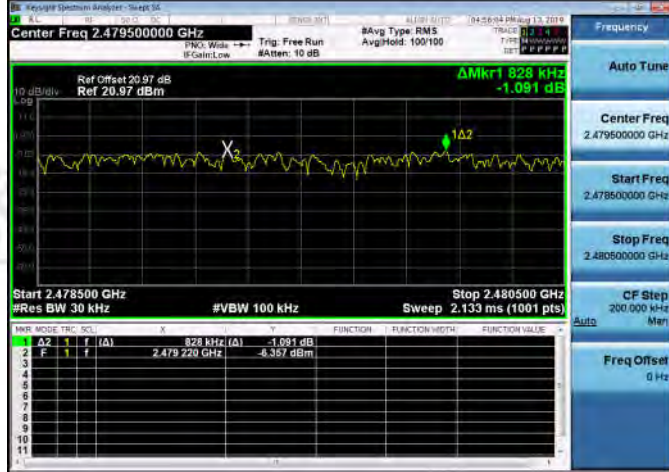

$\pi/4$ DQPSK/LCH	 Center Freq 2.402500000 GHz Ref Offset 20.7 dB Ref 20.70 dBm Start 2.401500 GHz #VBW 100 kHz Stop 2.403500 GHz #Res BW 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Hold</th><th>Function Value</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>728 kHz (A)</td><td>4.245 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.402 398 GHz</td><td>-9.236 dBm</td><td></td><td></td></tr></table>	Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value	1	A2	1	f	(A)	728 kHz (A)	4.245 dB			2	F	1	f	(A)	2.402 398 GHz	-9.236 dBm		
Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value																				
1	A2	1	f	(A)	728 kHz (A)	4.245 dB																						
2	F	1	f	(A)	2.402 398 GHz	-9.236 dBm																						
$\pi/4$ DQPSK/MCH	 Center Freq 2.440500000 GHz Ref Offset 20.97 dB Ref 20.97 dBm Start 2.439500 GHz #VBW 100 kHz Stop 2.441500 GHz #Res BW 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Hold</th><th>Function Value</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.242 MHz (A)</td><td>-1.220 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.439 888 GHz</td><td>-5.578 dBm</td><td></td><td></td></tr></table>	Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value	1	A2	1	f	(A)	1.242 MHz (A)	-1.220 dB			2	F	1	f	(A)	2.439 888 GHz	-5.578 dBm		
Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value																				
1	A2	1	f	(A)	1.242 MHz (A)	-1.220 dB																						
2	F	1	f	(A)	2.439 888 GHz	-5.578 dBm																						
$\pi/4$ DQPSK/HCH	 Center Freq 2.479500000 GHz Ref Offset 20.97 dB Ref 20.97 dBm Start 2.478500 GHz #VBW 100 kHz Stop 2.480500 GHz #Res BW 30 kHz Sweep 2.133 ms (1001 pts) <table><tr><th>Row</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Hold</th><th>Function Value</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>828 kHz (A)</td><td>-1.091 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(A)</td><td>2.479 220 GHz</td><td>-8.357 dBm</td><td></td><td></td></tr></table>	Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value	1	A2	1	f	(A)	828 kHz (A)	-1.091 dB			2	F	1	f	(A)	2.479 220 GHz	-8.357 dBm		
Row	Mode	Trig	SCL	X	Y	Function	Function Hold	Function Value																				
1	A2	1	f	(A)	828 kHz (A)	-1.091 dB																						
2	F	1	f	(A)	2.479 220 GHz	-8.357 dBm																						


8DPSK/LCH	Center Freq 2.402500000 GHz Ref Offset 20.7 dB Ref 20.70 dBm ΔMkr1 834 kHz 0.235 dB Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F (Δ)</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION HOLD</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>834 kHz (Δ)</td><td>0.235 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.402172 GHz</td><td>-8.085 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	834 kHz (Δ)	0.235 dB				2	F	1	f	(Δ)	2.402172 GHz	-8.085 dBm			
MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE																						
1	ΔZ	1	f	(Δ)	834 kHz (Δ)	0.235 dB																									
2	F	1	f	(Δ)	2.402172 GHz	-8.085 dBm																									
8DPSK/MCH	Center Freq 2.440500000 GHz Ref Offset 20.97 dB Ref 20.97 dBm ΔMkr1 1.282 MHz 4.463 dB Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F (Δ)</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION HOLD</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.282 MHz (Δ)</td><td>4.463 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.439965 GHz</td><td>-8.217 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.282 MHz (Δ)	4.463 dB				2	F	1	f	(Δ)	2.439965 GHz	-8.217 dBm			
MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE																						
1	ΔZ	1	f	(Δ)	1.282 MHz (Δ)	4.463 dB																									
2	F	1	f	(Δ)	2.439965 GHz	-8.217 dBm																									
8DPSK/HCH	Center Freq 2.479500000 GHz Ref Offset 20.97 dB Ref 20.97 dBm ΔMkr1 1.006 MHz 0.180 dB Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts) <table><thead><tr><th>MARK</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F (Δ)</th><th>Δ</th><th>FUNCTION</th><th>FUNCTION HOLD</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.006 MHz (Δ)</td><td>0.180 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>(Δ)</td><td>2.479160 GHz</td><td>-8.728 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.006 MHz (Δ)	0.180 dB				2	F	1	f	(Δ)	2.479160 GHz	-8.728 dBm			
MARK	MODE	TRC	SCL	F	F (Δ)	Δ	FUNCTION	FUNCTION HOLD	FUNCTION VALUE																						
1	ΔZ	1	f	(Δ)	1.006 MHz (Δ)	0.180 dB																									
2	F	1	f	(Δ)	2.479160 GHz	-8.728 dBm																									


Appendix C): Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.388867	320	0.124	0.31	PASS
GFSK	DH1	MCH	0.390133	320	0.125	0.31	PASS
GFSK	DH1	HCH	0.39014	320	0.125	0.31	PASS
GFSK	DH3	LCH	1.64667	160	0.263	0.66	PASS
GFSK	DH3	MCH	1.64667	160	0.263	0.66	PASS
GFSK	DH3	HCH	1.64667	160	0.263	0.66	PASS
GFSK	DH5	LCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	MCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	HCH	2.8796	106.7	0.307	0.77	PASS

Test Graph

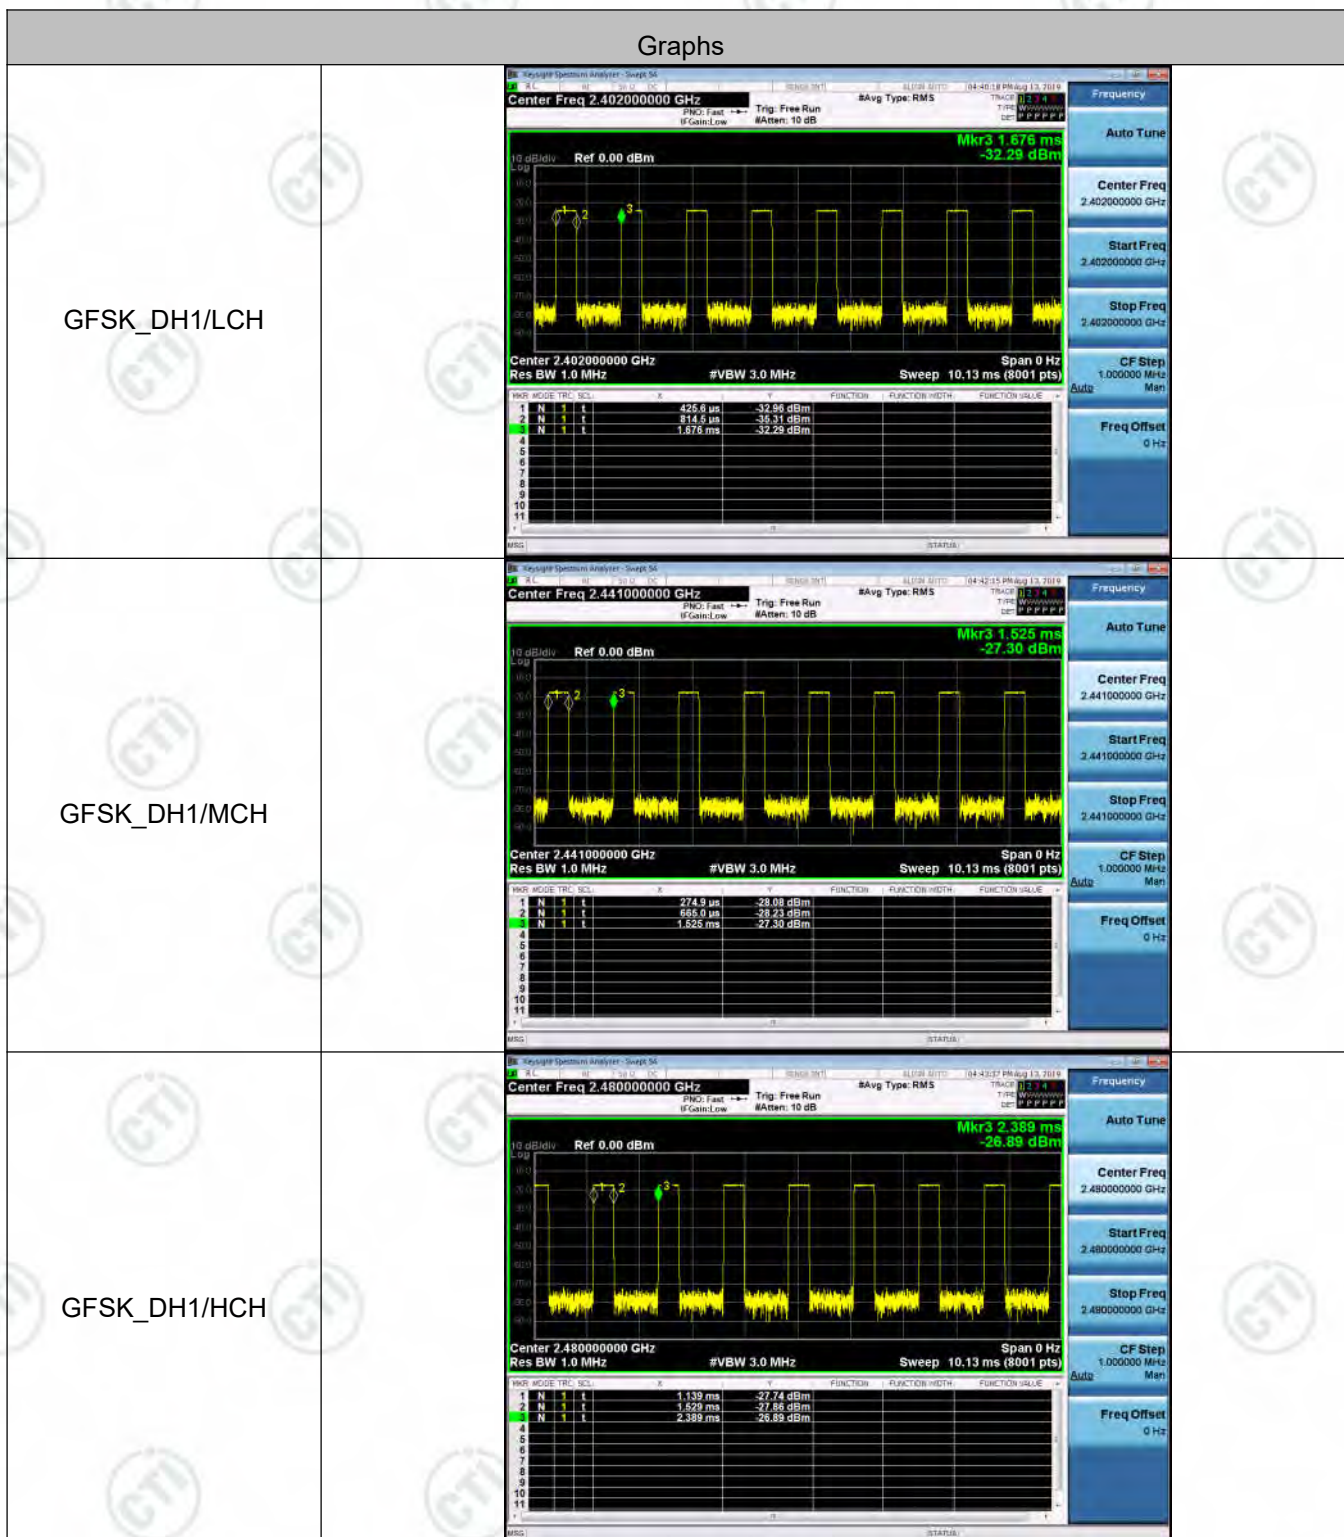

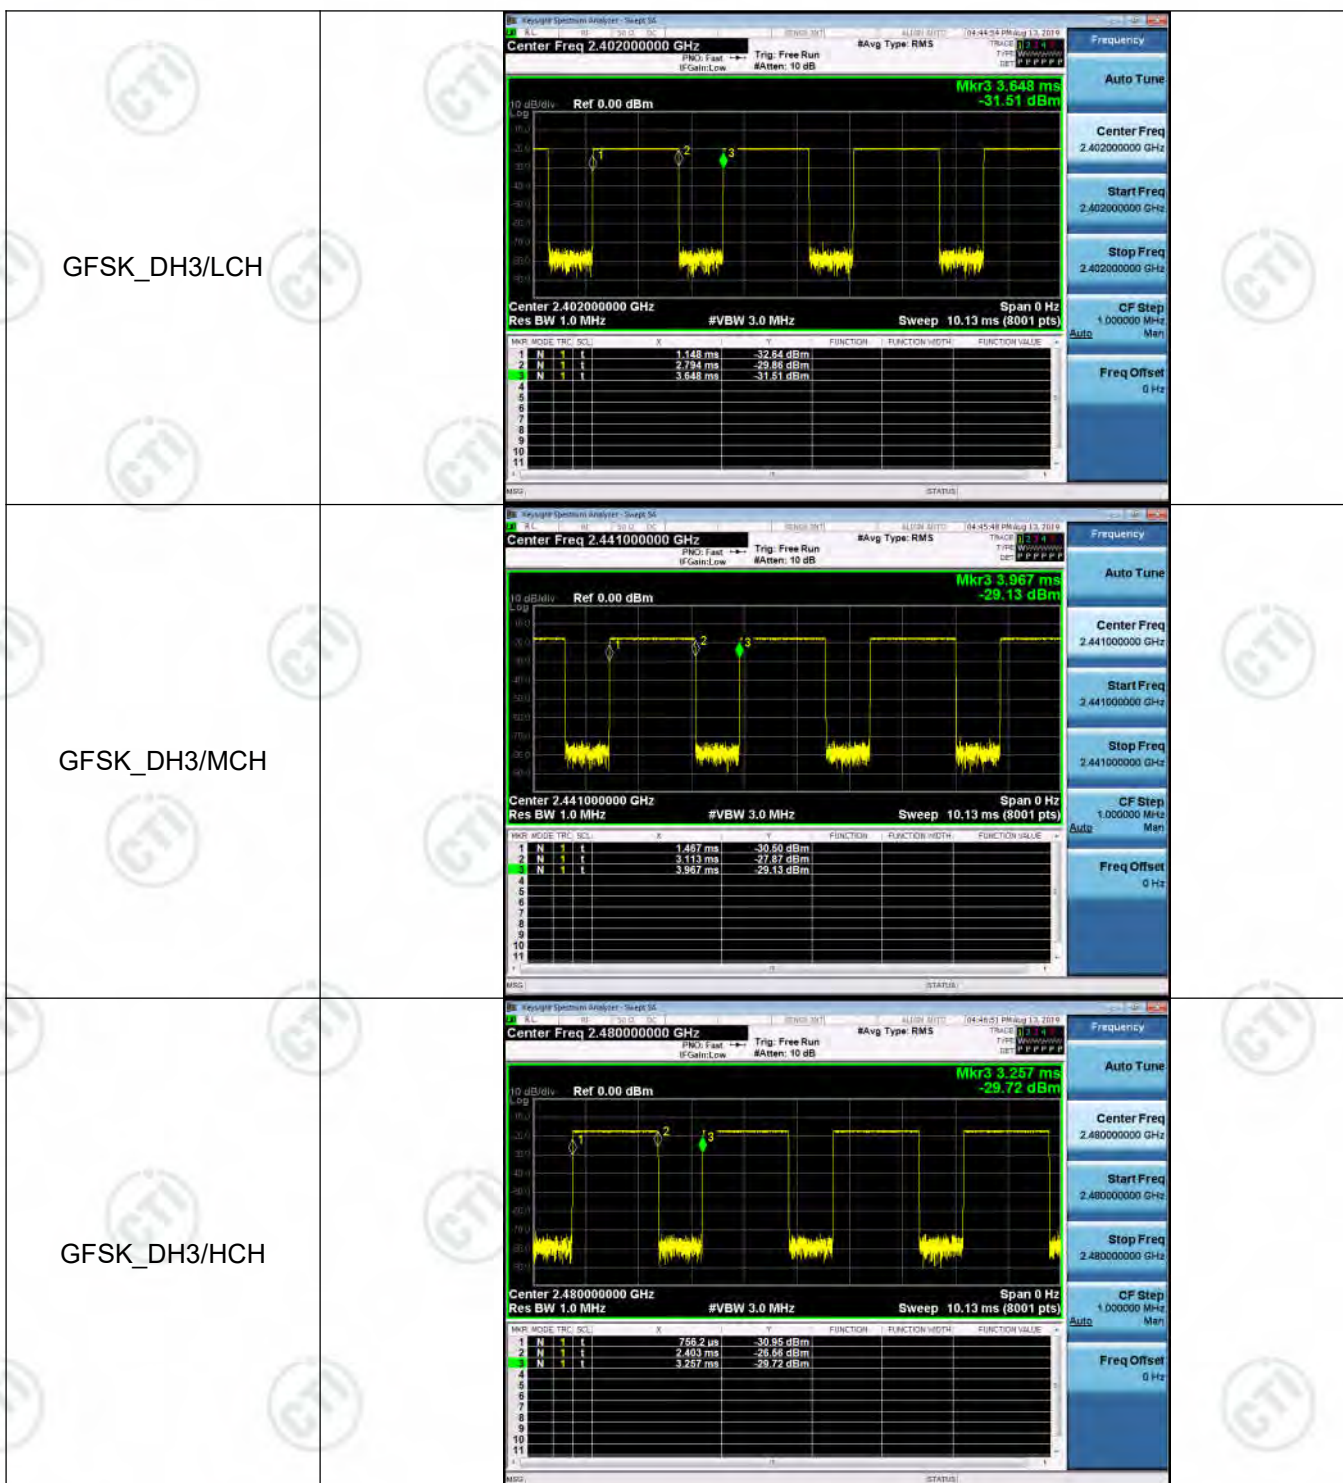

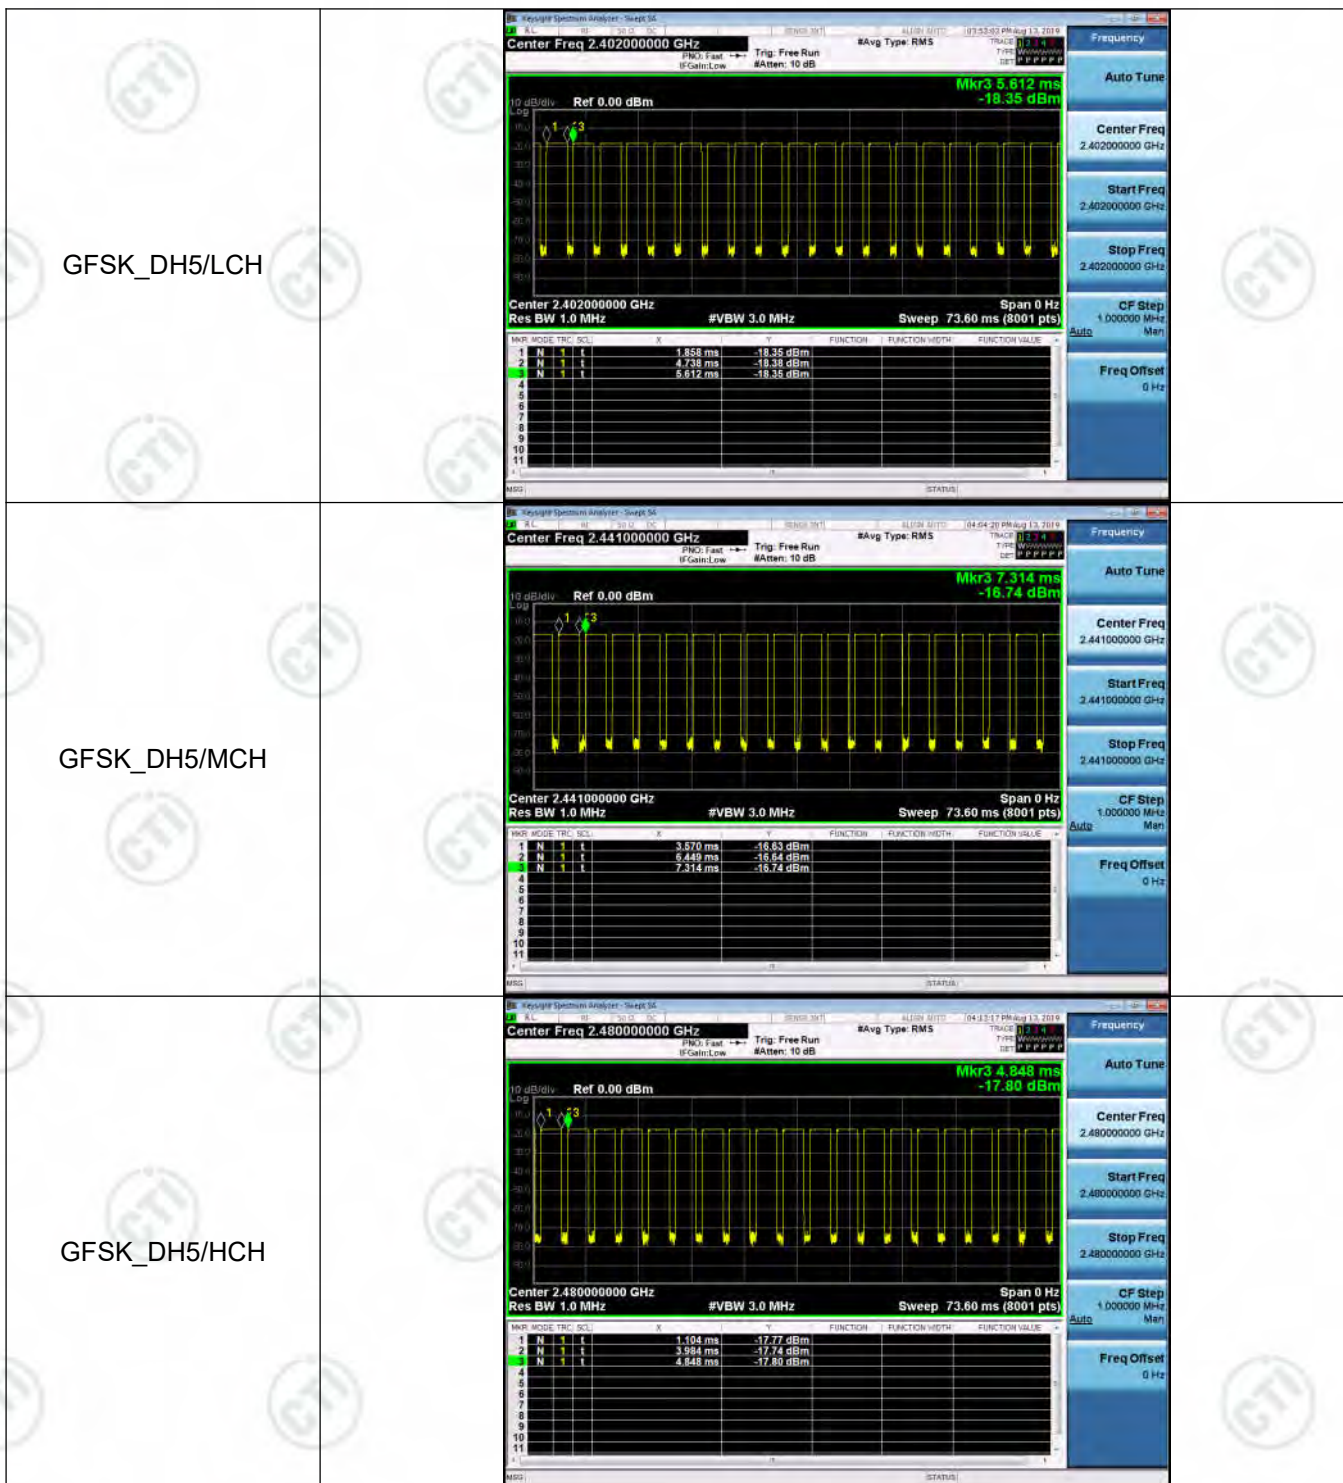




Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

Graphs

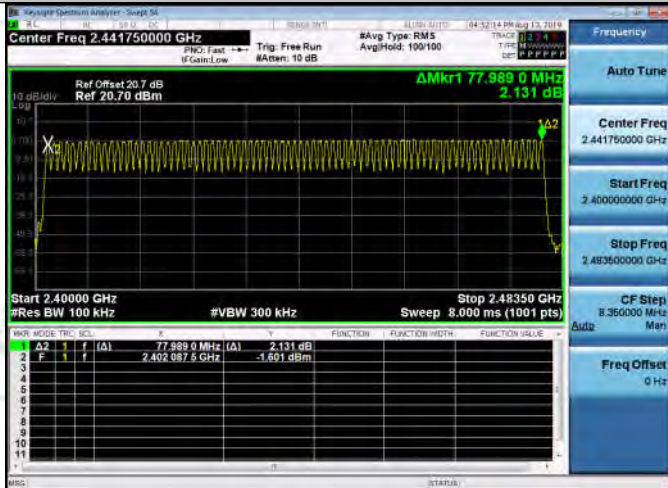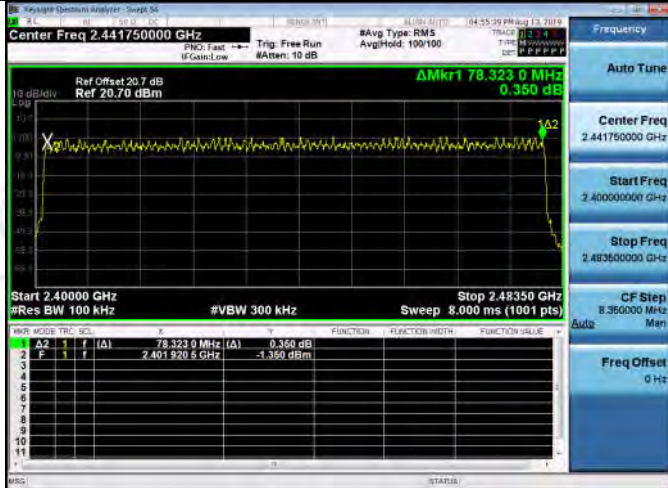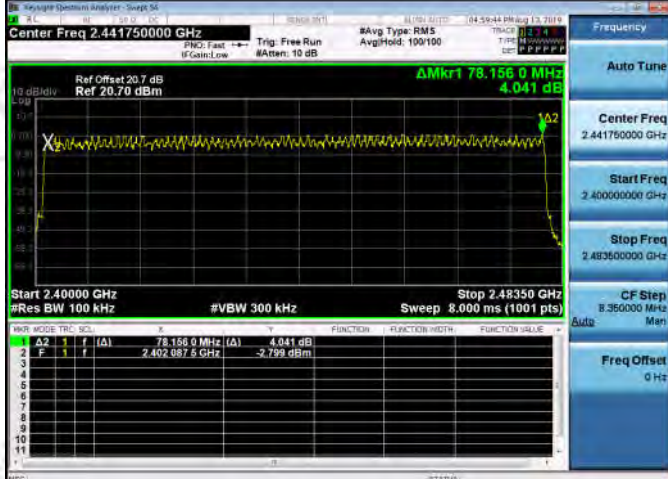GFSK/Hop	 Center Freq 2.441750000 GHz Ref Offset 20.7 dB Ref 20.70 dBm Start 2.40000 GHz #Res BW 100 kHz Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts) ΔMkr1 77.989 0 MHz 2.131 dB Frequency: 2.441750000 GHz Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz
π/4DQPSK/Hop	 Center Freq 2.441750000 GHz Ref Offset 20.7 dB Ref 20.70 dBm Start 2.40000 GHz #Res BW 100 kHz Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts) ΔMkr1 78.323 0 MHz 0.350 dB Frequency: 2.441750000 GHz Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz
8DPSK/Hop	 Center Freq 2.441750000 GHz Ref Offset 20.7 dB Ref 20.70 dBm Start 2.40000 GHz #Res BW 100 kHz Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts) ΔMkr1 78.156 0 MHz 4.041 dB Frequency: 2.441750000 GHz Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz


Appendix E): Conducted Peak Output Power


Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	1.298	PASS
GFSK	MCH	3.554	PASS
GFSK	HCH	3.438	PASS
$\pi/4$ DQPSK	LCH	-1.422	PASS
$\pi/4$ DQPSK	MCH	1.259	PASS
$\pi/4$ DQPSK	HCH	1.684	PASS
8DPSK	LCH	-0.974	PASS
8DPSK	MCH	1.761	PASS
8DPSK	HCH	2.126	PASS

Test Graph

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

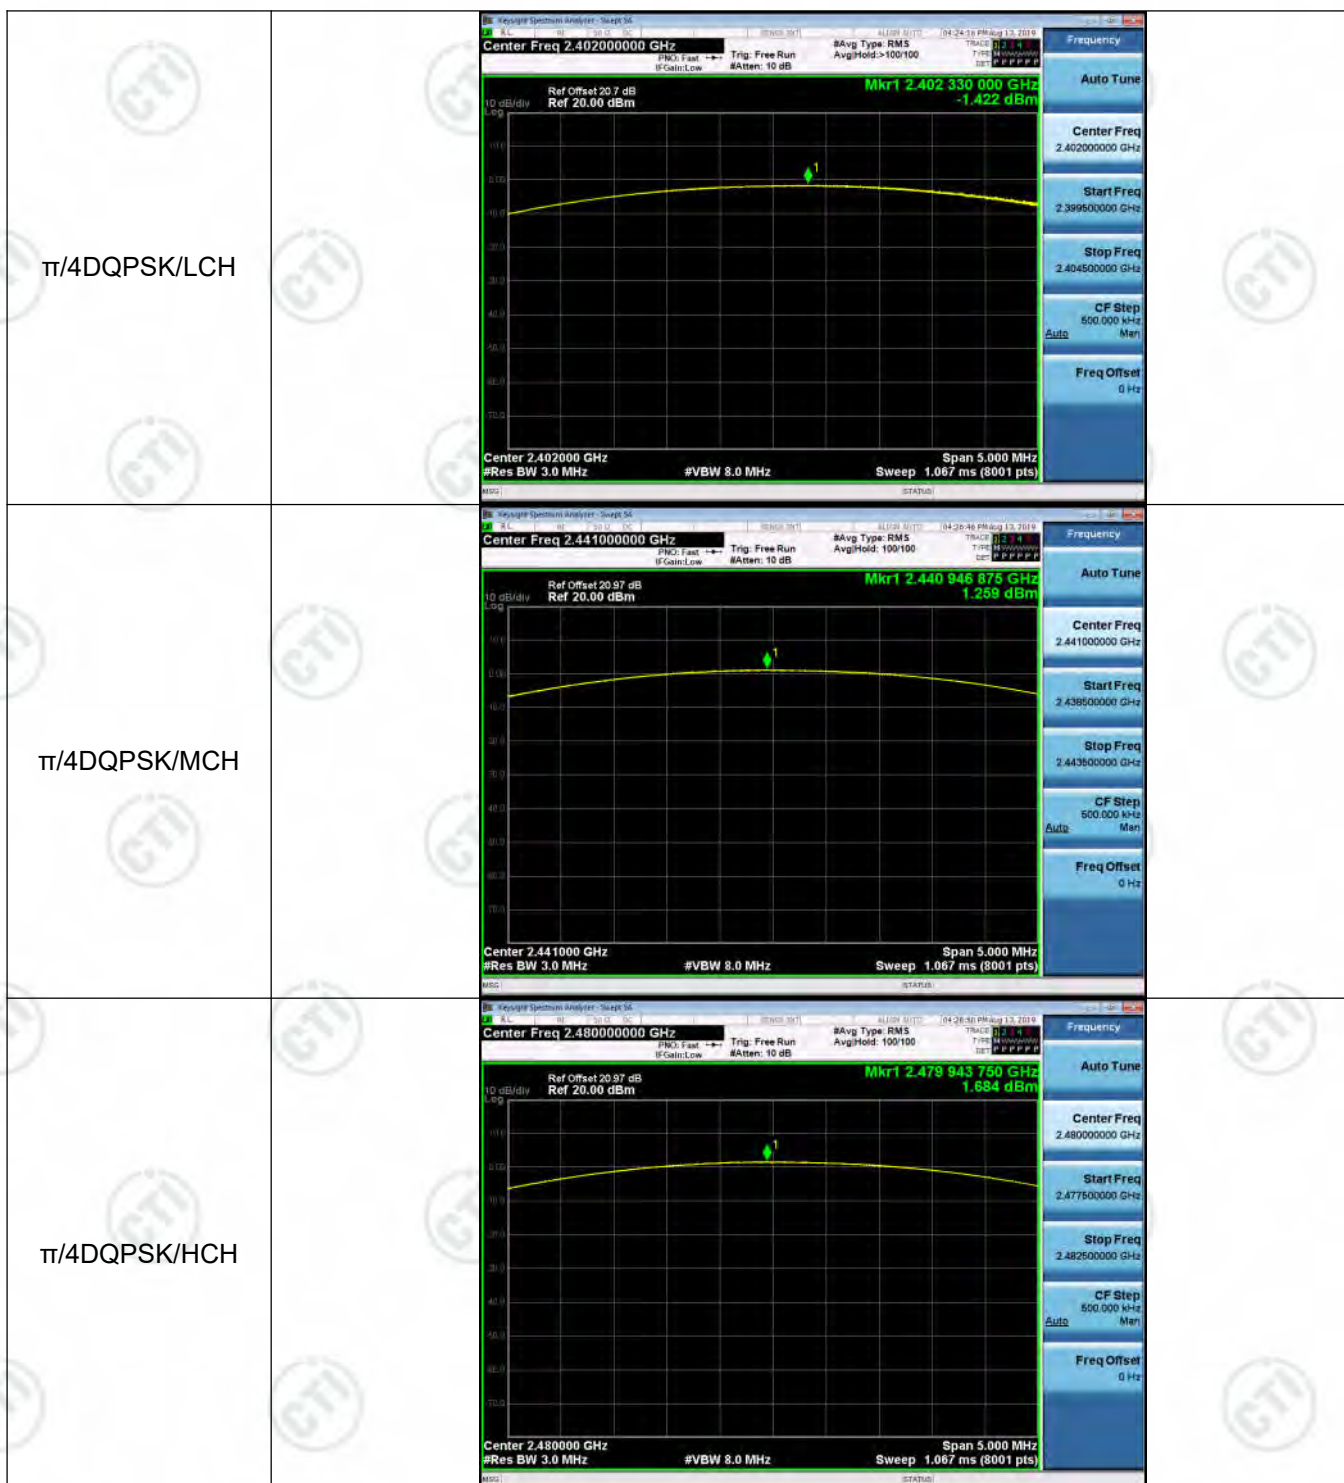

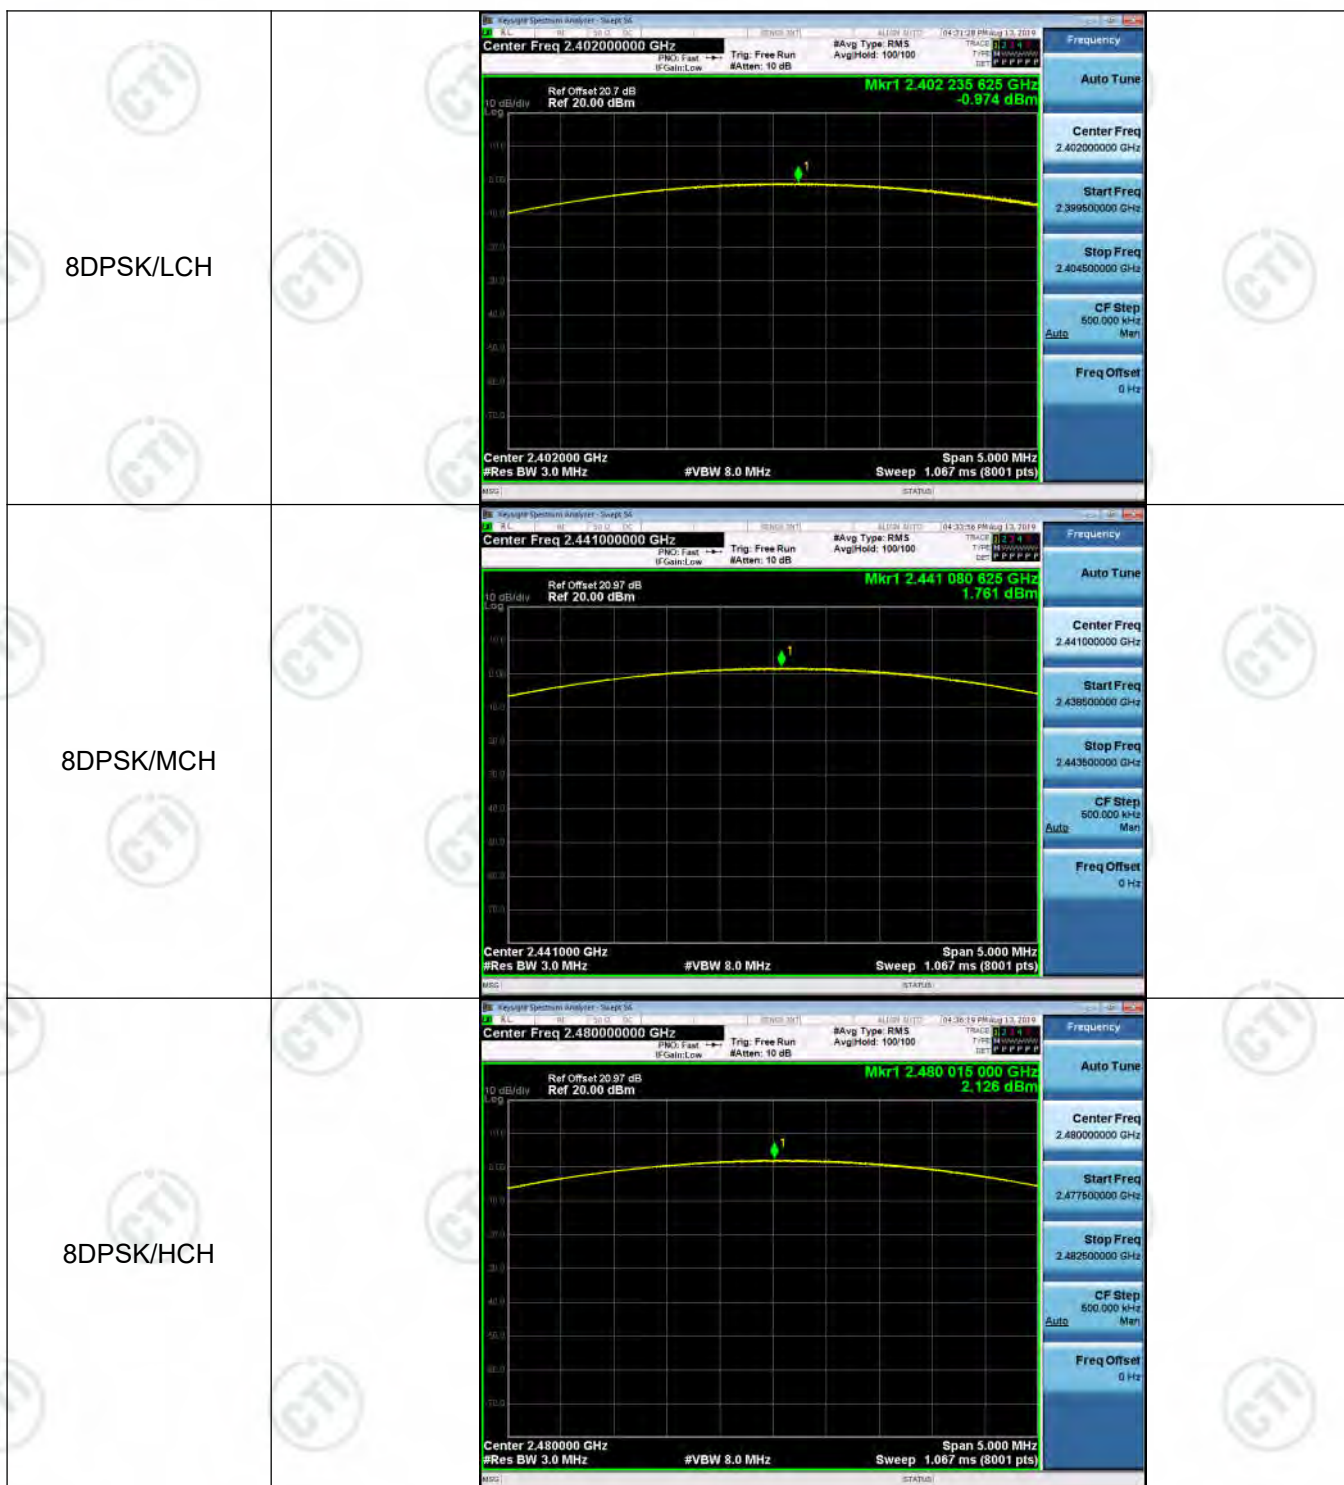


Appendix F): Band-edge for RF Conducted Emissions


Result Table


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	1.290	Off	-60.189	-18.71	PASS
			0.248	On	-57.793	-19.75	PASS
GFSK	HCH	2480	3.638	Off	-57.272	-16.36	PASS
			1.502	On	-53.338	-18.5	PASS
$\pi/4$ DQPSK	LCH	2402	-3.414	Off	-58.642	-23.41	PASS
			0.285	On	-58.037	-19.72	PASS
$\pi/4$ DQPSK	HCH	2480	-0.227	Off	-58.108	-20.23	PASS
			1.722	On	-53.850	-18.28	PASS
8DPSK	LCH	2402	-3.304	Off	-59.541	-23.3	PASS
			0.092	On	-58.070	-19.91	PASS
8DPSK	HCH	2480	-0.168	Off	-58.031	-20.17	PASS
			1.735	On	-54.272	-18.27	PASS


Test Graph

Graphs

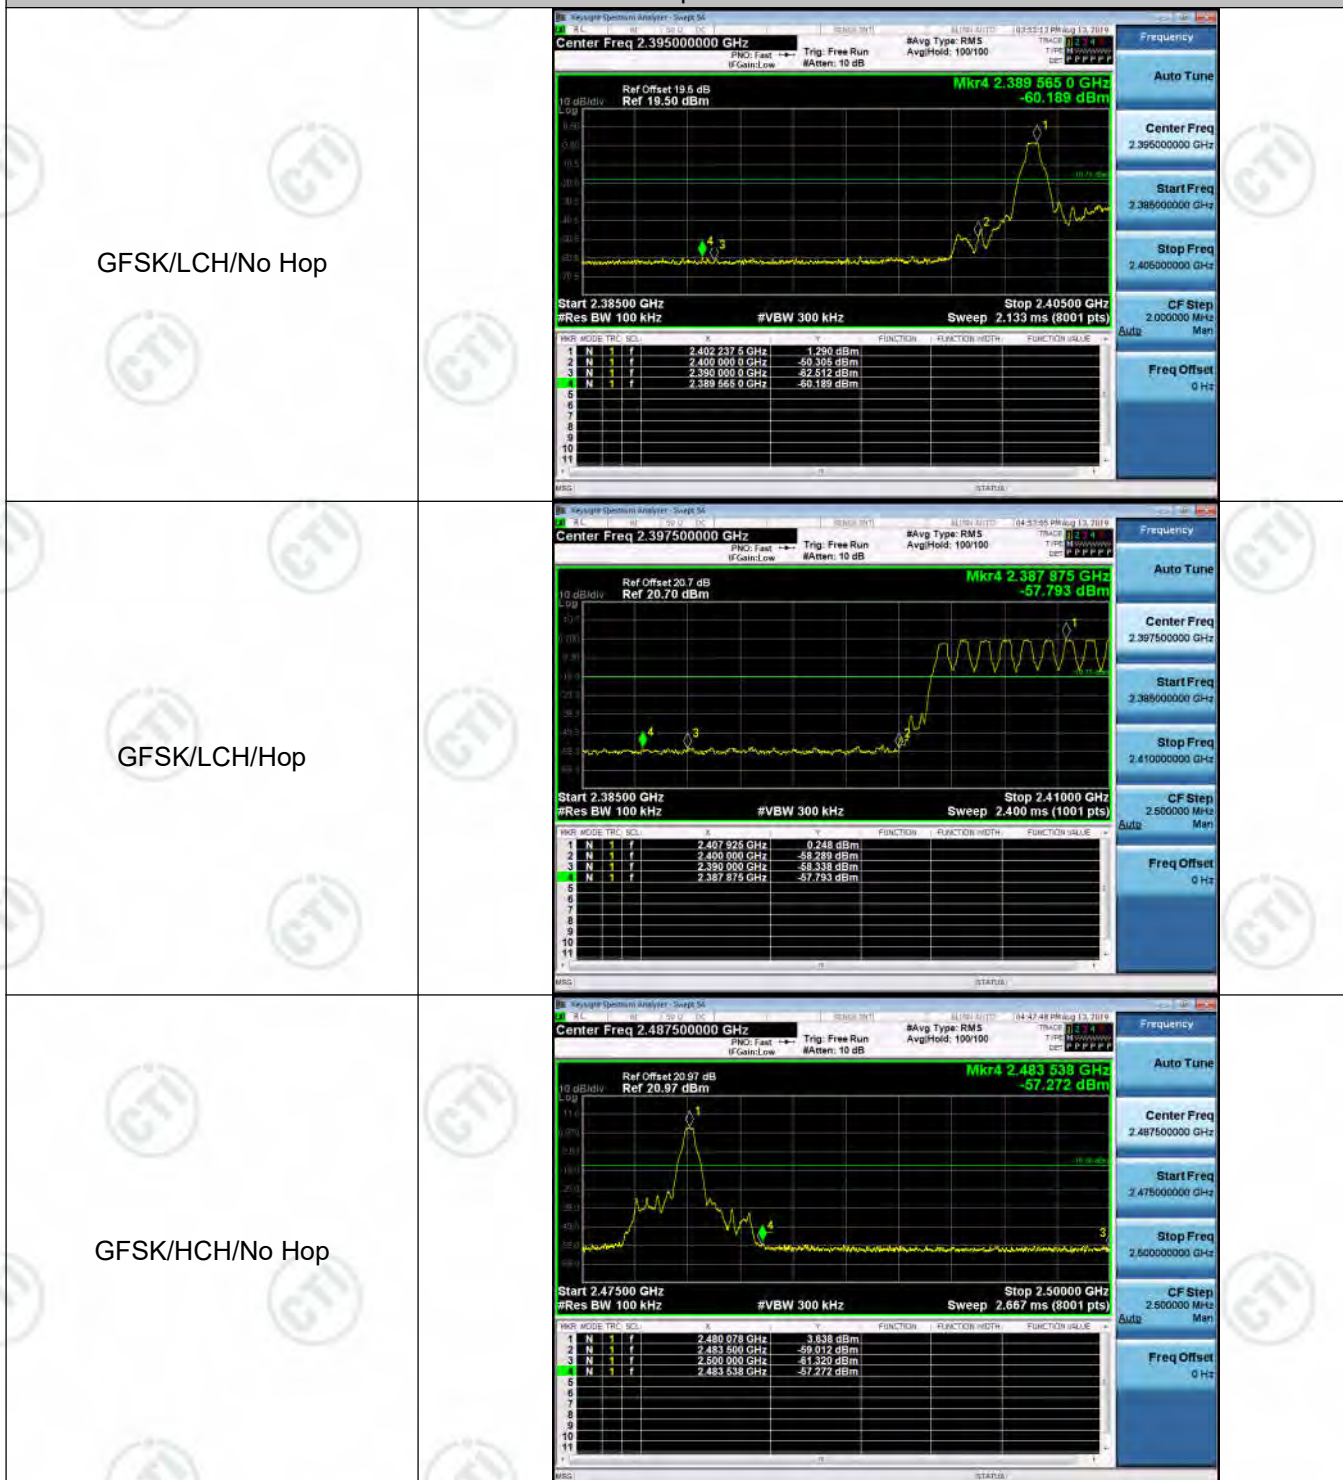

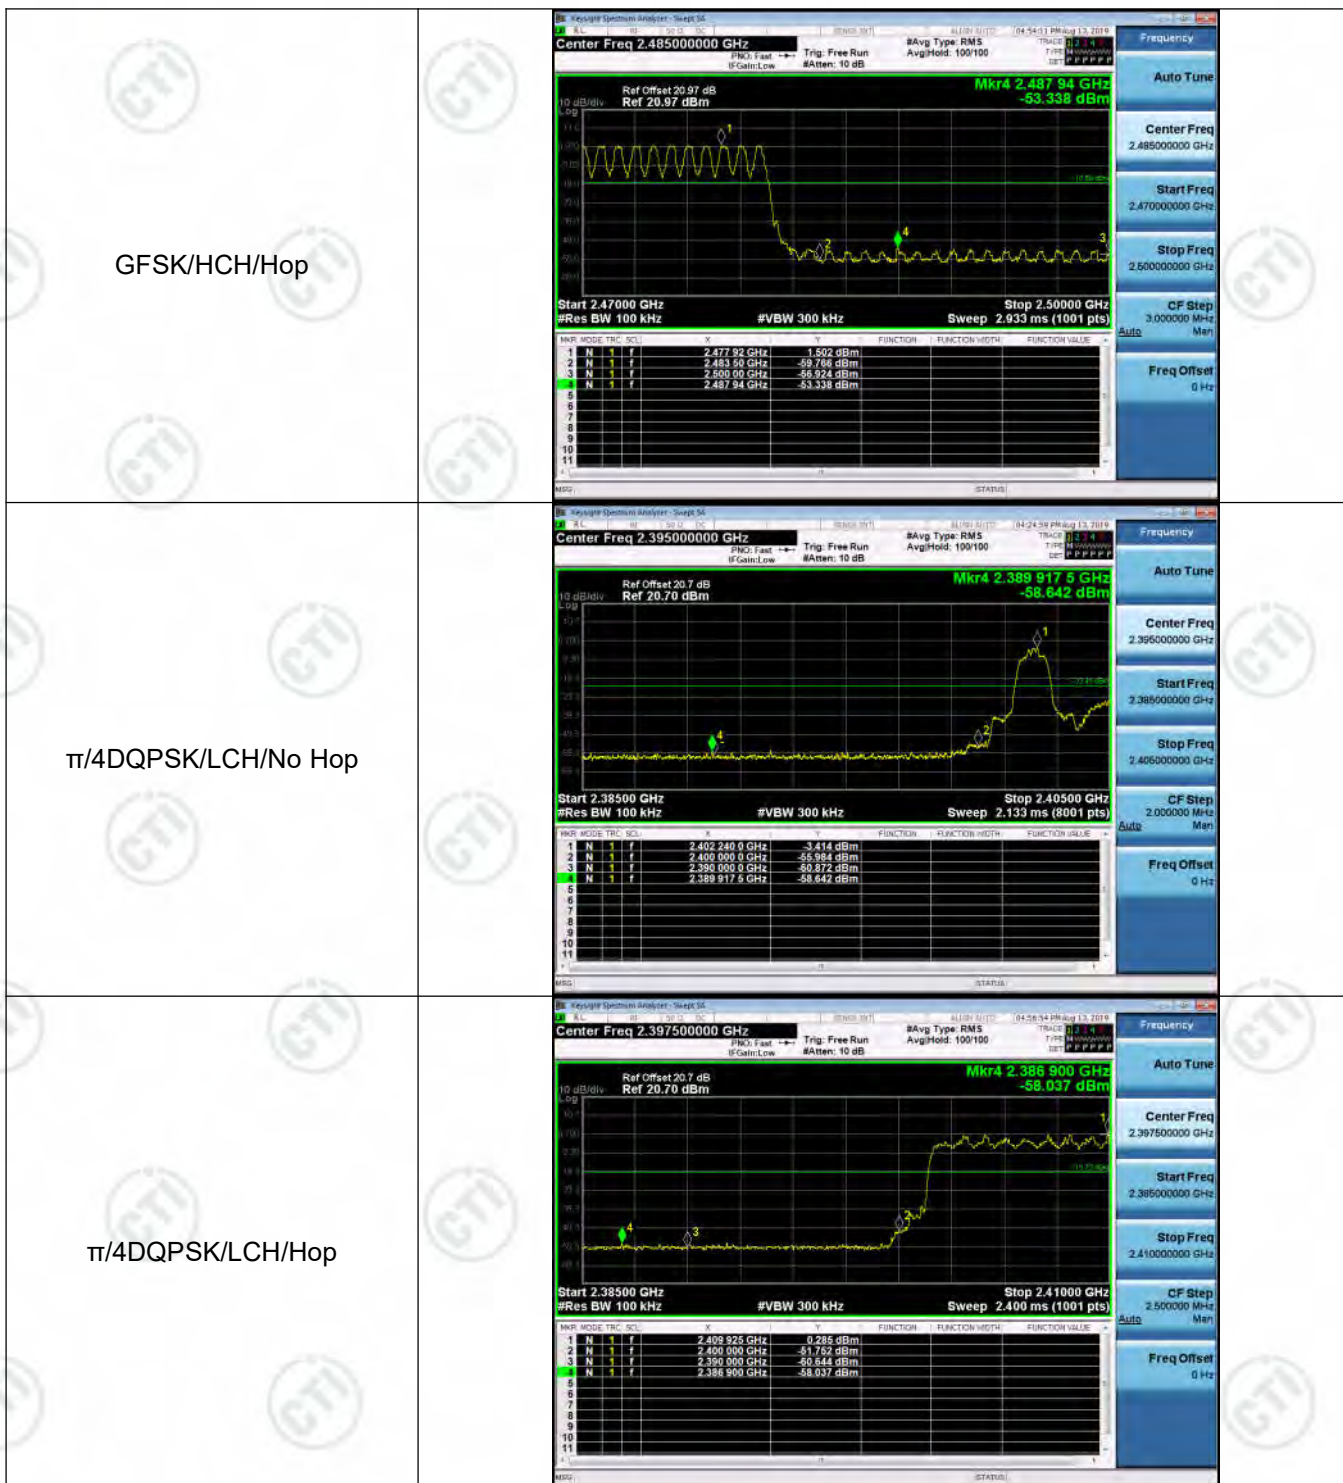

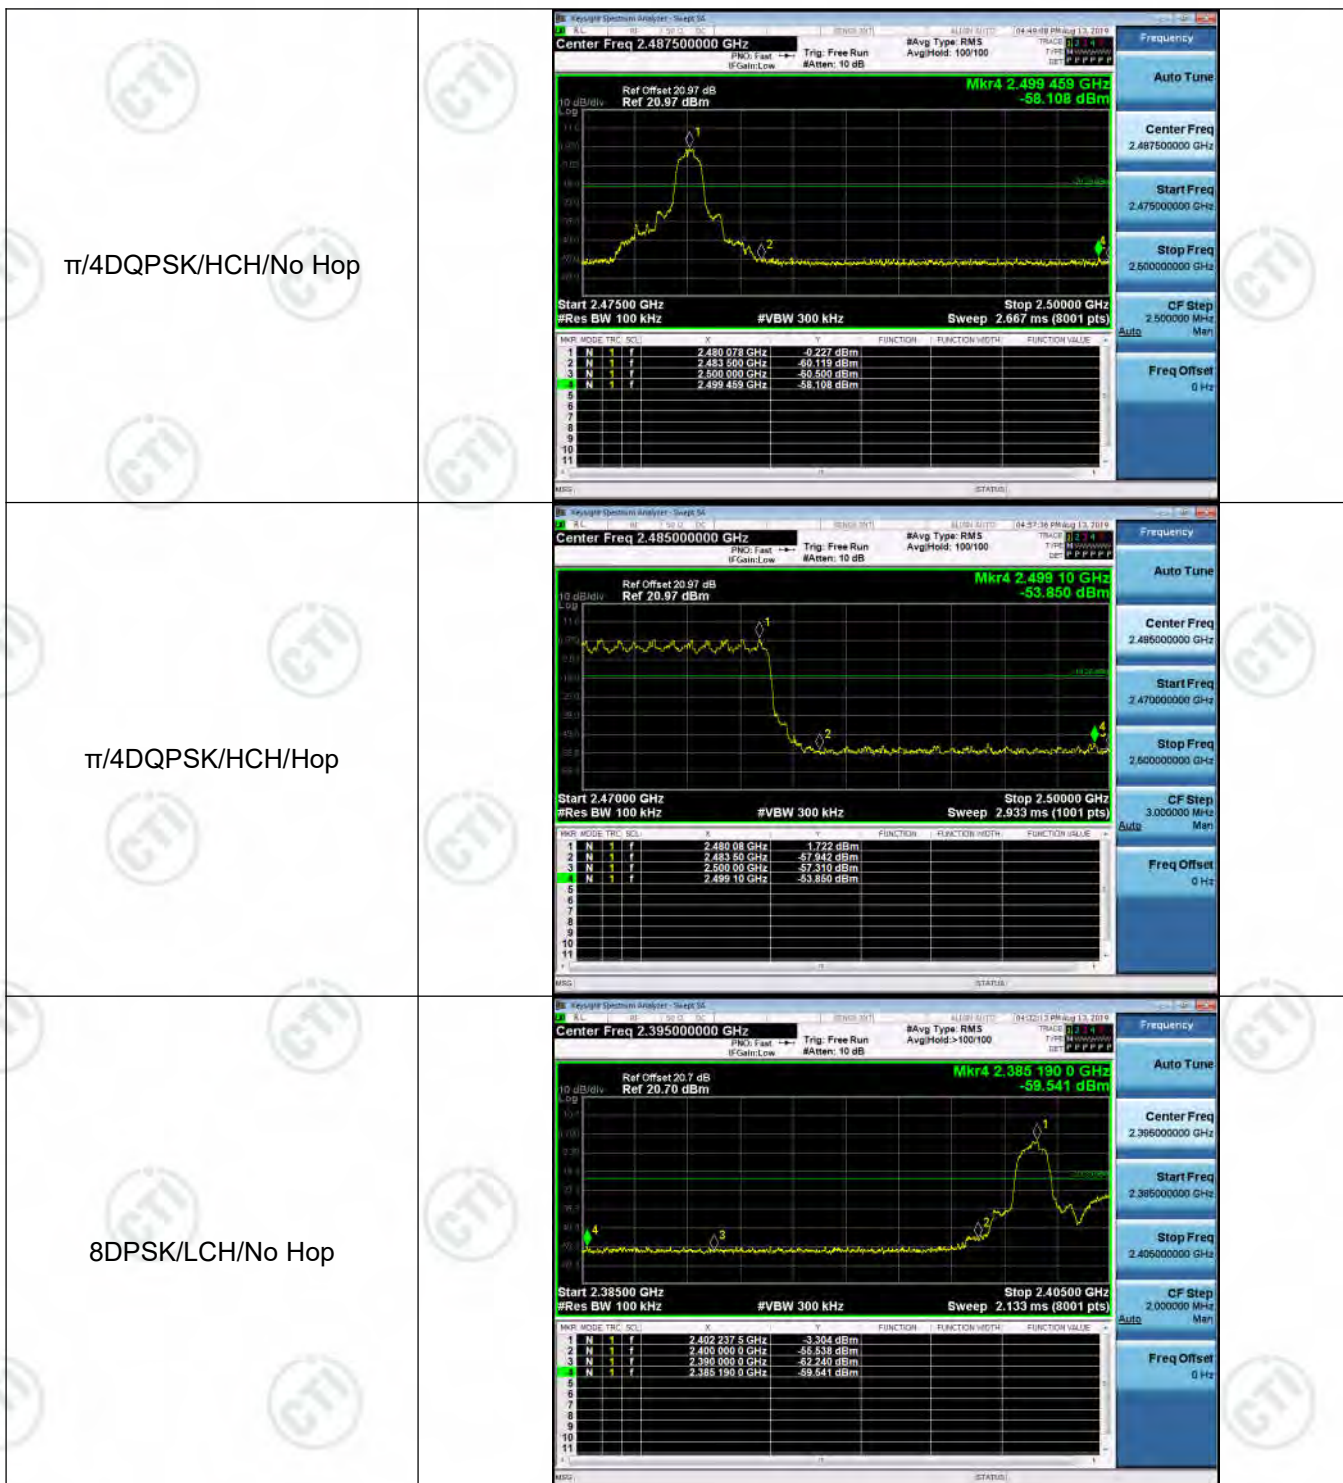

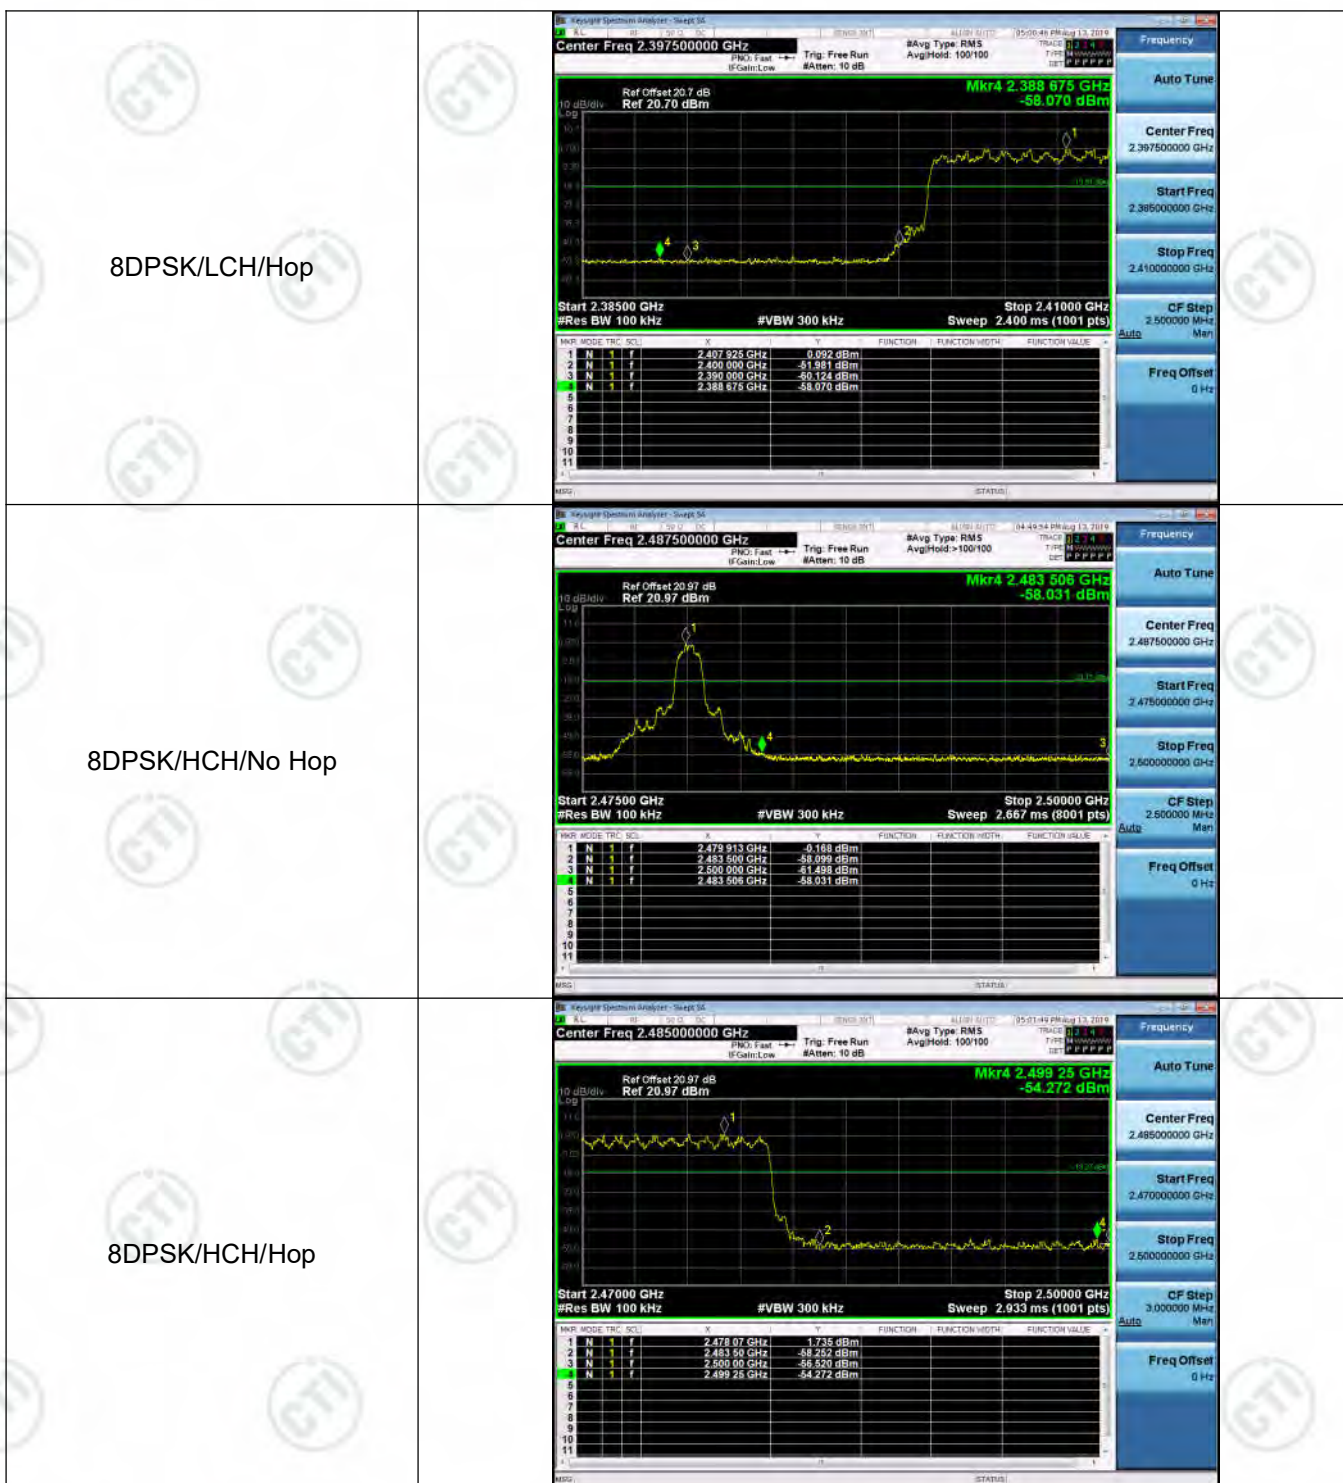

Appendix G): RF Conducted Spurious Emissions

Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	1.172	<Limit	PASS
GFSK	MCH	3.81	<Limit	PASS
GFSK	HCH	3.112	<Limit	PASS
$\pi/4$ DQPSK	LCH	-2.526	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.354	<Limit	PASS
$\pi/4$ DQPSK	HCH	-1.73	<Limit	PASS
8DPSK	LCH	-2.529	<Limit	PASS
8DPSK	MCH	-0.373	<Limit	PASS
8DPSK	HCH	-0.775	<Limit	PASS


Test Graph










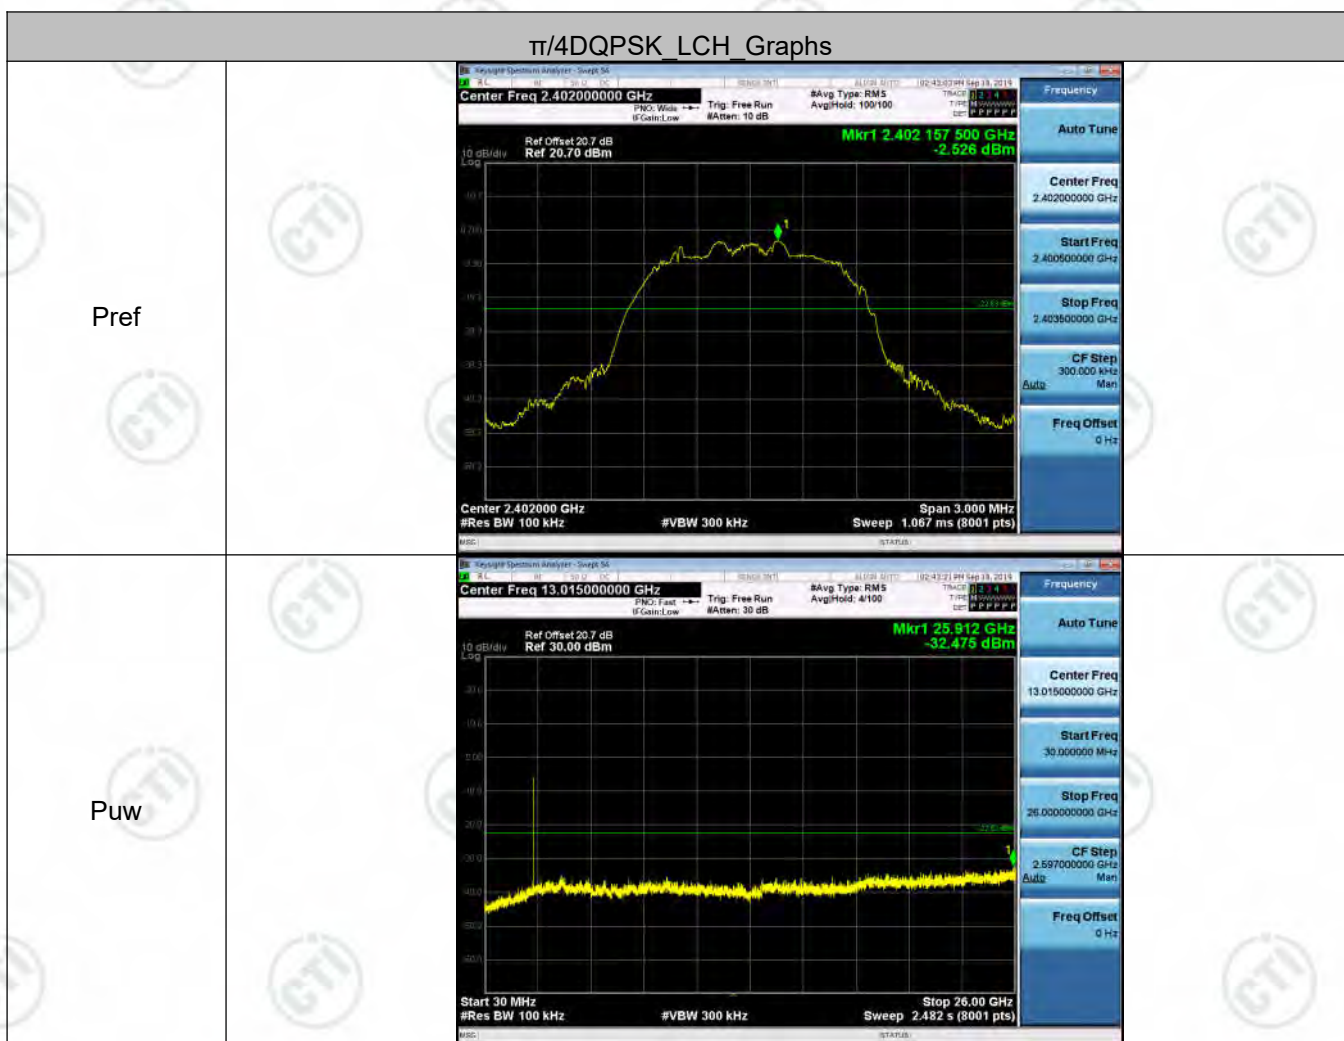


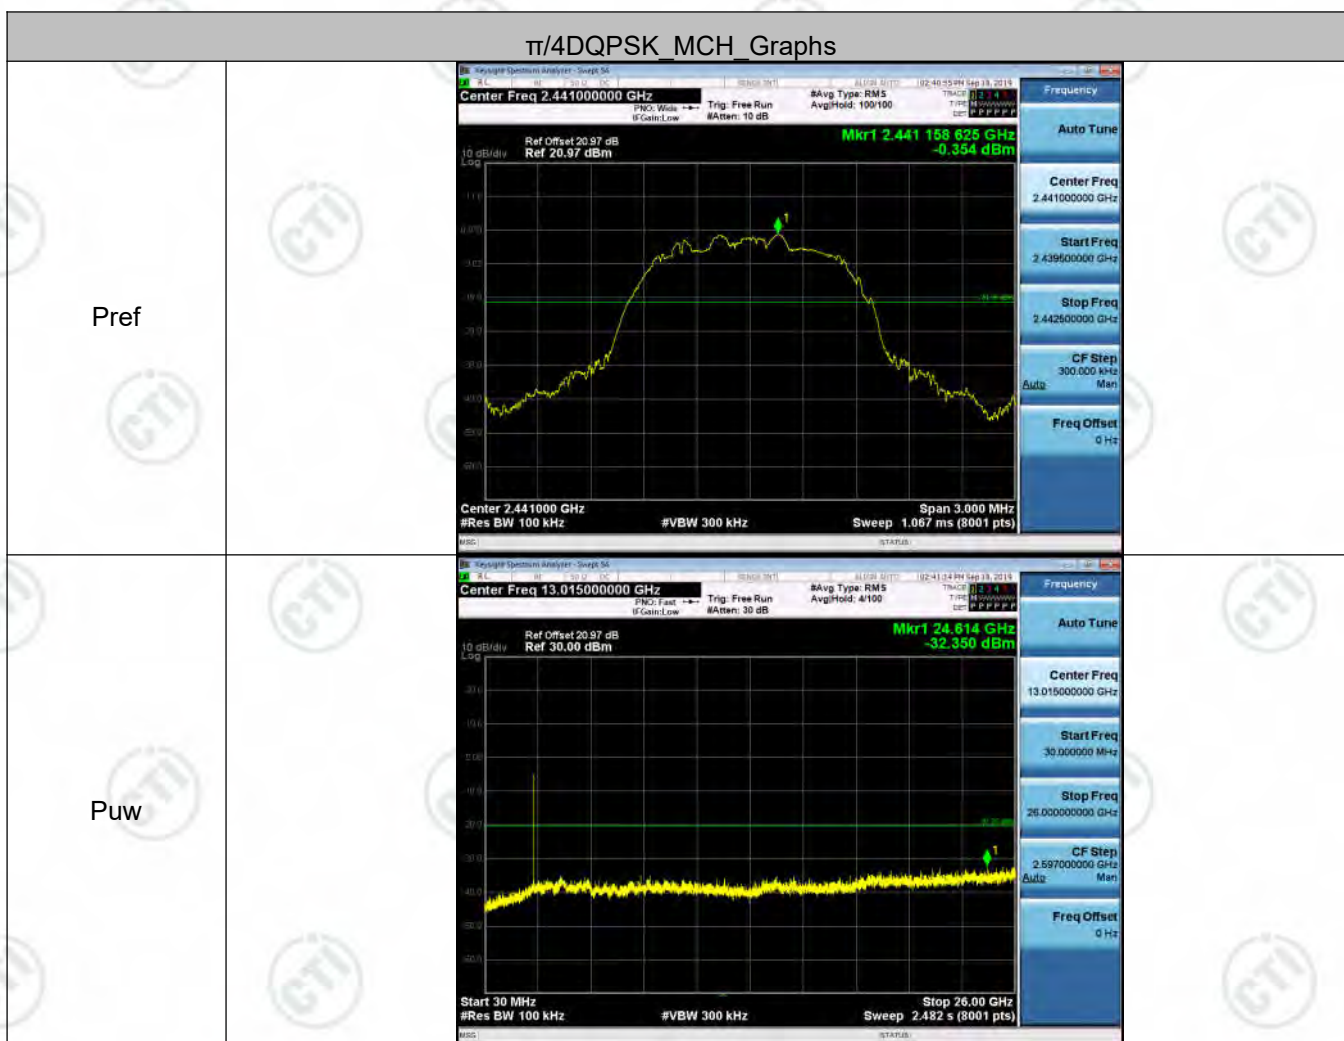

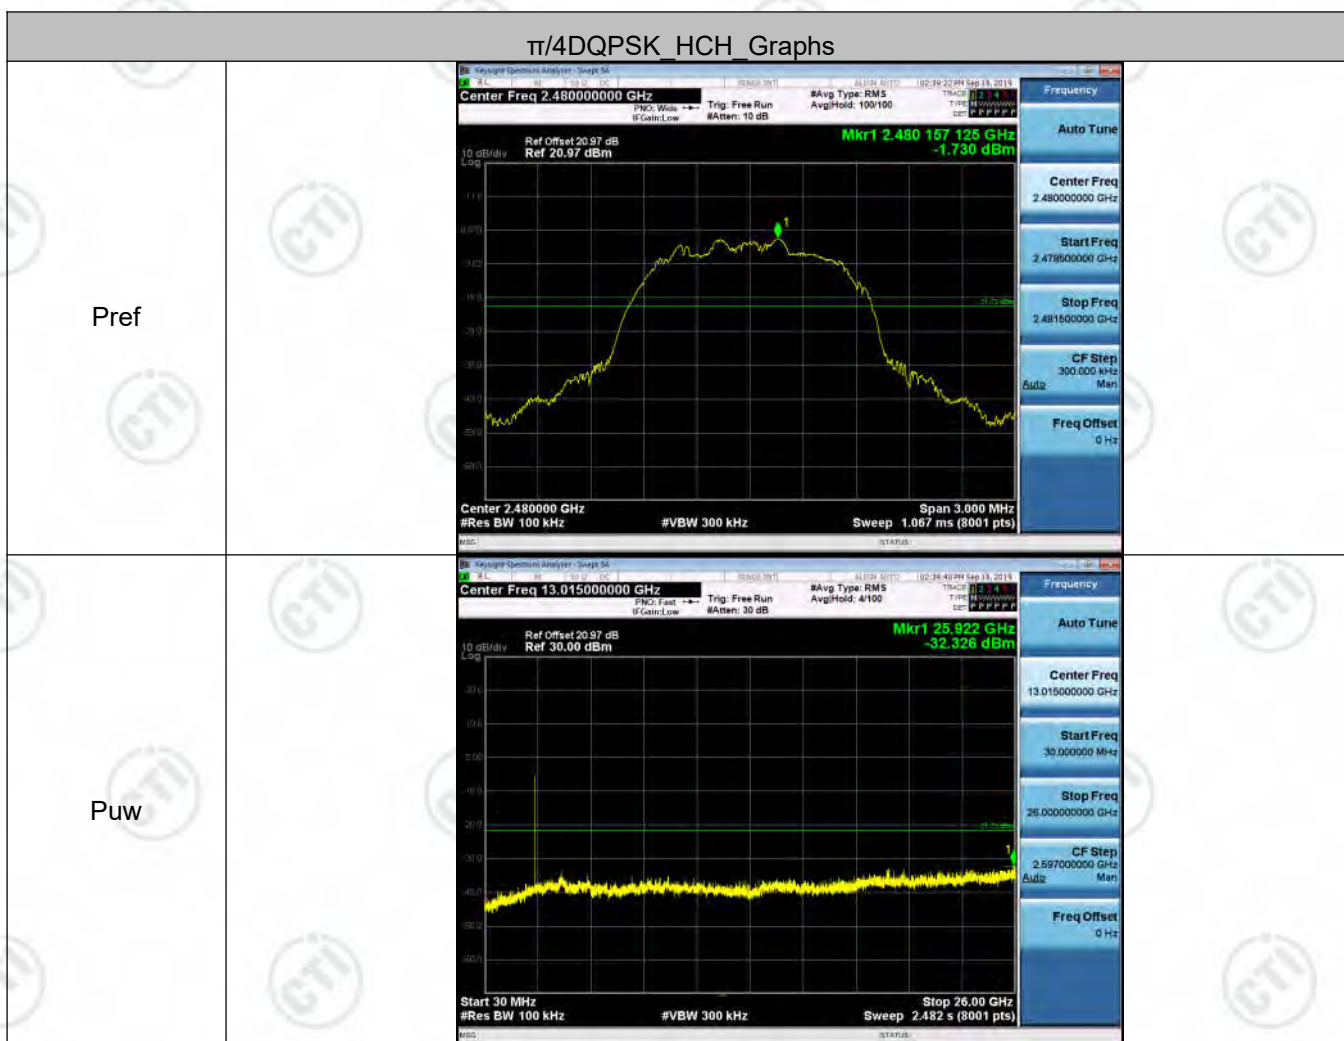

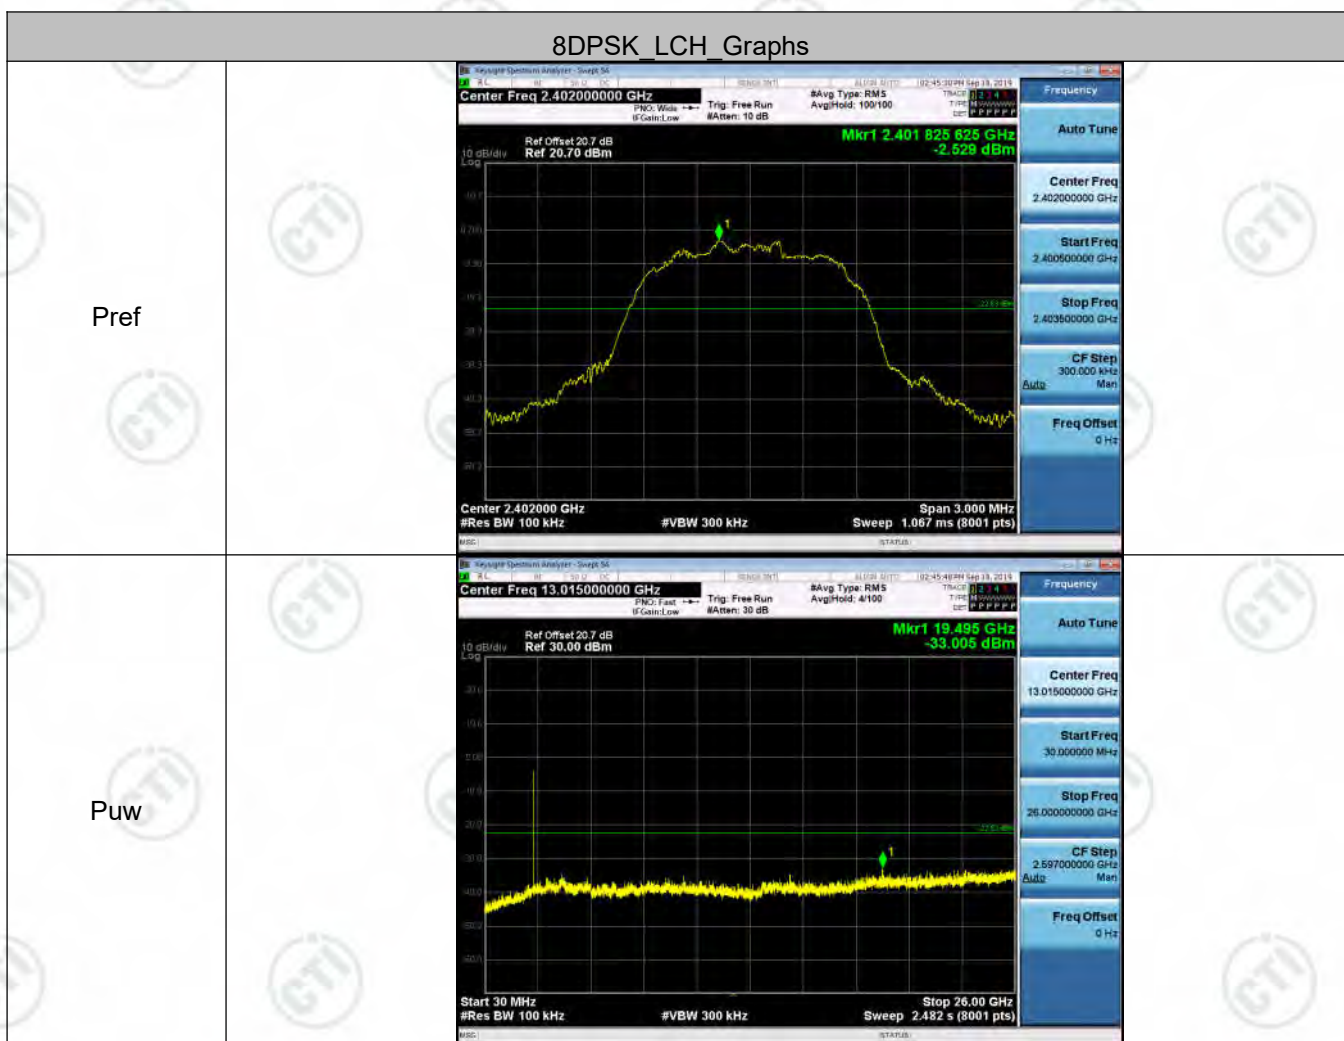

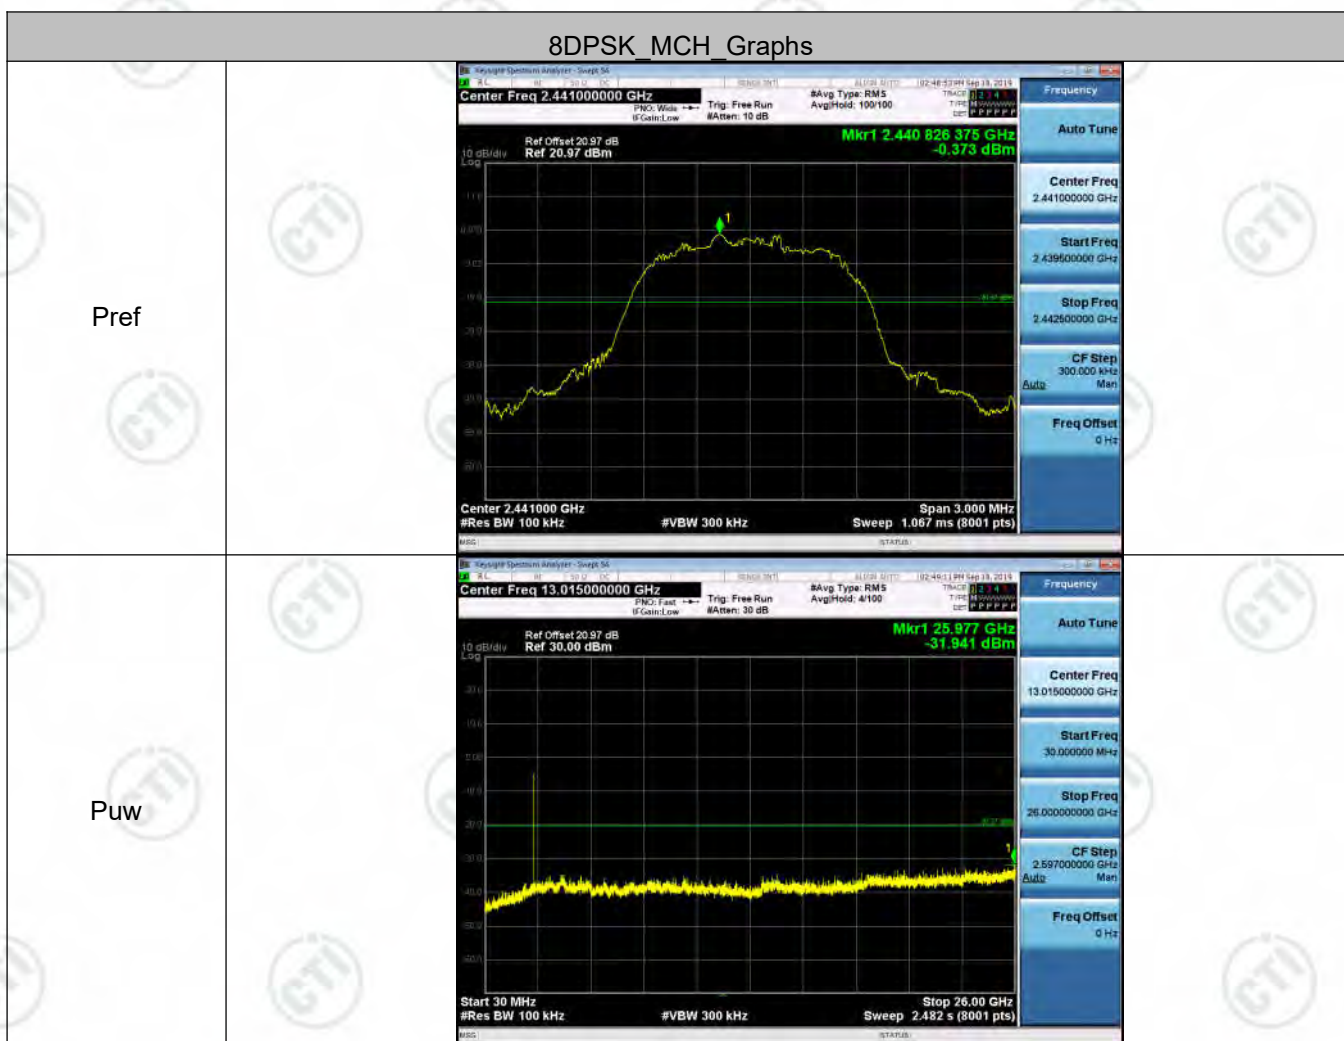

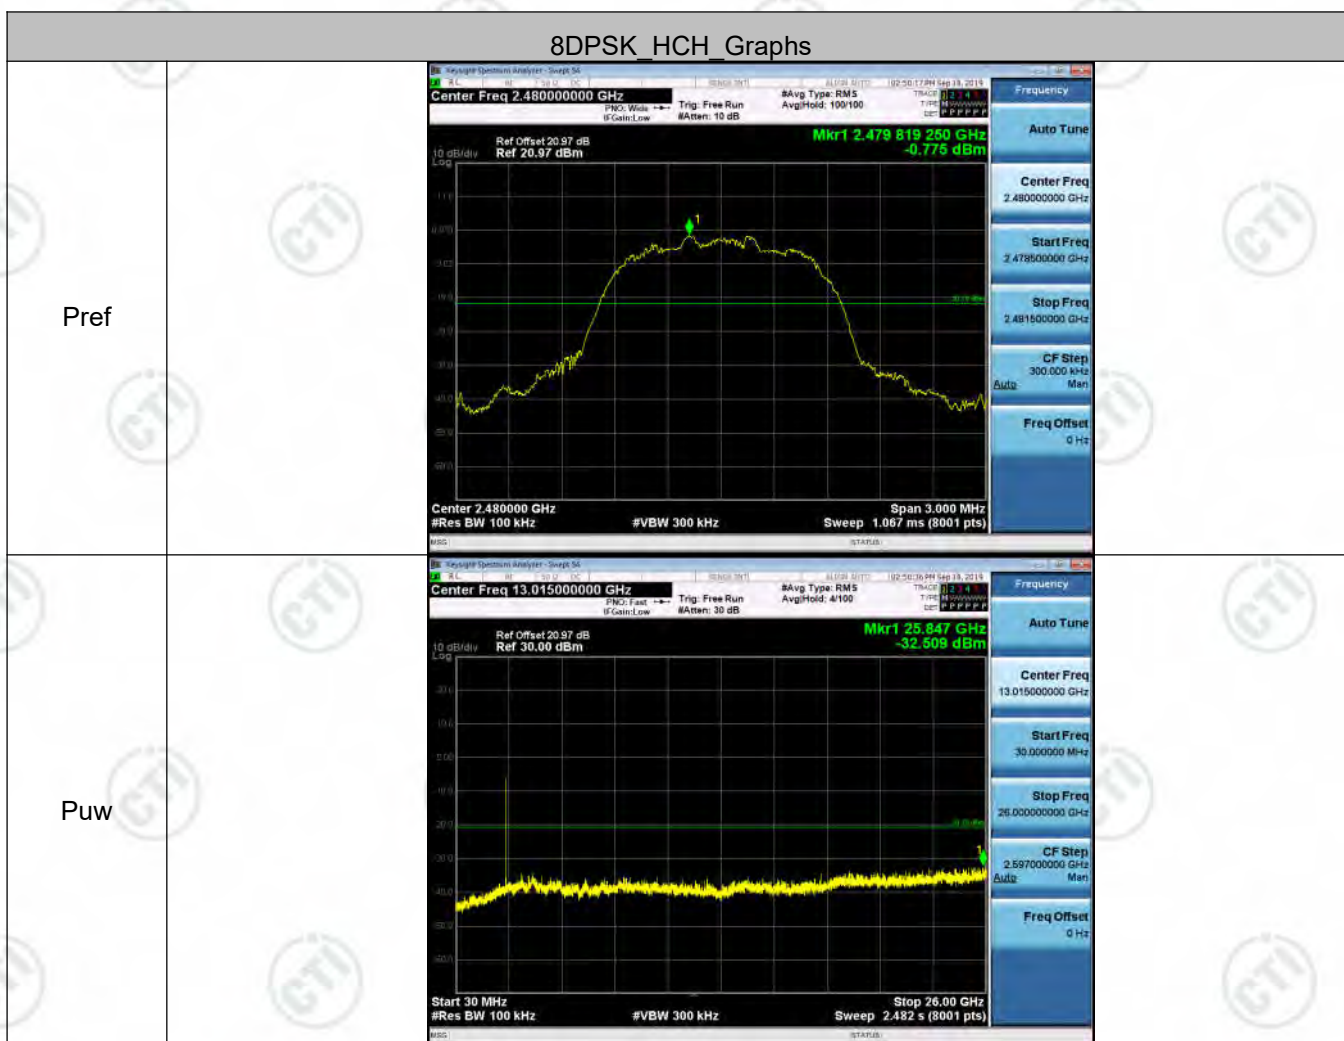

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:

47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

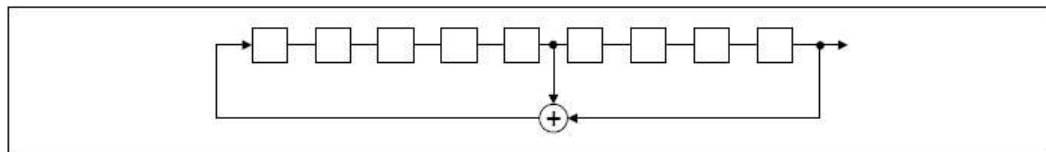

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

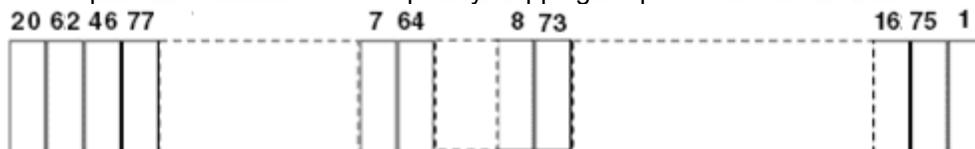

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

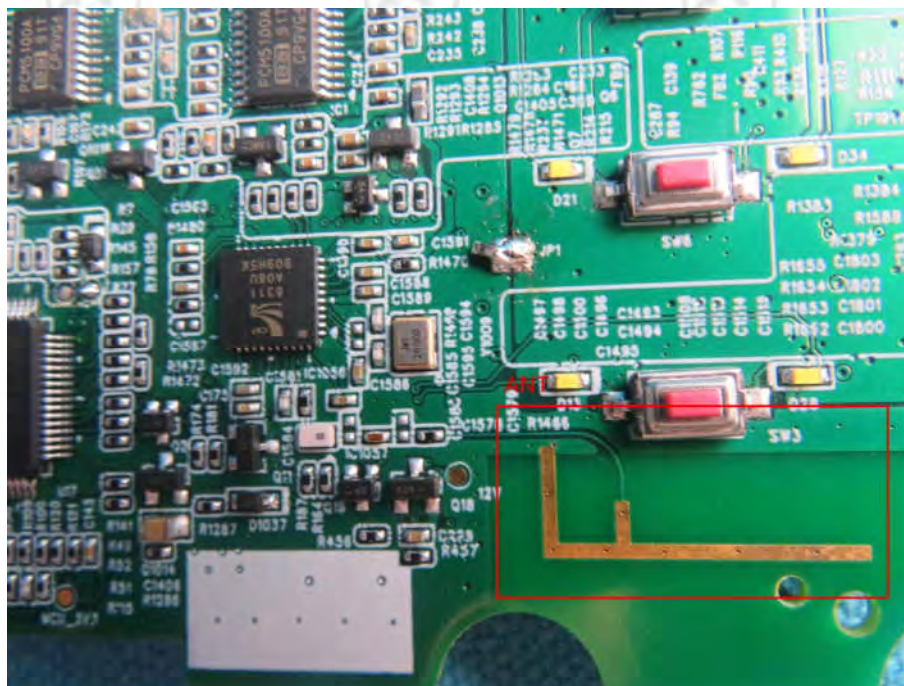


Appendix J): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average</td></tr></table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	Below 1GHz test procedure as below: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. b. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.																				
Limit:	<table><tr><td>Frequency</td><td>Limit (dBμV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></table>	Frequency	Limit (dBμV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBμV/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

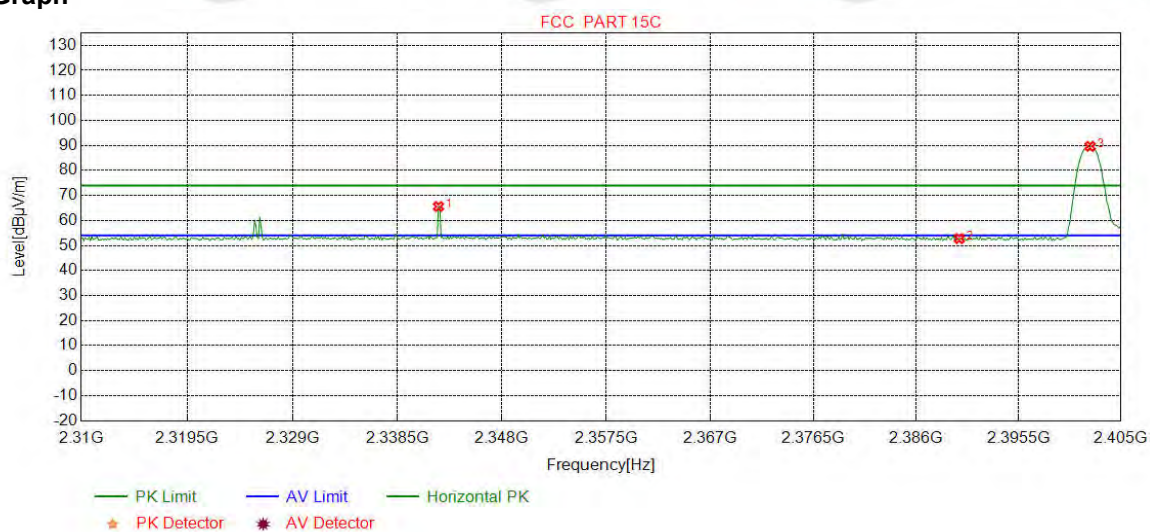

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2342.2215	32.18	13.61	-42.46	62.23	65.56	74.00	8.44	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	49.59	52.77	74.00	21.23	Pass	Horizontal
3	2402.1464	32.26	13.31	-42.43	86.49	89.63	74.00	-15.63	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

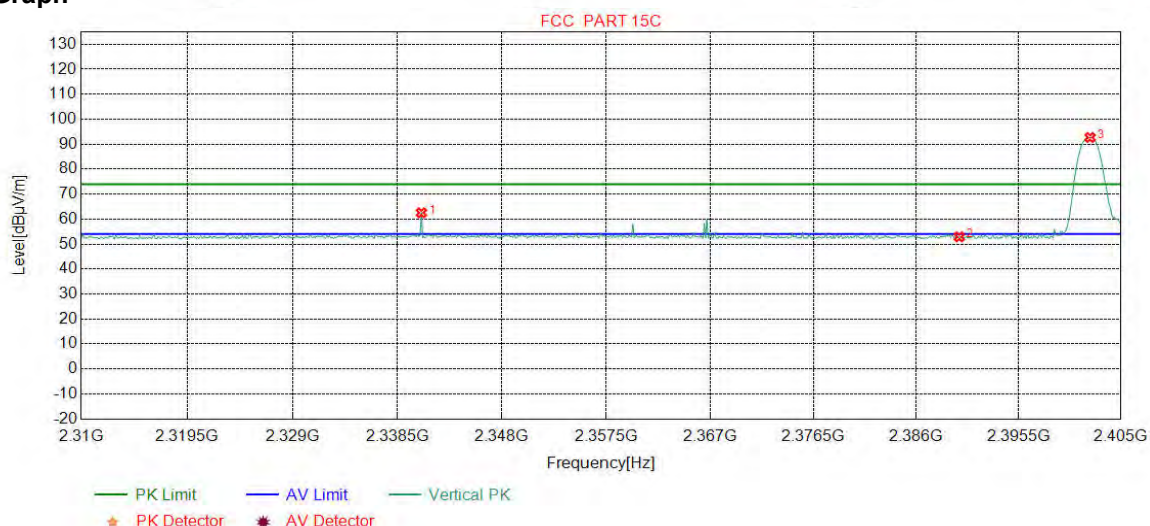

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2340.6758	32.18	13.60	-42.46	59.19	62.51	74.00	11.49	Pass	Vertical
2	2390.0000	32.25	13.37	-42.44	49.70	52.88	74.00	21.12	Pass	Vertical
3	2402.1464	32.26	13.31	-42.43	89.55	92.69	74.00	-18.69	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

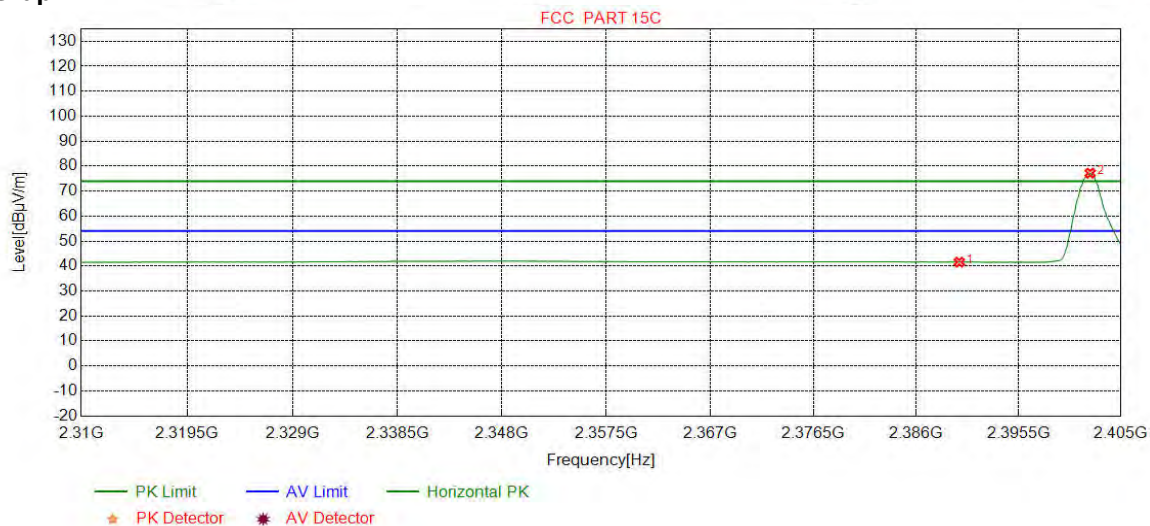

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.38	41.56	54.00	12.44	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	74.05	77.19	54.00	-23.19	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

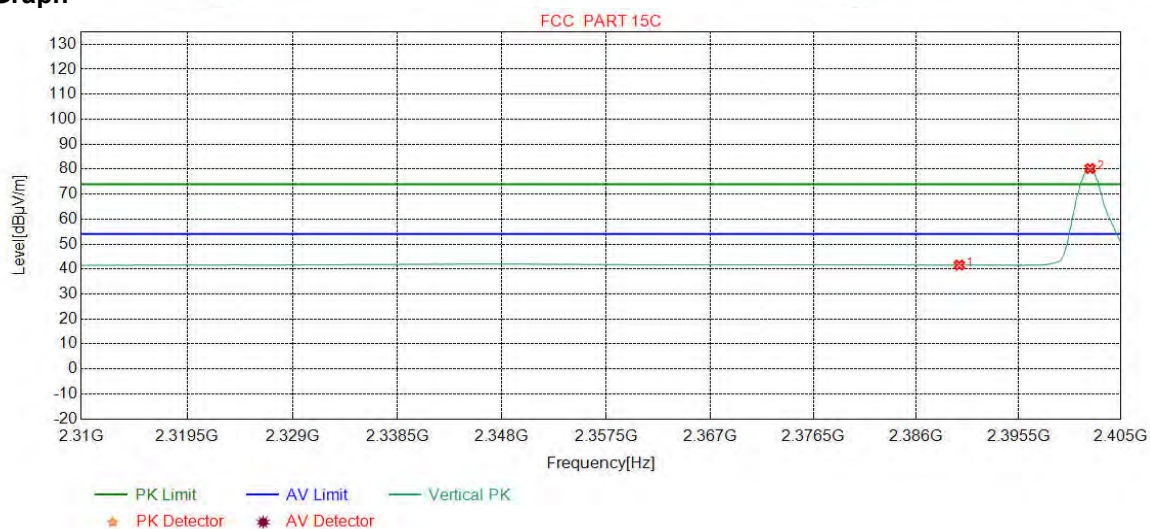

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.40	41.58	54.00	12.42	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	77.10	80.24	54.00	-26.24	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

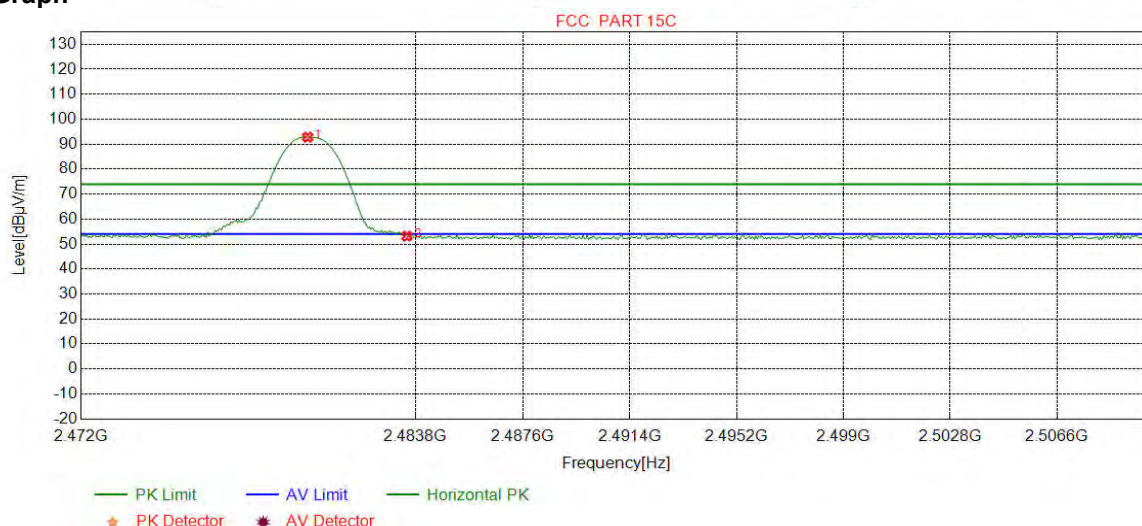

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9900	32.37	13.39	-42.39	89.42	92.79	74.00	-18.79	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.78	53.14	74.00	20.86	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

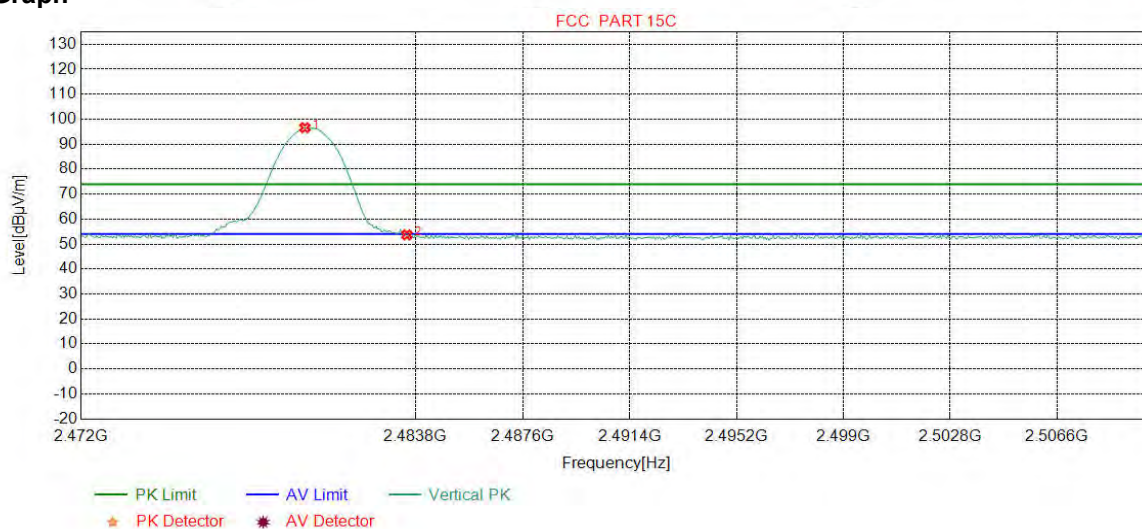

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8949	32.37	13.39	-42.39	93.21	96.58	74.00	-22.58	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	50.31	53.67	74.00	20.33	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

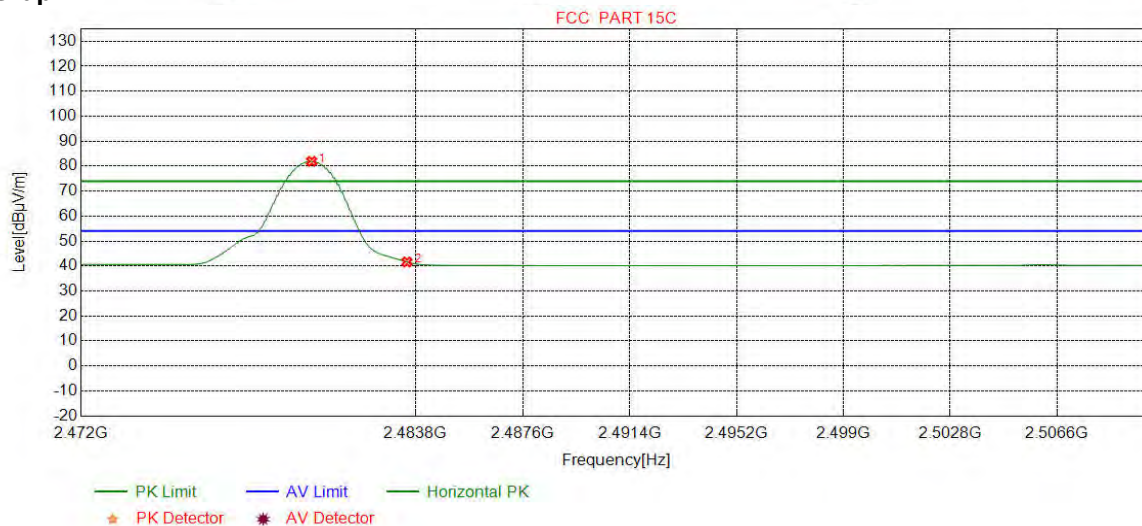

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1327	32.37	13.39	-42.40	78.56	81.92	54.00	-27.92	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	38.27	41.63	54.00	12.37	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

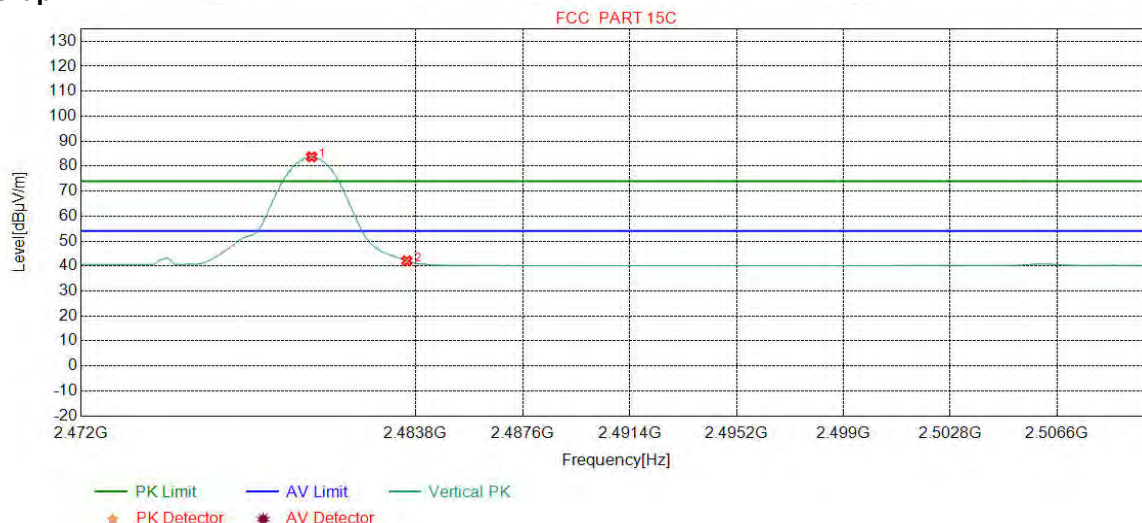

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.1327	32.37	13.39	-42.40	80.36	83.72	54.00	-29.72	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	38.71	42.07	54.00	11.93	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

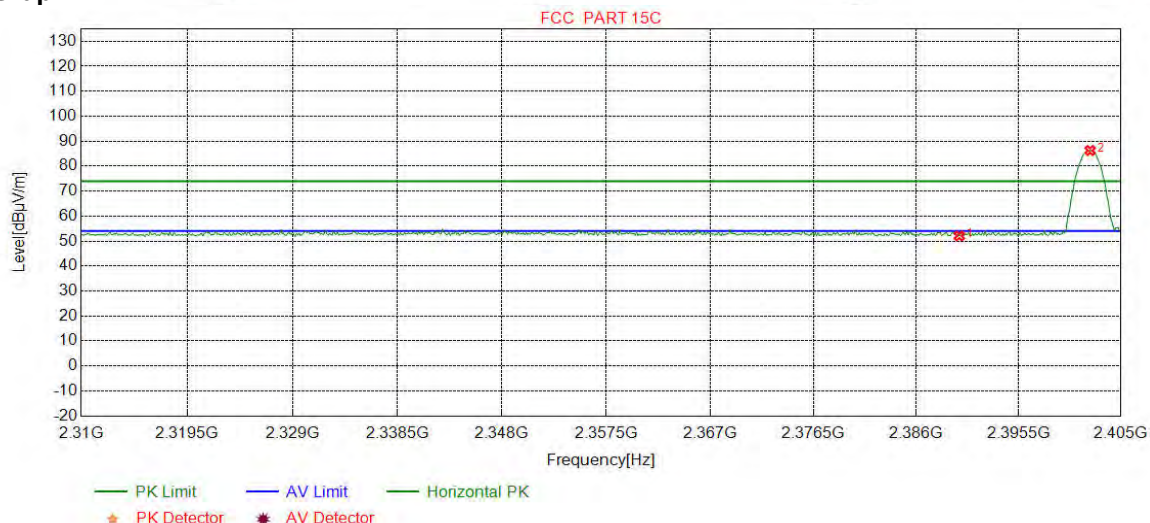

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.87	52.05	74.00	21.95	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	83.13	86.27	74.00	-12.27	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

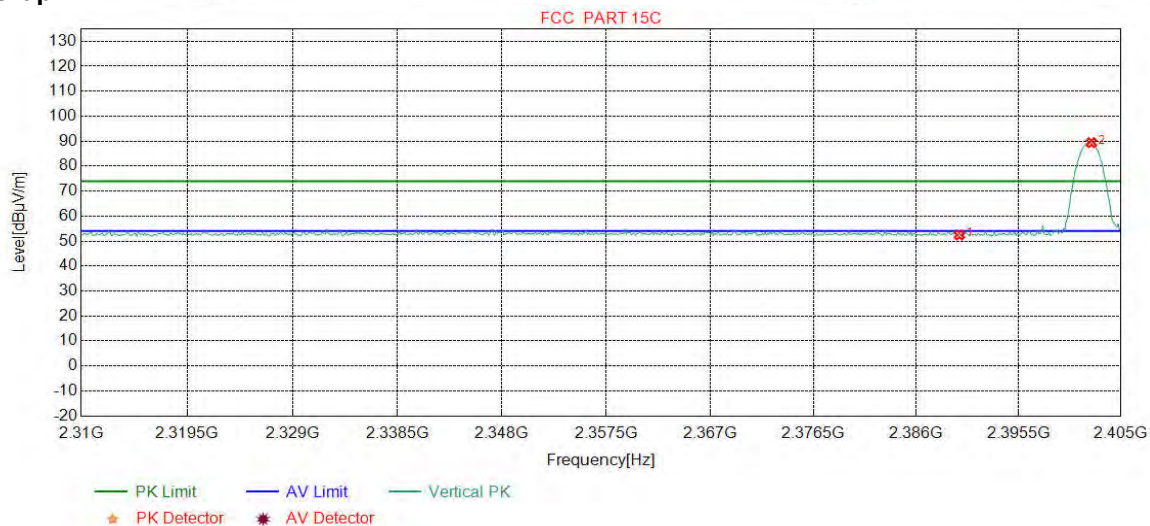

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.27	52.45	74.00	21.55	Pass	Vertical
2	2402.2653	32.26	13.31	-42.43	86.26	89.40	74.00	-15.40	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

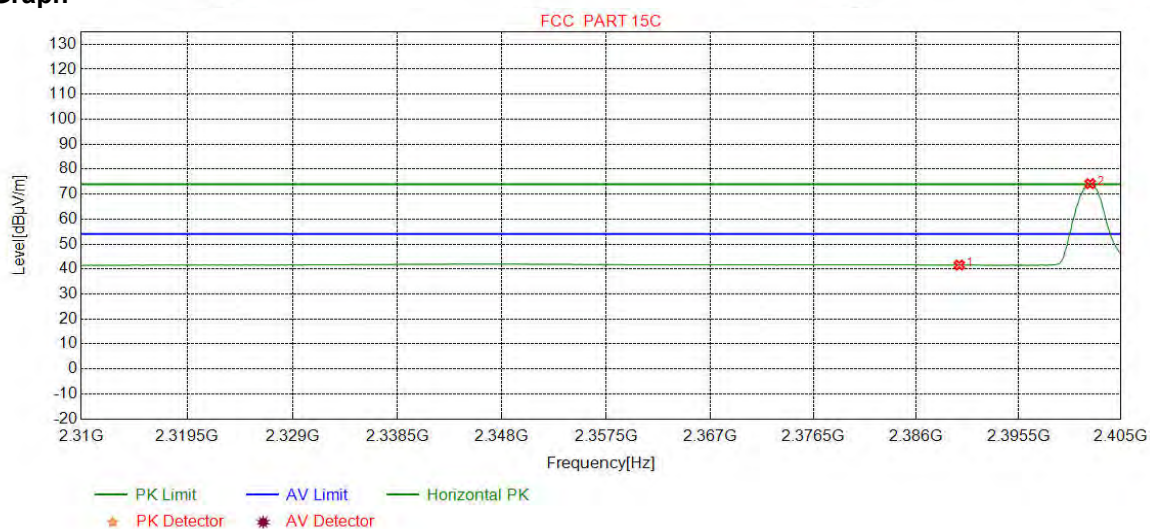

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.41	41.59	54.00	12.41	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	71.04	74.18	54.00	-20.18	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

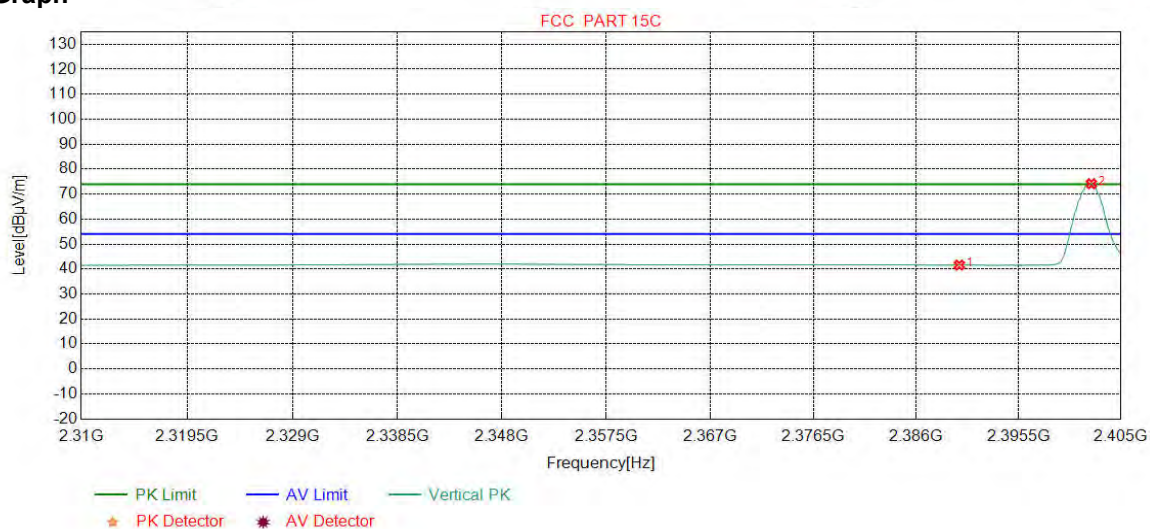

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.40	41.58	54.00	12.42	Pass	Vertical
2	2402.2653	32.26	13.31	-42.43	71.02	74.16	54.00	-20.16	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

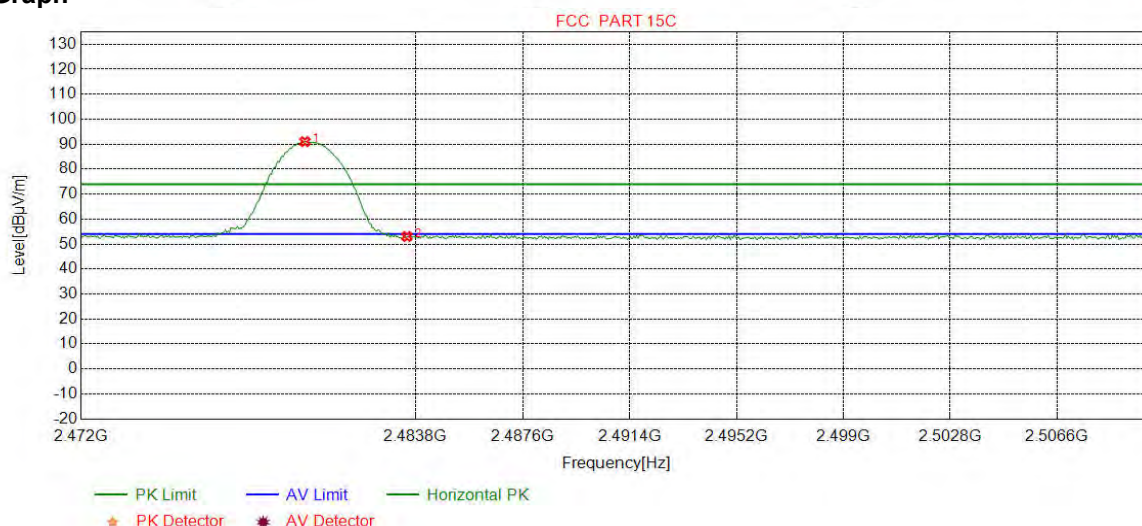

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.8949	32.37	13.39	-42.39	87.65	91.02	74.00	-17.02	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.66	53.02	74.00	20.98	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

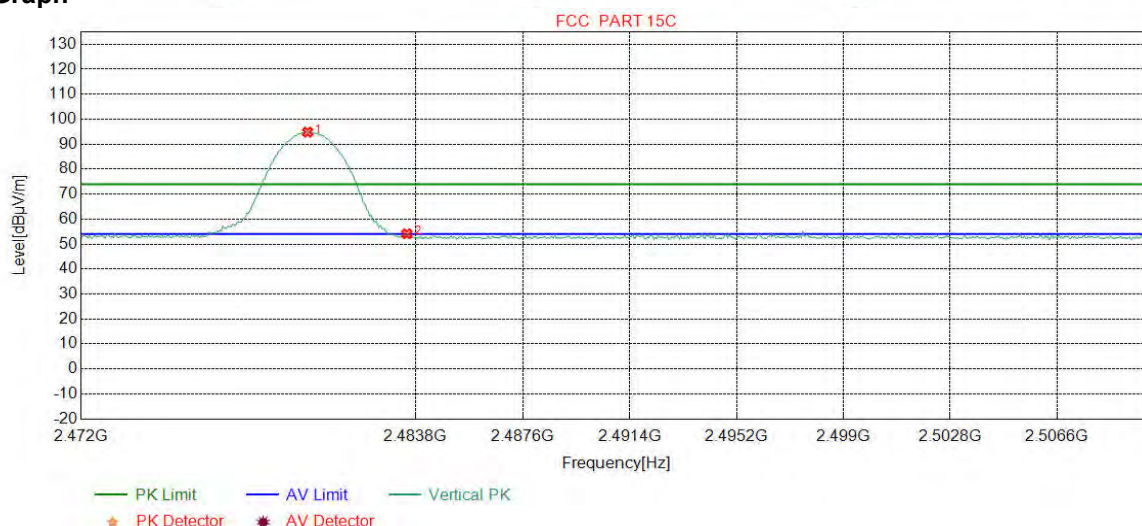

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9900	32.37	13.39	-42.39	91.44	94.81	74.00	-20.81	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	50.76	54.12	74.00	19.88	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

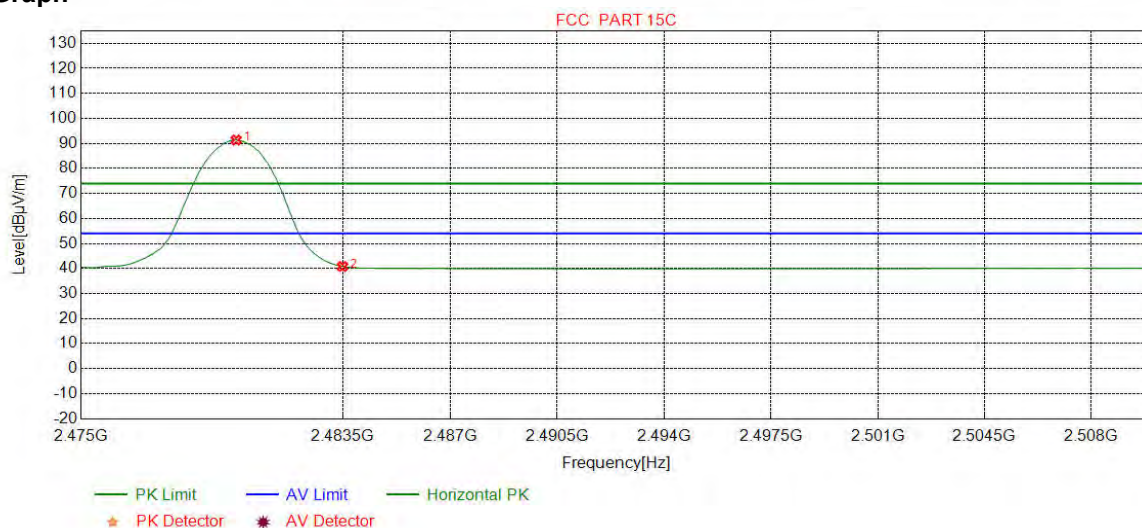

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	87.99	91.36	54.00	-37.36	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.43	40.79	54.00	13.21	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

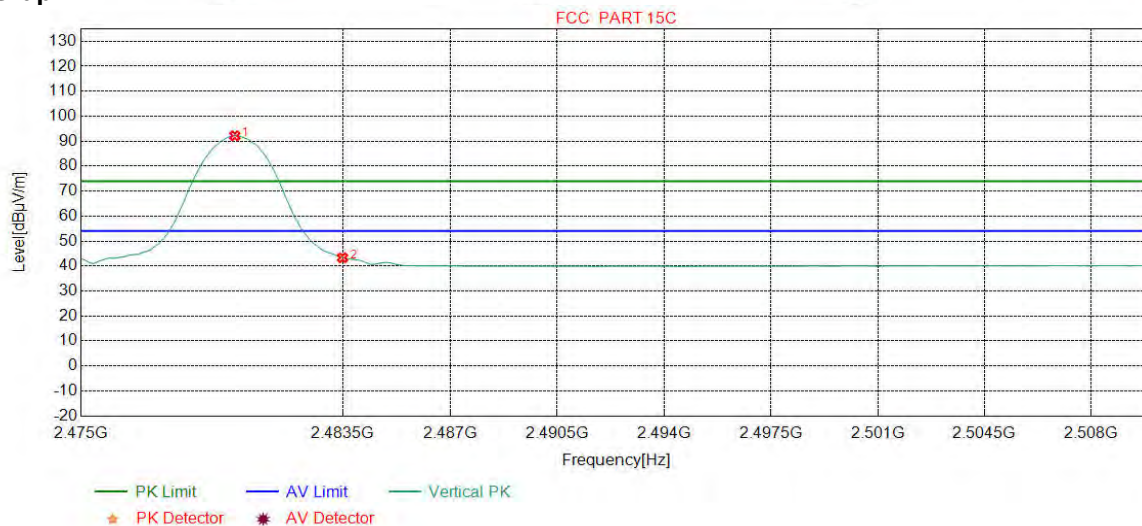

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9937	32.37	13.39	-42.39	88.79	92.16	54.00	-38.16	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	39.95	43.31	54.00	10.69	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

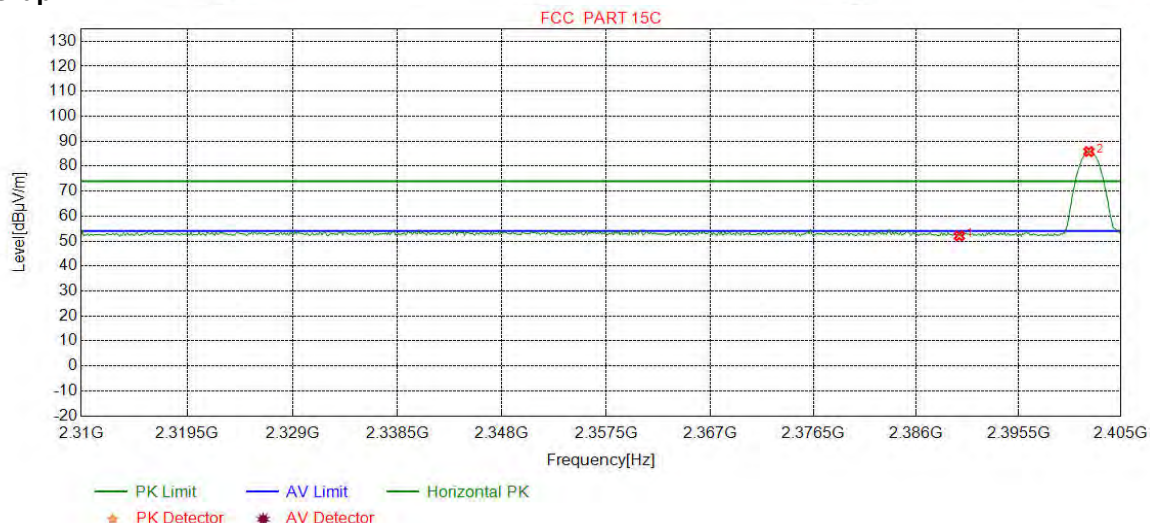

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.87	52.05	74.00	21.95	Pass	Horizontal
2	2402.0275	32.26	13.31	-42.43	82.69	85.83	74.00	-11.83	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

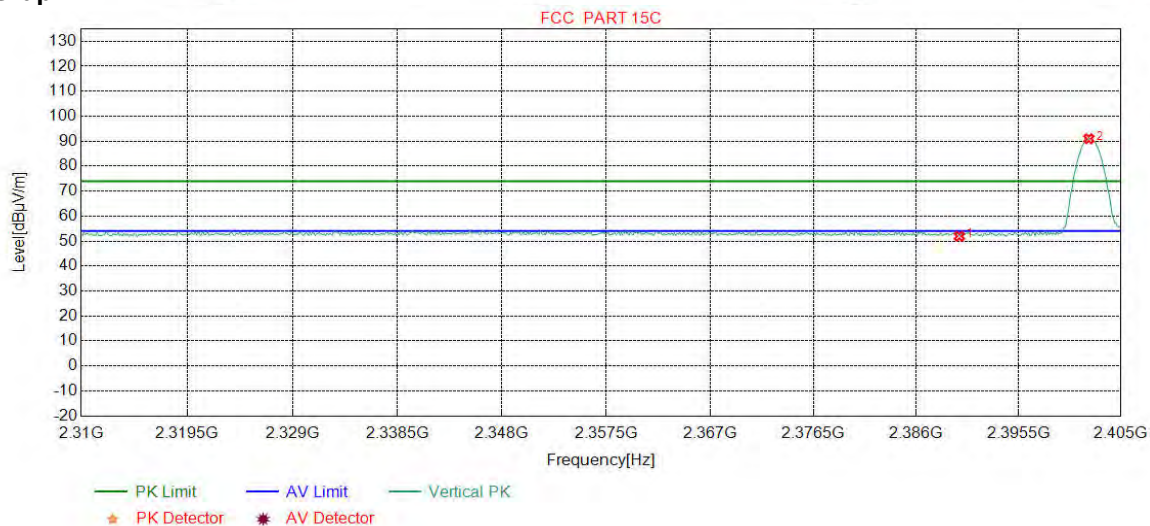

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.76	51.94	74.00	22.06	Pass	Vertical
2	2402.0275	32.26	13.31	-42.43	87.83	90.97	74.00	-16.97	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

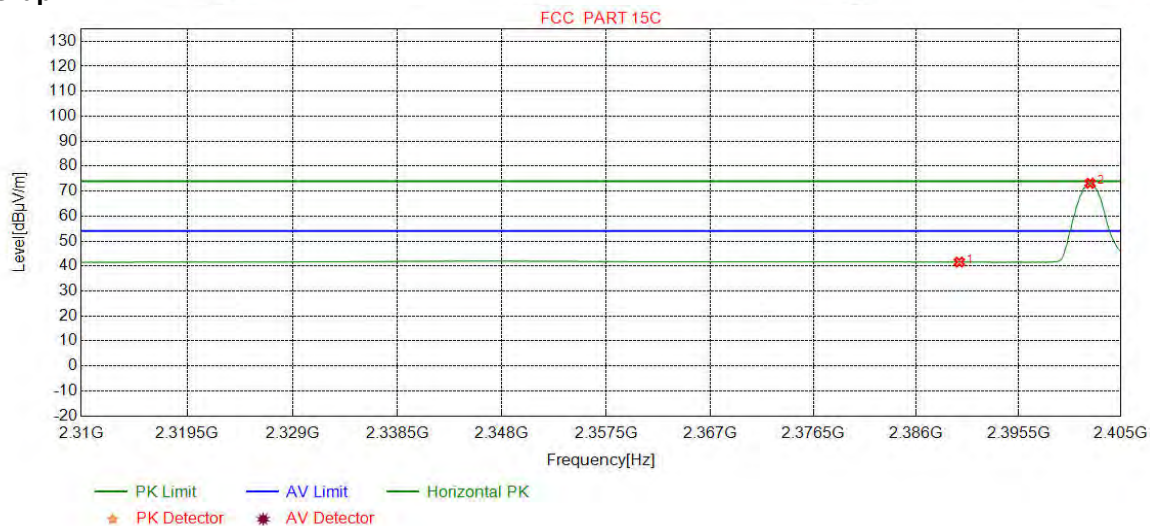

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.40	41.58	54.00	12.42	Pass	Horizontal
2	2402.1464	32.26	13.31	-42.43	69.98	73.12	54.00	-19.12	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

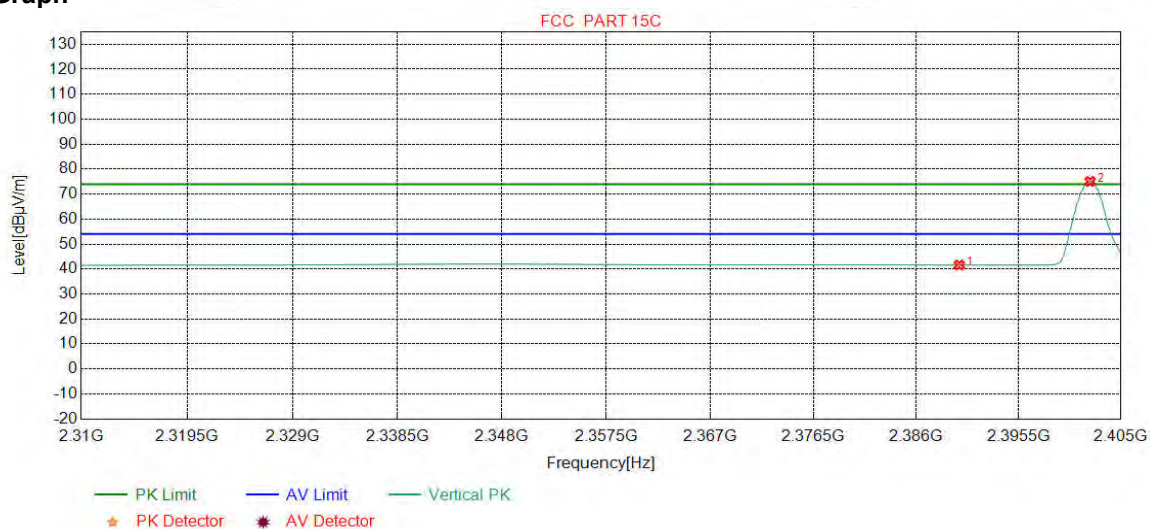

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.43	41.61	54.00	12.39	Pass	Vertical
2	2402.1464	32.26	13.31	-42.43	71.93	75.07	54.00	-21.07	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

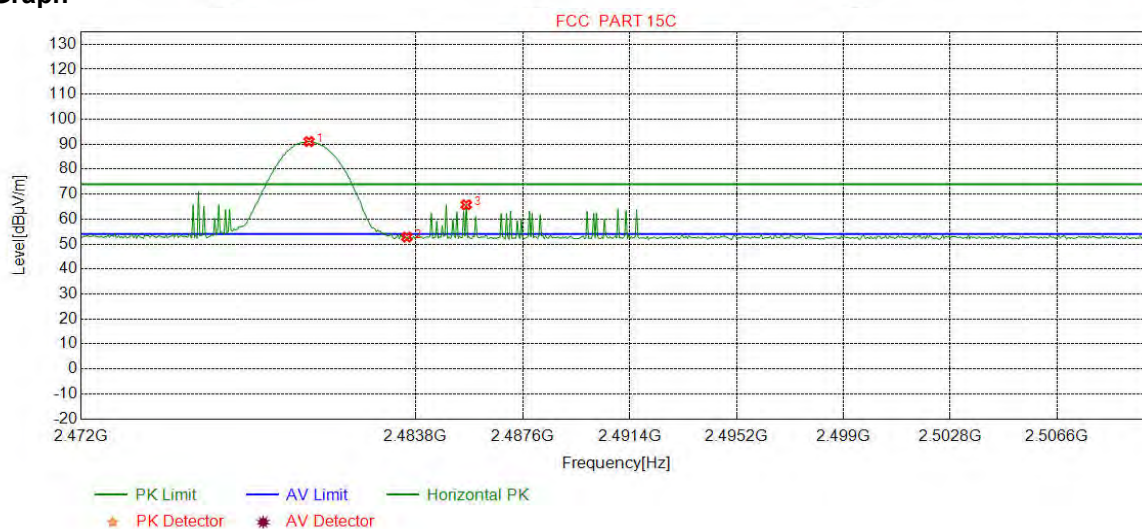

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0375	32.37	13.39	-42.39	87.67	91.04	74.00	-17.04	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.44	52.80	74.00	21.20	Pass	Horizontal
3	2485.6020	32.38	13.37	-42.40	62.38	65.73	74.00	8.27	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

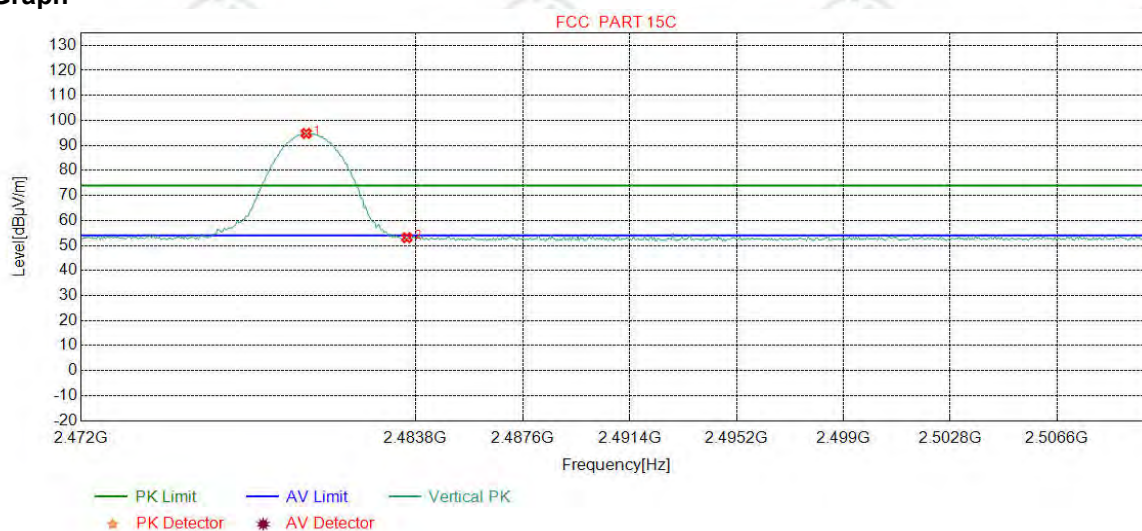

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9424	32.37	13.39	-42.39	91.43	94.80	74.00	-20.80	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.75	53.11	74.00	20.89	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

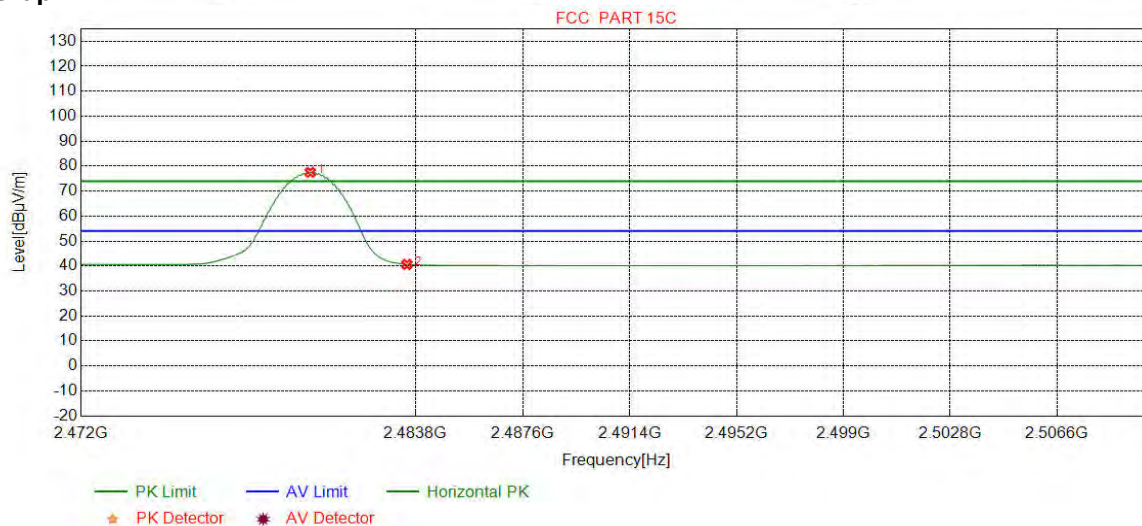

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0851	32.37	13.39	-42.40	74.16	77.52	54.00	-23.52	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	37.29	40.65	54.00	13.35	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

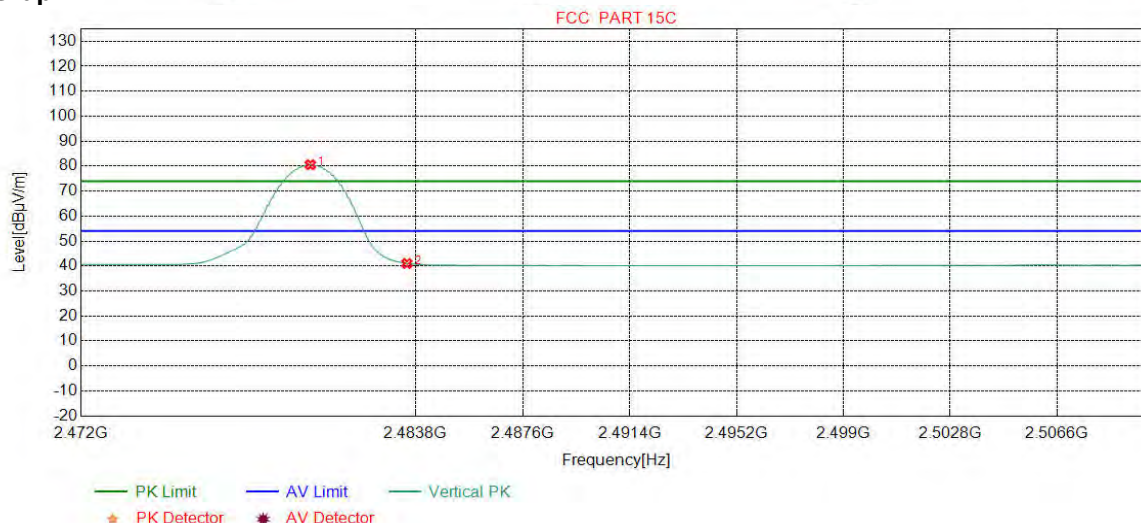

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0851	32.37	13.39	-42.40	77.18	80.54	54.00	-26.54	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	37.67	41.03	54.00	12.97	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix K): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	38.74	18.54	40.00	21.46	Pass	H	PK
2	87.1387	8.74	1.08	-32.09	47.77	25.50	40.00	14.50	Pass	H	PK
3	189.9690	9.95	1.61	-31.97	45.65	25.24	43.50	18.26	Pass	H	PK
4	325.0065	13.75	2.14	-31.79	38.14	22.24	46.00	23.76	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	38.98	29.41	46.00	16.59	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	34.43	28.71	46.00	17.29	Pass	H	PK
7	36.7907	11.27	0.68	-32.12	40.20	20.03	40.00	19.97	Pass	V	PK
8	87.2357	8.76	1.08	-32.08	41.88	19.64	40.00	20.36	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	48.53	29.43	43.50	14.07	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	41.40	25.50	46.00	20.50	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	39.53	29.96	46.00	16.04	Pass	V	PK
12	909.9750	22.16	3.60	-31.48	33.15	27.43	46.00	18.57	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	41.43	21.23	40.00	18.77	Pass	H	PK
2	86.9447	8.70	1.08	-32.09	41.85	19.54	40.00	20.46	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	48.86	29.76	43.50	13.74	Pass	H	PK
4	324.9095	13.75	2.14	-31.80	40.90	24.99	46.00	21.01	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	40.25	30.68	46.00	15.32	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	34.14	28.42	46.00	17.58	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	41.12	20.92	40.00	19.08	Pass	V	PK
8	88.3028	9.01	1.09	-32.09	47.00	25.01	43.50	18.49	Pass	V	PK
9	190.8421	10.03	1.62	-31.97	47.20	26.88	43.50	16.62	Pass	V	PK
10	324.9095	13.75	2.14	-31.80	38.67	22.76	46.00	23.24	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	39.54	29.97	46.00	16.03	Pass	V	PK
12	909.9750	22.16	3.60	-31.48	34.73	29.01	46.00	16.99	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	49.3049	13.20	0.79	-32.12	38.23	20.10	40.00	19.90	Pass	H	PK
2	86.9447	8.70	1.08	-32.09	41.46	19.15	40.00	20.85	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	49.00	29.90	43.50	13.60	Pass	H	PK
4	324.8125	13.75	2.14	-31.80	40.54	24.63	46.00	21.37	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	39.63	30.06	46.00	15.94	Pass	H	PK
6	892.9983	22.02	3.59	-31.62	40.97	34.96	46.00	11.04	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	42.08	21.88	40.00	18.12	Pass	V	PK
8	88.9819	9.17	1.09	-32.09	46.92	25.09	43.50	18.41	Pass	V	PK
9	191.5212	10.09	1.62	-31.96	45.97	25.72	43.50	17.78	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	40.19	24.29	46.00	21.71	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	38.99	29.42	46.00	16.58	Pass	V	PK
12	875.0515	21.80	3.55	-31.70	33.44	27.09	46.00	18.91	Pass	V	PK

Mode:			π/4DQPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	40.65	20.45	40.00	19.55	Pass	H	PK
2	88.0118	8.94	1.08	-32.08	40.87	18.81	43.50	24.69	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	49.46	30.36	43.50	13.14	Pass	H	PK
4	325.0065	13.75	2.14	-31.79	40.99	25.09	46.00	20.91	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	39.84	30.27	46.00	15.73	Pass	H	PK
6	879.7080	21.86	3.55	-31.66	35.65	29.40	46.00	16.60	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	41.03	20.83	40.00	19.17	Pass	V	PK
8	87.5268	8.83	1.08	-32.08	46.92	24.75	40.00	15.25	Pass	V	PK
9	189.4839	9.90	1.61	-31.97	46.20	25.74	43.50	17.76	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	39.26	23.36	46.00	22.64	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	40.06	30.49	46.00	15.51	Pass	V	PK
12	908.0348	22.15	3.60	-31.50	38.40	32.65	46.00	13.35	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	42.39	22.19	40.00	17.81	Pass	H	PK
2	87.3327	8.79	1.08	-32.09	41.03	18.81	40.00	21.19	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	49.13	30.03	43.50	13.47	Pass	H	PK
4	330.0510	13.86	2.16	-31.76	40.74	25.00	46.00	21.00	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	40.64	31.07	46.00	14.93	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	32.72	27.00	46.00	19.00	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	41.28	21.08	40.00	18.92	Pass	V	PK
8	88.8849	9.14	1.09	-32.08	46.99	25.14	43.50	18.36	Pass	V	PK
9	190.6481	10.01	1.61	-31.96	45.60	25.26	43.50	18.24	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	37.13	21.23	46.00	24.77	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	40.24	30.67	46.00	15.33	Pass	V	PK
12	879.7080	21.86	3.55	-31.66	35.29	29.04	46.00	16.96	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	42.82	22.62	40.00	17.38	Pass	H	PK
2	62.8863	10.85	0.91	-32.04	39.89	19.61	40.00	20.39	Pass	H	PK
3	88.1088	8.97	1.08	-32.09	41.12	19.08	43.50	24.42	Pass	H	PK
4	208.8859	11.13	1.71	-31.94	48.79	29.69	43.50	13.81	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	40.01	30.44	46.00	15.56	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	34.61	28.89	46.00	17.11	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	40.46	20.26	40.00	19.74	Pass	V	PK
8	88.5939	9.08	1.09	-32.09	46.67	24.75	43.50	18.75	Pass	V	PK
9	190.9391	10.04	1.62	-31.97	46.27	25.96	43.50	17.54	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	37.71	21.81	46.00	24.19	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	40.32	30.75	46.00	15.25	Pass	V	PK
12	879.7080	21.86	3.55	-31.66	35.15	28.90	46.00	17.10	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	43.49	23.29	40.00	16.71	Pass	H	PK
2	88.2058	8.99	1.09	-32.09	40.79	18.78	43.50	24.72	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	48.76	29.66	43.50	13.84	Pass	H	PK
4	325.0065	13.75	2.14	-31.79	40.60	24.70	46.00	21.30	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	38.51	28.94	46.00	17.06	Pass	H	PK
6	900.5651	22.10	3.60	-31.57	34.69	28.82	46.00	17.18	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	41.06	20.86	40.00	19.14	Pass	V	PK
8	88.5939	9.08	1.09	-32.09	46.43	24.51	43.50	18.99	Pass	V	PK
9	192.2972	10.17	1.62	-31.96	45.46	25.29	43.50	18.21	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	37.89	21.99	46.00	24.01	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	38.30	28.73	46.00	17.27	Pass	V	PK
12	879.7080	21.86	3.55	-31.66	35.48	29.23	46.00	16.77	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	41.81	21.61	40.00	18.39	Pass	H	PK
2	62.6923	10.90	0.91	-32.04	40.83	20.60	40.00	19.40	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	49.11	30.01	43.50	13.49	Pass	H	PK
4	330.0510	13.86	2.16	-31.76	40.86	25.12	46.00	20.88	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	38.44	28.87	46.00	17.13	Pass	H	PK
6	879.7080	21.86	3.55	-31.66	37.17	30.92	46.00	15.08	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	40.28	20.08	40.00	19.92	Pass	V	PK
8	88.7879	9.12	1.09	-32.09	46.67	24.79	43.50	18.71	Pass	V	PK
9	190.0660	9.96	1.61	-31.97	46.44	26.04	43.50	17.46	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	37.21	21.31	46.00	24.69	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	38.02	28.45	46.00	17.55	Pass	V	PK
12	879.6110	21.86	3.55	-31.66	35.21	28.96	46.00	17.04	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.6937	11.24	0.67	-32.11	41.42	21.22	40.00	18.78	Pass	H	PK
2	87.7208	8.88	1.08	-32.09	41.57	19.44	40.00	20.56	Pass	H	PK
3	208.8859	11.13	1.71	-31.94	49.47	30.37	43.50	13.13	Pass	H	PK
4	324.9095	13.75	2.14	-31.80	41.24	25.33	46.00	20.67	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	40.23	30.66	46.00	15.34	Pass	H	PK
6	909.9750	22.16	3.60	-31.48	33.12	27.40	46.00	18.60	Pass	H	PK
7	36.6937	11.24	0.67	-32.11	40.73	20.53	40.00	19.47	Pass	V	PK
8	88.8849	9.14	1.09	-32.08	46.78	24.93	43.50	18.57	Pass	V	PK
9	190.4540	9.99	1.61	-31.96	45.60	25.24	43.50	18.26	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	38.18	22.28	46.00	23.72	Pass	V	PK
11	649.9890	19.40	3.10	-32.07	39.68	30.11	46.00	15.89	Pass	V	PK
12	896.0056	22.05	3.59	-31.59	43.08	37.13	46.00	8.87	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1198.2198	28.10	2.66	-42.89	62.62	50.49	74.00	23.51	Pass	H	PK
2	2000.3000	31.70	3.47	-42.61	66.11	58.67	74.00	15.33	Pass	H	PK
3	2798.9799	32.88	4.24	-42.23	64.31	59.20	74.00	14.80	Pass	H	PK
4	4804.1203	34.50	4.55	-40.66	54.16	52.55	74.00	21.45	Pass	H	PK
5	7206.2804	36.31	5.81	-41.02	51.31	52.41	74.00	21.59	Pass	H	PK
6	12446.629	39.57	7.66	-41.11	46.03	52.15	74.00	21.85	Pass	H	PK
7	1996.7500	31.68	3.47	-42.61	39.96	32.50	54.00	21.50	Pass	H	AV
8	2799.0299	32.88	4.24	-42.23	40.01	34.90	54.00	19.10	Pass	H	AV
9	1996.8997	31.68	3.47	-42.62	64.67	57.20	74.00	16.80	Pass	V	PK
10	2655.1655	32.65	4.09	-42.30	59.37	53.81	74.00	20.19	Pass	V	PK
11	2796.9797	32.88	4.23	-42.23	62.25	57.13	74.00	16.87	Pass	V	PK
12	4804.1203	34.50	4.55	-40.66	53.27	51.66	74.00	22.34	Pass	V	PK
13	7206.2804	36.31	5.81	-41.02	51.32	52.42	74.00	21.58	Pass	V	PK
14	11015.534	38.61	7.55	-41.12	44.95	49.99	74.00	24.01	Pass	V	PK
15	1997.1797	31.68	3.47	-42.61	39.44	31.98	54.00	22.02	Pass	V	AV
16	2796.4197	32.87	4.23	-42.23	40.68	35.55	54.00	18.45	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2440.9441	32.32	3.96	-42.42	57.89	51.75	74.00	22.25	Pass	H	PK
2	4882.0000	34.50	4.81	-40.60	54.89	53.60	74.00	20.40	Pass	H	PK
3	7323.0000	36.42	5.85	-40.92	50.06	51.41	74.00	22.59	Pass	H	PK
4	9764.0000	37.71	6.71	-40.62	42.43	46.23	74.00	27.77	Pass	H	PK
5	12205.000	39.42	7.67	-41.16	43.05	48.98	74.00	25.02	Pass	H	PK
6	15108.807	40.51	9.55	-42.47	45.57	53.16	74.00	20.84	Pass	H	PK
7	2441.3441	32.32	3.96	-42.41	62.37	56.24	74.00	17.76	Pass	V	PK
8	3599.0399	33.48	4.34	-41.61	52.85	49.06	74.00	24.94	Pass	V	PK
9	4882.0000	34.50	4.81	-40.60	52.96	51.67	74.00	22.33	Pass	V	PK
10	7323.0000	36.42	5.85	-40.92	52.28	53.63	74.00	20.37	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	42.36	46.16	74.00	27.84	Pass	V	PK
12	12205.000	39.42	7.67	-41.16	44.97	50.90	74.00	23.10	Pass	V	PK
13	2445.9941	32.32	3.97	-42.41	35.95	29.83	54.00	24.17	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2480.1480	32.37	4.01	-42.40	57.22	51.20	74.00	22.80	Pass	H	PK
2	3199.0133	33.28	4.65	-42.00	50.50	46.43	74.00	27.57	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	56.99	55.78	74.00	18.22	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	50.31	51.88	74.00	22.12	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	41.82	45.90	74.00	28.10	Pass	H	PK
6	12400.000	39.54	7.86	-41.12	44.08	50.36	74.00	23.64	Pass	H	PK
7	2479.9480	32.37	4.01	-42.40	60.33	54.31	74.00	19.69	Pass	V	PK
8	4960.0000	34.50	4.82	-40.53	53.73	52.52	74.00	21.48	Pass	V	PK
9	7440.0000	36.54	5.85	-40.82	51.88	53.45	74.00	20.55	Pass	V	PK
10	9920.0000	37.77	6.79	-40.48	41.62	45.70	74.00	28.30	Pass	V	PK
11	12400.000	39.54	7.86	-41.12	43.72	50.00	74.00	24.00	Pass	V	PK
12	13700.713	39.52	8.35	-41.21	46.24	52.90	74.00	21.10	Pass	V	PK
13	2480.3580	32.37	4.01	-42.40	35.72	29.70	54.00	24.30	Pass	V	AV

Mode:			π/4DQPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	3334.0223	33.33	4.54	-41.92	54.07	50.02	74.00	23.98	Pass	H	PK
2	4840.1227	34.50	4.65	-40.63	62.76	61.28	74.00	12.72	Pass	H	PK
3	7340.2894	36.44	5.85	-40.90	48.36	49.75	74.00	24.25	Pass	H	PK
4	9608.0000	37.64	6.63	-40.76	42.42	45.93	74.00	28.07	Pass	H	PK
5	12010.000	39.31	7.60	-41.21	42.42	48.12	74.00	25.88	Pass	H	PK
6	14307.753	40.01	8.62	-41.88	46.33	53.08	74.00	20.92	Pass	H	PK
7	4845.1127	34.50	4.67	-40.63	28.94	27.48	54.00	26.52	Pass	H	AV
8	2401.9402	32.26	3.92	-42.43	56.69	50.44	74.00	23.56	Pass	V	PK
9	4804.0000	34.50	4.55	-40.66	47.63	46.02	74.00	27.98	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	47.49	48.59	74.00	25.41	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	42.21	45.72	74.00	28.28	Pass	V	PK
12	12010.000	39.31	7.60	-41.21	41.78	47.48	74.00	26.52	Pass	V	PK
13	14882.792	40.35	9.16	-42.30	45.83	53.04	74.00	20.96	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	2441.1441	32.32	3.96	-42.41	56.81	50.68	74.00	23.32	Pass	H	PK
2	4882.0000	34.50	4.81	-40.60	51.87	50.58	74.00	23.42	Pass	H	PK
3	7323.0000	36.42	5.85	-40.92	48.31	49.66	74.00	24.34	Pass	H	PK
4	9764.0000	37.71	6.71	-40.62	41.51	45.31	74.00	28.69	Pass	H	PK
5	12205.000	39.42	7.67	-41.16	43.04	48.97	74.00	25.03	Pass	H	PK
6	14349.756	40.05	8.63	-41.97	46.17	52.88	74.00	21.12	Pass	H	PK
7	2441.1441	32.32	3.96	-42.41	60.43	54.30	74.00	19.70	Pass	V	PK
8	4882.0000	34.50	4.81	-40.60	49.20	47.91	74.00	26.09	Pass	V	PK
9	7323.0000	36.42	5.85	-40.92	47.71	49.06	74.00	24.94	Pass	V	PK
10	9764.0000	37.71	6.71	-40.62	41.81	45.61	74.00	28.39	Pass	V	PK
11	12205.000	39.42	7.67	-41.16	42.95	48.88	74.00	25.12	Pass	V	PK
12	14874.791	40.35	9.15	-42.31	46.75	53.94	74.00	20.06	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1600.6601	29.06	3.07	-42.89	56.64	45.88	74.00	28.12	Pass	H	PK
2	2479.5480	32.37	4.01	-42.40	55.71	49.69	74.00	24.31	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	53.84	52.63	74.00	21.37	Pass	H	PK
4	7439.2960	36.54	5.85	-40.82	48.89	50.46	74.00	23.54	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	41.26	45.34	74.00	28.66	Pass	H	PK
6	12400.000	39.54	7.86	-41.12	43.57	49.85	74.00	24.15	Pass	H	PK
7	2480.1480	32.37	4.01	-42.40	57.62	51.60	74.00	22.40	Pass	V	PK
8	4960.0000	34.50	4.82	-40.53	51.91	50.70	74.00	23.30	Pass	V	PK
9	7440.0000	36.54	5.85	-40.82	48.23	49.80	74.00	24.20	Pass	V	PK
10	9920.0000	37.77	6.79	-40.48	40.91	44.99	74.00	29.01	Pass	V	PK
11	12400.000	39.54	7.86	-41.12	43.31	49.59	74.00	24.41	Pass	V	PK
12	15932.862	41.77	10.06	-43.33	44.92	53.42	74.00	20.58	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1999.9000	31.70	3.47	-42.61	65.03	57.59	74.00	16.41	Pass	H	PK
2	2798.5799	32.88	4.24	-42.23	64.89	59.78	74.00	14.22	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	49.55	47.94	74.00	26.06	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	46.82	47.92	74.00	26.08	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	42.14	45.65	74.00	28.35	Pass	H	PK
6	12010.000	39.31	7.60	-41.21	43.03	48.73	74.00	25.27	Pass	H	PK
7	1998.2300	31.69	3.47	-42.61	36.00	28.55	54.00	25.45	Pass	H	AV
8	2801.1299	32.88	4.24	-42.23	35.66	30.55	54.00	23.45	Pass	H	AV
9	1998.8999	31.69	3.47	-42.61	66.88	59.43	74.00	14.57	Pass	V	PK
10	2804.5805	32.89	4.24	-42.23	56.73	51.63	74.00	22.37	Pass	V	PK
11	4804.0000	34.50	4.55	-40.66	47.41	45.80	74.00	28.20	Pass	V	PK
12	7206.0000	36.31	5.81	-41.02	46.98	48.08	74.00	25.92	Pass	V	PK
13	9608.0000	37.64	6.63	-40.76	42.31	45.82	74.00	28.18	Pass	V	PK
14	12010.000	39.31	7.60	-41.21	42.42	48.12	74.00	25.88	Pass	V	PK
15	1997.2199	31.68	3.47	-42.61	36.01	28.55	54.00	25.45	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2800.3800	32.88	4.24	-42.23	64.79	59.68	74.00	14.32	Pass	H	PK
2	4882.0000	34.50	4.81	-40.60	52.13	50.84	74.00	23.16	Pass	H	PK
3	7323.0000	36.42	5.85	-40.92	48.28	49.63	74.00	24.37	Pass	H	PK
4	9764.0000	37.71	6.71	-40.62	41.04	44.84	74.00	29.16	Pass	H	PK
5	12205.000	39.42	7.67	-41.16	43.07	49.00	74.00	25.00	Pass	H	PK
6	13643.709	39.49	8.13	-41.19	45.76	52.19	74.00	21.81	Pass	H	PK
7	2803.4300	32.89	4.24	-42.23	35.68	30.58	54.00	23.42	Pass	H	AV
8	2803.3803	32.89	4.24	-42.23	66.05	60.95	74.00	13.05	Pass	V	PK
9	4882.0000	34.50	4.81	-40.60	49.48	48.19	74.00	25.81	Pass	V	PK
10	7323.0000	36.42	5.85	-40.92	48.24	49.59	74.00	24.41	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	40.43	44.23	74.00	29.77	Pass	V	PK
12	12205.000	39.42	7.67	-41.16	44.38	50.31	74.00	23.69	Pass	V	PK
13	15032.802	40.43	9.31	-42.36	46.29	53.67	74.00	20.33	Pass	V	PK
14	2805.7103	32.89	4.24	-42.22	35.67	30.58	54.00	23.42	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2799.9800	32.88	4.24	-42.23	55.32	50.21	74.00	23.79	Pass	H	PK
2	4960.0000	34.50	4.82	-40.53	53.93	52.72	74.00	21.28	Pass	H	PK
3	7440.0000	36.54	5.85	-40.82	47.32	48.89	74.00	25.11	Pass	H	PK
4	9920.0000	37.77	6.79	-40.48	41.25	45.33	74.00	28.67	Pass	H	PK
5	12400.000	39.54	7.86	-41.12	42.66	48.94	74.00	25.06	Pass	H	PK
6	13085.672	39.57	8.01	-41.65	46.76	52.69	74.00	21.31	Pass	H	PK
7	2802.8400	32.88	4.24	-42.23	35.68	30.57	54.00	23.43	Pass	H	AV
8	1996.6997	31.68	3.47	-42.62	65.13	57.66	74.00	16.34	Pass	V	PK
9	2802.9803	32.88	4.24	-42.22	56.82	51.72	74.00	22.28	Pass	V	PK
10	4960.0000	34.50	4.82	-40.53	51.36	50.15	74.00	23.85	Pass	V	PK
11	7440.0000	36.54	5.85	-40.82	49.23	50.80	74.00	23.20	Pass	V	PK
12	9920.0000	37.77	6.79	-40.48	41.40	45.48	74.00	28.52	Pass	V	PK
13	12400.000	39.54	7.86	-41.12	43.05	49.33	74.00	24.67	Pass	V	PK
14	1997.4497	31.68	3.47	-42.61	36.02	28.56	54.00	25.44	Pass	V	AV

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.