



## FCC - TEST REPORT

Report Number : **68.950.19.2875.01** Date of Issue: October 30, 2019

Model : MM3SB3350N

Product Type : Bluetooth&Wi-Fi dual band Communication Module

Applicant : GD Midea Air-Conditioning Equipment Co., Ltd.

Address : Building #4, Midea Global Innovation Center, Industry Boulevard,  
Beijiao, Shunde District, Foshan City, Guangdong Province 528311

Manufacturer&Factory : GD Midea Air-Conditioning Equipment Co., Ltd.

Address : Building #4, Midea Global Innovation Center, Industry Boulevard,  
Beijiao, Shunde District, Foshan City, Guangdong Province 528311

Test Result :  Positive  Negative

Total pages including Appendices : 33

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*



# 1 Table of Contents

- 1 Table of Contents.....2
- 2 Details about the Test Laboratory .....3
- 3 Description of the Equipment Under Test .....4
- 4 Summary of Test Standards .....5
- 5 Summary of Test Results .....6
- 6 General Remarks.....7
- 7 Test Setups .....8
- 8 Systems test configuration .....9
- 9 Technical Requirement..... 10
  - 9.1 Conducted Emission Test ..... 10
  - 9.2 Conducted peak output power..... 15
  - 9.3 Power spectral density ..... 17
  - 9.4 6 dB Bandwidth and 99% Occupied Bandwidth..... 19
  - 9.5 Spurious RF conducted emissions..... 22
  - 9.6 Band edge ..... 26
  - 9.7 Spurious radiated emissions for transmitter ..... 28
- 10 Test Equipment List..... 32
- 11 System Measurement Uncertainty ..... 33



## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint  
Road 2, Nanshan District  
Shenzhen 518052  
P.R. China

Telephone: 86 755 8828 6998

Fax: 86 755 828 5299

FCC Registration No.: 514049

### 3 Description of the Equipment Under Test

Product:	Bluetooth & Wi-Fi dual band Communication Module
Model no.:	MM3SB3350N
FCC ID:	2ADQO3SB3350N5
Brand name	Midea
Options and accessories:	NIL
Rating:	DC5V
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	PIFA antenna
Antenna Gain:	2.0dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Communication Module which support 2.4G Wi-Fi, 5G Wi-Fi and BLE function. The 2.4G Wi-Fi and BLE operated at 2402MHz to 2480MHz, The 5G Wi-Fi operation 5150MHz to 5250MHz, 5250MHz to 5350MHz, 5470MHz to 5725MHz, and 5725MHz to 5825Mhz. The EUT acting as a master only operate in UNII-1 and UNII-3 bands. And it acting as a client operate in UNII-1, UNII-2A, UNII-2C and UNII-3 bands.



## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2018 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to 558074 D01v05 DTS Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Test Condition		Test Site	Test Result		
			Pass	Fail	N/A
§15.207	Conducted emission AC power port	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	Note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a Integrated antenna, which gain is 2.0dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.



## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2ADQO3SB3350N5 complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

MM3SB3350N is a Communication Module which support 2.4G Wi-Fi, 5G Wi-Fi and BLE function. The 2.4G Wi-Fi and BLE operated at 2402MHz to 2480MHz, The 5G Wi-Fi operation 5150MHz to 5250MHz, 5250MHz to 5350MHz ,5470MHz to 5725MHz, and 5725MHz to 5825Mhz. The EUT acting as a master only operate in UNII-1 and UNII-3 bands. And it acting as a client operate in UNII-1, UNII-2A, UNII-2C and UNII-3 bands.

This report is for BLE only.

### SUMMARY:

All tests according to the regulations cited on page 5 were

n - Performed

o - **Not** Performed

The Equipment under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: August 2, 2019

Testing Start Date: September 26, 2019

Testing End Date: October 24, 2019

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -


Reviewed by:

Prepared by:

Tested by:


  
Zhi John  
EMC Section Manager

  
Warlen Song  
EMC Project Engineer


  
Louise Liu  
EMC Test Engineer

## 7 Test Setups


### AC Power Line Conducted Emission test setups

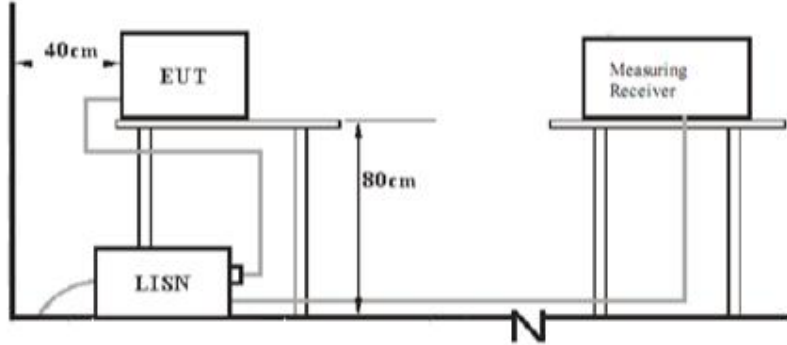


### Below 1GHz

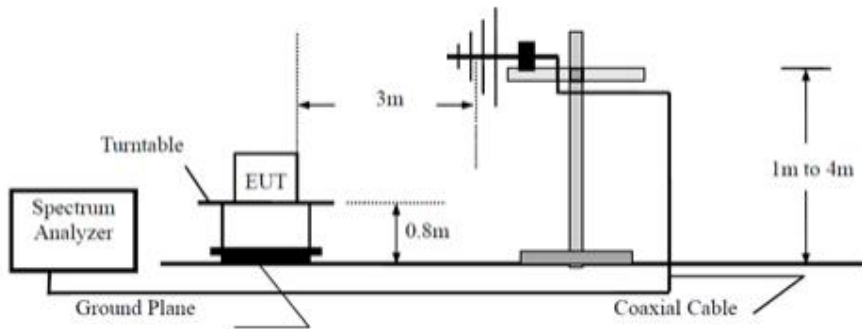

### Above 1GHz

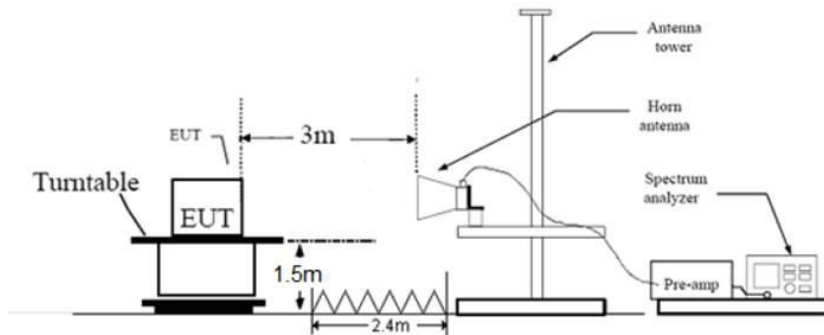

### Conducted RF test setups





## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Notebook	Lenovo	X220	---
Adapter	Apple	---	---

The system was configured to channel 0, 19, and 39 for the test.

## 9 Technical Requirement

### 9.1 Conducted Emission Test

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

#### Limit

According to §15.107, conducted emissions limit as below:


Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreasing linearly with logarithm of the frequency



## Conducted Emission

Product Type : Bluetooth & Wi-Fi dual band Communication Module  
 M/N : MM3SB3350N  
 Operating Condition : STA: Wi-Fi  
 Test Specification : Line  
 Comment : AC 120V/60Hz

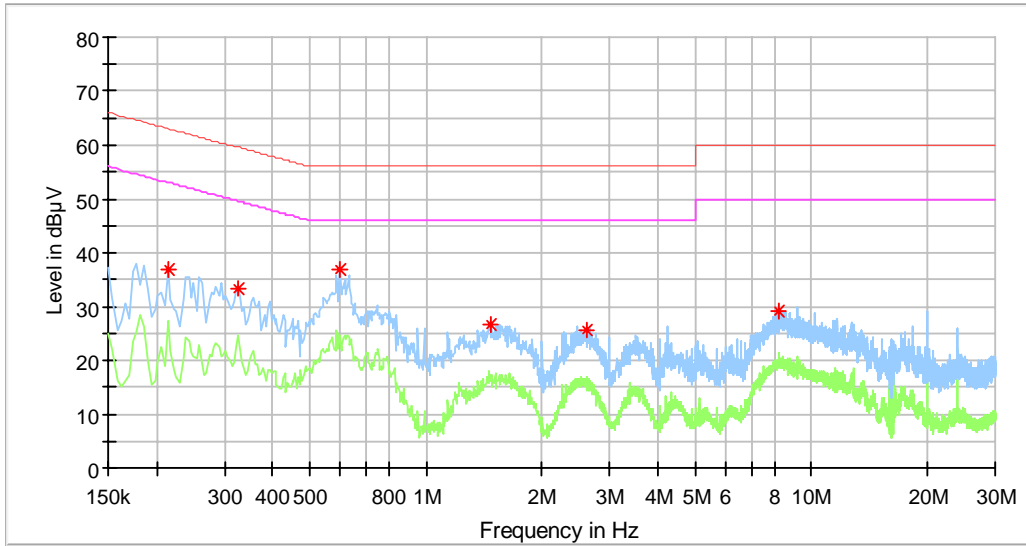

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)*
0.214000	37.02	---	63.05	26.03	L1	10.3
0.326000	33.45	---	59.55	26.10	L1	10.3
0.598000	36.96	---	56.00	19.04	L1	10.3
1.466000	26.58	---	56.00	29.42	L1	10.3
2.602000	25.54	---	56.00	30.46	L1	10.4
8.206000	29.21	---	60.00	30.79	L1	10.6


### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---	---	---

\*Correct factor=cable loss + LISN factor



Product Type : Bluetooth & Wi-Fi dual band Communication Module  
 M/N : MM3SB3350N  
 Operating Condition : STA: Wi-Fi  
 Test Specification : Neutral  
 Comment : AC 120V/60Hz

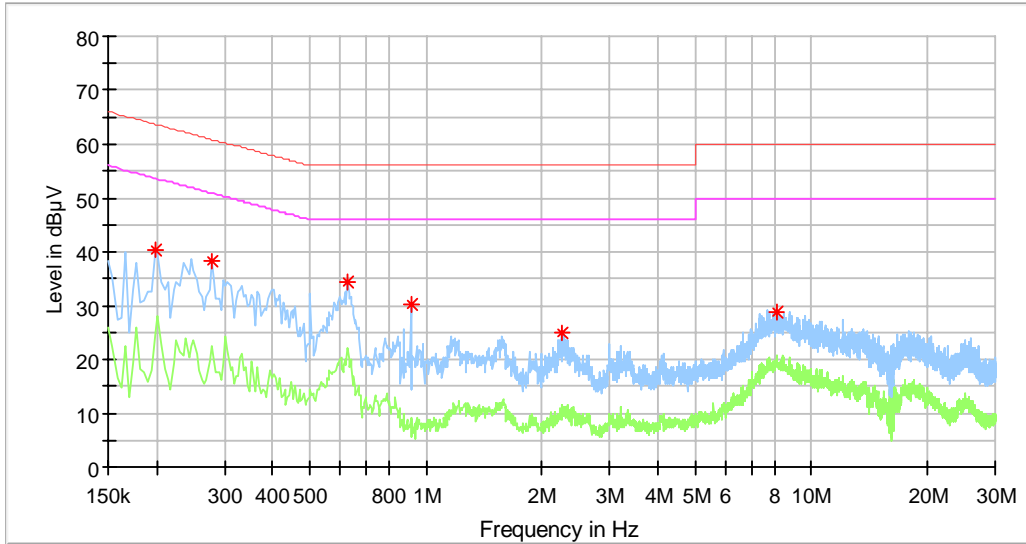

**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)*
0.198000	40.47	---	63.69	23.23	N	10.3
0.278000	38.23	---	60.88	22.64	N	10.3
0.626000	34.48	---	56.00	21.52	N	10.3
0.914000	30.05	---	56.00	25.95	N	10.3
2.246000	25.02	---	56.00	30.98	N	10.4
8.150000	28.87	---	60.00	31.13	N	10.7


**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---	---	---

\*Correct factor=cable loss + LISN factor



Product Type : Bluetooth & Wi-Fi dual band Communication Module  
 M/N : MM3SB3350N  
 Operating Condition : AP: Wi-Fi  
 Test Specification : Line  
 Comment : AC 120V/60Hz

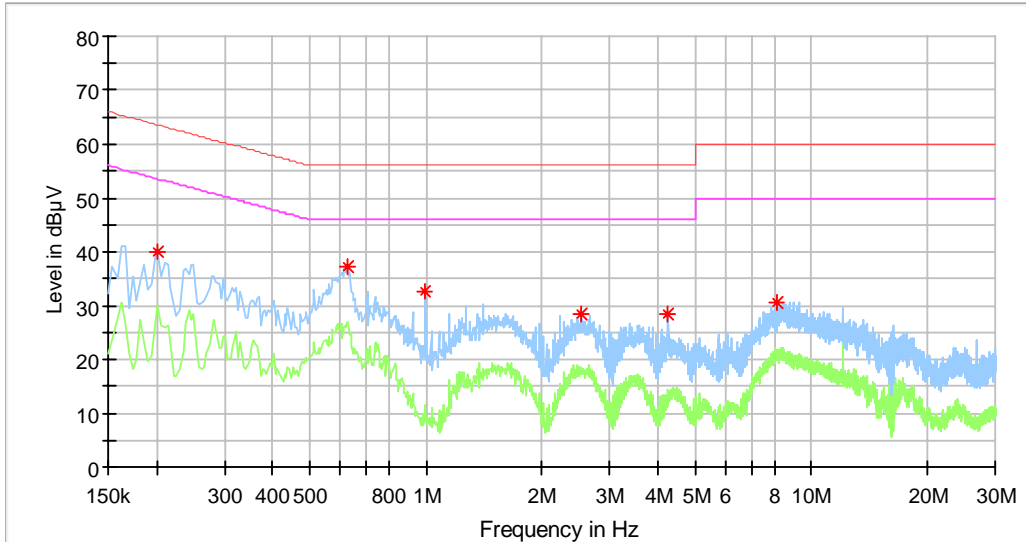

**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)*
0.202000	39.83	---	63.53	23.70	L1	10.3
0.626000	37.28	---	56.00	18.72	L1	10.3
0.998000	32.51	---	56.00	23.49	L1	10.3
2.538000	28.47	---	56.00	27.53	L1	10.4
4.258000	28.51	---	56.00	27.49	L1	10.4
8.178000	30.54	---	60.00	29.46	L1	10.6


**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---	---	---

\*Correct factor=cable loss + LISN factor



Product Type : Bluetooth & Wi-Fi dual band Communication Module  
 M/N : MM3SB3350N  
 Operating Condition : AP: Wi-Fi  
 Test Specification : Neutral  
 Comment : AC 120V/60Hz

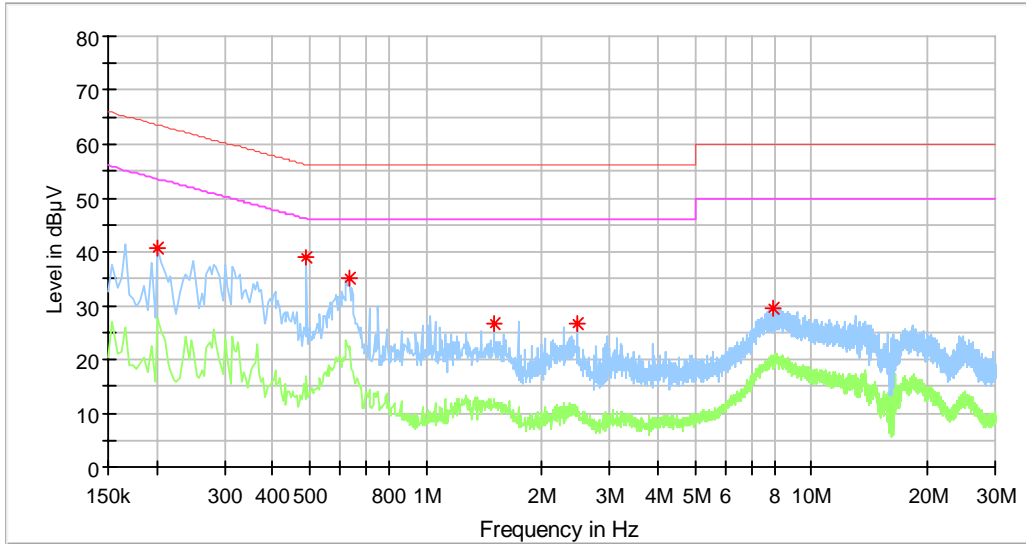

**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)*
0.202000	40.82	---	63.53	22.71	N	10.3
0.490000	38.78	---	56.17	17.38	N	10.3
0.630000	35.17	---	56.00	20.83	N	10.3
1.502000	26.59	---	56.00	29.41	N	10.3
2.478000	26.81	---	56.00	29.19	N	10.4
7.930000	29.38	---	60.00	30.62	N	10.7

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---	---	---

\*Correct factor=cable loss + LISN factor



## 9.2 Conducted peak output power

### Test Method

1. Use the following spectrum analyzer settings:  
 RBW > the 6 dB bandwidth of the emission being measured, VBW ≥ 3RBW, Span ≥ 3RBW  
 Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

### Limits

According to §15.247 (b) (1), conducted peak output power limit as below:


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

Frequency MHz	Conducted Peak Output Power dBm	Result
Bottom channel 2402MHz	-3.30	Pass
Middle channel 2440MHz	-2.35	Pass
Top channel 2480MHz	0.65	Pass




### Low channel 2402MHz

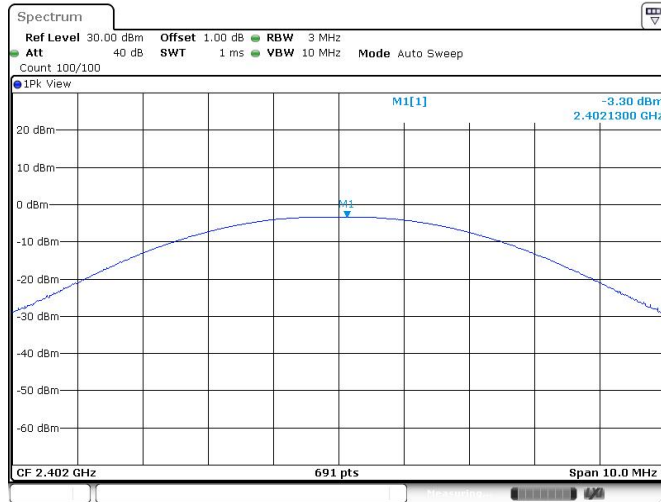


Date: 10.OCT.2019 18:48:04

### Middle channel 2440MHz

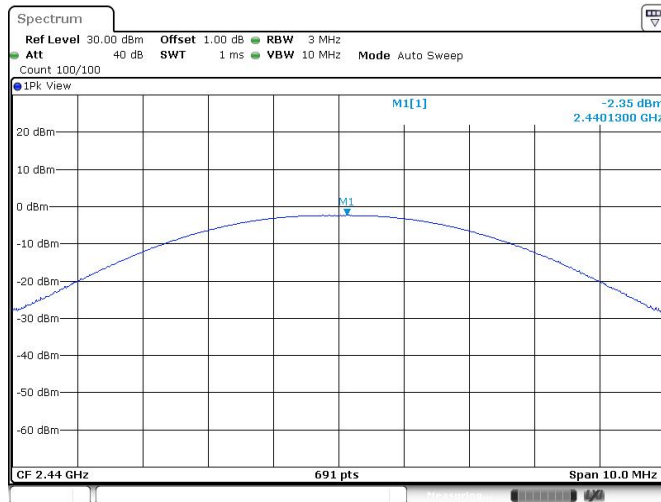

Date: 10.OCT.2019 18:50:17

### High channel 2480MHz

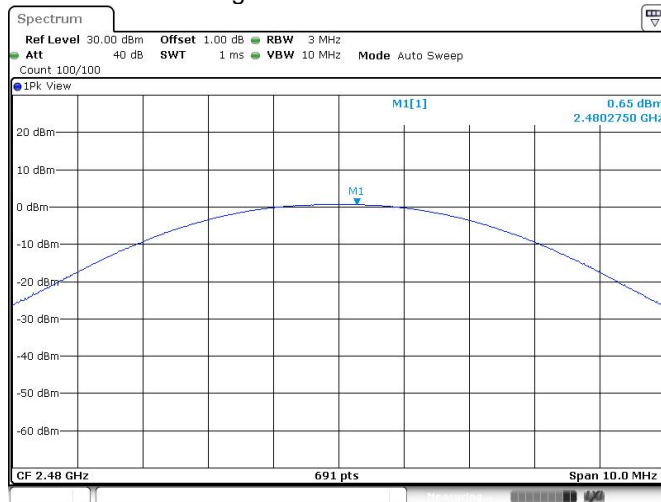

Date: 10.OCT.2019 18:54:11





### 9.3 Power spectral density

**Test Method**

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

**Limit**

**Limit [dBm/3KHz]**


≤8

**Test result**

Frequency MHz	Power spectral density dBm/3KHz	Result
Top channel 2402MHz	-18.84	Pass
Middle channel 2440MHz	-18.23	Pass
Bottom channel 2480MHz	-14.89	Pass




### Low channel 2402MHz

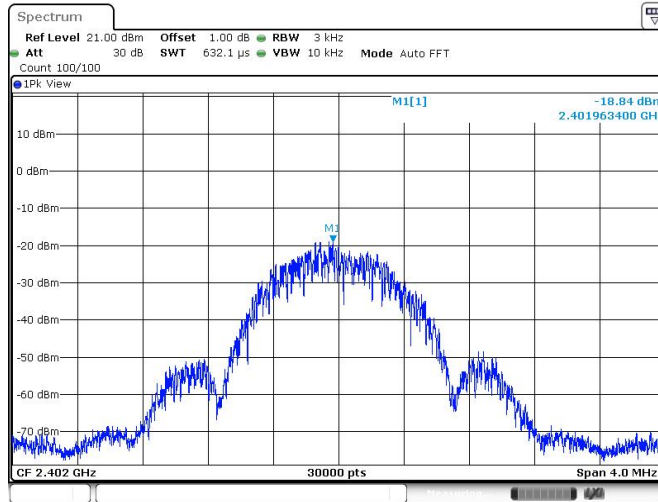


Date: 10.OCT.2019 18:48:10

### Middle channel 2440MHz

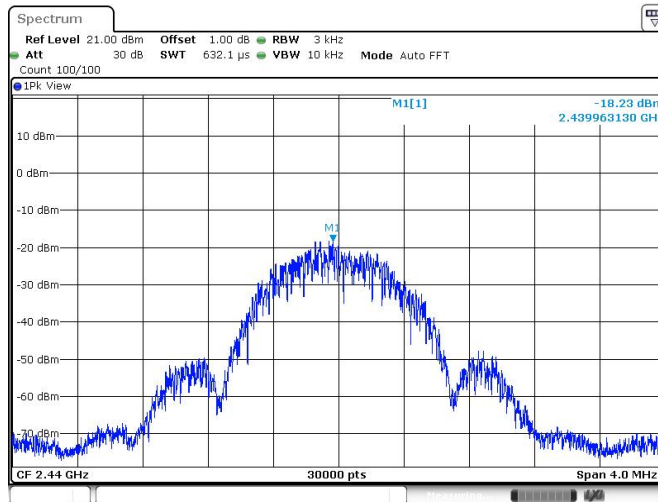

Date: 10.OCT.2019 18:50:23

### High channel 2480MHz

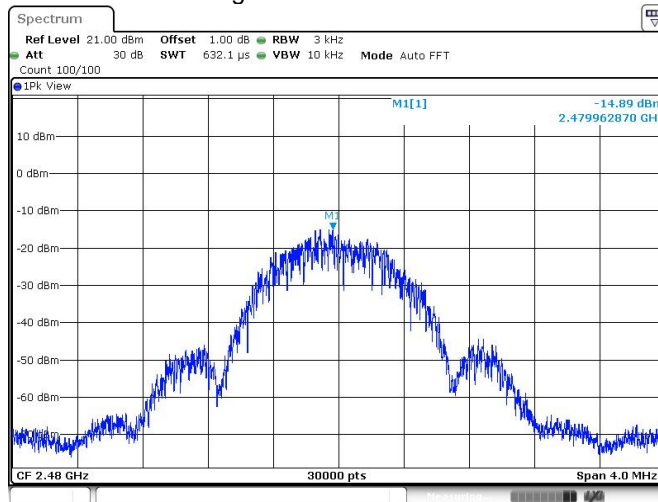

Date: 10.OCT.2019 18:54:18



## 9.4 6 dB Bandwidth and 99% Occupied Bandwidth

### Test Method

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

### Limit

Limit [kHz]

---

≥500


### Test result

Frequency MHz	6dB bandwidth kHz	99% bandwidth kHz	Result
Bottom channel 2402MHz	704.0	1015.0	Pass
Middle channel 2440MHz	704.0	1015.0	Pass
Top channel 2480MHz	668.0	1015.0	Pass




6 dB Bandwidth


Low channel 2402MHz

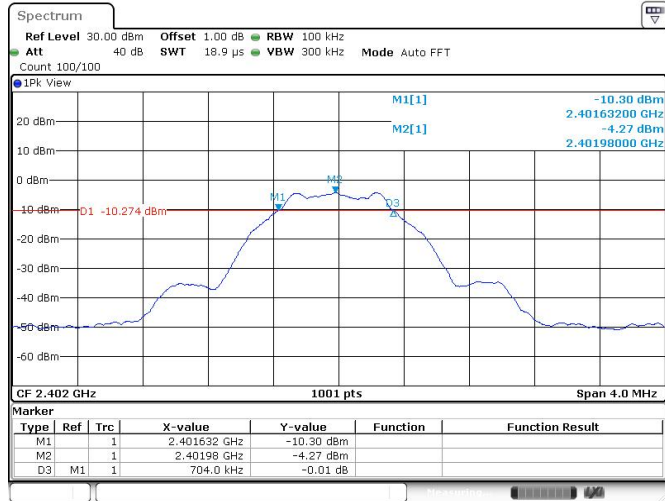

Middle channel 2440MHz

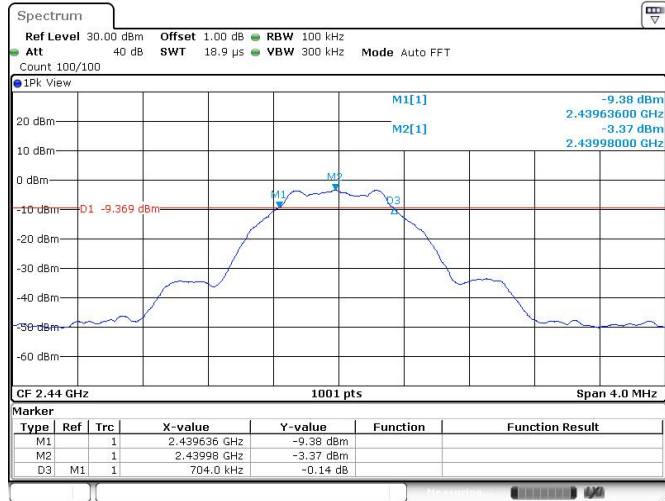


High channel 2480MHz

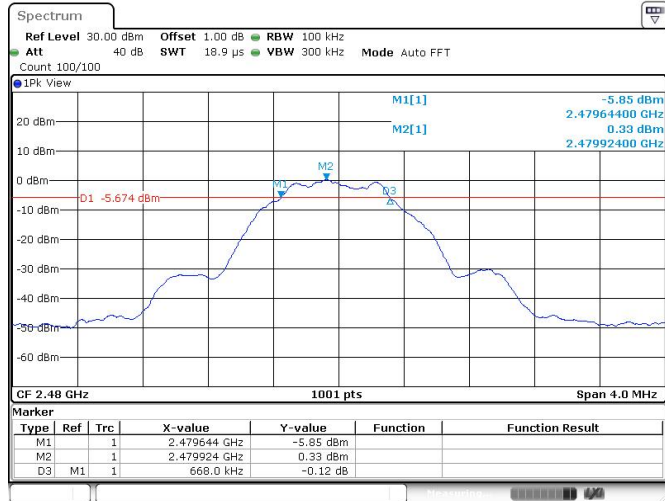


**99% Occupied Bandwidth**

**Low channel 2402MHz**

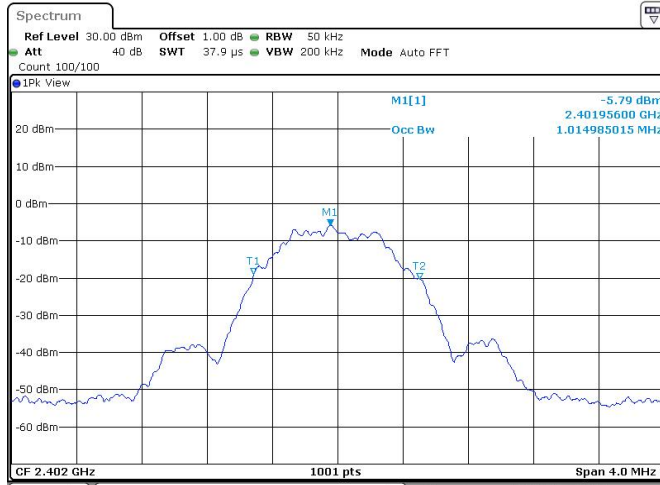


Date: 10.OCT.2019 18:47:57

**Middle channel 2440MHz**

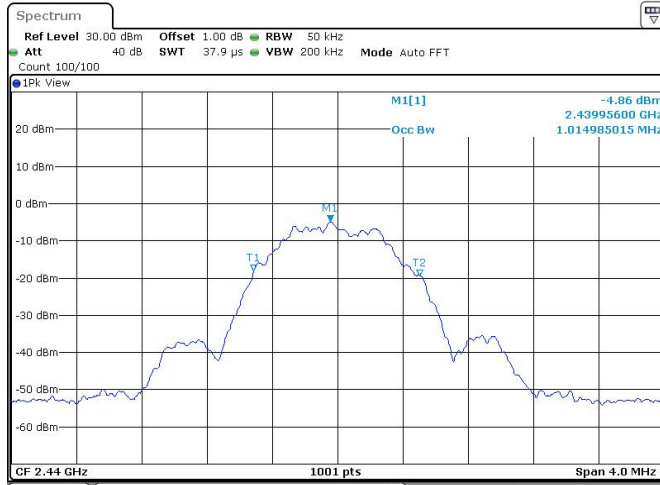

Date: 10.OCT.2019 18:50:10

**High channel 2480MHz**

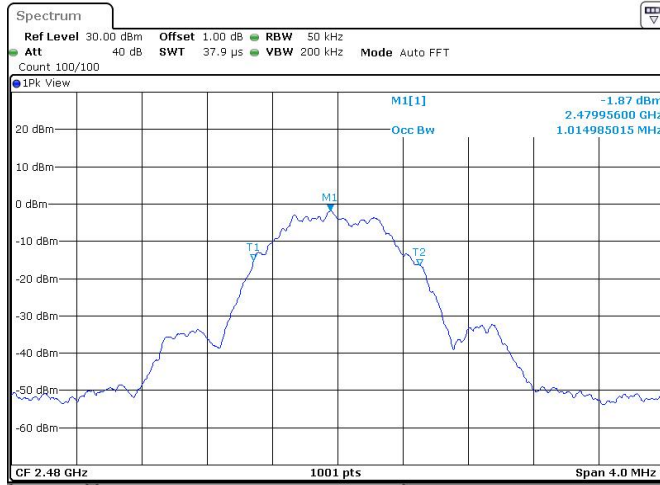

Date: 10.OCT.2019 18:54:05



## 9.5 Spurious RF conducted emissions

### Test Method

1. Establish a reference level by using the following procedure:
  - a. Set RBW=100 kHz. VBW≥3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
  - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
  - a. Set the center frequency and span to encompass frequency range to be measured.
  - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.


### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




**Spurious RF conducted emissions**

2402MHz

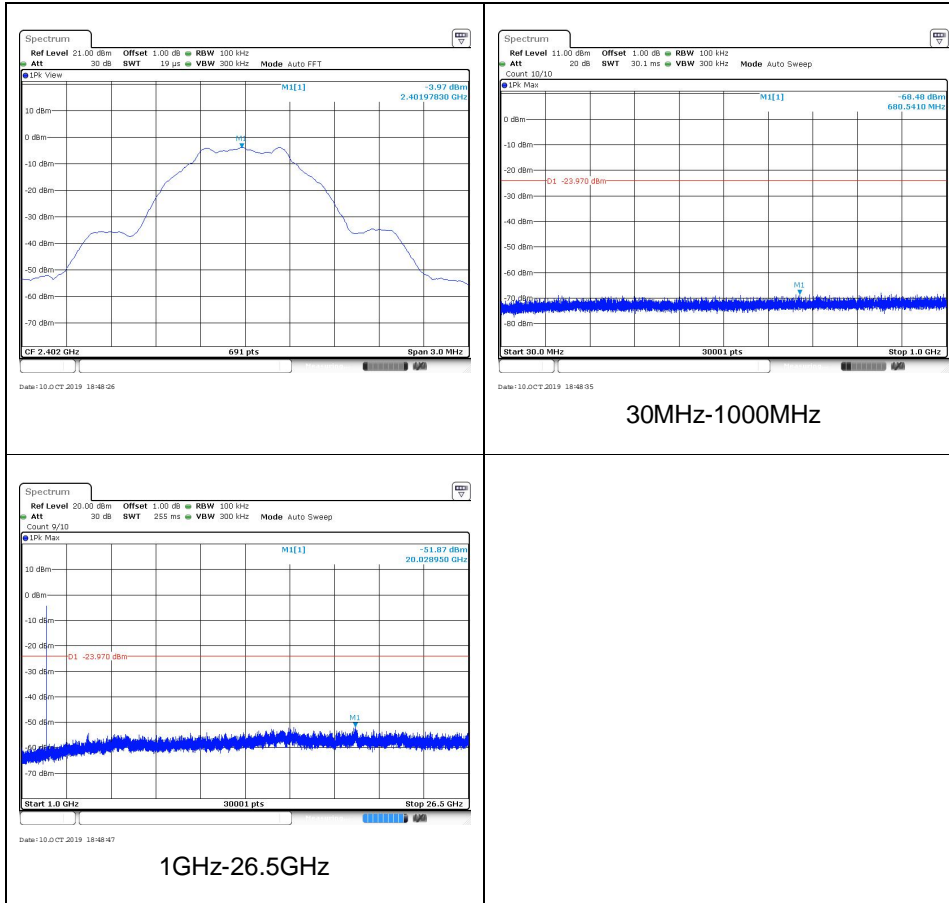




### 2440MHz

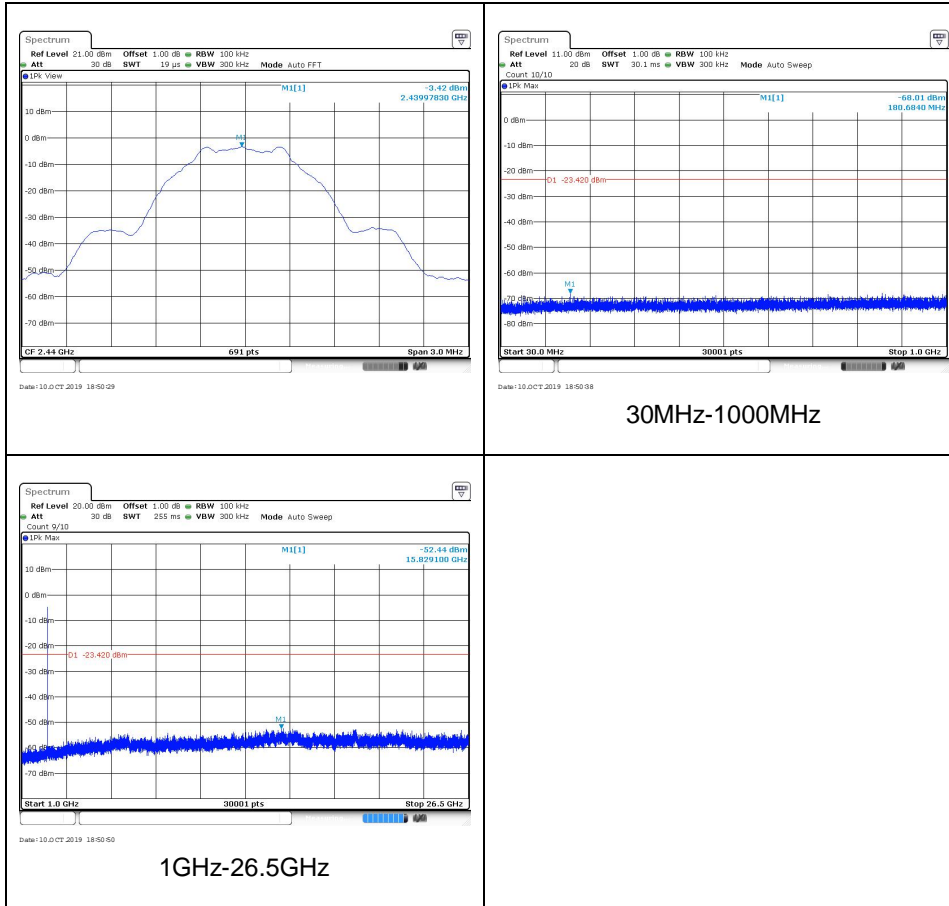





### 2480MHz

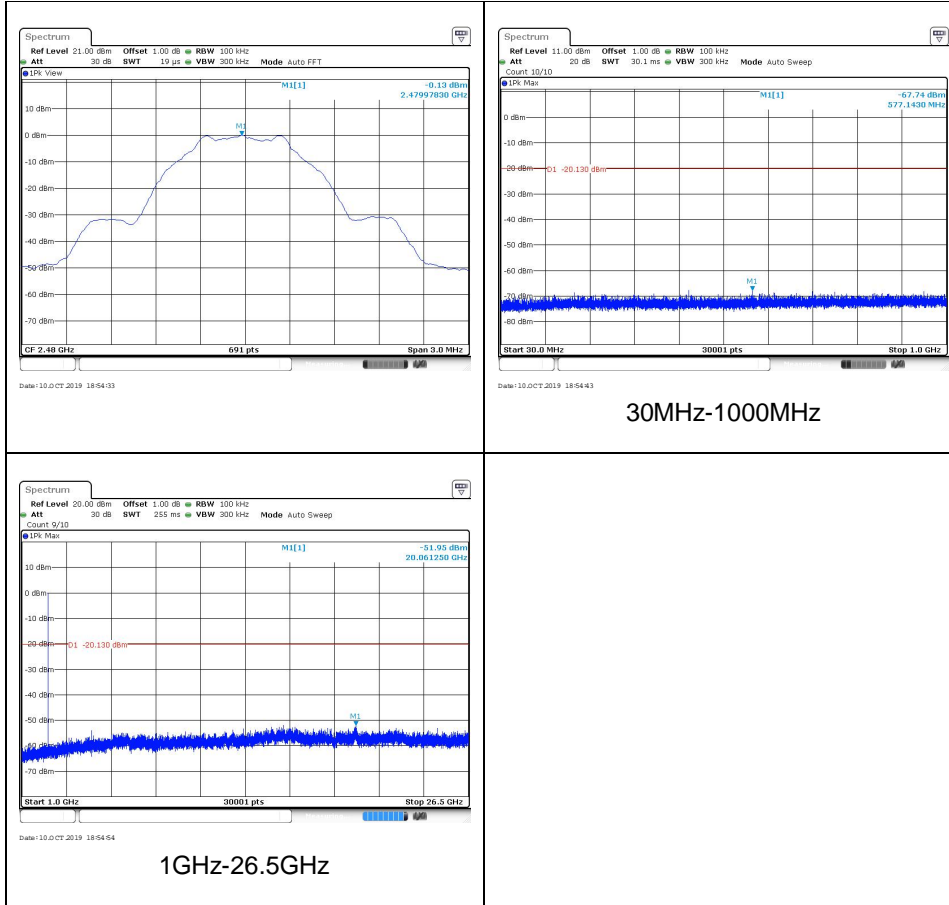



## 9.6 Band edge

### Test Method

- 1 Use the following spectrum analyzer settings:  
 Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.


### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20




**Band edge testing**

**2402MHz**

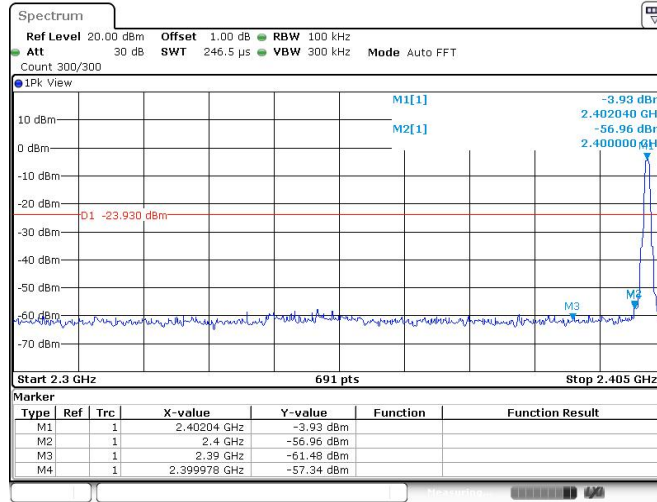

Date: 10.OCT.2019 18:48:20

**2480MHz**

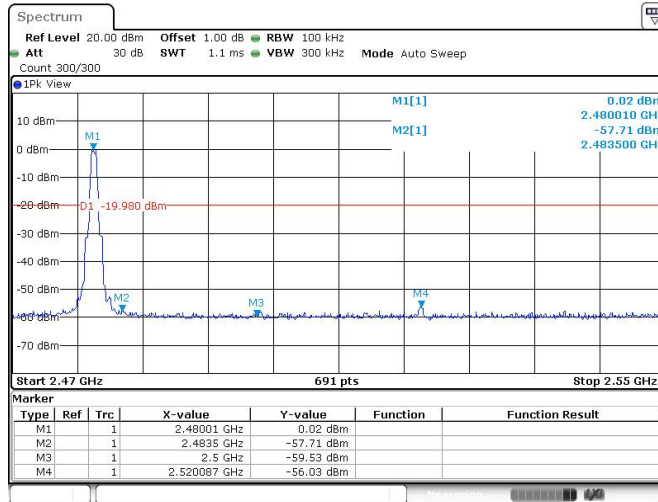

Date: 10.OCT.2019 18:54:27

## 9.7 Spurious radiated emissions for transmitter

### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1 MHz.
- b) VBW \ [3 × RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
  - 2) If linear voltage averaging mode was used in the preceding step e), then the correction



factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

**Limit**

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK



**Spurious radiated emissions for transmitter**

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

**Transmitting spurious emission test result as below:**

Low channel 2402MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor (dB)	Result
	MHz	dBuV/m		dBuV/m		dBuV/m		
30-1000MHz	612.11*	34.56	H	46.00	PK	11.44	-19.7	Pass
	888.13	36.22	H	46.00	PK	9.78	-15.8	Pass
	119.99*	28.60	V	43.50	PK	14.90	-30.3	Pass
	888.13	35.83	V	46.00	PK	10.17	-15.8	Pass
1000-25000MHz	2241.75*	33.21	H	74	PK	40.79	-7.1	Pass
	4804.36*	35.81	H	74	PK	38.19	1.3	Pass
	11844.46*	42.36	H	74	PK	31.64	11.0	Pass
	--	--	H	54	AV	--	--	Pass
	2241.75*	34.63	V	74	PK	39.37	-7.1	Pass
	4803.44*	37.08	V	74	PK	36.92	1.3	Pass
	11363.97*	41.62	V	74	PK	32.38	10.9	Pass
	--	--	V	54	AV	--	--	Pass

Middle channel 2440MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor (dB)	Result
	MHz	dBuV/m		dBuV/m		dBuV/m		
30-1000MHz	--	--	H	--	QP	--	--	Pass
	--	--	V	--	QP	--	--	Pass
1000-25000MHz	2280.25*	37.49	H	74	PK	36.51	-7.0	Pass
	4879.31*	36.46	H	74	PK	37.54	1.8	Pass
	7548.68*	38.30	H	74	PK	35.70	6.6	Pass
	11810.04*	41.60	H	74	PK	32.40	11.1	Pass
	--	--	H	54	AV	--	--	Pass
	2279.94*	32.68	V	74	PK	41.3	-7.0	Pass
	4879.31*	38.65	V	74	PK	35.35	1.8	Pass
	11874.33*	42.17	V	74	PK	31.83	10.7	Pass
--	--	V	54	AV	--	--	Pass	



High channel 2480MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Correct factor	Result
	MHz	dBuV/m		dBuV/m		dBuV/m	(dB)	
30-1000MHz	--	--	H	--	QP	--	--	Pass
	--	--	V	--	QP	--	--	Pass
1000-25000MHz	2319.75*	36.46	H	74	PK	37.54	-6.9	Pass
	4959.45*	37.55	H	74	PK	36.45	1.7	Pass
	11411.81*	41.97	H	74	PK	32.03	10.6	Pass
	--	--	H	54	AV	--	--	Pass
	2319.87*	31.76	V	74	PK	42.24	-6.9	Pass
	2747.56*	28.48	V	74	PK	45.52	-5.2	Pass
	4959.44*	41.64	V	74	PK	32.36	1.7	Pass
	11361.54*	42.23	V	74	PK	31.77	10.9	Pass
--	--	V	54	AV	--	--	Pass	

Remark:

- (1) "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.
- (3) Level=Reading Level + Correction Factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss  
 (The Reading Level is recorded by software which is not shown in the sheet)

## 10 Test Equipment List

### List of Test Instruments

#### Radiated Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	101031	2020-6-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	708	2020-6-28
Horn Antenna	Rohde & Schwarz	HF907	102295	2020-7-5
Loop Antenna	Rohde & Schwarz	HFH2-Z2	12827	2020-7-5
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2020-6-28
Signal Generator	Rohde & Schwarz	SMY01	100432	2020-3-20
Attenuator	Agilent	8491A	MY39264334	2020-6-28
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

#### TS8997 Test System

Description	Manufacturer	Model no.	Serial no.	cal. due date
Signal Generator	Rohde & Schwarz	SMB100A	108272	2020-6-28
Vector Signal Generator	Rohde & Schwarz	FSV40	262825	2020-6-28
Communication Synthetical Test Instrument	Rohde & Schwarz	SMU 200A	101251	2020-5-31
Signal Analyzer	Rohde & Schwarz	OSP120/OSP-B157	101030	2020-6-28
Vector Signal Generator	Rohde & Schwarz	1580	105324	2020-6-28
RF Switch Module	Rohde & Schwarz	4M-10	101226/100851	2020-6-28
Power Splitter	Weinschel	DNF	SC319	2020-7-7
10dB Attenuator	Weinschel	DNF	43152	2020-7-6
10dB Attenuator	R&S	DNF	DNF-001	2020-6-28
10dB Attenuator	R&S	DNF	DNF-002	2020-6-28
Test software	Rohde & Schwarz	EMC32	Version 10.38.00	N/A

#### Conducted Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2020-6-28
LISN	Rohde & Schwarz	ENV4200	100249	2020-6-28
LISN	Rohde & Schwarz	ENV432	101318	2020-3-20
LISN	Rohde & Schwarz	ENV216	100326	2020-6-28
Attenuator	Shanghai Huaxiang	TS2-26-3	080928189	2020-6-28
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A





## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using High Voltage Probe TK9420(VT9420))	3.21 dB
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.80dB; Vertical: 4.89dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.89dB; Vertical: 4.87dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6x10 <sup>-7</sup> or 1%