

FCC Part 15C Measurement and Test Report

For

Intracom Asia. Co., Ltd.

4F., No. 77, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221,

Taiwan

FCC ID: 2ADQY-525824

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>High-Power Wireless AC600 Outdoor Access Point / Repeater</u>
Tested Model:	<u>525824</u>
Report No.:	<u>STR16018037I-1</u>
Tested Date:	<u>2016-01-07 to 2016-01-20</u>
Issued Date:	<u>2016-01-20</u>
Tested By:	<u>Jong Wang / Engineer</u> <i>Jong Wang</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST SOFTWARE	5
1.5 TEST FACILITY	6
1.6 EUT SETUP AND TEST MODE	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 ENVIRONMENTAL CONDITIONS	11
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
6. 6DB BANDWIDTH	19
6.1 STANDARD APPLICABLE	19
6.2 TEST PROCEDURE	19
6.3 ENVIRONMENTAL CONDITIONS	19
6.4 SUMMARY OF TEST RESULTS/PLOTS	19
7. RF OUTPUT POWER	26
7.1 STANDARD APPLICABLE	26
7.2 TEST PROCEDURE	26
7.3 ENVIRONMENTAL CONDITIONS	26
7.4 SUMMARY OF TEST RESULTS/PLOTS	27
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	34
8.1 MEASUREMENT UNCERTAINTY	34
8.2 STANDARD APPLICABLE	34
8.3 TEST PROCEDURE	34
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	36
8.5 ENVIRONMENTAL CONDITIONS	36
8.6 SUMMARY OF TEST RESULTS/PLOTS	36
9. OUT OF BAND EMISSIONS	65
9.1 STANDARD APPLICABLE	65
9.2 TEST PROCEDURE	65
9.3 ENVIRONMENTAL CONDITIONS	66
9.4 SUMMARY OF TEST RESULTS/PLOTS	66
10. CONDUCTED EMISSIONS	74
10.1 MEASUREMENT UNCERTAINTY	74
10.2 TEST PROCEDURE	74
10.3 BASIC TEST SETUP BLOCK DIAGRAM	74
10.4 ENVIRONMENTAL CONDITIONS	74
10.5 TEST RECEIVER SETUP	75
10.6 SUMMARY OF TEST RESULTS/PLOTS	75
10.7 CONDUCTED EMISSIONS TEST DATA	75

History of this report		
Version	Description	Date
1.0	First Edition	2016-01-20
Rev1	Second Edition	2016-01-28
Rev2	Third Edition	2016-02-18
Rev3	Fourth Edition	2016-02-24

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Intracom Asia. Co., Ltd.
 Address of applicant: 4F., No. 77, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
 Manufacturer: Intracom Asia. Co., Ltd.
 Address of manufacturer: 4F., No. 77, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan

General Description of EUT	
Product Name:	High-Power Wireless AC600 Outdoor Access Point / Repeater
Trade Name:	Intellinet
Model No.:	525824
Adding Model(s):	/
Rated Voltage:	DC 24V Adapter
Power Adapter Model:	TDX-2400500 I/P: 100~240VAC; O/P: DC 24V/0.5A
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	19.90 dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 600Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	SMA-reverse Antenna
Antenna Gain:	7dBi
Lowest Internal Frequency	40MHz

1.2 Test Standards

The following report is prepared on behalf of the Intracom Asia. Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v03r04 for digital transmission systems shall be performed also.

1.4 Table for parameters of Test Software setting

The test utility software used during testing was “RPTA1-71W.M4300.01.GD.2015Sep1”. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	2412	2437	2462
802.11b-1Mbps	19	19	19
802.11g-6Mbps	19	19	19
802.11n-HT20-MCS0	19	19	19
Mode	Test Frequency (MHz)		
	NCB: 40MHz		
	2422	2437	2452
802.11n-HT40-MCS0	19	19	19

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under WIN XP were executed.

1.6 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.0	Unshielded	Without Ferrite
RJ45 Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

1.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA-reverse antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v03r04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/10kHz	Limit dBm/3kHz
802.11b	2412	-4.735	8
	2437	-3.407	8
	2462	-4.520	8
802.11g	2412	-9.142	8
	2437	-8.111	8
	2462	-8.558	8
802.11n HT20	2412	-8.629	8
	2437	-8.210	8
	2462	-8.518	8
802.11n HT40	2422	-14.86	8
	2437	-12.88	8
	2452	-13.76	8

Please refer to the following test plots:


802.11b-Low Channel

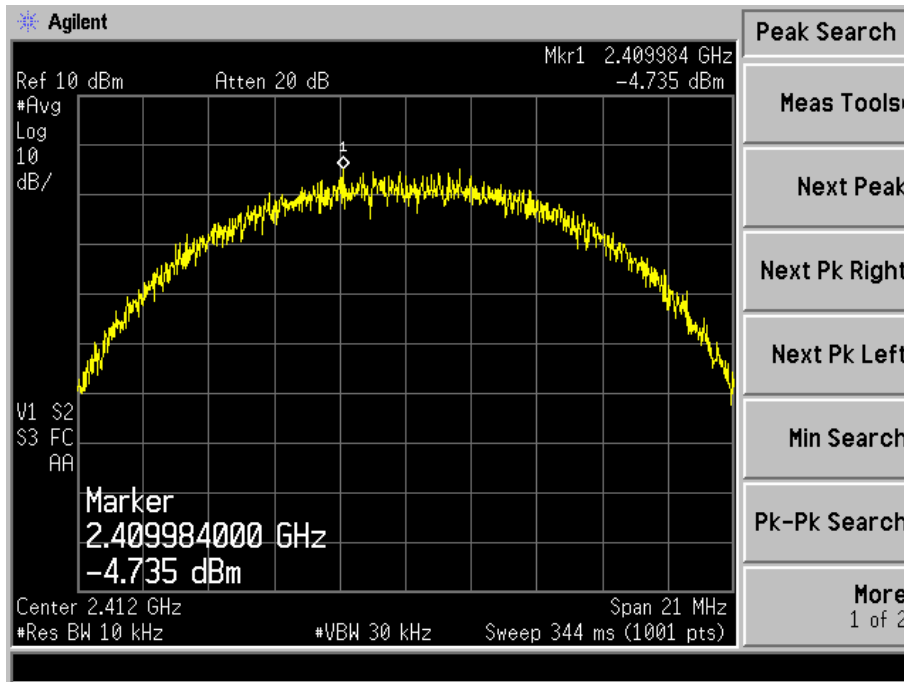


802.11b-Middle Channel

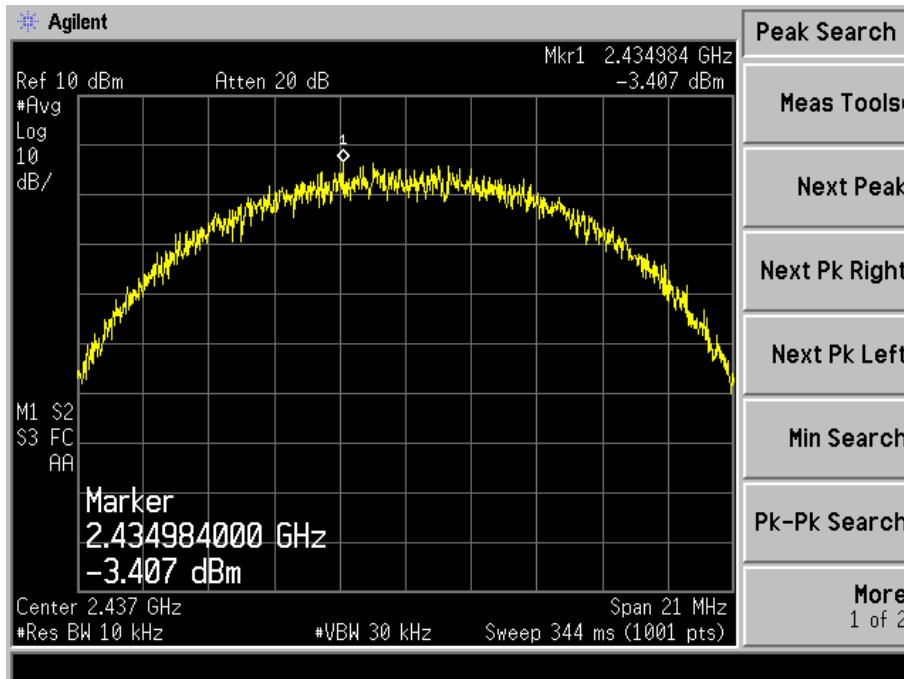


802.11b-High Channel

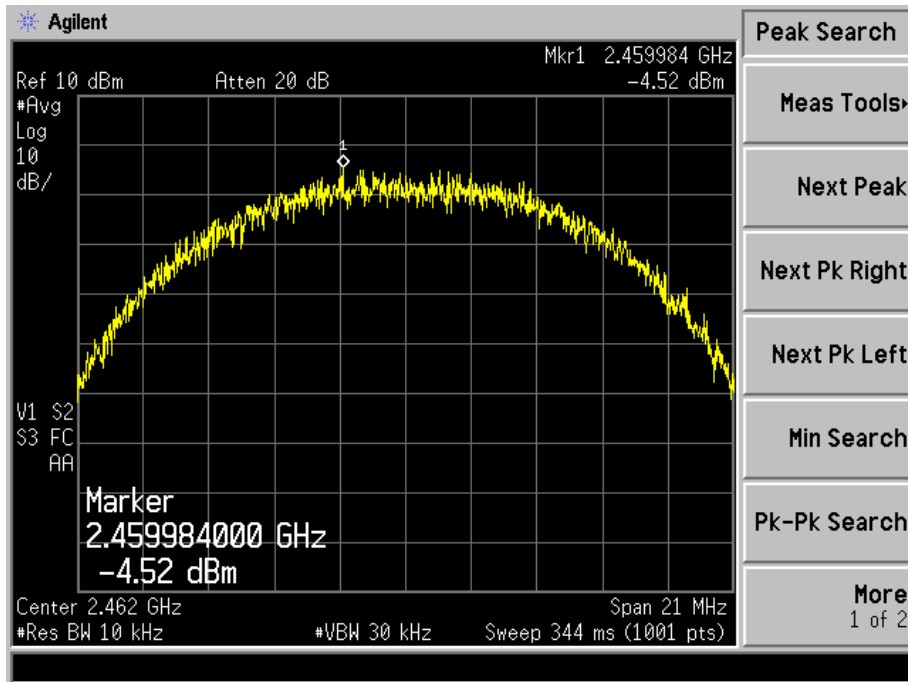


802.11g-Low Channel

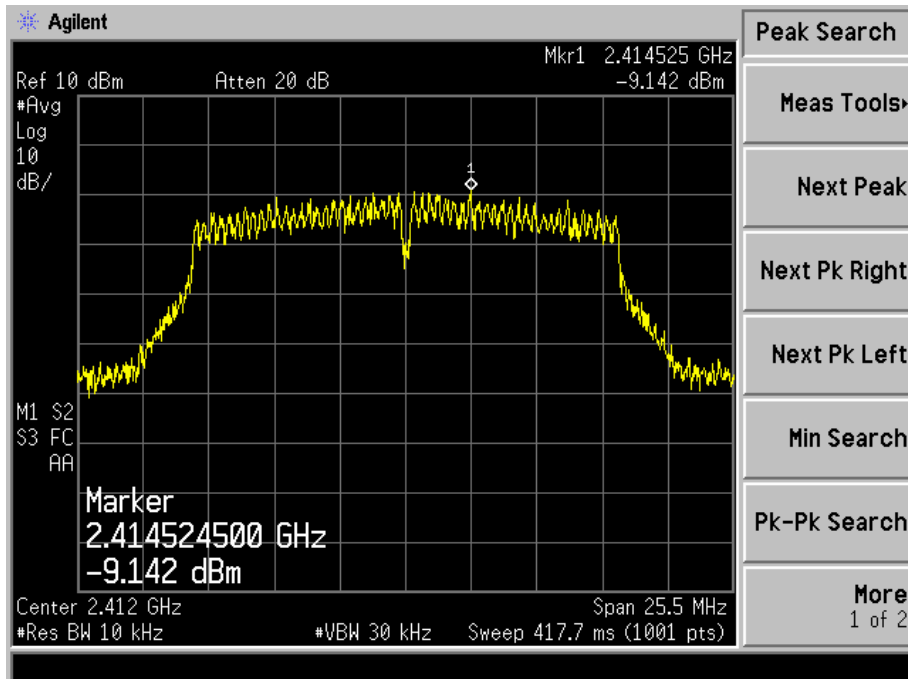


802.11g-Middle Channel

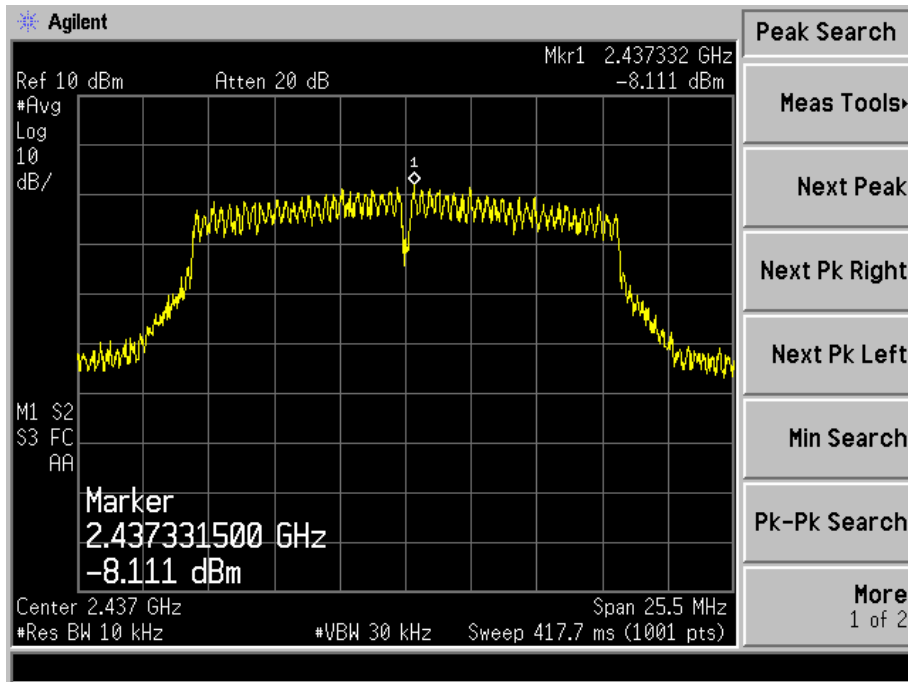


802.11g-High Channel

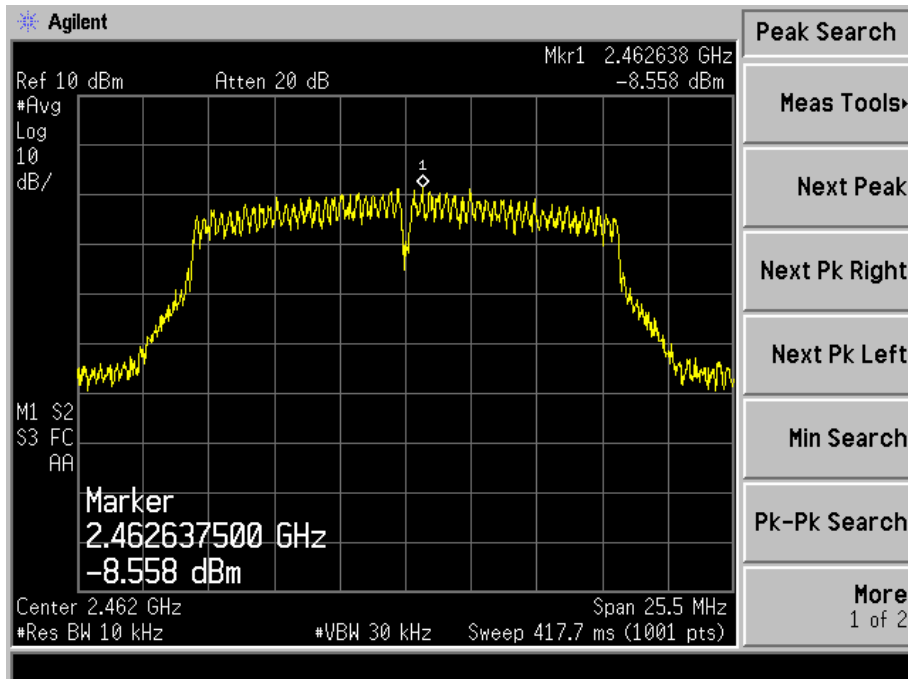


802.11n-HT20-Low Channel

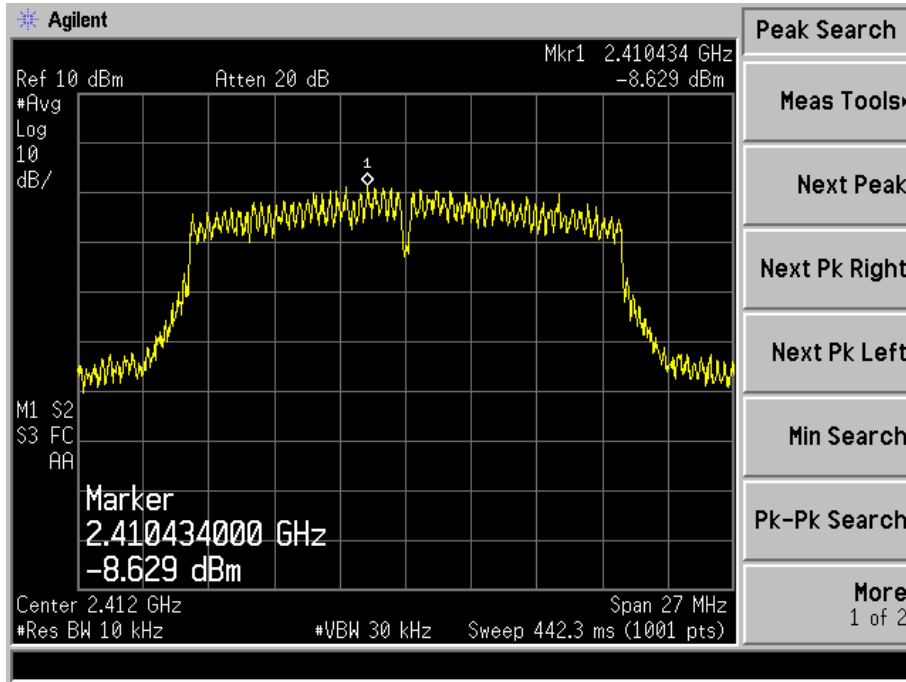


802.11n-HT20-Middle Channel

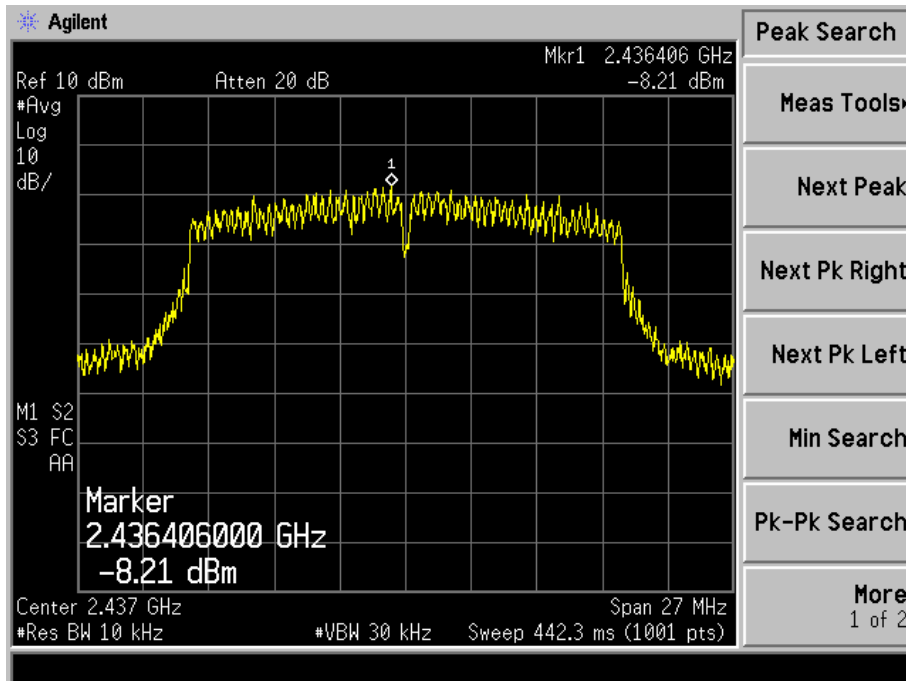


802.11n-HT20-High Channel

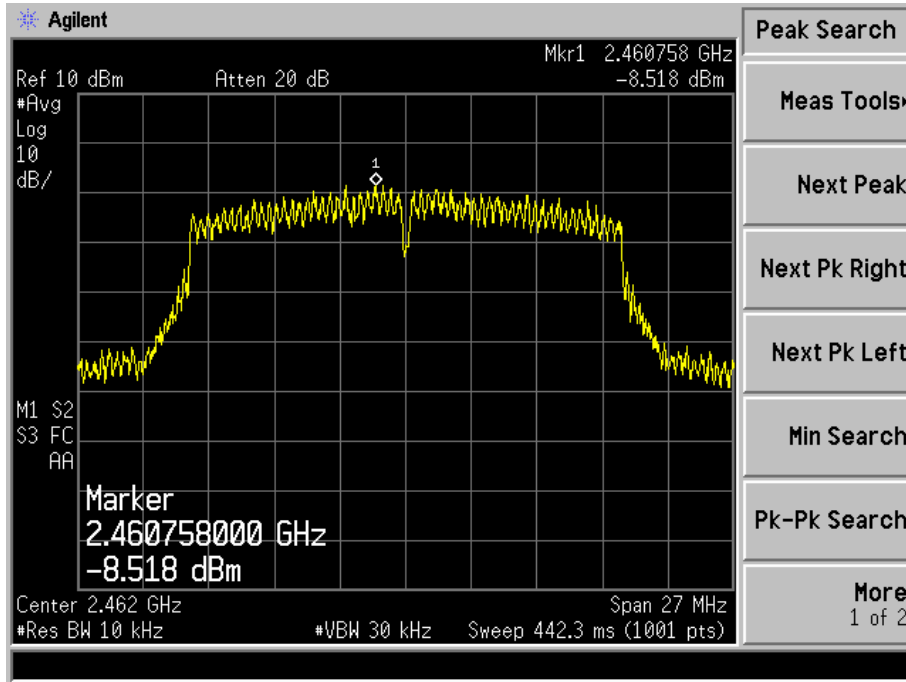


802.11n-HT40-Low Channel

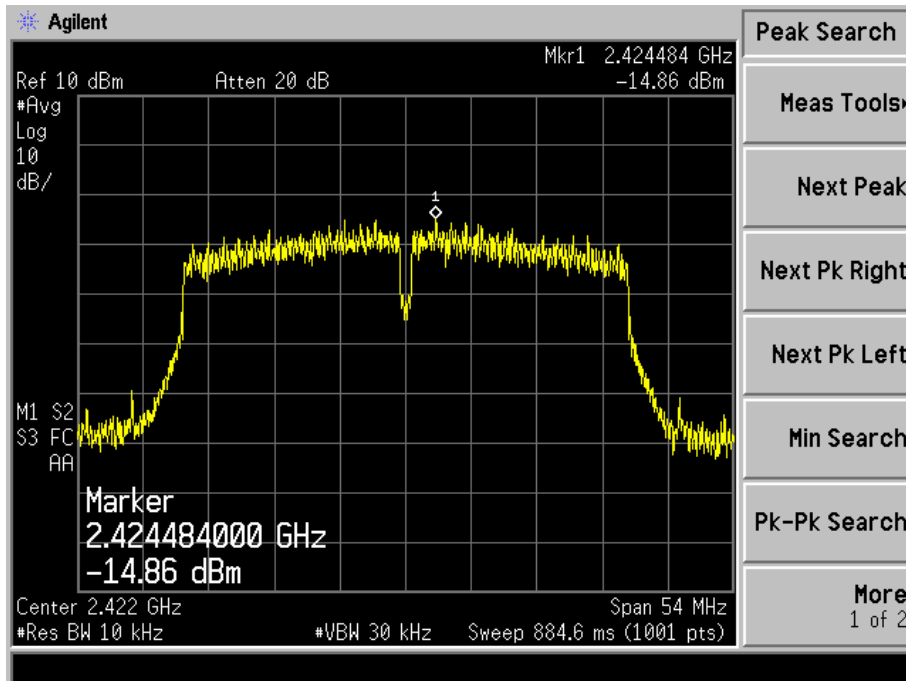

802.11n-HT40-Middle Channel

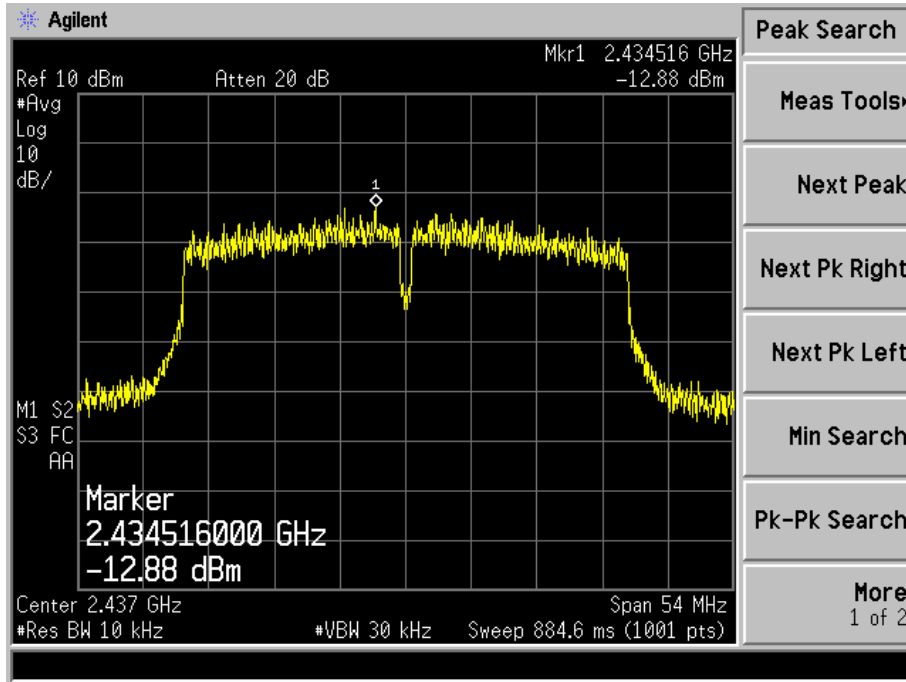

802.11n-HT40-High Channel

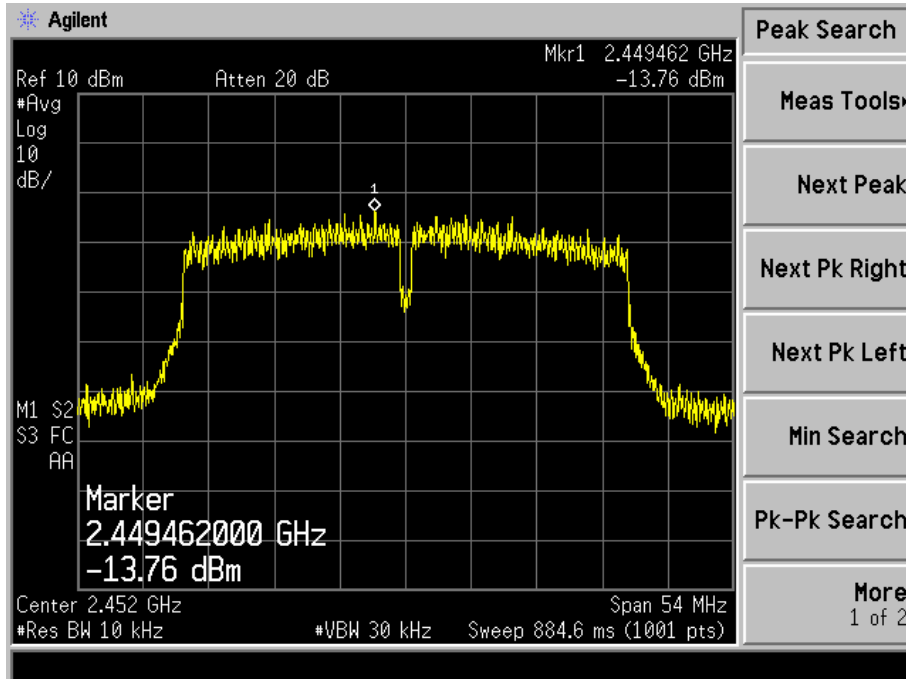

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	9.080	13.8576	≥ 500
	2437	9.049	13.9442	≥ 500
	2462	9.054	13.8478	≥ 500
802.11g	2412	13.902	16.3085	≥ 500
	2437	15.124	16.3246	≥ 500
	2462	15.117	16.3023	≥ 500
802.11n-HT20	2412	15.132	17.4909	≥ 500
	2437	15.127	17.5053	≥ 500
	2462	15.127	17.5002	≥ 500
802.11n-HT40	2422	35.113	35.7549	≥ 500
	2437	35.125	35.7109	≥ 500
	2452	35.124	35.6938	≥ 500

Please refer to the following test plots:


802.11b-Low Channel

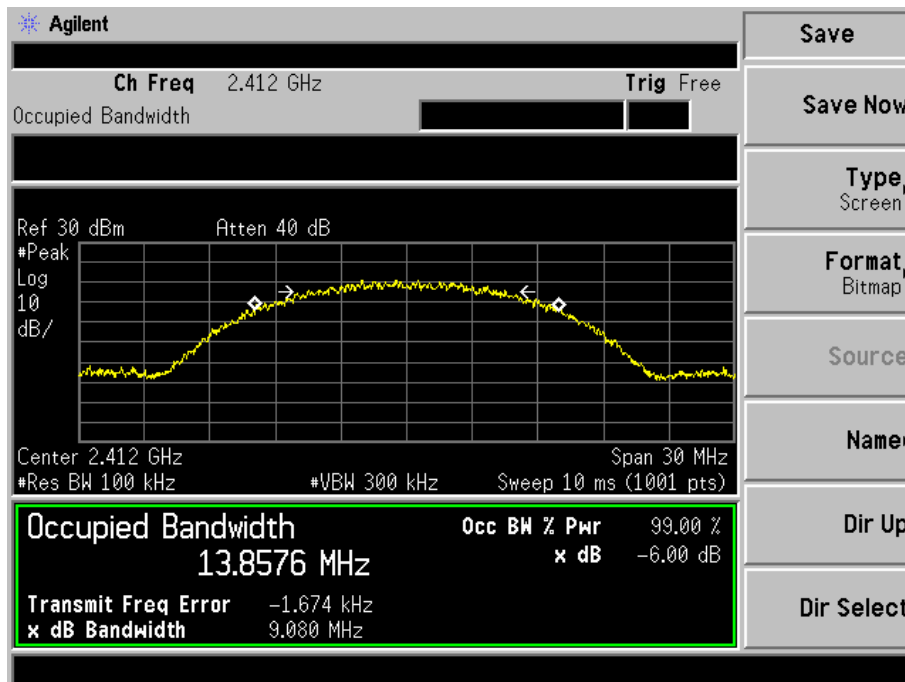


802.11b-Middle Channel

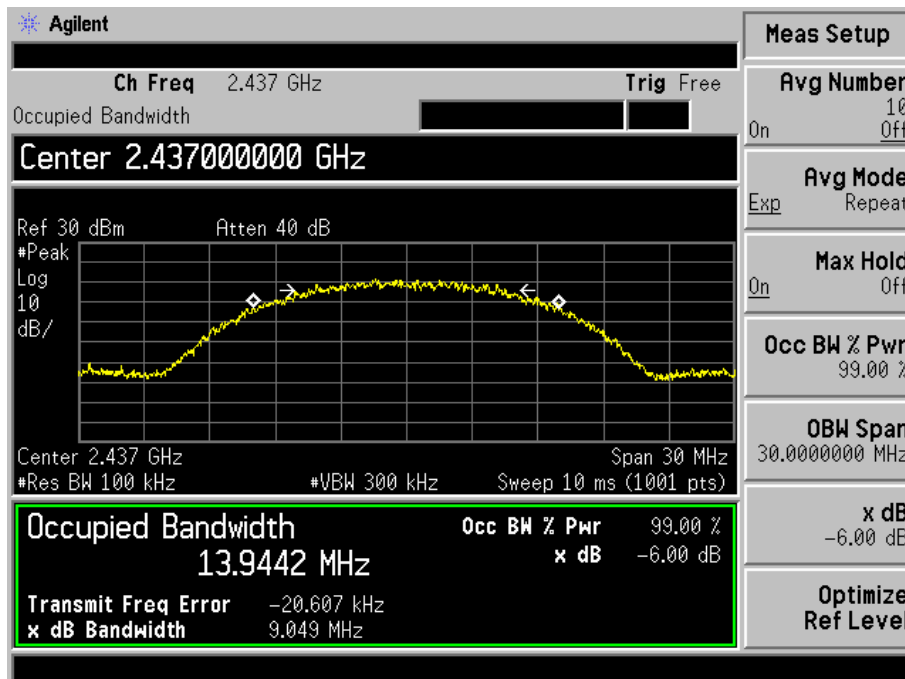


802.11b-High Channel

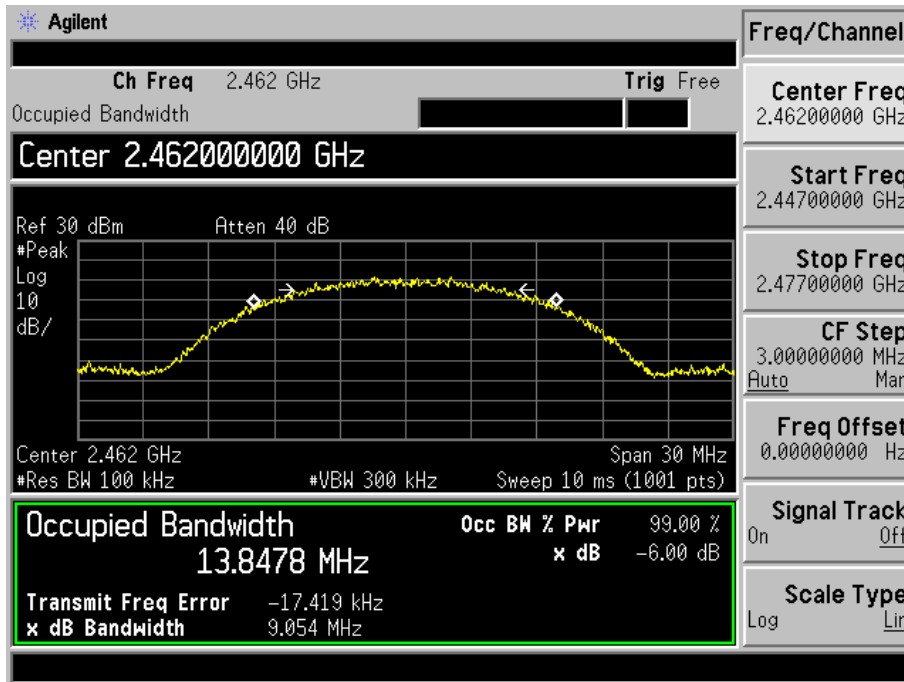


802.11g-Low Channel

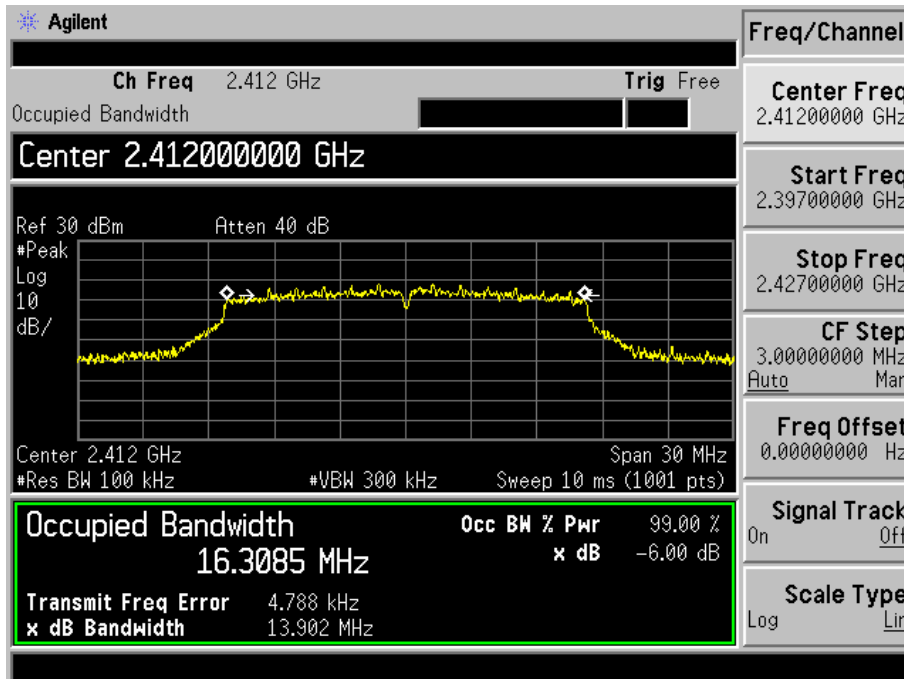


802.11g-Middle Channel

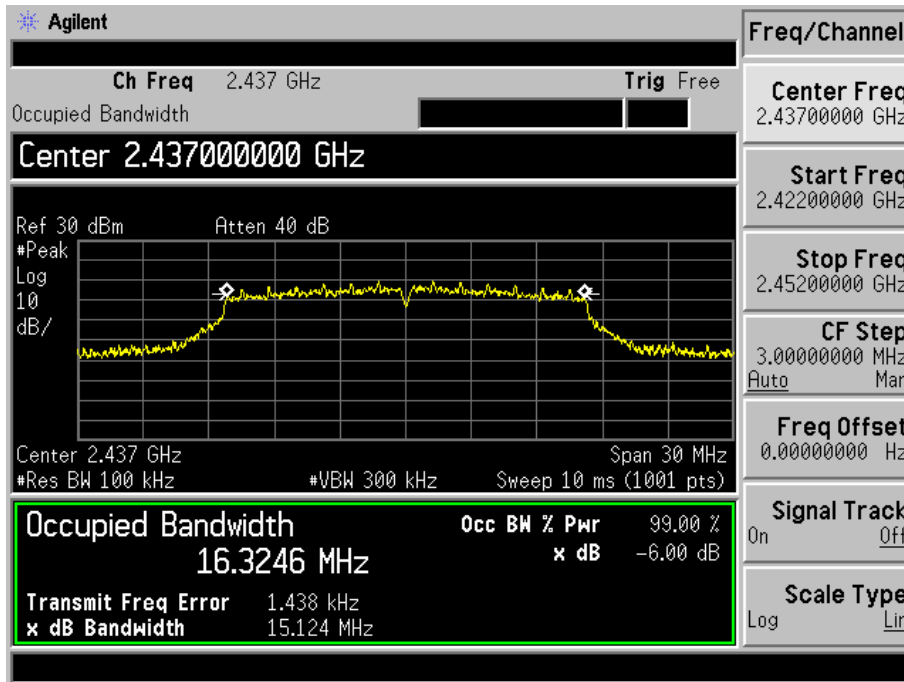


802.11g-High Channel

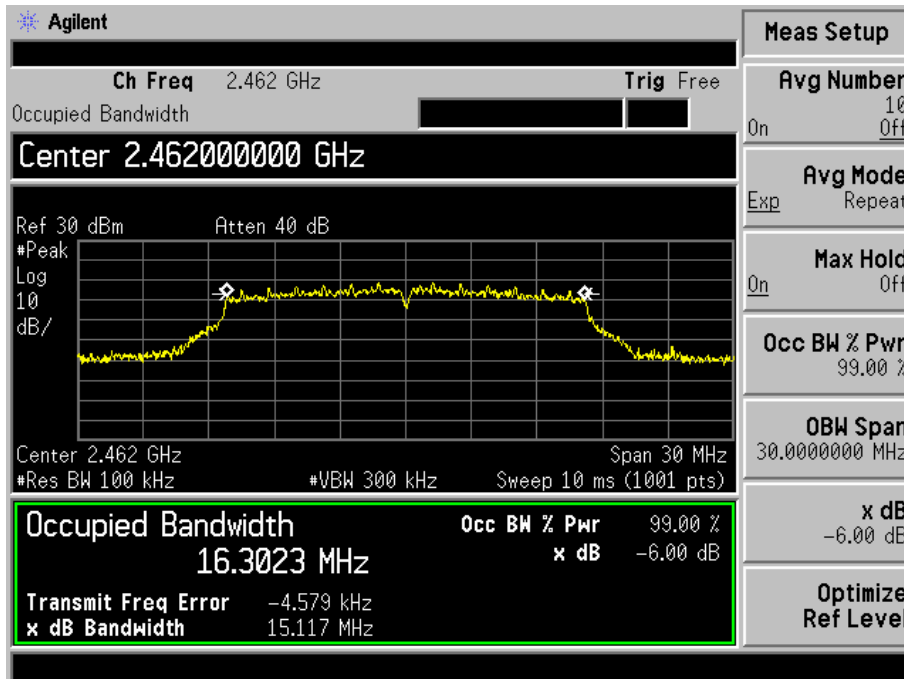


802.11n-HT20-Low Channel

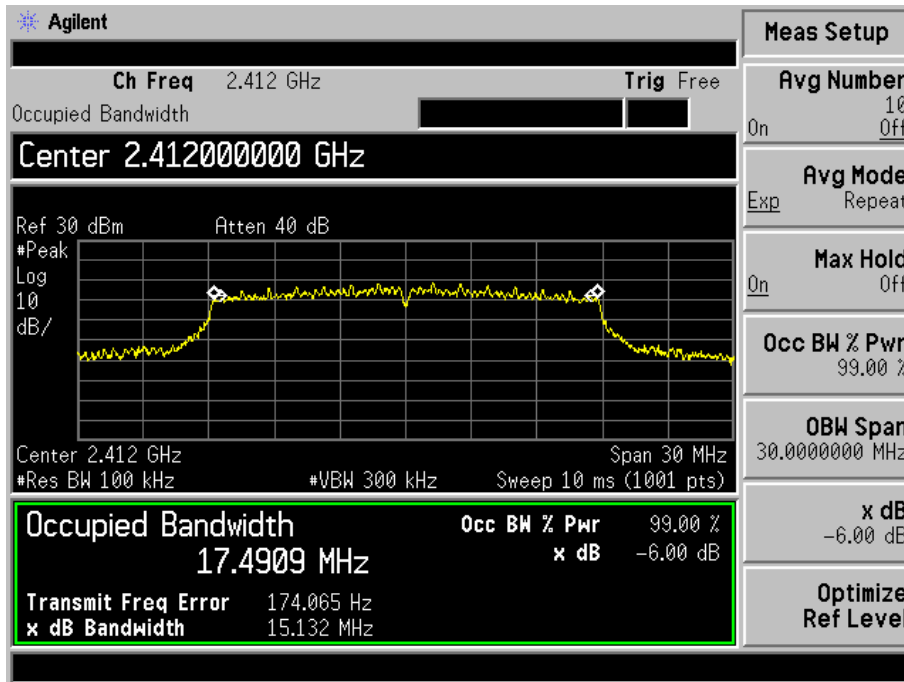


802.11n-HT20-Middle Channel

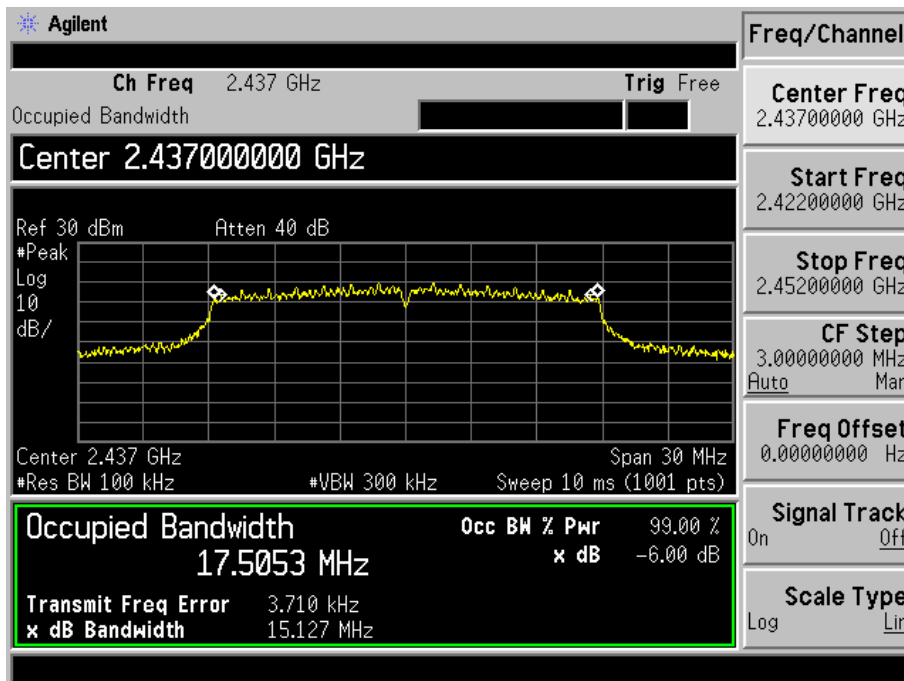


802.11n-HT20-High Channel

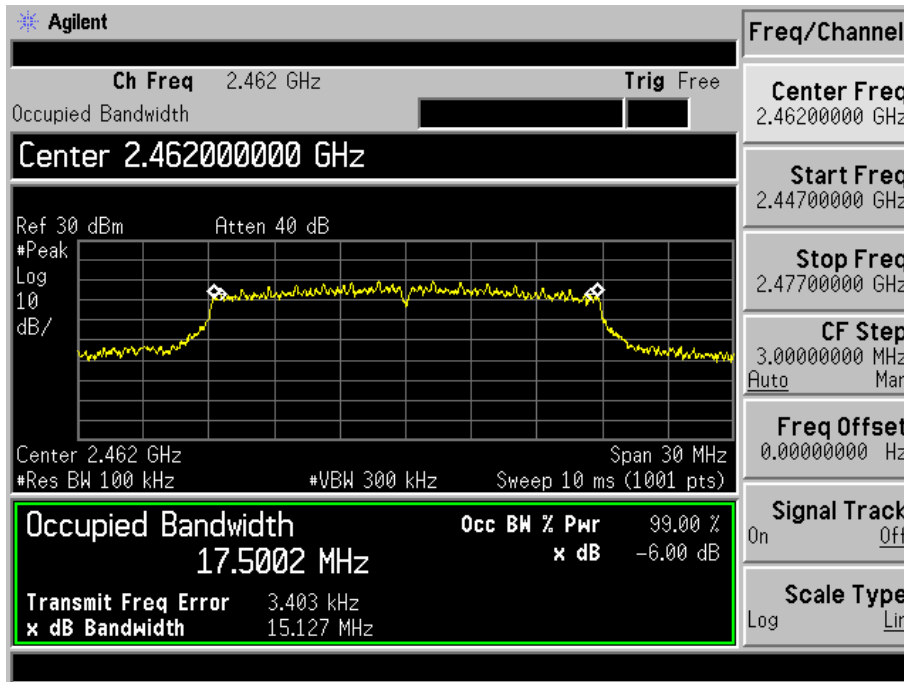


802.11n-HT40-Low Channel

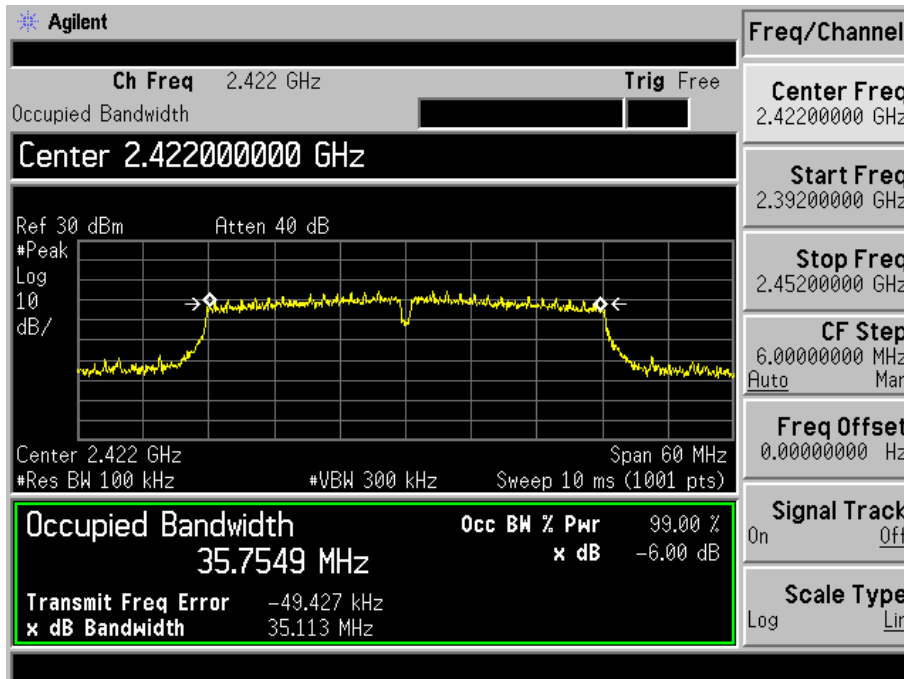

802.11n-HT40-Middle Channel

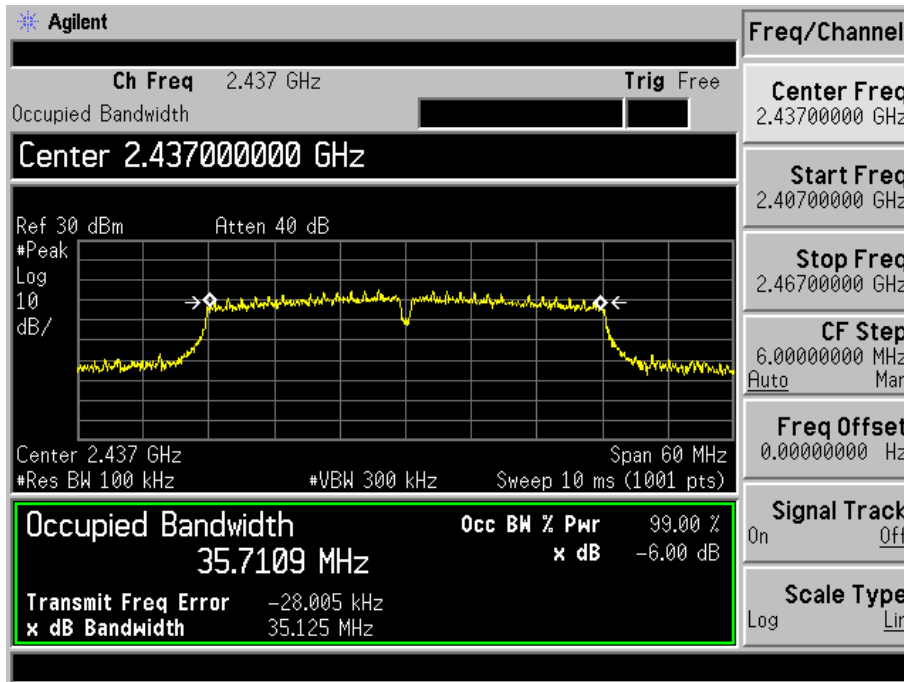

802.11n-HT40-High Channel

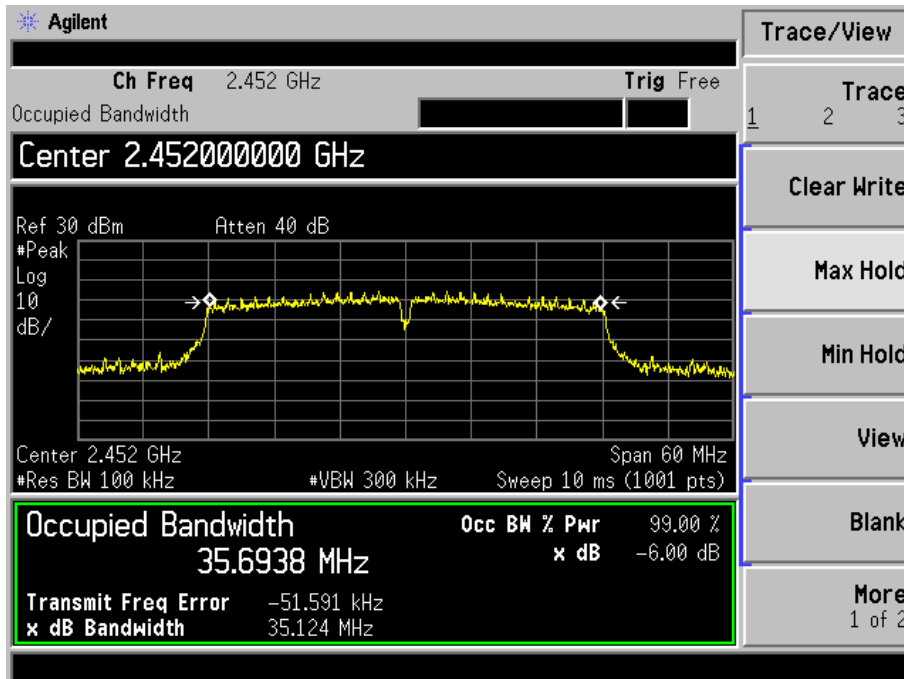

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v03r04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98 \%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit* mW
802.11b_11Mbps	2412	18.21	66.222	794
	2437	19.90	97.724	794
	2462	19.28	84.723	794
802.11g_54Mbps	2412	14.81	30.269	794
	2437	16.06	40.365	794
	2462	15.16	32.810	794
802.11n HT20_MCS7	2412	14.56	28.576	794
	2437	15.49	35.400	794
	2462	15.44	34.995	794
802.11n HT40_MCS7	2422	11.25	13.335	794
	2437	13.11	20.464	794
	2452	12.37	17.258	794


*Limit=30-(7-6)=29dBm

Please refer to the following test plots:


802.11-11Mbps-Low Channel

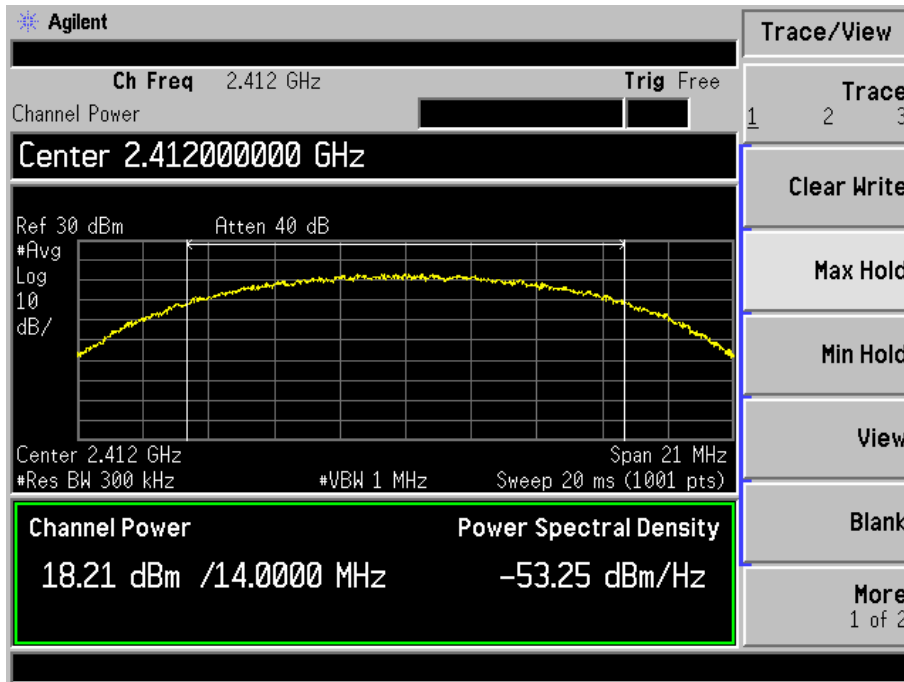


802.11b -11Mbps-Middle Channel

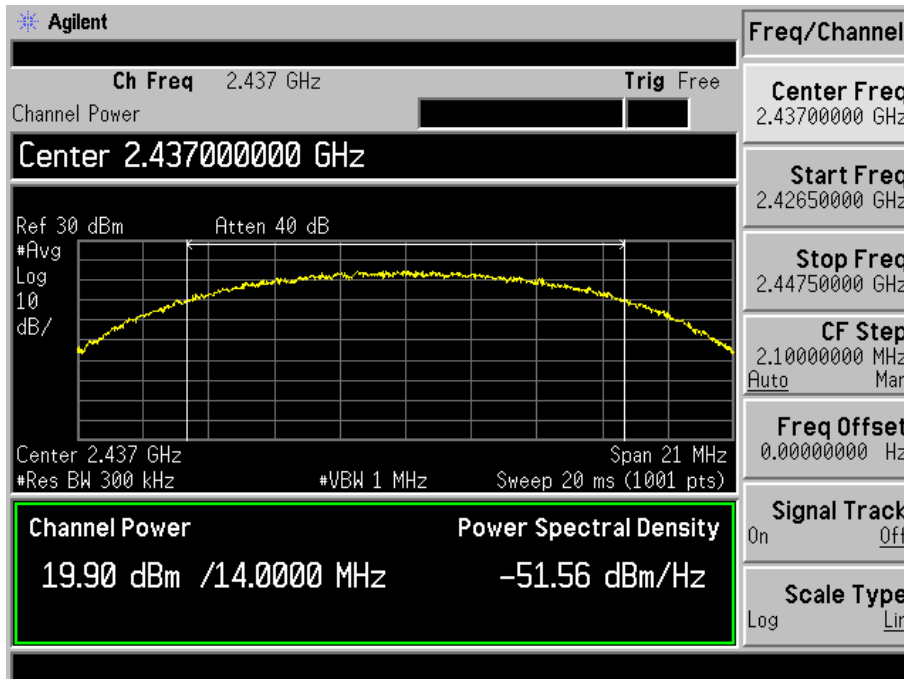


802.11b -11Mbps-High Channel

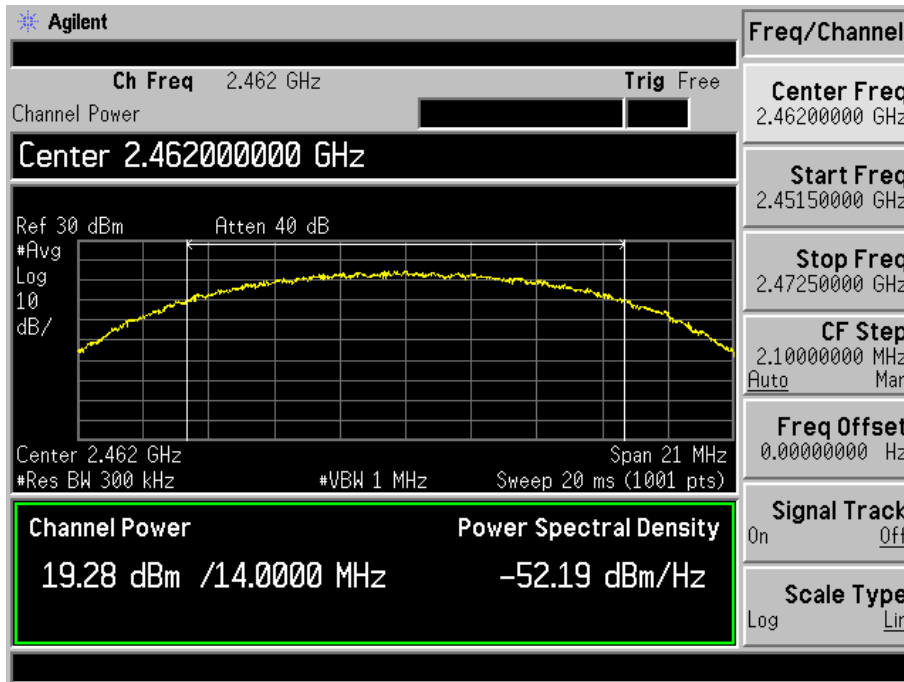


802.11g-54Mbps-Low Channel

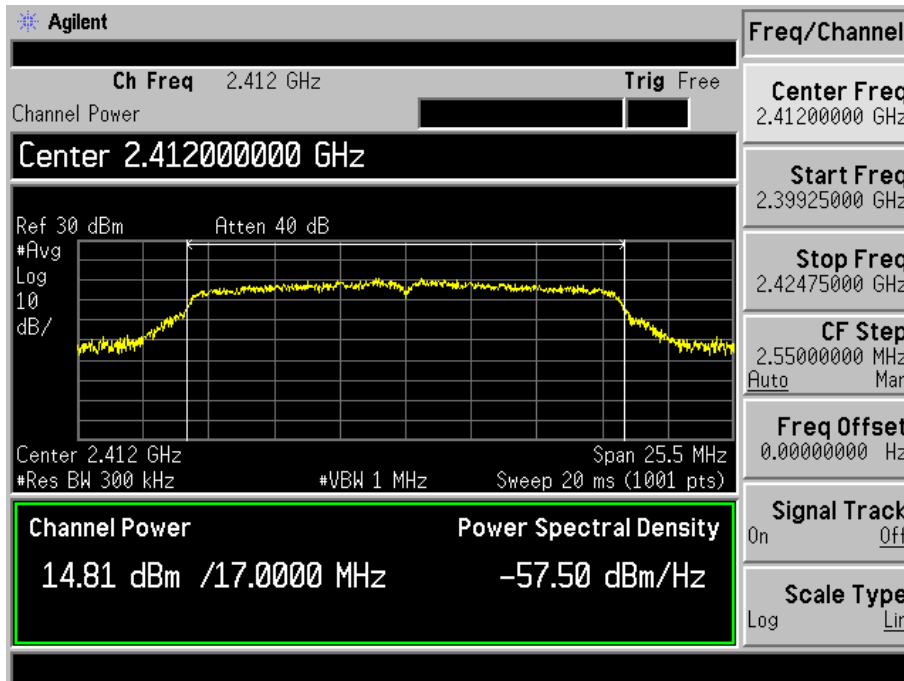


802.11g-54Mbps-Middle Channel

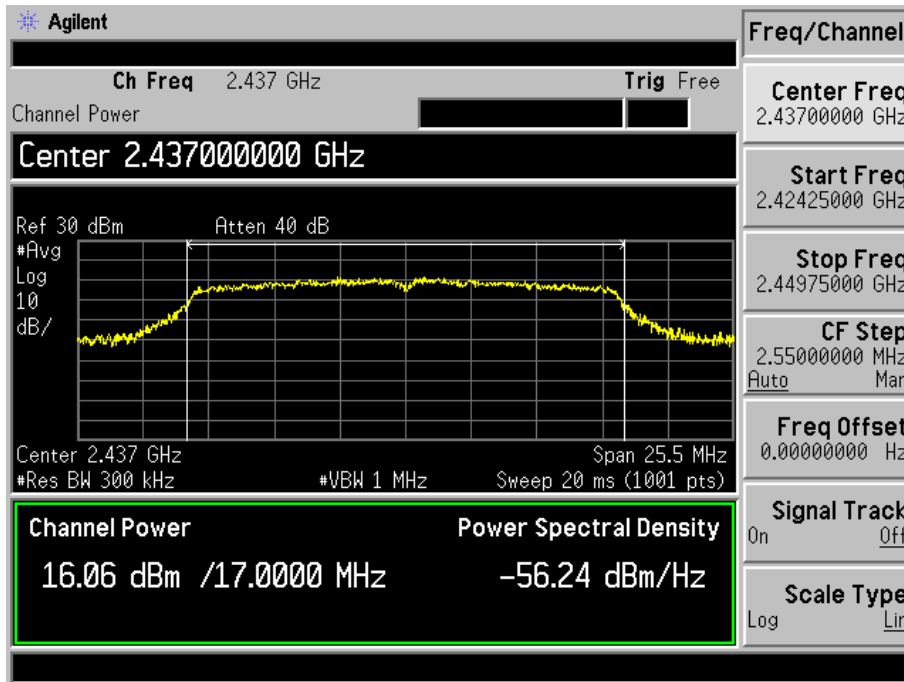


802.11g-54Mbps-High Channel

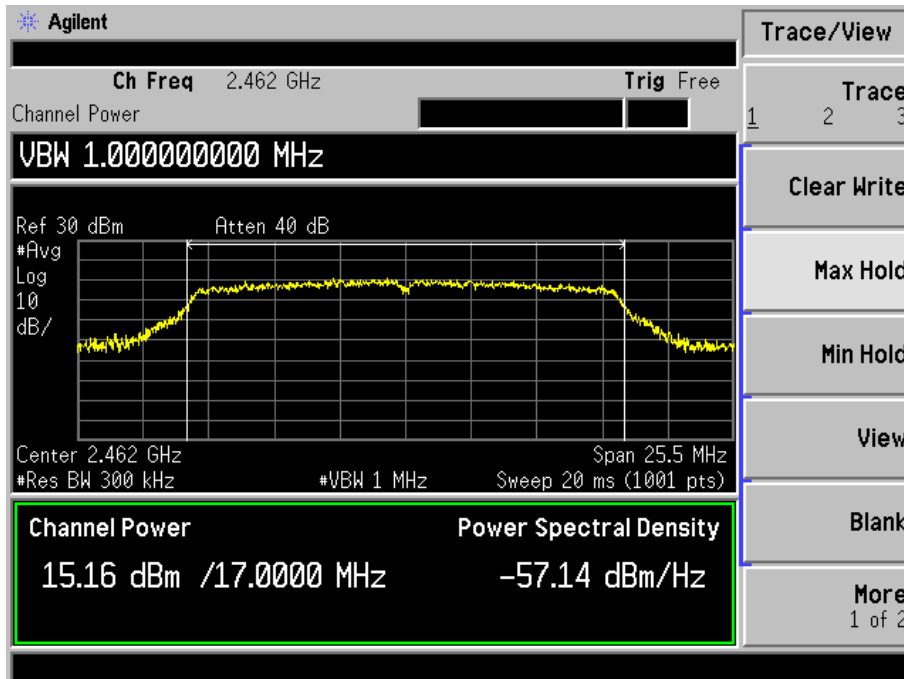

802.11n-HT20-MCS7-Low Channel

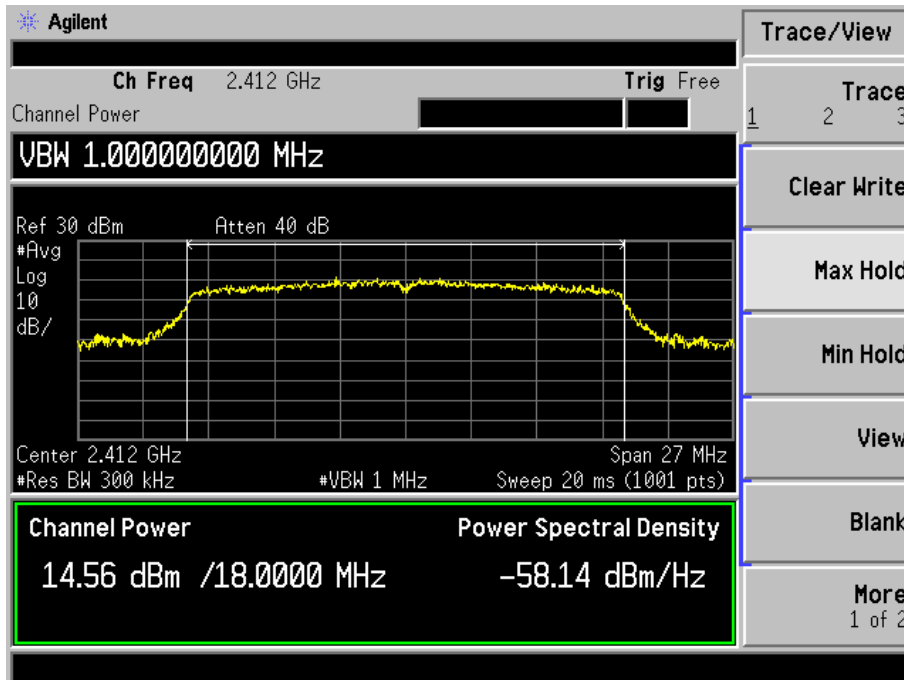


802.11n-HT20-MCS7-Middle Channel

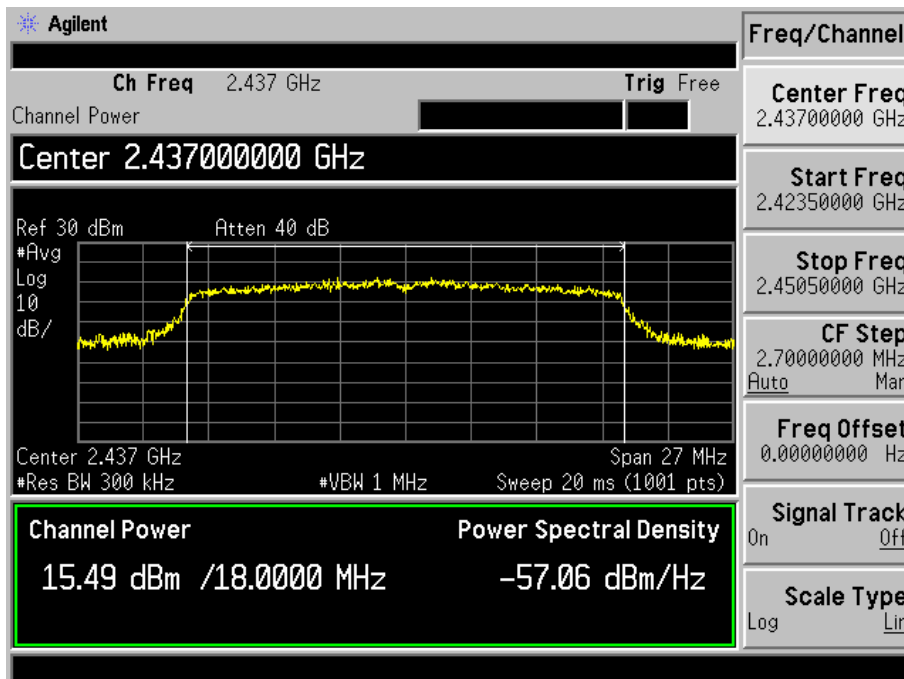


802.11n-HT20-MCS7-High Channel




802.11n-HT40-MCS7-Low Channel

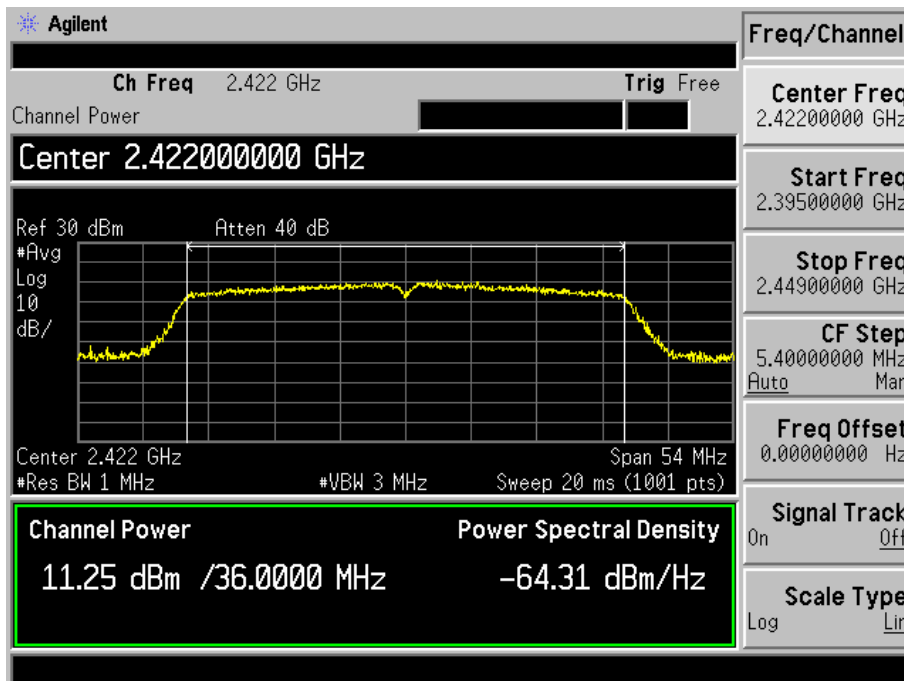

802.11n-HT40-MCS7-Middle Channel

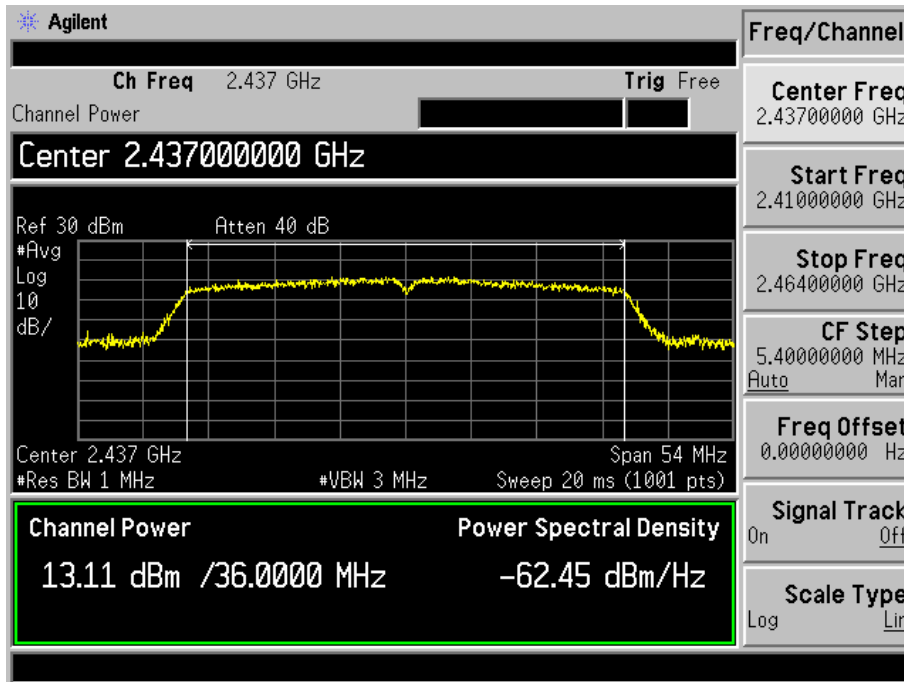

802.11n-HT40-MCS7-High Channel

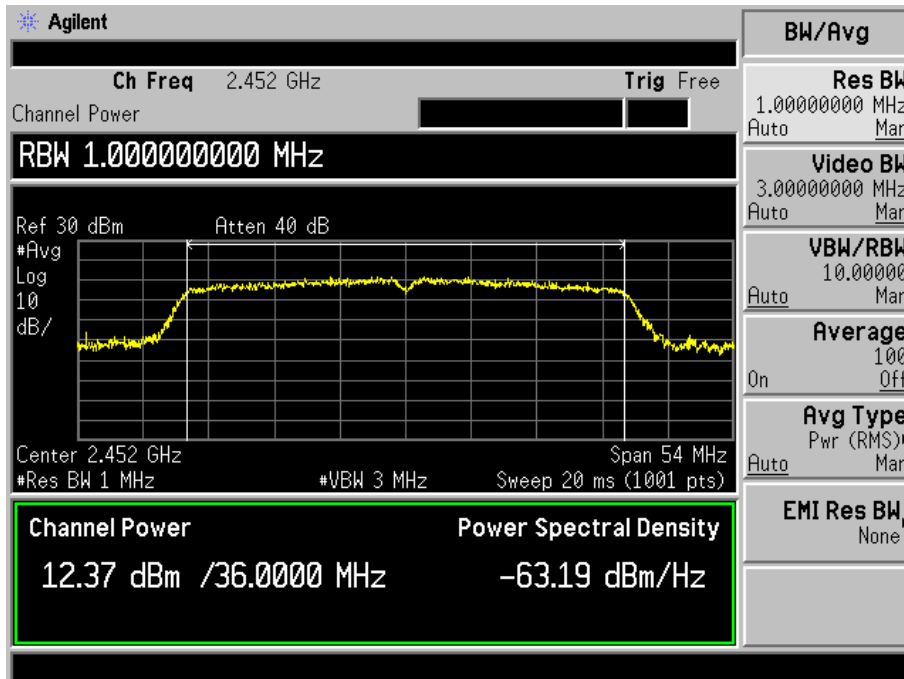

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

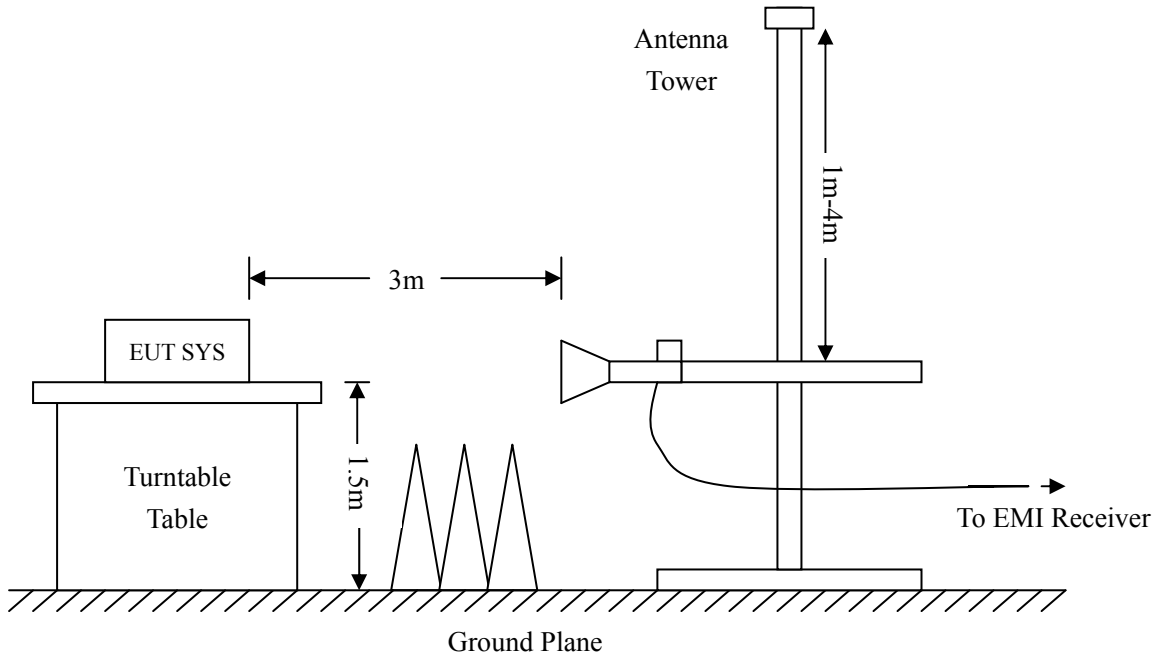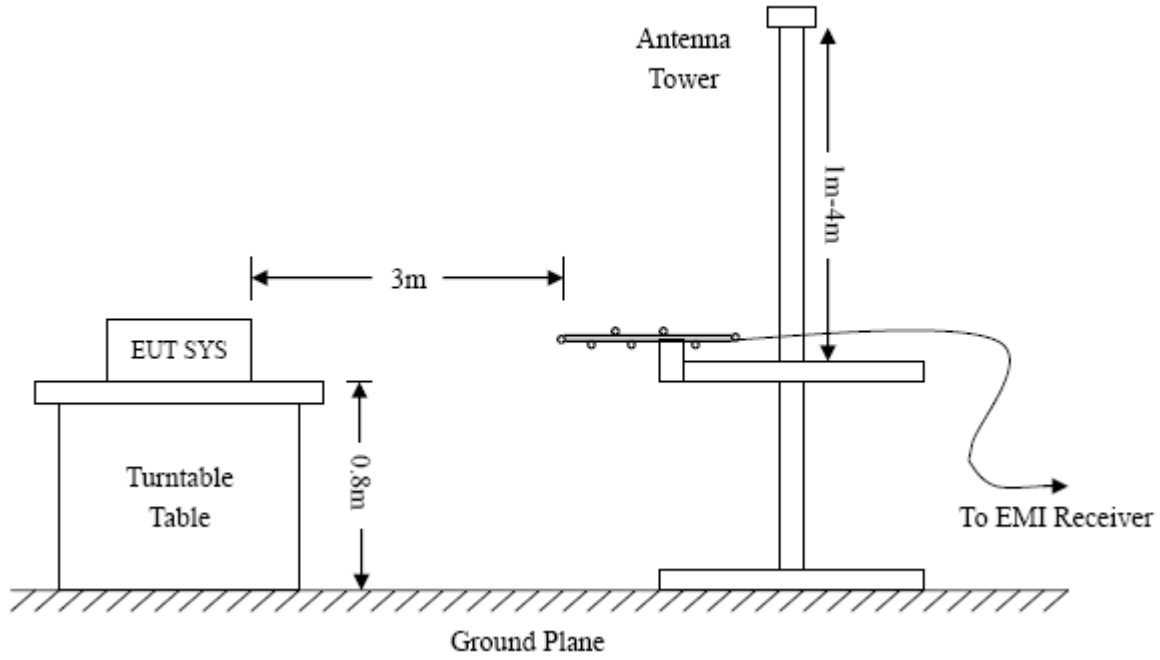

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: High-Power Wireless AC600 Outdoor Access Point / Repeater

Tested Model: 525824

Operating Condition: 802.11b Transmitting Low Channel-2412MHz


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

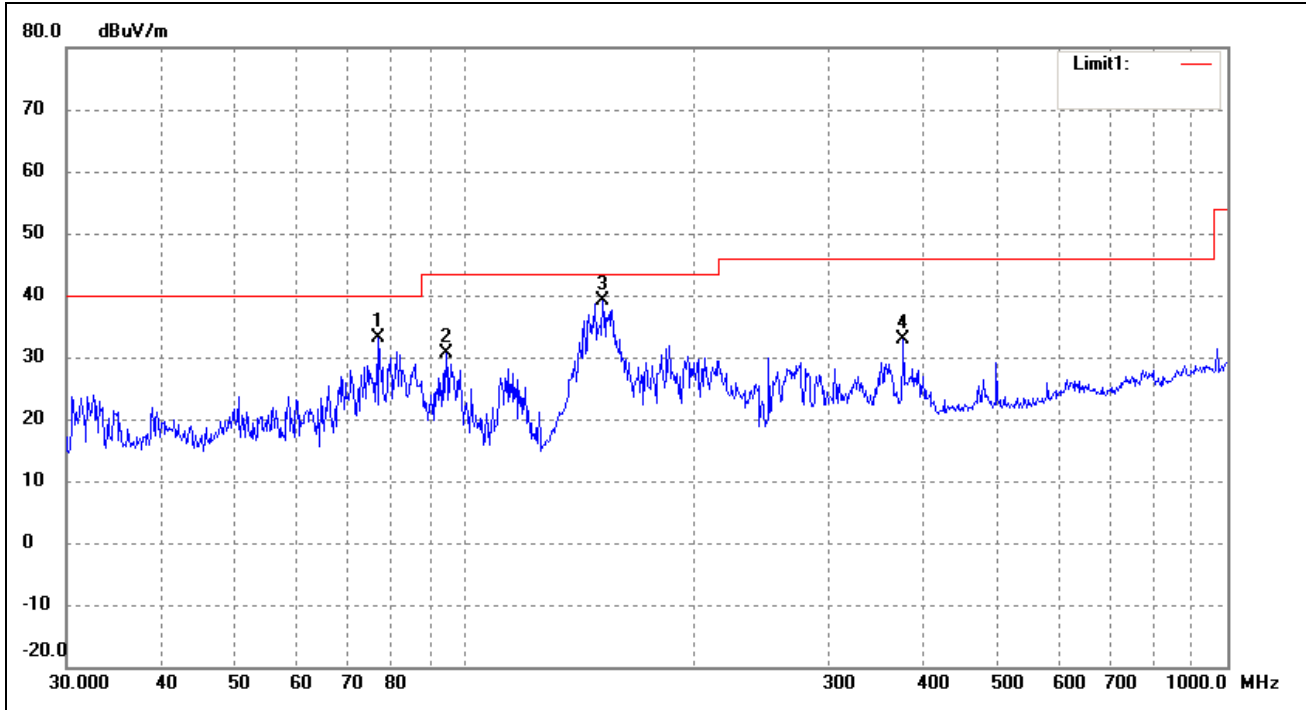

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0505	45.40	-12.24	33.16	40.00	-6.84	35	100	peak
2	94.4284	42.55	-12.04	30.51	43.50	-12.99	89	100	peak
3	151.5972	51.44	-12.40	39.04	43.50	-4.46	137	100	peak
4	375.9385	35.31	-2.33	32.98	46.00	-13.02	212	100	peak

Test Specification: Vertical

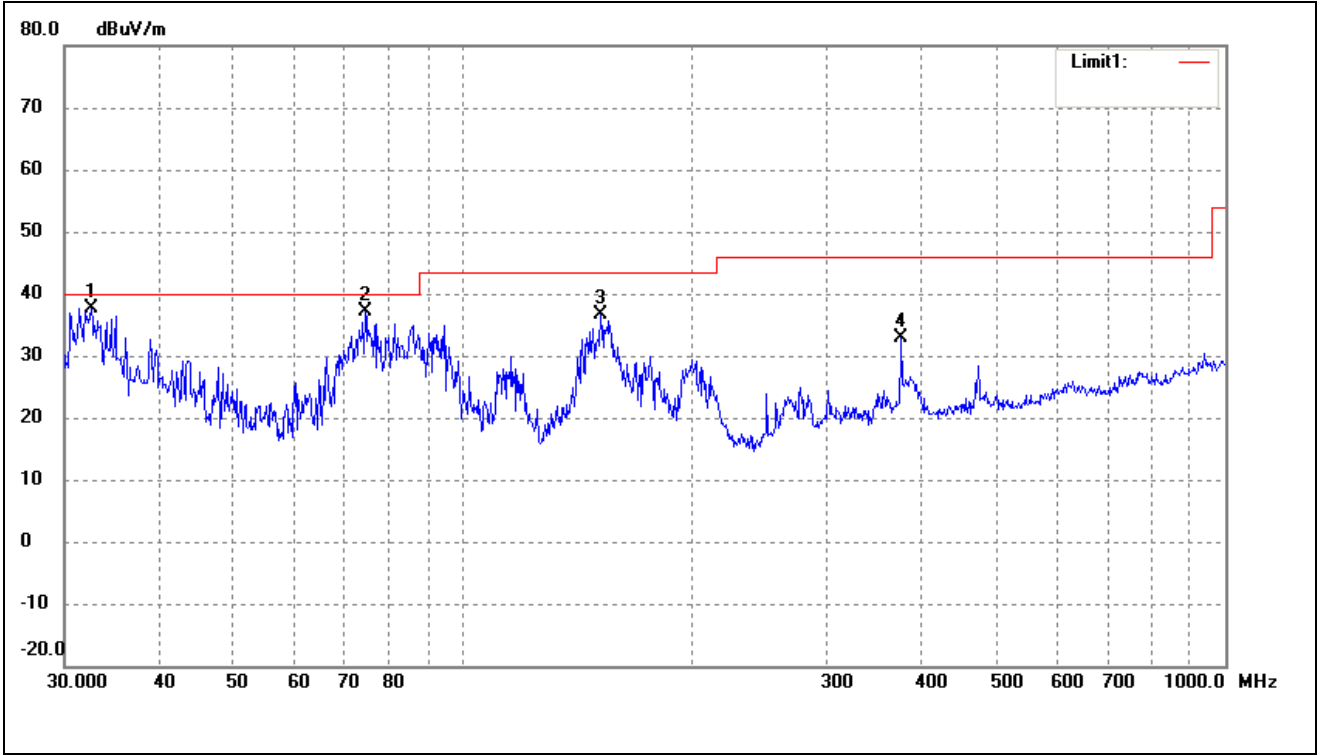


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5198	47.26	-9.67	37.59	40.00	-2.41	26	100	peak
2	74.3955	49.47	-12.46	37.01	40.00	-2.99	101	100	peak
3	151.5972	49.13	-12.40	36.73	43.50	-6.77	174	100	peak
4	375.9385	35.29	-2.33	32.96	46.00	-13.04	190	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

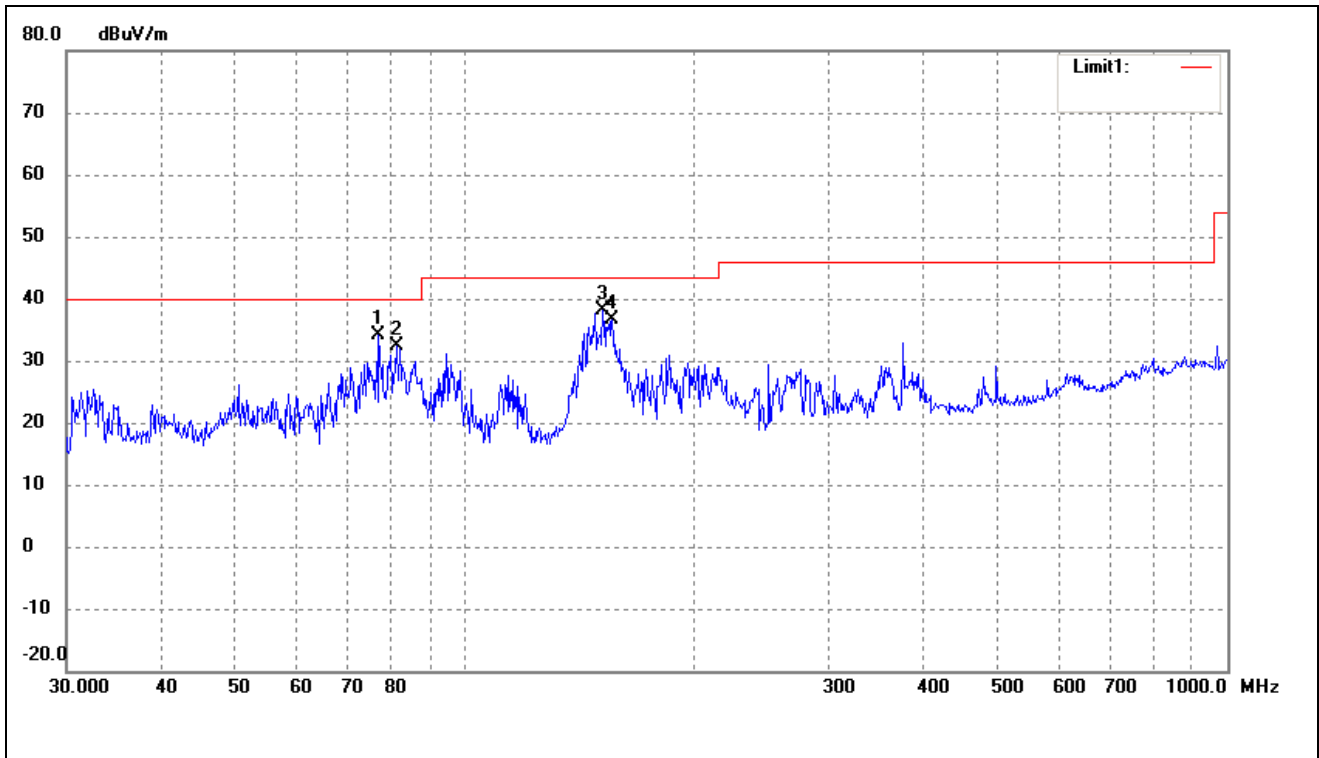

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0504	46.40	-12.24	34.16	40.00	-5.84	44	100	peak
2	81.4969	44.55	-12.13	32.42	40.00	-7.58	68	100	peak
3	151.5971	50.44	-12.40	38.04	43.50	-5.46	135	100	peak
4	155.9100	49.01	-12.34	36.67	43.50	-6.83	182	100	peak

Test Specification: Vertical

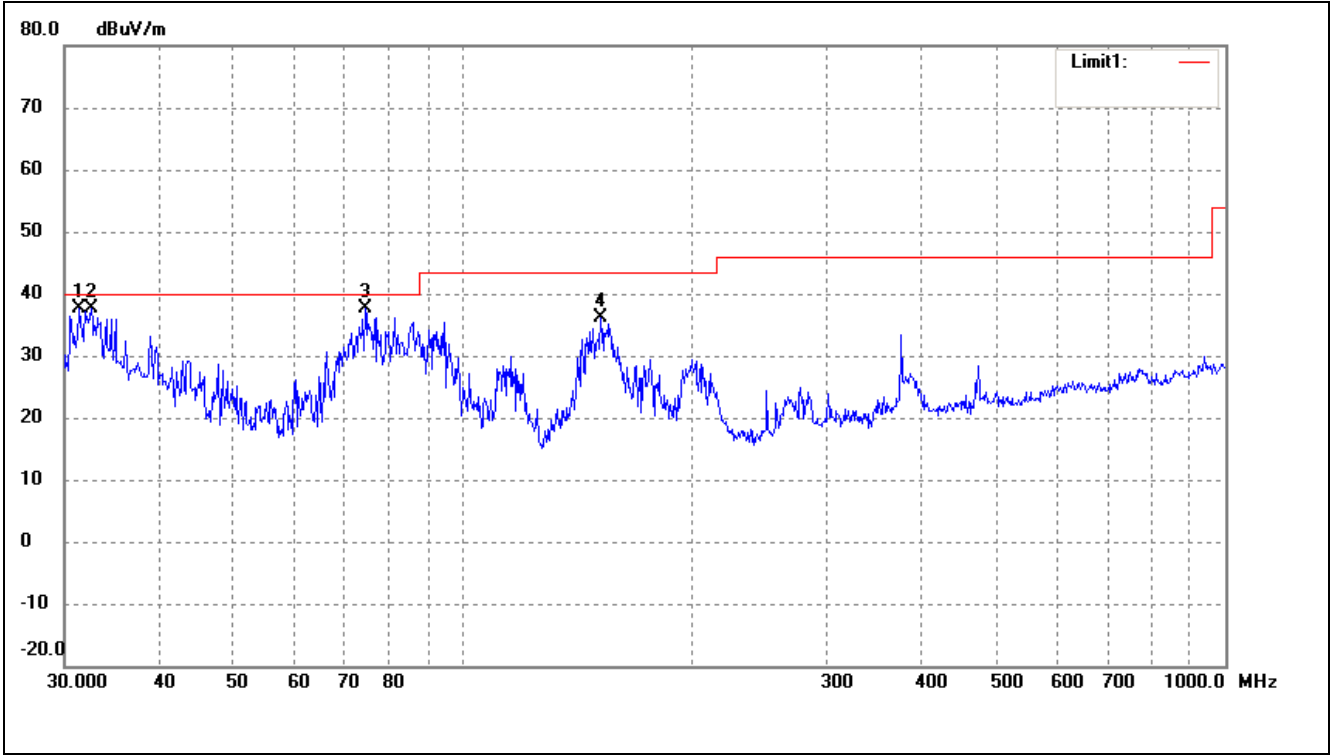


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	31.3992	47.47	-9.96	37.51	40.00	-2.49	41	100	peak
2	32.5198	47.26	-9.67	37.59	40.00	-2.41	36	100	peak
3	74.3955	49.97	-12.46	37.51	40.00	-2.49	152	100	peak
4	151.5972	48.63	-12.40	36.23	43.50	-7.27	97	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

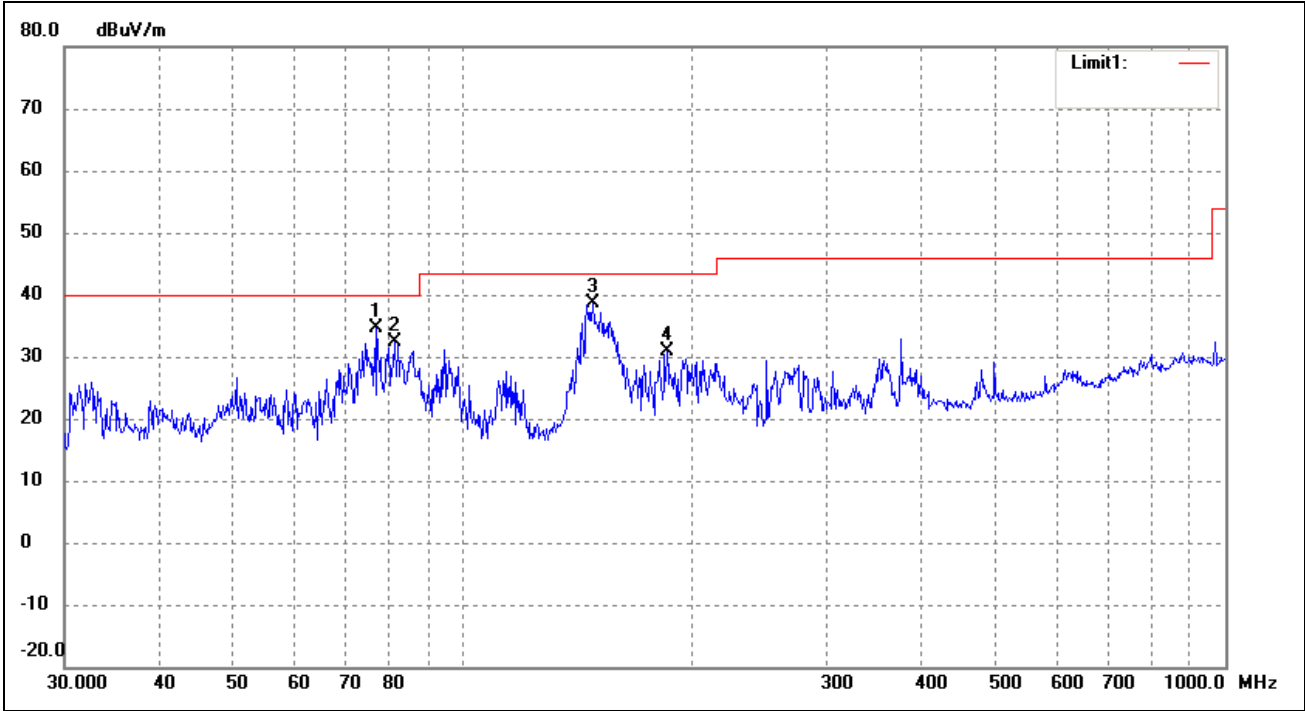

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0504	46.90	-12.24	34.66	40.00	-5.34	43	100	peak
2	81.4969	44.55	-12.13	32.42	40.00	-7.58	55	100	peak
3	147.9214	50.97	-12.45	38.52	43.50	-4.98	174	100	peak
4	185.1379	41.64	-10.66	30.98	43.50	-12.52	99	100	peak

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.26	-9.67	37.59	40.00	-2.41	51	100	peak
2	74.3954	50.47	-12.46	38.01	40.00	-1.99	82	100	peak
3	81.2116	48.68	-12.11	36.57	40.00	-3.43	99	100	peak
4	151.5971	49.13	-12.40	36.73	43.50	-6.77	164	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: High-Power Wireless AC600 Outdoor Access Point / Repeater

Tested Model: 525824

Operating Condition: 802.11g Transmitting Low Channel-2412MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

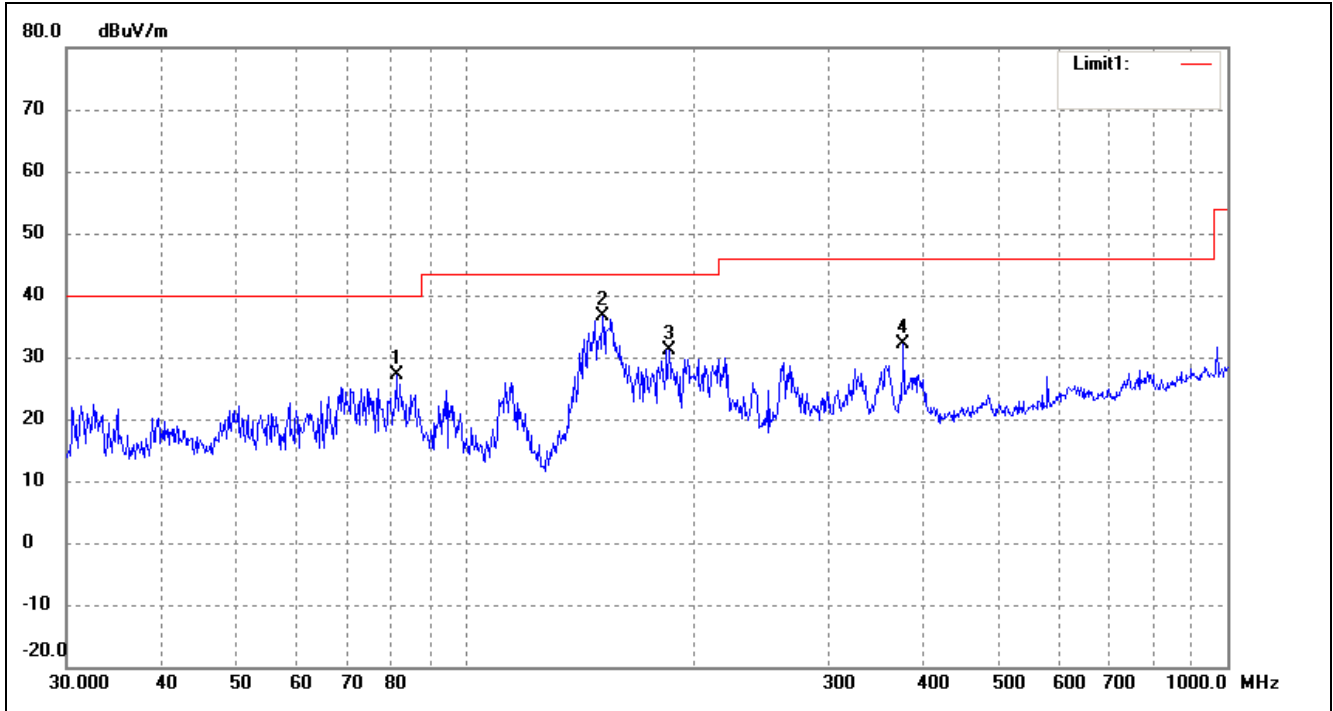

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	81.2116	39.26	-12.11	27.15	40.00	-12.85	66	100	peak
2	151.5971	48.91	-12.40	36.51	43.50	-6.99	123	100	peak
3	185.1379	41.82	-10.66	31.16	43.50	-12.34	168	100	peak
4	375.9384	34.41	-2.33	32.08	46.00	-13.92	243	100	peak

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	47.59	-9.53	38.06	40.00	-1.94	35	100	peak
2	77.0505	48.58	-12.24	36.34	40.00	-3.66	125	100	peak
3	85.5977	47.62	-12.52	35.10	40.00	-4.90	78	100	peak
4	151.5972	49.04	-12.40	36.64	43.50	-6.86	169	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0504	42.53	-12.24	30.29	40.00	-9.71	61	100	peak
2	151.5971	49.41	-12.40	37.01	43.50	-6.49	325	100	peak
3	199.2855	37.64	-8.75	28.89	43.50	-14.61	79	200	peak
4	375.9384	33.67	-2.33	31.34	46.00	-14.66	126	200	peak

Test Specification: Vertical

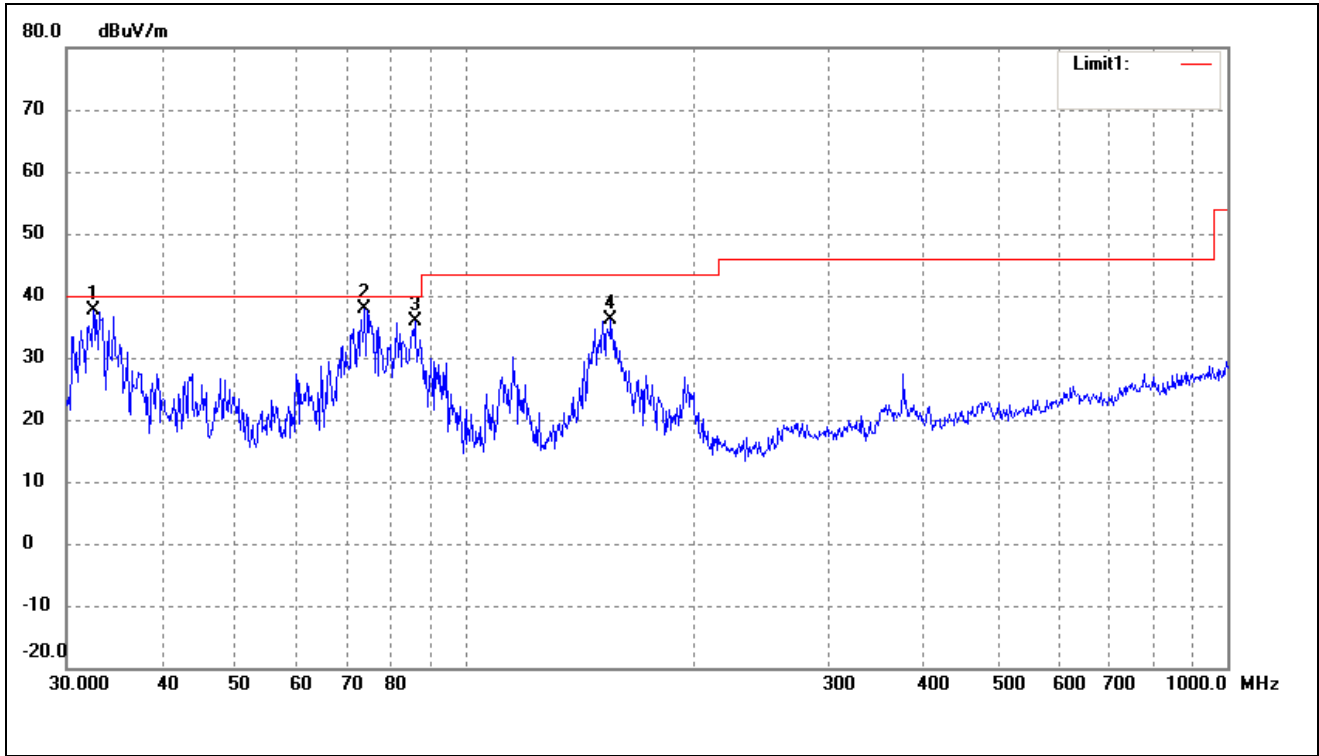

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.41	-9.67	37.74	40.00	-2.26	33	100	peak
2	73.8756	50.41	-12.50	37.91	40.00	-2.09	166	100	peak
3	85.8983	48.44	-12.55	35.89	40.00	-4.11	241	100	peak
4	155.3643	48.46	-12.34	36.12	43.50	-7.38	96	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0504	44.08	-12.24	31.84	40.00	-8.16	62	100	peak
2	81.2116	42.92	-12.11	30.81	40.00	-9.19	79	200	peak
3	151.5971	51.12	-12.40	38.72	43.50	-4.78	168	200	peak
4	185.1379	40.27	-10.66	29.61	43.50	-13.89	124	100	peak

Test Specification: Vertical

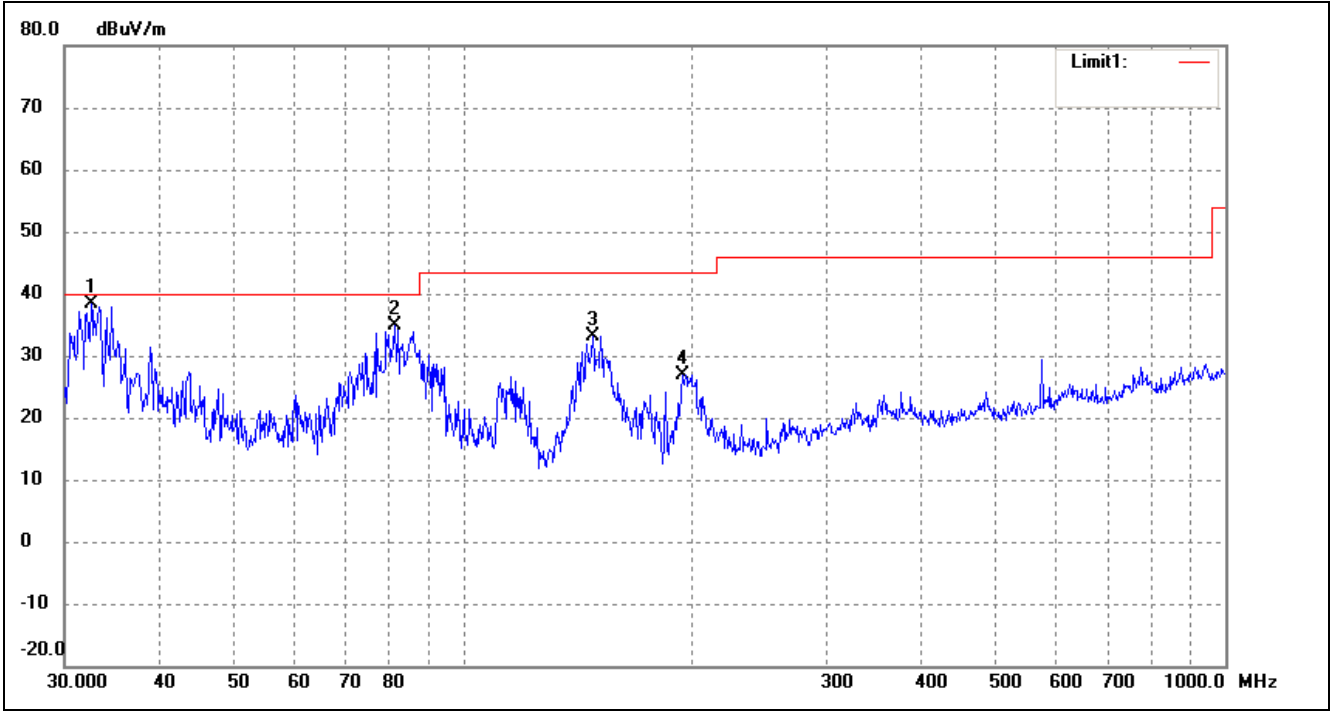

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	48.00	-9.67	38.33	40.00	-1.67	38	100	peak
2	81.2116	47.05	-12.11	34.94	40.00	-5.06	164	100	peak
3	147.9214	45.62	-12.45	33.17	43.50	-10.33	93	100	peak
4	193.7727	36.43	-9.49	26.94	43.50	-16.56	67	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: High-Power Wireless AC600 Outdoor Access Point / Repeater

Tested Model: 525824

Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

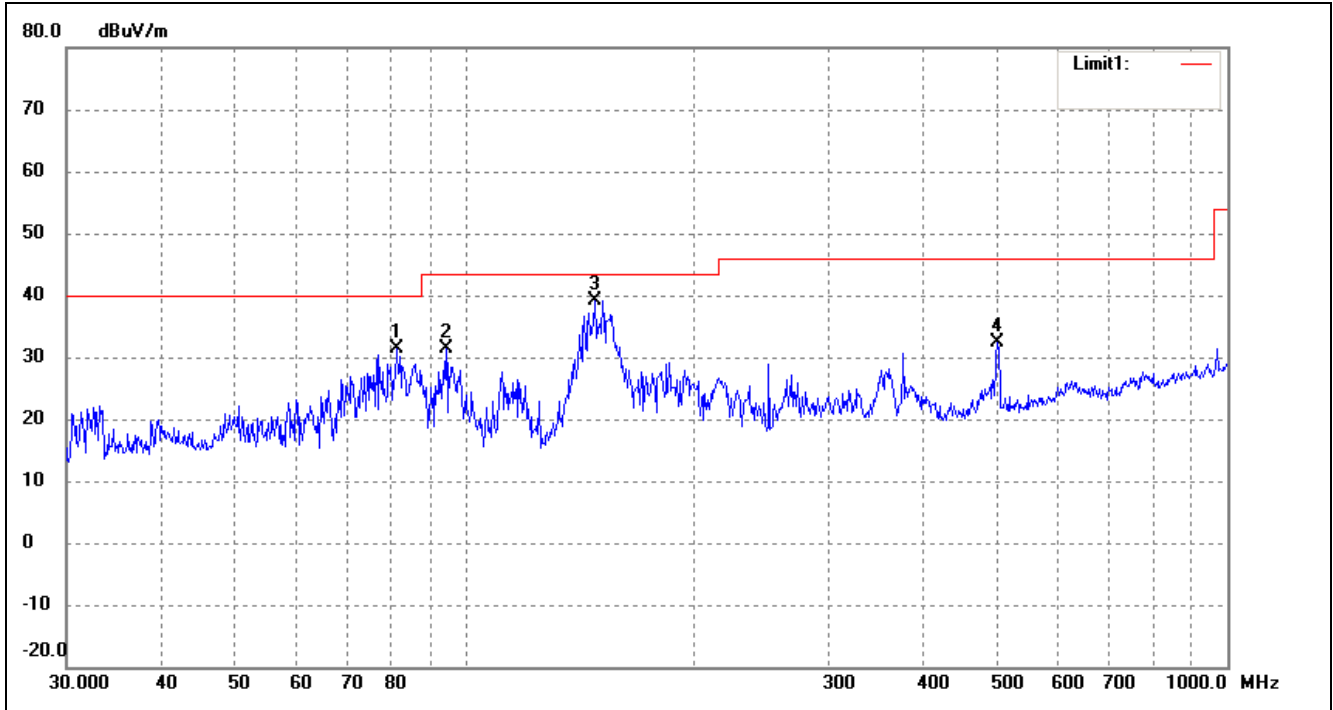

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	81.2117	43.47	-12.11	31.36	40.00	-8.64	62	100	peak
2	94.4284	43.41	-12.04	31.37	43.50	-12.13	93	200	peak
3	147.9214	51.59	-12.45	39.14	43.50	-4.36	162	200	peak
4	499.4247	34.46	-2.15	32.31	46.00	-13.69	198	100	peak

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0949	47.22	-9.53	37.69	40.00	-2.31	95	100	peak
2	77.0504	47.90	-12.24	35.66	40.00	-4.34	136	100	peak
3	81.2116	47.14	-12.11	35.03	40.00	-4.97	121	100	peak
4	151.5971	42.41	-12.40	30.01	43.50	-13.49	69	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	81.4969	41.46	-12.13	29.33	40.00	-10.67	91	100	peak
2	94.4283	40.01	-12.04	27.97	43.50	-15.53	168	100	peak
3	147.9214	51.59	-12.45	39.14	43.50	-4.36	136	100	peak
4	183.8439	38.95	-10.84	28.11	43.50	-15.39	54	100	peak

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.26	-9.67	37.59	40.00	-2.41	69	100	peak
2	74.3954	49.34	-12.46	36.88	40.00	-3.12	142	100	peak
3	85.8983	48.61	-12.55	36.06	40.00	-3.94	168	100	peak
4	151.5971	46.39	-12.40	33.99	43.50	-9.51	244	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.0504	41.88	-12.24	29.64	40.00	-10.36	67	100	peak
2	151.5971	49.73	-12.40	37.33	43.50	-6.17	111	100	peak
3	183.8439	41.68	-10.84	30.84	43.50	-12.66	163	200	peak
4	375.9384	34.82	-2.33	32.49	46.00	-13.51	190	200	peak


Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5198	47.41	-9.67	37.74	40.00	-2.26	33	100	peak
2	74.3955	50.01	-12.46	37.55	40.00	-2.45	162	100	peak
3	81.2117	47.51	-12.11	35.40	40.00	-4.60	95	100	peak
4	151.5972	48.82	-12.40	36.42	43.50	-7.08	68	100	peak


EUT: *High-Power Wireless AC600 Outdoor Access Point / Repeater*
 Tested Model: *525824*
 Operating Condition: *802.11n-HT40 Transmitting Low Channel-2422MHz*
 Comment: *AC120V/60Hz; Adapter DC 24V*

Test Specification: *Horizontal*

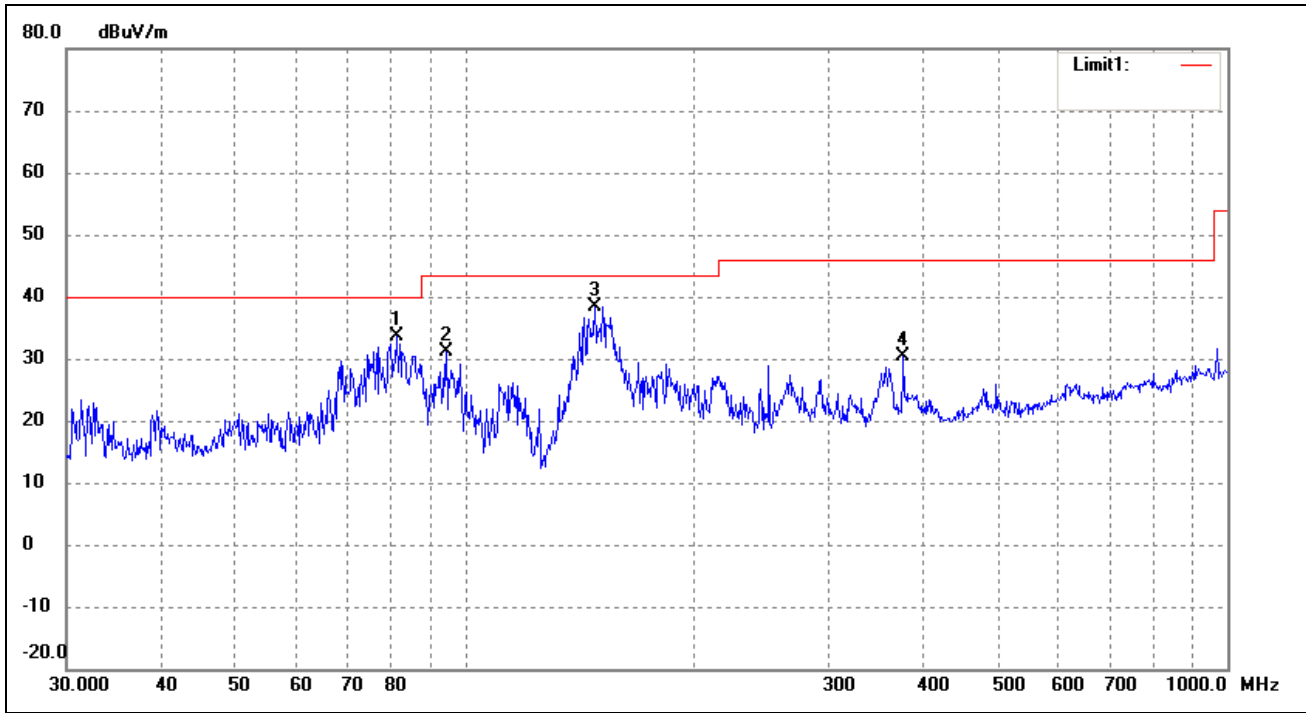

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	81.2117	45.68	-12.11	33.57	40.00	-6.43	83	100	peak
2	94.4284	43.15	-12.04	31.11	43.50	-12.39	135	200	peak
3	147.9214	50.83	-12.45	38.38	43.50	-5.12	194	200	peak
4	375.9385	32.66	-2.33	30.33	46.00	-15.67	265	100	peak

Test Specification: Vertical

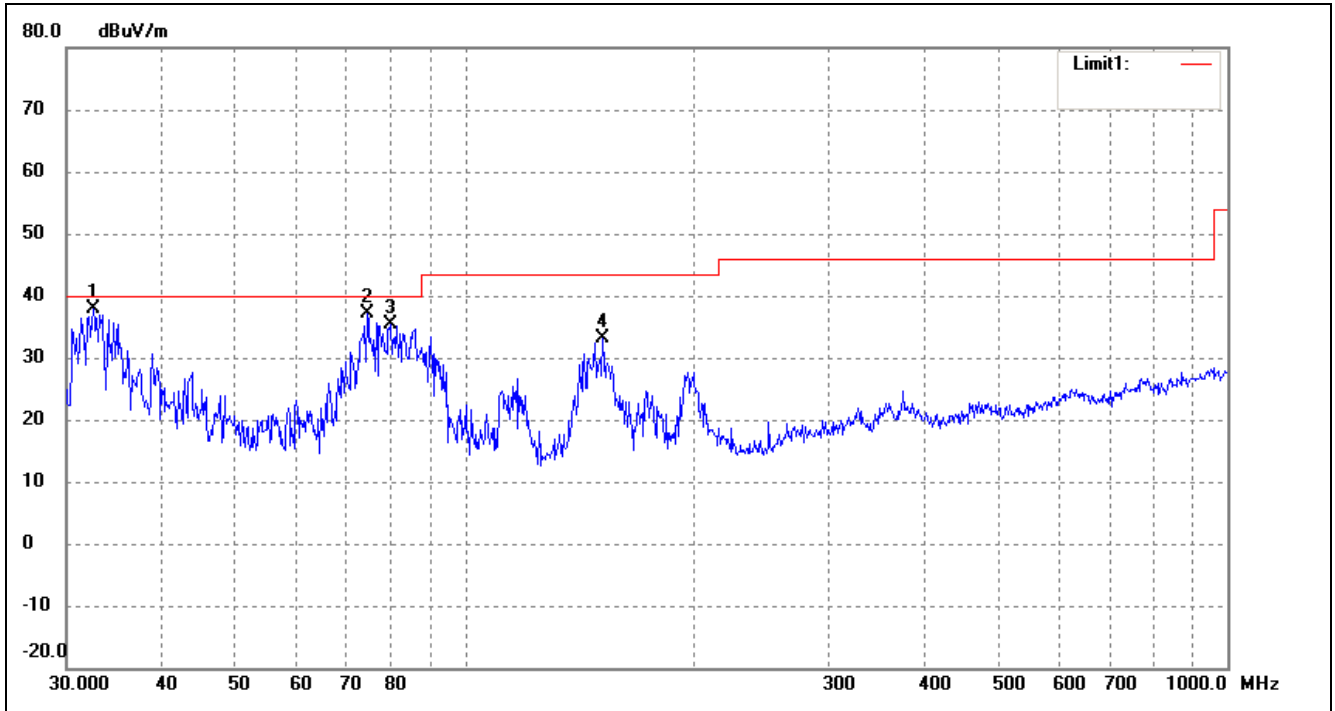


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.55	-9.67	37.88	40.00	-2.12	45	100	peak
2	74.3954	49.71	-12.46	37.25	40.00	-2.75	132	100	peak
3	79.8002	47.36	-12.01	35.35	40.00	-4.65	106	100	peak
4	151.5971	45.42	-12.40	33.02	43.50	-10.48	198	100	peak

Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz

Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal

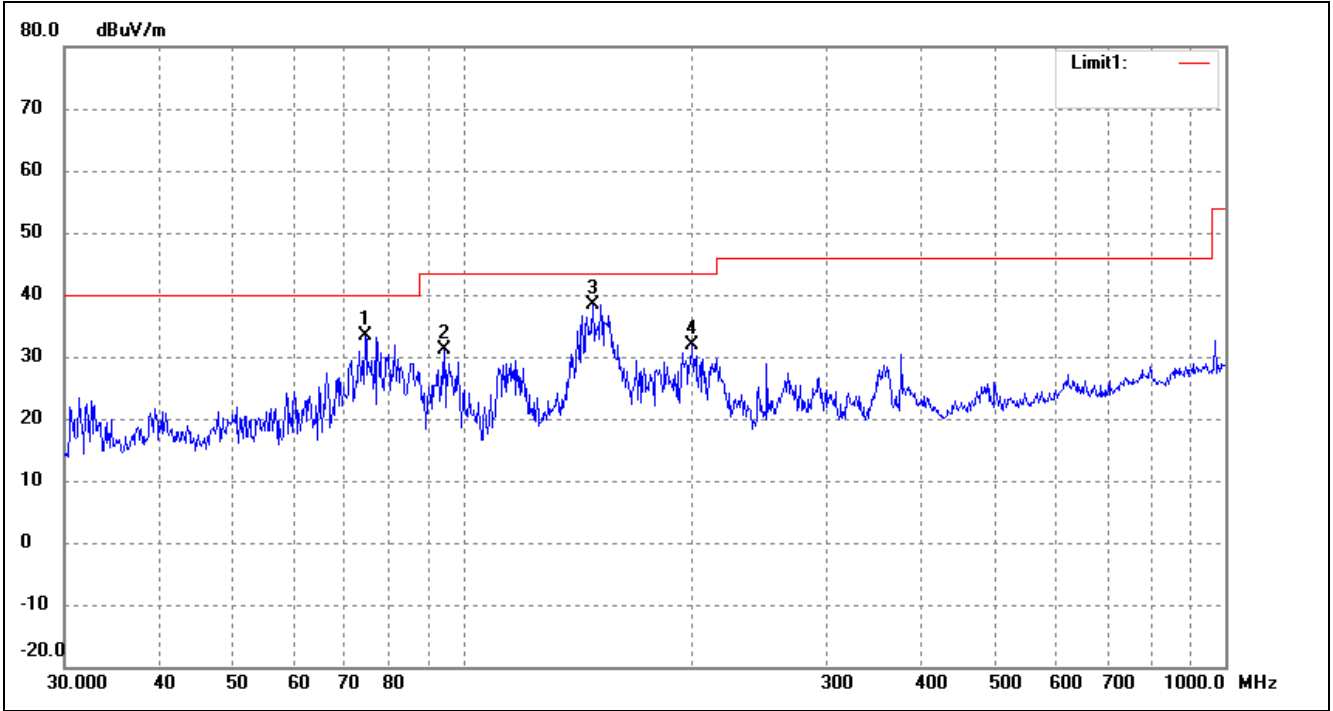

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	74.3954	45.83	-12.46	33.37	40.00	-6.63	61	100	peak
2	94.4283	43.15	-12.04	31.11	43.50	-12.39	138	100	peak
3	147.9214	50.83	-12.45	38.38	43.50	-5.12	194	100	peak
4	199.9856	40.54	-8.65	31.89	43.50	-11.61	235	100	peak

Test Specification: Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.55	-9.67	37.88	40.00	-2.12	35	100	peak
2	73.8756	50.13	-12.50	37.63	40.00	-2.37	167	100	peak
3	77.0504	48.97	-12.24	36.73	40.00	-3.27	134	100	peak
4	151.5971	49.41	-12.40	37.01	43.50	-6.49	241	100	peak

Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	74.3955	45.83	-12.46	33.37	40.00	-6.63	62	100	peak
2	77.0505	45.39	-12.24	33.15	40.00	-6.85	35	100	peak
3	151.5972	51.89	-12.40	39.49	43.50	-4.01	165	100	peak
4	199.2855	41.04	-8.75	32.29	43.50	-11.21	199	100	peak

Test Specification: Vertical

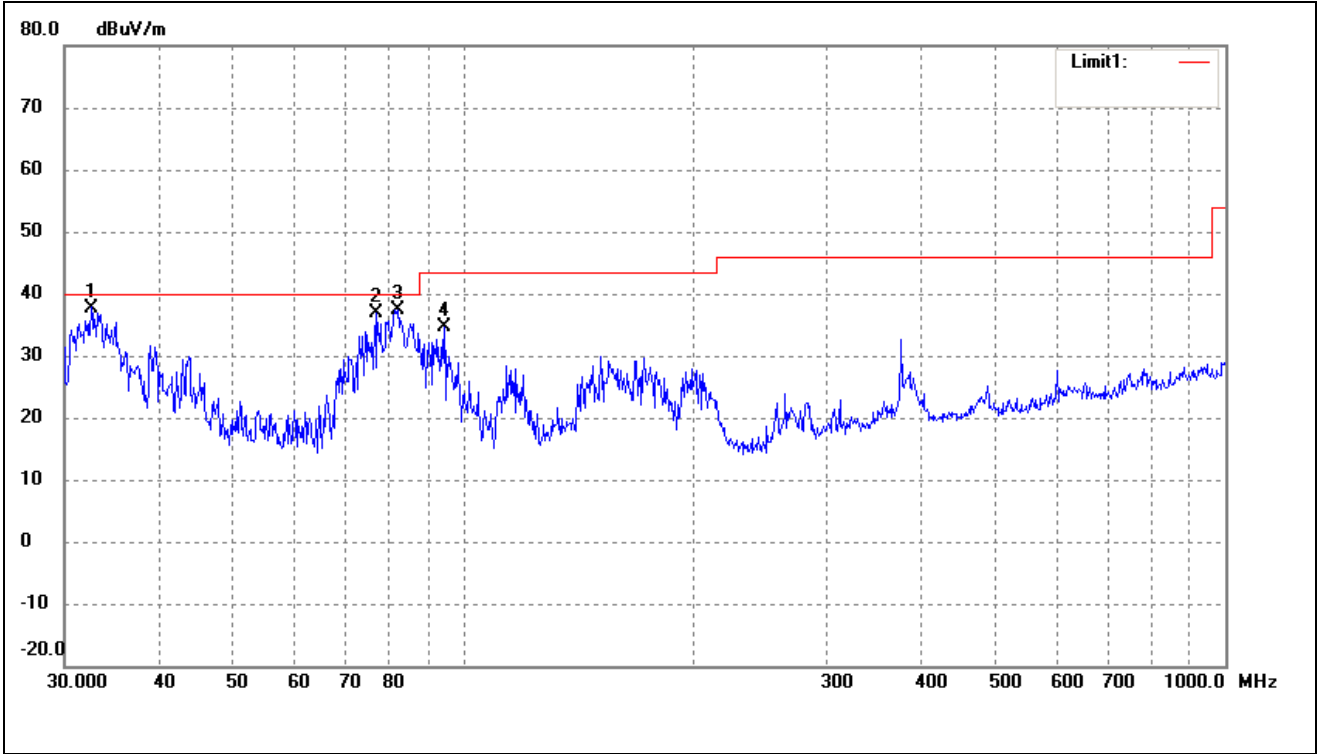

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.5197	47.42	-9.67	37.75	40.00	-2.25	32	100	peak
2	77.0504	49.04	-12.24	36.80	40.00	-3.20	167	100	peak
3	82.0705	49.64	-12.19	37.45	40.00	-2.55	153	100	peak
4	94.4283	46.61	-12.04	34.57	43.50	-8.93	192	100	peak

Spurious Emissions Above 1GHz
Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	51.23	-3.87	47.36	74.00	-26.64	H	PK
4824.000	36.42	-3.87	32.55	54.00	-21.45	H	AV
7236.000	42.51	1.14	43.65	74.00	-30.35	H	PK
7236.000	31.25	1.19	32.44	54.00	-21.56	H	AV
4824.000	54.61	-3.86	50.75	74.00	-23.25	V	PK
4824.000	40.05	-3.86	36.19	54.00	-17.81	V	AV
7236.000	45.62	1.10	46.72	74.00	-27.28	V	PK
7236.000	36.12	1.10	37.22	54.00	-16.78	V	AV
Middle Channel-2437MHz							
4874.000	50.28	-3.74	46.54	74.00	-27.46	H	PK
4874.000	34.62	-3.74	30.88	54.00	-23.12	H	AV
7311.000	47.38	1.47	48.85	74.00	-25.15	H	PK
7311.000	31.62	1.47	33.09	54.00	-20.91	H	AV
4874.000	51.29	-3.74	47.55	74.00	-26.45	V	PK
4874.000	40.36	-3.74	36.62	54.00	-17.38	V	AV
7311.000	45.62	1.47	47.09	74.00	-26.91	V	PK
7311.000	32.81	1.47	34.28	54.00	-19.72	V	AV
High Channel-2462MHz							
4924.000	53.16	-3.59	49.57	74.00	-24.43	H	PK
4924.000	40.81	-3.59	37.22	54.00	-16.78	H	AV
7386.000	42.66	1.79	44.45	74.00	-29.55	H	PK
7386.000	32.32	1.79	34.11	54.00	-19.89	H	AV
4924.000	51.24	-3.59	47.65	74.00	-26.35	V	PK
4924.000	41.04	-3.59	37.45	54.00	-16.55	V	AV
7386.000	42.43	1.79	44.22	74.00	-29.78	V	PK
7386.000	32.14	1.79	33.93	54.00	-20.07	V	AV

Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	51.22	-3.86	47.36	74.00	-26.64	H	PK
4824.000	40.85	-3.86	36.99	54.00	-17.01	H	AV
7236.000	45.21	1.10	46.31	74.00	-27.69	H	PK
7236.000	34.45	1.10	35.55	54.00	-18.45	H	AV
4824.000	52.84	-3.86	48.98	74.00	-25.02	V	PK
4824.000	40.67	-3.86	36.81	54.00	-17.19	V	AV
7236.000	45.64	1.10	46.74	74.00	-27.26	V	PK
7236.000	33.75	1.10	34.85	54.00	-19.15	V	AV
Middle Channel-2437MHz							
4874.000	53.54	-3.74	49.8	74.00	-24.2	H	PK
4874.000	41.65	-3.74	37.91	54.00	-16.09	H	AV
7311.000	44.58	1.47	46.05	74.00	-27.95	H	PK
7311.000	32.37	1.47	33.84	54.00	-20.16	H	AV
4874.000	54.51	-3.74	50.77	74.00	-23.23	V	PK
4874.000	41.27	-3.74	37.53	54.00	-16.47	V	AV
7311.000	45.63	1.47	47.1	74.00	-26.9	V	PK
7311.000	32.27	1.47	33.74	54.00	-20.26	V	AV
High Channel-2462MHz							
4924.000	51.31	-3.59	47.72	74.00	-26.28	H	PK
4924.000	40.24	-3.59	36.65	54.00	-17.35	H	AV
7386.000	43.85	1.79	45.64	74.00	-28.36	H	PK
7386.000	31.74	1.79	33.53	54.00	-20.47	H	AV
4924.000	54.29	-3.59	50.7	74.00	-23.3	V	PK
4924.000	41.32	-3.59	37.73	54.00	-16.27	V	AV
7386.000	45.94	1.79	47.73	74.00	-26.27	V	PK
7386.000	31.77	1.79	33.56	54.00	-20.44	V	AV

Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	51.52	-3.86	47.66	74.00	-26.34	H	PK
4824.000	40.57	-3.86	36.71	54.00	-17.29	H	AV
7236.000	44.62	1.10	45.72	74.00	-28.28	H	PK
7236.000	32.67	1.10	33.77	54.00	-20.23	H	AV
4824.000	51.42	-3.86	47.56	74.00	-26.44	V	PK
4824.000	41.28	-3.86	37.42	54.00	-16.58	V	AV
7236.000	45.63	1.10	46.73	74.00	-27.27	V	PK
7236.000	32.55	1.10	33.65	54.00	-20.35	V	AV
Middle Channel-2437MHz							
4874.000	51.16	-3.74	47.42	74.00	-26.58	H	PK
4874.000	40.45	-3.74	36.71	54.00	-17.29	H	AV
7311.000	43.53	1.47	45	74.00	-29	H	PK
7311.000	31.47	1.47	32.94	54.00	-21.06	H	AV
4874.000	52.47	-3.74	48.73	74.00	-25.27	V	PK
4874.000	42.66	-3.74	38.92	54.00	-15.08	V	AV
7311.000	44.86	1.47	46.33	74.00	-27.67	V	PK
7311.000	33.86	1.47	35.33	54.00	-18.67	V	AV
High Channel-2462MHz							
4924.000	50.98	-3.59	47.39	74.00	-26.61	H	PK
4924.000	42.55	-3.59	38.96	54.00	-15.04	H	AV
7386.000	45.37	1.79	47.16	74.00	-26.84	H	PK
7386.000	32.17	1.79	33.96	54.00	-20.04	H	AV
4924.000	53.75	-3.59	50.16	74.00	-23.84	V	PK
4924.000	41.46	-3.59	37.87	54.00	-16.13	V	AV
7386.000	45.53	1.79	47.32	74.00	-26.68	V	PK
7386.000	32.36	1.79	34.15	54.00	-19.85	V	AV

Test Mode: 802.11n-HT40

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2422MHz							
4844.000	51.97	-3.90	48.07	74.00	-25.93	H	PK
4824.000	35.67	-3.90	31.77	54.00	-22.23	H	AV
7266.000	43.82	1.06	44.88	74.00	-29.12	H	PK
7266.000	32.34	1.06	33.4	54.00	-20.6	H	AV
4844.000	51.54	-3.90	47.64	74.00	-26.36	V	PK
4824.000	36.45	-3.90	32.55	54.00	-21.45	V	AV
7266.000	44.63	1.06	45.69	74.00	-28.31	V	PK
7266.000	32.85	1.06	33.91	54.00	-20.09	V	AV
Middle Channel-2437MHz							
4874.000	51.57	-3.74	47.83	74.00	-26.17	H	PK
4874.000	35.82	-3.74	32.08	54.00	-21.92	H	AV
7311.000	42.86	1.47	44.33	74.00	-29.67	H	PK
7311.000	32.85	1.47	34.32	54.00	-19.68	H	AV
4874.000	52.63	-3.74	48.89	74.00	-25.11	V	PK
4874.000	38.68	-3.74	34.94	54.00	-19.06	V	AV
7311.000	43.47	1.47	44.94	74.00	-29.06	V	PK
7311.000	34.79	1.47	36.26	54.00	-17.74	V	AV
High Channel-2452MHz							
4904.000	51.37	-3.63	47.74	74.00	-26.26	H	PK
4904.000	37.73	-3.63	34.1	54.00	-19.9	H	AV
7356.000	43.47	1.62	45.09	74.00	-28.91	H	PK
7356.000	30.62	1.62	32.24	54.00	-21.76	H	AV
4904.000	51.35	-3.63	47.72	74.00	-26.28	V	PK
4904.000	40.53	-3.63	36.9	54.00	-17.1	V	AV
7356.000	45.16	1.62	46.78	74.00	-27.22	V	PK
7356.000	33.15	1.62	34.77	54.00	-19.23	V	AV

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v03r04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v03r04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


9.4 Summary of Test Results/Plots

802.11b-Lowest Bandedge
Vertical (Worst case)

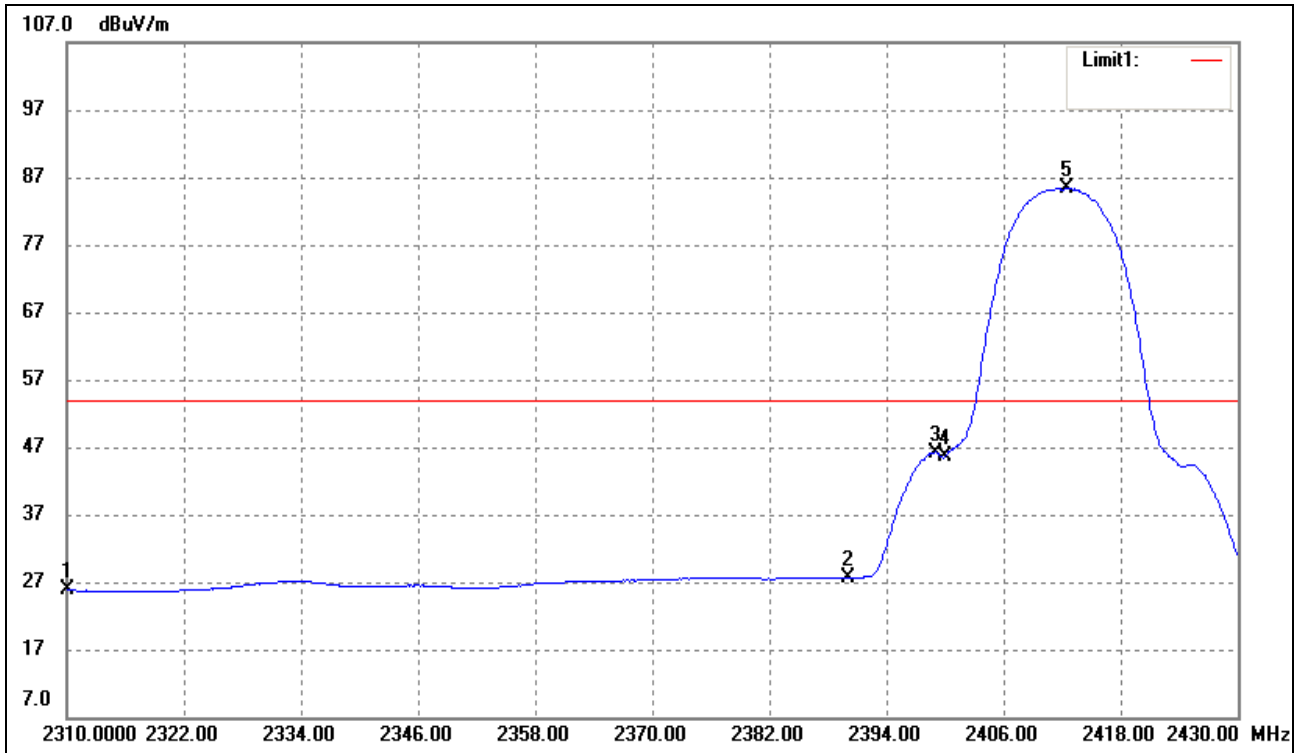

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	29.50	-3.71	25.79	54.00	-28.21	Average Detector
	2310.000	42.81	-3.71	39.10	74.00	-34.90	Peak Detector
2	2390.000	31.27	-3.54	27.73	54.00	-26.27	Average Detector
	2390.000	44.12	-3.54	40.58	74.00	-33.42	Peak Detector
3	2399.040	49.76	-3.51	46.25	54.00	-7.75	Average Detector
4	2400.000	49.20	-3.51	45.69	Delta =39.65dBc		Average Detector
5	2412.480	88.82	-3.48	85.34			Average Detector


802.11b-Highest Bandedge
Vertical (Worst case)

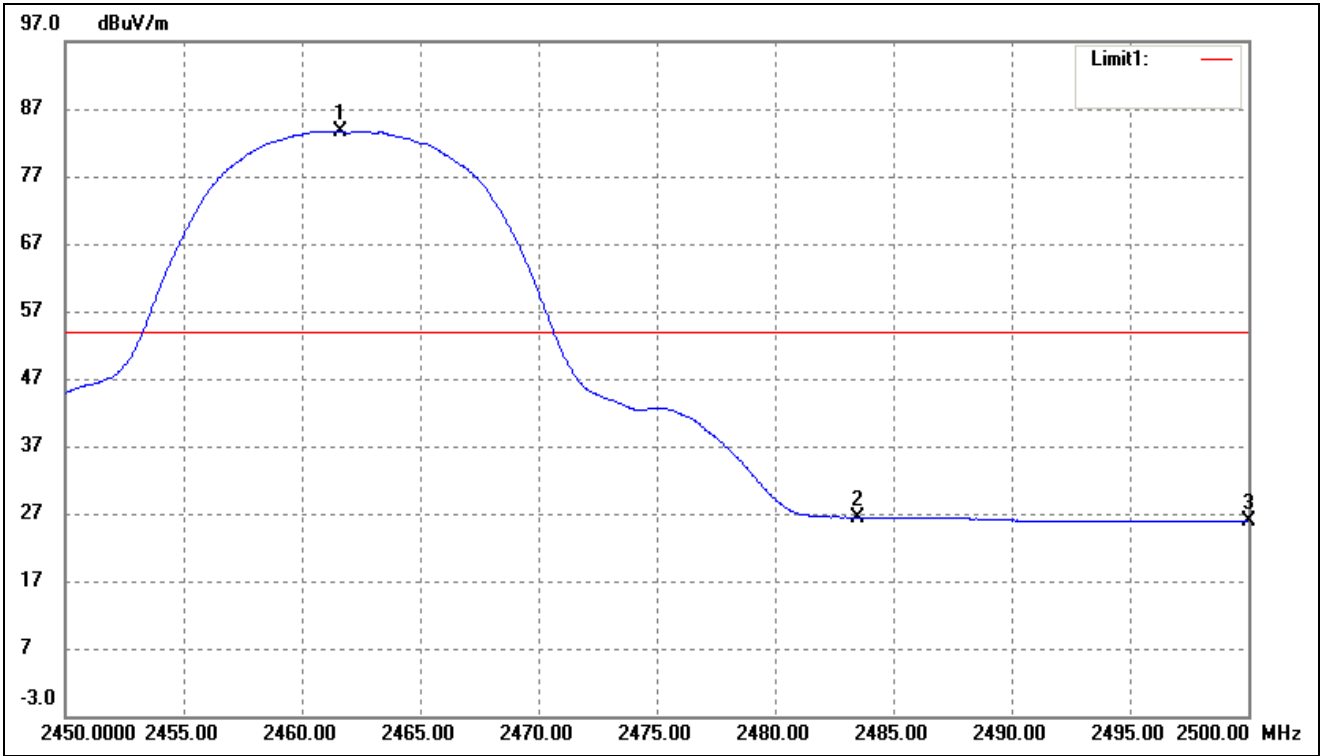

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.600	87.03	-3.37	83.66	/	/	Average Detector
	2463.300	96.02	-3.36	92.66	/	/	Peak Detector
2	2483.500	Delta = 58.99dBc		24.67	54.00	-29.33	Average Detector
	2483.500			33.67	74.00	-40.33	Peak Detector
3	2500.000	29.17	-3.28	25.89	54.00	-28.11	Average Detector
	2500.000	41.43	-3.28	38.15	74.00	-35.85	Peak Detector


802.11g-Lowest Bandedge

Vertical (Worst case)

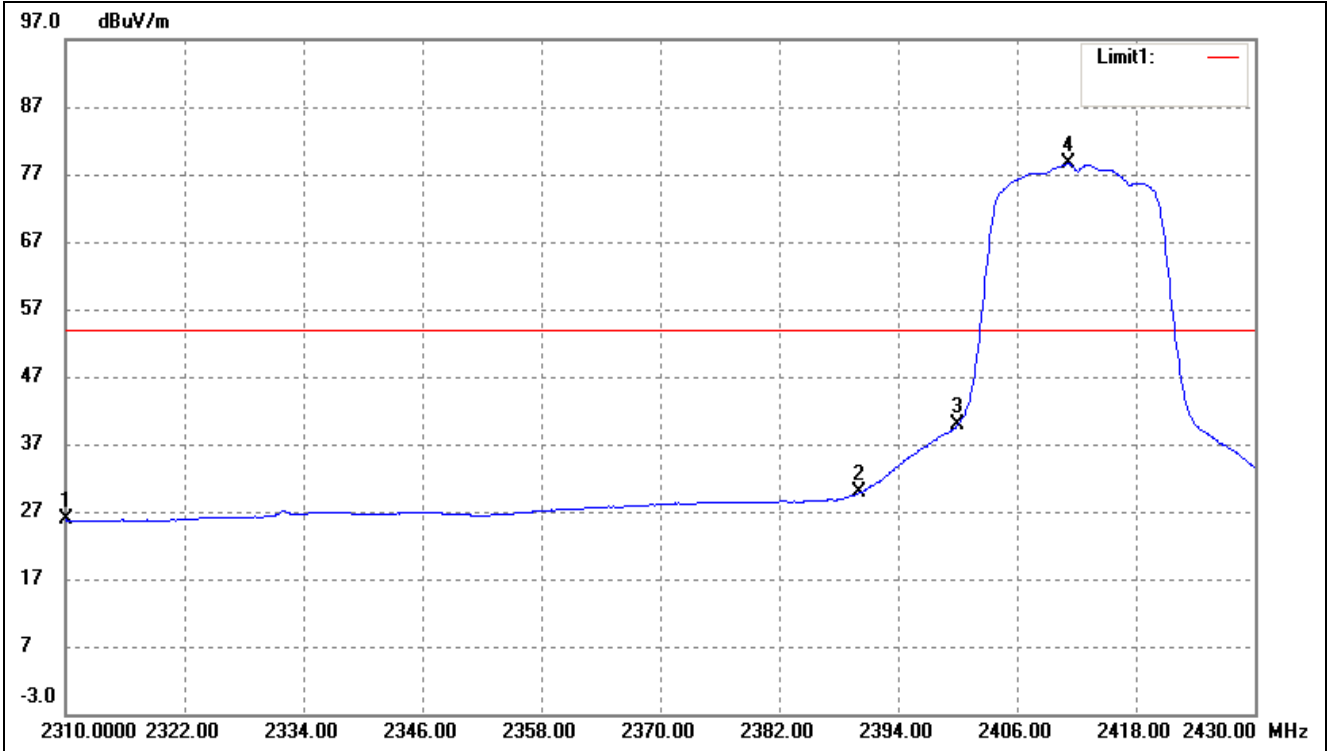

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	29.51	-3.71	25.80	54.00	-28.20	Average Detector
	2310.000	41.73	-3.71	38.02	74.00	-35.98	Peak Detector
2	2390.000	33.32	-3.54	29.78	54.00	-24.22	Average Detector
	2390.000	47.51	-3.54	43.97	74.00	-30.03	Peak Detector
3	2400.000	43.36	-3.51	39.85	Delta =38.69dBc		Average Detector
4	2411.160	82.02	-3.48	78.54			Average Detector


802.11g-Highest Bandedge
Vertical (Worst case)

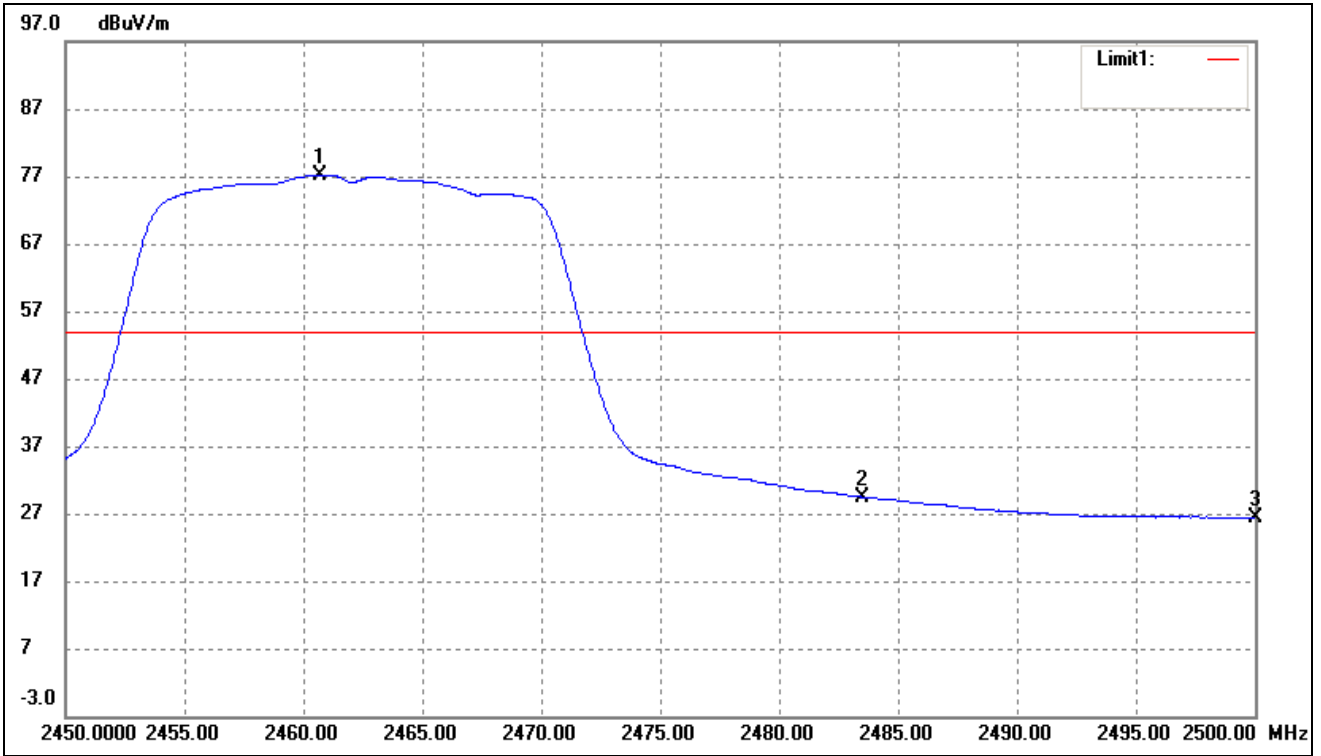

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.700	80.60	-3.37	77.23	/	/	Average Detector
	2463.450	91.85	-3.36	88.49	/	/	Peak Detector
2	2483.500	Delta = 46.90dBc		30.33	54.00	-23.67	Average Detector
	2483.500			41.59	74.00	-32.41	Peak Detector
3	2500.000	29.60	-3.28	26.32	54.00	-27.68	Average Detector
	2500.000	42.55	-3.28	39.27	74.00	-34.73	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

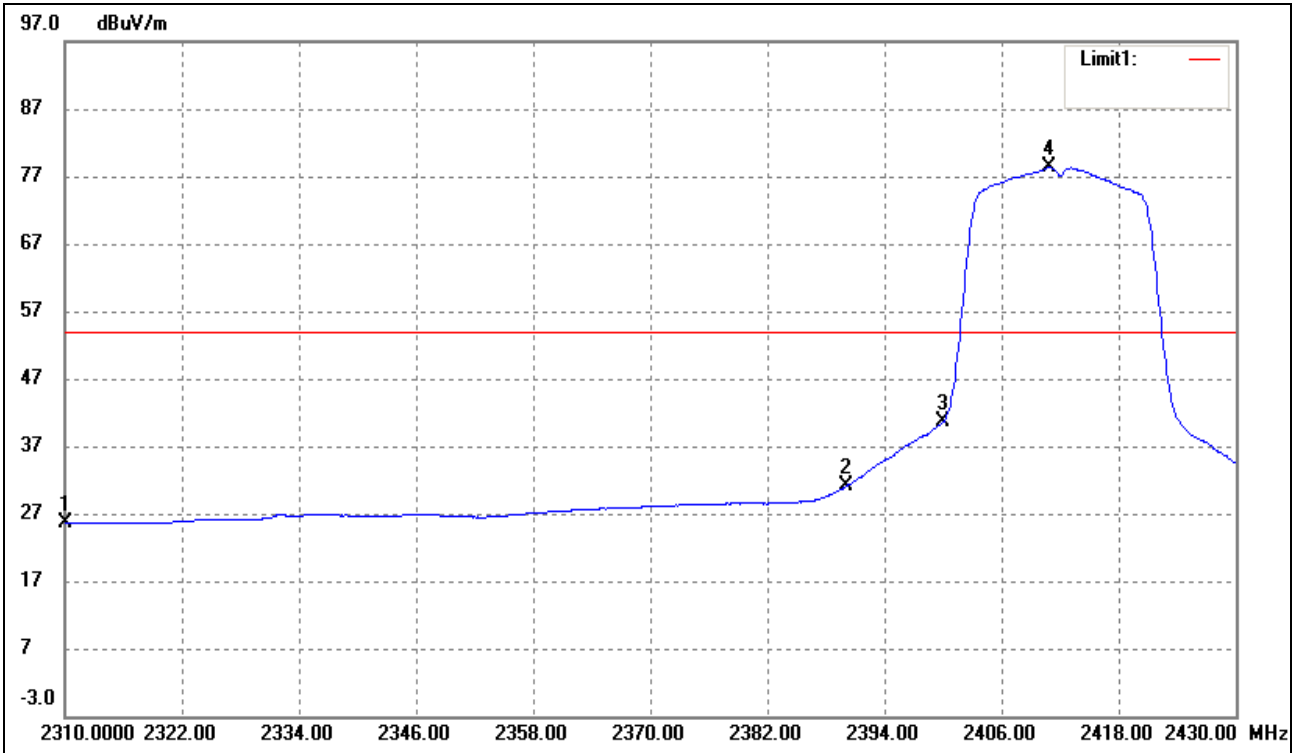

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	29.43	-3.71	25.72	54.00	-28.28	Average Detector
	2310.000	42.34	-3.71	38.63	74.00	-35.37	Peak Detector
2	2390.000	34.55	-3.54	31.01	54.00	-22.99	Average Detector
	2390.000	51.10	-3.54	47.56	74.00	-26.44	Peak Detector
3	2400.000	44.09	-3.51	40.58	Delta =37.75dBc		Average Detector
4	2410.920	81.81	-3.48	78.33			Average Detector

802.11n-HT20-Highest Bandedge


Vertical (Worst case)

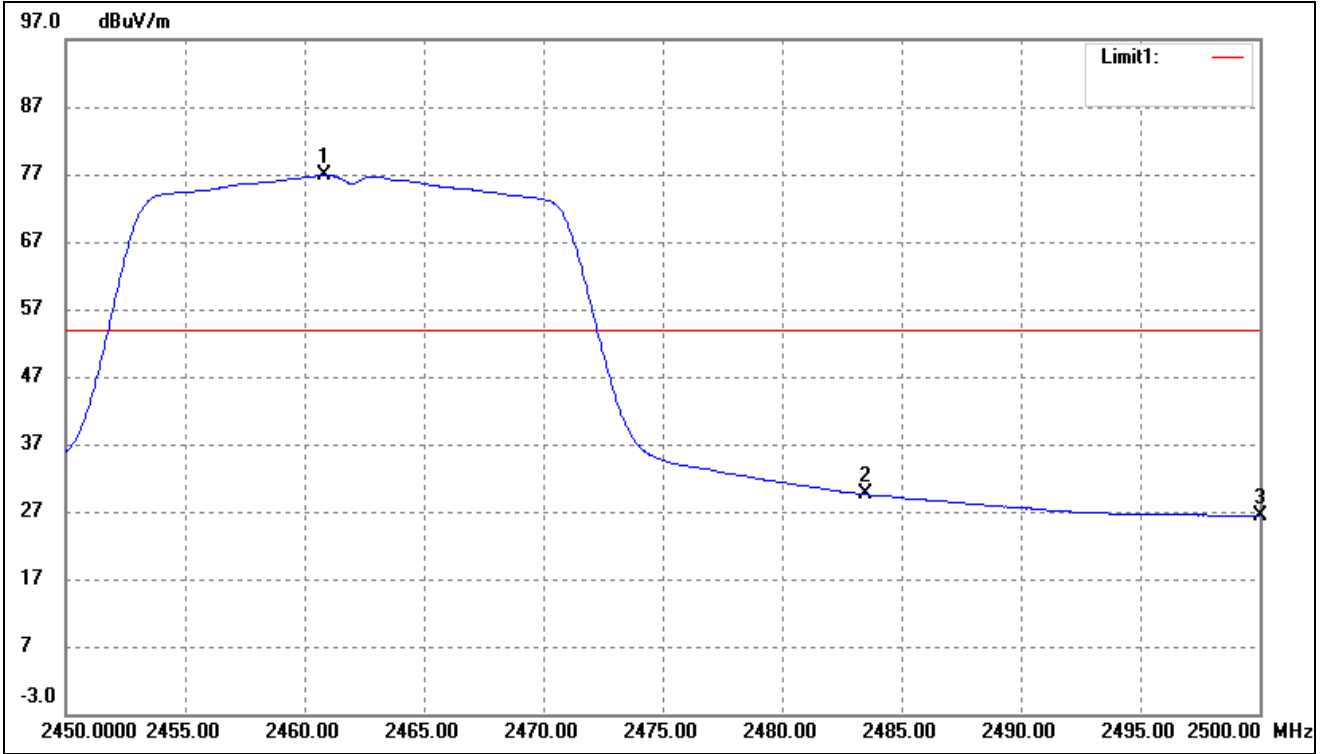

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.850	80.29	-3.37	76.92	/	/	Average Detector
	2461.400	91.78	-3.37	88.41	/	/	Peak Detector
2	2483.500	Delta =48.25dBc		28.67	54.00	-25.33	Average Detector
	2483.500			40.16	74.00	-33.84	Peak Detector
3	2500.000	29.63	-3.28	26.35	54.00	-27.65	Average Detector
	2500.000	41.59	-3.28	38.31	74.00	-35.69	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

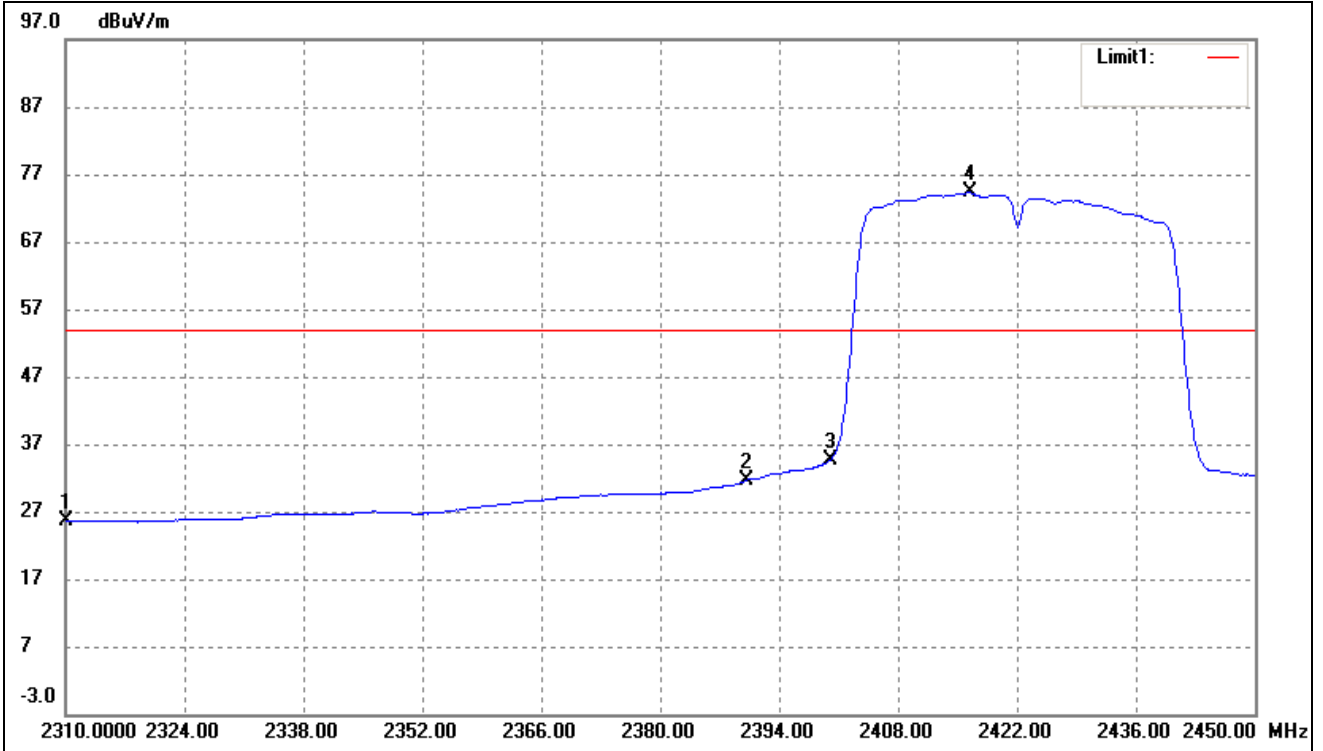

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	29.35	-3.71	25.64	54.00	-28.36	Average Detector
	2310.000	41.55	-3.71	37.84	74.00	-36.16	Peak Detector
2	2390.000	35.14	-3.54	31.60	54.00	-22.40	Average Detector
	2390.000	48.65	-3.54	45.11	74.00	-28.89	Peak Detector
3	2400.000	38.12	-3.51	34.61	Delta =39.70dBc		Average Detector
4	2416.400	77.78	-3.47	74.31		Average Detector	

802.11n-HT40-Highest Bandedge

Vertical (Worst case)

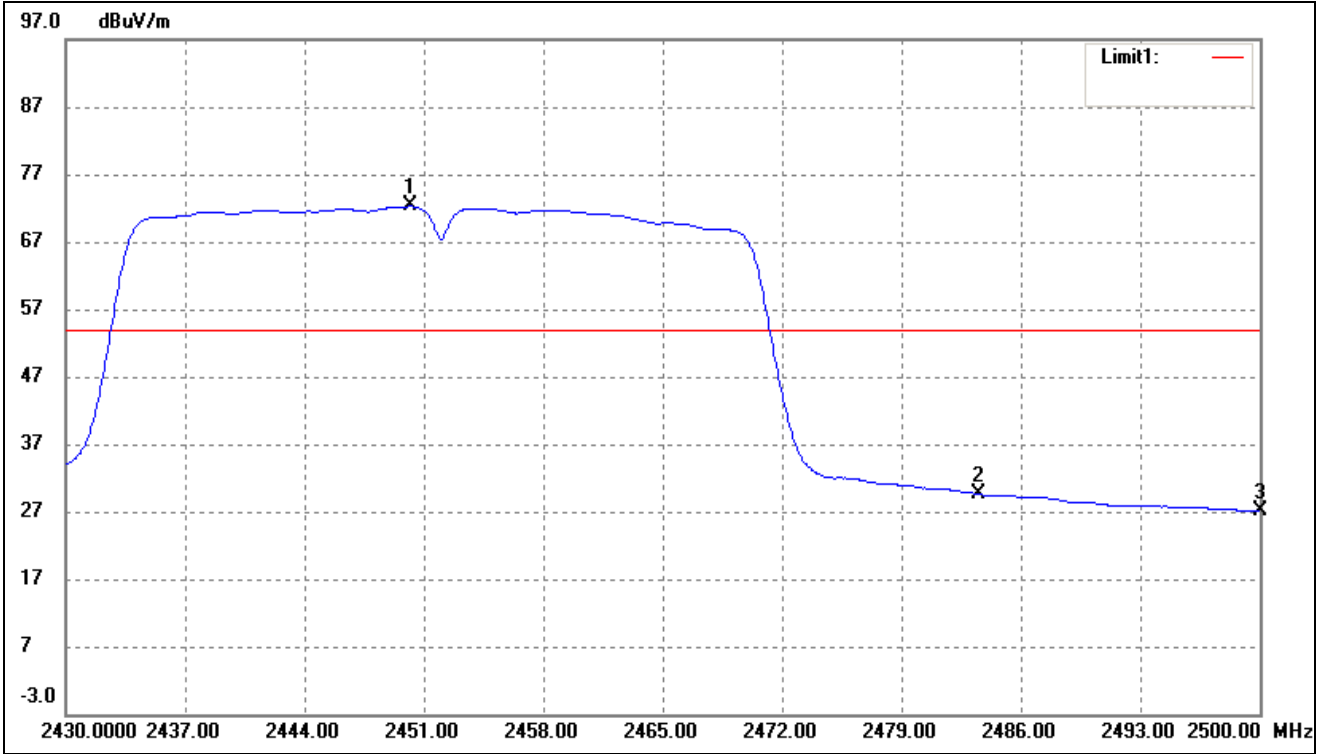

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.230	75.67	-3.40	72.27	/	/	Average Detector
	2459.330	86.70	-3.38	83.32	/	/	Peak Detector
2	2483.500	Delta = 44.36dBc		27.91	54.00	-26.09	Average Detector
	2483.500			38.96	74.00	-35.04	Peak Detector
3	2500.000	30.39	-3.28	27.11	54.00	-26.89	Average Detector
	2500.000	43.57	-3.28	40.29	74.00	-33.71	Peak Detector

10. Conducted Emissions

10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.3 Basic Test Setup Block Diagram

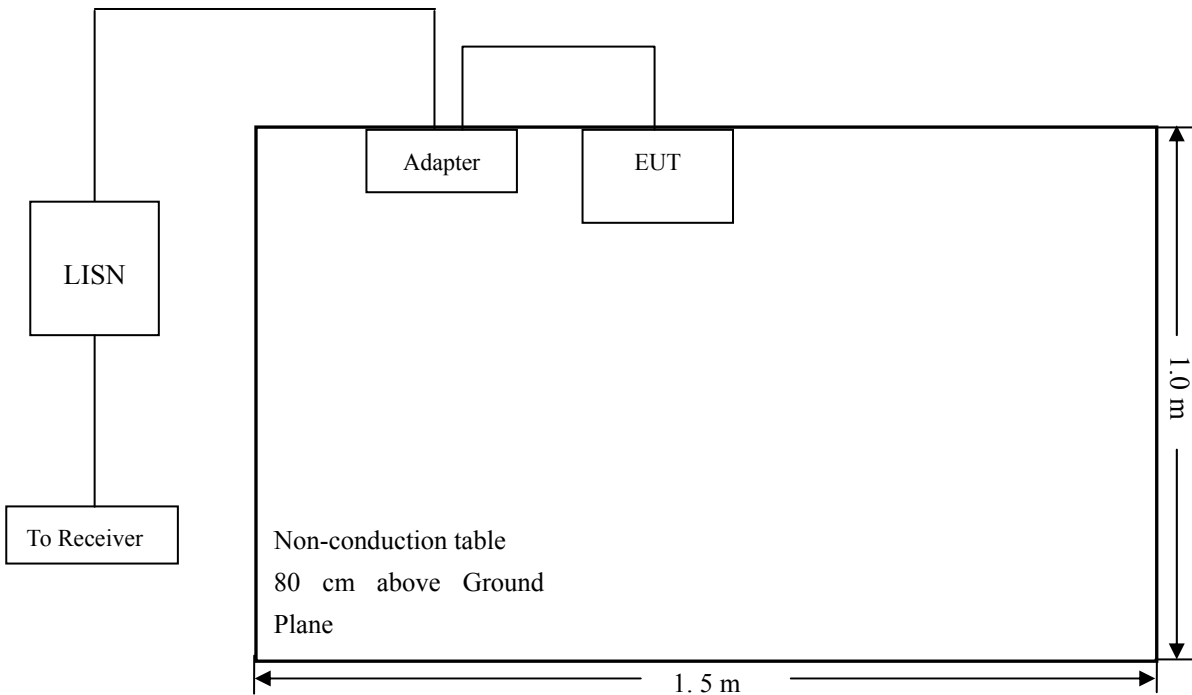

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

-2.39 dB at 3.8380 MHz in the **Line** mode, **Average** detector, **0.15-30MHz**

10.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: High-Power Wireless AC600 Outdoor Access Point / Repeater

Tested Model: 525824

Operating Condition: Transmitting(Wi-Fi)


Comment: AC120V/60Hz; Adapter DC 24V

Test Specification: Neutral

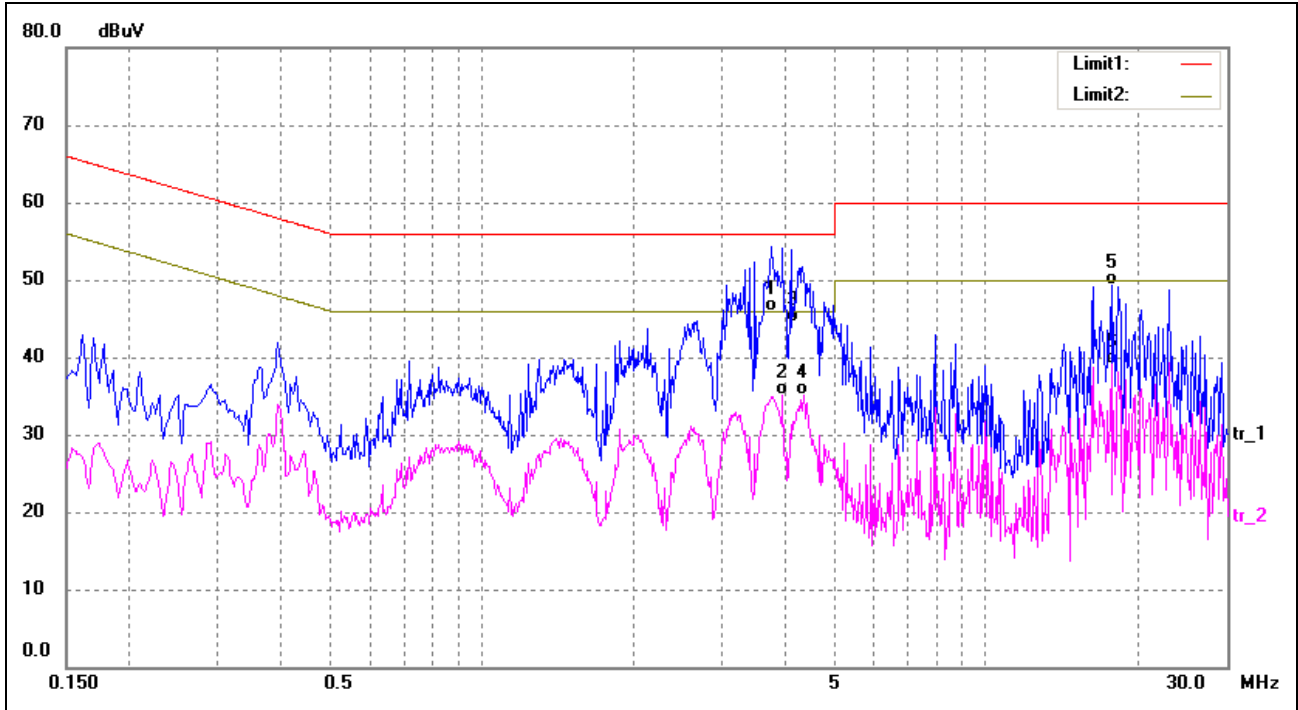

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	3.7500	32.88	13.00	45.88	56.00	-10.12	QP
2	3.9500	22.12	13.00	35.12	46.00	-10.88	AVG
3	4.1060	31.60	13.00	44.60	56.00	-11.40	QP
4	4.3540	22.14	13.00	35.14	46.00	-10.86	AVG
5	17.6940	37.67	11.54	49.21	60.00	-10.79	QP
6	17.6940	27.58	11.54	39.12	50.00	-10.88	AVG

Test Specification: Live

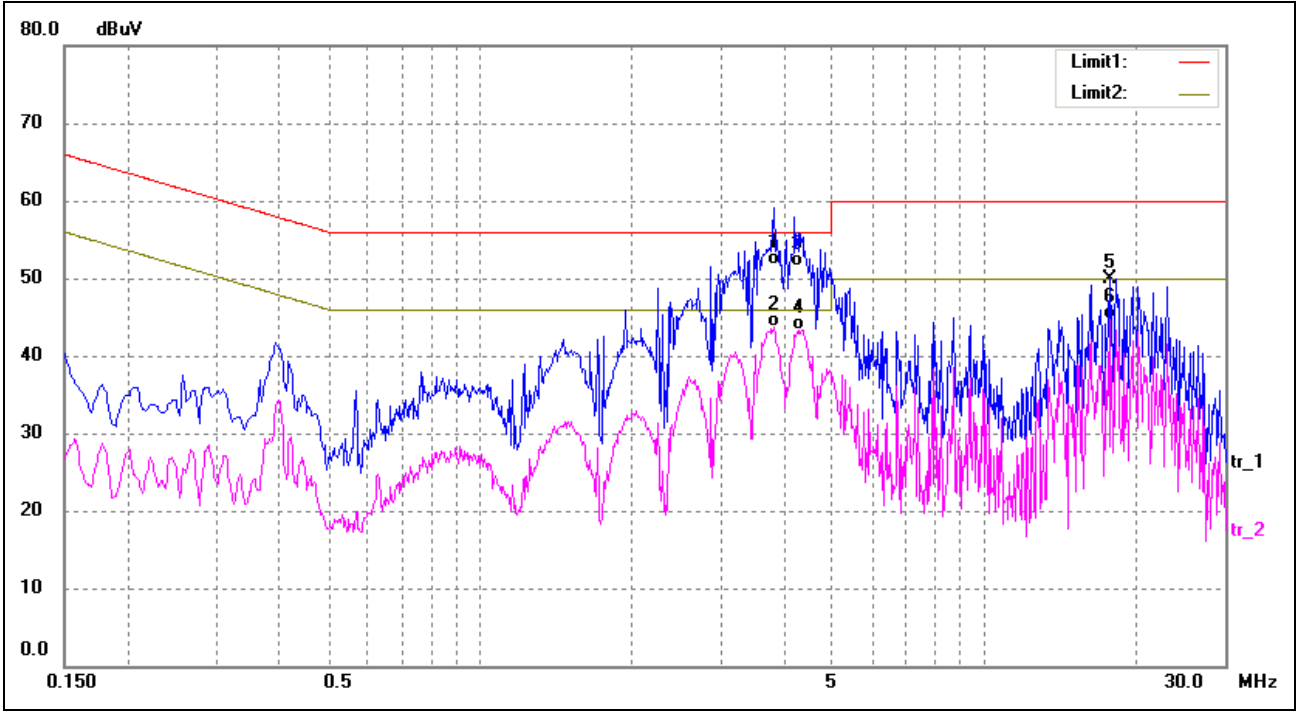

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	3.8380	38.66	13.00	51.66	56.00	-4.34	QP
2*	3.8380	30.61	13.00	43.61	46.00	-2.39	AVG
3	4.2220	38.53	13.00	51.53	56.00	-4.47	QP
4	4.2860	30.33	13.00	43.33	46.00	-2.67	AVG
5	17.6940	38.46	11.54	50.00	60.00	-10.00	QP
6	17.6940	33.07	11.54	44.61	50.00	-5.39	AVG

***** END OF REPORT *****