

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Intracom Asia Co., Ltd.

300N Access Point

Model No.: 525404-300N

FCC ID: 2ADQY525404-300N

Prepared for : Intracom Asia Co., Ltd.
4F., No.77, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City
221, Taiwan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F19013
Date of Test : Jan.11~21,2019
Date of Report : Apr.24,2019

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Device (EUT)	6
2.2. Tested Supporting System Details	7
2.3. Block diagram of connection between the EUT and simulators	7
2.4. Test Information	7
2.5. Test Facility	8
2.6. Measurement Uncertainty (95% confidence levels, k=2)	8
3. POWER LINE CONDUCTED EMISSION TEST	9
3.1. Test Equipments	9
3.2. Block Diagram of Test Setup	9
3.3. Power Line Conducted Emission Test Limits	9
3.4. Configuration of EUT on Test	9
3.5. Operating Condition of EUT	10
3.6. Test Procedure	10
3.7. Power Line Conducted Emission Test Results	10
4. RADIATED EMISSION TEST.....	12
4.1. Test Equipment	12
4.2. Block Diagram of Test Setup	13
4.3. Radiated Emission Limit	14
4.4. EUT Configuration on Test	14
4.5. Operating Condition of EUT	15
4.6. Test Procedure	15
4.7. Radiated Emission Test Results	15
5. CONDUCTED SPURIOUS EMISSIONS	36
5.1. Test Equipment	36
5.2. Limit	36
5.3. Test Procedure	36
5.4. Test result	36
6. BAND EDGE COMPLIANCE TEST.....	53
6.1. Test Equipment	53
6.2. Limit	53
6.3. Test Procedure	53
6.4. Test Results	53
7. 6dB Bandwidth Test	62
7.1. Test Equipment	62
7.2. Limit	62
7.3. Test Procedure	62
7.4. Test Results	62
8. OUTPUT POWER TEST	67
8.1. Test Equipment	67
8.2. Limit (FCC Part 15C 15.247 b(3))	67
8.3. Test Procedure	67
8.4. Test Results	68
9. POWER SPECTRAL DENSITY TEST.....	73
9.1. Test Equipment	73

FCC ID: 2AD0Y525404-300N

9.2. Limit	73
9.3. Test Procedure	73
9.4. Test Results	74
10. ANTENNA REQUIREMENT	79
10.1. Standard Applicable	79
10.2. Antenna Connected Construction	79
11. DEVIATION TO TEST SPECIFICATIONS	80
12. PHOTOGRAPH OF TEST	81
12.1. Photos of Power Line Conducted Emission Test	81
12.2. Photos of Radiated Emission Test	82
13. PHOTOS OF EUT	83



FCC ID: 2ADQY525404-300N

AUDIX Technology (Shenzhen) Co., Ltd.

TEST REPORT CERTIFICATION

Applicant : Intracom Asia Co., Ltd.
Manufacturer : Intracom Asia Co., Ltd.
Product : 300N Access Point
FCC ID : 2ADQY525404-300N
(A) Model No. : 525404-300N
(B) Power Supply : DC 5V
(C) Test Voltage : AC 120V/60Hz (Via power adapter)

Tested for comply with:
FCC CFR 47 Part 15 Subpart C

Test procedure used:

ANSI C63.10: 2013

KDB 558074 D01v05

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jan.11~21,2019 Report of date: Apr.24,2019

Prepared by : Brave Zhang Reviewed by : Sunny Lu
Brave Zhang / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION


2.1. Description of Device (EUT)

Product	: 300N Access Point
Model No.	: 525404-300N
FCC ID	: 2ADQY525404-300N
Test Model	: 525404-300N
Radio	: IEEE802.11 b/g/n
Operation Frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11nHT20: 2412MHz—2462MHz IEEE802.11nHT40: 2422MHz—2452MHz
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Assembly Gain	: Dipole Antenna, 5dBi
Applicant	: Intracom Asia Co., Ltd. 4F., No.77, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
Manufacturer	: Intracom Asia Co., Ltd. 4F., No.77, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
Factory	: Intracom Asia Co., Ltd. 4F., No.77, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan
Power Adapter	: Manufacturer: AMIGO, M/N: AMS66-0501000FU AC Input: 100-240V~50/60Hz, 0.2A DC Output: DC 5V, 1.0A DC Cable: Unshielded, Undetachable, 1.5m
Date of Test	: Jan.11~21,2019
Date of Receipt	: Jan.07,2019
Sample Type	: Prototype production

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C
Power Adapter: Manufacturer: LITEON, Model: PA-1900-32 Input: 100-240V~, 1.5A, 50/60Hz Output: 19V----4.74A Power Cord: Unshielded, Detachable, 1.8m					

2.3. Block diagram of connection between the EUT and simulators

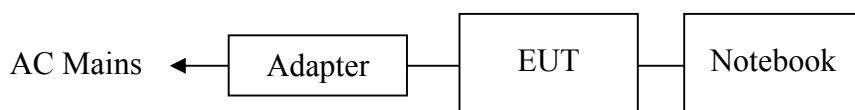

(EUT: 300N Access Point)

2.4. Test Information

A special test software was used to control EUT work in Continuous TX mode(The duty cycle of the test signal is 100%), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11n HT20	MCS0	Low :CH1	2412
	MCS0	Middle: CH6	2437
	MCS0	High: CH11	2462
IEEE 802.11n HT40	MCS0	Low :CH3	2422
	MCS0	Middle: CH6	2437
	MCS0	High: CH9	2452

Note: 1. According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note: 2. This device has been tested and comply with KDB662911,for 11b/g mode ,test radiated emission and band edge use ant 0 which has the worse case emission and test with two antenna transmit simultaneously for 11n Mode

2.5. Test Facility

Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.
: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

Certificated by Industry Canada
: Registration Number: IC 5183A-1
Valid Date: May.07, 2020

Certificated by DAkkS, Germany
: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

Accredited by NVLAP, USA
: NVLAP Code: 200372-0
Valid Date: Mar.31, 2020

Certificated by FCC USA.
: Designation No.: CN5022
Valid Date: Mar.31, 2020

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB (150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	4.0dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	4.4dB(200M~1GHz, Polarization: H)
	4.4dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	5.0dB (1~6GHz, Distance: 3m)
	5.4dB (6~18GHz, Distance: 3m)
	5.4dB (Above 18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.23,18	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Dec.01,18	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.23,18	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,18	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,18	1 Year
7.	RF Cable	Fujikura	RG55/U	No.2	Apr.23.18	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.23,18	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

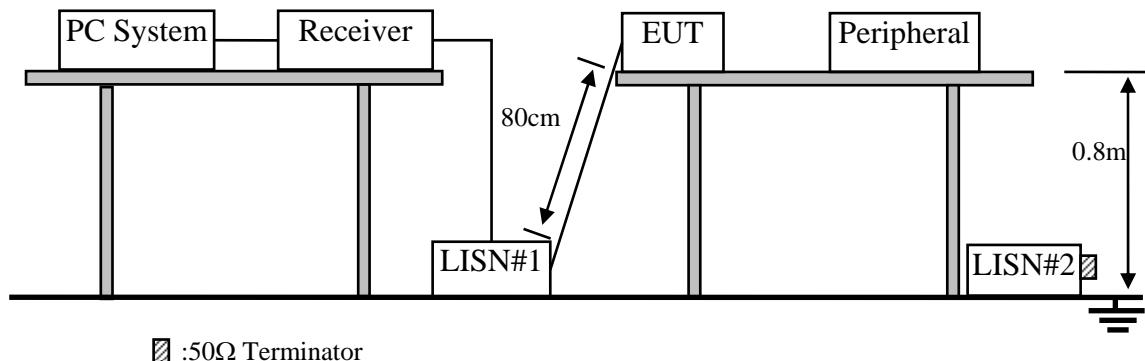

■ :50Ω Terminator

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. 300N Access Point (EUT)

Model No. : 525404-300N

Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. PC run test software to control EUT work in Tx (WiFi 2.4GHz) mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

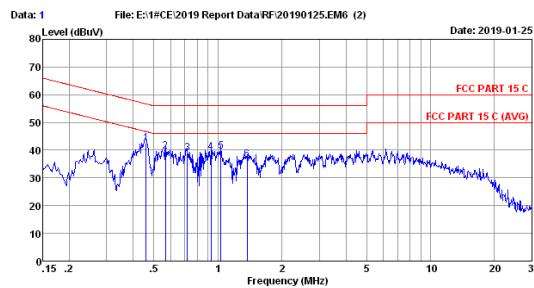


Site no :1# CE
Dis./Lissn :2018 ENV216-L
Limit :FCC PART 15 C
Env./Ins. :22.0°C/58°
EUT :300N Access Point M/N:S25404-300N
Power Rating :AC 120V/60Hz
Test Mode :WIFI 2.4G

Data No :1

No	LISN		Cable		Emission		Margin	Remark
	Freq (MHz)	Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)		
1	0.455	9.45	0.11	32.59	42.56	56.71	14.15	QP
2	0.567	9.40	0.16	30.12	39.00	56.00	16.92	QP
3	0.720	9.40	0.15	29.30	36.65	56.00	17.15	QP
4	0.928	9.40	0.14	29.80	39.34	56.00	16.66	QP
5	1.032	9.41	0.13	30.04	39.58	56.00	16.42	QP
6	1.374	9.44	0.13	26.94	36.51	56.00	19.49	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

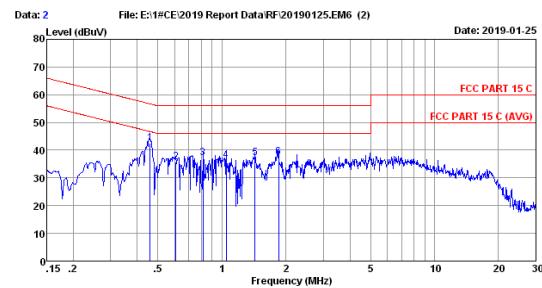

Site no :1# CE
Dis./Lissn :2018 ENV216-N
Limit :FCC PART 15 C
Env./Ins. :22.0°C/58°
EUT :300N Access Point M/N:S25404-300N
Power Rating :AC 120V/60Hz
Test Mode :WIFI 2.4G

Data No :2

No	LISN		Cable		Emission		Margin	Remark
	Freq (MHz)	Factor (dB)	Loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)		
1	0.455	9.40	0.11	32.87	42.44	56.71	14.27	QP
2	0.567	9.40	0.16	30.12	39.62	56.00	16.22	QP
3	0.613	9.40	0.15	27.61	37.16	56.00	18.84	QP
4	1.049	9.40	0.13	26.64	36.17	56.00	19.83	QP
5	1.433	9.40	0.13	27.79	37.32	56.00	18.68	QP
6	1.849	9.40	0.13	27.90	37.43	56.00	18.57	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun.19,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.23,18	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.23,18	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.23,18	1 Year
5.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	710	Aug.22,18	1 Year
6.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Dec.01,18	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.23,18	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	May.17,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.23,18	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.30,18	1 Year
4.	Horn Antenna	ETS	3116	00062639	Sep.13,2018	1 Year
5.	Amplifier	Agilent	83017A	MY53270084	Oct.14,18	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX106	505239/6	Apr.23,18	1 Year
7.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

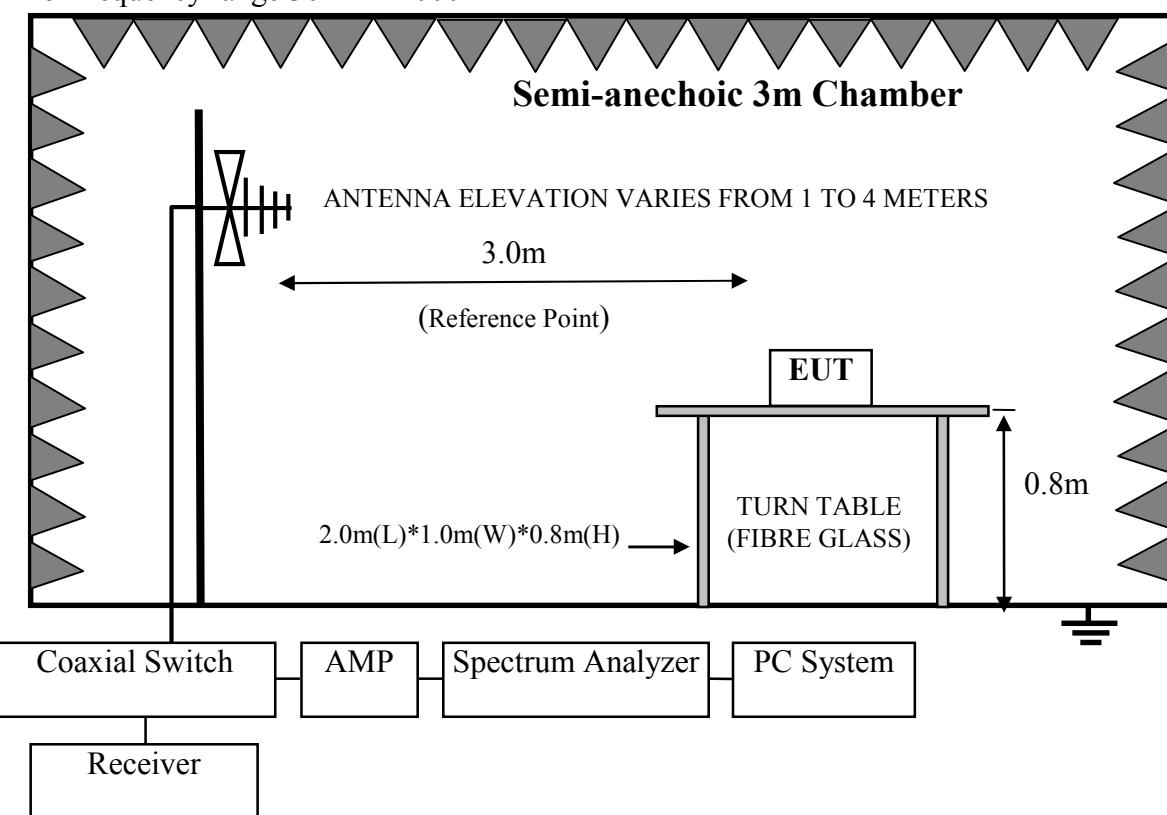

For frequency range 1GHz-25GHz

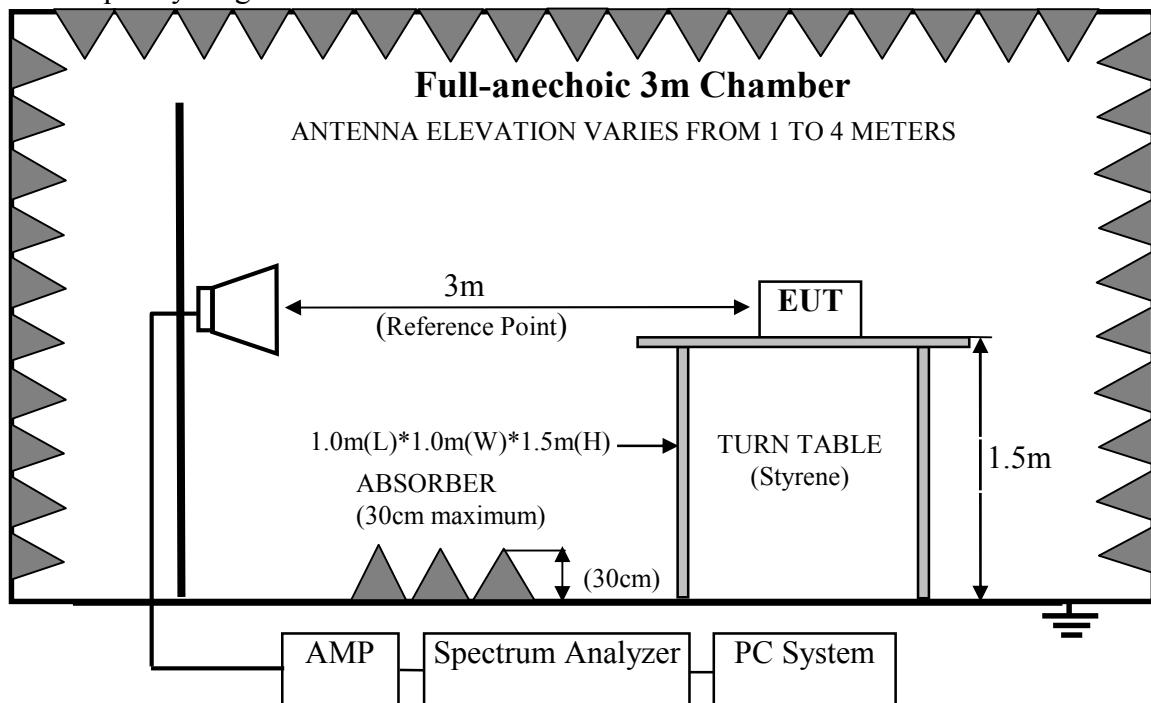

4.3.Radiated Emission Limit

4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark : (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4.1. 300N Access Point (EUT)

Model No. : 525404-300N

Serial No. : N/A

4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

4.5.Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx(WiFi 2.4GHz) mode

4.6.Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horm antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.


4.7.Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

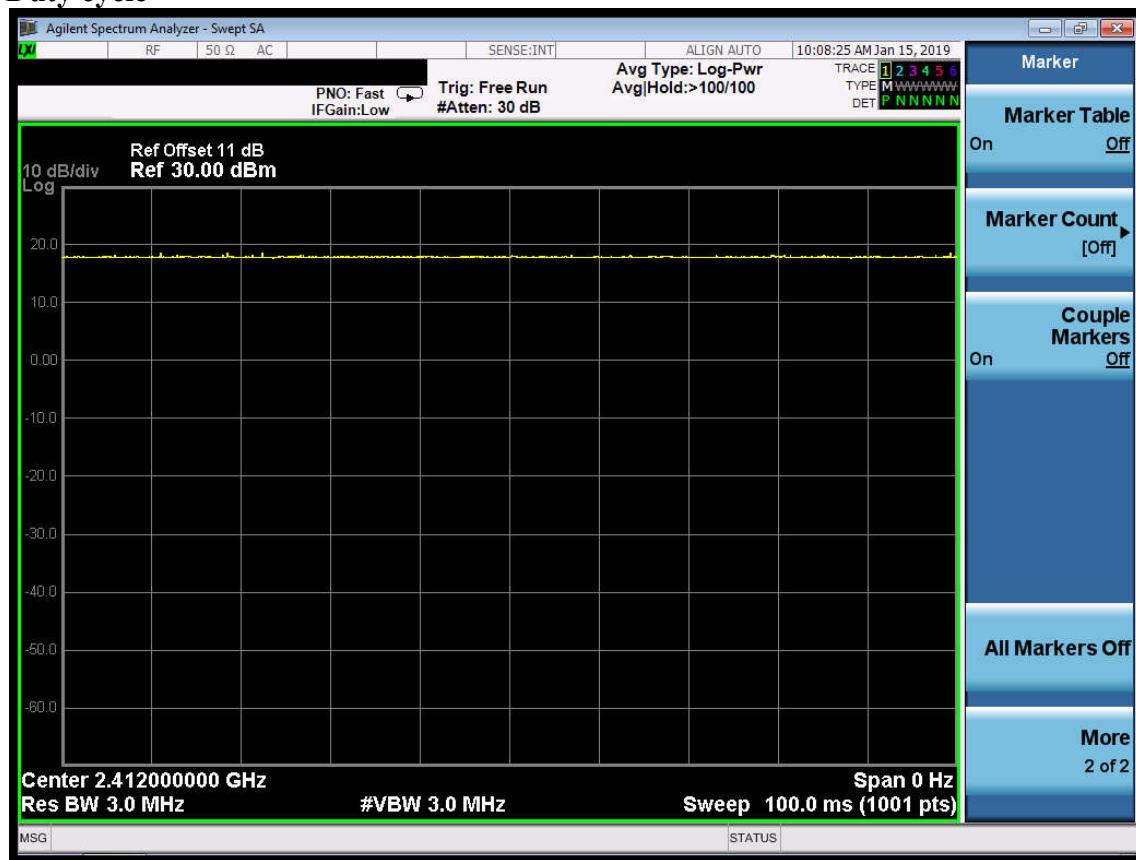Duty cycle

Note: The duty cycle of the test signal is 100%.


Frequency: 30MHz~1GHz

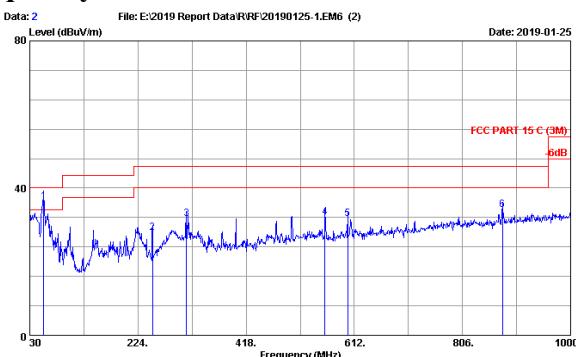

Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2018 VULB9168-710 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 22.5°C/55°C Engineer : Cote
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : WIFI 2.4G TX Mode

No.	Freq. (MHz)	Ant.		Cable		Emission		Margin (dB)	Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	55.220	20.10	0.70	15.42	36.22	40.00	3.78	QP	
2	250.190	18.20	1.57	8.16	27.93	46.00	18.07	QP	
3	311.300	20.02	1.78	9.88	31.68	46.00	14.32	QP	
4	559.620	25.00	2.49	4.62	32.11	46.00	13.89	QP	
5	600.360	25.90	2.61	3.24	31.75	46.00	14.25	QP	
6	877.780	28.80	3.26	1.94	34.02	46.00	11.98	QP	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

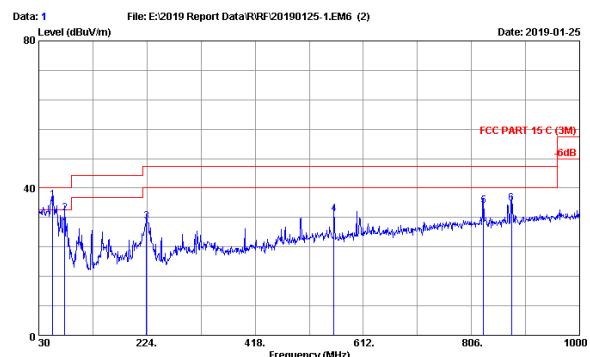


Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2018 VULB9168-710 Ant. pol. : VERTICAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 22.5°C/55°C Engineer : Cote
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : WIFI 2.4G TX Mode

No.	Freq. (MHz)	Ant.		Cable		Emission		Margin (dB)	Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	55.220	20.10	0.70	15.89	36.69	40.00	3.31	QP	
2	76.560	15.90	0.85	16.44	33.19	40.00	6.81	QP	
3	223.030	16.96	1.47	12.63	31.06	46.00	14.94	QP	
4	559.620	25.00	2.49	5.59	33.08	46.00	12.92	QP	
5	827.340	26.46	3.17	3.57	35.20	46.00	10.80	QP	
6	877.780	28.80	3.28	3.80	35.88	46.00	10.12	QP	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

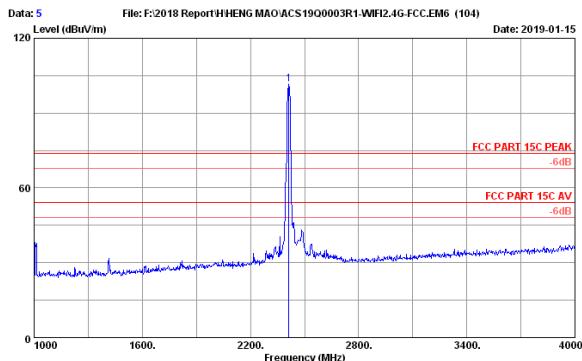

Site no. : 3m Chamber Data no. : 5
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode

No.	Ant.	Cable	Amp	Emission	Margin	Remark								
No.	Freq.	Factor	Loss	Reading	factor	Level	Limits	(dB _{V/m})	(dB _m)	(dB _{VW})	(dB _{V/m})	(dB _{V/m})	(dB)	
1	2412.00	28.08	10.31	99.01	35.70	101.75	74.00	-27.75	Peak					


Remarks:
1. Emission Level= Antenna Factor + Cable Loss + Reading Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

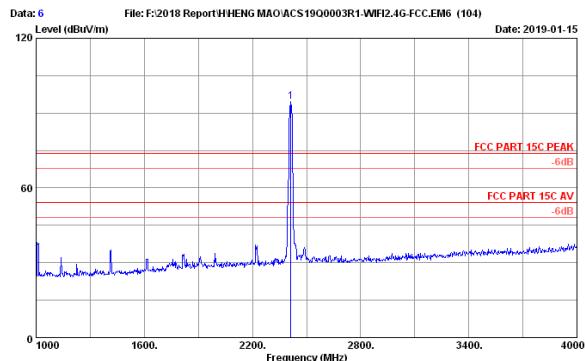


Site no. : 3m Chamber Data no. : 6
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode

No.	Ant.	Cable	Amp	Emission	Margin	Remark								
No.	Freq.	Factor	Loss	Reading	factor	Level	Limits	(dB _{V/m})	(dB _m)	(dB _{VW})	(dB _{V/m})	(dB _{V/m})	(dB)	
1	2412.00	28.08	10.31	91.78	35.70	94.47	74.00	-20.47	Peak					

Remarks:
1. Emission Level= Antenna Factor + Cable Loss + Reading Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

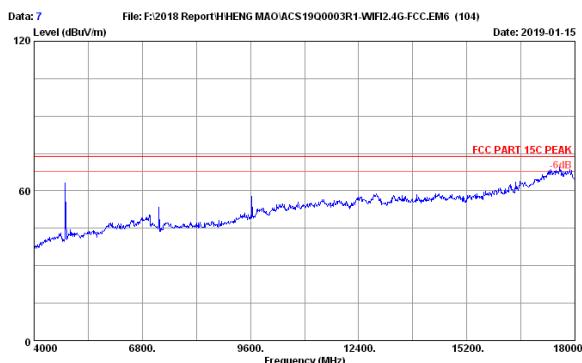

Site no. : 3m Chamber Data no. : 7
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode

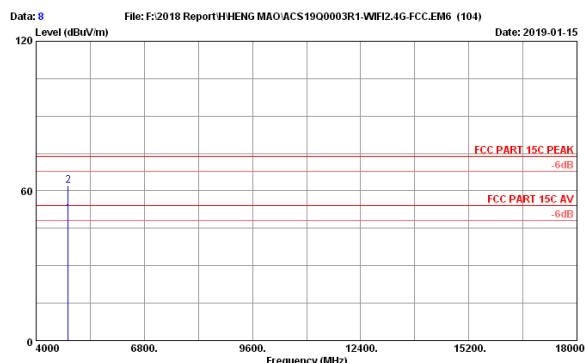


Site no. : 3m Chamber Data no. : 8
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode


No.	Ant.	Cable	Amp	Emission	Margin	Remark								
No.	Freq.	Factor	Loss	Reading	factor	Level	Limits	(dB _{V/m})	(dB _m)	(dB _{VW})	(dB _{V/m})	(dB _{V/m})	(dB)	
1	4824.00	33.68	14.56	37.20	34.74	50.70	54.00	3.30	Average					
2	4824.00	33.68	14.56	48.82	34.74	62.32	74.00	11.68	Peak					

Remarks:
1. Emission Level= Antenna Factor + Cable Loss + Reading Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

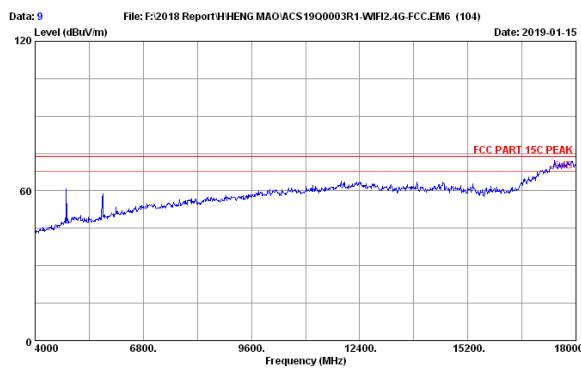


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode

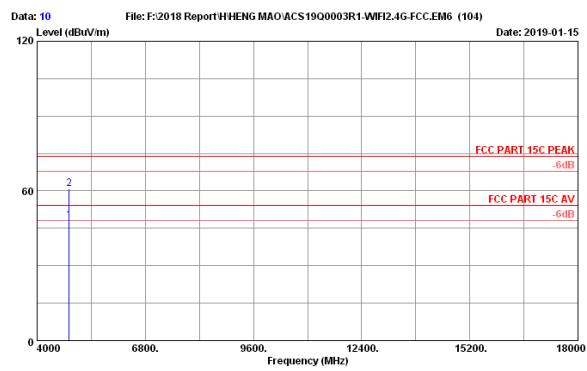

Site no. : 3m Chamber Data no. : 10
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor	Cable Loss (dB/m)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	33.68	14.56	34.70	34.74	48.20	54.00	5.80	Average
2	4824.00	33.68	14.56	47.30	34.74	60.88	74.00	13.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

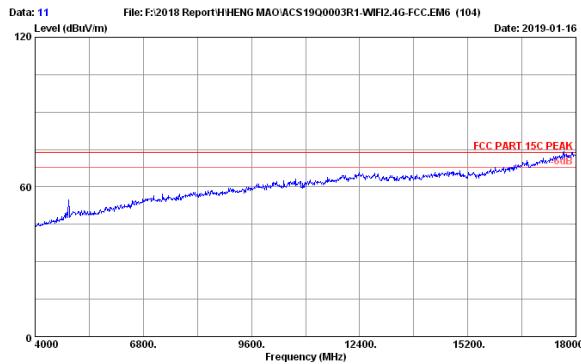


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2437MHz Tx Mode




Site no. : 3m Chamber Data no. : 12
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor	Cable Loss (dB/m)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	38.39	34.70	52.21	54.00	1.79	Average
2	4874.00	33.89	14.63	51.05	34.70	64.91	74.00	9.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

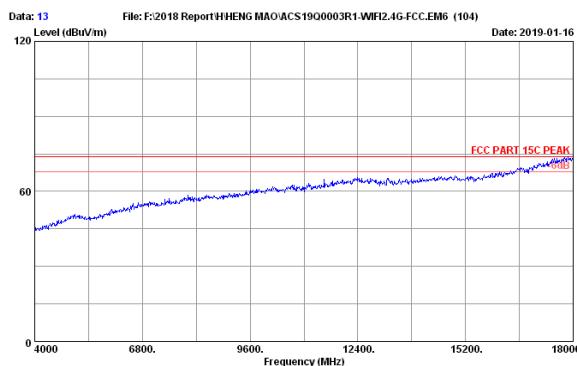


Site no. : 3m Chamber Data no. : 13
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1lb 2437MHz Tx Mode

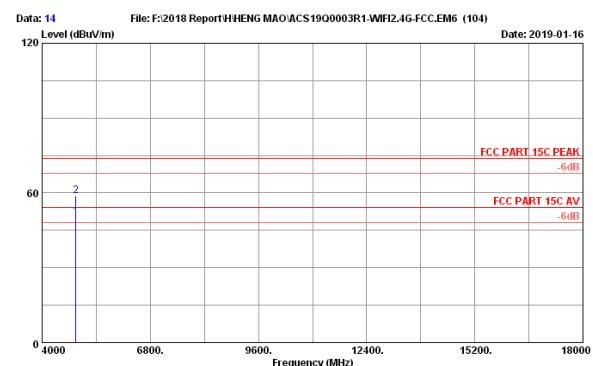

Site no. : 3m Chamber Data no. : 14
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1lb 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. (dB/m)	Cable (dB)	Reading (dBmW)	Amp (dB)	Emission (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	36.51	34.70	50.33	54.00	3.67	Average
2	4874.00	33.89	14.63	44.90	34.70	58.72	74.00	15.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

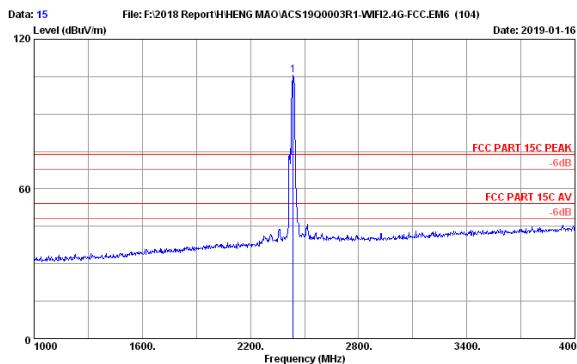

Site no. : 3m Chamber Data no. : 15
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1lb 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. (dB/m)	Cable (dB)	Reading (dBmW)	Amp (dB)	Emission (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	102.63	35.67	105.47	74.00	-31.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

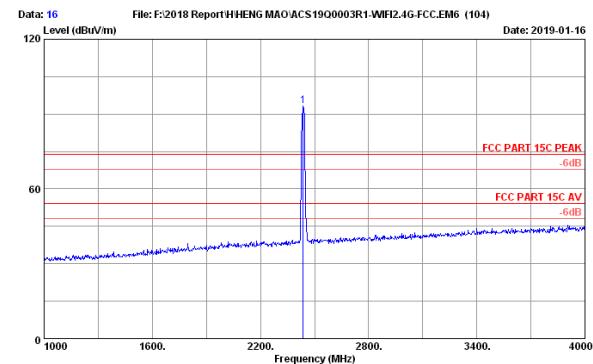


Site no. : 3m Chamber Data no. : 16
Dim. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point M/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1lb 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. (dB/m)	Cable (dB)	Reading (dBmW)	Amp (dB)	Emission (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	90.29	35.67	93.13	74.00	-19.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.


FCC ID: 2ADQY525404-300N

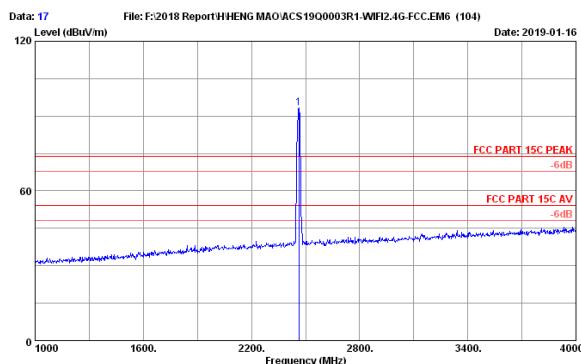

Site no. : 3m Chamber Data no. : 17
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode

No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dBuV)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.00	28.15	10.42	90.25	35.65	93.17	74.00	-19.17	Peak			


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

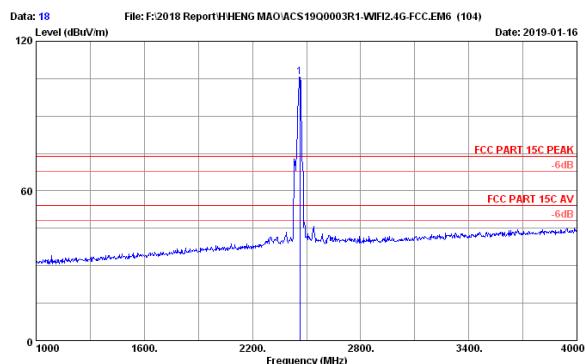

Site no. : 3m Chamber Data no. : 18
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode

No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dBuV)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.00	28.15	10.42	102.66	35.65	105.58	74.00	-31.58	Peak			

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

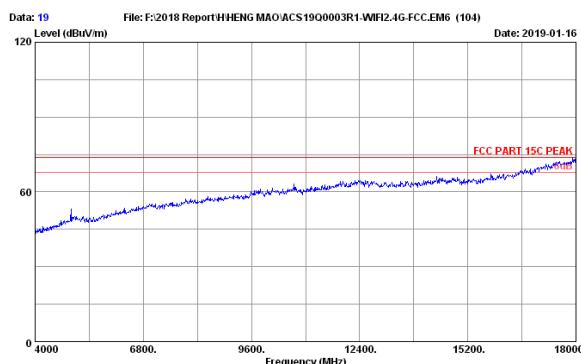

Site no. : 3m Chamber Data no. : 19
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode




Site no. : 3m Chamber Data no. : 20
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode


No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dBuV)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.00	34.11	14.71	32.63	34.66	46.79	54.00	-7.21	Average			
2	4924.00	34.11	14.71	39.09	34.66	53.25	74.00	20.75	Peak			

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

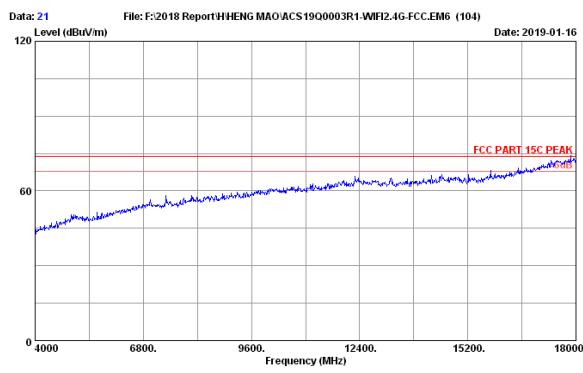


Site no. : 3m Chamber Data no. : 21
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode

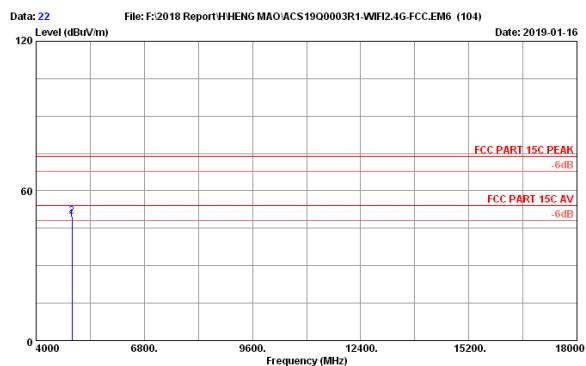

Site no. : 3m Chamber Data no. : 22
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor	Cable Loss (dB/m)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	34.11	14.71	34.24	34.66	48.40	54.00	5.60	Average
2	4924.00	34.11	14.71	35.64	34.66	49.80	74.00	24.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

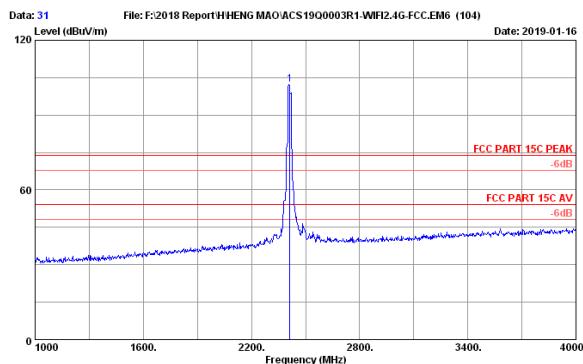

Site no. : 3m Chamber Data no. : 31
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.08	10.31	99.55	35.70	102.24	74.00	-28.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

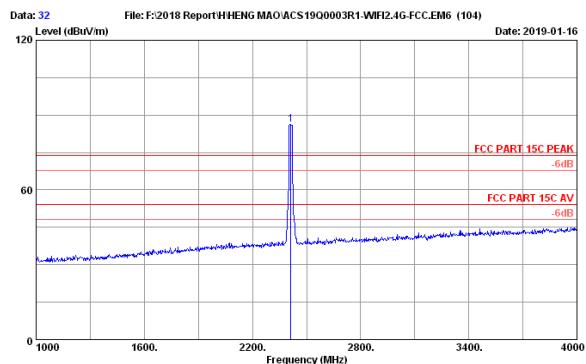


Site no. : 3m Chamber Data no. : 32
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.08	10.31	83.71	35.70	86.40	74.00	-12.40	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

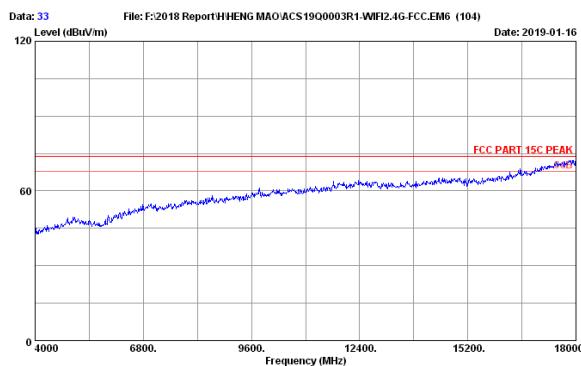

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	33.68	14.56	29.48	34.74	42.98	54.00	11.02	Average
2	4824.00	33.68	14.56	35.99	34.74	49.49	74.00	24.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

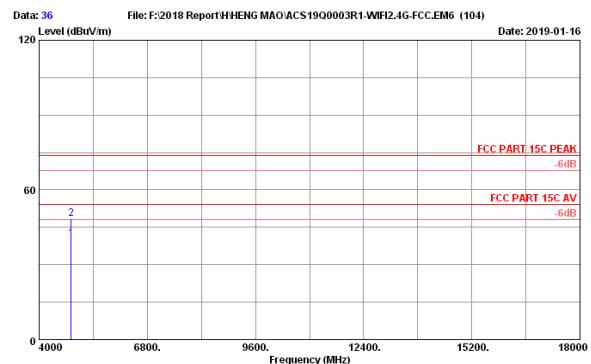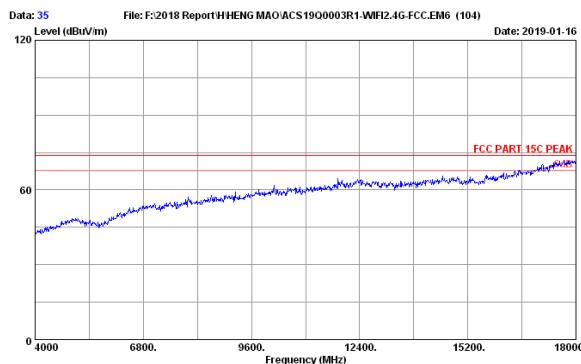


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	33.68	14.56	26.90	34.74	40.40	54.00	13.60	Average
2	4824.00	33.68	14.56	35.11	34.74	48.61	74.00	25.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

FCC ID: 2ADQY525404-300N

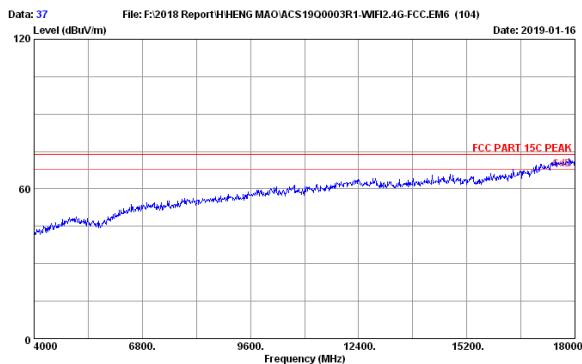


Site no. : 3m Chamber Data no. : 37
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

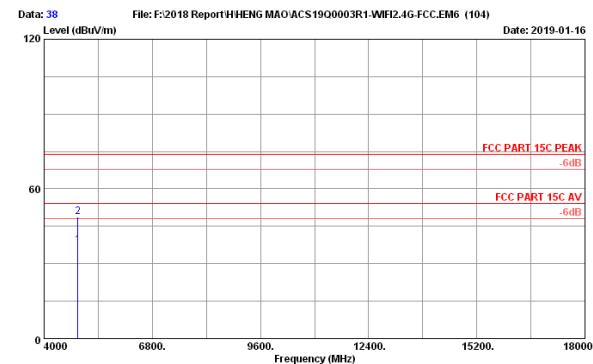


Site no. : 3m Chamber Data no. : 38
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor	Cable Loss (dB/m)	Reading (dBuW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	23.57	34.70	37.39	54.00	16.61	Average
2	4874.00	33.89	14.63	34.87	34.70	48.69	74.00	25.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

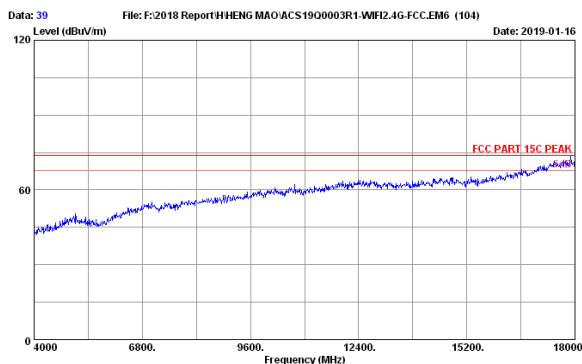

Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

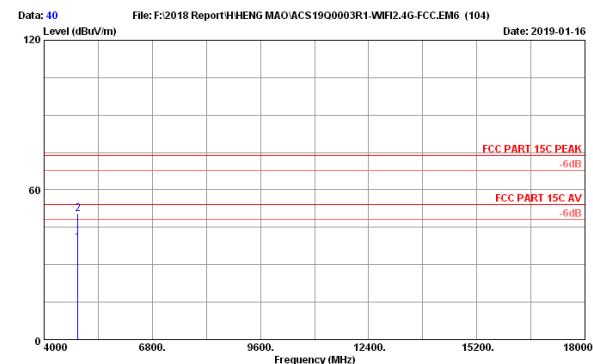


Site no. : 3m Chamber Data no. : 40
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor	Cable Loss (dB/m)	Reading (dBuW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	24.81	34.70	38.63	54.00	15.37	Average
2	4874.00	33.89	14.63	36.66	34.70	50.48	74.00	23.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.


FCC ID: 2ADQY525404-300N

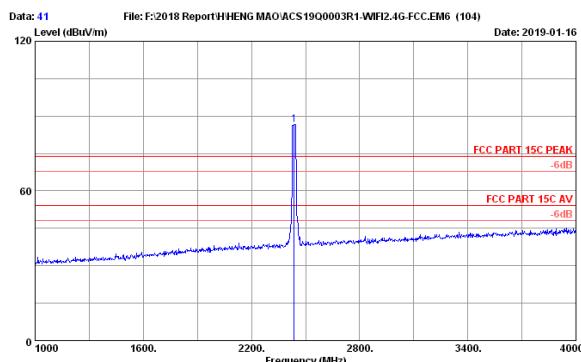

Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBmV)	Amp factor (dB)	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	83.84	35.67	86.68	74.00	-12.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

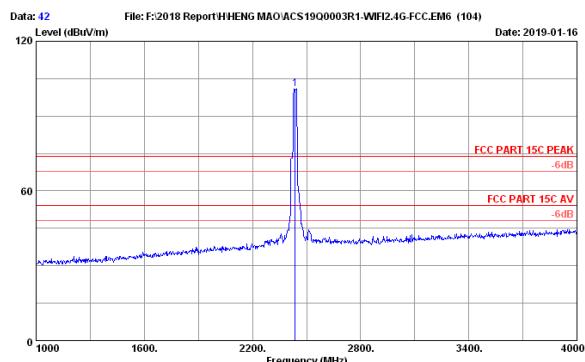

Site no. : 3m Chamber Data no. : 42
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBmV)	Amp factor (dB)	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	98.05	35.67	100.89	74.00	-26.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

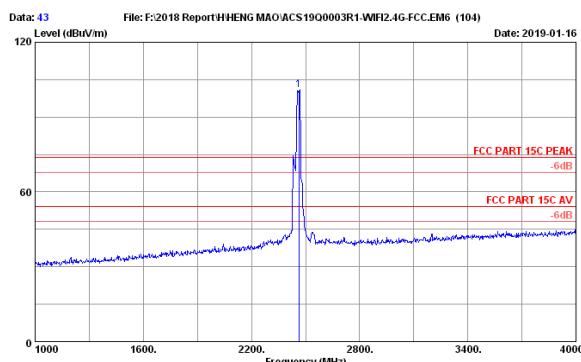

Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBmV)	Amp factor (dB)	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2462.00	28.15	10.42	98.17	35.65	101.09	74.00	-27.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

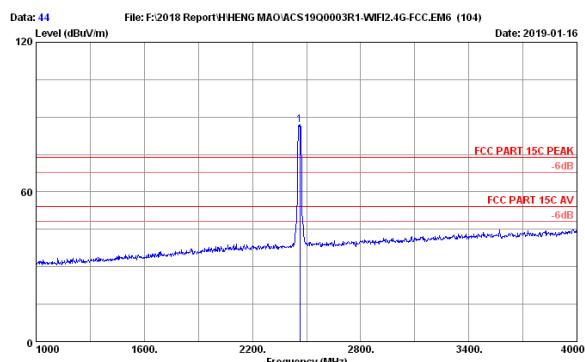


Site no. : 3m Chamber Data no. : 44
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBmV)	Amp factor (dB)	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2462.00	28.15	10.42	83.92	35.65	86.84	74.00	-12.84	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

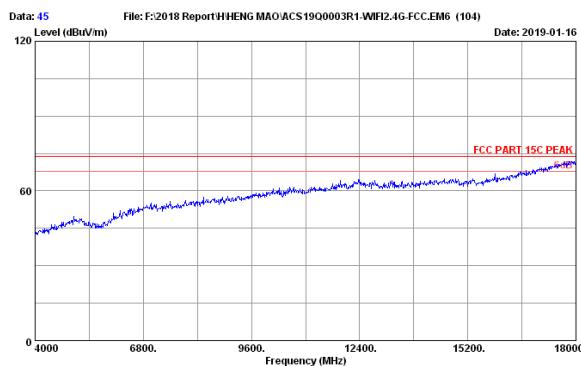

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	34.11	14.71	28.50	34.66	42.66	54.00	11.34	Average
2	4924.00	34.11	14.71	35.67	34.66	49.83	74.00	24.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

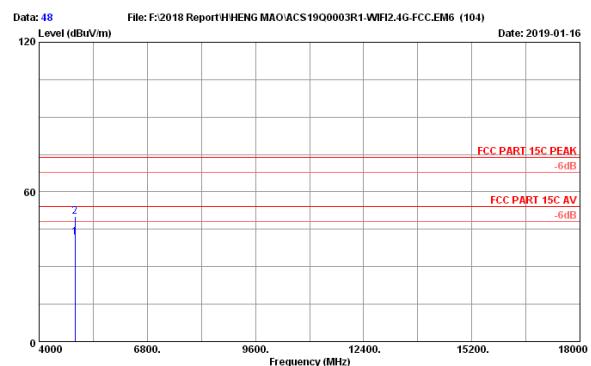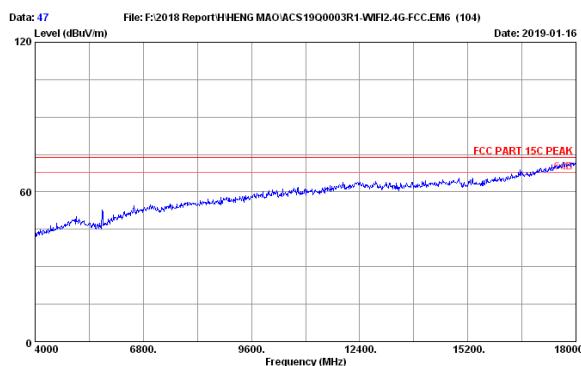

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	34.11	14.71	27.70	34.66	41.86	54.00	12.14	Average
2	4924.00	34.11	14.71	36.06	34.66	50.22	74.00	23.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.


FCC ID: 2ADQY525404-300N

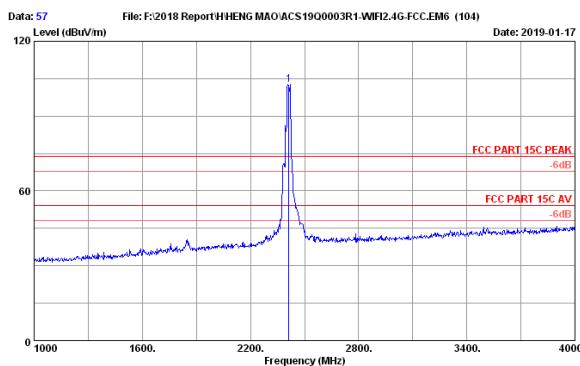

Site no. : 3m Chamber Data no. : 57
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB/m)	(dB)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2412.00	28.08	10.31	99.94	35.70	102.63	74.00	-28.63	Peak			


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

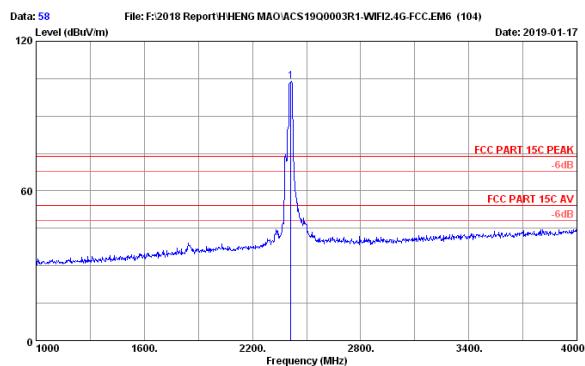


Site no. : 3m Chamber Data no. : 58
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB/m)	(dB)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2412.00	28.08	10.31	101.12	35.70	103.81	74.00	-29.81	Peak			

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

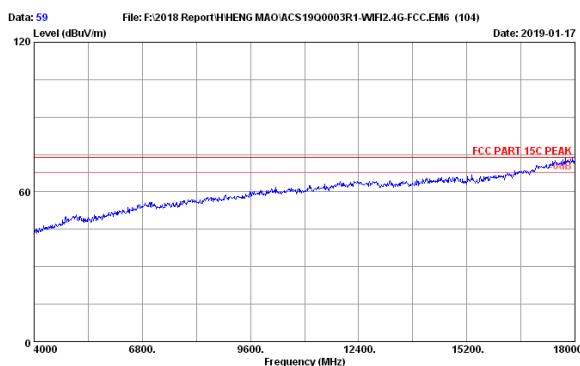


Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

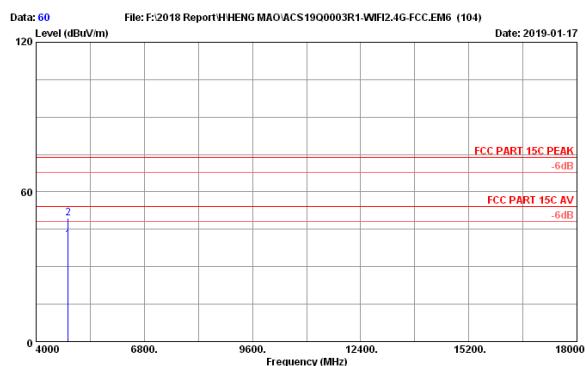


Site no. : 3m Chamber Data no. : 60
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

No.	Freq.	Ant.	Cable	Factor	Loss	Reading	Amp	Emission	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB/m)	(dB)	(dB)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.00	33.66	14.56	27.28	34.74	40.78	54.00	13.22	Average			
2	4824.00	33.66	14.56	35.92	34.74	49.42	74.00	24.58	Peak			

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

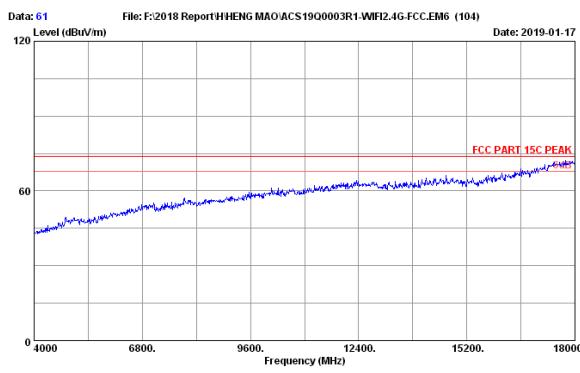


Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

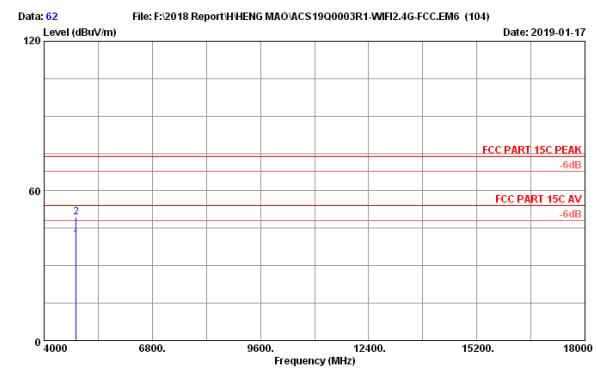


Site no. : 3m Chamber Data no. : 62
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	33.68	14.56	26.90	34.74	40.40	54.00	13.60	Average
2	4824.00	33.68	14.56	35.85	34.74	49.35	74.00	24.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

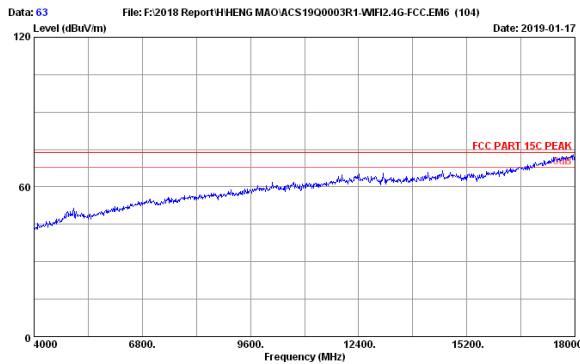

Site no. : 3m Chamber Data no. : 63
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2437MHz Tx Mode

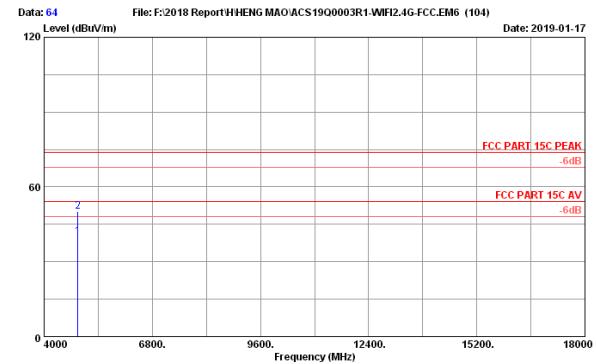


Site no. : 3m Chamber Data no. : 64
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 11nHT20 2437MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	26.41	34.70	40.23	54.00	13.77	Average
2	4874.00	33.89	14.63	36.41	34.70	50.23	74.00	23.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

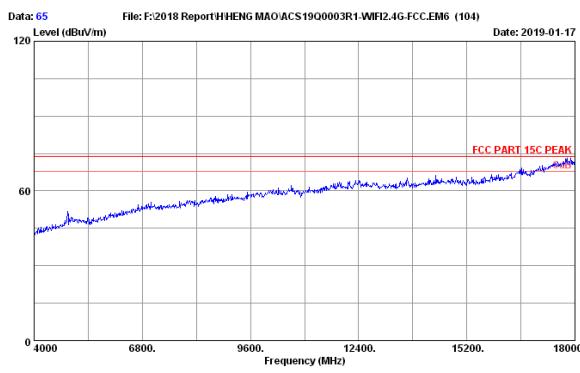


Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2437MHz Tx Mode

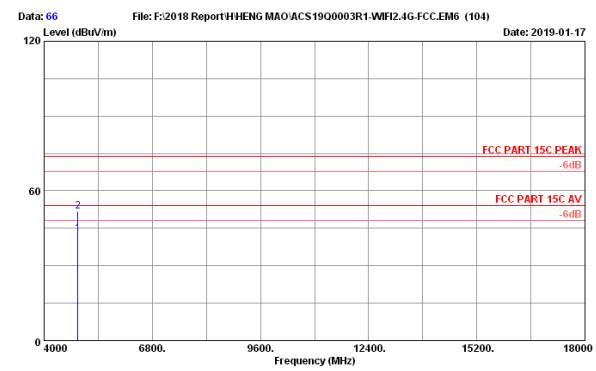


Site no. : 3m Chamber Data no. : 66
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	28.91	34.70	42.73	54.00	11.27	Average
2	4874.00	33.89	14.63	38.09	34.70	51.91	74.00	22.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

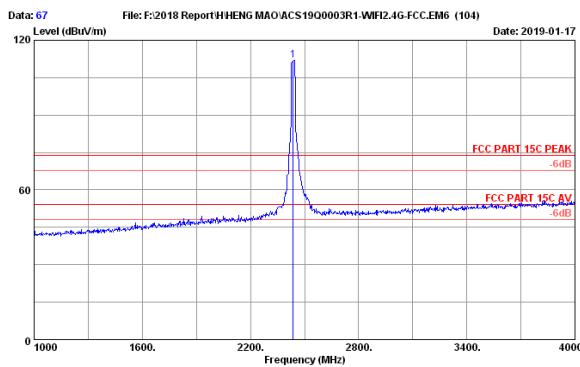

Site no. : 3m Chamber Data no. : 67
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2437MHz Tx Mode

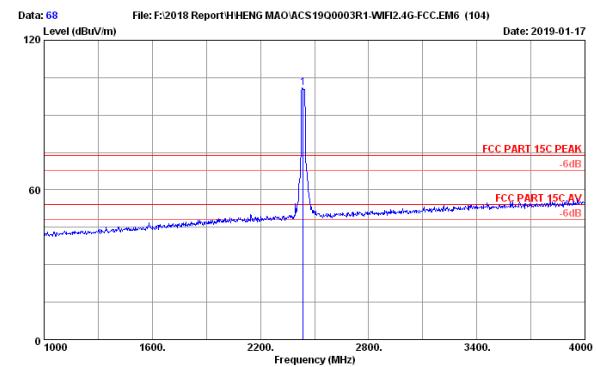

Site no. : 3m Chamber Data no. : 68
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2437MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	109.00	35.67	111.84	74.00	-37.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.13	10.38	98.04	35.67	100.88	74.00	-26.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.


FCC ID: 2ADQY525404-300N

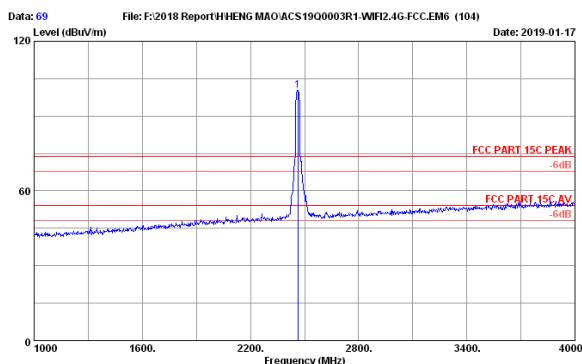

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Garry
 EUT : 300N Access Point N/N:525404-300N
 Power rating : AC 120V/60Hz
 Test Mode : 11nHT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. factor	Cable Loss (dB/m)	Reading (dBmV)	Amp factor	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2462.00	28.15	10.42	97.40	35.65	100.32	74.00	-26.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

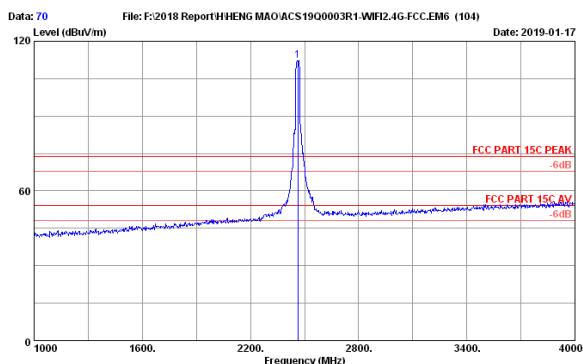


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Garry
 EUT : 300N Access Point N/N:525404-300N
 Power rating : AC 120V/60Hz
 Test Mode : 11nHT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. factor	Cable Loss (dB/m)	Reading (dBmV)	Amp factor	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	2462.00	28.15	10.42	109.48	35.65	112.40	74.00	-38.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

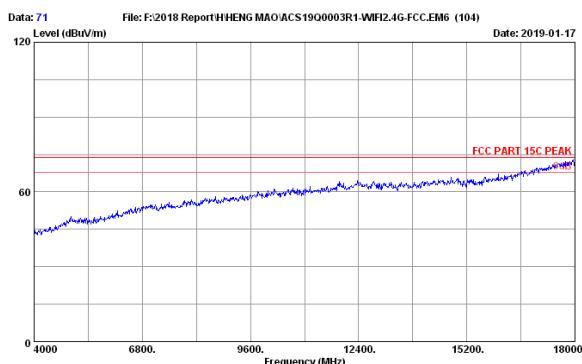

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Garry
 EUT : 300N Access Point N/N:525404-300N
 Power rating : AC 120V/60Hz
 Test Mode : 11nHT20 2462MHz Tx Mode

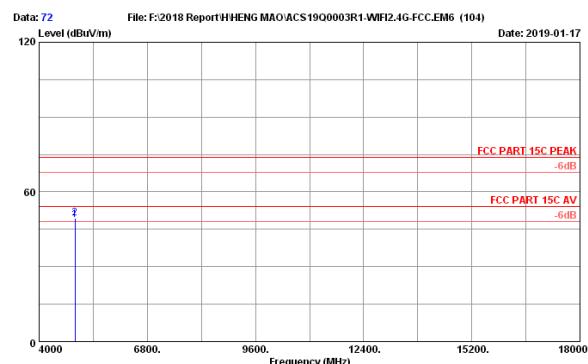


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Garry
 EUT : 300N Access Point N/N:525404-300N
 Power rating : AC 120V/60Hz
 Test Mode : 11nHT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. factor	Cable Loss (dB/m)	Reading (dBmV)	Amp factor	Emission Level (dBmV/m)	Limits (dBmV/m)	Margin (dB)	Remark
1	4924.00	34.11	14.71	34.80	34.66	48.96	54.00	5.04	Average
2	4924.00	34.11	14.71	35.17	34.66	49.33	74.00	24.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

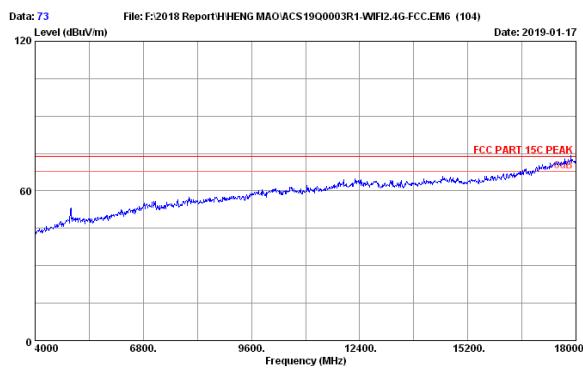


Site no. : 3m Chamber Data no. : 73
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2462MHz Tx Mode



Site no. : 3m Chamber Data no. : 74
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1inHT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	34.11	14.71	35.20	34.66	49.36	54.00	4.64	Average
2	4924.00	34.11	14.71	38.97	34.66	53.13	74.00	20.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

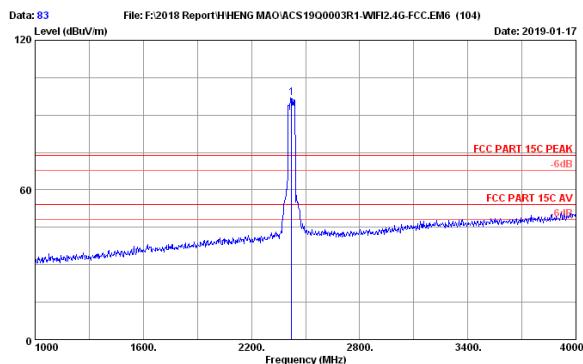

Site no. : 3m Chamber Data no. : 83
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.10	10.35	94.05	35.67	96.83	74.00	-22.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

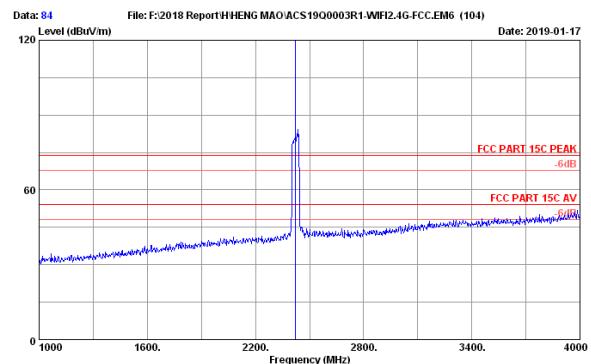


Site no. : 3m Chamber Data no. : 84
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.10	10.35	497.22	35.67	500.00	74.00	-426.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

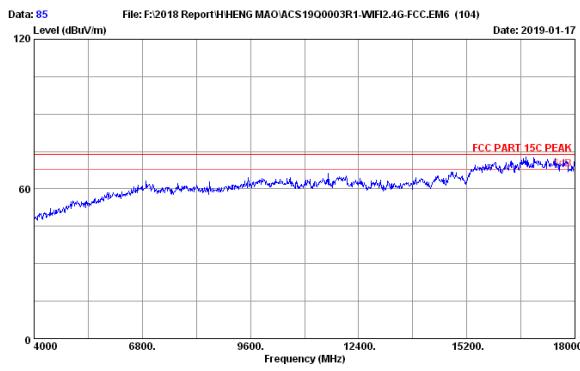


Site no. : 3m Chamber Data no. : 85
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode

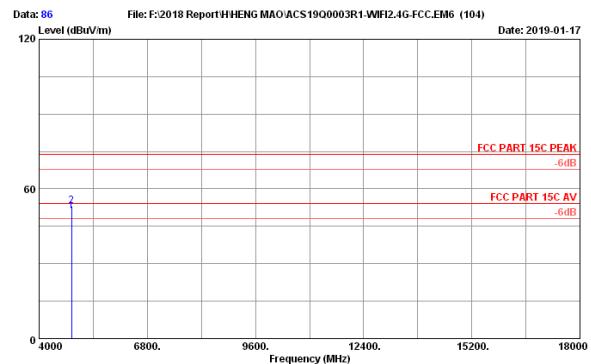


Site no. : 3m Chamber Data no. : 86
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	33.75	14.59	37.59	34.72	51.21	54.00	2.79	Average
2	4844.00	33.75	14.59	39.39	34.72	53.01	74.00	20.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

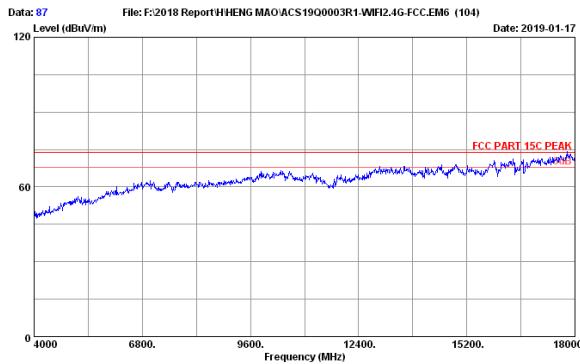

Site no. : 3m Chamber Data no. : 87
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode

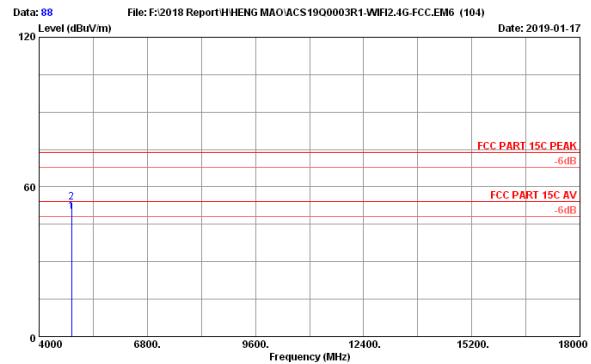


Site no. : 3m Chamber Data no. : 88
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	33.75	14.59	36.66	34.72	50.28	54.00	3.72	Average
2	4844.00	33.75	14.59	40.15	34.72	53.77	74.00	20.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

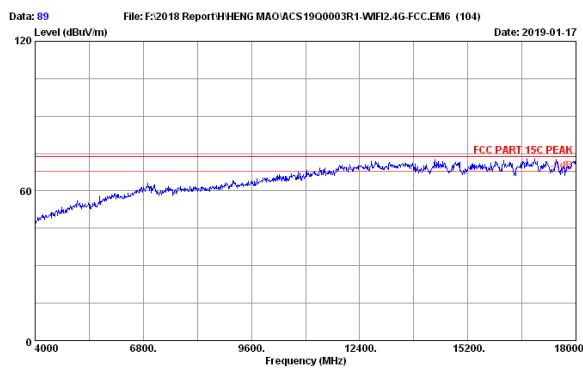


Site no. : 3m Chamber Data no. : 89
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Mode




Site no. : 3m Chamber Data no. : 90
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.89	14.63	35.51	34.70	49.33	54.00	4.67	Average
2	4874.00	33.89	14.63	38.72	34.70	52.54	74.00	21.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

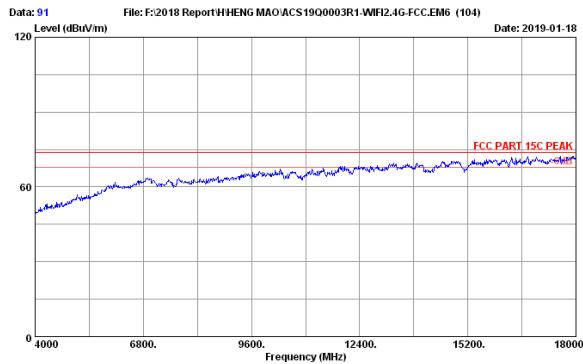


Site no. : 3m Chamber Data no. : 91
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Mode

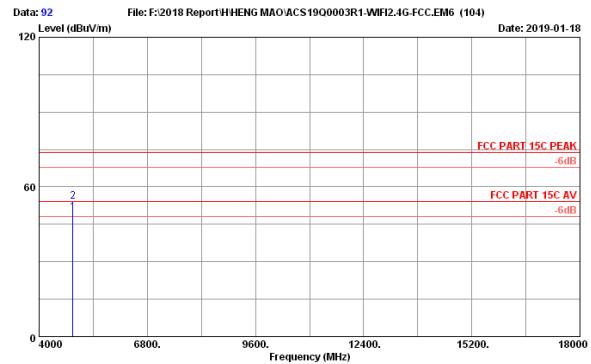

Site no. : 3m Chamber Data no. : 92
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	33.16	14.63	36.70	34.70	49.79	54.00	4.21	Average
2	4874.00	33.16	14.63	40.95	34.70	54.04	74.00	19.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

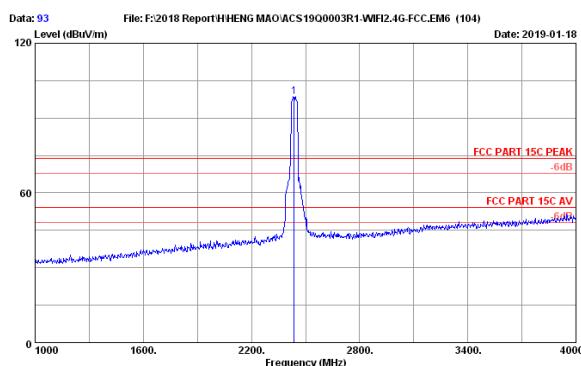

Site no. : 3m Chamber Data no. : 93
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point E/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.01	10.38	95.79	35.67	98.51	74.00	-24.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

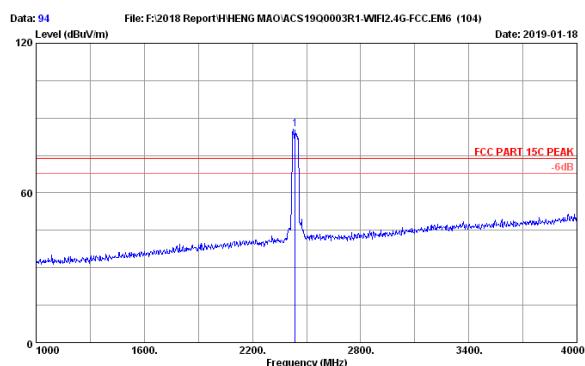

Site no. : 3m Chamber Data no. : 94
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point E/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2437MHz Tx Node

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.01	10.38	82.79	35.67	85.51	74.00	-11.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

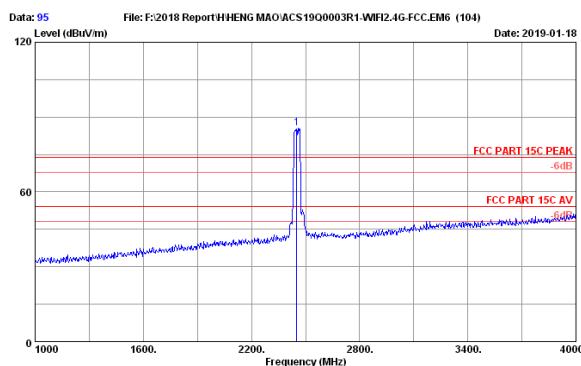

Site no. : 3m Chamber Data no. : 95
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point E/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.01	10.38	82.84	35.65	85.56	74.00	-11.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

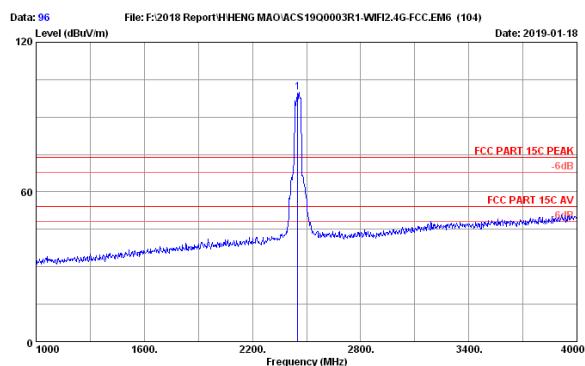


Site no. : 3m Chamber Data no. : 96
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point E/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Node


No.	Freq. (MHz)	Ant. factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.01	10.38	97.21	35.65	99.95	74.00	-25.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: 2ADQY525404-300N

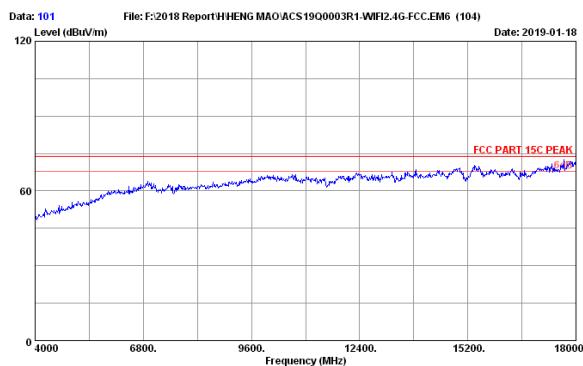


Site no. : 3m Chamber Data no. : 101
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Mode

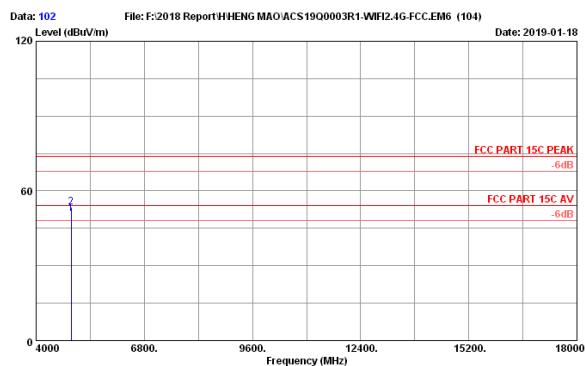


Site no. : 3m Chamber Data no. : 102
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.50	33.23	14.68	37.44	34.68	50.67	54.00	3.33	Average
2	4904.50	33.23	14.68	40.37	34.68	53.60	74.00	20.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

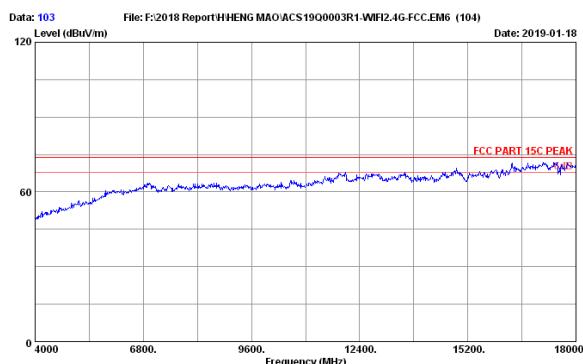

Site no. : 3m Chamber Data no. : 103
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Mode

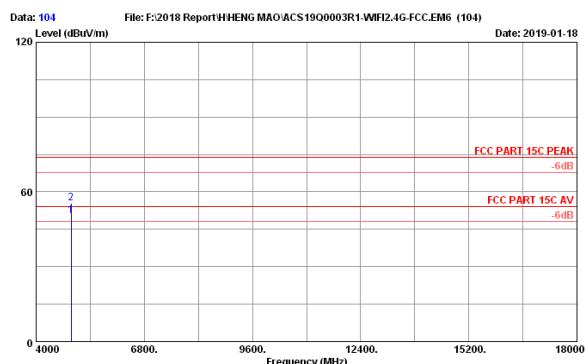

Site no. : 3m Chamber Data no. : 104
Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT : 300N Access Point N/N:525404-300N
Power rating : AC 120V/60Hz
Test Mode : 1in HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBmW)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	33.23	14.68	37.10	34.68	50.33	54.00	3.67	Average
2	4904.00	33.23	14.68	42.31	34.68	55.54	74.00	18.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Oct.14,18	1 Year
3.	RF Cable	EMCI	EMC102-KM-KM 3500	170702	Oct.14,18	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, the resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.


5.4. Test result

PASS (The testing data was attached in the next pages.)


ANT0:


Test Mode: IEEE 802.11b

Test CH1: 2412MHz

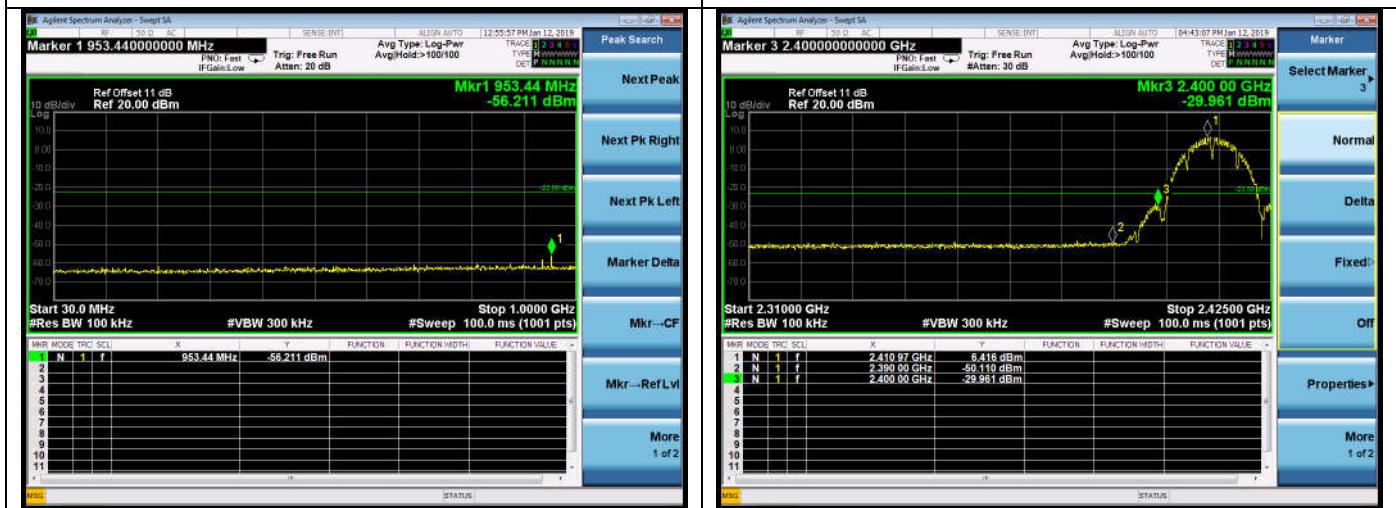


Test CH6: 2437MHz

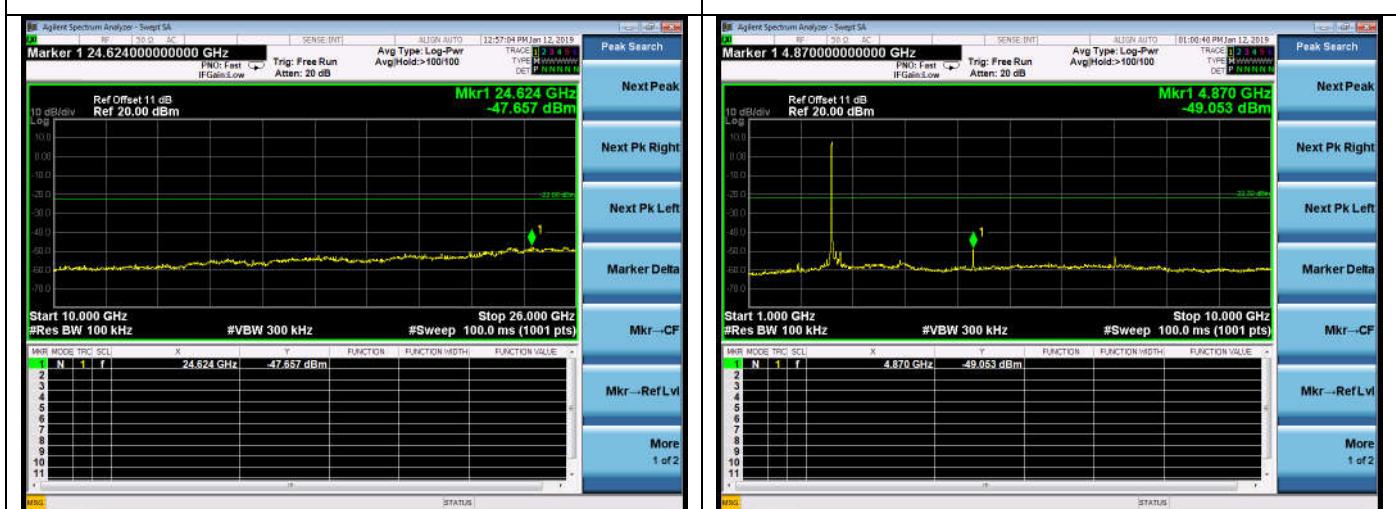

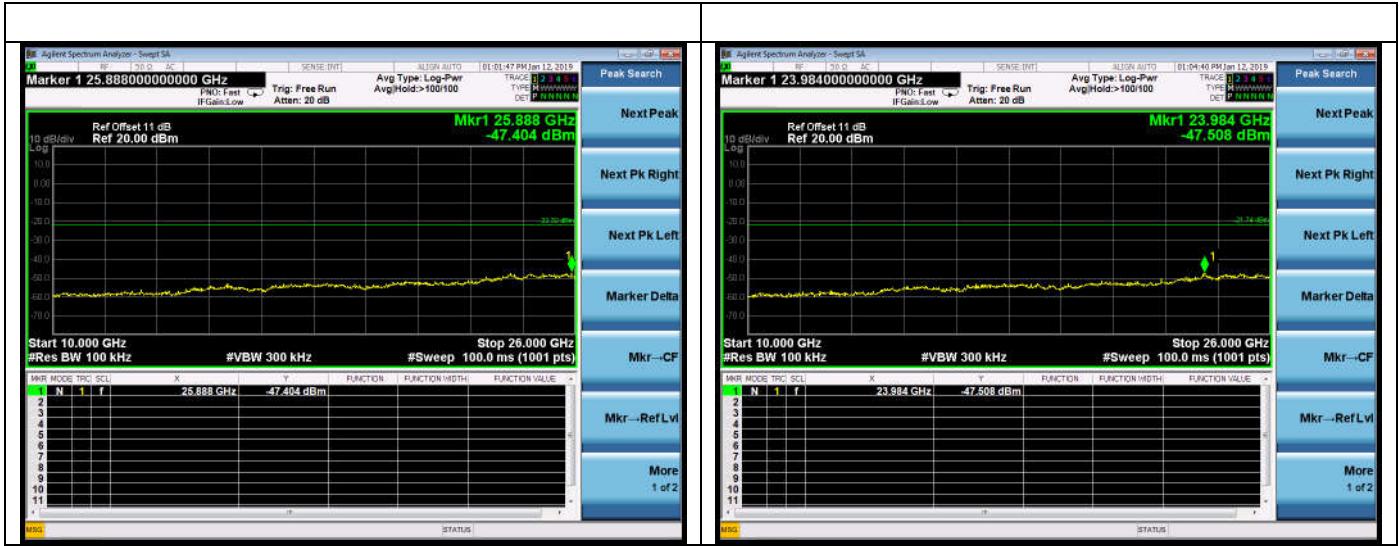


Test CH11: 2462MHz

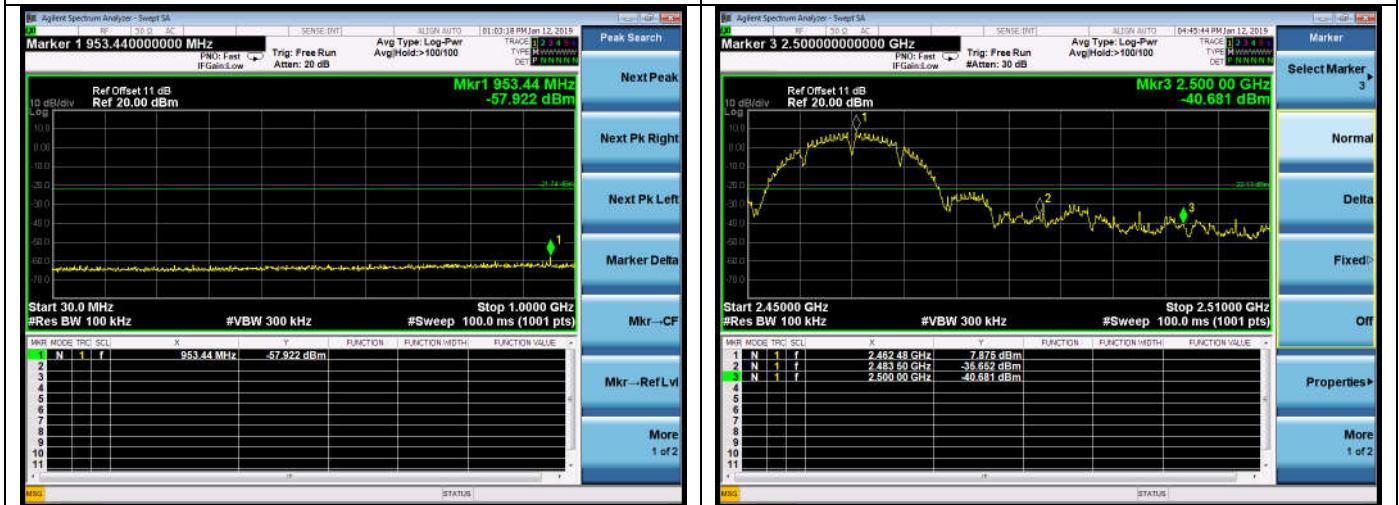


Test Mode: IEEE 802.11g
Test CH1: 2412MHz







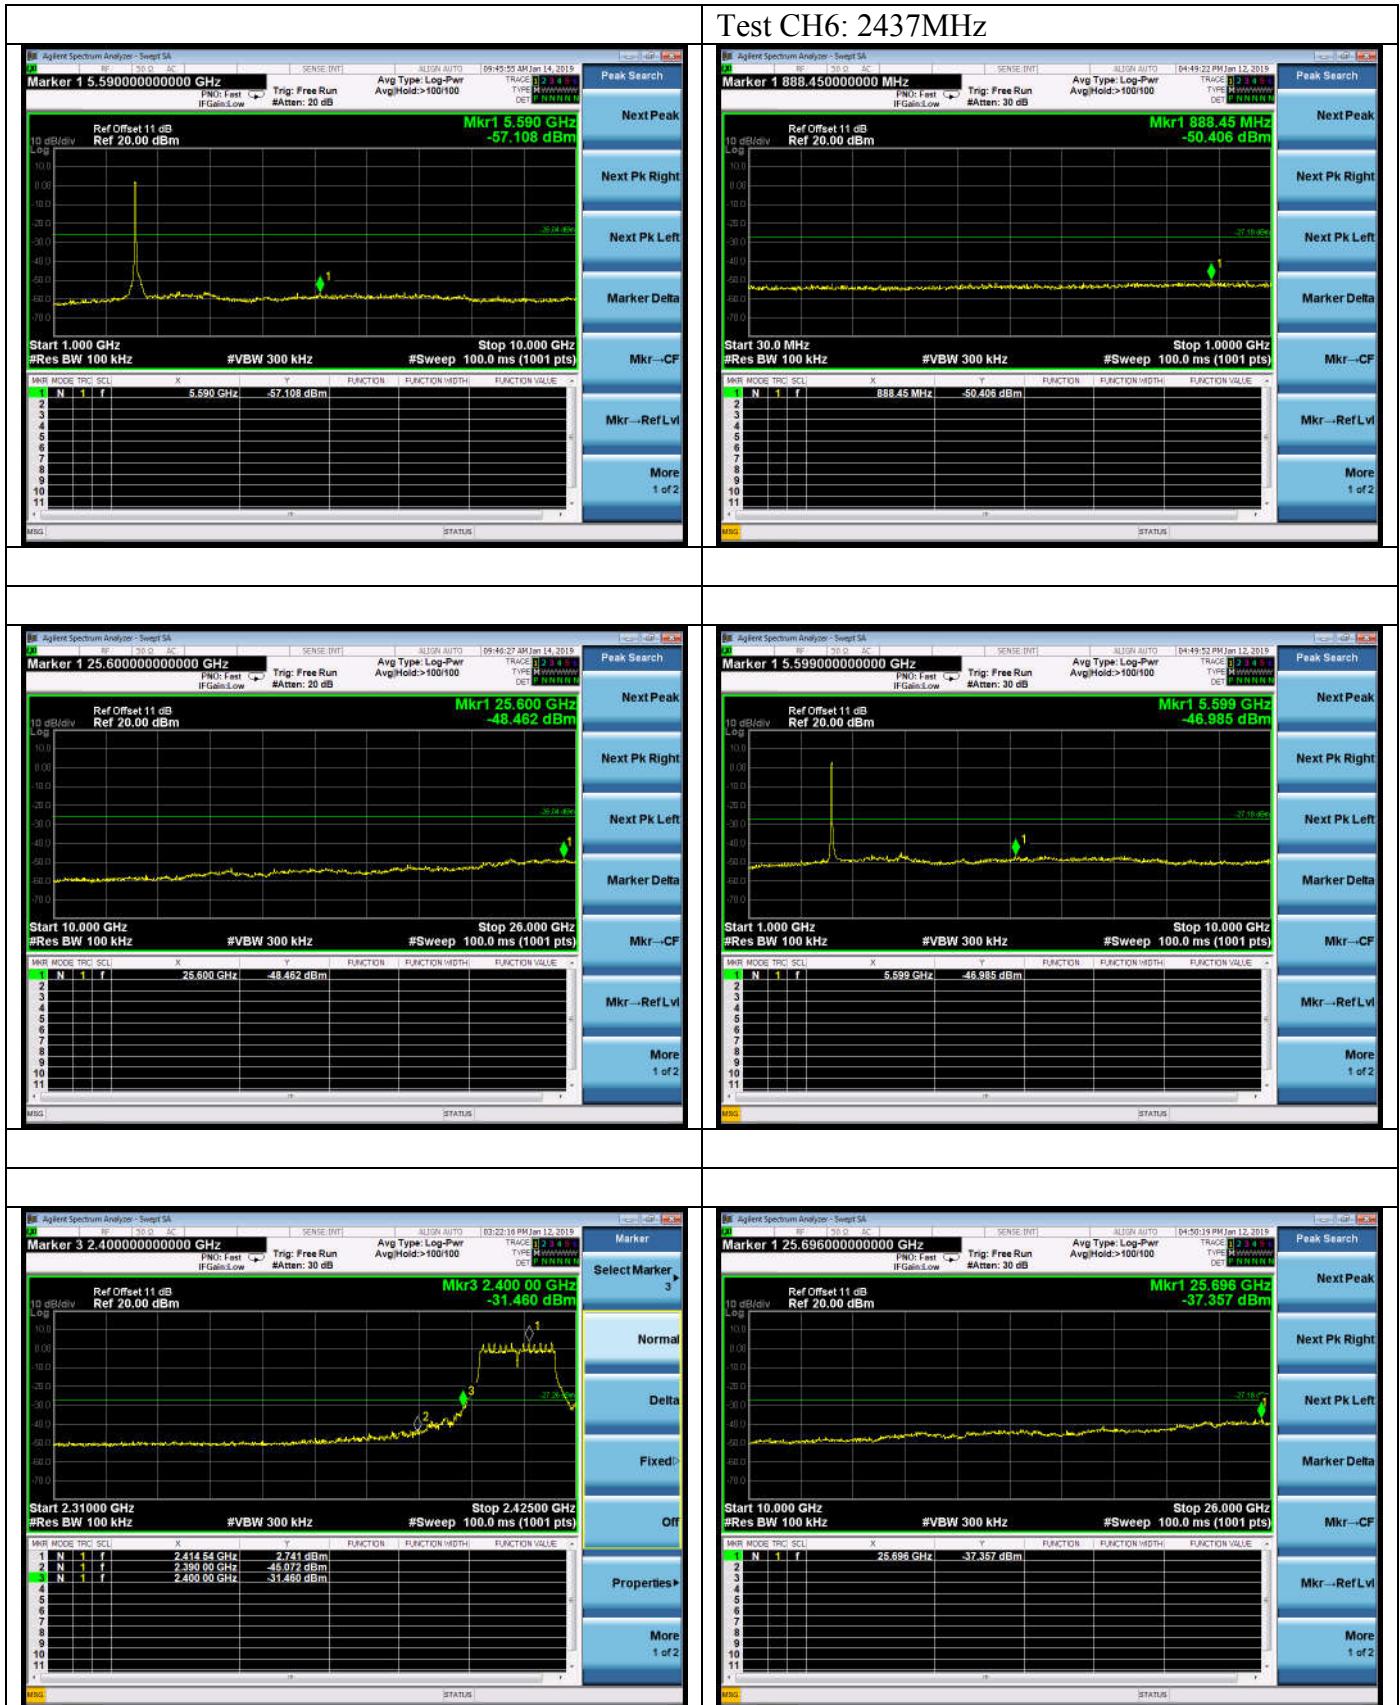


Test CH11: 2462MHz

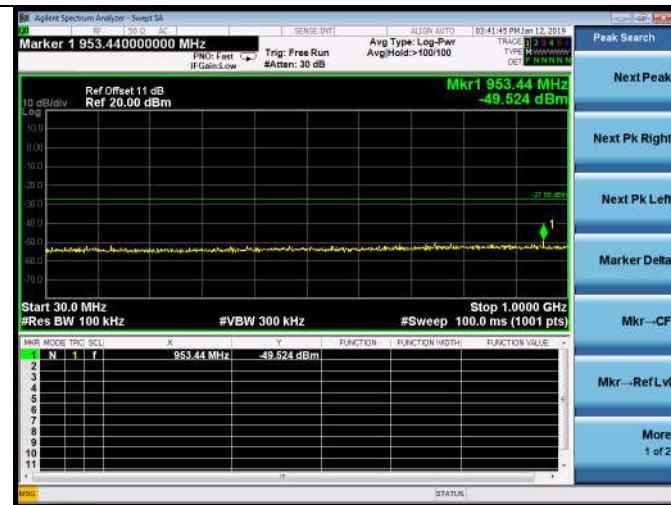


Test Mode: IEEE 802.11n HT20 Test CH1: 2412MHz

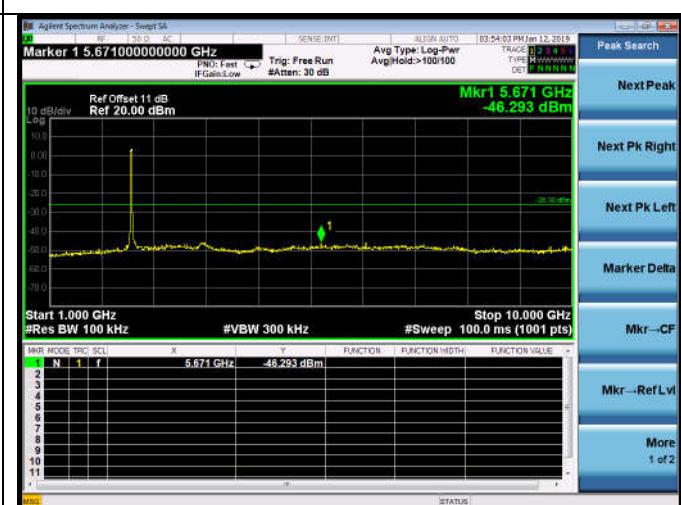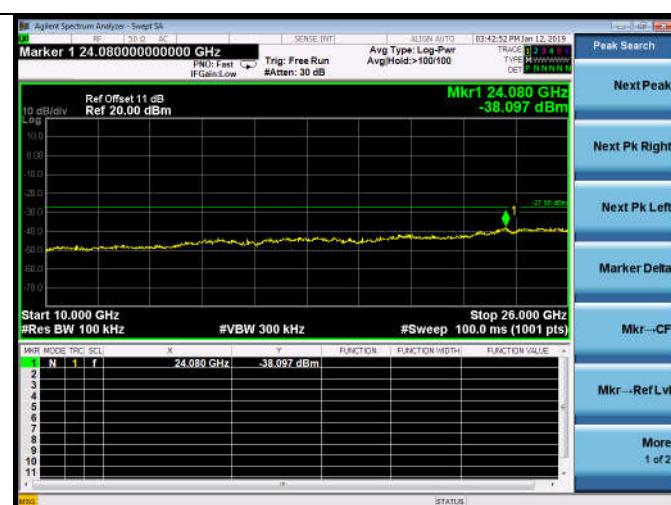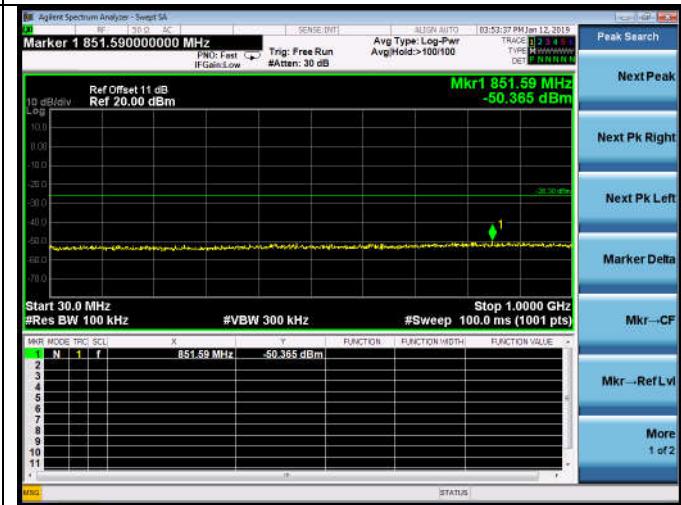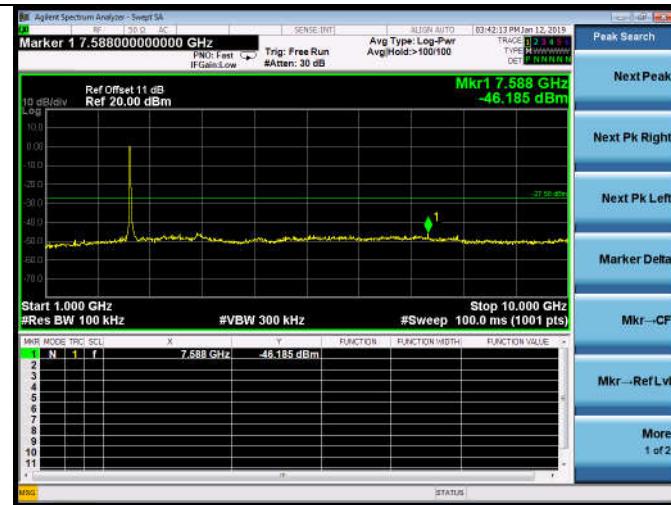



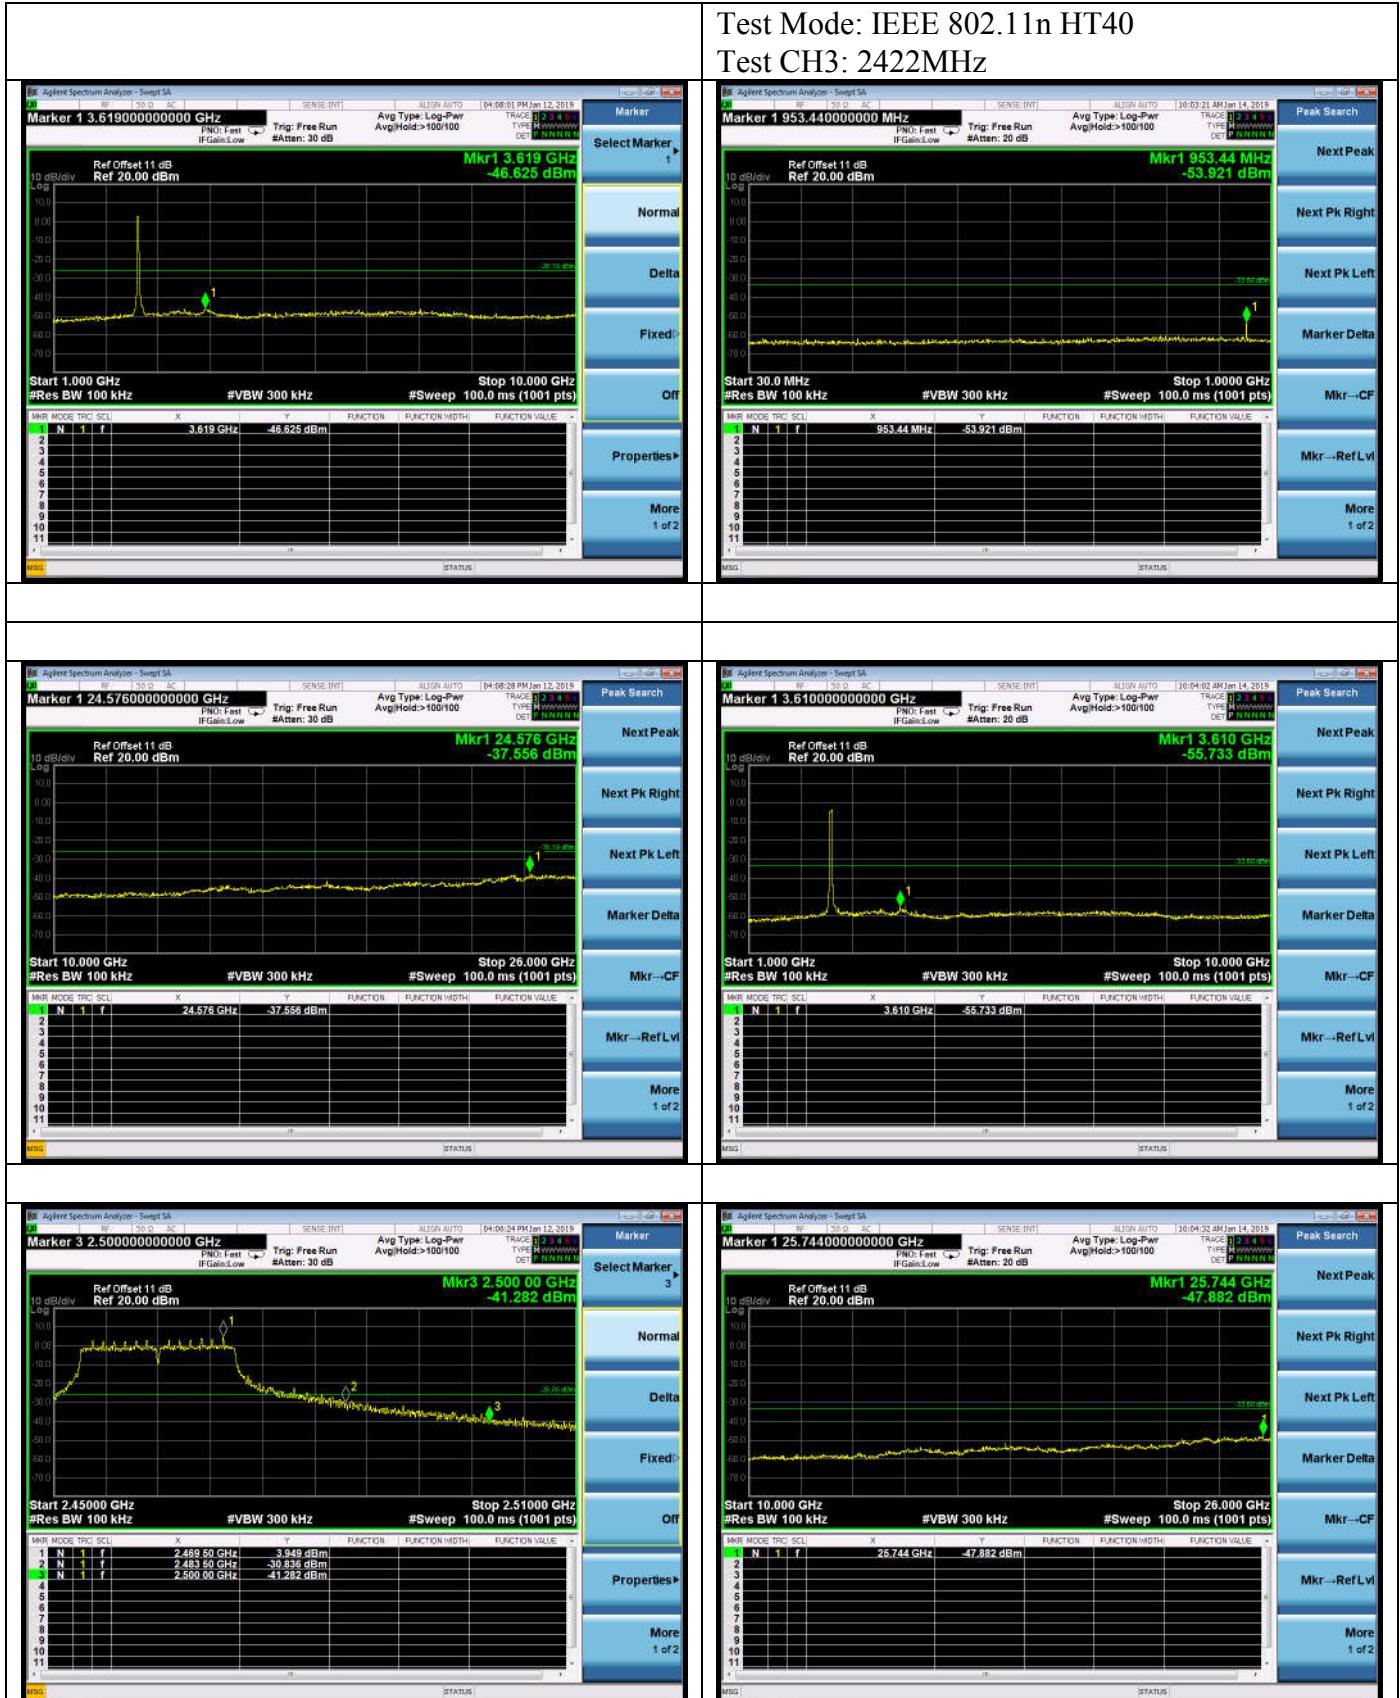

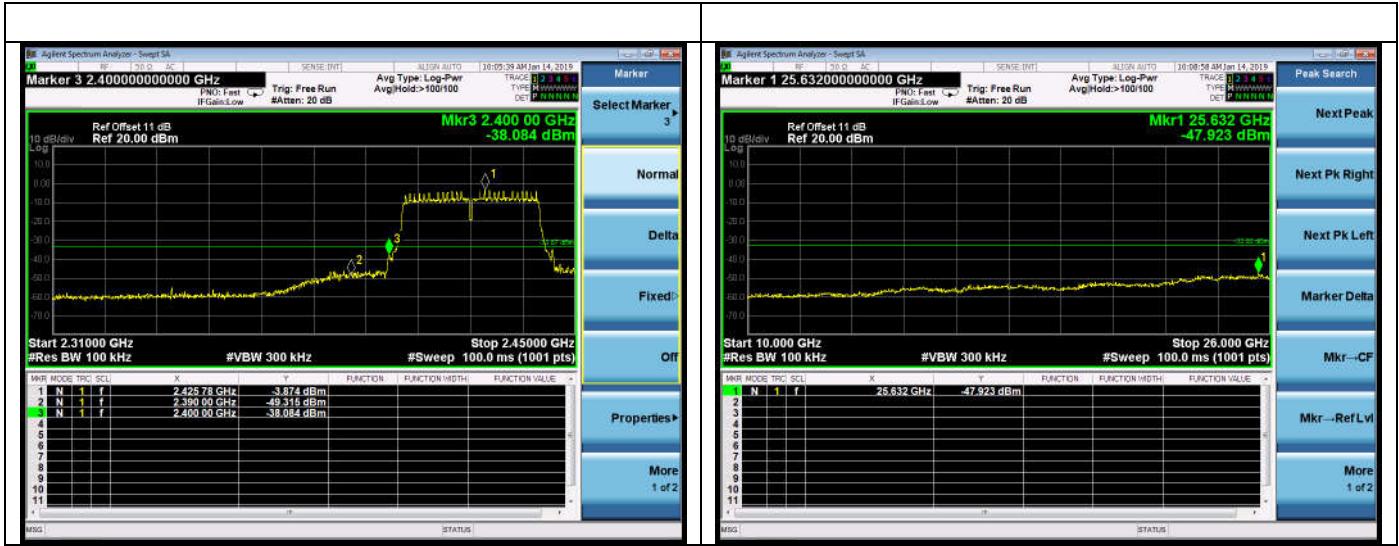

Test CH6: 2437MHz



Test CH9: 2452MHz

