

TEST REPORT

Reference No. : WTS15S0324184E
FCC ID..... : 2ADQY525695
Applicant..... : Intracom Asia. Co., Ltd.
Address..... : 4F., No. 77, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221,
Taiwan
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Wireless AC750 Dual-Band Range Extender
Model No. : 525695
Standards..... : FCC CFR47 Part 15 C Section 15.407:2014
Date of Receipt sample..... : Mar.25, 2015
Date of Test..... : Mar.26, 2015 – Apr.27, 2015
Date of Issue..... : Apr.30, 2015
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 DESCRIPTION OF SUPPORT UNITS	9
5.3 MEASUREMENT UNCERTAINTY	9
5.4 TEST EQUIPMENT CALIBRATION	9
6 CONDUCTED EMISSION	10
6.1 E.U.T. OPERATION	10
6.2 EUT SETUP	10
6.3 MEASUREMENT DESCRIPTION	10
6.4 CONDUCTED EMISSION TEST RESULT	11
7 UNWANTED EMISSIONS MEASUREMENT	13
7.1 EUT OPERATION.....	14
7.2 TEST SETUP	15
7.3 TEST PROCEDURES	16
7.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.5 SUMMARY OF TEST RESULTS	18
8 DUTY CYCLE	46
8.1 SUMMARY OF TEST RESULTS	46
9 BAND EDGE	53
9.1 TEST PROCEDURE.....	53
9.2 TEST RESULT	54
10 6 DB BANDWIDTH	66
10.1 TEST PROCEDURE:.....	66
10.2 TEST RESULT:	66
11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	74
11.1 TEST PROCEDURE:.....	74
11.2 TEST RESULT:	74
12 CONDUCTED OUTPUT POWER	89
12.1 TEST PROCEDURE:.....	89
12.2 TEST RESULT:	89
13 POWER SPECTRAL DENSITY	104
13.1 TEST PROCEDURE:.....	104
13.2 TEST RESULT:	104
14 ANTENNA REQUIREMENT	119
15 RF EXPOSURE	120
15.1 REQUIREMENTS.....	120
15.2 THE PROCEDURES / LIMIT	120

15.3	MPE CALCULATION METHOD	121
16	PHOTOGRAPHS – MODEL 525695 TEST SETUP	122
16.1	CONDUCTED EMISSION AT TEST SITE 1#	122
16.2	RADIATED EMISSION	122
17	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	124
17.1	MODEL 525695 – EXTERNAL VIEW	124
17.2	MODEL 525695 – INTERNAL VIEW	127

4 General Information

4.1 General Description of E.U.T.

Product Name:	Wireless AC750 Dual-Band Range Extender
Model No.:	525695
Operation Frequency:	IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz
The Lowest Oscillator:	40MHz
Antenna Gain:	3 dBi
Type of modulation:	IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Number of transmitter chains	1 (SISO)

4.2 Details of E.U.T.

Technical Data:	AC 100-240V,50/60Hz, 0.3A
-----------------	---------------------------

4.3 Channel List

Band I (5.15-5.25GHz)		Band IV (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2014	Sep.14,2015

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

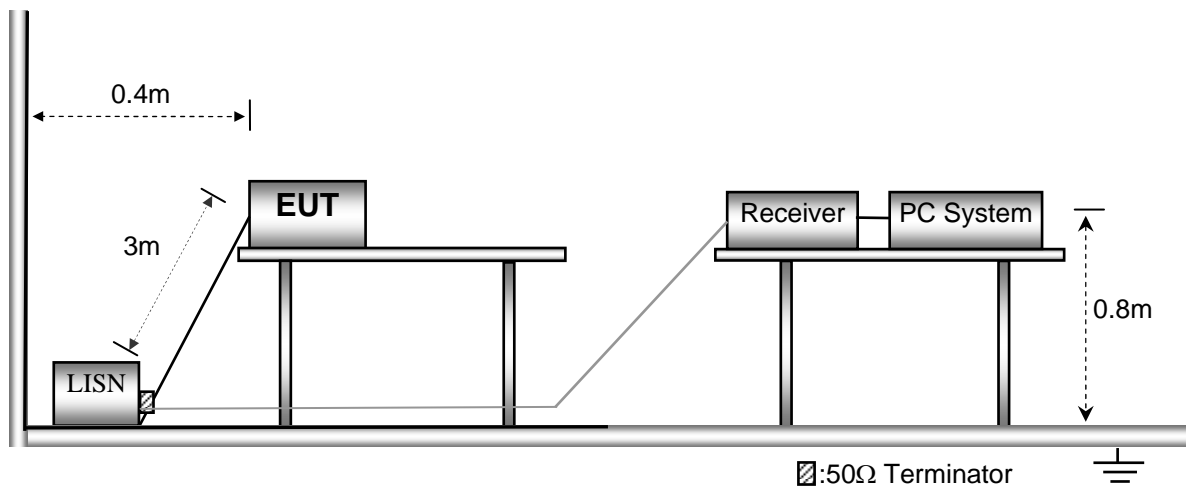


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

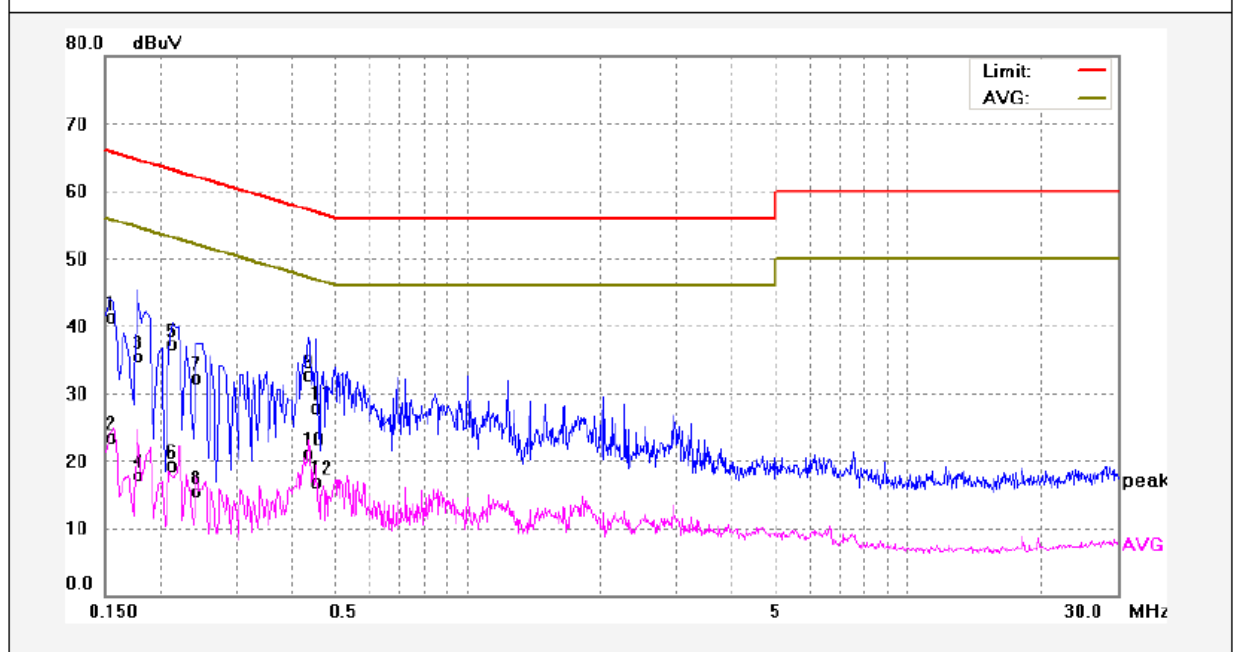

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	31.09	10.13	41.22	65.78	-24.56	QP	
2	0.1539	13.30	10.13	23.43	55.78	-32.35	AVG	
3	0.1780	25.43	10.14	35.57	64.57	-29.00	QP	
4	0.1780	7.72	10.14	17.86	54.57	-36.71	AVG	
5	0.2140	27.14	10.15	37.29	63.04	-25.75	QP	
6	0.2140	9.18	10.15	19.33	53.04	-33.71	AVG	
7	0.2420	22.21	10.16	32.37	62.02	-29.65	QP	
8	0.2420	5.37	10.16	15.53	52.02	-36.49	AVG	
9	0.4340	22.50	10.18	32.68	57.18	-24.50	QP	
10	0.4340	10.87	10.18	21.05	47.18	-26.13	AVG	
11	0.4540	17.69	10.18	27.87	56.80	-28.93	QP	
12	0.4540	6.77	10.18	16.95	46.80	-29.85	AVG	

Neutral line:

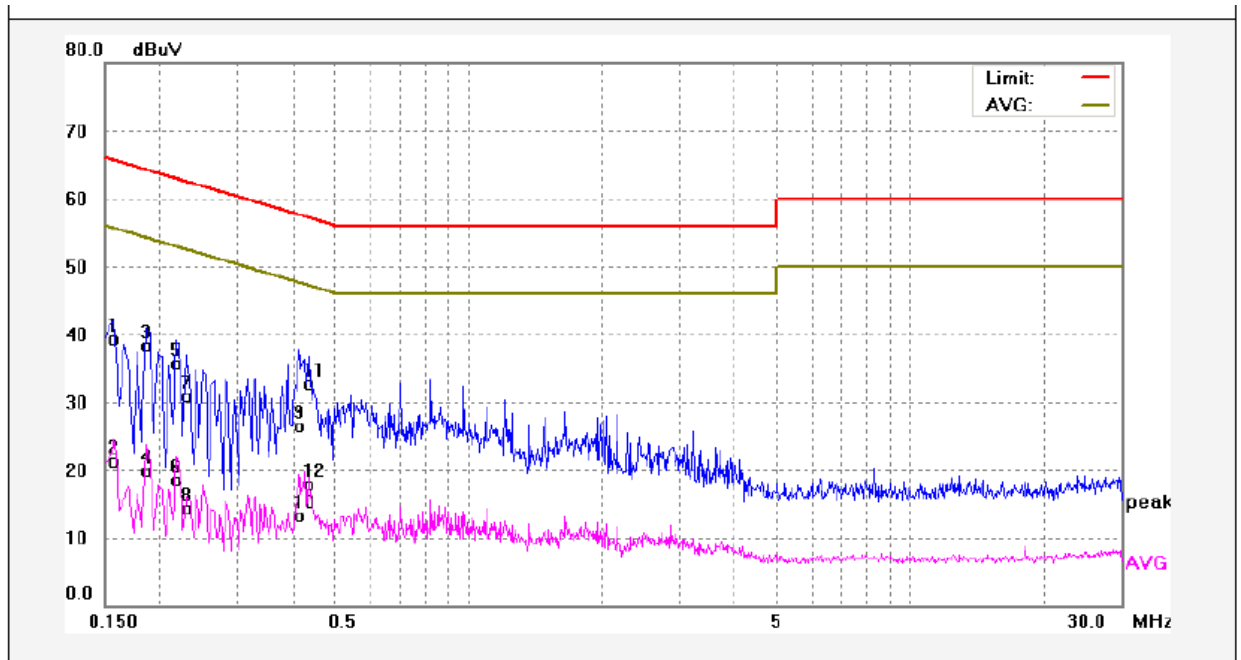

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	29.11	10.13	39.24	65.56	-26.32	QP	
2	0.1580	11.14	10.13	21.27	55.56	-34.29	AVG	
3	0.1860	28.16	10.14	38.30	64.21	-25.91	QP	
4	0.1860	9.76	10.14	19.90	54.21	-34.31	AVG	
5	0.2180	25.49	10.15	35.64	62.89	-27.25	QP	
6	0.2180	8.34	10.15	18.49	52.89	-34.40	AVG	
7	0.2300	20.68	10.15	30.83	62.45	-31.62	QP	
8	0.2300	4.11	10.15	14.26	52.45	-38.19	AVG	
9	0.4140	16.35	10.18	26.53	57.57	-31.04	QP	
10	0.4140	3.20	10.18	13.38	47.57	-34.19	AVG	
11	0.4340	22.50	10.18	32.68	57.18	-24.50	QP	
12	0.4340	7.63	10.18	17.81	47.18	-29.37	AVG	

7 Unwanted Emissions Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205

Test Method: KDB 789033 D02 v01

Test Result: PASS

Measurement Distance: 3m

Limit:

(1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
-27	68.3

(3) KDB789033 v01r03 H)2)c(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

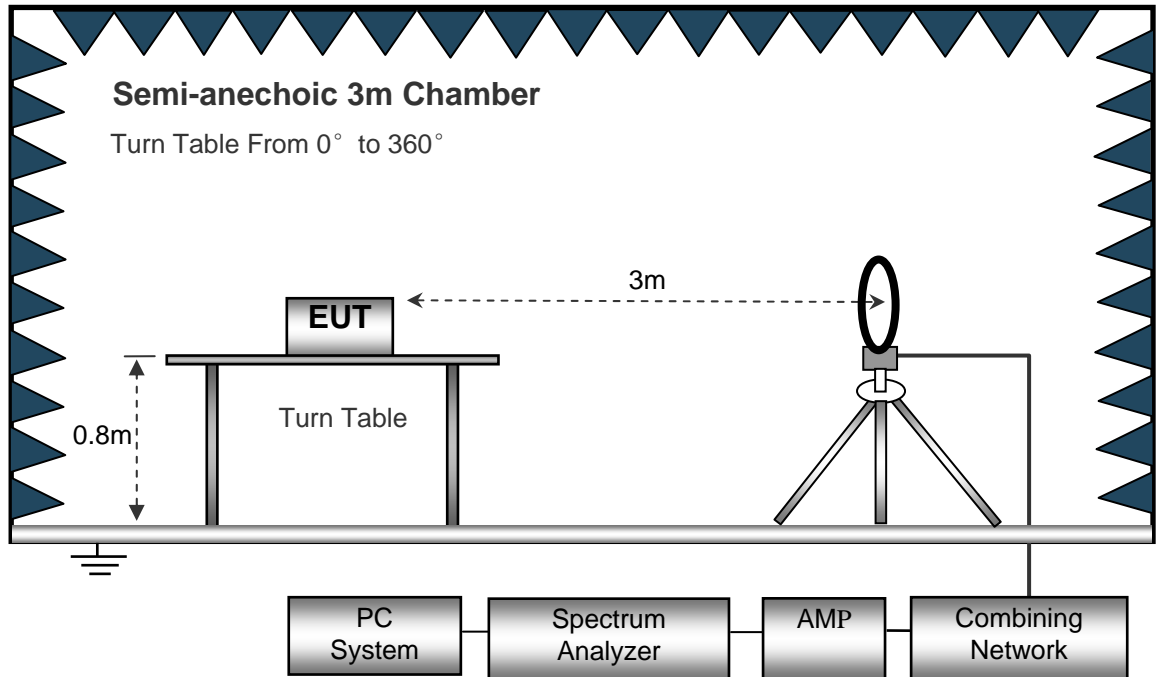

The test setup for emission measurement from 30 MHz to 1 GHz.

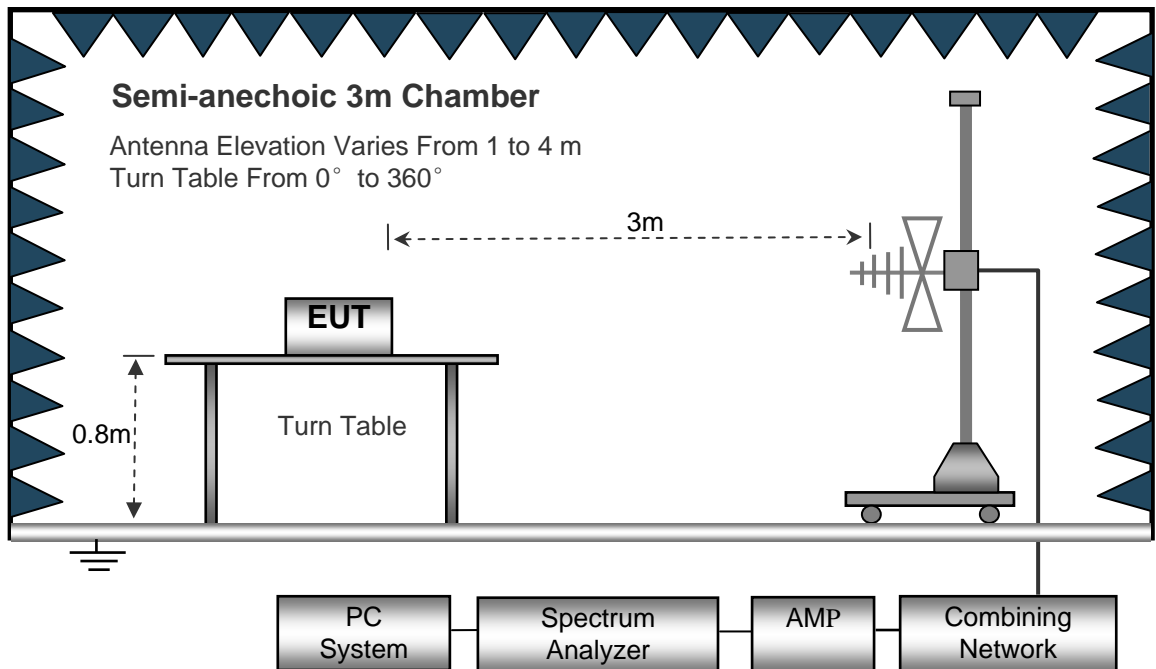

The test setup for emission measurement above 1 GHz.

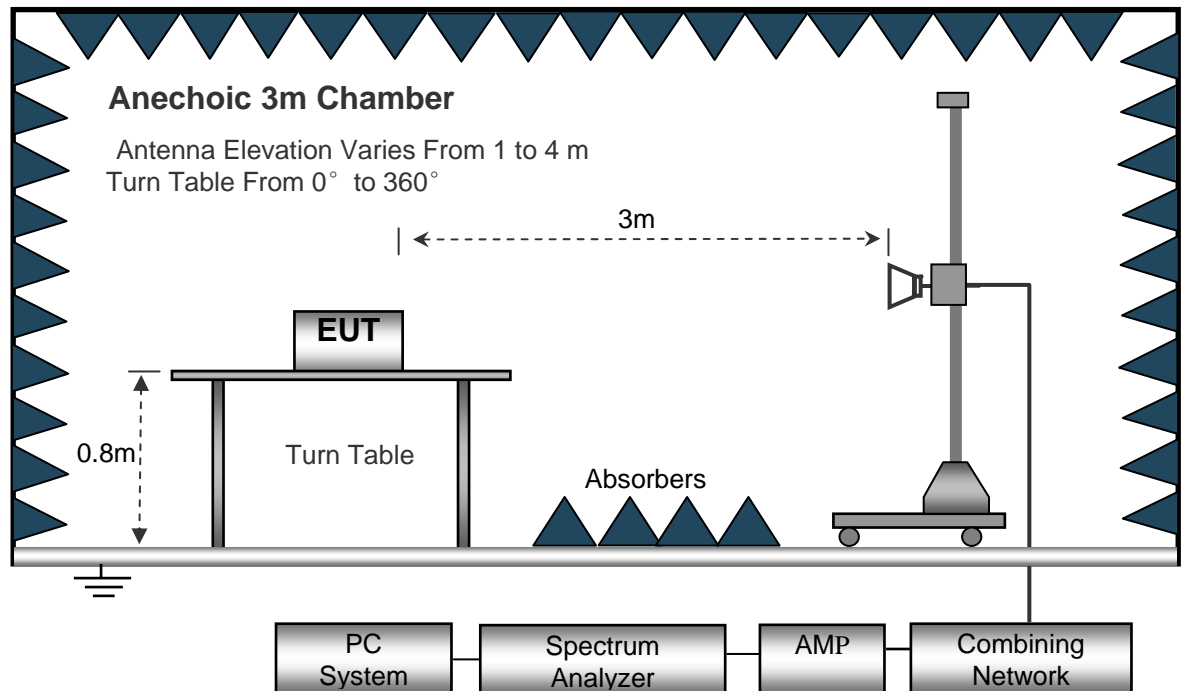

7.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum

2. The EUT is placed on a turntable, which is 0.8m above ground plane.

3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until the measurements for all frequencies are complete.
8. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
9. A 5.8GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.5 Summary of Test Results

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band I Low Channel 5180MHz									
200.03	22.74	PK	175	1.9	H	11.13	33.87	43.50	-9.63
200.03	20.28	PK	139	1.3	V	11.13	31.41	43.50	-12.09
5086.44	49.33	PK	329	1.6	V	0.09	49.42	74.00	-24.58
5086.44	42.15	Ave	329	1.6	V	0.09	42.24	54.00	-11.76
10360.00	45.14	PK	306	1.2	H	4.13	49.27	74.00	-24.73
10360.00	44.83	Ave	306	1.2	H	4.13	48.96	54.00	-5.04
2330.80	45.54	PK	182	1.9	V	-13.19	32.35	74.00	-41.65
2330.80	37.70	Ave	182	1.9	V	-13.19	24.51	54.00	-29.49
2357.00	44.89	PK	131	1.9	H	-13.14	31.75	74.00	-42.25
2357.00	37.92	Ave	131	1.9	H	-13.14	24.78	54.00	-29.22
3373.87	43.67	PK	123	1.6	V	-9.08	34.59	74.00	-39.41
3373.87	37.36	Ave	123	1.6	V	-9.08	28.28	54.00	-25.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band I middle channel 5200MHz									
200.03	21.87	PK	72	1.9	H	11.13	33.00	43.50	-10.50
200.03	19.81	PK	65	1.1	V	11.13	30.94	43.50	-12.56
5103.33	48.64	PK	12	1.9	V	-0.62	48.02	74.00	-25.98
5103.33	43.29	Ave	12	1.9	V	-0.62	42.67	54.00	-11.33
10400.00	45.41	PK	231	1.8	H	4.26	49.67	74.00	-24.33
10400.00	44.58	Ave	231	1.8	H	4.26	48.84	54.00	-5.16
2314.98	46.55	PK	12	1.4	V	-13.19	33.36	74.00	-40.64
2314.98	38.76	Ave	12	1.4	V	-13.19	25.57	54.00	-28.43
2372.67	42.18	PK	203	1.9	H	-13.14	29.04	74.00	-44.96
2372.67	36.01	Ave	203	1.9	H	-13.14	22.87	54.00	-31.13
3348.53	43.85	PK	300	1.7	V	-9.08	34.77	74.00	-39.23
3348.53	36.28	Ave	300	1.7	V	-9.08	27.20	54.00	-26.80

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a band I High channel 5240MHz									
200.03	25.11	PK	237	1.5	H	11.13	36.24	43.50	-7.26
200.03	18.57	PK	230	1.4	V	11.13	29.70	43.50	-13.80
5096.93	49.88	PK	26	1.6	V	-0.24	49.64	74.00	-24.36
5096.93	43.00	Ave	26	1.6	V	-0.24	42.76	54.00	-11.24
10480.00	46.40	PK	273	1.6	H	4.38	50.78	74.00	-23.22
10480.00	44.96	Ave	273	1.6	H	4.38	49.34	54.00	-4.66
2340.82	45.81	PK	109	1.3	V	-13.19	32.62	74.00	-41.38
2340.82	38.58	Ave	109	1.3	V	-13.19	25.39	54.00	-28.61
2383.49	44.68	PK	237	1.8	H	-13.14	31.54	74.00	-42.46
2383.49	37.21	Ave	237	1.8	H	-13.14	24.07	54.00	-29.93
3367.76	43.12	PK	147	1.4	V	-9.08	34.04	74.00	-39.96
3367.76	37.61	Ave	147	1.4	V	-9.08	28.53	54.00	-25.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band IV low Channel 5745MHz									
200.03	22.74	PK	348	2.0	H	11.13	33.87	43.50	-9.63
200.03	20.28	PK	205	1.2	V	11.13	31.41	43.50	-12.09
5085.86	49.33	PK	354	1.9	V	0.09	49.42	74.00	-24.58
5085.86	42.15	Ave	354	1.9	V	0.09	42.24	54.00	-11.76
11490.00	42.17	PK	308	1.4	H	6.02	48.19	74.00	-25.81
11490.00	41.79	Ave	308	1.4	H	6.02	47.81	54.00	-6.19
2329.64	46.90	PK	316	1.4	V	-13.19	33.71	74.00	-40.29
2329.64	37.13	Ave	316	1.4	V	-13.19	23.94	54.00	-30.06
2352.49	44.54	PK	25	1.3	H	-13.14	31.40	74.00	-42.60
2352.49	38.40	Ave	25	1.3	H	-13.14	25.26	54.00	-28.74
3358.65	43.93	PK	35	1.6	V	-9.08	34.85	74.00	-39.15
3358.65	37.73	Ave	35	1.6	V	-9.08	28.65	54.00	-25.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band IV middle channel 5785MHz									
200.03	24.10	PK	270	1.9	H	11.13	35.23	43.50	-8.27
200.03	21.30	PK	304	1.5	V	11.13	32.43	43.50	-11.07
5082.80	50.16	PK	32	1.1	V	-0.62	49.54	74.00	-24.46
5082.80	42.60	Ave	32	1.1	V	-0.62	41.98	54.00	-12.02
11570.00	43.62	PK	3	1.3	H	6.11	49.73	74.00	-24.27
11570.00	42.58	Ave	3	1.3	H	6.11	48.69	54.00	-5.31
2333.33	45.13	PK	164	1.9	V	-13.19	31.94	74.00	-42.06
2333.33	39.96	Ave	164	1.9	V	-13.19	26.77	54.00	-27.23
2373.77	42.71	PK	244	1.3	H	-13.14	29.57	74.00	-44.43
2373.77	37.77	Ave	244	1.3	H	-13.14	24.63	54.00	-29.37
3373.57	43.01	PK	211	1.3	V	-9.08	33.93	74.00	-40.07
3373.57	37.62	Ave	211	1.3	V	-9.08	28.54	54.00	-25.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a band IV High channel 5825MHz									
200.03	23.62	PK	4	1.0	H	11.13	34.75	43.50	-8.75
200.03	19.67	PK	307	1.9	V	11.13	30.80	43.50	-12.70
5089.32	48.72	PK	81	1.5	V	-0.24	48.48	74.00	-25.52
5089.32	42.46	Ave	81	1.5	V	-0.24	42.22	54.00	-11.78
11650.00	40.90	PK	84	1.2	H	6.13	47.03	74.00	-26.97
11650.00	39.67	Ave	84	1.2	H	6.13	45.80	54.00	-8.20
2317.58	45.84	PK	237	1.5	V	-13.19	32.65	74.00	-41.35
2317.58	39.77	Ave	237	1.5	V	-13.19	26.58	54.00	-27.42
2386.13	44.89	PK	325	1.1	H	-13.14	31.75	74.00	-42.25
2386.13	36.30	Ave	325	1.1	H	-13.14	23.16	54.00	-30.84
3355.41	43.25	PK	337	1.5	V	-9.08	34.17	74.00	-39.83
3355.41	36.47	Ave	337	1.5	V	-9.08	27.39	54.00	-26.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band I low Channel 5180MHz									
200.03	22.15	PK	11	1.1	H	11.13	33.28	43.50	-10.22
200.03	21.23	PK	242	1.4	V	11.13	32.36	43.50	-11.14
5101.06	49.33	PK	271	1.1	V	0.09	49.42	74.00	-24.58
5101.06	42.15	Ave	271	1.1	V	0.09	42.24	54.00	-11.76
10360.00	44.18	PK	313	1.5	H	4.13	48.31	74.00	-25.69
10360.00	43.57	Ave	313	1.5	H	4.13	47.70	54.00	-6.30
2336.21	46.45	PK	182	1.7	V	-13.19	33.26	74.00	-40.74
2336.21	38.83	Ave	182	1.7	V	-13.19	25.64	54.00	-28.36
2360.69	43.41	PK	255	2.0	H	-13.14	30.27	74.00	-43.73
2360.69	36.55	Ave	255	2.0	H	-13.14	23.41	54.00	-30.59
3347.69	42.52	PK	304	1.5	V	-9.08	33.44	74.00	-40.56
3347.69	37.55	Ave	304	1.5	V	-9.08	28.47	54.00	-25.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band I middle channel 5200MHz									
200.03	21.02	PK	75	1.3	H	11.13	32.15	43.50	-11.35
200.03	21.31	PK	103	1.2	V	11.13	32.44	43.50	-11.06
5106.65	48.38	PK	341	1.5	V	-0.62	47.76	74.00	-26.24
5106.65	42.75	Ave	341	1.5	V	-0.62	42.13	54.00	-11.87
10400.00	45.06	PK	62	1.2	H	4.26	49.32	74.00	-24.68
10400.00	44.34	Ave	62	1.2	H	4.26	48.60	54.00	-5.40
2348.81	46.69	PK	40	1.9	V	-13.19	33.50	74.00	-40.50
2348.81	39.46	Ave	40	1.9	V	-13.19	26.27	54.00	-27.73
2381.32	42.08	PK	327	1.1	H	-13.14	28.94	74.00	-45.06
2381.32	38.84	Ave	327	1.1	H	-13.14	25.70	54.00	-28.30
3360.64	44.63	PK	200	2.0	V	-9.08	35.55	74.00	-38.45
3360.64	37.55	Ave	200	2.0	V	-9.08	28.47	54.00	-25.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band I High channel 5240MHz									
200.03	20.40	PK	53	1.7	H	11.13	31.53	43.50	-11.97
200.03	20.06	PK	62	1.6	V	11.13	31.19	43.50	-12.31
5081.37	47.84	PK	306	1.8	V	-0.24	47.60	74.00	-26.40
5081.37	42.85	Ave	306	1.8	V	-0.24	42.61	54.00	-11.39
10480.00	45.28	PK	36	2.0	H	4.38	49.66	74.00	-24.34
10480.00	44.65	Ave	36	2.0	H	4.38	49.03	54.00	-4.97
2347.67	46.20	PK	16	1.4	V	-13.19	33.01	74.00	-40.99
2347.67	38.96	Ave	16	1.4	V	-13.19	25.77	54.00	-28.23
2389.28	43.71	PK	46	1.5	H	-13.14	30.57	74.00	-43.43
2389.28	37.78	Ave	46	1.5	H	-13.14	24.64	54.00	-29.36
3344.28	42.97	PK	253	1.5	V	-9.08	33.89	74.00	-40.11
3344.28	38.73	Ave	253	1.5	V	-9.08	29.65	54.00	-24.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) band IV low Channel 5745MHz									
200.03	21.67	PK	178	1.5	H	11.13	32.80	43.50	-10.70
200.03	21.43	PK	7	1.6	V	11.13	32.56	43.50	-10.94
5102.30	49.33	PK	2	1.3	V	0.09	49.42	74.00	-24.58
5102.30	42.17	Ave	2	1.3	V	0.09	42.26	54.00	-11.78
11490.00	42.17	PK	150	1.1	H	6.02	48.19	74.00	-25.81
11490.00	41.79	Ave	150	1.1	H	6.02	47.81	54.00	-6.19
2316.62	46.17	PK	267	1.8	V	-13.19	32.98	74.00	-41.02
2316.62	37.71	Ave	267	1.8	V	-13.19	24.52	54.00	-29.48
2385.82	43.54	PK	291	1.7	H	-13.14	30.40	74.00	-43.60
2385.82	36.01	Ave	291	1.7	H	-13.14	22.87	54.00	-31.13
3334.58	44.53	PK	179	1.6	V	-9.08	35.45	74.00	-38.55
3334.58	38.16	Ave	179	1.6	V	-9.08	29.08	54.00	-24.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band IV middle channel 5785MHz									
200.03	22.41	PK	15	1.6	H	11.13	33.54	43.50	-9.96
200.03	22.41	PK	292	1.7	V	11.13	33.54	43.50	-9.96
5100.26	49.29	PK	52	1.5	V	-0.62	48.67	74.00	-25.33
5100.26	41.65	Ave	52	1.5	V	-0.62	41.03	54.00	-12.97
11570.00	42.27	PK	337	1.3	H	6.11	48.38	74.00	-25.62
11570.00	41.07	Ave	337	1.3	H	6.11	47.18	54.00	-6.82
2320.50	46.36	PK	188	1.9	V	-13.19	33.17	74.00	-40.83
2320.50	39.24	Ave	188	1.9	V	-13.19	26.05	54.00	-27.95
2376.42	43.83	PK	282	1.2	H	-13.14	30.69	74.00	-43.31
2376.42	37.22	Ave	282	1.2	H	-13.14	24.08	54.00	-29.92
3347.33	44.77	PK	270	1.8	V	-9.08	35.69	74.00	-38.31
3347.33	36.59	Ave	270	1.8	V	-9.08	27.51	54.00	-26.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) band IV High channel 5825MHz									
200.03	24.40	PK	148	1.8	H	11.13	35.53	43.50	-7.97
200.03	21.74	PK	310	1.1	V	11.13	32.87	43.50	-10.63
5081.60	49.17	PK	172	1.9	V	-0.24	48.93	74.00	-25.07
5081.60	43.87	Ave	172	1.9	V	-0.24	43.63	54.00	-10.37
11650.00	43.71	PK	49	1.6	H	6.13	49.84	74.00	-24.16
11650.00	42.30	Ave	49	1.6	H	6.13	48.43	54.00	-5.57
2320.43	45.69	PK	283	1.3	V	-13.19	32.50	74.00	-41.50
2320.43	37.16	Ave	283	1.3	V	-13.19	23.97	54.00	-30.03
2358.43	44.06	PK	33	2.0	H	-13.14	30.92	74.00	-43.08
2358.43	37.79	Ave	33	2.0	H	-13.14	24.65	54.00	-29.35
3344.26	42.75	PK	255	1.9	V	-9.08	33.67	74.00	-40.33
3344.26	36.35	Ave	255	1.9	V	-9.08	27.27	54.00	-26.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band I low Channel 5180MHz									
200.03	22.34	PK	21	1.1	H	11.13	33.47	43.50	-10.03
200.03	21.94	PK	156	1.8	V	11.13	33.07	43.50	-10.43
5089.55	46.22	PK	306	1.2	V	0.09	46.31	74.00	-27.69
5089.55	41.67	Ave	306	1.2	V	0.09	41.76	54.00	-12.24
10360.00	44.55	PK	280	1.4	H	4.13	48.68	74.00	-25.32
10360.00	43.98	Ave	280	1.4	H	4.13	48.11	54.00	-5.89
2334.65	46.89	PK	195	1.9	V	-13.19	33.70	74.00	-40.30
2334.65	37.85	Ave	195	1.9	V	-13.19	24.66	54.00	-29.34
2372.91	44.88	PK	251	1.3	H	-13.14	31.74	74.00	-42.26
2372.91	38.82	Ave	251	1.3	H	-13.14	25.68	54.00	-28.32
3365.08	43.98	PK	289	1.9	V	-9.08	34.90	74.00	-39.10
3365.08	36.90	Ave	289	1.9	V	-9.08	27.82	54.00	-26.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band I middle channel 5200MHz									
200.03	22.05	PK	73	1.4	H	11.13	33.18	43.50	-10.32
200.03	21.51	PK	217	1.8	V	11.13	32.64	43.50	-10.86
5109.61	45.51	PK	311	2.0	V	-0.62	44.89	74.00	-29.11
5109.61	42.07	Ave	311	2.0	V	-0.62	41.45	54.00	-12.55
10400.00	43.12	PK	157	1.2	H	4.26	47.38	74.00	-26.62
10400.00	42.25	Ave	157	1.2	H	4.26	46.51	54.00	-7.49
2335.62	45.68	PK	26	1.1	V	-13.19	32.49	74.00	-41.51
2335.62	39.30	Ave	26	1.1	V	-13.19	26.11	54.00	-27.89
2381.28	43.65	PK	162	1.6	H	-13.14	30.51	74.00	-43.49
2381.28	36.70	Ave	162	1.6	H	-13.14	23.56	54.00	-30.44
3371.72	44.99	PK	185	1.0	V	-9.08	35.91	74.00	-38.09
3371.72	36.18	Ave	185	1.0	V	-9.08	27.10	54.00	-26.90

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band I High channel 5240MHz									
200.03	22.44	PK	350	1.0	H	11.13	33.57	43.50	-9.93
200.03	21.88	PK	145	1.3	V	11.13	33.01	43.50	-10.49
5091.33	46.97	PK	44	1.3	V	-0.24	46.73	74.00	-27.27
5091.33	42.08	Ave	44	1.3	V	-0.24	41.84	54.00	-12.16
10480.00	41.98	PK	196	1.0	H	4.38	46.36	74.00	-27.64
10480.00	40.59	Ave	196	1.0	H	4.38	44.97	54.00	-9.03
2342.61	46.69	PK	126	1.7	V	-13.19	33.50	74.00	-40.50
2342.61	38.78	Ave	126	1.7	V	-13.19	25.59	54.00	-28.41
2362.21	44.10	PK	130	1.8	H	-13.14	30.96	74.00	-43.04
2362.21	38.48	Ave	130	1.8	H	-13.14	25.34	54.00	-28.66
3331.32	44.22	PK	35	1.6	V	-9.08	35.14	74.00	-38.86
3331.32	37.12	Ave	35	1.6	V	-9.08	28.04	54.00	-25.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band IV low Channel 5745MHz									
200.03	22.20	PK	224	1.1	H	11.13	33.33	43.50	-10.17
200.03	21.89	PK	89	1.7	V	11.13	33.02	43.50	-10.48
5102.56	45.49	PK	32	1.4	V	0.09	45.58	74.00	-28.42
5102.56	42.03	Ave	32	1.4	V	0.09	42.12	54.00	-11.88
11490.00	42.56	PK	33	1.7	H	6.02	48.58	74.00	-25.42
11490.00	41.70	Ave	33	1.7	H	6.02	47.72	54.00	-6.28
2335.15	46.45	PK	284	1.8	V	-13.19	33.26	74.00	-40.74
2335.15	39.92	Ave	284	1.8	V	-13.19	26.73	54.00	-27.27
2361.24	43.29	PK	55	1.8	H	-13.14	30.15	74.00	-43.85
2361.24	37.06	Ave	55	1.8	H	-13.14	23.92	54.00	-30.08
3355.61	43.59	PK	288	2.0	V	-9.08	34.51	74.00	-39.49
3355.61	37.65	Ave	288	2.0	V	-9.08	28.57	54.00	-25.43

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band IV middle channel 5785MHz									
200.03	22.63	PK	41	1.6	H	11.13	33.76	43.50	-9.74
200.03	22.98	PK	340	1.6	V	11.13	34.11	43.50	-9.39
5082.43	46.24	PK	256	1.0	V	-0.62	45.62	74.00	-28.38
5082.43	43.43	Ave	256	1.0	V	-0.62	42.81	54.00	-11.19
11570.00	43.14	PK	125	1.7	H	6.11	49.25	74.00	-24.75
11570.00	42.29	Ave	125	1.7	H	6.11	48.40	54.00	-5.60
2345.73	45.35	PK	299	1.1	V	-13.19	32.16	74.00	-41.84
2345.73	37.83	Ave	299	1.1	V	-13.19	24.64	54.00	-29.36
2373.22	42.24	PK	68	1.8	H	-13.14	29.10	74.00	-44.90
2373.22	37.26	Ave	68	1.8	H	-13.14	24.12	54.00	-29.88
3374.99	43.37	PK	237	2.0	V	-9.08	34.29	74.00	-39.71
3374.99	38.01	Ave	237	2.0	V	-9.08	28.93	54.00	-25.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) band IV High channel 5825MHz									
200.03	20.31	PK	35	1.4	H	11.13	31.44	43.50	-12.06
200.03	20.56	PK	143	1.7	V	11.13	31.69	43.50	-11.81
5103.95	46.87	PK	332	1.0	V	-0.24	46.63	74.00	-27.37
5103.95	41.23	Ave	332	1.0	V	-0.24	40.99	54.00	-13.01
11650.00	43.02	PK	104	1.1	H	6.13	49.15	74.00	-24.85
11650.00	42.30	Ave	104	1.1	H	6.13	48.43	54.00	-5.57
2336.20	45.90	PK	278	1.2	V	-13.19	32.71	74.00	-41.29
2336.20	39.59	Ave	278	1.2	V	-13.19	26.40	54.00	-27.60
2380.57	44.59	PK	75	1.1	H	-13.14	31.45	74.00	-42.55
2380.57	37.15	Ave	75	1.1	H	-13.14	24.01	54.00	-29.99
3333.00	42.65	PK	236	1.0	V	-9.08	33.57	74.00	-40.43
3333.00	38.04	Ave	236	1.0	V	-9.08	28.96	54.00	-25.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band I low Channel 5190MHz									
200.03	22.34	PK	172	1.0	H	11.13	33.47	43.50	-10.03
200.03	21.94	PK	230	2.0	V	11.13	33.07	43.50	-10.43
5093.50	45.69	PK	340	1.7	V	0.09	45.78	74.00	-28.22
5093.50	41.15	Ave	340	1.7	V	0.09	41.24	54.00	-12.76
10380.00	44.59	PK	216	1.1	H	4.13	48.72	74.00	-25.28
10380.00	44.07	Ave	216	1.1	H	4.13	48.20	54.00	-5.80
2312.75	45.63	PK	197	1.5	V	-13.19	32.44	74.00	-41.56
2312.75	38.54	Ave	197	1.5	V	-13.19	25.35	54.00	-28.65
2350.22	44.87	PK	83	1.3	H	-13.14	31.73	74.00	-42.27
2350.22	37.68	Ave	83	1.3	H	-13.14	24.54	54.00	-29.46
3359.44	44.90	PK	1	1.3	V	-9.08	35.82	74.00	-38.18
3359.44	36.91	Ave	1	1.3	V	-9.08	27.83	54.00	-26.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band I High channel 5230MHz									
200.03	21.61	PK	96	1.6	H	11.13	32.74	43.50	-10.76
200.03	21.11	PK	12	1.6	V	11.13	32.24	43.50	-11.26
5081.26	45.62	PK	118	1.2	V	-0.24	45.38	74.00	-28.62
5081.26	44.21	Ave	118	1.2	V	-0.24	43.97	54.00	-10.03
10460.00	44.52	PK	218	1.4	H	4.38	48.90	74.00	-25.10
10480.00	43.86	Ave	218	1.4	H	4.38	48.24	54.00	-5.76
2340.99	45.58	PK	9	2.0	V	-13.19	32.39	74.00	-41.61
2340.99	39.19	Ave	9	2.0	V	-13.19	26.00	54.00	-28.00
2381.54	44.44	PK	111	1.1	H	-13.14	31.30	74.00	-42.70
2381.54	38.05	Ave	111	1.1	H	-13.14	24.91	54.00	-29.09
3370.45	43.07	PK	158	1.8	V	-9.08	33.99	74.00	-40.01
3370.45	37.34	Ave	158	1.8	V	-9.08	28.26	54.00	-25.74

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band IV low Channel 5755MHz									
200.03	22.14	PK	263	2.0	H	11.13	33.27	43.50	-10.23
200.03	20.98	PK	214	1.1	V	11.13	32.11	43.50	-11.39
5101.76	45.33	PK	61	1.7	V	0.09	45.42	74.00	-28.58
5101.76	41.43	Ave	61	1.7	V	0.09	41.52	54.00	-12.48
11510.00	44.97	PK	29	1.3	H	6.05	51.02	74.00	-22.98
11510.00	44.12	Ave	29	1.3	H	6.05	50.17	54.00	-3.83
2339.33	45.52	PK	141	1.5	V	-13.19	32.33	74.00	-41.67
2339.33	37.74	Ave	141	1.5	V	-13.19	24.55	54.00	-29.45
2382.66	44.95	PK	157	1.3	H	-13.14	31.81	74.00	-42.19
2382.66	36.20	Ave	157	1.3	H	-13.14	23.06	54.00	-30.94
3336.60	43.87	PK	92	1.3	V	-9.08	34.79	74.00	-39.21
3336.60	36.44	Ave	92	1.3	V	-9.08	27.36	54.00	-26.64

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) band IV High channel 5795MHz									
200.03	23.04	PK	348	1.1	H	11.13	34.17	43.50	-9.33
200.03	20.99	PK	222	1.9	V	11.13	32.12	43.50	-11.38
5093.01	48.22	PK	142	1.2	V	-0.24	47.98	74.00	-26.02
5093.01	43.17	Ave	142	1.2	V	-0.24	42.93	54.00	-11.07
11590.00	43.63	PK	117	1.1	H	6.15	49.78	74.00	-24.22
11590.00	42.37	Ave	117	1.1	H	6.15	48.52	54.00	-5.48
2341.44	45.45	PK	229	1.5	V	-13.19	32.26	74.00	-41.74
2341.44	38.23	Ave	229	1.5	V	-13.19	25.04	54.00	-28.96
2389.33	44.94	PK	248	1.2	H	-13.14	31.80	74.00	-42.20
2389.33	38.49	Ave	248	1.2	H	-13.14	25.35	54.00	-28.65
3346.83	44.58	PK	152	1.5	V	-9.08	35.50	74.00	-38.50
3346.83	36.77	Ave	152	1.5	V	-9.08	27.69	54.00	-26.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band I low Channel 5190MHz									
200.03	21.55	PK	353	1.3	H	11.13	32.68	43.50	-10.82
200.03	21.96	PK	331	1.3	V	11.13	33.09	43.50	-10.41
5102.30	46.92	PK	216	2.0	V	0.09	47.01	74.00	-26.99
5102.30	42.32	Ave	216	2.0	V	0.09	42.41	54.00	-11.59
10380.00	44.08	PK	161	1.3	H	4.13	48.21	74.00	-25.79
10380.00	43.20	Ave	161	1.3	H	4.13	47.33	54.00	-6.67
2332.69	46.37	PK	241	1.5	V	-13.19	33.18	74.00	-40.82
2332.69	38.11	Ave	241	1.5	V	-13.19	24.92	54.00	-29.08
2366.12	42.37	PK	261	1.3	H	-13.14	29.23	74.00	-44.77
2366.12	37.76	Ave	261	1.3	H	-13.14	24.62	54.00	-29.38
3379.88	43.69	PK	40	1.3	V	-9.08	34.61	74.00	-39.39
3379.88	38.40	Ave	40	1.3	V	-9.08	29.32	54.00	-24.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band I High channel 5230MHz									
200.03	24.26	PK	217	1.8	H	11.13	35.39	43.50	-8.11
200.03	21.14	PK	256	1.3	V	11.13	32.27	43.50	-11.23
5095.38	46.41	PK	213	1.5	V	-0.24	46.17	74.00	-27.83
5095.38	43.78	Ave	213	1.5	V	-0.24	43.54	54.00	-10.46
10460.00	44.29	PK	116	1.8	H	4.38	48.67	74.00	-25.33
10480.00	43.59	Ave	116	1.8	H	4.38	47.97	54.00	-6.03
2321.58	46.98	PK	93	1.2	V	-13.19	33.79	74.00	-40.21
2321.58	39.10	Ave	93	1.2	V	-13.19	25.91	54.00	-28.09
2354.30	42.26	PK	13	1.0	H	-13.14	29.12	74.00	-44.88
2354.30	36.36	Ave	13	1.0	H	-13.14	23.22	54.00	-30.78
3347.76	43.64	PK	220	1.5	V	-9.08	34.56	74.00	-39.44
3347.76	36.87	Ave	220	1.5	V	-9.08	27.79	54.00	-26.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band IV low Channel 5755MHz									
200.03	21.88	PK	87	1.6	H	11.13	33.01	43.50	-10.49
200.03	21.17	PK	200	1.1	V	11.13	32.30	43.50	-11.20
5090.60	45.96	PK	52	1.9	V	0.09	46.05	74.00	-27.95
5090.60	42.70	Ave	52	1.9	V	0.09	42.79	54.00	-11.21
11510.00	44.69	PK	151	1.9	H	6.05	50.74	74.00	-23.26
11510.00	43.90	Ave	151	1.9	H	6.05	49.95	54.00	-4.05
2344.97	45.28	PK	278	1.7	V	-13.19	32.09	74.00	-41.91
2344.97	37.95	Ave	278	1.7	V	-13.19	24.76	54.00	-29.24
2351.16	44.90	PK	44	1.5	H	-13.14	31.76	74.00	-42.24
2351.16	38.94	Ave	44	1.5	H	-13.14	25.80	54.00	-28.20
3351.37	44.10	PK	164	1.7	V	-9.08	35.02	74.00	-38.98
3351.37	37.95	Ave	164	1.7	V	-9.08	28.87	54.00	-25.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) band IV High channel 5795MHz									
200.03	20.85	PK	243	1.8	H	11.13	31.98	43.50	-11.52
200.03	23.74	PK	118	1.0	V	11.13	34.87	43.50	-8.63
5103.90	47.06	PK	241	1.1	V	-0.24	46.82	74.00	-27.18
5103.90	43.48	Ave	241	1.1	V	-0.24	43.24	54.00	-10.76
11590.00	47.00	PK	103	1.8	H	6.15	53.15	74.00	-20.85
11590.00	46.16	Ave	103	1.8	H	6.15	52.31	54.00	-1.69
2331.78	45.70	PK	26	1.1	V	-13.19	32.51	74.00	-41.49
2331.78	37.79	Ave	26	1.1	V	-13.19	24.60	54.00	-29.40
2354.86	43.48	PK	194	1.7	H	-13.14	30.34	74.00	-43.66
2354.86	36.27	Ave	194	1.7	H	-13.14	23.13	54.00	-30.87
3339.84	42.92	PK	173	1.8	V	-9.08	33.84	74.00	-40.16
3339.84	38.45	Ave	173	1.8	V	-9.08	29.37	54.00	-24.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT80) band I low Channel 5210MHz									
200.03	20.89	PK	206	1.9	H	11.13	32.02	43.50	-11.48
200.03	22.03	PK	192	1.7	V	11.13	33.16	43.50	-10.34
5102.96	45.31	PK	46	1.8	V	0.09	45.40	74.00	-28.60
5102.96	42.98	Ave	46	1.8	V	0.09	43.07	54.00	-10.93
10420.00	41.35	PK	204	1.3	H	4.15	45.50	74.00	-28.50
10420.00	40.37	Ave	204	1.3	H	4.15	44.52	54.00	-9.48
2342.42	45.70	PK	162	1.5	V	-13.19	32.51	74.00	-41.49
2342.42	38.04	Ave	162	1.5	V	-13.19	24.85	54.00	-29.15
2384.66	44.80	PK	27	1.0	H	-13.14	31.66	74.00	-42.34
2384.66	37.05	Ave	27	1.0	H	-13.14	23.91	54.00	-30.09
3379.39	43.04	PK	2	1.6	V	-9.08	33.96	74.00	-40.04
3379.39	36.81	Ave	2	1.6	V	-9.08	27.73	54.00	-26.27

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT80) band IV low Channel 5775MHz									
200.03	21.88	PK	168	1.4	H	11.13	33.01	43.50	-10.49
200.03	21.17	PK	353	1.7	V	11.13	32.30	43.50	-11.20
5086.34	46.24	PK	314	1.2	V	0.09	46.33	74.00	-27.67
5086.34	42.53	Ave	314	1.2	V	0.09	42.62	54.00	-11.38
11550.00	41.50	PK	208	1.9	H	6.12	47.62	74.00	-26.38
11550.00	40.88	Ave	208	1.9	H	6.12	47.00	54.00	-7.00
2328.97	45.13	PK	1	1.6	V	-13.19	31.94	74.00	-42.06
2328.97	39.82	Ave	1	1.6	V	-13.19	26.63	54.00	-27.37
2384.07	42.20	PK	218	1.8	H	-13.14	29.06	74.00	-44.94
2384.07	38.17	Ave	218	1.8	H	-13.14	25.03	54.00	-28.97
3352.53	44.17	PK	136	1.5	V	-9.08	35.09	74.00	-38.91
3352.53	37.54	Ave	136	1.5	V	-9.08	28.46	54.00	-25.54

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

8 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v01, Section (B)
Test Method:	ANSI C63.10: 2009
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

8.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100

Test result plots shown as follows:


802.11a band I Low channel

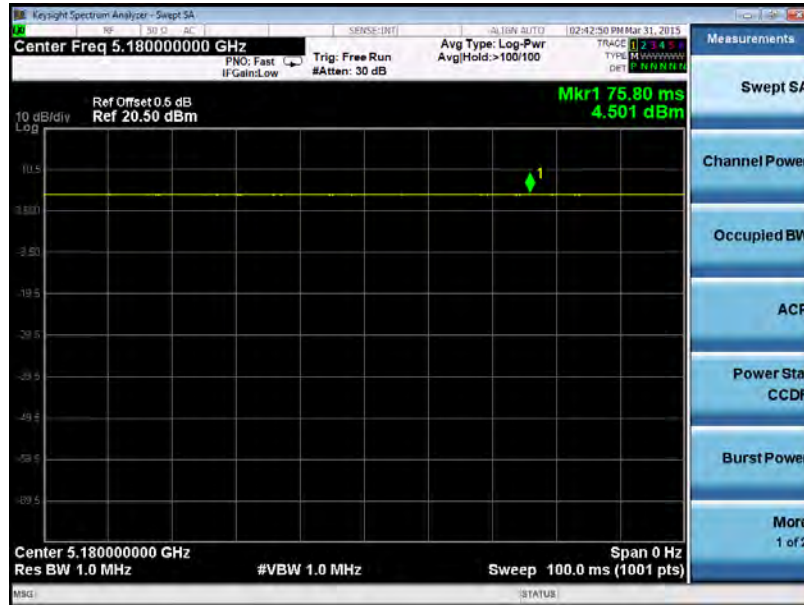


802.11a band IV Low channel

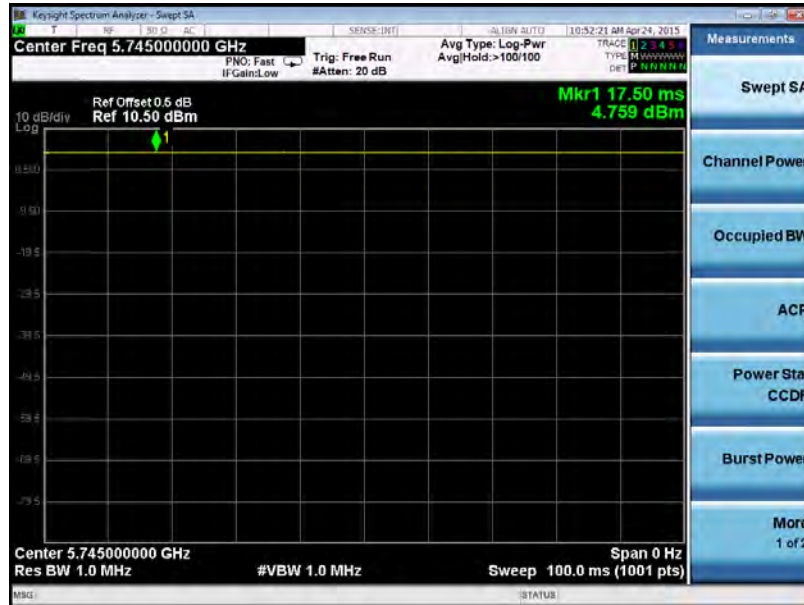


802.11n(HT20) band I Low channel

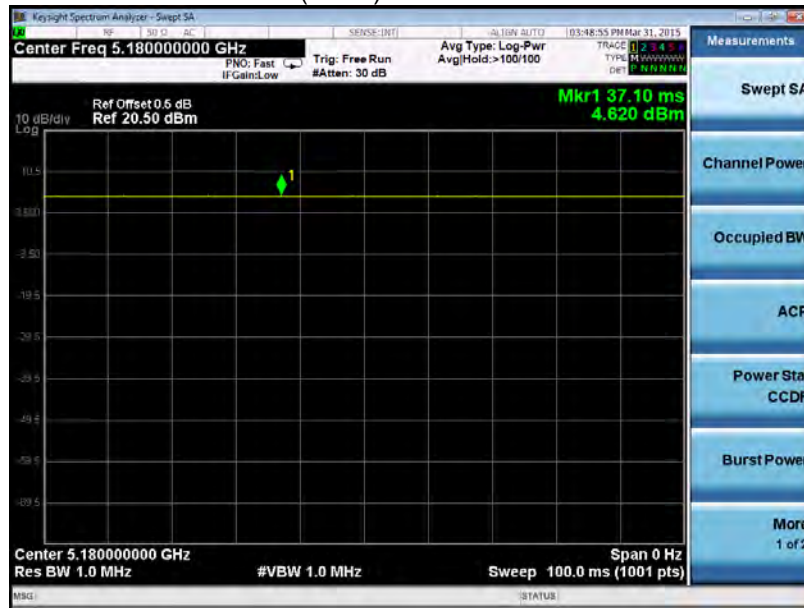


802.11n(HT20) band IV Low channel

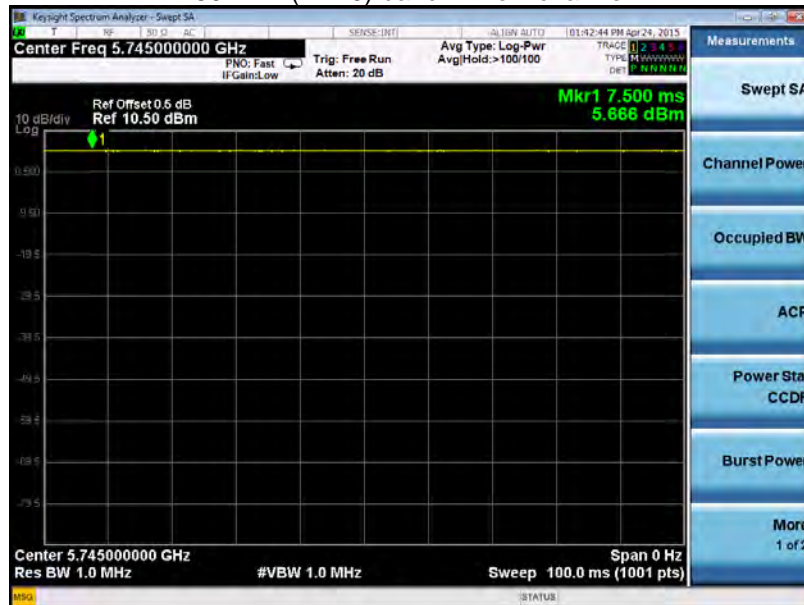


802.11n(HT40) band I Low channel

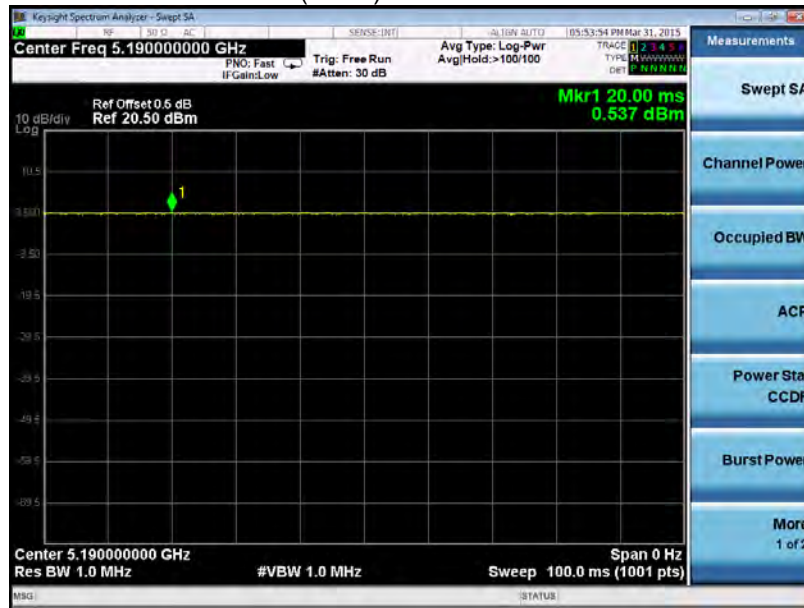


802.11n(HT40) band IV Low channel

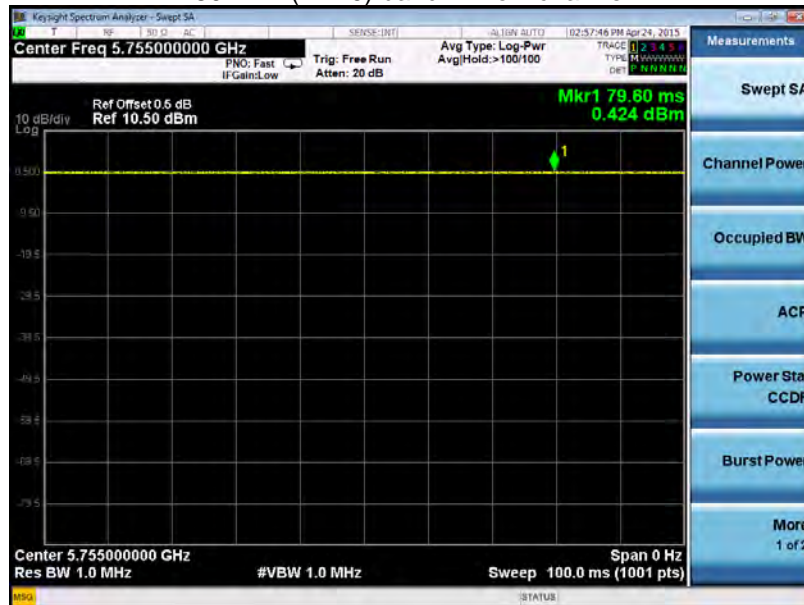


802.11ac(HT20) band I Low channel

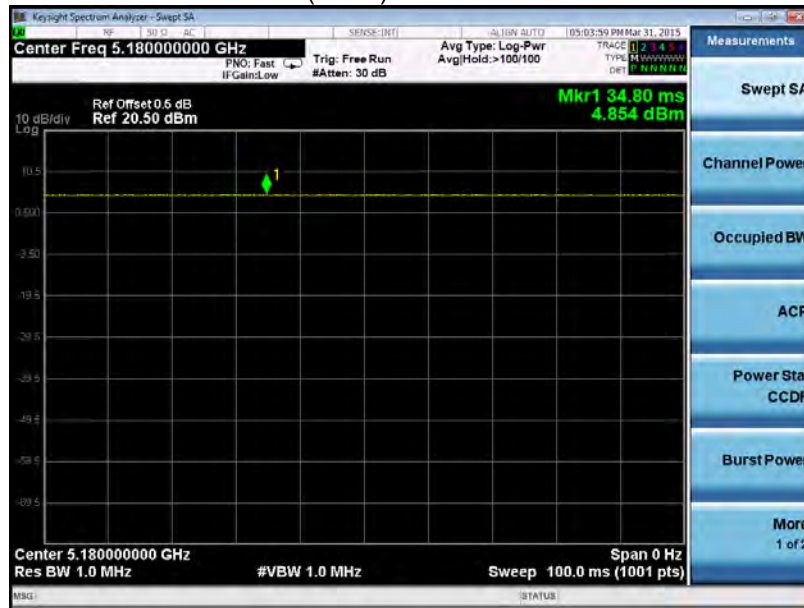


802.11ac(HT20) band IV Low channel

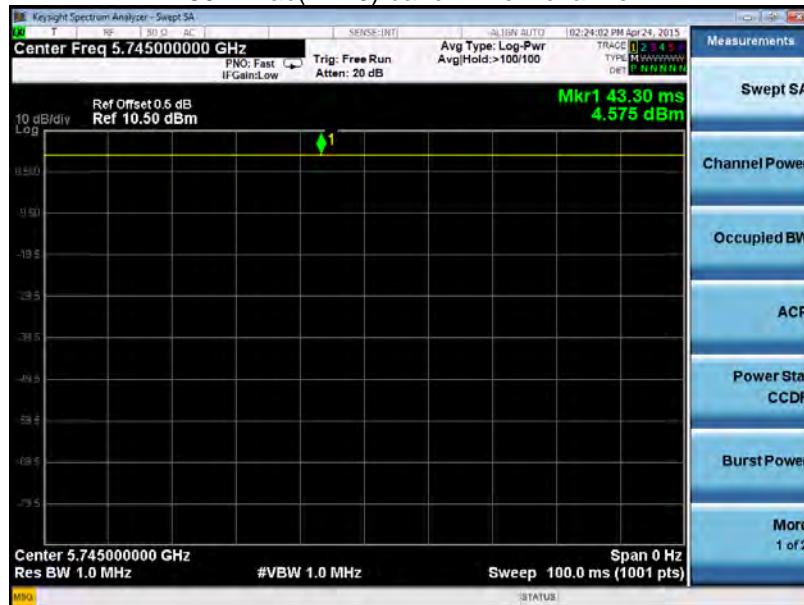

802.11ac(HT40) band I Low channel

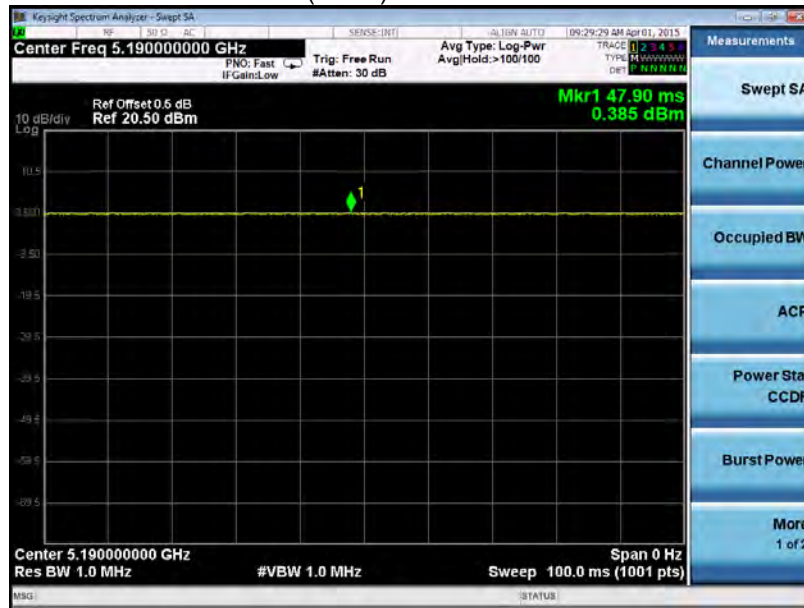


802.11ac(HT40) band IV Low channel

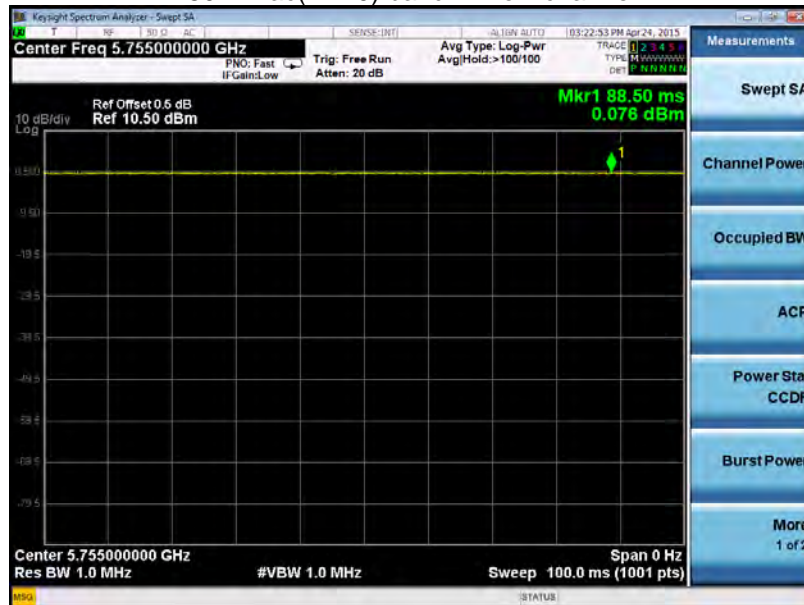

802.11ac(HT80) band I Low channel



802.11ac(HT80) band IV Low channel

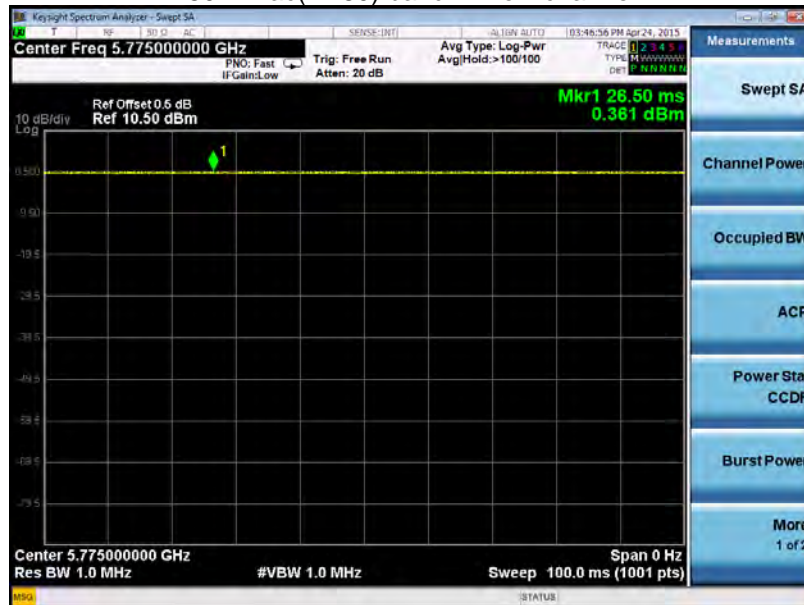

9 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2009
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz . (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17dBm/MHz ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27dBm/MHz .
Test Result:	PASS


9.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


9.2 Test Result

Test result plots shown as follows:

802.11a band I Band edge-left side

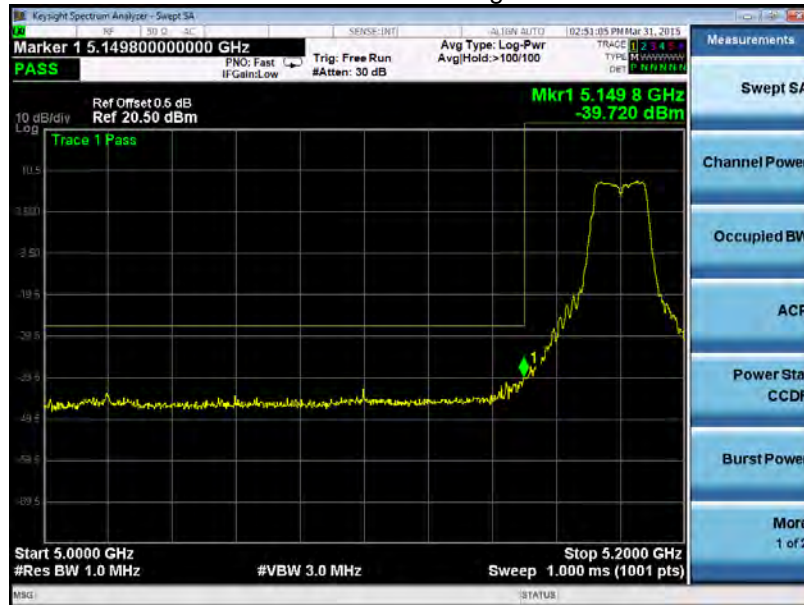

802.11a band I Band edge-right side

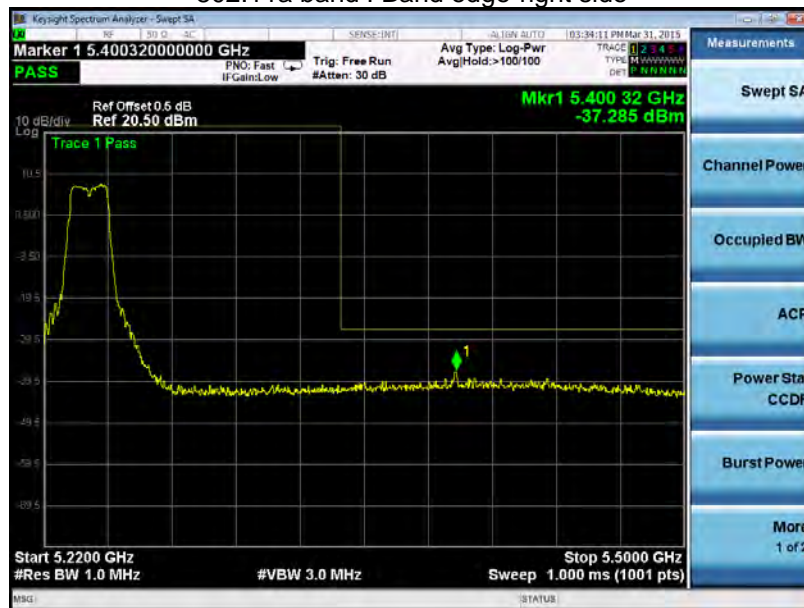


802.11a band IV Band edge-left side




802.11a band IV Band edge-right side




802.11n(HT20) band I Band edge-left side

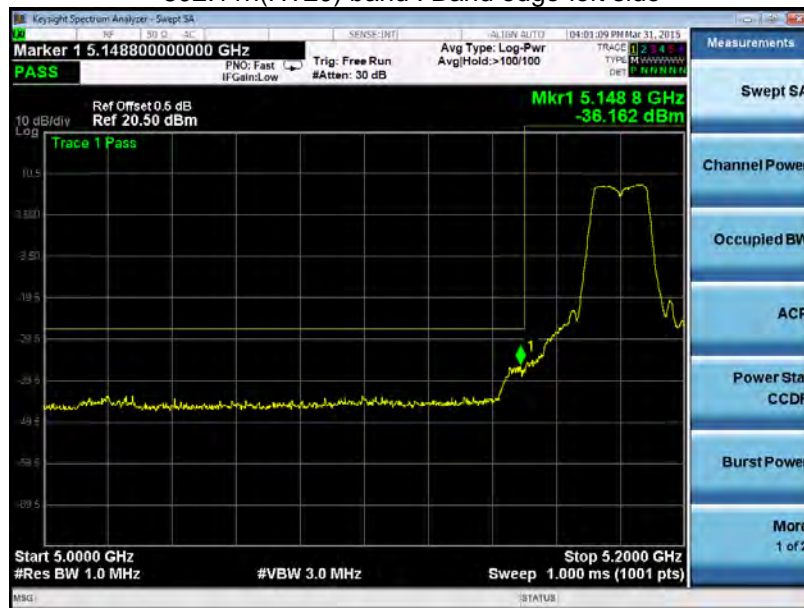

802.11n(HT20) band I Band edge-right side

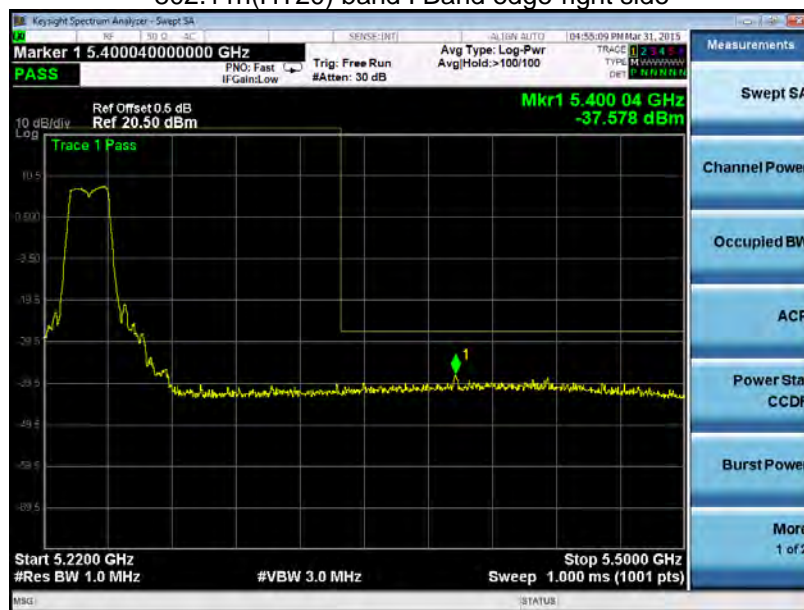

802.11n(HT20) band IV Band edge-left side

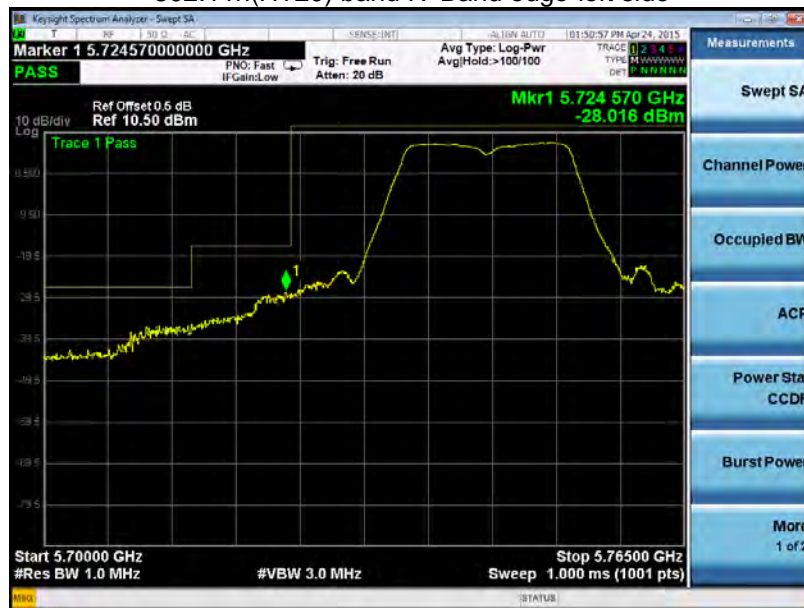

802.11n(HT20) band IV Band edge-right side



802.11n(HT40) band I Band edge-left side



802.11n(HT40) band I Band edge-right side




802.11n(HT40) band IV Band edge-left side



802.11n(HT40) band IV Band edge-right side




802.11ac(HT20) band I Band edge-left side

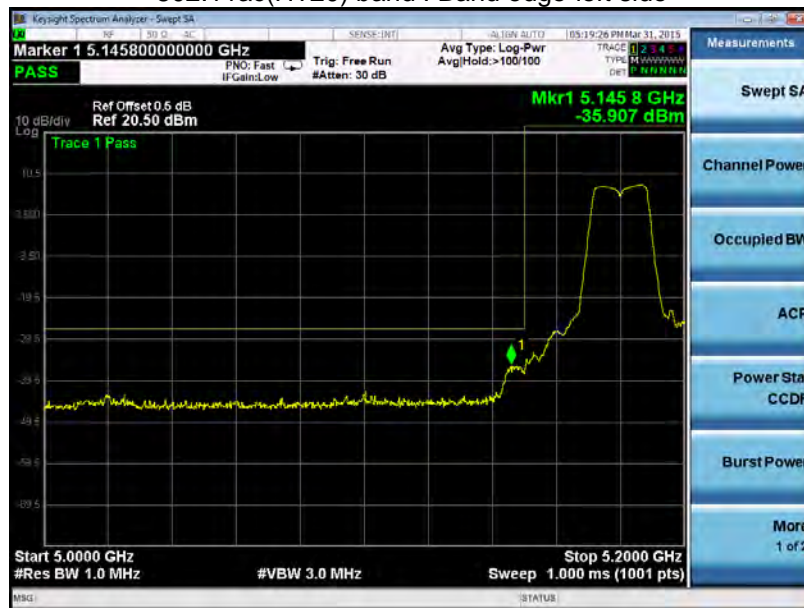

802.11ac(HT20) band I Band edge-right side




802.11ac(HT20) band IV Band edge-left side

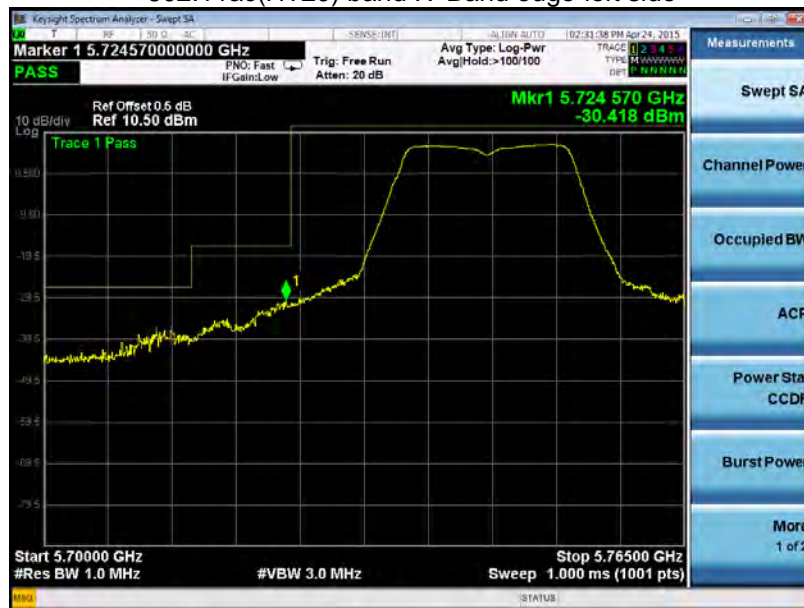

802.11ac(HT20) band IV Band edge-right side



802.11ac(HT40) band I Band edge-left side

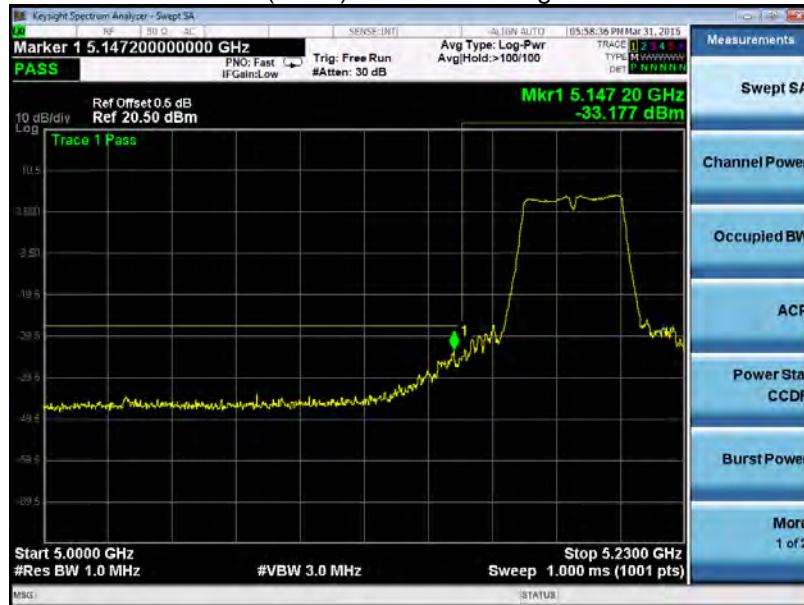

802.11ac(HT40) band I Band edge-right side



802.11ac(HT80) band IV Band edge-left side



802.11ac(HT80) band IV Band edge-right side



802.11ac(HT80) band I Band edge-left side



802.11ac(HT40) band I Band edge-right side



802.11ac(HT80) band IV Band edge-left side



802.11ac(HT80) band IV Band edge-right side



10 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

10.2 Test Result:


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
Band IV	802.11a	16.59	16.62	16.62
	802.11n(HT20)	17.73	17.82	17.73
	802.11n(HT40)	36.54	/	36.60
	802.11ac(HT20)	17.82	17.76	17.82
	802.11ac(HT40)	36.54	/	36.60
	802.11ac(HT80)	76.56	/	/

Test result plots shown as follows:


802.11a band IV Low channel



802.11a band IV Middle channel

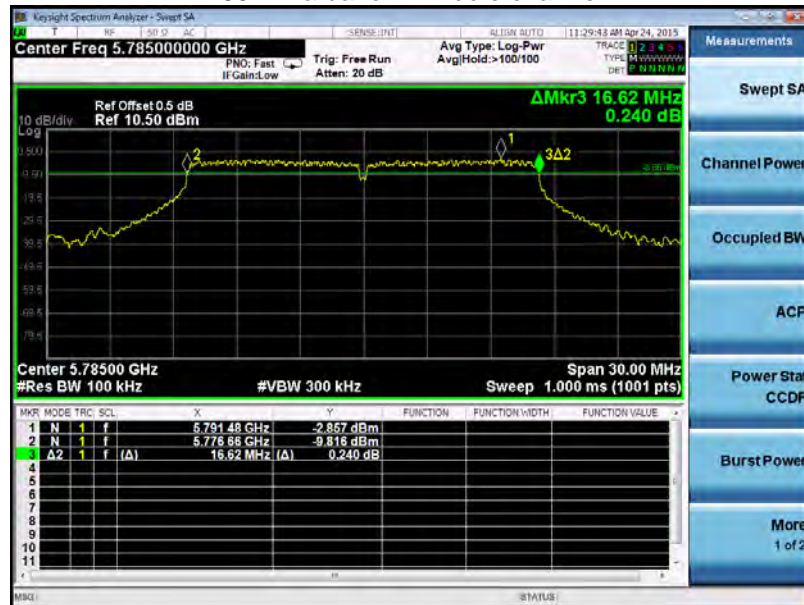


802.11a band IV High channel

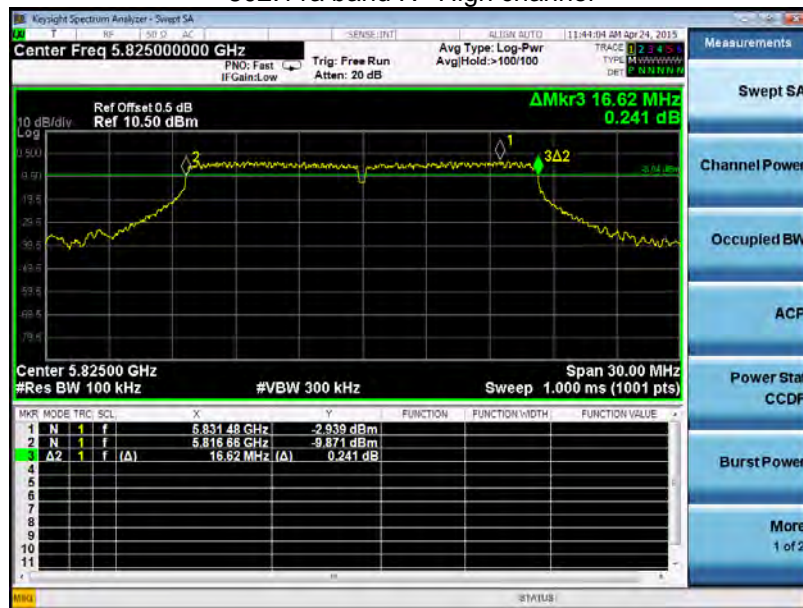


802.11n(HT20) band IV Low channel




802.11n(HT20) band IV Middle channel

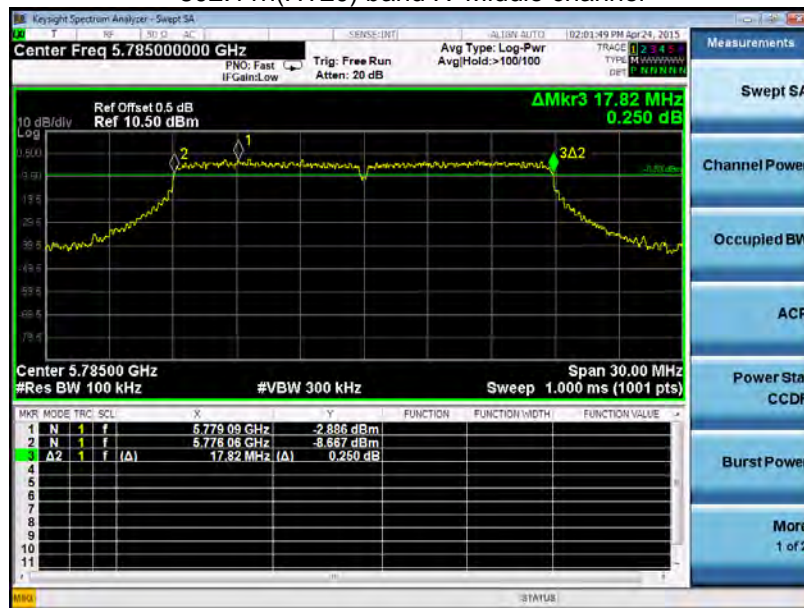


802.11n(HT20) band IV High channel

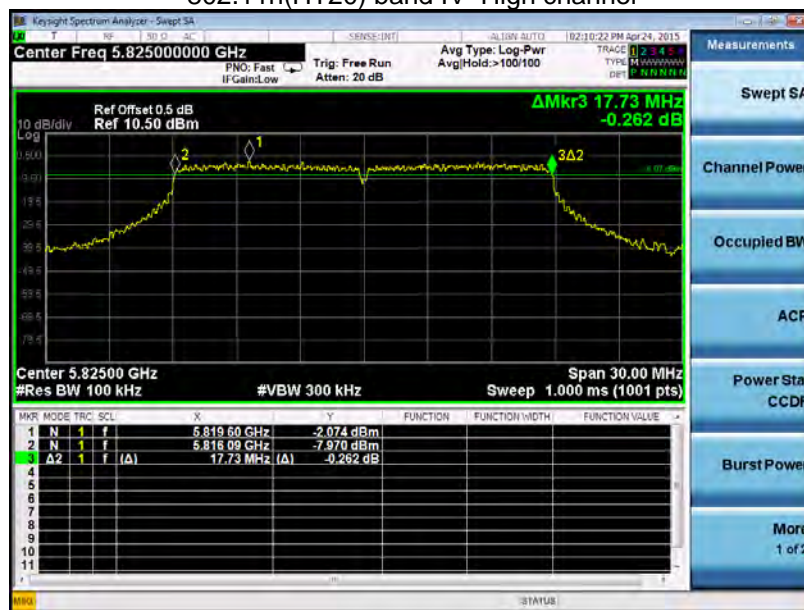


802.11n(HT40) band IV Low channel

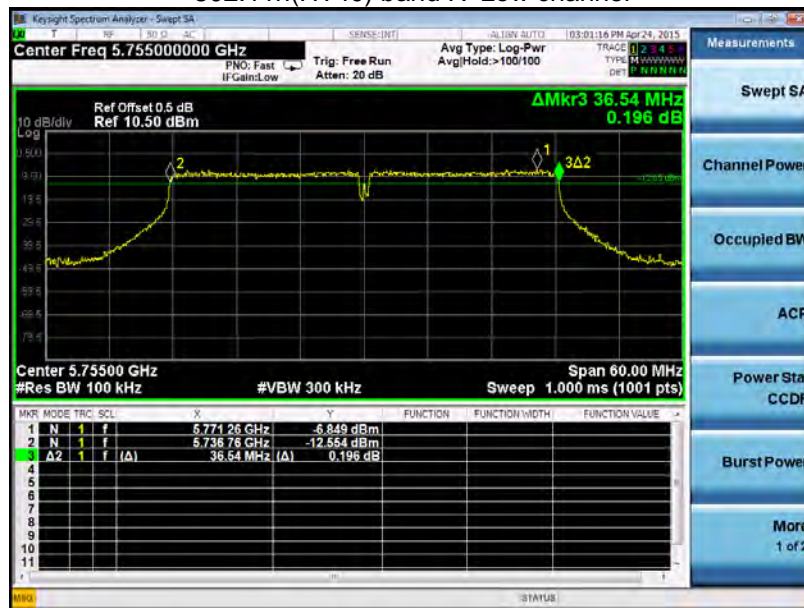


802.11n(HT40) band IV High channel

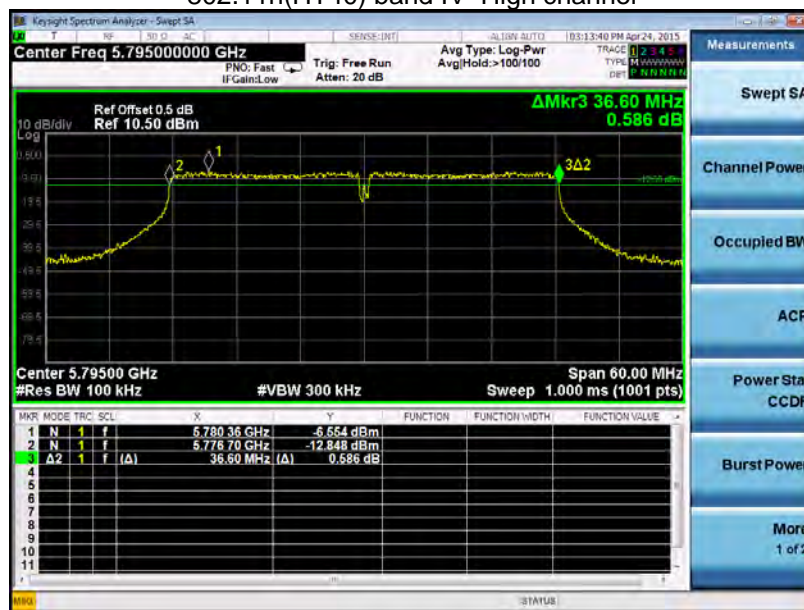

802.11ac(HT20) band IV Low channel

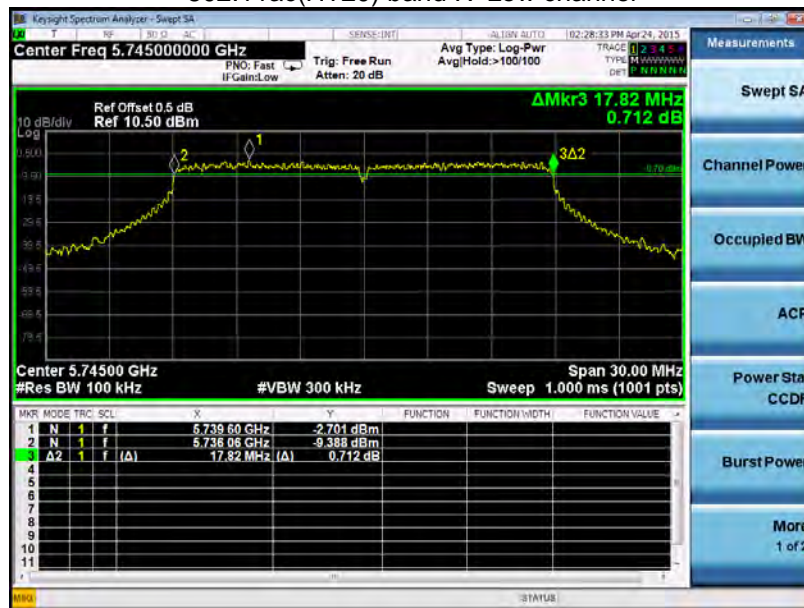


802.11ac(HT20) band IV Middle channel

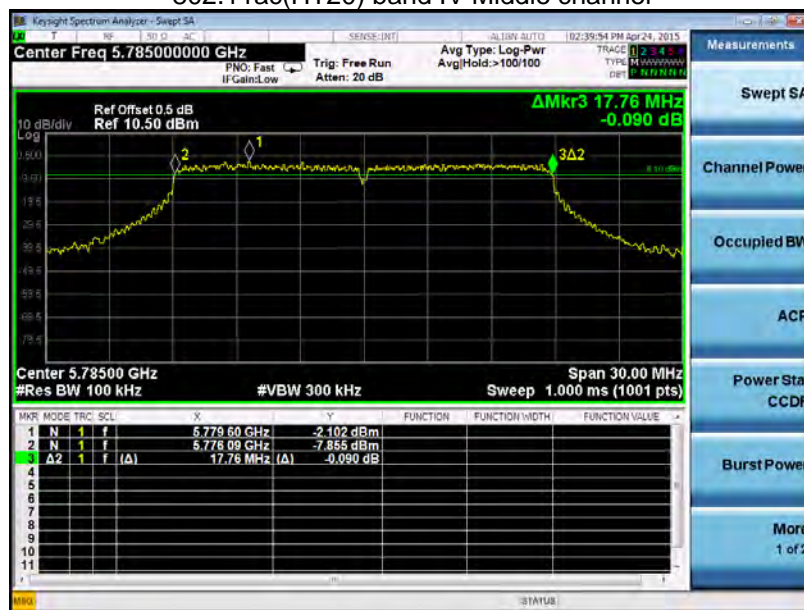


802.11ac(HT20) band IV High channel




802.11ac(HT40) band IV Low channel

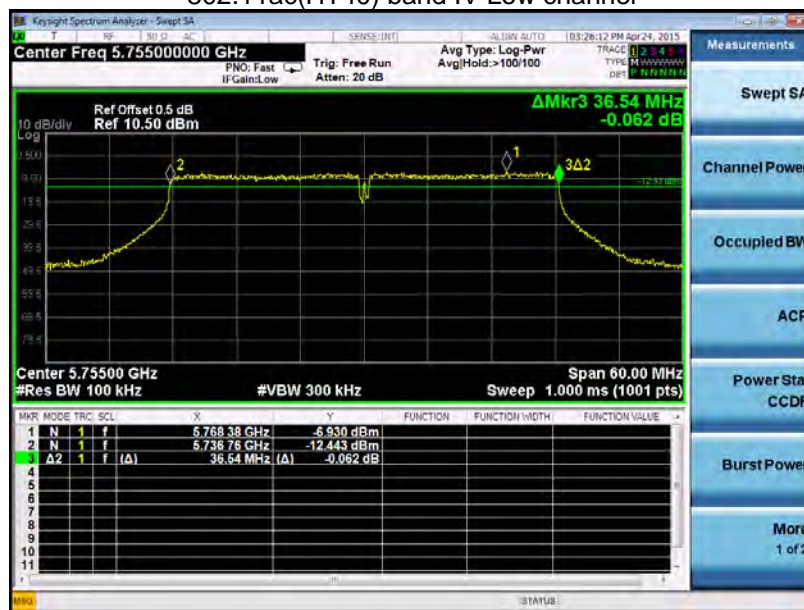

802.11n(HT40) band IV High channel

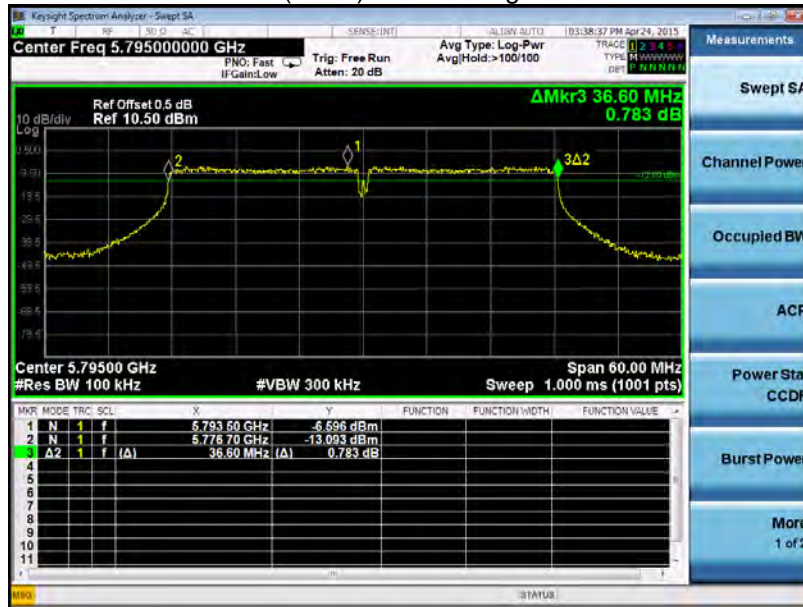

802.11ac(HT80) band IV Low channel

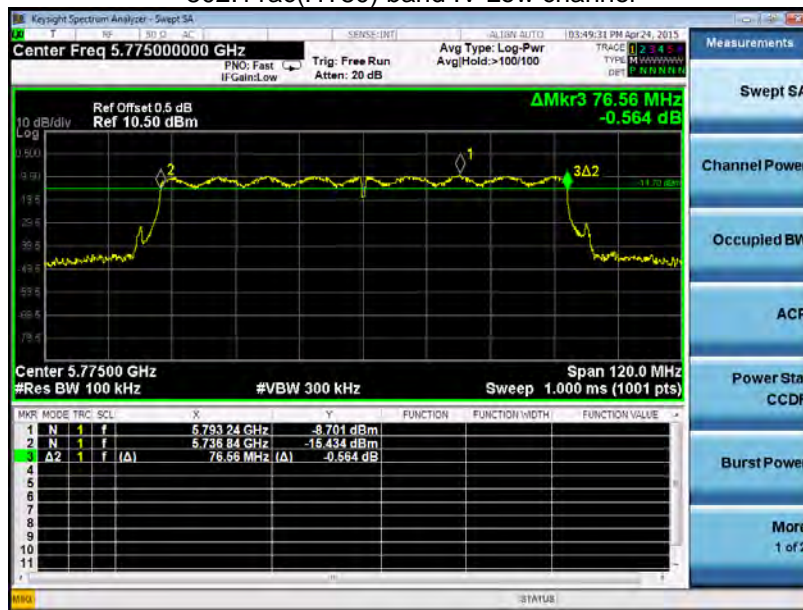

11 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
Band I	802.11a	20.92	21.99	21.96	16.64	16.68	16.67
	802.11n(HT20)	21.72	21.96	21.84	17.78	17.80	17.80
	802.11n(HT40)	43.89	/	43.92	36.56	/	36.58
	802.11ac(HT20)	21.80	21.89	22.43	17.80	17.81	17.85
	802.11ac(HT40)	43.83	/	43.63	36.59	/	36.53
	802.11ac(HT80)	84.51	/	/	76.11	/	/
Band IV	802.11a	22.99	21.07	21.03	16.68	16.67	16.66
	802.11n(HT20)	22.54	22.02	21.98	17.83	17.80	17.79
	802.11n(HT40)	43.61	/	43.55	36.47	/	36.48
	802.11ac(HT20)	21.88	21.80	21.84	17.81	17.81	17.81
	802.11ac(HT40)	43.50	/	43.37	36.43	/	36.44
	802.11ac(HT80)	84.56	/	/	76.03	/	/

Test result plots shown as follows:


802.11a band I Low channel

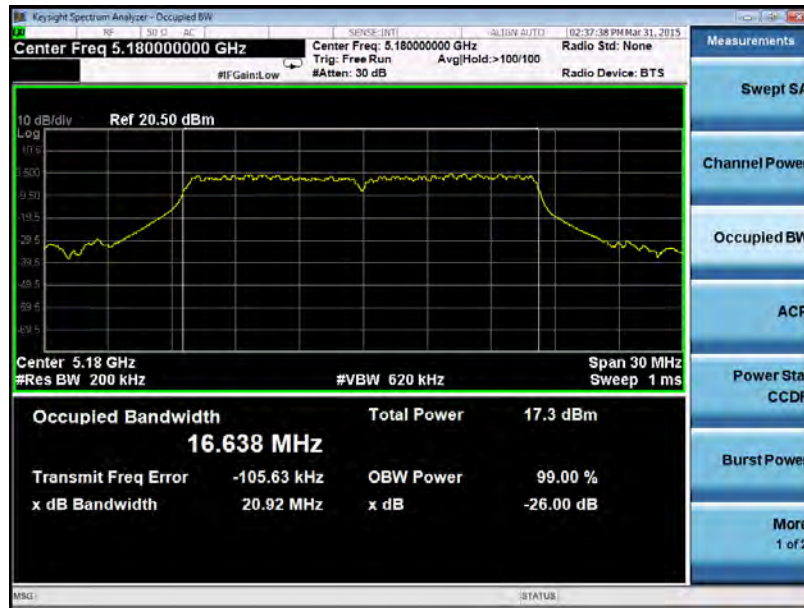


802.11a band I Middle channel

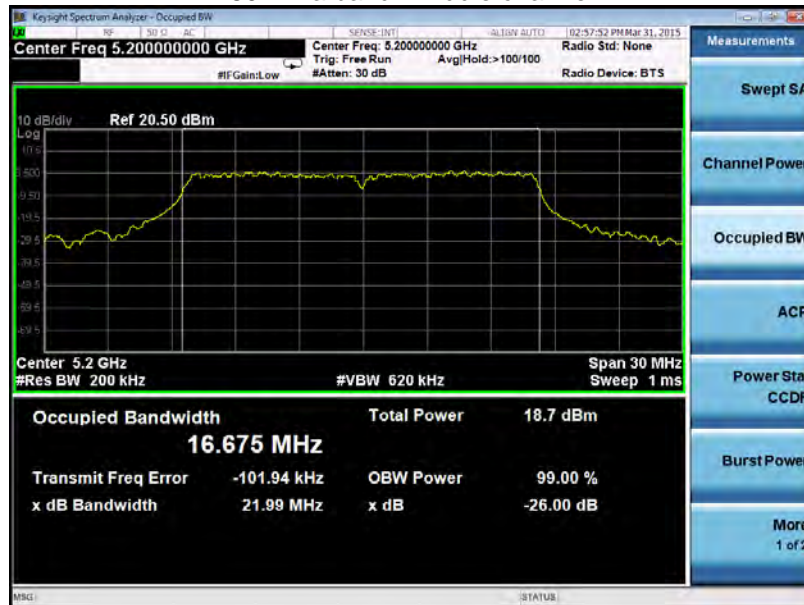


802.11a band I High channel

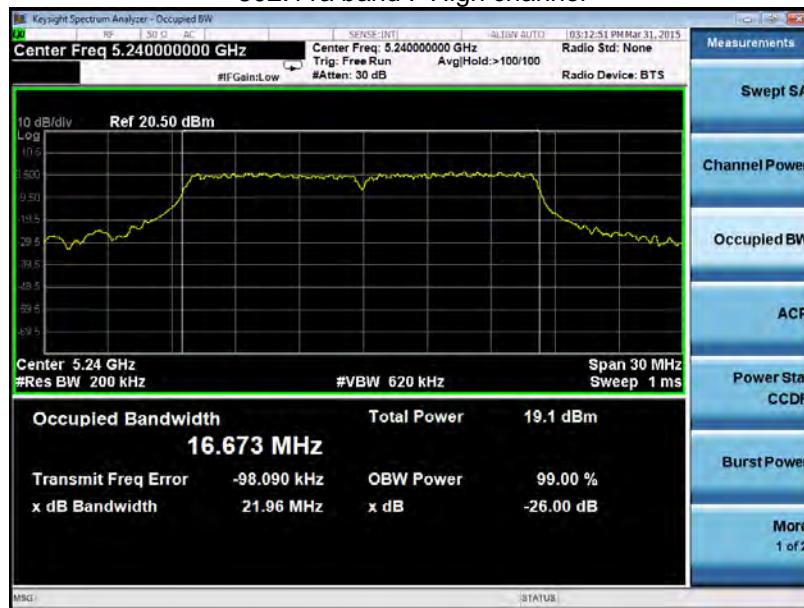


802.11n(HT20) band I Low channel

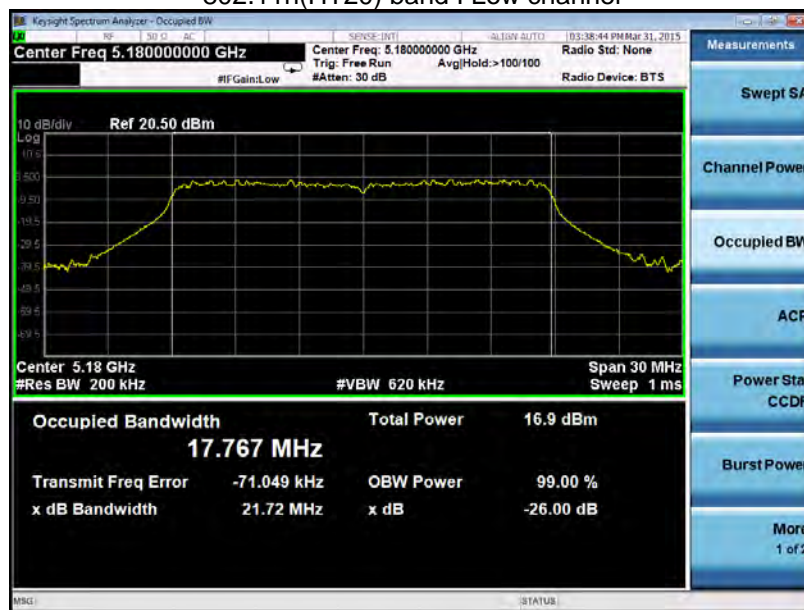


802.11n(HT20) band I Middle channel

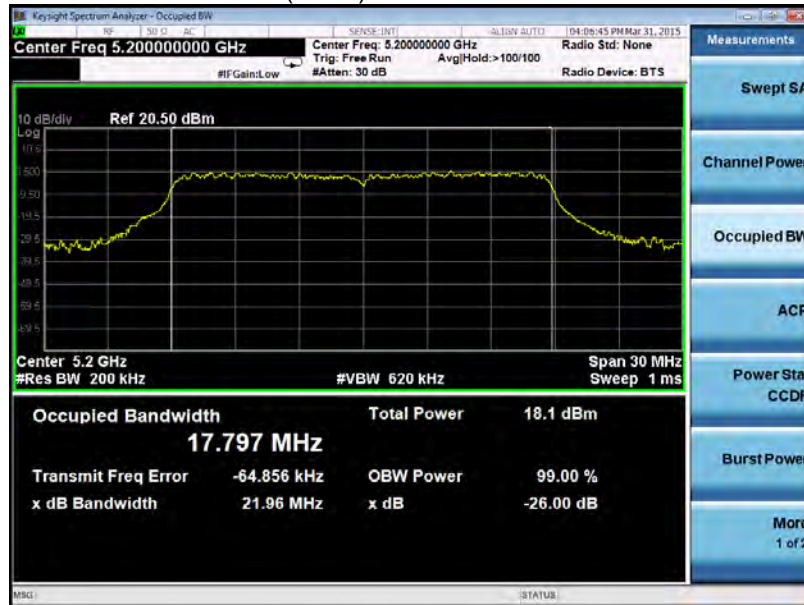


802.11n(HT20) band I High channel

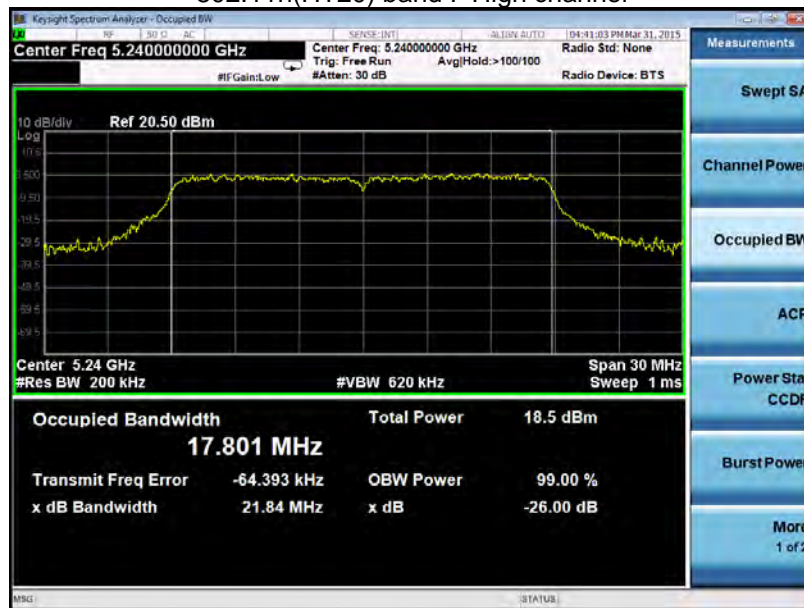


802.11n(HT40) band I Low channel

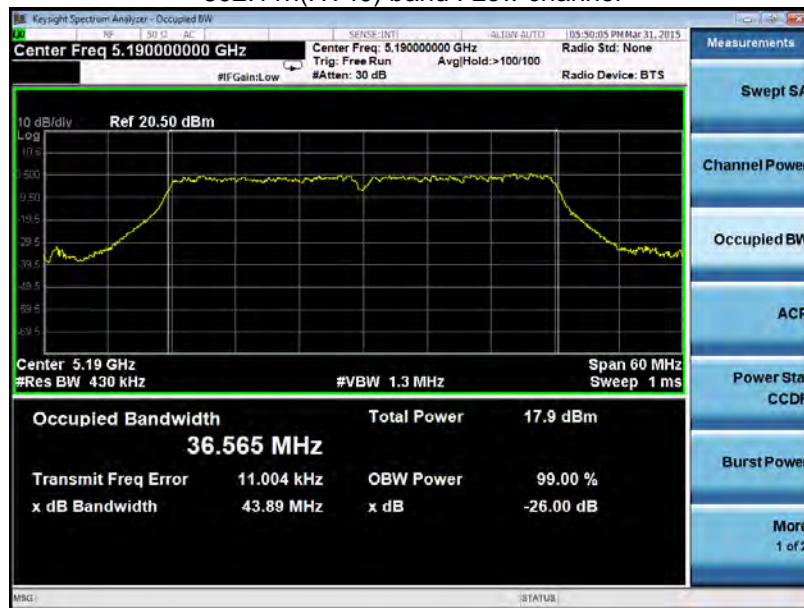


802.11n(HT40) band I High channel

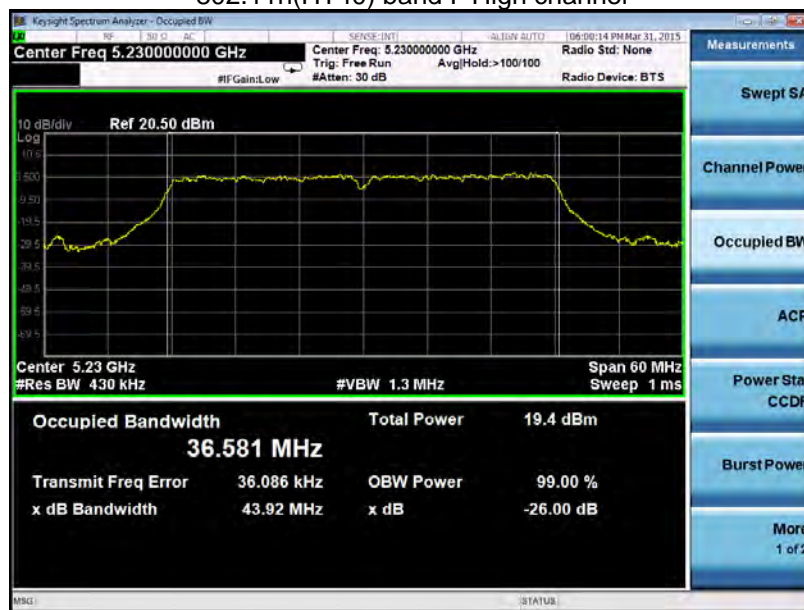


802.11ac(HT20) band I Low channel

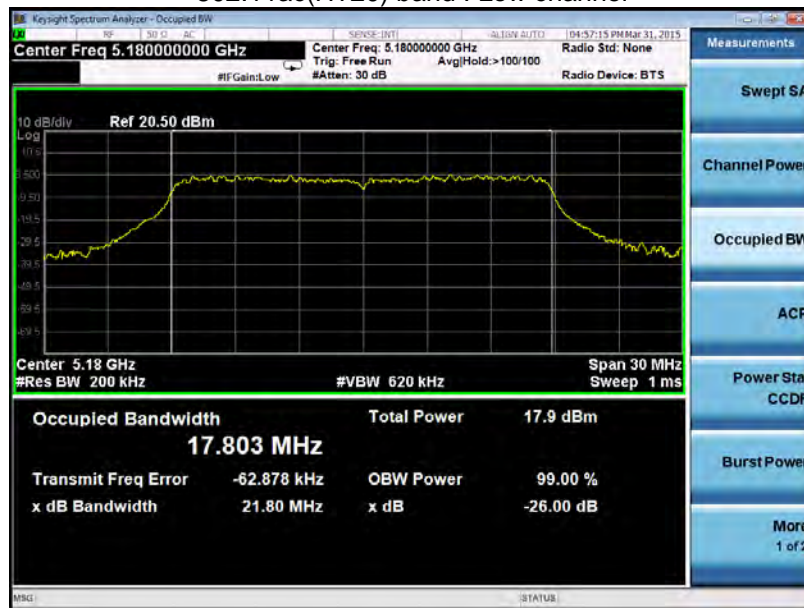


802.11ac(HT20) band I Middle channel

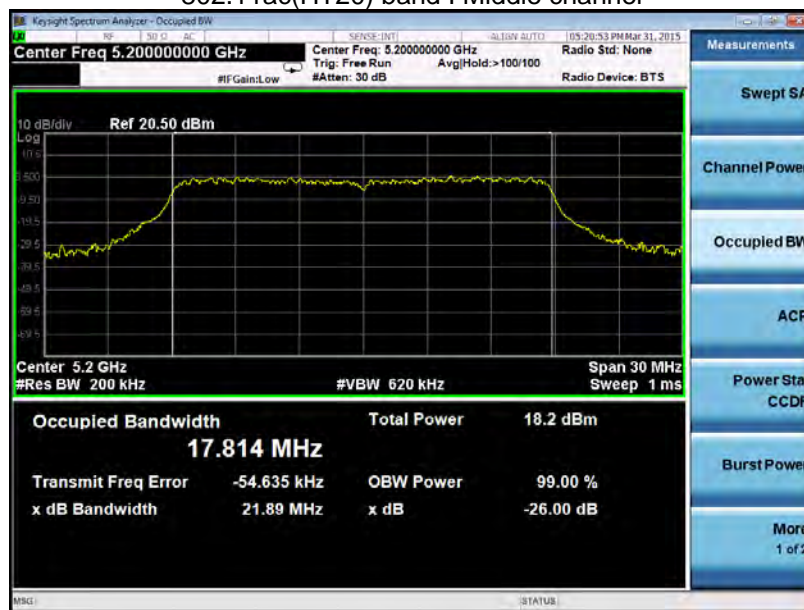


802.11ac(HT20) band I High channel

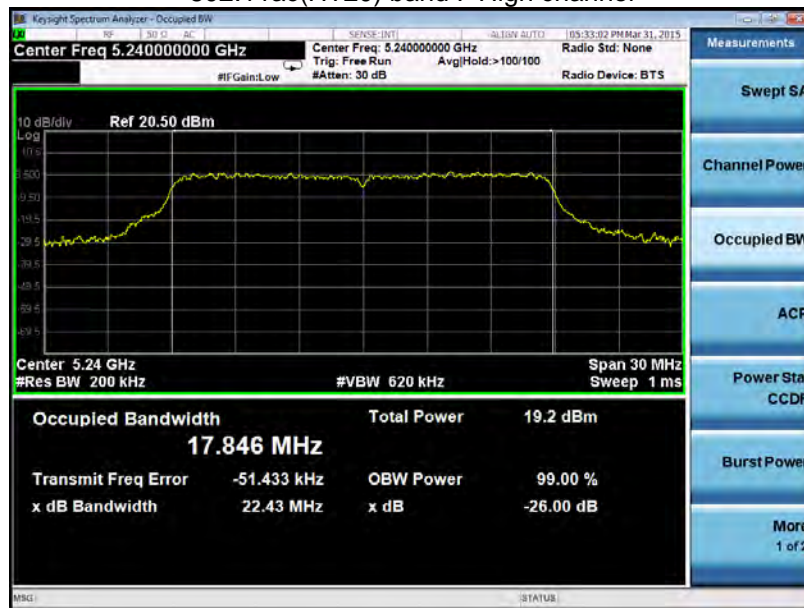


802.11ac(HT40) band I Low channel

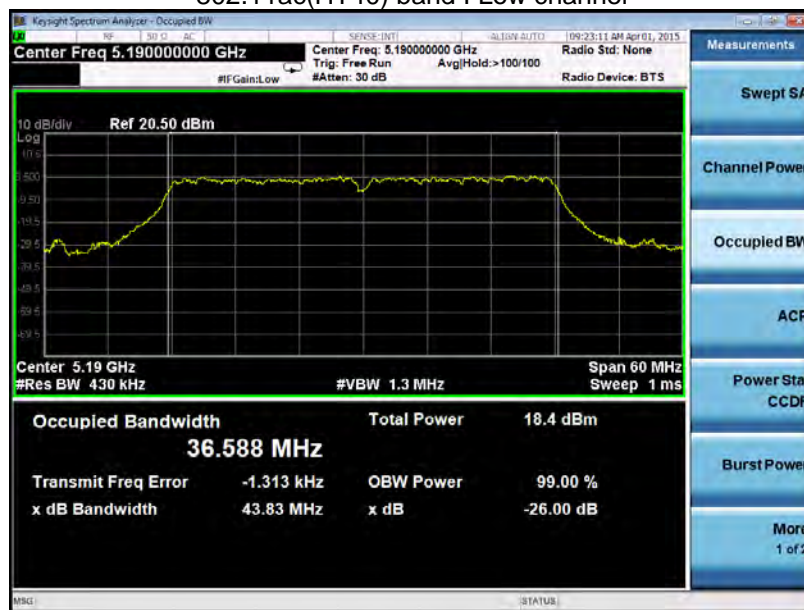


802.11n(HT40) band I High channel

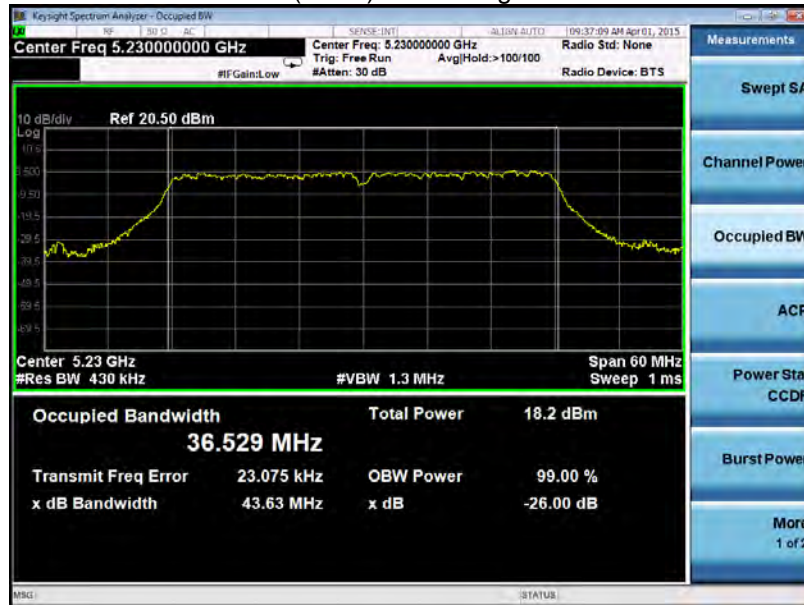


802.11ac(HT80) band I Low channel

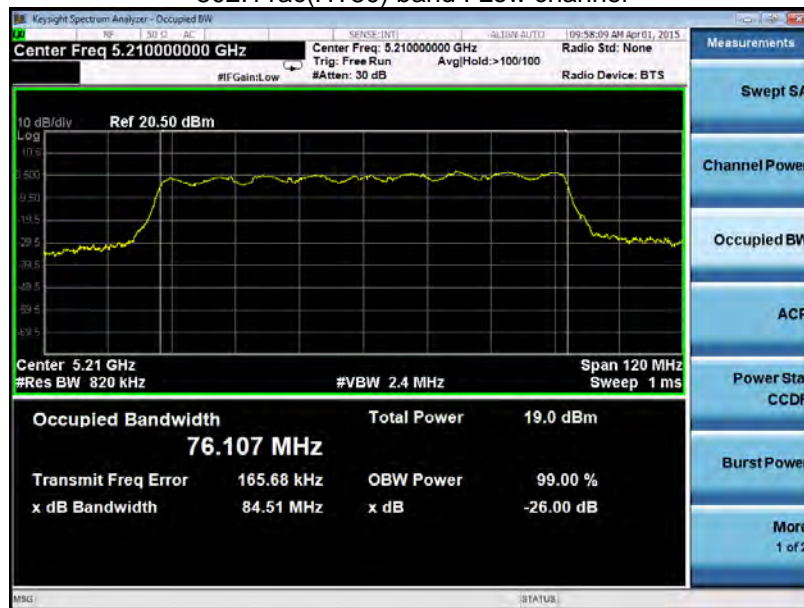


802.11a band IV Low channel

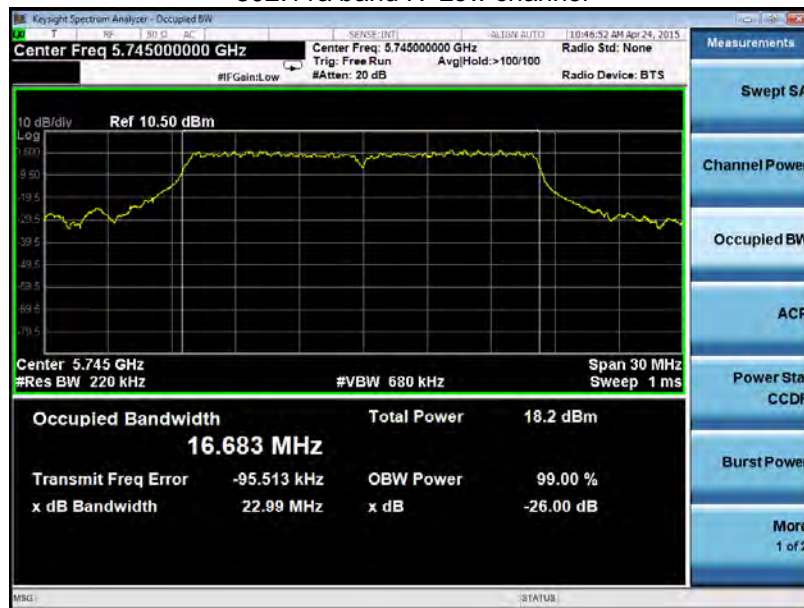


802.11a band IV Middle channel

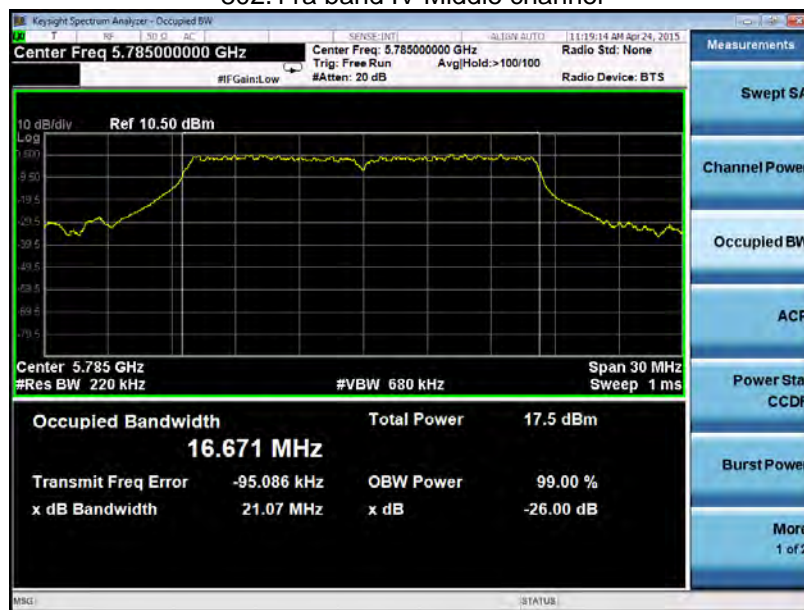


802.11a band IV High channel

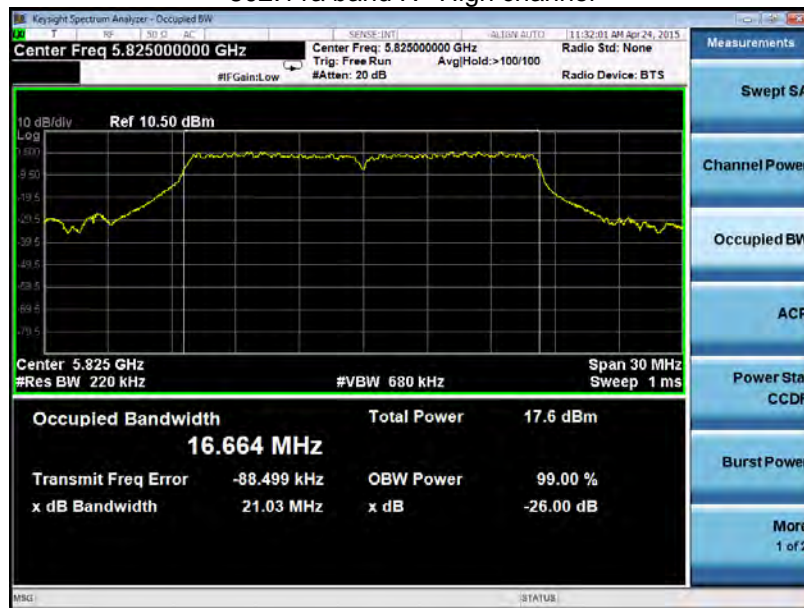


802.11n(HT20) band IV Low channel

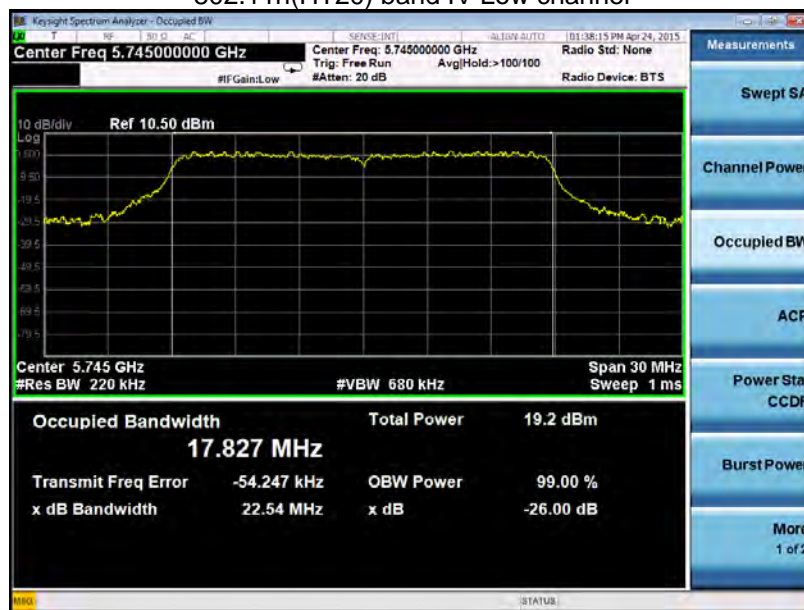


802.11n(HT20) band IV Middle channel

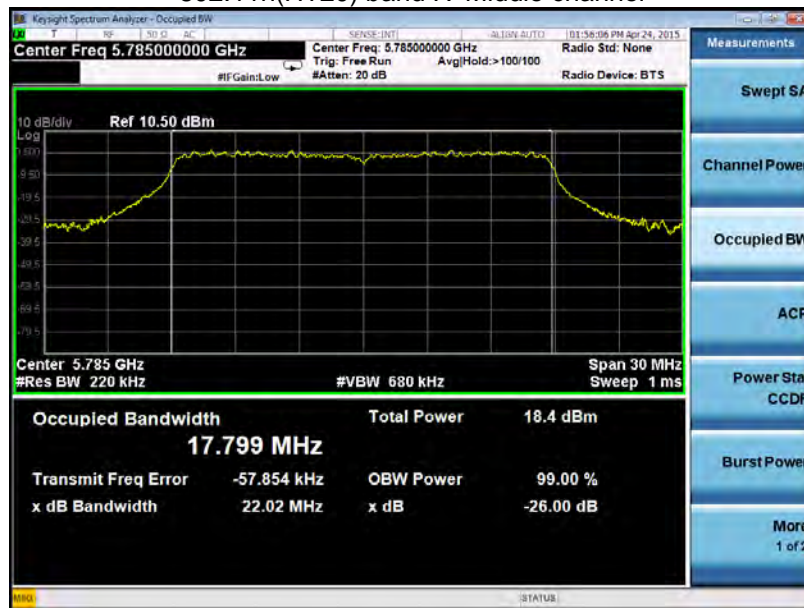


802.11n(HT20) band IV High channel

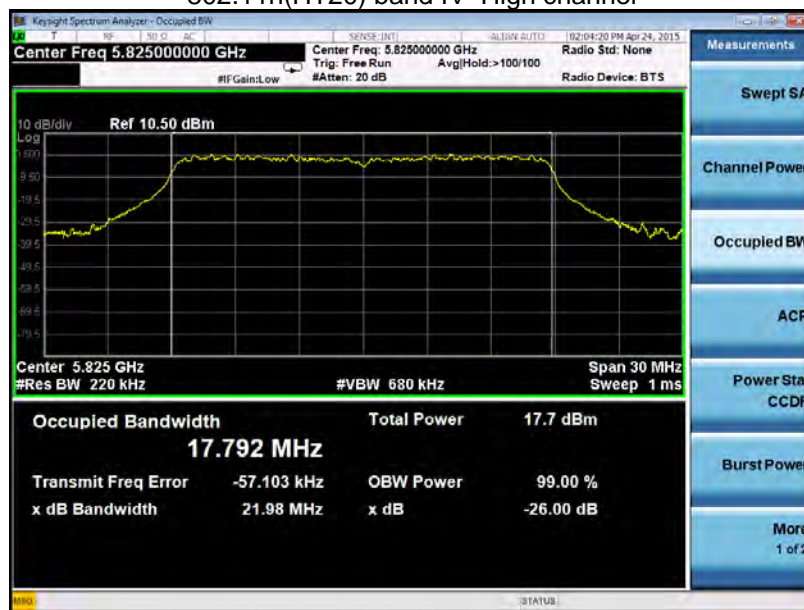


802.11n(HT40) band IV Low channel

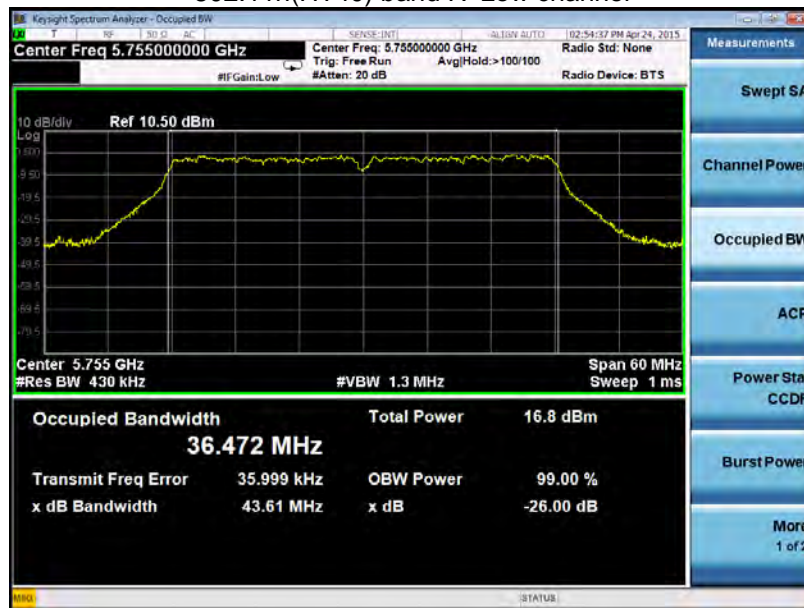


802.11n(HT40) band IV High channel

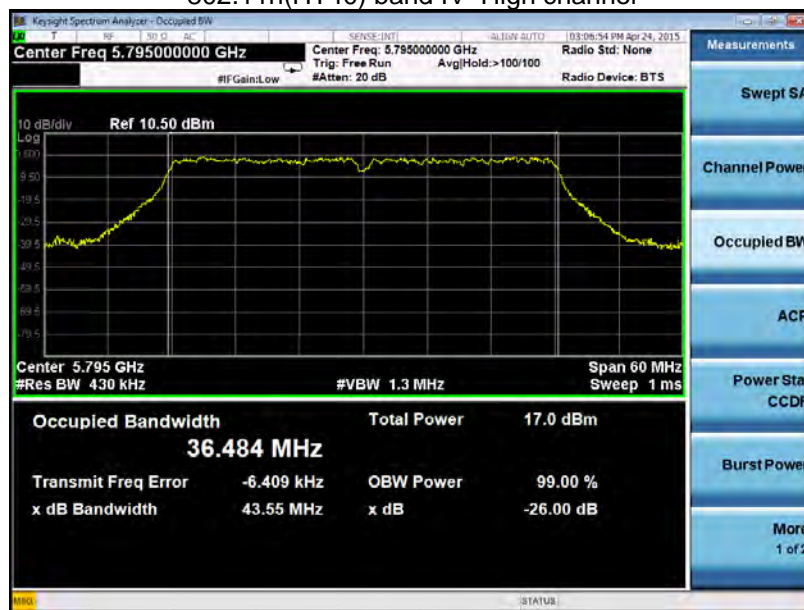


802.11ac(HT20) band IV Low channel

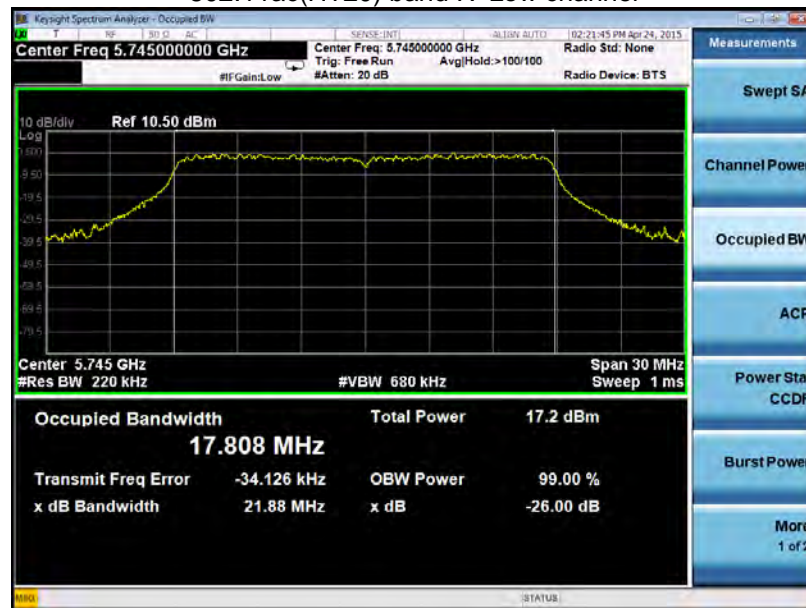


802.11ac(HT20) band IV Middle channel

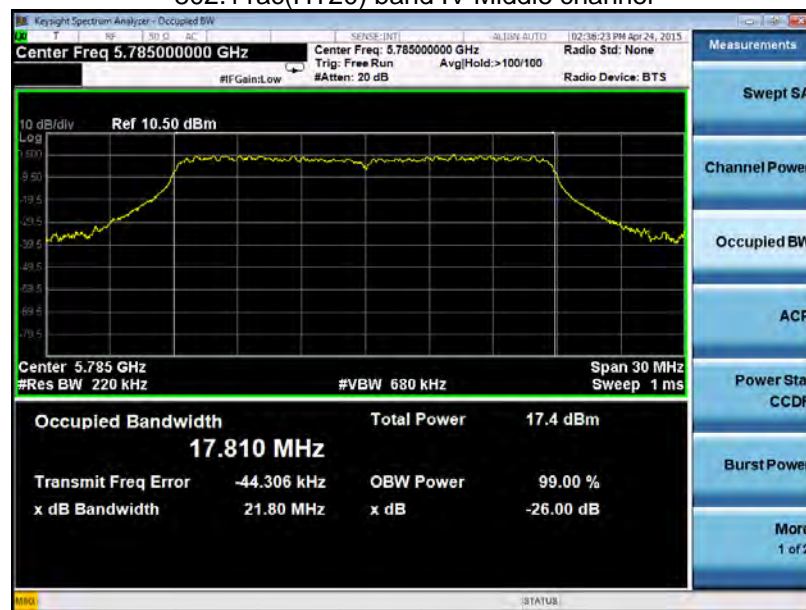


802.11ac(HT20) band IV High channel

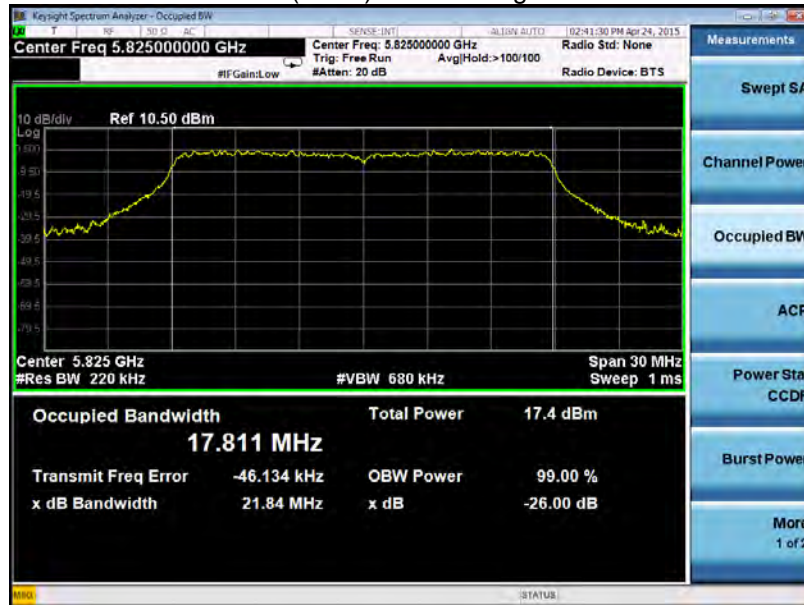


802.11ac(HT40) band IV Low channel

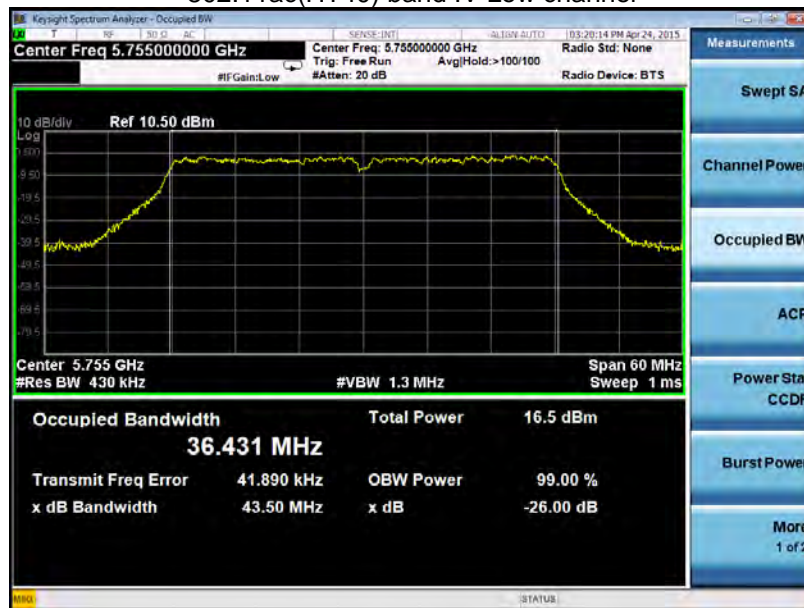

802.11n(HT40) band IV High channel

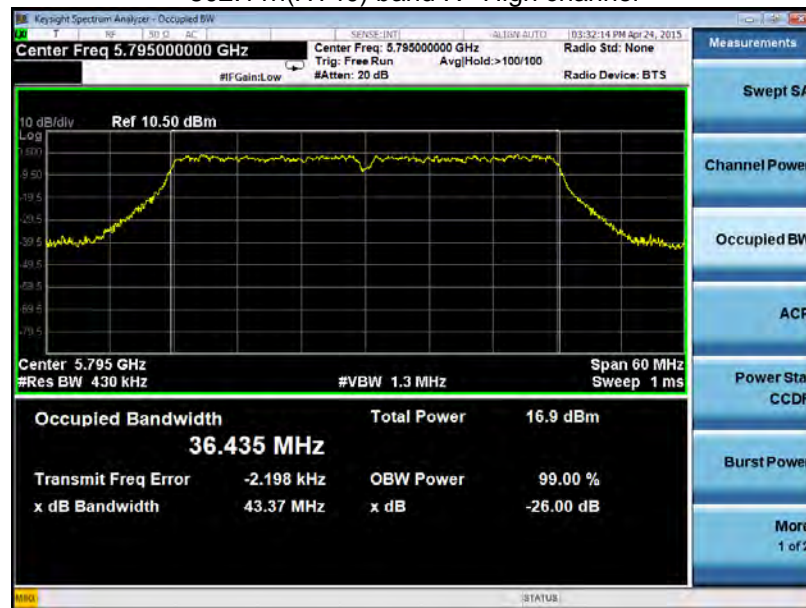

802.11ac(HT80) band IV Low channel

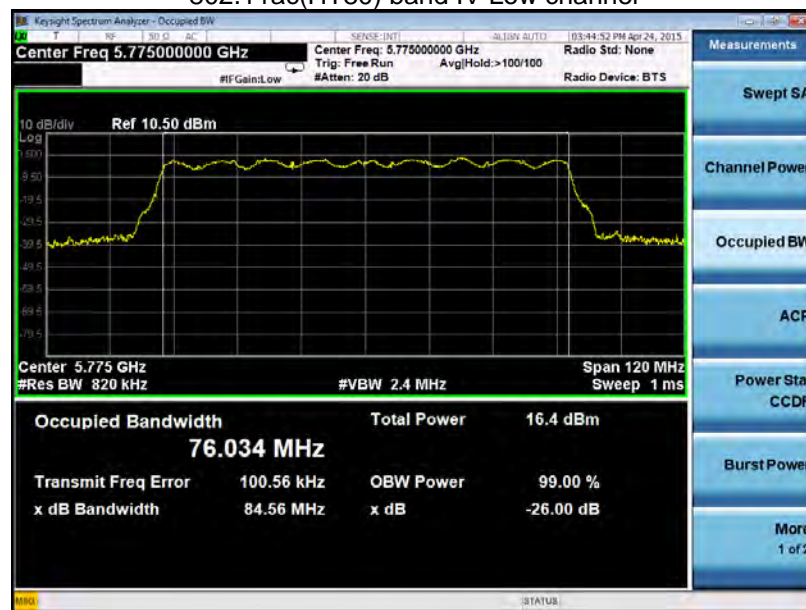

12 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section E
Test Limit:	30dBm
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result:


Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
Band I	802.11a	16.56	16.27	16.88
	802.11n(HT20)	16.81	16.86	16.69
	802.11n(HT40)	16.47	/	16.91
	802.11ac(HT20)	16.82	16.84	16.61
	802.11ac(HT40)	16.41	/	16.63
	802.11ac(HT80)	16.94	/	/
Band IV	802.11a	11.64	11.31	11.37
	802.11n(HT20)	12.15	11.78	11.64
	802.11n(HT40)	10.60	/	10.91
	802.11ac(HT20)	11.06	11.44	11.21
	802.11ac(HT40)	10.49	/	10.86
	802.11ac(HT80)	10.74	/	/

Test result plots shown as follows:


802.11a band I Low channel

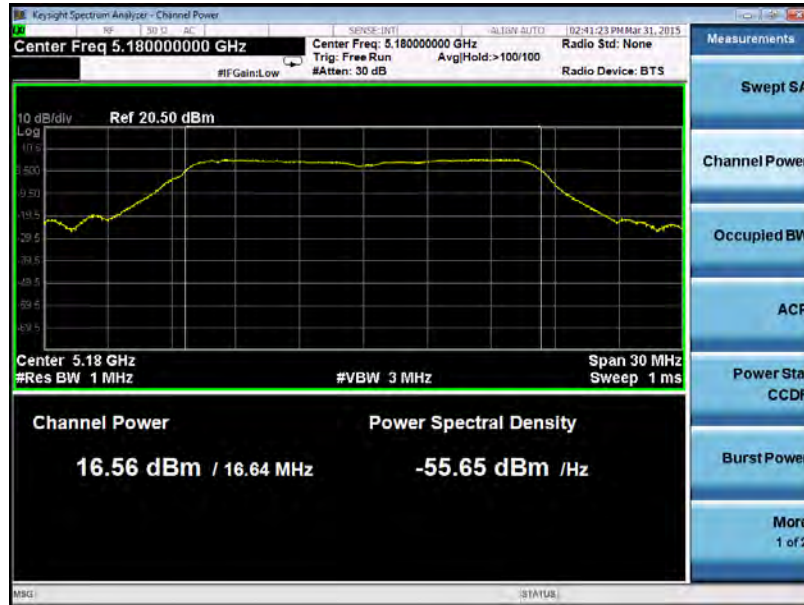

802.11a band I Middle channel

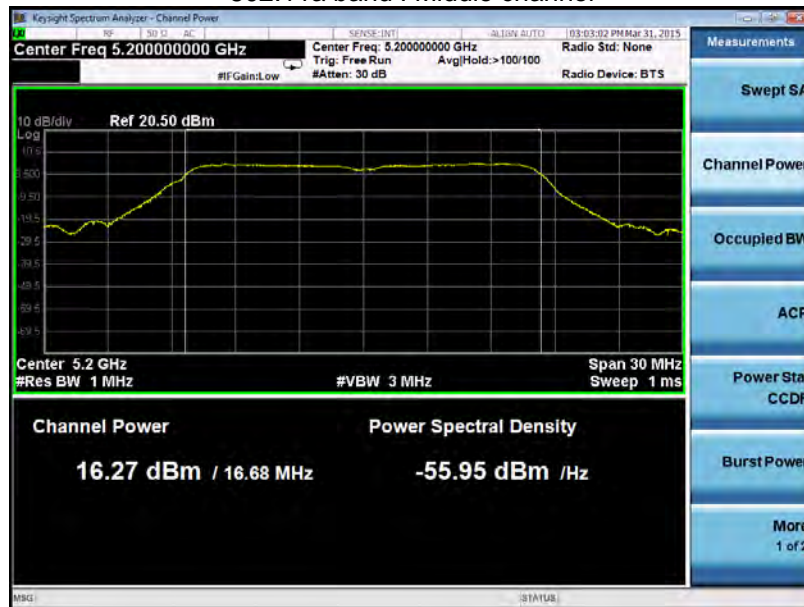


802.11a band I High channel

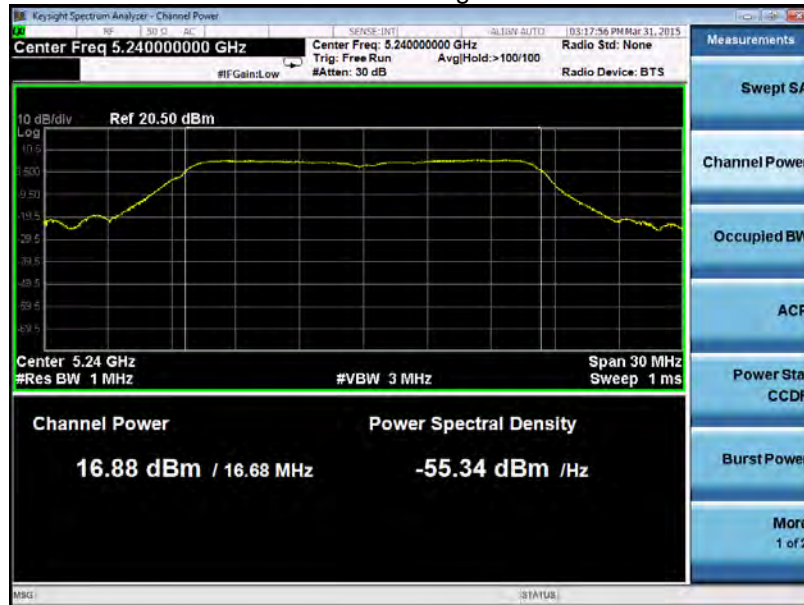


802.11n(HT20) band I Low channel




802.11n(HT20) band I Middle channel

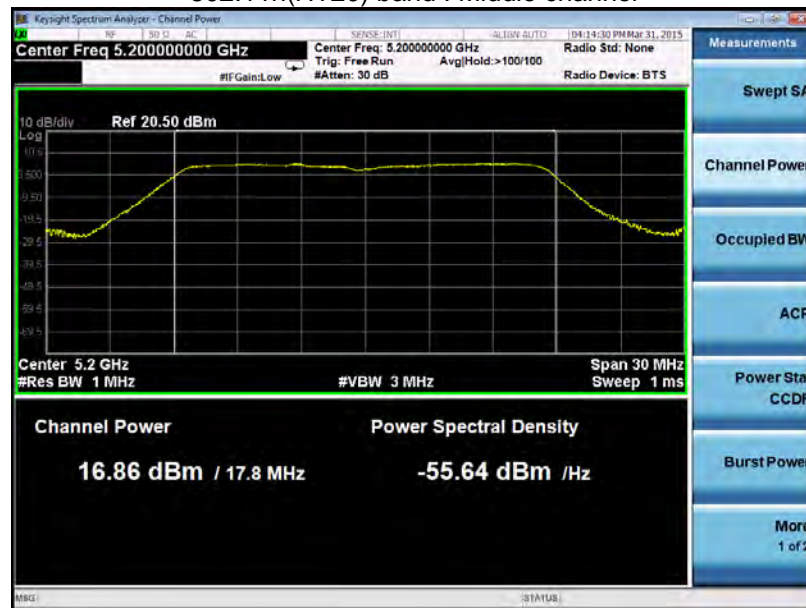

802.11n(HT20) band I High channel

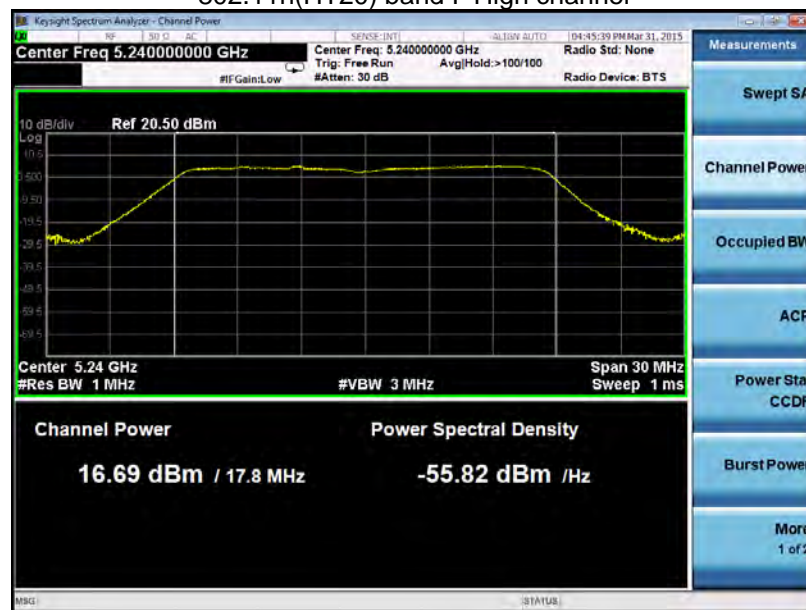


802.11n(HT40) band I Low channel

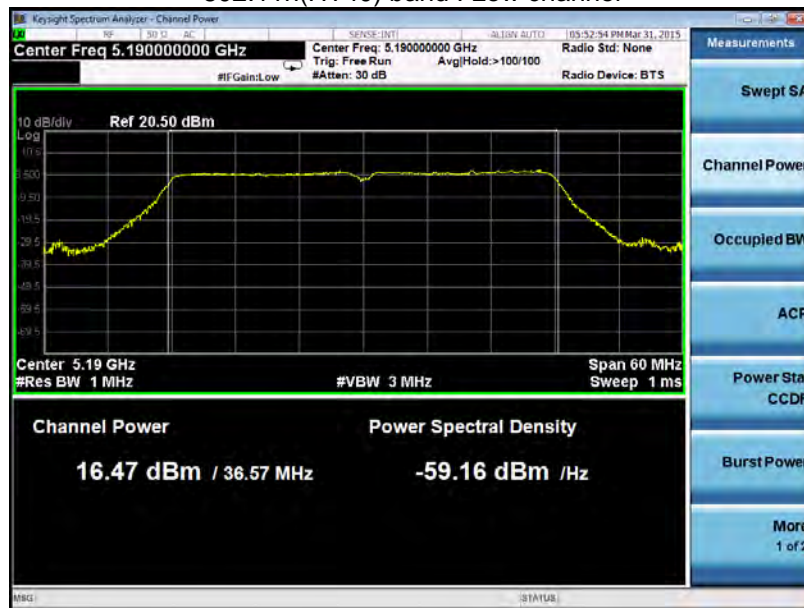

802.11n(HT40) band I High channel




802.11ac(HT20) band I Low channel

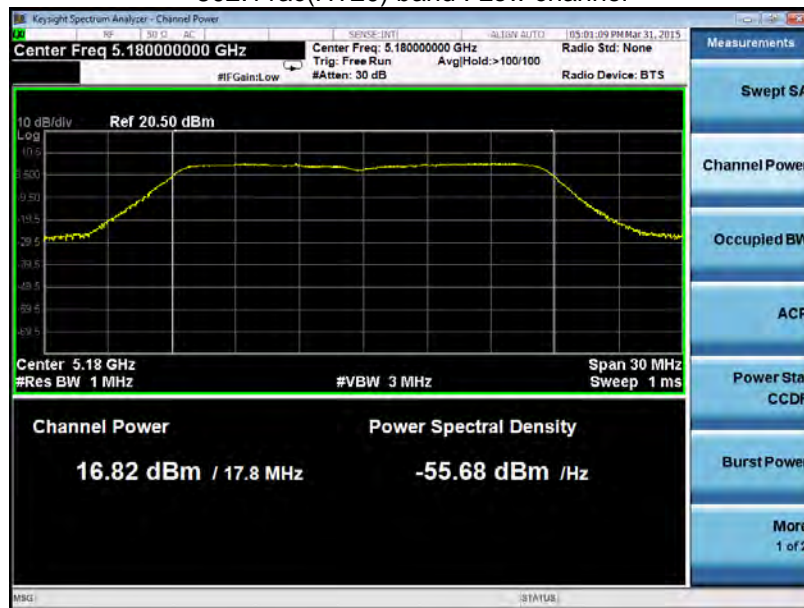


802.11ac(HT20) band I Middle channel




802.11ac(HT20) band I High channel

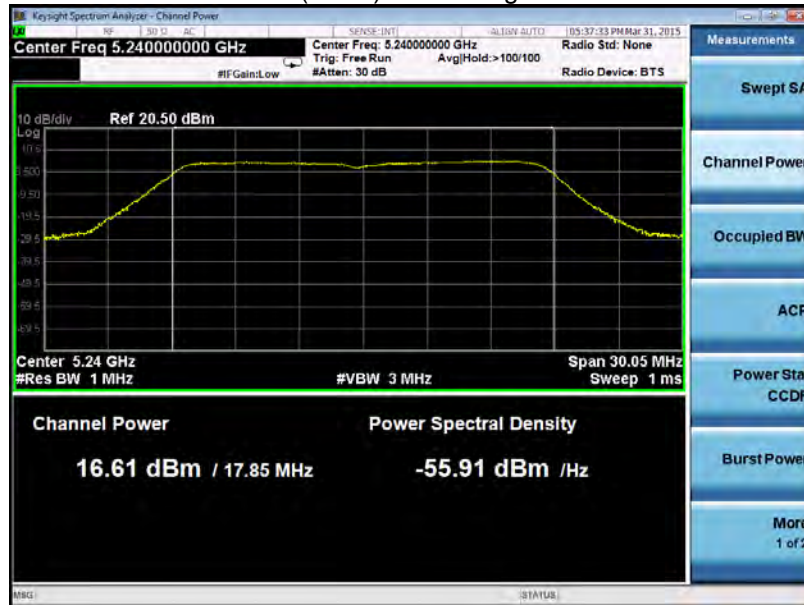


802.11ac(HT40) band I Low channel

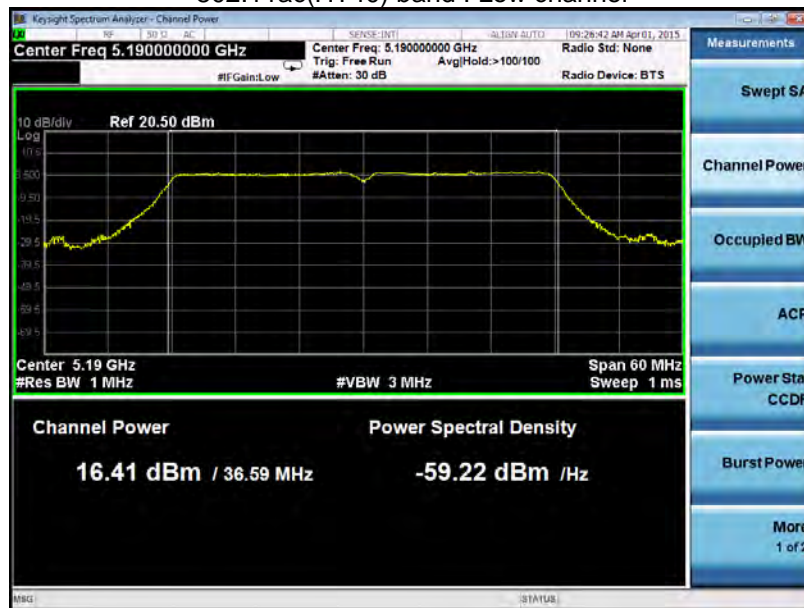


802.11n(HT40) band I High channel

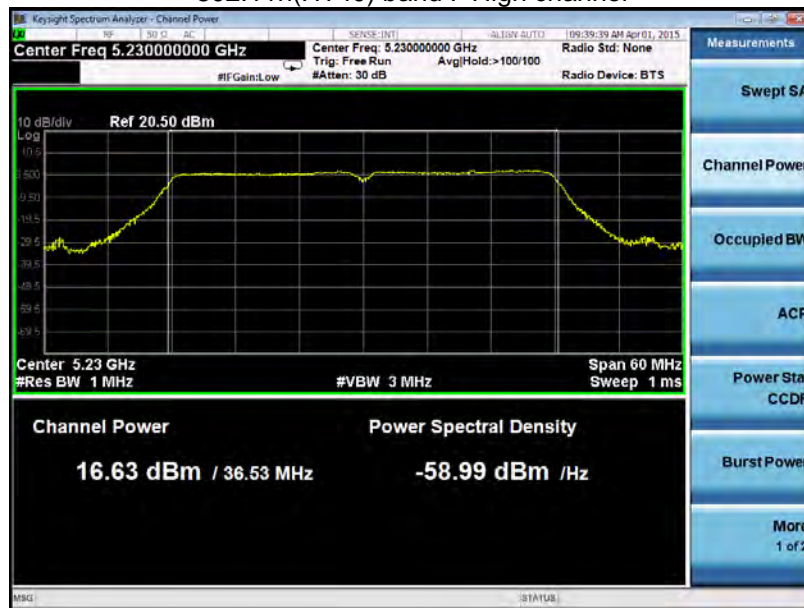


802.11ac(HT80) band I Low channel

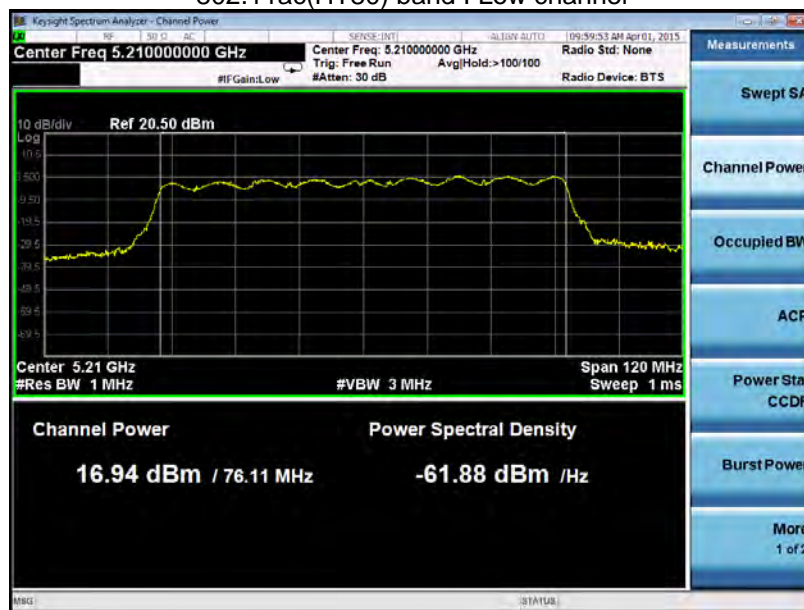


802.11a band IV Low channel

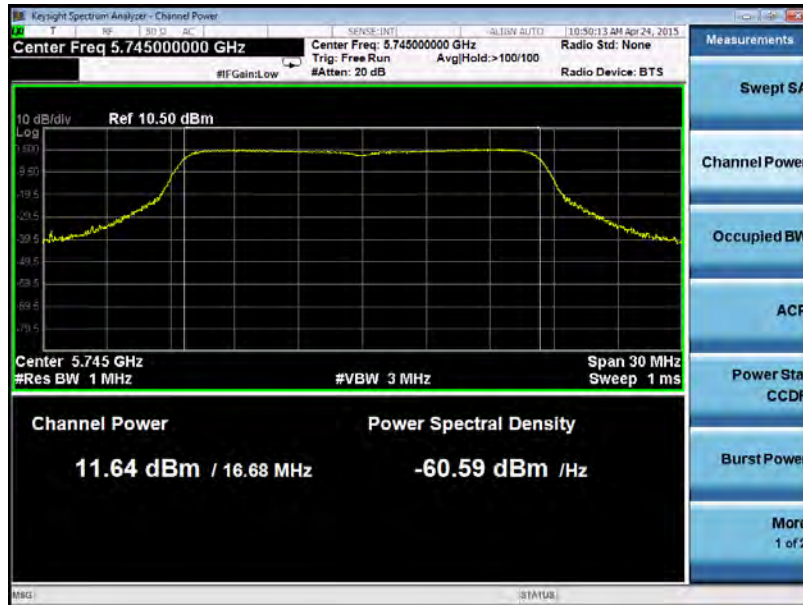


802.11a band IV Middle channel

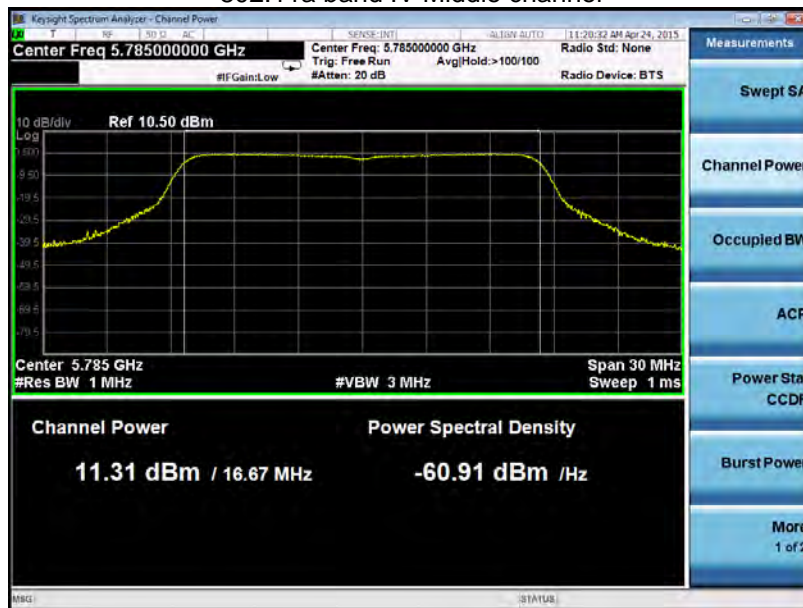


802.11a band IV High channel

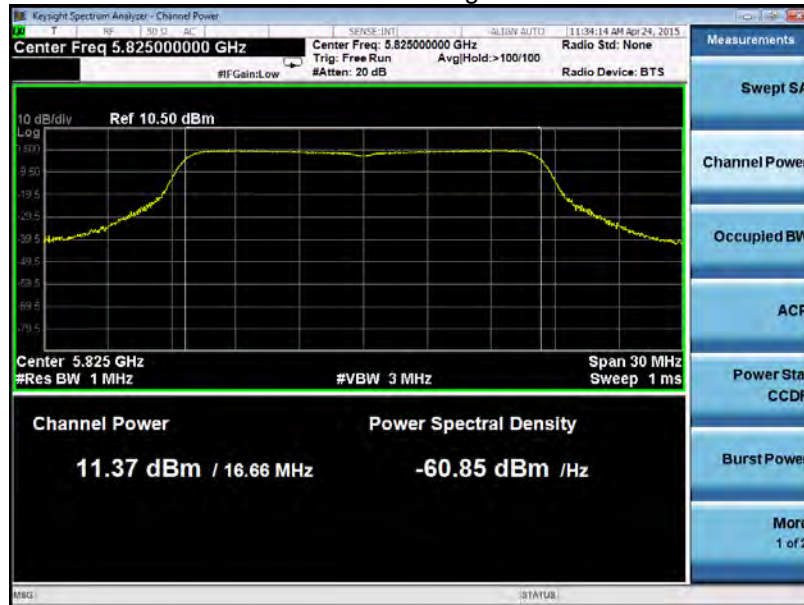


802.11n(HT20) band IV Low channel

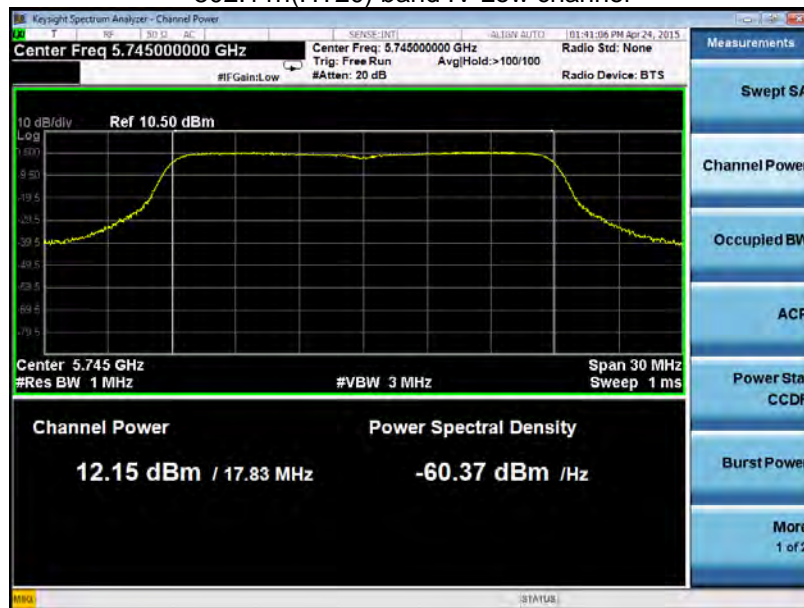


802.11n(HT20) band IV Middle channel

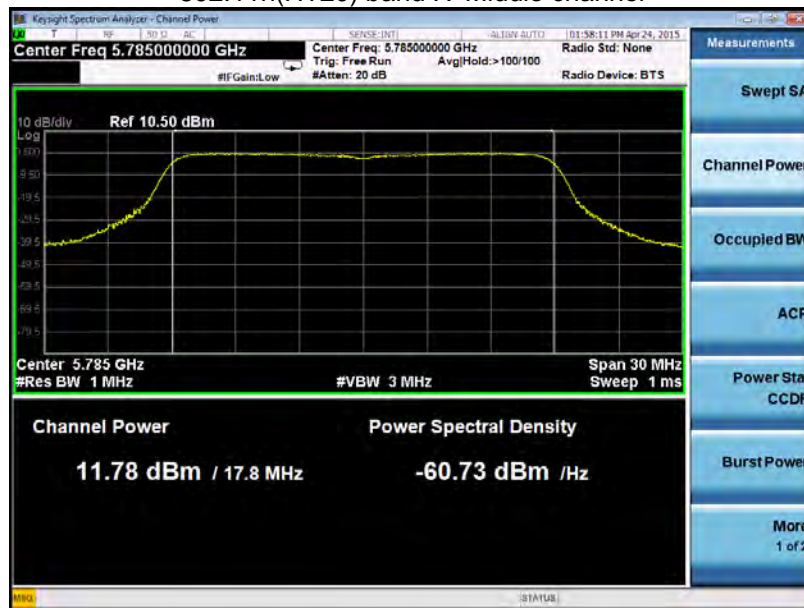


802.11n(HT20) band IV High channel

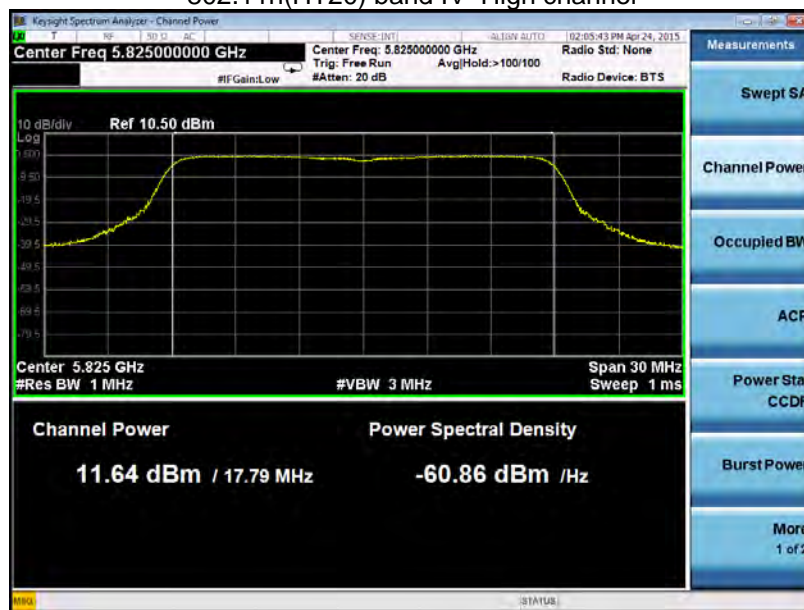


802.11n(HT40) band IV Low channel

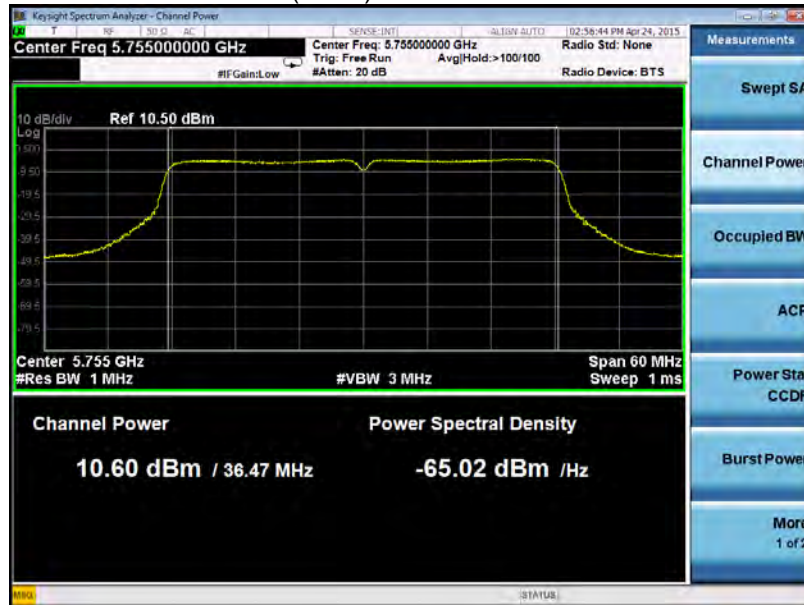


802.11n(HT40) band IV High channel

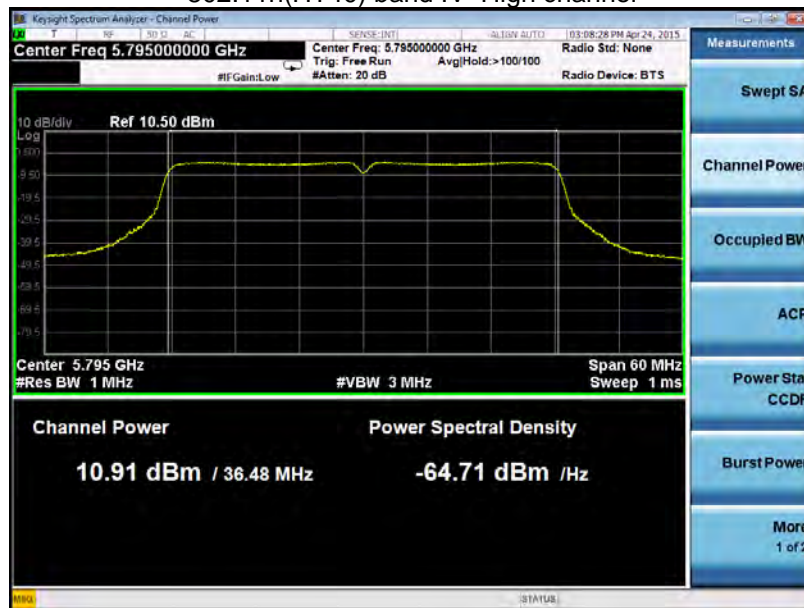


802.11ac(HT20) band IV Low channel

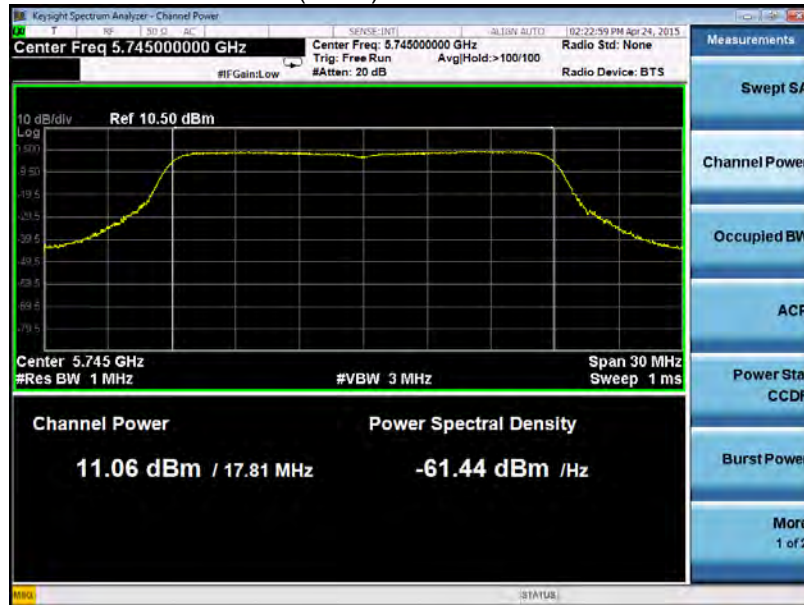


802.11ac(HT20) band IV Middle channel

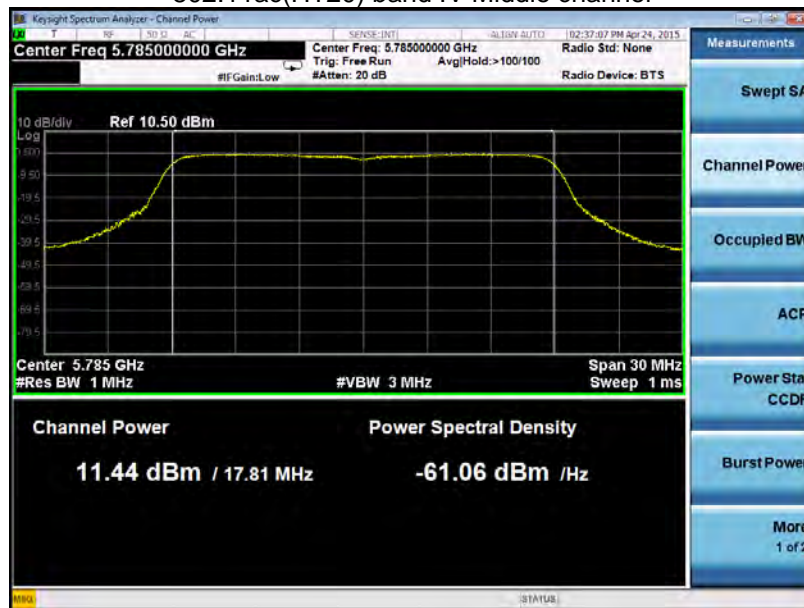


802.11ac(HT20) band IV High channel

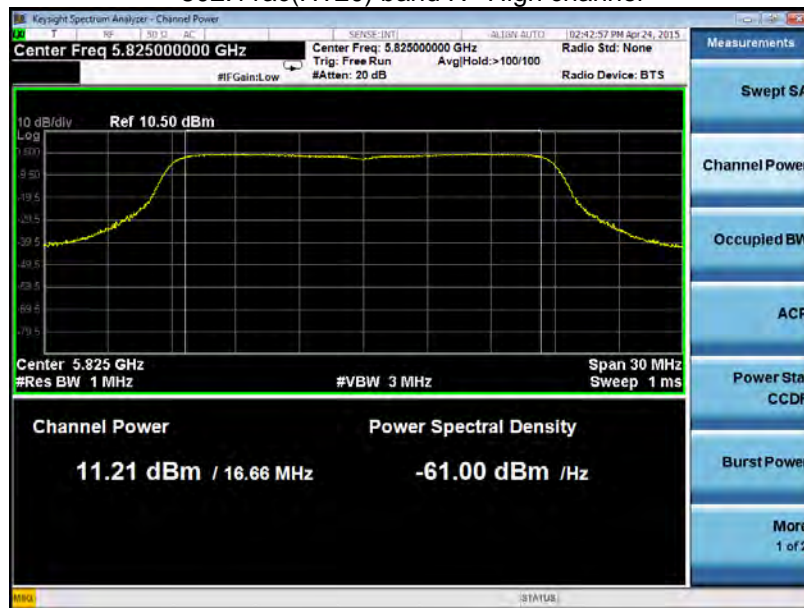


802.11ac(HT40) band IV Low channel

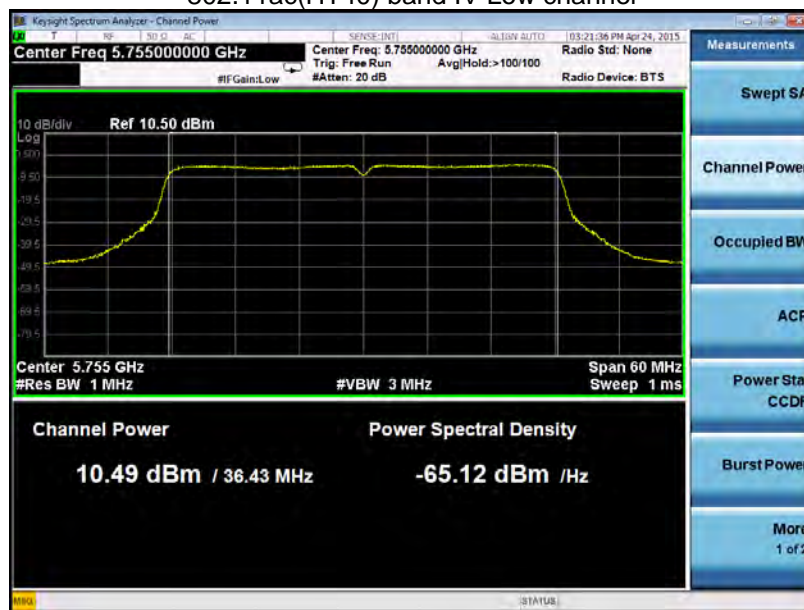

802.11n(HT40) band IV High channel

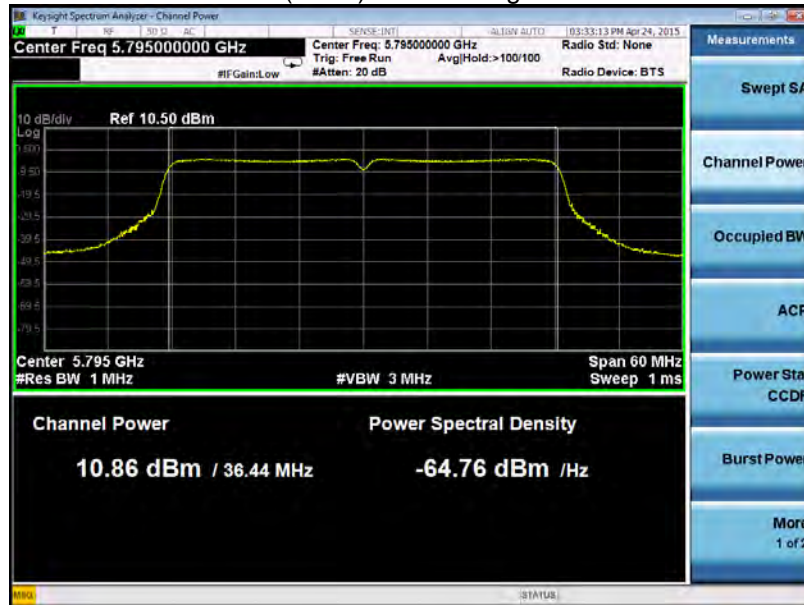

802.11ac(HT80) band IV Low channel

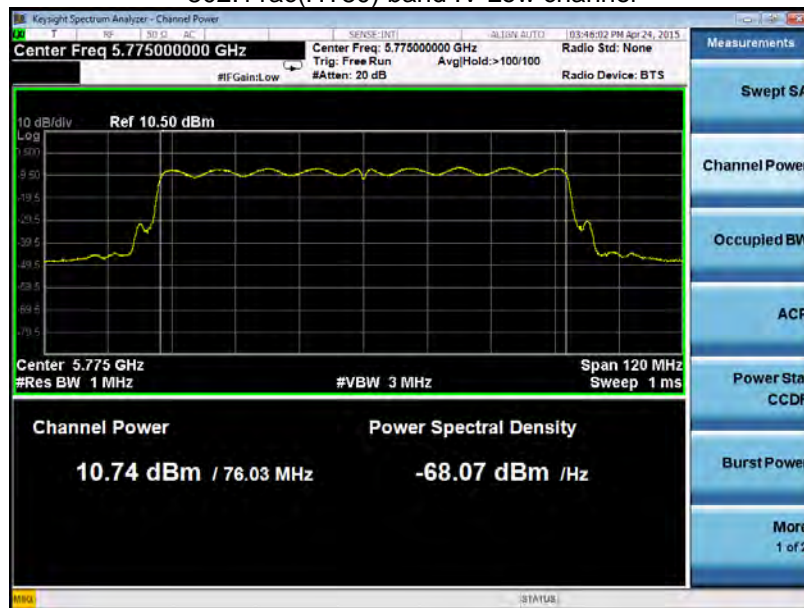

13 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01, Section F
Test Limit:	≤17.00dBm/MHz for Operation in the band I(5150MHz-5250MHz)of device ≤30.00dBm/500KHz for Operation in the band IV(5725MHz- 5850MHz)of device
Test Result:	PASS

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 510kHz/1MHz. VBW ≥3 RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

13.2 Test Result:

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
Band I	802.11a	7.99	7.65	7.86
	802.11n(HT20)	7.84	7.41	7.74
	802.11n(HT40)	4.53	/	4.63
	802.11ac(HT20)	7.88	7.95	7.68
	802.11ac(HT40)	4.70	/	4.68
	802.11ac(HT80)	3.56	/	/
	Limit	≤17.00dBm/MHz		
Band	Operation mode	Power Spectral Density (dBm/500kHz)		
		Low	Middle	High
Band IV	802.11a	4.51	4.50	4.53
	802.11n(HT20)	4.98	4.98	4.67
	802.11n(HT40)	0.90	/	0.93
	802.11ac(HT20)	4.39	4.85	4.83
	802.11ac(HT40)	0.76	/	0.93
	802.11ac(HT80)	-1.18	/	/
	Limit	≤30.00dBm/500KHz		

Test result plots shown as follows:


802.11a band I Low channel



802.11a band I Middle channel




802.11a band I High channel

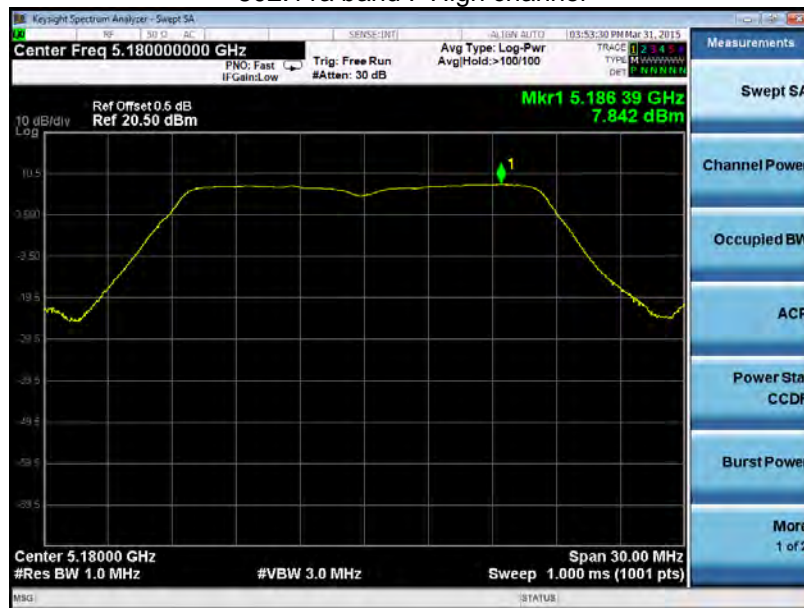

802.11n(HT20) band I Low channel



802.11n(HT20) band I Middle channel

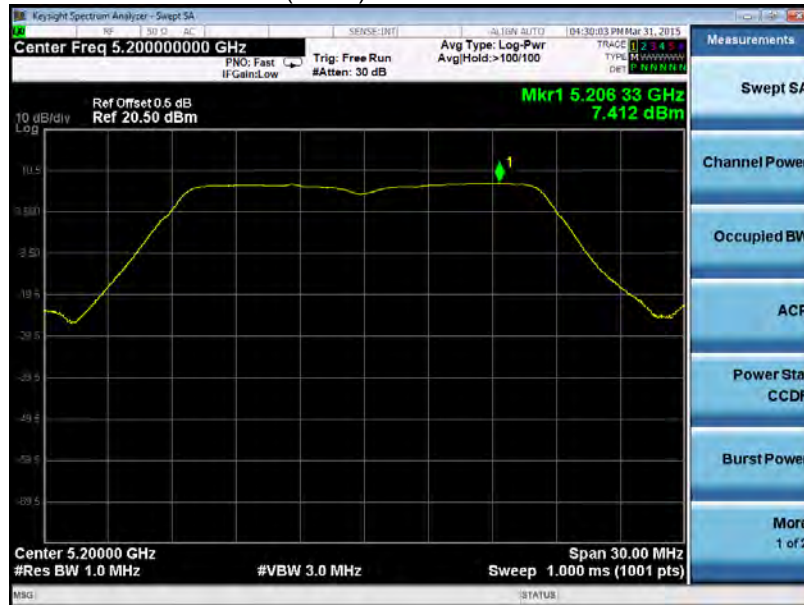

802.11n(HT20) band I High channel



802.11n(HT40) band I Low channel



802.11n(HT40) band I High channel



802.11ac(HT20) band I Low channel



802.11ac(HT20) band I Middle channel



802.11ac(HT20) band I High channel




802.11ac(HT40) band I Low channel



802.11n(HT40) band I High channel




802.11ac(HT80) band I Low channel

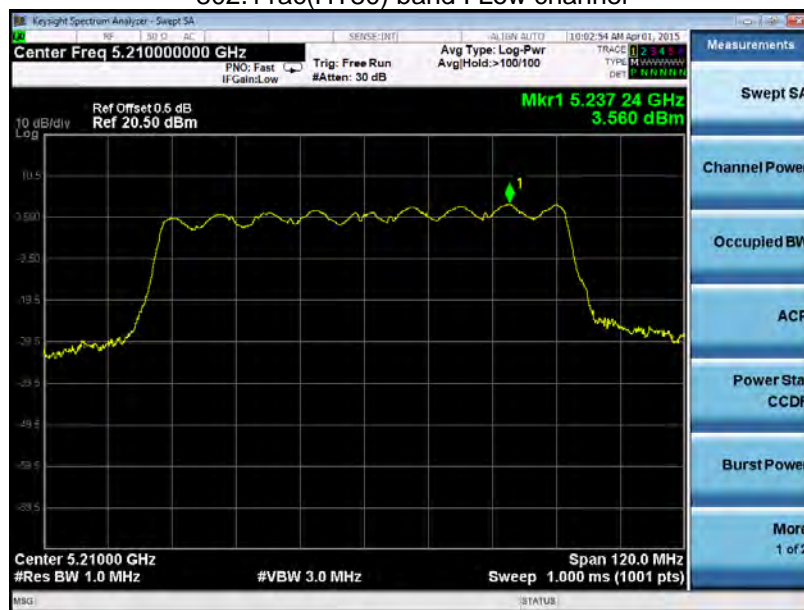

802.11a band IV Low channel



802.11a band IV Middle channel

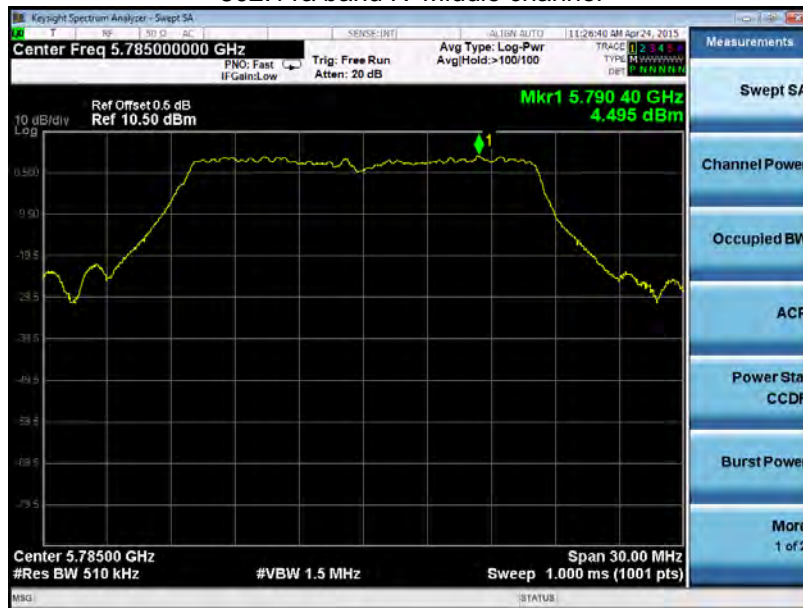


802.11a band IV High channel



802.11n(HT20) band IV Low channel



802.11n(HT20) band IV Middle channel

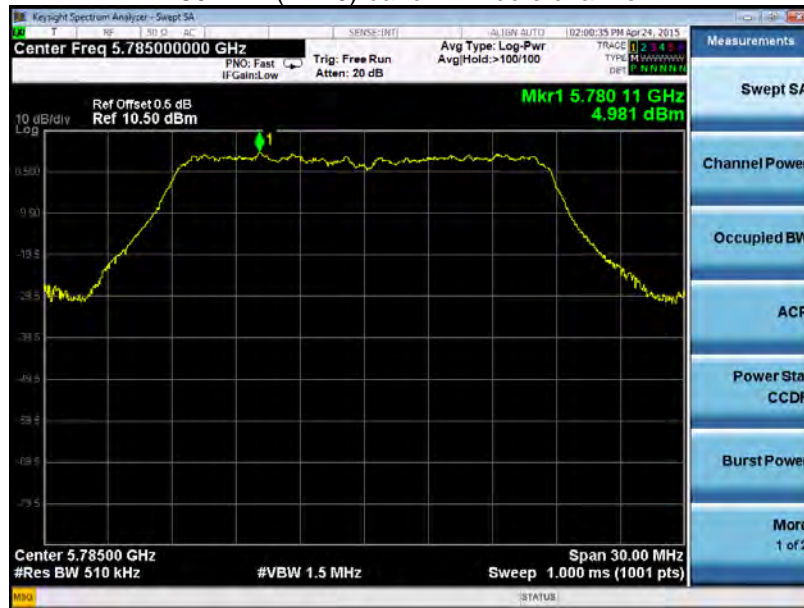

802.11n(HT20) band IV High channel



802.11n(HT40) band IV Low channel




802.11n(HT40) band IV High channel



802.11ac(HT20) band IV Low channel




802.11ac(HT20) band IV Middle channel

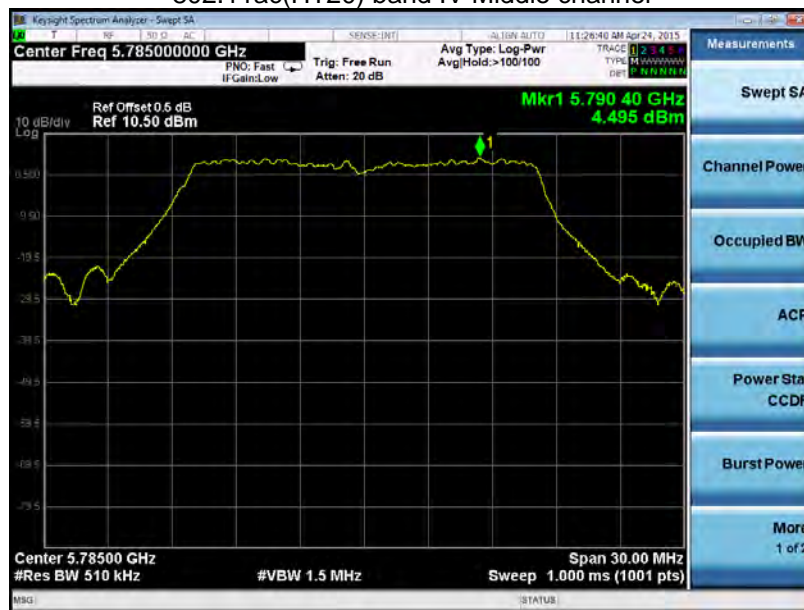

802.11ac(HT20) band IV High channel




802.11ac(HT40) band IV Low channel

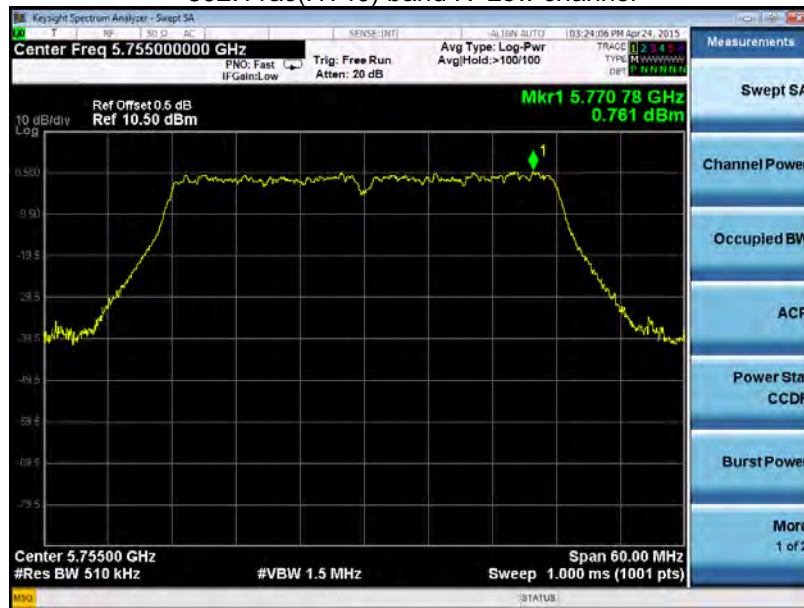

802.11n(HT40) band IV High channel



802.11ac(HT80) band IV Low channel

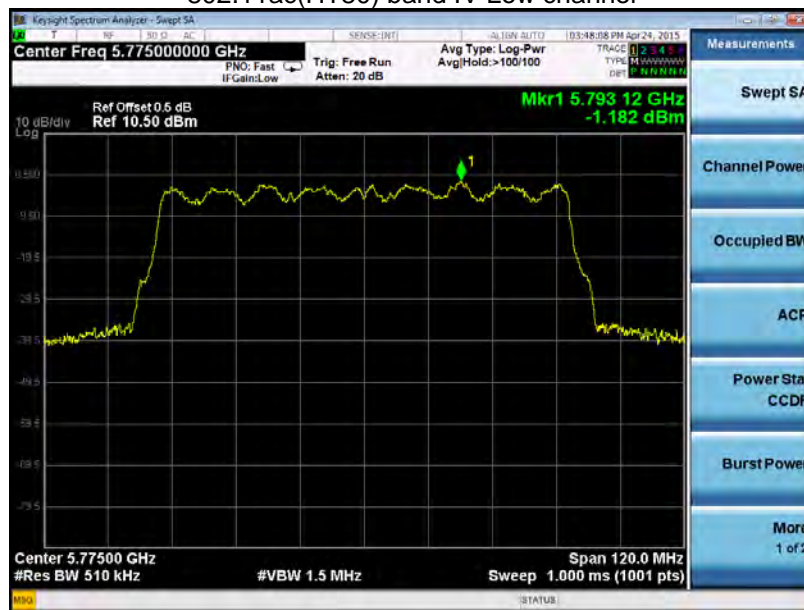

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an embedded-in antenna fulfill the requirement of this section.

15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to


$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
1.995	16.94	49.43	0.0196	1


16 Photographs – Model 525695 Test Setup

16.1 Conducted Emission at Test Site 1#

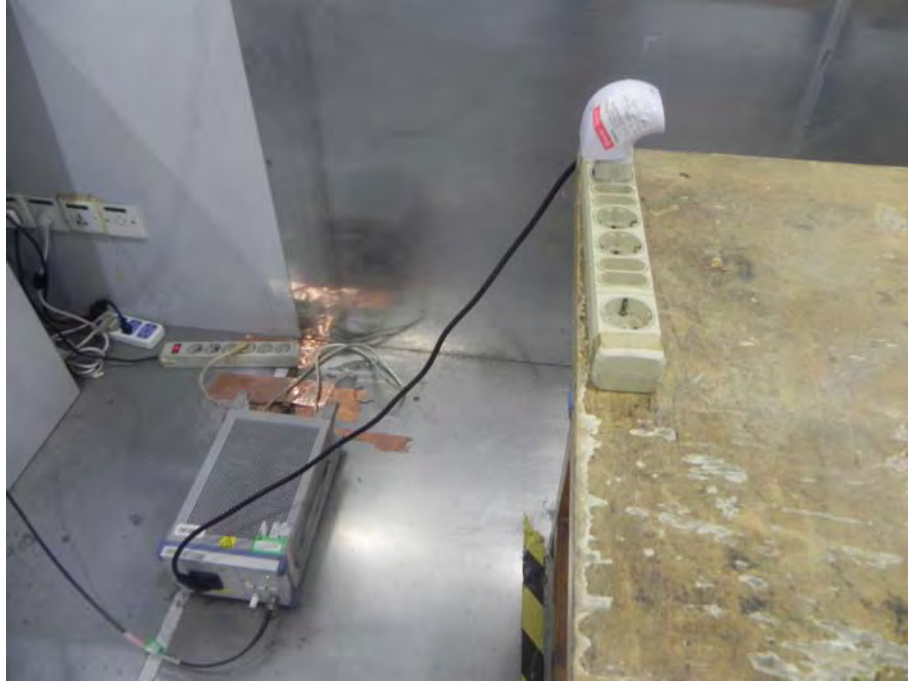


16.2 Radiated Emission

Test frequency from 30MHz to 1GHz at Test Site 2#

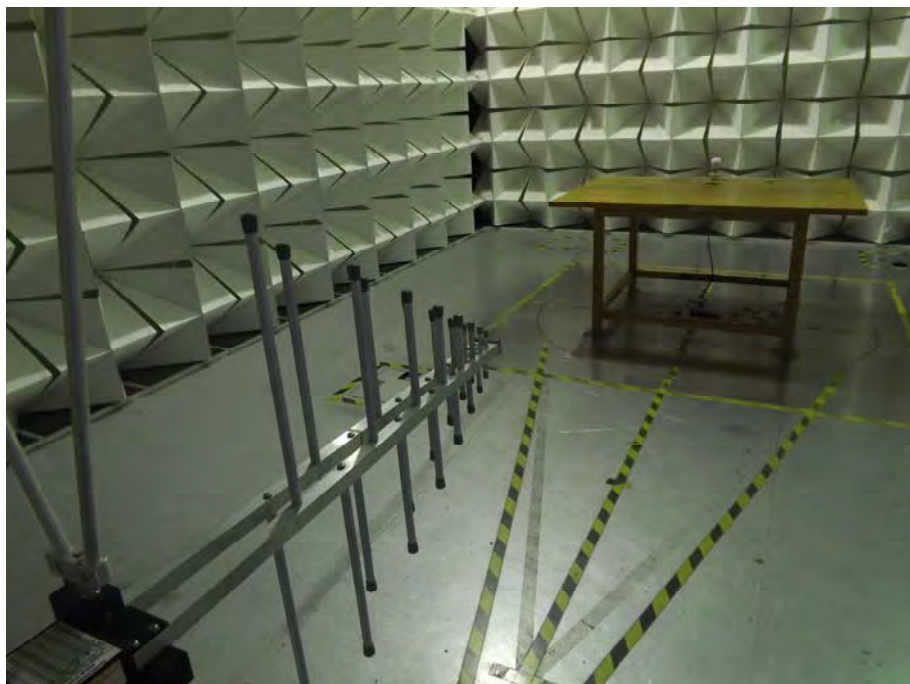

Test frequency above 1GHz at Test Site 1#

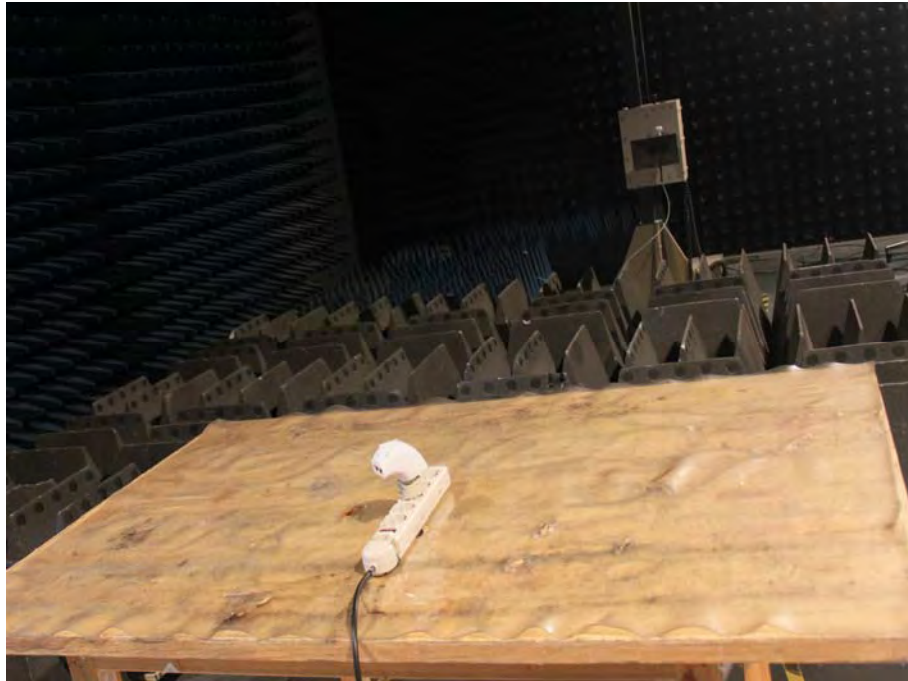

17 Photographs - Constructional Details


17.1 Model 525695 – External View









17.2 Model 525695 – Internal View

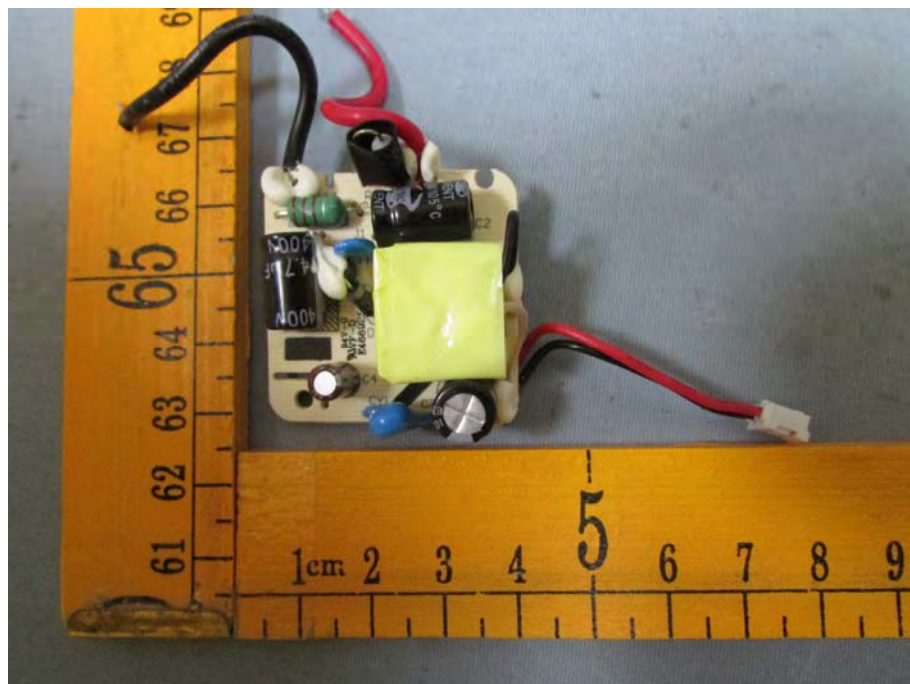

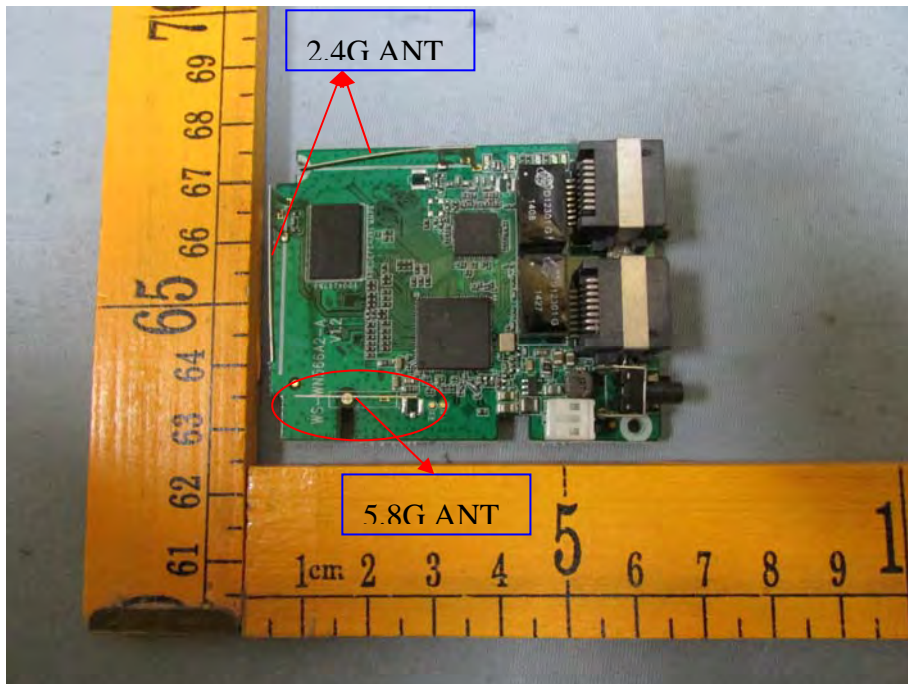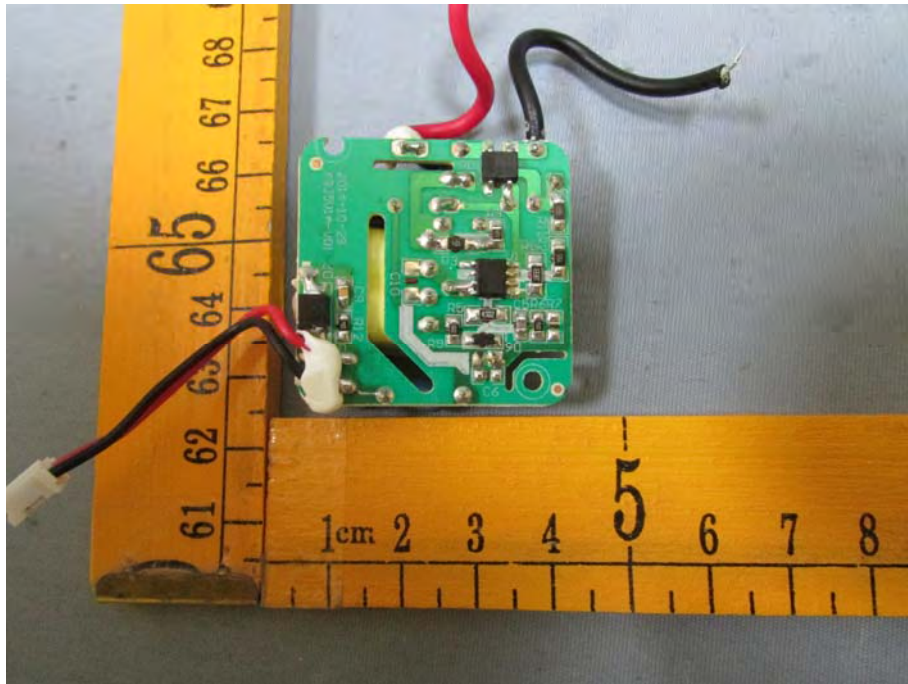



=====-End of Report=-====