

客户 Customer	
项目名 Project	SW52
料号 Part NO.	
规格 Specification	BT Antennas

APPROVAL			
QiXinTongDa:			
RF Check	ME Check	QC Check	Confirm By
Customer:			
EE Check	PM Check	QC Check	Confirm By

Project	Author: Yi Long.CHEN	File Name: A.doc
Date:		
Revision:		
	A	
CONFIDENTIAL		
Shenzhen QiXinTongDaCommunication Technology Co.,Ltd.		

1 Antenna description

BT antenna' s frequency band is: 2402-2480MHz.

BT antenna' s type is: **wire Cable**

Bluetooth model: LE, LE support 1Mbps/2Mbps

Antenna Average Gain: **-7.53dBi**

PCBA Power: 3dbm

Frequency: 2402~2480MHz

Bluetooth type: GFSK, Pi/4 DQPSK

1.1 Antenna pictures



2 Electrical Performance

2.1 Specification

Frequency Range: **2402MHz~2480MHz**

2.2 Measurement Set-up

2.2.1 VSWR and Return Loss

VSWR measurements (S_{11}) were performed using an Agilent ENA series Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

2.2.2 Efficiency and Gain

The gain of the antenna was measured in OPO' s 3D anechoic chamber in Shenzhen, China. The chamber is a ETS system capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents during passive tests. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a 8960 / MT8820C to establish the connection with the mobile device and read the power.

Project	Author: Yi Long.CHEN	File Name: A.doc
Date:		
Revision:		
CONFIDENTIAL Shenzhen OiXinTongDaCommunication Technology Co.,Ltd.		

3 Reference measurement data

3.1 Passive



Project	Author: Yi Long.CHEN	File Name: A.doc
Date:		
Revision:	A	
CONFIDENTIAL		
Shenzhen QiXinTongDaCommunication Technology Co.,Ltd.		


3.2 Active

passive Test For2.4				
Test Point ID	Freq. (MHz)	Efficiency (%)	Efficiency (dB)	Gain (dBi)
<u>1</u>	2400.0	4.50	-13.47	-8.03
<u>2</u>	2410.0	3.90	-14.05	-8.55
<u>3</u>	2420.0	4.00	-13.99	-8.42
<u>4</u>	2430.0	4.30	-13.67	-7.94
<u>5</u>	2440.0	4.40	-13.55	-7.68
<u>6</u>	2450.0	4.30	-13.62	-7.53
<u>7</u>	2460.0	3.90	-14.08	-7.85
<u>8</u>	2470.0	3.60	-14.39	-8.10
<u>9</u>	2480.0	3.50	-14.50	-8.34
<u>10</u>	2490.0	3.50	-14.53	-8.51
<u>11</u>	2500.0	2.80	-15.50	-9.73

Project	Author: Yi Long.CHEN	File Name: A.doc
Date:		
Revision:		
CONFIDENTIAL Shenzhen OiXinTongDaCommunication Technology Co.,Ltd.		

Mechanical description

4.1 Drawings

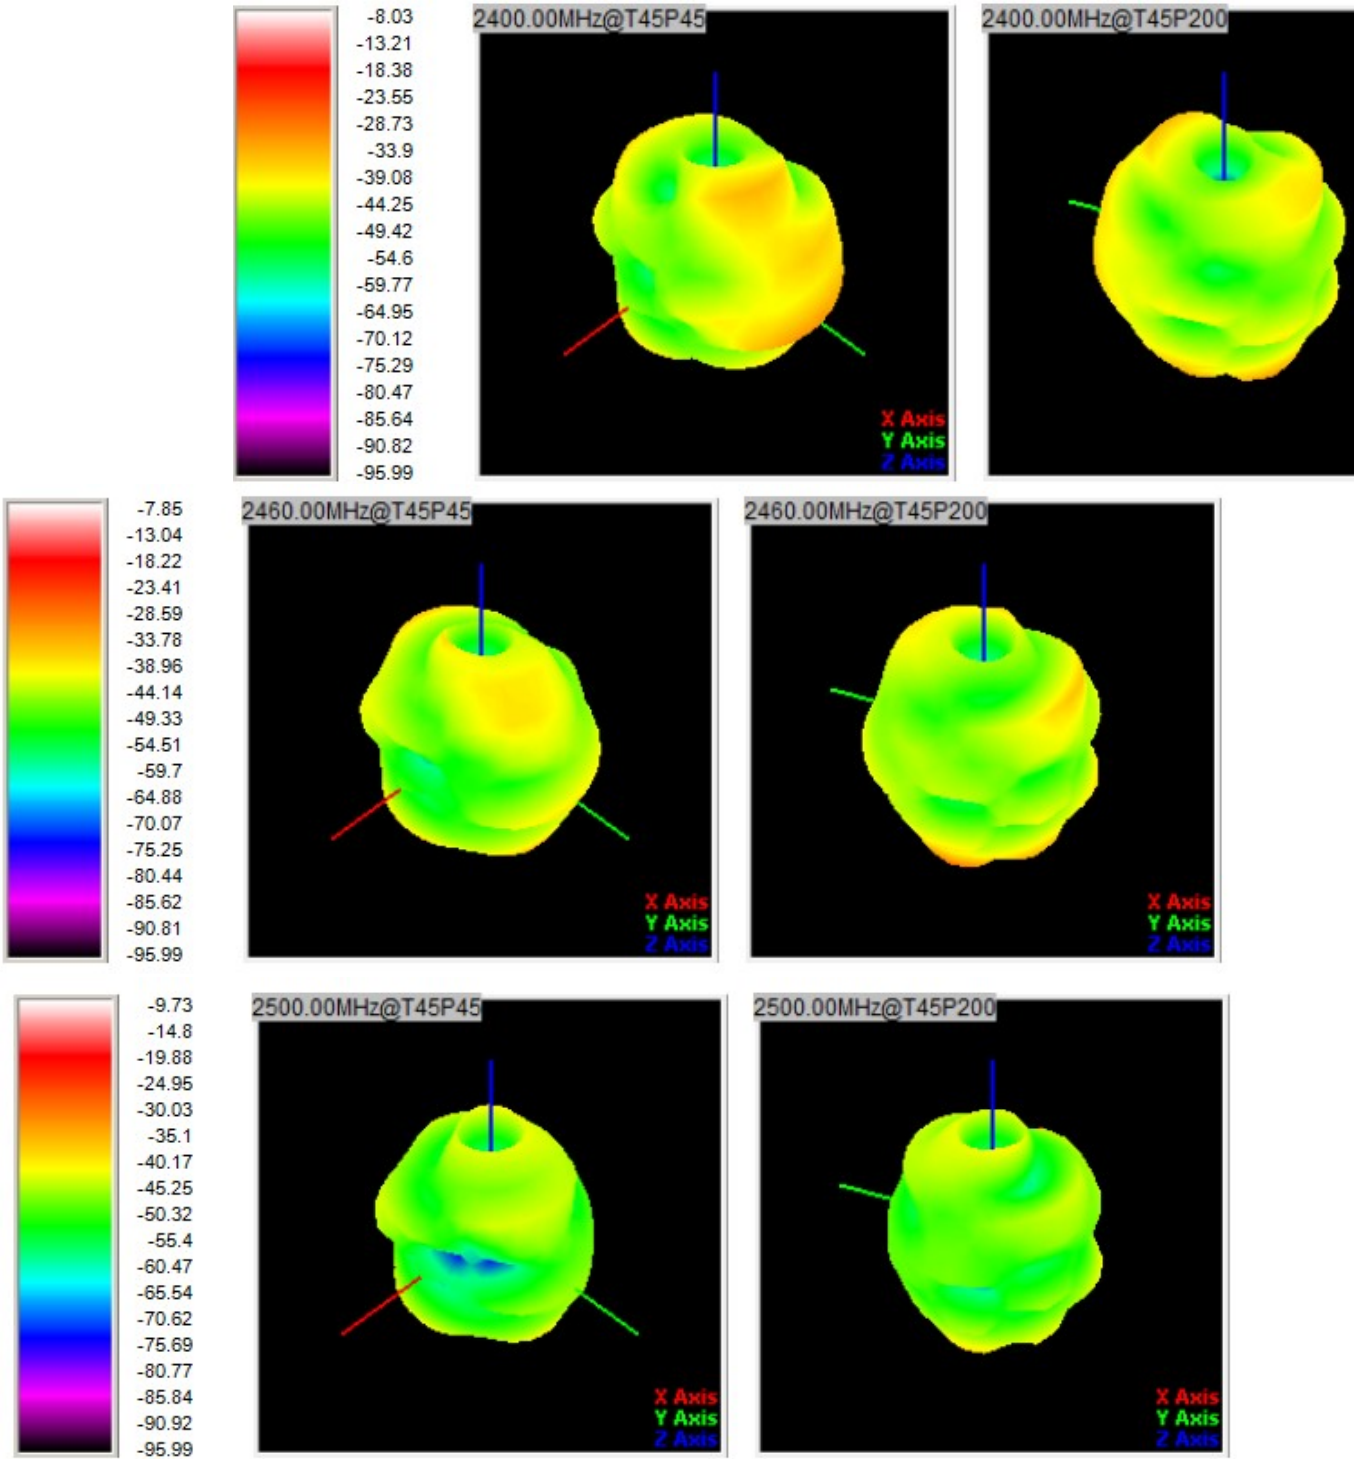

Project	Author: Yi Long.CHEN	File Name: A.doc
Date:		
Revision:		
CONFIDENTIAL Shenzhen QiXinTongDaCommunication Technology Co.,Ltd.		

