

TEST REPORT

Product : Easi-Scope Visual
Trade mark : TTS
Model/Type reference : SC10202
Serial Number : N/A
Report Number : EED32M80075901
FCC ID : 2ADRESC10202
Date of Issue : Dec. 18, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

TTS-Group Ltd

**Unit 1, Park Lane Business Park Park Lane, Kirkby in
Ashfield, NG179GU, United Kingdom**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Tom Chen

Tom Chen

Reviewed by:

Aaron Ma

Aaron Ma

Approved by:

David Wang

David Wang

Date:

Dec. 18, 2020



Check:7059161120

2 Version

Version No.	Date	Description
00	Dec. 18, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.


4 Content

1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENT.....	4
5 TEST REQUIREMENT.....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION.....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST.....	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	13
Appendix A): Conducted Peak Output Power.....	19
Appendix B): 6dB Occupied Bandwidth.....	21
Appendix C): Band-edge for RF Conducted Emissions.....	31
Appendix D): RF Conducted Spurious Emissions.....	36
Appendix E): Power Spectral Density.....	50
Appendix F): Antenna Requirement.....	56
Appendix G): AC Power Line Conducted Emission.....	57
Appendix H): Restricted bands around fundamental frequency (Radiated).....	60
Appendix I): Radiated Spurious Emissions.....	93
PHOTOGRAPHS OF TEST SETUP.....	101
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	104

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

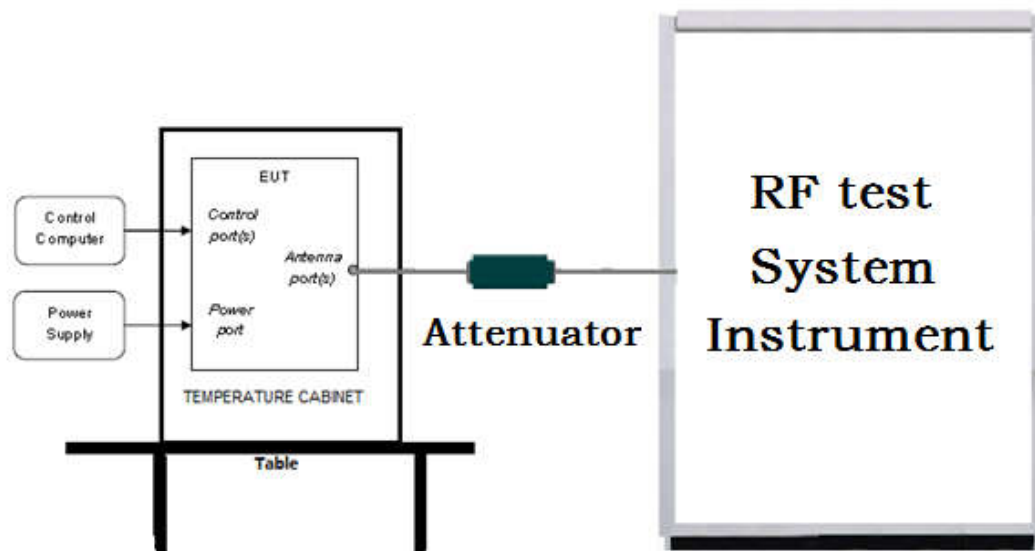

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

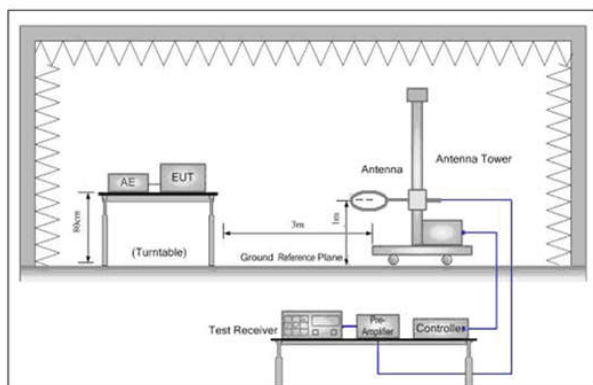


Figure 1. Below 30MHz

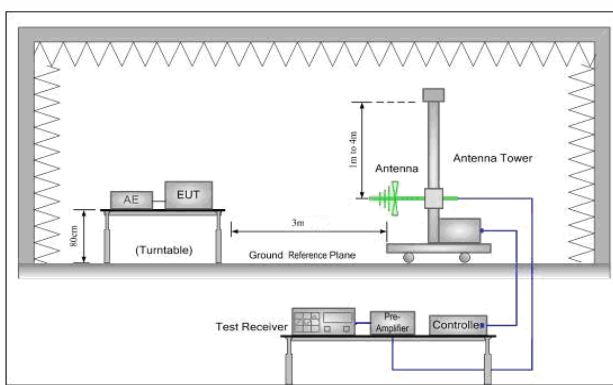


Figure 2. 30MHz to 1GHz


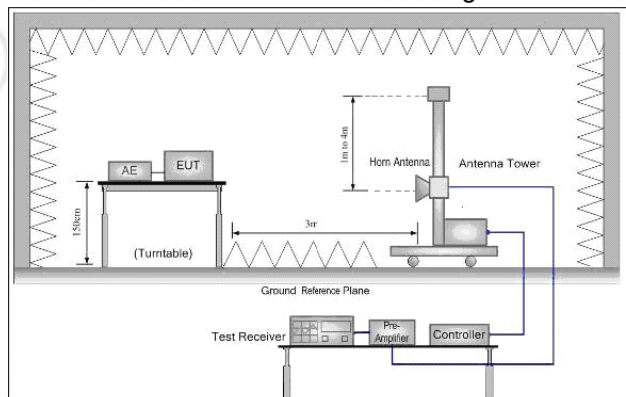


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

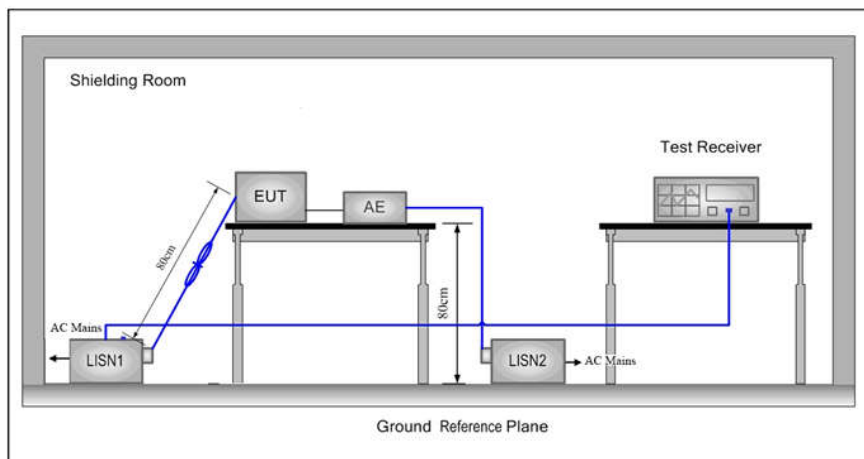

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 1	Channel 4	Channel7
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	TTS-Group Ltd
Address of Applicant:	Unit 1, Park Lane Business Park Park Lane, Kirkby in Ashfield, NG179GU, United Kingdom
Manufacturer:	Sunpet Industries Limited
Address of Manufacturer:	Unit 618, Lakeside 2, No. 10 Science Park West Avenue, Hong Kong Science Park, Shatin, Hong Kong
Factory:	Zhongshan Sunpet Plastics & Electronics Mfy. Ltd.
Address of Factory:	109 Zhongshan Port Avenue, Zhongshan Torch Development Zone, Zhongshan City, Guangdong Province, China

6.2 General Description of EUT

Product Name:	Easi-Scope Visual
Model No.(EUT):	SC10202
Trade mark:	TTS
EUT Supports Radios application:	IEEE 802.11 b/g/n(HT20)(HT40): 2412MHz to 2462MHz
Power Supply:	DC 5V
	Lithium Polymer Battery Model:ICR17335 DC 3.7V 700mAh
Sample Received Date:	Nov. 16, 2020
Sample tested Date:	Nov. 16, 2020 to Nov. 27, 2020

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Test Power Grade:	Reference Table
Test Software of EUT:	SecureCRT
Antenna Type and Gain:	Type: Dipole Antenna Gain:3 dBi
Test Voltage:	DC 3.7V

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2422MHz	4	2437MHz	7	2452MHz		
2	2427MHz	5	2442MHz				
3	2432MHz	6	2447MHz				

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	DELL	DELL 3490	D245DX2	DELL	CE&FCC
AE2	Power supply Unit	OPPO	Ak933JH	J51642000007	CTI	FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-16-2020	10-15-2021
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980597	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

EUT DUTY CYCLE
Result Table

Test Mode	Antenna	Channel	Duty Cycle [%]	Limit	Verdict
11B	Ant1	2412	100	---	PASS
	Ant1	2437	100	---	PASS
	Ant1	2462	100	---	PASS
11G	Ant1	2412	100	---	PASS
	Ant1	2437	100	---	PASS
	Ant1	2462	100	---	PASS
11N20SISO	Ant1	2412	100	---	PASS
	Ant1	2437	100	---	PASS
	Ant1	2462	100	---	PASS
11N40SISO	Ant1	2422	100	---	PASS
	Ant1	2437	100	---	PASS
	Ant1	2452	100	---	PASS

Test Graph

11B_Ant1_2412

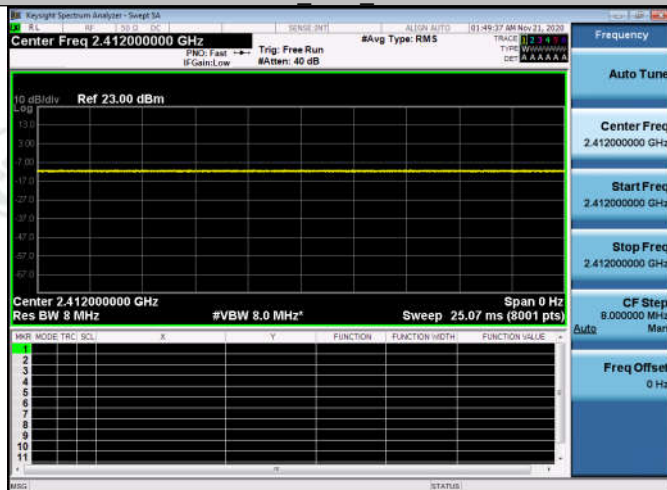


11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

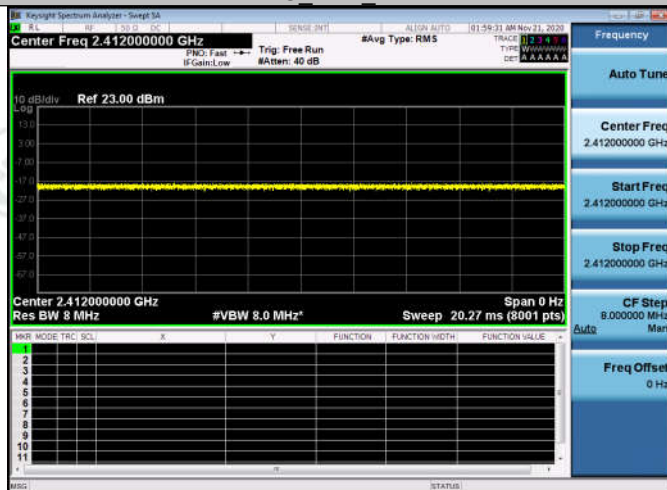


11G_Ant1_2437

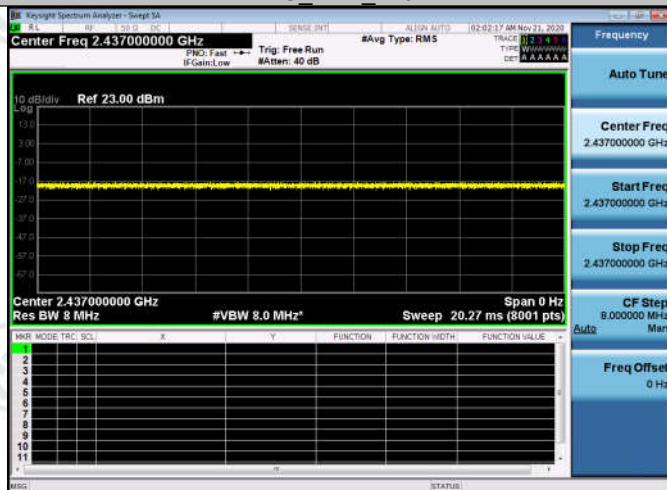


11G_Ant1_2462

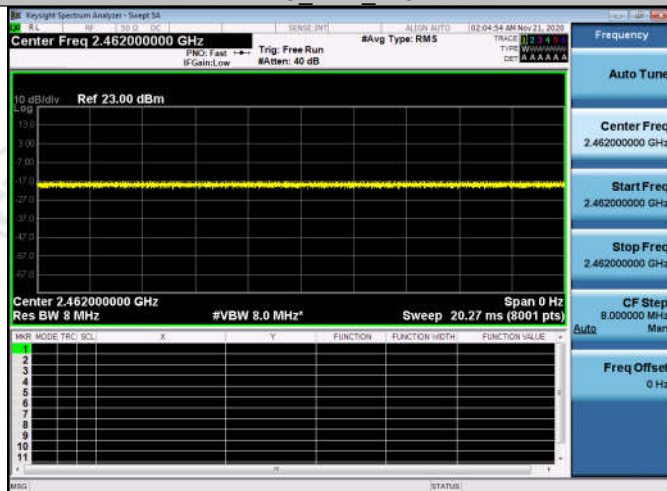


11N20SISO_Ant1_2412

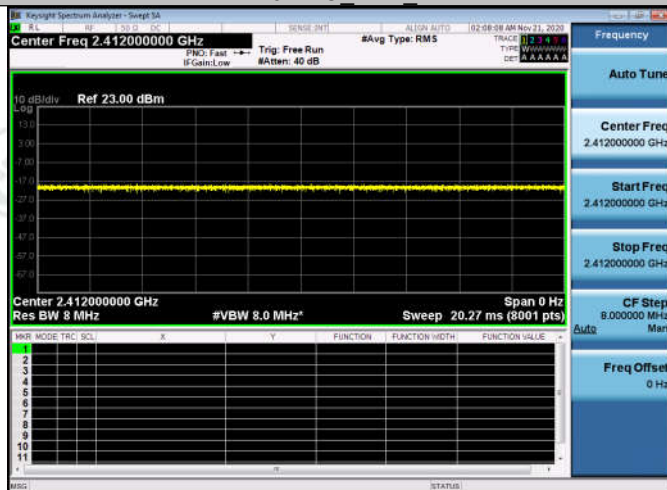


11N20SISO_Ant1_2437

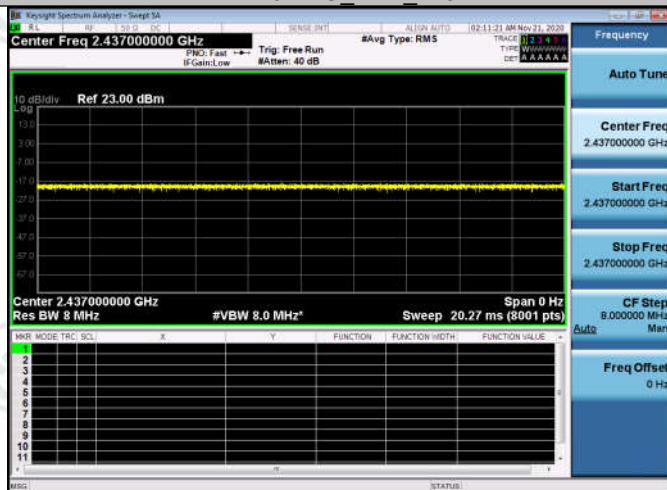


11N20SISO_Ant1_2462

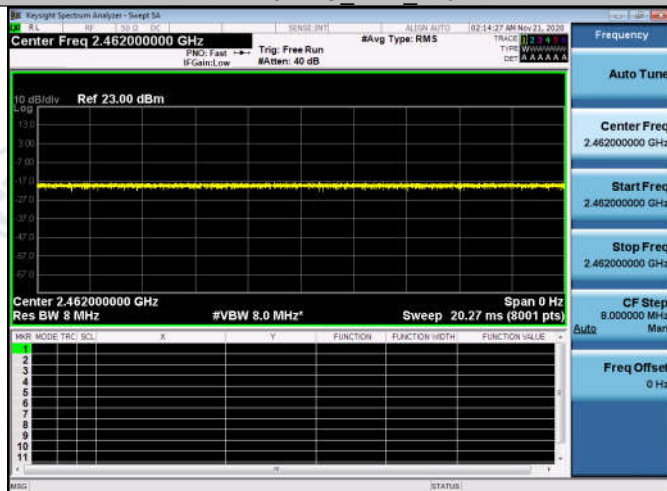


11N40SISO_Ant1_2422

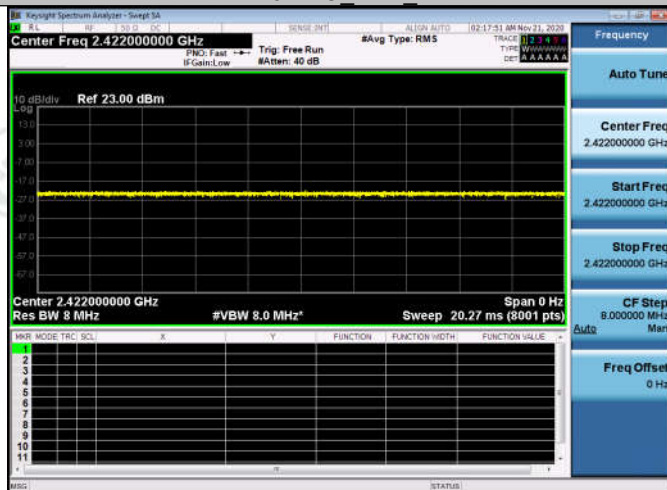

11N40SISO_Ant1_2437

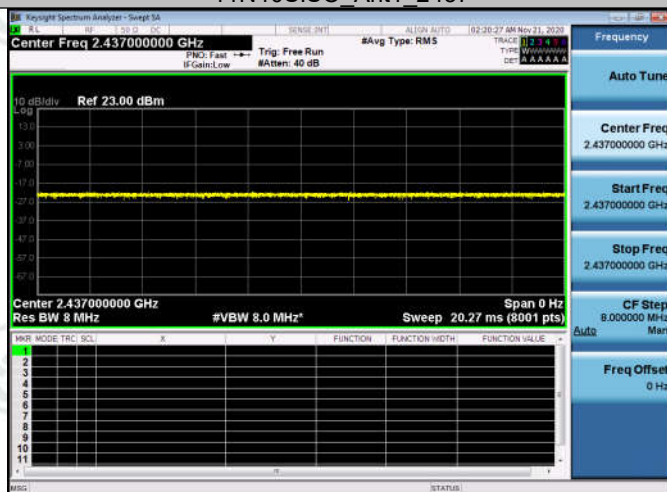

11N40SISO_Ant1_2452

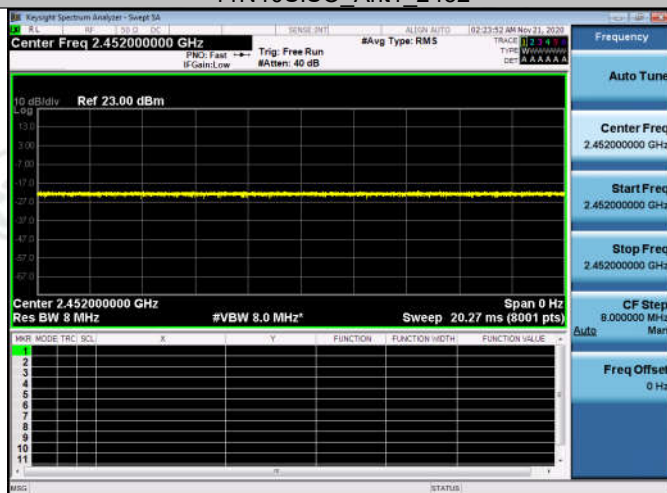

Appendix A): Conducted Peak Output Power

Test Limit

According to §15.247(b)(3),

Peak output power:

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: [Limit = 30 – (DG – 6)] <input type="checkbox"/> Point-to-point operation:
-------	--


Average output power: For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

Test Setup



Test Result

Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	12.26	PASS
11B	MCH	12.53	PASS
11B	HCH	12.9	PASS
11G	LCH	11.52	PASS
11G	MCH	12.41	PASS
11G	HCH	12.78	PASS
11N20SISO	LCH	10.88	PASS
11N20SISO	MCH	11.74	PASS
11N20SISO	HCH	12.2	PASS
11N40SISO	LCH	10.83	PASS
11N40SISO	MCH	11.28	PASS
11N40SISO	HCH	11.64	PASS

Appendix B): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup






Test Result




Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	LCH	10.06	15.120	PASS
11B	MCH	10.07	15.134	PASS
11B	HCH	9.094	15.109	PASS
11G	LCH	16.52	16.745	PASS
11G	MCH	16.52	16.744	PASS
11G	HCH	16.53	16.748	PASS
11N20SISO	LCH	17.74	17.935	PASS
11N20SISO	MCH	17.74	17.938	PASS
11N20SISO	HCH	17.76	17.930	PASS
11N40SISO	LCH	36.36	36.125	PASS
11N40SISO	MCH	36.32	36.098	PASS
11N40SISO	HCH	36.31	36.025	PASS




Test Graph

6 dB Bandwidth

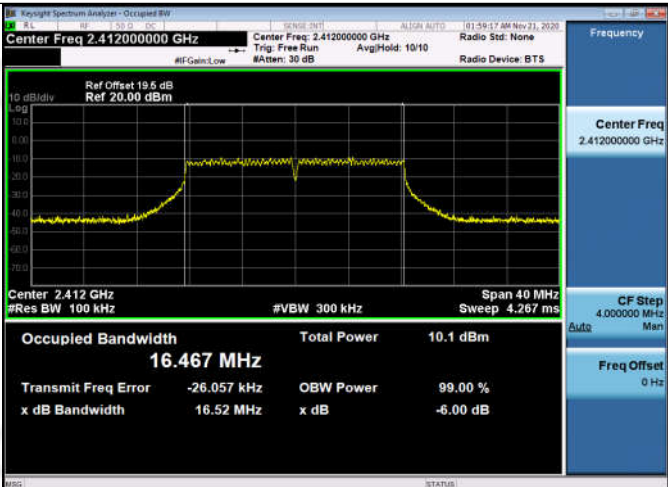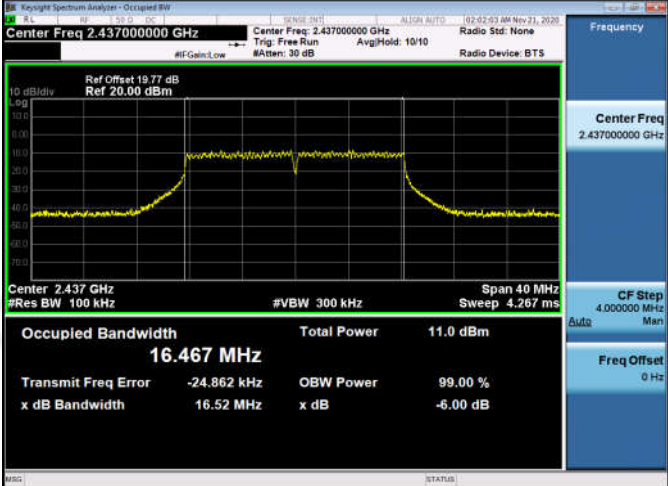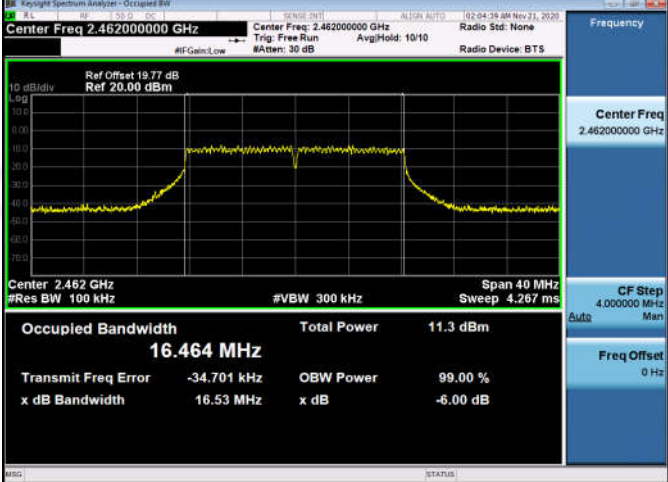


11G/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.467 MHz</p> <p>Total Power 10.1 dBm</p> <p>Transmit Freq Error -26.057 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.52 MHz</p> <p>x dB -6.00 dB</p>
11G/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.467 MHz</p> <p>Total Power 11.0 dBm</p> <p>Transmit Freq Error -24.862 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.52 MHz</p> <p>x dB -6.00 dB</p>
11G/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.464 MHz</p> <p>Total Power 11.3 dBm</p> <p>Transmit Freq Error -34.701 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.53 MHz</p> <p>x dB -6.00 dB</p>

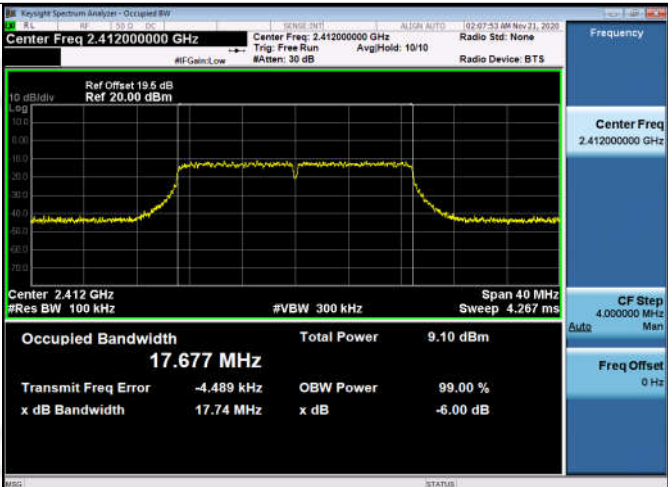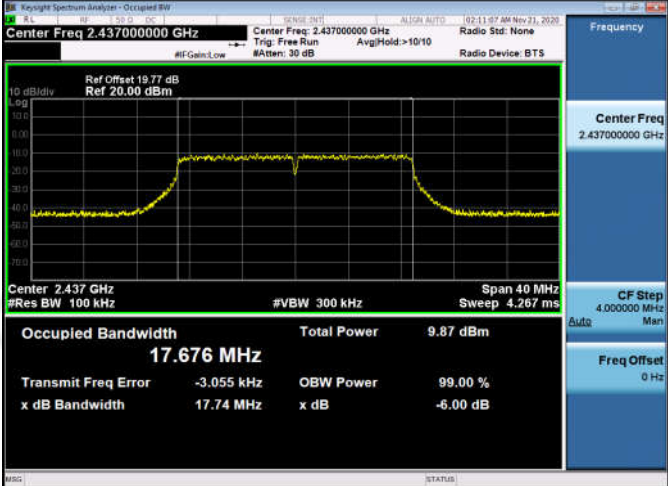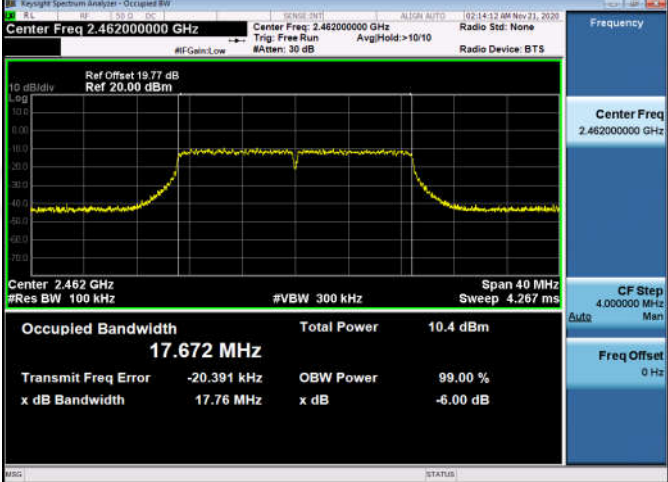11N20SISO/LCH	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>#VBW 300 kHz</p> <p>Occupied Bandwidth 17.677 MHz</p> <p>Total Power 9.10 dBm</p> <p>Transmit Freq Error -4.489 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.74 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.412000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>
11N20SISO/MCH	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>#VBW 300 kHz</p> <p>Occupied Bandwidth 17.676 MHz</p> <p>Total Power 9.87 dBm</p> <p>Transmit Freq Error -3.055 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.74 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>
11N20SISO/HCH	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Span 40 MHz Sweep 4.267 ms</p> <p>#VBW 300 kHz</p> <p>Occupied Bandwidth 17.672 MHz</p> <p>Total Power 10.4 dBm</p> <p>Transmit Freq Error -20.391 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.76 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Freq Offset 0 Hz</p>

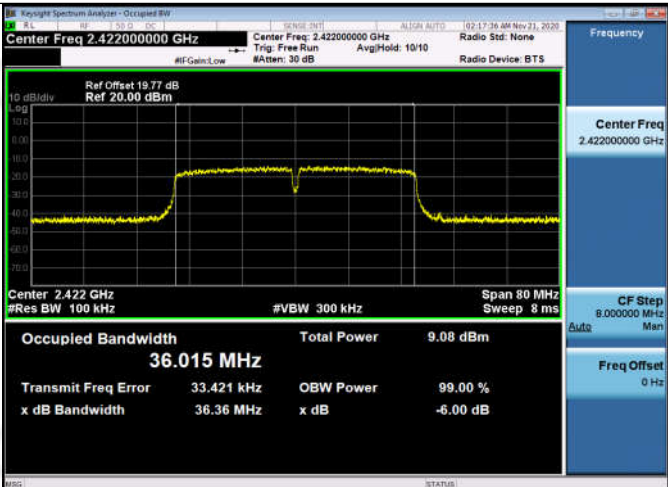
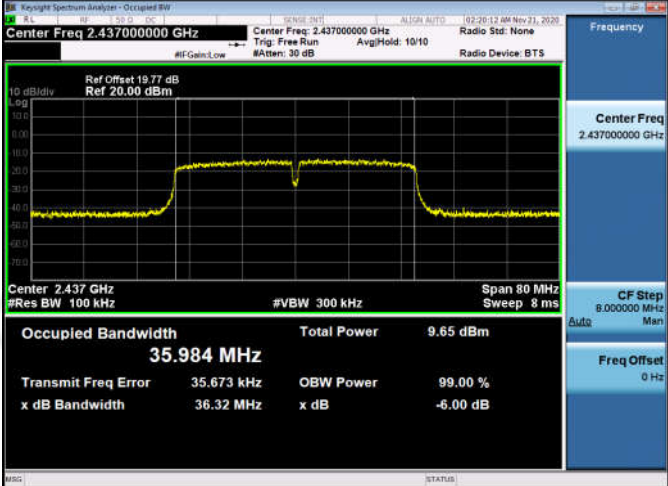
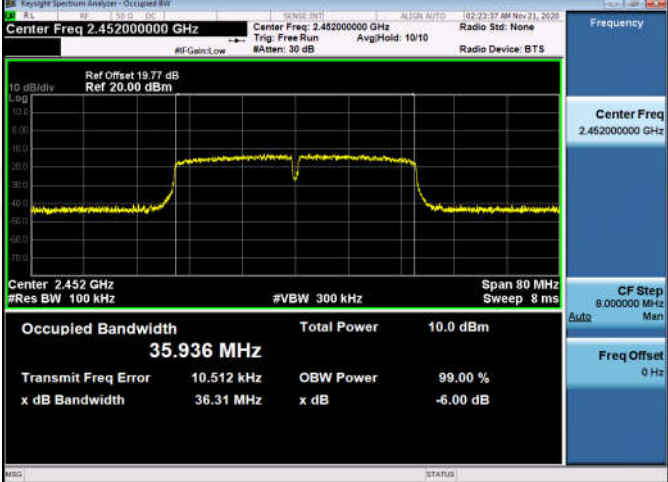
11N40SISO/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 8 ms</p> <p>Occupied Bandwidth 36.015 MHz</p> <p>Total Power 9.08 dBm</p> <p>Transmit Freq Error 33.421 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.36 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.422000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Freq Offset 0 Hz</p>
11N40SISO/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 8 ms</p> <p>Occupied Bandwidth 35.984 MHz</p> <p>Total Power 9.65 dBm</p> <p>Transmit Freq Error 35.673 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.32 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Freq Offset 0 Hz</p>
11N40SISO/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Span 80 MHz Sweep 8 ms</p> <p>Occupied Bandwidth 35.936 MHz</p> <p>Total Power 10.0 dBm</p> <p>Transmit Freq Error 10.512 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.31 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.452000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Freq Offset 0 Hz</p>

Occupied Bandwidth(99%)

Graphs	
11B/LCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.6 dB Ref 20.00 dBm</p> <p>Mkr1 2.4044376 GHz -12.661 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 15.120 MHz</p> <p>Total Power 13.3 dBm</p> <p>Transmit Freq Error -2.439 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.28 MHz</p> <p>x dB -20.00 dB</p>
11B/MCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 15.134 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error 20.780 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.28 MHz</p> <p>x dB -20.00 dB</p>
11B/HCH	 <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Mkr1 2.4695304 GHz -11.890 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 15.109 MHz</p> <p>Total Power 13.9 dBm</p> <p>Transmit Freq Error -24.124 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.28 MHz</p> <p>x dB -20.00 dB</p>

11G/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.4035969 GHz -13.123 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.745 MHz</p> <p>Total Power 10.4 dBm</p> <p>Transmit Freq Error -30.571 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 18.89 MHz</p> <p>x dB -20.00 dB</p>
11G/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.744 MHz</p> <p>Total Power 11.3 dBm</p> <p>Transmit Freq Error -20.880 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 18.80 MHz</p> <p>x dB -20.00 dB</p>
11G/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Mkr1 2.4703293 GHz -9.7737 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.748 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error -44.706 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 18.88 MHz</p> <p>x dB -20.00 dB</p>

11N20SISO/LCH	 <p>Key: Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.4030156 GHz -14.172 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 17.935 MHz</p> <p>Total Power 9.79 dBm</p> <p>Transmit Freq Error -16.891 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 20.17 MHz</p> <p>x dB -20.00 dB</p>
11N20SISO/MCH	 <p>Key: Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 17.938 MHz</p> <p>Total Power 10.6 dBm</p> <p>Transmit Freq Error -6.404 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 20.21 MHz</p> <p>x dB -20.00 dB</p>
11N20SISO/HCH	 <p>Key: Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Mkr1 2.4709139 GHz -13.110 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>#VBW 1 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 17.930 MHz</p> <p>Total Power 11.1 dBm</p> <p>Transmit Freq Error -51.111 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 20.00 MHz</p> <p>x dB -20.00 dB</p>

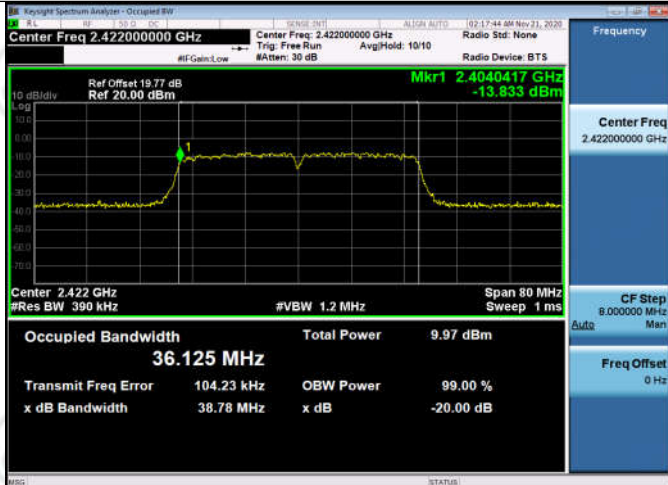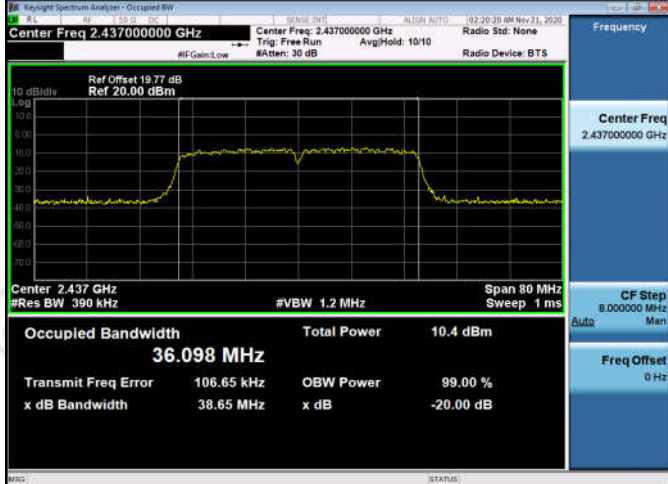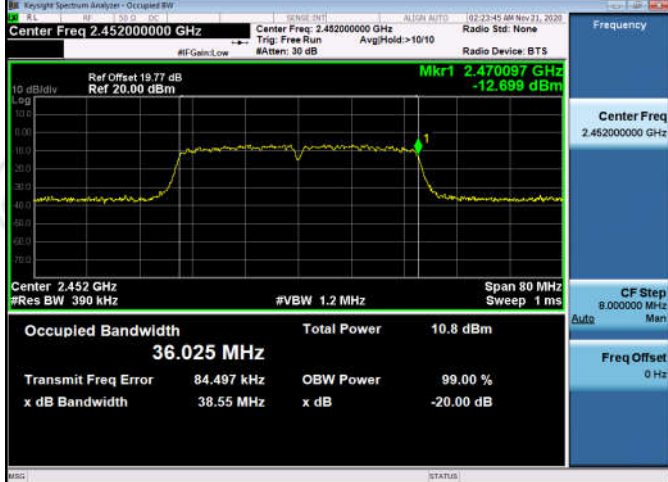11N40SISO/LCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Mkr1 2.4040417 GHz -13.833 dBm</p> <p>Center 2.422 GHz #Res BW 390 kHz</p> <p>#VBW 1.2 MHz</p> <p>Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.125 MHz</p> <p>Total Power 9.97 dBm</p> <p>Transmit Freq Error 104.23 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 38.78 MHz</p> <p>x dB -20.00 dB</p> <p>Frequency</p> <p>Center Freq 2.422000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
11N40SISO/MCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 390 kHz</p> <p>#VBW 1.2 MHz</p> <p>Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.098 MHz</p> <p>Total Power 10.4 dBm</p> <p>Transmit Freq Error 106.65 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 38.65 MHz</p> <p>x dB -20.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>
11N40SISO/HCH	 <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 19.77 dB Ref 20.00 dBm</p> <p>Mkr1 2.4700097 GHz -12.699 dBm</p> <p>Center 2.452 GHz #Res BW 390 kHz</p> <p>#VBW 1.2 MHz</p> <p>Span 80 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.025 MHz</p> <p>Total Power 10.8 dBm</p> <p>Transmit Freq Error 84.497 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 38.55 MHz</p> <p>x dB -20.00 dB</p> <p>Frequency</p> <p>Center Freq 2.452000000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d),


In any 100 kHz bandwidth outside the authorized frequency band,
Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup







Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	-0.690	-50.312	-30.69	PASS
11B	HCH	-0.012	-49.621	-30.01	PASS
11G	LCH	-9.580	-50.398	-39.58	PASS
11G	HCH	-8.400	-49.605	-38.4	PASS
11N20SISO	LCH	-11.168	-50.685	-41.17	PASS
11N20SISO	HCH	-9.748	-49.835	-39.75	PASS
11N40SISO	LCH	-14.100	-49.890	-44.1	PASS
11N40SISO	HCH	-13.409	-49.916	-43.41	PASS

Test Graph

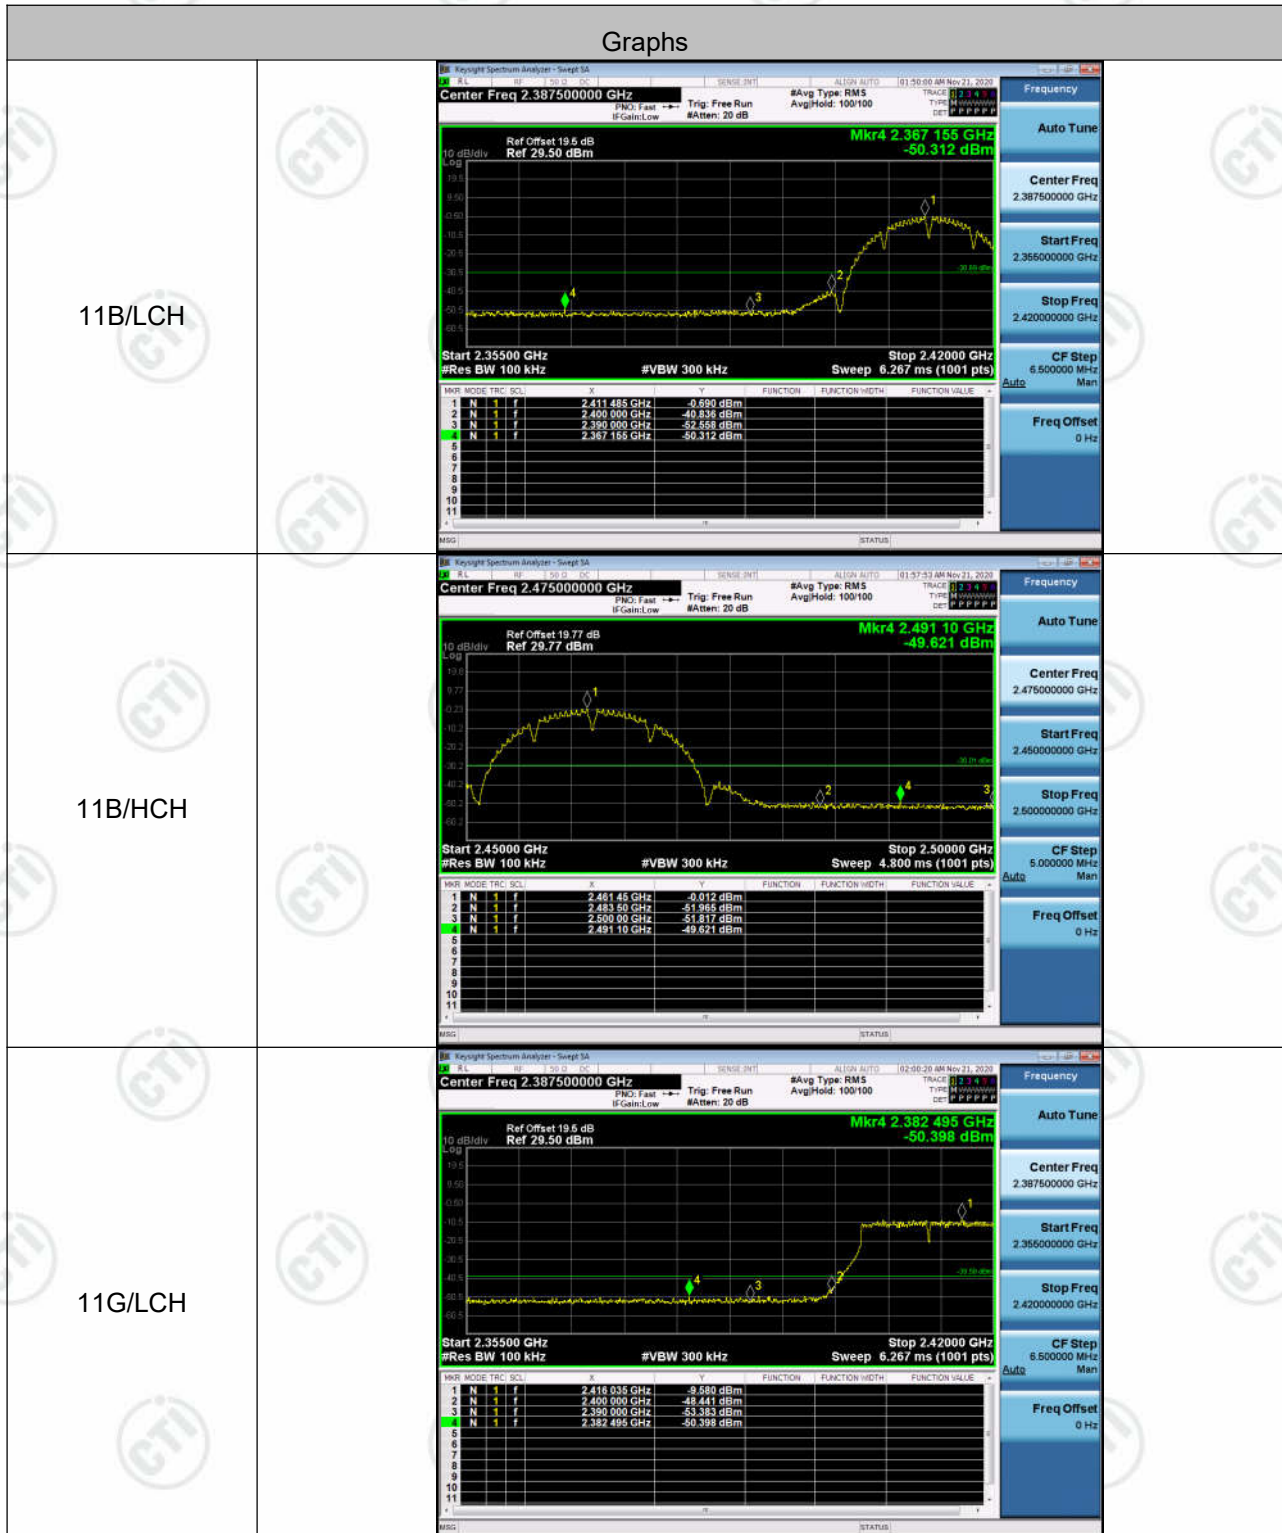

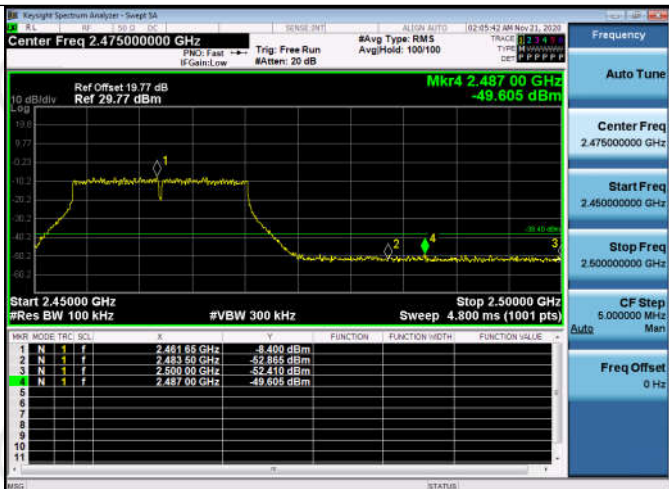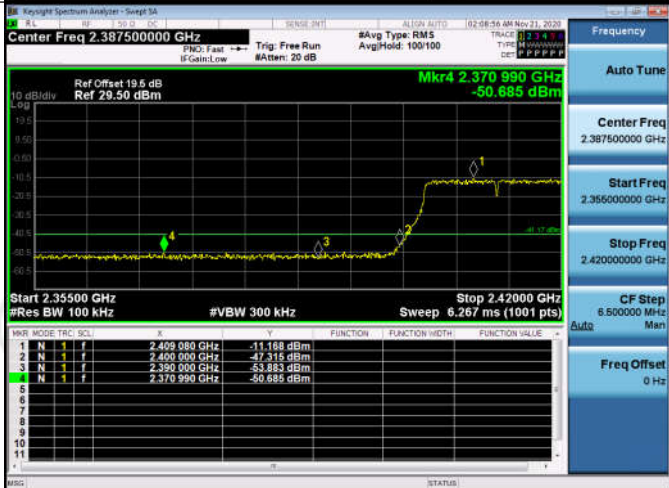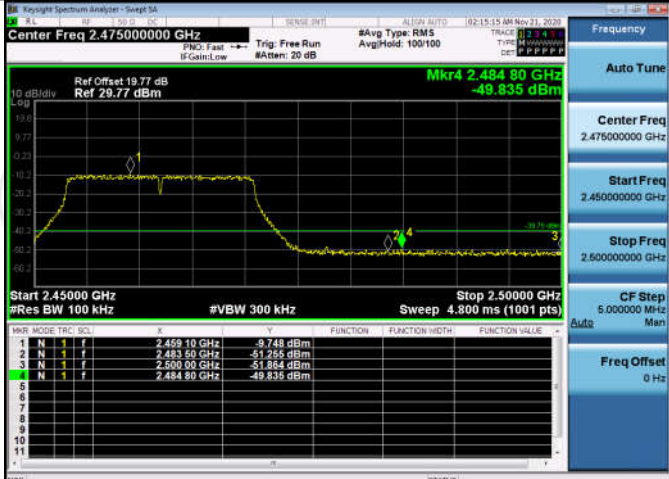11G/HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.46185 GHz</td><td>-9.400 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-52.895 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-52.410 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48700 GHz</td><td>-49.605 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.46185 GHz	-9.400 dBm				2	N	1	f	2.48350 GHz	-52.895 dBm				3	N	1	f	2.50000 GHz	-52.410 dBm				4	N	1	f	2.48700 GHz	-49.605 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.46185 GHz	-9.400 dBm																																									
2	N	1	f	2.48350 GHz	-52.895 dBm																																									
3	N	1	f	2.50000 GHz	-52.410 dBm																																									
4	N	1	f	2.48700 GHz	-49.605 dBm																																									
11N20SISO/LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409080 GHz</td><td>-11.158 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.490990 GHz</td><td>-47.515 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-53.883 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.370990 GHz</td><td>-50.685 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409080 GHz	-11.158 dBm				2	N	1	f	2.490990 GHz	-47.515 dBm				3	N	1	f	2.390000 GHz	-53.883 dBm				4	N	1	f	2.370990 GHz	-50.685 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.409080 GHz	-11.158 dBm																																									
2	N	1	f	2.490990 GHz	-47.515 dBm																																									
3	N	1	f	2.390000 GHz	-53.883 dBm																																									
4	N	1	f	2.370990 GHz	-50.685 dBm																																									
11N20SISO/HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.45910 GHz</td><td>-9.748 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48360 GHz</td><td>-51.295 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-51.884 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48480 GHz</td><td>-49.835 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.45910 GHz	-9.748 dBm				2	N	1	f	2.48360 GHz	-51.295 dBm				3	N	1	f	2.50000 GHz	-51.884 dBm				4	N	1	f	2.48480 GHz	-49.835 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.45910 GHz	-9.748 dBm																																									
2	N	1	f	2.48360 GHz	-51.295 dBm																																									
3	N	1	f	2.50000 GHz	-51.884 dBm																																									
4	N	1	f	2.48480 GHz	-49.835 dBm																																									

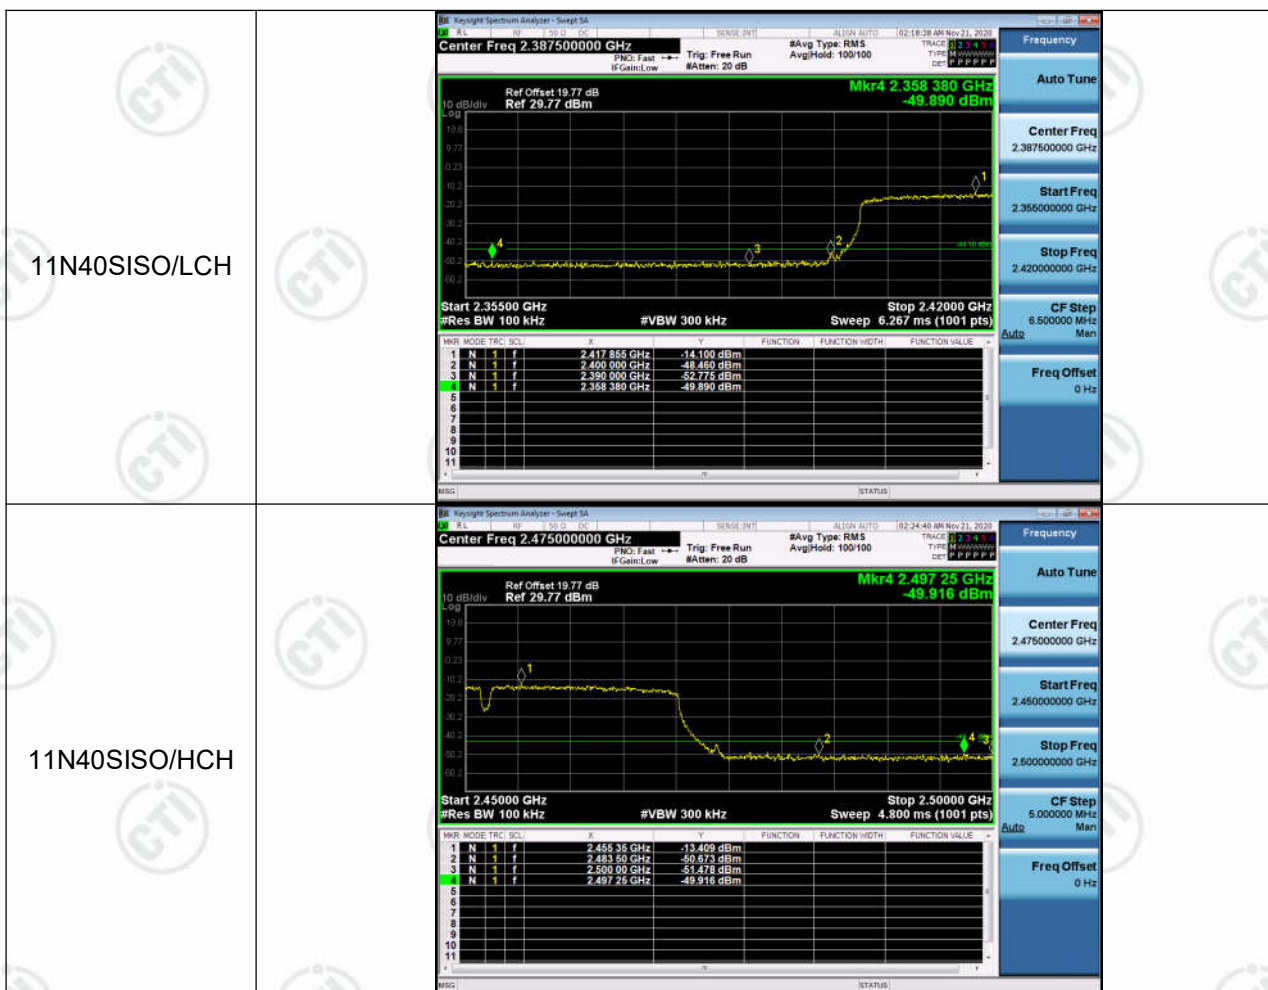

Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup



Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	-2.903	<Limit	PASS
11B	MCH	-2.042	<Limit	PASS
11B	HCH	-1.972	<Limit	PASS
11G	LCH	-8.042	<Limit	PASS
11G	MCH	-8.582	<Limit	PASS
11G	HCH	-7.422	<Limit	PASS
11N20SISO	LCH	-11.102	<Limit	PASS
11N20SISO	MCH	-11.19	<Limit	PASS
11N20SISO	HCH	-11.262	<Limit	PASS
11N40SISO	LCH	-15.947	<Limit	PASS
11N40SISO	MCH	-13.449	<Limit	PASS
11N40SISO	HCH	-13.849	<Limit	PASS


Test Graph

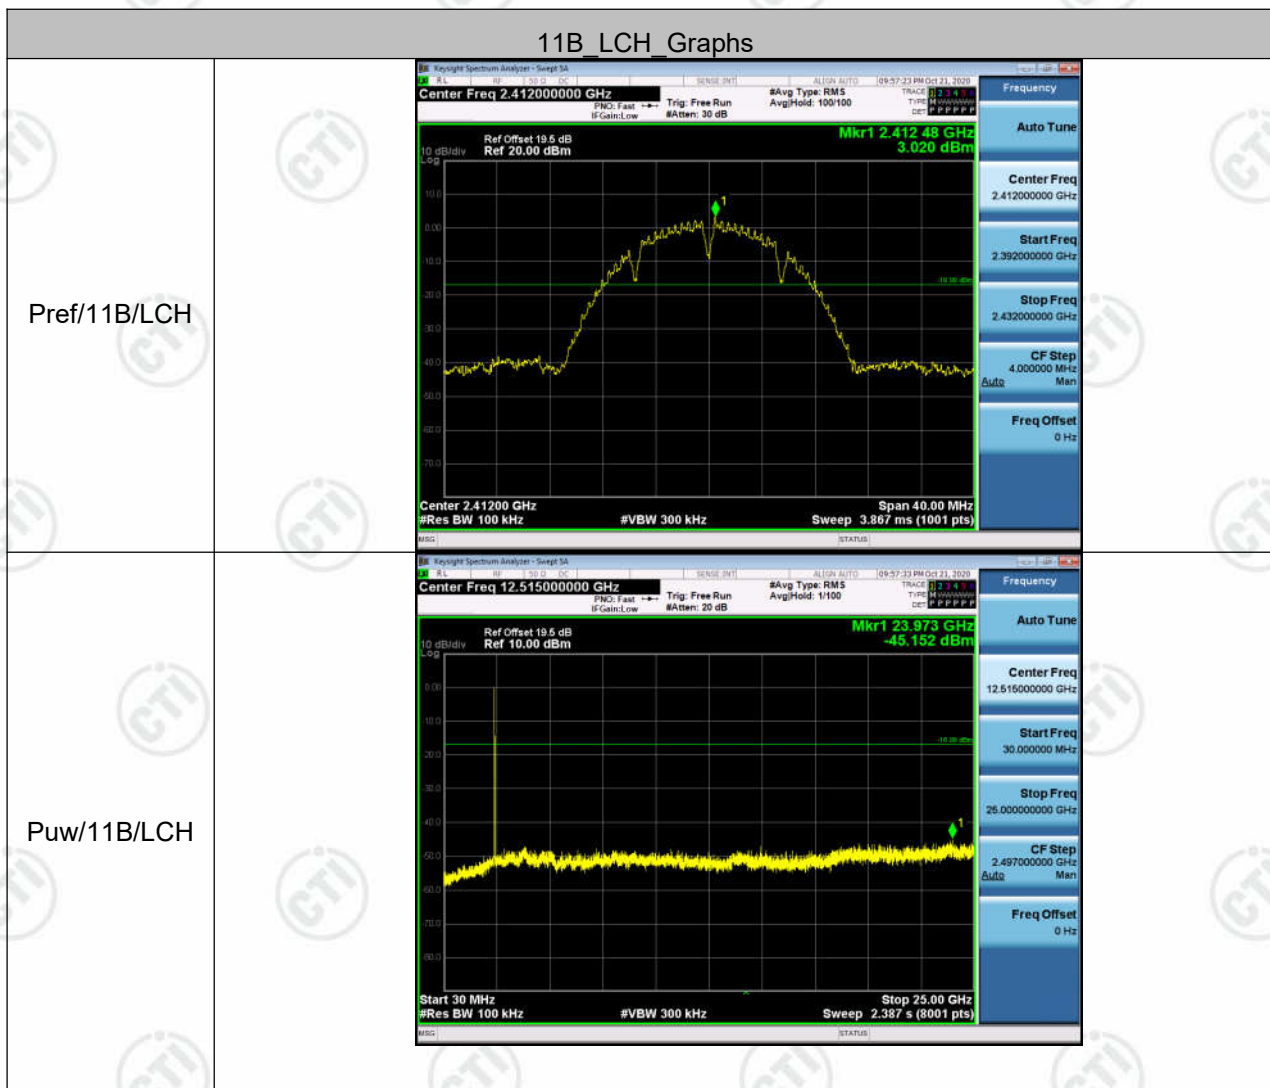







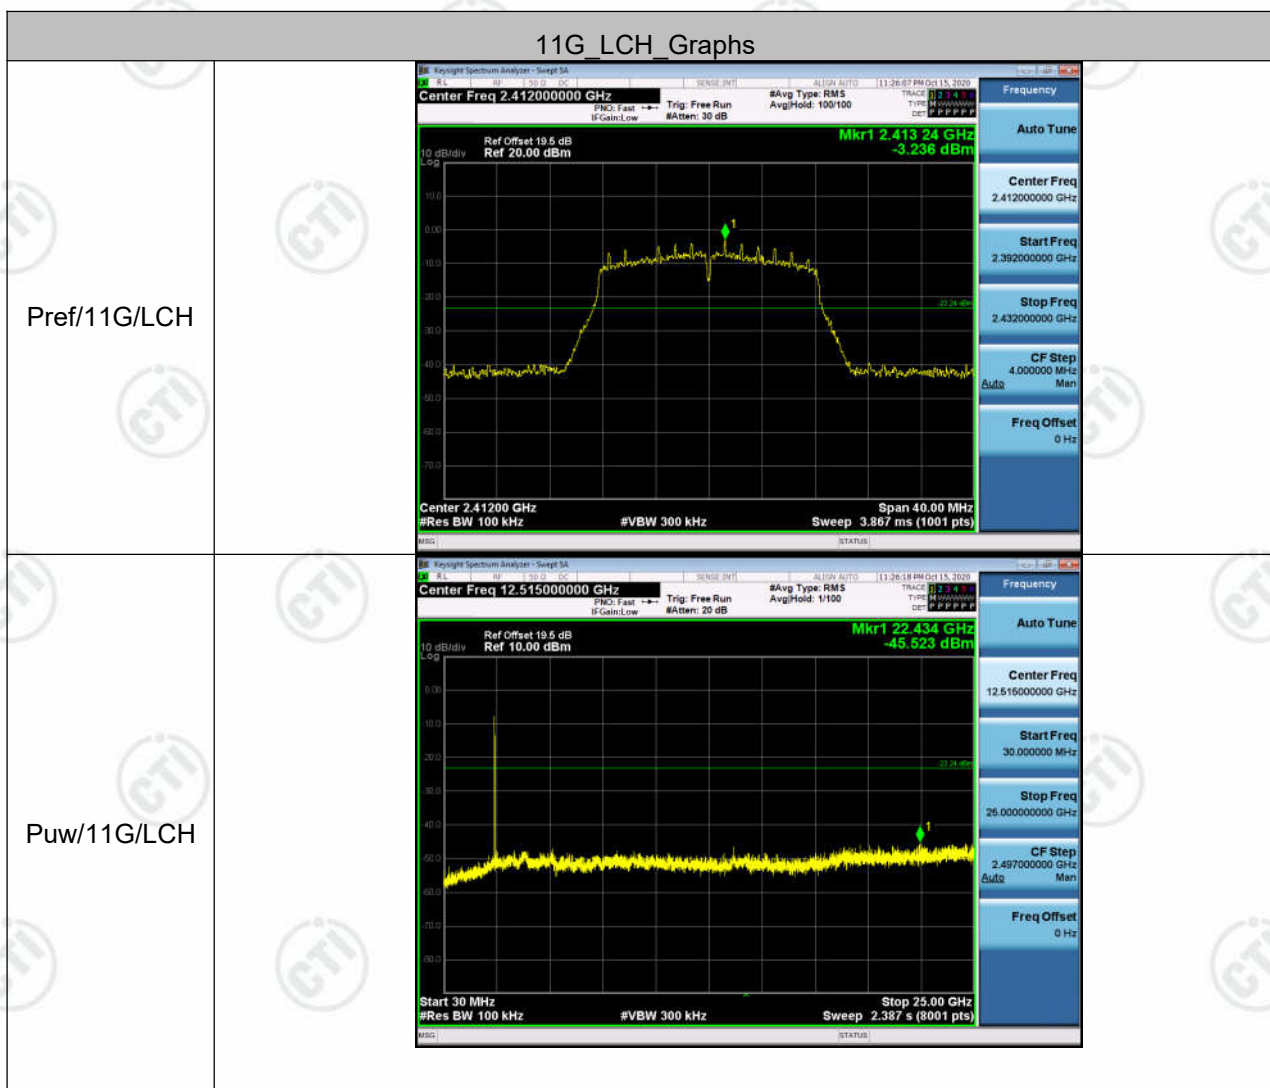


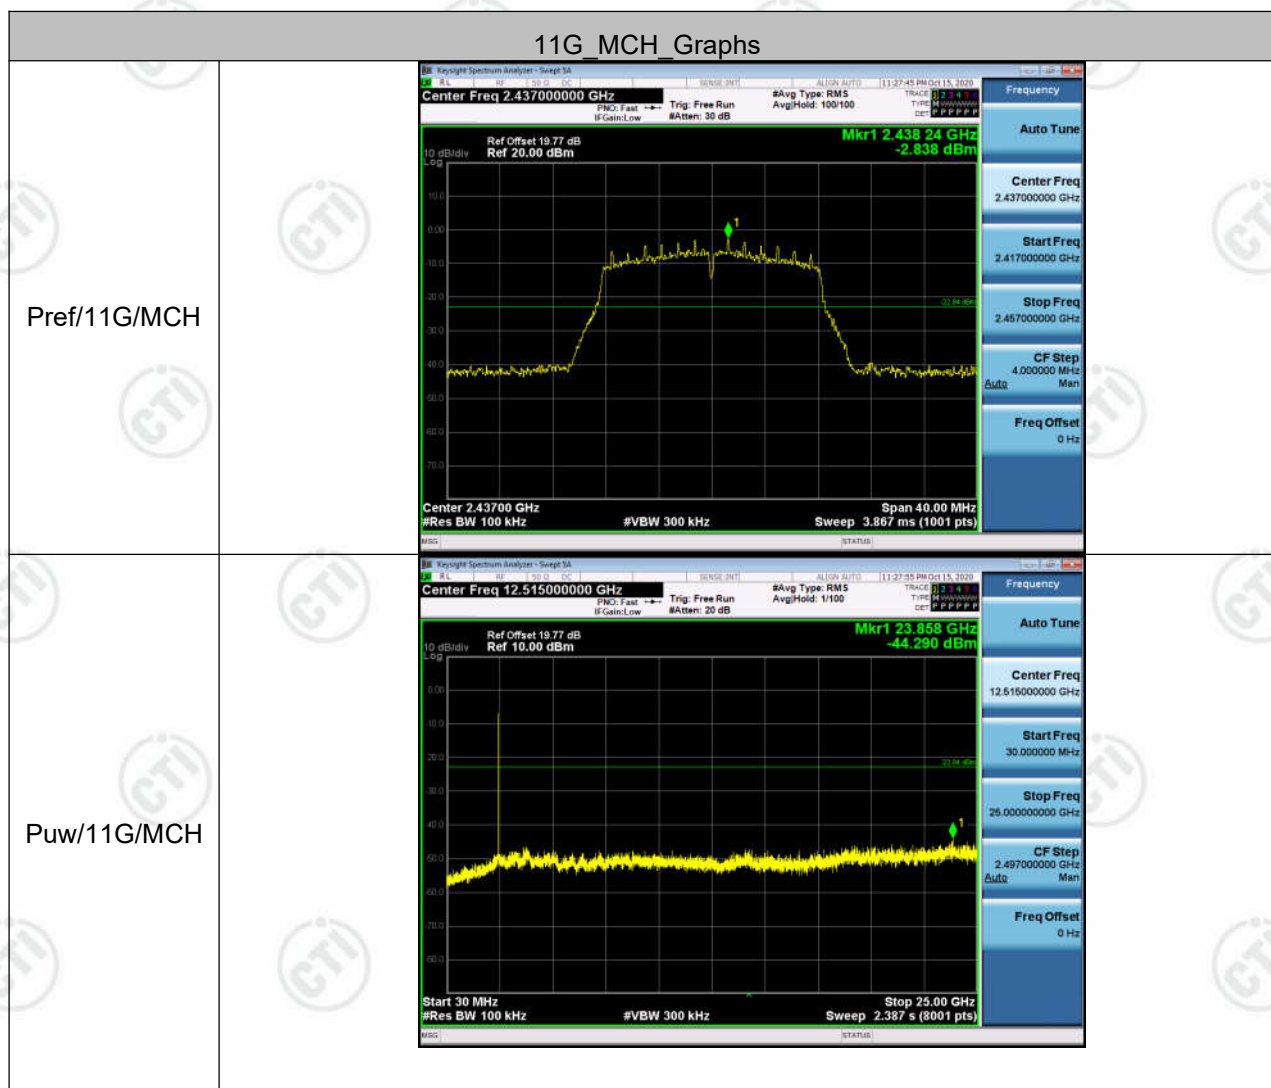





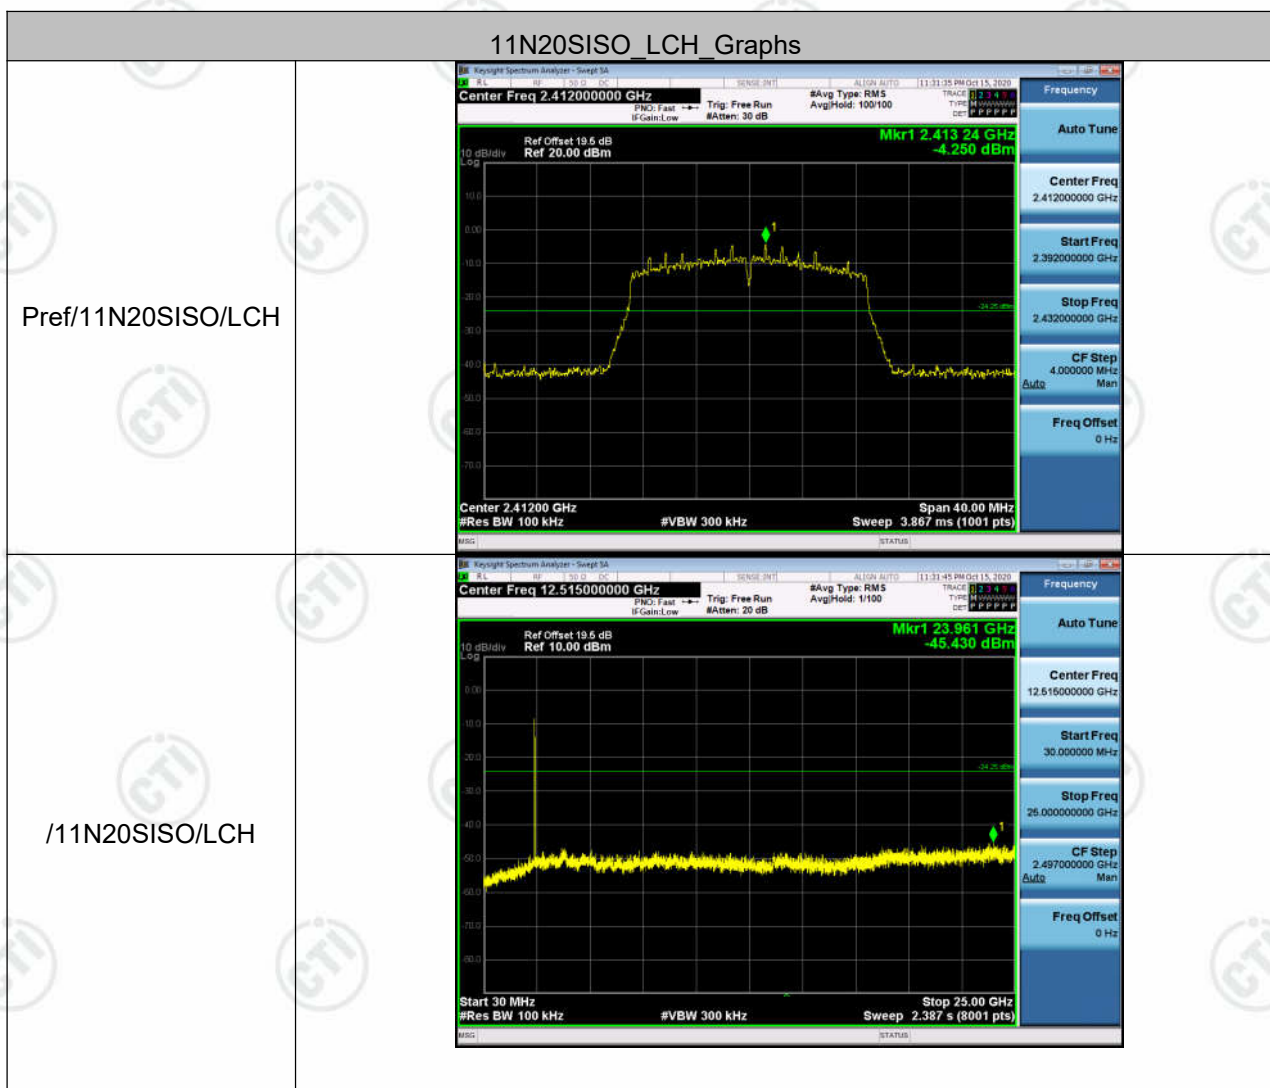


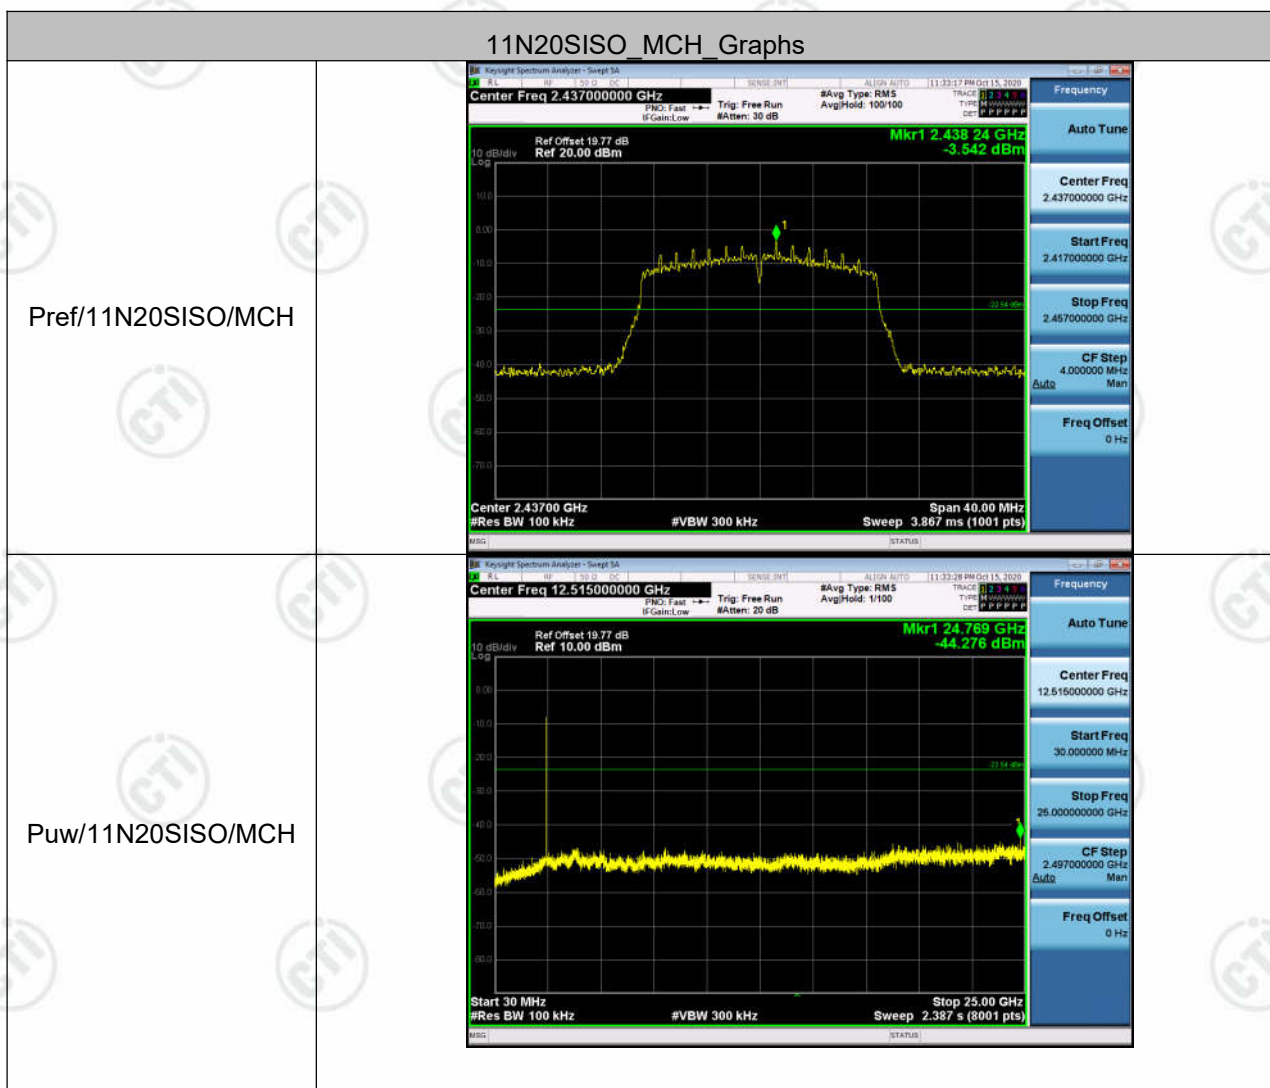

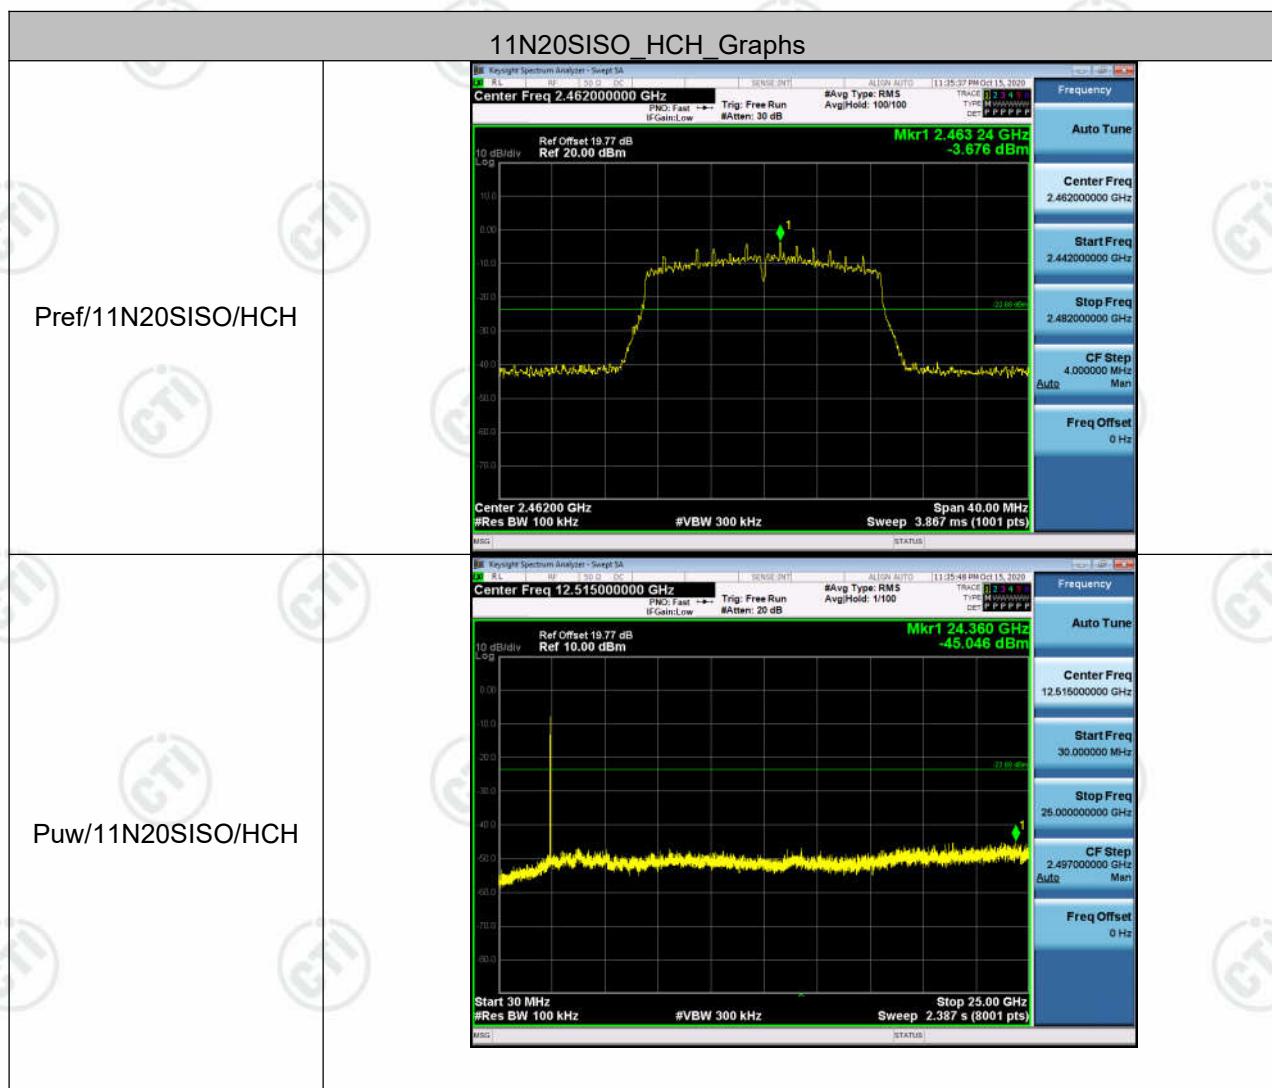

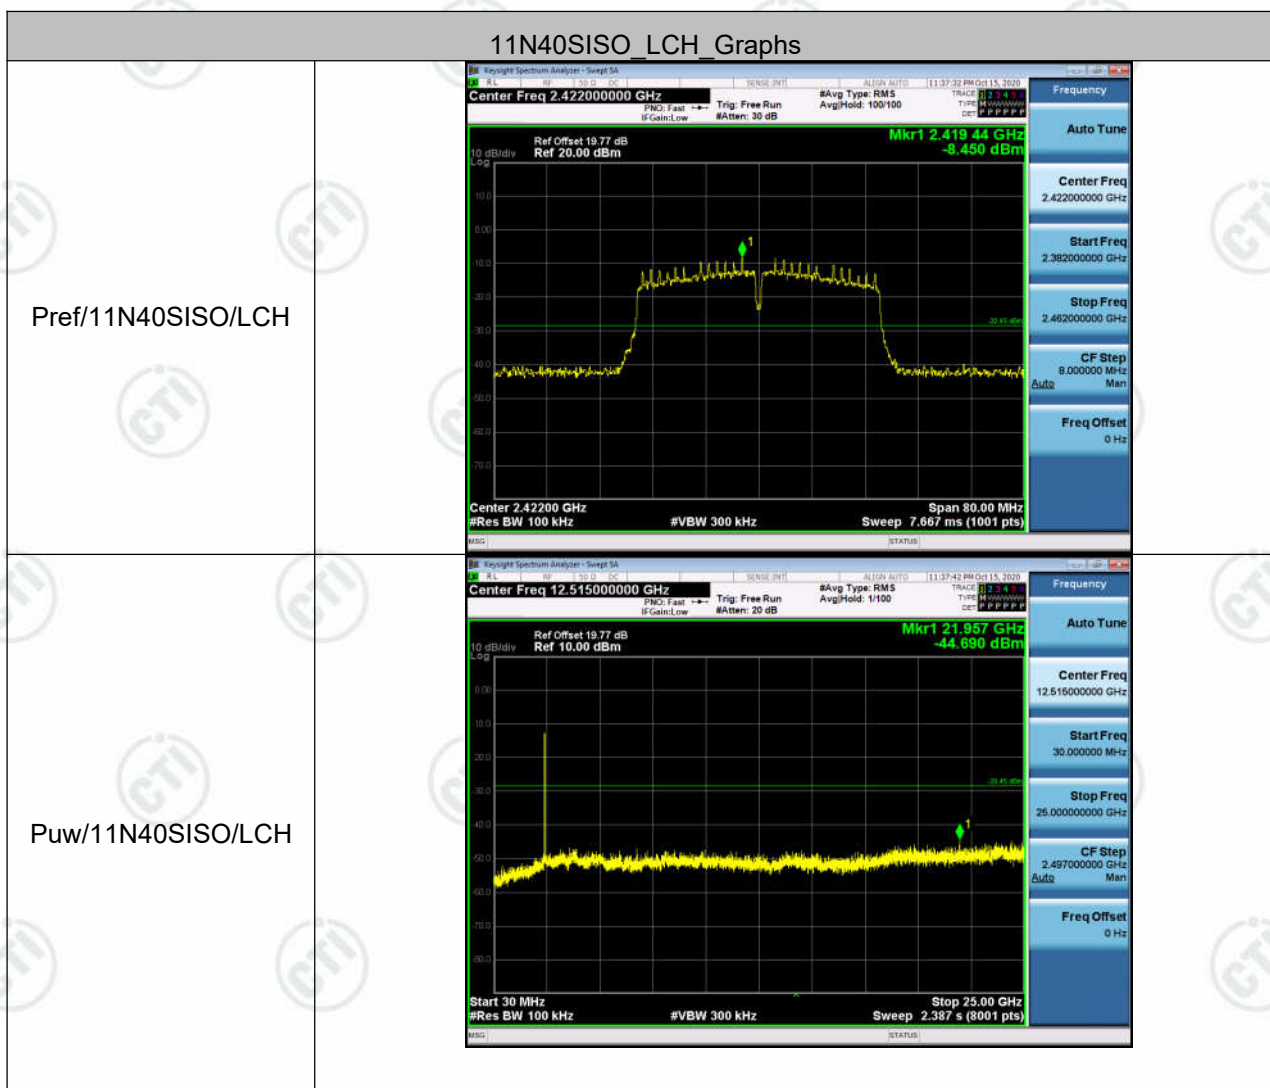

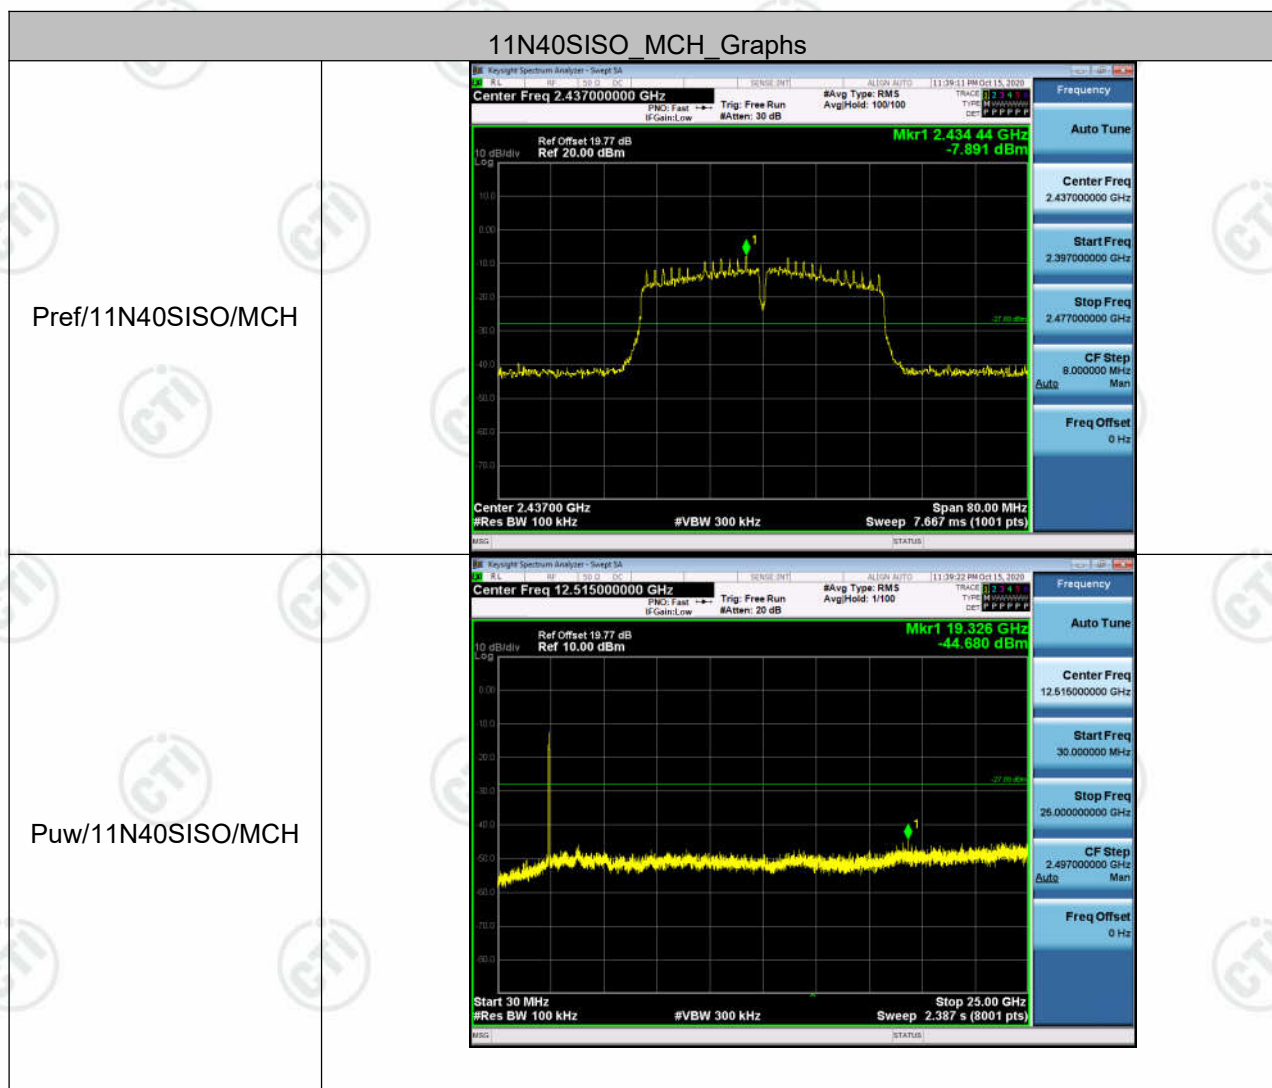

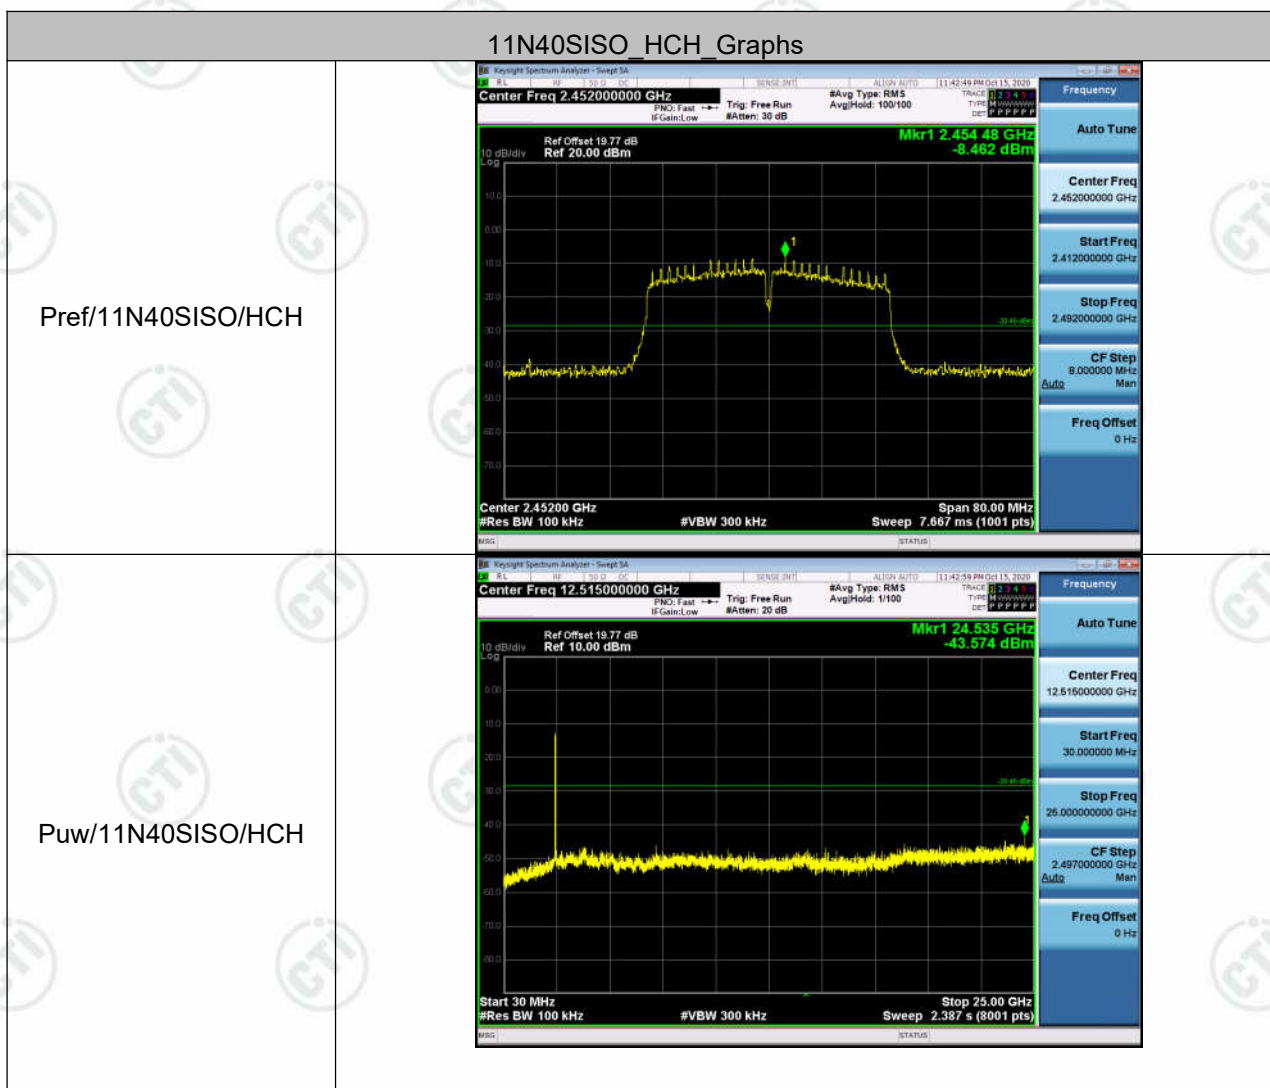

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation:
-------	--

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.


Test Setup



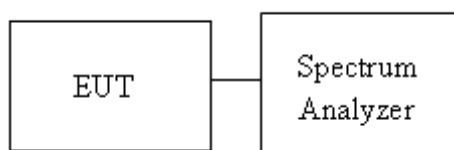





Result Table




Mode	Channel	Power Spectral Density [dBm]	Verdict
11B	LCH	-20.734	PASS
11B	MCH	-20.392	PASS
11B	HCH	-20.086	PASS
11G	LCH	-23.401	PASS
11G	MCH	-22.532	PASS
11G	HCH	-22.093	PASS
11N20SISO	LCH	-24.745	PASS
11N20SISO	MCH	-24.188	PASS
11N20SISO	HCH	-23.726	PASS
11N40SISO	LCH	-25.102	PASS
11N40SISO	MCH	-26.111	PASS
11N40SISO	HCH	-23.683	PASS

Test Graph

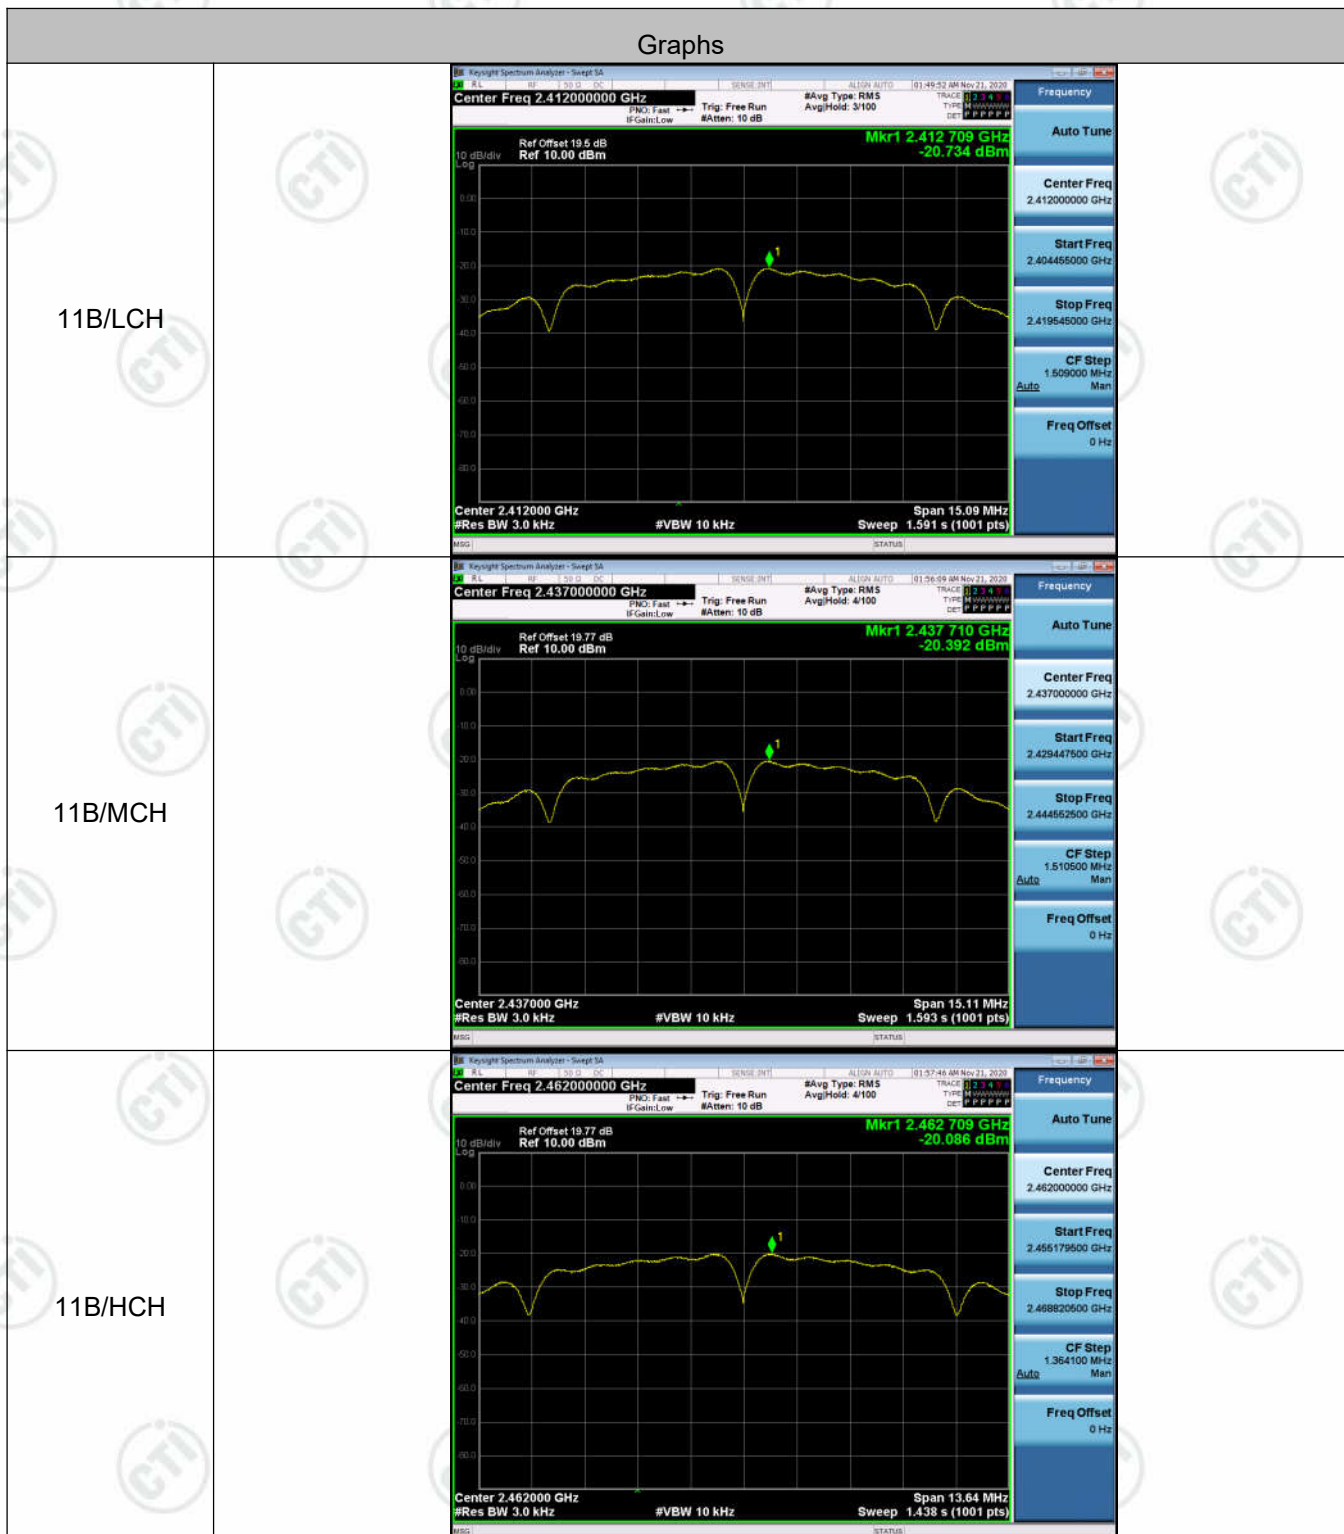

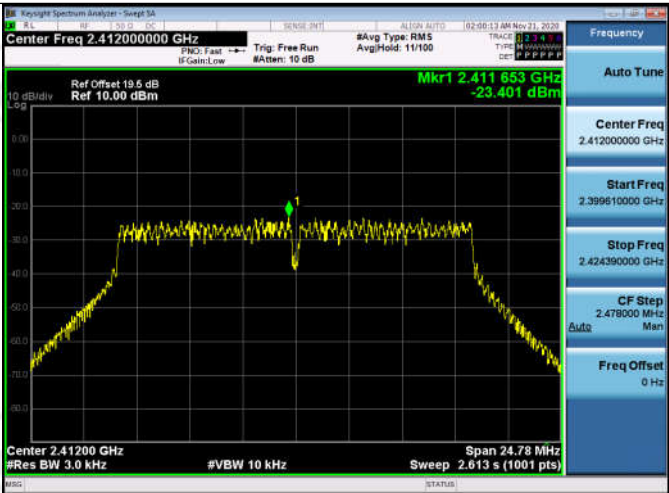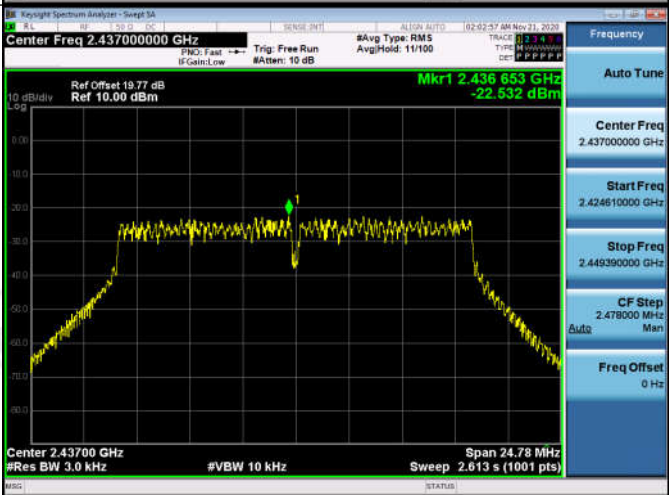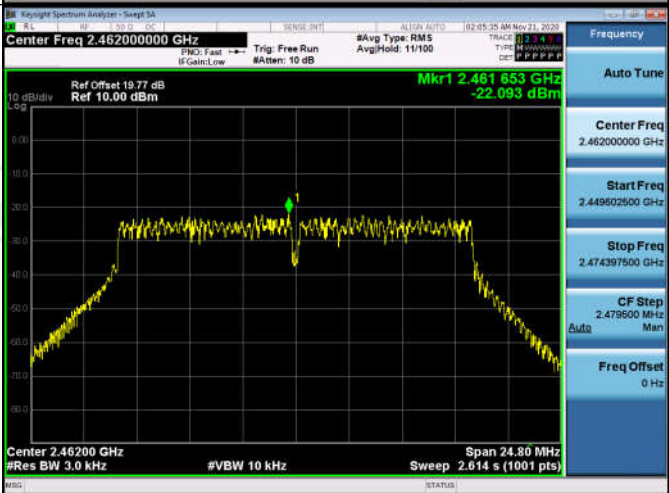11G/LCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 19.6 dB Ref 10.00 dBm</p> <p>Mkr1 2.411653 GHz -23.401 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.613 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.399610000 GHz</p> <p>Stop Freq 2.424390000 GHz</p> <p>CF Step 2.478000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
11G/MCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 19.77 dB Ref 10.00 dBm</p> <p>Mkr1 2.436653 GHz -22.532 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.613 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.424610000 GHz</p> <p>Stop Freq 2.449390000 GHz</p> <p>CF Step 2.478000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
11G/HCH	 <p>Keyight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 19.77 dB Ref 10.00 dBm</p> <p>Mkr1 2.461653 GHz -22.093 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 2.614 s (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.462000000 GHz</p> <p>Start Freq 2.449602500 GHz</p> <p>Stop Freq 2.474397500 GHz</p> <p>CF Step 2.478000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
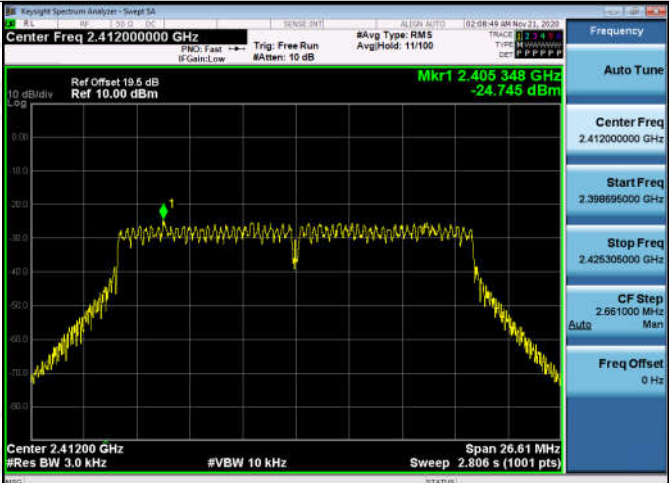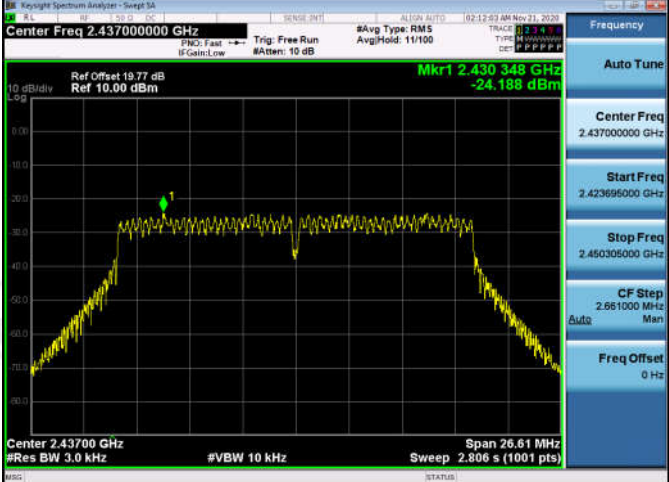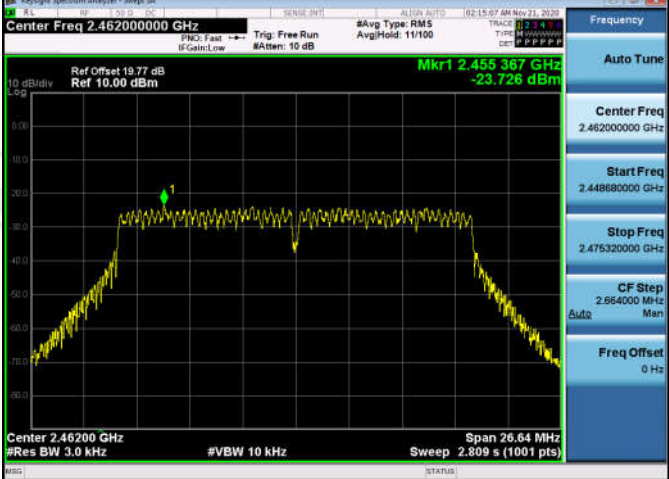
<p>11N20SISO/L CH</p>	
<p>11N20SISO/M CH</p>	
<p>11N20SISO/H CH</p>	
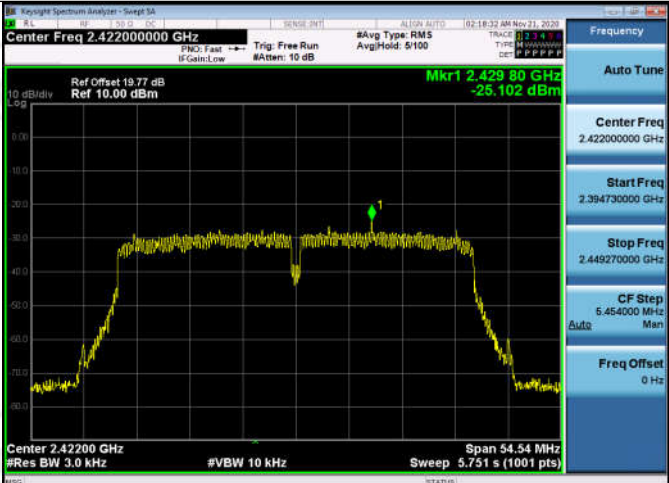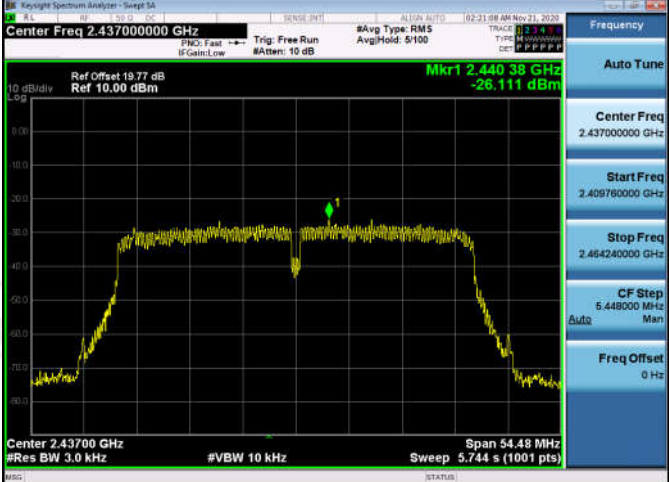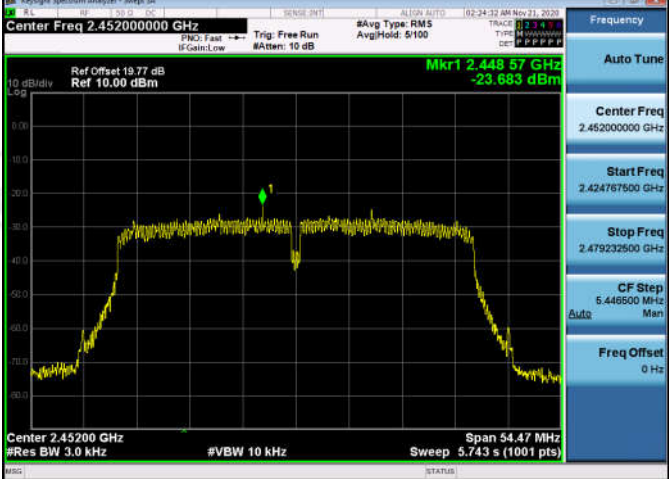
<p>11N40SISO/L CH</p>	
<p>11N40SISO/M CH</p>	
<p>11N40SISO/H CH</p>	

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

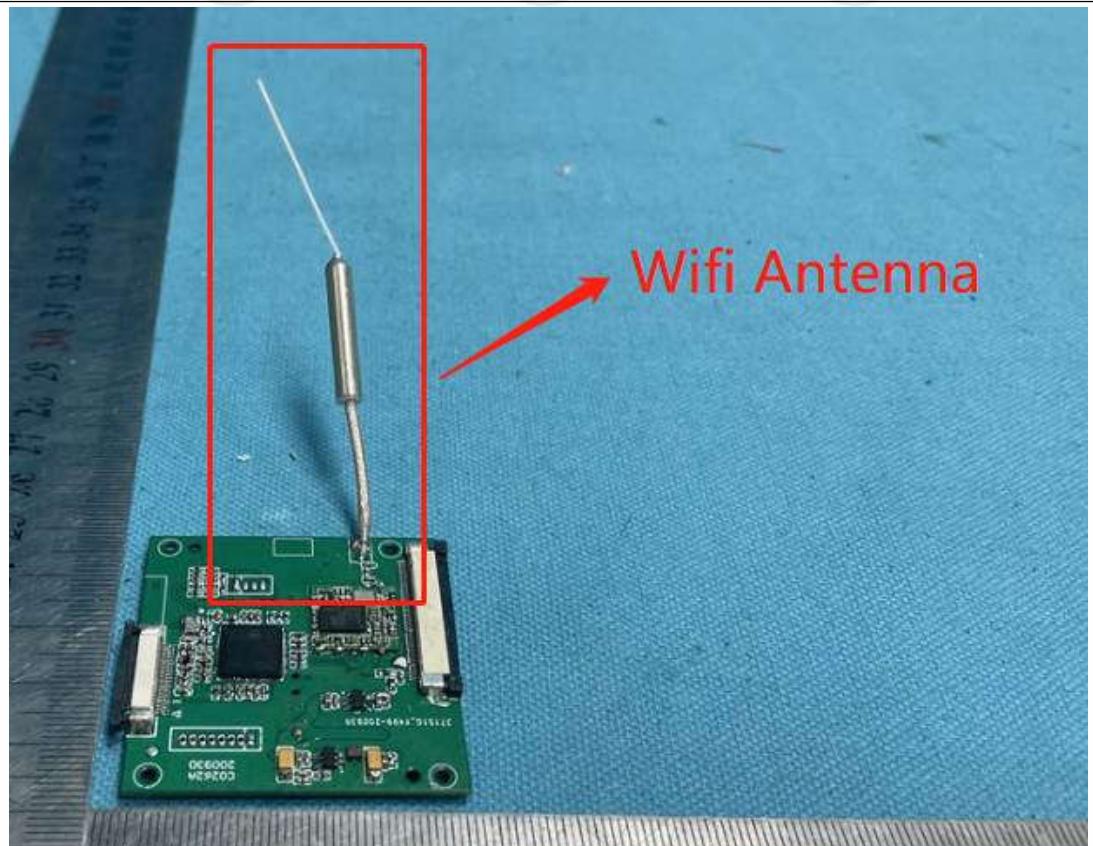

The antenna is Dipole Antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 3 dBi.

Appendix G): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

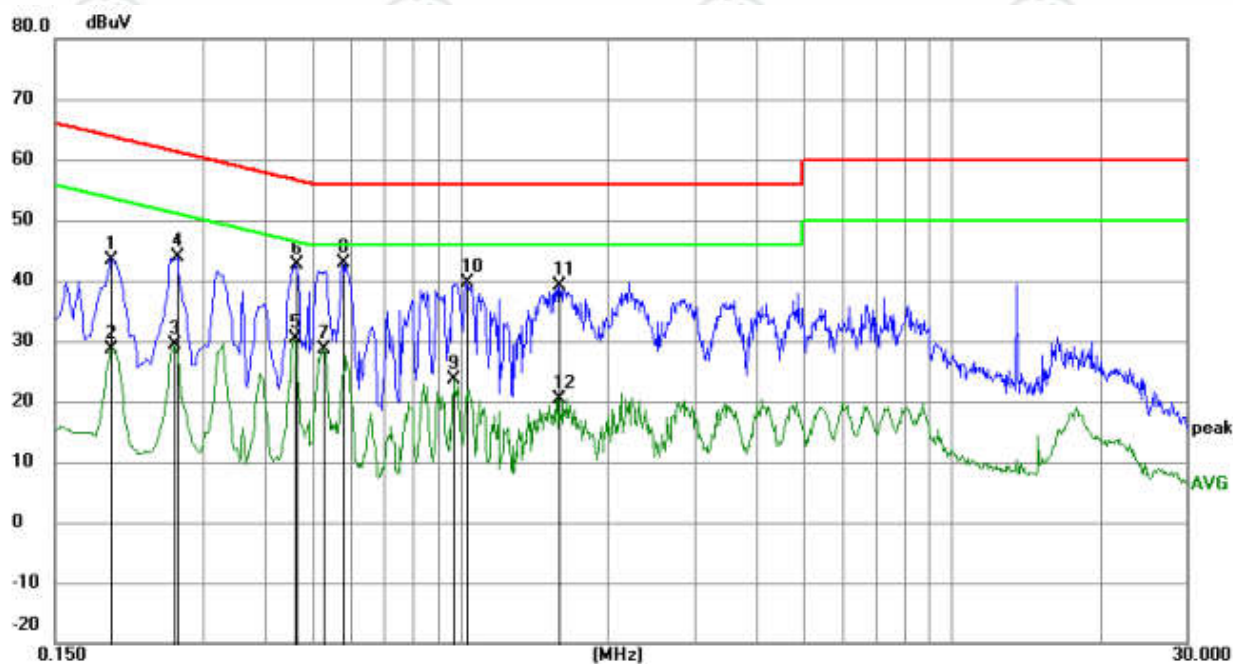

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1949	33.52	9.87	43.39	63.83	-20.44	QP	
2		0.1949	18.79	9.87	28.66	53.83	-25.17	AVG	
3		0.2625	19.28	10.00	29.28	51.35	-22.07	AVG	
4		0.2670	33.78	10.00	43.78	61.21	-17.43	QP	
5		0.4605	20.41	9.96	30.37	46.68	-16.31	AVG	
6		0.4650	32.59	9.96	42.55	56.60	-14.05	QP	
7		0.5280	18.60	9.98	28.58	46.00	-17.42	AVG	
8	*	0.5775	32.79	10.04	42.83	56.00	-13.17	QP	
9		0.9735	13.91	9.84	23.75	46.00	-22.25	AVG	
10		1.0275	29.90	9.83	39.73	56.00	-16.27	QP	
11		1.5900	29.30	9.81	39.11	56.00	-16.89	QP	
12		1.5900	10.67	9.81	20.48	46.00	-25.52	AVG	