

# Test report

**292630-1R2TRFWL**

Date of issue: December 10, 2015

Applicant:

**ESKI Inc.**

Product:

**Broadcaster**

Model:

**PX-BR01**

FCC ID:

**2ADS4BRO1**

IC Registration number:

**7254A-BRO1**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**

Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

◆ **RSS-247, Issue 1, May 2015, Section 5**

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs)  
and Licence-Exempt Local Area Network (LE-LAN) Devices

#### Test location

---

|              |  |
|--------------|--|
| Company name | Nemko Canada Inc.                                    |
| Address      | 303 River Road                                       |
| City         | Ottawa   |
| Province     | Ontario  |
| Postal code  | K1V 1H2  |
| Country      | Canada   |
| Telephone    | +1 613 737 9680                                      |
| Facsimile    | +1 613 737 9691                                      |
| Toll free    | +1 800 563 6336                                      |
| Website      | www.nemko.com  |
| Site number  | FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber) |

|                    |   |
|--------------------|---|
| Tested by          | Avul Nzenza, EMC Specialist                     |
| Reviewed by        | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Review date        | December 10, 2015                               |
| Reviewer signature |   |

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of contents

|   |           |
|---|-----------|
| <b>Table of contents</b> .....  | <b>3</b>  |
| <b>Section 1. Report summary</b> .....  | <b>4</b>  |
| 1.1 Applicant and manufacturer .....  | 4         |
| 1.2 Test specifications .....   | 4         |
| 1.3 Test methods.....   | 4         |
| 1.4 Statement of compliance .....   | 4         |
| 1.5 Exclusions.....   | 4         |
| 1.6 Test report revision history .....  | 4         |
| <b>Section 2. Summary of test results</b> .....   | <b>5</b>  |
| 2.1 FCC Part 15 Subpart C, general requirements test results.....   | 5         |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results.....  | 5         |
| 2.3 IC RSS-GEN, Issue 4, test results .....   | 5         |
| 2.4 IC RSS-247, Issue 1, test results .....   | 6         |
| <b>Section 3. Equipment under test (EUT) details</b> .....  | <b>7</b>  |
| 3.1 Sample information.....   | 7         |
| 3.2 EUT information .....   | 7         |
| 3.3 Technical information .....   | 7         |
| 3.4 Product description and theory of operation .....   | 7         |
| 3.5 EUT exercise details.....   | 7         |
| 3.6 EUT setup diagram .....   | 8         |
| 3.7 EUT sub assemblies .....  | 8         |
| <b>Section 4. Engineering considerations</b> .....  | <b>9</b>  |
| 4.1 Modifications incorporated in the EUT.....  | 9         |
| 4.2 Technical judgment .....  | 9         |
| 4.3 Deviations from laboratory tests procedures .....   | 9         |
| <b>Section 5. Test conditions</b> .....   | <b>10</b> |
| 5.1 Atmospheric conditions .....  | 10        |
| 5.2 Power supply range.....   | 10        |
| <b>Section 6. Measurement uncertainty</b> .....   | <b>11</b> |
| 6.1 Uncertainty of measurement .....  | 11        |
| <b>Section 7. Test equipment</b> .....  | <b>12</b> |
| 7.1 Test equipment list.....  | 12        |
| <b>Section 8. Testing data</b> .....  | <b>13</b> |
| 8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits .....                                    | 13        |
| 8.2 FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques..... | 17        |
| 8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements .....                      | 20        |
| 8.4 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions .....  | 23        |
| 8.5 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices .....                   | 29        |
| <b>Section 9. EUT photos</b> .....  | <b>31</b> |
| 9.1 External photos .....   | 31        |
| 9.2 Internal photos.....  | 32        |
| <b>Section 10. Block diagrams of test set-ups</b> .....   | <b>33</b> |
| 10.1 Radiated emissions set-up for frequencies below 1 GHz.....   | 33        |
| 10.2 Radiated emissions set-up for frequencies above 1 GHz.....   | 34        |
| 10.3 Conducted emissions set-up .....   | 34        |

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

|                 |                |
|-----------------|----------------|
| Company name    | ESKI Inc       |
| Address         | 103 Louvain O. |
| City            | Montreal       |
| Province/State  | Quebec         |
| Postal/Zip code | H2N 1A3        |
| Country         | Canada         |

### 1.2 Test specifications

---

|  |  |
|--|--|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz  |
| RSS-247, Issue 1, May 2015, Section 5        | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

### 1.3 Test methods

---

|  |   |
|--|---|
| 558074 D01 DTS Meas Guidance v03r03 (June 9, 2015) | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
| ANSI C63.10 v2013                                  | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                |

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

| Revision # | Details of changes made to test report                                       |
|------------|--|
| TRF        | Original report issued   |
| R1TRF      | Revised output power measurements results based on the unit gain             |
| R2TRF      | Revised conducted spurious emissions plots and 99% bandwidth plot were added |

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

| Part       | Test description          | Verdict           |
|------------|---------------------------|-------------------|
| §15.207(a) | Conducted limits          | Pass              |
| §15.31(e)  | Variation of power source | Pass <sup>1</sup> |
| §15.203    | Antenna requirement       | Pass <sup>2</sup> |

Notes: <sup>1</sup> The testing was performed with fully charged battery

<sup>2</sup> The equipment will be professionally installed

### 2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part               | Test description   | Verdict        |
|--------------------|--|----------------|
| §15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band  | Not applicable |
| §15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band  | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band  | Not applicable |
| §15.247(a)(2)      | Minimum 6 dB bandwidth for systems using digital modulation techniques   | Pass           |
| §15.247(b)(1)      | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | Not applicable |
| §15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | Not applicable |
| §15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass           |
| §15.247(c)(1)      | Fixed point-to-point operation with directional antenna gains greater than 6 dBi   | Not applicable |
| §15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | Not applicable |
| §15.247(d)         | Spurious emissions   | Pass           |
| §15.247(e)         | Power spectral density for digitally modulated devices   | Pass           |
| §15.247(f)         | Time of occupancy for hybrid systems   | Not applicable |

### 2.3 IC RSS-GEN, Issue 4, test results

| Part  | Test description   | Verdict        |
|-------|--|----------------|
| 7.1.2 | Receiver radiated emission limits  | Not applicable |
| 7.1.3 | Receiver conducted emission limits                                       | Not applicable |
| 8.8   | Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus | Pass           |

Notes: <sup>1</sup> According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

## 2.4 IC RSS-247, Issue 1, test results

| Part    | Test description   | Verdict        |
|---------|--|----------------|
| 5.1     | Frequency Hopping Systems (FHSs)   |                |
| 5.1 (1) | Bandwidth of a frequency hopping channel   | Not applicable |
| 5.1 (2) | Minimum channel spacing for frequency hopping systems                                  | Not applicable |
| 5.1 (3) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.1 (4) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.1 (5) | Frequency hopping systems operating in the 5725–5850 MHz band                          | Not applicable |
| 5.2     | Digital Transmission Systems (DTSs)  |                |
| 5.2 (1) | Minimum 6 dB bandwidth   | Pass           |
| 5.2 (2) | Maximum power spectral density   | Pass           |
| 5.3     | Hybrid Systems   |                |
| 5.3 (1) | Digital modulation turned off  | Not applicable |
| 5.3 (2) | Frequency hopping turned off   | Not applicable |
| 5.4     | Transmitter output power and e.i.r.p. requirements                                     |                |
| 5.4 (1) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.4 (2) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.4 (3) | Frequency hopping systems operating in the 5725–5850 MHz                               | Not applicable |
| 5.4 (4) | Systems employing digital modulation techniques  | Pass           |
| 5.4 (5) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band                       | Not applicable |
| 5.4 (6) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5     | Out-of-band emissions  | Pass           |

Notes: None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

|                        |                   |
|------------------------|-------------------|
| Receipt date           | September 3, 2015 |
| Nemko sample ID number | 133-001078        |

### 3.2 EUT information

---

|               |             |
|---------------|-------------|
| Product name  | Broadcaster |
| Model         | PX-BR01     |
| Model variant | None        |
| Serial number | None        |

### 3.3 Technical information

---

|   |  |
|---|--|
| Applicant IC company number             | 7254A  |
| IC UPN number                           | BLE  |
| All used IC test site(s) Reg. number    | 2040A-4  |
| RSS number and Issue number             | RSS-247 Issue 1, May 2015  |
| Frequency band                          | 2400–2483.5 MHz  |
| Frequency Min (MHz)                     | 2402   |
| Frequency Max (MHz)                     | 2480   |
| RF power Min (W)                        | N/A  |
| RF power Max (W), Conducted             | 0.02 (12.99 dBm)   |
| Field strength, Units @ distance        | N/A  |
| Measured BW (MHz) (99%)                 | 1.0224   |
| Calculated BW (kHz), as per TRC-43      | N/A  |
| Type of modulation                      | GFSK   |
| Emission classification (F1D, G1D, D1D) | 1M02F1D  |
| Transmitter spurious, Units @ distance  | 42.19 dB $\mu$ V/m (average) at 2483.5 MHz @ 3 m   |
| Power requirements                      | 110/220 Vac 50/60 Hz   |
| Antenna information                     | The EUT is professionally installed. Antenna Gain 4.9 dBi, Manufacturer: Pulse Electronics |

### 3.4 Product description and theory of operation

---

The Broadcaster is a Bluetooth transmitter that controls PixMob luminous objects wirelessly. Similarly to a LED flood light, it is controllable by a lighting board through DMX.


### 3.5 EUT exercise details

---

A test firmware was installed in the Broadcaster in order to control the transmission frequency, the output power and the length and number of packets transmitted.

### 3.6 EUT setup diagram

---

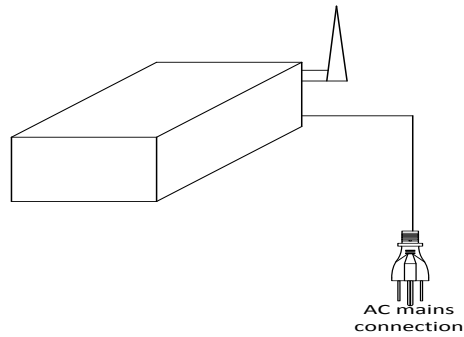

*Figure 3.6-1: Setup diagram*

### 3.7 EUT sub assemblies

---

*Table 3.7-1: EUT sub assemblies*

| Description      | Brand name | Model/Part number | Serial number |
|------------------|------------|-------------------|---------------|
| Bluetooth module | BLE Module | CB01              | N/A           |



## Section 4. Engineering considerations

---

---

### 4.1 Modifications incorporated in the EUT

---

The following modifications were performed by client:

In order to pass conducted emissions, the power supply ground connection to chassis was reinforced

### 4.2 Technical judgment

---

---

None

### 4.3 Deviations from laboratory tests procedures

---

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

|                   |               |
|-------------------|---------------|
| Temperature       | 15–30 °C      |
| Relative humidity | 20–75 %       |
| Air pressure      | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

| Test name                         | Measurement uncertainty, dB |
|-----------------------------------|-----------------------------|
| All antenna port measurements     | 0.55                        |
| Conducted spurious emissions      | 1.13                        |
| Radiated spurious emissions       | 3.78                        |
| AC power line conducted emissions | 3.55                        |

## Section 7. Test equipment

---

### 7.1 Test equipment list

---

*Table 7.1-1: Equipment list*

| Equipment                  | Manufacturer           | Model no. | Asset no. | Cal cycle | Next cal.  |
|----------------------------|------------------------|-----------|-----------|-----------|------------|
| 3 m EMI test chamber       | TDK                    | SAC-3     | FA002532  | 1 year    | Oct. 16/15 |
| Flush mount turntable      | Sunol                  | FM2022    | FA002550  | —         | NCR        |
| Controller                 | Sunol                  | SC104V    | FA002551  | —         | NCR        |
| Antenna mast               | Sunol                  | TLT2      | FA002552  | —         | NCR        |
| Receiver/spectrum analyzer | Rohde & Schwarz        | ESU 40    | FA002071  | 1 year    | April 7/16 |
| Horn antenna (1–18 GHz)    | EMCO                   | RGA-60    | FA002577  | 1 year    | Nov. 4/15  |
| Pre-amplifier (0.5–18 GHz) | COM-POWER              | PAM-118A  | FA002561  | 1 year    | May 6/16   |
| Power source               | California Instruments | 5001ix    | FA002494  | 1 year    | Jan. 22/16 |
| Four Line V-Network        | TESEQ                  | NNB52     | FA002339  | 1 year    | Jan 27/16  |

Note: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

#### 8.1.1 Definitions and limits

**FCC:**

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**IC:**

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

*Table 8.1-1: Conducted emissions limit*

| Frequency of emission, MHz | Quasi-peak | Average** |
|----------------------------|------------|-----------|
| 0.15–0.5                   | 66 to 56*  | 56 to 46* |
| 0.5–5                      | 56         | 46        |
| 5–30                       | 60         | 50        |

Note: \* - The level decreases linearly with the logarithm of the frequency.  
 \*\* - A linear average detector is required.

#### 8.1.2 Test summary

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 11, 2015 | Temperature       | 23 °C     |
| Test engineer | Daniel Hynes       | Air pressure      | 1009 mbar |
| Verdict       | Pass               | Relative humidity | 55 %      |

**Section 8** Testing data  
**Test name** FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques  
**Specification** FCC Part 15 Subpart C and RSS-247, Issue 1



### 8.1.3 Observations, settings and special notes

---

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

|                      |                  |
|----------------------|------------------|
| Resolution bandwidth | 9 kHz            |
| Video bandwidth      | 30 kHz           |
| Detector mode        | Peak and Average |
| Trace mode           | Max Hold         |
| Measurement time     | 1000 ms          |

Receiver settings for final measurements:

|                      |                        |
|----------------------|------------------------|
| Resolution bandwidth | 9 kHz                  |
| Video bandwidth      | 30 kHz                 |
| Detector mode        | Quasi-Peak and Average |
| Trace mode           | Max Hold               |
| Measurement time     | 1000 ms                |

8.1.4 Test data

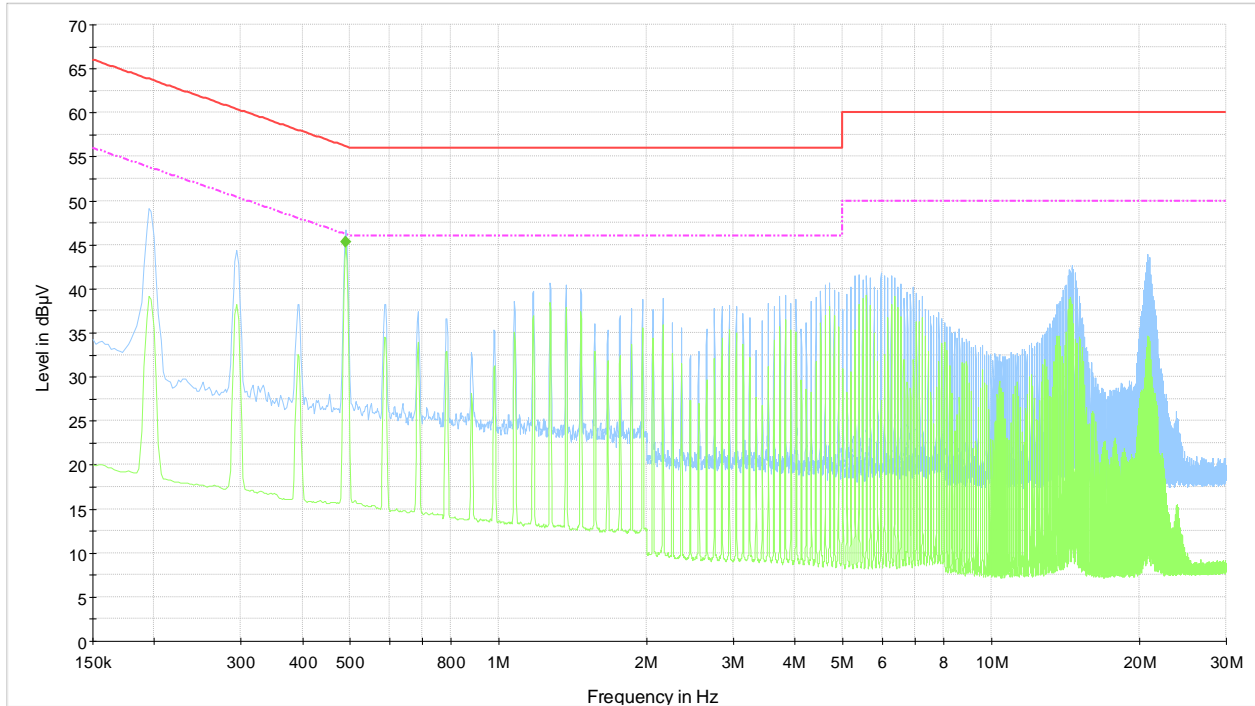

5W292630 - September 11, 2015 - 120 VAC, 60 Hz - Phase - Original PSU Manufacturer

- CISPR 22 Mains QP Class B
- - - CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 2-AVG

**Plot 8.1-1:** Conducted emissions on phase line

**Table 8.1-2:** Average conducted emissions results on phase line

| Frequency, MHz | Average result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Conductor | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|----------------------|----------------|----------------|--------|-----------|----------------|------------|-------------|
| 0.49           | 45.27                | 1000           | 9              | On     | L         | 10.29          | 0.90       | 46.20       |

Sample calculation:

Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

Result (dBµV) = XX dBµV (reading from receiver) + XX dB (Correction factor)

Example:

43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)

**Section 8**


Testing data

**Test name**

FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques

**Specification**

FCC Part 15 Subpart C and RSS-247, Issue 1

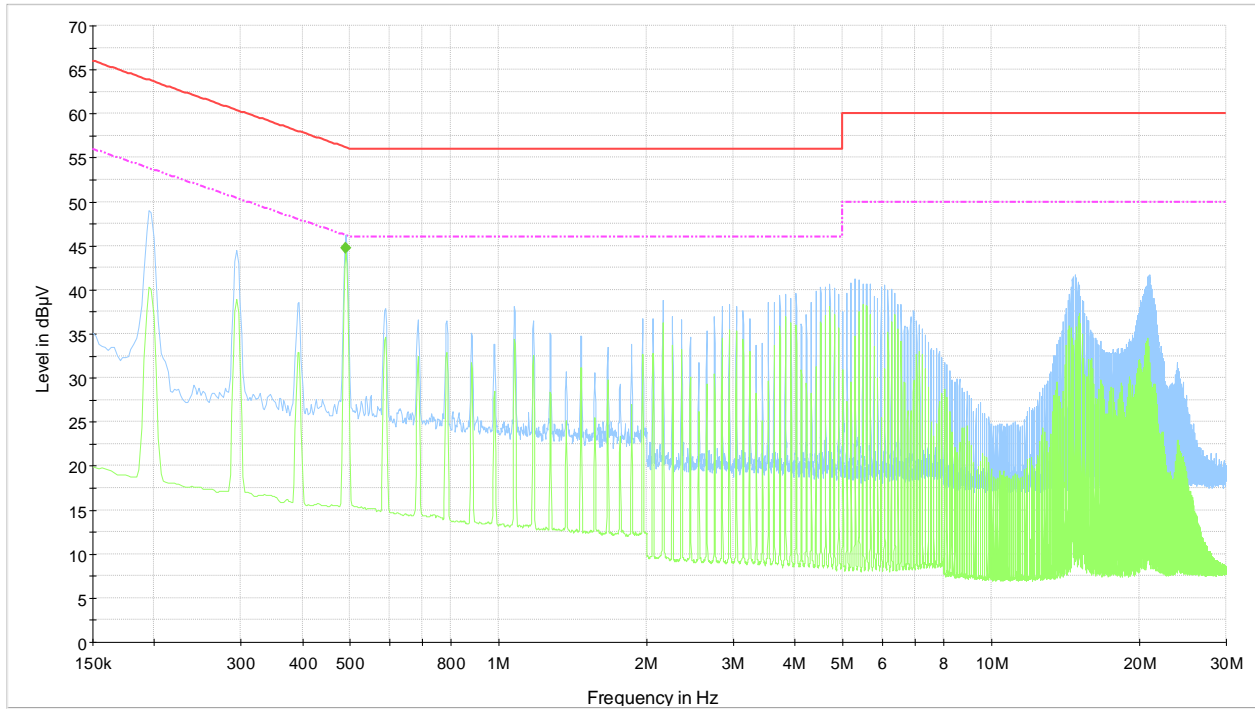

5W292630 - September 11, 2015 - 120 VAC, 60 Hz - Neutral - Original PSU Manufacturer

- CISPR 22 Mains QP Class B
- - - CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 2-AVG

**Plot 8.1-2:** Conducted emissions on neutral line

**Table 8.1-3:** Average conducted emissions results on neutral line

| Frequency, MHz | Average result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Conductor | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|----------------------|----------------|----------------|--------|-----------|----------------|------------|-------------|
| 0.49           | 44.73                | 1000.00        | 9.00           | On     | N         | 10.11          | 1.40       | 46.20       |

Sample calculation:

Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

Result (dBµV) = XX dBµV (reading from receiver) + XX dB (Correction factor)

Example:

43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)



## 8.2 FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques

---

### 8.2.1 Definitions and limits

---

**FCC and IC:**

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2.2 Test summary

---

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 24, 2015 | Temperature       | 23.5 °C   |
| Test engineer | Avul Nzenza        | Air pressure      | 1006 mbar |
| Verdict       | Pass               | Relative humidity | 54 %      |

### 8.2.3 Observations, settings and special notes

---

Spectrum analyser settings:

|                      |          |
|----------------------|----------|
| Resolution bandwidth | 100 kHz  |
| Video bandwidth      | ≥RBW     |
| Frequency span       | 2 MHz    |
| Detector mode        | Peak     |
| Trace mode           | Max Hold |

### 8.2.4 Test data

---

**Table 8.2-1: 6 dB bandwidth results**

| Frequency, MHz | 6 dB bandwidth, kHz | Minimum limit, kHz | Margin, kHz |
|----------------|---------------------|--------------------|-------------|
| 2402           | 689.10              | 500                | 189.10      |
| 2440           | 689.10              | 500                | 189.10      |
| 2480           | 705.12              | 500                | 205.12      |

Section 8


Test name

Specification

Testing data


FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques

FCC Part 15 Subpart C and RSS-247, Issue 1

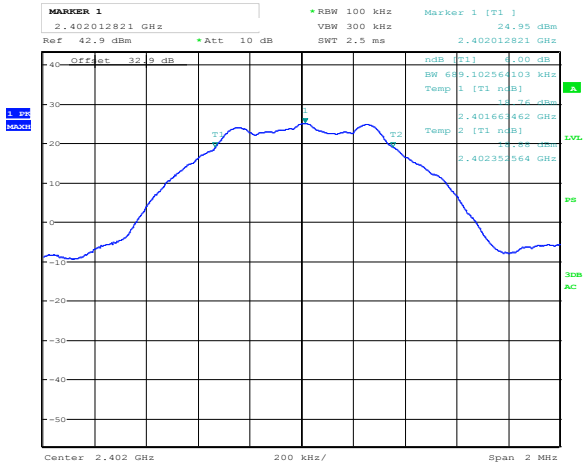


Date: 24.SEP.2015 18:33:29

Figure 8.2-1: 6 dB bandwidth on Low Channel

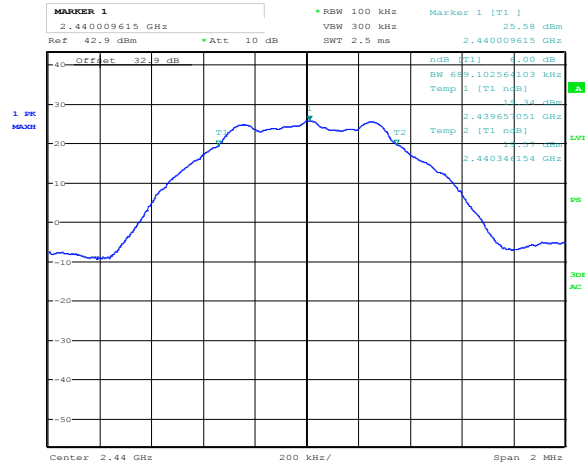

Date: 24.SEP.2015 18:51:23

Figure 8.2-2: 6 dB bandwidth on Mid Channel

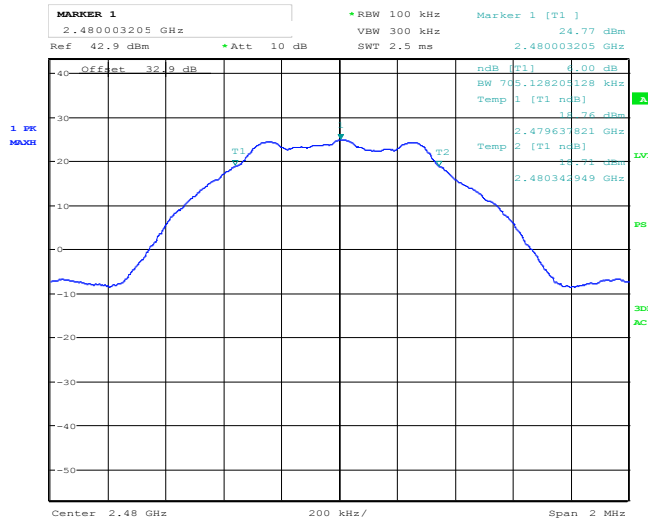

Date: 24.SEP.2015 18:48:43

Figure 8.2-3: 6 dB bandwidth on High Channel

Section 8


Test name

Specification

Testing data

FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques

FCC Part 15 Subpart C and RSS-247, Issue 1

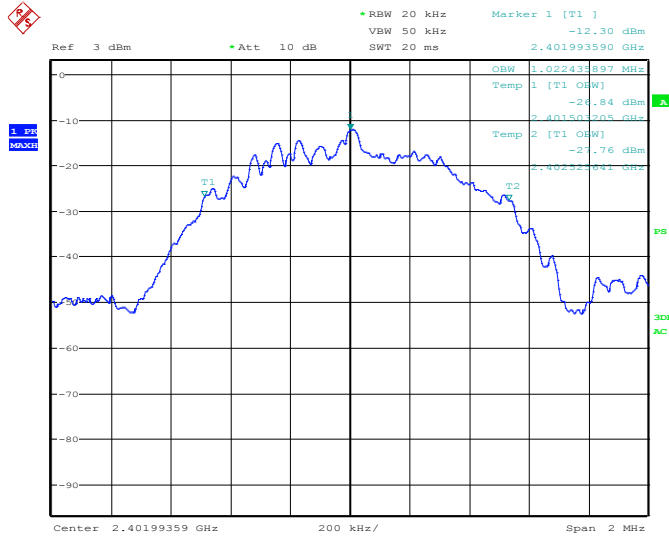

Date: 11.SEP.2015 09:52:39

Figure 8.2-4: 99% bandwidth

## 8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

---

### 8.3.1 Definitions and limits

---

**FCC:**

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
  - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
    - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) and (b)(3)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

- (c) Operation with directional antenna gains greater than 6 dBi.
- (2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
    - (i) Different information must be transmitted to each receiver.
    - (ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
      - (A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stove having the highest gain.

**IC:**  
For DTSs employing digital modulation techniques operating in the bands 902–928 MHz and 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

Fixed point-to-point systems in the bands 2400–2483.5 MHz and 5725–5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

8.3.2 Test summary

|               |                    |                   |           |
|---------------|--------------------|-------------------|-----------|
| Test date     | September 28, 2015 | Temperature       | 23.5 °C   |
| Test engineer | Avul Nzena         | Air pressure      | 1006 mbar |
| Verdict       | Pass               | Relative humidity | 54 %      |


8.3.3 Observations, settings and special notes

The test was performed according to DTS guidelines section 9.2.2.3 : Method AVGSA-1 Alternative (RMS detection with slow sweep and EUT transmitting continuously at full power)

8.3.4 Test data


**Table 8.3-1: Output power measurements results**

| Frequency, MHz | Conducted output power, dBm |       | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|-----------------------------|-------|------------|-------------------|-----------|-----------------|-----------------|
|                | Measured                    | Limit |            |                   |           |                 |                 |
| 2402           | 12.31                       | 30    | 17.69      | 4.9               | 17.21     | 36              | 18.79           |
| 2440           | 12.99                       | 30    | 17.01      | 4.9               | 17.89     | 36              | 18.11           |
| 2480           | 12.37                       | 30    | 17.63      | 4.9               | 17.27     | 36              | 18.73           |

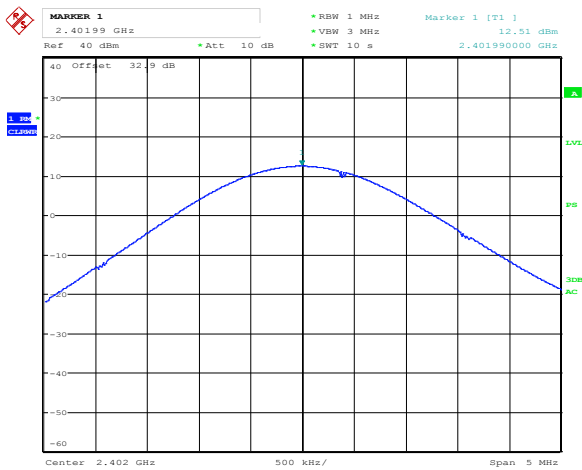


Date: 28.SEP.2015 14:28:07

**Figure 8.3-1: Low Channel**

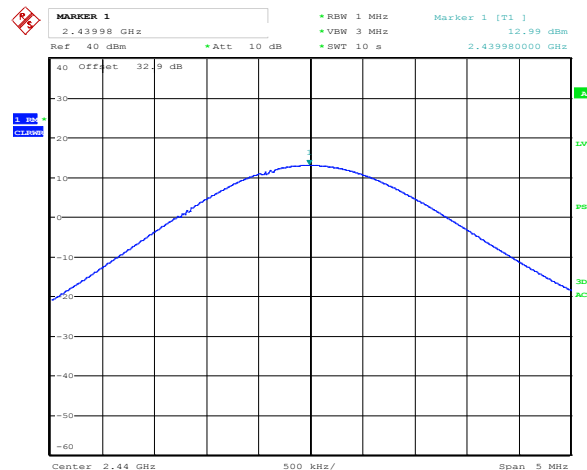

Date: 28.SEP.2015 14:33:06

**Figure 8.3-2: Mid Channel**

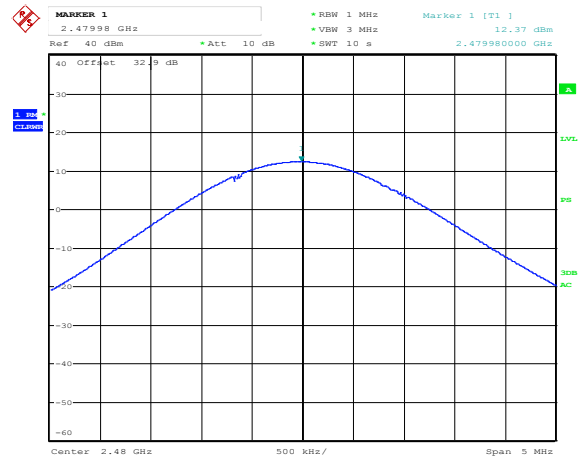

Date: 28.SEP.2015 14:43:24

Figure 8.3-3: High Channel

## 8.4 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

### 8.4.1 Definitions and limits

#### FCC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### IC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**Table 8.4-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

| Frequency,<br>MHz | Field strength of emissions |                                 | Measurement distance, m |
|-------------------|-----------------------------|---------------------------------|-------------------------|
|                   | µV/m                        | dBµV/m                          |                         |
| 0.009–0.490       | 2400/F                      | $67.6 - 20 \times \log_{10}(F)$ | 300                     |
| 0.490–1.705       | 24000/F                     | $87.6 - 20 \times \log_{10}(F)$ | 30                      |
| 1.705–30.0        | 30                          | 29.5                            | 30                      |
| 30–88             | 100                         | 40.0                            | 3                       |
| 88–216            | 150                         | 43.5                            | 3                       |
| 216–960           | 200                         | 46.0                            | 3                       |
| above 960         | 500                         | 54.0                            | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

**Table 8.4-2: IC restricted frequency bands**

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090–0.110     | 12.51975–12.52025   | 399.9–410     | 5.35–5.46   |
| 2.1735–2.1905   | 12.57675–12.57725   | 608–614       | 7.25–7.75   |
| 3.020–3.026     | 13.36–13.41         | 960–1427      | 8.025–8.5   |
| 4.125–4.128     | 16.42–16.423        | 1435–1626.5   | 9.0–9.2     |
| 4.17725–4.17775 | 16.69475–16.69525   | 1645.5–1646.5 | 9.3–9.5     |
| 4.20725–4.20775 | 16.80425–16.80475   | 1660–1710     | 10.6–12.7   |
| 5.677–5.683     | 25.5–25.67          | 1718.8–1722.2 | 13.25–13.4  |
| 6.215–6.218     | 37.5–38.25          | 2200–2300     | 14.47–14.5  |
| 6.26775–6.26825 | 73–74.6             | 2310–2390     | 15.35–16.2  |
| 6.31175–6.31225 | 74.8–75.2           | 2655–2900     | 17.7–21.4   |
| 8.291–8.294     | 108–138             | 3260–3267     | 22.01–23.12 |
| 8.362–8.366     | 156.52475–156.52525 | 3332–3339     | 23.6–24.0   |
| 8.37625–8.38675 | 156.7–156.9         | 3345.8–3358   | 31.2–31.8   |
| 8.41425–8.41475 | 240–285             | 3500–4400     | 36.43–36.5  |
| 12.29–12.293    | 322–335.4           | 4500–5150     | Above 38.6  |

Note: Certain frequency bands listed in Table 8.4-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

**Table 8.4-3: FCC restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 16.42–16.423        | 399.9–410     | 4.5–5.15    |
| 0.495–0.505       | 16.69475–16.69525   | 608–614       | 5.35–5.46   |
| 2.1735–2.1905     | 16.80425–16.80475   | 960–1240      | 7.25–7.75   |
| 4.125–4.128       | 25.5–25.67          | 1300–1427     | 8.025–8.5   |
| 4.17725–4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725–4.20775   | 73–74.6             | 1645.5–1646.5 | 9.3–9.5     |
| 6.215–6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775–6.26825   | 108–121.94          | 1718.8–1722.2 | 13.25–13.4  |
| 6.31175–6.31225   | 123–138             | 2200–2300     | 14.47–14.5  |
| 8.291–8.294       | 149.9–150.05        | 2310–2390     | 15.35–16.2  |
| 8.362–8.366       | 156.52475–156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625–8.38675   | 156.7–156.9         | 2690–2900     | 22.01–23.12 |
| 8.41425–8.41475   | 162.0125–167.17     | 3260–3267     | 23.6–24.0   |
| 12.29–12.293      | 167.72–173.2        | 3332–3339     | 31.2–31.8   |
| 12.51975–12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675–12.57725 | 322–335.4           | 3600–4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

#### 8.4.2 Test summary

|               |                |                   |           |
|---------------|----------------|-------------------|-----------|
| Test date     | March 28, 2028 | Temperature       | 24 °C     |
| Test engineer | Avul Nzenza    | Air pressure      | 1009 mbar |
| Verdict       | Pass           | Relative humidity | 54 %      |

#### 8.4.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.  
 EUT was set to transmit with 100 % duty cycle.  
 Since fundamental power was tested using average method, the spurious emissions limit is –30 dBc/100 kHz

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz    |
| Video bandwidth:      | 3 MHz    |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |



Spectrum analyser settings for conducted spurious emissions measurements:



|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

### 8.4.4 Test data

Table 8.4-4: Radiated field strength measurement results

| Channel | Frequency, MHz | Peak Field strength, dB $\mu$ V/m |       | Margin, dB | Average Field strength, dB $\mu$ V/m |       | Margin, dB |
|---------|----------------|-----------------------------------|-------|------------|--------------------------------------|-------|------------|
|         |                | Measured                          | Limit |            | Calculated                           | Limit |            |
| Low     | 2390           | 60.72                             | 74    | 13.28      | 36.04                                | 54    | 17.96      |
| High    | 2483.5         | 66.87                             | 74    | 7.13       | 42.19                                | 54    | 11.81      |


Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable. Duty Cycle correction 24.68 dB

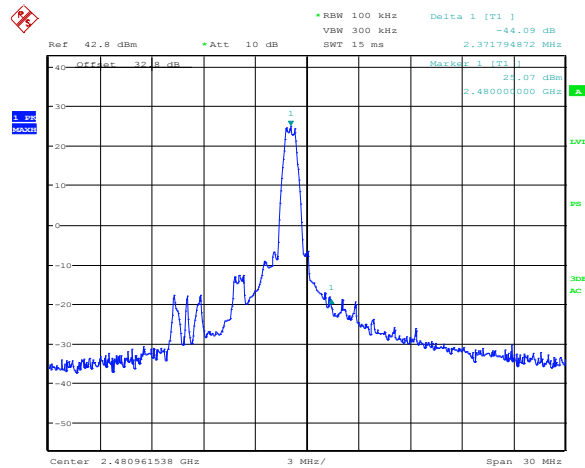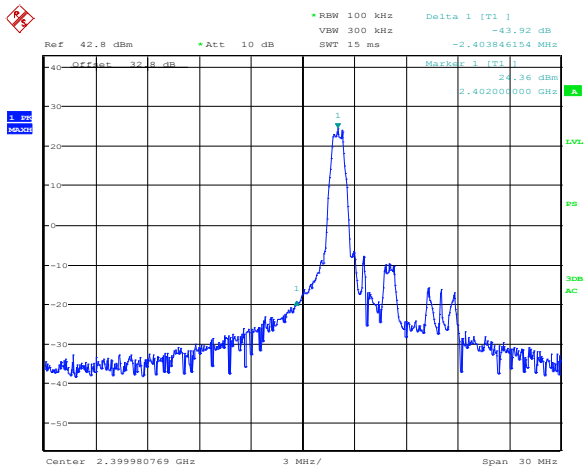

Date: 3.SEP.2015 13:59:50


Date: 3.SEP.2015 13:52:52

Figure 8.4-1: Conducted spurious emission, low channel

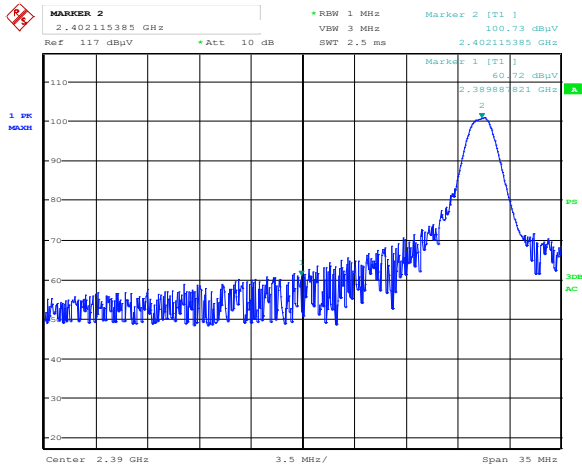


Date: 21.SEP.2015 13:50:59

Figure 8.4-2: Conducted spurious emissions for High channel

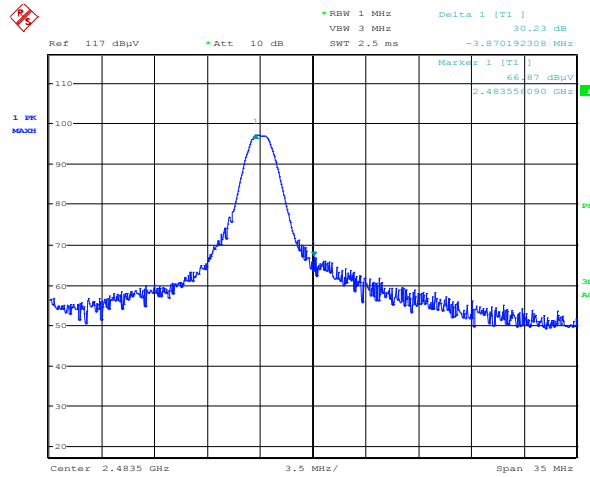


Date: 21.SEP.2015 14:12:41

Figure 8.4-3: Radiated spurious emission, band edge, low channel

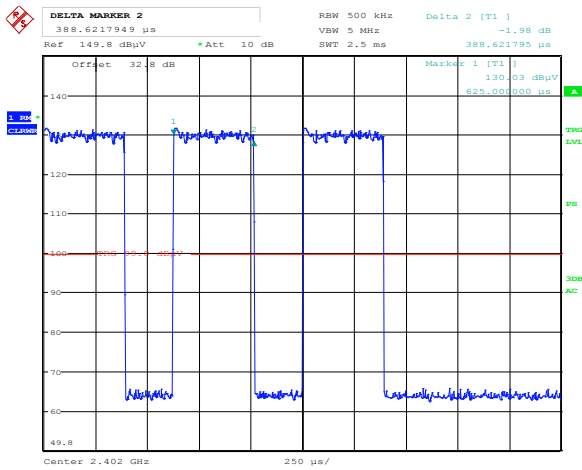

Date: 3.SEP.2015 14:08:32

Figure 8.4-4: Radiated spurious emission, band edge, High channel

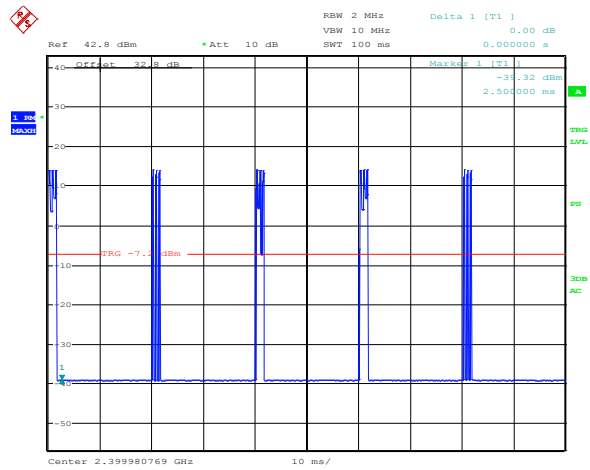


Date: 3.SEP.2015 14:03:47


Figure 8.4-5: Pulse width and number of pulses within one burst

Figure 8.4-6: Number of bursts within 100 ms


$DCCF = 20 \times \log_{10} (TX_{ON} \text{ within } 100 \text{ ms} / 100 \text{ ms}), \text{ therefore } DCCF = 20 \times \log_{10} ([0.38862 \text{ ms} \times 3 \times 5] / 100 \text{ ms}) = -24.68 \text{ dB}$

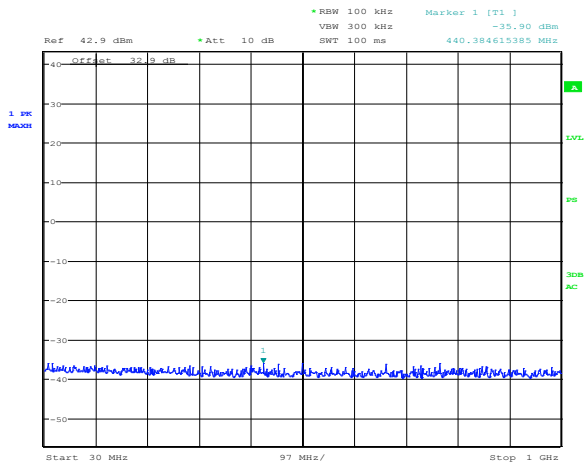


**Figure 8.4-7:** Conducted spurious emissions, Low channel\_30MHz – 1GHz

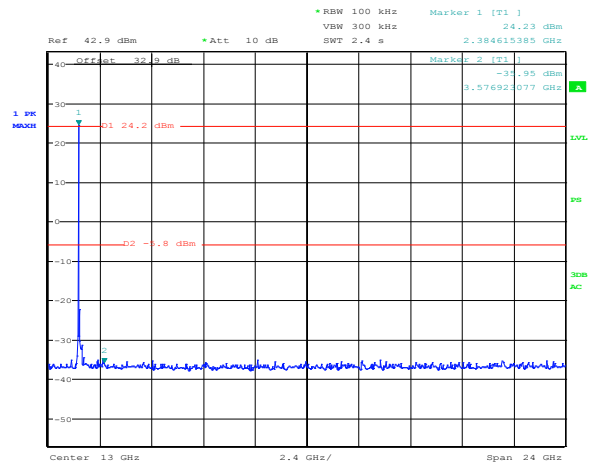

**Figure 8.4-8:** Conducted spurious, Low channel

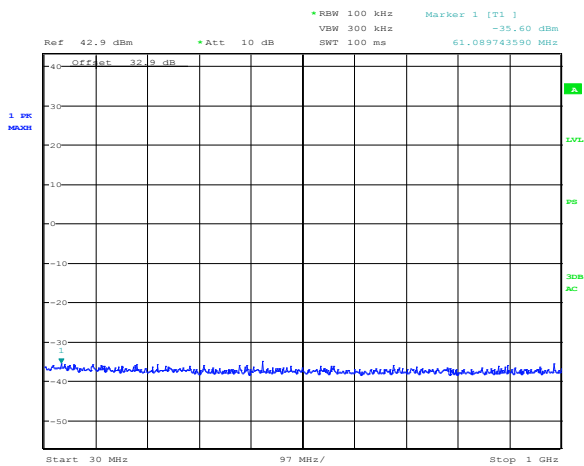


**Figure 8.4-9:** Conducted spurious emissions, Mid channel\_30MHz – 1GHz

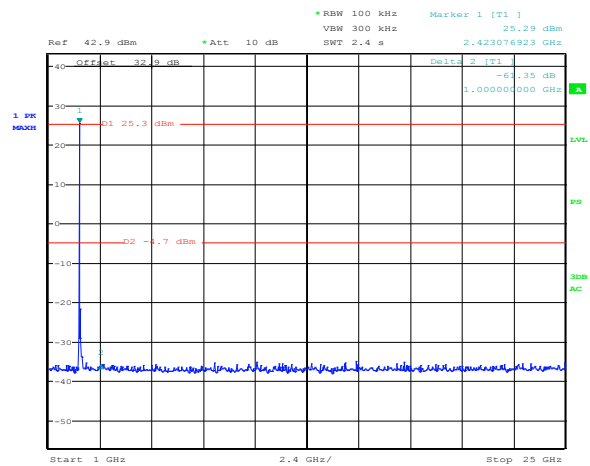


**Figure 8.4-10:** Conducted spurious, mid channel

**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart C and RSS-247, Issue 1

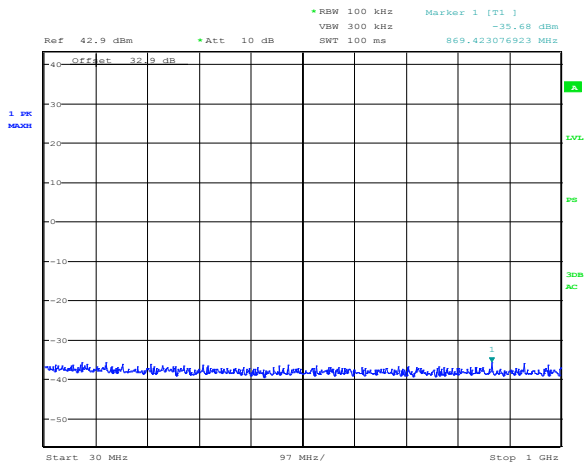

**Figure 8.4-11:** Conducted spurious emissions, High channel\_30MHz – 1GHz

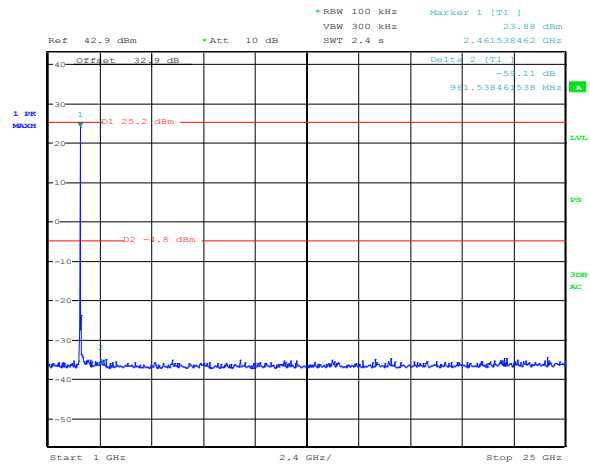

**Figure 8.4-12:** Conducted spurious, High channel

## 8.5 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices

---

### 8.5.1 Definitions and limits

---

**FCC:**  
 For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

**IC:**  
 The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 8.5.2 Test summary

---

|               |                   |                   |           |
|---------------|-------------------|-------------------|-----------|
| Test date     | September 3, 2015 | Temperature       | 23.5 °C   |
| Test engineer | Avul Nzenza       | Air pressure      | 1006 mbar |
| Verdict       | Pass              | Relative humidity | 54 %      |

### 8.5.3 Observations, settings and special notes

---

The test was performed using method described in section 10.4 AVGPS-1 Alternative


|                       |              |
|-----------------------|--------------|
| Resolution bandwidth: | 3 kHz        |
| Video bandwidth:      | 10 kHz       |
| Frequency span:       | 2 MHz        |
| Detector mode:        | RMS          |
| Trace mode:           | Single Sweep |

### 8.5.4 Test data

---


**Table 8.5-1: PSD measurements results**

| Frequency, MHz | PSD, dBm/3 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|----------------|----------------|----------------------|------------|
| 2402           | 5.41           | 8.00                 | 2.59       |
| 2440           | 6.21           | 8.00                 | 1.79       |
| 2480           | 6.20           | 8.00                 | 1.8        |

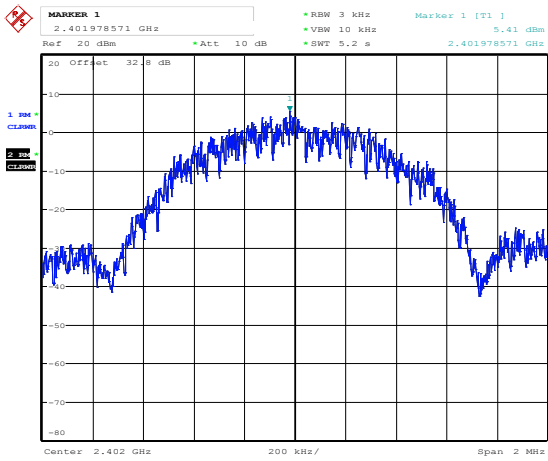


Date: 3.SEP.2015 11:14:07

Figure 8.5-1: PSD plot on Low channel

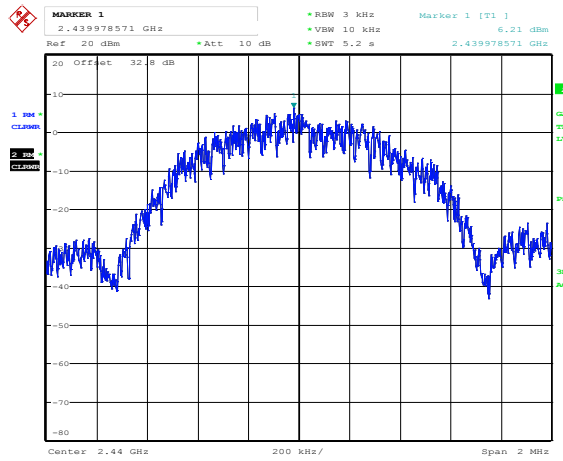

Date: 3.SEP.2015 11:09:11

Figure 8.5-2: PSD plot on Mid channel

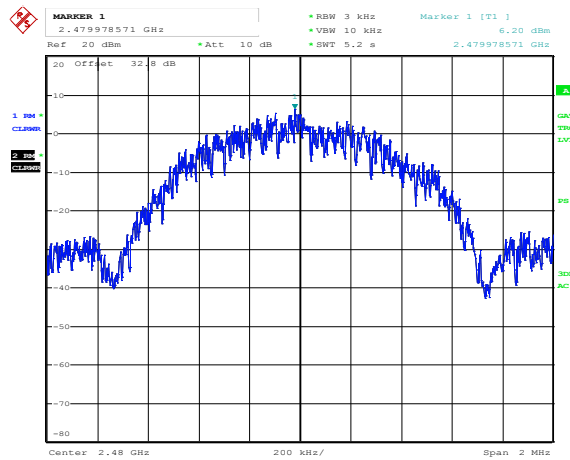

Date: 3.SEP.2015 11:17:47

Figure 8.5-3: PSD plot on High channel

## Section 9. EUT photos

### 9.1 External photos

---



*Figure 9.1-1: Front view photo*



*Figure 9.1-2: Rear view photo*

9.2 Internal photos

---

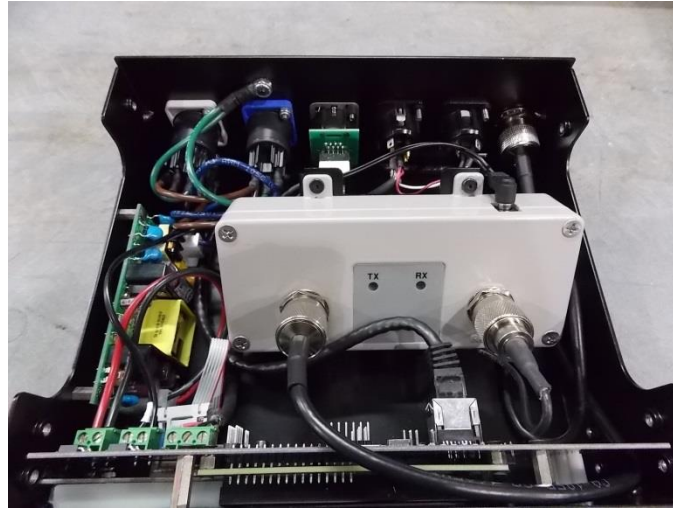


Figure 9.2-1: Internal view photo


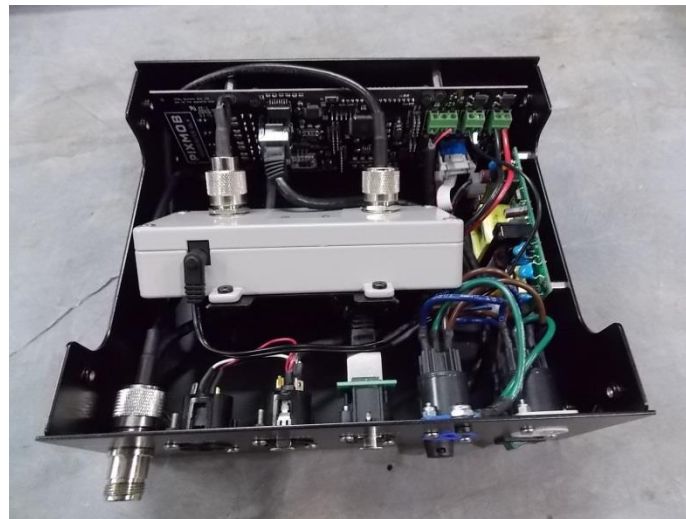


Figure 9.2-2: Internal view photo




## Section 10. Block diagrams of test set-ups

### 10.1 Radiated emissions set-up for frequencies below 1 GHz

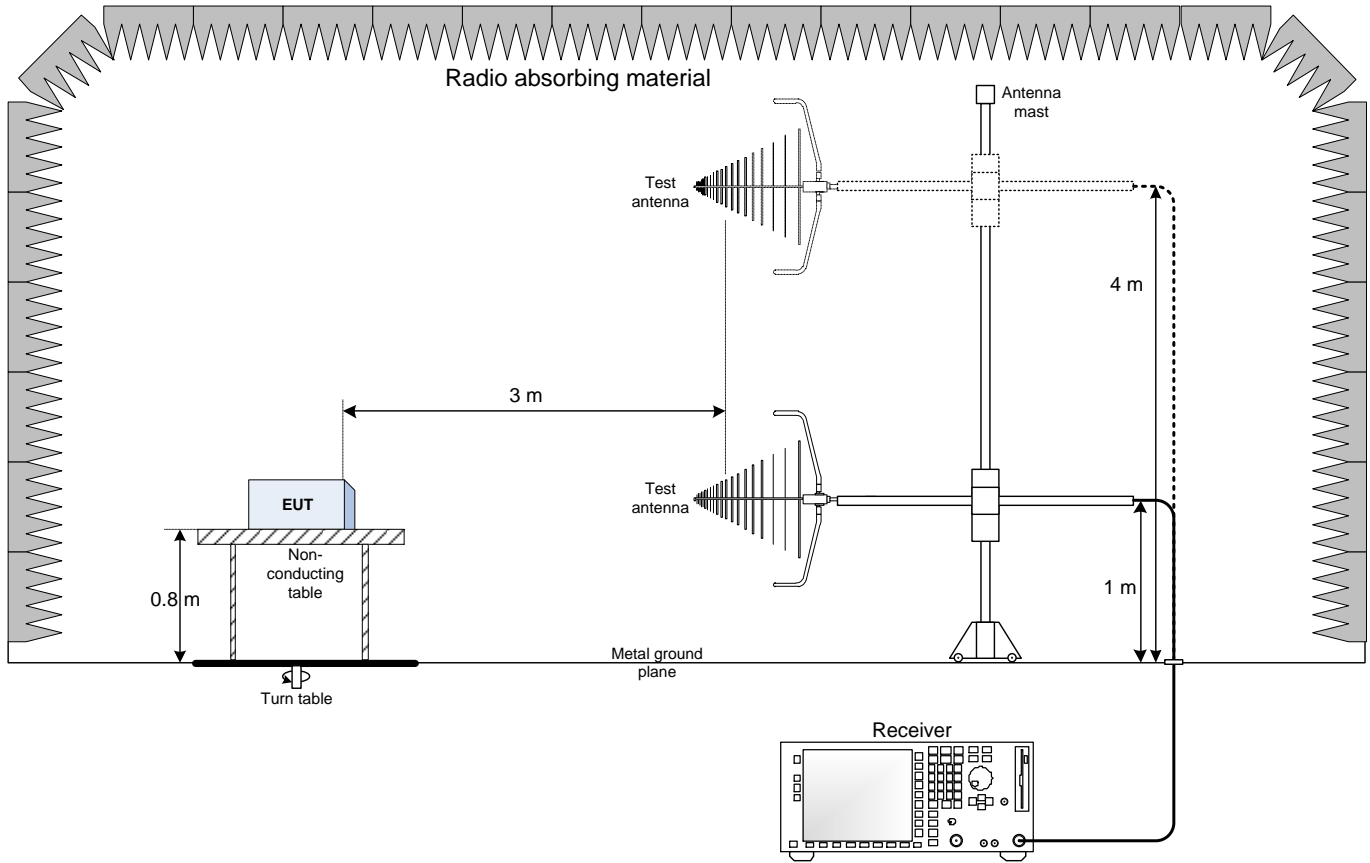

### 10.2 Radiated emissions set-up for frequencies above 1 GHz

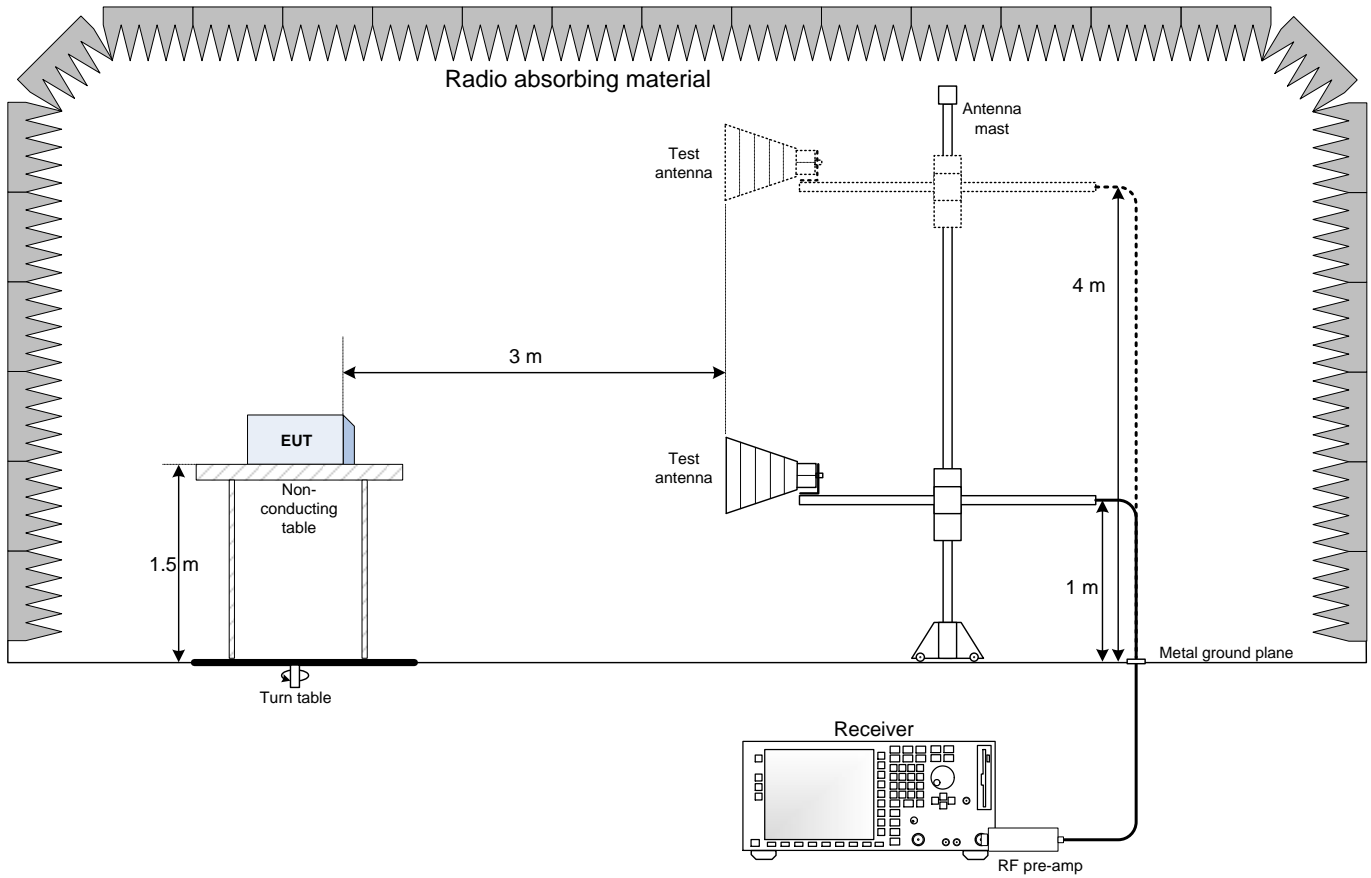

### 10.3 Conducted emissions set-up

