

Report No.: SZEM141200691101

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 49

FCC REPORT

Application No: SZEM1412006911CR

Applicant:Healbe CorporationManufacturer:Healbe Corporation

Product Name: Gobe watch Model No.(EUT): GoBe 1.0

Trade Mark: Healbe

FCC ID: 2ADSYRF07HB1

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-12-15

Date of Test: 2014-12-17 to 2014-12-22

Date of Issue: 2014-12-26

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM141200691101

Page: 2 of 49

2 Version

| Revision Record | | | | | |
|-----------------|---------|------------|----------|----------|--|
| Version | Chapter | Date | Modifier | Remark | |
| 00 | | 2014-12-26 | | Original | |
| | | | | | |
| | | | | | |

| Authorized for issue by: | | |
|--------------------------|-----------------------------|------------------|
| Tested By | Exic Fu | 2014-12-22 Date |
| | (Eric Fu) /Project Engineer | Date |
| Prepared By | Cintin W | 2014-12-26 |
| | (Linlin Lv) /Clerk | Date |
| Checked By | Samper | 2014-12-30 |
| | (Kevin Feng) /Reviewer | Date |



Report No.: SZEM141200691101

Page: 3 of 49

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|---|--|-------------------------|--------|
| Antenna Requirement | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2009 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15, Subpart C Section 15.207 | ANSI C63.10 2009 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C Section 15.247 (b)(3) | KDB558074 D01 v03r02 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15, Subpart C Section 15.247 (a)(2) | KDB558074 D01 v03r02 | PASS |
| Power Spectral Density | 47 CFR Part 15, Subpart C Section 15.247 (e) | KDB558074 D01 v03r02 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | KDB558074 D01 v03r02 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | KDB558074 D01 v03r02 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2009 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2009 | PASS |



Report No.: SZEM141200691101

Page: 4 of 49

4 Contents

| | | | Page |
|---|------|---|-------|
| 1 | CC | OVER PAGE | 1 |
| 2 | VF | RSION | 2 |
| 3 | | ST SUMMARY | |
| 4 | CC | ONTENTS | Δ |
| _ | | | |
| 5 | GE | ENERAL INFORMATION | 5 |
| | 5.1 | CLIENT INFORMATION | 5 |
| | 5.2 | GENERAL DESCRIPTION OF EUT | |
| | 5.3 | TEST ENVIRONMENT | |
| | 5.4 | DESCRIPTION OF SUPPORT UNITS | 7 |
| | 5.5 | TEST LOCATION | |
| | 5.6 | TEST FACILITY | |
| | 5.7 | DEVIATION FROM STANDARDS | |
| | 5.8 | ABNORMALITIES FROM STANDARD CONDITIONS | |
| | 5.9 | OTHER INFORMATION REQUESTED BY THE CUSTOMER | |
| | 5.10 | EQUIPMENT LIST | 9 |
| 6 | TE | ST RESULTS AND MEASUREMENT DATA | 12 |
| | 6.1 | Antenna Requirement | 12 |
| | 6.2 | CONDUCTED EMISSIONS | |
| | 6.3 | CONDUCTED PEAK OUTPUT POWER | 17 |
| | 6.4 | 6DB OCCUPY BANDWIDTH | 20 |
| | 6.5 | Power Spectral Density | |
| | 6.6 | BAND-EDGE FOR RF CONDUCTED EMISSIONS | 26 |
| | 6.7 | Spurious RF Conducted Emissions | |
| | 6.8 | RADIATED SPURIOUS EMISSION | |
| | 6.8 | | |
| | 6.9 | RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY | 44-49 |



Report No.: SZEM141200691101

Page: 5 of 49

5 General Information

5.1 Client Information

| Applicant: | Healbe Corporation |
|--------------------------|---|
| Address of Applicant: | 541 Jefferson Avenue, Suite 100, Redwood City, CA 94063 |
| Manufacturer: | Healbe Corporation |
| Address of Manufacturer: | 541 Jefferson Avenue, Suite 100, Redwood City, CA 94063 |

5.2 General Description of EUT

| Product Name: | Gobe watch |
|-----------------------|---|
| Model No.: | GoBe 1.0 |
| Trade Mark: | Healbe |
| Operation Frequency: | 2402MHz~2480MHz, 2.4GHz |
| Bluetooth Version: | 4.0 Single mode |
| Modulation Type: | GFSK |
| Number of Channel: | 40 |
| Sample Type: | Portable production |
| Test Power Grade: | Default setting (manufacturer declare) |
| Test Software of EUT: | Blegui2.exe (manufacturer declare) |
| Antenna Type: | Integral |
| Antenna Gain: | 0.5dBi |
| Power Supply: | USB charge |
| Battery: | DC 3.7V 350mAh |
| USB Cable: | 100cm |



Report No.: SZEM141200691101

Page: 6 of 49

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 11 | 2422MHz | 21 | 2442MHz | 31 | 2462MHz |
| 2 | 2404MHz | 12 | 2424MHz | 22 | 2444MHz | 32 | 2464MHz |
| 3 | 2406MHz | 13 | 2426MHz | 23 | 2446MHz | 33 | 2466MHz |
| 4 | 2408MHz | 14 | 2428MHz | 24 | 2448MHz | 34 | 2468MHz |
| 5 | 2410MHz | 15 | 2430MHz | 25 | 2450MHz | 35 | 2470MHz |
| 6 | 2412MHz | 16 | 2432MHz | 26 | 2452MHz | 36 | 2472MHz |
| 7 | 2414MHz | 17 | 2434MHz | 27 | 2454MHz | 37 | 2474MHz |
| 8 | 2416MHz | 18 | 2436MHz | 28 | 2456MHz | 38 | 2476MHz |
| 9 | 2418MHz | 19 | 2438MHz | 29 | 2458MHz | 39 | 2478MHz |
| 10 | 2420MHz | 20 | 2440MHz | 30 | 2460MHz | 40 | 2480MHz |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel | Frequency | |
|---------------------|-----------|--|
| The Lowest channel | 2402MHz | |
| The Middle channel | 2440MHz | |
| The Highest channel | 2480MHz | |



Report No.: SZEM141200691101

Page: 7 of 49

5.3 Test Environment

| Operating Environment: | | |
|------------------------|----------|--|
| Temperature: | 25.0 °C | |
| Humidity: | 53 % RH | |
| Atmospheric Pressure: | 1015mbar | |

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No. |
|--------------------------|------------------|-------------|
| Adapter | Supply by SGS | DC 5V 500mA |
| Transmitting debug board | Supply by client | None |

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM141200691101

Page: 8 of 49

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141200691101

Page: 9 of 49

5.10 Equipment List

| | Conducted Emission | n | | | |
|------|---------------------------------------|--|---------------------|------------------|---------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) |
| 1 | Shielding Room | ZhongYu Electron | GB-88 | SEL0042 | 2015-06-10 |
| 2 | LISN | Rohde & Schwarz | ENV216 | SEL0152 | 2015-10-24 |
| 3 | LISN | ETS-LINDGREN | 3816/2 | SEL0021 | 2015-05-16 |
| 4 | 8 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T8-02 | SEL0162 | 2015-08-30 |
| 5 | 4 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T4-02 | SEL0163 | 2015-08-30 |
| 6 | 2 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN- T2-02 | SEL0164 | 2015-08-30 |
| 7 | EMI Test Receiver | Rohde & Schwarz | ESCI | SEL0022 | 2015-05-16 |
| 8 | Coaxial Cable | SGS | N/A | SEL0025 | 2015-05-29 |
| 9 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 |
| 10 | Humidity/ Temperature Indicator | Shanhai Qixiang | ZJ1-2B | SEL0103 | 2015-10-24 |
| 11 | Barometer | Chang Chun | DYM3 | SEL0088 | 2015-05-16 |



Report No.: SZEM141200691101

Page: 10 of 49

| | RE in Chamber | | | | |
|------|------------------------------------|--|-----------|------------------|---------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Due date (yyyy-mm-dd) |
| 1 | 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 2015-06-10 |
| 2 | EMI Test Receiver | Agilent Technologies | N9038A | SEL0312 | 2015-09-16 |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A |
| 4 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0015 | 2015-10-24 |
| 5 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0006 | 2015-10-24 |
| 6 | Horn Antenna (18-26GHz) | ETS-LINDGREN | 3160 | SEL0076 | 2015-10-24 |
| 7 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 2015-05-16 |
| 8 | Pre-Amplifier (0.1-26.5GHz) | Compliance Directions Systems Inc. | PAP-0126 | SEL0168 | 2015-10-24 |
| 9 | Coaxial cable | SGS | N/A | SEL0027 | 2015-05-29 |
| 10 | Coaxial cable | SGS | N/A | SEL0189 | 2015-05-29 |
| 11 | Coaxial cable | SGS | N/A | SEL0121 | 2015-05-29 |
| 12 | Coaxial cable | SGS | N/A | SEL0178 | 2015-05-29 |
| 13 | Band filter | Amindeon | 82346 | SEL0094 | 2015-05-16 |
| 14 | Barometer | Chang Chun | DYM3 | SEL0088 | 2015-05-16 |
| 15 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 |
| 16 | Humidity/ Temperature Indicator | Shanhai Qixiang | ZJ1-2B | SEL0103 | 2015-10-24 |
| 17 | Signal Generator (10M-27GHz) | Rohde & Schwarz | SMR27 | SEL0067 | 2015-05-16 |
| 18 | Signal Generator | Rohde & Schwarz | SMY01 | SEL0155 | 2015-10-24 |
| 19 | Loop Antenna | Beijing Daze | ZN30401 | SEL0203 | 2015-06-04 |



Report No.: SZEM141200691101

Page: 11 of 49

| | RF connected test | | | | |
|------|---------------------------------------|-------------------------|-----------|------------------|---------------------------|
| Item | Test Equipment | Manufacturer Model | | Inventory No. | Cal.Due date (yyyy-mm-dd) |
| 1 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2015-10-24 |
| 2 | Humidity/ Temperature Indicator | HYGRO | ZJ1-2B | SEL0033 | 2015-10-24 |
| 3 | Spectrum Analyzer | Rohde & Schwarz | FSP | SEL0154 | 2015-10-24 |
| 4 | Coaxial cable | SGS | N/A | SEL0178 | 2015-05-29 |
| 5 | Coaxial cable | SGS | N/A | SEL0179 | 2015-05-29 |
| 6 | Barometer | ChangChun | DYM3 | SEL0088 | 2015-05-16 |
| 7 | Signal Generator | Rohde & Schwarz | SML03 | SEL0068 | 2015-05-16 |
| 8 | Band filter | amideon | 82346 | SEL0094 | 2015-05-16 |
| 9 | POWER METER | R&S | NRVS | SEL0144 | 2015-10-24 |
| 10 | Attenuator | Beijin feihang taida | TST-2-6dB | SEL0205 | 2015-05-16 |
| 11 | Power Divider(splitter) | Agilent Technologies | 11636B | SEL0130 | 2015-10-24 |

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM141200691101

Page: 12 of 49

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

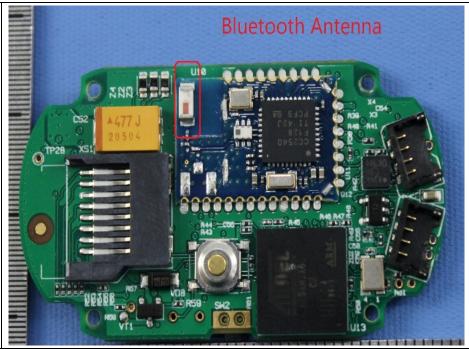

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.5dBi.



Report No.: SZEM141200691101

Page: 13 of 49


6.2 Conducted Emissions

| Test Requirement: | 47 CFR Part 15C Section 15.207 | | | | | | |
|-----------------------|---|------------------------|----------------------|-------|--|--|--|
| Test Method: | ANSI C63.10: 2009 | | | | | | |
| Test Frequency Range: | 150kHz to 30MHz | | | | | | |
| Limit: | Francisco (MIII-) | Limit (dBuV) | | | | | |
| | Frequency range (MHz) | Quasi-peak | Average | | | | |
| | 0.15-0.5 | 66 to 56* | 56 to 46* | : | | | |
| | 0.5-5 | 56 | 46 | | | | |
| | 5-30 | 60 | 50 | | | | |
| | * Decreases with the logarithn | n of the frequency. | | | | | |
| Test Procedure: | The mains terminal disturt room. | bance voltage test was | s conducted in a shi | elded | | | |
| | The mains terminal disturbance voltage test was conducted in a shield room. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω line impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT with placed on the horizontal ground reference plane, The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to | | | | | | |



Report No.: SZEM141200691101

Page: 14 of 49

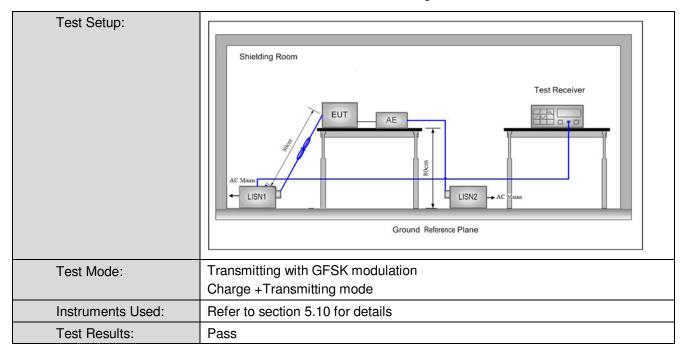



Report No.: SZEM141200691101


Page: 15 of 49

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

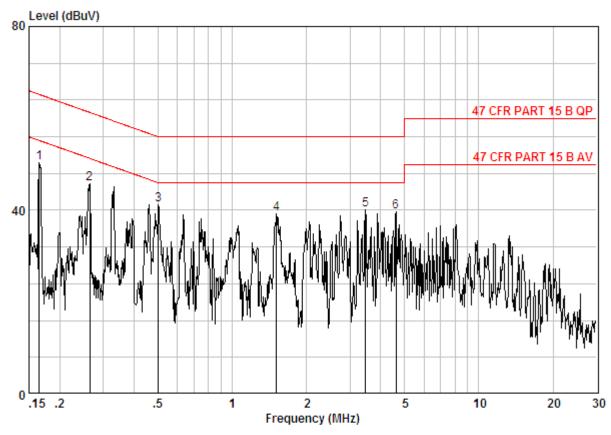

Site : Shielding Room

Condition : 47 CFR PART 15 B AV CE LINE

| | Freq | | LISN Factor | | | | | Remark |
|---|---------|------|----------------|-------|-------|-------|-------|--------|
| | MHz | dB | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.16501 | 0.02 | 9.70 | 40.67 | 50.39 | 55.21 | -4.82 | Peak |
| 2 | 0.26442 | 0.01 | 9.70 | 36.08 | 45.79 | 51.29 | -5.50 | Peak |
| 3 | 0.50203 | 0.01 | 9.80 | 31.46 | 41.27 | 46.00 | -4.73 | Peak |
| 4 | 1.511 | 0.02 | 9.80 | 29.32 | 39.14 | 46.00 | -6.86 | Peak |
| 5 | 3.472 | 0.02 | 9.86 | 30.27 | 40.15 | 46.00 | -5.85 | Peak |
| 6 | 4.622 | 0.01 | 9.89 | 29.76 | 39.66 | 46.00 | -6.34 | Peak |


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 16 of 49

Neutral line:

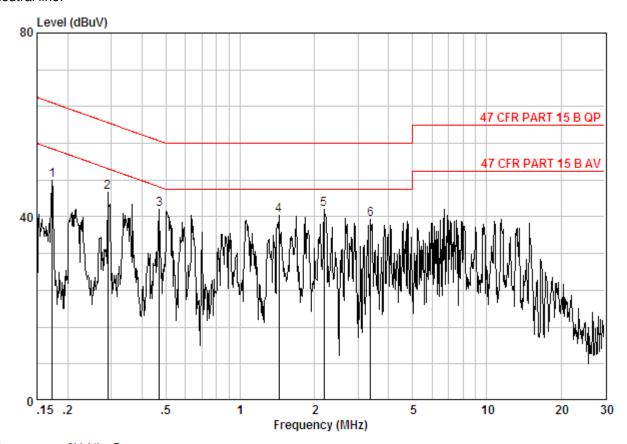

Site : Shielding Room

Condition : 47 CFR PART 15 B AV CE NEUTRAL

| | Freq | | LISN Factor | | | | | Remark |
|---|---------|------|----------------|-------|-------|-------|-------|--------|
| | MHz | dB | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.17307 | 0.02 | 9.70 | 38.32 | 48.04 | 54.81 | -6.77 | Peak |
| 2 | 0.29088 | 0.01 | 9.70 | 35.70 | 45.41 | 50.50 | -5.08 | Peak |
| 3 | 0.47110 | 0.01 | 9.80 | 31.85 | 41.66 | 46.49 | -4.83 | Peak |
| 4 | 1.433 | 0.02 | 9.80 | 30.53 | 40.35 | 46.00 | -5.65 | Peak |
| 5 | 2.190 | 0.02 | 9.81 | 31.81 | 41.64 | 46.00 | -4.36 | Peak |
| 6 | 3.381 | 0.02 | 9.86 | 29.49 | 39.36 | 46.00 | -6.64 | Peak |

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM141200691101

Page: 17 of 49

6.3 Conducted Peak Output Power

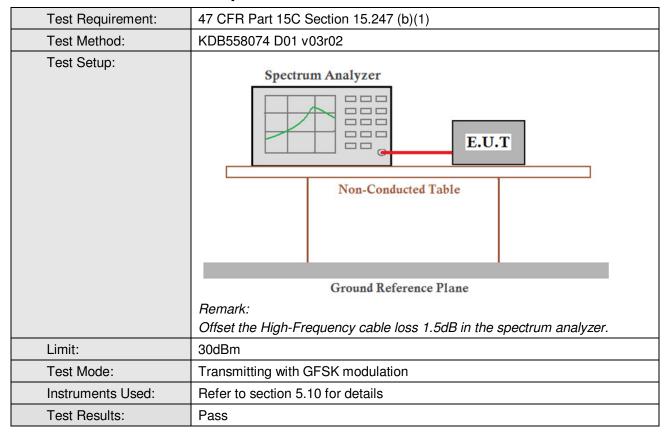

Measurement Data

| | GFSK mode | | | | | | | |
|--------------|--|-------|------|--|--|--|--|--|
| Test channel | Test channel Peak Output Power (dBm) Limit (dBm) | | | | | | | |
| Lowest | 5.82 | 30.00 | Pass | | | | | |
| Middle | 5.55 | 30.00 | Pass | | | | | |
| Highest | 4.89 | 30.00 | Pass | | | | | |




Report No.: SZEM141200691101


Page: 18 of 49

Test plot as follows:

Test mode: GFSK Test channel: Lowest

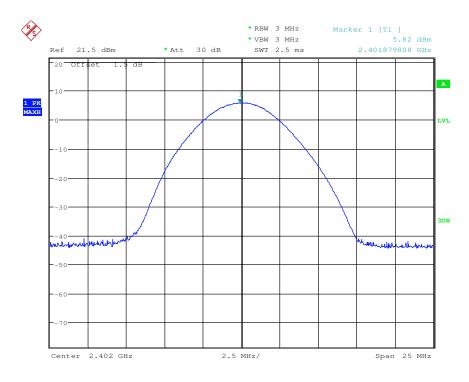



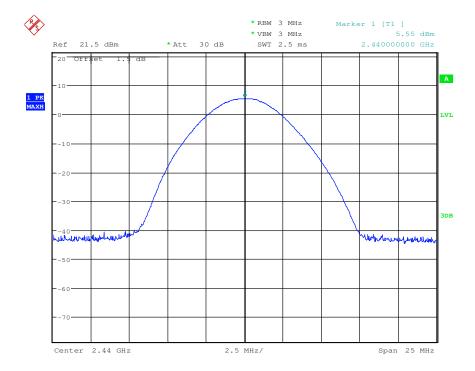




Report No.: SZEM141200691101

Page: 19 of 49

Test mode: GFSK Test channel: Highest

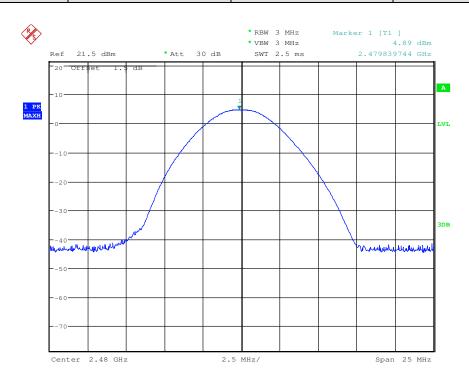




Report No.: SZEM141200691101

Page: 20 of 49

6.4 6dB Occupy Bandwidth

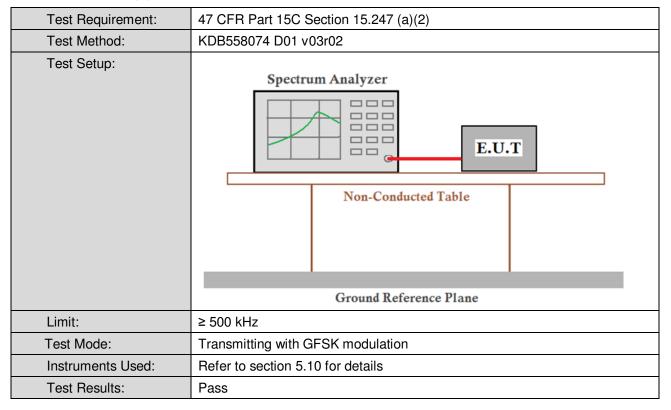

Measurement Data

| Test channel | 6dB Occupy Bandwidth (MHz) | Limit (kHz) | Result |
|--------------|----------------------------|-------------|--------|
| Lowest | 0.735576923077 | ≥500 | Pass |
| Middle | 0.730769230769 | ≥500 | Pass |
| Highest | 0.735576923077 | ≥500 | Pass |




Report No.: SZEM141200691101


Page: 21 of 49

Test plot as follows:

Test mode: GFSK Test channel: Lowest

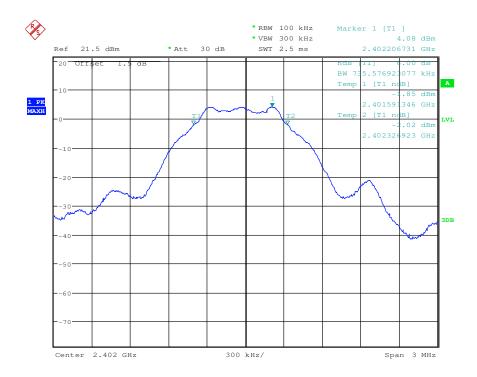



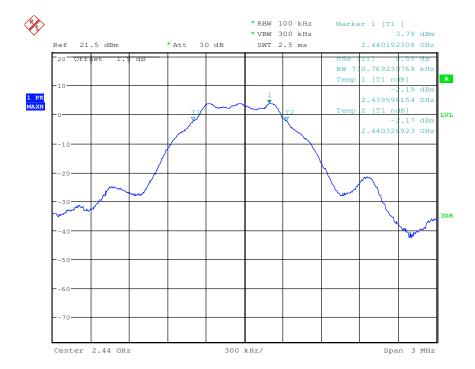




Report No.: SZEM141200691101

Page: 22 of 49

Test mode: GFSK Test channel: Highest

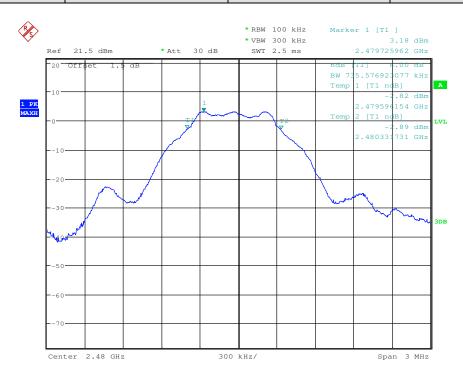






Report No.: SZEM141200691101

Page: 23 of 49

6.5 Power Spectral Density

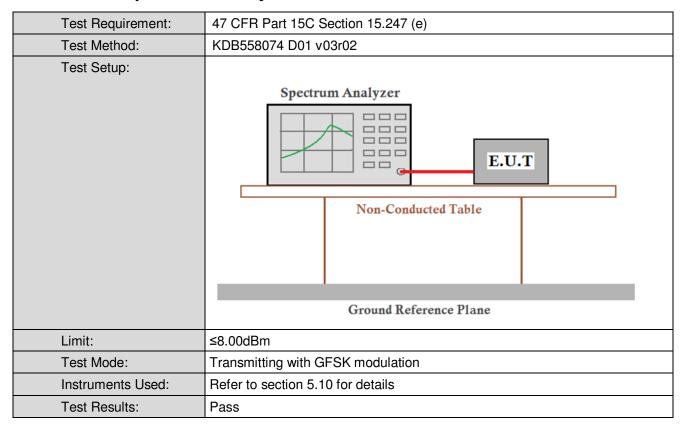

Measurement Data

| GFSK mode | | | | | | | |
|--------------|------------------------------|-------------|--------|--|--|--|--|
| Test channel | Power Spectral Density (dBm) | Limit (dBm) | Result | | | | |
| Lowest | 4.03 | ≤8.00 | Pass | | | | |
| Middle | 3.72 | ≤8.00 | Pass | | | | |
| Highest | 3.06 | ≤8.00 | Pass | | | | |




Report No.: SZEM141200691101


Page: 24 of 49

Test plot as follows:

Test mode: GFSK Test channel: Lowest

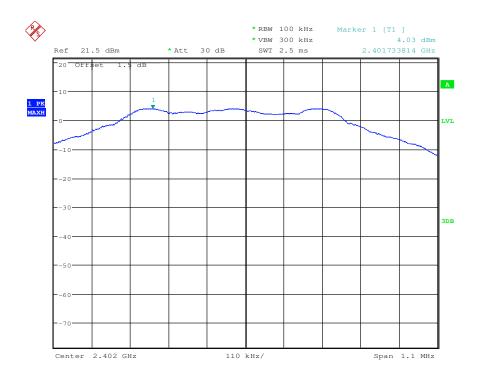

Test mode: GFSK Test channel: Middle

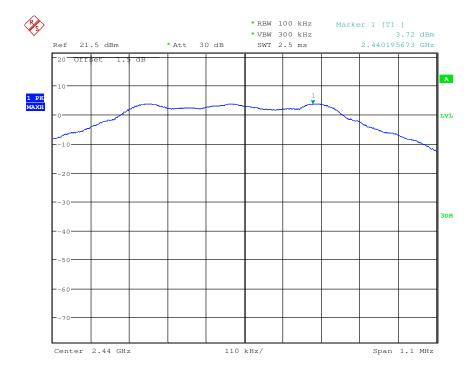




Report No.: SZEM141200691101

Page: 25 of 49

Test mode: GFSK Test channel: Highest

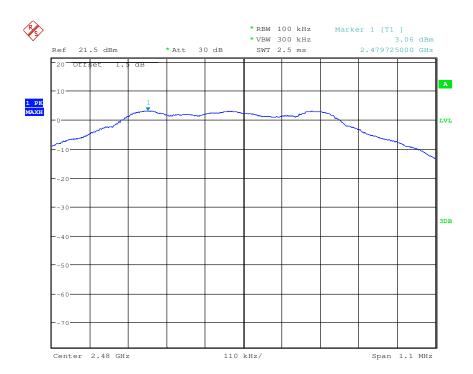




Report No.: SZEM141200691101

Page: 26 of 49

6.6 Band-edge for RF Conducted Emissions

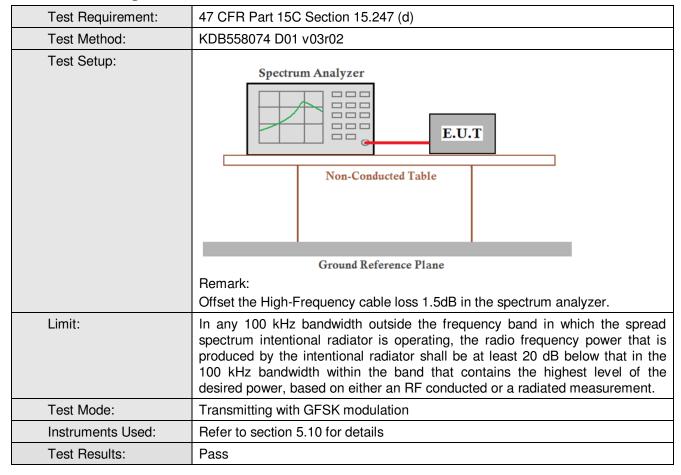




Report No.: SZEM141200691101


Page: 27 of 49

Test plot as follows:

Test mode: GFSK Test channel: Lowest

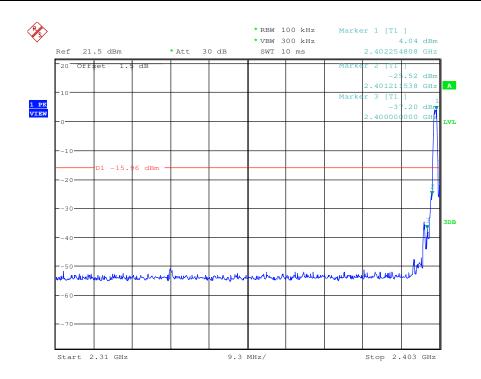



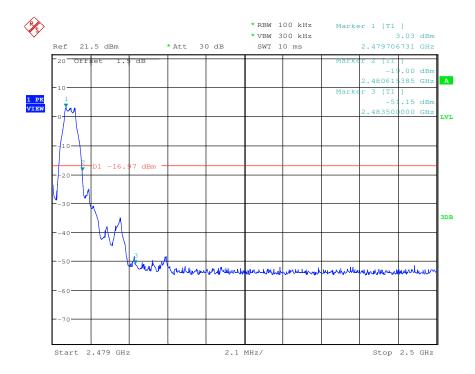



Report No.: SZEM141200691101

Page: 28 of 49

6.7 Spurious RF Conducted Emissions


| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) | | | | | | |
|-------------------|---|--|--|--|--|--|--|
| Test Method: | KDB558074 D01 v03r02 | | | | | | |
| Test Setup: | Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane | | | | | | |
| | Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. | | | | | | |
| | | | | | | | |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. | | | | | | |
| Test Mode: | Transmitting with GFSK modulation | | | | | | |
| Instruments Used: | Refer to section 5.10 for details | | | | | | |
| Test Results: | Pass | | | | | | |




Report No.: SZEM141200691101

Page: 29 of 49



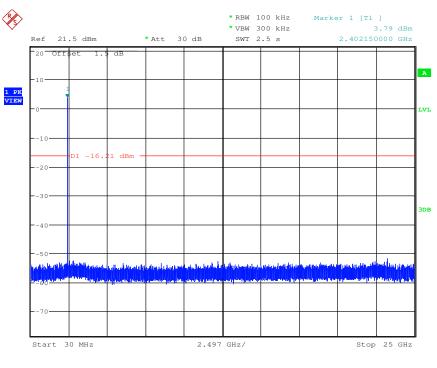


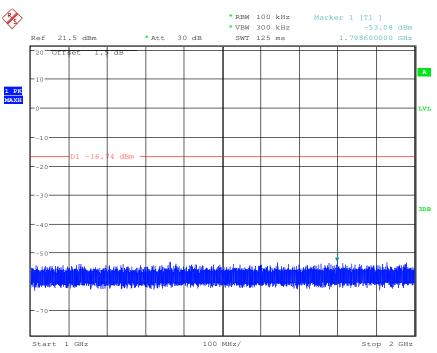



Report No.: SZEM141200691101

Page: 30 of 49

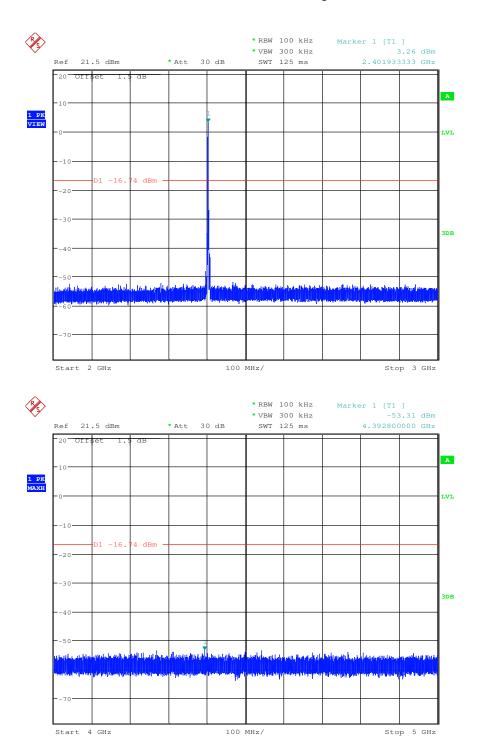




Report No.: SZEM141200691101

Page: 31 of 49



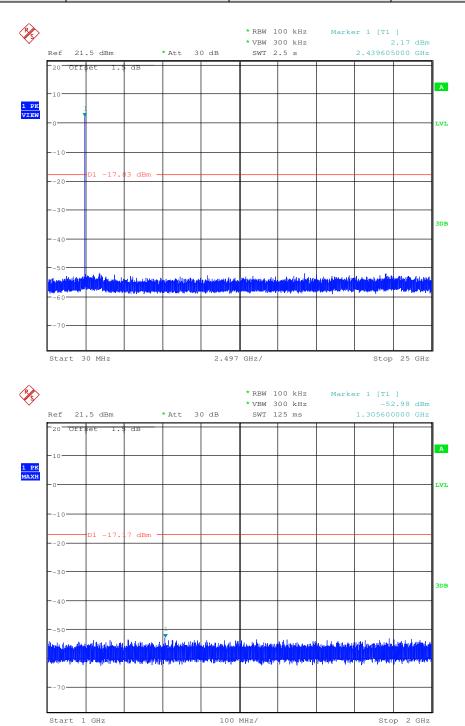




Report No.: SZEM141200691101

Stop 5 GHz

Page: 32 of 49

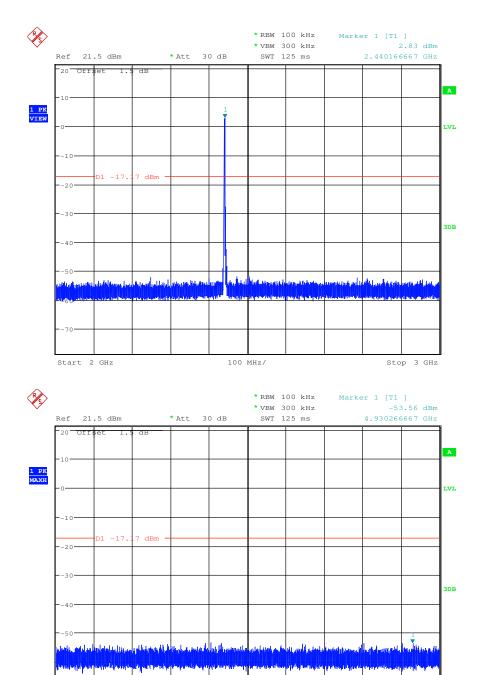

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


100 MHz/


Start 4 GHz



Report No.: SZEM141200691101

Page: 33 of 49




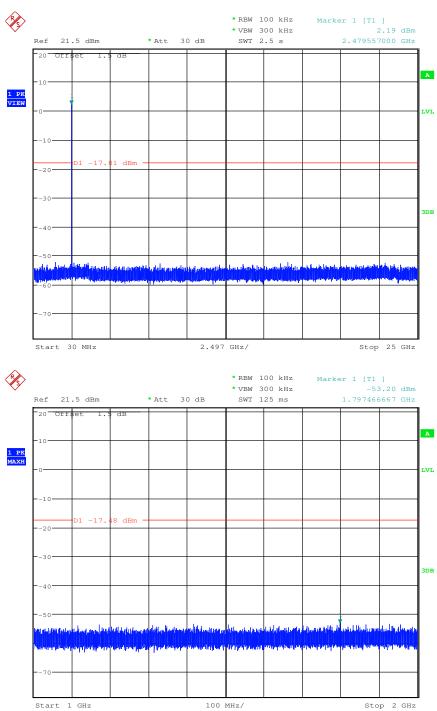



Report No.: SZEM141200691101

Page: 34 of 49

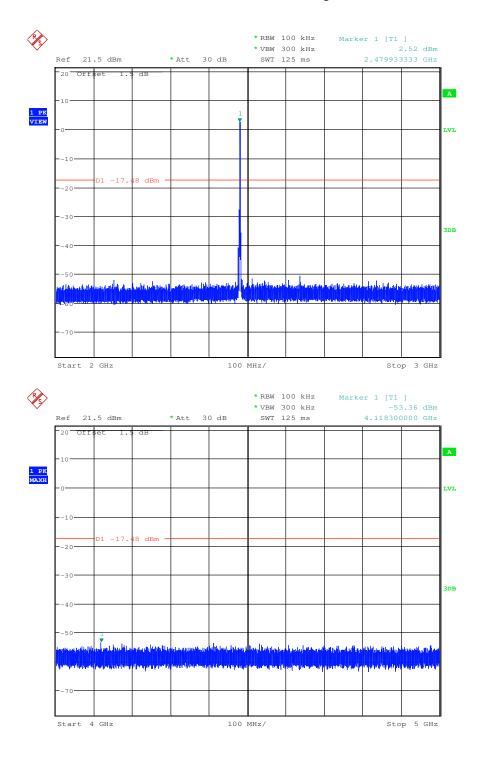

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 35 of 49


6.8 Radiated Spurious Emission

| 6.8.1 Spurious Emiss | ions | | | | | | | |
|----------------------|--|--|-------------|-------------------|---------------|-----------|--------------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | | | | | | |
| Test Method: | ANSI C63.10 2009 | | | | | | | |
| Test Site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | | | | |
| Receiver Setup: | Frequency | | Detector | RBW | / VBW | | Remark | |
| | 0.009MHz-0.090MH | Z | Peak | 10kHz | <u>z</u> | 30kHz | Peak | 9 |
| | 0.009MHz-0.090MH | Z | Average | 10kHz | <u>z</u> | 30kHz | Average | |
| | 0.090MHz-0.110MH | Z | Quasi-peak | 10kHz | Z | 30kHz | Quasi-peak | |
| | 0.110MHz-0.490MH | Z | Peak | 10kHz | Z | 30kHz | Peak | |
| | 0.110MHz-0.490MH | Z | Average | 10kHz | Z | 30kHz | Average | |
| | 0.490MHz -30MHz | z -30MHz Quasi-peak | | 10kHz | Z | 30kHz | Quasi-peak | (|
| | 30MHz-1GHz | | Quasi-peak | 100 kH | lz | 300kHz | Quasi-peak | |
| | Above 1GHz | | Peak | 1MHz | <u>-</u> | 3MHz | Peak | |
| | Above IGHZ | | Peak | 1MHz | - | 10Hz | Average | |
| Limit: | Frequency | Frequency Field strength (microvolt/meter) | | Limit (dBuV/m) | Remark | | Measureme distance (n | |
| | 0.009MHz-0.490MHz | 2 | 400/F(kHz) | - | - | | 300 | |
| | 0.490MHz-1.705MHz | 24 | 1000/F(kHz) | - | - | | 30 | |
| | 1.705MHz-30MHz | | 30 | - | - | | 30 | |
| | 30MHz-88MHz | | 100 | 40.0 | <u> </u> | | 3 | |
| | 88MHz-216MHz | | 150 | 43.5 | | | 3 | |
| | 216MHz-960MHz | | 200 | 46.0 | Q | uasi-peak | 3 | |
| | 960MHz-1GHz | | 500 | 54.0 | .0 Quasi-peak | | 3 | |
| | Above 1GHz 500 | | 54.0 | 54.0 Average | | 3 | | |
| | ess otherwise IB above the oment under to do by the device | maximum est. This p | pe | rmitted ave | erage emissio | n | | |
| Test Setup: | | | | | | | | |



Report No.: SZEM141200691101

Page: 36 of 49

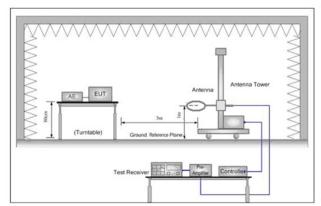

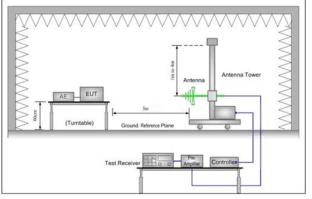


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

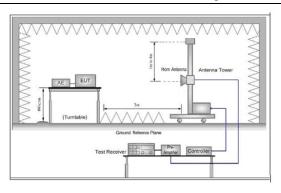


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse



Report No.: SZEM141200691101

Page: 37 of 49


| | case. i. Repeat above procedures until all frequencies measured was complete. |
|------------------------|---|
| Exploratory Test Mode: | Transmitting with GFSK modulation Transmitting mode, Charge +Transmitting mode |
| Final Test Mode: | Transmitting with GFSK modulation Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |



Report No.: SZEM141200691101

Page: 38 of 49

| Radiated Emission below 1GHz | | | | |
|---|--|--|--|--|
| 30MHz~1GHz (QP) | | | | |
| Test mode: Charge +Transmitting mode Vertical | | | | |

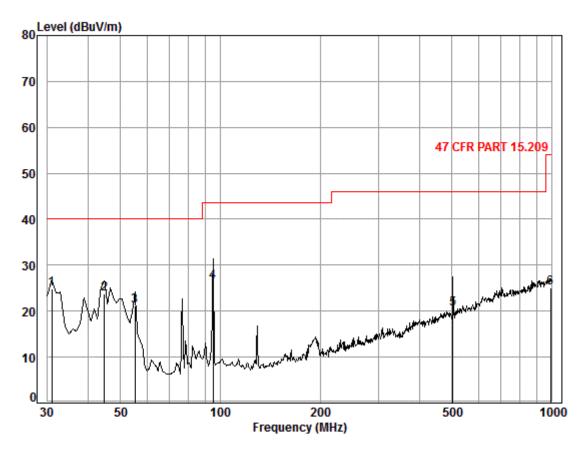

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 6911CR

| | Freq | Cable Loss | | Preamp Factor | | | | |
|---|--------|---------------|-------|------------------|-------|--------|--------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 30.96 | 0.60 | 18.16 | 27.35 | 33.47 | 24.88 | 40.00 | -15.12 |
| 2 | 44.59 | 0.70 | 11.08 | 27.31 | 39.22 | 23.69 | 40.00 | -16.31 |
| 3 | 55.22 | 0.80 | 7.92 | 27.28 | 39.69 | 21.13 | 40.00 | -18.87 |
| 4 | 95.09 | 1.15 | 8.90 | 27.21 | 43.58 | 26.42 | 43.50 | -17.08 |
| 5 | 502.94 | 2.60 | 17.88 | 27.69 | 27.77 | 20.56 | 46.00 | -25.44 |
| 6 | 993.01 | 3.69 | 24.02 | 26.33 | 23.64 | 25.02 | 54.00 | -28.98 |


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 39 of 49

Test mode: Charge +Transmitting mode Horizontal

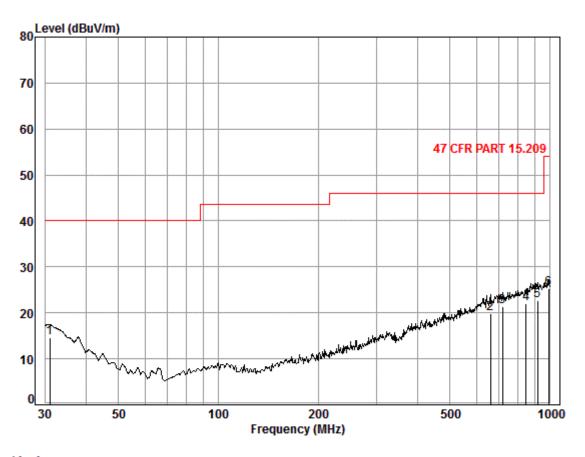

Condition: 47 CFR PART 15.209 3m 3142C HORIZONTAL

Job No. : 6911CR

| | | Cable | Ant | Preamp | Read | | Limit | 0ver |
|---|--------|-------|--------|--------|-------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 30.96 | 0.60 | 18.16 | 27.35 | 23.11 | 14.52 | 40.00 | -25.48 |
| 2 | 663.47 | 2.83 | 21.03 | 27.46 | 23.49 | 19.89 | 46.00 | -26.11 |
| 3 | 719.20 | 2.96 | 21.60 | 27.39 | 24.29 | 21.46 | 46.00 | -24.54 |
| 4 | 848.06 | 3.40 | 22.40 | 27.02 | 23.30 | 22.08 | 46.00 | -23.92 |
| 5 | 919.29 | 3.62 | 23.28 | 26.68 | 22.34 | 22.56 | 46.00 | -23.44 |
| 6 | 993.01 | 3.69 | 24.02 | 26.33 | 23.84 | 25.22 | 54.00 | -28.78 |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 40 of 49

Above 1GHz

Lowest channel

Peak value:

| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
|------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| 1330.612 | 51.50 | 74 | 22.50 | 24.80 | 34.20 | 6.00 | V |
| 4804.000 | 52.40 | 74 | 21.60 | 34.30 | 35.10 | 7.60 | V |
| 6730.812 | 57.10 | 74 | 16.90 | 35.30 | 33.70 | 9.20 | V |
| 7206.000 | 58.00 | 74 | 16.00 | 35.80 | 33.80 | 9.90 | V |
| 9608.000 | 62.30 | 74 | 11.70 | 37.20 | 32.50 | 12.00 | V |
| 12245.316 | 63.10 | 74 | 10.90 | 37.90 | 31.90 | 14.90 | V |
| 1326.234 | 45.00 | 74 | 29.00 | 24.70 | 34.20 | 6.00 | Н |
| 4804.000 | 52.40 | 74 | 21.60 | 34.30 | 35.10 | 7.60 | Н |
| 6564.072 | 56.00 | 74 | 18.00 | 35.40 | 33.70 | 9.00 | Н |
| 7206.000 | 57.50 | 74 | 16.50 | 35.80 | 33.80 | 9.90 | Н |
| 9608.000 | 61.90 | 74 | 12.10 | 37.20 | 32.50 | 12.00 | Н |
| 12267.276 | 62.10 | 74 | 11.90 | 37.90 | 31.90 | 15.00 | Н |

Average value:

| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
|------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| 1330.612 | 26.80 | 54 | 27.20 | 24.80 | 34.20 | 6.00 | ٧ |
| 4804.000 | 39.50 | 54 | 14.50 | 34.30 | 35.10 | 7.60 | V |
| 6730.812 | 43.20 | 54 | 10.80 | 35.30 | 33.70 | 9.20 | V |
| 7206.000 | 44.90 | 54 | 9.10 | 35.80 | 33.80 | 9.90 | V |
| 9608.000 | 48.50 | 54 | 5.50 | 37.20 | 32.50 | 12.00 | V |
| 12245.316 | 49.80 | 54 | 4.20 | 37.90 | 31.90 | 14.90 | V |
| 1326.234 | 26.30 | 54 | 27.70 | 24.70 | 34.20 | 6.00 | Н |
| 4804.000 | 39.50 | 54 | 14.50 | 34.30 | 35.10 | 7.60 | Н |
| 6564.072 | 43.30 | 54 | 10.70 | 35.40 | 33.70 | 9.00 | Н |
| 7206.000 | 44.60 | 54 | 9.40 | 35.80 | 33.80 | 9.90 | Н |
| 9608.000 | 49.00 | 54 | 5.00 | 37.20 | 32.50 | 12.00 | Н |
| 12267.276 | 49.20 | 54 | 4.80 | 37.90 | 31.90 | 15.00 | Н |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 41 of 49

Middle channel

Peak value:

| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
|------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| 1327.692 | 50.70 | 74 | 23.30 | 24.70 | 34.20 | 6.00 | V |
| 4880.000 | 52.00 | 74 | 22.00 | 34.50 | 35.20 | 7.60 | V |
| 6682.745 | 55.60 | 74 | 18.40 | 35.40 | 33.70 | 9.10 | V |
| 7320.000 | 57.50 | 74 | 16.50 | 35.70 | 33.80 | 10.00 | V |
| 9760.000 | 61.30 | 74 | 12.70 | 37.30 | 32.10 | 12.30 | V |
| 12006.331 | 62.50 | 74 | 11.50 | 37.80 | 31.80 | 14.20 | V |
| 1326.234 | 45.40 | 74 | 28.60 | 24.70 | 34.20 | 6.00 | Н |
| 4880.000 | 52.00 | 74 | 22.00 | 34.50 | 35.20 | 7.60 | Н |
| 6209.415 | 56.00 | 74 | 18.00 | 34.90 | 33.80 | 8.50 | Н |
| 7320.000 | 58.70 | 74 | 15.30 | 35.70 | 33.80 | 10.00 | Н |
| 9760.000 | 60.90 | 74 | 13.10 | 37.30 | 32.10 | 12.30 | Н |
| 12092.690 | 61.70 | 74 | 12.30 | 37.90 | 31.80 | 14.50 | Н |

Average value:

| Average value: | | | | | | | |
|----------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
| 1327.692 | 26.30 | 54 | 27.70 | 24.70 | 34.20 | 6.00 | V |
| 4880.000 | 39.30 | 54 | 14.70 | 34.50 | 35.20 | 7.60 | V |
| 6682.745 | 43.10 | 54 | 10.90 | 35.40 | 33.70 | 9.10 | V |
| 7320.000 | 44.80 | 54 | 9.20 | 35.70 | 33.80 | 10.00 | V |
| 9760.000 | 47.30 | 54 | 6.70 | 37.30 | 32.10 | 12.30 | V |
| 12006.331 | 49.70 | 54 | 4.30 | 37.80 | 31.80 | 14.20 | V |
| 1326.234 | 26.40 | 54 | 27.60 | 24.70 | 34.20 | 6.00 | Н |
| 4880.000 | 38.70 | 54 | 15.30 | 34.50 | 35.20 | 7.60 | Н |
| 6209.415 | 42.20 | 54 | 11.80 | 34.90 | 33.80 | 8.50 | Н |
| 7320.000 | 44.50 | 54 | 9.50 | 35.70 | 33.80 | 10.00 | Н |
| 9760.000 | 48.40 | 54 | 5.60 | 37.30 | 32.10 | 12.30 | Н |
| 12092.690 | 49.60 | 54 | 4.40 | 37.90 | 31.80 | 14.50 | Н |



Report No.: SZEM141200691101

Page: 42 of 49

Highest channel

Peak value:

| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
|------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| | (dbd v/III) | (ubu v/III) | (ub) | (GD/111) | (GD) | (GD) | |
| 1326.234 | 50.80 | 74 | 23.20 | 24.70 | 34.20 | 6.00 | V |
| 4960.000 | 52.40 | 74 | 21.60 | 34.60 | 35.30 | 7.60 | V |
| 6658.840 | 56.20 | 74 | 17.80 | 35.40 | 33.70 | 9.10 | V |
| 7440.000 | 57.90 | 74 | 16.10 | 35.80 | 33.90 | 10.10 | V |
| 9920.000 | 62.00 | 74 | 12.00 | 37.30 | 32.10 | 12.30 | V |
| 12027.863 | 62.40 | 74 | 11.60 | 37.80 | 31.80 | 14.20 | V |
| 1332.075 | 45.10 | 74 | 28.90 | 24.80 | 34.20 | 6.00 | Н |
| 4960.000 | 52.20 | 74 | 21.80 | 34.60 | 35.30 | 7.60 | Н |
| 6791.383 | 56.20 | 74 | 17.80 | 35.30 | 33.70 | 9.30 | Н |
| 7440.000 | 58.20 | 74 | 15.80 | 35.80 | 33.90 | 10.10 | Н |
| 9920.000 | 61.20 | 74 | 12.80 | 37.30 | 32.10 | 12.30 | Н |
| 12049.433 | 62.60 | 74 | 11.40 | 37.80 | 31.80 | 14.30 | Н |

Average value:

| Average value: | | | | | | | |
|----------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
| 1326.234 | 26.30 | 54 | 27.70 | 24.70 | 34.20 | 6.00 | V |
| 4960.000 | 39.10 | 54 | 14.90 | 34.60 | 35.30 | 7.60 | V |
| 6558.840 | 43.30 | 54 | 10.70 | 35.40 | 33.70 | 9.00 | V |
| 7440.000 | 44.60 | 54 | 9.40 | 35.80 | 33.90 | 10.10 | V |
| 9920.000 | 49.00 | 54 | 5.00 | 37.30 | 32.10 | 12.30 | V |
| 12027.863 | 49.80 | 54 | 4.20 | 37.80 | 31.80 | 14.20 | V |
| 1332.075 | 26.60 | 54 | 27.40 | 24.80 | 34.20 | 6.00 | Н |
| 4960.000 | 51.60 | 54 | 2.40 | 34.60 | 35.30 | 7.60 | Н |
| 6791.383 | 42.90 | 54 | 11.10 | 35.30 | 33.70 | 9.30 | Н |
| 7440.000 | 44.80 | 54 | 9.20 | 35.80 | 33.90 | 10.10 | Н |
| 9920.000 | 48.60 | 54 | 5.40 | 37.30 | 32.10 | 12.30 | |
| 12049.433 | 49.80 | 54 | 4.20 | 37.80 | 31.80 | 14.30 | LEN |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 43 of 49

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM141200691101

Page: 44 of 49

6.9 Restricted bands around fundamental frequency

| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | | | |
|-------------------|---|-----------------------|------------------|--|--|
| Test Method: | ANSI C63.10 2009 | | | | |
| Test Site: | Measurement Distance: 3m | (Semi-Anechoic Chambe | r) | | |
| Limit: | Frequency | Limit (dBuV/m @3m) | Remark | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value | | |
| | Above 1CUz | 54.0 | Average Value | | |
| | Above 1GHz 74.0 Peak Value | | | | |
| | | | | | |
| Test Setup: | | | | | |

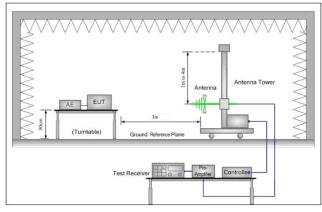

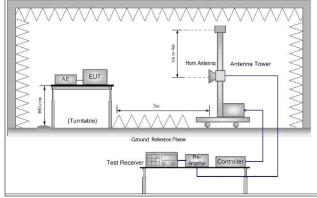


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 45 of 49

| | g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. |
|------------------------|---|
| Exploratory Test Mode: | Transmitting with GFSK modulation |
| | Transmitting mode, Charge +Transmitting mode |
| Final Test Mode: | Transmitting with GFSK modulation |
| | Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case |
| | Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141200691101

Page: 46 of 49

Test plot as follows:

| Worse case mode: | GFSK (DH5) | Test channel: | Lowest | Vertical |
|------------------|------------|---------------|--------|----------|
| | | | | |

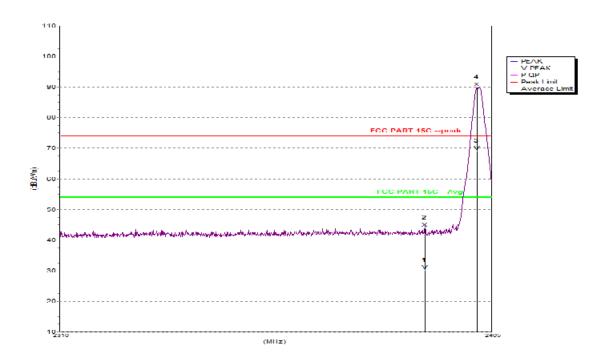

| Freq.(MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Ant.F. (dB/m) | Amp.G. (dB) | Cbl.L. (dB) | Pol. |
|------------|-------------------|-------------------|----------------|------------------|----------------|----------------|------|
| Peak | , | , | , | () | , | | |
| 2390.000 | 44.00 | 74 | 30.00 | 28.70 | 34.80 | 4.60 | V |
| 2401.770 | 89.80 | 74 | -15.80 | 28.80 | 34.90 | 4.60 | V |
| Average | | | | | | | |
| 2390.000 | 30.20 | 54 | 23.80 | 28.70 | 34.80 | 4.60 | V |
| 2401.770 | 69.10 | 54 | -15.10 | 28.80 | 34.90 | 4.60 | V |


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 47 of 49

Worse case mode: GFSK (DH5) Test channel: Lowest Horizontal

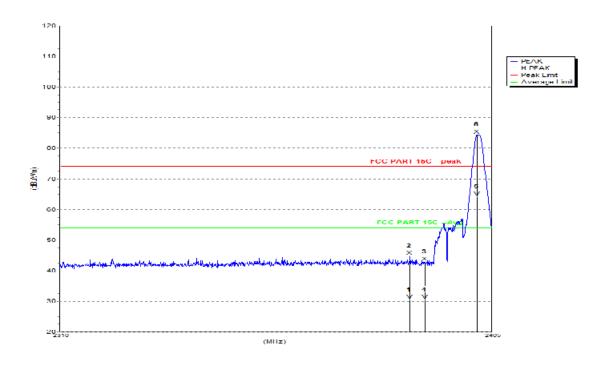

| Freq.(MHz) | Level | Limit | Margin | Ant.F. | Amp.G. | Cbl.L. | Pol. |
|------------|----------|----------|--------|--------|--------|--------|------|
| Peak | (dBuV/m) | (dBuV/m) | (dB) | (dB/m) | (dB) | (dB) | |
| 1 Car | | | | | | | |
| 2386.760 | 44.80 | 74 | 29.20 | 28.70 | 34.80 | 4.60 | Н |
| 2401.770 | 84.40 | 74 | -10.40 | 28.80 | 34.90 | 4.60 | Н |
| Average | | | | | | | |
| 2386.760 | 30.40 | 54 | 23.60 | 28.70 | 34.80 | 4.60 | Н |
| 2401.770 | 64.20 | 54 | -10.20 | 28.80 | 34.90 | 4.60 | Н |


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 48 of 49

Worse case mode: GFSK (DH5) Test channel: Highest Vertical

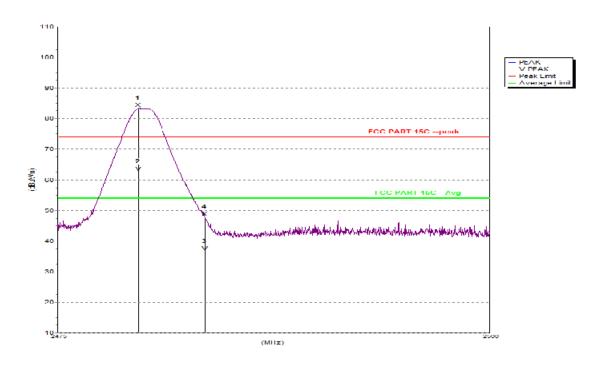

| Freq.(MHz) | Level | Limit | Margin | Ant.F. | Amp.G. | Cbl.L. | Pol. |
|------------|----------|----------|--------|--------|--------|--------|------|
| | (dBuV/m) | (dBuV/m) | (dB) | (dB/m) | (dB) | (dB) | |
| Peak | | | | | | | |
| 2479.675 | 83.40 | 74 | -9.40 | 29.30 | 35.00 | 4.50 | V |
| 2483.500 | 47.80 | 74 | 26.20 | 29.30 | 35.00 | 4.50 | V |
| Average | | | | | | | |
| 2479.675 | 62.70 | 54. | -8.70 | 29.30 | 35.00 | 4.50 | V |
| 2483.500 | 36.60 | 54 | 17.40 | 29.30 | 35.00 | 4.50 | V |


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141200691101

Page: 49 of 49

| Worse case mode: | GFSK (DH5) | Test channel: | Highest | Horizontal |
|------------------|----------------|-----------------|------------|------------|
| Worse case mode. | ai oit (Di io) | Tool Gridinici. | i ligitost | Honzontai |

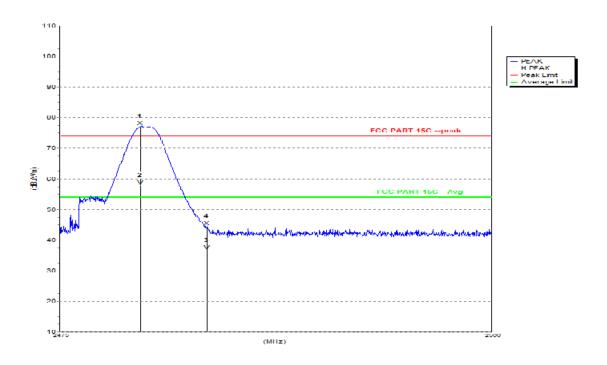

| Freq.(MHz) | Level | Limit | Margin | Ant.F. | Amp.G. | Cbl.L. | Pol. |
|------------|----------|----------|--------|--------|--------|--------|------|
| | (dBuV/m) | (dBuV/m) | (dB) | (dB/m) | (dB) | (dB) | |
| Peak | | | | | | | |
| 2479.675 | 77.10 | 74 | -3.10 | 29.30 | 35.00 | 4.50 | Н |
| 2483.500 | 44.40 | 74 | 29.60 | 29.30 | 35.00 | 4.50 | Н |
| Average | | | | | | | |
| 2479.675 | 57.80 | 54 | -3.80 | 29.30 | 35.00 | 4.50 | Н |
| 2483.500 | 36.50 | 54 | 17.50 | 29.30 | 35.00 | 4.50 | Н |

Note

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."