



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.249 TEST REPORT

For

Hangzhou Hikvision Digital Technology Co., Ltd.

No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

FCC ID: 2ADTD-2SR8141IXS

Report Type: Original Report	Product Type: Speed Dome
Test Engineer: CK Huang	<i>CK Huang</i>
Report Number: RKSA200515002-00B	
Report Date: 2020-07-13	
Reviewed By: Oscar Ye EMC Manager	<i>Oscar Ye</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 OBJECTIVE.....3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY.....3

 MEASUREMENT UNCERTAINTY.....4

 TEST FACILITY.....4

SYSTEM TEST CONFIGURATION.....5

 JUSTIFICATION.....5

 EUT EXERCISE SOFTWARE.....5

 SUPPORT EQUIPMENT LIST AND DETAILS.....5

 EXTERNAL I/O CABLE.....5

 BLOCK DIAGRAM OF TEST SETUP.....6

SUMMARY OF TEST RESULTS.....8

TEST EQUIPMENT LIST.....9

FCC§15.203 - ANTENNA REQUIREMENT.....10

 APPLICABLE STANDARD.....10

 ANTENNA CONNECTOR CONSTRUCTION.....10

FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS11

 APPLICABLE STANDARD.....11

 EUT SETUP.....11

 EMI TEST RECEIVER SETUP.....11

 TEST PROCEDURE.....11

 FACTOR & OVER LIMIT CALCULATION.....12

 TEST RESULTS SUMMARY.....12

 TEST DATA.....12

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....15

 APPLICABLE STANDARD.....15

 EUT SETUP.....15

 TEST EQUIPMENT SETUP.....17

 TEST PROCEDURE.....17

 CORRECTED AMPLITUDE & MARGIN CALCULATION.....17

 TEST RESULTS SUMMARY.....17

 TEST DATA.....18

FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....23

 APPLICABLE STANDARD.....23

 TEST PROCEDURE.....23

 TEST DATA.....23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Hangzhou Hikvision Digital Technology Co., Ltd.
Tested Model:	iDS-2SR8141IXS-AB
Product Type:	Speed Dome
Power Supply:	AC 24 V
RF Function:	SRD
Operating Band/Frequency:	24.05-24.25GHz
Antenna Type:	Array antenna
Maximum Antenna Gain:	12.0 dBi

All measurement and test data in this report was gathered from production sample serial number: 20200515002. (Assigned by BACL, Kunshan). The EUT was received on 2020-05-15.

Objective

This type approval report is prepared on behalf of *Hangzhou Hikvision Digital Technology Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

Channel list:

Channel	Frequency (GHz)
1	24.125

EUT Exercise Software

The EUT is tested in the engineering mode.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
BEIYA	Alarm	BY40J	/
DELL	Notebook	GX620	D65874152
/	Adapter	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN/ AC Source
RS485 Cable	5.0	EUT	Notebook
Signal Cable	5.0	EUT	Alarm
RJ45 Cable	5.0	EUT	Notebook

Block Diagram of Test Setup


For Conducted Emissions

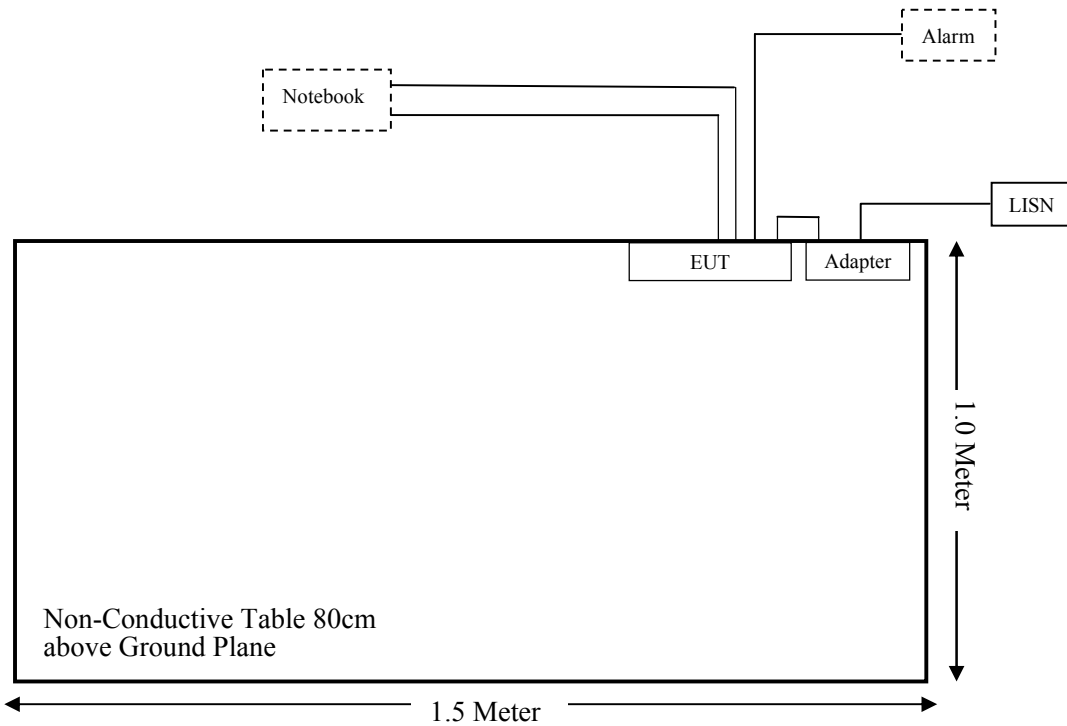

For Radiated Emissions(Below 1GHz):

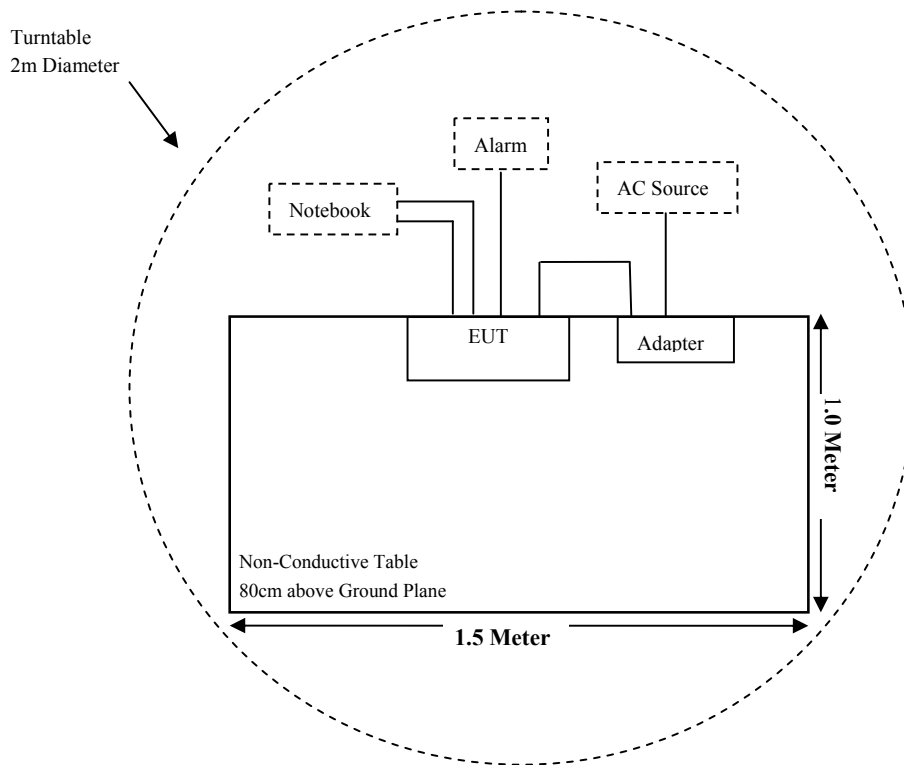

For Radiated Emissions(Above 1GHz):

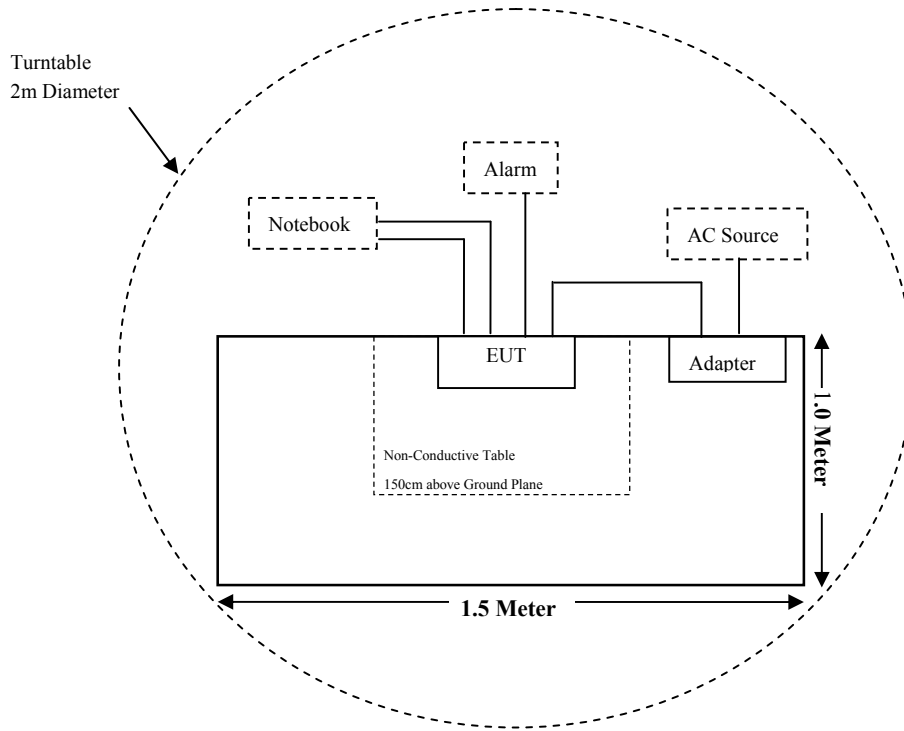

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
OML	Harmonic Mixer	WR19/M19HWD	U60313-1	2019-10-14	2022-10-14
OML	Horn Antenna	M19RH	11648-01	2019-10-14	2022-10-14
Agilent	Harmonic Mixer	11970V	2521A01767	2019-10-14	2022-10-14
Flann Microwave	Horn Antenna	861V/385	736	2019-12-07	2022-12-07
OML	Harmonic Mixer	WR12/M12HWD	E60120-1	2019-10-19	2022-10-19
OML	Horn Antenna	M12RH	E60120-2	2019-10-19	2022-10-19
OML	Harmonic Mixer	WR08/M08HWD	F60313-1	2019-10-24	2022-10-24
OML	Horn Antenna	M08RH	F60313-2	2019-10-24	2022-10-24
A.H.Systems, inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
SELECTOR	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-08-05	2020-08-04
Rohde & Schwarz	LISN	ENV216	101115	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-01-10	2021-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-09-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has an Array antenna for SRD, which was permanently attached to the EUT, antenna gain is 12.0 dBi, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

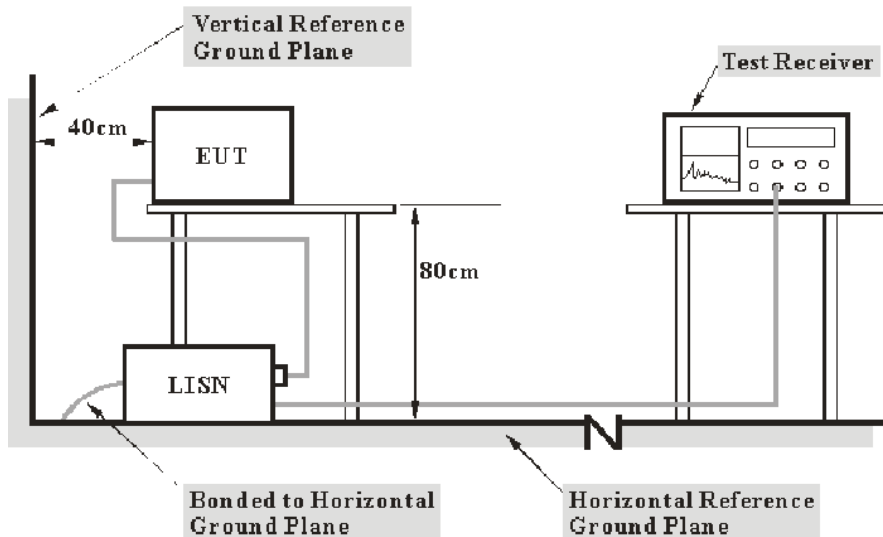

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa


The testing was performed by CK Huang on 2020-07-03.

Test Result: Compliant.

EUT operation mode: Transmitting

AC 120V/60Hz, Line


Date: 2020-07-03

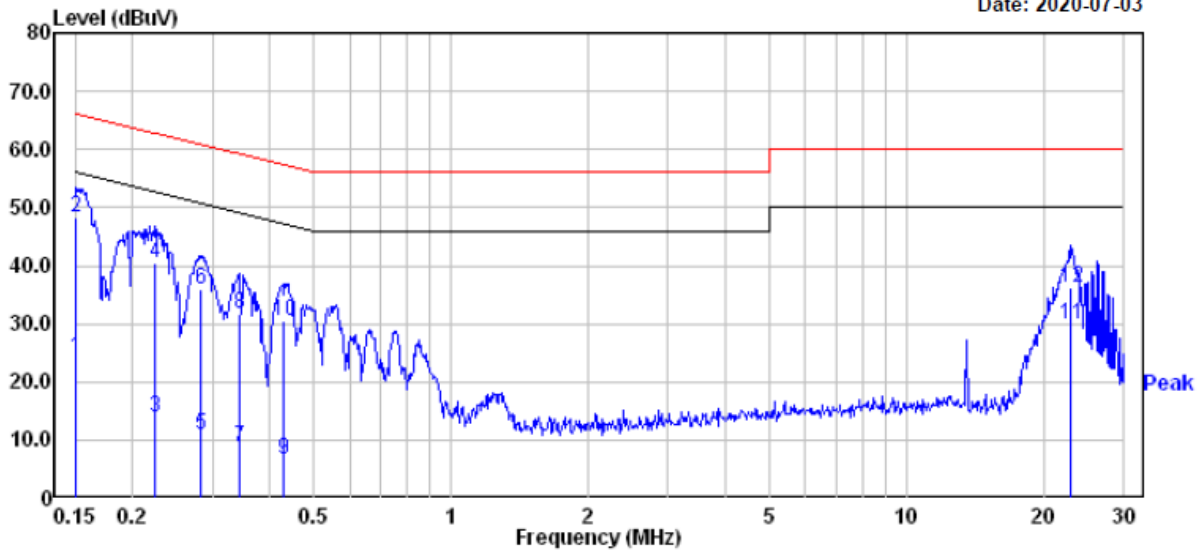

	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	4.40	19.82	24.22	56.00	-31.78	Average
2	0.150	28.40	19.82	48.22	66.00	-17.78	QP
3	0.224	-5.80	19.82	14.02	52.66	-38.64	Average
4	0.224	20.70	19.82	40.52	62.66	-22.14	QP
5	0.282	-9.10	19.82	10.72	50.76	-40.04	Average
6	0.282	16.00	19.82	35.82	60.76	-24.94	QP
7	0.345	-11.10	19.81	8.71	49.09	-40.38	Average
8	0.345	11.80	19.81	31.61	59.09	-27.48	QP
9	0.428	-13.00	19.75	6.75	47.29	-40.54	Average
10	0.428	10.60	19.75	30.35	57.29	-26.94	QP
11	22.896	10.01	19.79	29.80	50.00	-20.20	Average
12	22.896	16.41	19.79	36.20	60.00	-23.80	QP

AC 120V/60Hz, Neutral

Date: 2020-07-03

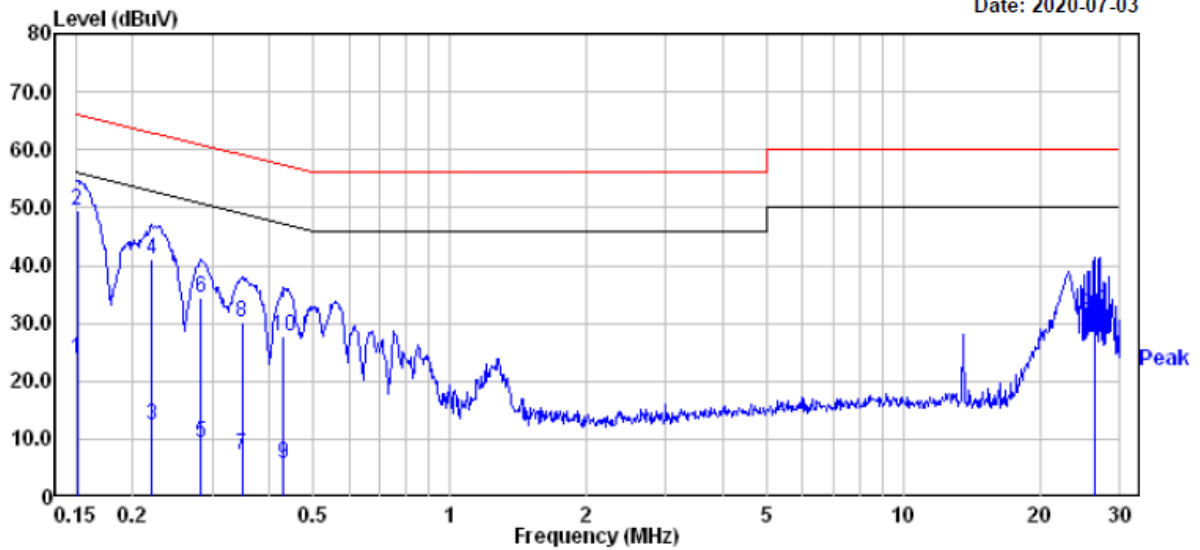

	Read	Limit	Over				
Freq	Level	Factor	Level	Line			
MHz	dBuV	dB	dBuV	dBuV			
1	0.151	4.00	19.82	23.82	55.96	-32.14	Average
2	0.151	29.60	19.82	49.42	65.96	-16.54	QP
3	0.221	-7.40	19.82	12.42	52.79	-40.37	Average
4	0.221	21.20	19.82	41.02	62.79	-21.77	QP
5	0.283	-10.40	19.82	9.42	50.72	-41.30	Average
6	0.283	14.50	19.82	34.32	60.72	-26.40	QP
7	0.348	-12.70	19.81	7.11	49.00	-41.89	Average
8	0.348	10.30	19.81	30.11	59.00	-28.89	QP
9	0.431	-14.00	19.75	5.75	47.24	-41.49	Average
10	0.431	8.00	19.75	27.75	57.24	-29.49	QP
11	26.558	10.70	19.72	30.42	50.00	-19.58	Average
12	26.558	12.40	19.72	32.12	60.00	-27.88	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24 GHz-24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup


Below 1 GHz:

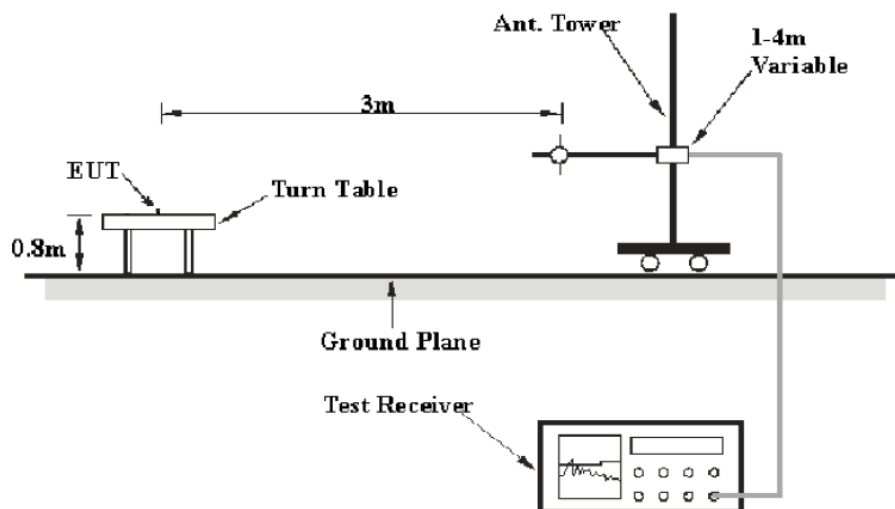

Above 1 GHz:

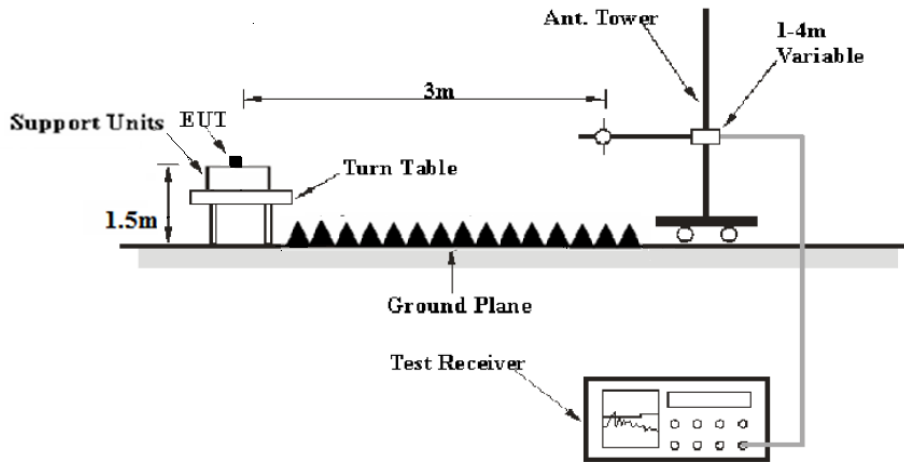

18 GHz-100GHz:

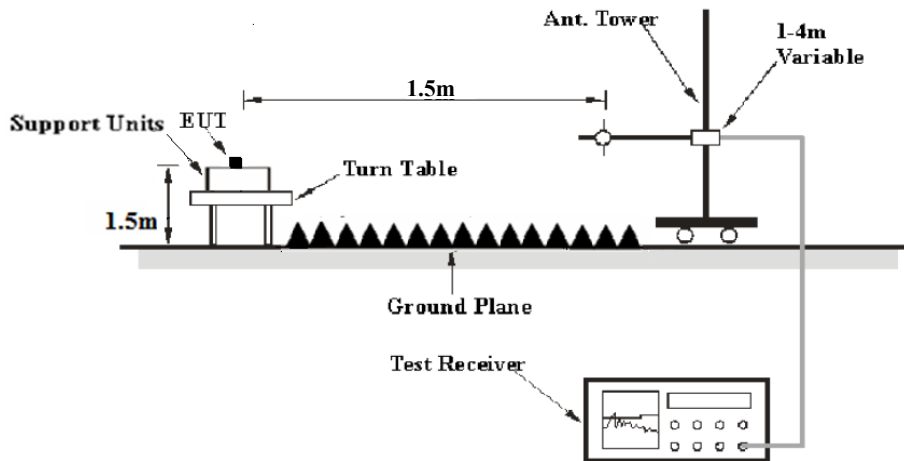

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 100 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V/m)

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

Test Data

Environmental Conditions

Temperature:	21.2°C
Relative Humidity:	51%
ATM Pressure:	101.6kPa


The testing was performed by CK Huang on 2020-07-07.

Test Mode: Transmitting

Spurious Emission Test:

30MHz-1GHz:

Scan with X-Axis, Y-Axis and Z-Axis position, the worst case **Z-axis** was recorded

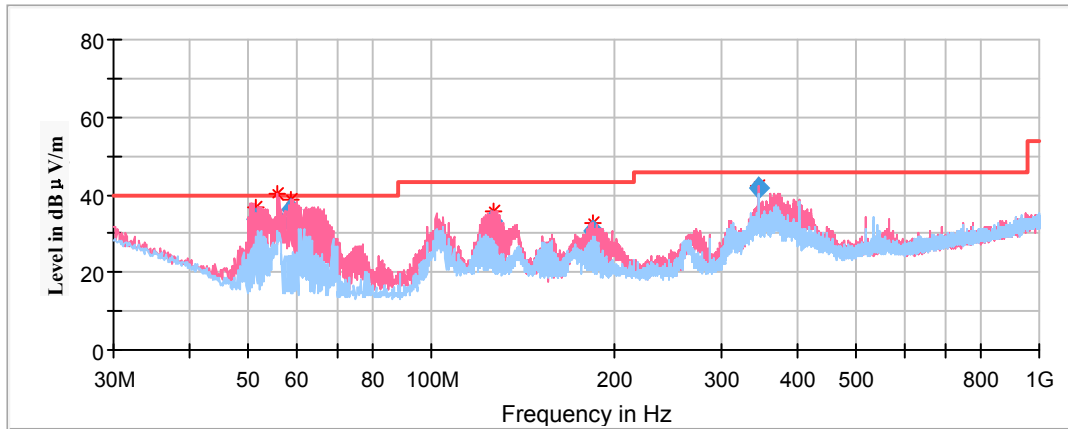

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
51.44	33.94	100.0	V	353.0	-17.6	40.00	6.06
56.81	32.52	100.0	V	358.0	-17.8	40.00	7.48
58.73	36.08	100.0	V	347.0	-17.9	40.00	3.92
125.73	33.37	100.0	V	210.0	-11.4	43.50	10.13
184.95	30.49	100.0	V	336.0	-13.3	43.50	13.01
345.60	41.80	200.0	V	173.0	-9.4	46.00	4.20

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV/m)
2. The other spurious emission which is 20dB to the limit was not recorded.

Channel (24.125 GHz)

Full Spectrum

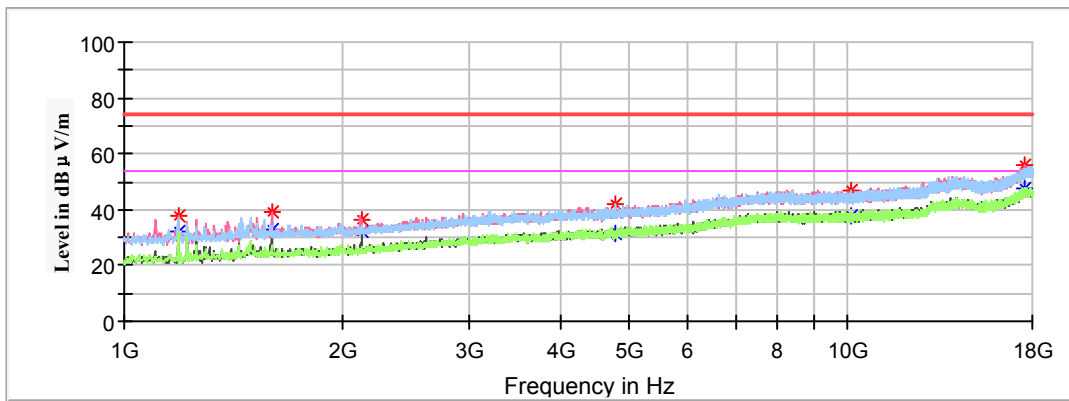

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1187.00	37.56	---	200.0	V	322.0	-18.1	74.00	36.44
1187.00	---	32.37	200.0	V	322.0	-18.1	54.00	21.63
1598.40	39.44	---	150.0	V	341.0	-16.0	74.00	34.56
1598.40	---	33.12	150.0	V	341.0	-16.0	54.00	20.88
2127.10	36.10	---	150.0	V	93.0	-13.9	74.00	37.90
2127.10	---	32.11	150.0	V	93.0	-13.9	54.00	21.89
4780.80	---	31.42	200.0	V	171.0	-5.6	54.00	22.58
4780.80	41.67	---	200.0	V	171.0	-5.6	74.00	32.33
10132.40	---	37.97	150.0	H	20.0	2.0	54.00	16.03
10132.40	46.93	---	150.0	H	20.0	2.0	74.00	27.07
17551.20	---	47.25	200.0	V	201.0	8.9	54.00	6.75
17551.20	55.64	---	200.0	V	201.0	8.9	74.00	18.36


18GHz-100GHz:

Note:

1. The test distance is 1.5m, the limit for Peak is 74dBuV/m@3m= 80dBuV/m @1.5m, the limit for Average is 54dBuV/m@3m= 60dBuV/m @1.5m


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded)

Horizontal

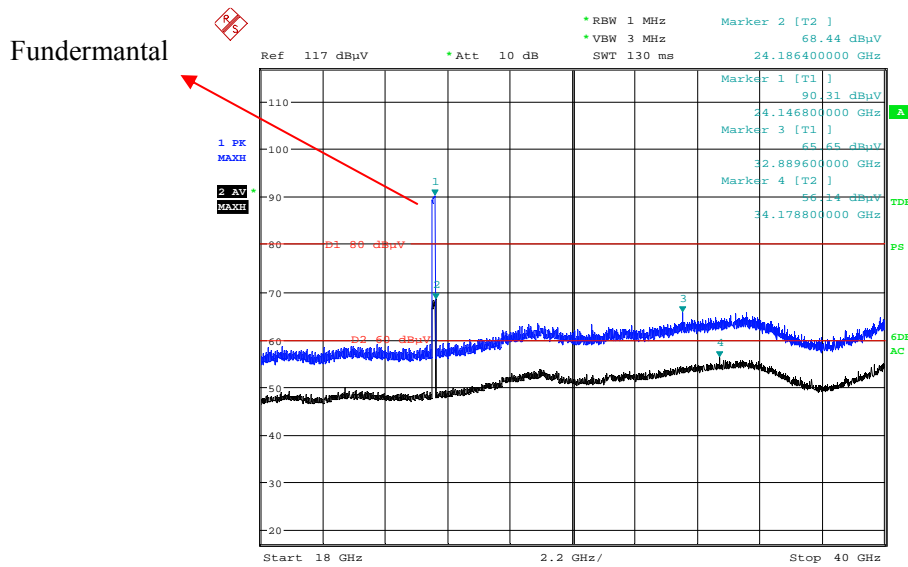

Date: 7.JUL.2020 12:20:55

Vertical

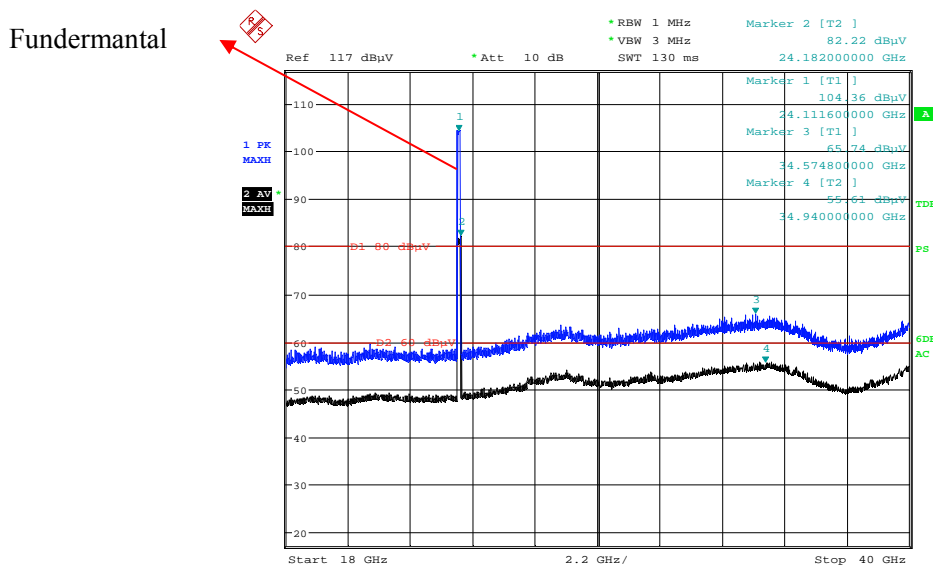

Date: 7.JUL.2020 11:37:59

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
48250.00	---	63.15	150	H	235	32.10	74	10.85
48250.00	73.14	---	150	H	154	32.10	94	20.86
48250.00	---	64.52	200	V	23	32.10	74	9.48
48250.00	76.15	---	200	V	153	32.10	94	17.85
72375.00	---	60.12	200	H	46	37.52	74	13.88
72375.00	66.15	---	200	H	310	37.52	94	27.85
72375.00	67.45	---	150	V	158	37.52	94	26.55
72375.00	---	60.25	150	V	254	37.52	74	13.75

Note:

Extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = 20 log (specific distance [3m]/test distance [1.5m]) dB

Limit line = Specific limits(dBµV) + distance extrapolation factor (6dB)

Fundamental Radiation Emissions & Band Edge:

1. This test is performed with a 10dB Attenuator.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
3. Corrected Amplitude = Corrected Factor + Reading
4. Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
24125.00	---	68.44	150	H	235	20.88	114	45.56
24125.00	90.31	---	150	H	154	20.88	134	43.69
24125.00	---	82.22	250	V	23	20.88	114	31.78
24125.00	104.36	---	250	V	153	20.88	134	29.64
24000.00	---	49.46	150	V	46	20.46	60	10.54
24000.00	59.46	---	150	V	310	20.46	80	20.54
24250.00	59.67	---	200	V	158	20.46	80	20.33
24250.00	---	49.54	200	V	254	20.46	60	10.46

Note:

Extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = 20 log (specific distance [3m]/test distance [1.5m]) dB

Limit line = Specific limits(dBµV) + distance extrapolation factor (6 dB)

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	22.4°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa


The testing was performed by CK Huang on 2020-07-07.

Test Result: Compliant.

Test Mode: Transmitting

Channel	Frequency (GHz)	20 dB Bandwidth (MHz)
1	24.125	142.53

Channel 1

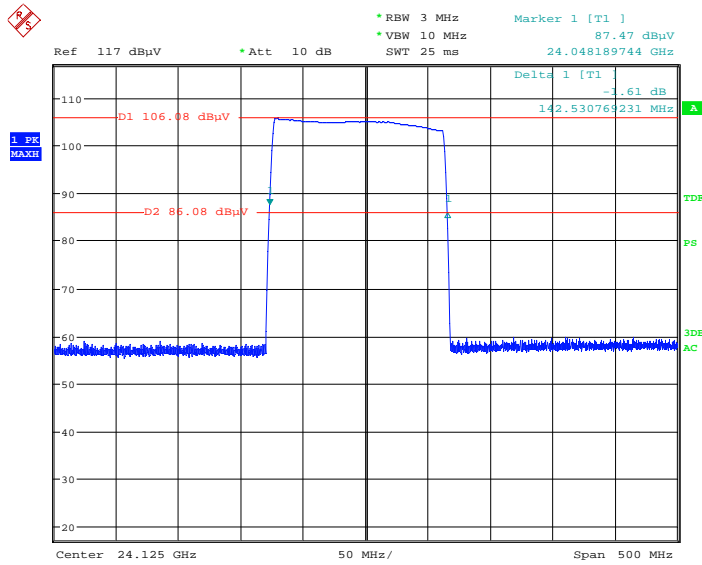

Date: 7.JUL.2020 13:08:52

Note:
The device work in sweep mode, The OBW use for determining the frequency range.

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******