

# TEST REPORT

**Application No.:** SHEM1901010170CR  
**FCC ID** 2ADTD-5604SD  
**Applicant:** Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Applicant:** No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China  
**Manufacturer:** Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Manufacturer:** No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China  
**Factory:** 1, Hangzhou Hikvision Technology Co., Ltd.  
 2, Hangzhou Hikvision Electronics Co., Ltd.  
 3, Chongqing Hikvision technology Co., LTD.  
 4, Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Factory:** 1, No.700,Dongliu Road, Binjiang District, Hangzhou City,Zhejiang, 310052, China  
 2, No.299,Qiushi Road,Tonglu Economic Development Zone,Tonglu County, Hangzhou,Zhejiang,310052,China  
 3, No. 118, Haikang Road, Area C, Jianqiao Industrial Park, Dadukou District, Chongqing.  
 4, No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

**Equipment Under Test (EUT):**

**EUT Name:** Digital Video Recorder  
**Model No.:** DS-MP3504-SD, DS-MP5604-SD, DS-MP3504-SD/GW, DS-MP5604-SD/GW, DS-MP3504-SD/GW/WI, DS-MP5604-SD/GW/WI, DS-MP5604-SD/GW/WI58, DS-MP3504-SD/GLF, DS-MP5604-SD/GLF, DS-MP3504-SD/GLF/WI, DS-MP5604-SD/GLF/WI, DS-MP5604-SD/GLF/WI58, DS-MP5XXX-SD/YY/ZZ, DS-MP5604-SDUHK, DS-MP5604-SDCKV, DS-MP5604-SDUVS, DS-MP5604-SDKVO, DS-MP5604-SDHUN ☐

☐ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**Trade mark:** HIKVISION  
**Standard(s) :** 47 CFR Part 15, Subpart E 15.407  
**Date of Receipt:** 2019-01-09  
**Date of Test:** 2019-02-20 to 2019-02-23  
**Date of Issue:** 2019-02-23

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

*Parlam Zhan*

Parlam Zhan  
 E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**



Revision Record			
Version	Description	Date	Remark
00	Original	2019-02-23	/

Authorized for issue by:			
			
		<hr/> <b>Bill Wu / Project Engineer</b>	
			
		<hr/> <b>Parlam Zhan / Reviewer</b>	

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Customer Declaration
Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band )	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass

N/A: Not applicable

### Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model DS-MP5604-SD and DS-MP5604-SD/GW was tested since their differences were the model number and appearance.

The model DS-MP3504-SD/GW; DS-MP5604-SD/GW; DS-MP3504-SD/GW/WI; DS-MP5604-SD/GW/WI; DS-MP5604-SD/GW/WI58; used the model of UC20: FCC ID: XMR201510UC20

The model DS-MP3504-SD; DS-MP5604-SD; DS-MP3504-SD/GLF; DS-MP5604-SD/GLF; DS-MP3504-SD/GLF/WI; DS-MP5604-SD/GLF/WI; DS-MP5604-SD/GLF/WI58;

DS-MP5XXX-SD/YY/ZZ; DS-MP5604-SDUHK; DS-MP5604-SDCKV; DS-MP5604-SDUVS;

DS-MP5604-SDKVO; DS-MP5604-SDHUN; used the model of EC25: FCC ID: XMR201805EC25AU



### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 DETAILS OF E.U.T. ....	5
4.2 DESCRIPTION OF SUPPORT UNITS .....	5
4.3 POWER LEVEL SETTING USING IN TEST:.....	5
4.4 MEASUREMENT UNCERTAINTY.....	5
4.5 TEST LOCATION.....	7
4.6 TEST FACILITY.....	7
4.7 DEVIATION FROM STANDARDS.....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
<b>5 EQUIPMENT LIST .....</b>	<b>8</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT.....</b>	<b>9</b>
6.1 ANTENNA REQUIREMENT .....	9
6.2 TRANSMISSION IN THE ABSENCE OF DATA .....	10
<b>7 RADIO SPECTRUM MATTER TEST RESULTS.....</b>	<b>11</b>
7.1 99% BANDWIDTH.....	11
7.2 26DB EMISSION BANDWIDTH .....	12
7.3 MINIMUM 6 DB BANDWIDTH (5.725-5.85 GHZ BAND ).....	13
7.4 MAXIMUM CONDUCTED OUTPUT POWER .....	14
7.5 PEAK POWER SPECTRUM DENSITY .....	15
7.6 RADIATED EMISSIONS .....	16
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....	29
7.8 FREQUENCY STABILITY.....	75
<b>8 TEST SETUP PHOTOGRAPHS .....</b>	<b>76</b>
<b>9 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>76</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC 9-32V  
Test voltage: DC 12V  
Antenna Gain: 3dBi  
Antenna Type: Dipole Antenna

Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	Band 3	802.11a/n(HT20)/ac(HT20)	5745-5825	5
		802.11n(HT40)/ac(HT40)	5755-5795	2
		802.11ac(HT80)	5775	1
Modulation Type:	802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)			
Channel Spacing:	802.11a/n(HT20)/ac(HT20): 20MHz 802.11n(HT40)/ac(HT40): 40MHz 802.11ac(HT80): 80MHz			

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	ThinkPad X100e	/

### 4.3 Power level setting using in test:

Band	802.11 a	802.11 n (HT20)	802.11 n (HT40)	802.11 ac (VHT20)	802.11 ac (VHT40)	802.11 ac (VHT80)
U-NII 3	46	44	44	44	44	42

### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 8.4 \times 10^{-8}$
2	Timeout	$\pm 2s$
3	Duty cycle	$\pm 0.37\%$
4	Occupied Bandwidth	$\pm 3\%$
5	RF conducted power	$\pm 0.6dB$
6	RF power density	$\pm 2.84dB$
7	Conducted Spurious emissions	$\pm 0.75dB$
8	RF Radiated power	$\pm 4.6dB$ (Below 1GHz)
		$\pm 4.1dB$ (Above 1GHz)
9	Radiated Spurious emission test	$\pm 4.2dB$ (Below 30MHz)
		$\pm 4.4dB$ (30MHz-1GHz)
		$\pm 4.8dB$ (1GHz-18GHz)
		$\pm 5.2dB$ (Above 18GHz)
10	Temperature test	$\pm 1^{\circ}C$
11	Humidity test	$\pm 3\%$
12	Supply voltages	$\pm 1.5\%$



13	Time	$\pm 3\%$
----	------	-----------

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch  
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China  
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **NVLAP (Certificate No. 201034-0)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). Certificate No. 201034-0.

- **FCC –Designation Number: CN5033**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.7 Deviation from Standards

None

#### 4.8 Abnormalities from Standard Conditions

None



## 5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
<b>Conducted Test</b>					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2018-12-20	2019-12-19
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2018-08-13	2019-08-12
Signal Generator	R&S	SMR20	SHEM006-1	2018-08-13	2019-08-12
Signal Generator	Agilent	N5182A	SHEM182-1	2018-08-13	2019-08-12
Communication Tester	R&S	CMW270	SHEM183-1	2018-08-13	2019-08-12
Switcher	Tonscend	JS0806	SHEM184-1	2018-08-13	2019-08-12
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2018-08-13	2019-08-12
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2017-09-25	2020-09-24
AC Power Stabilizer	WOCEN	6100	SHEM045-1	2018-12-26	2019-12-25
DC Power Supply	MCN	MCH-303A	SHEM210-1	2018-12-26	2019-12-25
Conducted test Cable	/	RF01~RF04	/	2018-12-26	2019-12-25
<b>Radiated Test</b>					
EMI test Receiver	R&S	ESU40	SHEM051-1	2018-12-20	2019-12-19
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2018-12-20	2019-12-19
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2017-04-10	2020-04-09
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2017-02-28	2020-02-27
Antenna (25MHz-3GHz)	Schwarzbeck	HL562	SHEM010-1	2017-02-28	2020-02-27
Horn Antenna (1-8GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-12-03	2020-12-02
Pre-amplifier (9KHz-2GHz)	CLAVIIO	BDLNA-0001	SHEM164-1	2018-08-13	2019-08-12
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118	SHEM050-2	2018-08-13	2019-08-12
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2018-12-20	2019-12-19
Signal Generator	R&S	SMR40	SHEM058-1	2018-08-13	2019-08-12
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21
RE test Cable	/	RE01, RE02, RE06	/	2018-12-26	2019-12-25



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203


#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is dipole antenna and no consideration of replacement. The best case gain of the antenna is 3dBi.

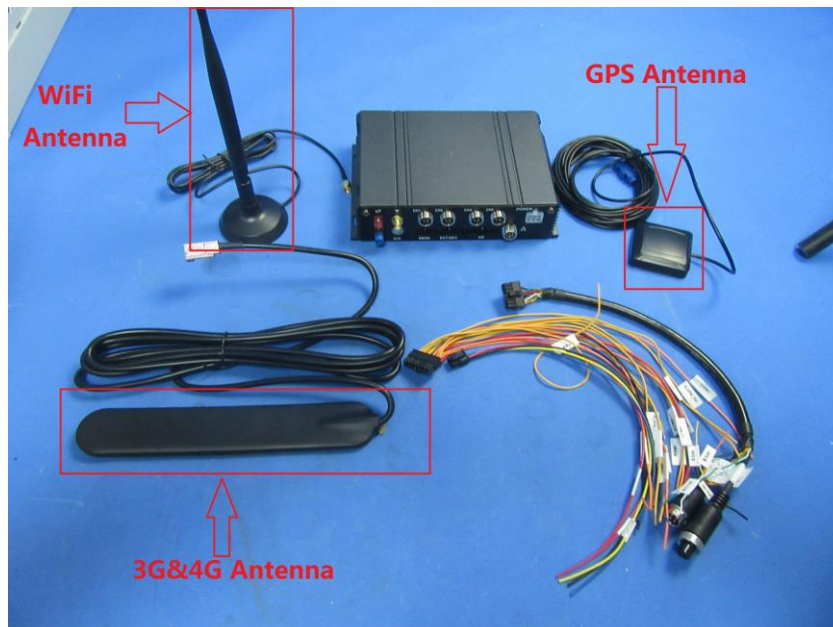



## **6.2 Transmission in the Absence of Data**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.407 (c)

### **6.2.2 Conclusion**

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip (RTL8812AU-VS) support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

## 7 Radio Spectrum Matter Test Results

### 7.1 99% Bandwidth

Test Requirement N/A  
Test Method: KDB 789033 II D


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

#### 7.1.2 Test Setup Diagram

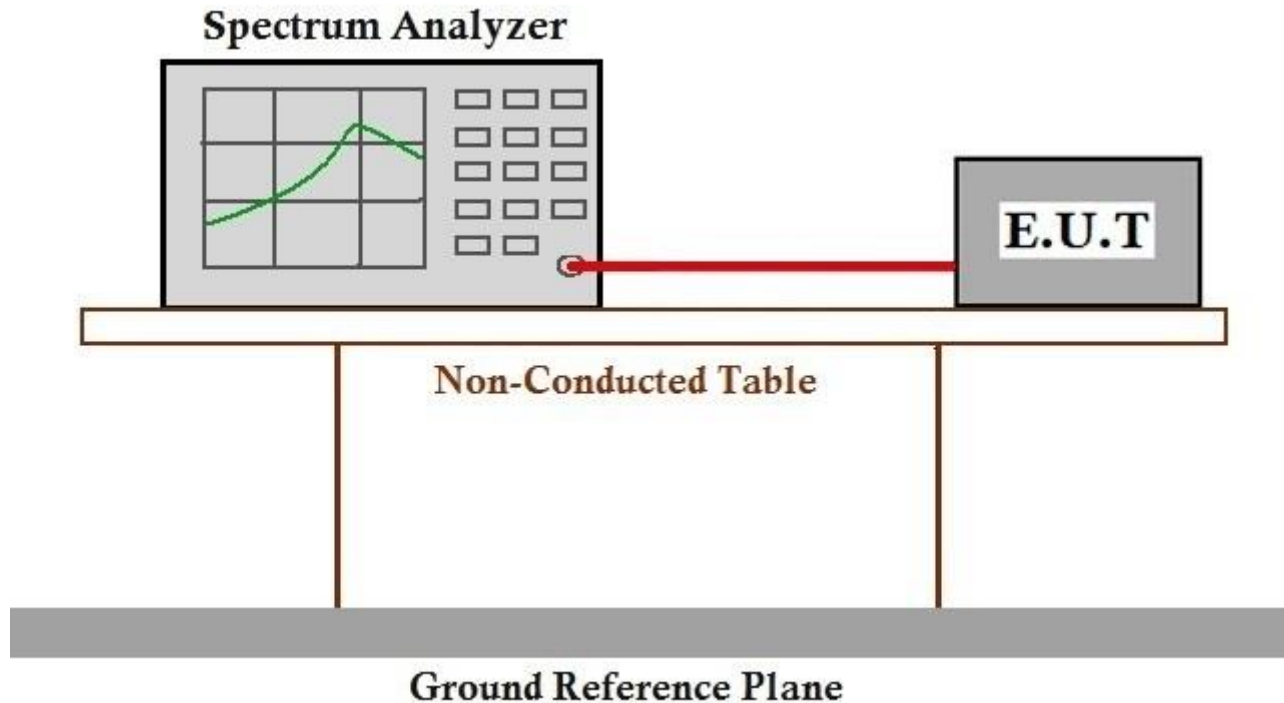

#### 7.1.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM190101017002

## 7.2 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)  
Test Method: KDB 789033 D02 II C 1


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

### 7.2.2 Test Setup Diagram

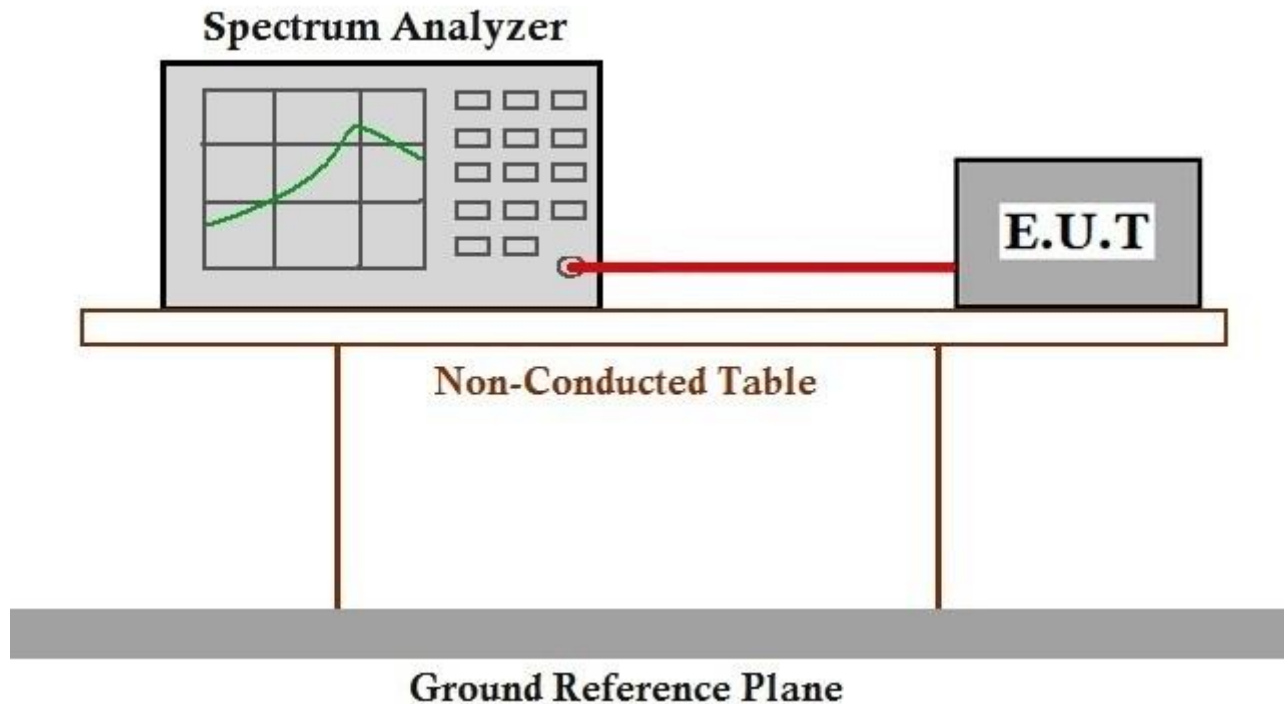

### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM190101017002

**7.3 Minimum 6 dB bandwidth (5.725-5.85 GHz band )**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)  
Test Method: KDB 789033 D02 II C 2  
Limit:  $\geq 500$  kHz


**7.3.1 E.U.T. Operation**

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

**7.3.2 Test Setup Diagram**

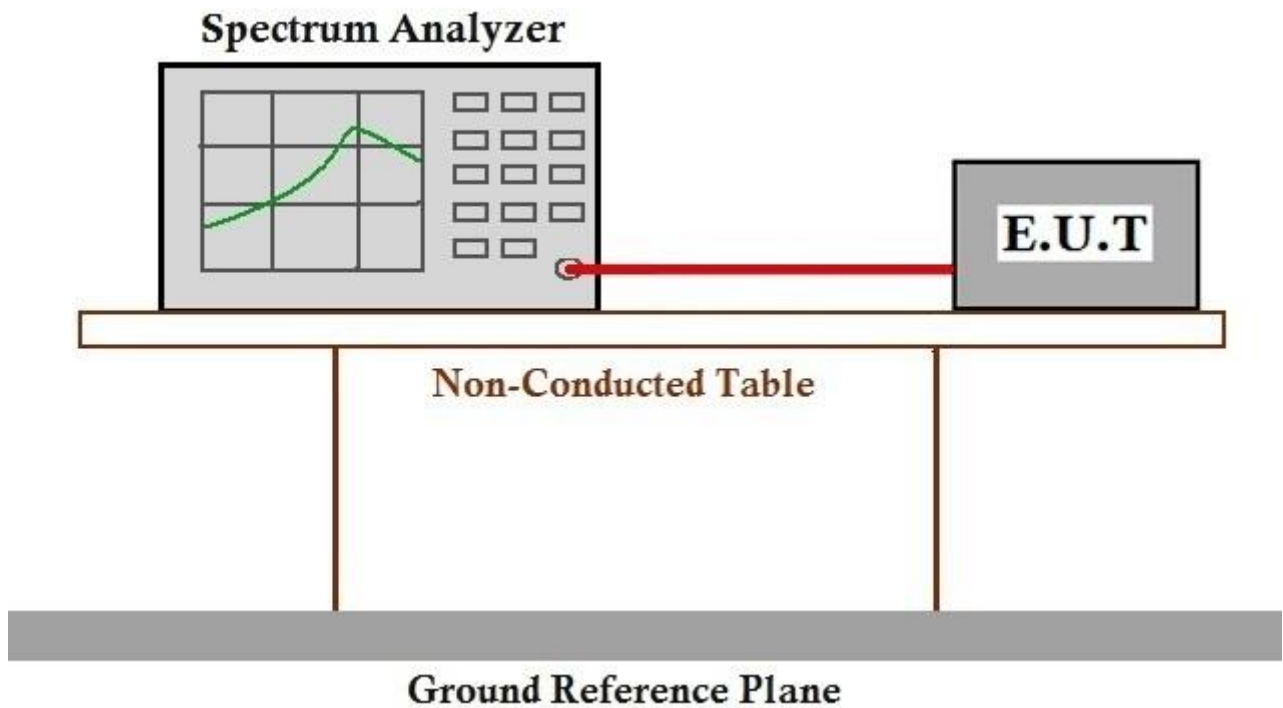

**7.3.3 Measurement Procedure and Data**

The detailed test data see: Appendix B SHEM190101017002

### 7.4 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)  
Test Method: KDB 789033 D02 II E  
Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.


#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

#### 7.4.2 Test Setup Diagram

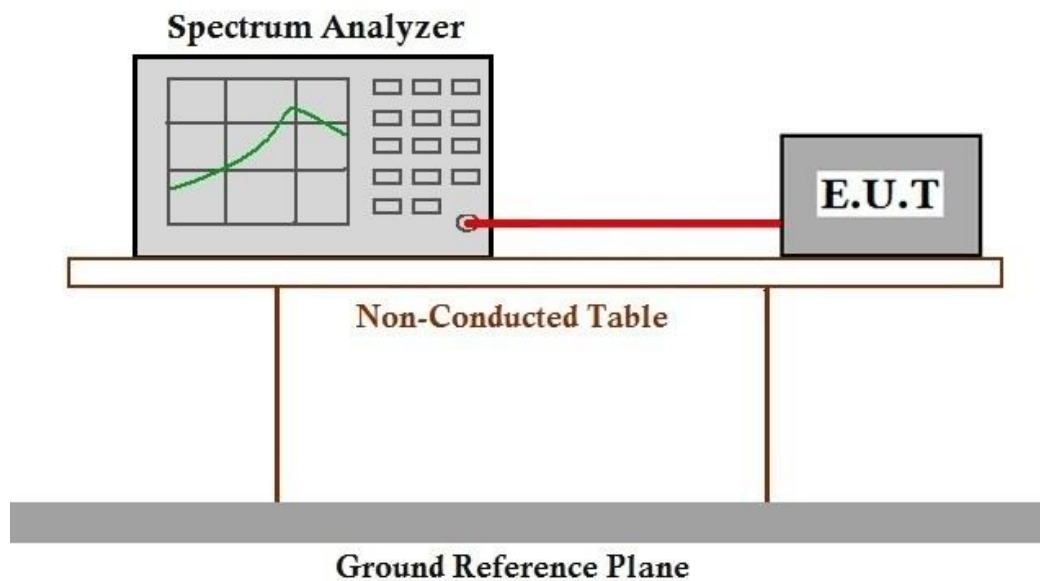

#### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM190101017002

### 7.5 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)  
Test Method: KDB 789033 D02 II F  
Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.


#### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

#### 7.5.2 Test Setup Diagram

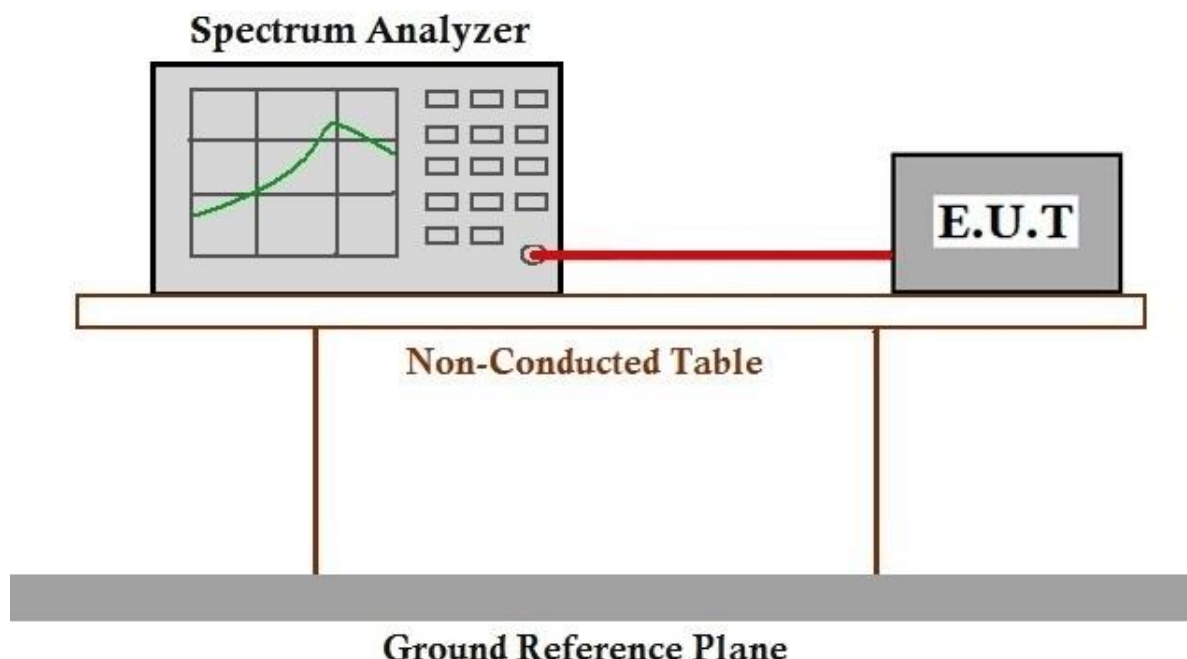

#### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM190101017002



## 7.6 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)  
Test Method: KDB 789033 D02 II G

### 7.6.1 E.U.T. Operation




Operating Environment:

Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar  
Test mode: b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode

with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 3)\_Keep the WiFi+4G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

### 7.6.2 Test Setup Diagram

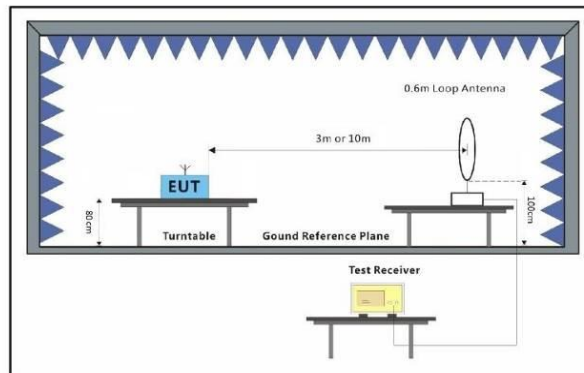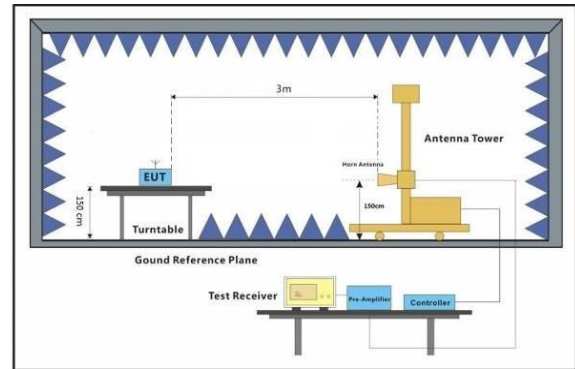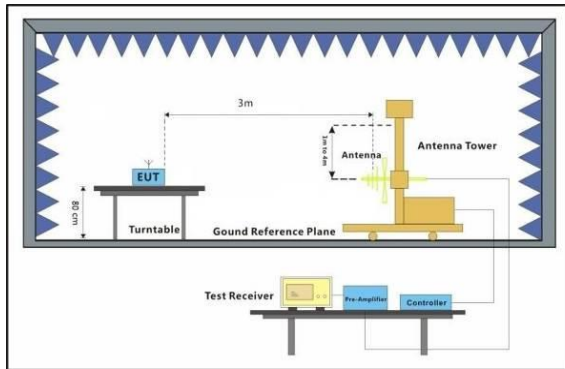

### 7.6.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Mode:b; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11490	33.67	14.41	48.08	54	-5.92	peak
17235	26.79	22.57	49.36	68.2	-18.84	peak
22980	27.21	24.45	51.66	54	-2.34	peak

Mode:b; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11490	32.12	14.41	46.53	54	-7.47	peak
17235	26.34	22.57	48.91	68.2	-19.29	peak
22980	28.01	24.45	52.46	54	-1.54	peak

Mode:b; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11570	33.79	14.25	48.04	54	-5.96	peak
17355	29.51	21.86	51.37	68.2	-16.83	peak
23140	29.34	24.68	54.02	68.2	-14.18	peak

Mode:b; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11570	36.66	14.25	50.91	54	-3.09	peak
17355	30.13	21.86	51.99	68.2	-16.21	peak
23140	25.65	24.68	50.33	68.2	-17.87	peak

Mode:b; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11650	32.43	14.06	46.49	54	-7.51	peak
17475	28.71	21.15	49.86	68.2	-18.34	peak
23300	28.64	25.11	53.75	68.2	-14.45	peak

Mode:b; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11650	33.13	14.06	47.19	54	-6.81	peak
17475	27.49	21.15	48.64	68.2	-19.56	peak
23300	26.88	25.11	51.99	68.2	-16.21	peak



Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	33.11	14.41	47.52	54	-6.48	peak
17235	27.82	22.57	50.39	68.2	-17.81	peak
22980	27.66	24.45	52.11	54	-1.89	peak

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	32.61	14.41	47.02	54	-6.98	peak
17235	30.52	22.57	53.09	68.2	-15.11	peak
22980	26.83	24.45	51.28	54	-2.72	peak

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	32.42	14.25	46.67	54	-7.33	peak
17355	28.09	21.86	49.95	68.2	-18.25	peak
23140	24.79	24.68	49.47	68.2	-18.73	peak

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	32.83	14.25	47.08	54	-6.92	peak
17355	28.88	21.86	50.74	68.2	-17.46	peak
23140	25.39	24.68	50.07	68.2	-18.13	peak

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	30.60	14.06	44.66	54	-9.34	peak
17475	26.91	21.15	48.06	68.2	-20.14	peak
23300	27.72	25.11	52.83	68.2	-15.37	peak



Mode:b; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	33.37	14.06	47.43	54	-6.57	peak
17475	26.30	21.15	47.45	68.2	-20.75	peak
23300	29.81	25.11	54.92	68.2	-13.28	peak

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11510	31.07	14.40	45.47	54	-8.53	peak
17265	30.23	22.40	52.63	68.2	-15.57	peak
23020	27.81	24.68	52.49	54	-1.51	peak

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11510	36.18	14.40	50.58	54	-3.42	peak
17265	26.16	22.40	48.56	68.2	-19.64	peak
23020	27.59	24.68	52.27	54	-1.73	peak

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11590	32.92	14.20	47.12	54	-6.88	peak
17385	27.81	21.68	49.49	68.2	-18.71	peak
23180	27.02	24.72	51.74	68.2	-16.46	peak

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11590	35.23	14.20	49.43	54	-4.57	peak
17385	30.22	21.68	51.90	68.2	-16.30	peak
23180	26.69	24.72	51.41	68.2	-16.79	peak



Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	32.15	14.41	46.56	54	-7.44	peak
17235	26.37	22.57	48.94	68.2	-19.26	peak
22980	25.76	24.45	50.21	54	-3.79	peak

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	33.91	14.41	48.32	54	-5.68	peak
17235	29.27	22.57	51.84	68.2	-16.36	peak
22980	27.98	24.45	52.43	54	-1.57	peak

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	34.72	14.25	48.97	54	-5.03	peak
17355	28.16	21.86	50.02	68.2	-18.18	peak
23140	27.47	24.68	52.15	68.2	-16.05	peak

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	32.52	14.25	46.77	54	-7.23	peak
17355	26.62	21.86	48.48	68.2	-19.72	peak
23140	31.46	24.68	56.14	68.2	-12.06	peak

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	31.31	14.06	45.37	54	-8.63	peak
17475	29.21	21.15	50.36	68.2	-17.84	peak
23300	25.18	25.11	50.29	68.2	-17.91	peak



Mode:b; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11650	35.34	14.06	49.40	54	-4.60	peak
17475	26.79	21.15	47.94	68.2	-20.26	peak
23300	27.38	25.11	52.49	68.2	-15.71	peak

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11510	33.82	14.40	48.22	54	-5.78	peak
17265	28.22	22.40	50.62	68.2	-17.58	peak
23020	28.60	24.68	53.28	54	-0.72	peak

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11510	35.41	14.40	49.81	54	-4.19	peak
17265	27.61	22.40	50.01	68.2	-18.19	peak
23020	26.47	24.68	51.15	54	-2.85	peak

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	33.12	14.20	47.32	54	-6.68	peak
17385	26.97	21.68	48.65	68.2	-19.55	peak
23180	23.56	24.72	48.28	68.2	-19.92	peak

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	34.30	14.20	48.50	54	-5.50	peak
17385	27.69	21.68	49.37	68.2	-18.83	peak
23180	29.32	24.72	54.04	68.2	-14.16	peak





Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:80MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11550	32.86	14.30	47.16	54	-6.84	peak
17325	27.34	22.04	49.38	68.2	-18.82	peak
23100	27.42	24.60	52.02	54	-1.98	peak

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:80MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11550	36.03	14.30	50.33	54	-3.67	peak
17325	29.21	22.04	51.25	68.2	-16.95	peak
23100	24.14	24.60	48.74	54	-5.26	peak

Mode:d; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	31.86	14.41	46.27	54	-7.73	peak
17235	28.78	22.57	51.35	68.2	-16.85	peak
22980	27.62	24.45	52.07	54	-1.93	peak

Mode:d; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	31.84	14.41	46.25	54	-7.75	peak
17235	26.50	22.57	49.07	68.2	-19.13	peak
22980	29.47	24.45	53.92	54	-0.08	peak

Mode:d; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	34.00	14.25	48.25	54	-5.75	peak
17355	27.48	21.86	49.34	68.2	-18.86	peak
23140	27.02	24.68	51.70	68.2	-16.50	peak



Mode:d; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	33.97	14.25	48.22	54	-5.78	peak
17355	30.24	21.86	52.10	68.2	-16.10	peak
23140	28.69	24.68	53.37	68.2	-14.83	peak

Mode:d; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	34.76	14.06	48.82	54	-5.18	peak
17475	28.73	21.15	49.88	68.2	-18.32	peak
23300	28.13	25.11	53.24	68.2	-14.96	peak

Mode:d; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	33.39	14.06	47.45	54	-6.55	peak
17475	25.05	21.15	46.20	68.2	-22.00	peak
23300	25.50	25.11	50.61	68.2	-17.59	peak

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11510	31.34	14.40	45.74	54	-8.26	peak
17265	30.20	22.40	52.60	68.2	-15.60	peak
23020	27.27	24.68	51.95	54	-2.05	peak

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11490	32.84	14.41	47.25	54	-6.75	peak
17235	27.57	22.57	50.14	68.2	-18.06	peak
22980	26.46	24.45	50.91	54	-3.09	peak



Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:middle

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11570	36.24	14.25	50.49	54	-3.51	peak
17355	30.55	21.86	52.41	68.2	-15.79	peak
23140	27.58	24.68	52.26	68.2	-15.94	peak

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:middle

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11570	34.01	14.25	48.26	54	-5.74	peak
17355	29.67	21.86	51.53	68.2	-16.67	peak
23140	28.28	24.68	52.96	68.2	-15.24	peak

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11650	32.30	14.06	46.36	54	-7.64	peak
17475	27.66	21.15	48.81	68.2	-19.39	peak
23300	26.90	25.11	52.01	68.2	-16.19	peak

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11650	34.60	14.06	48.66	54	-5.34	peak
17475	27.52	21.15	48.67	68.2	-19.53	peak
23300	27.74	25.11	52.85	68.2	-15.35	peak

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11510	33.12	14.40	47.52	54	-6.48	peak
17265	29.23	22.40	51.63	68.2	-16.57	peak
23020	25.06	24.68	49.74	54	-4.26	peak



Mode:d; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11510	31.32	14.40	45.72	54	-8.28	peak
17265	26.53	22.40	48.93	68.2	-19.27	peak
23020	27.25	24.68	51.93	54	-2.07	peak

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	32.89	14.20	47.09	54	-6.91	peak
17385	27.38	21.68	49.06	68.2	-19.14	peak
23180	27.49	24.72	52.21	68.2	-15.99	peak

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	32.53	14.20	46.73	54	-7.27	peak
17385	27.83	21.68	49.51	68.2	-18.69	peak
23180	27.95	24.72	52.67	68.2	-15.53	peak

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11490	34.20	14.41	48.61	54	-5.39	peak
17235	28.29	22.57	50.86	68.2	-17.34	peak
22980	28.43	24.45	52.88	54	-1.12	peak

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11490	35.49	14.41	49.90	54	-4.10	peak
17235	27.00	22.57	49.57	68.2	-18.63	peak
22980	26.86	24.45	51.31	54	-2.69	peak



Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	33.07	14.25	47.32	54	-6.68	peak
17355	25.93	21.86	47.79	68.2	-20.41	peak
23140	28.44	24.68	53.12	68.2	-15.08	peak

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:middle

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11570	33.45	14.25	47.70	54	-6.30	peak
17355	27.58	21.86	49.44	68.2	-18.76	peak
23140	29.11	24.68	53.79	68.2	-14.41	peak

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	35.88	14.06	49.94	54	-4.06	peak
17475	30.17	21.15	51.32	68.2	-16.88	peak
23300	27.22	25.11	52.33	68.2	-15.87	peak

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:High

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11650	32.19	14.06	46.25	54	-7.75	peak
17475	28.37	21.15	49.52	68.2	-18.68	peak
23300	25.52	25.11	50.63	68.2	-17.57	peak

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:Low

Frequency	RX_R	Factor	Emission	Limit	Margin	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
11510	33.94	14.40	48.34	54	-5.66	peak
17265	30.79	22.40	53.19	68.2	-15.01	peak
23020	28.32	24.68	53.00	54	-1.00	peak



Mode:d; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11510	34.04	14.40	48.44	54	-5.56	peak
17265	25.99	22.40	48.39	68.2	-19.81	peak
23020	24.94	24.68	49.62	54	-4.38	peak

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	32.31	14.20	46.51	54	-7.49	peak
17385	26.37	21.68	48.05	68.2	-20.15	peak
23180	24.78	24.72	49.50	68.2	-18.70	peak

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:High

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11590	33.01	14.20	47.21	54	-6.79	peak
17385	26.33	21.68	48.01	68.2	-20.19	peak
23180	24.97	24.72	49.69	68.2	-18.51	peak

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:80MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11550	34.85	14.30	49.15	54	-4.85	peak
17325	28.02	22.04	50.06	68.2	-18.14	peak
23100	28.91	24.60	53.51	54	-0.49	peak

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:80MHz; Channel:Low

Frequency MHz	RX_R dBuV	Factor dB	Emission dBuV/m	Limit dBuV/m	Margin dB	Detector
11550	32.95	14.30	47.25	54	-6.75	peak
17325	28.13	22.04	50.17	68.2	-18.03	peak
23100	25.17	24.60	49.77	54	-4.23	peak

### 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)  
Test Method: KDB 789033 D02 II G  
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.7.1 E.U.T. Operation

Operating Environment:


Temperature: 20 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Test mode: b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 3)\_Keep the WiFi+4G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.



### 7.7.2 Test Setup Diagram

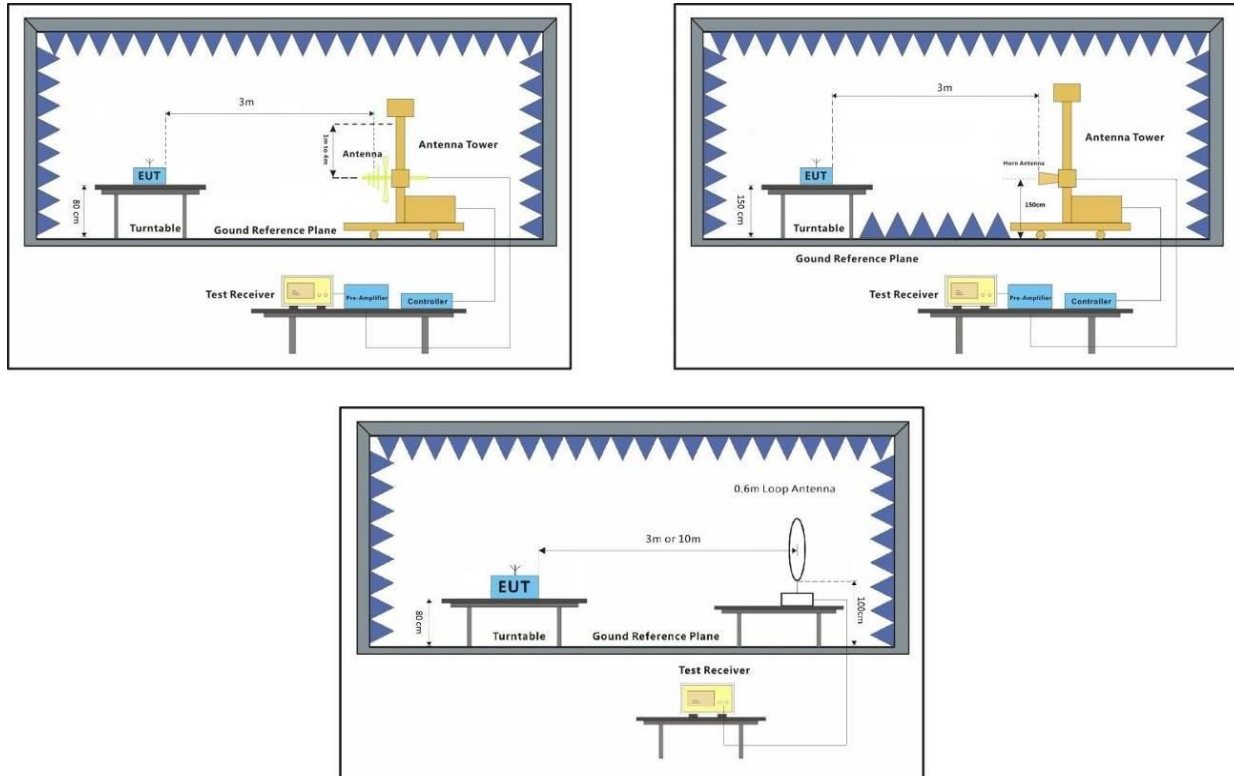


### 7.7.3 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

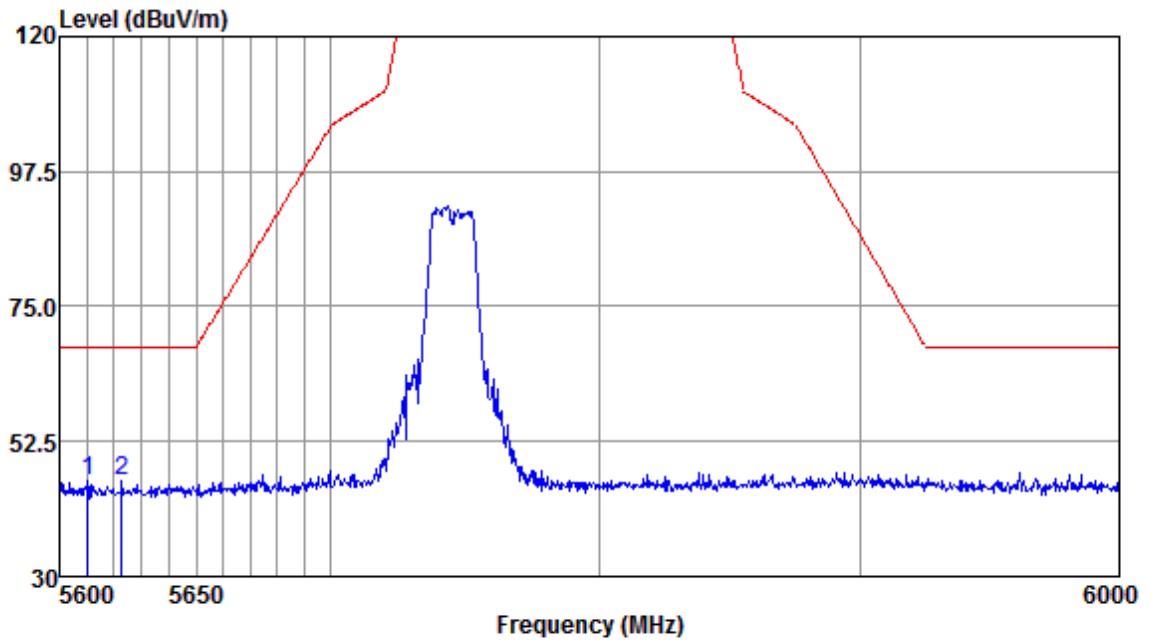


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5610.44	43.43	32.12	8.95	38.67	45.83	68.20	-22.37	Peak
5622.84	43.38	32.12	8.95	38.67	45.78	68.20	-22.42	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

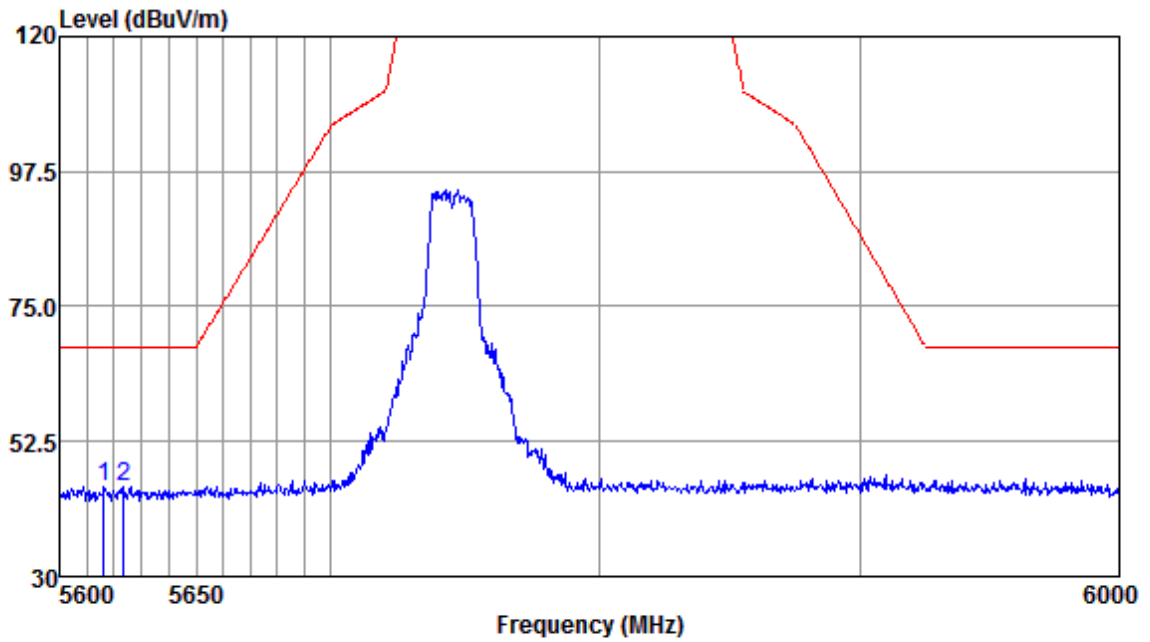


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5616.25	42.67	32.12	8.95	38.67	45.07	68.20	-23.13	Peak
5623.62	42.49	32.12	8.95	38.67	44.89	68.20	-23.31	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

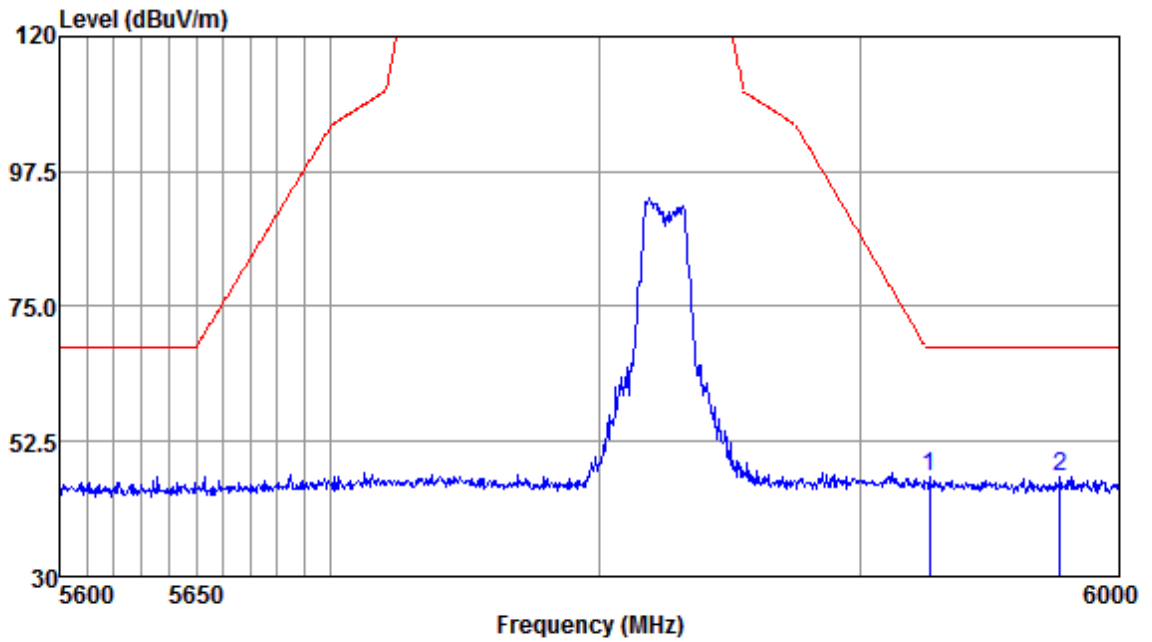


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5926.36	43.97	32.19	8.96	38.67	46.45	68.20	-21.75	Peak
5976.86	44.10	32.20	8.99	38.63	46.66	68.20	-21.54	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

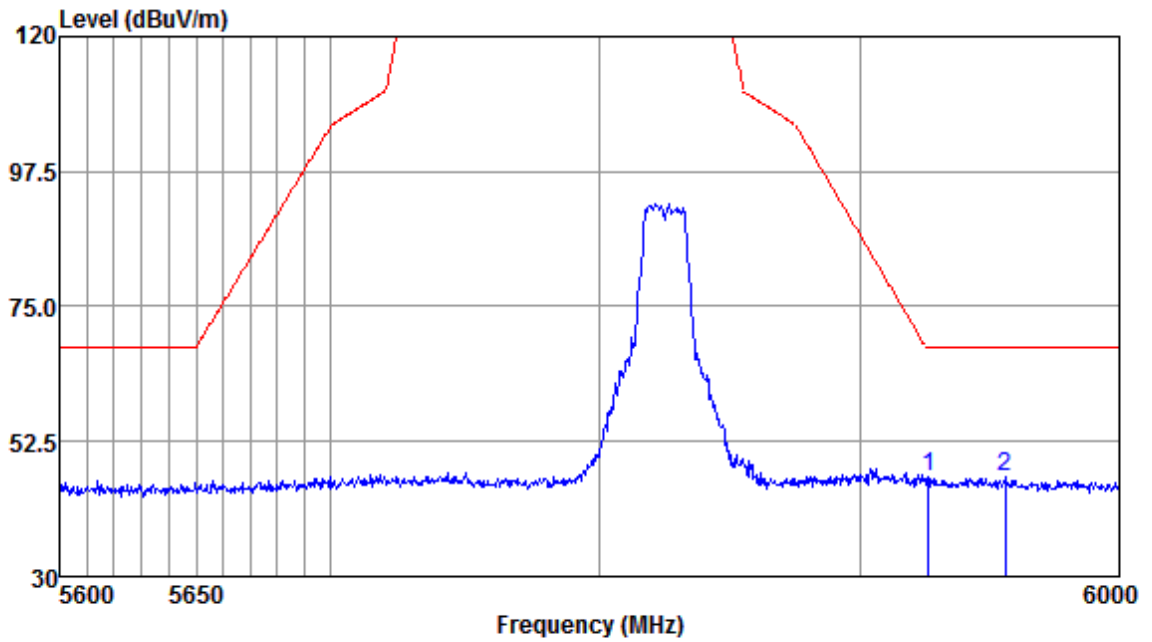


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5925.95	44.11	32.19	8.96	38.67	46.59	68.20	-21.61	Peak
5955.46	43.92	32.19	8.99	38.66	46.44	68.20	-21.76	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

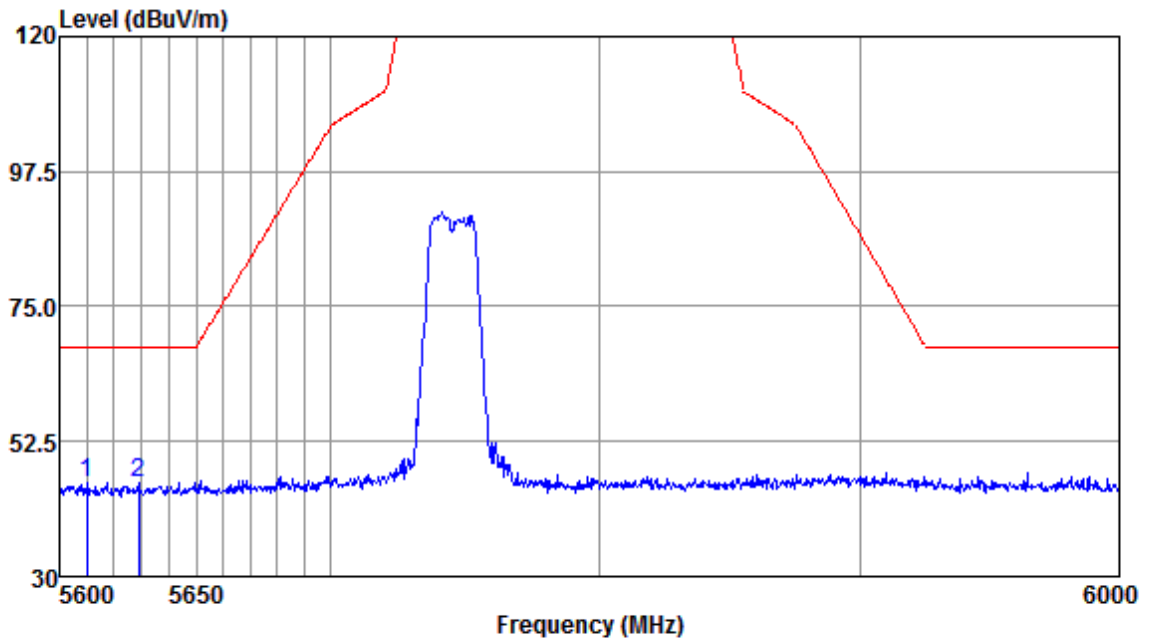


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5610.05	43.19	32.12	8.95	38.67	45.59	68.20	-22.61	Peak
5629.05	43.10	32.13	8.95	38.68	45.50	68.20	-22.70	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

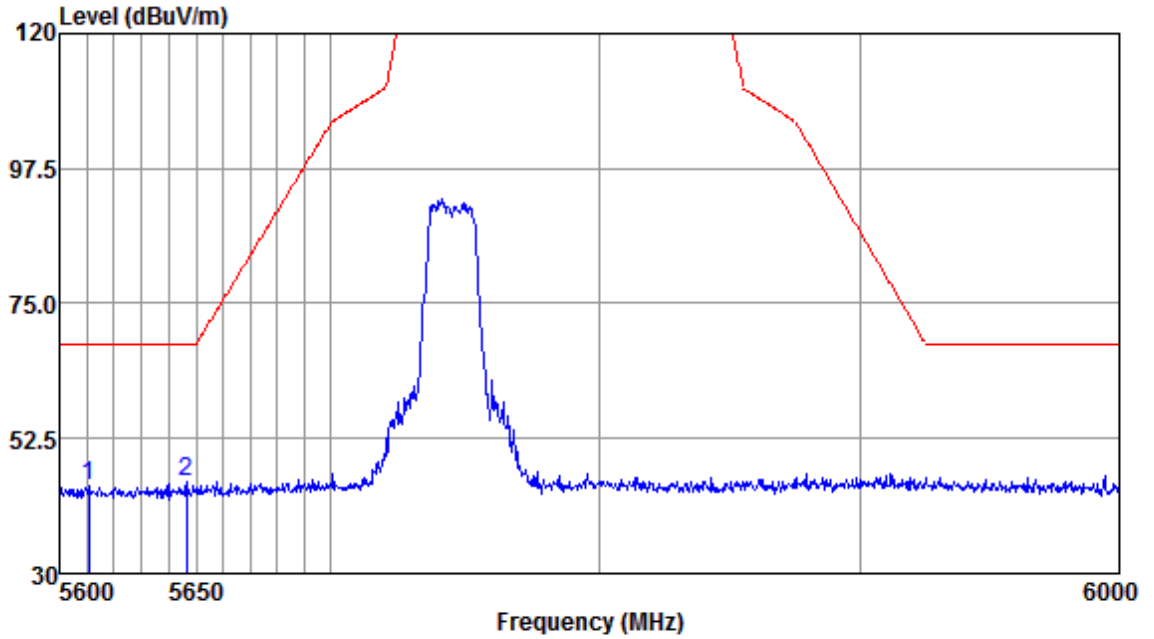


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5610.83	42.08	32.12	8.95	38.67	44.48	68.20	-23.72	Peak
5646.56	42.73	32.13	9.01	38.69	45.18	68.20	-23.02	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

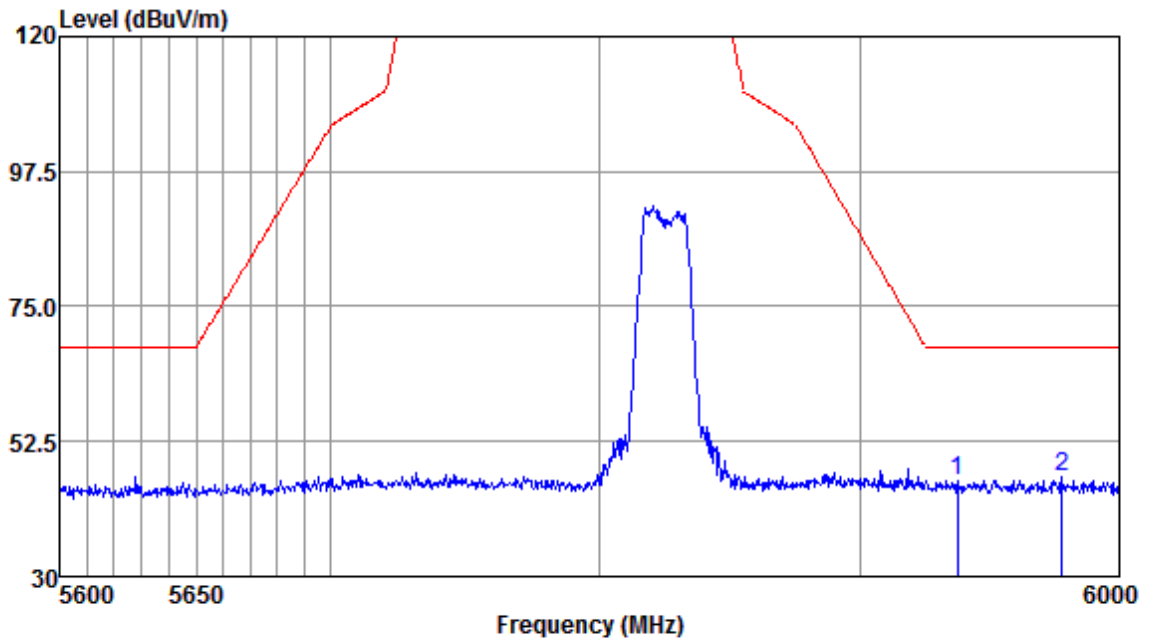


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5937.00	43.47	32.19	8.96	38.67	45.95	68.20	-22.25	Peak
5977.69	43.96	32.20	8.99	38.63	46.52	68.20	-21.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

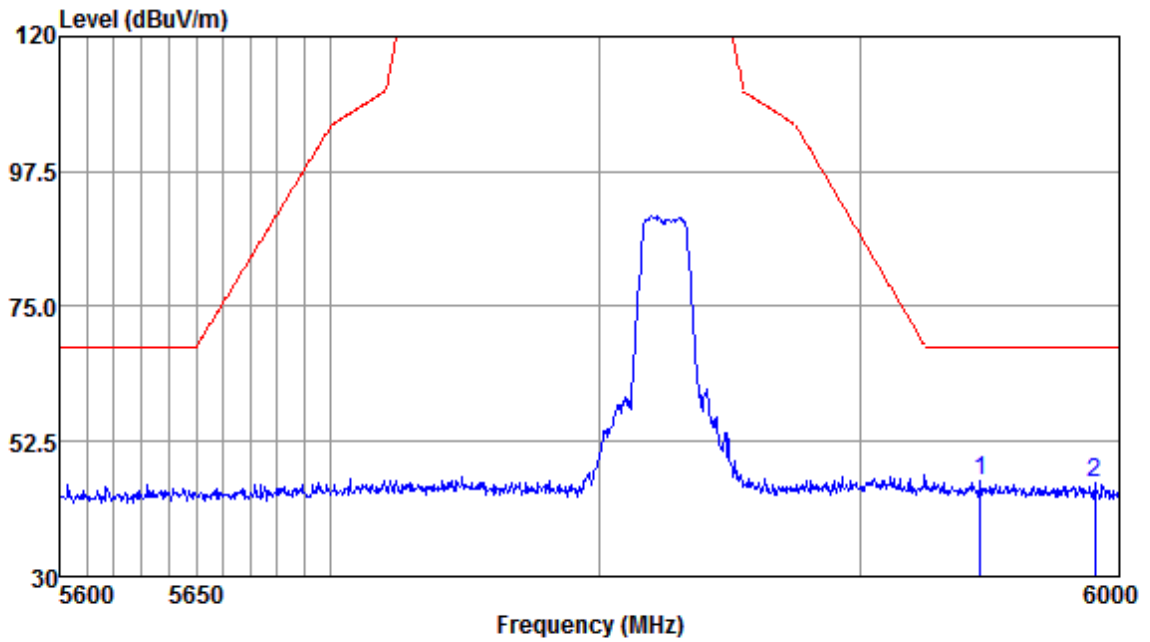


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5946.02	43.29	32.19	8.96	38.66	45.78	68.20	-22.42	Peak
5990.49	43.06	32.20	9.02	38.63	45.65	68.20	-22.55	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

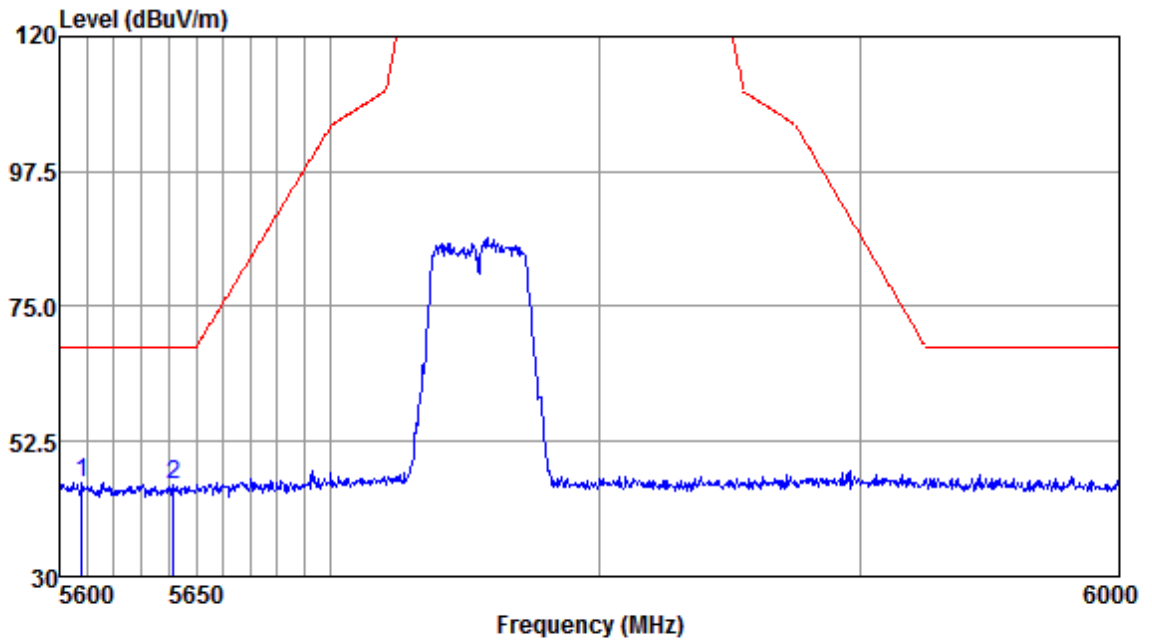


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5608.12	43.30	32.12	8.95	38.67	45.70	68.20	-22.50	Peak
5641.88	42.96	32.13	9.01	38.69	45.41	68.20	-22.79	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

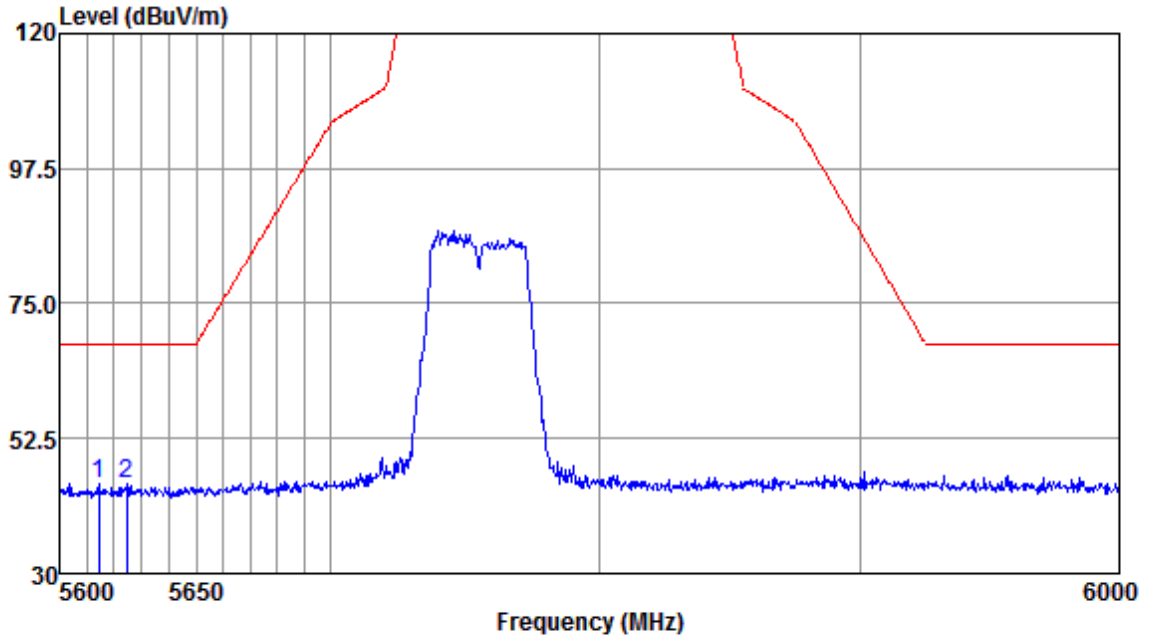


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5614.31	42.58	32.12	8.95	38.67	44.98	68.20	-23.22	Peak
5624.39	42.42	32.13	8.95	38.68	44.82	68.20	-23.38	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

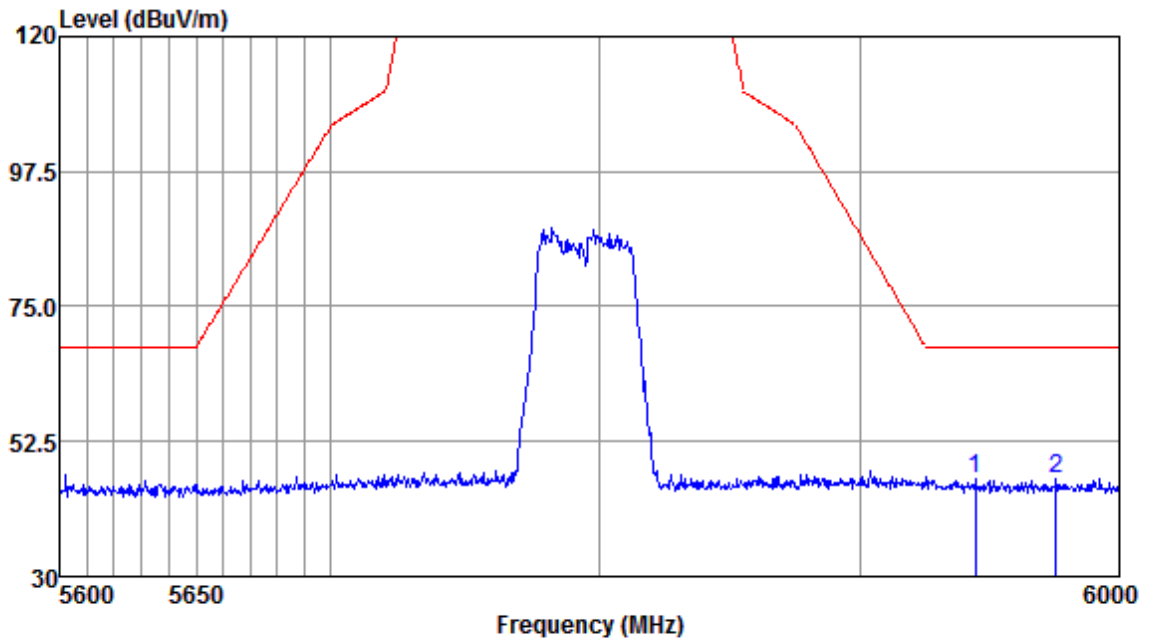


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5943.97	43.91	32.19	8.96	38.66	46.40	68.20	-21.80	Peak
5975.21	43.72	32.19	8.99	38.64	46.26	68.20	-21.94	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

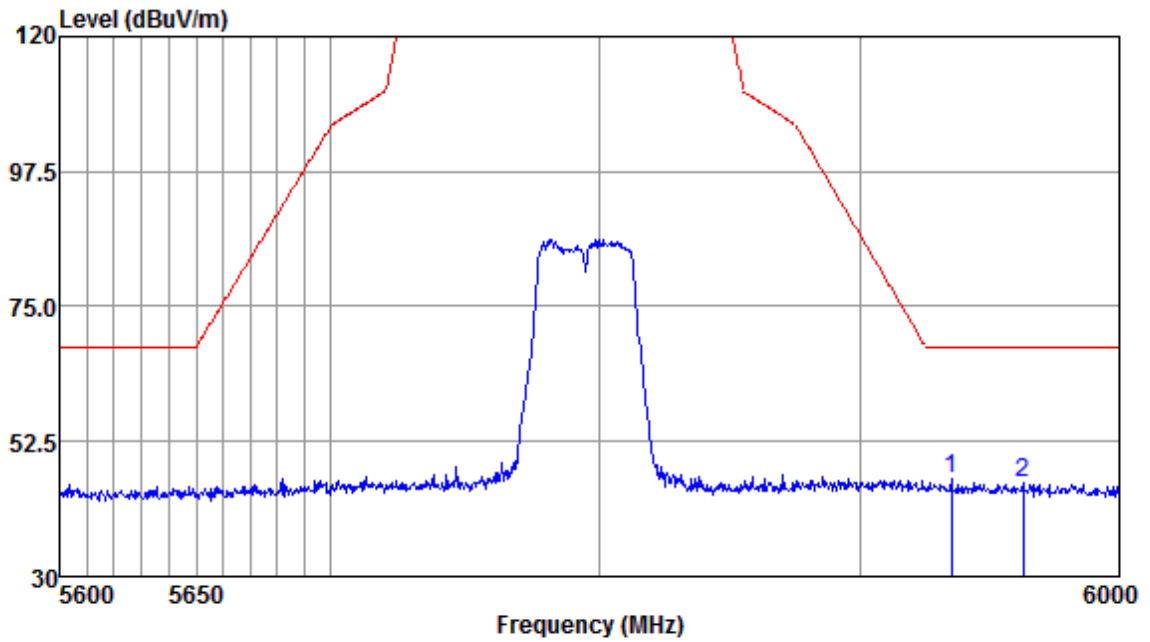


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5934.95	43.91	32.19	8.96	38.67	46.39	68.20	-21.81	Peak
5962.45	42.92	32.19	8.99	38.64	45.46	68.20	-22.74	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:Low

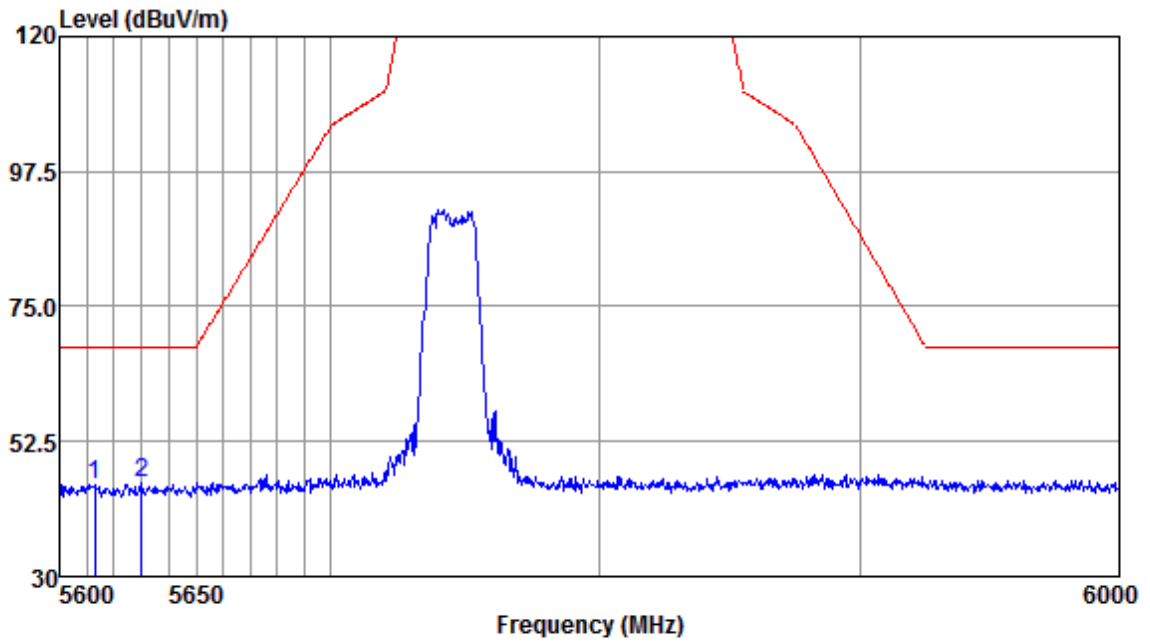


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5612.77	43.01	32.12	8.95	38.67	45.41	68.20	-22.79	Peak
5630.22	43.25	32.13	8.95	38.68	45.65	68.20	-22.55	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:b; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:Low

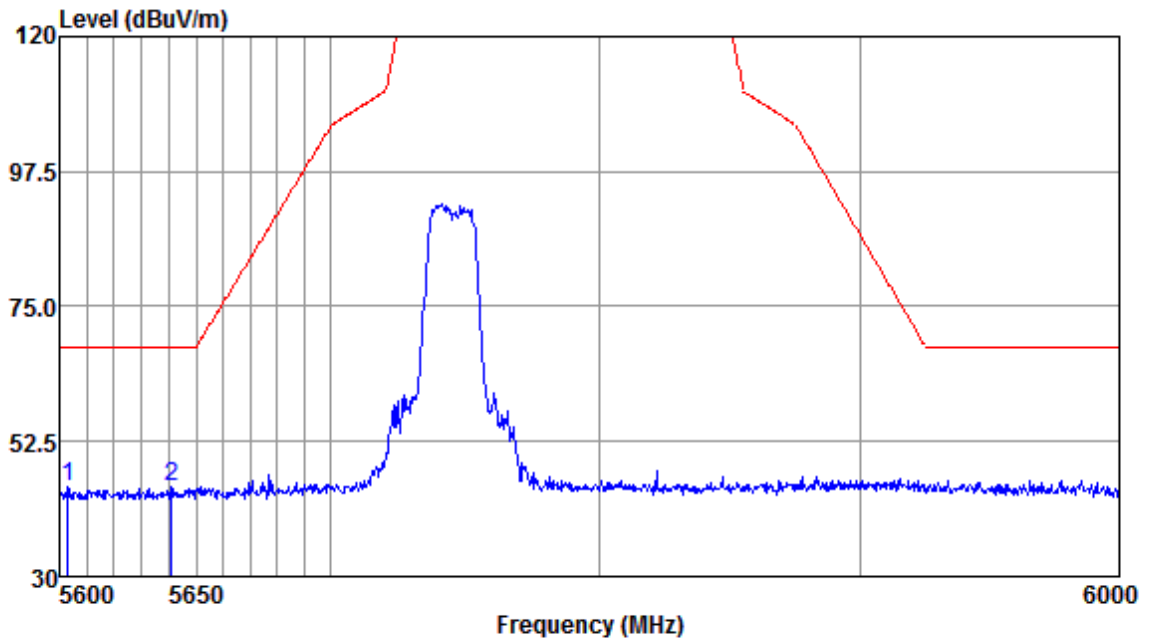


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5603.09	42.61	32.12	8.95	38.66	45.02	68.20	-23.18	Peak
5641.10	42.62	32.13	9.01	38.69	45.07	68.20	-23.13	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:High

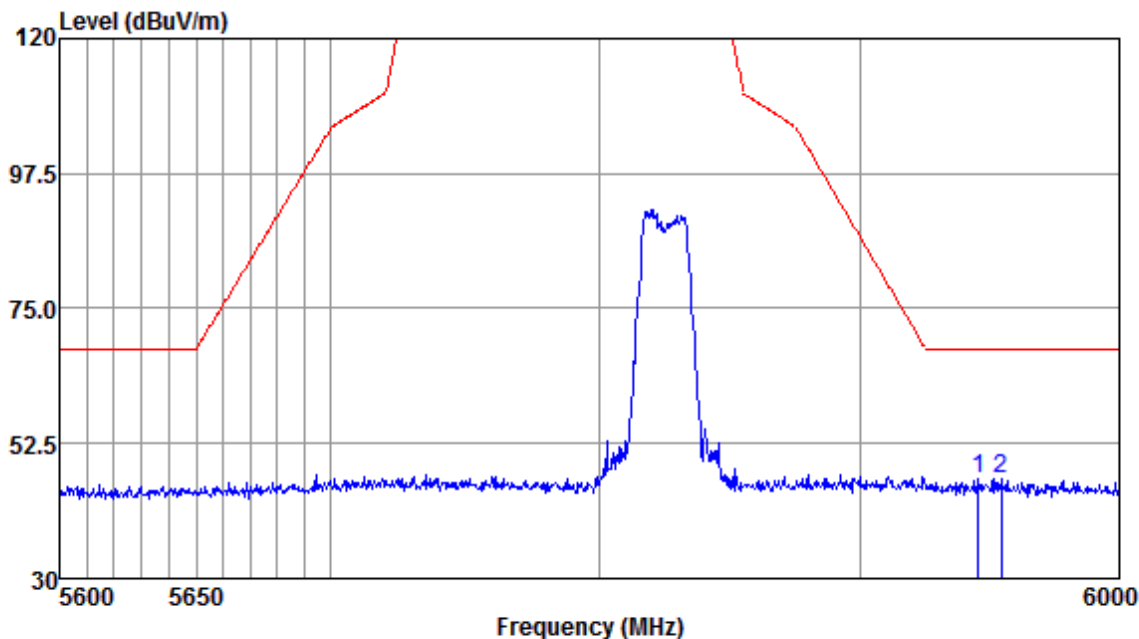


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5945.20	44.07	32.19	8.96	38.66	46.56	68.20	-21.64	Peak
5954.23	44.00	32.19	8.99	38.66	46.52	68.20	-21.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:High

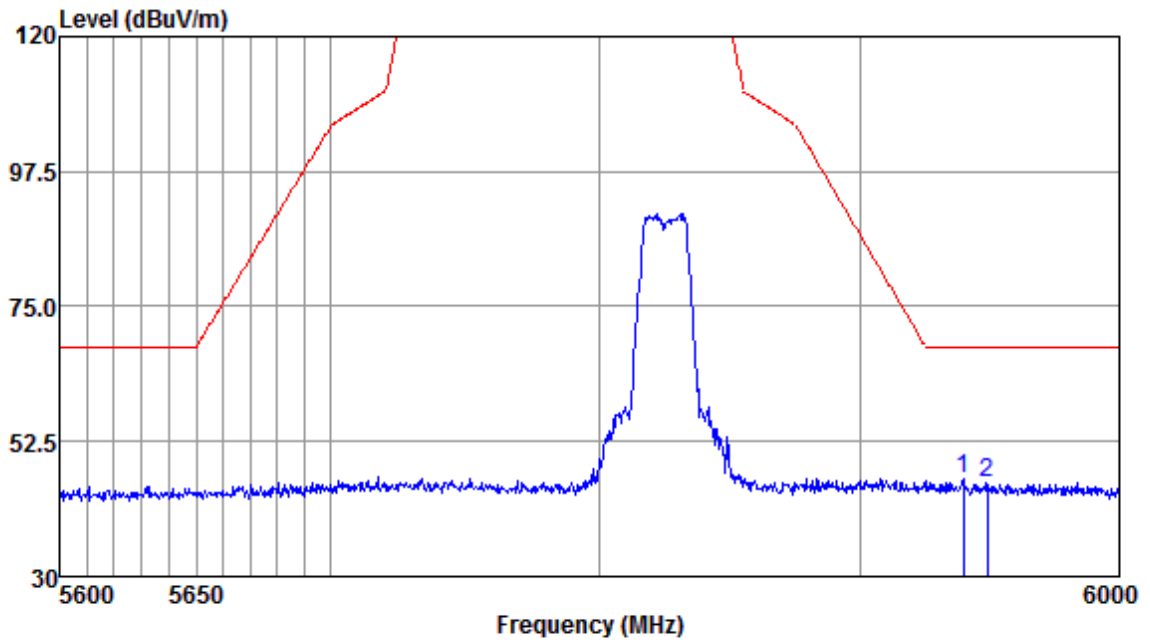


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5939.46	43.68	32.19	8.96	38.67	46.16	68.20	-22.04	Peak
5948.48	43.10	32.19	8.99	38.66	45.62	68.20	-22.58	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:Low

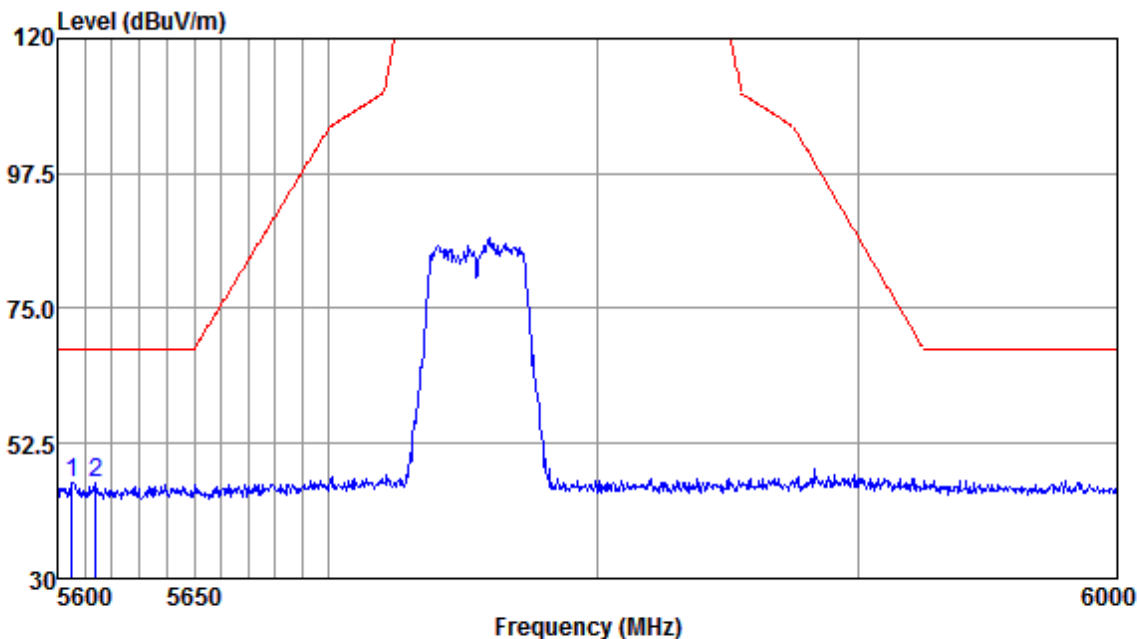


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5605.41	43.43	32.12	8.95	38.66	45.84	68.20	-22.36	Peak
5613.93	43.69	32.12	8.95	38.67	46.09	68.20	-22.11	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:Low

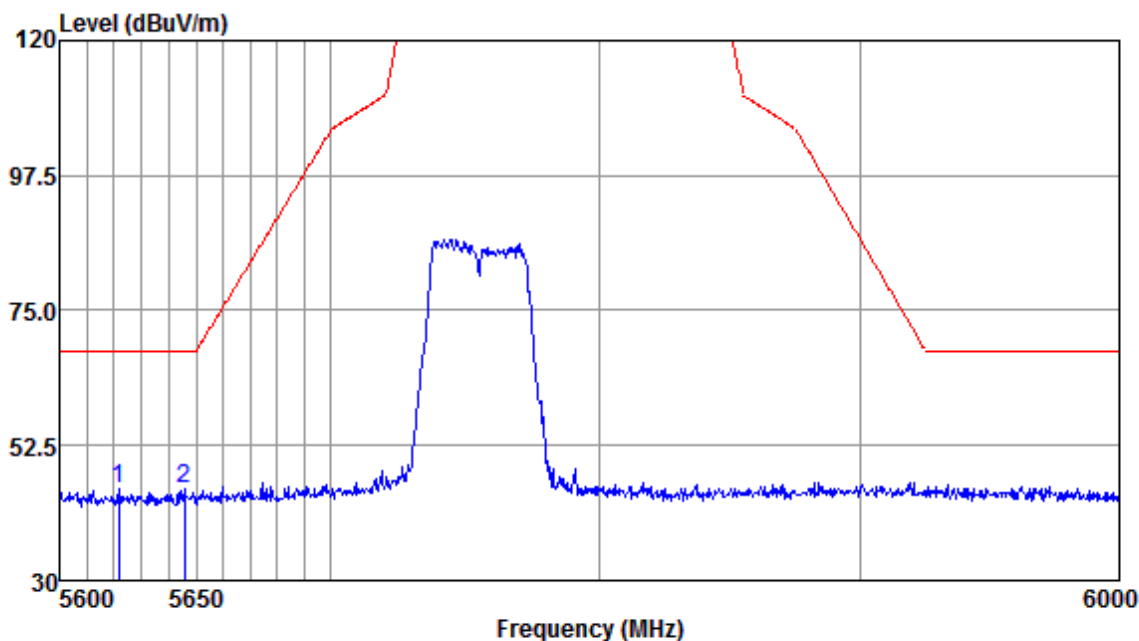


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5621.68	42.79	32.12	8.95	38.67	45.19	68.20	-23.01	Peak
5645.78	42.90	32.13	9.01	38.69	45.35	68.20	-22.85	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:High

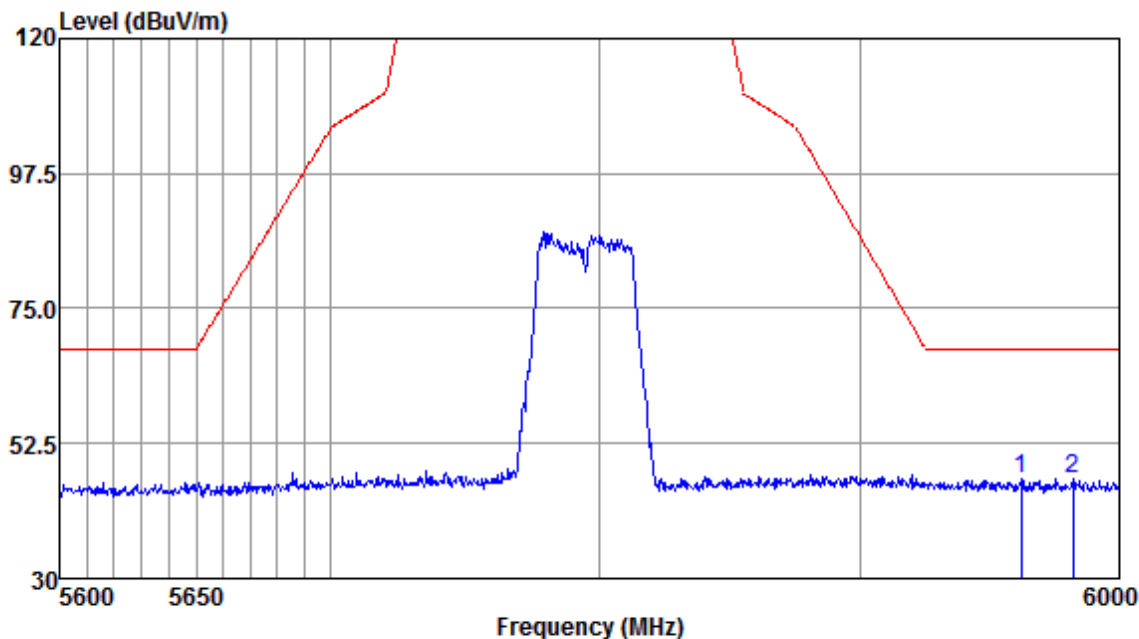


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5961.63	44.15	32.19	8.99	38.64	46.69	68.20	-21.51	Peak
5981.81	43.92	32.20	8.99	38.63	46.48	68.20	-21.72	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:High

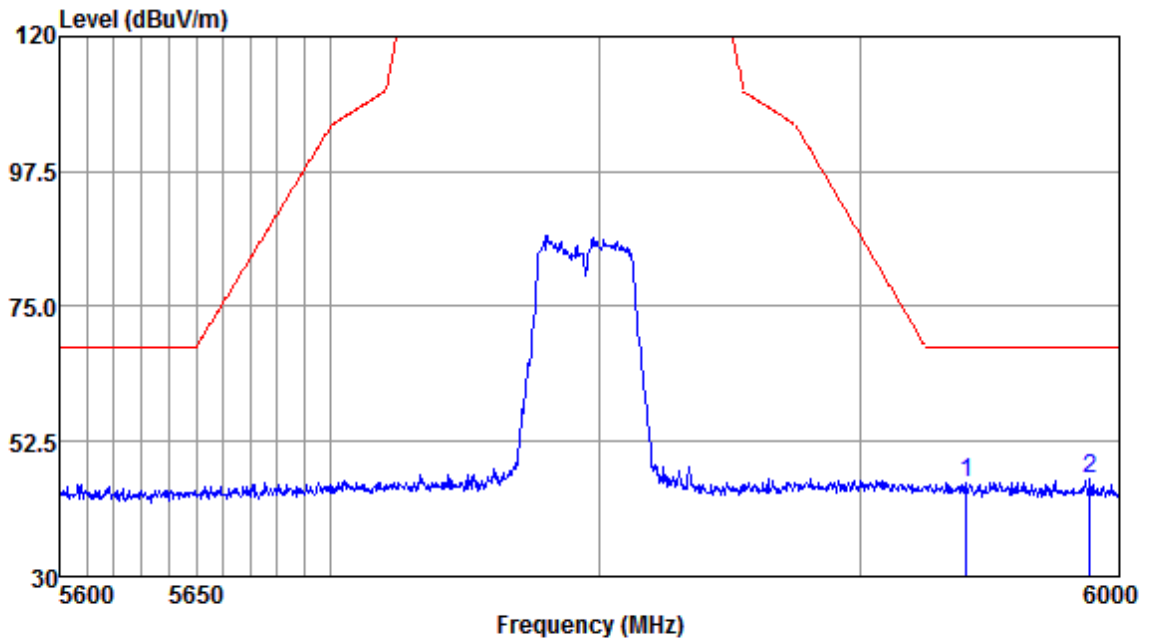


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5940.69	43.21	32.19	8.96	38.67	45.69	68.20	-22.51	Peak
5988.42	43.55	32.20	9.02	38.63	46.14	68.20	-22.06	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:b; Polarization:Horizontal; Modulation:c; bandwidth:80MHz; Channel:Low

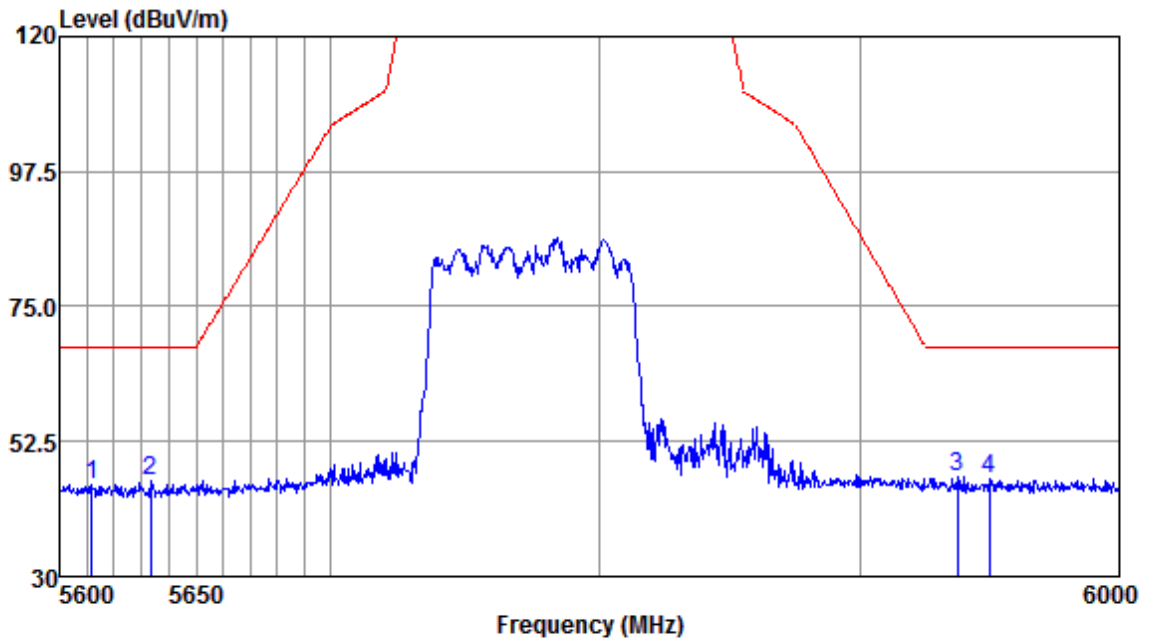


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5611.99	43.00	32.12	8.95	38.67	45.40	68.20	-22.80	Peak
5633.33	43.62	32.13	8.95	38.68	46.02	68.20	-22.18	Peak
5937.00	44.03	32.19	8.96	38.67	46.51	68.20	-21.69	Peak
5949.30	43.80	32.19	8.99	38.66	46.32	68.20	-21.88	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:b; Polarization:Vertical; Modulation:c; bandwidth:80MHz; Channel:Low

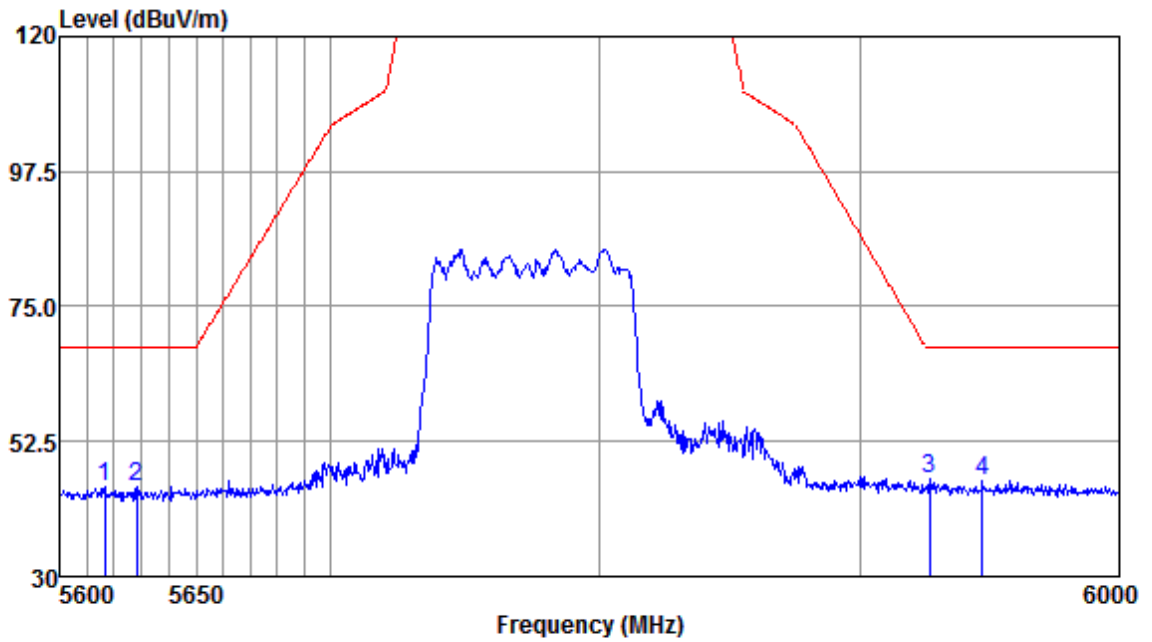


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5616.64	42.45	32.12	8.95	38.67	44.85	68.20	-23.35	Peak
5628.28	42.69	32.13	8.95	38.68	45.09	68.20	-23.11	Peak
5926.36	43.78	32.19	8.96	38.67	46.26	68.20	-21.94	Peak
5946.84	43.44	32.19	8.96	38.66	45.93	68.20	-22.27	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:Low

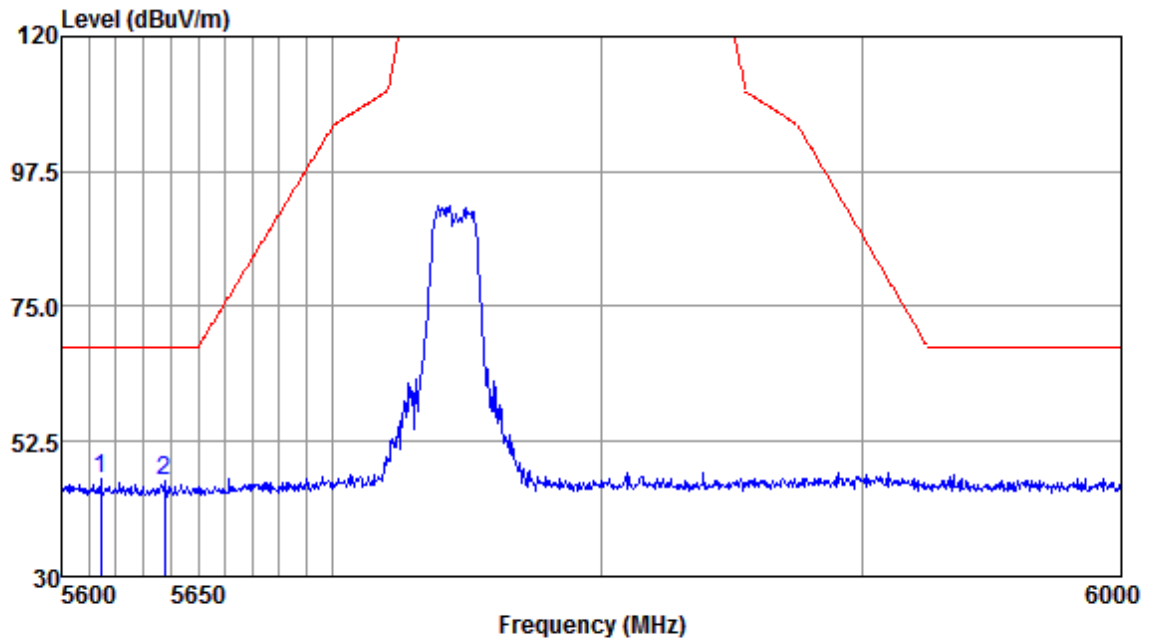


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5614.31	43.87	32.12	8.95	38.67	46.27	68.20	-21.93	Peak
5637.60	43.39	32.13	9.01	38.68	45.85	68.20	-22.35	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:Low

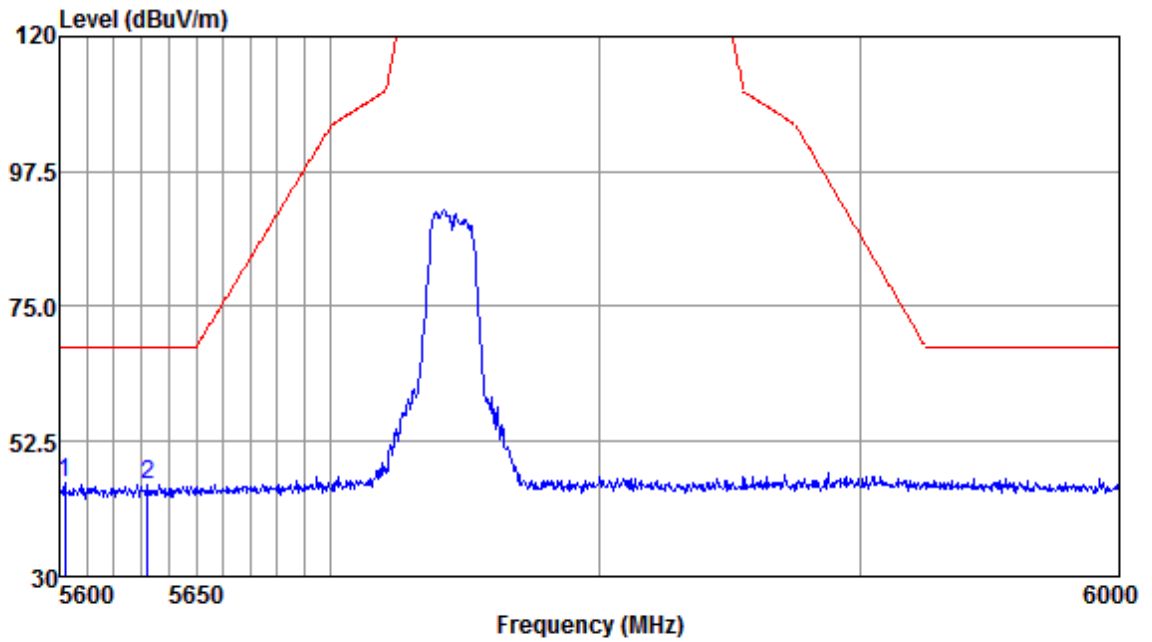


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5601.93	43.29	32.12	8.95	38.66	45.70	68.20	-22.50	Peak
5632.16	42.98	32.13	8.95	38.68	45.38	68.20	-22.82	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:a; bandwidth:20MHz; Channel:High

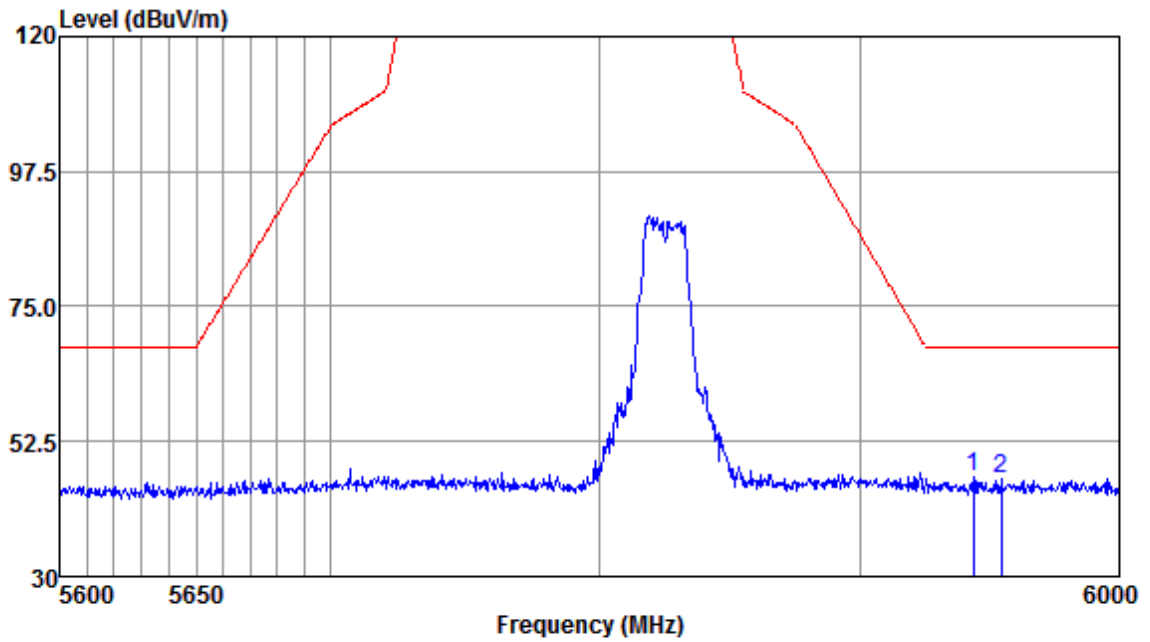


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5943.15	44.23	32.19	8.96	38.66	46.72	68.20	-21.48	Peak
5954.23	43.78	32.19	8.99	38.66	46.30	68.20	-21.90	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:a; bandwidth:20MHz; Channel:High

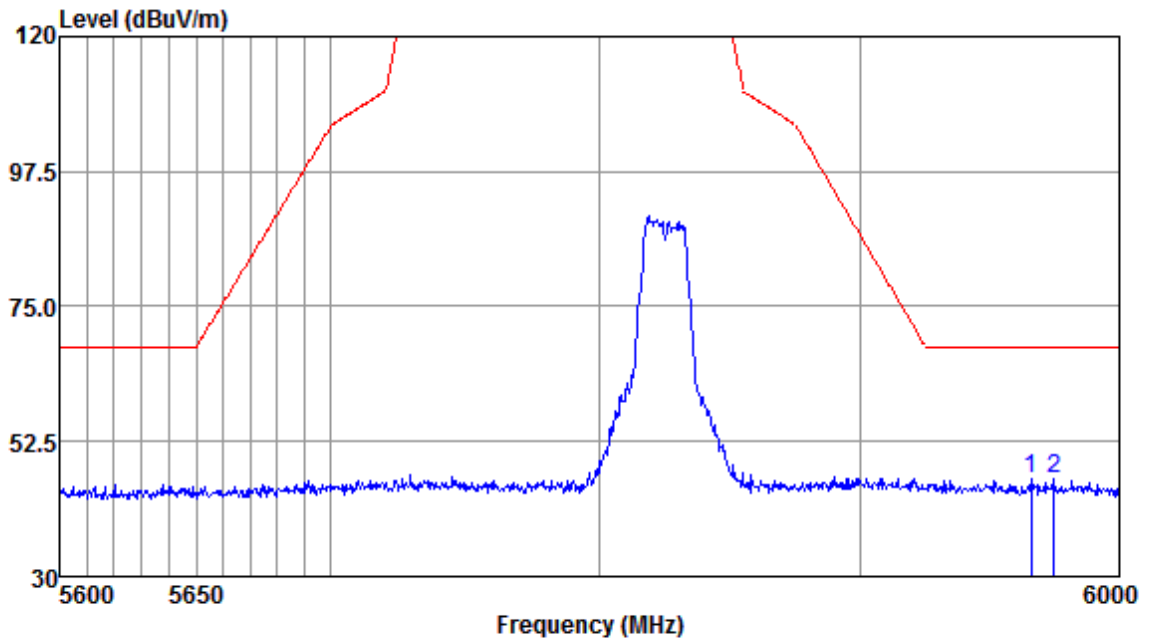


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5965.74	43.81	32.19	8.99	38.64	46.35	68.20	-21.85	Peak
5974.39	43.85	32.19	8.99	38.64	46.39	68.20	-21.81	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:Low

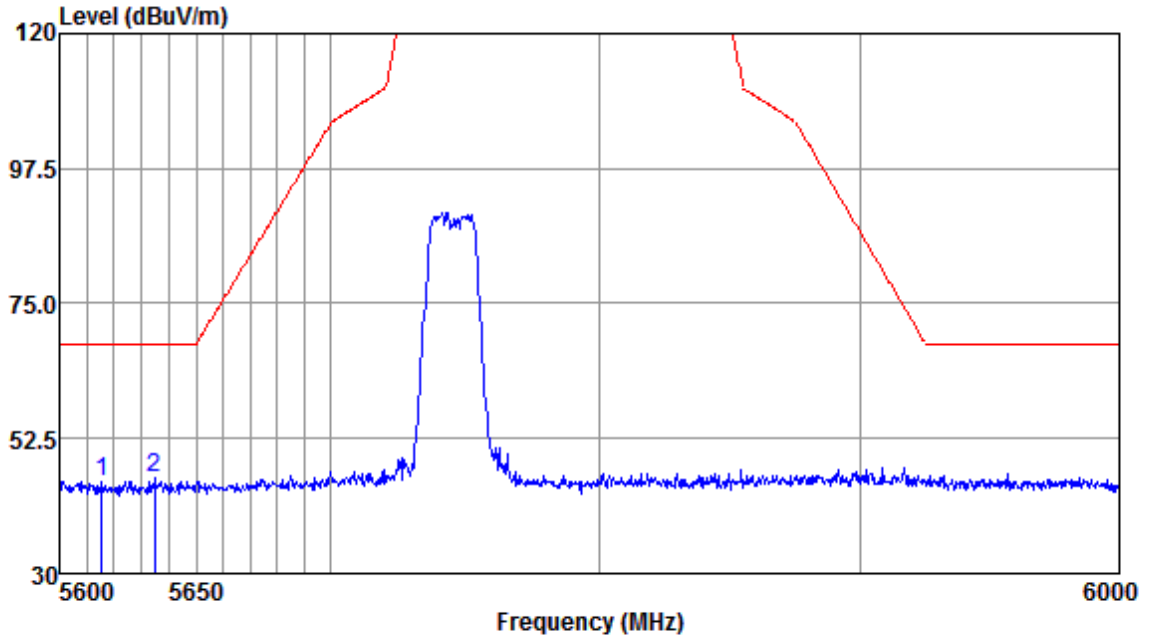


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5615.48	43.04	32.12	8.95	38.67	45.44	68.20	-22.76	Peak
5634.88	43.60	32.13	8.95	38.68	46.00	68.20	-22.20	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:d; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:Low

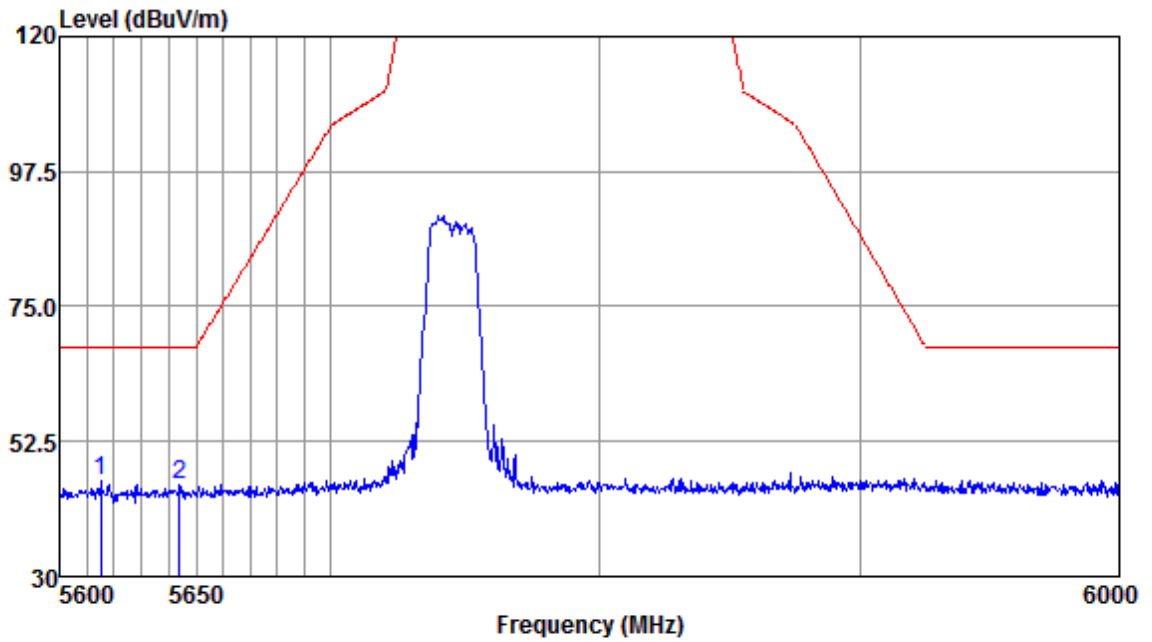


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5615.09	43.45	32.12	8.95	38.67	45.85	68.20	-22.35	Peak
5643.83	42.83	32.13	9.01	38.69	45.28	68.20	-22.92	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

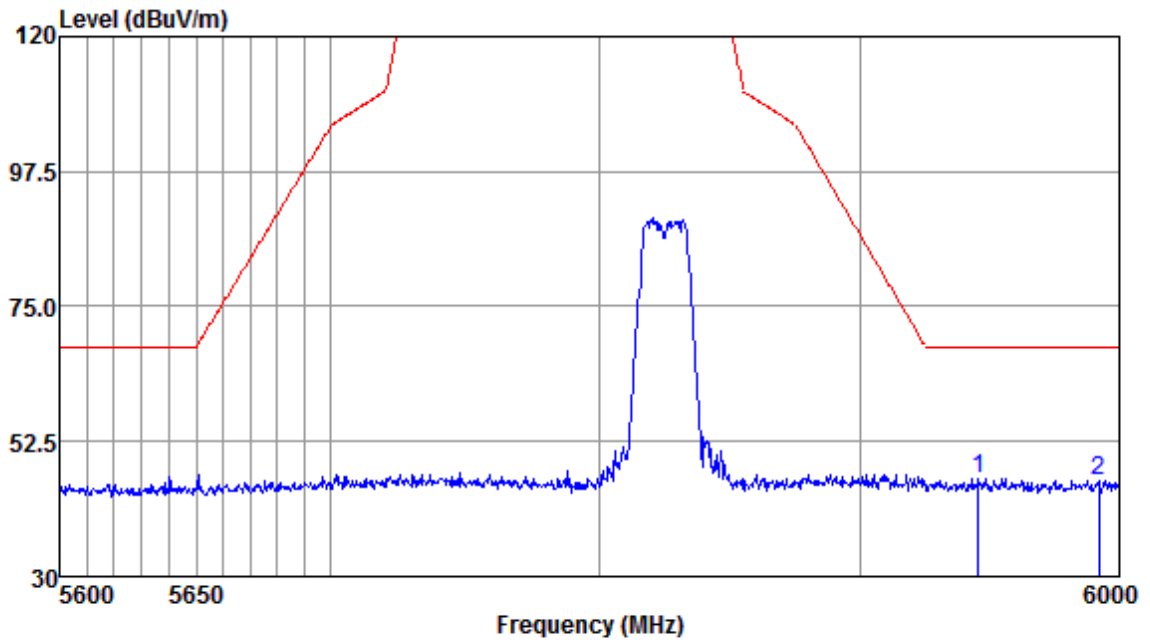


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5945.20	43.80	32.19	8.96	38.66	46.29	68.20	-21.91	Peak
5992.14	43.51	32.20	9.02	38.63	46.10	68.20	-22.10	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

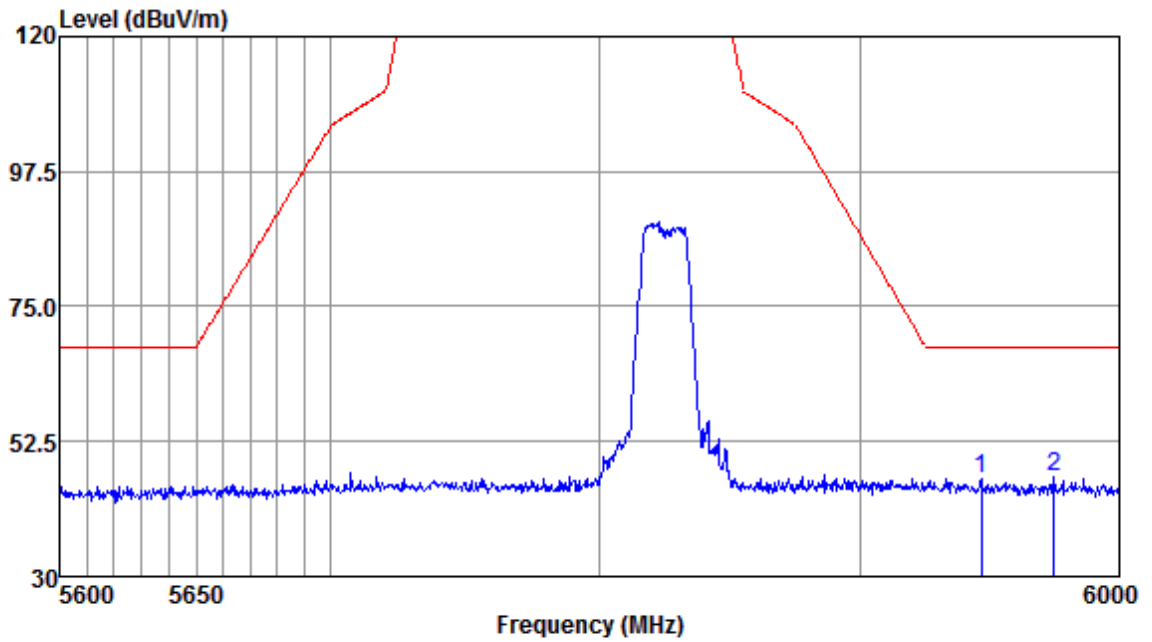


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5946.43	43.78	32.19	8.96	38.66	46.27	68.20	-21.93	Peak
5974.39	44.03	32.19	8.99	38.64	46.57	68.20	-21.63	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

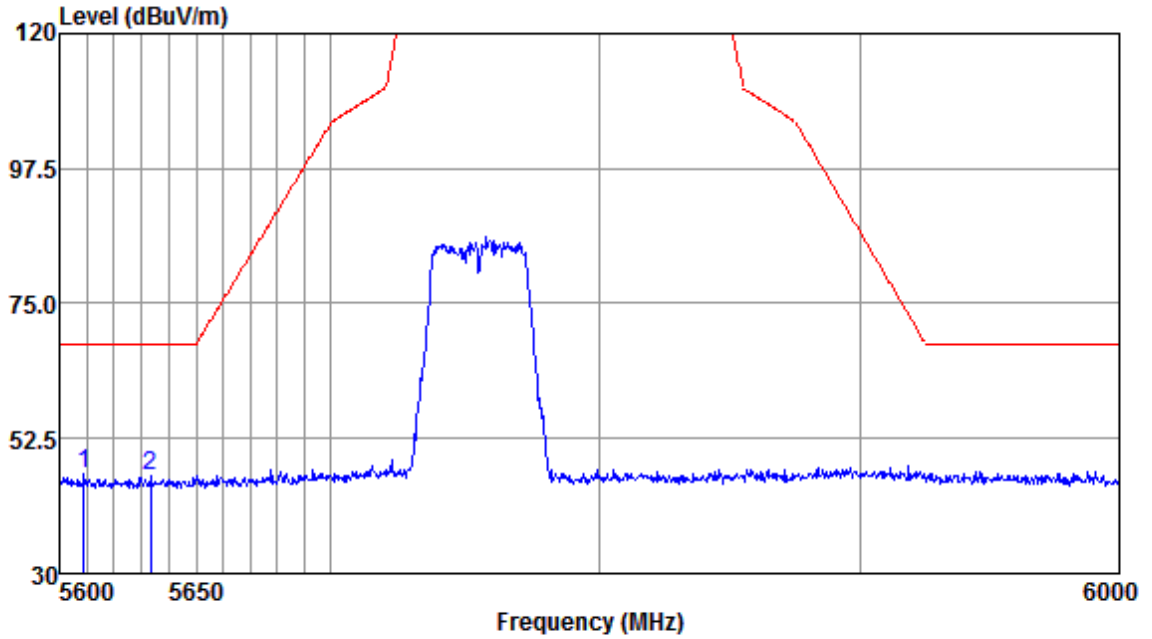


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5608.89	44.34	32.12	8.95	38.67	46.74	68.20	-21.46	Peak
5633.33	43.99	32.13	8.95	38.68	46.39	68.20	-21.81	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

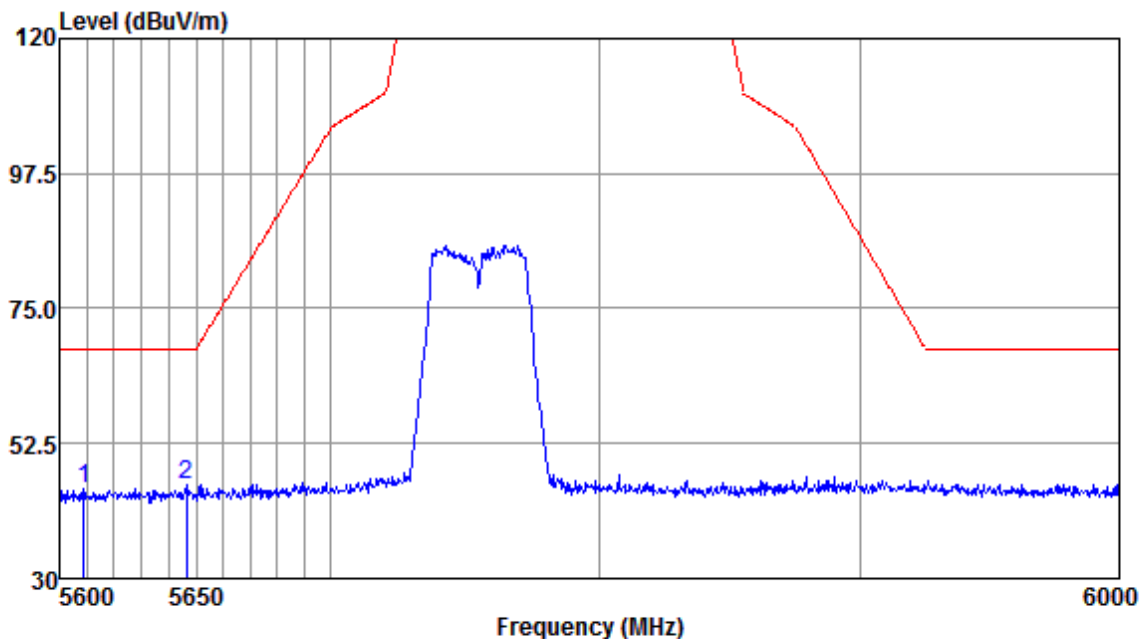


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5608.89	42.49	32.12	8.95	38.67	44.89	68.20	-23.31	Peak
5646.56	43.04	32.13	9.01	38.69	45.49	68.20	-22.71	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

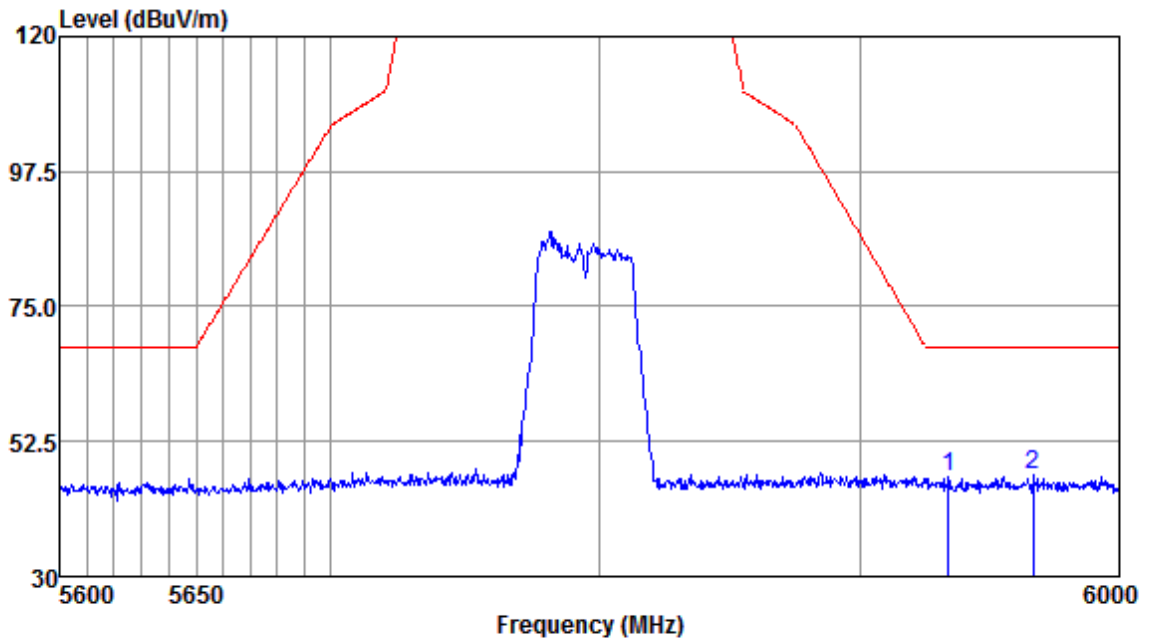


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5933.72	44.15	32.19	8.96	38.67	46.63	68.20	-21.57	Peak
5966.56	44.35	32.19	8.99	38.64	46.89	68.20	-21.31	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

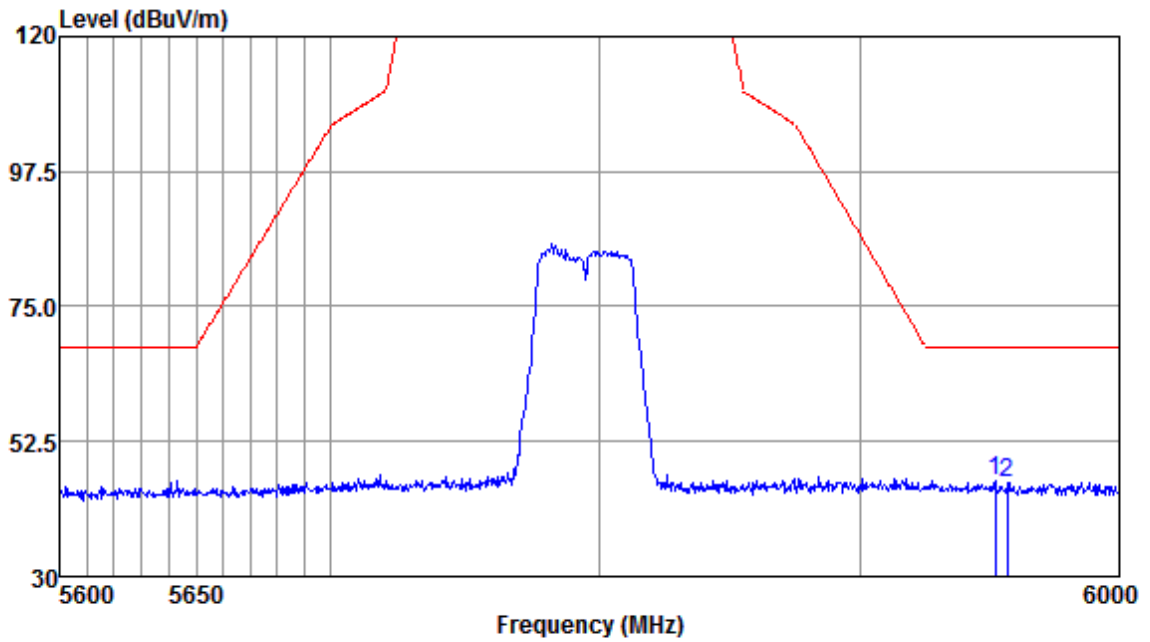


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5951.76	43.28	32.19	8.99	38.66	45.80	68.20	-22.40	Peak
5956.28	43.11	32.19	8.99	38.66	45.63	68.20	-22.57	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:Low

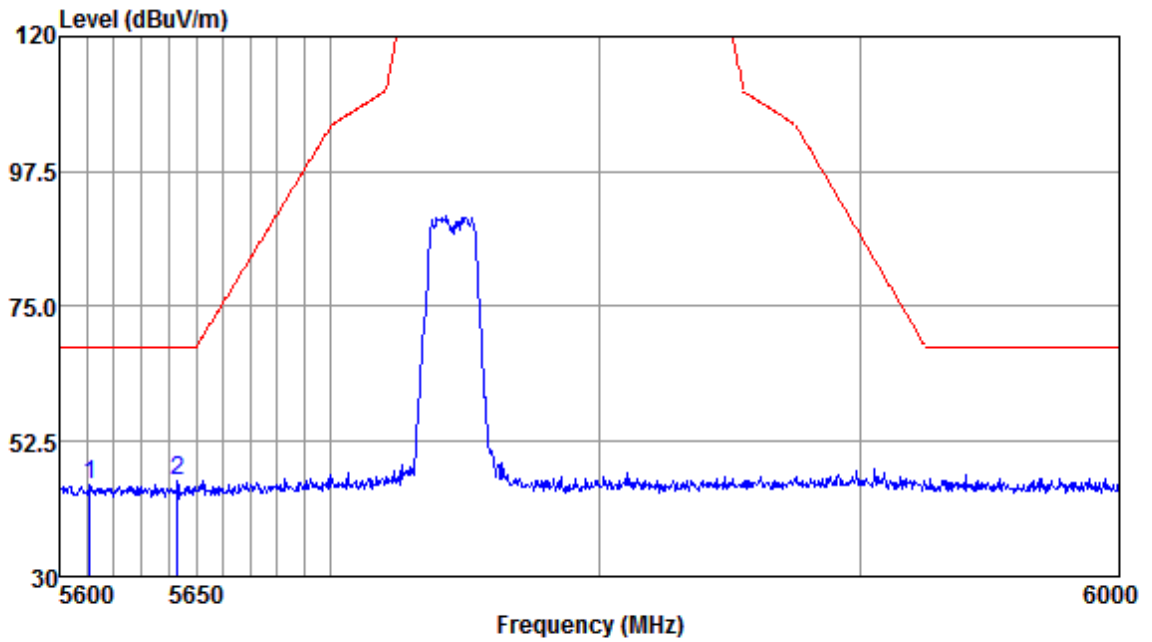


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5611.22	42.74	32.12	8.95	38.67	45.14	68.20	-23.06	Peak
5643.05	43.46	32.13	9.01	38.69	45.91	68.20	-22.29	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:d; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:Low

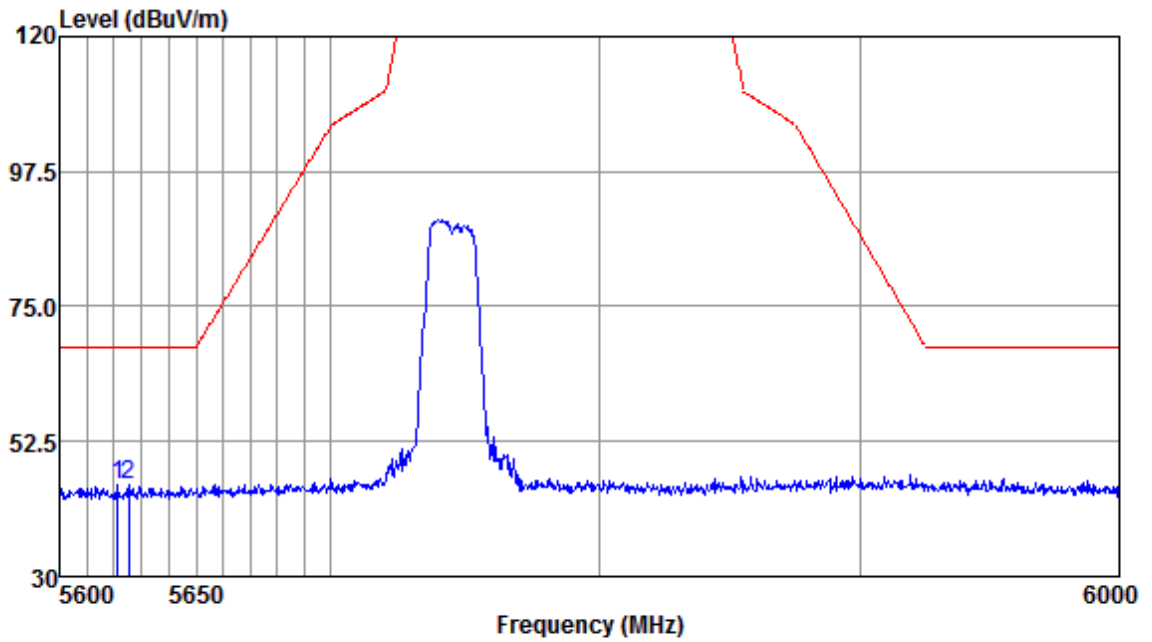


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5621.29	42.79	32.12	8.95	38.67	45.19	68.20	-23.01	Peak
5625.17	42.72	32.13	8.95	38.68	45.12	68.20	-23.08	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:20MHz; Channel:High

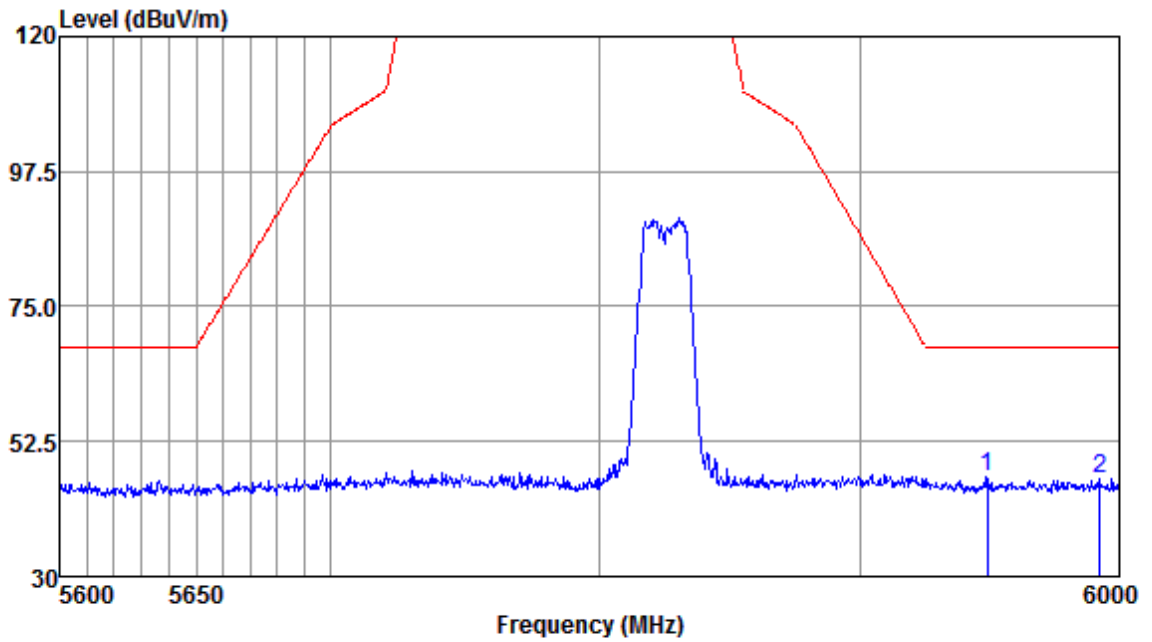


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5948.48	44.04	32.19	8.99	38.66	46.56	68.20	-21.64	Peak
5992.55	43.73	32.20	9.02	38.63	46.32	68.20	-21.88	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:20MHz; Channel:High

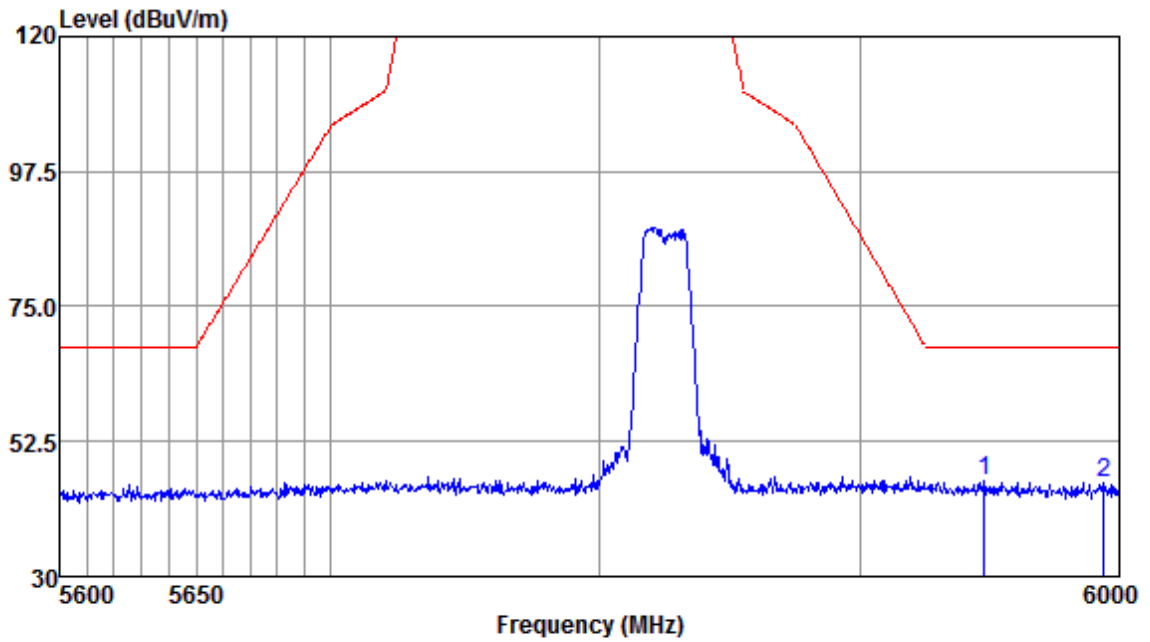


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5947.66	43.31	32.19	8.99	38.66	45.83	68.20	-22.37	Peak
5993.79	42.98	32.20	9.02	38.61	45.59	68.20	-22.61	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:Low

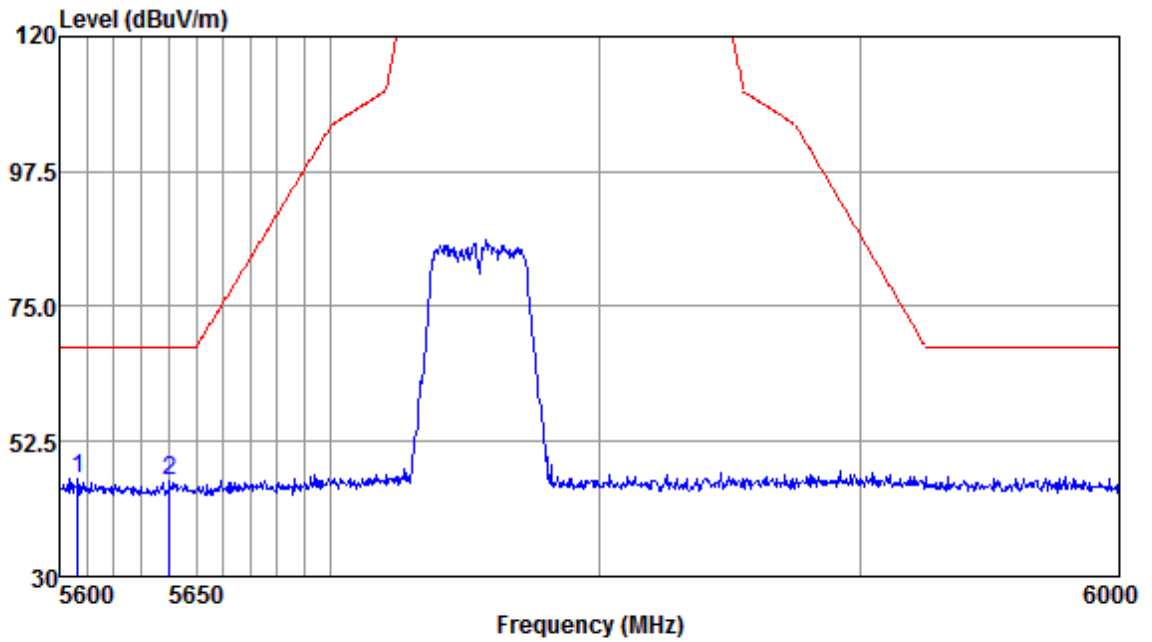


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5606.57	43.99	32.12	8.95	38.66	46.40	68.20	-21.80	Peak
5640.33	43.58	32.13	9.01	38.69	46.03	68.20	-22.17	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:Low

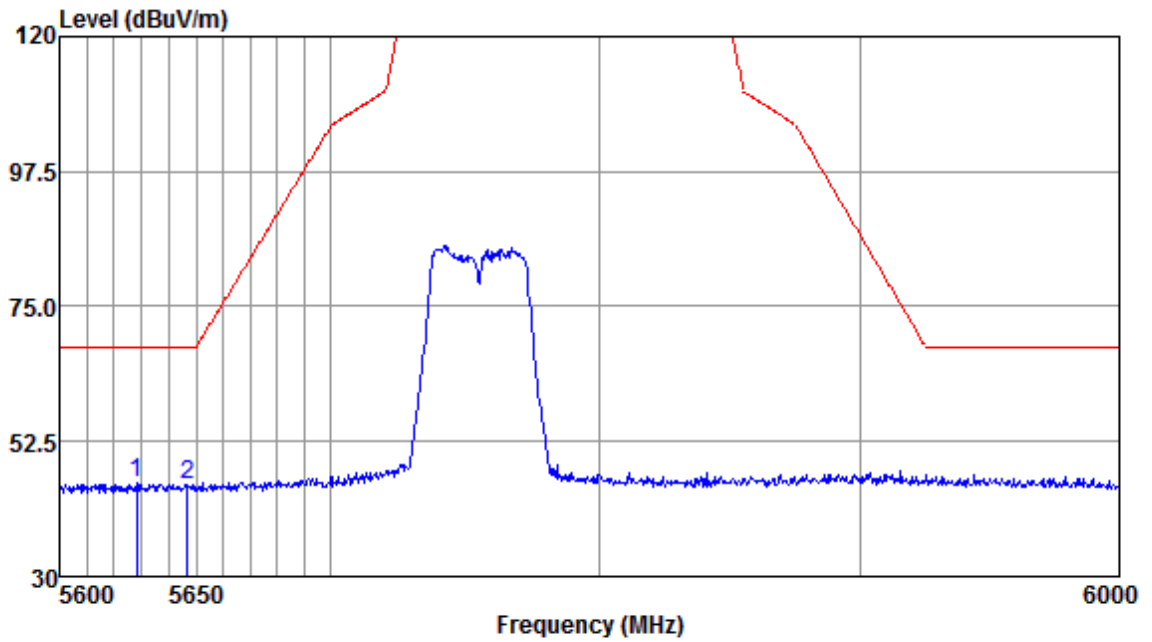


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5628.28	43.14	32.13	8.95	38.68	45.54	68.20	-22.66	Peak
5646.95	42.98	32.13	9.01	38.69	45.43	68.20	-22.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:40MHz; Channel:High

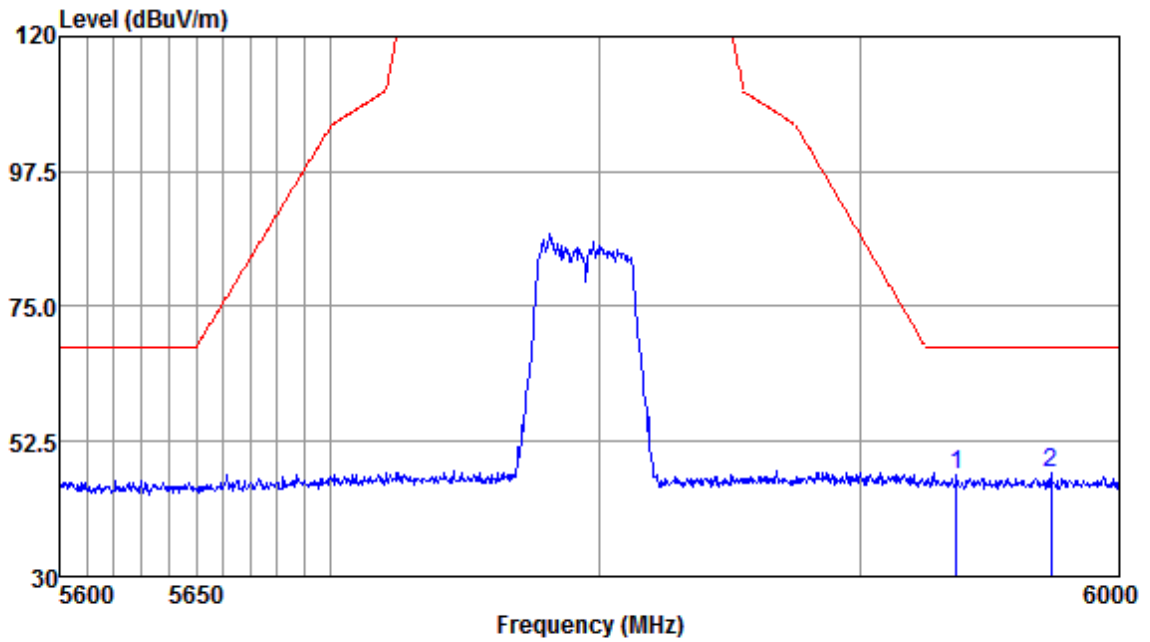


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5936.59	44.34	32.19	8.96	38.67	46.82	68.20	-21.38	Peak
5973.57	44.71	32.19	8.99	38.64	47.25	68.20	-20.95	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Vertical; Modulation:c; bandwidth:40MHz; Channel:High

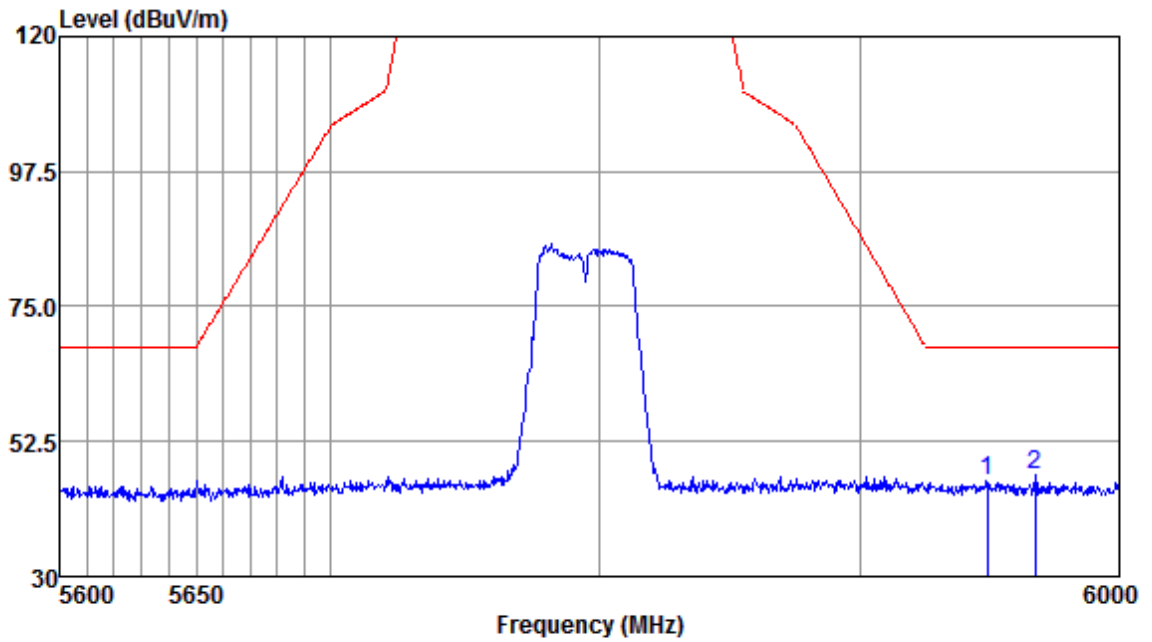


Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5948.48	43.51	32.19	8.99	38.66	46.03	68.20	-22.17	Peak
5967.39	44.29	32.19	8.99	38.64	46.83	68.20	-21.37	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Mode:d; Polarization:Horizontal; Modulation:c; bandwidth:80MHz; Channel:Low

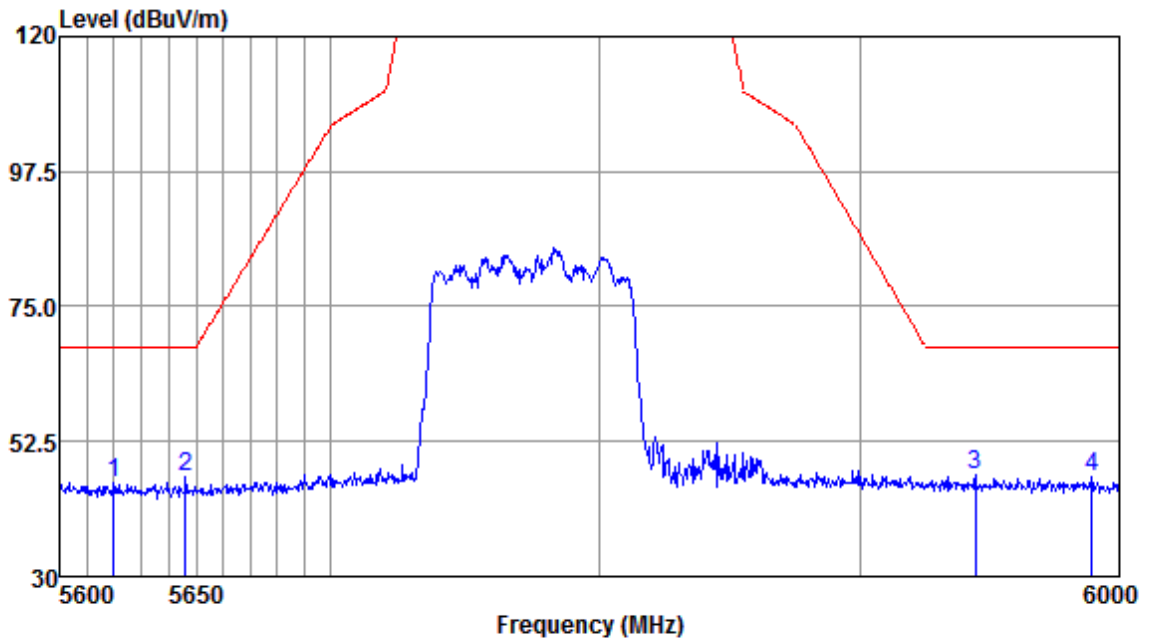


Antenna Polarity :HORIZONTAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5619.74	43.13	32.12	8.95	38.67	45.53	68.20	-22.67	Peak
5646.17	44.12	32.13	9.01	38.69	46.57	68.20	-21.63	Peak
5943.97	44.29	32.19	8.96	38.66	46.78	68.20	-21.42	Peak
5989.25	43.93	32.20	9.02	38.63	46.52	68.20	-21.68	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Mode:d; Polarization:Vertical; Modulation:c; bandwidth:80MHz; Channel:Low

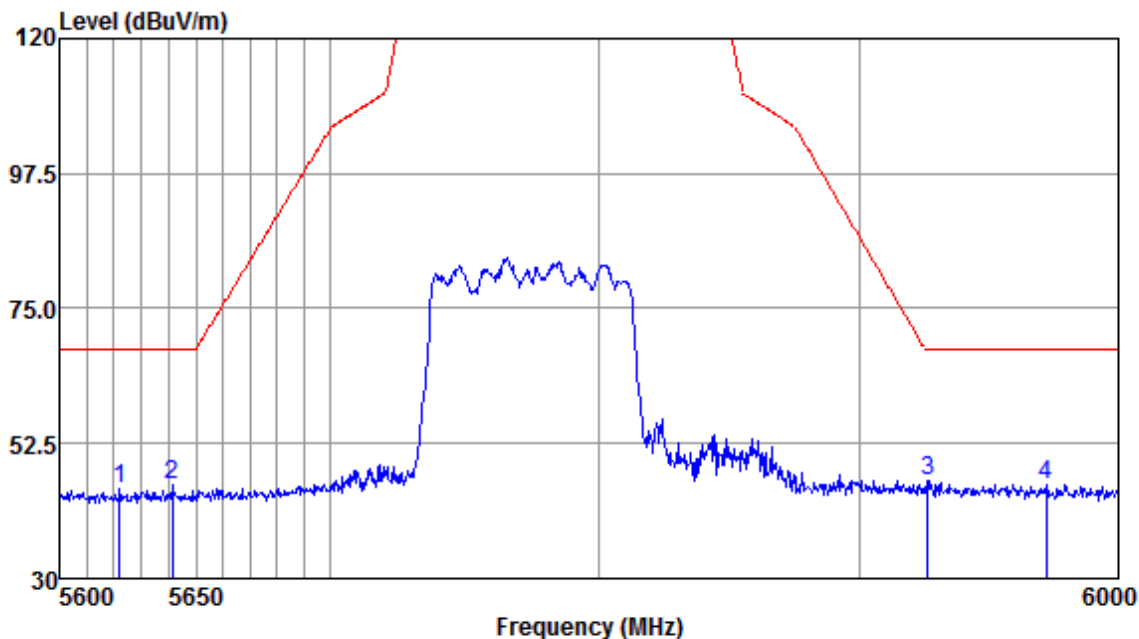

Antenna Polarity :VERTICAL

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5622.07	42.50	32.12	8.95	38.67	44.90	68.20	-23.30	Peak
5641.49	43.24	32.13	9.01	38.69	45.69	68.20	-22.51	Peak
5925.95	43.77	32.19	8.96	38.67	46.25	68.20	-21.95	Peak
5971.92	43.19	32.19	8.99	38.64	45.73	68.20	-22.47	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor


### 7.8 Frequency Stability

Test Requirement: 47 CFR Part 15, Subpart C 15.407 (g)  
 Test Method: ANSI C63.10 (2013) Section 6.8  
 Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of -20 degrees to 55 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 7.8.1 E.U.T. Operation

Operating Environment:  
 Temperature: 20 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar  
 Test mode: b:TX mode (Band 3)\_Keep the WiFi+3G module in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

#### 7.8.2 Test Setup Diagram

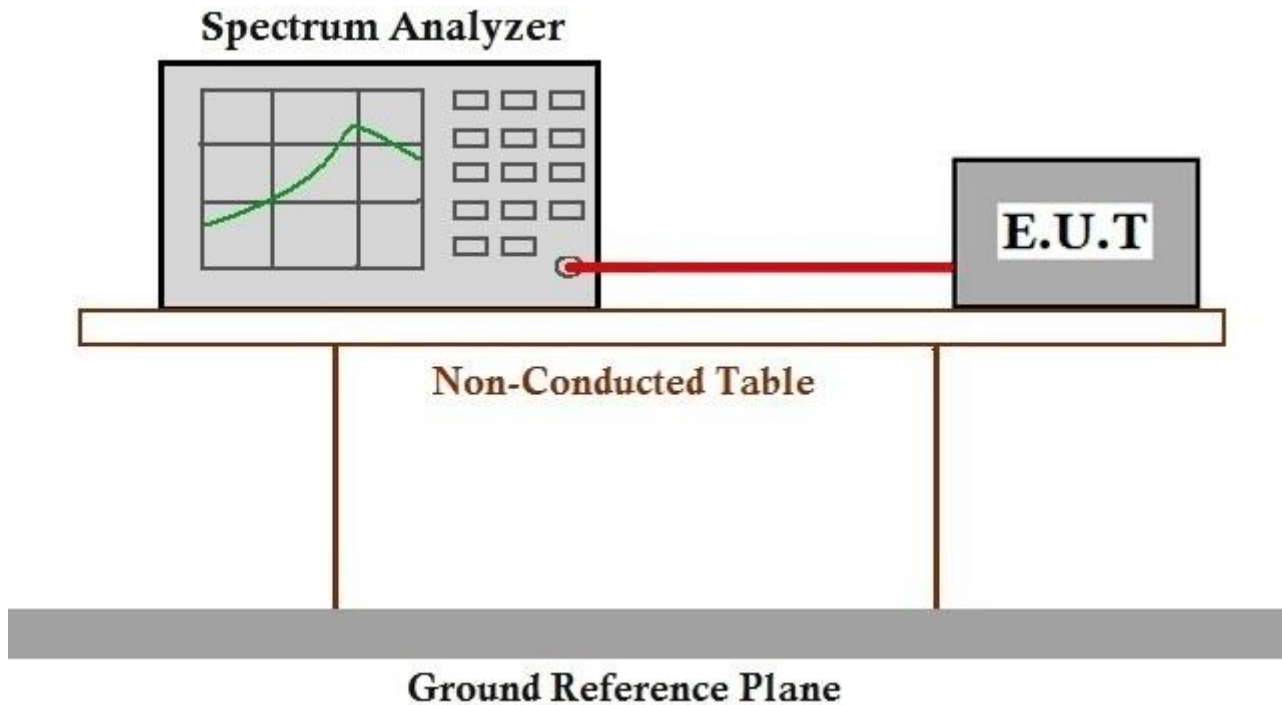

#### 7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix B SHEM190101017002



## **8 Test Setup Photographs**

Refer to the < Test Setup photos-FCC>.

## **9 EUT Constructional Details**

Refer to the < External Photos > & < Internal Photos >.

**- End of the Report -**