

# 1 Cover Page

# RF REPORT

**Application No.:** KSEM2103000415CR  
**FCC ID:** 2ADTD-K3B801SXR  
**Applicant:** Hangzhou Hikvision Digital Technology Co.,Ltd  
**Address of Applicant:** No.555 Qianmo Road,Binjiang District,Hangzhou,310052,China  
**Manufacturer:** Hangzhou Hikvision Digital Technology Co.,Ltd  
**Address of Manufacturer:** No.555 Qianmo Road,Binjiang District,Hangzhou,310052,China  
**Factory:** 1.Hangzhou Hikvision Technology Co., Ltd.  
 2.Hangzhou Hikvision Electronics Co.,Ltd.  
 3.Hangzhou Hikvision Digital Technology Co., Ltd.  
**Address of Factory:** 1.No.700,Dongliu Road,Binjiang District,Hangzhou City,Zhejiang,310052,China  
 2.No.299,Qiushi Road,Tonglu Economic Development Zone,Tonglu County,Hangzhou,Zhejiang,310052,China.  
 3.No.555 Qianmo Road, Binjiang District Hangzhou 310052,China

**Equipment Under Test (EUT):**

**EUT Name:** Swing Barrier  
**Model No.:** DS-K3B801SX-R/M, DS-K3B801SX-R/E  
**Add Model No.:** Refer page 2  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.231  
**Date of Receipt:** 2021-03-31  
**Date of Test:** 2021-04-01 to 2021-04-20  
**Date of Issue:** 2021-04-21

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

Eric Lin  
EMC Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**  
 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn  
 中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Mode No:

DS-K3B801SAX-L, DS-K3B801SAX-L/M, DS-K3B801SAX-L/E, DS-K3B801SAX-M, DS-K3B801SAX-M/M, DS-K3B801SAX-M/E, DS-K3B801SAX-R, DS-K3B801SAX-R/M, DS-K3B801SAX-R/E, DS-K3B801SAX-UHK, DS-K3B801SAX-CKV, DS-K3B801SAX-UVS, DS-K3B801SAX-KVO, DS-K3B801SAX-HUN, DS-K3B801SX-L, DS-K3B801SX-L/M, DS-K3B801SX-L/E, DS-K3B801SX-M, DS-K3B801SX-M/M, DS-K3B801SX-M/E, DS-K3B801SX-R, DS-K3B801SX-UHK, DS-K3B801SX-CKV, DS-K3B801SX-UVS, DS-K3B801SX-KVO, DS-K3B801SX-HUN, DS-K3B802X-L, DS-K3B802X-L/M, DS-K3B802X-L/E, DS-K3B802X-M, DS-K3B802X-M/M, DS-K3B802X-M/E, DS-K3B802X-R, DS-K3B802X-R/M, DS-K3B802X-R/E, DS-K3B802X-UHK, DS-K3B802X-CKV, DS-K3B802X-UVS, DS-K3B802X-KVO, DS-K3B802X-HUN



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2021-04-21	/

<b>Authorized for issue by:</b>			
		<i>Damon Zhou</i>	
		_____	
		<b>Damon Zhou / Project Engineer</b>	
		<i>Eric Lin</i>	
		_____	
		<b>Eric Lin / Reviewer</b>	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
 中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn  
 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

## 2 Test Summary

Test Item	FCC Requirement	Test method	Result
Antenna Requirement	Part 15.203	/	PASS
Conducted Emission	Part 15.207	ANSI C63.10 (2013) Section 6.2	PASS
Field Strength of the Fundamental	Part 15.231 (b)	ANSI C63.10 (2013) Section 6.5	PASS
Radiated Spurious emissions	Part 15.209 15.231(b)	ANSI C63.10 (2013) Section 6.4&6.5&6.6	PASS
20dB Bandwidth	Part 15.231 (c)	ANSI C63.10 (2013) Section 6.9.2	PASS
Dwell Time	Part 15.231 (a)	ANSI C63.10 (2013) Section 7.8.4	PASS

### Declaration of EUT Family Grouping:

Note 1: There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model DS-K3B801SX-R/M and DS-K3B801SX-R/E was tested since their differences were the model number and appearance.

Note 2: The product built into a certified module(DS-K1102AEK or DS-K1102AMK), the test data of different modules has been recorded in the report

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY.....</b>	<b>4</b>
<b>3 CONTENTS.....</b>	<b>5</b>
<b>4 GENERAL INFORMATION.....</b>	<b>6</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 TECHNICAL SPECIFICATIONS.....	6
4.3 DESCRIPTION OF SUPPORT UNITS.....	6
4.4 MEASUREMENT UNCERTAINTY.....	6
4.5 TEST LOCATION.....	7
4.6 TEST FACILITY.....	7
<b>5 EQUIPMENTS USED DURING TEST.....</b>	<b>8</b>
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>10</b>
6.1 ANTENNA REQUIREMENT.....	10
6.2 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz).....	11
<b>6.2.1 E.U.T. Operation.....</b>	<b>11</b>
<b>6.2.2 Test Setup Diagram.....</b>	<b>11</b>
<b>6.2.3 Measurement Procedure and Data.....</b>	<b>12</b>
6.3 SPURIOUS EMISSIONS.....	15
<b>6.3.1 E.U.T. Operation.....</b>	<b>16</b>
<b>6.3.2 Field Strength of the Fundamental Signal.....</b>	<b>16</b>
<b>6.3.3 Spurious Emissions.....</b>	<b>17</b>
6.4 20DB BANDWIDTH.....	22
6.5 DWELL TIME.....	24
<b>7 TEST SETUP PHOTOGRAPHS.....</b>	<b>26</b>
<b>8 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>26</b>

## 4 General Information

### 4.1 General Description of E.U.T.

Power supply:	AC 100-240V 50/60Hz
Test voltage:	AC 120V/60Hz

### 4.2 Technical Specifications:

Modulation Type	2GFSK
Number of Channels	1
Operation Frequency	433.60MHz
Antenna Type	Spiral Antenna

### 4.3 Description of Support Units

The EUT has been tested independently

### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 <sup>-8</sup>
2	Timeout	2s
3	Duty Cycle	0.4%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.1dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888

Fax: +86 512 5737 0818

No tests were sub-contracted.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L4354)**

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC (Designation Number: CN1172)**

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED (CAB identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

CAB Identifier: CN0072.

- **VCCI (Member No.: 1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.



## 5 Equipments Used during Test

### Conducted Emission at Mains Terminals (150kHz-30MHz)

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
1	Test Software	Farad	EZ-EMC	CCS-03A1	N.C.R	N.C.R
2	EMI Test Receive	R&S	ESCI	100781	02/01/2021	01/31/2022
3	LISN	R&S	ENV216	101604	10/19/2020	10/18/2021
4	LISN	Schwarzbeck	NNLK 8129	8129-143	10/19/2020	10/18/2021
5	Pulse Limiter	R&S	ESH3-Z2	100609	02/01/2021	01/31/2022
6	CE test Cable	Thermax	/	14	10/17/2020	10/16/2021

### RF Conducted Test

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
1	Test Software	BST	TST PASS	V 1.1.0	N.C.R	N.C.R
2	Spectrum Analyzer	Agilent	E4446A	MY44020154	04/22/2020	04/21/2021
3	Spectrum Analyzer	Keysight	N9020A	MY53420174	09/25/2020	09/24/2021
4	Spectrum Analyzer	Keysight	N9020A	MY55370209	10/19/2020	10/18/2021
5	Signal Generator	Agilent	E8257C	MY43321570	10/18/2020	10/18/2021
6	MXG Vector Signal Generator	Agilent	N5182A	MY50142015	09/25/2020	09/24/2021
7	Universal Radio Communication Tester	R&S	CMU200	109525	10/19/2020	10/18/2021
8	Universal Radio Communication Tester	R&S	CMW500	159275	10/19/2020	10/18/2021
9	Power Meter	Anritsu	ML2495A	1445010	04/21/2020	04/20/2021
10	Switcher	CCSRF	FY562	KS301219	10/19/2020	10/18/2021
11	AC Power Source	EXTECH	6605	1570106	N.C.R	N.C.R
12	DC Power Supply	Agilent	E3632A	MY50340053	N.C.R	N.C.R
13	6dB Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R	N.C.R
14	Power Divider	AISI	IOWOPE2068	PE2068	N.C.R	N.C.R
15	Filter	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
16	Conducted test cable	/	RF01-RF04	/	04/21/2020	04/22/2021
17	Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	04/21/2020	04/20/2021

### RF Radiated Test

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
1	Test Software	Farad	EZ-EMC	CCS-03A1	N/A	N/A
2	Spectrum Analyzer	R&S	FSV40	101493	10/19/2020	10/18/2021
3	Signal Generator	Agilent	E8257C	MY43321570	10/10/2020	10/18/2021
4	Loop Antenna	COM-POWER	AL-130R	10160008	04/29/2019	04/28/2021
5	Bilog Antenna	TESEQ	CBL 6112D	35403	06/22/2019	06/21/2021
6	Bilog Antenna	SCHWARZBECK	VULB9160	9160-3342	04/29/2019	04/28/2021
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	267	10/26/2020	10/25/2022
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	00143290	02/22/2021	02/21/2023
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	BBHA9170171	02/22/2021	02/21/2024
10	Pre-Amplifier(30MHz~18GHz)	CCSRF	AMP1277	1	10/19/2020	10/18/2021
11	Pre-Amplifier(0.1~26.5GHz)	EMCI	EMC012645	980060	04/21/2020	04/20/2021
12	Low Pass Filter	MICRO-TRONICS	VLFX-950	RV142900829	N.C.R	N.C.R
13	High Pass Filter	Mini-Circuits	VHF-1200	15542	N.C.R	N.C.R
14	Filter (5450MHz~5770 MHz)	MICRO-TRONICS	BRC50704-01	2	N.C.R	N.C.R
15	Filter (5690 MHz~5930 MHz)	MICRO-TRONICS	BRC50705-01	4	N.C.R	N.C.R



16	Filter (5150 MHz~5350 MHz)	MICRO-TRONICS	BRC50703-01	2	N.C.R	N.C.R
17	Filter (885 MHz~915 MHz)	MICRO-TRONICS	BRM14698	1	N.C.R	N.C.R
18	Filter (815 MHz~860 MHz)	MICRO-TRONICS	BRM14697	1	N.C.R	N.C.R
19	Filter (1745 MHz~1910 MHz)	MICRO-TRONICS	BRM14700	1	N.C.R	N.C.R
20	Filter (1922 MHz~1977 MHz)	MICRO-TRONICS	BRM50715	1	N.C.R	N.C.R
21	Filter (2550 MHz)	MICRO-TRONICS	HPM13362	5	N.C.R	N.C.R
22	Filter (1532 MHz~1845 MHz)	MICRO-TRONICS	BRM50713	1	N.C.R	N.C.R
23	Filter (2.4GHz)	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
24	RE test cable	/	RE01-RE04	/	04/21/2020	04/22/2021
25	Software	Fard technology co.,ltd	EZ-EMC	1.1.1.2	N/A	N/A



## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

There is Spring antenna and no consideration of replacement.

Antenna location: Refer to Appendix (Internal Photos)

## 6.2 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 6.2.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Pre-Test mode a: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/M)

b: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/E)

Final mode a: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/M)


### 6.2.2 Test Setup Diagram

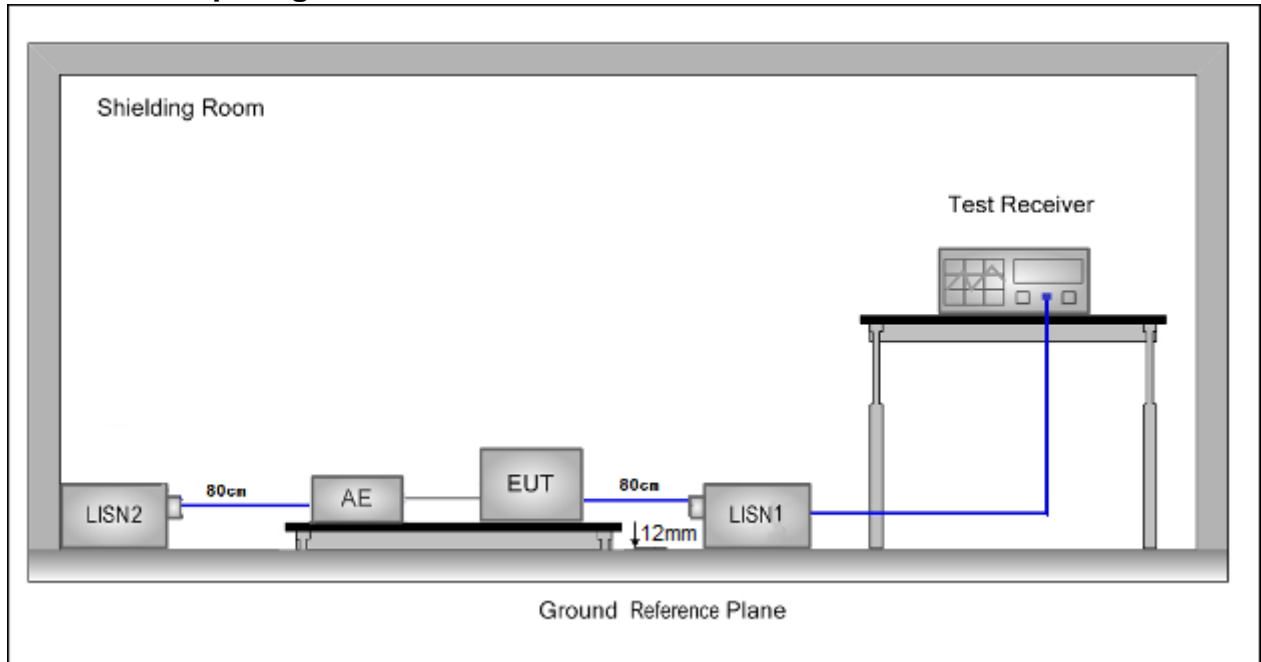

### 6.2.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
  - 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
  - 3) The tabletop EUT was placed upon a non-metallic table 12mm above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
  - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 12mm from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 12mm from the LISN 2.
  - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line

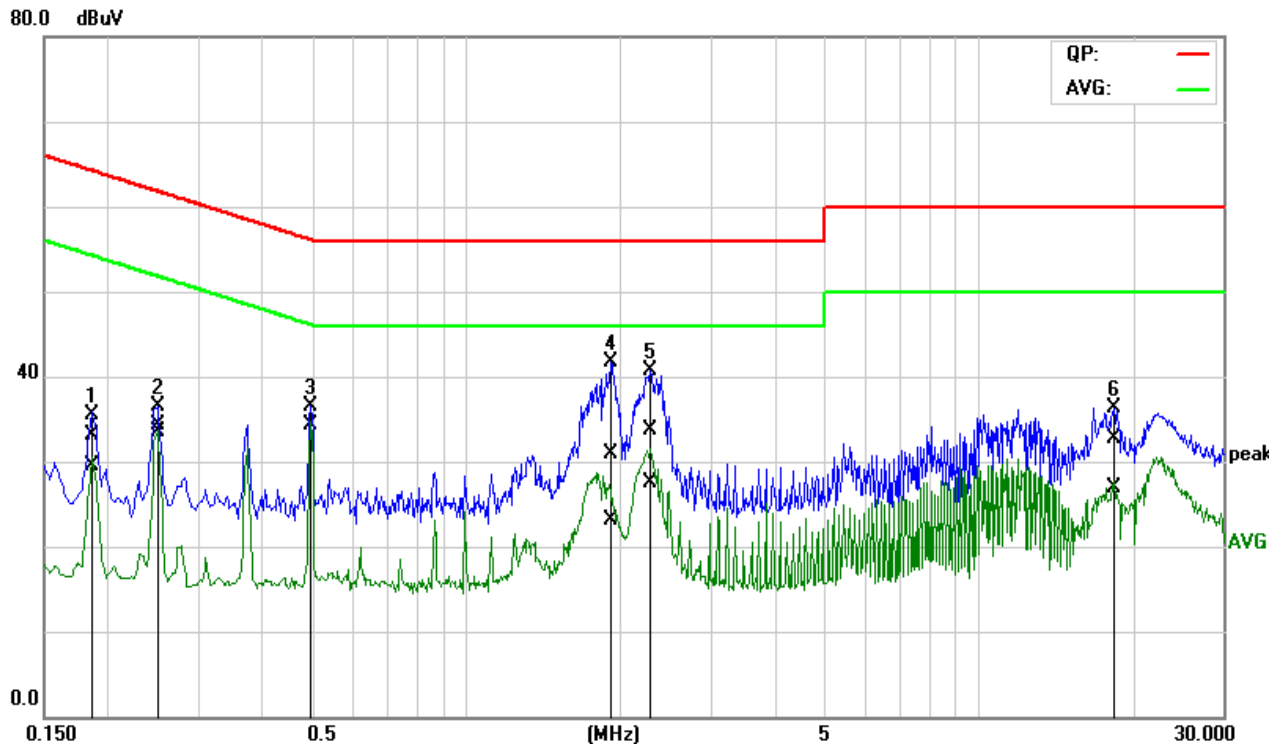

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1880	13.55	10.12	19.46	33.01	29.58	64.12	54.12	-31.11	-24.54	Pass
2	0.2502	14.76	14.01	19.47	34.23	33.48	61.75	51.75	-27.52	-18.27	Pass
3*	0.4993	14.86	14.68	19.53	34.39	34.21	56.01	46.01	-21.62	-11.80	Pass
4	1.9278	11.33	3.47	19.59	30.92	23.06	56.00	46.00	-25.08	-22.94	Pass
5	2.2627	14.19	7.94	19.61	33.80	27.55	56.00	46.00	-22.20	-18.45	Pass
6	18.3607	12.40	6.76	20.21	32.61	26.97	60.00	50.00	-27.39	-23.03	Pass

Mode:a; Line:Neutral Line

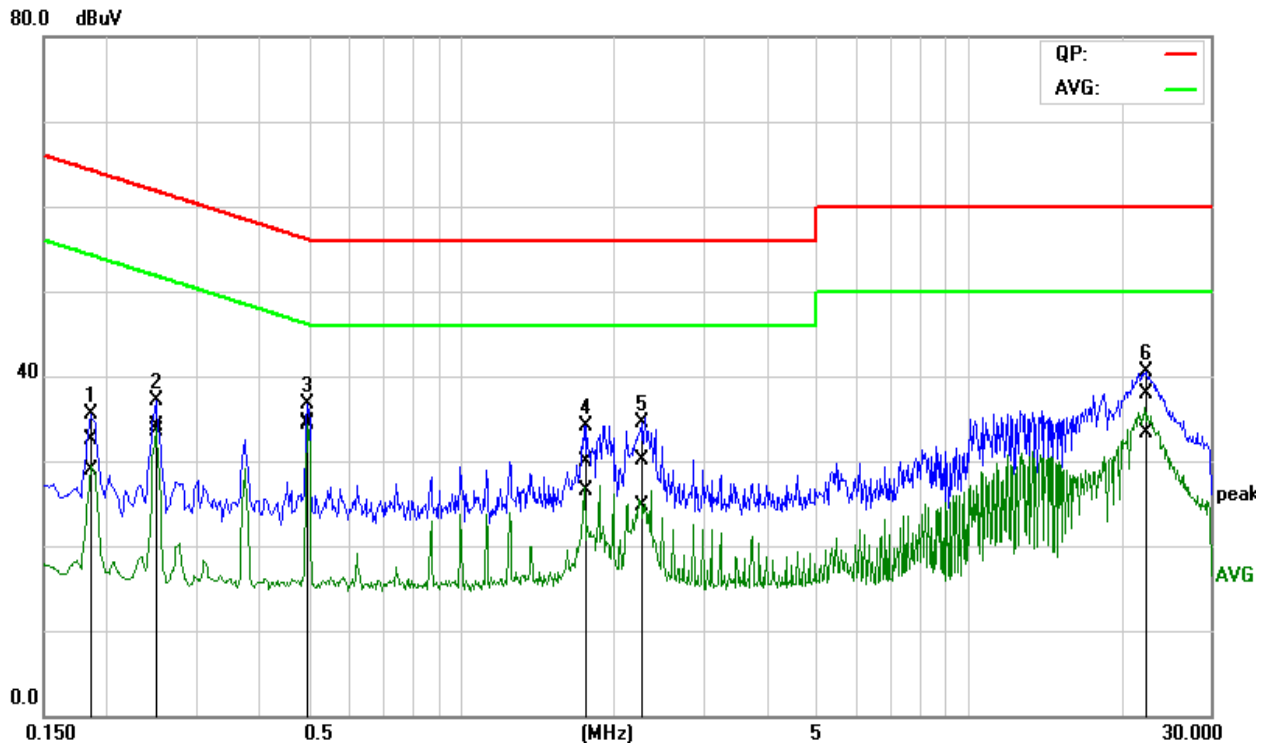

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1855	13.16	9.49	19.43	32.59	28.92	64.24	54.24	-31.65	-25.32	Pass
2	0.2505	14.72	13.98	19.44	34.16	33.42	61.74	51.74	-27.58	-18.32	Pass
3*	0.4991	14.97	14.80	19.51	34.48	34.31	56.01	46.01	-21.53	-11.70	Pass
4	1.7458	10.42	6.86	19.56	29.98	26.42	56.00	46.00	-26.02	-19.58	Pass
5	2.2448	10.48	5.17	19.59	30.07	24.76	56.00	46.00	-25.93	-21.24	Pass
6	22.3350	17.59	12.93	20.30	37.89	33.23	60.00	50.00	-22.11	-16.77	Pass



### 6.3 Spurious Emissions

Test frequency range: 9KHz – 5GHz

Test Site: Measurement Distance: 3m

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.015MHz	Quasi-peak	200Hz	1KHz	Quasi-peak
0.015MHz-30MHz	Quasi-peak	9kHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:  
(Spurious Emissions)

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F(kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3

Limit:  
(Field strength of the fundamental signal)

Frequency	Limit (dBuV/m @3m)	Remark
433.09 - 434.61MHz	80.8	Average Value
	100.8	Peak Value

Test Procedure:

- The EUT was placed on 12mm above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The radiation measurements are performed in X, Y, Z axis positioning. And found the Z axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Remark


**6.3.1 E.U.T. Operation**

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/M)  
 b: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/E)

**Test Setup:**

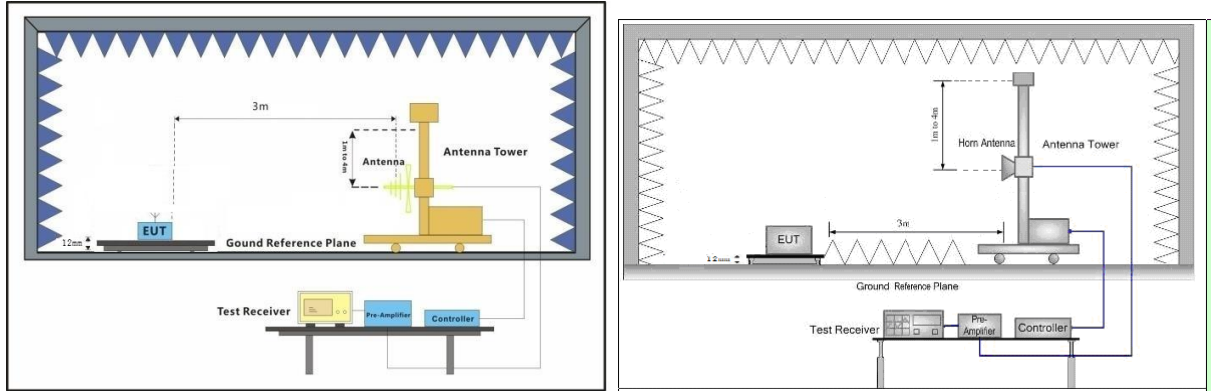

**Test Results:** Pass

**6.3.2 Field Strength of the Fundamental Signal**

Mode a

Test channel	Freq. (MHz)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
Channel 1	433.60	87.29	100.8	-13.51	Peak	Vertical
		87.74	100.8	-13.06	Peak	Horizontal
		77.66	80.8	-3.14	AVG	Vertical
		78.11	80.8	-2.69	AVG	Horizontal

Mode b

Test channel	Freq. (MHz)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
Channel 1	433.60	83.29	100.8	-17.51	Peak	Vertical
		87.99	100.8	-12.81	Peak	Horizontal
		73.66	80.8	-7.14	AVG	Vertical
		78.36	80.8	-2.44	AVG	Horizontal


Remark:

1. If the Peak value below the AV Limit, the AV test doesn't perform for this submission.
2. Average level=Peak level-Duty Cycle Factor
3. Duty Cycle Factor= 20log(Duty Cycle)= -9.63dB

### 6.3.3 Spurious Emissions


Mode a :Below 1GHz

Vertical:

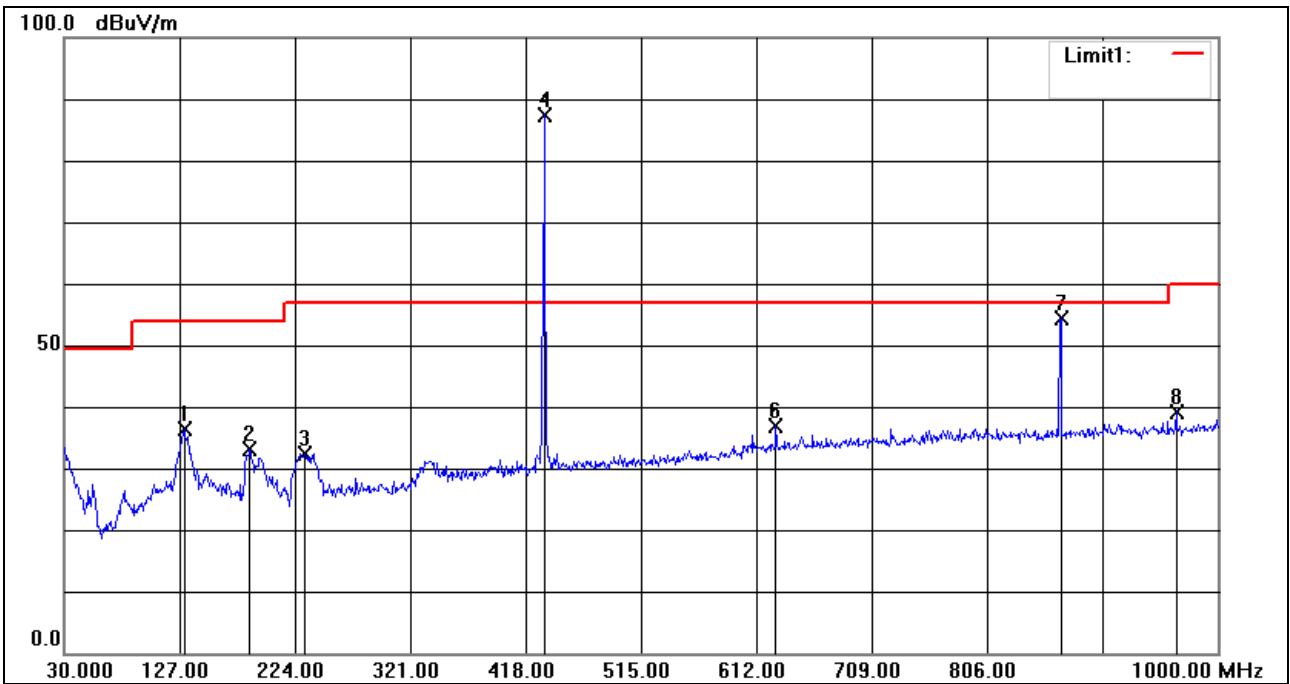

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	130.8800	16.87	19.50	36.37	54.00	-17.63	QP
2	186.1700	15.77	17.29	33.06	54.00	-20.94	QP
3	232.7300	14.15	18.31	32.46	56.90	-24.44	QP
4	433.5200	62.79	24.50	87.29	100.8	-13.51	peak
6	628.4900	10.13	26.68	36.81	56.90	-20.09	QP
7	868.0800	25.44	28.97	54.41	56.90	-2.49	QP
8	965.0800	9.53	29.72	39.25	60.00	-20.75	QP


Horizontal:

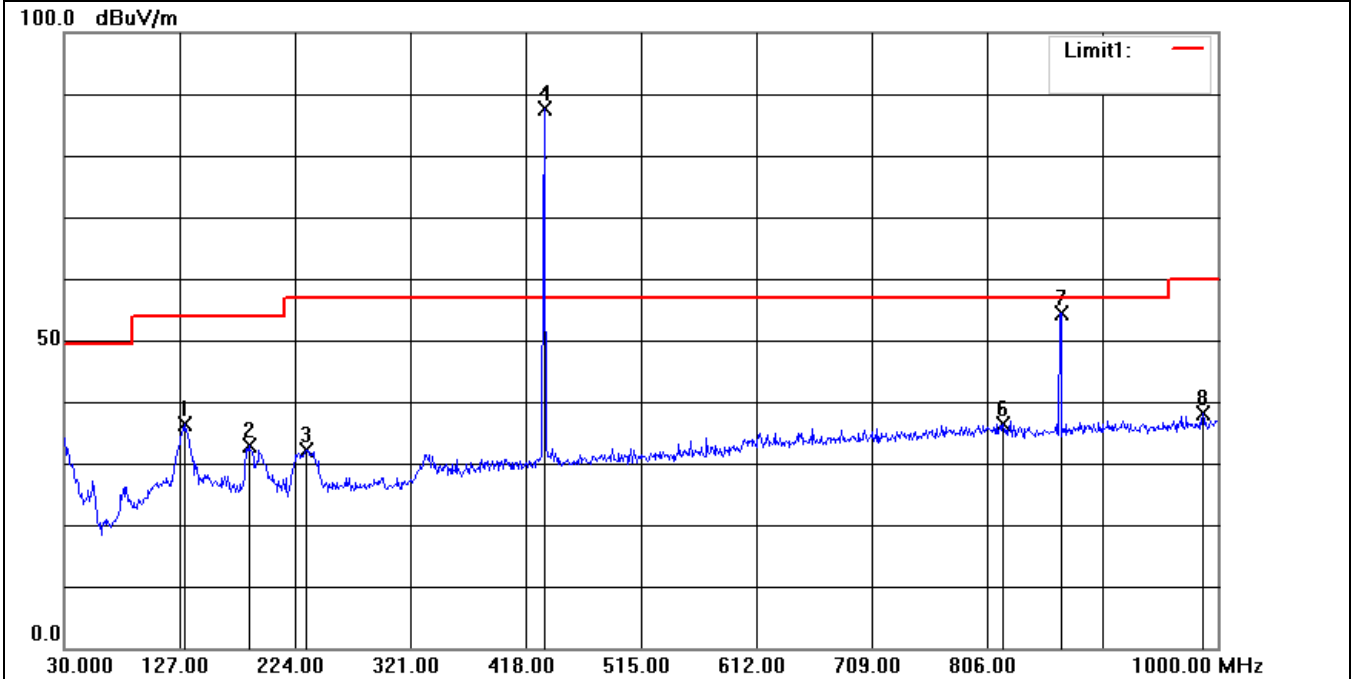

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	130.8800	16.82	19.50	36.32	54.00	-17.68	QP
2	185.2000	15.63	17.37	33.00	54.00	-21.00	QP
3	233.7000	13.83	18.37	32.20	56.90	-24.70	QP
4	433.5200	63.24	24.50	87.74	100.8	-13.06	peak
6	819.5800	7.70	28.77	36.47	56.90	-20.43	QP
7	868.0800	25.36	28.97	54.33	56.90	-2.57	QP
8	987.3900	8.11	29.92	38.03	60.00	-21.97	QP


Mode b :Below 1GHz

Vertical:

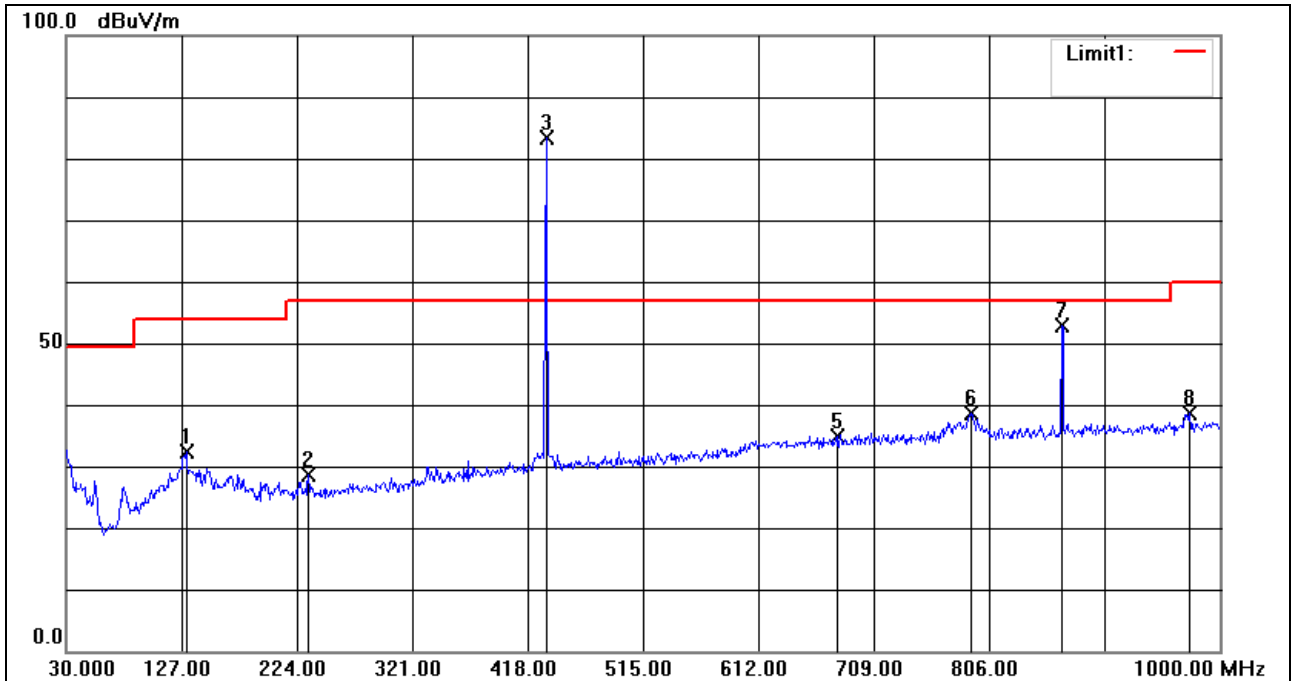

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	130.8800	12.80	19.50	32.30	54.00	-21.70	QP
2	233.7000	10.27	18.37	28.64	56.90	-28.26	QP
3	433.5200	58.79	24.50	83.29	100.8	-17.51	peak
5	677.9600	7.68	27.22	34.90	56.90	-22.00	QP
6	790.4800	10.09	28.61	38.70	56.90	-18.20	QP
7	867.1100	23.84	28.96	52.80	56.90	-4.10	QP
8	974.7800	8.81	29.81	38.62	60.00	-21.38	QP

Horizontal:

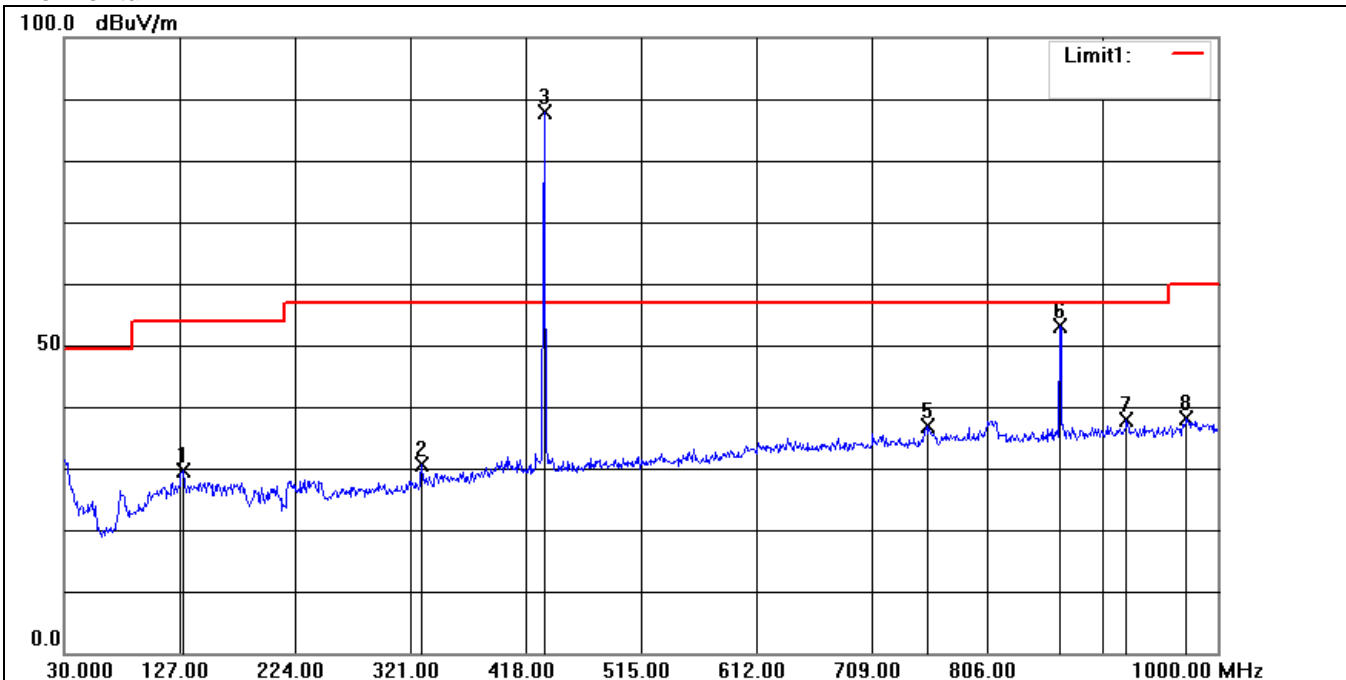

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	129.9100	10.12	19.48	29.60	54.00	-24.40	QP
2	330.7000	8.70	21.92	30.62	56.90	-26.28	QP
3	433.5200	63.49	24.50	87.99	100.8	-12.81	peak
5	755.5600	8.76	28.01	36.77	56.90	-20.13	QP
6	867.1100	24.22	28.96	53.18	56.90	-3.72	QP
7	923.3700	8.40	29.45	37.85	56.90	-19.05	QP
8	973.8100	8.23	29.80	38.03	60.00	-21.97	QP



**Mode a : Above 1GHz**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	polarization
1	1455.000	55.20	-17.75	37.45	54.00	-16.55	peak	Vertical
2	1725.000	56.45	-17.17	39.28	54.00	-14.72	peak	Vertical
3	1945.000	56.29	-16.80	39.49	54.00	-14.51	peak	Vertical
4	1330.000	55.98	-18.32	37.66	54.00	-16.34	peak	Horizontal
5	2085.000	55.76	-16.35	39.41	54.00	-14.59	peak	Horizontal
6	2685.000	53.33	-14.20	39.13	54.00	-14.87	peak	Horizontal

**Mode b: Above 1GHz**

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	polarization
1	1670.000	56.12	-17.26	38.86	54.00	-15.14	peak	Vertical
2	2670.000	56.56	-14.23	42.33	54.00	-11.67	peak	Vertical
3	3355.000	56.44	-12.86	43.58	54.00	-10.42	peak	Vertical
4	1750.000	57.65	-17.13	40.52	54.00	-13.48	peak	Horizontal
5	2695.000	54.86	-14.17	40.69	54.00	-13.31	peak	Horizontal
6	3305.000	53.83	-12.95	40.88	54.00	-13.12	peak	Horizontal

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading Level + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) If Peak Result comply with AV limit, AV Result is deemed to comply with QP limit
- 3) No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.
- 4) for above 1GHz test, Since the product size is too large. product placed on 12mm non-metallic material

## 6.4 20dB Bandwidth


### E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/M)

### Test Setup:

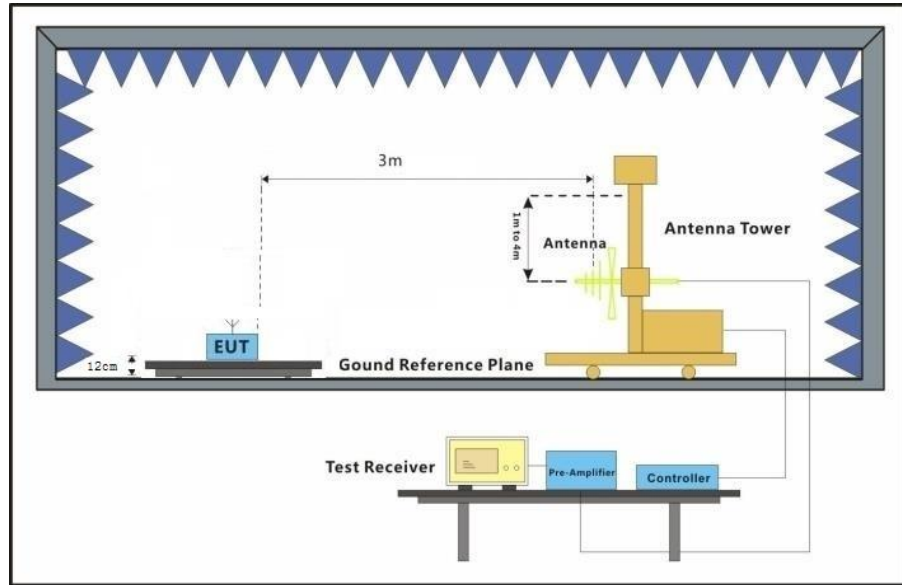


**Limit:** The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Results:** Pass

### Measurement Data:

Frequency(MHz)	20dB bandwidth (kHz)	Limit (kHz)	Results
433.60	48.40	1086.5	Pass

Test plot as follows:

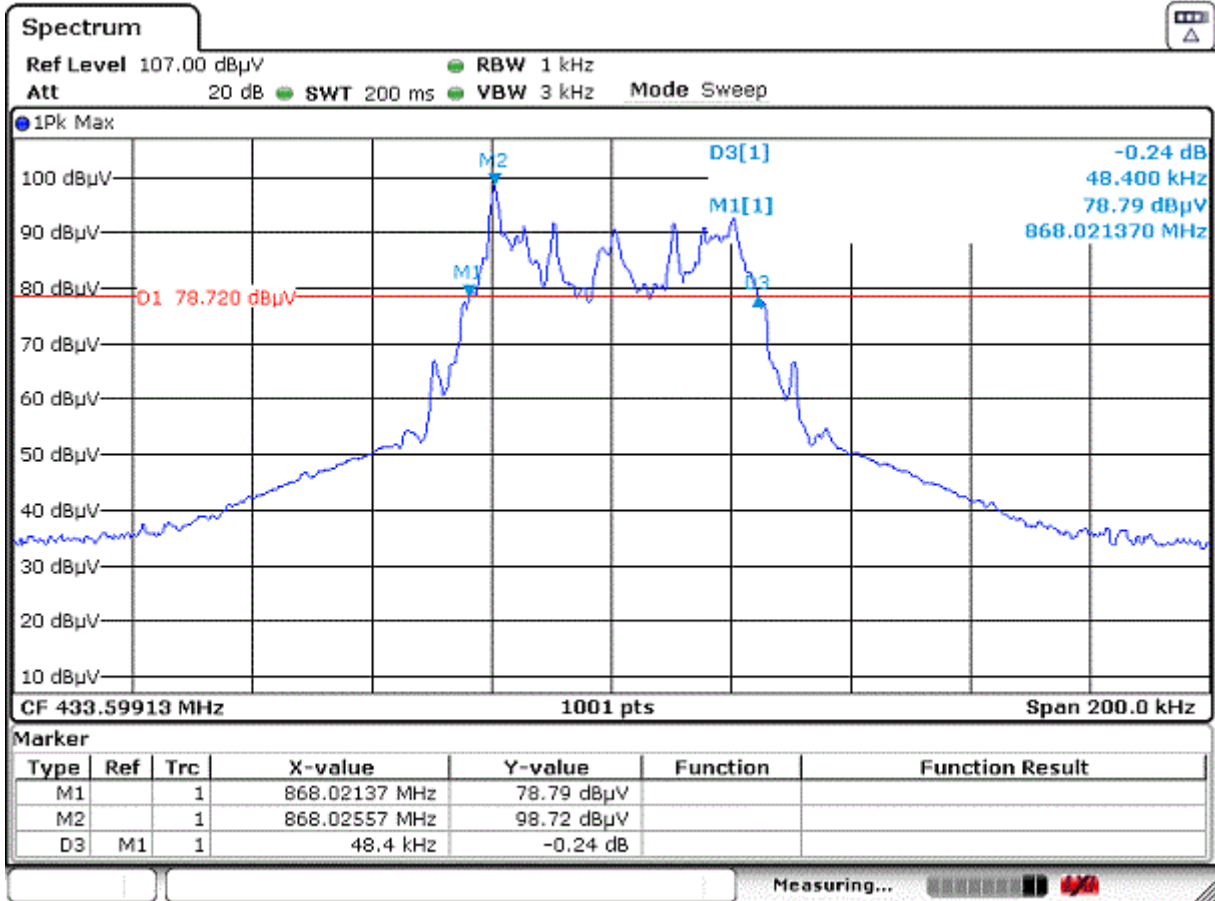

## 6.5 Dwell Time


### E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1020 mbar

Test mode a: TX mode\_Keep the EUT in transmitting with modulation mode. (DS-K3B801SX-M/M)

### Test Setup:

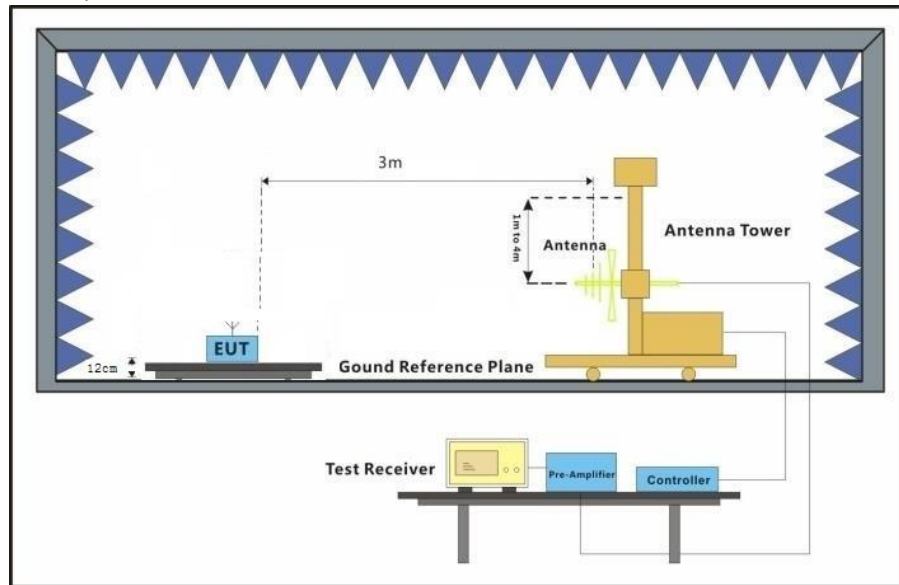



Limit: 15.231 (a): Not more than 5 seconds

Test Results: Pass

### Measurement Data:

Test item	Limit (s)	Results
Transmission Duration	≤5s	Pass

Test plot as follows:

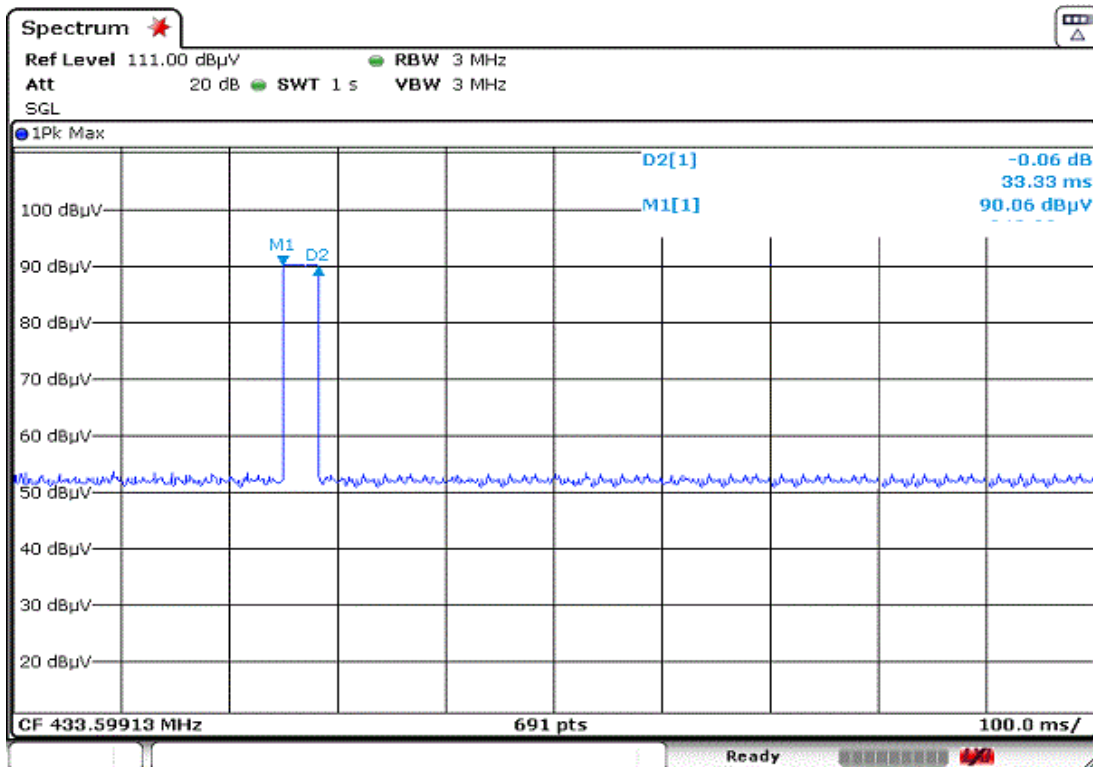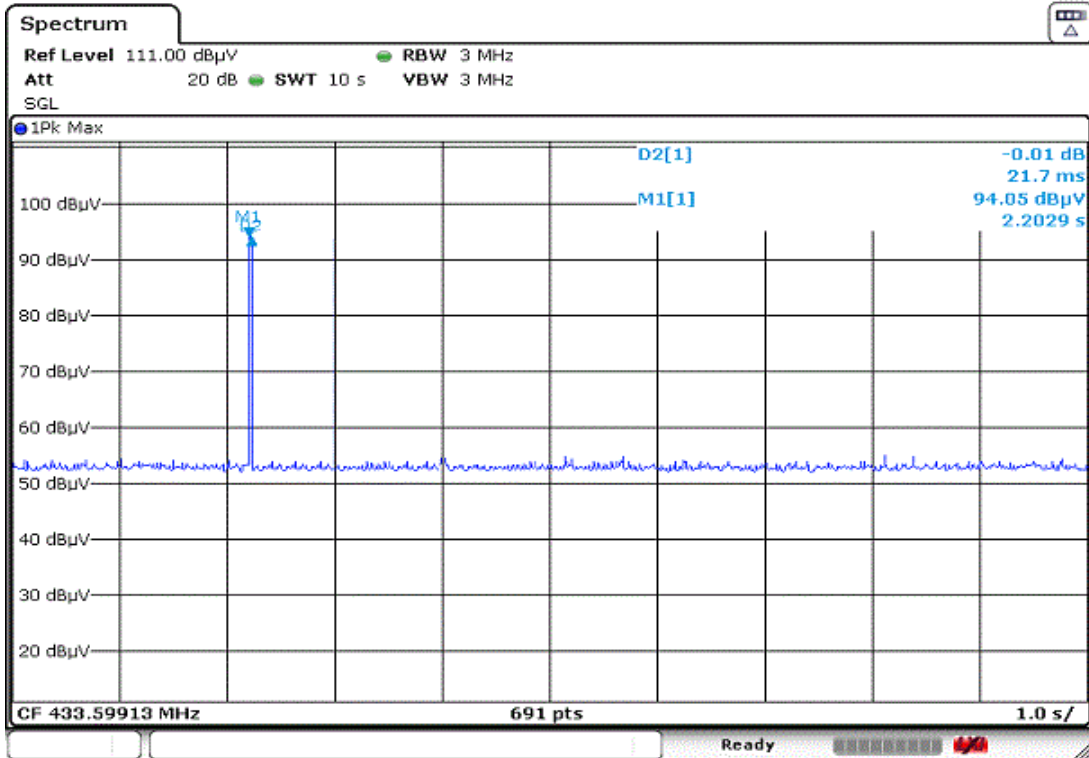

## 7 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

## 8 EUT Constructional Details

Refer to the < External Photos > & <Internal Photos >.

**--End of the Report--**